

---

## Test Report FOR HAC T-coil

---

Report No. : SRTC2020-9004(F)-20060301(M)

Product Name: LTE/WCDMA/GSM(GPRS) Multi-Mode

Digital Mobile Phone

Product Model: Z2335L

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: FCC Part 20.19

ANSI C63.19

FCC ID: SRQ-Z2335L

The State Radio\_monitoring\_center Testing Center (SRTC)  
15th Building, No.30, Shixing Street, Shijingshan District, Beijing,  
P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

## Contents

1 GENERAL INFORMATION .....	2
1.1 Notes of the test report .....	2
1.2 Information about the testing laboratory .....	2
1.3 Applicant's details.....	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE DEVICE UNDER TEST .....	4
2.1 Final Equipment Build Status .....	4
2.2 Support Equipment.....	5
3 REFERENCE SPECIFICATIONS.....	5
4 RESULT SUMMAR .....	6
5 Test Procedures for all Technologies.....	7
6 Audio Level and Gain Measurements.....	12
7 Description of the test Position .....	15
7.1 Test positions .....	15
7.2 T-coil Requirements and Category Limits.....	16
8 Measurement uncertainty .....	18
9 Air Interfaces and Operating Mode.....	19
10 T-Coil testing.....	20
10 .1 GSM Test Result.....	21
10 .2 WCMDA Test Result .....	22
10 .3VOLTE Test Result .....	23
11 Test Equipments.....	25
11.1 Audio Magnetic Probe AM1DV2 .....	25
11.2 Audio Magnetic Measurement Instrument AMMI .....	25
11.3 Audio Magnetic calibration Coil AMCC .....	25
ANNEX A: TEST PLOTS.....	26

## **1 GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).The test results relate only to individual items of the samples which have been tested.The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R.China
City:	Beijing
CountryorRegion:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

### **1.3 Applicant's details**

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Shenzhen, Guangdong,P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Gong Yu
Tel:	021-68895397
Email:	gongyu@zte.com.cn

### **1.4 Manufacturer's details**

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Shenzhen, Guangdong,P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Gong Yu

Tel:	021-68895397
Email:	gongyu@zte.com.cn

### 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020.06.03
Testing Start Date:	2020.06.03
Testing End Date:	2020.07.04

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	35

Normal Supply Voltage (V d.c.):	3.8
---------------------------------	-----

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	<input checked="" type="checkbox"/> GSM Band: GSM850/PCS1900 <input checked="" type="checkbox"/> WCDMA Band: FDD2/4/5 <input checked="" type="checkbox"/> LTE Band: 2/4/5/7/12/13/66 <input checked="" type="checkbox"/> Bluetooth Band:2.4GHz <input checked="" type="checkbox"/> Wi-Fi Band:2.4GHz
Mode	<p>GSM</p> <input checked="" type="checkbox"/> Voice (GMSK) <input checked="" type="checkbox"/> GPRS (GMSK) <input checked="" type="checkbox"/> EGPRS (GMSK/8PSK) <p>WCDMA</p> <input checked="" type="checkbox"/> UMTS Rel. 99 (Voice & Data) <input checked="" type="checkbox"/> HSDPA (Rel. 5) <input checked="" type="checkbox"/> HSUPA (Rel. 6) <input type="checkbox"/> HSPA+ (Rel.7 ) <input type="checkbox"/> DC-HSDPA (Rel.8 ) <p>Wi-Fi (802.11b/g/n/ac)</p> <input type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n* (20MHz) <input type="checkbox"/> 802.11n *(40MHz) <input type="checkbox"/> 802.11ac (20MHz) <input type="checkbox"/> 802.11ac (40MHz) <input type="checkbox"/> 802.11ac (80MHz) <input type="checkbox"/> 802.11ac (160MHz) <p>Bluetooth</p> <input checked="" type="checkbox"/> BR(GFSK) <input checked="" type="checkbox"/> EDR( $\pi/4$ DQPSK , 8-DPSK) <input checked="" type="checkbox"/> BLE(GFSK) <p>LTE</p> <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM <p>OTT Mode</p> <input type="checkbox"/> Support <input checked="" type="checkbox"/> Not Support <p>VoWiFi</p> <input type="checkbox"/> Support <input checked="" type="checkbox"/> Not Support

## 2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:




State of sample	Normal
Batteries	Battery1:Li3816T43P4h604550/Jiada Energy Technolog Co.,Ltd Battery2:Li3816T43P4h604550/Shanghai BYD Company Ltd.
H/W Version	Z2335CCHW1.0
S/W Version	Z2335CCV1.0.0B01
IMEI	862674040000693
Normal	operation
Notes	We verified the results of the two batteries and selected battery 1 as the worst case to perform the test.

## 3 REFERENCE SPECIFICATIONS

Specification	Version	Title
Part 20.19	2019	Hearing aid-compatible mobile handsets.
C63.19	2011	American National Standard Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids
285076 D01	v05	HAC Guidance
285076 D02	v03	T-Coil Testing

## 4 RESULT SUMMAR

Band	Category assessment T-coil signal quality	Pass/Fail
GSM850	T4	PASS
GSM1900	T4	PASS
WCDMA BAND2	T4	PASS
WCDMA BAND4	T4	PASS
WCDMA BAND5	T4	PASS
LTE BAND2	T4	PASS
LTE BAND4	T4	PASS
LTE BAND5	T4	PASS
LTE BAND7	T4	PASS
LTE BAND12	T4	PASS
LTE BAND13	T4	PASS
LTE BAND66	T4	PASS
<b>Final T Category</b>	T4	PASS

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date:  20200707

## **5 Test Procedures for all Technologies**

Referenced to ANSI C63.19, Section 7.4,

This section describes the describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.


The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

- a. A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.
- b. Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.
- c. The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test




mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at  $f = 1$  kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.<sup>46</sup> The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.

- d. Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.
- e. At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at  $f_i$ ) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency ( $f_i$ ) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.
- f. Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)
- g. All Measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in ANSI C63.19 clause 7.3.1.
- h. At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality).
- i. Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

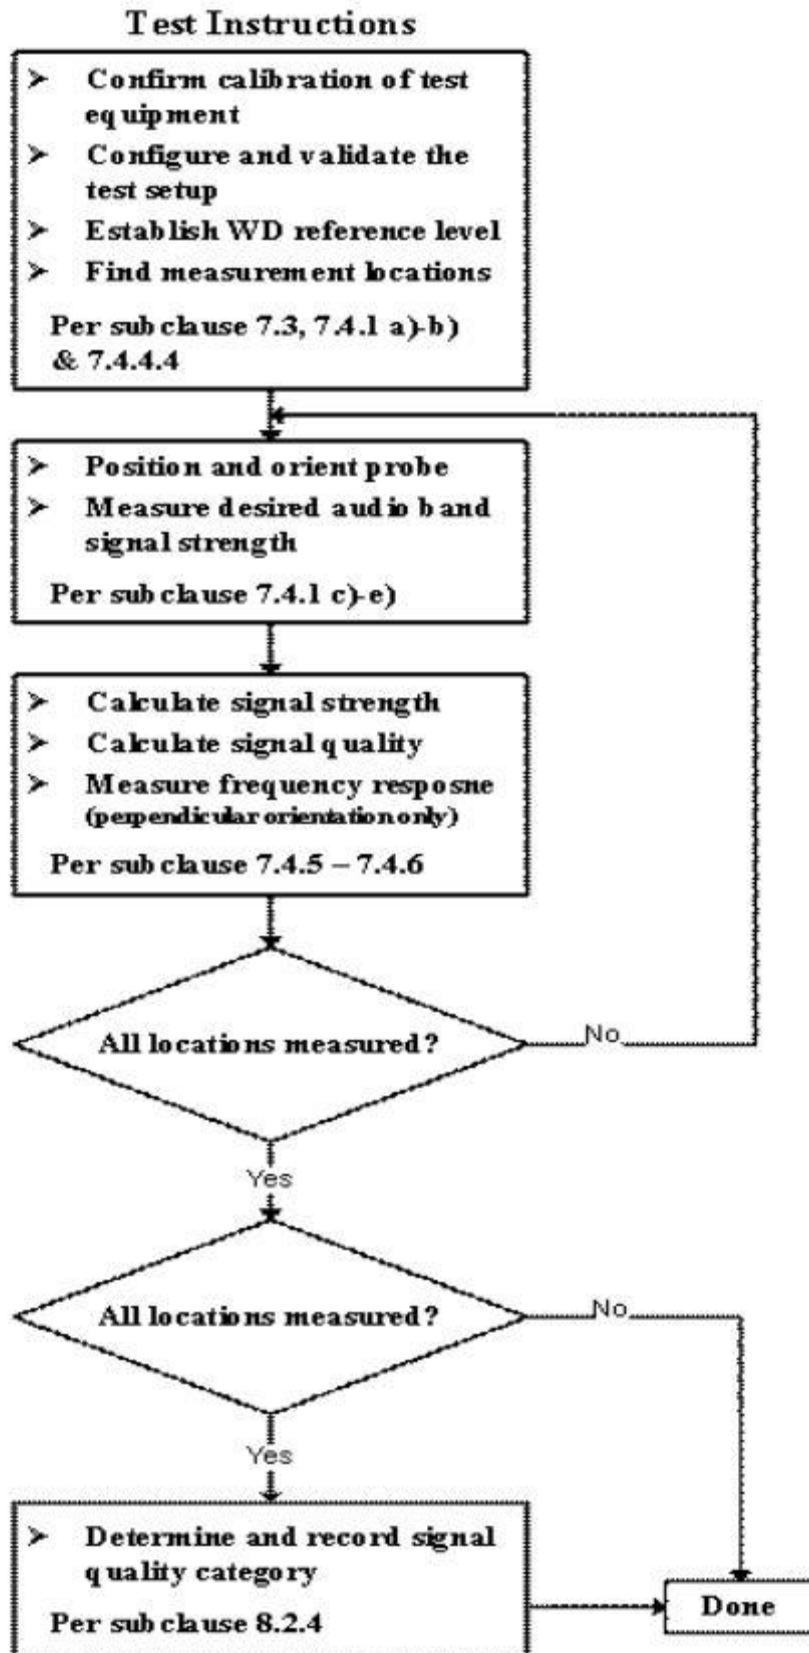

WD T-Coil signal test flowchart

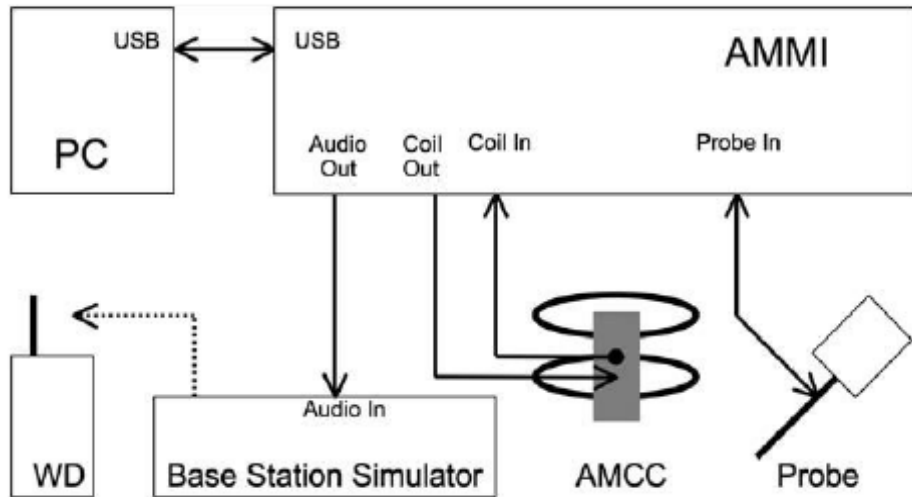

Test Setup Diagram

For GSM / UMTS test setup and input level, the correct input level definition is via a communication tester CMU200's "Decoder Cal" and "Codec Cal" with audio option to set the correct audio input levels.

For VoLTE the test setup used is via the callbox of CMW500 for T-coil measurement, The DAU of the CMW500 was used to simulate the IMS (CDMA2000 do not need IMS registration). The CMW500 can be manually configured to ensure and control the speech input level result is -16dBm0 for VoLTE.

For GSM / UMTS test setup and input level, the correct input level definition is via a communication tester **CMU200**'s "Decoder Cal" and "Codec Cal" with audio option B52 and B85

The following options units on **CMW500** were used to simulate the VoLTE /VOWIFI (IMS,EPDG,DNS inside DAU with Audio Board) for testing.

Firmware License Keys	Software Name
CMW-PS505	Basic Assembly
CMW-S052S	SSD Driver
CMW-S100D	Baseband Measurement Unit
CMW-S550N	Flexible Internal Connection
CMW-S570B	RF Converter
CMW-S590D	Advanced Frontend
CMW-S600B	Front Panel with Display
CMW-PS505	Basic Assembly
CMW-S052S	SSD Driver

Hardware Options and Accessory:

<b>CMW-B400B</b>	<b>Audio Board</b>
<b>CMW-B405A</b>	<b>CODEC Board</b>
<b>CMW-B500I</b>	<b>Signaling Unit for LTE and WLAN</b>
CMW-B612A	GPIO Connector
CMW-B660H	Option Carrier
CMW-B661H	Ethernet Switch Board
CMW-B690B	OXCO
CMW-KB036	6 GHz Extension
CMW-Z06	Test USIM Card
<b>CMW-B450H</b>	<b>Data Application Unit (DAU) for IMS Server and IP Emulation</b>

Software Options:

CMW-K0	
CMW-KS104	Software License for EVS
CMW-PK45	Software License Package for IP Network Emulation
CMW-PK50	Software License Package for LTE
CMW-PK65	Software License Package for WLAN

## 6 Audio Level and Gain Measurements

According to C63 .19and KDB 285076 D02v03 , the input audio level showing below:

- GSM input level: -16dBm0
- UMTS input level: -16dBm0
- VoLTE input level: -16dBm0

The table of **Required gain** showing below is given by SPEAG, And we used these parameters to determine the **Gain setting** on the software DASY52 perform HAC T-coil test.

Signal [file name]	Duration [s]	Peak-to-RMS [dB]	RMS [dB]	Required gain factor *)	Gain setting
1kHz sine	---	3.0	0.0	1.00	
48k_1.025kHz_10s.wav	10	3.0	0.0	1.00	
48k_1kHz_3.15kHz_10s.wav	10	6.0	-3.0	1.42	
48k_315Hz_1kHz_10s.wav	10	6.0	-2.9	1.40	
48k_csek_8k_441_white_10s.wav	10	13.8	-10.5	3.34	
48k_multisine_50-5000_10s.wav	10	11.1	-7.9	2.49	
48k_multisine_50-10000_10s.wav	10	10.8	-7.7	2.42	
48k_voice_1kHz_1s.wav	1	16.2	-12.7	4.33	
48k_voice_300-3000_2s.wav	2	21.6	-18.6	8.48	
48k_normal (example)	51	25.4	-22.42	13.21	

(\*) The gain for the specific signal shall typically be multiplied by this factor to achieve approx. the same level as for the 1kHz sine signal.

**Note:** For protocols not listed in Table 7.1 of ANSI C63.19 or the ANSI C63.19 VoLTE interpretation, the average speech level of -20 dBm0 should be used

**For GSM/UMTS test**, we use uncalibrated simulator CMU200 the reference level in dBm0 depend on the instrument, the signaling unit used and on the AMMI.

The gain level determination to obtain a specific level in dBm0 with R&S CMU200 describe as following procedure.

Step1:**Decoder Calibration** on the CMU200.

The value of AMCC coil in\_RMS (dBV) is -2.42dBV is equal to the reference input level of 3.14dBm0

Step2: **Codec Calibration** on the CMU200.

Measure the AMMI 1KHz sine with gain 10(20dB) looped through the CMU200 using AMMI 'Coil\_In' and 'Coil\_In' signal reading is -19.71dBV corresponds to a level -14.15 dBm0

Step3:**Calculate the required gain** for a '1 kHz Sine'.

The desire input level is -16dBm0 for GSM and WCDMA, so the **required gain** is  $(-16\text{dBm0}) - (-14.15\text{dBm0}) + 20\text{ dB}=18.15\text{ dB}(\text{gain dB})=8.08(\text{gain linear})$

The desire input level is -18dBm0 for CDMA, so the **required gain** is  $(-18\text{dBm0}) - (-14.15\text{dBm0}) + 20\text{ dB}=16.15\text{ dB}(\text{gain dB})=6.42(\text{gain linear})$

Step4: **Gain setting for several audio files (required gain\* gain factor).**

Mode	Signal Type	Duration (s)	Peak to RMS (dB)	Peak to RMS (dB)	Required Gain Factor	Calculated Gain Setting
GSM/ WCDMA (-16dBm0)	1kHz sine	---	3	0	1	<b>8.08</b>
	48k_voice_1kHz	1	16.2	-12.7	4.33	<b>34.99</b>
	48k_voice_300Hz ~ 3kHz	2	21.6	-18.6	8.48	<b>68.52</b>

**For VoLTE test**, we use simulators with calibrated inputs CMW500 where the input sensitivity dBm0 per input voltage is known or can be set, the relation between the analog input voltage and the internal level in dBm0 can be determined.

The gain level determination to obtain a specific level in dBm0 with CMW500 describe as following procedure.

**Step1: Define CMW500 analog input voltage** on the CMW500.

The value of Speech\_In Sensitivity is 1.8V\_fullscale is equal to the reference input level of 3.14dBm0, Full scale input level converted to dBV\_RMS is 2.10

**Step2: Connect AMMI “Audio Out” to “AMMI Coil In” via BNC-XLR adapter.**

Measure the AMMI 1KHz sine with gain 100(40dB) 'Coil\_In' signal reading is 3.37 dBV ,Impedence corrected 'Coil\_In' signal reading is 3.37 dBV -0.15dB= 3.22dBV corresponds to a level 4.26 dBm0

**Step3: Calculate the required gain** for a '1 kHz Sine'.

When the desire input level is -18dBm0 for CDMA, the **required gain** is (-18dBm0) – (4.26dBm0) + 40 dB=17.74 dB(gain dB)= 7.71(gain linear)

When the desire input level is -16dBm0 for LTE, the **required gain** is (-16dBm0) – (4.26dBm0) + 40 dB=19.74 dB(gain dB)= 9.70(gain linear)

When the desire input level is -20dBm0 for WIFI, the **required gain** is (-20dBm0) – (4.26dBm0) + 40 dB=15.74 dB(gain dB)= 6.12(gain linear)

**Step4: Gain setting for several audio files (required gain\* gain factor).**

Mode	Signal Type	Duration (s)	Peak to RMS (dB)	Peak to RMS (dB)	Required Gain Factor	Calculated Gain Setting
LTE (-16dBm0)	1kHz sine	---	3	0	1	<b>9.70</b>
	48k_voice_1k Hz	1	16.2	-12.7	4.33	<b>42.00</b>
	48k_voice_30 0Hz ~ 3kHz	2	21.6	-18.6	8.48	<b>82.26</b>

## 7 Description of the test Position

### 7.1 Test positions

The device was positioned such that Device Reference plane was touching the bottom of the Test Arch. The scan is centered at the acoustic output by aligning the acoustic output with the intersection of the Test Arch's middle bar and dielectric wire. The WD is positioned always this way to ensure repeatability of the measurements. Coordinate system depicted below is used to define exact locations of measurement points relative to the center of the acoustic output.

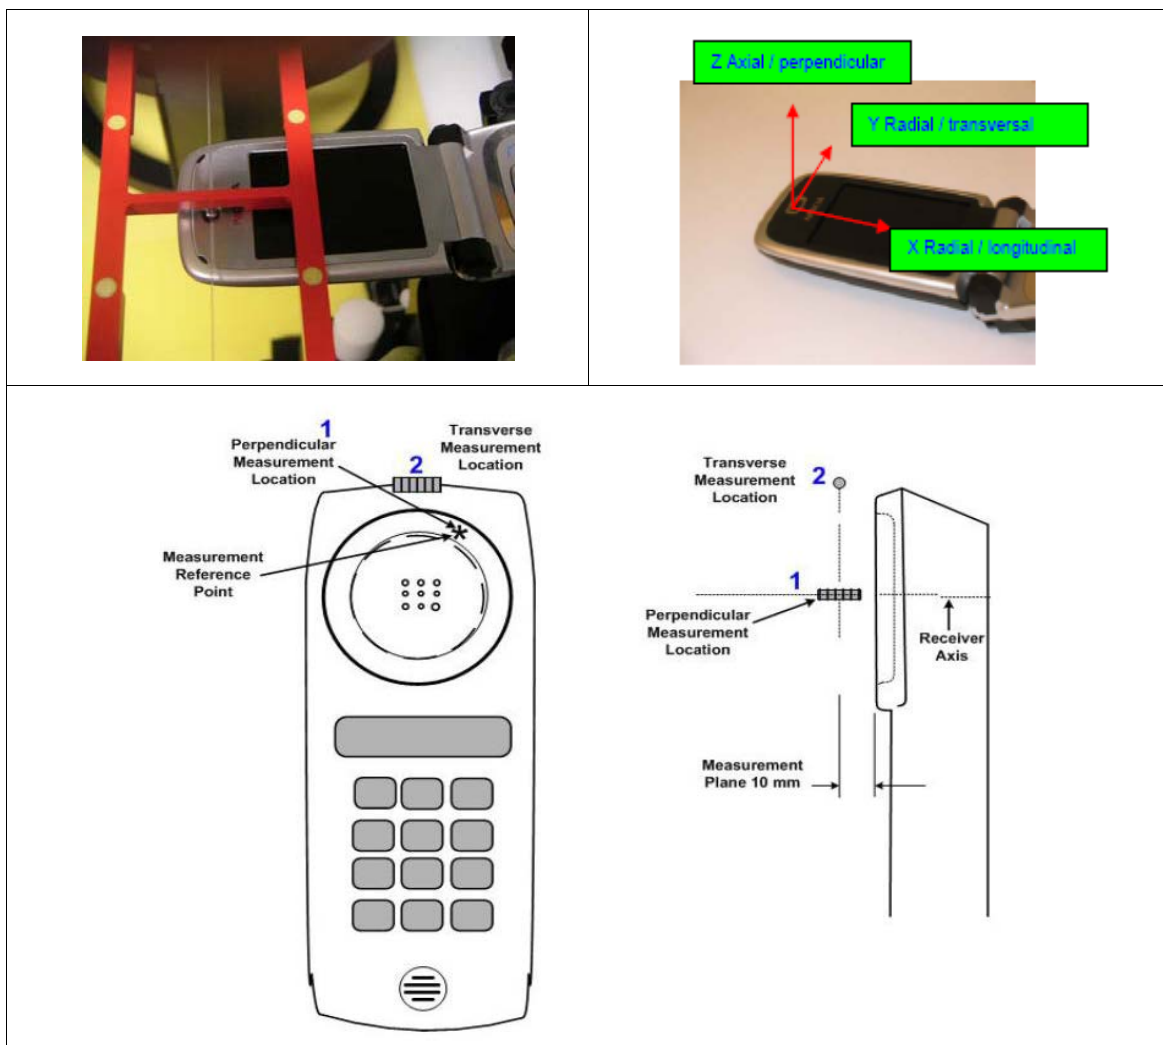


Photo of the device positioned under Test Arch and coordinate system (The EUT in picture is generic phone sample and does not represent the actual equipment under test)




## 7.2 T-coil Requirements and Category Limits

**Signal to Noise** :This section provides the signal quality requirement for the intended T-Coil signal from a WD. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode.The RF measurements made for the T-Coil evaluation are used to assign the category T1 through T4.

Category	Telephone parameters WD signal quality [(signal + noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Frequency Response**

The frequency response of the perpendicular component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz.

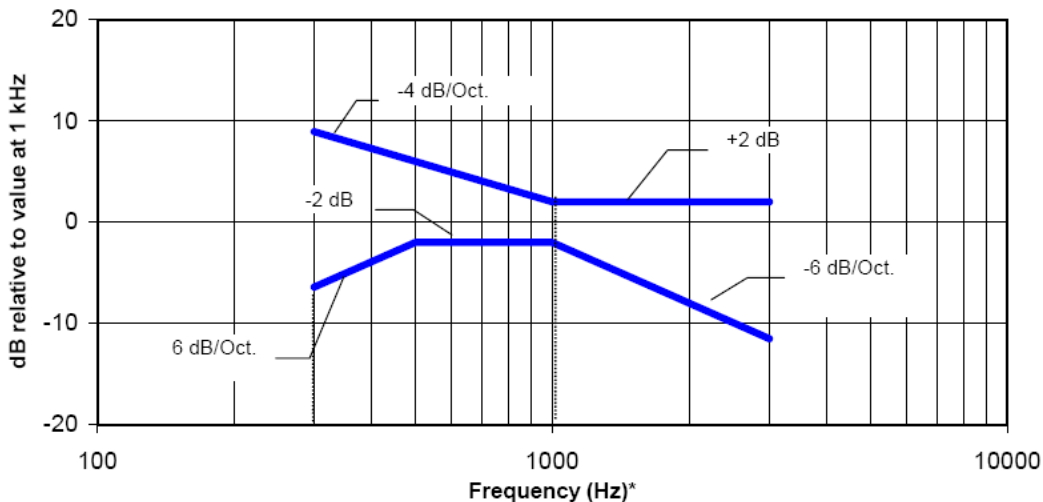

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Magnetic field frequency response for WDs with a field ≤ -15 dB (A/m) at 1 kHz**

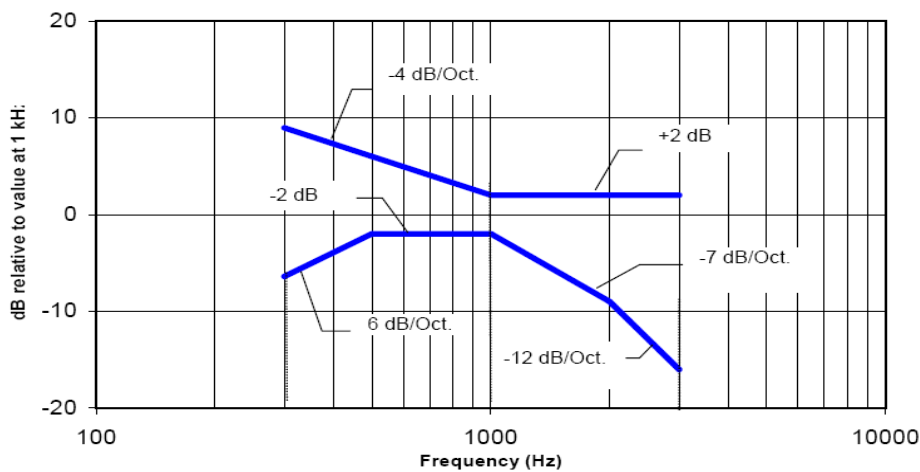

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Magnetic field frequency response for WDs with a field that exceeds -15 dB(A/m) at 1 kHz**

## 8 Measurement uncertainty

Uncertainty of Audio Band Magnetic Measurements							
Error Description	Unc. Value	Prob. Dist.	Div.	( $c_1$ ) ABM1	( $c_1$ ) ABM2	Std. Unc. ABM1	Std. Unc. ABM2
Probe Sensitivity							
Reference Level	±3.0%	N	1	1	1	±3.0%	±3.0%
AMCC Geometry	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%
AMCC Current	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Probe Positioning during Calibr.	±0.1%	R	$\sqrt{3}$	1	1	±0.1%	±0.1%
Noise Contribution	±0.7%	R	$\sqrt{3}$	0.0143	1	±0.0%	±0.4%
Frequency Slope	±5.9%	R	$\sqrt{3}$	0.1	1.0	±0.3%	±3.5%
Probe System							
Repeatability / Drift	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Linearity / Dynamic Range	±0.6%	R	$\sqrt{3}$	1	1	±0.4%	±0.4%
Acoustic Noise	±1.0%	R	$\sqrt{3}$	0.1	1	±0.1%	±0.6%
Probe Angle	±2.3%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
Spectral Processing	±0.9%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±0.6%	N	1	1	5	±0.6%	±3.0%
Field Disturbance	±0.2%	R	$\sqrt{3}$	1	1	±0.1%	±0.1%
Test Signal							
Ref. Signal Spectral Response	±0.6%	R	$\sqrt{3}$	0	1	±0.0%	±0.4%
Positioning							
Probe Positioning	±1.9%	R	$\sqrt{3}$	1	1	±1.1%	±1.1%
Phantom Thickness	±0.9%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
DUT Positioning	±1.9%	R	$\sqrt{3}$	1	1	±1.1%	±1.1%
External Contributions							
RF Interference	±0.0%	R	$\sqrt{3}$	1	0.3	±0.0%	±0.0%
Test Signal Variation	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Combined Uncertainty							
Combined Std. Uncertainty (ABM Field)						±4.1%	±6.1%
Expanded Std. Uncertainty						±8.1%	±12.3%

## 9 Air Interfaces and Operating Mode

CMRS mode

Air interface	Bands (MHz)	Type	ANSI C63.19 Tested	Simultaneous Transmitter	Voice Service	Power Reduction
GSM	GSM850	VO	YES	WLAN, BT	GSMCS Voice	NA
	GSM1900		YES	WLAN, BT	GSMCS Voice	NA
WCDMA (UMTS)	Band 2	VO	YES	WLAN, BT	WCDMACS Voice	NA
	Band 4	VO	YES	WLAN, BT	WCDMACS Voice	NA
	Band 5	VO	YES	WLAN, BT	WCDMACS Voice	NA
LTE (FDD)	LTE BAND2	VD	YES	WLAN, BT	VoLTE	NA
	LTE BAND4			WLAN, BT		NA
	LTE BAND5			WLAN, BT		NA
	LTE BAND7			WLAN, BT		NA
	LTE BAND12			WLAN, BT		NA
	LTE BAND13			WLAN, BT		NA
	LTE BAND66			WLAN, BT		NA

## **10 T-Coil testing**

### **General illustration:**

- 1.The middle channel of each frequency band is used for T-Coil testing according ANSI C63.19.
2. For VoLTE,Codec investigation is choose either one radio configuration and an investigation was performed, the following tests use worst codec for the handset.
3. For VoLTE, Radio configuration investigation is choose worst codec from codec investigationto determine the worstradio configuration on all frequency band, data rates and modulations and RB configuration,
- 4.All the data showing on the section “Tests Results” usedthe worst features (codec andradio configuration) determined by codec investigation (illustration2) and Radio configuration investigation (illustration3).
5. According to 3GPP 36.211 Table 4.2-2, TDD-LTE supports uplink-downlinkconfiguration from 0 to 6, an additional parameter investigation was performed to determine the worst-case uplink-downlinkand with the FDD-LTE worst case radio configuration.
6. Phone Condition: Mute on; Backlight off; Max Volume

## 10.1 GSM Test Result

### Codec Investigation

codec	Full rate version1	Half rate version1	Worst Orientation	Band/channel
ABM1 [dB A/m]	<b>-9.02</b>	-9.12	Axial(Y)	GSM850 /CH 189
ABM2 [dB A/m]	<b>-58.55</b>	-58.90		
SNR [dB]	<b>49.53</b>	49.78		

### Tests Results

We use codec **Full rate version1** perform all the test below.

Air interface	Channel	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Signal Quality dB	T-Rating ANSI C63.19	Freq. Response
GSM850	189	Radial (Y)	-9.02	-58.55	49.53	T4	---
		Axial (Z)	-0.60	-52.27	51.67	T4	Pass
GSM1900	661	Radial (Y)	-9.05	-59.01	49.96	T4	---
		Axial (Z)	-0.54	-54.58	54.04	T4	Pass

## 10.2 WCDMA Test Result

### Codec Investigation

codec	AMR-NB 4.75Kbps	AMR-NB7.95Kbps	AMR-NB 12.2Kbps	Worst Orientation	Band/channel
ABM1 [dB A/m]	<b>-8.95</b>	-9.01	-9.12	Axial(Y)	WCDMA Band2/CH9400
ABM2 [dB A/m]	<b>-58.91</b>	-59.13	-59.20		
SNR [dB]	<b>49.96</b>	50.12	50.08		

### Tests Results

We use codec **AMR-NB 4.75Kbps** perform all the test below.

Air interface	Channel	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Signal Quality dB	T-Rating ANSI C63.19	Freq. Response
WCDMA BAND2	9400	Radial (Y)	-8.95	-58.91	49.96	T4	---
		Axial (Z)	-0.45	-57.94	57.49	T4	Pass
WCDMA BAND4	1413	Radial (Y)	-8.89	-59.23	50.34	T4	---
		Axial (Z)	-0.29	-57.73	57.44	T4	Pass
WCDMA BAND5	4182	Radial (Y)	-8.72	-58.79	50.07	T4	---
		Axial (Z)	-0.37	-57.74	57.37	T4	Pass

## 10 .3VOLTE Test Result

### Codec Investigation

AMR Codec Investigation

codec	AMR -NB 4.75Kbps	AMR -NB 12.2Kbps	AMR -WB 6.6Kbps	AMR -WB 23.85Kbps	Worst Orientation	Band/ BW/ channel/ Modulation
ABM1 [dB A/m]	<b>-11.76</b>	-11.82	-11.78	-11.92	Axial( Y)	LTE BAND2 / 20MHz/CH18 900/QPSK
ABM2 [dB A/m]	<b>-59.22</b>	-59.40	-59.30	-59.53		
SNR [dB]	<b>47.46</b>	47.58	47.52	47.61		

Note: The product does not support EVS Codec.

### Radio Configuration Investigation

For the radio configuration investigation (FDD-LTE), we use codec **AMR -NB4.75Kbps** determined by Codec Investigation which represents the worst codec future.

Air interface	BW	Modulation	RB Size/ offset	Channel	Power Class	UL-DL Configuration	ABM1 withWorst Orientation [dB A/m]	ABM2 withWorst Orientation [dB A/m]	Signal Quality dB
FDD-LTE BAND2	1.4	QPSK	1/0	18900	3	---	-11.84	-59.36	47.52
	3	QPSK	1/0	18900	3	---	-11.81	-59.42	47.61
	5	QPSK	1/0	18900	3	---	-11.92	-59.75	47.83
	10	QPSK	1/0	18900	3	---	-12.03	-59.54	47.51
	15	QPSK	1/0	18900	3	---	-11.89	-59.52	47.63
	<b>20</b>	<b>QPSK</b>	<b>1/0</b>	<b>18900</b>	<b>3</b>	<b>---</b>	<b>-11.76</b>	<b>-59.22</b>	<b>47.46</b>
	20	16QAM	1/0	18900	3	---	-11.98	-59.56	47.58
	20	64QAM	1/0	18900	3	---	-11.86	-59.35	47.49
	20	QPSK	50/0	18900	3	---	-11.78	-59.34	47.56
	20	QPSK	100/0	18900	3	---	-11.93	-59.64	47.71

#### FDD:

Step1: SRTC evaluate the worst bandwidth.

Step2: then evaluate the worst modulation type based on step1.

Step3: and finally evaluate the RB allocation based on previous steps.



### Summary Tests Results

Refers to previous investigation, we use the worst codec **AMR –NB4.75Kbps** and the worst configuration showing below perform all the test for each LTE bands.

Configuration for FDD-LTE:

MAX Bandwidth, QPSK,1RB@0

Air interface	Channel	Orientation	ABM1 dB(A/m)	ABM2 dB(A/m)	Signal Quality dB	T-Rating ANSI C63.19	Freq. Response
FDD-LTE BAND2	18900	Radial (Y)	-11.76	-59.22	47.46	T4	---
		Axial (Z)	-4.57	-59.49	54.92	T4	Pass
FDD-LTE BAND4	20175	Radial (Y)	-8.41	-59.09	50.68	T4	---
		Axial (Z)	-2.77	-58.43	55.66	T4	Pass
FDD-LTE BAND5	20525	Radial (Y)	-12.03	-59.28	47.25	T4	---
		Axial (Z)	-3.60	-58.21	54.61	T4	Pass
FDD-LTE BAND7	21100	Radial (Y)	-11.96	-59.33	47.37	T4	---
		Axial (Z)	-3.49	-57.67	54.18	T4	Pass
FDD-LTE BAND12	23095	Radial (Y)	-8.82	-59.23	50.41	T4	---
		Axial (Z)	-3.59	-58.12	54.53	T4	Pass
FDD-LTE BAND13	23230	Radial (Y)	-8.71	-59.31	50.60	T4	---
		Axial (Z)	-0.20	-58.05	57.85	T4	Pass
FDD-LTE BAND66	132322	Radial (Y)	-12.15	-59.67	47.52	T4	---
		Axial (Z)	-3.53	-57.62	54.09	T4	Pass

## 11 Test Equipments

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland.

The following table lists calibration dates of components:

Test equipment	Model	S/N	Cal Date	Cal Due Date
DAE	DAE 4	546	2019.09.28	2020.09.27
Audio Magnetic Probe	AM1DV2	1021	2019.09.24	2020.09.23
Audio Magnetic Measurement Instrument	TMFS	1013	2019.09.24	2020.09.23
Radio Tester	CMU200	114666	2019.08.20	2020.08.19
Radio Tester	CMW500	102143	2019.07.11	2020.07.10

Support equipment	S/N
AMMI	1045
HAC Phantom part1	1080
HAC Phantom part2	1042

### 11.1 Audio Magnetic Probe AM1DV2

Construction	Fully RF shielded metal construction (RF sensitivity<-100 dB)
System Calibration	Calibrated using Helmholtz coil according to manufacturers instructions
Frequency	0.1-20kHz(HOX!test signal is limited to required BW of 300 to 3000Hz,ANSI C63.19);
Sensitivity	<-50dB A/m
Dimensions	Overall length:290mm; Tip diameter:6mm

### 11.2 Audio Magnetic Measurement Instrument AMMI

Sampling rate	48kHz/24bit
Dynamic Range	85dB
Test Signal generation	User selectable and predefined(via pc)
System calibration	Auto-calibration/full system calibration using AMCC with monitor output




### 11.3 Audio Magnetic calibration Coil AMCC

Dimensions	370 x 370 x 196 mm (ANSI-C63.19 compliant)
------------	--

**ANNEX A: TEST PLOTS**



GSM850	Axial Y										
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz;Duty Cycle: 1:8.6896            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM835_T-Coil_HAC Full rate version1/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 34.99            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.14 dB            Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b>            ABM1/ABM2 = 49.53 dB            ABM1 comp = -9.20 dBA/m            BWC Factor = 0.14 dB            Location: -0.4, 7.9, 3.7 mm</p>											

GSM850	Axial Z & Frequency Resp.																				
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.4 MHz;Duty Cycle: 1:8.6896            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>Sensor-Surface: 0mm (Fix Surface)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM835_T-Coil_HAC Full rate version1/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 34.99            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.14 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            ABM1/ABM2 = 51.67 dB            ABM1 comp = -0.60 dBA/m            BWC Factor = 0.14 dB            Location: 0, -0.8, 3.7 mm</p> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM835_T-Coil_HAC Full rate version1/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm            Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav            Output Gain: 68.52            Measure Window Start: 300ms            Measure Window Length: 2000ms            BWC applied: 10.78 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            Diff = 0.86 dB            BWC Factor = 10.78 dB            Location: 0, -0.7, 3.7 mm</p>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB	Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				

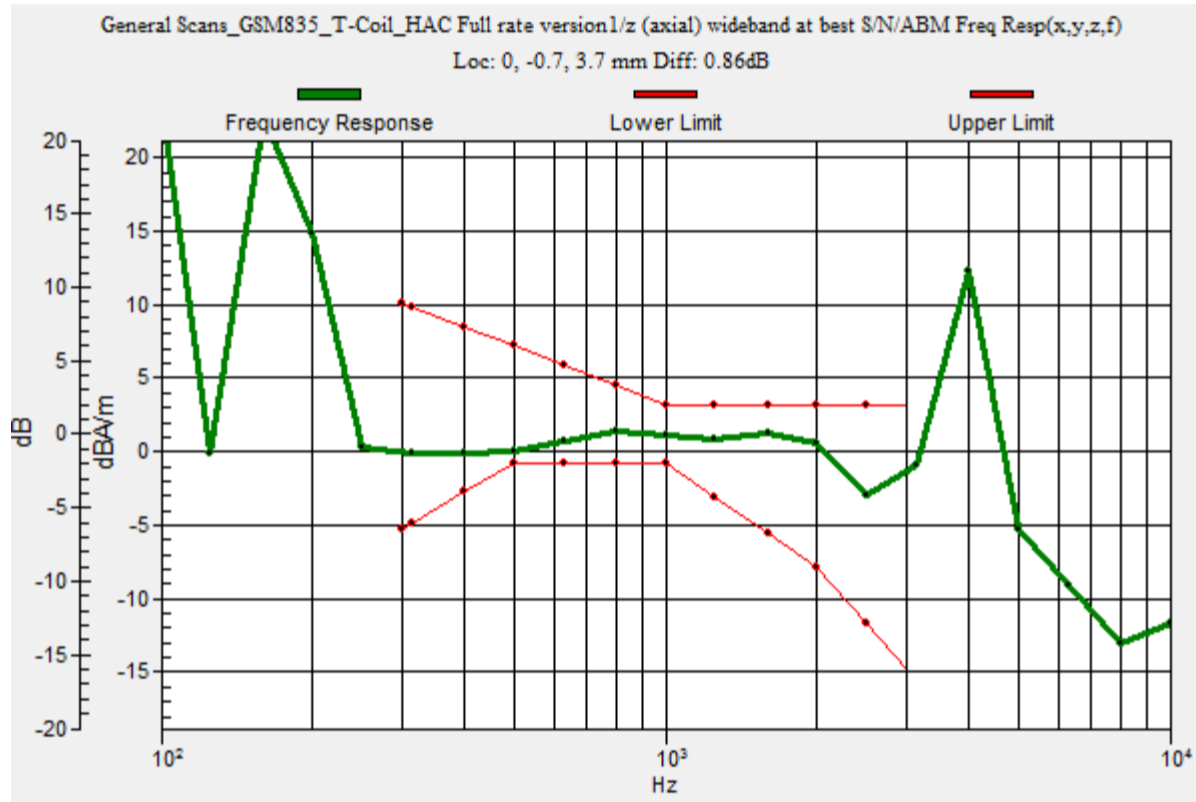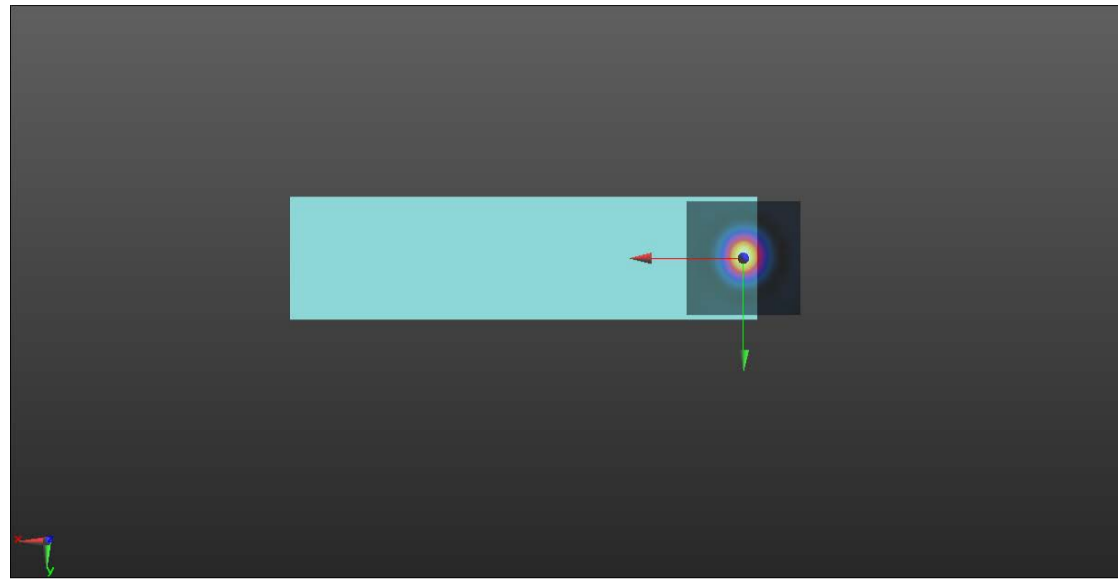

GSM1900	Axial Y										
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM1900_T-Coil_HAC Full rate version1/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 34.99            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.14 dB            Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b>            ABM1/ABM2 = 49.96 dB            ABM1 comp = -9.05 dBA/m            BWC Factor = 0.14 dB            Location: 0, 7.5, 3.7 mm</p>											

GSM1900	Axial Z & Frequency Resp.																				
<p>Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>Sensor-Surface: 0mm (Fix Surface)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM1900_T-Coil_HAC Full rate version1/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 34.99            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.14 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            ABM1/ABM2 = 54.01 dB            ABM1 comp = -0.54 dBA/m            BWC Factor = 0.14 dB            Location: 0, -0.8, 3.7 mm</p> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_GSM1900_T-Coil_HAC Full rate version1/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm            Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav            Output Gain: 68.52            Measure Window Start: 300ms            Measure Window Length: 2000ms            BWC applied: 10.78 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            Diff = 0.81 dB            BWC Factor = 10.78 dB            Location: 0, -0.7, 3.7 mm</p>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB	Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				

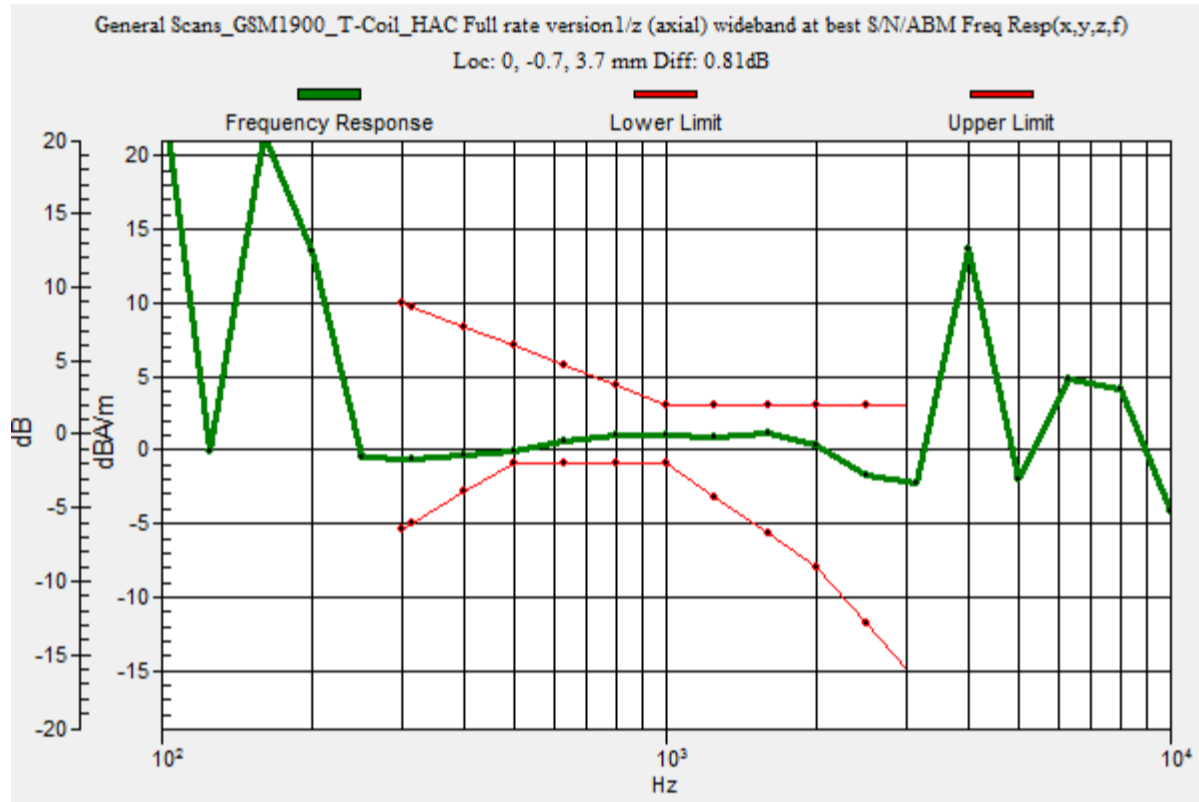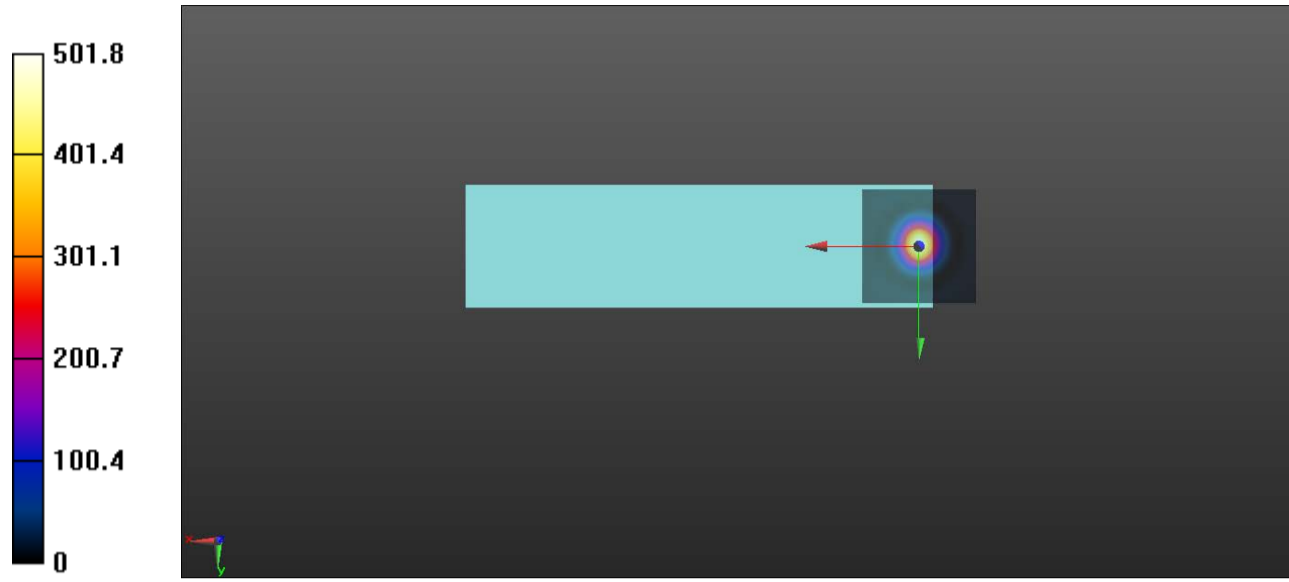



**WCDMA BAND2**

**Axial Y**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1880 MHz;Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 2\_T-Coil\_HAC AMR 4.75Kbps/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 34.99  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 49.96 dB  
ABM1 comp = -8.95 dBA/m  
BWC Factor = 0.15 dB  
Location: 0, 7.9, 3.7 mm

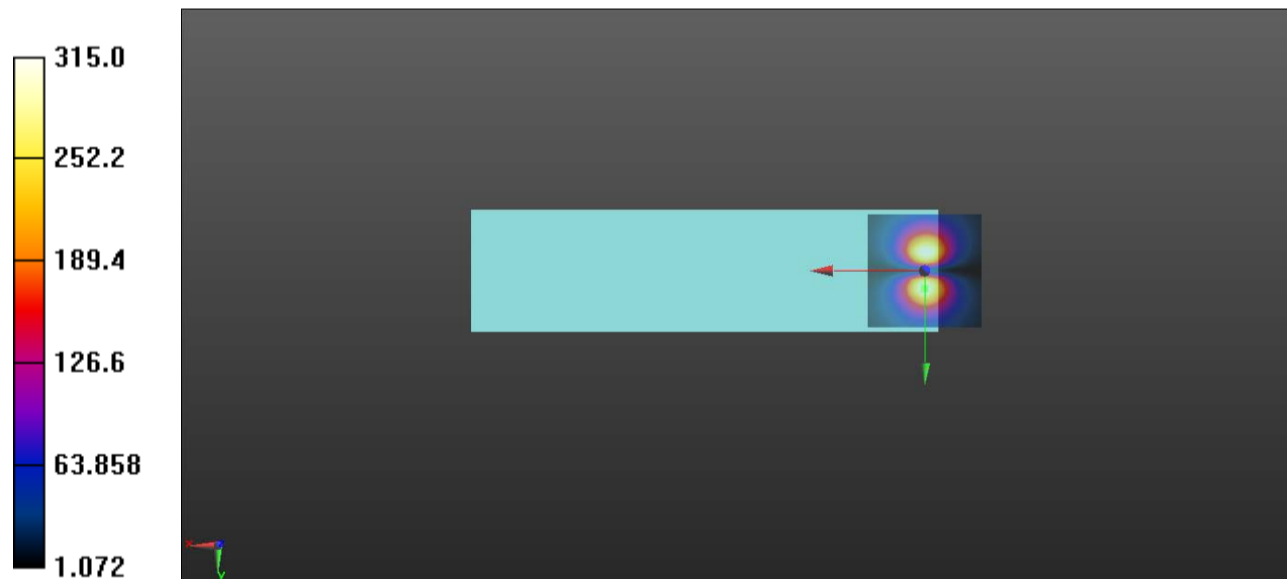

**WCDMA BAND2**

**Axial Z & Frequency Resp.**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1880 MHz; Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 2\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 34.99

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 57.49 dB

ABM1 comp = -0.45 dBA/m

BWC Factor = 0.15 dB

Location: 0.4, 0, 3.7 mm

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 2\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 68.52

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.79 dB

Device Reference Point: 0, 0, -6.3 mm



Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 1.08 dB

BWC Factor = 10.79 dB

Location: 0.3, 0.2, 3.7 mm

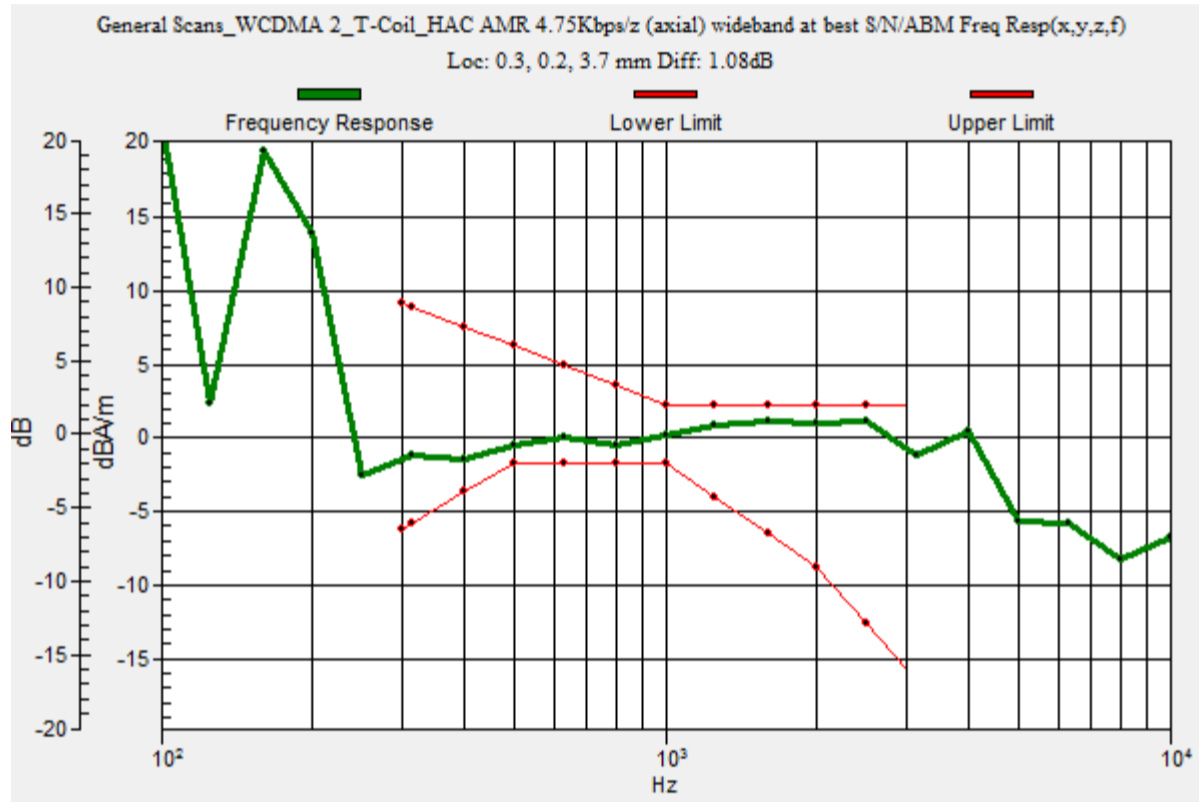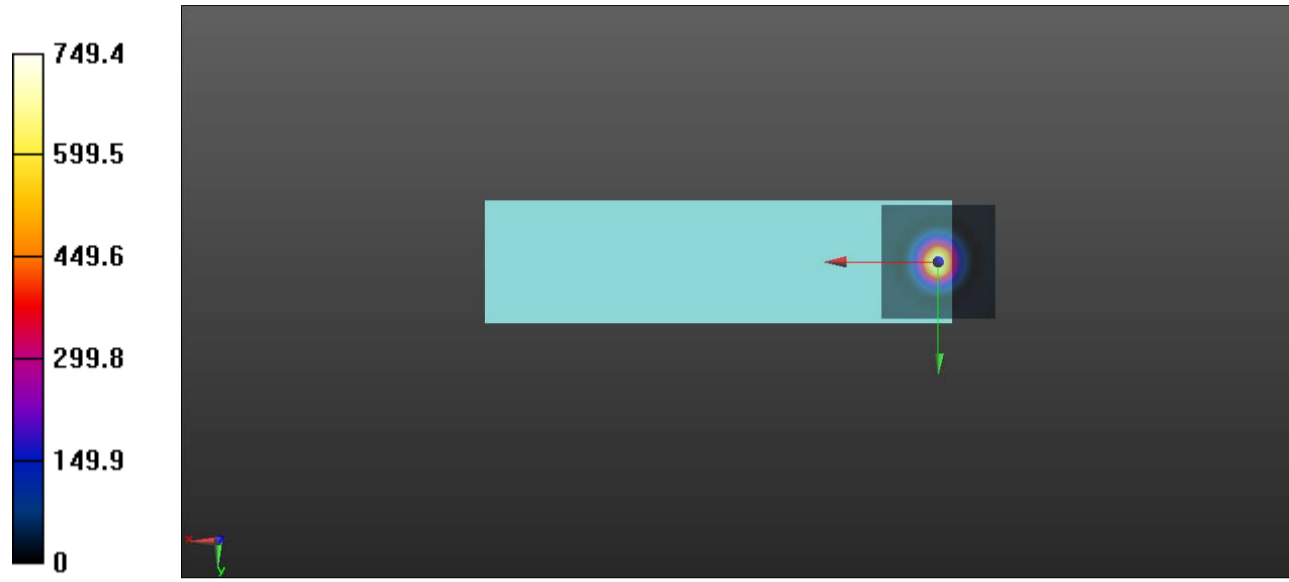

**WCDMA BAND4**

**Axial Y**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1732.4 MHz;Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 4\_T-Coil\_HAC AMR 4.75Kbps/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav  
Output Gain: 34.99  
Measure Window Start: 300ms  
Measure Window Length: 1000ms  
BWC applied: 0.15 dB  
Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 50.34 dB  
ABM1 comp = -8.89 dBA/m  
BWC Factor = 0.15 dB  
Location: -0.4, -8.3, 3.7 mm

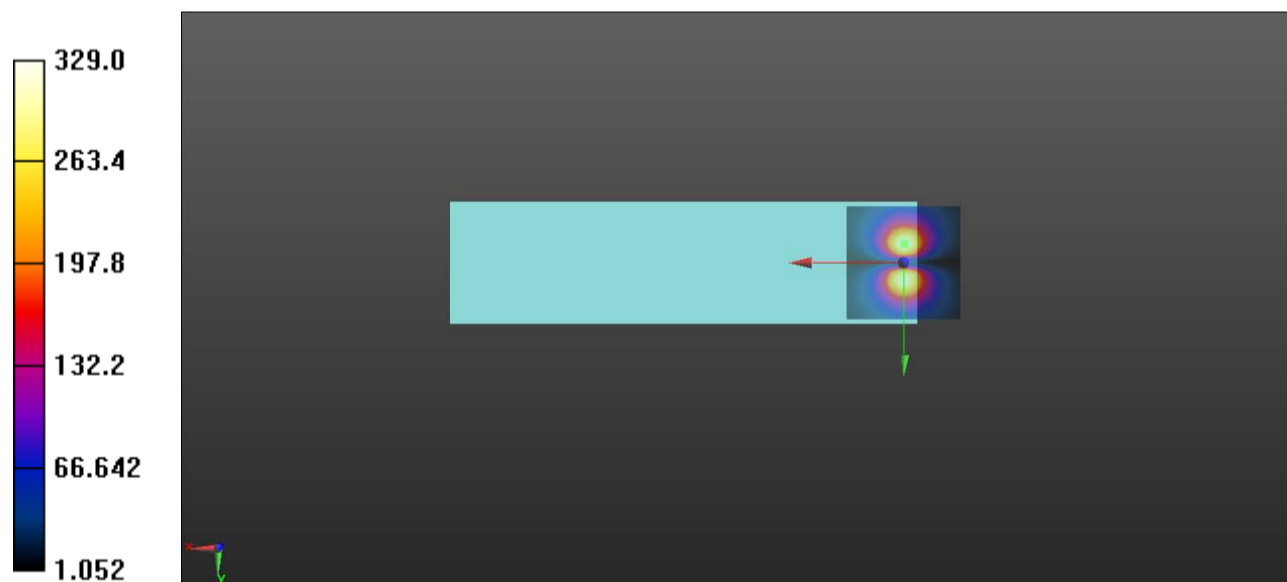

**WCDMA BAND4**

**Axial Z & Frequency Resp.**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 1732.4 MHz;Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 4\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 34.99

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 57.44 dB

ABM1 comp = -0.29 dBA/m

BWC Factor = 0.15 dB

Location: 0.4, 0, 3.7 mm

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 4\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 68.52

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.79 dB

Device Reference Point: 0, 0, -6.3 mm



Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 0.94 dB

BWC Factor = 10.79 dB

Location: 0.4, 0, 3.7 mm

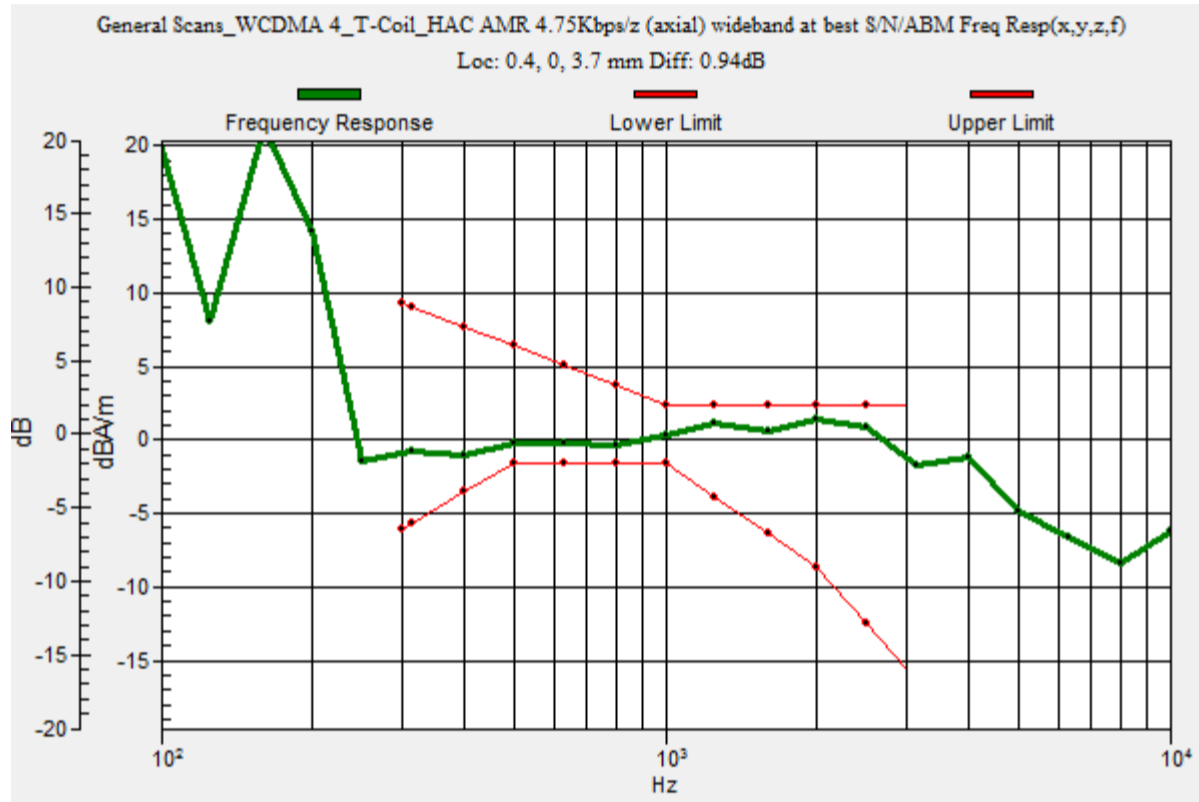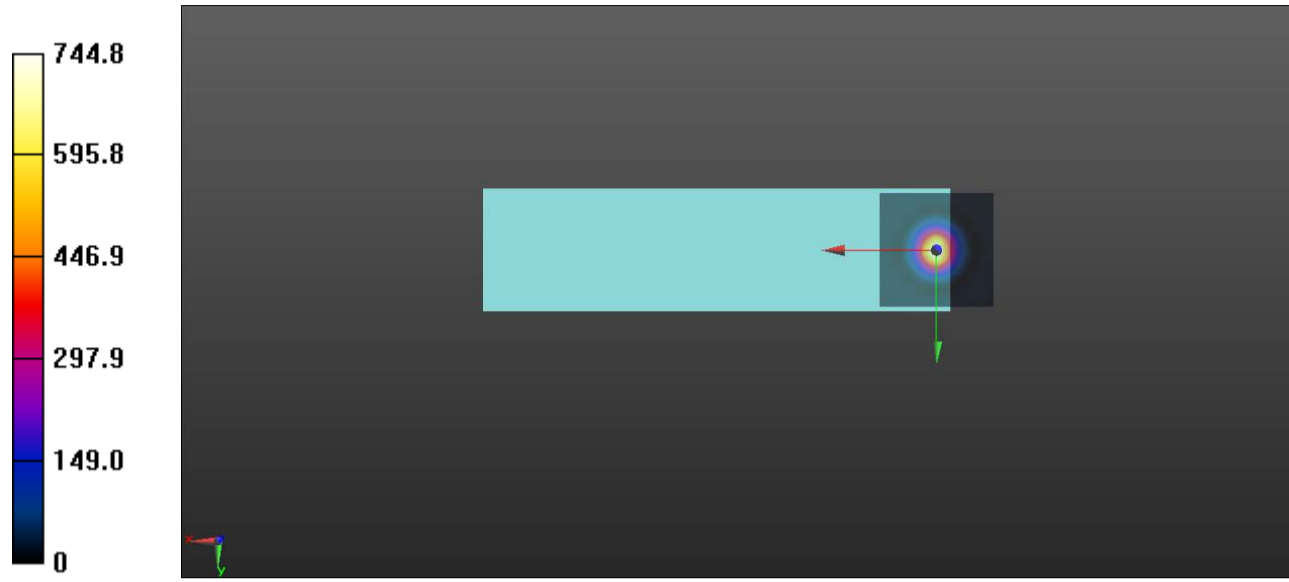

**WCDMA BAND5**

**Axial Y**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 836.6 MHz;Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 5\_T-Coil\_HAC AMR 4.75Kbps/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 34.99

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.14 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 50.07 dB

ABM1 comp = -8.72 dBA/m

BWC Factor = 0.14 dB

Location: -0.8, -8.8, 3.7 mm

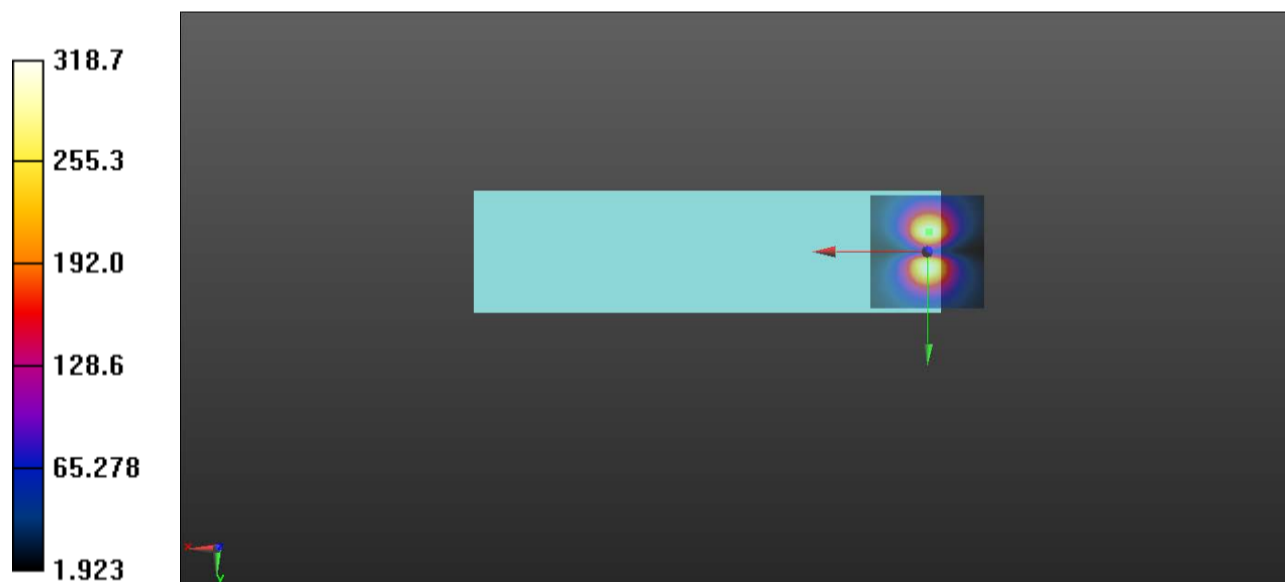

**WCDMA BAND5**

**Axial Z & Frequency Resp.**

Communication System: UID 10460 - AAA, UMTS-FDD (WCDMA, AMR); Frequency: 836.6 MHz;Duty Cycle: 1:1.7338  
Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 5\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 34.99

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.14 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 57.37 dB

ABM1 comp = -0.37 dBA/m

BWC Factor = 0.14 dB

Location: 0.4, -0.4, 3.7 mm

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_WCDMA 5\_T-Coil\_HAC AMR 4.75Kbps/z (axial)**

**wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 68.52

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.79 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB



**Cursor:**

Diff = 0.87 dB

BWC Factor = 10.79 dB





Location: 0.2, -0.4, 3.7 mm



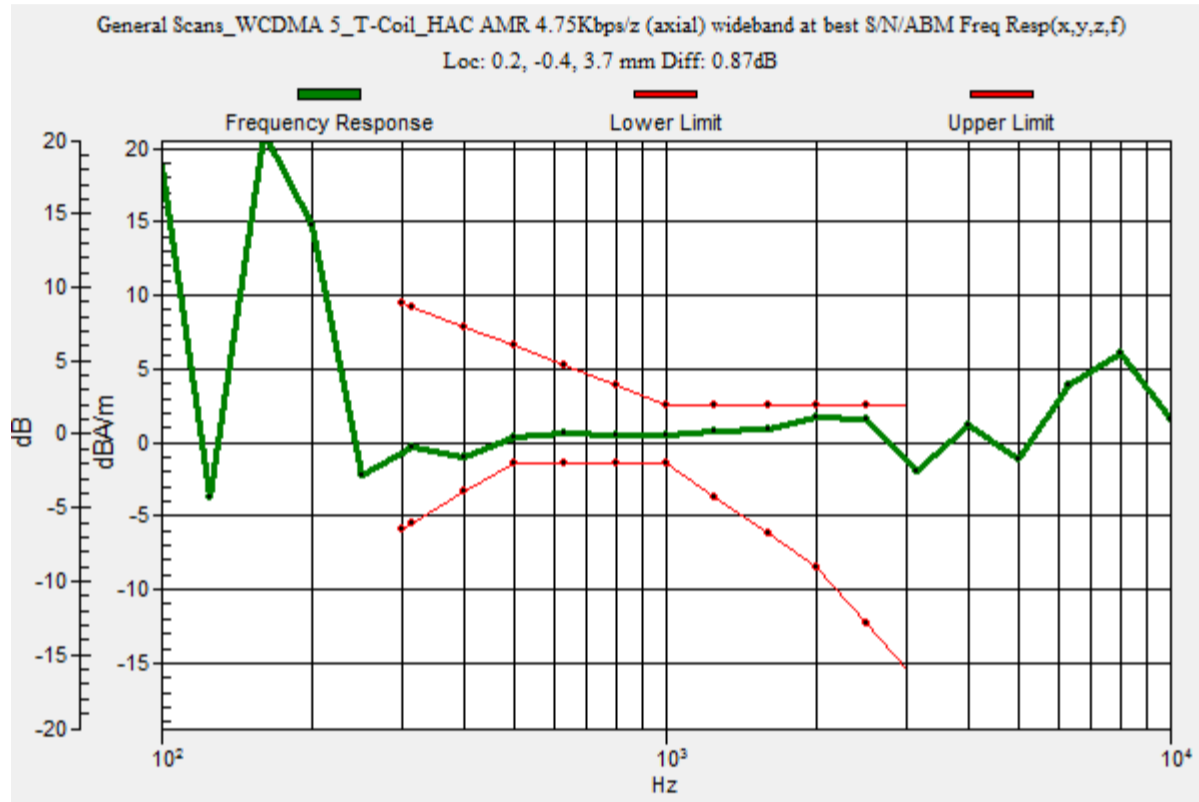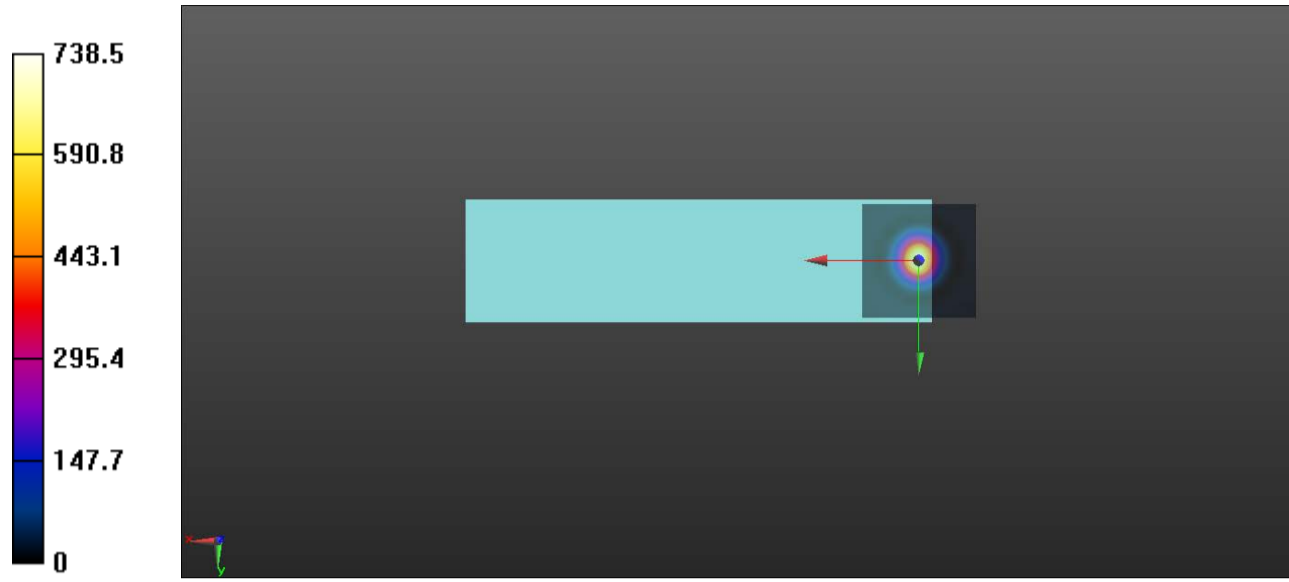

LTE BAND2	Axial Y										
<p>Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz;Duty Cycle: 1:3.74111</p> <p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup></p> <p>Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band2_T-Coil_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav</p> <p>Output Gain: 42</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 1000ms</p> <p>BWC applied: 0.22 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>ABM1/ABM2 = 47.46 dB</p> <p>ABM1 comp = -11.76 dBA/m</p> <p>BWC Factor = 0.22 dB</p> <p>Location: 1.7, 8.3, 3.7 mm</p>											

LTE BAND2	Axial Z & Frequency Resp.										
<p>Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1880 MHz;Duty Cycle: 1:3.74111</p> <p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup></p> <p>Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>Sensor-Surface: 0mm (Fix Surface)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band2_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav</p> <p>Output Gain: 42</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 1000ms</p> <p>BWC applied: 0.22 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>ABM1/ABM2 = 54.92 dB</p> <p>ABM1 comp = -4.57 dBA/m</p> <p>BWC Factor = 0.22 dB</p> <p>Location: 0.8, -0.4, 3.7 mm</p>											
<p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band2_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav</p> <p>Output Gain: 82.26</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 2000ms</p> <p>BWC applied: 10.86 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>Diff = 0.73 dB</p> <p>BWC Factor = 10.86 dB</p> <p>Location: 0.6, -0.5, 3.7 mm</p>											

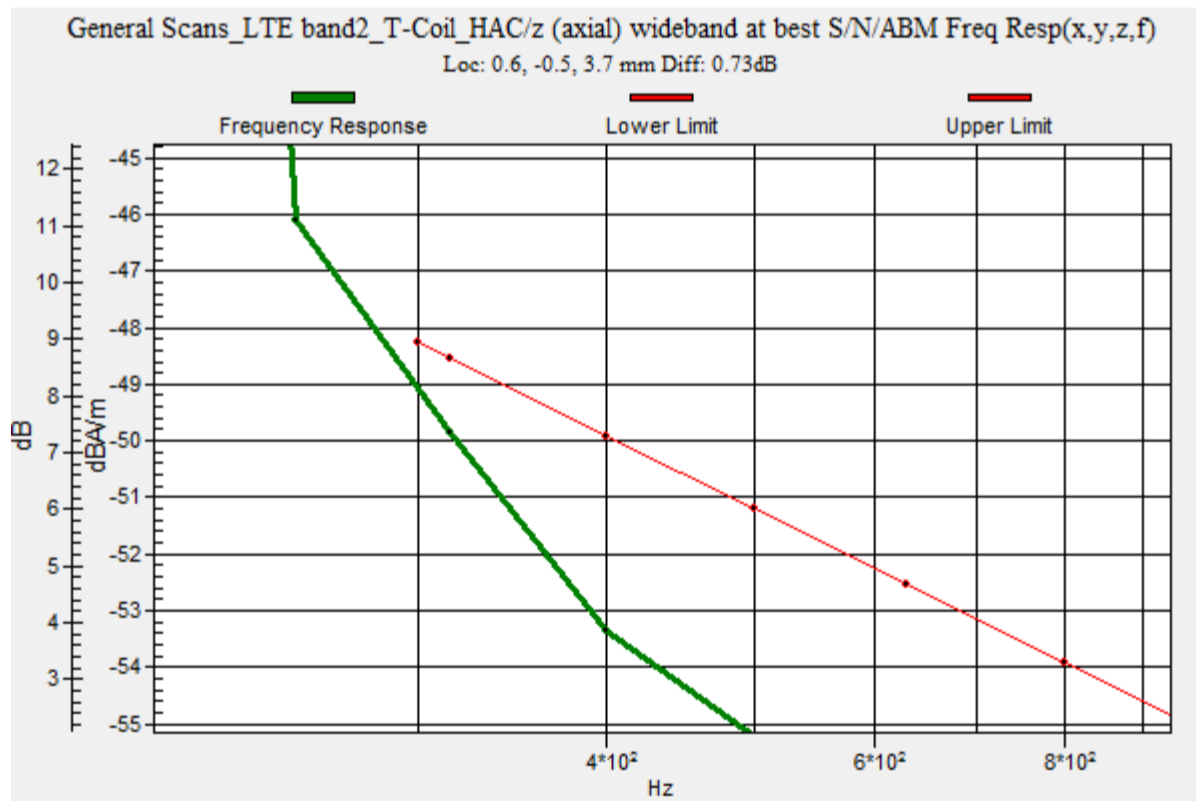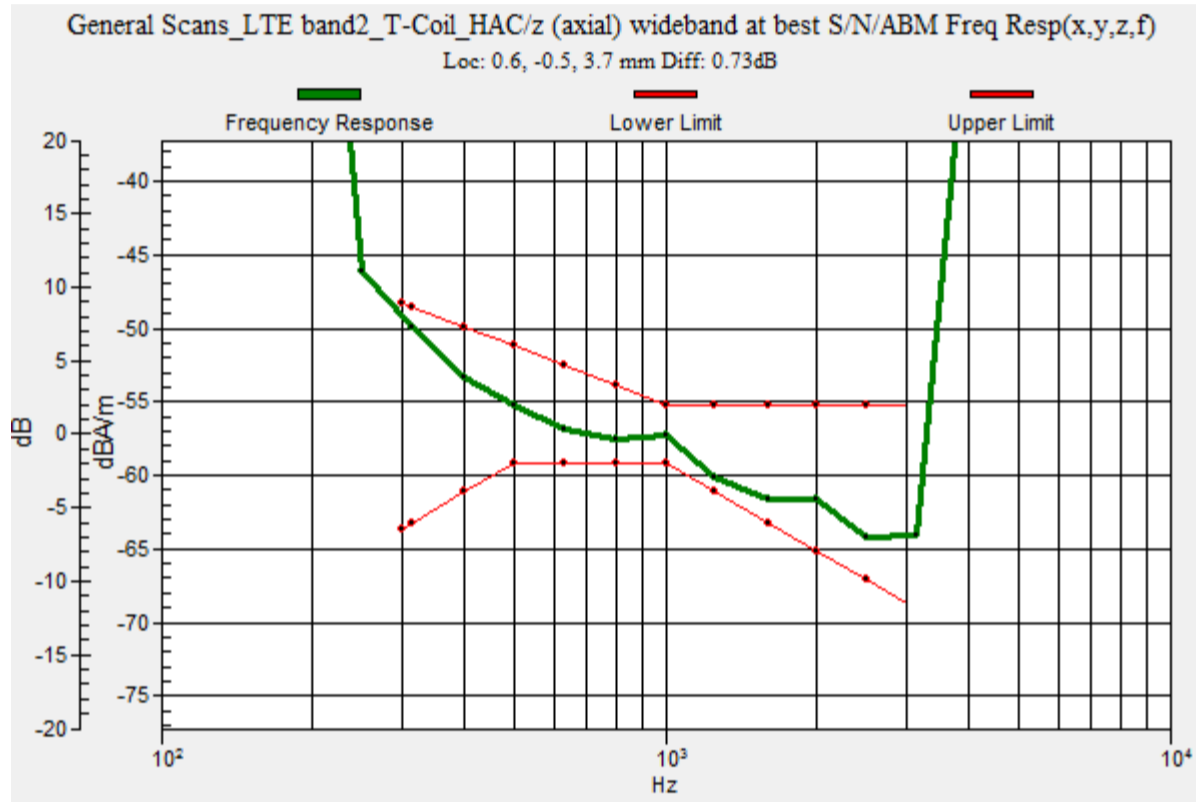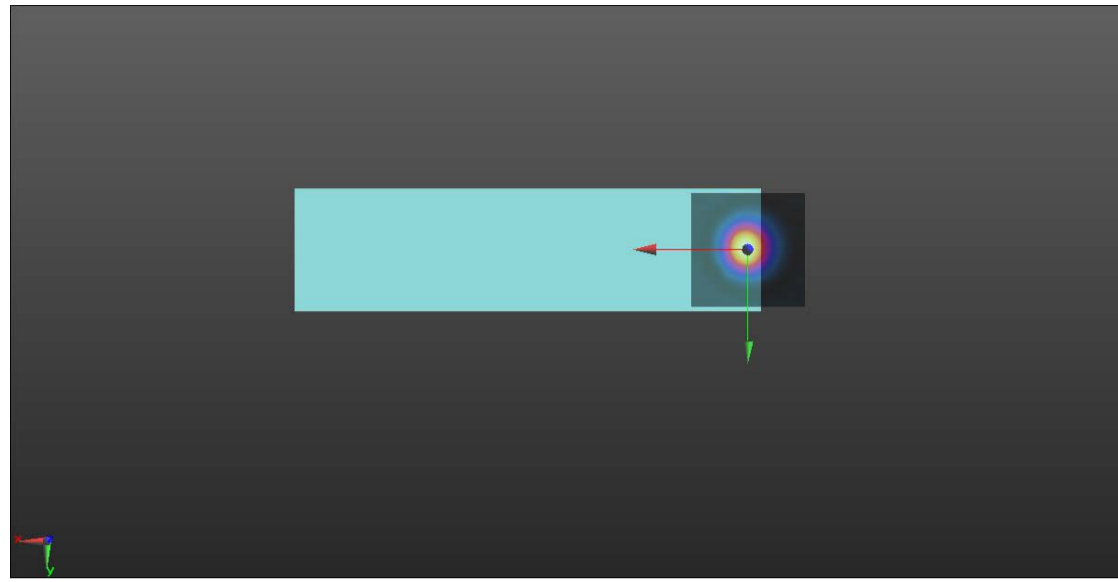

<b>LTE BAND4</b>	<b>Axial Y</b>
------------------	----------------

Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz; Duty Cycle: 1:3.74111

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band4\_T-Coil\_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 42

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 50.68 dB



ABM1 comp = -8.41 dBA/m

BWC Factor = 0.16 dB

Location: 0, 7.1, 3.7 mm

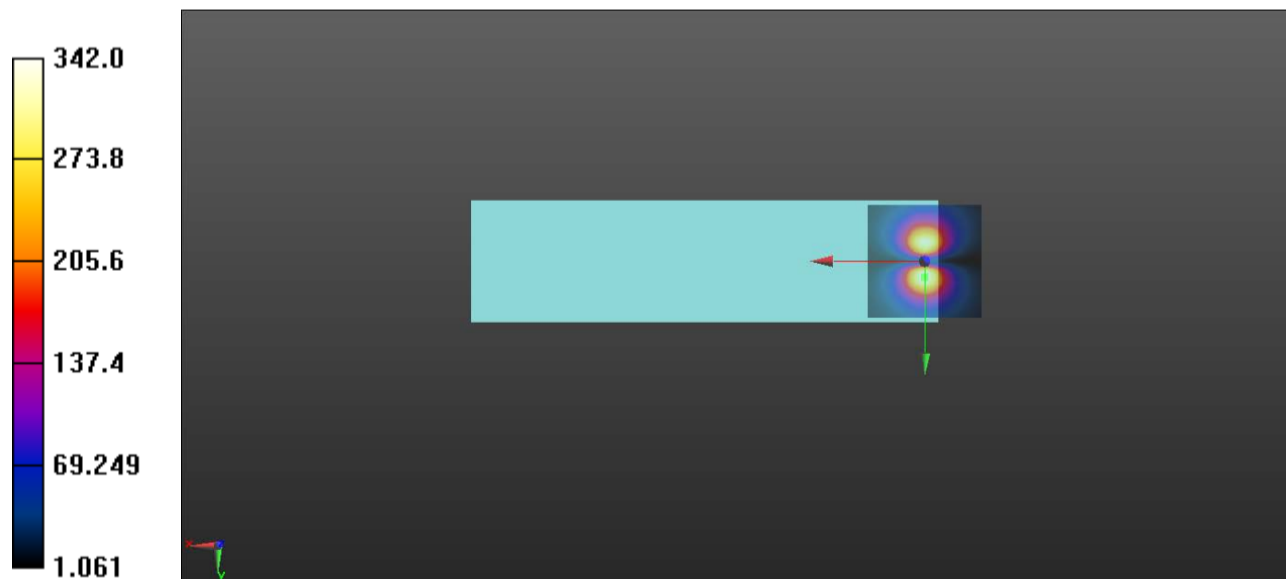

LTE BAND4	Axial Z & Frequency Resp.										
<p>Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 1732.5 MHz;Duty Cycle: 1:3.74111</p> <p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup></p> <p>Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band4_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav</p> <p>Output Gain: 42</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 1000ms</p> <p>BWC applied: 0.16 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>ABM1/ABM2 = 55.66 dB</p> <p>ABM1 comp = -2.77 dBA/m</p> <p>BWC Factor = 0.16 dB</p> <p>Location: 4.6, 0, 3.7 mm</p>											
<p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band4_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav</p> <p>Output Gain: 82.26</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 2000ms</p> <p>BWC applied: 10.80 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>Diff = 1.12 dB</p> <p>BWC Factor = 10.80 dB</p> <p>Location: 4.4, 0, 3.7 mm</p>											

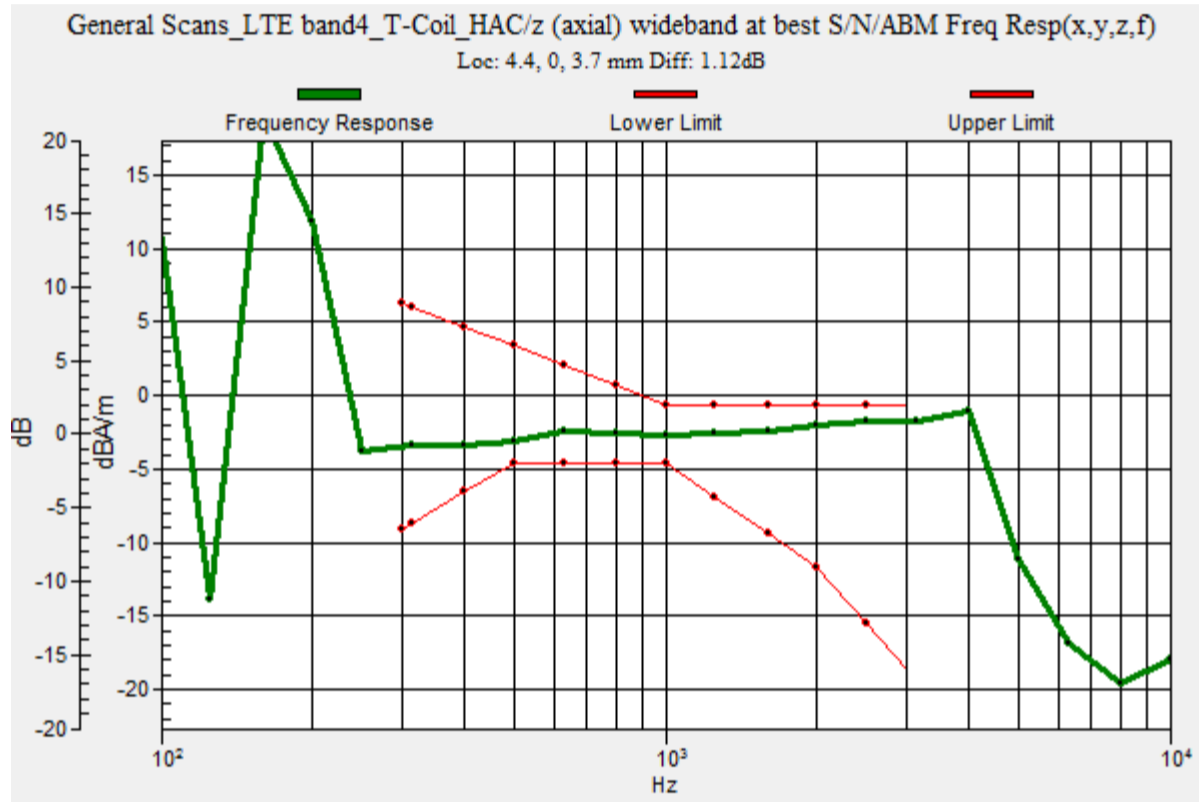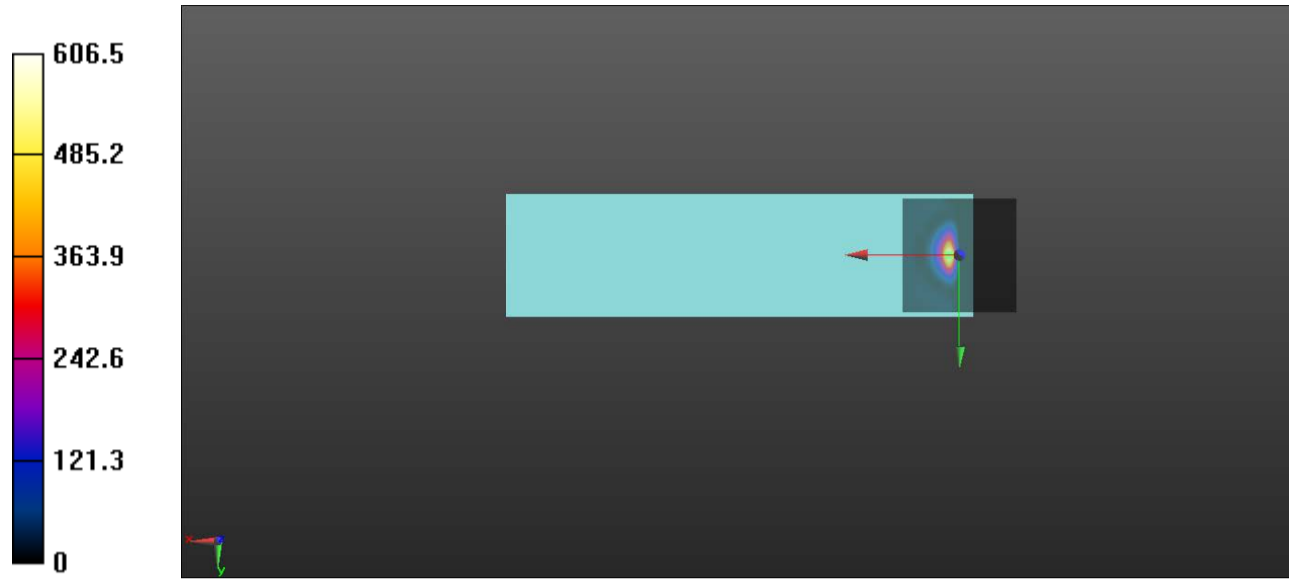

<b>LTE BAND5</b>	<b>Axial Y</b>
------------------	----------------

Communication System: UID 10175 - CAC, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz;Duty Cycle: 1:3.7325

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band5\_T-Coil\_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 42

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 47.25 dB

ABM1 comp = -12.03 dBA/m



BWC Factor = 0.15 dB

Location: -0.4, 7.9, 3.7 mm

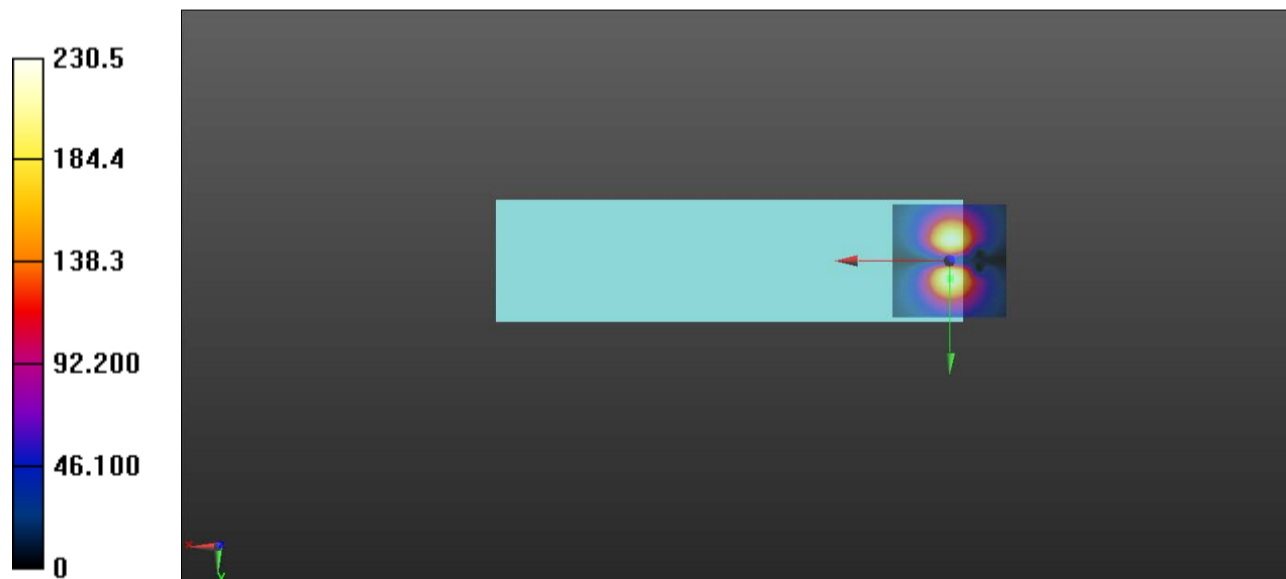





LTE BAND5	Axial Z & Frequency Resp.										
<p>Communication System: UID 10175 - CAC, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 836.5 MHz;Duty Cycle: 1:3.7325</p>											
<p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup> Phantom section: TCoil Section</p>											
<p>DASY5 Configuration:</p>											
<ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul>											
<p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band5_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p>											
<p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav Output Gain: 42</p>											
<p>Measure Window Start: 300ms Measure Window Length: 1000ms</p>											
<p>BWC applied: 0.15 dB Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p>											
<p>ABM1/ABM2 = 54.61 dB ABM1 comp = -3.60 dBA/m</p>											
<p>BWC Factor = 0.15 dB Location: 0, -0.4, 3.7 mm</p>											
<p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band5_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm</p>											
<p>Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 82.26</p>											
<p>Measure Window Start: 300ms Measure Window Length: 2000ms</p>											
<p>BWC applied: 10.79 dB Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p>											
<p>Diff = 1.07 dB BWC Factor = 10.79 dB</p>											
<p>Location: -0.1, -0.4, 3.7 mm</p>											

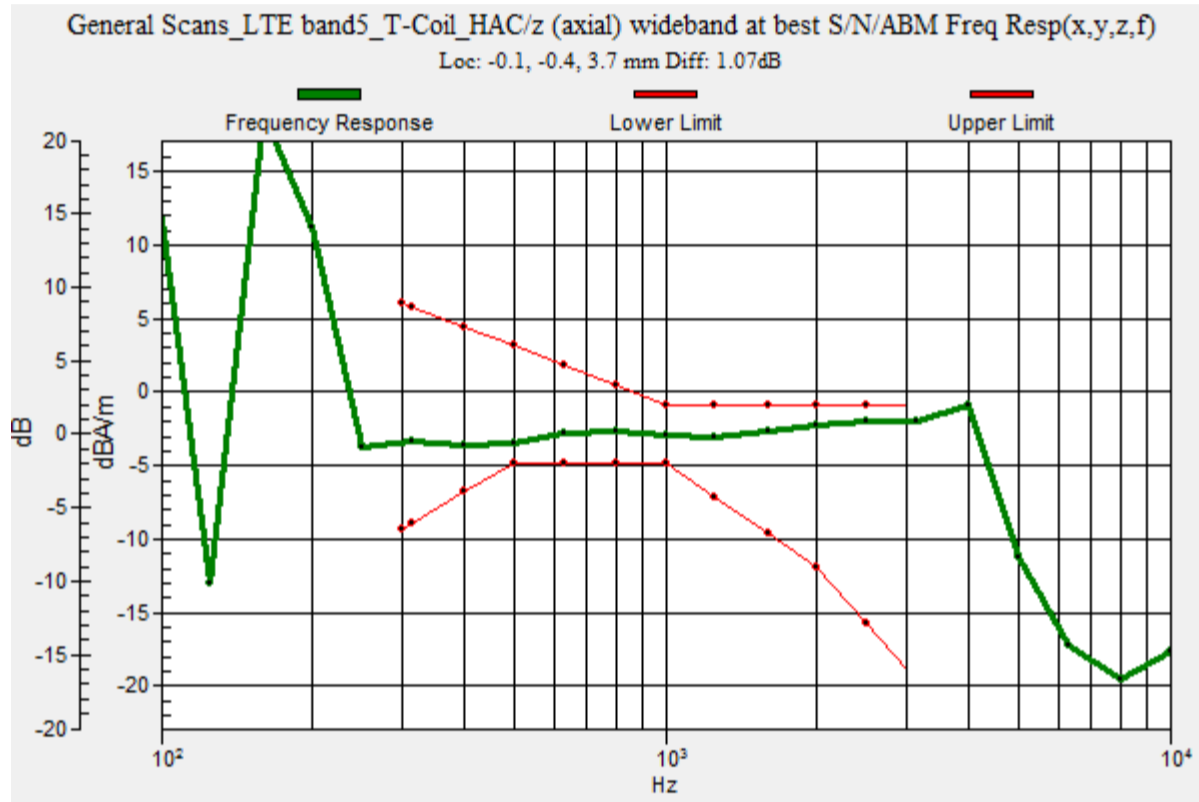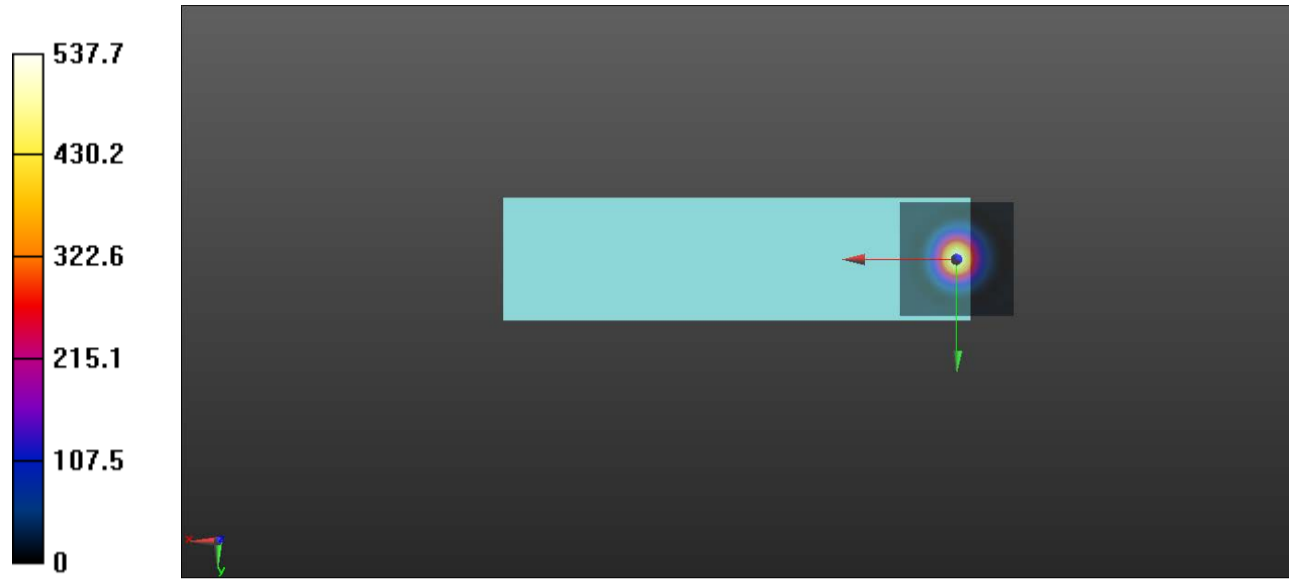

LTE BAND7	Axial Y										
<p>Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111</p> <p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup></p> <p>Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band7_T-Coil_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav</p> <p>Output Gain: 42</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 1000ms</p> <p>BWC applied: 0.15 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>ABM1/ABM2 = 47.37 dB</p> <p>ABM1 comp = -11.96 dBA/m</p> <p>BWC Factor = 0.15 dB</p> <p>Location: -0.4, -9.2, 3.7 mm</p>											

LTE BAND7	Axial Z & Frequency Resp.										
<p>Communication System: UID 10169 - CAE, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111</p> <p>Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup></p> <p>Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band7_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav</p> <p>Output Gain: 42</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 1000ms</p> <p>BWC applied: 0.15 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>ABM1/ABM2 = 54.18 dB</p> <p>ABM1 comp = -3.49 dBA/m</p> <p>BWC Factor = 0.15 dB</p> <p>Location: 0, -0.4, 3.7 mm</p>											
<p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band7_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm</p> <p>Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav</p> <p>Output Gain: 82.26</p> <p>Measure Window Start: 300ms</p> <p>Measure Window Length: 2000ms</p> <p>BWC applied: 10.79 dB</p> <p>Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b></p> <p>Diff = 0.91 dB</p> <p>BWC Factor = 10.79 dB</p> <p>Location: -0.1, -0.4, 3.7 mm</p>											

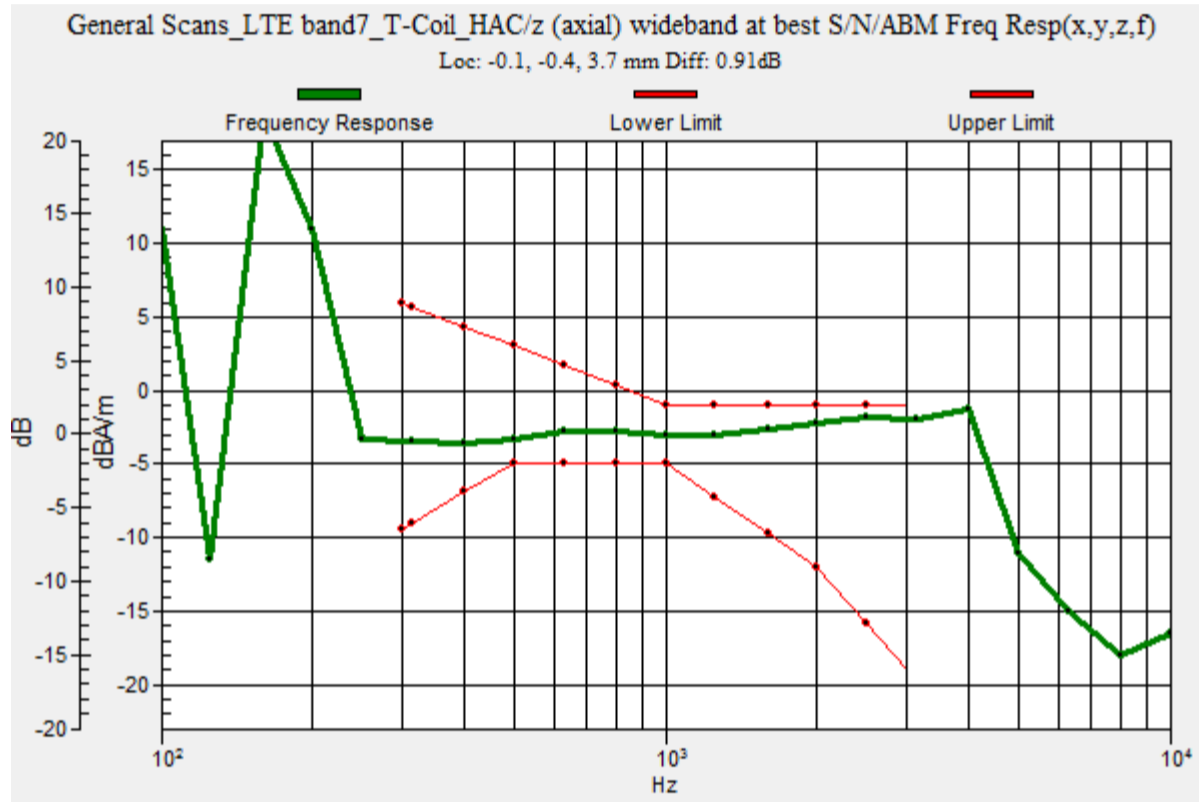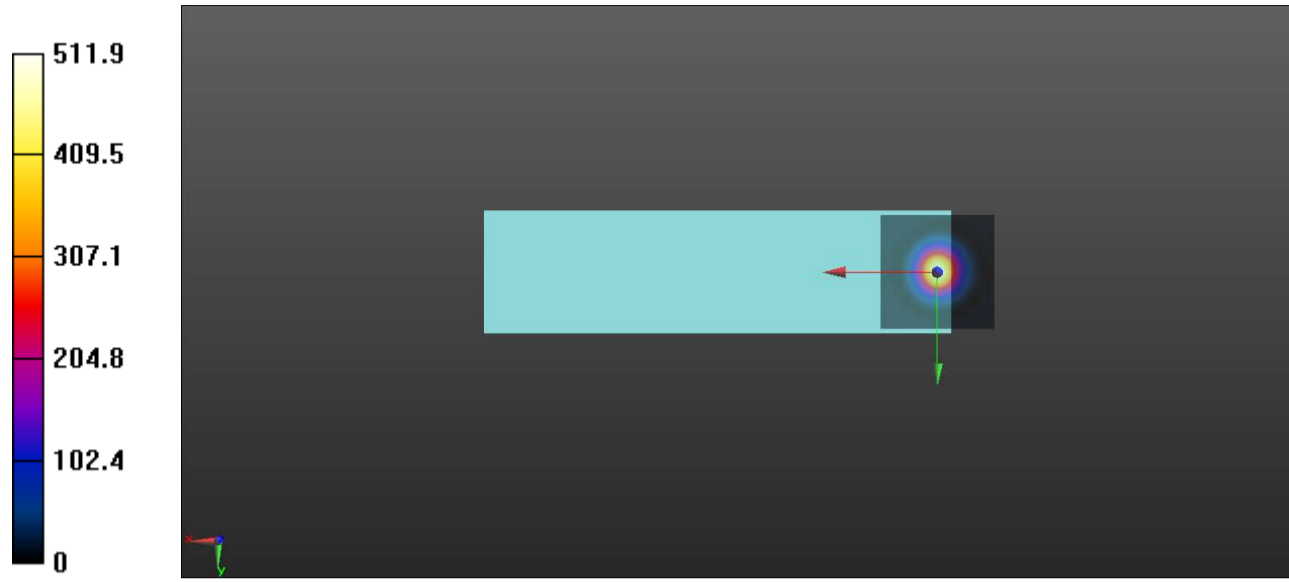

<b>LTE BAND12</b>	<b>Axial Y</b>
-------------------	----------------

Communication System: UID 10175 - CAC, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz;Duty Cycle: 1:3.7325

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band12\_T-Coil\_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 42

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 50.41 dB



ABM1 comp = -8.82 dBA/m

BWC Factor = 0.15 dB

Location: 0, -8.3, 3.7 mm

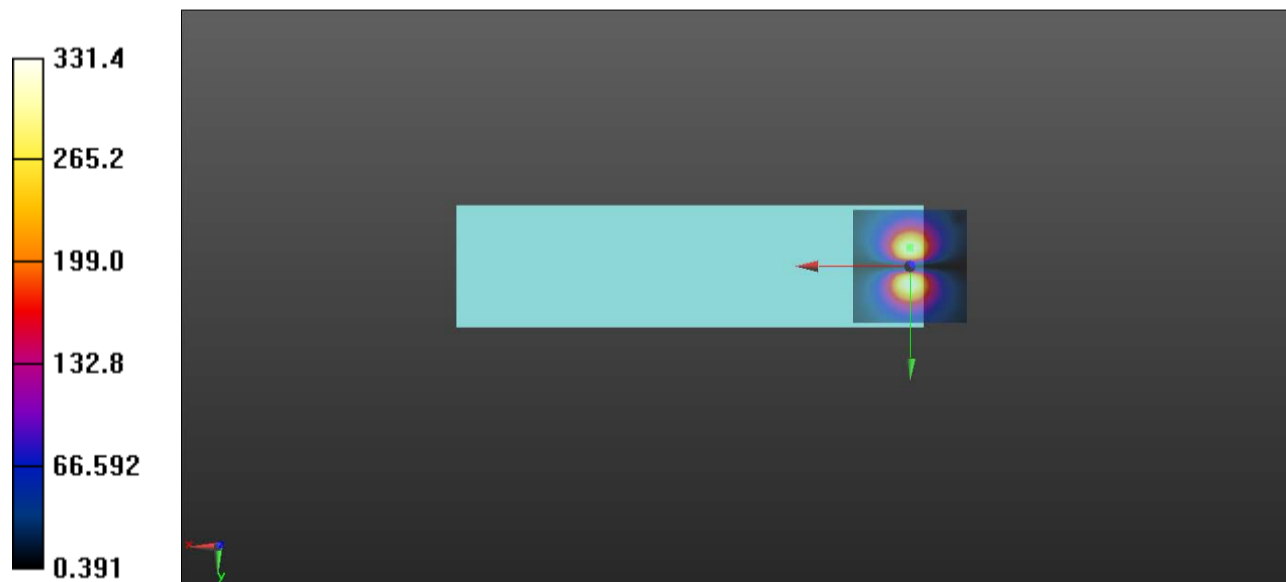

LTE BAND12	Axial Z & Frequency Resp.																				
<p>Communication System: UID 10175 - CAC, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 707.5 MHz;Duty Cycle: 1:3.7325            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>Sensor-Surface: 0mm (Fix Surface)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band12_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 42            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.15 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            ABM1/ABM2 = 54.53 dB            ABM1 comp = -3.59 dBA/m            BWC Factor = 0.15 dB            Location: 0, -0.4, 3.7 mm</p> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band12_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm            Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav            Output Gain: 82.26            Measure Window Start: 300ms            Measure Window Length: 2000ms            BWC applied: 10.79 dB            Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b>            Diff = 1.04 dB            BWC Factor = 10.79 dB            Location: -0.1, -0.4, 3.7 mm</p>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB	Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				

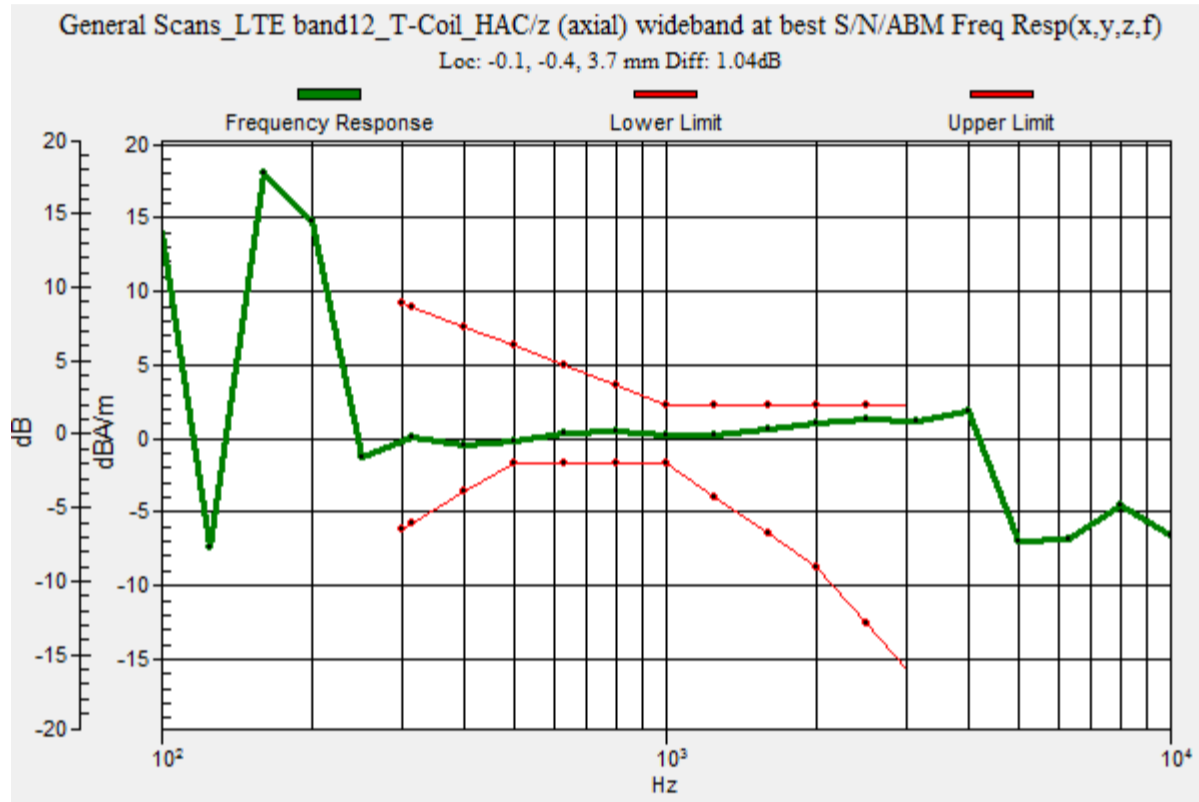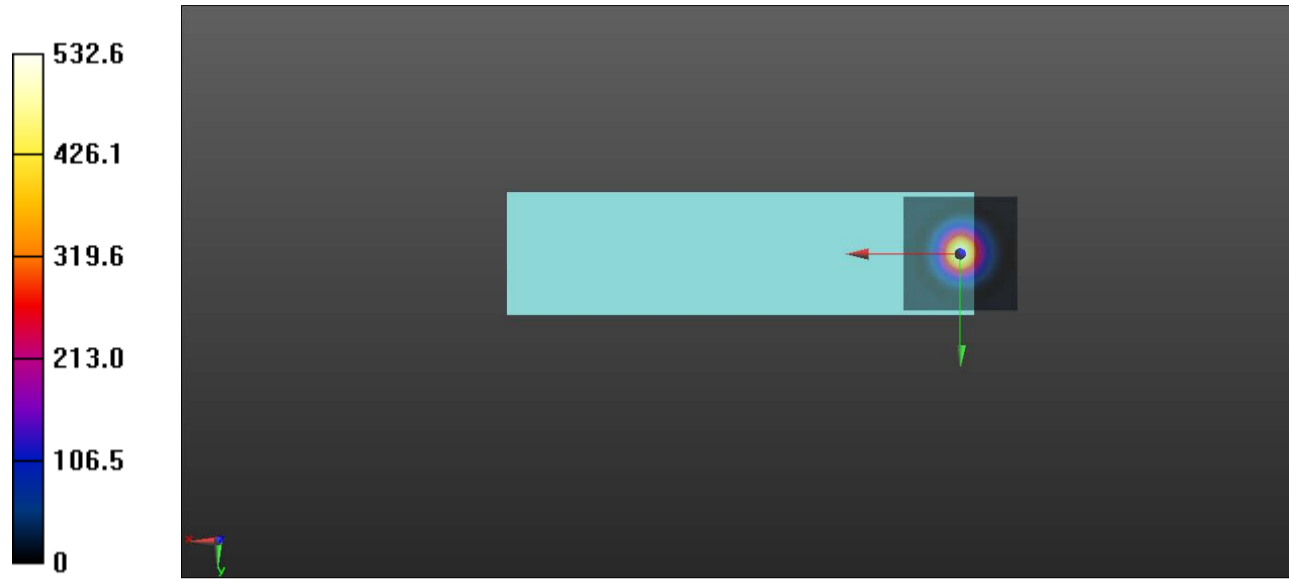



<b>LTE BAND13</b>	<b>Axial Y</b>
-------------------	----------------

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz;Duty Cycle: 1:3.7325

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band13\_T-Coil\_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 42

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB


**Cursor:**

ABM1/ABM2 = 50.60 dB

ABM1 comp = -8.71 dBA/m

BWC Factor = 0.15 dB

Location: -0.4, -8.3, 3.7 mm

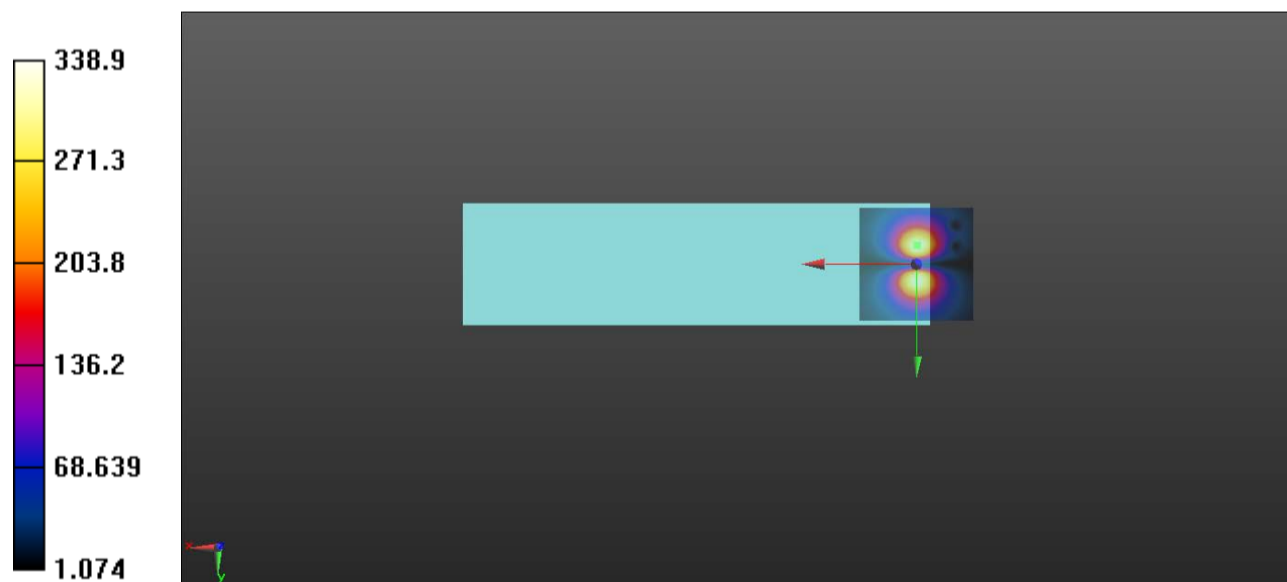

**LTE BAND13**

**Axial Z & Frequency Resp.**

Communication System: UID 10175 - CAG, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK); Frequency: 782 MHz;Duty Cycle: 1:3.7325

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn546; Calibrated: 2019/8/28
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band13\_T-Coil\_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 42

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

ABM1/ABM2 = 57.85 dB

ABM1 comp = -0.20 dBA/m

BWC Factor = 0.15 dB

Location: 0.4, 0, 3.7 mm

**T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans\_LTE band13\_T-Coil\_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 82.26

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.79 dB

Device Reference Point: 0, 0, -6.3 mm




Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

**Cursor:**

Diff = 1.02 dB

BWC Factor = 10.79 dB

Location: 0.2, 0.1, 3.7 mm

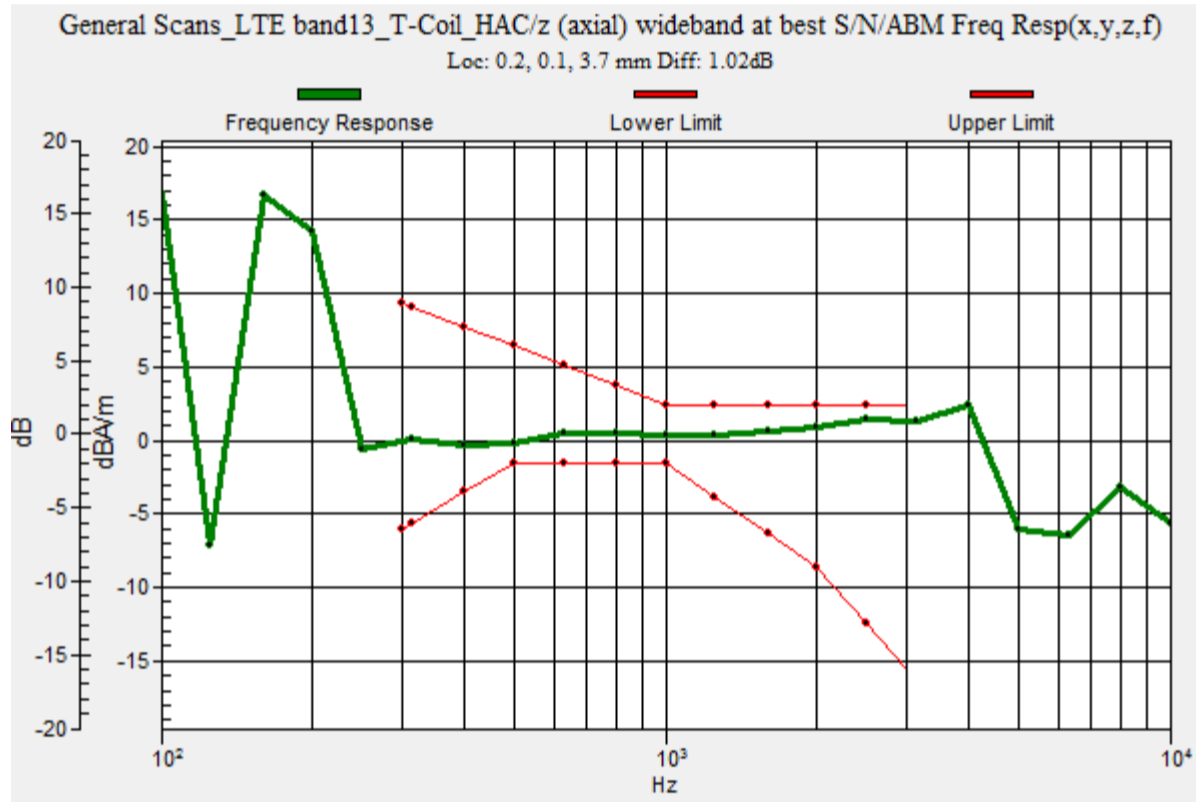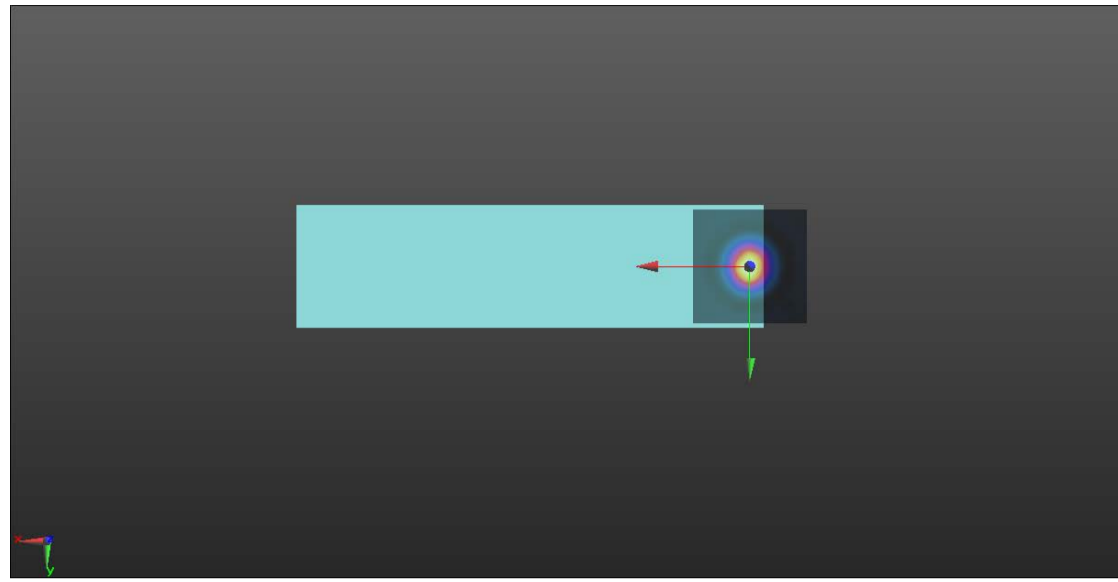

LTE BAND66	Axial Y										
<p>Communication System: UID 0, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) (0); Frequency: 1745 MHz;Duty Cycle: 1:1            Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup>            Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>• Sensor-Surface: 0mm (Fix Surface)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>• Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band66_T-Coil_HAC/y (transversal) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm            Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav            Output Gain: 42            Measure Window Start: 300ms            Measure Window Length: 1000ms            BWC applied: 0.15 dB            Device Reference Point: 0, 0, -6.3 mm</p>											
<table border="1" style="margin: auto;"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]										
Category T1	0 dB to 10 dB										
Category T2	10 dB to 20 dB										
Category T3	20 dB to 30 dB										
Category T4	> 30 dB										
<p><b>Cursor:</b>            ABM1/ABM2 = 47.52 dB            ABM1 comp = -12.15 dBA/m            BWC Factor = 0.15 dB            Location: -1.7, 8.3, 3.7 mm</p>											

LTE BAND66	Axial Z & Frequency Resp.																				
<p>Communication System: UID 0, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) (0); Frequency: 1745 MHz;Duty Cycle: 1:1 Medium parameters used: <math>\sigma = 0</math> S/m, <math>\epsilon_r = 1</math>; <math>\rho = 0</math> kg/m<sup>3</sup> Phantom section: TCoil Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: AM1DV2 - 1021; ; Calibrated: 2019/9/24</li> <li>Sensor-Surface: 0mm (Fix Surface)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2019/8/28</li> <li>Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band66_T-Coil_HAC/z (axial) 4.2mm 50 x 50/ABM Interpolated SNR(x,y,z) (121x121x1):</b> Interpolated grid: dx=1.000 mm, dy=1.000 mm Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav Output Gain: 42 Measure Window Start: 300ms Measure Window Length: 1000ms BWC applied: 0.15 dB Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b> ABM1/ABM2 = 54.09 dB ABM1 comp = -3.53 dBA/m BWC Factor = 0.15 dB Location: 0, -0.4, 3.7 mm</p> <p><b>T-Coil scan (scan for ANSI C63.19-2011 compliance)/General Scans_LTE band66_T-Coil_HAC/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1):</b> Measurement grid: dx=10mm, dy=10mm Signal Type: Audio File (.wav) 48k_voice_300-3000_2s.wav Output Gain: 82.26 Measure Window Start: 300ms Measure Window Length: 2000ms BWC applied: 10.79 dB Device Reference Point: 0, 0, -6.3 mm</p> <table border="1"> <thead> <tr> <th>Category</th> <th>Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]</th> </tr> </thead> <tbody> <tr> <td>Category T1</td> <td>0 dB to 10 dB</td> </tr> <tr> <td>Category T2</td> <td>10 dB to 20 dB</td> </tr> <tr> <td>Category T3</td> <td>20 dB to 30 dB</td> </tr> <tr> <td>Category T4</td> <td>&gt; 30 dB</td> </tr> </tbody> </table> <p><b>Cursor:</b> Diff = 0.96 dB BWC Factor = 10.79 dB Location: 0, -0.2, 3.7 mm</p>		Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB	Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]	Category T1	0 dB to 10 dB	Category T2	10 dB to 20 dB	Category T3	20 dB to 30 dB	Category T4	> 30 dB
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				
Category	Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels]																				
Category T1	0 dB to 10 dB																				
Category T2	10 dB to 20 dB																				
Category T3	20 dB to 30 dB																				
Category T4	> 30 dB																				

