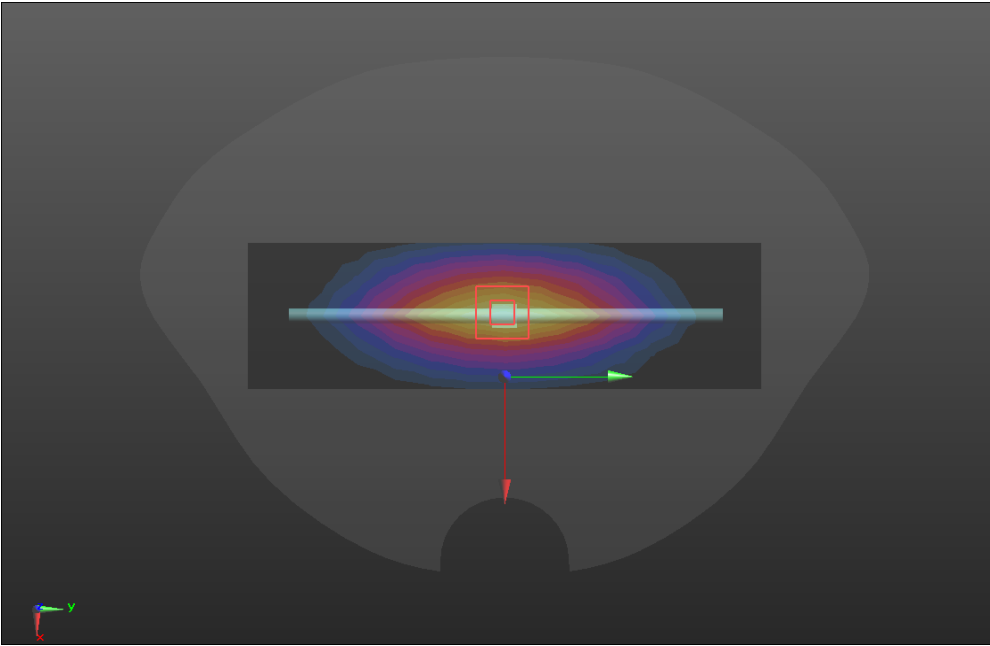
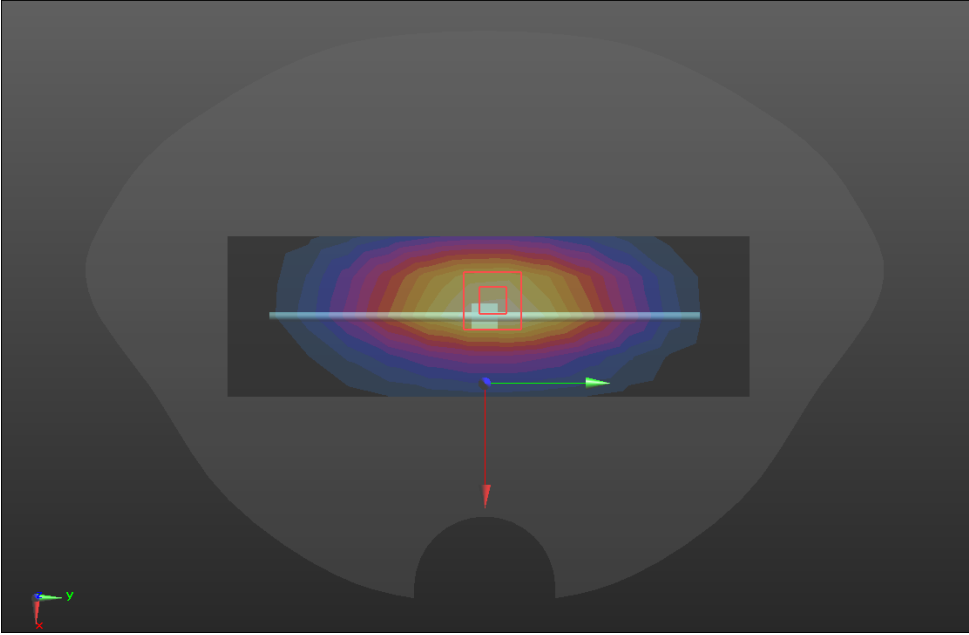


**ANNEX A – TEST PLOTS**

System check	750MHz
<p>Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1                      Medium parameters used: <math>f = 750 \text{ MHz}</math>; <math>\sigma = 0.93 \text{ S/m}</math>; <math>\epsilon_r = 43.07</math>; <math>\rho = 1000 \text{ kg/m}^3</math>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35) @ 750 MHz; Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>750/Dipole 750MHz/Area Scan (5x15x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 2.83 W/kg</p> <p><b>750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 58.50 V/m; Power Drift = 0.09 dB                      Peak SAR (extrapolated) = 3.24 W/kg  <b>SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg</b>                      Maximum value of SAR (measured) = 2.85 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MH; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.93 \text{ S/m}</math>; <math>\epsilon_r = 42.99</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 835 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>D835/Dipole 835MHz/Area Scan (5x14x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 2.71 W/kg</p> <p><b>D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 56.70 V/m; Power Drift = 0.05 dB            Peak SAR (extrapolated) = 3.50 W/kg  <b>SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg</b>            Maximum value of SAR (measured) = 3.04 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

System check	900MHz
<p>Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1                      Medium parameters used: <math>f = 900 \text{ MHz}</math>; <math>\sigma = 1.01 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>                      Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 900 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>D900/Dipole 900MHz/Area Scan (5x13x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 3.85 W/kg</p> <p><b>D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 66.17 V/m; Power Drift = 0.00 dB                      Peak SAR (extrapolated) = 4.74 W/kg  <b>SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.83 W/kg</b>                      Maximum value of SAR (measured) = 3.99 W/kg</p> 	

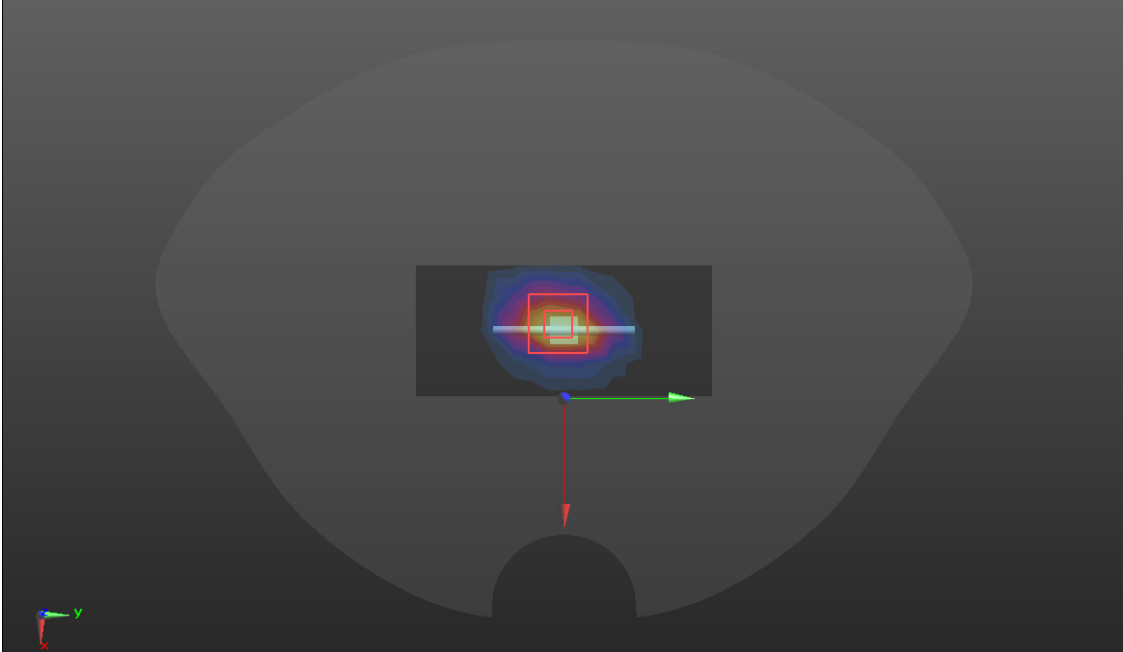
SRTC performed system check by using 250mw at antenna port

System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1                      Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.4 \text{ S/m}</math>; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000 \text{ kg/m}^3</math>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08) @ 1800 MHz; Calibrated: 2021/8/27</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li>• <b>D1800/Dipole 1800MHz/Area Scan (5x9x1)</b>: Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>                      Maximum value of SAR (measured) = 15.3 W/kg</li> <li>• <b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0</b>: Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>                      Reference Value = 107.8 V/m; Power Drift = 0.05 dB                      Peak SAR (extrapolated) = 18.7 W/kg  <b>SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg</b>                      Maximum value of SAR (measured) = 15.6 W/kg</li> </ul> 	

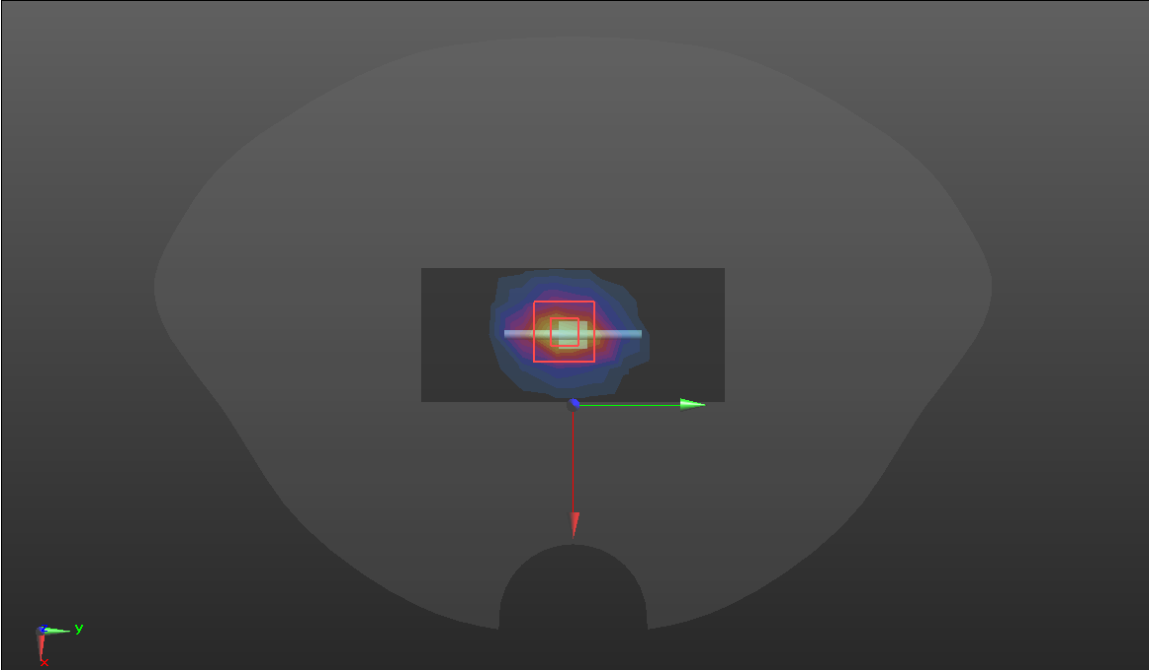
SRTC performed system check by using 250mw at antenna port

System check	2000MHz
<p>Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty Cycle: 1:1                      Medium parameters used: <math>f = 2000</math> MHz; <math>\sigma = 1.47</math> S/m; <math>\epsilon_r = 41.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5, 5, 5) @ 2000 MHz; Calibrated: 2021/8/27</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>D2000/Dipole 2000MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 15.2 W/kg</p> <p><b>D2000/Dipole 2000MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 107.6 V/m; Power Drift = 0.04 dB                      Peak SAR (extrapolated) = 18.9 W/kg  <b>SAR(1 g) = 10.64 W/kg; SAR(10 g) = 4.99 W/kg</b>                      Maximum value of SAR (measured) = 15.5 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

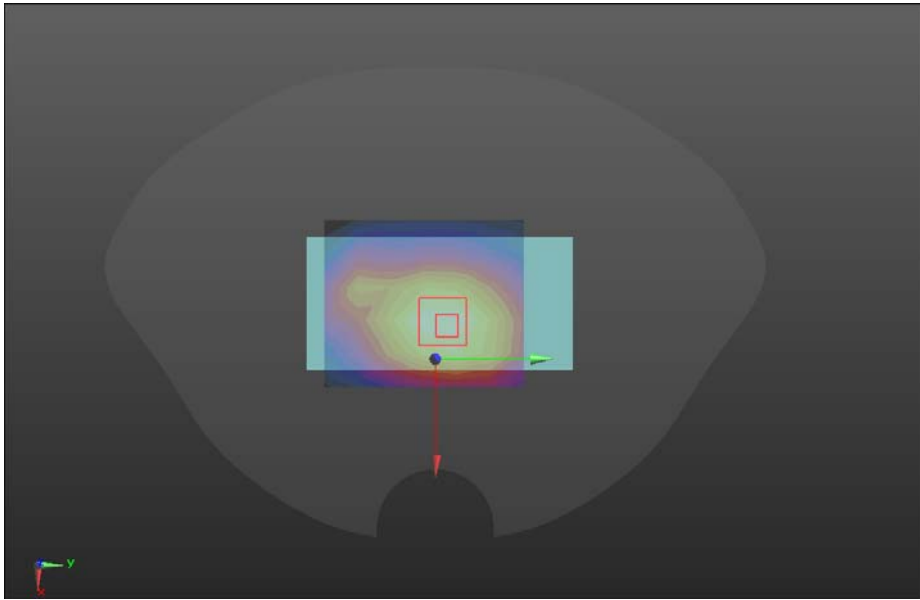
System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.74</math> S/m; <math>\epsilon_r = 40.83</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li><b>D2450/Dipole 2450MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm              Maximum value of SAR (measured) = 18.1 W/kg</li> <li><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm              Reference Value = 107.6 V/m; Power Drift = 0.06 dB              Peak SAR (extrapolated) = 25.1 W/kg  <b>SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg</b>              Maximum value of SAR (measured) = 20.3 W/kg</li> </ul> 	

SRTC performed system check by using 250mw at antenna port

System check	2600MHz
<p>Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1                      Medium parameters used: <math>f = 2600</math> MHz; <math>\sigma = 1.92</math> S/m; <math>\epsilon_r = 38.65</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF (4.33, 4.33, 4.33) @ 2600 MHz; Calibrated: 2021/8/27</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li>• <b>D2600/Dipole 2600MHz/Area Scan (5x10x1)</b>: Measurement grid: dx=12mm, dy=12mm                      Maximum value of SAR (measured) = 21.0 W/kg</li> <li>• <b>D2600/Dipole 2600MHz/Zoom Scan (5x5x7)/Cube 0</b>: Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 107.0 V/m; Power Drift = 0.00 dB                      Peak SAR (extrapolated) = 27.8 W/kg  <b>SAR(1 g) = 14.02 W/kg; SAR(10 g) = 6.53 W/kg</b>                      Maximum value of SAR (measured) = 21.7 W/kg</li> </ul> 	

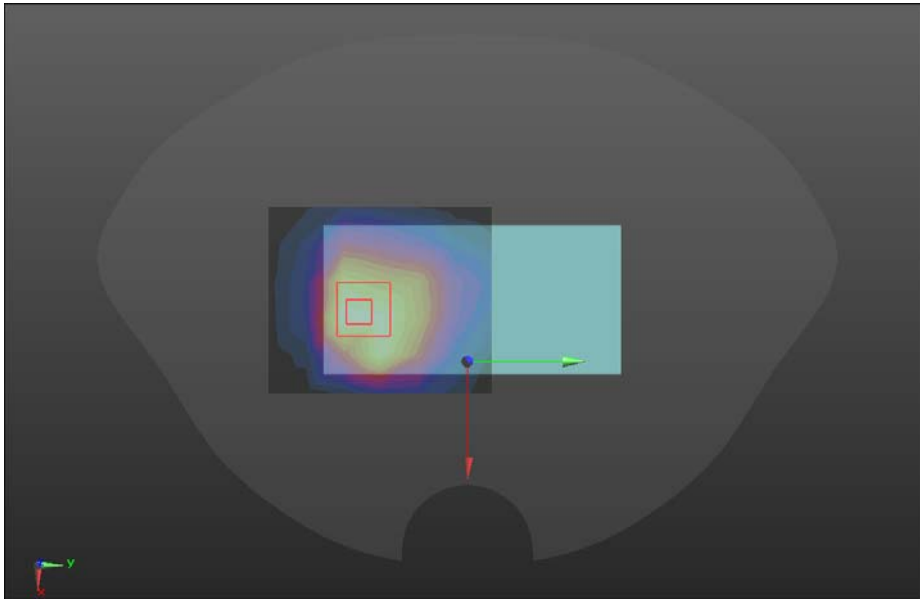
SRTC performed system check by using 250mw at antenna port

**GSM 850**

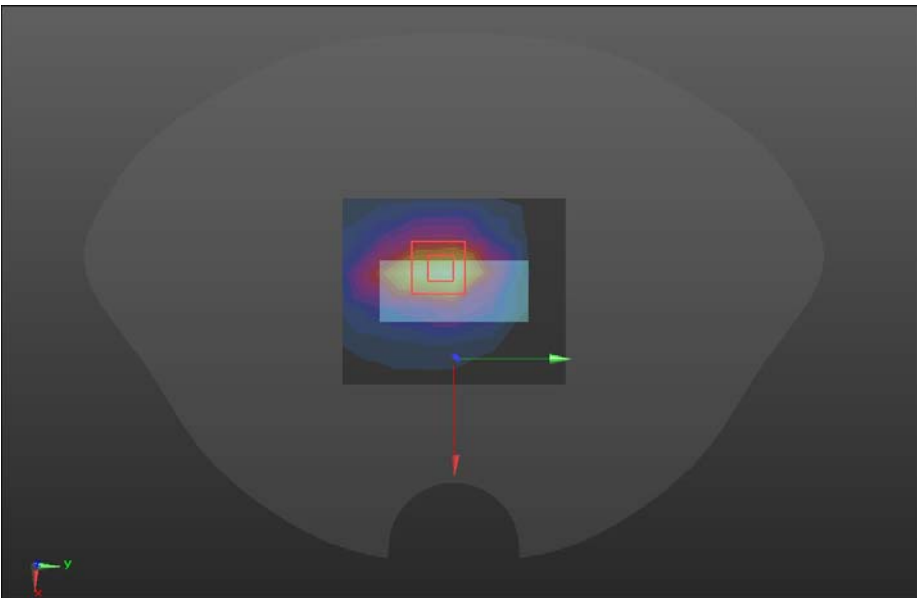
Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8                      Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.93</math> S/m; <math>\epsilon_r = 42.99</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/GSM 850/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.660 W/kg</p> <p><b>Back/GSM 850/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 24.88 V/m; Power Drift = -0.02 dB                      Peak SAR (extrapolated) = 0.796 W/kg  <b>SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.380 W/kg</b>                      Maximum value of SAR (measured) = 0.682 W/kg</p> 	



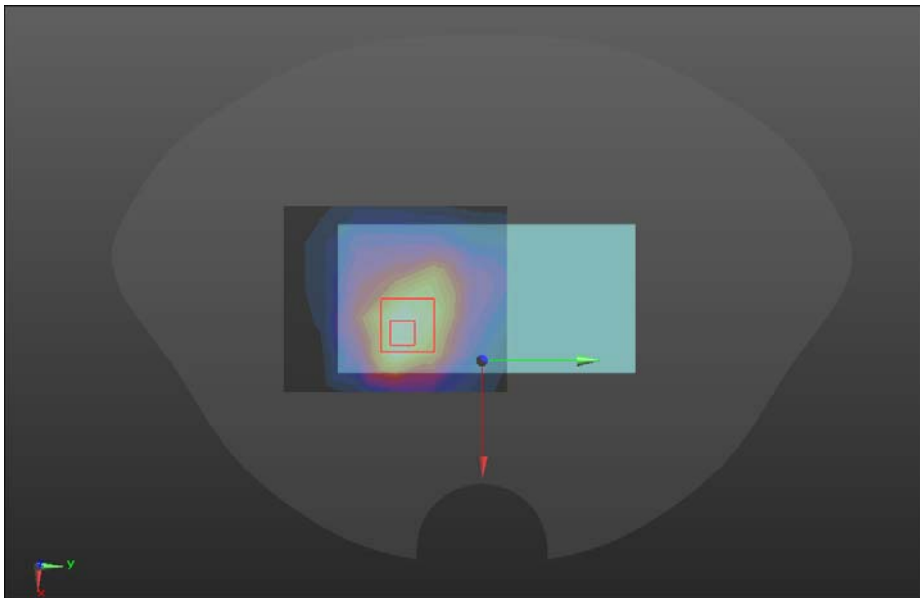
**GSM 1900**

Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8                      Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/GSM 1900/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.430 W/kg</p> <p><b>Back/GSM 1900/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 9.069 V/m; Power Drift = 0.12 dB                      Peak SAR (extrapolated) = 0.630 W/kg  <b>SAR(1 g) = 0.483 W/kg; SAR(10 g) = 0.202 W/kg</b>                      Maximum value of SAR (measured) = 0.520 W/kg</p>	
	

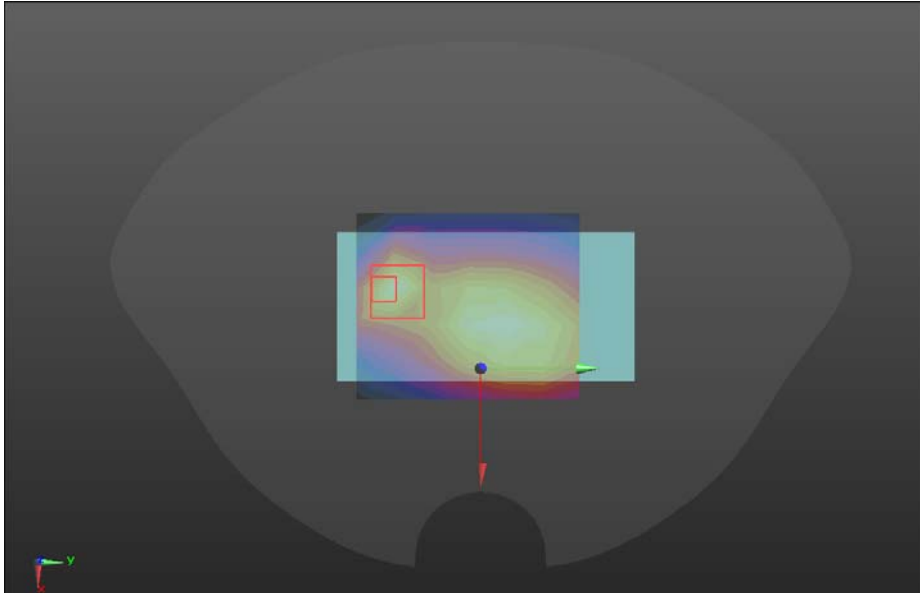
**WCDMA BAND II**

Hotspot	Bottom
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>BOTTOM/WCDMA B2/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 1.23 W/kg</p> <p><b>BOTTOM/WCDMA B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 20.28 V/m; Power Drift = 0.08dB            Peak SAR (extrapolated) = 1.48 W/kg  <b>SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.363 W/kg</b>            Maximum value of SAR (measured) = 1.22 W/kg</p>	
	

**WCDMA BAND IV**

Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1732.6</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/WCDMA B4/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 1.73 W/kg</p> <p><b>Back/WCDMA B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 18.84 V/m; Power Drift = 0.10 dB            Peak SAR (extrapolated) = 2.33 W/kg  <b>SAR(1 g) = 0.797 W/kg; SAR(10 g) = 0.382 W/kg</b>            Maximum value of SAR (measured) = 1.92 W/kg</p>	
	

**WCDMA BAND V**

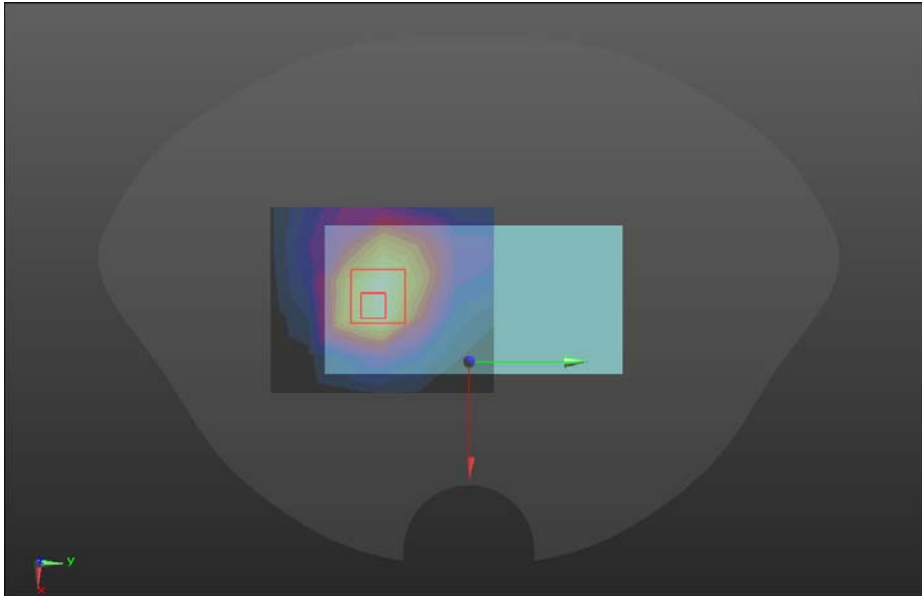
Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.93</math> S/m; <math>\epsilon_r = 42.99</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/WCDMA B5/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.797 W/kg</p> <p><b>Back/WCDMA B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 26.15 V/m; Power Drift = 0.02 dB            Peak SAR (extrapolated) = 1.09 W/kg  <b>SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.390 W/kg</b>            Maximum value of SAR (measured) = 0.871 W/kg</p>	
	

## LTE Band 2

Hotspot	Bottom
<p>Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup> Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>BOTTOM/LTE B2/Area Scan (7x6x1)::</b> Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.04 W/kg</p> <p><b>BOTTOM/LTE B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.82 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 1.23 W/kg <b>SAR(1 g) = 0.798 W/kg; SAR(10 g) = 0.378 W/kg</b> Maximum value of SAR (measured) = 1.01 W/kg</p> 	



**LTE BAND 4**

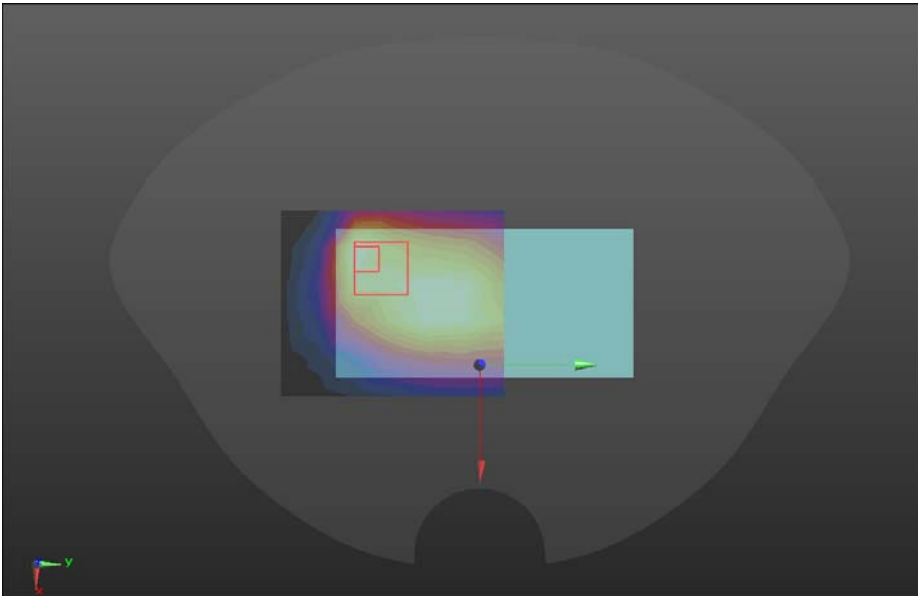
Hotspot	Back
<p>Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 1732.5</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B4/Area Scan (7x6x1)</b> :Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 1.33 W/kg</p> <p><b>Back/LTE B4/Zoom Scan (5x5x7)/Cube 0</b>: Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 12.96 V/m; Power Drift = -0.08 dB                      Peak SAR (extrapolated) = 1.61 W/kg  <b>SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.536 W/kg</b>                      Maximum value of SAR (measured) = 1.33 W/kg</p> 	

**LTE BAND 5**

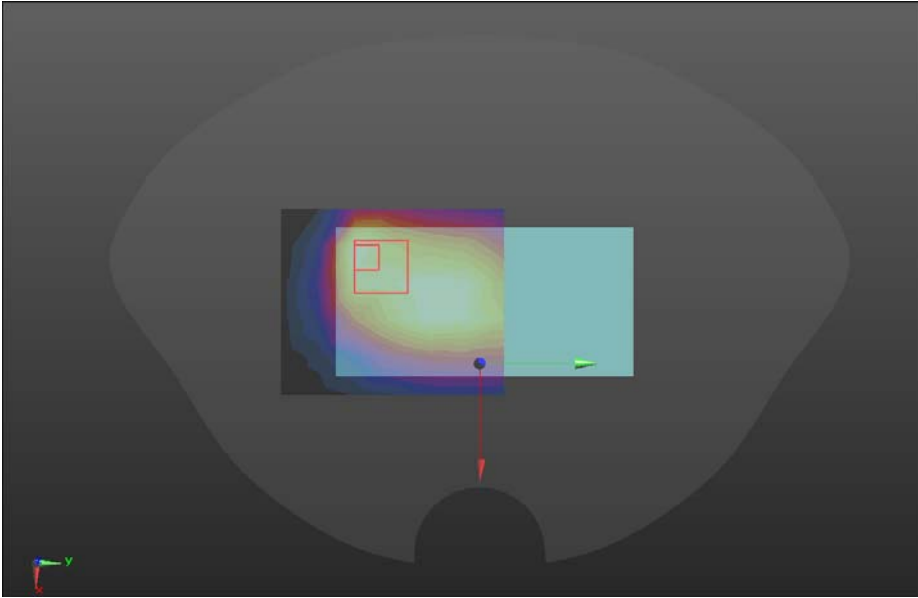
Hotspot	Back
<p>Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 836.5</math> MHz; <math>\sigma = 0.93</math> S/m; <math>\epsilon_r = 42.99</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B5/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.793 W/kg</p> <p><b>Back/LTE B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 28.02 V/m; Power Drift = -0.19 dB                      Peak SAR (extrapolated) = 0.891 W/kg  <b>SAR(1 g) = 0.616 W/kg; SAR(10 g) = 0.433 W/kg</b>                      Maximum value of SAR (measured) = 0.792 W/kg</p>	
	



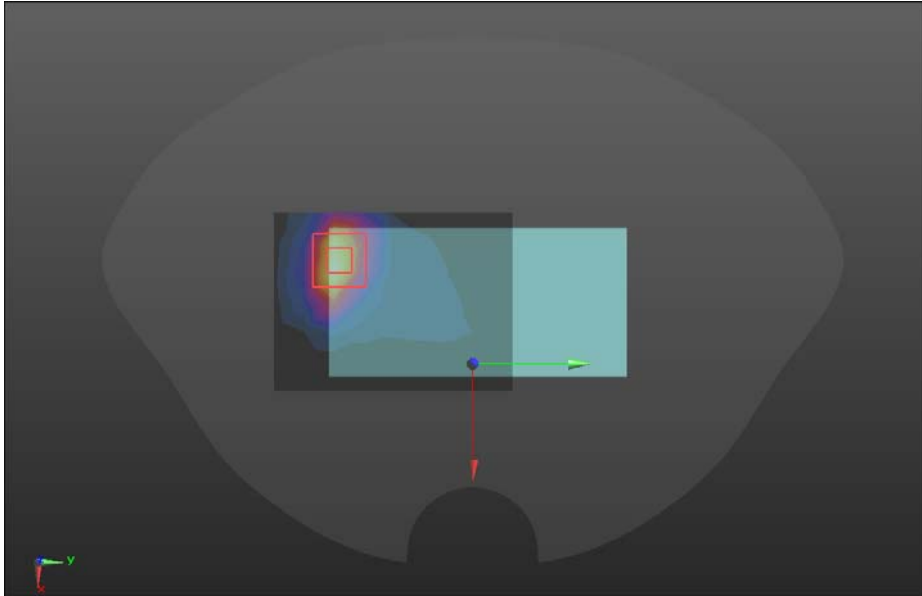
**LTE BAND 12**

Hotspot	Back
<p>Communication System: UID 0, LTE band 12 (0); Frequency: 707.5 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 707.5</math> MHz; <math>\sigma = 0.93</math> S/m; <math>\epsilon_r = 43.07</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35); Calibrated: 2021/8/27;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B12/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.743 W/kg</p> <p><b>Back/LTE B12/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 26.97 V/m; Power Drift = -0.01 dB                      Peak SAR (extrapolated) = 0.977 W/kg  <b>SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.398 W/kg</b>                      Maximum value of SAR (measured) = 0.816 W/kg</p>	
	

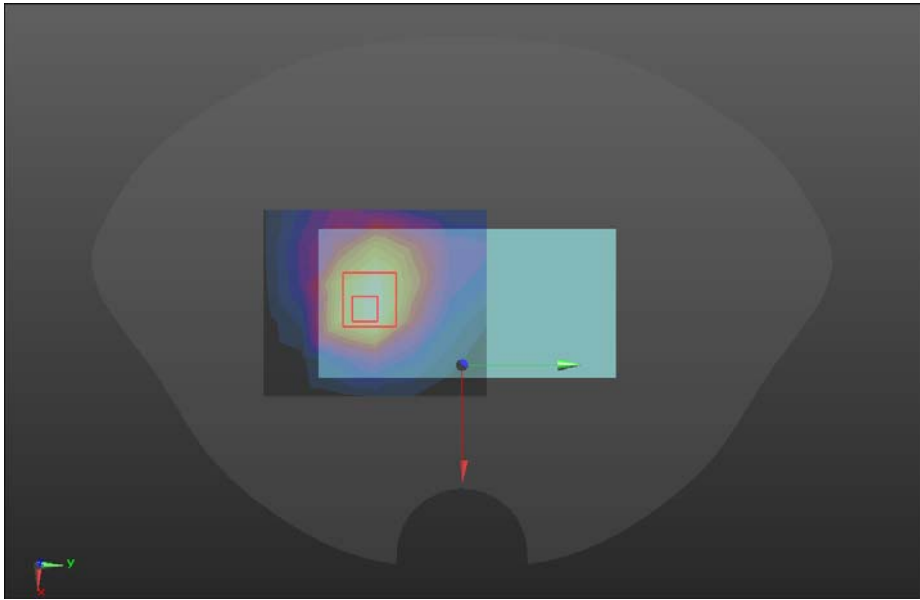
**LTE BAND 25**

Hotspot	Back
<p>Communication System: UID 0, LTE band 25 (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 1882.5</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.35, 6.35, 6.35); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B12/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 1.03 W/kg</p> <p><b>Back/LTE B12/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 26.97 V/m; Power Drift = -0.01 dB                      Peak SAR (extrapolated) = 0.977 W/kg  <b>SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.438 W/kg</b>                      Maximum value of SAR (measured) = 1.216 W/kg</p>	
	

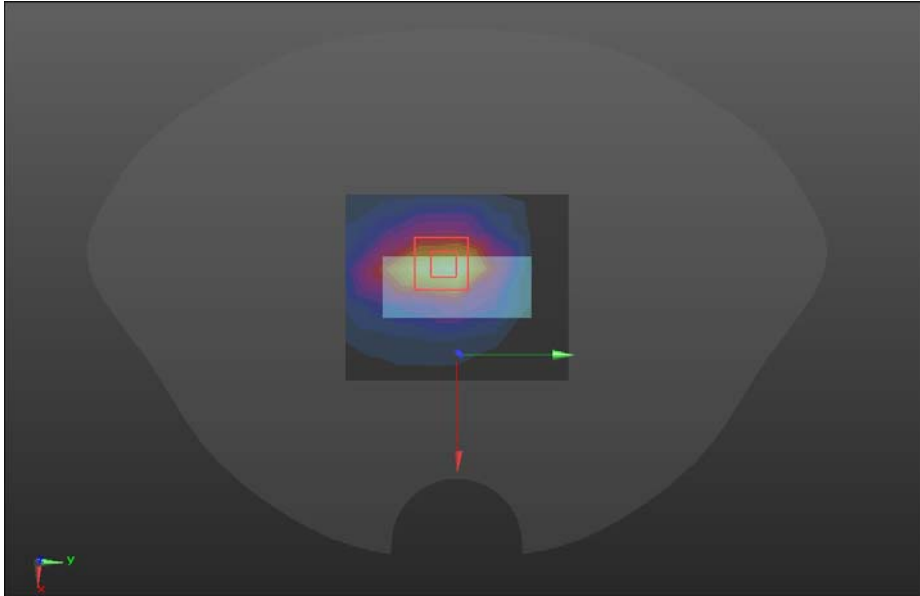
**LTE BAND 41**

Hotspot	Back
<p>Communication System: UID 0, LTE Band 41 (0); Frequency: 2593 MHz; Duty Cycle: 0.633:1            Medium parameters used (interpolated): <math>f = 2593</math> MHz; <math>\sigma = 1.92</math> S/m; <math>\epsilon_r = 38.65</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Right Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.33, 4.33, 4.33); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B41/Area Scan (9x7x1):</b> Measurement grid: dx=12mm, dy=12mm            Maximum value of SAR (measured) = 1.61 W/kg</p> <p><b>Back/LTE B41/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 6.759 V/m; Power Drift = 0.06dB            Peak SAR (extrapolated) = 2.32 W/kg  <b>SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.489 W/kg</b>            Maximum value of SAR (measured) = 1.84 W/kg</p>	
	

**LTE BAND 66**

Hotspot	Back
<p>Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 1745</math> MHz; <math>\sigma = 1.4</math> S/m; <math>\epsilon_r = 39.31</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B66/Area Scan (7x6x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 1.14 W/kg</p> <p><b>Back/LTE B66/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 11.89 V/m; Power Drift = 0.10 dB                      Peak SAR (extrapolated) = 1.49 W/kg  <b>SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.494 W/kg</b>                      Maximum value of SAR (measured) = 1.24 W/kg</p>	
	

**Bluetooth**

Hotspot	Top
<p>Communication System: UID 0, BT (0); Frequency: 2441 MHz; Duty Cycle: 0.417 :1                      Medium parameters used (interpolated): <math>f = 2441</math> MHz; <math>\sigma = 1.74</math> S/m; <math>\epsilon_r = 40.83</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Left Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Top /BT/Area Scan (7x6x1):</b> Measurement grid: dx=12mm, dy=12mm                      Maximum value of SAR (measured) = 0.0892 W/kg</p> <p><b>Top /BT/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 2.109 V/m; Power Drift = 0.16 dB                      Peak SAR (extrapolated) = 0.169 W/kg  <b>SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.041 W/kg</b>                      Maximum value of SAR (measured) = 0.101 W/kg</p> 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.