



# FCC Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/WCDMA/GSM(GPRS) Multi-Mode  
Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : Z3352CA  
FCC ID : SRQ-Z3352CA  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Jan. 06, 2020 and testing was completed on Mar. 08, 2020. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Reviewed by: Jason Jia / Supervisor

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1. GENERAL DESCRIPTION ..... 5**

    1.1. Applicant..... 5

    1.2. Manufacturer ..... 5

    1.3. Product Feature of Equipment Under Test ..... 5

    1.4. Product Specification of Equipment Under Test ..... 6

    1.5. Modification of EUT ..... 7

    1.6. Test Location ..... 7

    1.7. Test Software ..... 7

    1.8. Applicable Standards ..... 7

**2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1. Test Mode ..... 8

    2.2. Connection Diagram of Test System ..... 9

    2.3. Support Unit used in test configuration and system ..... 10

    2.4. EUT Operation Test Setup ..... 11

**3. TEST RESULT ..... 12**

    3.1. Test of AC Conducted Emission Measurement ..... 12

    3.2. Test of Radiated Emission Measurement ..... 16

**4. LIST OF MEASURING EQUIPMENT ..... 21**

**5. UNCERTAINTY OF EVALUATION ..... 21**

**APPENDIX A. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 9.76 dB at 0.535 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 6.25 dB at 48.430 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1. General Description

## 1.1. Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.2. Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.3. Product Feature of Equipment Under Test

Product Feature	
<b>Equipment</b>	LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone
<b>Brand Name</b>	ZTE
<b>Model Name</b>	Z3352CA
<b>FCC ID</b>	SRQ-Z3352CA
<b>EUT supports Radios application</b>	GSM/WCDMA/LTE WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth BR/EDR/LE GNSS
<b>IMEI Code</b>	Conduction: 868815040004253 Radiation: 868815040004238
<b>HW Version</b>	Z3352CAHW1.0
<b>SW Version</b>	Z3352CAV1.0.1B02
<b>EUT Stage</b>	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



### 1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx Frequency</b>	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz LTE Band 2 : 1850.7 MHz ~ 1909.3 MHz LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz LTE Band 5 : 824.7 MHz ~ 848.3 MHz LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz LTE Band 12 : 699.7 MHz ~ 715.3 MHz LTE Band 13 : 779.5 MHz ~ 784.5 MHz LTE Band 66 : 1710.7 MHz ~ 1779.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
<b>Rx Frequency</b>	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz LTE Band 2 : 1930.7 MHz ~ 1989.3 MHz LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz LTE Band 5 : 869.7 MHz ~ 893.3 MHz LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz LTE Band 12 : 729.7 MHz ~ 745.3 MHz LTE Band 13 : 748.5 MHz ~ 753.5 MHz LTE Band 66 : 2110.7 MHz~ 2179.3 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GNSS : 1559 MHz ~ 1610 MHz
<b>Antenna Type</b>	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GNSS: PIFA Antenna
<b>Type of Modulation</b>	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA : BPSK (Uplink) HSDPA/DC-HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) HSPA+ : 16QAM (16QAM Uplink is not supported) DC-HSDPA : 64QAM LTE: QPSK / 16QAM / 64QAM 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth LE : GFSK Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK GNSS : BPSK

Remark: GNSS = GPS + GLONASS



### 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6. Test Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International (Kunshan) Inc.		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH06-KS	CN1257	314309

### 1.7. Test Software

Item	Site	Manufacture	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart B
- ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2. Test Configuration of Equipment Under Test

### 2.1. Test Mode


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM 850 Rx(Middle) + Earphone + BT Idle + WLAN Idle(2.4G) + Camera(Rear) + Battery + USB Cable (Charging from Adapter1 ) Mode 2: LTE Band 13 Rx(High) + Earphone + BT Idle + WLAN Idle(2.4G) + Camera(Front) + Battery + USB Cable (Charging from Adapter2 ) Mode 3: LTE Band 5 Rx(High) + Earphone + BT Idle + WLAN Idle(2.4G) + MPEG4 + Battery + USB Cable (Charging from Adapter2 ) Mode 4: LTE Band 12 Rx(Low) + Earphone + BT Idle + WLAN Idle(2.4G) + GNSS Rx + Battery + USB Cable (Data Link with Notebook)
Radiated Emissions	Mode 1: GSM 850 Rx(Middle) + Earphone + BT Idle + WLAN Idle(2.4G) + Camera(Rear) + Battery + USB Cable (Charging from Adapter1 ) Mode 2: LTE Band 13 Rx(High) + Earphone + BT Idle + WLAN Idle(2.4G) + Camera(Front) + Battery + USB Cable (Charging from Adapter2 ) Mode 3: LTE Band 5 Rx(High) + Earphone + BT Idle + WLAN Idle(2.4G) + MPEG4 + Battery + USB Cable (Charging from Adapter2 ) Mode 4: LTE Band 12 Rx(Low) + Earphone + BT Idle + WLAN Idle(2.4G) + GNSS Rx + Battery + USB Cable (Data Link with Notebook)
<b>Remark:</b> <ol style="list-style-type: none"> <li>The worst case of AC is mode 2; only the test data of this mode is reported.</li> <li>The worst case of RE is mode 2; only the test data of this mode is reported.</li> <li>Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.</li> <li>Pre-scanned Low/Middle/High channel for GSM 850/ WCDMA Band V/LTE Band 5/12/13, the worst channel was recorded in this report.</li> </ol>	



## 2.2.Connection Diagram of Test System

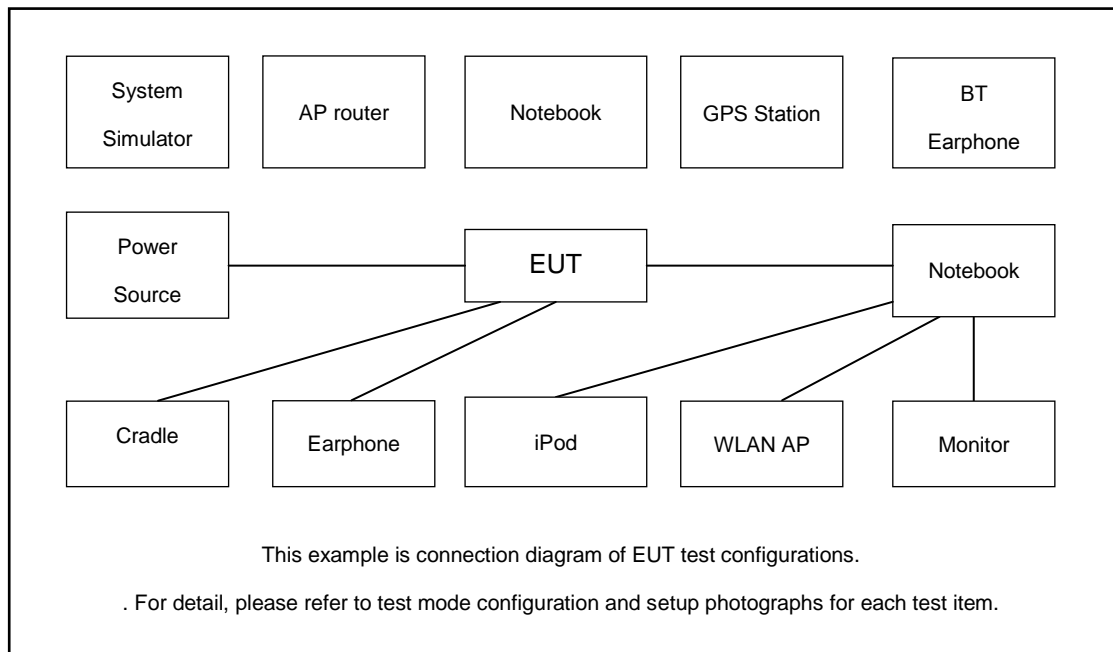

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application



### 2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	SD Card	SanDisk	Ultra	N/A	N/A	N/A
2.	SD Card	Kingston	SDC4/4GB	N/A	N/A	N/A
3.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
4.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
5.	Earphone	Lenovo	P121	N/A	N/A	Unshielded,1.2m
6.	WLAN AP	ASUS	AC66U	N/A	N/A	Unshielded,1.8m
7.	WLAN AP	TP-Link	TL-WDR5600	N/A	N/A	Unshielded,1.8m
8.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
9.	Hard disk	Lenovo	FH310	Fcc DoC	Shielded, 1.2m	N/A
10.	Signal Generator	R&S	SMBV100A	N/A	N/A	Unshielded,1.8m
11.	LTE Base Station	Anritus	MT8820C	N/A	N/A	Unshielded,1.8m
12.	Notebook	Dell	Latitude3440	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
13.	Notebook	Lenovo	QDS-BRCM1050I	PRC4	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
14.	Vector Signal Generator	R&S	SMBV100A	258305	N/A	N/A
15.	iPod	Apple	A1199	Fcc DoC	Shielded, 1.2m	N/A



## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on MPEG4 function.
4. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.



### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


### 3.1.4 Test Setup





3.1.5 Test Result of AC Conducted Emission

Test Engineer :	Amos Zhang	Temperature :	25.6~27.2°C
		Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

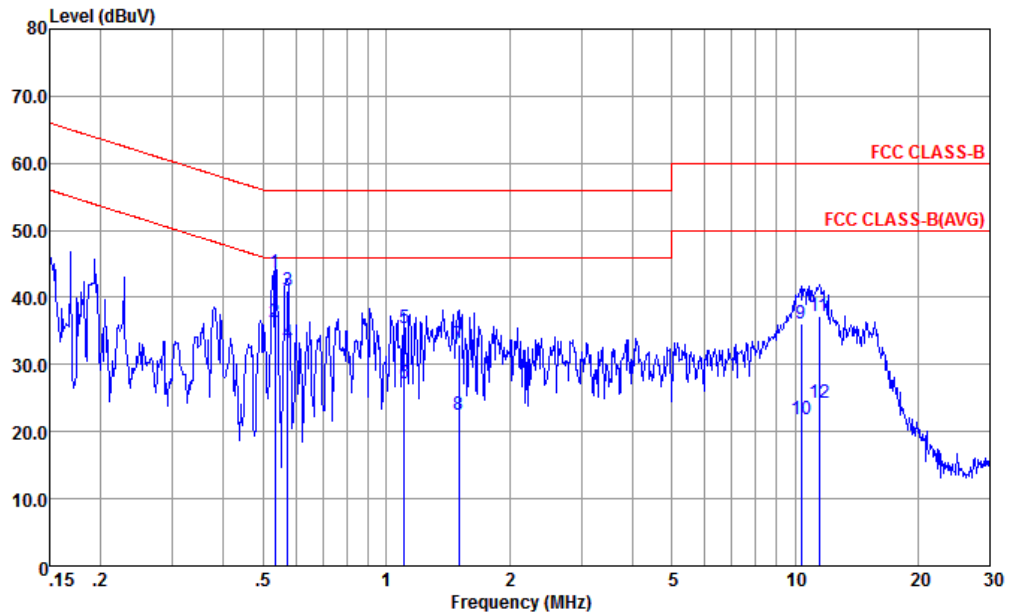


Site : CO01-KS  
 Condition : FCC CLASS-B LISN-N-191028-060105 NEUTRAL  
 Project : (FC) 010610  
 mode : Mode 2  
 : 868815040004253

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.535	43.64	-12.36	56.00	33.30	0.10	10.24	QP
2 *	0.535	36.24	-9.76	46.00	25.90	0.10	10.24	Average
3	0.573	40.94	-15.06	56.00	30.60	0.10	10.24	QP
4	0.573	33.24	-12.76	46.00	22.90	0.10	10.24	Average
5	1.106	35.45	-20.55	56.00	25.11	0.11	10.23	QP
6	1.106	27.25	-18.75	46.00	16.91	0.11	10.23	Average
7	1.503	32.95	-23.05	56.00	22.60	0.12	10.23	QP
8	1.503	22.55	-23.45	46.00	12.20	0.12	10.23	Average
9	10.342	36.21	-23.79	60.00	25.60	0.26	10.35	QP
10	10.342	21.91	-28.09	50.00	11.30	0.26	10.35	Average
11	11.438	37.25	-22.75	60.00	26.60	0.29	10.36	QP
12	11.438	24.25	-25.75	50.00	13.60	0.29	10.36	Average



Test Engineer :	Amos Zhang	Temperature :	25.6~27.2°C
		Relative Humidity :	35~37%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

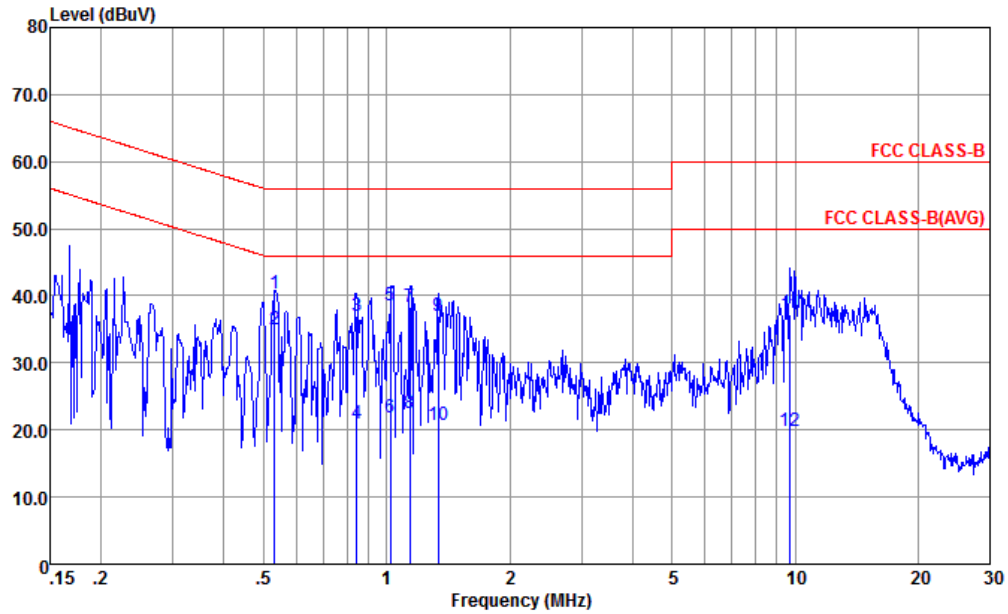

Site : CO01-KS  
 Condition : FCC CLASS-B LISN-L-191028-060105 LINE  
 Project : (FC) 010610  
 mode : Mode 2  
 : 868815040004253

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.532	40.40	-15.60	56.00	30.10	0.06	10.24	QP
2 *	0.532	35.10	-10.90	46.00	24.80	0.06	10.24	Average
3	0.844	36.91	-19.09	56.00	26.59	0.08	10.24	QP
4	0.844	20.91	-25.09	46.00	10.59	0.08	10.24	Average
5	1.021	38.51	-17.49	56.00	28.20	0.08	10.23	QP
6	1.021	21.91	-24.09	46.00	11.60	0.08	10.23	Average
7	1.141	38.42	-17.58	56.00	28.10	0.09	10.23	QP
8	1.141	22.62	-23.38	46.00	12.30	0.09	10.23	Average
9	1.338	36.92	-19.08	56.00	26.60	0.09	10.23	QP
10	1.338	20.62	-25.38	46.00	10.30	0.09	10.23	Average
11	9.705	37.17	-22.83	60.00	26.60	0.23	10.34	QP
12	9.705	19.77	-30.23	50.00	9.20	0.23	10.34	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



### 3.2. Test of Radiated Emission Measurement

#### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

<Class B Limit>

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.2.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.





### **3.2.3. Test Procedures**


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz




For radiated emissions above 1GHz

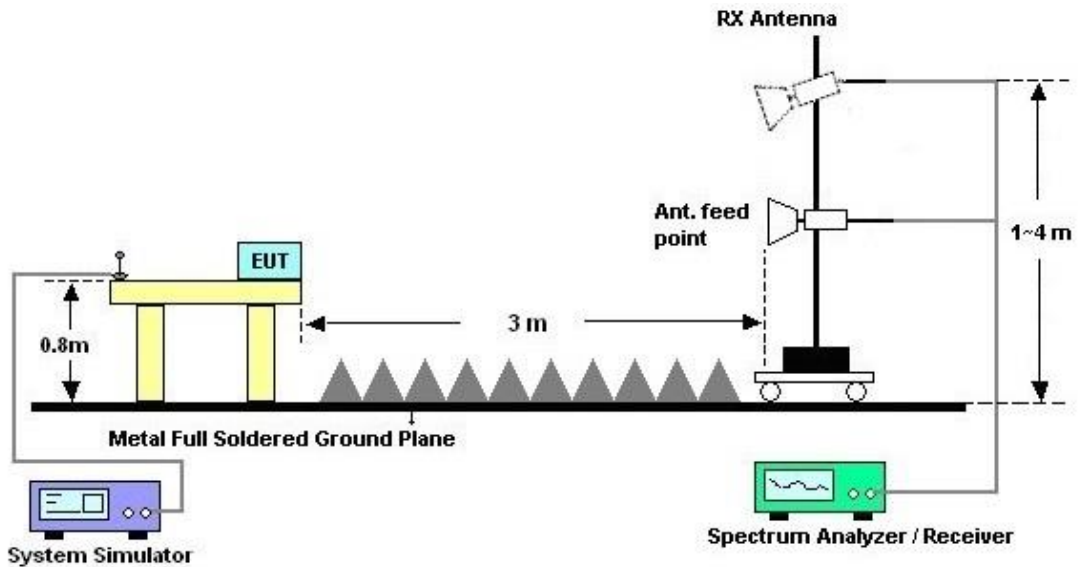




3.2.5. Test Result of Radiated Emission

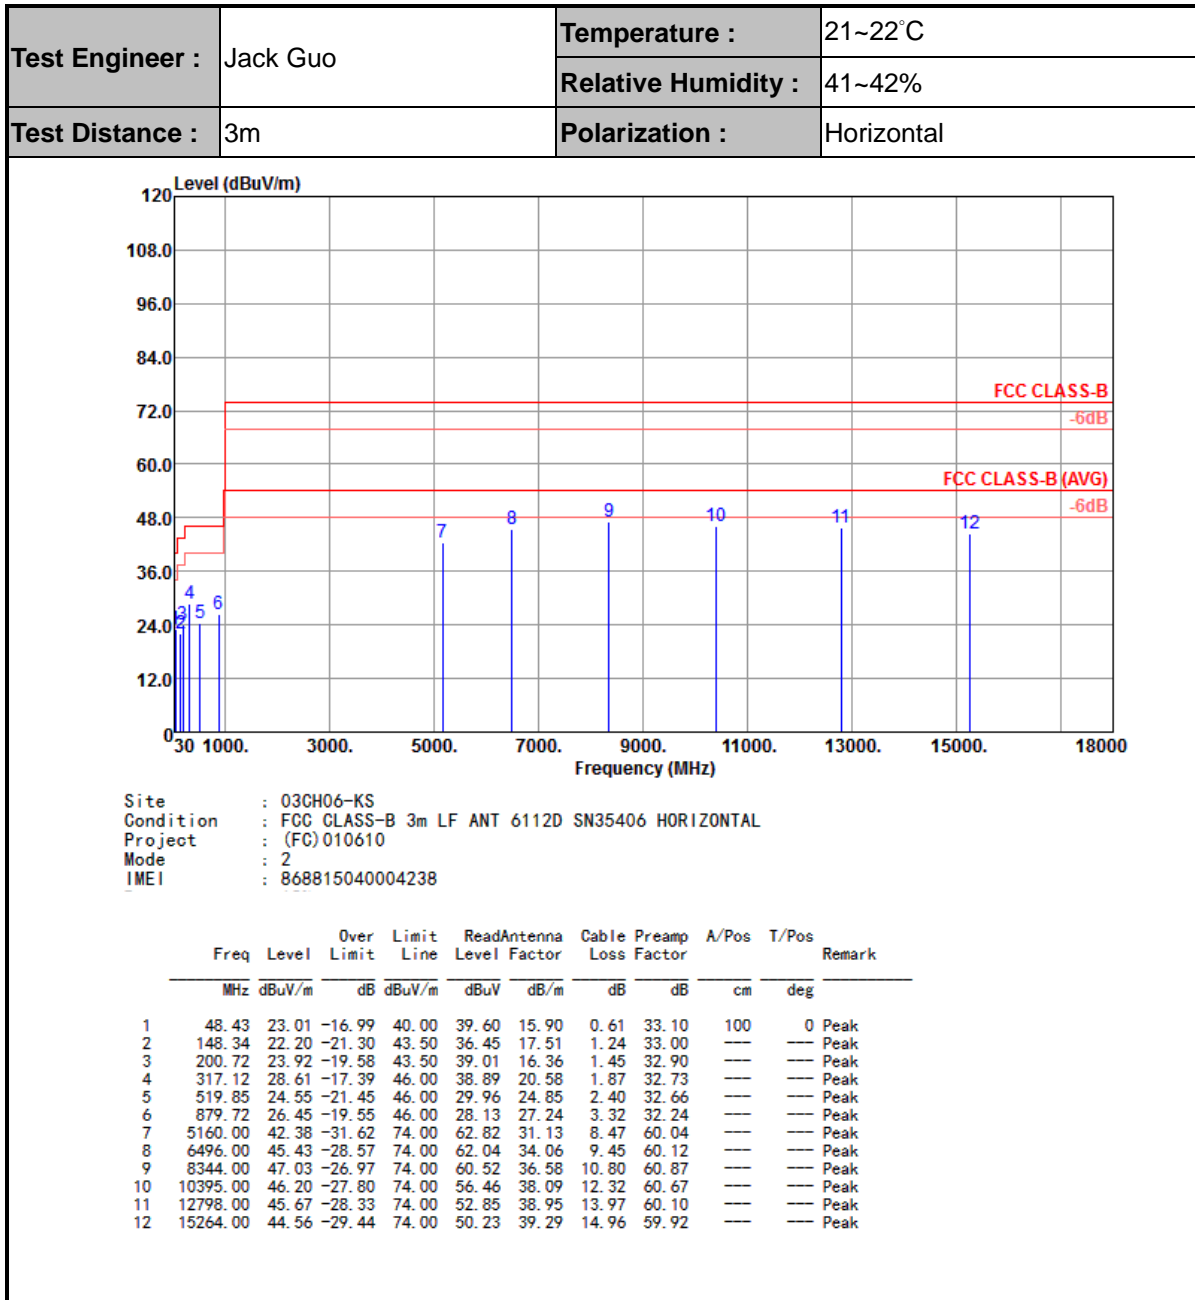



Test Engineer :	Jack Guo	Temperature :	21~22°C
		Relative Humidity :	41~42%
Test Distance :	3m	Polarization :	Vertical

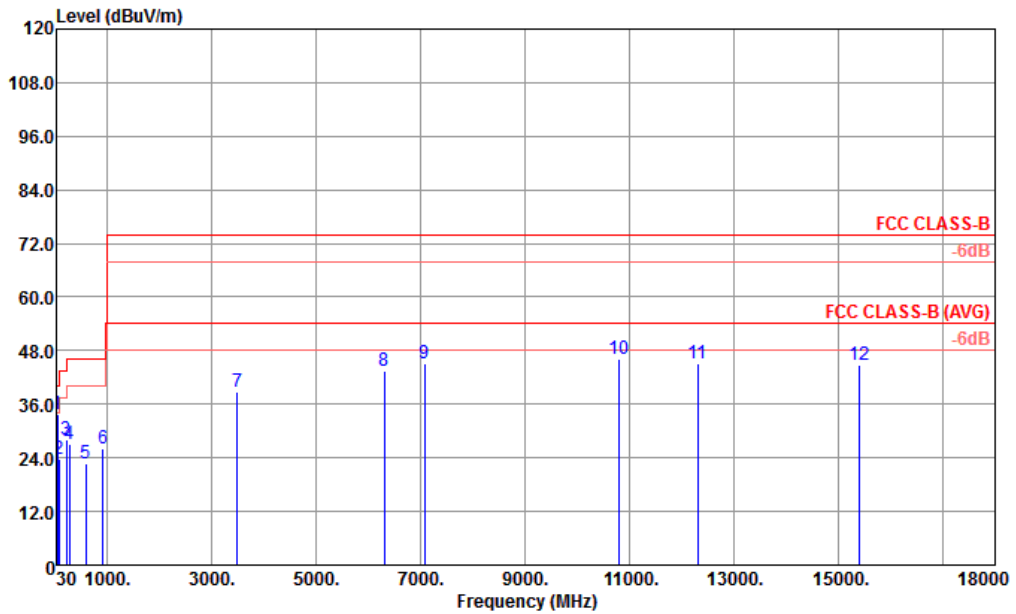

Site : 03CH06-KS  
 Condition : FCC CLASS-B 3m LF ANT 6112D SN35406 VERTICAL  
 Project : (FC) 010610  
 Mode : 2  
 IMEI : 868815040004238

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	48.43	33.75	-6.25	40.00	51.32	14.92	0.61	33.10	100	0 Peak
2	74.62	23.57	-16.43	40.00	42.90	12.85	0.82	33.00	---	Peak
3	226.91	28.22	-17.78	46.00	43.52	16.00	1.55	32.85	---	Peak
4	278.32	27.17	-18.83	46.00	39.16	19.01	1.74	32.74	---	Peak
5	587.75	22.84	-23.16	46.00	28.65	24.45	2.57	32.83	---	Peak
6	929.19	26.09	-19.91	46.00	28.06	26.76	3.41	32.14	---	Peak
7	3488.00	38.80	-35.20	74.00	63.59	28.21	6.94	59.94	---	Peak
8	6312.00	43.39	-30.61	74.00	60.72	33.48	9.31	60.12	---	Peak
9	7080.00	45.20	-28.80	74.00	60.71	35.07	9.89	60.47	---	Peak
10	10791.00	46.19	-27.81	74.00	55.43	38.66	12.69	60.59	---	Peak
11	12303.00	45.28	-28.72	74.00	52.99	38.49	13.89	60.09	---	Peak
12	15408.00	44.67	-29.33	74.00	49.98	39.52	15.04	59.87	---	Peak

Note:

- Level(dBμV/m) = Read Level(dBμV) + Antenna Factor(dB/m) + Cable Loss(dB) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)



### 4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2019	Jan. 19, 2020	Apr. 15, 2020	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 18, 2019	Jan. 19, 2020	Oct. 17, 2020	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Oct. 28, 2019	Jan. 19, 2020	Oct. 27, 2020	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 18, 2019	Jan. 19, 2020	Oct. 17, 2020	Conduction (CO01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;M ax 30dBm	Jul. 18, 2019	Mar. 08, 2020	Jul. 17, 2020	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz-44GHz	Apr. 16, 2019	Mar. 08, 2020	Apr. 18, 2020	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 30, 2019	Mar. 08, 2020	May 29, 2020	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 27, 2019	Mar. 08, 2020	Apr. 26, 2020	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Nov. 10, 2019	Mar. 08, 2020	Nov. 09, 2020	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 08, 2020	Mar. 08, 2020	Jan. 07, 2021	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	187289	9KHz ~1GHZ	Aug. 06, 2019	Mar. 08, 2020	Aug. 05, 2020	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270203	500MHz~26.5G Hz	Apr. 15, 2019	Mar. 08, 2020	Apr. 14, 2020	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 08, 2020	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 08, 2020	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 08, 2020	NCR	Radiation (03CH06-KS)

NCR: No Calibration Required



## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.9 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.0 dB
---	--------