

---

# TEST REPORT FOR SAR TESTING

---

Report No.: SRTC2020-9004(F)-20050704 (H)

Product Name: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile

Product Model: Z6250CC

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: SRQ-Z6250CC

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R. China

Tel: 86-10-57996183 Fax: 86-10-57996388

## Contents

<b>1. GENERAL INFORMATION</b> .....	<b>2</b>
1.1 NOTES OF THE TEST REPORT .....	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY .....	2
1.3 APPLICANT'S DETAILS .....	2
1.4 MANUFACTURER'S DETAILS .....	2
1.5 TEST ENVIRONMENT .....	3
<b>2. DESCRIPTION OF THE DEVICE UNDER TEST</b> .....	<b>3</b>
2.1 FINAL EQUIPMENT BUILD STATUS .....	3
2.2 SUPPORT EQUIPMENT .....	4
<b>3. REFERENCE SPECIFICATION</b> .....	<b>5</b>
<b>4. TEST CONDITIONS</b> .....	<b>6</b>
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH .....	6
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER .....	6
4.3 SAR MEASUREMENT SET-UP .....	6
4.4 PHANTOMS .....	7
4.5 TISSUE SIMULANTS .....	7
4.6 DESCRIPTION OF THE TEST PROCEDURE .....	8
<b>5 RESULT SUMMAR</b> .....	<b>11</b>
<b>6 TEST RESULT</b> .....	<b>14</b>
6.1 MANUFACTURING TOLERANCE .....	14
6.2 GSM MEASUREMENT RESULT .....	38
6.3 WCDMA MEASUREMENT RESULT .....	41
6.4 LTE MEASUREMENT RESULT .....	52
6.5 BLUETOOTH MEASUREMENT RESULT .....	118
6.6 WI-FI MEASUREMENT RESULT .....	118
6.7 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS .....	120
6.8 RF EXPOSURE CONDITIONS .....	122
6.9 SYSTEM CHECKING .....	125
6.10 SAR TEST RESULT .....	127
6.11 SAR MEASUREMENT VARIABILITY .....	154
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS .....	155
<b>7 MEASUREMENT UNCERTAINTY</b> .....	<b>156</b>
<b>8 TEST EQUIPMENTS</b> .....	<b>158</b>
<b>ANNEX A – TEST PLOTS</b> .....	<b>167</b>
<b>ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS</b> .....	<b>207</b>

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R. China
City:	Beijing
Country or Region:	P.R. China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

### **1.3 Applicant's details**

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Zhao Yang
Tel:	86-029-83637990
Fax:	---
Email:	zhao.yangxa@zte.com.cn

### **1.4 Manufacturer's details**

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Zhao Yang
Tel:	86-029-83637990
Fax:	---
Email:	zhao.yangxa@zte.com.cn

## 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020.05.25
Testing Start Date:	2020.05.25
Testing End Date:	2020.06.17

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	40

Normal Supply Voltage (Vdc.):	3.7
-------------------------------	-----

## 2. DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	<input checked="" type="checkbox"/> GSM Band: GSM850/GSM1900 <input checked="" type="checkbox"/> WCDMA Band: FDD II/IV/V <input checked="" type="checkbox"/> LTE Band: 2/4/5/12/25/41/66/71 <input checked="" type="checkbox"/> Wi-Fi Band: 2.4GHz/5GHz <input checked="" type="checkbox"/> BT/BLE
Mode	GSM <input checked="" type="checkbox"/> GPRS (GMSK) <input checked="" type="checkbox"/> EGPRS (GMSK/8PSK) WCDMA <input checked="" type="checkbox"/> UMTS Rel. 99 <input checked="" type="checkbox"/> HSDPA (Rel. 5) <input checked="" type="checkbox"/> HSUPA (Rel. 6) <input checked="" type="checkbox"/> HSPA+ (Rel.7) <input checked="" type="checkbox"/> DC-HSDPA (Rel.8) Wi-Fi 2.4GHz <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n HT20 Wi-Fi 5GHz <input checked="" type="checkbox"/> 802.11n HT20/40 <input checked="" type="checkbox"/> 802.11ac VHT20/40/80 LTE <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM
Duty Cycle*	GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) EDGE(GMSK/8PSK) 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% LTE(FDD): 100% Wi-Fi 2.4GHz:802.11b: 99.6%/11g: 97.0%/11n 20: 97.3%

	Wi-Fi 5GHz: 11n20: 96.64%/11n 40: 95.53%/11ac20:96.46%/11ac40:93.59%/11ac80:87.79% Bluetooth:GFSK:46.10%/π/4DQPSK:45.90%/8DPSK:46.10% BLE:84.9%
Multi-Slot Class for GPRS/EDGE	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input checked="" type="checkbox"/> Class 12 - Four Up <input type="checkbox"/> Class 33- Four Up
Mobile Phone Capability	<input type="checkbox"/> Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM	Not Supported
Note	For licensed cellular network duty cycle is inherent. For unlicensed network, WLAN Duty cycle is depends on the data traffic, and the traffic allocation in operating mode could be the most conservative condition which with 100% duty cycle. SAR measurement also use non signalling mode, so the duty factor shall be taken into consideration.

## **2.2 Support Equipment**

The following support equipment was used to exercise the DUT during testing:

State of sample	Normal
H/W Version	Z6250CCHW1.0
S/W Version	Z6250CCV1.0.0B02
IMEI	860938040003105
Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features.

### **3. REFERENCE SPECIFICATION**

Specification	Version	Title
Part 2.1093	2019	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 447498 D02	v02r01	SAR MEASUREMENT PROCEDURES FOR USB DONGLE TRANSMITTERS
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

## **4. TEST CONDITIONS**

### **4.1 Picture to demonstrate the required liquid depth**

The liquid depth is large than 15cm in the used SAM phantoms in flat section, and the depth of the tissue simulant was  $15.0 \pm 0.5$  cm measured from the ear reference point during system checking and device measurements.



Liquid depth for SAR Measurement

### **4.2 Test Signal, Frequencies and Output Power**

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

### **4.3 SAR Measurement Set-up**

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than  $\pm 0.02$ mm. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

#### **4.4 Phantoms**

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

#### **4.5 Tissue Simulants**

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528. All tests were carried out using simulants whose dielectric parameters were within  $\pm 10\%$  below 3GHz and  $\pm 5\%$  above 3GHz of the recommended values when use DASY system according to KDB865664D01. All tests were carried out within 24 hours of measuring the dielectric parameters.



<b>Tissue Stimulant Recipes</b>	
Name	Broadband tissue-equivalent liquid
Type	HBBL600-6000V6 Simulating Liquid
Note: The stimulant could be the same for head and body.	

## 4.6 DESCRIPTION OF THE TEST PROCEDURE

### 4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



**Device holder supplied by SPEAG**

## 4.6.2 Test Exposure Conditions

### 4.6.2.1 Head Configuration

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

### 4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is normally determined according to the actual scene which might be the worst use condition for general exposure. The device's front and rear were oriented facing the phantom since these orientations give higher results for most regular portable devices.

### 4.6.2.3 Hotspot Configuration

Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

## 4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm × 15 mm (equal or less than 2GHz), 12 mm × 12 mm (from 2GHz~4GHz) and 10mm x 10mm (from 4GHz~6GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location.

When the reported 1g-SAR estimated by area scan is less than 1.40 w/kg.

Zoom scan was performed by using the configuration mentioned below or more conservative scan area and step to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

Below 3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

2GHz-3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

3GHz-4GHz: 28mmX28mmX28mm scan area with 7 mm X7 mm X4 mm steps

4GHz-5GHz: 25mmX25mmX24mm scan area with 5 mm X5 mm X3 mm steps

5GHz-6GHz: 25mmX25mmX22mm scan area with 5 mm X5 mm X2 mm steps

#### **4.6.4 SAR Averaging Methods**

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASYS are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

## 5 RESULT SUMMAR




The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

Exposure Position	Frequency Band	Main supply 1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)	Limit(W/kg)/1g	Result	
Head	GSM 850	0.116	0.861			
	GSM 1900	0.380				
	WCDMA BAND II	0.545				
	WCDMA BAND IV	0.610				
	WCDMA BAND V	0.192				
	LTE BAND 2	0.638				
	LTE BAND 4	0.604				
	LTE BAND 5	0.159				
	LTE BAND 12	0.219				
	LTE BAND 25	0.579				
	LTE BAND 41	0.176				
	LTE BAND 66	0.736				
	LTE BAND 71	0.157				
	BT/BLE	0.229				
	WIFI 2.4GHz	0.718				
WIFI 5G U-NII-1	0.441					
WIFI 5G U-NII-3	0.861					
Body-Worn & Hotspot (10mm Gap)	GSM 850	0.277	0.749	0.861	1.6	PASS
	GSM 1900	0.540				
	WCDMA BAND II	0.565				
	WCDMA BAND IV	0.708				
	WCDMA BAND V	0.277				
	LTE BAND 2	0.491				
	LTE BAND 4	0.589				
	LTE BAND 5	0.337				
	LTE BAND 12	0.260				
	LTE BAND 25	0.526				
	LTE BAND 41	0.382				
	LTE BAND 66	0.581				
	LTE BAND 71	0.288				
	BT/BLE	0.114				
	WIFI 2.4GHz	0.312				
WIFI 5G U-NII-1	0.445					
WIFI 5G U-NII-3	0.749					
Hotspot (10mm Gap)	GSM 850	0.277	0.749			
	GSM 1900	0.540				
	WCDMA BAND II	0.609				
	WCDMA BAND IV	0.708				
	WCDMA BAND V	0.277				

	LTE BAND 2	0.632				
	LTE BAND 4	0.702				
	LTE BAND 5	0.337				
	LTE BAND 12	0.260				
	LTE BAND 25	0.595				
	LTE BAND 41	0.382				
	LTE BAND 66	0.664				
	LTE BAND 71	0.288				
	BT/BLE	0.114				
	WIFI 2.4GHz	0.312				
	WIFI 5G U-NII-1	0.694				
	WIFI 5G U-NII-3	0.749				

**Simultaneous Transmission Summary**

Exposure Position	Frequency Band	Main supply 1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit(W/kg)/1g	Result
Head	GSM&WIFI	1.188	1.571	1.571	1.6	PASS
	WCDMA&WIFI	1.401				
	LTE&WIFI	1.571				
	GSM&BT/BLE	0.609				
	WCDMA&BT/BLE	0.839				
	LTE&BT/BLE	0.965				
Body-Worn & Hotspot (10mm Gap)	GSM&WIFI	1.289	1.457	1.571	1.6	PASS
	WCDMA&WIFI	1.457				
	LTE&WIFI	1.338				
	GSM&BT/BLE	0.654				
	WCDMA&BT/BLE	0.822				
	LTE&BT/BLE	0.703				
Hotspot (10mm Gap)	GSM&WIFI	1.289	1.457	1.571	1.6	PASS
	WCDMA&WIFI	1.457				
	LTE&WIFI	1.415				

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Miss Jin Wanqing 	Issued date:  20200617

## 6 TEST RESULT

### 6.1 Manufacturing Tolerance

#### GSM

##### GSM850

Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
824.2	128	28.5~32.5
836.4	189	
848.8	251	

##### GPRS/EGPRS (GMSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tolerance (dBm)
824.2	128	4Downlink1uplink	28.5~32.5
836.4	189		
848.8	251		
824.2	128	3Downlink2uplink	28.0~32.0
836.4	189		
848.8	251		
824.2	128	2Downlink3uplink	26.5~30.5
836.4	189		
848.8	251		
824.2	128	1Downlink4uplink	25.1~29.1
836.4	189		
848.8	251		

##### EGPRS (8PSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tolerance (dBm)
824.2	128	8PSK 4Downlink1uplink	23.0~27.0
836.4	189		
848.8	251		
824.2	128	8PSK 3Downlink2uplink	22.0~26.0
836.4	189		
848.8	251		
824.2	128	8PSK 2Downlink3uplink	19.5~23.5
836.4	189		
848.8	251		
824.2	128	8PSK 1Downlink4uplink	18.5~22.5
836.4	189		
848.8	251		

PCS1900: full power

GSM:

Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
1850.2	512	25.0~29.0
1880.0	661	
1909.8	810	

GPRS/EGPRS (GMSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tolerance (dBm)
1850.2	512	4Downlink1uplink	25.0~29.0
1880.0	661		
1909.8	810		
1850.2	512	3Downlink2uplink	24.5~28.5
1880.0	661		
1909.8	810		
1850.2	512	2Downlink3uplink	22.5~26.5
1880.0	661		
1909.8	810		
1850.2	512	1Downlink4uplink	21.4~25.4
1880.0	661		
1909.8	810		

EGPRS (8PSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tolerance (dBm)
1850.2	512	8PSK 4Downlink1uplink	21.5~25.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 3Downlink2uplink	20.5~24.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 2Downlink3uplink	18.5~22.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 1Downlink4uplink	17.5~21.5
1880.0	661		
1909.8	810		

reduced power

GSM:

Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
1850.2	512	22.0~26.0
1880.0	661	
1909.8	810	



### WCDMA

WCDMA band II  
full power

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	19.3~23.3
		1880.0	9400	
		1907.6	9538	
	RMC,64kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	RMC,144kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	RMC,384kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
AMR,12.2kbps	1852.4	9262		
	1880.0	9400		
	1907.6	9538		
HSDPA	Subtest 1	1852.4	9262	18.5~22.5
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
HSUPA	Subtest 1	1852.4	9262	19.0~23.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 5	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
HSPA+	QPSK	1852.4	9262	18.5~22.5
		1880.0	9400	
		1907.6	9538	
	16QAM	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
DC-HSDPA	Subtest 1	1852.4	9262	19.0~23.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

reduced power

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	16.3~20.3
		1880.0	9400	
		1907.6	9538	
	RMC,64kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	RMC,144kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	RMC,384kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	AMR,12.2kbps	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
HSDPA	Subtest 1	1852.4	9262	15.5~19.5
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
	Subtest 4	1852.4	9262	16.0~20.0
		1880.0	9400	
		1907.6	9538	
HSUPA	Subtest 1	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
Subtest 5	1852.4	9262		
	1880.0	9400		
	1907.6	9538		
HSPA+	QPSK	1852.4	9262	15.5~19.5
		1880.0	9400	
		1907.6	9538	
	16QAM	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
DC-HSDPA	Subtest 1	1852.4	9262	16.0~19.0
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

WCDMA band IV  
full power

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	19.4~23.4
		1732.4	1412	
		1752.6	1513	
	RMC,64kbps	1712.4	1312	
		1732.4	1412	

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)		
	RMC,144kbps	1752.6	1513			
		1712.4	1312			
		1732.4	1412			
		1752.6	1513			
		RMC,384kbps	1712.4		1312	
			1732.4		1412	
	1752.6		1513			
	AMR,12.2kbps	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
	HSDPA	Subtest 1	1712.4		1312	18.5~22.5
			1732.4		1412	
1752.6			1513			
Subtest 2		1712.4	1312			
		1732.4	1412			
		1752.6	1513			
Subtest 3		1712.4	1312			
		1732.4	1412			
		1752.6	1513			
Subtest 4		1712.4	1312			
		1732.4	1412			
		1752.6	1513			
HSUPA	Subtest 1	1712.4	1312	19.0~23.0		
		1732.4	1412			
		1752.6	1513			
	Subtest 2	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
	Subtest 3	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
	Subtest 4	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
	Subtest 5	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
HSPA+	QPSK	1712.4	1312	17.5~21.5		
		1732.4	1412			
		1752.6	1513			
	16QAM	1712.4	1312			
		1732.4	1412			
		1752.6	1513			
DC-HSDPA	Subtest 1	1712.4	1312	19.0~23.0		
		1732.4	1412			
		1752.6	1513			

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	

reduced power

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	15.4~19.4
		1732.4	1412	
		1752.6	1513	
	RMC,64kbps	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	RMC,144kbps	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	RMC,384kbps	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	AMR,12.2kbps	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSDPA	Subtest 1	1712.4	1312	14.5~18.5
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSUPA	Subtest 1	1712.4	1312	15.0~19.0
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	

Mode		Carrier frequency (MHz)	Channel No.	Tolerance (dBm)
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 5	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSPA+	QPSK	1712.4	1312	13.5~17.5
		1732.4	1412	
		1752.6	1513	
	16QAM	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
DC-HSDPA	Subtest 1	1712.4	1312	15.0~19.0
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	

WCDMA band V  
full power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	826.4	4132	20.0~24.0
		836.6	4183	
		846.6	4233	
	RMC,64kbps	826.4	4132	
		836.6	4183	
		846.6	4233	
	RMC,144kbps	826.4	4132	
		836.6	4183	
		846.6	4233	
	RMC,384kbps	826.4	4132	
		836.6	4183	
		846.6	4233	
AMR,12.2kbps	826.4	4132		
	836.6	4183		
	846.6	4233		
HSDPA	Subtest 1	826.4	4132	19.0~23.0
		836.6	4183	
		846.6	4233	
	Subtest 2	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 3	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 4	826.4	4132	
		836.6	4183	
		846.6	4233	
HSUPA	Subtest 1	826.4	4132	19.0~23.0
		836.6	4183	
		846.6	4233	
	Subtest 2	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 3	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 4	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 5	826.4	4132	
		836.6	4183	
		846.6	4233	

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
HSPA+	QPSK	826.4	4132	18.0~22.0
		836.6	4183	
		846.6	4233	
	16QAM	826.4	4132	
		836.6	4183	
		846.6	4233	
DC-HSDPA	Subtest 1	826.4	4132	19.5~23.5
		836.6	4183	
		846.6	4233	
	Subtest 2	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 3	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 4	826.4	4132	
		836.6	4183	
		846.6	4233	



### LTE

Note: RB allocation mentioned below is for all Bandwidths, and the Frequency Range are divided to 3 ranges (Low, Mid, High)

#### Band 2 full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	18.4~22.4
			Mid	
			High	
		50%	Low	17.9~21.9
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	16QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
		100%	Low	17.0~21.0
			Mid	
			High	
	64QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
100%		Low	17.0~21.0	
		Mid		
		High		

reduced power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	16.4~20.4
			Mid	
			High	
		50%	Low	15.9~29.9
			Mid	
			High	
		100%	Low	16.0~20.0
			Mid	
			High	
	16QAM	1	Low	16.0~20.0
			Mid	
			High	
		50%	Low	15.0~19.0
			Mid	
			High	
		100%	Low	15.0~19.0
			Mid	
			High	
	64QAM	1	Low	16.0~20.0
			Mid	
			High	
		50%	Low	15.0~19.0
			Mid	
			High	
100%		Low	15.0~19.0	
		Mid		
		High		

**Band 4**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	18.6~22.6
			Mid	
			High	
		50%	Low	17.9~21.9
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	16QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
		100%	Low	17.0~21.0
			Mid	
			High	
	64QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
100%		Low	17.0~21.0	
		Mid		
		High		

reduced power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	15.1~19.1
			Mid	
			High	
		50%	Low	14.4~18.4
			Mid	
			High	
		100%	Low	14.5~18.5
			Mid	
			High	
	16QAM	1	Low	14.5~18.5
			Mid	
			High	
		50%	Low	13.5~17.5
			Mid	
			High	
		100%	Low	13.5~17.5
			Mid	
			High	
	64QAM	1	Low	14.5~18.5
			Mid	
			High	
		50%	Low	13.5~17.5
			Mid	
			High	
100%		Low	13.5~17.5	
		Mid		
		High		

**Band 5**  
 full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	19.8~23.8
			Mid	
			High	
		50%	Low	19.0~23.0
			Mid	
			High	
		100%	Low	19.0~23.0
			Mid	
			High	
	16QAM	1	Low	19.5~23.5
			Mid	
			High	
		50%	Low	18.0~22.0
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	64QAM	1	Low	19.0~23.0
			Mid	
			High	
		50%	Low	18.0~22.0
			Mid	
			High	
100%		Low	18.0~22.0	
		Mid		
		High		

**Band 12**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	19.8~23.8
			Mid	
			High	
		50%	Low	19.0~23.0
			Mid	
			High	
		100%	Low	19.0~23.0
			Mid	
			High	
	16QAM	1	Low	19.0~23.0
			Mid	
			High	
		50%	Low	18.0~22.0
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	64QAM	1	Low	19.0~23.0
			Mid	
			High	
		50%	Low	18.0~22.0
			Mid	
			High	
100%		Low	18.0~22.0	
		Mid		
		High		

**Band 25**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	18.6~22.6
			Mid	
			High	
		50%	Low	18.1~22.1
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	16QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.5~21.5
			Mid	
			High	
		100%	Low	17.0~21.0
			Mid	
			High	
	64QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.5~21.5
			Mid	
			High	
100%		Low	17.0~21.0	
		Mid		
		High		

reduced power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	16.1~20.1
			Mid	
			High	
		50%	Low	15.6~19.6
			Mid	
			High	
		100%	Low	15.5~19.5
			Mid	
			High	
	16QAM	1	Low	15.5~19.5
			Mid	
			High	
		50%	Low	15.0~19.0
			Mid	
			High	
		100%	Low	14.5~18.5
			Mid	
			High	
	64QAM	1	Low	15.5~19.5
			Mid	
			High	
		50%	Low	15.0~19.0
			Mid	
			High	
100%		Low	14.5~18.5	
		Mid		
		High		



**Band 41**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	22.3~26.3
			Mid	
			High	
		50%	Low	21.8~25.8
			Mid	
			High	
		100%	Low	22.0~26.0
			Mid	
			High	
	16QAM	1	Low	21.5~25.5
			Mid	
			High	
		50%	Low	21.0~25.0
			Mid	
			High	
		100%	Low	21.0~25.0
			Mid	
			High	
	64QAM	1	Low	21.5~25.5
			Mid	
			High	
		50%	Low	21.0~25.0
			Mid	
			High	
100%		Low	21.0~25.0	
		Mid		
		High		

**Band 66**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	18.5~22.5
			Mid	
			High	
		50%	Low	18.0~22.0
			Mid	
			High	
		100%	Low	18.0~22.0
			Mid	
			High	
	16QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
		100%	Low	17.0~21.0
			Mid	
			High	
	64QAM	1	Low	18.0~22.0
			Mid	
			High	
		50%	Low	17.0~21.0
			Mid	
			High	
100%		Low	17.0~21.0	
		Mid		
		High		

reduced power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	16.0~20.0
			Mid	
			High	
		50%	Low	14.5~18.5
			Mid	
			High	
		100%	Low	14.5~18.5
			Mid	
			High	
	16QAM	1	Low	14.5~18.5
			Mid	
			High	
		50%	Low	13.5~17.5
			Mid	
			High	
		100%	Low	13.5~17.5
			Mid	
			High	
	64QAM	1	Low	14.5~18.5
			Mid	
			High	
		50%	Low	13.5~17.5
			Mid	
			High	
100%		Low	13.5~17.5	
		Mid		
		High		

**Band 71**  
full power

BW	Modulation	RB allocation with different offset	Frequency range	Tolerance (dBm)
All Bandwidth	QPSK	1	Low	19.1~23.1
			Mid	
			High	
		50%	Low	18.3~22.3
			Mid	
			High	
		100%	Low	18.5~22.5
			Mid	
			High	
	16QAM	1	Low	18.5~22.5
			Mid	
			High	
		50%	Low	17.5~21.5
			Mid	
			High	
		100%	Low	17.5~21.5
			Mid	
			High	
	64QAM	1	Low	18.5~22.5
			Mid	
			High	
		50%	Low	17.5~21.5
			Mid	
			High	
100%		Low	17.5~21.5	
		Mid		
		High		

### Bluetooth

Modulation type	Tolerance (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	3.5~7.5		
$\pi/4$ DQPSK	0.5~4.5		
8DPSK	0.5~4.5		

### Bluetooth (BLE)

Modulation type	Average Power Output (dBm)		
	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
GFSK (LE 1Mbps)	-6.0~-2.0		

### WLAN 2.4GHz

Modulation type	Tolerance (dBm)		
	2412MHz	2437MHz	2462MHz
11b	16.6~20.6		
11g	15.5~19.5		
11n HT20	14.5~18.5		

### WLAN 5GHz U-NII-1

Modulation type	Tolerance (dBm)		
	5180MHz	5200MHz	5240MHz
11n HT20	12.9~16.9		
11ac VHT20	11.5~15.5		
Modulation type	Tolerance (dBm)		
	5190MHz	5230MHz	
11n HT40	12.0~16.0		
11ac VHT40	11.0~15.0		
Modulation type	Tolerance (dBm)		
	5210MHz		
11ac VHT80	11.0~15.0		

**WLAN 5GHz U-NII-3**

Modulation type	Tolerance (dBm)		
	5745MHz	5785MHz	5825MHz
11n HT20	11.7~15.7		
11ac VHT20	10.0~14.0		
Modulation type	Tolerance (dBm)		
	5755MHz	5795MHz	
11n HT40	10.5~14.5		
11ac VHT40	10.0~14.0		
Modulation type	Tolerance (dBm)		
	5775MHz		
11ac VHT80	10.0~14.0		

## 6.2 GSM Measurement result

GSM850

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	32.12	23.09
836.4	189	32.23	23.20
848.8	251	32.17	23.14

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	4Downlink1uplink	32.11	23.08
836.4	189		32.27	23.24
848.8	251		32.19	23.16
824.2	128	3Downlink2uplink	31.50	25.48
836.4	189		31.68	25.66
848.8	251		31.62	25.6
824.2	128	2Downlink3uplink	29.92	25.66
836.4	189		30.07	25.81
848.8	251		30.05	25.79
824.2	128	1Downlink4uplink	28.85	<b>25.84</b>
836.4	189		29.03	<b>26.02</b>
848.8	251		28.96	<b>25.95</b>

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	8PSK 4Downlink1uplink	26.44	17.41
836.4	189		26.60	17.57
848.8	251		26.59	17.56
824.2	128	8PSK 3Downlink2uplink	25.24	19.22
836.4	189		25.42	19.40
848.8	251		25.53	19.51
824.2	128	8PSK 2Downlink3uplink	23.23	18.97
836.4	189		23.31	19.05
848.8	251		23.31	19.05
824.2	128	8PSK 1Downlink4uplink	21.95	18.94
836.4	189		22.11	19.10
848.8	251		22.15	19.14

PCS1900

full power

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	28.78	19.75
1880.0	661	28.77	19.74
1909.8	810	28.97	19.94

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	4Downlink1uplink	28.78	19.75
1880.0	661		28.77	19.74
1909.8	810		28.97	19.94
1850.2	512	3Downlink2uplink	28.03	22.01
1880.0	661		28.01	21.99
1909.8	810		28.24	22.22
1850.2	512	2Downlink3uplink	26.30	22.04
1880.0	661		26.25	21.99
1909.8	810		26.47	22.21
1850.2	512	1Downlink4uplink	25.17	<b>22.16</b>
1880.0	661		25.12	<b>22.11</b>
1909.8	810		25.33	<b>22.32</b>

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	8PSK 4Downlink1uplink	24.98	15.95
1880.0	661		24.96	15.93
1909.8	810		25.24	16.21
1850.2	512	8PSK 3Downlink2uplink	23.90	17.88
1880.0	661		23.98	17.96
1909.8	810		24.22	18.20
1850.2	512	8PSK 2Downlink3uplink	21.93	17.67
1880.0	661		21.91	17.65
1909.8	810		22.17	17.91
1850.2	512	8PSK 1Downlink4uplink	20.84	17.83
1880.0	661		20.83	17.82
1909.8	810		21.10	18.09

reduced power

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	25.78	16.75
1880.0	661	25.77	16.74
1909.8	810	25.97	16.94



**Division Factors (for Measured Power and Frame Average Power):**

To average the power, the division factor is as follows:

1TX-slot (1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the frame average conducted power, the SAR measurements are performed with **4Txslots (4uplink)** of GPRS850 (GMSK) and **4Txslots (4uplink)** of GPRS1900 (GMSK).

### 6.3 WCDMA Measurement result

#### Release 99

The following procedures are according to FCC KDB Publication 941225 D01.

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	RMC mode AMR mode	12.2kbps RMC 12.2kbps RMC in 3.4 kbps SRB
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

#### Release 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM(dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note2: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ .

Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

## Release 6

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (S F)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (S F)	$\beta_{ed}$ (code s)	CM <sup>(2)</sup> (dB)	MP R (d B)	AG <sup>(4)</sup> Index	E-TF CI
1	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	11/15 <sup>(3)</sup>	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64	15/15 <sup>(4)</sup>	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note2: CM=1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to  $\beta_c=10/15$  and  $\beta_d=15/15$ .

Note4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to  $\beta_c=14/15$  and  $\beta_d=15/15$ .

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

## Release 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121.

Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	$\beta_c$ (Note3)	$\beta_d$	$\beta_{HS}$ (Note1)	$\beta_{ec}$	$\beta_{ed}$ (2xSF2) (Note 4)	$\beta_{ed}$ (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TF CI (Note 5)	E-TF CI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.


Release 8

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload ( $N_{INF}$ )	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

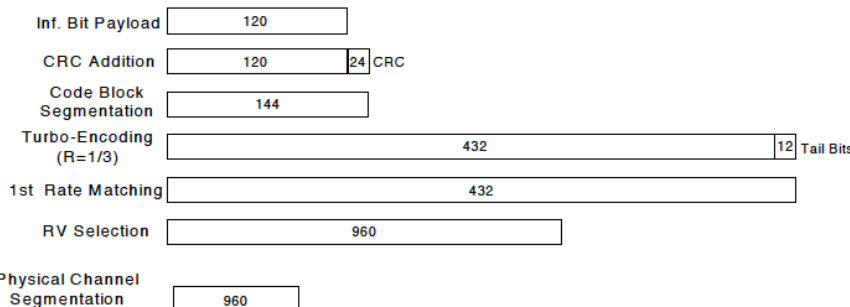

**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	CM(dB) <sup>(2)</sup>
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64	12/15 <sup>(3)</sup>	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1:  $\Delta_{ACK}, \Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note2: CM=1 for  $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ .

Note3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

WCDMA band II  
full power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	23.12
		1880.0	9400	23.23
		1907.6	9538	23.30
	RMC,64kbps	1852.4	9262	22.78
		1880.0	9400	23.18
		1907.6	9538	22.40
	RMC,144kbps	1852.4	9262	22.63
		1880.0	9400	22.49
		1907.6	9538	22.74
	RMC,384kbps	1852.4	9262	22.95
		1880.0	9400	22.31
		1907.6	9538	22.89
	AMR,12.2kbps	1852.4	9262	22.82
		1880.0	9400	22.53
		1907.6	9538	23.28
HSDPA	Subtest 1	1852.4	9262	22.45
		1880.0	9400	22.45
		1907.6	9538	22.49
	Subtest 2	1852.4	9262	22.46
		1880.0	9400	22.31
		1907.6	9538	22.38
	Subtest 3	1852.4	9262	22.26
		1880.0	9400	22.32
		1907.6	9538	22.25
	Subtest 4	1852.4	9262	22.36
		1880.0	9400	22.33
		1907.6	9538	22.20
HSUPA	Subtest 1	1852.4	9262	22.78
		1880.0	9400	22.86
		1907.6	9538	22.71
	Subtest 2	1852.4	9262	22.83
		1880.0	9400	22.89
		1907.6	9538	22.68
	Subtest 3	1852.4	9262	22.76
		1880.0	9400	22.80
		1907.6	9538	22.62
	Subtest 4	1852.4	9262	22.84
		1880.0	9400	22.89
		1907.6	9538	22.77
	Subtest 5	1852.4	9262	22.69
		1880.0	9400	22.74
		1907.6	9538	22.59
HSPA+	QPSK	1852.4	9262	22.10
		1880.0	9400	22.06

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
	16QAM	1907.6	9538	22.01
		1852.4	9262	21.04
		1880.0	9400	21.01
		1907.6	9538	21.39
DC-HSDPA	Subtest 1	1852.4	9262	22.17
		1880.0	9400	22.64
		1907.6	9538	22.26
	Subtest 2	1852.4	9262	22.48
		1880.0	9400	22.52
		1907.6	9538	22.47
	Subtest 3	1852.4	9262	22.61
		1880.0	9400	22.30
		1907.6	9538	21.89
	Subtest 4	1852.4	9262	22.11
		1880.0	9400	21.89
		1907.6	9538	22.64

reduced power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	
Release 99	RMC,12.2kbps	1852.4	9262	20.12	
		1880.0	9400	20.23	
		1907.6	9538	20.30	
	RMC,64kbps	1852.4	9262	19.78	
		1880.0	9400	20.18	
		1907.6	9538	19.40	
	RMC,144kbps	1852.4	9262	19.63	
		1880.0	9400	19.49	
		1907.6	9538	19.74	
	RMC,384kbps	1852.4	9262	19.95	
		1880.0	9400	19.31	
		1907.6	9538	19.89	
	AMR,12.2kbps	1852.4	9262	19.82	
		1880.0	9400	19.53	
		1907.6	9538	20.28	
	HSDPA	Subtest 1	1852.4	9262	19.45
			1880.0	9400	19.45
			1907.6	9538	19.49
Subtest 2		1852.4	9262	19.46	
		1880.0	9400	19.31	
		1907.6	9538	19.38	
Subtest 3		1852.4	9262	19.26	
		1880.0	9400	19.32	
		1907.6	9538	19.25	
Subtest 4		1852.4	9262	19.36	
		1880.0	9400	19.33	

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
		1907.6	9538	19.20
HSUPA	Subtest 1	1852.4	9262	19.78
		1880.0	9400	19.86
		1907.6	9538	19.71
		1852.4	9262	19.83
	Subtest 2	1880.0	9400	19.89
		1907.6	9538	19.68
		1852.4	9262	19.76
	Subtest 3	1880.0	9400	19.80
		1907.6	9538	19.62
		1852.4	9262	19.84
	Subtest 4	1880.0	9400	19.89
		1907.6	9538	19.77
		1852.4	9262	19.69
	Subtest 5	1880.0	9400	19.74
		1907.6	9538	19.59
1852.4		9262	19.10	
HSPA+	QPSK	1880.0	9400	19.06
		1907.6	9538	19.01
		1852.4	9262	18.04
	16QAM	1880.0	9400	18.01
		1907.6	9538	18.39
		1852.4	9262	19.17
DC-HSDPA	Subtest 1	1880.0	9400	19.64
		1907.6	9538	19.26
		1852.4	9262	19.48
	Subtest 2	1880.0	9400	19.52
		1907.6	9538	19.47
		1852.4	9262	19.61
	Subtest 3	1880.0	9400	19.30
		1907.6	9538	18.89
		1852.4	9262	19.11
	Subtest 4	1880.0	9400	18.89
		1907.6	9538	19.64

WCDMA band IV  
full power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	23.32
		1732.4	1412	23.09
		1752.6	1513	23.20
	RMC,64kbps	1712.4	1312	22.96
		1732.4	1412	22.61
		1752.6	1513	22.96
	RMC,144kbps	1712.4	1312	22.72
		1732.4	1412	22.62
		1752.6	1513	22.40
	RMC,384kbps	1712.4	1312	23.26
		1732.4	1412	23.07
		1752.6	1513	23.06
	AMR,12.2kbps	1712.4	1312	22.64
		1732.4	1412	22.28
		1752.6	1513	23.08
HSDPA	Subtest 1	1712.4	1312	22.26
		1732.4	1412	22.22
		1752.6	1513	22.30
	Subtest 2	1712.4	1312	22.23
		1732.4	1412	22.16
		1752.6	1513	22.38
	Subtest 3	1712.4	1312	22.14
		1732.4	1412	22.22
		1752.6	1513	22.30
	Subtest 4	1712.4	1312	22.20
		1732.4	1412	22.18
		1752.6	1513	22.14
HSUPA	Subtest 1	1712.4	1312	22.61
		1732.4	1412	22.75
		1752.6	1513	22.55
	Subtest 2	1712.4	1312	22.48
		1732.4	1412	22.70
		1752.6	1513	22.53
	Subtest 3	1712.4	1312	22.58
		1732.4	1412	22.57
		1752.6	1513	22.63
	Subtest 4	1712.4	1312	22.42
		1732.4	1412	22.62
		1752.6	1513	22.71
	Subtest 5	1712.4	1312	22.42
		1732.4	1412	22.66
		1752.6	1513	22.51
HSPA+	QPSK	1712.4	1312	21.37



Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
	16QAM	1732.4	1412	21.17
		1752.6	1513	21.46
		1712.4	1312	20.63
		1732.4	1412	20.68
		1752.6	1513	20.73
DC-HSDPA	Subtest 1	1712.4	1312	21.81
		1732.4	1412	22.20
		1752.6	1513	22.37
	Subtest 2	1712.4	1312	21.79
		1732.4	1412	22.25
		1752.6	1513	22.05
	Subtest 3	1712.4	1312	22.55
		1732.4	1412	22.17
		1752.6	1513	22.64
	Subtest 4	1712.4	1312	22.34
		1732.4	1412	22.67
		1752.6	1513	22.55

reduced power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	19.32
		1732.4	1412	19.09
		1752.6	1513	19.20
	RMC,64kbps	1712.4	1312	18.96
		1732.4	1412	18.61
		1752.6	1513	18.96
	RMC,144kbps	1712.4	1312	18.72
		1732.4	1412	18.62
		1752.6	1513	18.40
	RMC,384kbps	1712.4	1312	19.26
		1732.4	1412	19.07
		1752.6	1513	19.06
	AMR,12.2kbps	1712.4	1312	18.64
		1732.4	1412	18.28
		1752.6	1513	19.08
HSDPA	Subtest 1	1712.4	1312	18.26
		1732.4	1412	18.22
		1752.6	1513	18.30
	Subtest 2	1712.4	1312	18.23
		1732.4	1412	18.16
		1752.6	1513	18.38
	Subtest 3	1712.4	1312	18.14
		1732.4	1412	18.22
		1752.6	1513	18.30
	Subtest 4	1712.4	1312	18.20

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	
HSUPA	Subtest 1	1732.4	1412	18.18	
		1752.6	1513	18.14	
		1712.4	1312	18.61	
	Subtest 2	1732.4	1412	18.75	
		1752.6	1513	18.55	
		1712.4	1312	18.48	
	Subtest 3	1732.4	1412	18.70	
		1752.6	1513	18.53	
		1712.4	1312	18.58	
	Subtest 4	1732.4	1412	18.57	
		1752.6	1513	18.63	
		1712.4	1312	18.42	
	Subtest 5	1732.4	1412	18.62	
		1752.6	1513	18.71	
		1712.4	1312	18.42	
	HSPA+	QPSK	1732.4	1412	18.66
			1752.6	1513	18.51
			1712.4	1312	17.37
16QAM		1732.4	1412	17.17	
		1752.6	1513	17.46	
		1712.4	1312	16.63	
DC-HSDPA	Subtest 1	1732.4	1412	16.68	
		1752.6	1513	16.73	
		1712.4	1312	17.81	
	Subtest 2	1732.4	1412	18.20	
		1752.6	1513	18.37	
		1712.4	1312	17.79	
	Subtest 3	1732.4	1412	18.25	
		1752.6	1513	18.05	
		1712.4	1312	18.55	
	Subtest 4	1732.4	1412	18.17	
		1752.6	1513	18.64	
		1712.4	1312	18.34	
		1732.4	1412	18.67	
		1752.6	1513	18.55	
		1712.4	1312		

WCDMA band V  
full power

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	826.4	4132	23.93
		836.6	4183	23.84
		846.6	4233	23.94
	RMC,64kbps	826.4	4132	23.49
		836.6	4183	23.39
		846.6	4233	23.78
	RMC,144kbps	826.4	4132	23.41
		836.6	4183	23.60
		846.6	4233	23.85
	RMC,384kbps	826.4	4132	23.00
		836.6	4183	23.03
		846.6	4233	23.21
AMR,12.2kbps	826.4	4132	23.06	
	836.6	4183	23.23	
	846.6	4233	23.05	
HSDPA	Subtest 1	826.4	4132	22.56
		836.6	4183	22.78
		846.6	4233	22.86
	Subtest 2	826.4	4132	22.67
		836.6	4183	22.48
		846.6	4233	22.86
	Subtest 3	826.4	4132	22.35
		836.6	4183	22.64
		846.6	4233	22.71
	Subtest 4	826.4	4132	22.58
		836.6	4183	22.50
		846.6	4233	22.72
HSUPA	Subtest 1	826.4	4132	22.16
		836.6	4183	22.32
		846.6	4233	22.12
	Subtest 2	826.4	4132	22.76
		836.6	4183	22.98
		846.6	4233	22.99
	Subtest 3	826.4	4132	22.88
		836.6	4183	22.79
		846.6	4233	22.92
	Subtest 4	826.4	4132	22.57
		836.6	4183	22.10
		846.6	4233	22.58
	Subtest 5	826.4	4132	22.72
		836.6	4183	22.54
		846.6	4233	22.53
HSPA+	QPSK	826.4	4132	21.82


Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
	16QAM	836.6	4183	21.93
		846.6	4233	21.67
		826.4	4132	20.31
		836.6	4183	20.62
		846.6	4233	20.23
DC-HSDPA	Subtest 1	826.4	4132	22.82
		836.6	4183	22.39
		846.6	4233	23.00
	Subtest 2	826.4	4132	23.11
		836.6	4183	22.09
		846.6	4233	22.42
	Subtest 3	826.4	4132	22.13
		836.6	4183	22.32
		846.6	4233	22.89
	Subtest 4	826.4	4132	22.66
		836.6	4183	22.34
		846.6	4233	23.00

Note: UMTS SAR was tested under Rel.99 RMC 12.2kbps mode per KDB Publication 941225 D01. for other higher release configuration, SAR was not required since any average output power was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg with RMC mode.

## 6.4 LTE Measurement result

### General description:

#### TDD-LTE frame structure

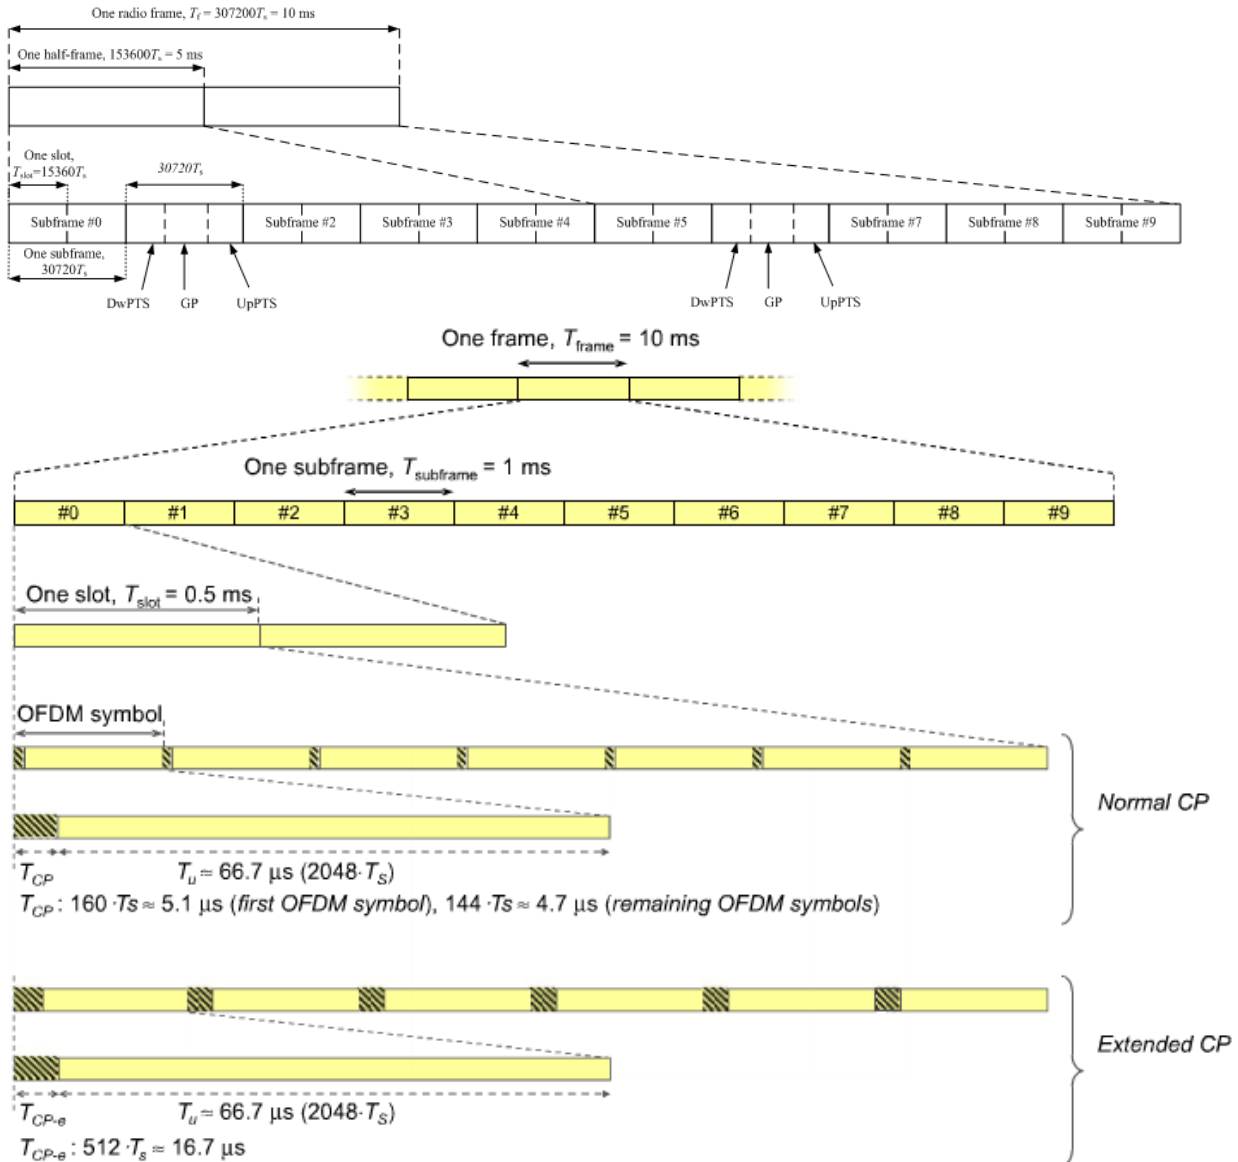

### Uplink-downlink configuration

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

### Special sub-frame configuration

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-		
8	$24144 \cdot T_s$	-	-	-	-	-

### Special sub-frame with cyclic prefix uplink

Special sub-frame configuration		Duty factor with normal cyclic prefix in uplink	Duty factor with extended cyclic prefix in uplink
Normal cyclic prefix in downlink	0~4	7.13%	8.33%
	5~9	14.3%	16.7%
Extended cyclic prefix in downlink	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

So we perform SAR test with maximum duty factor equal to 63.3% by using uplink-downlink configuration 0.

Note: One sub-frame is  $30720T_s=1\text{ms}$ , when UpPTS(uplink) in special sub-frame with extended cyclic prefix, duty factor =  $5120/30720=0.167$ . There are 5 sub-frames in half frame(3up link), so the final duty factor is  $(30720 \cdot 3 + 5120) / (30720 \cdot 5) = 63.3\%$  which we used to evaluate the SAR compliance (worst case)

**LTE Band 2**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	22.28
				1	5	22.37
				3	2	21.72
				6	0	21.63
	1880	18900		1	0	22.29
				1	5	22.20
				3	2	21.85
				6	0	21.62
	1909.3	19193		1	0	22.14
				1	5	22.27
				3	2	21.79
				6	0	21.67
16QAM	1850.7	18607	1.4	1	0	21.25
				1	5	21.24
				3	2	20.83
				6	0	20.59
	1880	18900		1	0	21.34
				1	5	21.24
				3	2	20.83
				6	0	20.74
	1909.3	19193		1	0	21.60
				1	5	21.74
				3	2	20.66
				6	0	20.64
64QAM	1850.7	18607	1.4	1	0	21.57
				1	5	21.50
				3	2	20.75
				6	0	20.51
	1880	18900		1	0	21.21
				1	5	21.27
				3	2	20.68
				6	0	20.70
	1909.3	19193		1	0	21.29
				1	5	21.19
				3	2	20.75
				6	0	20.59

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	22.40
				1	14	22.32
				8	4	21.72
				15	0	21.68
	1880	18900		1	0	22.23
				1	14	22.29
				8	4	21.70
				15	0	21.57
	1908.5	19185		1	0	22.13
				1	14	22.31
				8	4	21.77
				15	0	21.59
16QAM	1851.5	18615	3	1	0	21.33
				1	14	21.24
				8	4	20.67
				15	0	20.49
	1880	18900		1	0	21.35
				1	14	21.29
				8	4	20.82
				15	0	20.66
	1908.5	19185		1	0	21.70
				1	14	21.57
				8	4	20.81
				15	0	20.61
64QAM	1851.5	18615	3	1	0	21.46
				1	14	21.56
				8	4	20.79
				15	0	20.66
	1880	18900		1	0	21.18
				1	14	21.15
				8	4	20.72
				15	0	20.66
	1908.5	19185		1	0	21.17
				1	14	21.24
				8	4	20.76
				15	0	20.72



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	18625	5	1	0	22.12
				1	24	22.05
				12	6	21.16
				25	0	21.19
	1880	18900		1	0	22.03
				1	24	21.97
				12	6	21.22
				25	0	21.28
	1907.5	19175		1	0	21.91
				1	24	21.90
				12	6	21.14
				25	0	21.27
16QAM	1852.5	18625	5	1	0	21.17
				1	24	21.21
				12	6	20.30
				25	0	20.26
	1880	18900		1	0	21.36
				1	24	21.41
				12	6	20.48
				25	0	20.38
	1907.5	19175		1	0	21.27
				1	24	21.22
				12	6	20.33
				25	0	20.35
64QAM	1852.5	18625	5	1	0	21.13
				1	24	21.10
				12	6	20.23
				25	0	20.24
	1880	18900		1	0	21.40
				1	24	21.39
				12	6	20.46
				25	0	20.28
	1907.5	19175		1	0	21.22
				1	24	21.11
				12	6	20.33
				25	0	20.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	22.29
				1	49	22.25
				24	12	21.73
				50	0	21.55
	1880	18900		1	0	22.23
				1	49	22.17
				24	12	21.73
				50	0	21.57
	1905	19150		1	0	22.28
				1	49	22.20
				24	12	21.68
				50	0	21.67
16QAM	1855	18650	10	1	0	21.33
				1	49	21.23
				24	12	20.84
				50	0	20.50
	1880	18900		1	0	21.34
				1	49	21.34
				24	12	20.74
				50	0	20.74
	1905	19150		1	0	21.65
				1	49	21.70
				24	12	20.77
				50	0	20.75
64QAM	1855	18650	10	1	0	21.57
				1	49	21.46
				24	12	20.78
				50	0	20.56
	1880	18900		1	0	21.20
				1	49	21.15
				24	12	20.80
				50	0	20.62
	1905	19150		1	0	21.25
				1	49	21.30
				24	12	20.63
				50	0	20.57

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	22.06
				1	74	22.07
				40	18	21.16
				75	0	21.15
	1880	18900		1	0	22.12
				1	74	21.98
				40	18	21.29
				75	0	21.28
	1902.5	19125		1	0	22.01
				1	74	21.92
				40	18	21.14
				75	0	21.28
16QAM	1857.5	18675	15	1	0	21.15
				1	74	21.19
				40	18	20.33
				75	0	20.30
	1880	18900		1	0	21.41
				1	74	21.32
				40	18	20.42
				75	0	20.38
	1902.5	19125		1	0	21.27
				1	74	21.20
				40	18	20.40
				75	0	20.32
64QAM	1857.5	18675	15	1	0	21.15
				1	74	21.22
				40	18	20.30
				75	0	20.20
	1880	18900		1	0	21.41
				1	74	21.33
				40	18	20.38
				75	0	20.32
	1902.5	19125		1	0	21.23
				1	74	21.21
				40	18	20.36
				75	0	20.38

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	22.40
				1	99	22.25
				50	25	21.61
				100	0	21.61
	1880	18900		1	0	22.26
				1	99	22.24
				50	25	21.85
				100	0	21.56
	1900	19100		1	0	22.22
				1	99	22.27
				50	25	21.69
				100	0	21.60
16QAM	1860	18700	20	1	0	21.22
				1	99	21.25
				50	25	20.85
				100	0	20.48
	1880	18900		1	0	21.29
				1	99	21.34
				50	25	20.80
				100	0	20.66
	1900	19100		1	0	21.62
				1	99	21.64
				50	25	20.74
				100	0	20.72
64QAM	1860	18700	20	1	0	21.59
				1	99	21.58
				50	25	20.77
				100	0	20.53
	1880	18900		1	0	21.18
				1	99	21.28
				50	25	20.68
				100	0	20.60
	1900	19100		1	0	21.15
				1	99	21.21
				50	25	20.76
				100	0	20.57

reduced Power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	20.28
				1	5	20.37
				3	2	19.72
				6	0	19.63
	1880	18900		1	0	20.29
				1	5	20.20
				3	2	19.85
	1909.3	19193		6	0	19.62
				1	0	20.14
16QAM	1850.7	18607	1.4	1	5	20.27
				3	2	19.79
				6	0	19.67
				1	0	19.25
	1880	18900		1	5	19.24
				3	2	18.83
				6	0	18.59
	1909.3	19193		1	0	19.34
				1	5	19.24
64QAM	1850.7	18607	1.4	3	2	18.83
				6	0	18.74
				1	0	19.60
				1	5	19.74
	1880	18900		3	2	18.66
				6	0	18.64
				1	0	19.57
	1909.3	19193		1	5	19.50
				3	2	18.75
64QAM	1850.7	18607	1.4	6	0	18.51
				1	0	19.21
				1	5	19.27
				3	2	18.68
	1880	18900		6	0	18.70
				1	0	19.29
				1	5	19.19
	1909.3	19193		3	2	18.75
				6	0	18.59

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	20.40
				1	14	20.32
				8	4	19.72
				15	0	19.68
	1880	18900		1	0	20.23
				1	14	20.29
				8	4	19.70
				15	0	19.57
	1908.5	19185		1	0	20.13
				1	14	20.31
				8	4	19.77
				15	0	19.59
16QAM	1851.5	18615	3	1	0	19.33
				1	14	19.24
				8	4	18.67
				15	0	18.49
	1880	18900		1	0	19.35
				1	14	19.29
				8	4	18.82
				15	0	18.66
	1908.5	19185		1	0	19.70
				1	14	19.57
				8	4	18.81
				15	0	18.61
64QAM	1851.5	18615	3	1	0	19.46
				1	14	19.56
				8	4	18.79
				15	0	18.66
	1880	18900		1	0	19.18
				1	14	19.15
				8	4	18.72
				15	0	18.66
	1908.5	19185		1	0	19.17
				1	14	19.24
				8	4	18.76
				15	0	18.72

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	18625	5	1	0	20.12
				1	24	20.05
				12	6	19.16
				25	0	19.19
	1880	18900		1	0	20.03
				1	24	19.97
				12	6	19.22
				25	0	19.28
	1907.5	19175		1	0	19.91
				1	24	19.90
				12	6	19.14
				25	0	19.27
16QAM	1852.5	18625	5	1	0	19.17
				1	24	19.21
				12	6	18.30
				25	0	18.26
	1880	18900		1	0	19.36
				1	24	19.41
				12	6	18.48
				25	0	18.38
	1907.5	19175		1	0	19.27
				1	24	19.22
				12	6	18.33
				25	0	18.35
64QAM	1852.5	18625	5	1	0	19.13
				1	24	19.10
				12	6	18.23
				25	0	18.24
	1880	18900		1	0	19.40
				1	24	19.39
				12	6	18.46
				25	0	18.28
	1907.5	19175		1	0	19.22
				1	24	19.11
				12	6	18.33
				25	0	18.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	20.29
				1	49	20.25
				24	12	19.73
				50	0	19.55
	1880	18900		1	0	20.23
				1	49	20.17
				24	12	19.73
				50	0	19.57
	1905	19150		1	0	20.28
				1	49	20.20
				24	12	19.68
				50	0	19.67
16QAM	1855	18650	10	1	0	19.33
				1	49	19.23
				24	12	18.84
				50	0	18.50
	1880	18900		1	0	19.34
				1	49	19.34
				24	12	18.74
				50	0	18.74
	1905	19150		1	0	19.65
				1	49	19.70
				24	12	18.77
				50	0	18.75
64QAM	1855	18650	10	1	0	19.57
				1	49	19.46
				24	12	18.78
				50	0	18.56
	1880	18900		1	0	19.20
				1	49	19.15
				24	12	18.80
				50	0	18.62
	1905	19150		1	0	19.25
				1	49	19.30
				24	12	18.63
				50	0	18.57



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	20.06
				1	74	20.07
				40	18	19.16
				75	0	19.15
	1880	18900		1	0	20.12
				1	74	19.98
				40	18	19.29
				75	0	19.28
	1902.5	19125		1	0	20.01
				1	74	19.92
				40	18	19.14
				75	0	19.28
16QAM	1857.5	18675	15	1	0	19.15
				1	74	19.19
				40	18	18.33
				75	0	18.30
	1880	18900		1	0	19.41
				1	74	19.32
				40	18	18.42
				75	0	18.38
	1902.5	19125		1	0	19.27
				1	74	19.20
				40	18	18.40
				75	0	18.32
64QAM	1857.5	18675	15	1	0	19.15
				1	74	19.22
				40	18	18.30
				75	0	18.20
	1880	18900		1	0	19.41
				1	74	19.33
				40	18	18.38
				75	0	18.32
	1902.5	19125		1	0	19.23
				1	74	19.21
				40	18	18.36
				75	0	18.38

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	20.40
				1	99	20.25
				50	25	19.61
				100	0	19.61
	1880	18900		1	0	20.26
				1	99	20.24
				50	25	19.85
				100	0	19.56
	1900	19100		1	0	20.22
				1	99	20.27
				50	25	19.69
				100	0	19.60
16QAM	1860	18700	20	1	0	19.22
				1	99	19.25
				50	25	18.85
				100	0	18.48
	1880	18900		1	0	19.29
				1	99	19.34
				50	25	18.80
				100	0	18.66
	1900	19100		1	0	19.62
				1	99	19.64
				50	25	18.74
				100	0	18.72
64QAM	1860	18700	20	1	0	19.59
				1	99	19.58
				50	25	18.77
				100	0	18.53
	1880	18900		1	0	19.18
				1	99	19.28
				50	25	18.68
				100	0	18.60
	1900	19100		1	0	19.15
				1	99	19.21
				50	25	18.76
				100	0	18.57

**LTE Band 4**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	22.33
				1	5	22.19
				3	2	21.72
				6	0	21.55
	1732.5	20175		1	0	22.15
				1	5	22.15
				3	2	21.70
				6	0	21.70
	1754.3	20393		1	0	22.17
				1	5	22.22
				3	2	21.60
				6	0	21.54
16QAM	1710.7	19957	1.4	1	0	21.52
				1	5	21.49
				3	2	20.64
				6	0	20.76
	1732.5	20175		1	0	21.20
				1	5	21.31
				3	2	20.64
				6	0	20.68
	1754.3	20393		1	0	21.31
				1	5	21.23
				3	2	20.68
				6	0	20.65
64QAM	1710.7	19957	1.4	1	0	21.33
				1	5	21.34
				3	2	20.58
				6	0	20.73
	1732.5	20175		1	0	21.31
				1	5	21.36
				3	2	20.69
				6	0	20.59
	1754.3	20393		1	0	21.37
				1	5	21.18
				3	2	20.61
				6	0	20.56

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	22.38
				1	14	22.09
				8	4	21.63
				15	0	21.64
	1732.5	20175		1	0	22.27
				1	14	21.99
				8	4	21.60
				15	0	21.55
	1753.5	20385		1	0	22.17
				1	14	22.22
				8	4	21.55
				15	0	21.50
16QAM	1711.5	19965	3	1	0	21.40
				1	14	21.36
				8	4	20.76
				15	0	20.80
	1732.5	20175		1	0	21.34
				1	14	21.19
				8	4	20.53
				15	0	20.53
	1753.5	20385		1	0	21.17
				1	14	21.20
				8	4	20.58
				15	0	20.70
64QAM	1711.5	19965	3	1	0	21.36
				1	14	21.26
				8	4	20.66
				15	0	20.73
	1732.5	20175		1	0	21.30
				1	14	21.34
				8	4	20.60
				15	0	20.73
	1753.5	20385		1	0	21.22
				1	14	21.36
				8	4	20.61
				15	0	20.64

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	22.40
				1	24	22.10
				12	6	21.68
				25	0	21.60
	1732.5	20175		1	0	22.20
				1	24	22.14
				12	6	21.61
				25	0	21.71
	1752.5	20375		1	0	22.17
				1	24	22.11
				12	6	21.60
				25	0	21.56
16QAM	1712.5	19975	5	1	0	21.37
				1	24	21.49
				12	6	20.66
				25	0	20.78
	1732.5	20175		1	0	21.36
				1	24	21.23
				12	6	20.67
				25	0	20.61
	1752.5	20375		1	0	21.24
				1	24	21.24
				12	6	20.63
				25	0	20.63
64QAM	1712.5	19975	5	1	0	21.32
				1	24	21.42
				12	6	20.70
				25	0	20.80
	1732.5	20175		1	0	21.42
				1	24	21.41
				12	6	20.72
				25	0	20.57
	1752.5	20375		1	0	21.25
				1	24	21.24
				12	6	20.59
				25	0	20.69

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	20000	10	1	0	22.32
				1	49	22.20
				24	12	21.70
				50	0	21.63
	1732.5	20175		1	0	22.27
				1	49	22.00
				24	12	21.67
				50	0	21.62
	1750	20350		1	0	22.20
				1	49	22.24
				24	12	21.62
				50	0	21.51
16QAM	1715	20000	10	1	0	21.48
				1	49	21.46
				24	12	20.71
				50	0	20.77
	1732.5	20175		1	0	21.21
				1	49	21.19
				24	12	20.63
				50	0	20.57
	1750	20350		1	0	21.19
				1	49	21.20
				24	12	20.58
				50	0	20.59
64QAM	1715	20000	10	1	0	21.35
				1	49	21.43
				24	12	20.70
				50	0	20.62
	1732.5	20175		1	0	21.30
				1	49	21.30
				24	12	20.58
				50	0	20.57
	1750	20350		1	0	21.20
				1	49	21.22
				24	12	20.60
				50	0	20.70

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	22.42
				1	74	22.11
				40	18	21.70
				75	0	21.56
	1732.5	20175		1	0	22.10
				1	74	22.10
				40	18	21.71
				75	0	21.66
	1747.5	20325		1	0	22.22
				1	74	22.10
				40	18	21.54
				75	0	21.55
16QAM	1717.5	20025	15	1	0	21.41
				1	74	21.47
				40	18	20.68
				75	0	20.69
	1732.5	20175		1	0	21.23
				1	74	21.22
				40	18	20.54
				75	0	20.69
	1747.5	20325		1	0	21.34
				1	74	21.12
				40	18	20.66
				75	0	20.64
64QAM	1717.5	20025	15	1	0	21.33
				1	74	21.37
				40	18	20.62
				75	0	20.79
	1732.5	20175		1	0	21.28
				1	74	21.31
				40	18	20.56
				75	0	20.61
	1747.5	20325		1	0	21.26
				1	74	21.30
				40	18	20.65
				75	0	20.60

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	22.55
				1	99	22.36
				50	25	21.85
				100	0	21.79
	1732.5	20175		1	0	22.39
				1	99	22.28
				50	25	21.82
				100	0	21.84
	1745	20300		1	0	22.44
				1	99	22.39
				50	25	21.78
				100	0	21.79
16QAM	1720	20050	20	1	0	21.63
				1	99	21.62
				50	25	20.87
				100	0	20.91
	1732.5	20175		1	0	21.47
				1	99	21.44
				50	25	20.81
				100	0	20.80
	1745	20300		1	0	21.45
				1	99	21.38
				50	25	20.82
				100	0	20.81
64QAM	1720	20050	20	1	0	21.57
				1	99	21.55
				50	25	20.83
				100	0	20.91
	1732.5	20175		1	0	21.55
				1	99	21.53
				50	25	20.84
				100	0	20.85
	1745	20300		1	0	21.48
				1	99	21.47
				50	25	20.82
				100	0	20.85



reduced RF Power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	18.83
				1	5	18.69
				3	2	18.22
				6	0	18.05
	1732.5	20175		1	0	18.65
				1	5	18.65
				3	2	18.20
				6	0	18.20
	1754.3	20393		1	0	18.67
				1	5	18.72
				3	2	18.10
				6	0	18.04
16QAM	1710.7	19957	1.4	1	0	18.02
				1	5	17.99
				3	2	17.14
				6	0	17.26
	1732.5	20175		1	0	17.70
				1	5	17.81
				3	2	17.14
				6	0	17.18
	1754.3	20393		1	0	17.81
				1	5	17.73
				3	2	17.18
				6	0	17.15
64QAM	1710.7	19957	1.4	1	0	17.83
				1	5	17.84
				3	2	17.08
				6	0	17.23
	1732.5	20175		1	0	17.81
				1	5	17.86
				3	2	17.19
				6	0	17.09
	1754.3	20393		1	0	17.87
				1	5	17.68
				3	2	17.11
				6	0	17.06

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	18.88
				1	14	18.59
				8	4	18.13
				15	0	18.14
	1732.5	20175		1	0	18.77
				1	14	18.49
				8	4	18.10
				15	0	18.05
	1753.5	20385		1	0	18.67
				1	14	18.72
				8	4	18.05
				15	0	18.00
16QAM	1711.5	19965	3	1	0	17.90
				1	14	17.86
				8	4	17.26
				15	0	17.30
	1732.5	20175		1	0	17.84
				1	14	17.69
				8	4	17.03
				15	0	17.03
	1753.5	20385		1	0	17.67
				1	14	17.70
				8	4	17.08
				15	0	17.20
64QAM	1711.5	19965	3	1	0	17.86
				1	14	17.76
				8	4	17.16
				15	0	17.23
	1732.5	20175		1	0	17.80
				1	14	17.84
				8	4	17.10
				15	0	17.23
	1753.5	20385		1	0	17.72
				1	14	17.86
				8	4	17.11
				15	0	17.14

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	18.90
				1	24	18.60
				12	6	18.18
				25	0	18.10
	1732.5	20175		1	0	18.70
				1	24	18.64
				12	6	18.11
				25	0	18.21
	1752.5	20375		1	0	18.67
				1	24	18.61
				12	6	18.10
				25	0	18.06
16QAM	1712.5	19975	5	1	0	17.87
				1	24	17.99
				12	6	17.16
				25	0	17.28
	1732.5	20175		1	0	17.86
				1	24	17.73
				12	6	17.17
				25	0	17.11
	1752.5	20375		1	0	17.74
				1	24	17.74
				12	6	17.13
				25	0	17.13
64QAM	1712.5	19975	5	1	0	17.82
				1	24	17.92
				12	6	17.20
				25	0	17.30
	1732.5	20175		1	0	17.92
				1	24	17.91
				12	6	17.22
				25	0	17.07
	1752.5	20375		1	0	17.75
				1	24	17.74
				12	6	17.09
				25	0	17.19

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	20000	10	1	0	18.82
				1	49	18.70
				24	12	18.20
				50	0	18.13
	1732.5	20175		1	0	18.77
				1	49	18.50
				24	12	18.17
				50	0	18.12
	1750	20350		1	0	18.70
				1	49	18.74
				24	12	18.12
				50	0	18.01
16QAM	1715	20000	10	1	0	17.98
				1	49	17.96
				24	12	17.21
				50	0	17.27
	1732.5	20175		1	0	17.71
				1	49	17.69
				24	12	17.13
				50	0	17.07
	1750	20350		1	0	17.69
				1	49	17.70
				24	12	17.08
				50	0	17.09
64QAM	1715	20000	10	1	0	17.85
				1	49	17.93
				24	12	17.20
				50	0	17.12
	1732.5	20175		1	0	17.80
				1	49	17.80
				24	12	17.08
				50	0	17.07
	1750	20350		1	0	17.70
				1	49	17.72
				24	12	17.10
				50	0	17.20

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	18.92
				1	74	18.61
				40	18	18.20
				75	0	18.06
	1732.5	20175		1	0	18.60
				1	74	18.60
				40	18	18.21
				75	0	18.16
	1747.5	20325		1	0	18.72
				1	74	18.60
				40	18	18.04
				75	0	18.05
16QAM	1717.5	20025	15	1	0	17.91
				1	74	17.97
				40	18	17.18
				75	0	17.19
	1732.5	20175		1	0	17.73
				1	74	17.72
				40	18	17.04
				75	0	17.19
	1747.5	20325		1	0	17.84
				1	74	17.62
				40	18	17.16
				75	0	17.14
64QAM	1717.5	20025	15	1	0	17.83
				1	74	17.87
				40	18	17.12
				75	0	17.29
	1732.5	20175		1	0	17.78
				1	74	17.81
				40	18	17.06
				75	0	17.11
	1747.5	20325		1	0	17.76
				1	74	17.80
				40	18	17.15
				75	0	17.10

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	19.05
				1	99	18.86
				50	25	18.35
				100	0	18.29
	1732.5	20175		1	0	18.89
				1	99	18.78
				50	25	18.32
				100	0	18.34
	1745	20300		1	0	18.94
				1	99	18.89
				50	25	18.28
				100	0	18.29
16QAM	1720	20050	20	1	0	18.13
				1	99	18.12
				50	25	17.37
				100	0	17.41
	1732.5	20175		1	0	17.97
				1	99	17.94
				50	25	17.31
				100	0	17.30
	1745	20300		1	0	17.95
				1	99	17.88
				50	25	17.32
				100	0	17.31
64QAM	1720	20050	20	1	0	18.07
				1	99	18.05
				50	25	17.33
				100	0	17.41
	1732.5	20175		1	0	18.05
				1	99	18.03
				50	25	17.34
				100	0	17.35
	1745	20300		1	0	17.98
				1	99	17.97
				50	25	17.32
				100	0	17.35

**LTE Band 5**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	20407	1.4	1	0	23.33
				1	5	23.41
				3	2	22.85
	836.5	20525		6	0	22.80
				1	0	23.55
				1	5	23.51
	848.3	20643		3	2	22.65
				6	0	22.50
				1	0	23.42
16QAM	824.7	20407	1.4	1	5	23.70
				3	2	22.59
				6	0	22.74
	836.5	20525		1	0	23.01
				1	5	22.84
				3	2	21.81
	848.3	20643		6	0	21.75
				1	0	22.84
				1	5	22.81
3	2	21.58				
6	0	21.73				
64QAM	824.7	20407	1.4	1	0	22.52
				1	5	22.33
				3	2	21.69
	836.5	20525		6	0	21.72
				1	0	22.56
				1	5	22.41
	848.3	20643		3	2	21.59
				6	0	21.60
				1	0	22.55
1	5	22.61				
3	2	21.56				
6	0	21.70				
1	0	22.60				
1	5	22.83				
3	2	21.67				
6	0	21.67				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	20415	3	1	0	23.32
				1	14	23.30
				8	4	22.67
				15	0	22.76
	836.5	20525		1	0	23.61
				1	14	23.44
				8	4	22.56
				15	0	22.51
	847.5	20635		1	0	23.54
				1	14	23.74
				8	4	22.65
				15	0	22.61
16QAM	825.5	20415	3	1	0	22.94
				1	14	22.84
				8	4	21.69
				15	0	21.79
	836.5	20525		1	0	22.77
				1	14	22.74
				8	4	21.58
				15	0	21.78
	847.5	20635		1	0	22.58
				1	14	22.31
				8	4	21.75
				15	0	21.58
64QAM	825.5	20415	3	1	0	22.53
				1	14	22.33
				8	4	21.69
				15	0	21.57
	836.5	20525		1	0	22.67
				1	14	22.56
				8	4	21.55
				15	0	21.63
	847.5	20635		1	0	22.58
				1	14	22.80
				8	4	21.65
				15	0	21.74



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	20425	5	1	0	23.38
				1	24	23.37
				12	6	22.70
				25	0	22.70
	836.5	20525		1	0	23.67
				1	24	23.55
				12	6	22.67
				25	0	22.61
	846.5	20625		1	0	23.42
				1	24	23.74
				12	6	22.73
				25	0	22.62
16QAM	826.5	20425	5	1	0	23.04
				1	24	23.00
				12	6	21.63
				25	0	21.81
	836.5	20525		1	0	22.92
				1	24	22.76
				12	6	21.68
				25	0	21.78
	846.5	20625		1	0	22.42
				1	24	22.41
				12	6	21.66
				25	0	21.60
64QAM	826.5	20425	5	1	0	22.47
				1	24	22.33
				12	6	21.61
				25	0	21.69
	836.5	20525		1	0	22.53
				1	24	22.54
				12	6	21.64
				25	0	21.68
	846.5	20625		1	0	22.56
				1	24	22.75
				12	6	21.66
				25	0	21.62

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	20450	10	1	0	23.61
				1	49	23.59
				24	12	22.96
				50	0	22.91
	836.5	20525		1	0	23.78
				1	49	23.67
				24	12	22.83
				50	0	22.79
	844	20600		1	0	23.67
				1	49	23.88
				24	12	22.87
				50	0	22.85
16QAM	829	20450	10	1	0	23.20
				1	49	23.13
				24	12	21.92
				50	0	21.93
	836.5	20525		1	0	23.06
				1	49	22.93
				24	12	21.82
				50	0	21.90
	844	20600		1	0	22.69
				1	49	22.58
				24	12	21.91
				50	0	21.84
64QAM	829	20450	10	1	0	22.70
				1	49	22.59
				24	12	21.87
				50	0	21.84
	836.5	20525		1	0	22.80
				1	49	22.78
				24	12	21.82
				50	0	21.91
	844	20600		1	0	22.71
				1	49	22.97
				24	12	21.90
				50	0	21.91

**LTE Band 12**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	699.7	23017	1.4	1	0	23.46
				1	5	23.56
				3	2	22.53
	6	0		22.78		
	707.5	23095		1	0	23.32
				1	5	23.26
				3	2	22.62
	6	0		22.65		
	715.3	23173		1	0	23.44
1			5	23.30		
3			2	22.76		
6	0	22.54				
16QAM	699.7	23017	1.4	1	0	22.83
				1	5	22.76
				3	2	21.62
	6	0		21.60		
	707.5	23095		1	0	22.39
				1	5	22.36
				3	2	21.60
	6	0		21.69		
	715.3	23173		1	0	22.59
1			5	22.59		
3			2	21.60		
6	0	21.66				
64QAM	699.7	23017	1.4	1	0	22.40
				1	5	22.36
				3	2	21.58
	6	0		21.67		
	707.5	23095		1	0	22.65
				1	5	22.55
				3	2	21.62
	6	0		21.64		
	715.3	23173		1	0	22.57
1			5	22.66		
3			2	21.70		
6	0	21.52				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	700.5	23025	3	1	0	23.59
				1	14	23.62
				8	4	22.66
				15	0	22.64
	707.5	23095		1	0	23.22
				1	14	23.42
				8	4	22.76
				15	0	22.77
	714.5	23165		1	0	23.46
				1	14	23.33
				8	4	22.72
				15	0	22.60
16QAM	700.5	23025	3	1	0	22.82
				1	14	22.76
				8	4	21.56
				15	0	21.64
	707.5	23095		1	0	22.52
				1	14	22.49
				8	4	21.63
				15	0	21.59
	714.5	23165		1	0	22.67
				1	14	22.66
				8	4	21.70
				15	0	21.60
64QAM	700.5	23025	3	1	0	22.55
				1	14	22.52
				8	4	21.71
				15	0	21.63
	707.5	23095		1	0	22.65
				1	14	22.56
				8	4	21.62
				15	0	21.75
	714.5	23165		1	0	22.59
				1	14	22.59
				8	4	21.59
				15	0	21.48

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	701.5	23035	5	1	0	23.48
				1	24	23.63
				12	6	22.53
				25	0	22.75
	707.5	23095		1	0	23.37
				1	24	23.43
				12	6	22.78
				25	0	22.71
	713.5	23155		1	0	23.47
				1	24	23.29
				12	6	22.58
				25	0	22.69
16QAM	701.5	23035	5	1	0	22.80
				1	24	22.80
				12	6	21.59
				25	0	21.68
	707.5	23095		1	0	22.47
				1	24	22.47
				12	6	21.50
				25	0	21.59
	713.5	23155		1	0	22.64
				1	24	22.68
				12	6	21.76
				25	0	21.51
64QAM	701.5	23035	5	1	0	22.51
				1	24	22.45
				12	6	21.59
				25	0	21.54
	707.5	23095		1	0	22.62
				1	24	22.64
				12	6	21.65
				25	0	21.72
	713.5	23155		1	0	22.66
				1	24	22.56
				12	6	21.75
				25	0	21.53

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	704	23060	10	1	0	23.71
				1	49	23.80
				24	12	22.82
				50	0	22.93
	707.5	23095		1	0	23.51
				1	49	23.55
				24	12	22.91
				50	0	22.94
	711	23130		1	0	23.60
				1	49	23.48
				24	12	22.87
				50	0	22.81
16QAM	704	23060	10	1	0	22.96
				1	49	22.94
				24	12	21.78
				50	0	21.82
	707.5	23095		1	0	22.66
				1	49	22.62
				24	12	21.79
				50	0	21.88
	711	23130		1	0	22.88
				1	49	22.85
				24	12	21.89
				50	0	21.78
64QAM	704	23060	10	1	0	22.68
				1	49	22.63
				24	12	21.82
				50	0	21.79
	707.5	23095		1	0	22.83
				1	49	22.81
				24	12	21.76
				50	0	21.91
	711	23130		1	0	22.82
				1	49	22.81
				24	12	21.86
				50	0	21.75

**LTE Band 25**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	26047	1.4	1	0	22.46
				1	5	23.10
				3	2	21.58
				6	0	21.67
	1882.5	26365		1	0	22.07
				1	5	22.14
				3	2	21.58
				6	0	21.56
	1914.3	26683		1	0	22.28
				1	5	22.20
				3	2	21.89
				6	0	21.62
16QAM	1850.7	26047	1.4	1	0	21.07
				1	5	21.12
				3	2	20.86
				6	0	20.68
	1882.5	26365		1	0	21.36
				1	5	21.20
				3	2	20.63
				6	0	20.58
	1914.3	26683		1	0	21.61
				1	5	21.52
				3	2	20.69
				6	0	20.73
64QAM	1850.7	26047	1.4	1	0	21.11
				1	5	21.18
				3	2	20.71
				6	0	20.51
	1882.5	26365		1	0	21.65
				1	5	21.46
				3	2	20.60
				6	0	20.66
	1914.3	26683		1	0	21.64
				1	5	21.50
				3	2	20.89
				6	0	20.71

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	26055	3	1	0	22.44
				1	14	23.15
				8	4	21.70
				15	0	21.64
	1882.5	26365		1	0	22.04
				1	14	22.07
				8	4	21.60
				15	0	21.57
	1913.5	26675		1	0	22.28
				1	14	22.12
				8	4	21.77
				15	0	21.73
16QAM	1851.5	26055	3	1	0	21.07
				1	14	21.17
				8	4	20.89
				15	0	20.69
	1882.5	26365		1	0	21.27
				1	14	21.17
				8	4	20.68
				15	0	20.54
	1913.5	26675		1	0	21.60
				1	14	21.64
				8	4	20.80
				15	0	20.70
64QAM	1851.5	26055	3	1	0	21.19
				1	14	21.15
				8	4	20.63
				15	0	20.65
	1882.5	26365		1	0	21.56
				1	14	21.45
				8	4	20.66
				15	0	20.67
	1913.5	26675		1	0	21.66
				1	14	21.61
				8	4	20.86
				15	0	20.67



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	26065	5	1	0	22.47
				1	24	23.14
				12	6	21.61
				25	0	21.65
	1882.5	26365		1	0	22.12
				1	24	22.11
				12	6	21.60
				25	0	21.59
	1912.5	26665		1	0	22.22
				1	24	22.22
				12	6	21.92
				25	0	21.66
16QAM	1852.5	26065	5	1	0	21.05
				1	24	21.08
				12	6	20.96
				25	0	20.60
	1882.5	26365		1	0	21.36
				1	24	21.28
				12	6	20.66
				25	0	20.68
	1912.5	26665		1	0	21.68
				1	24	21.57
				12	6	20.73
				25	0	20.75
64QAM	1852.5	26065	5	1	0	21.24
				1	24	21.07
				12	6	20.57
				25	0	20.56
	1882.5	26365		1	0	21.57
				1	24	21.48
				12	6	20.56
				25	0	20.53
	1912.5	26665		1	0	21.58
				1	24	21.58
				12	6	20.86
				25	0	20.71

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	26090	10	1	0	22.34
				1	49	23.16
				24	12	21.56
				50	0	21.63
	1882.5	26365		1	0	22.05
				1	49	22.14
				24	12	21.70
				50	0	21.69
	1910	26640		1	0	22.17
				1	49	22.09
				24	12	21.92
				50	0	21.63
16QAM	1855	26090	10	1	0	21.11
				1	49	21.02
				24	12	20.91
				50	0	20.62
	1882.5	26365		1	0	21.36
				1	49	21.33
				24	12	20.70
				50	0	20.53
	1910	26640		1	0	21.74
				1	49	21.68
				24	12	20.70
				50	0	20.65
64QAM	1855	26090	10	1	0	21.26
				1	49	21.02
				24	12	20.59
				50	0	20.57
	1882.5	26365		1	0	21.52
				1	49	21.55
				24	12	20.56
				50	0	20.56
	1910	26640		1	0	21.64
				1	49	21.61
				24	12	20.76
				50	0	20.67

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	26115	15	1	0	22.40
				1	74	23.09
				40	18	21.69
				75	0	21.55
	1882.5	26365		1	0	22.20
				1	74	22.11
				40	18	21.69
				75	0	21.69
	1907.5	26615		1	0	22.19
				1	74	22.16
				40	18	21.78
				75	0	21.78
16QAM	1857.5	26115	15	1	0	21.05
				1	74	21.03
				40	18	20.83
				75	0	20.59
	1882.5	26365		1	0	21.40
				1	74	21.17
				40	18	20.66
				75	0	20.56
	1907.5	26615		1	0	21.59
				1	74	21.52
				40	18	20.77
				75	0	20.66
64QAM	1857.5	26115	15	1	0	21.23
				1	74	21.06
				40	18	20.62
				75	0	20.67
	1882.5	26365		1	0	21.64
				1	74	21.63
				40	18	20.52
				75	0	20.62
	1907.5	26615		1	0	21.63
				1	74	21.62
				40	18	20.84
				75	0	20.61

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	26140	20	1	0	<b>22.58</b>
				1	99	<b>23.32</b>
				50	25	21.85
				100	0	21.78
	1882.5	26365		1	0	<b>22.33</b>
				1	99	<b>22.28</b>
				50	25	21.84
				100	0	21.80
	1905	26590		1	0	<b>22.41</b>
				1	99	<b>22.38</b>
				50	25	22.06
				100	0	21.91
16QAM	1860	26140	20	1	0	21.32
				1	99	21.29
				50	25	21.08
				100	0	20.86
	1882.5	26365		1	0	21.53
				1	99	21.45
				50	25	20.84
				100	0	20.80
	1905	26590		1	0	21.85
				1	99	21.79
				50	25	20.96
				100	0	20.91
64QAM	1860	26140	20	1	0	21.37
				1	99	21.29
				50	25	20.85
				100	0	20.78
	1882.5	26365		1	0	21.79
				1	99	21.74
				50	25	20.78
				100	0	20.79
	1905	26590		1	0	21.82
				1	99	21.77
				50	25	21.02
				100	0	20.90

reduced Power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	26047	1.4	1	0	19.96
				1	5	20.60
				3	2	19.08
				6	0	19.17
	1882.5	26365		1	0	19.57
				1	5	19.64
				3	2	19.08
				6	0	19.06
	1914.3	26683		1	0	19.78
				1	5	19.70
				3	2	19.39
				6	0	19.12
16QAM	1850.7	26047	1.4	1	0	18.57
				1	5	18.62
				3	2	18.36
				6	0	18.18
	1882.5	26365		1	0	18.86
				1	5	18.70
				3	2	18.13
				6	0	18.08
	1914.3	26683		1	0	19.11
				1	5	19.02
				3	2	18.19
				6	0	18.23
64QAM	1850.7	26047	1.4	1	0	18.61
				1	5	18.68
				3	2	18.21
				6	0	18.01
	1882.5	26365		1	0	19.15
				1	5	18.96
				3	2	18.10
				6	0	18.16
	1914.3	26683		1	0	19.14
				1	5	19.00
				3	2	18.39
				6	0	18.21

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	26055	3	1	0	19.94
				1	14	20.65
				8	4	19.20
				15	0	19.14
	1882.5	26365		1	0	19.54
				1	14	19.57
				8	4	19.10
				15	0	19.07
	1913.5	26675		1	0	19.78
				1	14	19.62
				8	4	19.27
				15	0	19.23
16QAM	1851.5	26055	3	1	0	18.57
				1	14	18.67
				8	4	18.39
				15	0	18.19
	1882.5	26365		1	0	18.77
				1	14	18.67
				8	4	18.18
				15	0	18.04
	1913.5	26675		1	0	19.10
				1	14	19.14
				8	4	18.30
				15	0	18.20
64QAM	1851.5	26055	3	1	0	18.69
				1	14	18.65
				8	4	18.13
				15	0	18.15
	1882.5	26365		1	0	19.06
				1	14	18.95
				8	4	18.16
				15	0	18.17
	1913.5	26675		1	0	19.16
				1	14	19.11
				8	4	18.36
				15	0	18.17

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1852.5	26065	5	1	0	19.97
				1	24	20.64
				12	6	19.11
				25	0	19.15
	1882.5	26365		1	0	19.62
				1	24	19.61
				12	6	19.10
				25	0	19.09
	1912.5	26665		1	0	19.72
				1	24	19.72
				12	6	19.42
				25	0	19.16
16QAM	1852.5	26065	5	1	0	18.55
				1	24	18.58
				12	6	18.46
				25	0	18.10
	1882.5	26365		1	0	18.86
				1	24	18.78
				12	6	18.16
				25	0	18.18
	1912.5	26665		1	0	19.18
				1	24	19.07
				12	6	18.23
				25	0	18.25
64QAM	1852.5	26065	5	1	0	18.74
				1	24	18.57
				12	6	18.07
				25	0	18.06
	1882.5	26365		1	0	19.07
				1	24	18.98
				12	6	18.06
				25	0	18.03
	1912.5	26665		1	0	19.08
				1	24	19.08
				12	6	18.36
				25	0	18.21

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	26090	10	1	0	19.84
				1	49	20.66
				24	12	19.06
				50	0	19.13
	1882.5	26365		1	0	19.55
				1	49	19.64
				24	12	19.20
				50	0	19.19
	1910	26640		1	0	19.67
				1	49	19.59
				24	12	19.42
				50	0	19.13
16QAM	1855	26090	10	1	0	18.61
				1	49	18.52
				24	12	18.41
				50	0	18.12
	1882.5	26365		1	0	18.86
				1	49	18.83
				24	12	18.20
				50	0	18.03
	1910	26640		1	0	19.24
				1	49	19.18
				24	12	18.20
				50	0	18.15
64QAM	1855	26090	10	1	0	18.76
				1	49	18.52
				24	12	18.09
				50	0	18.07
	1882.5	26365		1	0	19.02
				1	49	19.05
				24	12	18.06
				50	0	18.06
	1910	26640		1	0	19.14
				1	49	19.11
				24	12	18.26
				50	0	18.17



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	26115	15	1	0	19.90
				1	74	20.59
				40	18	19.19
				75	0	19.05
	1882.5	26365		1	0	19.70
				1	74	19.61
				40	18	19.19
				75	0	19.19
	1907.5	26615		1	0	19.69
				1	74	19.66
				40	18	19.28
				75	0	19.28
16QAM	1857.5	26115	15	1	0	18.55
				1	74	18.53
				40	18	18.33
				75	0	18.09
	1882.5	26365		1	0	18.90
				1	74	18.67
				40	18	18.16
				75	0	18.06
	1907.5	26615		1	0	19.09
				1	74	19.02
				40	18	18.27
				75	0	18.16
64QAM	1857.5	26115	15	1	0	18.73
				1	74	18.56
				40	18	18.12
				75	0	18.17
	1882.5	26365		1	0	19.14
				1	74	19.13
				40	18	18.02
				75	0	18.12
	1907.5	26615		1	0	19.13
				1	74	19.12
				40	18	18.34
				75	0	18.11

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	26140	20	1	0	20.08
				1	99	20.82
				50	25	19.35
				100	0	19.28
	1882.5	26365		1	0	19.83
				1	99	19.78
				50	25	19.34
				100	0	19.30
	1905	26590		1	0	19.91
				1	99	19.88
				50	25	19.56
				100	0	19.41
16QAM	1860	26140	20	1	0	18.82
				1	99	18.79
				50	25	18.58
				100	0	18.36
	1882.5	26365		1	0	19.03
				1	99	18.95
				50	25	18.34
				100	0	18.30
	1905	26590		1	0	19.35
				1	99	19.29
				50	25	18.46
				100	0	18.41
64QAM	1860	26140	20	1	0	18.87
				1	99	18.79
				50	25	18.35
				100	0	18.28
	1882.5	26365		1	0	19.29
				1	99	19.24
				50	25	18.28
				100	0	18.29
	1905	26590		1	0	19.32
				1	99	19.27
				50	25	18.52
				100	0	18.40

**LTE Band 41**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted Average (dBm)
QPSK	2537.5	40065	5	1	0	26.11
				1	24	25.96
				12	6	25.49
				25	0	25.50
	2593	40620		1	0	25.80
				1	24	25.60
				12	6	25.11
				25	0	25.32
	2652.5	41215		1	0	25.59
				1	24	25.99
				12	6	25.08
				25	0	25.26
16QAM	2537.5	40065	5	1	0	25.23
				1	24	25.24
				12	6	24.46
				25	0	24.51
	2593	40620		1	0	24.98
				1	24	24.95
				12	6	24.36
				25	0	24.37
	2652.5	41215		1	0	24.96
				1	24	24.86
				12	6	24.09
				25	0	24.34
64QAM	2537.5	40065	5	1	0	25.07
				1	24	25.03
				12	6	24.31
				25	0	24.69
	2593	40620		1	0	24.89
				1	24	24.84
				12	6	24.30
				25	0	24.32
	2652.5	41215		1	0	24.93
				1	24	24.75
				12	6	24.28
				25	0	24.24

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted Average (dBm)
QPSK	2540	40090	10	1	0	26.03
				1	49	25.85
				24	12	25.57
				50	0	25.40
	2593	40620		1	0	25.76
				1	49	25.85
				24	12	25.11
				50	0	25.18
	2650	41190		1	0	25.82
				1	49	25.96
				24	12	25.15
				50	0	25.24
16QAM	2540	40090	10	1	0	25.15
				1	49	25.06
				24	12	24.36
				50	0	24.62
	2593	40620		1	0	24.93
				1	49	25.00
				24	12	24.16
				50	0	24.24
	2650	41190		1	0	25.02
				1	49	24.81
				24	12	24.34
				50	0	24.31
64QAM	2540	40090	10	1	0	25.03
				1	49	24.93
				24	12	24.55
				50	0	24.50
	2593	40620		1	0	24.79
				1	49	24.69
				24	12	24.25
				50	0	24.23
	2650	41190		1	0	24.72
				1	49	24.77
				24	12	24.19
				50	0	24.27

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted Average (dBm)
QPSK	2542.5	40115	15	1	0	26.00
				1	74	25.96
				40	18	25.57
				75	0	25.48
	2593	40620		1	0	25.76
				1	74	25.82
				40	18	25.26
				75	0	25.45
	2647.5	41165		1	0	25.85
				1	74	25.85
				40	18	25.15
				75	0	25.43
16QAM	2542.5	40115	15	1	0	25.13
				1	74	25.22
				40	18	24.61
				75	0	24.54
	2593	40620		1	0	25.03
				1	74	24.82
				40	18	24.40
				75	0	24.33
	2647.5	41165		1	0	25.05
				1	74	24.86
				40	18	24.20
				75	0	24.29
64QAM	2542.5	40115	15	1	0	25.08
				1	74	25.15
				40	18	24.46
				75	0	24.66
	2593	40620		1	0	24.91
				1	74	24.79
				40	18	24.35
				75	0	24.41
	2647.5	41165		1	0	24.97
				1	74	24.76
				40	18	24.13
				75	0	24.49

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted Average (dBm)
QPSK	2545	40140	20	1	0	<b>26.25</b>
				1	99	<b>26.17</b>
				50	25	25.71
				100	0	25.73
	2593	40620		1	0	<b>26.04</b>
				1	99	<b>25.99</b>
				50	25	25.48
				100	0	25.57
	2645	41140		1	0	<b>25.96</b>
				1	99	<b>26.14</b>
				50	25	25.44
				100	0	25.58
16QAM	2545	40140	20	1	0	25.42
				1	99	25.37
				50	25	24.73
				100	0	24.77
	2593	40620		1	0	25.20
				1	99	25.11
				50	25	24.52
				100	0	24.56
	2645	41140		1	0	25.18
				1	99	25.07
				50	25	24.47
				100	0	24.57
64QAM	2545	40140	20	1	0	25.35
				1	99	25.27
				50	25	24.69
				100	0	24.81
	2593	40620		1	0	25.14
				1	99	25.01
				50	25	24.46
				100	0	24.60
	2645	41140		1	0	25.11
				1	99	25.04
				50	25	24.41
				100	0	24.62

**LTE Band 66**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	131979	1.4	1	0	22.22
				1	5	22.03
				3	2	21.60
	6	0		21.57		
	1745	132322		1	0	22.31
				1	5	22.06
				3	2	21.75
	6	0		21.67		
	1779.3	132665		1	0	22.28
1			5	22.17		
3			2	21.66		
6	0	21.63				
16QAM	1710.7	131979	1.4	1	0	21.44
				1	5	21.33
				3	2	20.82
	6	0		20.61		
	1745	132322		1	0	21.71
				1	5	21.67
				3	2	20.67
	6	0		20.56		
	1779.3	132665		1	0	21.14
1			5	21.03		
3			2	20.82		
6	0	20.71				
64QAM	1710.7	131979	1.4	1	0	21.13
				1	5	21.15
				3	2	20.65
	6	0		20.60		
	1745	132322		1	0	21.53
				1	5	21.54
				3	2	20.61
	6	0		20.63		
	1779.3	132665		1	0	21.38
1			5	21.31		
3			2	20.70		
6	0	20.64				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	131987	3	1	0	22.25
				1	14	22.04
				8	4	21.64
	15	0		21.57		
	1745	132322		1	0	22.25
				1	14	22.22
				8	4	21.66
	15	0		21.62		
	1778.5	132657		1	0	22.19
				1	14	22.29
				8	4	21.72
	15	0		21.58		
16QAM	1711.5	131987	3	1	0	21.36
				1	14	21.40
				8	4	20.81
	15	0		20.75		
	1745	132322		1	0	21.59
				1	14	21.70
				8	4	20.69
	15	0		20.52		
	1778.5	132657		1	0	21.13
				1	14	21.04
				8	4	20.78
	15	0		20.70		
64QAM	1711.5	131987	3	1	0	21.26
				1	14	21.09
				8	4	20.59
	15	0		20.75		
	1745	132322		1	0	21.58
				1	14	21.45
				8	4	20.54
	15	0		20.53		
	1778.5	132657		1	0	21.31
				1	14	21.36
				8	4	20.75
	15	0		20.59		



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	131997	5	1	0	22.18
				1	24	22.14
				12	6	21.62
				25	0	21.66
	1745	132322		1	0	22.20
				1	24	22.16
				12	6	21.61
				25	0	21.57
	1777.5	132647		1	0	22.23
				1	24	22.27
				12	6	21.75
				25	0	21.76
16QAM	1712.5	131997	5	1	0	21.46
				1	24	21.22
				12	6	20.76
				25	0	20.72
	1745	132322		1	0	21.63
				1	24	21.70
				12	6	20.62
				25	0	20.65
	1777.5	132647		1	0	21.17
				1	24	20.99
				12	6	20.73
				25	0	20.54
64QAM	1712.5	131997	5	1	0	21.25
				1	24	21.08
				12	6	20.68
				25	0	20.73
	1745	132322		1	0	21.55
				1	24	21.49
				12	6	20.60
				25	0	20.59
	1777.5	132647		1	0	21.31
				1	24	21.25
				12	6	20.72
				25	0	20.57

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	132022	10	1	0	22.08
				1	49	22.11
				24	12	21.52
				50	0	21.51
	1745	132322		1	0	22.15
				1	49	22.12
				24	12	21.76
				50	0	21.69
	1775	132622		1	0	22.28
				1	49	22.17
				24	12	21.57
				50	0	21.55
16QAM	1715	132022	10	1	0	21.38
				1	49	21.33
				24	12	20.70
				50	0	20.63
	1745	132322		1	0	21.58
				1	49	21.67
				24	12	20.53
				50	0	20.51
	1775	132622		1	0	21.12
				1	49	21.05
				24	12	20.65
				50	0	20.64
64QAM	1715	132022	10	1	0	21.03
				1	49	20.90
				24	12	20.45
				50	0	20.60
	1745	132322		1	0	21.63
				1	49	21.41
				24	12	20.53
				50	0	20.42
	1775	132622		1	0	21.36
				1	49	21.23
				24	12	20.61
				50	0	20.51

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	132047	15	1	0	22.28
				1	74	21.94
				40	18	21.70
				75	0	21.57
	1745	132322		1	0	22.13
				1	74	22.03
				40	18	21.72
				75	0	21.74
	1772.5	132597		1	0	22.16
				1	74	22.21
				40	18	21.80
				75	0	21.61
16QAM	1717.5	132047	15	1	0	21.38
				1	74	21.36
				40	18	20.64
				75	0	20.55
	1745	132322		1	0	21.59
				1	74	21.62
				40	18	20.57
				75	0	20.50
	1772.5	132597		1	0	21.12
				1	74	21.12
				40	18	20.71
				75	0	20.56
64QAM	1717.5	132047	15	1	0	21.22
				1	74	20.93
				40	18	20.71
				75	0	20.72
	1745	132322		1	0	21.54
				1	74	21.57
				40	18	20.57
				75	0	20.52
	1772.5	132597		1	0	21.21
				1	74	21.13
				40	18	20.62
				75	0	20.71

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	132072	20	1	0	22.43
				1	99	22.27
				50	25	21.86
				100	0	21.83
	1745	132322		1	0	22.49
				1	99	22.34
				50	25	21.89
				100	0	21.85
	1770	132572		1	0	22.45
				1	99	22.40
				50	25	21.94
				100	0	21.87
16QAM	1720	132072	20	1	0	21.65
				1	99	21.51
				50	25	20.93
				100	0	20.90
	1745	132322		1	0	21.86
				1	99	21.81
				50	25	20.84
				100	0	20.78
	1770	132572		1	0	21.35
				1	99	21.28
				50	25	21.00
				100	0	20.83
64QAM	1720	132072	20	1	0	21.39
				1	99	21.27
				50	25	20.84
				100	0	20.88
	1745	132322		1	0	21.82
				1	99	21.73
				50	25	20.79
				100	0	20.80
	1770	132572		1	0	21.52
				1	99	21.48
				50	25	20.96
				100	0	20.82

reduced Power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	131979	1.4	1	0	18.72
				1	5	18.53
				3	2	18.10
				6	0	18.07
	1745	132322		1	0	18.81
				1	5	18.56
				3	2	18.25
				6	0	18.17
	1779.3	132665		1	0	18.78
				1	5	18.67
				3	2	18.16
				6	0	18.13
16QAM	1710.7	131979	1.4	1	0	17.94
				1	5	17.83
				3	2	17.32
				6	0	17.11
	1745	132322		1	0	18.21
				1	5	18.17
				3	2	17.17
				6	0	17.06
	1779.3	132665		1	0	17.64
				1	5	17.53
				3	2	17.32
				6	0	17.21
64QAM	1710.7	131979	1.4	1	0	17.63
				1	5	17.65
				3	2	17.15
				6	0	17.10
	1745	132322		1	0	18.03
				1	5	18.04
				3	2	17.11
				6	0	17.13
	1779.3	132665		1	0	17.88
				1	5	17.81
				3	2	17.20
				6	0	17.14

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	131987	3	1	0	18.75
				1	14	18.54
				8	4	18.14
				15	0	18.07
	1745	132322		1	0	18.75
				1	14	18.72
				8	4	18.16
				15	0	18.12
	1778.5	132657		1	0	18.69
				1	14	18.79
				8	4	18.22
				15	0	18.08
16QAM	1711.5	131987	3	1	0	17.86
				1	14	17.90
				8	4	17.31
				15	0	17.25
	1745	132322		1	0	18.09
				1	14	18.20
				8	4	17.19
				15	0	17.02
	1778.5	132657		1	0	17.63
				1	14	17.54
				8	4	17.28
				15	0	17.20
64QAM	1711.5	131987	3	1	0	17.76
				1	14	17.59
				8	4	17.09
				15	0	17.25
	1745	132322		1	0	18.08
				1	14	17.95
				8	4	17.04
				15	0	17.03
	1778.5	132657		1	0	17.81
				1	14	17.86
				8	4	17.25
				15	0	17.09

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	131997	5	1	0	18.68
				1	24	18.64
				12	6	18.12
				25	0	18.16
	1745	132322		1	0	18.70
				1	24	18.66
				12	6	18.11
				25	0	18.07
	1777.5	132647		1	0	18.73
				1	24	18.77
				12	6	18.25
				25	0	18.26
16QAM	1712.5	131997	5	1	0	17.96
				1	24	17.72
				12	6	17.26
				25	0	17.22
	1745	132322		1	0	18.13
				1	24	18.20
				12	6	17.12
				25	0	17.15
	1777.5	132647		1	0	17.67
				1	24	17.49
				12	6	17.23
				25	0	17.04
64QAM	1712.5	131997	5	1	0	17.75
				1	24	17.58
				12	6	17.18
				25	0	17.23
	1745	132322		1	0	18.05
				1	24	17.99
				12	6	17.10
				25	0	17.09
	1777.5	132647		1	0	17.81
				1	24	17.75
				12	6	17.22
				25	0	17.07

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1715	132022	10	1	0	18.58
				1	49	18.61
				24	12	18.02
				50	0	18.01
	1745	132322		1	0	18.65
				1	49	18.62
				24	12	18.26
				50	0	18.19
	1775	132622		1	0	18.78
				1	49	18.67
				24	12	18.07
				50	0	18.05
16QAM	1715	132022	10	1	0	17.88
				1	49	17.83
				24	12	17.20
				50	0	17.13
	1745	132322		1	0	18.08
				1	49	18.17
				24	12	17.03
				50	0	17.01
	1775	132622		1	0	17.62
				1	49	17.55
				24	12	17.15
				50	0	17.14
64QAM	1715	132022	10	1	0	17.53
				1	49	17.40
				24	12	16.95
				50	0	17.10
	1745	132322		1	0	18.13
				1	49	17.91
				24	12	17.03
				50	0	16.92
	1775	132622		1	0	17.86
				1	49	17.73
				24	12	17.11
				50	0	17.01



Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	132047	15	1	0	18.78
				1	74	18.44
				40	18	18.20
				75	0	18.07
	1745	132322		1	0	18.63
				1	74	18.53
				40	18	18.22
				75	0	18.24
	1772.5	132597		1	0	18.66
				1	74	18.71
				40	18	18.30
				75	0	18.11
16QAM	1717.5	132047	15	1	0	17.88
				1	74	17.86
				40	18	17.14
				75	0	17.05
	1745	132322		1	0	18.09
				1	74	18.12
				40	18	17.07
				75	0	17.00
	1772.5	132597		1	0	17.62
				1	74	17.62
				40	18	17.21
				75	0	17.06
64QAM	1717.5	132047	15	1	0	17.72
				1	74	17.43
				40	18	17.21
				75	0	17.22
	1745	132322		1	0	18.04
				1	74	18.07
				40	18	17.07
				75	0	17.02
	1772.5	132597		1	0	17.71
				1	74	17.63
				40	18	17.12
				75	0	17.21

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	132072	20	1	0	18.93
				1	99	18.77
				50	25	18.36
				100	0	18.33
	1745	132322		1	0	18.99
				1	99	18.84
				50	25	18.39
				100	0	18.35
	1770	132572		1	0	18.95
				1	99	18.90
				50	25	18.44
				100	0	18.37
16QAM	1720	132072	20	1	0	18.15
				1	99	18.01
				50	25	17.43
				100	0	17.40
	1745	132322		1	0	18.36
				1	99	18.31
				50	25	17.34
				100	0	17.28
	1770	132572		1	0	17.85
				1	99	17.78
				50	25	17.50
				100	0	17.33
64QAM	1720	132072	20	1	0	17.89
				1	99	17.77
				50	25	17.34
				100	0	17.38
	1745	132322		1	0	18.32
				1	99	18.23
				50	25	17.29
				100	0	17.30
	1770	132572		1	0	18.02
				1	99	17.98
				50	25	17.46
				100	0	17.32

**LTE Band 71**  
full power

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	665.5	133147	5	1	0	22.84
				1	24	22.96
				12	6	21.87
				25	0	22.03
	680.5	133297		1	0	22.74
				1	24	22.85
				12	6	22.14
				25	0	22.25
	695.5	133447		1	0	22.79
				1	24	22.86
				12	6	22.05
				25	0	22.19
16QAM	665.5	133147	5	1	0	22.04
				1	24	21.92
				12	6	20.93
				25	0	21.24
	680.5	133297		1	0	22.34
				1	24	22.26
				12	6	21.17
				25	0	21.13
	695.5	133447		1	0	22.12
				1	24	22.24
				12	6	21.03
				25	0	21.14
64QAM	665.5	133147	5	1	0	21.70
				1	24	21.71
				12	6	20.72
				25	0	20.82
	680.5	133297		1	0	22.18
				1	24	22.01
				12	6	20.75
				25	0	20.93
	695.5	133447		1	0	21.81
				1	24	21.97
				12	6	21.03
				25	0	20.90

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	668	133172	10	1	0	22.86
				1	49	22.92
				24	12	21.99
				50	0	22.00
	680.5	133297		1	0	22.73
				1	49	22.83
				24	12	22.02
				50	0	22.21
	693	133422		1	0	22.81
				1	49	22.98
				24	12	22.05
				50	0	22.12
16QAM	668	133172	10	1	0	22.02
				1	49	21.89
				24	12	20.86
				50	0	21.09
	680.5	133297		1	0	22.36
				1	49	22.29
				24	12	21.14
				50	0	21.07
	693	133422		1	0	21.95
				1	49	22.16
				24	12	20.98
				50	0	21.18
64QAM	668	133172	10	1	0	21.66
				1	49	21.84
				24	12	20.70
				50	0	20.96
	680.5	133297		1	0	22.06
				1	49	22.12
				24	12	20.87
				50	0	21.04
	693	133422		1	0	21.72
				1	49	21.90
				24	12	20.86
				50	0	20.90

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	670.5	133197	15	1	0	22.99
				1	74	22.83
				40	18	21.97
				75	0	21.96
	680.5	133297		1	0	22.79
				1	74	22.94
				40	18	22.06
				75	0	22.25
	690.5	133397		1	0	22.85
				1	74	23.03
				40	18	22.06
				75	0	22.12
16QAM	670.5	133197	15	1	0	21.95
				1	74	22.01
				40	18	20.97
				75	0	21.19
	680.5	133297		1	0	22.30
				1	74	22.17
				40	18	21.05
				75	0	21.09
	690.5	133397		1	0	21.99
				1	74	22.20
				40	18	21.16
				75	0	21.01
64QAM	670.5	133197	15	1	0	21.77
				1	74	21.87
				40	18	20.84
				75	0	20.83
	680.5	133297		1	0	22.01
				1	74	22.14
				40	18	20.76
				75	0	20.91
	690.5	133397		1	0	21.73
				1	74	21.91
				40	18	20.90
				75	0	20.81

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	673	133222	20	1	0	23.10
				1	99	23.08
				50	25	22.13
				100	0	22.18
	683	133322		1	0	22.91
				1	99	23.07
				50	25	22.28
				100	0	22.36
	688	133372		1	0	23.06
				1	99	23.14
				50	25	22.29
				100	0	22.31
16QAM	673	133222	20	1	0	22.21
				1	99	22.17
				50	25	21.15
				100	0	21.36
	683	133322		1	0	22.47
				1	99	22.45
				50	25	21.28
				100	0	21.35
	688	133372		1	0	22.23
				1	99	22.38
				50	25	21.27
				100	0	21.29
64QAM	673	133222	20	1	0	21.94
				1	99	22.00
				50	25	20.96
				100	0	21.07
	683	133322		1	0	22.30
				1	99	22.28
				50	25	21.02
				100	0	21.16
	688	133372		1	0	21.94
				1	99	22.15
				50	25	21.15
				100	0	21.03

## 6.5 Bluetooth Measurement result

### BT

Modulation type	Average Power Output (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480MHz (Ch78)
GFSK	7.10	7.40	6.40
π/4DQPSK	4.10	4.10	3.10
8DPSK	4.10	4.10	3.10

### BLE

Modulation type	Average Power Output (dBm)		
	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
GFSK (LE 1Mbps)	-3.28	-2.11	-2.60

## 6.6 Wi-Fi Measurement result

### WIFI 2.4GHz

Modulation type	Average power output (dBm)		
	2412MHz	2437MHz	2462MHz
11b	20.40	20.60	20.60
11g	18.90	19.40	19.20
11n HT20	17.90	18.30	18.20

### Wifi 5GHz

Band	Test Mode	Average Power(dBm)			Limit (dBm)
		5180MHz	5200MHz	5240MHz	
U-NII-1	802.11n HT20	16.78	16.85	16.79	30.0
	802.11ac VHT20	15.07	15.33	15.17	30.0
	Test Mode	Average Power(dBm)			Limit (dBm)
		5190 MHz	5230 MHz		
	802.11n HT40	15.66	15.60		30.0
	802.11ac VHT40	14.78	14.79		30.0
	Test Mode	Average Power(dBm)			Limit (dBm)
		5210 MHz			
	802.11ac VHT80	14.68			30.0

Band	Test Mode	Average Power(dBm)			Limit (dBm)
		5745MHz	5785MHz	5825MHz	
U-NII-3	802.11n HT20	15.69	15.51	15.28	30.0
	802.11ac VHT20	13.94	13.50	13.40	30.0
	Test Mode	Average Power(dBm)			Limit (dBm)
		5755 MHz	5795 MHz		
	802.11n HT40	14.38	14.12		30.0
	802.11ac VHT40	13.59	13.24		30.0
	Test Mode	Average Power(dBm)			Limit (dBm)
		5775MHz			
802.11ac VHT80	13.24			30.0	



## 6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

### SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and $\leq 50$ mm

#### Method1:

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$  for 1-g SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to  $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f} \text{ (GHz)})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$  for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

**Method2:**

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	<i>SAR Test Exclusion Threshold (mW)</i>
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Max conducted power adjusted for tune-up tolerance(mW)	Position	SAR test exclusion threshold (mW)	Standalone SAR Required
2.4GHz BT/BLE	5.5	Head	10	No
		Body	19	No
2.4GHz Wi-Fi	191.9	Head	10	Yes
		Body	19	Yes
5GHz Wi-Fi U-NII-1	48.4	Head	7	Yes
		Body	13	Yes
5GHz Wi-Fi U-NII-3	37.1	Head	6	Yes
		Body	12	Yes

## 6.8 RF exposure conditions

Refer to the follow picture “Antenna information” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



low frequency main antenna:

GSM850,WCDMA BANDV,LTE BAND5,LTE BAND12,LTE BAND71

middle frequency Main antenna:

GSM1900,WCDMA BANDII,WCDMA BANDIV,LTE BAND2,LTE BAND4,LTE BAND25,  
LTE BAND66

LTE BAND 41 Main antenna:

LTE BAND41

2.4g/5g WIFI:

BT/BLE,WIFI 2.4G,WIFI 5G U-NII-1, WIFI 5G U-NII-1

**Note: we defined these position when we face the screen of EUT, the reason why we perform SAR test for these edges is that the structures of antennas is close to our body, and for the other edges do not necessary cause we already consider the worst case.**

### 6.8.1 Head Exposure Conditions For WWAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

#### For WLAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

#### For BT/BLE

Test Configurations	Estimated SAR	Note
Left Touch	Yes	Excluded from SAR test
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

### 6.8.2 Body Exposure conditions

#### For WWAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

#### For WLAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

#### For BT/BLE

Test Configurations	Estimated SAR	Note
Back	Yes	Excluded from SAR test
Front	Yes	

### 6.8.3 Hotspot Exposure conditions

#### For WWAN

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	Yes	<25mm
Left	Yes	<25mm
Right	Yes	<25mm

#### For WLAN

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	Yes	<25mm
Left	Yes	<25mm
Right	Yes	<25mm

#### For BT/BLE

Test Configurations	SAR evaluation	Note
Back	No	There is no hotspot mode for BT/BLE
Front		
Top		
Bottom		
Left		
Right		

**Note\*:** For hotspot mode, it's not necessary test Rear and Front position cause we already test the these position without hotspot mode in Body Exposure conditions, Normally if the hotspot mode opened, the technology "power reduction" used for mobile, so we consider the worst condition, and remain the data of body worn as hotspots mode.

## 6.9 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser.

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)
2020.06.01	750	$\epsilon_r$	42.07	41.90	0.4	$\pm 10$
		$\sigma$ [S/m]	0.92	0.89	3.4	$\pm 10$
2020.06.02	835	$\epsilon_r$	40.266	41.50	-3.0	$\pm 10$
		$\sigma$ [S/m]	0.911	0.90	1.2	$\pm 10$
2019.06.03	1800	$\epsilon_r$	41.215	40.00	3.0	$\pm 10$
		$\sigma$ [S/m]	1.418	1.40	1.3	$\pm 10$
2020.06.03	2000	$\epsilon_r$	39.844	40.00	-0.4	$\pm 10$
		$\sigma$ [S/m]	1.427	1.40	1.9	$\pm 10$
2020.06.04	2450	$\epsilon_r$	39.517	39.20	0.8	$\pm 10$
		$\sigma$ [S/m]	1.881	1.80	4.5	$\pm 10$
2020.06.04	2600	$\epsilon_r$	38.67	39.00	-0.8	$\pm 10$
		$\sigma$ [S/m]	1.93	1.96	-1.5	$\pm 10$
2020.06.05	5200	$\epsilon_r$	37.691	36.00	4.7	$\pm 10$
		$\sigma$ [S/m]	4.734	4.66	1.6	$\pm 10$
2020.06.08	5800	$\epsilon_r$	36.774	35.2	4.5	$\pm 10$
		$\sigma$ [S/m]	5.495	5.27	4.3	$\pm 10$

**Note: For DASY system, the conservative tolerance 5% could expand to 10% when the frequency under 3GHz.**

A system check measurement was made following once the determination of the dielectric parameters of the simulant, using the dipole validation kit. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)
2020.06.01	D750V3	Head	1g	8.28	8.26	0.2	$\pm 10$
2020.06.02	D835V2	Head	1g	9.56	9.37	2.0	$\pm 10$
2020.06.03	D1800V2	Head	1g	40.8	38.9	4.9	$\pm 10$
2020.06.03	D2000V2	Head	1g	39.28	40.3	-2.5	$\pm 10$
2020.06.04	D2450V2	Head	1g	54.8	52.4	4.6	$\pm 10$
2020.06.04	D2600V2	Head	1g	59.6	56.6	5.3	$\pm 10$
2020.06.05	D5GHzV2 ( 5200MHz )	Head	1g	78.2	77.6	0.8	$\pm 10$
2020.06.08	D5GHzV2 ( 5800MHz )	Head	1g	77.5	78.7	-1.5	$\pm 10$



## 6.10 SAR TEST RESULT

This device uses the receiver to indicate whether the user is making a voice call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. A fixed level power reduction is applied for some frequency bands when the audio receiver is on. The power reduce support GSM1900,WCDMA B2/4, LTE B2/4/25/66.

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),  
b) All configurations for each device position in a), e.g., antenna extended and retracted, and  
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e.,  $N_c > 3$ ), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Duty Factor = 1 / Duty Cycle(%)

For cellular network:

Reported SAR (W/kg) = Measured SAR (W/kg) \* Scaling Factor

For WLAN

Reported SAR (W/kg) = Measured SAR (W/kg) \* Scaling Factor \* Duty factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR  $\leq 0.8$ W/kg, other channels SAR testing are not necessary.

3. The distance between the EUT and the phantom bottom is 10mm.



Mode		Duty cycle	Duty factor	Note
Licensed Frequency	GSM Band	Depends on UP slots	NA	According to the theory, we configured duty cycle with relevant value on the communication tester, so correction factor do not need such as "duty factor"
	WCDMA Band	100%		
	FDD-LTE Band	100%		
	TDD-LTE Band	63.3%		
Unlicensed Frequency	WIFI 2.4GHz 802.11b	99.6%	1.01	SRTC perform SAR test with non-signaling mode, and duty factor shall be considered because of the uncertainty of data traffic.

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 850

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
GPRS 4TX	Head	Left touch	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.091	0.093
			H	28.96	29.10	1.03	---	---
		Left tilt	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.053	0.054
			H	28.96	29.10	1.03	---	---
		Right touch	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.114	0.116
			H	28.96	29.10	1.03	---	---
		Right tilt	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.066	0.067
			H	28.96	29.10	1.03	---	---
	Body worn & Hotspot	Back	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.272	0.277
			H	28.96	29.10	1.03	---	---
		Front	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.165	0.168
			H	28.96	29.10	1.03	---	---
	Hotspot	Top	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.001	0.001
			H	28.96	29.10	1.03	---	---
		Bottom	L	28.85	29.10	1.06	---	---
			M	29.03	29.10	1.02	0.220	0.224
			H	28.96	29.10	1.03	---	---
Left		L	28.85	29.10	1.06	---	---	
		M	29.03	29.10	1.02	0.065	0.066	
		H	28.96	29.10	1.03	---	---	
Right		L	28.85	29.10	1.06	---	---	
		M	29.03	29.10	1.02	0.141	0.144	
		H	28.96	29.10	1.03	---	---	

**Mode: GSM1900**

fL (MHz)=1850.2MHz      fM (MHz)=1880.0MHz      fH (MHz)=1909.8MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
GSM Voice	Head	Left touch	L	25.78	26.00	1.05	---	---
			M	25.77	26.00	1.05	0.287	0.301
			H	25.97	26.00	1.01	---	---
		Left tilt	L	25.78	26.00	1.05	---	---
			M	25.77	26.00	1.05	0.304	0.319
			H	25.97	26.00	1.01	---	---
		Right touch	L	25.78	26.00	1.05	---	---
			M	25.77	26.00	1.05	0.362	0.380
			H	25.97	26.00	1.01	---	---
		Right tilt	L	25.78	26.00	1.05	---	---
			M	25.77	26.00	1.05	0.311	0.327
			H	25.97	26.00	1.01	---	---
GPRS 4TX	Body worn & Hotspot	Back	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.505	0.540
			H	25.33	25.40	1.02	---	---
		Front	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.223	0.239
			H	25.33	25.40	1.02	---	---
	Hotspot	Top	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.471	0.504
			H	25.33	25.40	1.02	---	---
		Bottom	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.001	0.001
			H	25.33	25.40	1.02	---	---
		Left	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.218	0.233
			H	25.33	25.40	1.02	---	---
		Right	L	25.17	25.40	1.05	---	---
			M	25.12	25.40	1.07	0.184	0.197
			H	25.33	25.40	1.02	---	---

**Mode: WCDMA BAND II**

fL (MHz)= 1852.4MHz      fM (MHz)= 1880.0MHz      fH (MHz)= 1907.6MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
Rel.99	Head	Left touch	L	20.12	20.30	1.04	---	---
			M	20.23	20.30	1.02	0.408	0.416
			H	20.30	20.30	1.00	---	---
		Left tilt	L	20.12	20.30	1.04	---	---
			M	20.23	20.30	1.02	0.462	0.471
			H	20.30	20.30	1.00	---	---
		Right touch	L	20.12	20.30	1.04	---	---
			M	20.23	20.30	1.02	0.534	0.545
			H	20.30	20.30	1.00	---	---
		Right tilt	L	20.12	20.30	1.04	---	---
			M	20.23	20.30	1.02	0.510	0.520
			H	20.30	20.30	1.00	---	---
	Body worn & Hotspot	Back	L	23.12	23.30	1.04	---	---
			M	23.23	23.30	1.02	0.554	0.565
			H	23.30	23.30	1.00	---	---
		Front	L	23.12	23.30	1.04	---	---
			M	23.23	23.30	1.02	0.305	0.311
			H	23.30	23.30	1.00	---	---
	Hotspot	Top	L	23.12	23.30	1.04	---	---
			M	23.23	23.30	1.02	0.597	0.609
			H	23.30	23.30	1.00	---	---
		Bottom	L	23.12	23.30	1.04	---	---
			M	23.23	23.30	1.02	0.001	0.001
			H	23.30	23.30	1.00	---	---
Left		L	23.12	23.30	1.04	---	---	
		M	23.23	23.30	1.02	0.274	0.279	
		H	23.30	23.30	1.00	---	---	
Right		L	23.12	23.30	1.04	---	---	
		M	23.23	23.30	1.02	0.115	0.117	
		H	23.30	23.30	1.00	---	---	

**Mode: WCDMA BAND IV**

fL (MHz)=1712.4MHz      fM (MHz)=1732.4MHz      fH (MHz)= 1752.6MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
Rel.99	Head	Left touch	L	19.32	19.40	1.02	---	---
			M	19.09	19.40	1.07	0.397	0.425
			H	19.20	19.40	1.05	---	---
		Left tilt	L	19.32	19.40	1.02	---	---
			M	19.09	19.40	1.07	0.446	0.477
			H	19.20	19.40	1.05	---	---
		Right touch	L	19.32	19.40	1.02	---	---
			M	19.09	19.40	1.07	0.570	0.610
			H	19.20	19.40	1.05	---	---
		Right tilt	L	19.32	19.40	1.02	---	---
			M	19.09	19.40	1.07	0.428	0.458
			H	19.20	19.40	1.05	---	---
	Body worn & Hotspot	Back	L	23.32	23.40	1.02	---	---
			M	23.09	23.40	1.07	0.662	0.708
			H	23.20	23.40	1.05	---	---
		Front	L	23.32	23.40	1.02	---	---
			M	23.09	23.40	1.07	0.368	0.394
			H	23.20	23.40	1.05	---	---
	Hotspot	Top	L	23.32	23.40	1.02	---	---
			M	23.09	23.40	1.07	0.551	0.590
			H	23.20	23.40	1.05	---	---
		Bottom	L	23.32	23.40	1.02	---	---
			M	23.09	23.40	1.07	0.053	0.057
			H	23.20	23.40	1.05	---	---
Left		L	23.32	23.40	1.02	---	---	
		M	23.09	23.40	1.07	0.317	0.339	
		H	23.20	23.40	1.05	---	---	
Right		L	23.32	23.40	1.02	---	---	
		M	23.09	23.40	1.07	0.109	0.117	
		H	23.20	23.40	1.05	---	---	

**Mode: WCDMA BAND V**

fL (MHz)=826.4MHz

fM (MHz)=836.5MHz

fH (MHz)= 846.6MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
Rel.99	Head	Left touch	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.108	0.112
			H	23.94	24.00	1.01	---	---
		Left tilt	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.060	0.063
			H	23.94	24.00	1.01	---	---
		Right touch	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.185	0.192
			H	23.94	24.00	1.01	---	---
		Right tilt	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.070	0.072
			H	23.94	24.00	1.01	---	---
	Body worn & Hotspot	Back	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.266	0.277
			H	23.94	24.00	1.01	---	---
		Front	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.177	0.184
			H	23.94	24.00	1.01	---	---
	Hotspot	Top	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.001	0.001
			H	23.94	24.00	1.01	---	---
		Bottom	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.232	0.241
			H	23.94	24.00	1.01	---	---
		Left	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.068	0.071
			H	23.94	24.00	1.01	---	---
		Right	L	23.93	24.00	1.02	---	---
			M	23.84	24.00	1.04	0.163	0.170
			H	23.94	24.00	1.01	---	---

**Mode: LTE Band 2**

fL (MHz)= 1860MHz

fM (MHz)= 1880MHz

fH (MHz)= 1900MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=20MHz QPSK 1%RB	Head	Left touch	L	20.40	20.40	1.00	---	---
			M	20.26	20.40	1.03	0.552	0.569
			H	20.22	20.40	1.04	---	---
		Left tilt	L	20.40	20.40	1.00	---	---
			M	20.26	20.40	1.03	0.498	0.513
			H	20.22	20.40	1.04	---	---
		Right touch	L	20.40	20.40	1.00	---	---
			M	20.26	20.40	1.03	0.573	0.590
			H	20.22	20.40	1.04	---	---
		Right tilt	L	20.40	20.40	1.00	---	---
			M	20.26	20.40	1.03	0.619	0.638
			H	20.22	20.40	1.04	---	---
	Body worn & Hotspot	Back	L	22.40	22.40	1.00	---	---
			M	22.26	22.40	1.03	0.477	0.491
			H	22.22	22.40	1.04	---	---
		Front	L	22.40	22.40	1.00	---	---
			M	22.26	22.40	1.03	0.241	0.248
			H	22.22	22.40	1.04	---	---
	Hotspot	Top	L	22.40	22.40	1.00	---	---
			M	22.26	22.40	1.03	0.614	0.632
			H	22.22	22.40	1.04	---	---
		Bottom	L	22.40	22.40	1.00	---	---
			M	22.26	22.40	1.03	0.001	0.001
			H	22.22	22.40	1.04	---	---
		Left	L	22.40	22.40	1.00	---	---
			M	22.26	22.40	1.03	0.255	0.263
			H	22.22	22.40	1.04	---	---
Right		L	22.40	22.40	1.00	---	---	
		M	22.26	22.40	1.03	0.107	0.110	
		H	22.22	22.40	1.04	---	---	

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=20MHz QPSK 50%RB	Head	Left touch	L	19.61	19.90	1.07	---	---
			M	19.85	19.90	1.01	0.525	0.530
			H	19.69	19.90	1.05	---	---
		Left tilt	L	19.61	19.90	1.07	---	---
			M	19.85	19.90	1.01	0.537	0.542
			H	19.69	19.90	1.05	---	---
		Right touch	L	19.61	19.90	1.07	---	---
			M	19.85	19.90	1.01	0.571	0.577
			H	19.69	19.90	1.05	---	---
		Right tilt	L	19.61	19.90	1.07	---	---
			M	19.85	19.90	1.01	0.598	0.604
			H	19.69	19.90	1.05	---	---
	Body worn & Hotspot	Back	L	21.61	21.90	1.07	---	---
			M	21.85	21.90	1.01	0.474	0.479
			H	21.69	21.90	1.05	---	---
		Front	L	21.61	21.90	1.07	---	---
			M	21.85	21.90	1.01	0.247	0.249
			H	21.69	21.90	1.05	---	---
	Hotspot	Top	L	21.61	21.90	1.07	---	---
			M	21.85	21.90	1.01	0.499	0.504
			H	21.69	21.90	1.05	---	---
		Bottom	L	21.61	21.90	1.07	---	---
			M	21.85	21.90	1.01	0.001	0.001
			H	21.69	21.90	1.05	---	---
		Left	L	21.61	21.90	1.07	---	---
			M	21.85	21.90	1.01	0.232	0.234
			H	21.69	21.90	1.05	---	---
Right		L	21.61	21.90	1.07	---	---	
		M	21.85	21.90	1.01	0.091	0.092	
		H	21.69	21.90	1.05	---	---	



**Mode: LTE Band 4**

fL (MHz)=1720MHz fM (MHz)= 1732.5MHz fH (MHz)= 1745MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=20MHz QPSK 1%RB	Head	Left touch	L	19.05	19.10	1.01	---	---
			M	18.89	19.10	1.05	0.494	0.519
			H	18.94	19.10	1.04	---	---
		Left tilt	L	19.05	19.10	1.01	---	---
			M	18.89	19.10	1.05	0.516	0.542
			H	18.94	19.10	1.04	---	---
		Right touch	L	19.05	19.10	1.01	---	---
			M	18.89	19.10	1.05	0.575	0.604
			H	18.94	19.10	1.04	---	---
		Right tilt	L	19.05	19.10	1.01	---	---
			M	18.89	19.10	1.05	0.534	0.561
			H	18.94	19.10	1.04	---	---
	Body worn & Hotspot	Back	L	22.55	22.60	1.01	---	---
			M	22.39	22.60	1.05	0.561	0.589
			H	22.44	22.60	1.04	---	---
		Front	L	22.55	22.60	1.01	---	---
			M	22.39	22.60	1.05	0.396	0.416
			H	22.44	22.60	1.04	---	---
	Hotspot	Top	L	22.55	22.60	1.01	---	---
			M	22.39	22.60	1.05	0.669	0.702
			H	22.44	22.60	1.04	---	---
		Bottom	L	22.55	22.60	1.01	---	---
			M	22.39	22.60	1.05	0.042	0.044
			H	22.44	22.60	1.04	---	---
Left		L	22.55	22.60	1.01	---	---	
		M	22.39	22.60	1.05	0.306	0.321	
		H	22.44	22.60	1.04	---	---	
Right		L	22.55	22.60	1.01	---	---	
		M	22.39	22.60	1.05	0.093	0.098	
		H	22.44	22.60	1.04	---	---	

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=20MHz QPSK 50%RB	Head	Left touch	L	18.35	18.40	1.01	---	---
			M	18.32	18.40	1.02	0.468	0.477
			H	18.28	18.40	1.03	---	---
		Left tilt	L	18.35	18.40	1.01	---	---
			M	18.32	18.40	1.02	0.504	0.514
			H	18.28	18.40	1.03	---	---
		Right touch	L	18.35	18.40	1.01	---	---
			M	18.32	18.40	1.02	0.516	0.526
			H	18.28	18.40	1.03	---	---
		Right tilt	L	18.35	18.40	1.01	---	---
			M	18.32	18.40	1.02	0.489	0.499
			H	18.28	18.40	1.03	---	---
	Body worn & Hotspot	Back	L	21.85	21.90	1.01	---	---
			M	21.82	21.90	1.02	0.454	0.463
			H	21.78	21.90	1.03	---	---
		Front	L	21.85	21.90	1.01	---	---
			M	21.82	21.90	1.02	0.339	0.346
			H	21.78	21.90	1.03	---	---
	Hotspot	Top	L	21.85	21.90	1.01	---	---
			M	21.82	21.90	1.02	0.526	0.537
			H	21.78	21.90	1.03	---	---
		Bottom	L	21.85	21.90	1.01	---	---
			M	21.82	21.90	1.02	0.001	0.001
			H	21.78	21.90	1.03	---	---
Left		L	21.85	21.90	1.01	---	---	
		M	21.82	21.90	1.02	0.262	0.267	
		H	21.78	21.90	1.03	---	---	
Right		L	21.85	21.90	1.01	---	---	
		M	21.82	21.90	1.02	0.088	0.090	
		H	21.78	21.90	1.03	---	---	

**Mode: LTE Band 5**

fL (MHz)=829 MHz      fM (MHz)=836.5MHz      fH (MHz)= 844MHz

**Limit of SAR (W/kg) : <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.115	0.115
			H	23.67	23.80	1.03	---	---
		Left tilt	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.071	0.071
			H	23.67	23.80	1.03	---	---
		Right touch	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.159	0.159
			H	23.67	23.80	1.03	---	---
		Right tilt	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.071	0.071
			H	23.67	23.80	1.03	---	---
	Body worn & Hotspot	Back	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.337	0.337
			H	23.67	23.80	1.03	---	---
		Front	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.188	0.188
			H	23.67	23.80	1.03	---	---
	Hotspot	Top	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.001	0.001
			H	23.67	23.80	1.03	---	---
		Bottom	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.236	0.236
			H	23.67	23.80	1.03	---	---
		Left	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.074	0.074
			H	23.67	23.80	1.03	---	---
		Right	L	23.61	23.80	1.04	---	---
			M	23.78	23.80	1.00	0.170	0.170
			H	23.67	23.80	1.03	---	---

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.090	0.094
			H	22.87	23.00	1.03	---	---
		Left tilt	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.055	0.057
			H	22.87	23.00	1.03	---	---
		Right touch	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.120	0.125
			H	22.87	23.00	1.03	---	---
		Right tilt	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.056	0.058
			H	22.87	23.00	1.03	---	---
	Body worn & Hotspot	Back	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.266	0.277
			H	22.87	23.00	1.03	---	---
		Front	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.153	0.159
			H	22.87	23.00	1.03	---	---
	Hotspot	Top	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.001	0.001
			H	22.87	23.00	1.03	---	---
		Bottom	L	22.96	23.00	1.01	---	---
			M	22.83	23.00	1.04	0.205	0.213
			H	22.87	23.00	1.03	---	---
Left		L	22.96	23.00	1.01	---	---	
		M	22.83	23.00	1.04	0.057	0.059	
		H	22.87	23.00	1.03	---	---	
Right		L	22.96	23.00	1.01	---	---	
		M	22.83	23.00	1.04	0.142	0.148	
		H	22.87	23.00	1.03	---	---	

**Mode: LTE Band 12**

fL (MHz)=704 MHz      fM (MHz)=707.5MHz      fH (MHz)= 711MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.153	0.164
			H	23.60	23.80	1.05	---	---
		Left tilt	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.092	0.098
			H	23.60	23.80	1.05	---	---
		Right touch	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.205	0.219
			H	23.60	23.80	1.05	---	---
		Right tilt	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.098	0.105
			H	23.60	23.80	1.05	---	---
	Body worn & Hotspot	Back	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.243	0.260
			H	23.60	23.80	1.05	---	---
		Front	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.233	0.249
			H	23.60	23.80	1.05	---	---
	Hotspot	Top	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.001	0.001
			H	23.60	23.80	1.05	---	---
		Bottom	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.194	0.208
			H	23.60	23.80	1.05	---	---
		Left	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.208	0.223
			H	23.60	23.80	1.05	---	---
		Right	L	23.71	23.80	1.02	---	---
			M	23.51	23.80	1.07	0.205	0.219
			H	23.60	23.80	1.05	---	---

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.132	0.135
			H	22.87	23.00	1.03	---	---
		Left tilt	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.079	0.081
			H	22.87	23.00	1.03	---	---
		Right touch	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.153	0.156
			H	22.87	23.00	1.03	---	---
		Right tilt	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.081	0.083
			H	22.87	23.00	1.03	---	---
	Body worn & Hotspot	Back	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.237	0.242
			H	22.87	23.00	1.03	---	---
		Front	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.206	0.210
			H	22.87	23.00	1.03	---	---
	Hotspot	Top	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.001	0.001
			H	22.87	23.00	1.03	---	---
		Bottom	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.186	0.190
			H	22.87	23.00	1.03	---	---
		Left	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.179	0.183
			H	22.87	23.00	1.03	---	---
		Right	L	22.82	23.00	1.04	---	---
			M	22.91	23.00	1.02	0.214	0.218
			H	22.87	23.00	1.03	---	---

**Mode: LTE Band 25**

fL (MHz)= 1860 MHz

fM (MHz)= 1882.5MHz

fH (MHz)= 1905MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	20.08	20.10	1.00	---	---
			M	19.83	20.10	1.06	0.515	0.546
			H	19.91	20.10	1.04	---	---
		Left tilt	L	20.08	20.10	1.00	---	---
			M	19.83	20.10	1.06	0.502	0.532
			H	19.91	20.10	1.04	---	---
		Right touch	L	20.08	20.10	1.00	---	---
			M	19.83	20.10	1.06	0.546	0.579
			H	19.91	20.10	1.04	---	---
		Right tilt	L	20.08	20.10	1.00	---	---
			M	19.83	20.10	1.06	0.537	0.569
			H	19.91	20.10	1.04	---	---
	Body worn & Hotspot	Back	L	22.58	22.60	1.00	---	---
			M	22.33	22.60	1.06	0.496	0.526
			H	22.41	22.60	1.04	---	---
		Front	L	22.58	22.60	1.00	---	---
			M	22.33	22.60	1.06	0.279	0.296
			H	22.41	22.60	1.04	---	---
	Hotspot	Top	L	22.58	22.60	1.00	---	---
			M	22.33	22.60	1.06	0.561	0.595
			H	22.41	22.60	1.04	---	---
		Bottom	L	22.58	22.60	1.00	---	---
			M	22.33	22.60	1.06	0.001	0.001
			H	22.41	22.60	1.04	---	---
		Left	L	22.58	22.60	1.00	---	---
			M	22.33	22.60	1.06	0.270	0.286
			H	22.41	22.60	1.04	---	---
Right		L	22.58	22.60	1.00	---	---	
		M	22.33	22.60	1.06	0.108	0.114	
		H	22.41	22.60	1.04	---	---	

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	19.35	19.60	1.06	---	---
			M	19.34	19.60	1.06	0.427	0.453
			H	19.56	19.60	1.01	---	---
		Left tilt	L	19.35	19.60	1.06	---	---
			M	19.34	19.60	1.06	0.418	0.443
			H	19.56	19.60	1.01	---	---
		Right touch	L	19.35	19.60	1.06	---	---
			M	19.34	19.60	1.06	0.501	0.531
			H	19.56	19.60	1.01	---	---
		Right tilt	L	19.35	19.60	1.06	---	---
			M	19.34	19.60	1.06	0.473	0.501
			H	19.56	19.60	1.01	---	---
	Body worn & Hotspot	Back	L	21.85	22.10	1.06	---	---
			M	21.84	22.10	1.06	0.410	0.435
			H	22.06	22.10	1.01	---	---
		Front	L	21.85	22.10	1.06	---	---
			M	21.84	22.10	1.06	0.230	0.244
			H	22.06	22.10	1.01	---	---
	Hotspot	Top	L	21.85	22.10	1.06	---	---
			M	21.84	22.10	1.06	0.398	0.422
			H	22.06	22.10	1.01	---	---
		Bottom	L	21.85	22.10	1.06	---	---
			M	21.84	22.10	1.06	0.001	0.001
			H	22.06	22.10	1.01	---	---
Left		L	21.85	22.10	1.06	---	---	
		M	21.84	22.10	1.06	0.227	0.241	
		H	22.06	22.10	1.01	---	---	
Right		L	21.85	22.10	1.06	---	---	
		M	21.84	22.10	1.06	0.087	0.092	
		H	22.06	22.10	1.01	---	---	



**Mode: LTE Band 41**

fL (MHz)= 2545 MHz

fM (MHz)= 2593MHz

fH (MHz)= 2645MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.132	0.140
			H	25.96	26.30	1.08	---	---
		Left tilt	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.064	0.068
			H	25.96	26.30	1.08	---	---
		Right touch	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.124	0.131
			H	25.96	26.30	1.08	---	---
		Right tilt	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.120	0.127
			H	25.96	26.30	1.08	---	---
	Body worn & Hotspot	Back	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.360	0.382
			H	25.96	26.30	1.08	---	---
		Front	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.318	0.337
			H	25.96	26.30	1.08	---	---
	Hotspot	Top	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.050	0.053
			H	25.96	26.30	1.08	---	---
		Bottom	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.222	0.235
			H	25.96	26.30	1.08	---	---
		Left	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.341	0.361
			H	25.96	26.30	1.08	---	---
		Right	L	26.25	26.30	1.01	---	---
			M	26.04	26.30	1.06	0.072	0.076
			H	25.96	26.30	1.08	---	---

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.163	0.176
			H	25.44	25.80	1.09	---	---
		Left tilt	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.071	0.077
			H	25.44	25.80	1.09	---	---
		Right touch	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.135	0.146
			H	25.44	25.80	1.09	---	---
		Right tilt	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.129	0.139
			H	25.44	25.80	1.09	---	---
	Body worn & Hotspot	Back	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.310	0.335
			H	25.44	25.80	1.09	---	---
		Front	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.300	0.324
			H	25.44	25.80	1.09	---	---
	Hotspot	Top	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.022	0.024
			H	25.44	25.80	1.09	---	---
		Bottom	L	25.71	25.80	1.02	---	---
			M	25.48	25.80	1.08	0.202	0.218
			H	25.44	25.80	1.09	---	---
Left		L	25.71	25.80	1.02	---	---	
		M	25.48	25.80	1.08	0.274	0.296	
		H	25.44	25.80	1.09	---	---	
Right		L	25.71	25.80	1.02	---	---	
		M	25.48	25.80	1.08	0.064	0.069	
		H	25.44	25.80	1.09	---	---	

**Mode: LTE Band 66**

fL (MHz)= 1720 MHz

fM (MHz)= 1745MHz

fH (MHz)= 1770MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	18.93	20.00	1.28	---	---
			M	18.99	20.00	1.26	0.562	0.708
			H	18.95	20.00	1.27	---	---
		Left tilt	L	18.93	20.00	1.28	---	---
			M	18.99	20.00	1.26	0.528	0.665
			H	18.95	20.00	1.27	---	---
		Right touch	L	18.93	20.00	1.28	---	---
			M	18.99	20.00	1.26	0.584	0.736
			H	18.95	20.00	1.27	---	---
		Right tilt	L	18.93	20.00	1.28	---	---
			M	18.99	20.00	1.26	0.563	0.709
			H	18.95	20.00	1.27	---	---
	Body worn & Hotspot	Back	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.581	0.581
			H	22.45	22.50	1.01	---	---
		Front	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.375	0.375
			H	22.45	22.50	1.01	---	---
	Hotspot	Top	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.664	0.664
			H	22.45	22.50	1.01	---	---
		Bottom	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.053	0.053
			H	22.45	22.50	1.01	---	---
		Left	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.300	0.300
			H	22.45	22.50	1.01	---	---
		Right	L	22.43	22.50	1.02	---	---
			M	22.49	22.50	1.00	0.095	0.095
			H	22.45	22.50	1.01	---	---

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	18.36	18.50	1.03	---	---
			M	18.39	18.50	1.03	0.538	0.554
			H	18.44	18.50	1.01	---	---
		Left tilt	L	18.36	18.50	1.03	---	---
			M	18.39	18.50	1.03	0.541	0.557
			H	18.44	18.50	1.01	---	---
		Right touch	L	18.36	18.50	1.03	---	---
			M	18.39	18.50	1.03	0.569	0.586
			H	18.44	18.50	1.01	---	---
		Right tilt	L	18.36	18.50	1.03	---	---
			M	18.39	18.50	1.03	0.552	0.569
			H	18.44	18.50	1.01	---	---
	Body worn & Hotspot	Back	L	21.86	22.00	1.03	---	---
			M	21.89	22.00	1.03	0.468	0.482
			H	21.94	22.00	1.01	---	---
		Front	L	21.86	22.00	1.03	---	---
			M	21.89	22.00	1.03	0.310	0.319
			H	21.94	22.00	1.01	---	---
	Hotspot	Top	L	21.86	22.00	1.03	---	---
			M	21.89	22.00	1.03	0.494	0.509
			H	21.94	22.00	1.01	---	---
		Bottom	L	21.86	22.00	1.03	---	---
			M	21.89	22.00	1.03	0.047	0.048
			H	21.94	22.00	1.01	---	---
		Left	L	21.86	22.00	1.03	---	---
			M	21.89	22.00	1.03	0.248	0.255
			H	21.94	22.00	1.01	---	---
Right		L	21.86	22.00	1.03	---	---	
		M	21.89	22.00	1.03	0.084	0.087	
		H	21.94	22.00	1.01	---	---	

**Mode: LTE Band 71**

fL (MHz)= 673 MHz    fM (MHz)= 683MHz    fH (MHz)= 688MHz

**Limit of SAR (W/kg): <1.6W/kg (1g Average)**

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 1%RB	Head	Left touch	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.117	0.122
			H	23.06	23.10	1.01	---	---
		Left tilt	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.066	0.069
			H	23.06	23.10	1.01	---	---
		Right touch	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.151	0.157
			H	23.06	23.10	1.01	---	---
		Right tilt	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.066	0.069
			H	23.06	23.10	1.01	---	---
	Body worn & Hotspot	Back	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.277	0.288
			H	23.06	23.10	1.01	---	---
		Front	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.195	0.203
			H	23.06	23.10	1.01	---	---
	Hotspot	Top	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.001	0.001
			H	23.06	23.10	1.01	---	---
		Bottom	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.152	0.158
			H	23.06	23.10	1.01	---	---
		Left	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.167	0.174
			H	23.06	23.10	1.01	---	---
		Right	L	23.10	23.10	1.00	---	---
			M	22.91	23.10	1.04	0.244	0.254
			H	23.06	23.10	1.01	---	---

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
BW=10MHz QPSK 50%RB	Head	Left touch	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.097	0.097
			H	22.29	22.30	1.00	---	---
		Left tilt	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.055	0.055
			H	22.29	22.30	1.00	---	---
		Right touch	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.111	0.111
			H	22.29	22.30	1.00	---	---
		Right tilt	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.052	0.052
			H	22.29	22.30	1.00	---	---
	Body worn & Hotspot	Back	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.243	0.243
			H	22.29	22.30	1.00	---	---
		Front	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.162	0.162
			H	22.29	22.30	1.00	---	---
	Hotspot	Top	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.001	0.001
			H	22.29	22.30	1.00	---	---
		Bottom	L	22.13	22.30	1.04	---	---
			M	22.28	22.30	1.00	0.120	0.120
			H	22.29	22.30	1.00	---	---
Left		L	22.13	22.30	1.04	---	---	
		M	22.28	22.30	1.00	0.142	0.142	
		H	22.29	22.30	1.00	---	---	
Right		L	22.13	22.30	1.04	---	---	
		M	22.28	22.30	1.00	0.212	0.212	
		H	22.29	22.30	1.00	---	---	

**Mode: BT**

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Estimated SAR					
MAX power		Head distance	Body-worn distance	Head SAR	Body-worn SAR
dBm	mw	mm	mm	w/kg	w/kg
7.4	5.50	5	10	0.229	0.114

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{\text{(GHz)}}/x}]$  W/kg for test separation distances  $\leq 50$  mm;  
where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.

**Mode: Wi-Fi 2.4GHz**

fL (MHz)=2412MHz    fM (MHz)=2437MHz    fH (MHz)= 2462MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
802.11b 1Mbps	Head	Left touch	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.718	0.718
			H	20.60	20.60	1.00	---	---
		Left tilt	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.709	0.709
			H	20.60	20.60	1.00	---	---
		Right touch	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.326	0.326
			H	20.60	20.60	1.00	---	---
		Right tilt	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.423	0.423
			H	20.60	20.60	1.00	---	---
	Body worn & Hotspot	Back	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.312	0.312
			H	20.60	20.60	1.00	---	---
		Front	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.285	0.285
			H	20.60	20.60	1.00	---	---
	Hotspot	Top	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.307	0.307
			H	20.60	20.60	1.00	---	---
		Bottom	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.001	0.001
			H	20.60	20.60	1.00	---	---
		Left	L	20.40	20.60	1.05	---	---
			M	20.60	20.60	1.00	0.078	0.078
			H	20.60	20.60	1.00	---	---
Right	L	20.40	20.60	1.05	---	---		
	M	20.60	20.60	1.00	0.141	0.141		
	H	20.60	20.60	1.00	---	---		



**Mode: Wi-Fi 5GHz U-NII-1**

fL (MHz)= 5180MHz

fM (MHz)= 5200MHz

fH (MHz)= 5240MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
802.11n HT20 6Mbps	Head	Left touch	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.354	0.358
			H	16.79	16.90	1.03	---	---
		Left tilt	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.437	0.441
			H	16.79	16.90	1.03	---	---
		Right touch	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.304	0.307
			H	16.79	16.90	1.03	---	---
		Right tilt	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.421	0.425
			H	16.79	16.90	1.03	---	---
	Body worn & Hotspot	Back	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.441	0.445
			H	16.79	16.90	1.03	---	---
		Front	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.113	0.114
			H	16.79	16.90	1.03	---	---
	Hotspot	Top	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.687	0.694
			H	16.79	16.90	1.03	---	---
		Bottom	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.001	0.001
			H	16.79	16.90	1.03	---	---
		Left	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.001	0.001
			H	16.79	16.90	1.03	---	---
		Right	L	16.78	16.90	1.03	---	---
			M	16.85	16.90	1.01	0.001	0.001
			H	16.79	16.90	1.03	---	---

**Mode: Wi-Fi 5GHz U-NII-3**

fL (MHz)= 5745MHz

fM (MHz)= 5785MHz

fH (MHz)= 5825MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg) 1g Average	Reported Results (W/kg) 1g Average
Mode	Exposure condition	Position	CH					
802.11n HT20 6Mbps	Head	Left touch	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.774	0.805
			H	15.28	15.70	1.10	---	---
		Left tilt	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.729	0.758
			H	15.28	15.70	1.10	---	---
		Right touch	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.761	0.791
			H	15.28	15.70	1.10	---	---
		Right tilt	L	15.69	15.70	1.00	0.794	0.794
			M	15.51	15.70	1.04	0.828	0.861
			H	15.28	15.70	1.10	0.771	0.848
	Body worn & Hotspot	Back	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.720	0.749
			H	15.28	15.70	1.10	---	---
		Front	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.284	0.295
			H	15.28	15.70	1.10	---	---
	Hotspot	Top	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.685	0.712
			H	15.28	15.70	1.10	---	---
		Bottom	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.001	0.001
			H	15.28	15.70	1.10	---	---
		Left	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.001	0.001
			H	15.28	15.70	1.10	---	---
		Right	L	15.69	15.70	1.00	---	---
			M	15.51	15.70	1.04	0.155	0.161
			H	15.28	15.70	1.10	---	---

## 6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

### The Highest Reported/Estimated SAR configuration in Each Frequency Band

Frequency band	Air interface	Head SAR(w/kg)	Body-worn SAR(w/kg)	Hotspot SAR(w/kg)
Below 1GHz	GSM850 WCDMA BANDV LTE BAND5 LTE BAND12 LTE BAND71	<0.8	<0.8	<0.8
1GHz-2GHz	GSM1900 WCDMA BANDII WCDMA BANDIV LTE BAND2 LTE BAND4 LTE BAND25 LTE BAND66	<0.8	<0.8	<0.8
2GHz-3GHz	BT/BLE LTE BAND41 WIFI 2.4GHz	<0.8	<0.8	<0.8
Above 5G	WIFI 5GHz U-NII-1 WIFI 5GHz U-NII-3	>0.8	<0.8	<0.8

## 6.12 Simultaneous Transmission SAR Analysis

Antenna numbers of Simultaneous Transmission	Antennas of Simultaneous Transmission	Simultaneous Transmission Modes
2	MAIN ANT+ WLAN/BT ANT	Celluar2/3/4G+WIFI 2.4GHz Celluar2/3/4G+BT

### Head exposure

Position of worst case	Licensed band	Unlicensed band	Simultaneous SAR(w/kg)
Right Tilt	LTE BAND 66	WIFI 5GHz U-NII-1	1.571

### Body-worn exposure

Position of worst case	Licensed band	Unlicensed band	Simultaneous SAR(w/kg)
Back	WCDMA	WIFI 5GHz U-NII-3	1.457

### Hotspot exposure

Position of worst case	Licensed band	Unlicensed band	Simultaneous SAR(w/kg)
Back	WCDMA	WIFI 5GHz U-NII-3	1.457

According to the above tables, all the exposure condition of SAR values < 1.6W/kg.

## 7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	( $c_i$ ) 1g	( $c_i$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Response <sup>m</sup>	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scaling <sup>p</sup>	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) <sup>DAK</sup>	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity <sup>BB</sup>	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity <sup>BB</sup>	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)

Error Description	Uncert. value	Prob. Dist.	Div.	( $c_1$ ) 1g	( $c_2$ ) 10g	Std. Unc. (1g)	Std. Unc. (10g)	( $v_i$ ) $v_{eff}$
<b>Measurement System</b>								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response <sup>m</sup>	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
<b>Test Sample Related</b>								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling <sup>P</sup>	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
<b>Phantom and Setup</b>								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) <sup>DAK</sup>	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) <sup>DAK</sup>	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity <sup>BB</sup>	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity <sup>BB</sup>	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

## **8 TEST EQUIPMENTS**

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	546	2019.08.28	2020.08.27
Dosimetric E-field Probe	EX3DV4	3708	2019.09.26	2020.09.25
Dipole Validation Kit	D750V3	4d023	2017.09.13	2020.09.12
Dipole Validation Kit	D835V2	4d023	2017.09.13	2020.09.12
Dipole Validation Kit	D1800V2	2d084	2017.09.15	2020.09.14
Dipole Validation Kit	D2000V2	1009	2018.02.01	2021.01.31
Dipole Validation Kit	D2450V2	738	2017.09.18	2020.09.17
Dipole Validation Kit	D2600V2	1166	2019.11.08	2022.11.08
Dipole Validation Kit	D5GHzV2	1079	2017.09.25	2020.09.24

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2019.08.20	2020.08.19
Signal Generator	SML 03	103514	2019.08.20	2020.08.19
Power meter	E4417A	MY45101182	2019.08.20	2020.08.19
Power Sensor	E4412A	MY41502214	2019.08.20	2020.08.19
Power Sensor	E4412A	MY41502130	2019.08.20	2020.08.19
Power meter	E4417A	MY45101004	2019.08.20	2020.08.19
Power Sensor	E9300B	MY41496001	2019.08.20	2020.08.19
Power Sensor	E9300B	MY41496003	2019.08.20	2020.08.19
Communication Tester	E5515C	MY48367401	2019.08.20	2020.08.19
Communication Tester	CMU500	114666	2019.08.20	2020.08.19
Communication Tester	MT8820C	6201300660	2019.08.20	2020.08.19
Communication Tester	MT8821C	6201547819	2019.08.20	2020.08.19
Vector Network Analyzer	VNA R140	0011213	2019.09.18	2020.09.17
Dielectric Parameter Probe	DAKS-3.5	1042	2019.09.17	2020.09.16

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 4 GHz)
Optical Surface Detection	$\pm 0.2$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 $\mu$ W/g to > 100 W/kg; Linearity: $\pm 0.2$ dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Optical Surface Detection	$\pm 0.3$ mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 $\mu$ W/g to > 100 W/kg Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
  - a) After a dipole is damaged and properly repaired to meet required specifications.
  - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
  - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB $\times$ 0.2) or not meeting the required 20 dB minimum return-loss requirement.
  - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5  $\Omega$  from the previous measurement.



### Dipole 750

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance, deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	53.9Ω+0.24jΩ	49.5Ω-2.15jΩ	<5Ω
Return loss	-28.4dB	-29.8dB	<20%

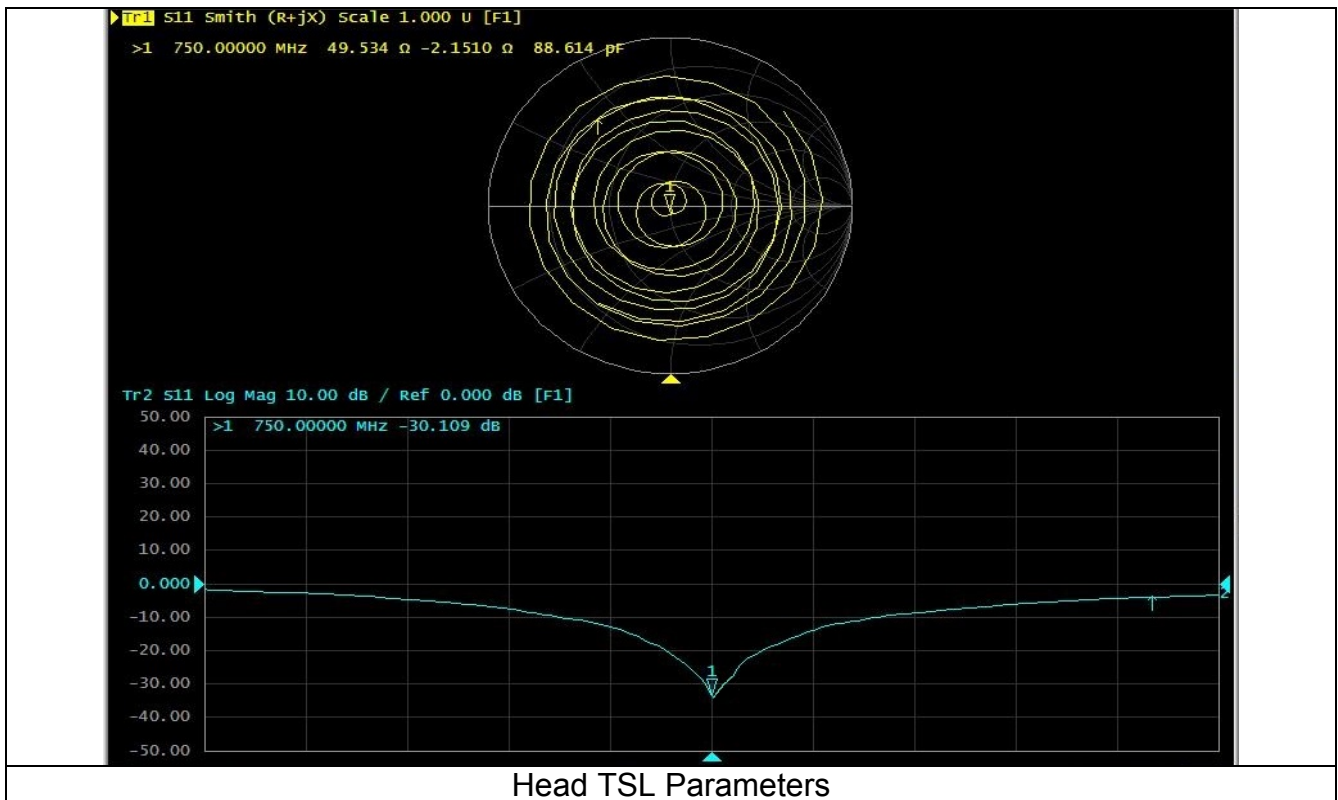

### Dipole 835

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance, deviates within 5  $\Omega$  from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.0 $\Omega$ -2.79j $\Omega$	49.5 $\Omega$ -2.15j $\Omega$	<5 $\Omega$
Return loss	-30.7 dB	-33.1 dB	<20%

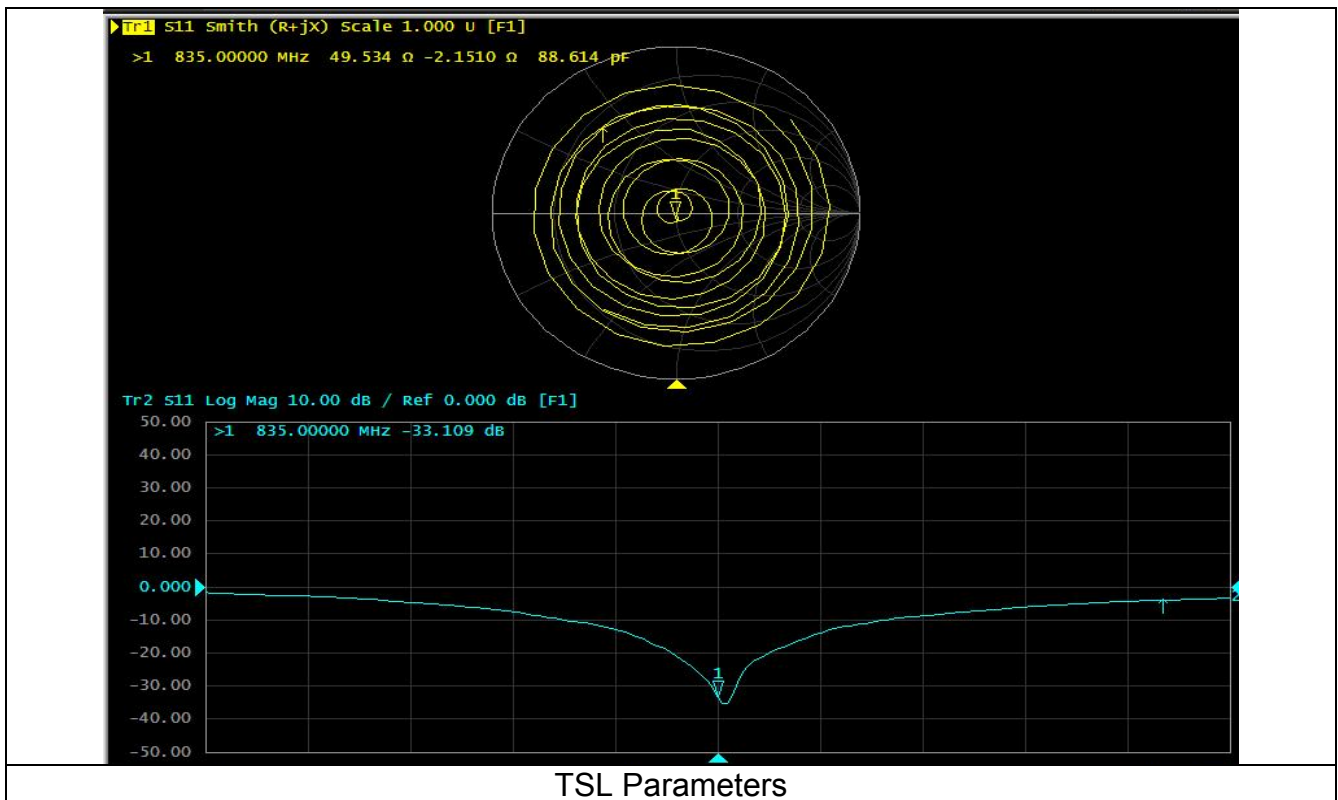

### Dipole1800

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance, deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.3Ω-1.55jΩ	51.9Ω-4.41jΩ	<5Ω
Return loss	-35.4 dB	-36.0dB	<20%

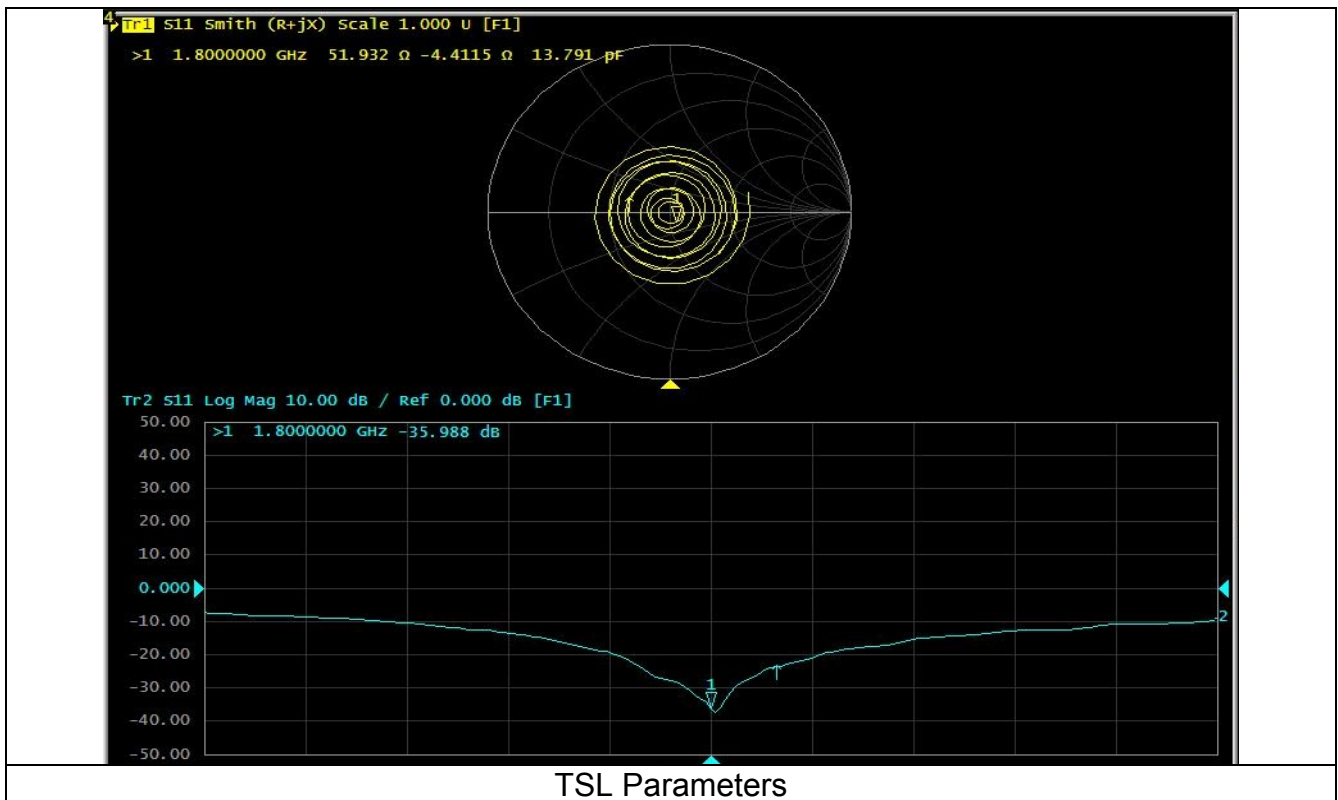

TSL Parameters

### Dipole2000

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance, deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	49.8Ω-2.08jΩ	52.6Ω-3.44jΩ	<5Ω
Return loss	-33.6dB	-36.0dB	<20%

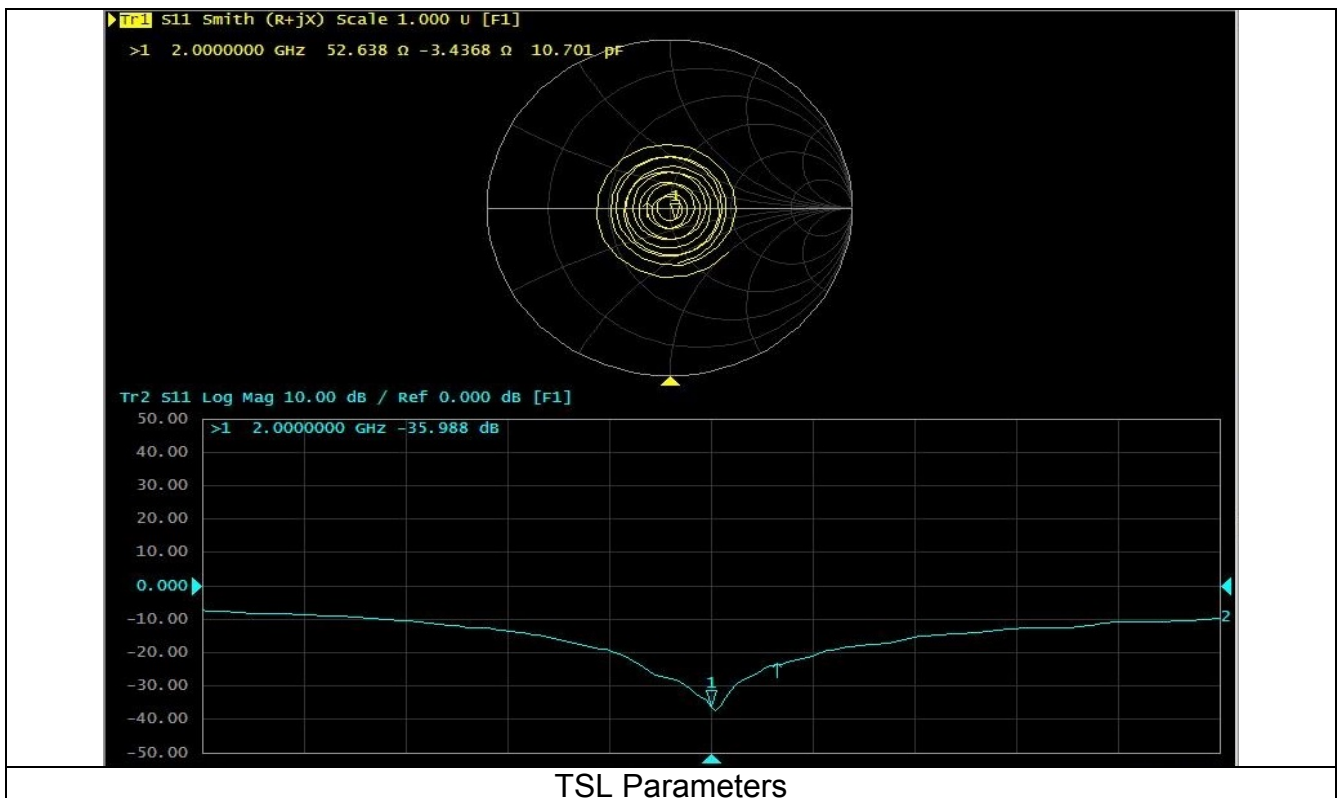

TSL Parameters

### Dipole2450

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

TSL Parameters			
Parameters	Target (Ref. Value)	Measured data	Deviation
Impedance	51.3Ω+5.92jΩ	48.9Ω+4.78jΩ	<5Ω
Return loss	-24.5 dB	-22.6dB	<20%

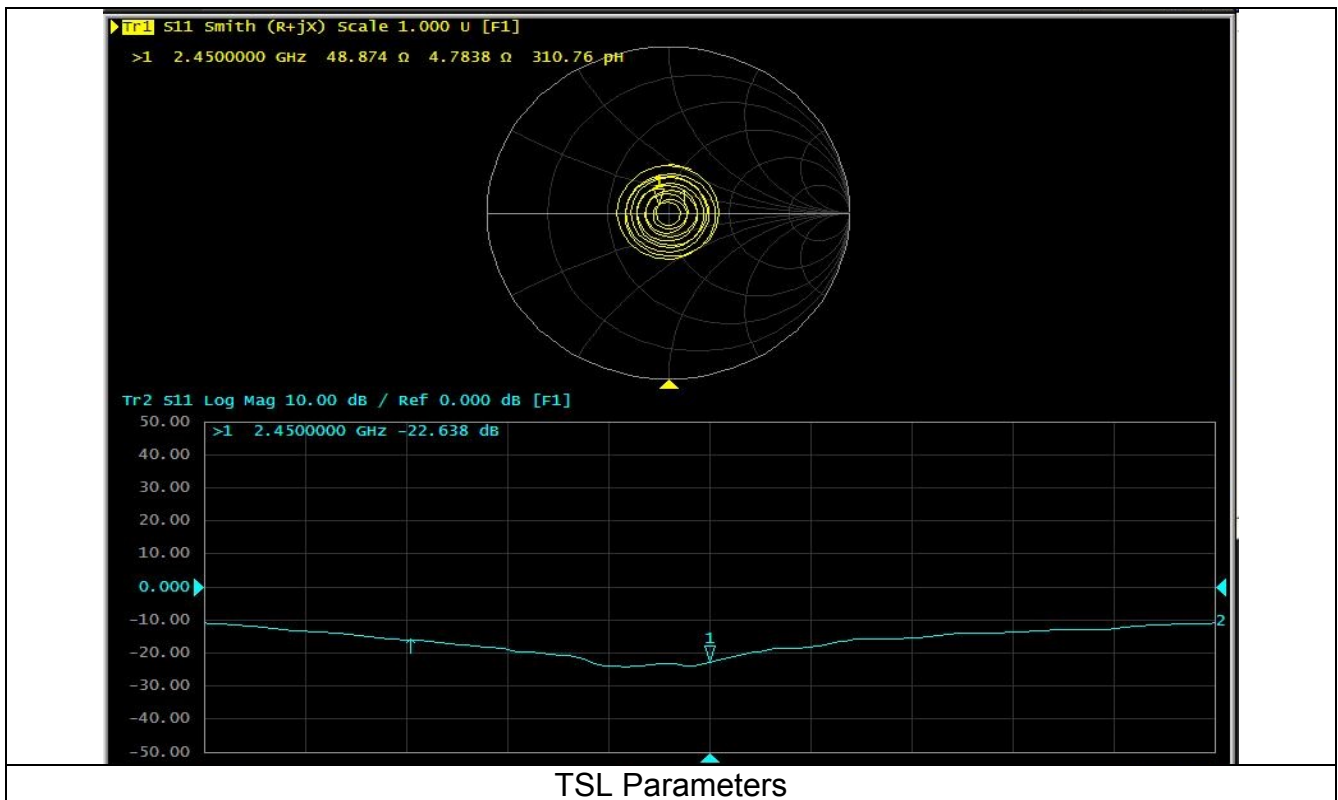

### Dipole5GHz

#### SAR target


Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

#### Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance , deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

Head TSL Parameters				
Parameters	Target (Ref. Value)	Measured data	Deviation	Frequency (MHz)
Impedance	47.6Ω-8.77jΩ	46.3Ω-6.51jΩ	<5Ω	5200
Return loss	-20.7dB	-20.9dB	<20%	5200
Impedance	45.5Ω-6.82jΩ	48.4Ω-7.54jΩ	<5Ω	5300
Return loss	-21.4dB	-20.9dB	<20%	5300
Impedance	50.7Ω-7.14jΩ	48.9Ω-7.35jΩ	<5Ω	5500
Return loss	-23.0dB	-20.9dB	<20%	5500
Impedance	55.2Ω-4.00jΩ	55.5Ω-5.73jΩ	<5Ω	5600
Return loss	-24.1dB	-20.9dB	<20%	5600
Impedance	52.2Ω-8.20jΩ	53.5Ω-4.39jΩ	<5Ω	5800
Return loss	-21.6dB	-20.9dB	<20%	5800

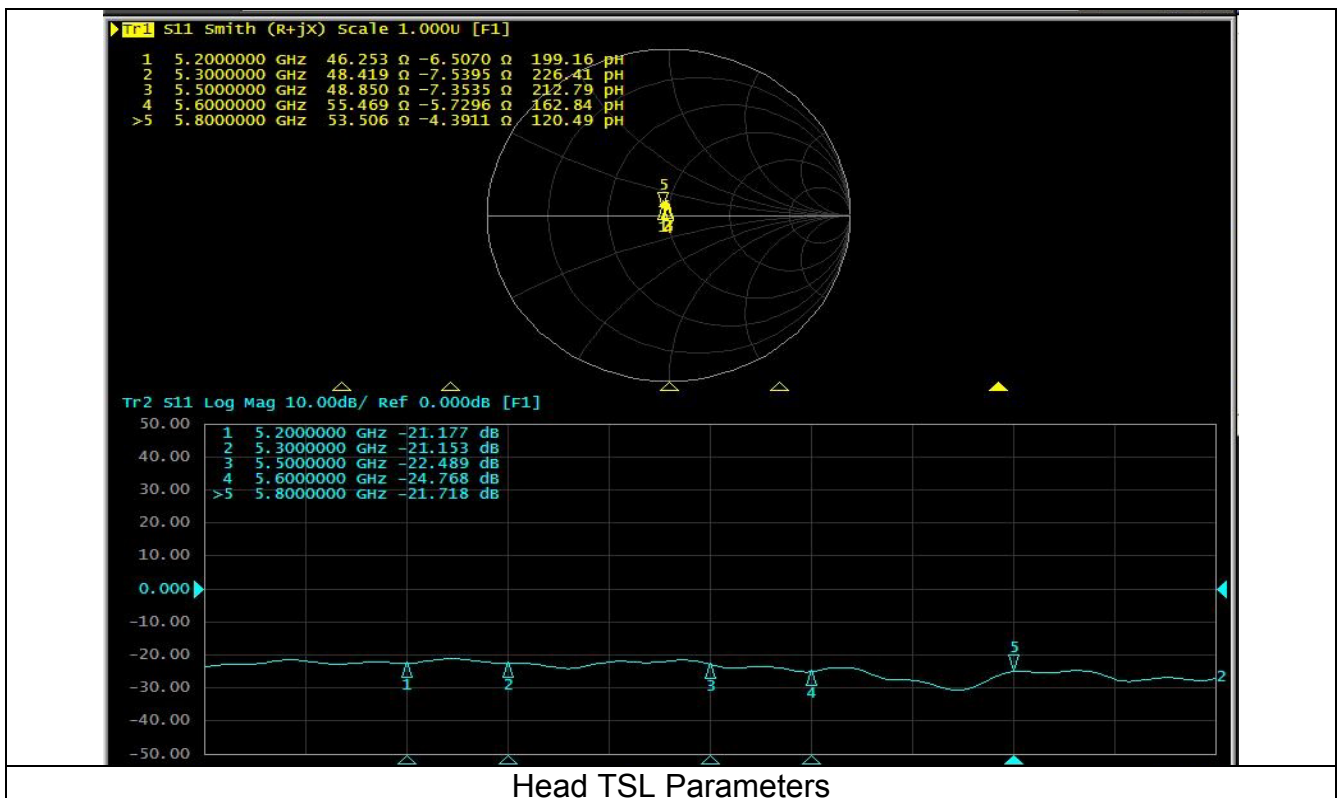

**ANNEX A – TEST PLOTS**

Please refer to the attachment.

**ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS**

Please refer to the attachment.