



FCC Test Report

APPLICANT : ZTE CORPORATION
EQUIPMENT : WCDMA Digital Mobile Phone
BRAND NAME : ZTE
MODEL NAME : ZTE Z933
FCC ID : SRQ-Z933
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on May 20, 2014 and testing was completed on Jun. 02, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2003 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Louis Wu / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.
No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. C.



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification subjective to this standard.....	6
1.5. Modification of EUT	7
1.6. Test Location.....	7
1.7. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	10
2.3. Support Unit used in test configuration and system.....	11
2.4. EUT Operation Test Setup.....	11
3. TEST RESULT.....	12
3.1. Test of AC Conducted Emission Measurement.....	12
3.2. Test of Radiated Emission Measurement.....	18
4. LIST OF MEASURING EQUIPMENT	22
5. UNCERTAINTY OF EVALUATION.....	23

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.107	ICES003 Section 6.1	AC Conducted Emission	< 15.107 limits < ICES003 6.1 limits	PASS	Under limit 6.93 dB at 0.430 MHz
3.2	15.109	ICES003 Section 6.2	Radiated Emission	< 15.109 limits < ICES003 6.2 limits	PASS	Under limit 3.74 dB at 240.060 MHz for Quasi-Peak



1. General Description

1.1. Applicant

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

1.2. Manufacturer

ZTE CORPORATION

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	WCDMA Digital Mobile Phone
Brand Name	ZTE
Model Name	ZTE Z933
FCC ID	SRQ-Z933
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/HSPA+ (Downlink Only)/ WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
HW Version	Z933_V1EMB_B
SW Version	Z933V1.0.0B01
EUT Stage	Pre-Production

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification subjective to this standard

Product Specification subjective to this standard	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz 802.11b/g/n: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz GPS : 1.57542 GHz
Antenna Type	WWAN : PIFA Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna GPS : PIFA Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) HSPA+: 16QAM (Downlink Only) 802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth v4.0 LE : GFSK Bluetooth v3.0 + EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK GPS : BPSK



1.5. Modification of EUT

No modifications are made to the EUT during all test items.

1.6. Test Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. C. TEL: +86-755- 3320-2398		
Test Site No.	Sporton Site No.	FCC/IC Registration No.	
	CO01-SZ	03CH01-SZ	831040/4086F-1

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2003
- IC ICES-003 Issue 5
- IC RSS-Gen Issue 3
- NOTICE 2012-DRS0126

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The test results for FCC compliance, indicating that these results are deemed satisfactory evidence of compliance with **Industry Canada Interference-Causing Equipment Standard ICES-003**.
3. Per the section 2.2.3 of Notice of 2012-DRS0126, “ Receivers Excluded from Industry Canada Requirements”, only radio communication receivers operating in stand-alone mode within the band 30-960 MHz and scanner receivers are subject to Industry Canada requirements.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.

Item	EUT Configuration	Test Condition		
		EMI AC	EMI RE<1G	EMI RE≥1G
1.	Charging Mode (EUT with adapter)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Note 1
2.	Data application transferred mode (EUT with notebook)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>

Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE \geq 1G: EUT radiated emissions \geq 1GHz
- EMI RE < 1G: EUT radiated emissions < 1GHz

Note 1: Testing for this mode is not required or not the worst case.

Remark: For signal above 1GHz, the worst case was test item 2.




Test Items	EUT Configure Mode	Function Type
AC Conducted Emission	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Camera <Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + MPEG4 <Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx <Fig.2>
Radiated Emissions < 1GHz	1/2	Mode 1: GSM850 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + Camera <Fig.1> Mode 2: GSM1900 Idle + Bluetooth Idle + WLAN Idle + USB Cable (Charging from Adapter) + MPEG4 <Fig.1> Mode 3: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx <Fig.2>
Radiated Emissions \geq 1GHz	2	Mode 1: WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx <Fig.2>


Remark:

1. The worst case of AC is mode 1, and the USB Link mode of AC is mode 3, the test data of these modes are reported.
2. The worst case of RE < 1G is mode 3; only the test data of this mode is reported.
3. Link with Notebook means data application transferred mode between EUT and Notebook.

2.2. Connection Diagram of Test System

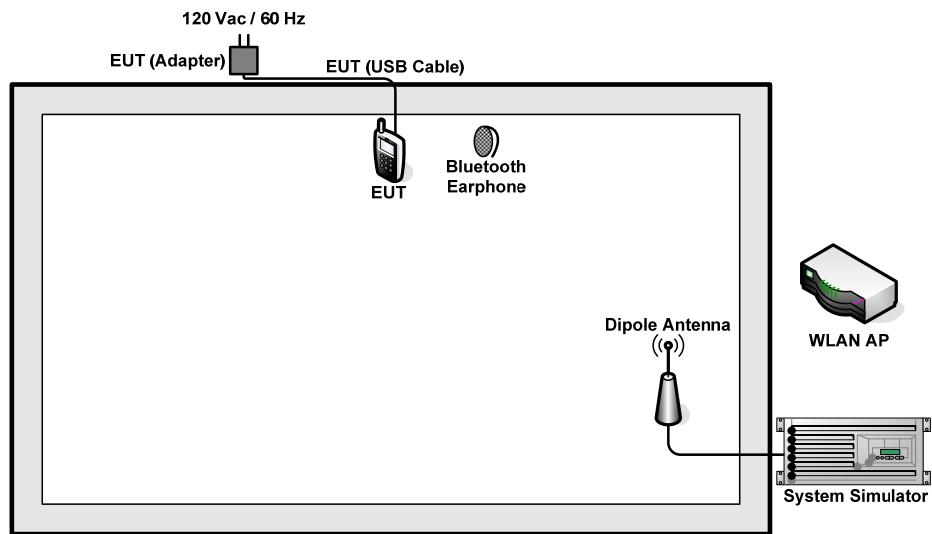

<Fig.1>

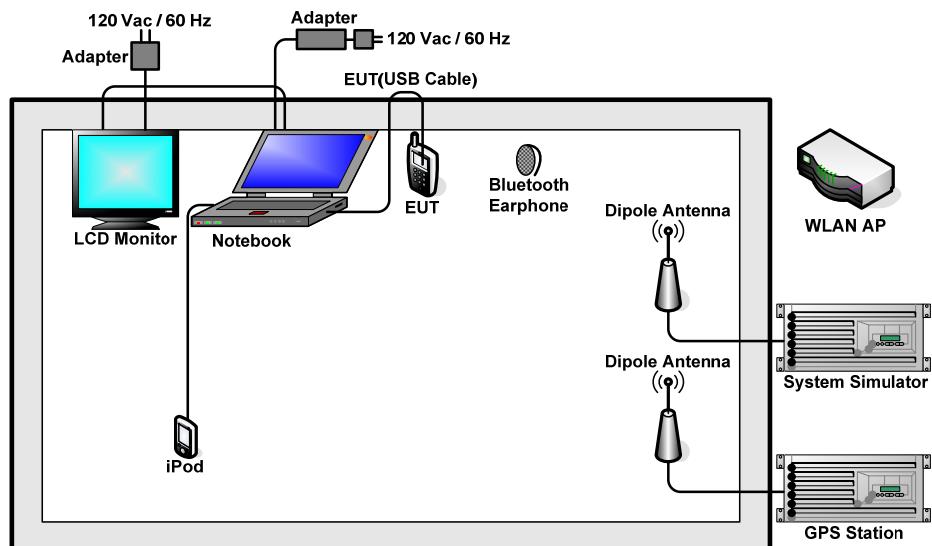

<Fig.2>



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMW 500	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Agilent	E5515C	N/A	N/A	Unshielded, 1.8 m
3.	GPS Station	ADIVIC	MP9000	N/A	N/A	Unshielded, 1.8 m
4.	WLAN AP	D-Link	DIR-815	KA2IR815A1	N/A	Unshielded, 1.8 m
5.	WLAN AP	D-Link	DIR-615	N/A	N/A	Unshielded, 1.8 m
6.	Bluetooth Earphone	Nokia	BH-108	2010DP1340	N/A	N/A
7.	Notebook	Lenovo	G480	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
8.	Notebook	Lenovo	E540	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
9.	LCD Monitor	DELL	IN1940MWB	FCC DoC	Shielded, 1.6 m	Unshielded, 1.8 m
10.	iPod	Apple	MC525 ZP/A	FCC DoC	Shielded, 1.0 m	N/A
11.	SD Card	SanDisk	4G class4	FCC Doc	N/A	N/A

2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Execute the program, "Winthrax" under WIN7 installed in notebook for files transfer with EUT via USB cable.
2. Execute "GPS Test" to make the EUT receive continuous signals from GPS station.
3. Execute "Video Player" to play MPEG4 files.
4. Turn on camera to capture images.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.


3.1.4 Test Setup

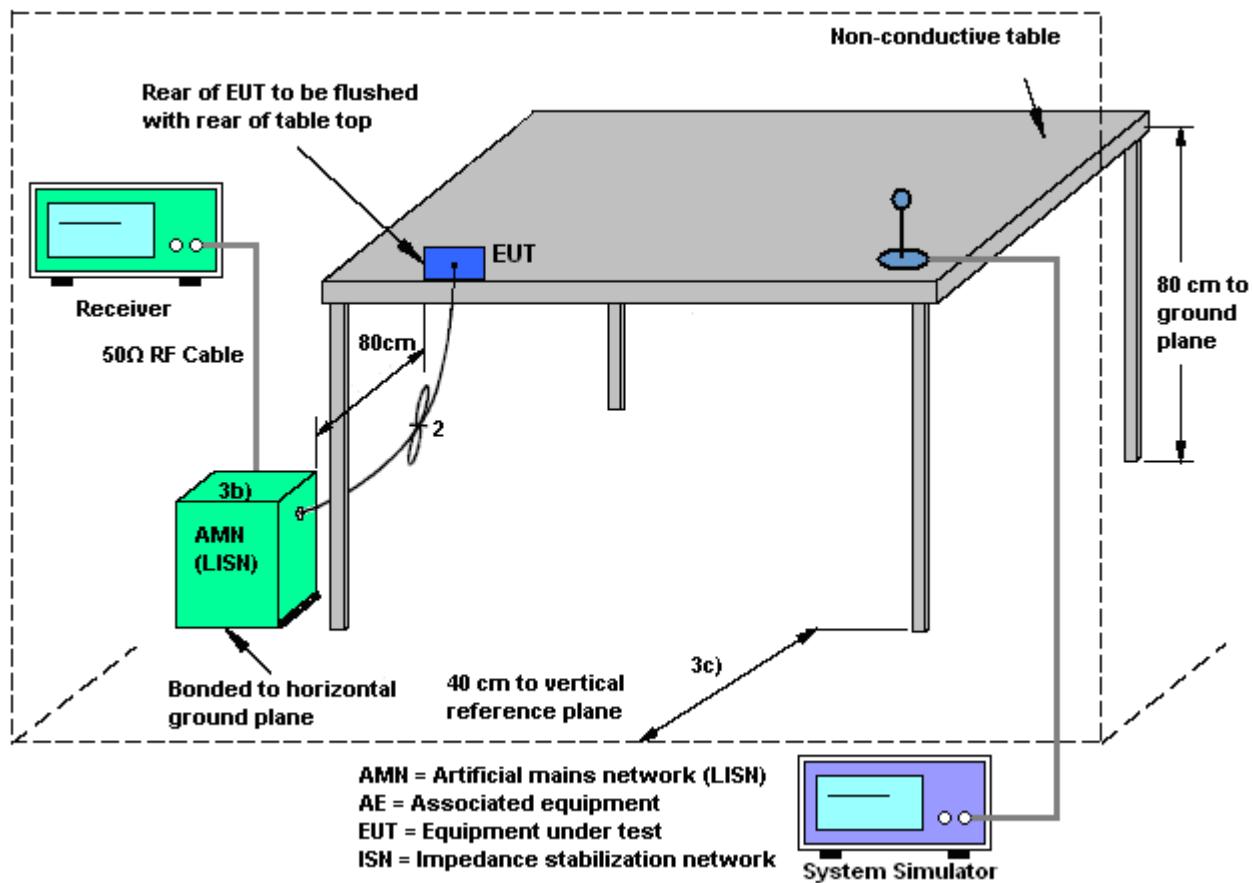




3.1.5 Test Result of AC Conducted Emission

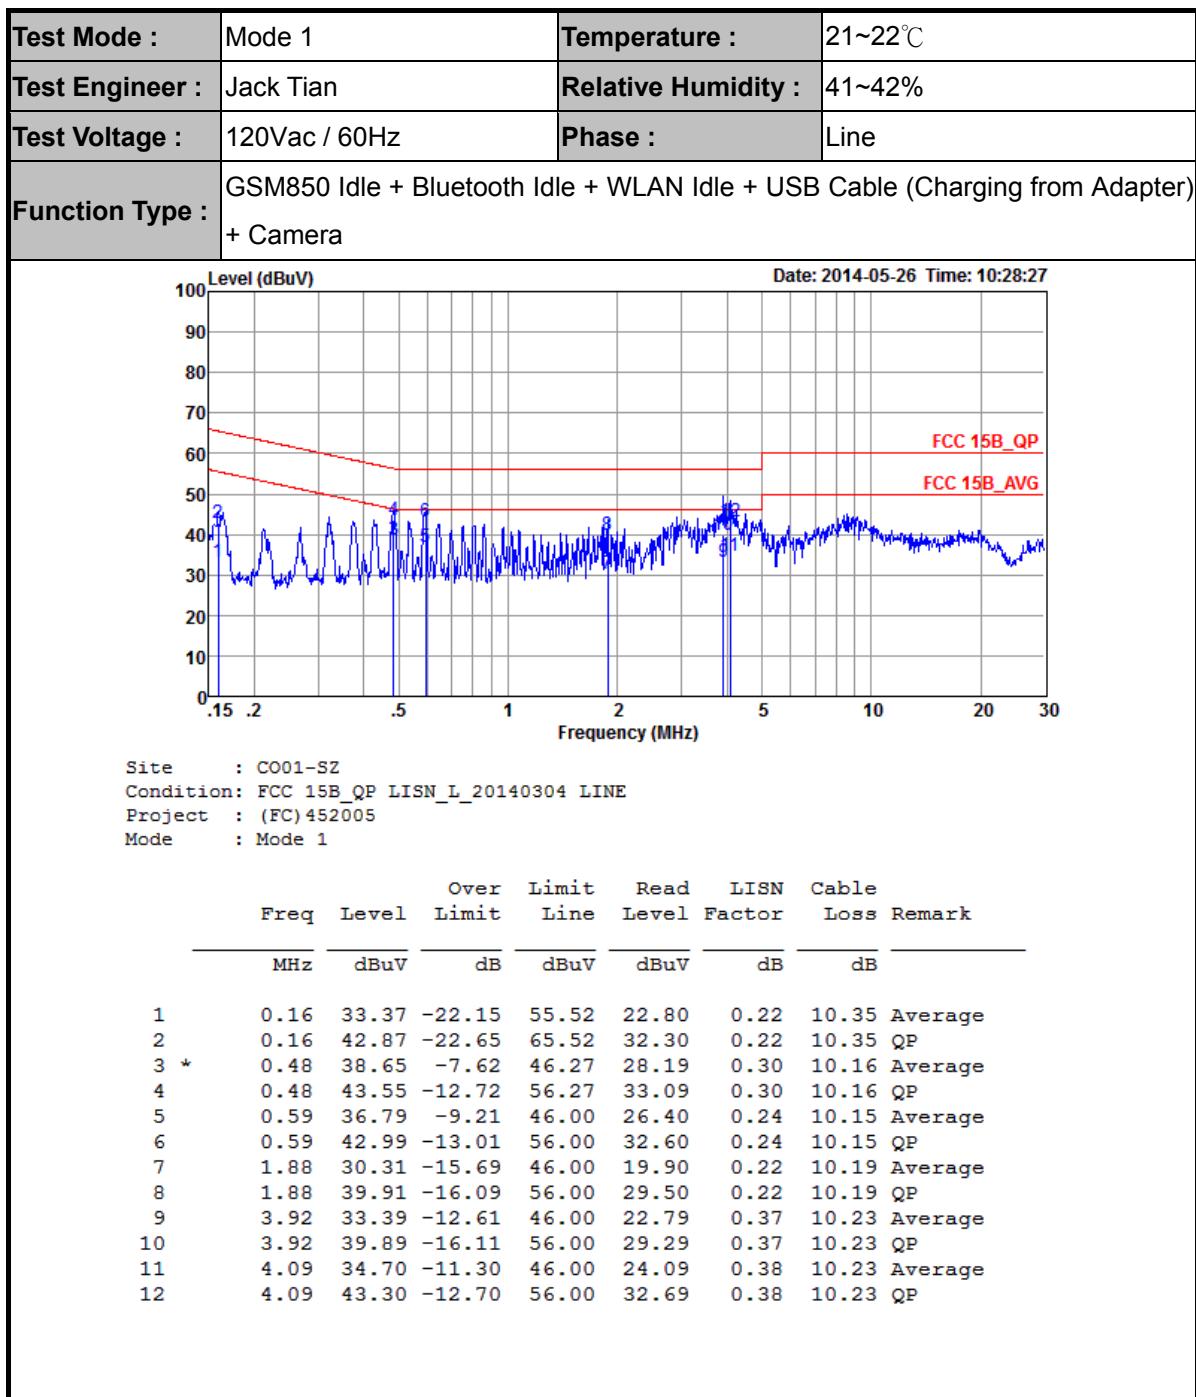

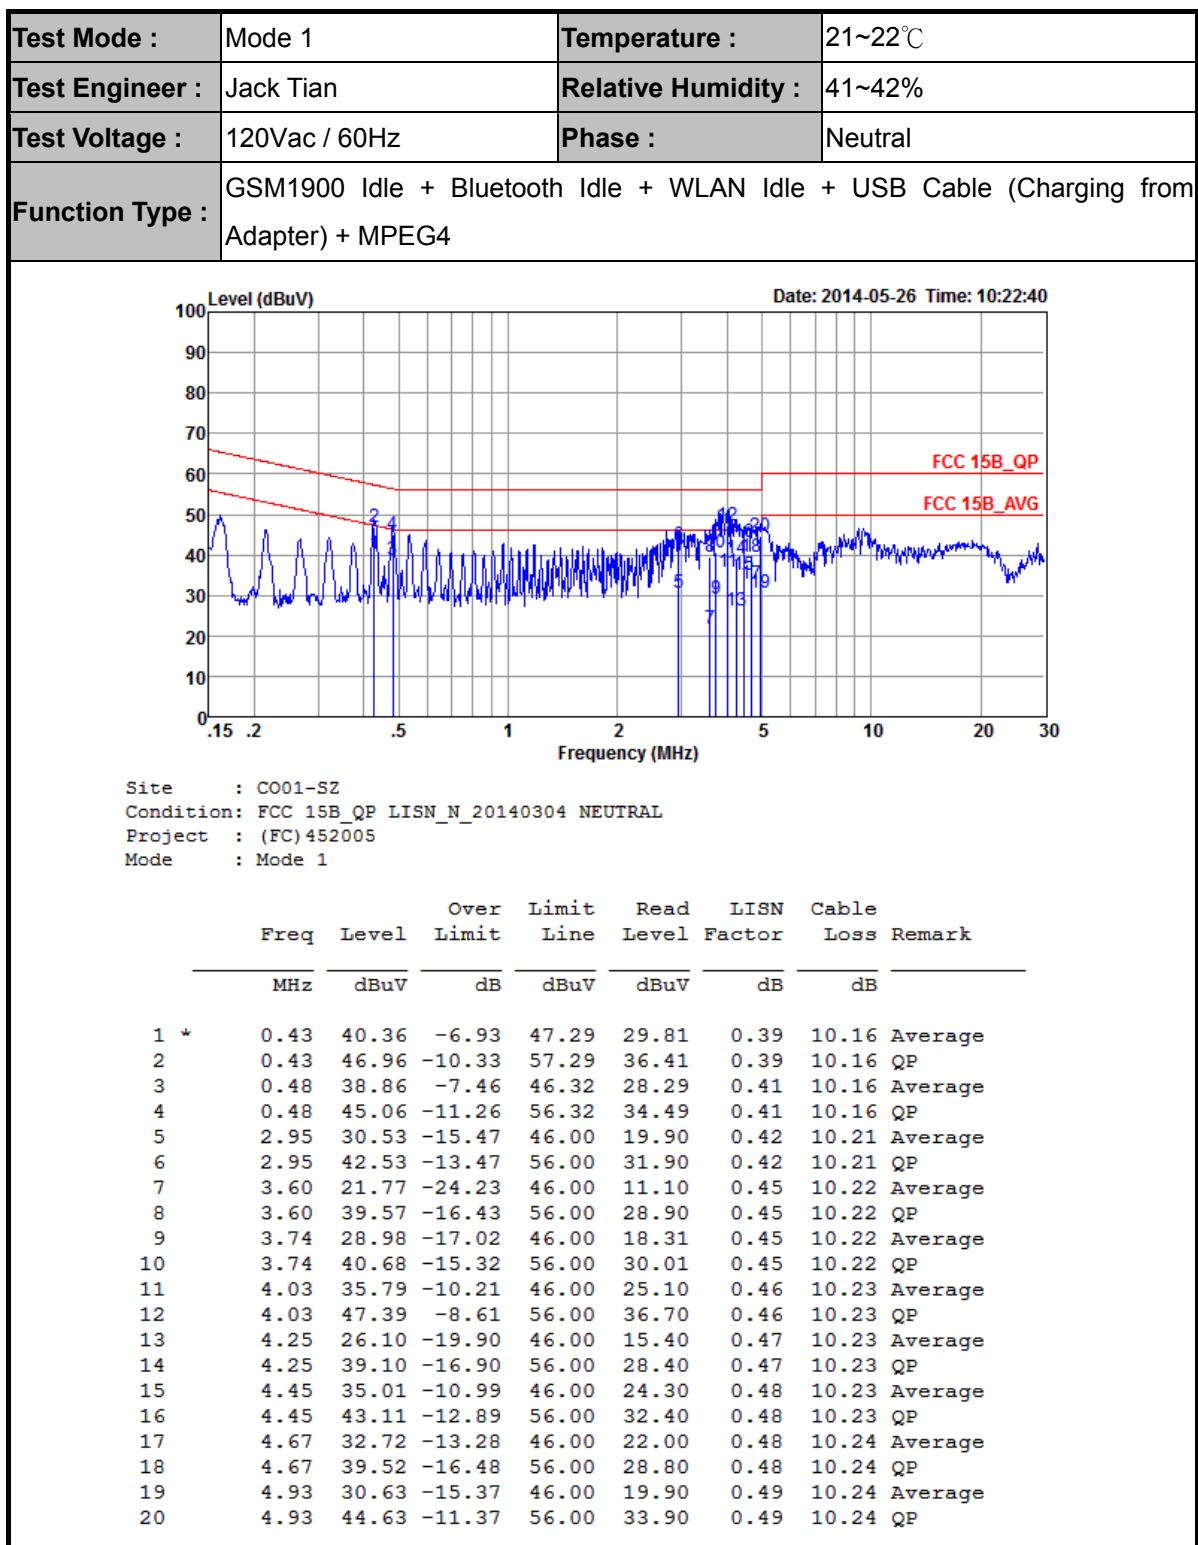




Test Mode :	Mode 3	Temperature :	21~22°C
Test Engineer :	Jack Tian	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx		

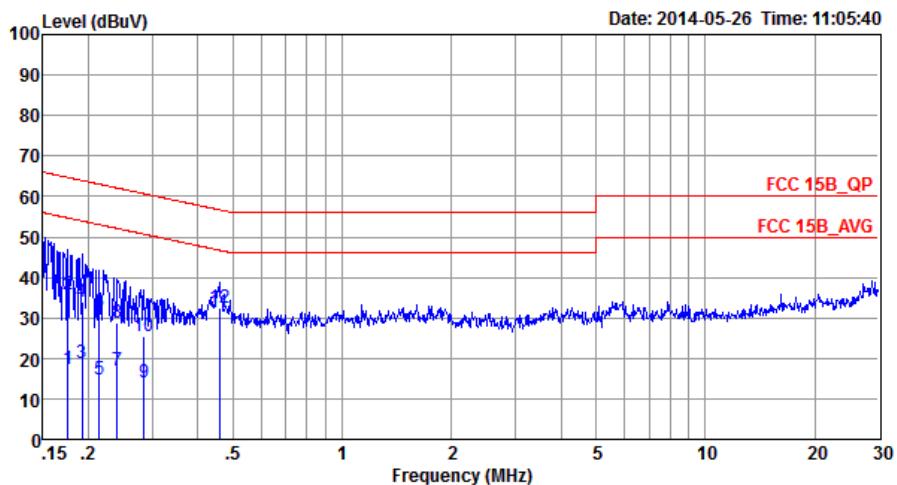

Site : CO01-SZ
Condition: FCC 15B_QP LISN_L_20140304 LINE
Project : (FC)452005
Mode : Mode 3

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Line	Level	Factor	dB	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	17.34	-37.34	54.68	6.80	0.22	10.32 Average
2	0.18	35.84	-28.84	64.68	25.30	0.22	10.32 QP
3	0.19	18.92	-35.01	53.93	8.40	0.22	10.30 Average
4	0.19	34.12	-29.81	63.93	23.60	0.22	10.30 QP
5	0.21	14.80	-38.25	53.05	4.29	0.23	10.28 Average
6	0.21	31.20	-31.85	63.05	20.69	0.23	10.28 QP
7	0.24	16.89	-35.19	52.08	6.40	0.24	10.25 Average
8	0.24	28.89	-33.19	62.08	18.40	0.24	10.25 QP
9	0.28	13.86	-36.82	50.68	3.40	0.25	10.21 Average
10	0.28	25.36	-35.32	60.68	14.90	0.25	10.21 QP
11 *	0.46	31.25	-15.46	46.71	20.80	0.29	10.16 Average
12	0.46	32.45	-24.26	56.71	22.00	0.29	10.16 QP

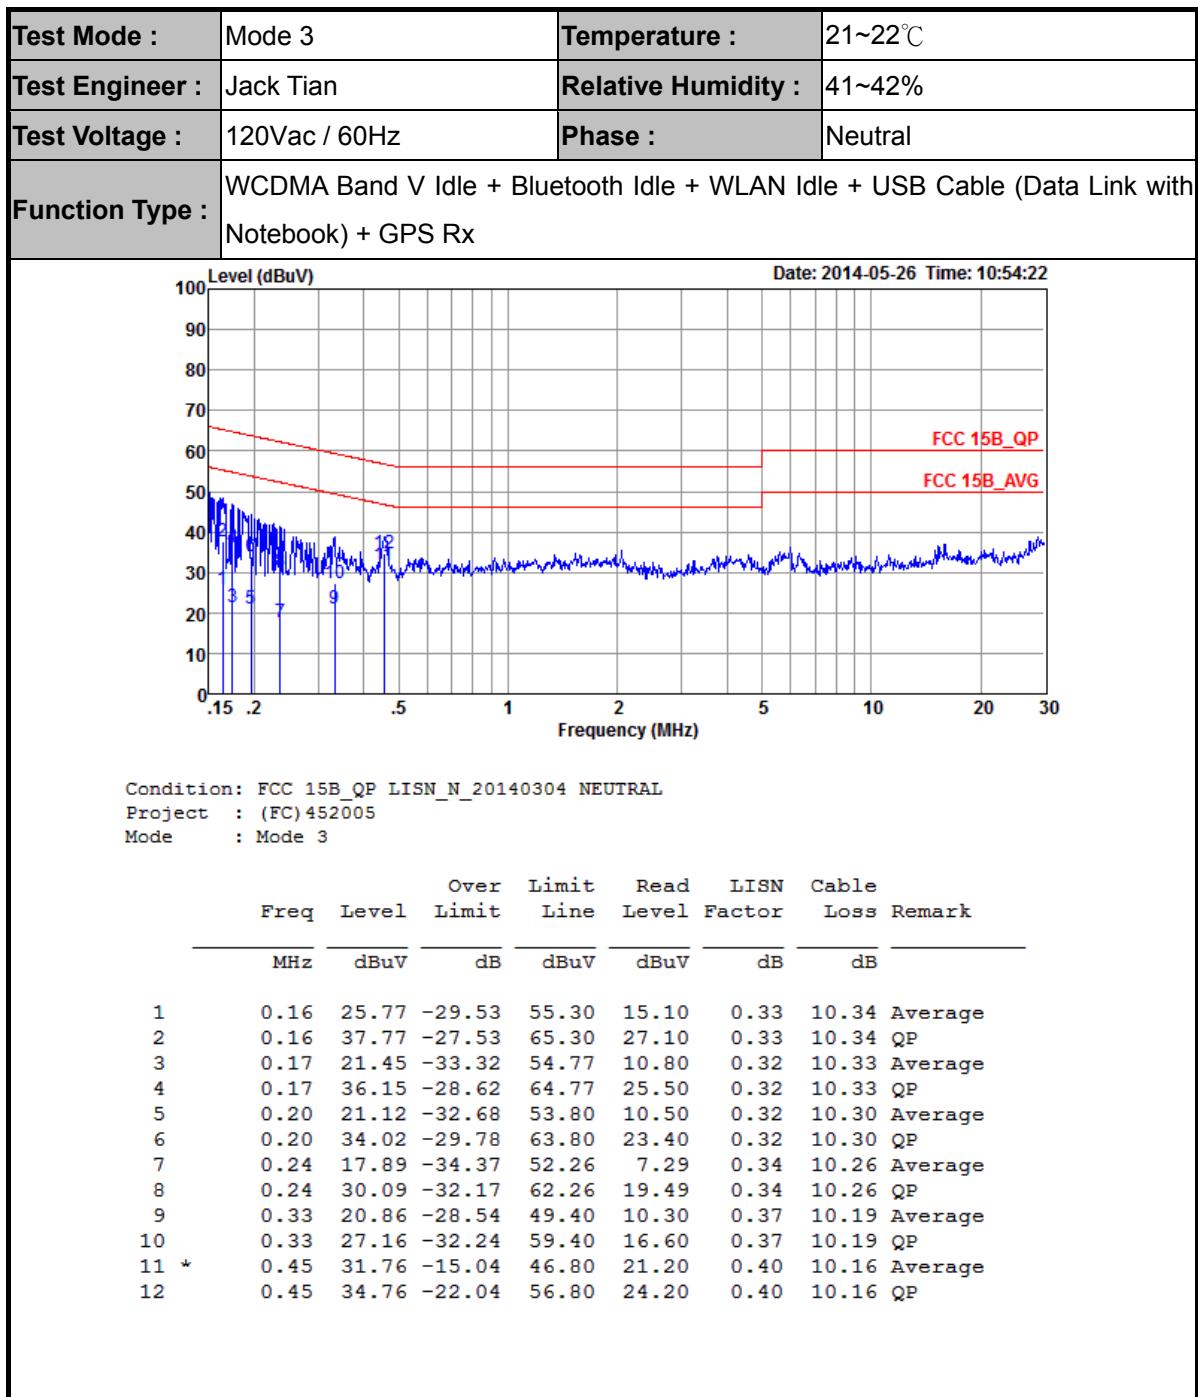



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

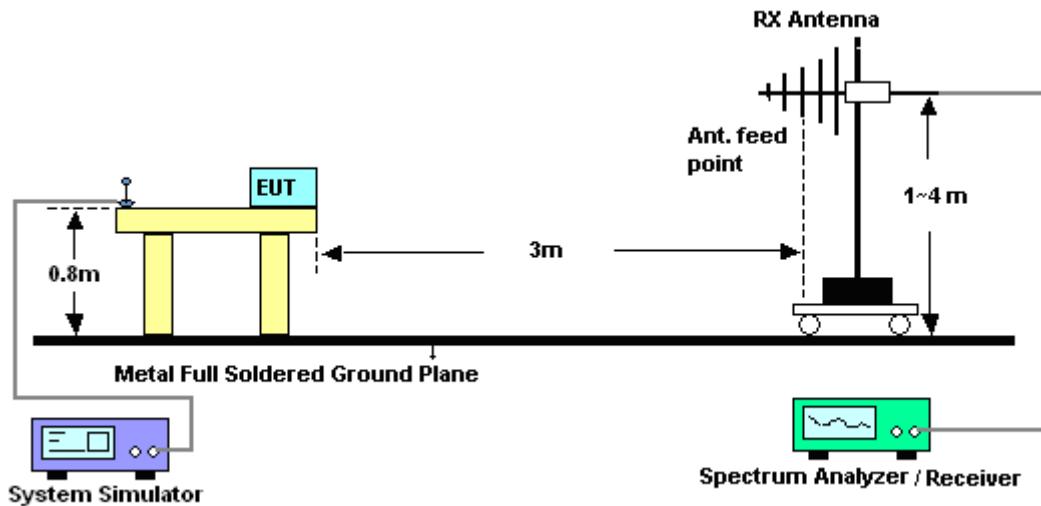

For radiated emissions above 1GHz

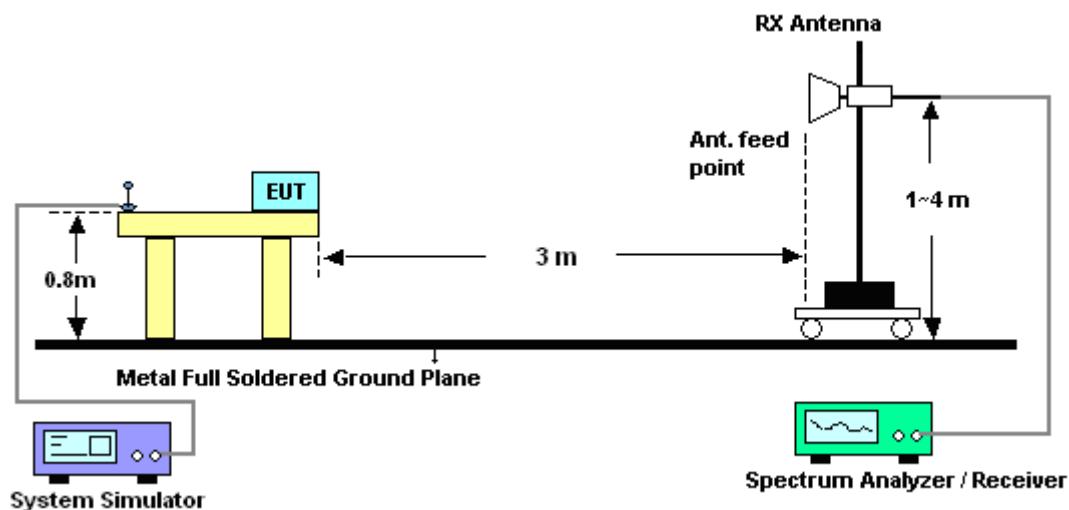



3.2.5. Test Result of Radiated Emission

Test Mode :	Mode 3	Temperature :	24~25°C																																																																																																																																																																																												
Test Engineer :	Leo Liao	Relative Humidity :	48~49%																																																																																																																																																																																												
Test Distance :	3m	Polarization :	Horizontal																																																																																																																																																																																												
Function Type :	WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx																																																																																																																																																																																														
Remark :	#7 is system simulator signal which can be ignored.																																																																																																																																																																																														
<p>Level (dBuV/m)</p> <p>Date: 2014-06-02</p> <p>FCC CLASS-B</p> <p>FCC CLASS-B (AVG)</p> <p>Frequency (MHz)</p>																																																																																																																																																																																															
Site	: 03CH01-SZ																																																																																																																																																																																														
Condition	: FCC CLASS-B 3m LF_ANT_131026 HORIZONTAL																																																																																																																																																																																														
Project	: (FC) 452005																																																																																																																																																																																														
Mode	: Mode 3																																																																																																																																																																																														
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Over Limit</th> <th>Limit</th> <th>ReadAntenna Level</th> <th>Antenna Factor</th> <th>Cable Loss</th> <th>Preamplifier Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>75.09</td> <td>31.71</td> <td>-8.29</td> <td>40.00</td> <td>55.43</td> <td>5.12</td> <td>1.10</td> <td>29.94</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 Q</td> <td>240.06</td> <td>42.26</td> <td>-3.74</td> <td>46.00</td> <td>59.02</td> <td>11.35</td> <td>1.82</td> <td>29.93</td> <td>100</td> <td>46</td> <td>QP</td> </tr> <tr> <td>3</td> <td>258.96</td> <td>39.07</td> <td>-6.93</td> <td>46.00</td> <td>54.59</td> <td>12.52</td> <td>1.89</td> <td>29.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>345.50</td> <td>30.99</td> <td>-15.01</td> <td>46.00</td> <td>44.58</td> <td>14.20</td> <td>2.14</td> <td>29.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>479.90</td> <td>39.31</td> <td>-6.69</td> <td>46.00</td> <td>49.35</td> <td>17.40</td> <td>2.48</td> <td>29.92</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6 !</td> <td>720.00</td> <td>40.27</td> <td>-5.73</td> <td>46.00</td> <td>47.91</td> <td>19.30</td> <td>2.99</td> <td>29.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>7 P</td> <td>881.00</td> <td>42.65</td> <td></td> <td></td> <td>48.73</td> <td>20.58</td> <td>3.28</td> <td>29.94</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>8</td> <td>2628.00</td> <td>32.94</td> <td>-41.06</td> <td>74.00</td> <td>51.23</td> <td>32.63</td> <td>5.91</td> <td>56.83</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>3666.00</td> <td>33.15</td> <td>-40.85</td> <td>74.00</td> <td>51.05</td> <td>33.10</td> <td>7.15</td> <td>58.15</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>10</td> <td>6642.00</td> <td>36.10</td> <td>-37.90</td> <td>74.00</td> <td>49.26</td> <td>33.92</td> <td>9.85</td> <td>56.93</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>11</td> <td>8206.00</td> <td>38.67</td> <td>-35.33</td> <td>74.00</td> <td>48.60</td> <td>35.27</td> <td>10.85</td> <td>56.05</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>12</td> <td>10450.00</td> <td>40.01</td> <td>-33.99</td> <td>74.00</td> <td>47.27</td> <td>36.73</td> <td>12.90</td> <td>56.89</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>13</td> <td>12708.00</td> <td>41.64</td> <td>-32.36</td> <td>74.00</td> <td>45.23</td> <td>38.29</td> <td>14.27</td> <td>56.15</td> <td>152</td> <td>325</td> <td>Peak</td> </tr> </tbody> </table>													Freq	Level	Over Limit	Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	75.09	31.71	-8.29	40.00	55.43	5.12	1.10	29.94	---	---	Peak	2 Q	240.06	42.26	-3.74	46.00	59.02	11.35	1.82	29.93	100	46	QP	3	258.96	39.07	-6.93	46.00	54.59	12.52	1.89	29.93	---	---	Peak	4	345.50	30.99	-15.01	46.00	44.58	14.20	2.14	29.93	---	---	Peak	5	479.90	39.31	-6.69	46.00	49.35	17.40	2.48	29.92	---	---	Peak	6 !	720.00	40.27	-5.73	46.00	47.91	19.30	2.99	29.93	---	---	Peak	7 P	881.00	42.65			48.73	20.58	3.28	29.94	---	---	Peak	8	2628.00	32.94	-41.06	74.00	51.23	32.63	5.91	56.83	---	---	Peak	9	3666.00	33.15	-40.85	74.00	51.05	33.10	7.15	58.15	---	---	Peak	10	6642.00	36.10	-37.90	74.00	49.26	33.92	9.85	56.93	---	---	Peak	11	8206.00	38.67	-35.33	74.00	48.60	35.27	10.85	56.05	---	---	Peak	12	10450.00	40.01	-33.99	74.00	47.27	36.73	12.90	56.89	---	---	Peak	13	12708.00	41.64	-32.36	74.00	45.23	38.29	14.27	56.15	152	325	Peak
	Freq	Level	Over Limit	Limit	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	A/Pos	T/Pos	Remark																																																																																																																																																																																				
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																					
1	75.09	31.71	-8.29	40.00	55.43	5.12	1.10	29.94	---	---	Peak																																																																																																																																																																																				
2 Q	240.06	42.26	-3.74	46.00	59.02	11.35	1.82	29.93	100	46	QP																																																																																																																																																																																				
3	258.96	39.07	-6.93	46.00	54.59	12.52	1.89	29.93	---	---	Peak																																																																																																																																																																																				
4	345.50	30.99	-15.01	46.00	44.58	14.20	2.14	29.93	---	---	Peak																																																																																																																																																																																				
5	479.90	39.31	-6.69	46.00	49.35	17.40	2.48	29.92	---	---	Peak																																																																																																																																																																																				
6 !	720.00	40.27	-5.73	46.00	47.91	19.30	2.99	29.93	---	---	Peak																																																																																																																																																																																				
7 P	881.00	42.65			48.73	20.58	3.28	29.94	---	---	Peak																																																																																																																																																																																				
8	2628.00	32.94	-41.06	74.00	51.23	32.63	5.91	56.83	---	---	Peak																																																																																																																																																																																				
9	3666.00	33.15	-40.85	74.00	51.05	33.10	7.15	58.15	---	---	Peak																																																																																																																																																																																				
10	6642.00	36.10	-37.90	74.00	49.26	33.92	9.85	56.93	---	---	Peak																																																																																																																																																																																				
11	8206.00	38.67	-35.33	74.00	48.60	35.27	10.85	56.05	---	---	Peak																																																																																																																																																																																				
12	10450.00	40.01	-33.99	74.00	47.27	36.73	12.90	56.89	---	---	Peak																																																																																																																																																																																				
13	12708.00	41.64	-32.36	74.00	45.23	38.29	14.27	56.15	152	325	Peak																																																																																																																																																																																				



Test Mode :	Mode 3	Temperature :	24~25°C																																																																																																																																																																		
Test Engineer :	Leo Liao	Relative Humidity :	48~49%																																																																																																																																																																		
Test Distance :	3m	Polarization :	Vertical																																																																																																																																																																		
Function Type :	WCDMA Band V Idle + Bluetooth Idle + WLAN Idle + USB Cable (Data Link with Notebook) + GPS Rx																																																																																																																																																																				
Remark :	#7 is system simulator signal which can be ignored.																																																																																																																																																																				
<p>Date: 2014-06-02</p> <p>Site : 03CH01-SZ Condition : FCC CLASS-B 3m LF_ANT_131026 VERTICAL Project : (FC) 452005 Mode : Mode 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>75.09</td> <td>26.98</td> <td>-13.02</td> <td>40.00</td> <td>50.70</td> <td>5.12</td> <td>1.10</td> <td>29.94</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>240.06</td> <td>39.50</td> <td>-6.50</td> <td>46.00</td> <td>56.26</td> <td>11.35</td> <td>1.82</td> <td>29.93</td> <td>100</td> <td>325 Peak</td> </tr> <tr> <td>3</td> <td>270.57</td> <td>35.08</td> <td>-10.92</td> <td>46.00</td> <td>50.99</td> <td>12.11</td> <td>1.91</td> <td>29.93</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>360.20</td> <td>30.06</td> <td>-15.94</td> <td>46.00</td> <td>43.02</td> <td>14.80</td> <td>2.17</td> <td>29.93</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>5</td> <td>479.90</td> <td>30.81</td> <td>-15.19</td> <td>46.00</td> <td>40.85</td> <td>17.40</td> <td>2.48</td> <td>29.92</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>6</td> <td>736.10</td> <td>31.97</td> <td>-14.03</td> <td>46.00</td> <td>38.96</td> <td>19.90</td> <td>3.04</td> <td>29.93</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>7 P</td> <td>881.00</td> <td>42.50</td> <td></td> <td></td> <td>48.58</td> <td>20.58</td> <td>3.28</td> <td>29.94</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>8</td> <td>2430.00</td> <td>36.54</td> <td>-37.46</td> <td>74.00</td> <td>55.50</td> <td>32.16</td> <td>5.65</td> <td>56.77</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>9</td> <td>4720.00</td> <td>36.33</td> <td>-37.67</td> <td>74.00</td> <td>51.93</td> <td>33.59</td> <td>8.25</td> <td>57.44</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>10</td> <td>6612.00</td> <td>37.68</td> <td>-36.32</td> <td>74.00</td> <td>50.76</td> <td>33.94</td> <td>9.85</td> <td>56.87</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>11</td> <td>8892.00</td> <td>39.12</td> <td>-34.88</td> <td>74.00</td> <td>47.02</td> <td>36.26</td> <td>11.10</td> <td>55.26</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>12</td> <td>9570.00</td> <td>39.46</td> <td>-34.54</td> <td>74.00</td> <td>47.33</td> <td>36.40</td> <td>11.92</td> <td>56.19</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13</td> <td>12932.00</td> <td>42.39</td> <td>-31.61</td> <td>74.00</td> <td>45.54</td> <td>38.68</td> <td>14.34</td> <td>56.17</td> <td>105</td> <td>159 Peak</td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Line	Limit	Level	Factor	Loss	Factor	cm	deg	1	75.09	26.98	-13.02	40.00	50.70	5.12	1.10	29.94	---	--- Peak	2	240.06	39.50	-6.50	46.00	56.26	11.35	1.82	29.93	100	325 Peak	3	270.57	35.08	-10.92	46.00	50.99	12.11	1.91	29.93	---	--- Peak	4	360.20	30.06	-15.94	46.00	43.02	14.80	2.17	29.93	---	--- Peak	5	479.90	30.81	-15.19	46.00	40.85	17.40	2.48	29.92	---	--- Peak	6	736.10	31.97	-14.03	46.00	38.96	19.90	3.04	29.93	---	--- Peak	7 P	881.00	42.50			48.58	20.58	3.28	29.94	---	--- Peak	8	2430.00	36.54	-37.46	74.00	55.50	32.16	5.65	56.77	---	--- Peak	9	4720.00	36.33	-37.67	74.00	51.93	33.59	8.25	57.44	---	--- Peak	10	6612.00	37.68	-36.32	74.00	50.76	33.94	9.85	56.87	---	--- Peak	11	8892.00	39.12	-34.88	74.00	47.02	36.26	11.10	55.26	---	--- Peak	12	9570.00	39.46	-34.54	74.00	47.33	36.40	11.92	56.19	---	--- Peak	13	12932.00	42.39	-31.61	74.00	45.54	38.68	14.34	56.17	105	159 Peak
Freq	Level	Over	Limit			Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																									
		Line	Limit	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																												
1	75.09	26.98	-13.02	40.00	50.70	5.12	1.10	29.94	---	--- Peak																																																																																																																																																											
2	240.06	39.50	-6.50	46.00	56.26	11.35	1.82	29.93	100	325 Peak																																																																																																																																																											
3	270.57	35.08	-10.92	46.00	50.99	12.11	1.91	29.93	---	--- Peak																																																																																																																																																											
4	360.20	30.06	-15.94	46.00	43.02	14.80	2.17	29.93	---	--- Peak																																																																																																																																																											
5	479.90	30.81	-15.19	46.00	40.85	17.40	2.48	29.92	---	--- Peak																																																																																																																																																											
6	736.10	31.97	-14.03	46.00	38.96	19.90	3.04	29.93	---	--- Peak																																																																																																																																																											
7 P	881.00	42.50			48.58	20.58	3.28	29.94	---	--- Peak																																																																																																																																																											
8	2430.00	36.54	-37.46	74.00	55.50	32.16	5.65	56.77	---	--- Peak																																																																																																																																																											
9	4720.00	36.33	-37.67	74.00	51.93	33.59	8.25	57.44	---	--- Peak																																																																																																																																																											
10	6612.00	37.68	-36.32	74.00	50.76	33.94	9.85	56.87	---	--- Peak																																																																																																																																																											
11	8892.00	39.12	-34.88	74.00	47.02	36.26	11.10	55.26	---	--- Peak																																																																																																																																																											
12	9570.00	39.46	-34.54	74.00	47.33	36.40	11.92	56.19	---	--- Peak																																																																																																																																																											
13	12932.00	42.39	-31.61	74.00	45.54	38.68	14.34	56.17	105	159 Peak																																																																																																																																																											



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
ESClO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	May 26, 2014	Feb. 20, 2015	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Mar. 04, 2014	May 26, 2014	Mar. 03, 2015	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Mar. 04, 2014	May 26, 2014	Mar. 03, 2015	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Dec. 17, 2013	May 26, 2014	Dec. 16, 2014	Conduction (CO01-SZ)
ESClO TEST Receiver	R&S	ESCI	100724	9kHz~3GHz	Feb. 21, 2014	Jun. 02, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Spectrum Analyzer	Agilent Technologies	N9038A	MY52260185	20Hz~26.5GHz	May 26, 2014	Jun. 02, 2014	May 25, 2015	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 09, 2014	Jun. 02, 2014	May 08, 2015	Radiation (03CH01-SZ)
Bilog Antenna	TESEQ	CBL 6112D	23188	30MHz~2GHz	Oct. 26, 2013	Jun. 02, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS Lindgren	3117	00119436	1GHz~18GHz	Oct. 26, 2013	Jun. 02, 2014	Oct. 25, 2014	Radiation (03CH01-SZ)
Amplifier	ADVANTEST	BB525C	E9007003	9kHz~3000MHz	Feb. 21, 2014	Jun. 02, 2014	Feb. 20, 2015	Radiation (03CH01-SZ)
Amplifier	Yiai	AV3860B	04030	2GHz~26.5GHz	May 08, 2014	Jun. 02, 2014	May 07, 2015	Radiation (03CH01-SZ)
AC Source(AVR)	Chroma	61601	616010001985	100Vac~250Vac	Mar. 25, 2014	Jun. 02, 2014	Mar. 24, 2015	Radiation (03CH01-SZ)
Turn Table	EM Electronics	EM 1000	N/A	0~360 degree	NCR	Jun. 02, 2014	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM Electronics	EM 1000	N/A	1 m~4 m	NCR	Jun. 02, 2014	NCR	Radiation (03CH01-SZ)



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.31
--	-------------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.90
--	-------------