



# RF TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-ZM8300G  
**Product** NB-IoT/eMTC Module  
**Brand** ZTE  
**Model** ZM8300G  
**Report No.** RXA1709-0333RF05R1  
**Issue Date** November 14, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 24E (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

*Jiang peng Lan*

*Performed by: Jiangpeng Lan*

*Kai Xu*

*Approved by: Kai Xu*

---

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

1. Test Laboratory .....	4
1.1. Notes of the test report.....	4
1.2. Test facility .....	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	9
5.1. RF Power Output .....	9
5.2. Effective Isotropic Radiated Power .....	11
5.3. Occupied Bandwidth .....	14
5.4. Band Edge Compliance.....	18
5.5. Peak-to-Average Power Ratio (PAPR).....	27
5.6. Frequency Stability.....	29
5.7. Spurious Emissions at Antenna Terminals.....	34
5.8. Radiates Spurious Emission .....	45
6. Main Test Instruments .....	56
ANNEX A: EUT Appearance and Test Setup .....	57
A.1 EUT Appearance.....	57
A.2 Test Setup.....	59

## Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Effective Isotropic Radiated power	24.232(c)	PASS
3	Occupied Bandwidth	2.1049	PASS
4	Band Edge Compliance	2.1051 /24.238(a)	PASS
5	Peak-to-Average Power Ratio	24.232/KDB 971168 D01(5.7)	PASS
6	Frequency Stability	2.1055 / 24.235	PASS
7	Spurious Emissions at Antenna Terminals	2.1051 / 24.238(a)	PASS
8	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: October 20, 2017~ November 1, 2017			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

### 1.2. Test facility

#### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### General information

EUT Description			
Model	ZM8300G		
IMEI	865199030108496		
Hardware Version	ek8A		
Software Version	EN_ZTE_ZM8300GV1.0.0B01		
Power Supply	External power supply		
Antenna Type	The EUT don't have standard Antenna, The Antenna used for testing in this report is the after-market accessory (Dipole Antenna)		
Test Mode(s)	LTE Band 2;		
Test Modulation	QPSK,16QAM		
LTE Category	M1		
Maximum E.I.R.P	LTE Band 2:	25.43dBm	
Rated Power Supply Voltage	3.6V		
Extreme Voltage	Minimum: 3.0V    Maximum: 4.2V		
Extreme Temperature	Lowest: -40°C    Highest: +85°C		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
Note: The information of the EUT is declared by the manufacturer.			



### **3. Applied Standards**

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC CFR47 Part 2 (2017)**

**FCC CFR 47 Part 24E (2017)**

**ANSI/TIA-603-D (2010)**

**KDB 971168 D01 Power Meas License Digital Systems v03**

### 4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Effective Isotropic Radiated power	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Occupied Bandwidth	O	O	O	O	O	O	O	O	-	-	O	-	O	-
Band Edge Compliance	O	O	O	O	O	O	O	O	O	-	O	O	-	O
Peak-to-Average Power Ratio	O	O	O	O	O	O	O	O	-	-	O	O	O	O
Frequency Stability	O	O	O	O	O	O	O	O	-	-	O	-	O	-
Conducted Spurious Emissions	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Radiates Spurious Emission	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													



## 5. Test Case Results

### 5.1.RF Power Output


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

#### Test Setup

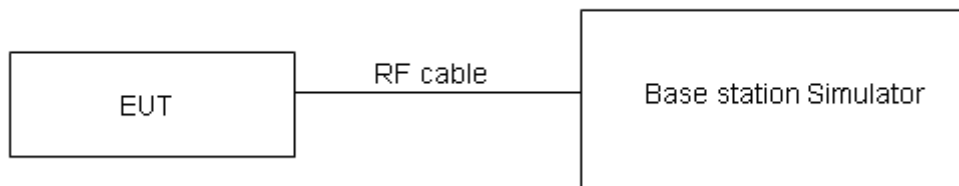

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

#### Limits

No specific RF power output requirements in part 2.1046.

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.



## Test Results

Mode	Bandwidth	Channel/ Frequency(MHz)	RB	Index	Conducted Power (dBm)	
					QPSK	16QAM
Band2	1.4MHz	18607/1850.7	1#0	0	23.09	22.73
			6#0	0	21.41	21.24
		18900/1880	1#0	0	23.21	22.70
			6#0	0	21.49	21.39
		19193/1909.3	1#5	0	23.52	22.01
			6#0	0	21.59	21.77
	3MHz	18615/1851.5	1#0	0	23.02	22.61
			6#0	0	21.36	21.50
		18900/1880	1#0	0	23.15	22.71
			6#0	0	21.39	21.52
		19185/1908.5	1#5	1	23.43	22.02
			6#0	1	21.44	21.89
	5MHz	18625/1852.5	1#0	0	23.12	23.64
			6#0	0	22.42	21.54
		18900/1880	1#0	0	23.46	23.29
			6#0	0	22.56	21.79
		19175/1907.5	1#5	3	23.49	23.24
			6#0	3	22.42	21.81
	10MHz	18650/1855	1#0	0	23.37	23.17
			4#0	0	23.48	22.83
		18900/1880	1#0	0	23.24	23.81
			4#0	0	23.44	22.41
		19150/1905	1#5	7	23.14	23.62
			4#2	7	23.39	22.65
	15MHz	18675/1857.5	1#0	0	23.05	23.78
			6#0	0	23.29	23.43
		18900/1880	1#0	0	23.45	23.22
			6#0	0	23.43	23.79
		19125/1902.5	1#5	11	23.08	23.37
			6#0	11	23.42	23.49
	20MHz	18700/1860	1#0	0	23.36	23.21
			6#0	0	23.29	23.34
		18900/1880	1#0	0	23.07	23.70
			6#0	0	23.35	23.34
		19100/1900	1#5	15	23.40	23.26
			6#0	15	23.42	23.56

## 5.2. Effective Isotropic Radiated Power

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Methods of Measurement

1. The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-D-2010.

a) Connect the equipment as illustrated. Mount the equipment with the manufacturer specified antenna in a vertical orientation on a manufacturer specified mounting surface located on a non-conducting rotating platform of a RF anechoic chamber (preferred) or a standard radiation site.

b) Key the transmitter, then rotate the EUT 360° azimuthally and record spectrum analyzer power level (LVL) measurements at angular increments that are sufficiently small to permit resolution of all peaks. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading at each angular increment. (Note: several batteries may be needed to offset the effect of battery voltage droop, which should not exceed 5% of the manufactured specified battery voltage during transmission).

c) Replace the transmitter under test with a vertically polarized half-wave dipole (or an antenna whose gain is known relative to an ideal half-wave dipole). The center of the antenna should be at the same location as the center of the antenna under test.

d) Connect the antenna to a signal generator with a known output power and record the path loss (in dB) as LOSS. If a standard radiation test site is used, raise and lower the test antenna to obtain a maximum reading.  $LOSS = \text{Generator Output Power (dBm)} - \text{Analyzer reading (dBm)}$

e) Determine the effective radiated output power at each angular position from the readings in steps b) and d) using the following equation:  $ERP \text{ (dBm)} = \text{LVL (dBm)} + \text{LOSS (dB)}$

f) The maximum ERP is the maximum value determined in the preceding step.


g) When calculating ERP, in addition to knowing the antenna radiation and matching characteristics, it is necessary to know the loss values of all elements (e.g. transmission line attenuation, mismatches, filters, combiners) interposed between the point where transmitter output power is measured, and the point where power is applied to the antenna. ERP can then be calculated as follows:

$$ERP \text{ (dBm)} = \text{Output Power (dBm)} - \text{Losses (dB)} + \text{Antenna Gain (dBd)}$$

where: dBd refers to gain relative to an ideal dipole.

$$EIRP \text{ (dBm)} = ERP \text{ (dBm)} + 2.15 \text{ (dB)}$$

**Test setup**

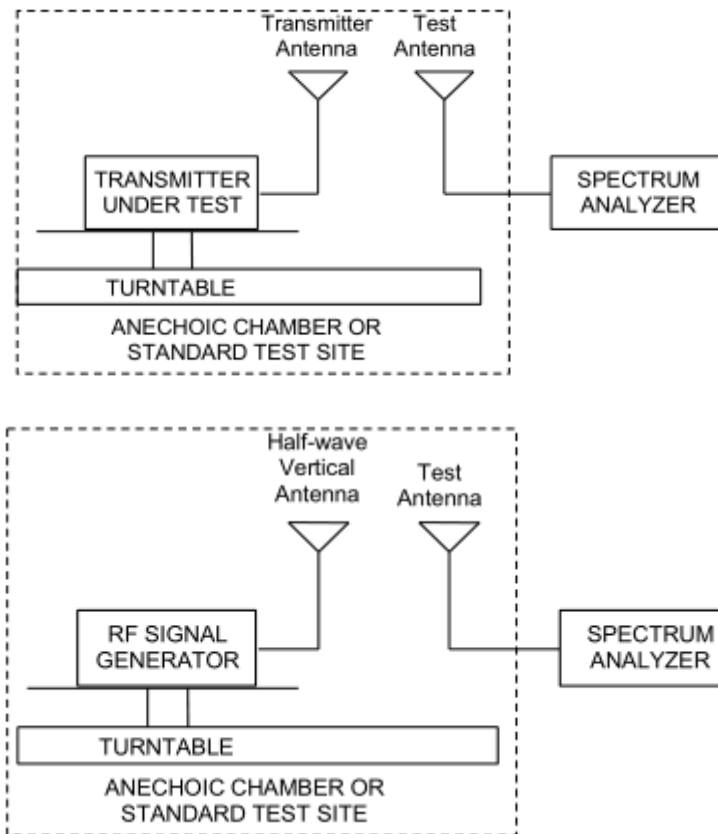

**Limits**

Rule Part 24.232(c) Mobile and portable stations are limited to 2 watts EIRP.

Rule Part 24.232(e) Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Limit (EIRP)	$\leq 2 \text{ W}$ (33 dBm)
--------------	-----------------------------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 1.19 \text{ dB}$

**Test Results:**

The measurement is performed for both of horizontal and vertical antenna Polarization, and only the data of worst mode is recorded in this report.

Mode	Band width	Modulation	Channel/ Frequency (MHz)	Polarization	RB	Index	Output power (dBm)	Losses (dBm)	Ant gain (dBi)	EIRP (dBm)
Band2	1.4MHz	QPSK	8607/1850.7	H	1#0	0	-32.33	-54.89	1.90	24.46
			18900/1880	H	1#2	0	-34.36	-56.66	1.92	24.23
			19193/1909.3	H	1#5	0	-35.68	-58.09	1.91	24.31
		16QAM	18607/1850.7	H	1#0	0	-32.50	-54.89	1.90	24.29
			18900/1880	H	1#2	0	-34.52	-56.66	1.92	24.06
			19193/1909.3	H	1#5	0	-35.85	-58.09	1.91	24.15
	3MHz	QPSK	18615/1851.5	H	1#0	0	-32.53	-54.93	1.91	24.31
			18900/1880	H	1#5	0	-34.52	-56.66	1.94	24.08
			19185/1908.5	H	1#5	1	-35.82	-58.08	1.91	24.17
		16QAM	18615/1851.5	H	1#0	0	-32.69	-54.93	1.91	24.14
			18900/1880	H	1#5	0	-34.69	-56.66	1.94	23.91
			19185/1908.5	H	1#5	1	-35.99	-58.08	1.91	24.00
	5MHz	QPSK	18625/1852.5	H	1#0	0	-33.21	-54.98	1.92	23.69
			18900/1880	H	1#5	1	-35.21	-56.66	1.94	23.40
			19175/1907.5	H	1#5	3	-36.06	-58.05	1.90	23.89
		16QAM	18625/1852.5	H	1#0	0	-33.35	-54.98	1.92	23.54
			18900/1880	H	1#5	1	-35.35	-56.66	1.94	23.25
			19175/1907.5	H	1#5	3	-36.21	-58.05	1.90	23.75
	10MHz	QPSK	18650/1855	H	4#0	0	-32.66	-55.09	1.91	24.33
			18900/1880	H	4#2	3	-34.50	-56.66	1.94	24.10
			19150/1905	H	4#2	7	-35.74	-58.01	1.92	24.19
		16QAM	18650/1855	H	4#0	0	-32.83	-55.09	1.91	24.16
			18900/1880	H	4#2	3	-34.67	-56.66	1.94	23.93
			19150/1905	H	4#2	7	-35.91	-58.01	1.92	24.02
	15MHz	QPSK	18675/1857.5	H	1#0	0	-32.24	-55.23	1.93	24.92
			18900/1880	H	1#5	5	-33.82	-56.66	1.94	24.79
			19125/1902.5	H	1#5	11	-35.15	-57.95	1.92	24.72
		16QAM	18675/1857.5	H	1#0	0	-32.39	-55.23	1.93	24.77
			18900/1880	H	1#5	5	-33.96	-56.66	1.94	24.64
			19125/1902.5	H	1#5	11	-35.30	-57.95	1.92	24.57
20MHz	QPSK	18700/1860	H	6#0	0	-31.85	-55.35	1.93	25.43	
		18900/1880	H	6#0	7	-33.30	-56.66	1.94	25.30	
		19100/1900	H	6#0	15	-34.55	-57.86	1.92	25.24	
	16QAM	18700/1860	H	6#0	0	-31.99	-55.35	1.93	25.29	
		18900/1880	H	6#0	7	-33.45	-56.66	1.94	25.16	
		19100/1900	H	6#0	15	-34.69	-57.86	1.92	25.09	

### 5.3.Occupied Bandwidth

#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The occupied bandwidth is measured using spectrum analyzer.

RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2

99% power and -26dBc occupied bandwidths are recorded. Spectrum analyzer plots are included on the following pages.

#### Test Setup

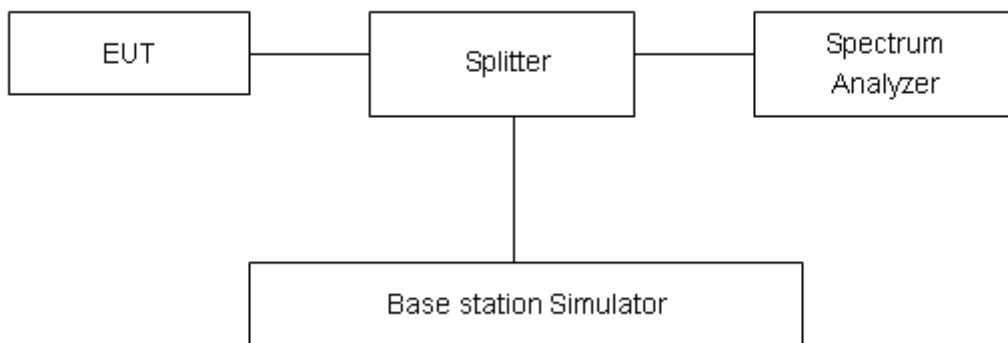

#### Limits

No specific occupied bandwidth requirements in part 2.1049.







#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 624\text{Hz}$ .









## Test Result

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	RB	Index	Bandwidth(MHz)	
						99% Power	-26dBc
Band2	1.4MHz	QPSK	18900/1880	6#0	0	1.1100	1.325
		16QAM	18900/1880	6#0	0	0.9501	1.278
	3MHz	QPSK	18900/1880	6#0	0	1.2564	2.141
		16QAM	18900/1880	6#0	0	0.9891	1.410
	5MHz	QPSK	18900/1880	6#0	0	1.1619	1.930
		16QAM	18900/1880	6#0	0	1.0886	2.061
	10MHz	QPSK	18900/1880	6#0	0	1.2222	2.024
		16QAM	18900/1880	6#0	0	1.0820	1.720
	15MHz	QPSK	18900/1880	6#0	0	1.2344	2.139
		16QAM	18900/1880	6#0	0	1.0504	1.743
	20MHz	QPSK	18900/1880	6#0	0	1.2371	1.933
		16QAM	18900/1880	6#0	0	1.1294	1.895

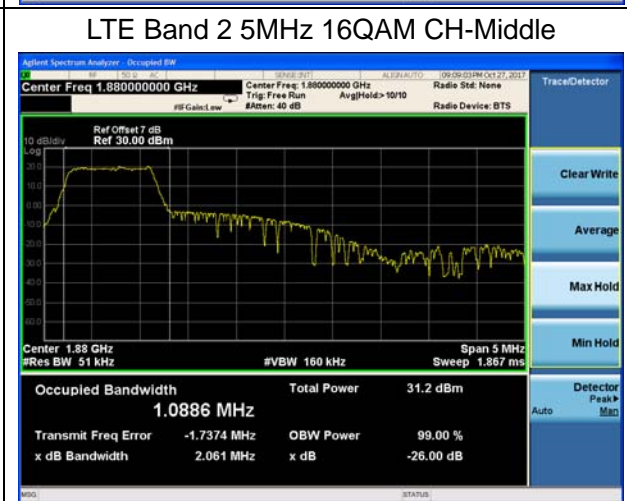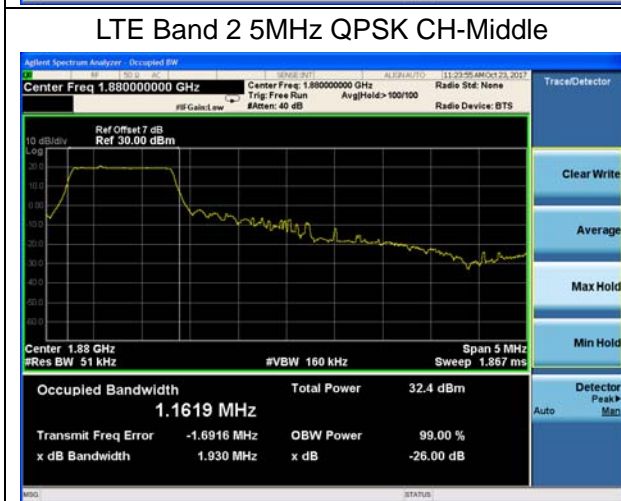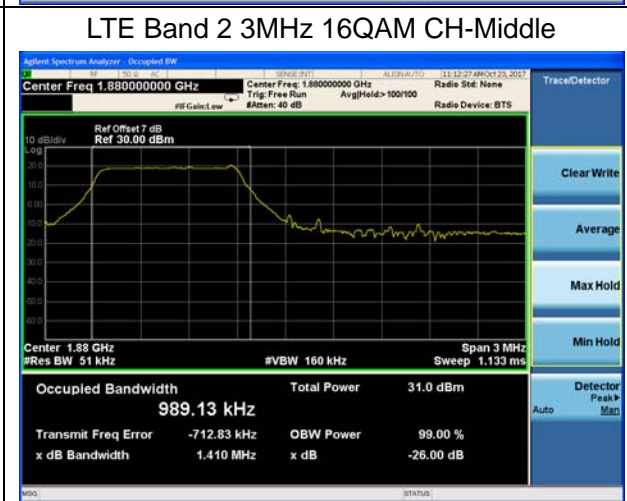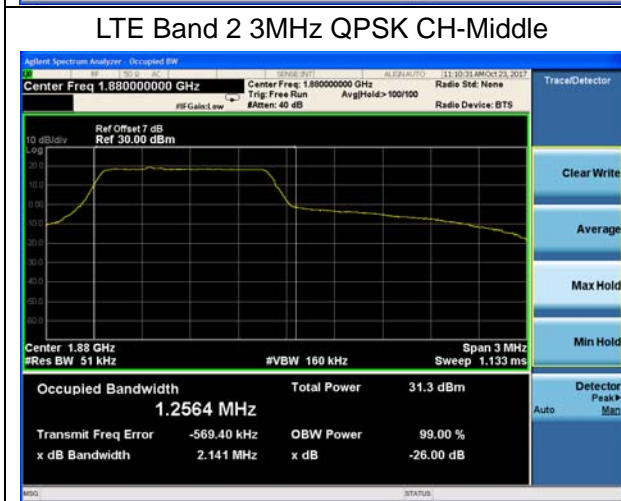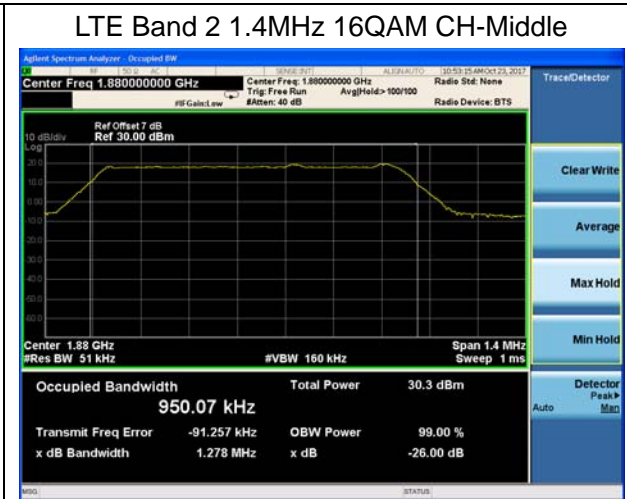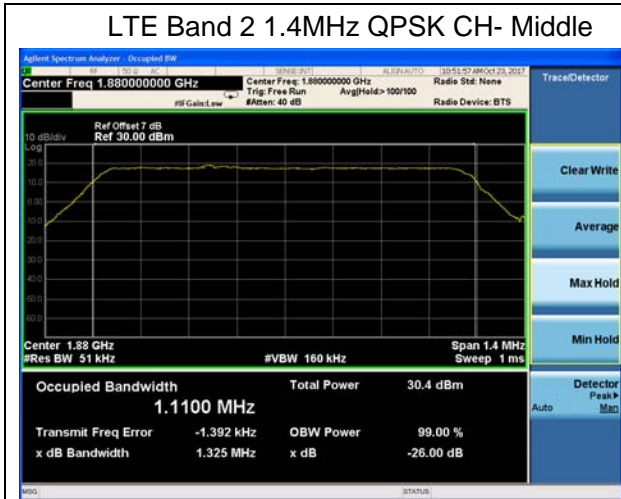



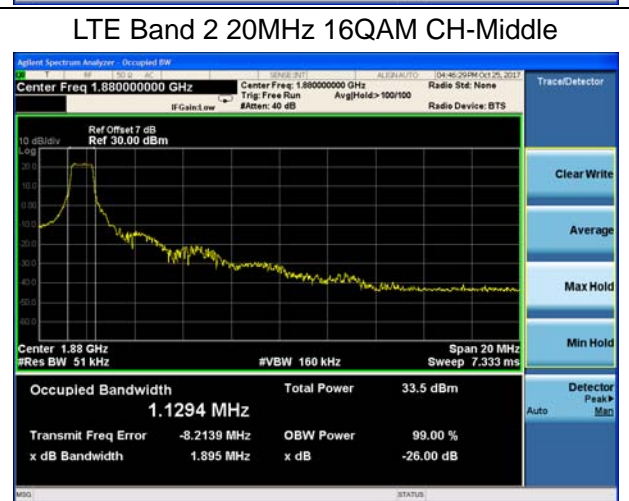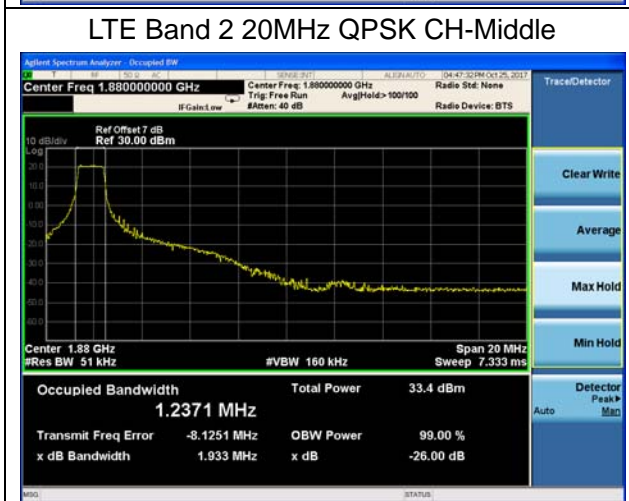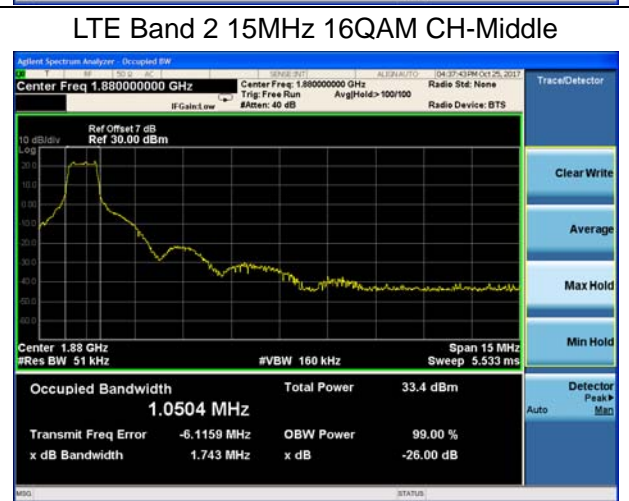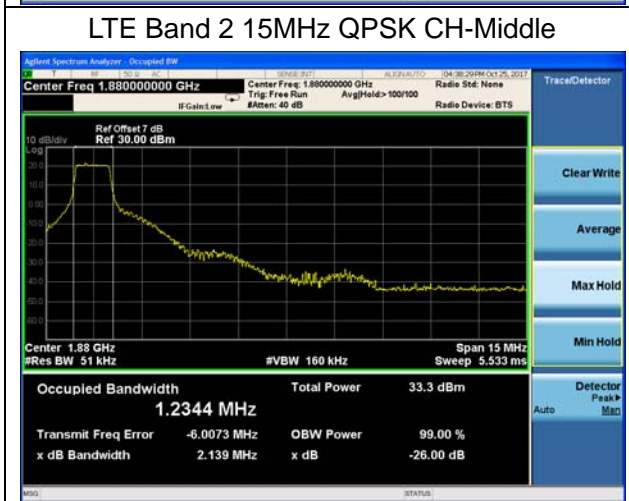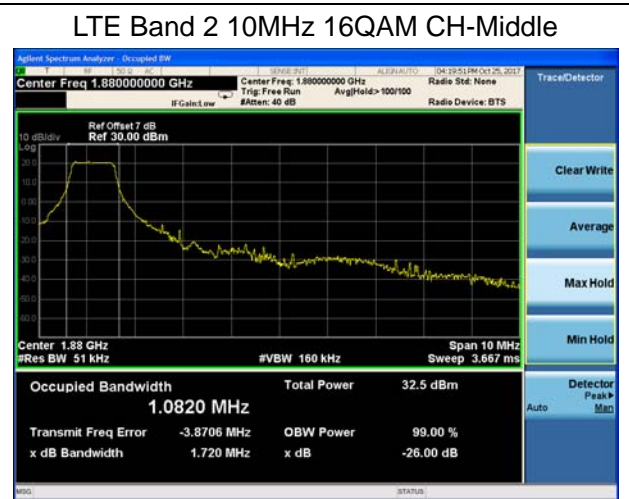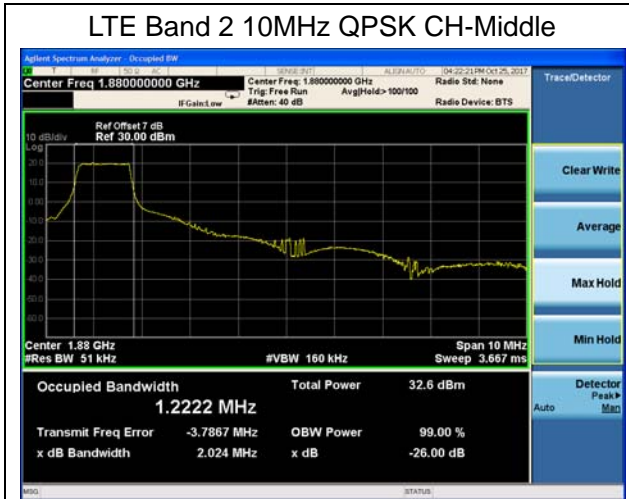

### 5.4. Band Edge Compliance


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The band edge of the lowest and highest channels were measured. The Average detector is used and RBW is set to 51kHz, VBW is set to 160kHz for LTE Band 2. Spectrum analyzer plots are included on the following pages.

#### Test Setup

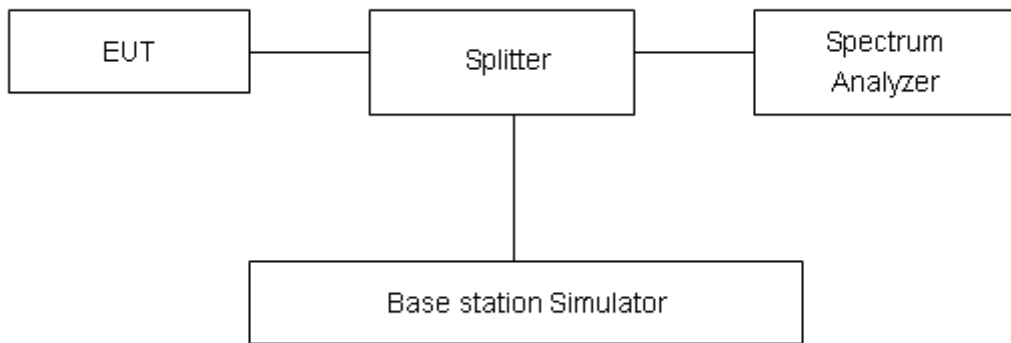

#### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10} (P)$  dB.”

Limit	-13 dBm
-------	---------


#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U=0.684$ dB.




Test Result:


LTE Band 2 1.4MHz QPSK 1RB CH-Low

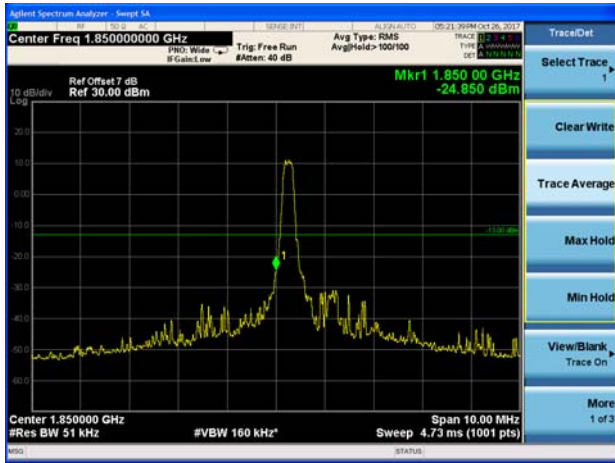


LTE Band 2 1.4MHz QPSK 1RB CH-High

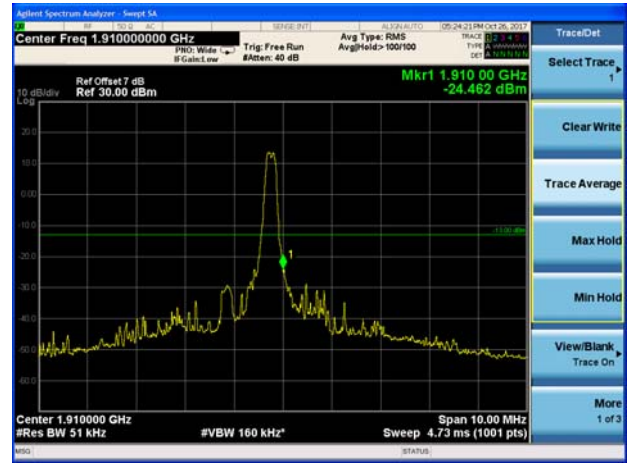


LTE Band 2 1.4MHz QPSK 100%RB CH-Low

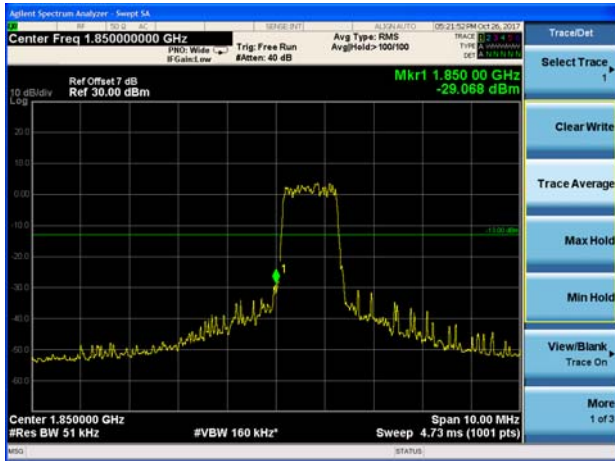

LTE Band 2 1.4MHz QPSK 100%RB CH-High

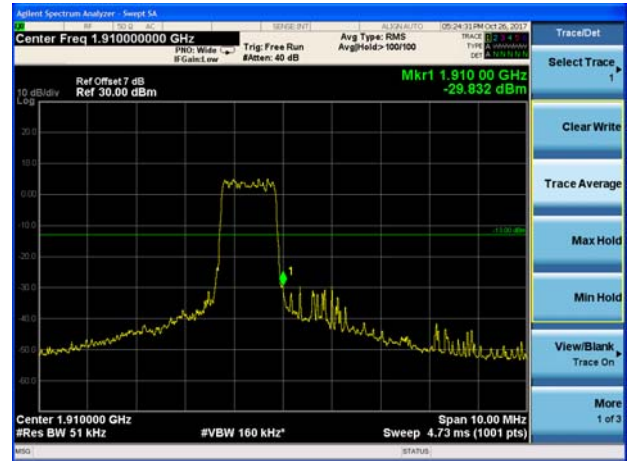

LTE Band 2 3MHz QPSK 1RB CH-Low

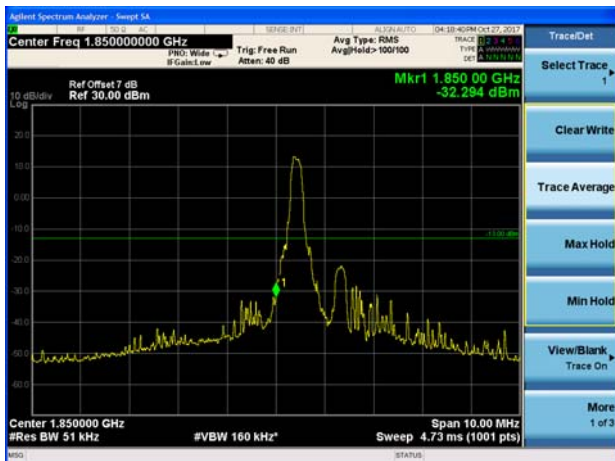

LTE Band 2 3MHz QPSK 1RB CH-High







LTE Band 2 3MHz QPSK 100%RB CH-Low




LTE Band 2 3MHz QPSK 100%RB CH-High

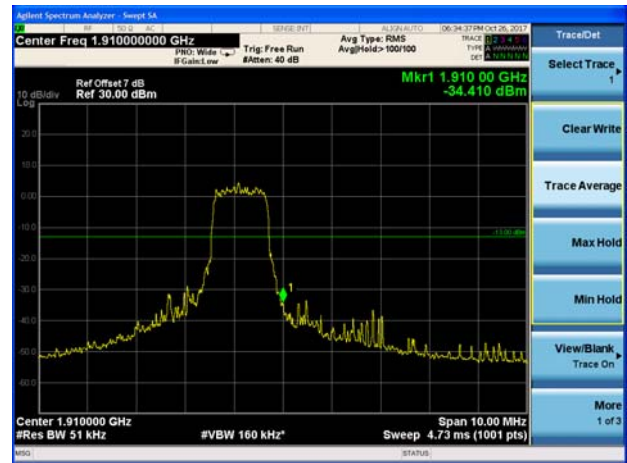


LTE Band 2 5MHz QPSK 1RB CH-Low

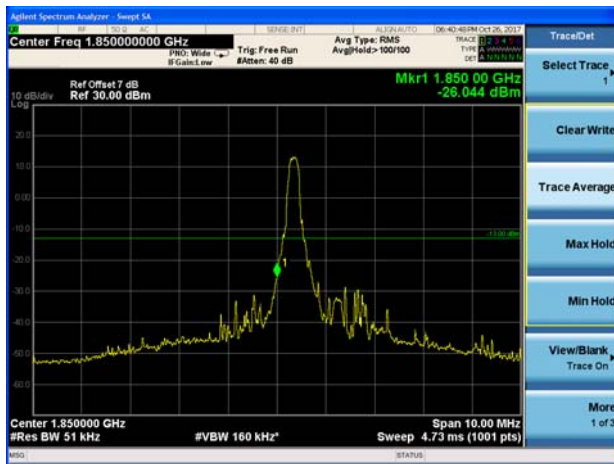


LTE Band 2 5MHz QPSK 1RB CH-High

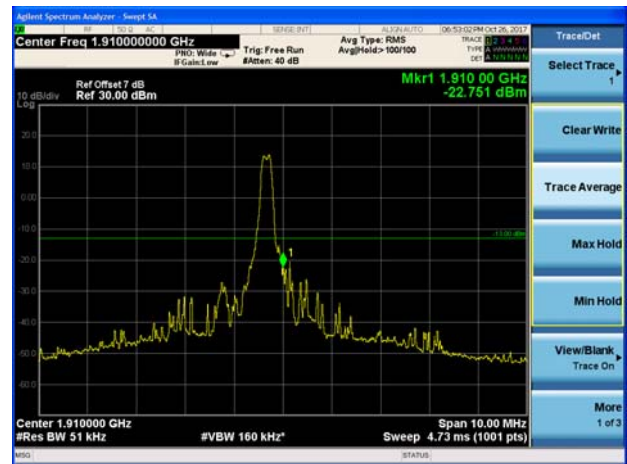


LTE Band 2 5MHz QPSK 100%RB CH-Low

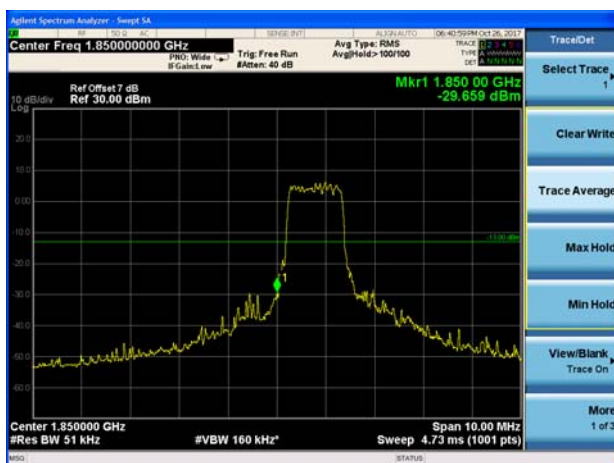


LTE Band 2 5MHz QPSK 100%RB CH-High

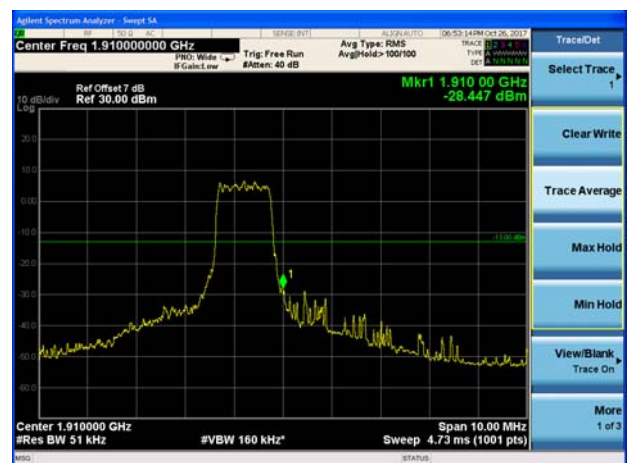


LTE Band 2 10MHz QPSK 1RB CH-Low

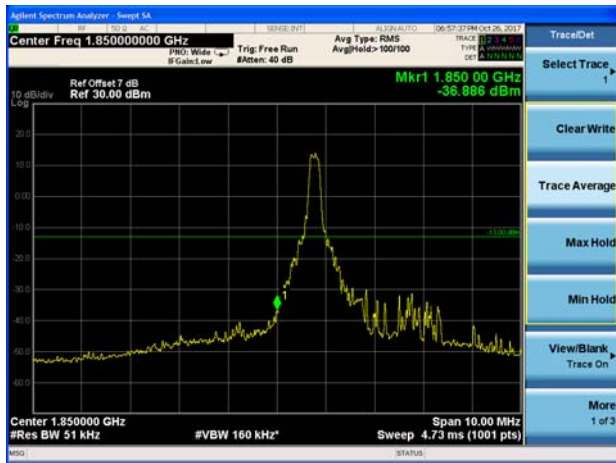


LTE Band 2 10MHz QPSK 1RB CH-High

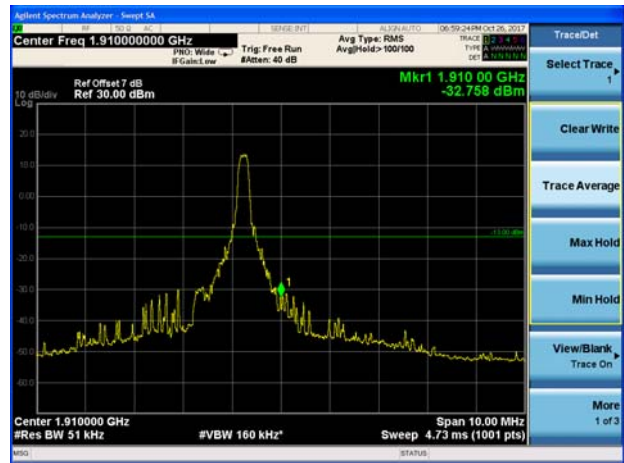


LTE Band 2 10MHz QPSK 100%RB CH-Low

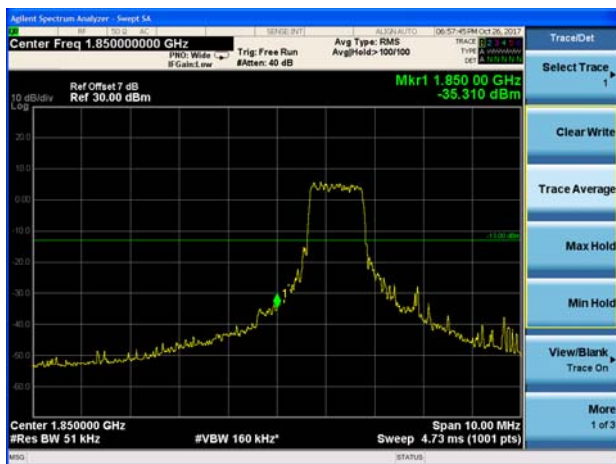


LTE Band 2 10MHz QPSK 100%RB CH-High

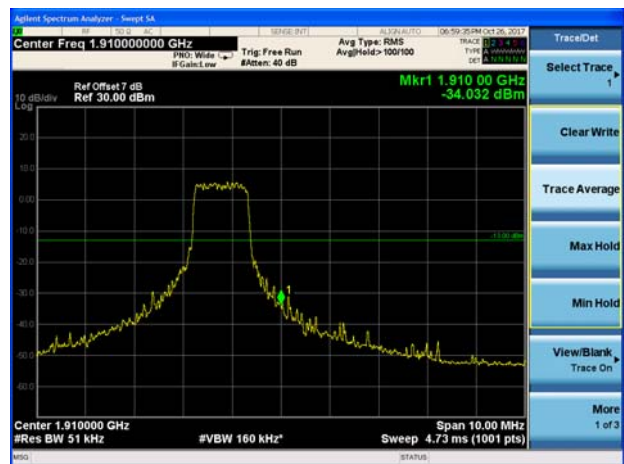

LTE Band 2 15MHz QPSK 1RB CH-Low

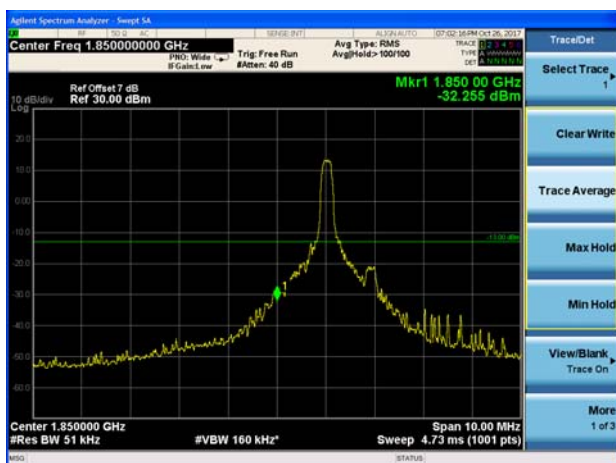


LTE Band 2 15MHz QPSK 1RB CH-High

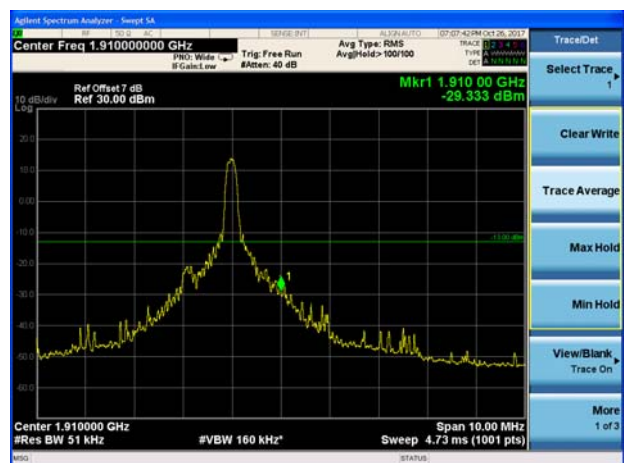





LTE Band 2 15MHz QPSK 100%RB CH-Low

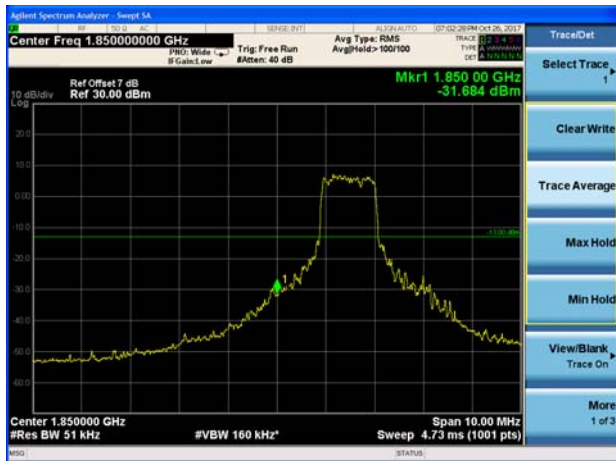


LTE Band 2 15MHz QPSK 100%RB CH-High

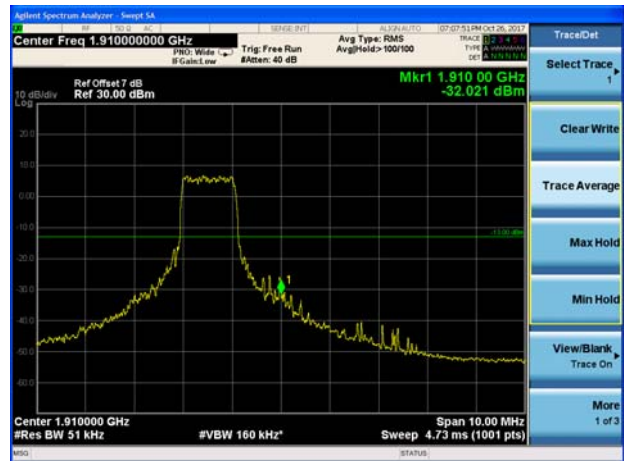


LTE Band 2 20MHz QPSK 1RB CH-Low

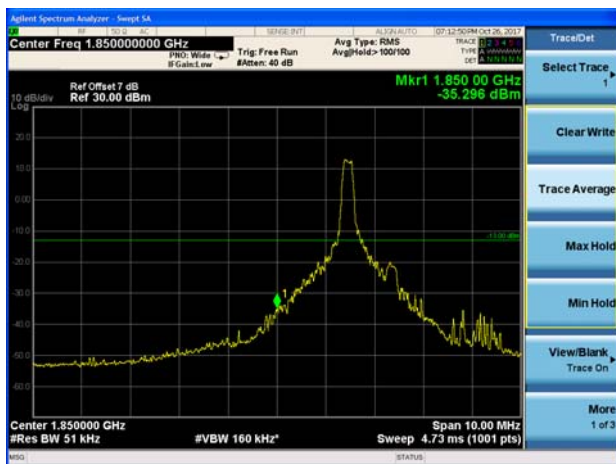


LTE Band 2 20MHz QPSK 1RB CH-High

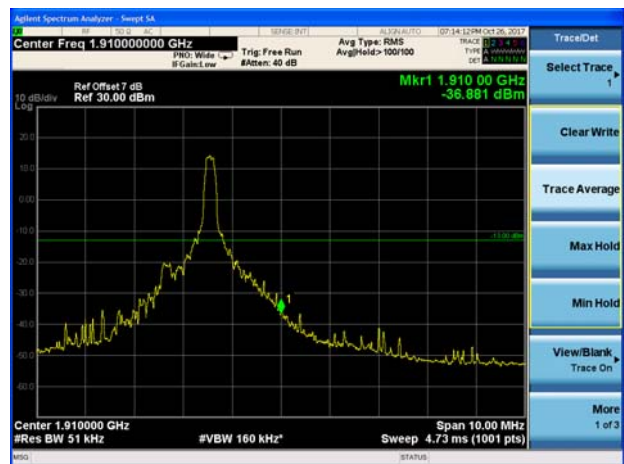

LTE Band 2 20MHz QPSK 100%RB CH-Low

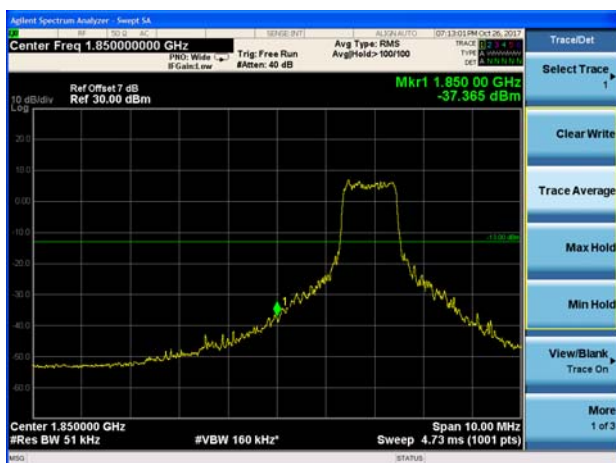


LTE Band 2 20MHz QPSK 100%RB CH-High

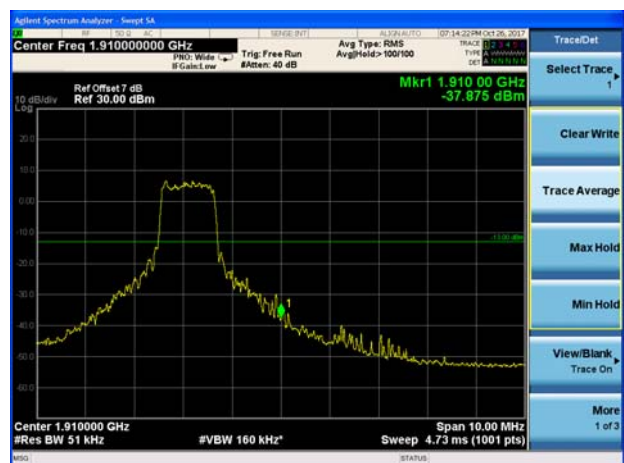





LTE Band 2 1.4MHz 16QAM 1RB CH-Low

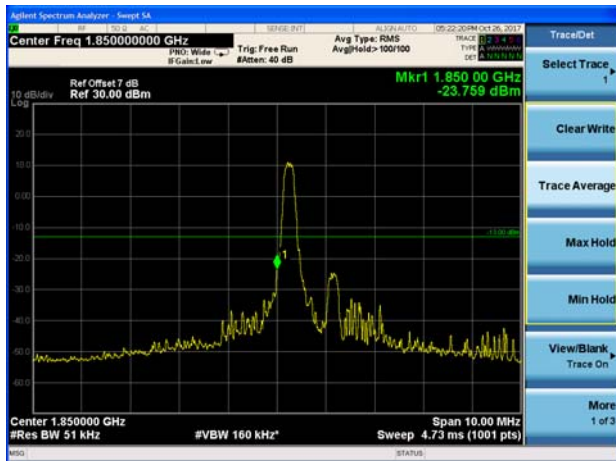


LTE Band 2 1.4MHz 16QAM 1RB CH-High

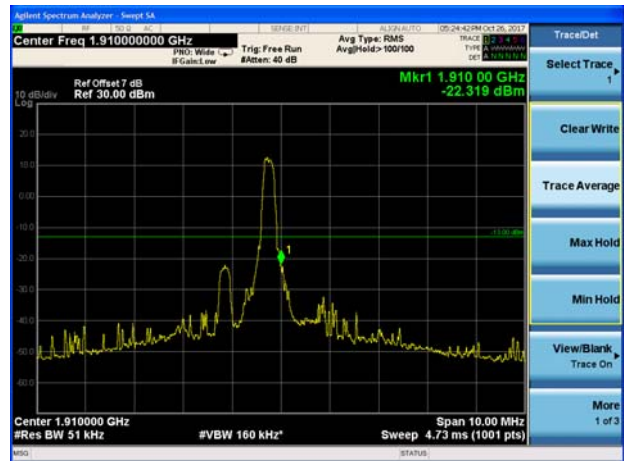


LTE Band 2 1.4MHz 16QAM 100%RB CH-Low

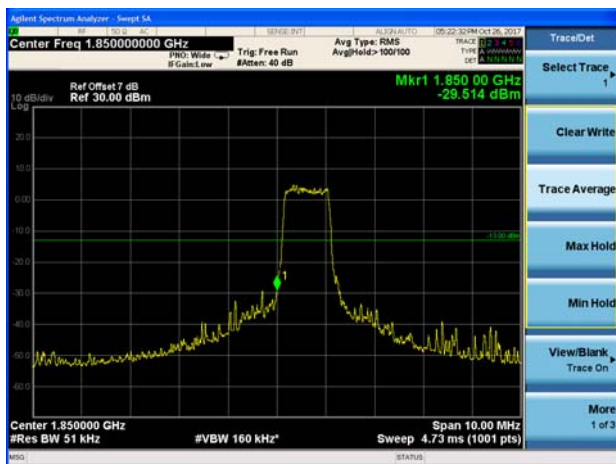


LTE Band 2 1.4MHz 16QAM 100%RB CH-High

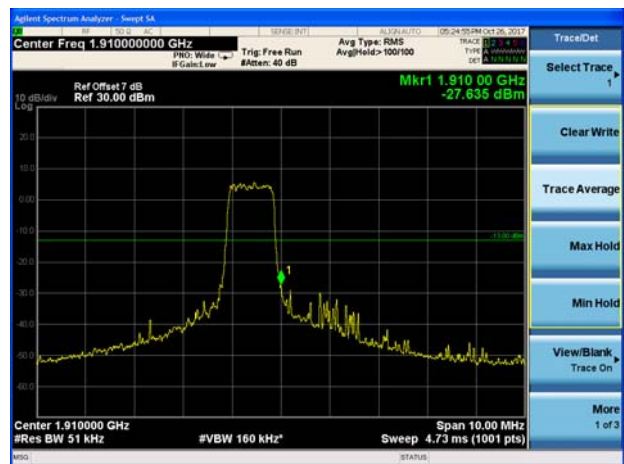

LTE Band 2 3MHz 16QAM 1RB CH-Low

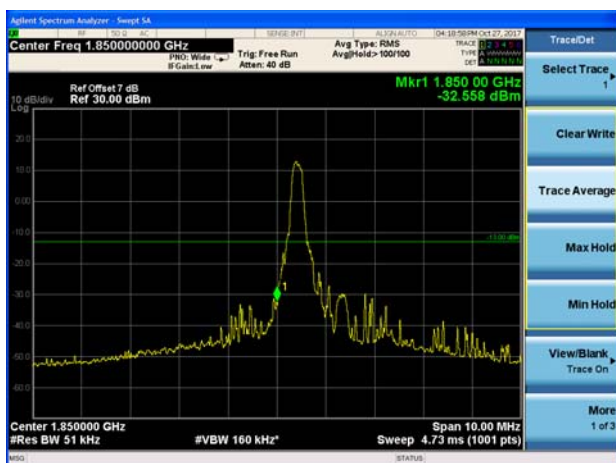


LTE Band 2 3MHz 16QAM 1RB CH-High

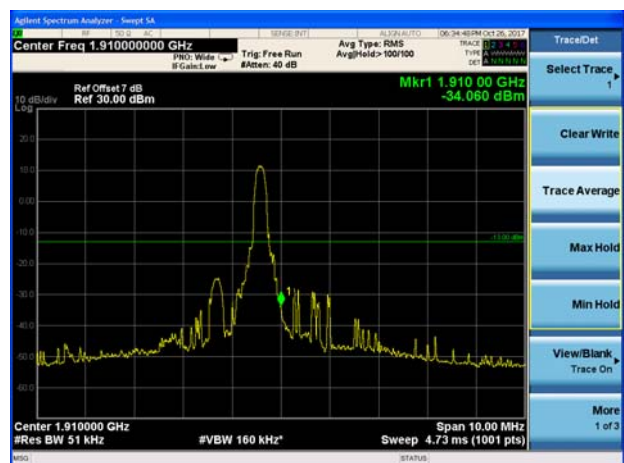





LTE Band 2 3MHz 16QAM 100%RB CH-Low

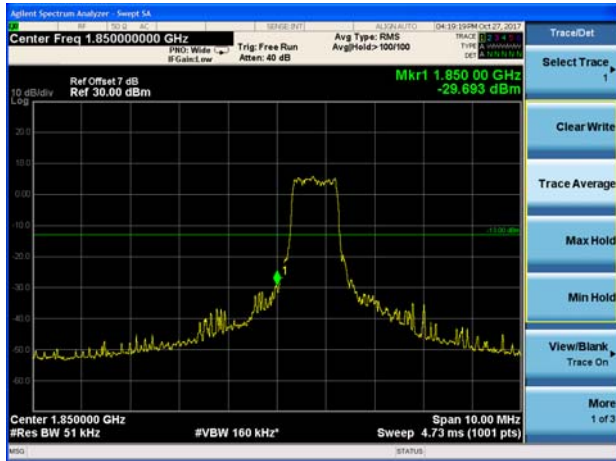


LTE Band 2 3MHz 16QAM 100%RB CH-High

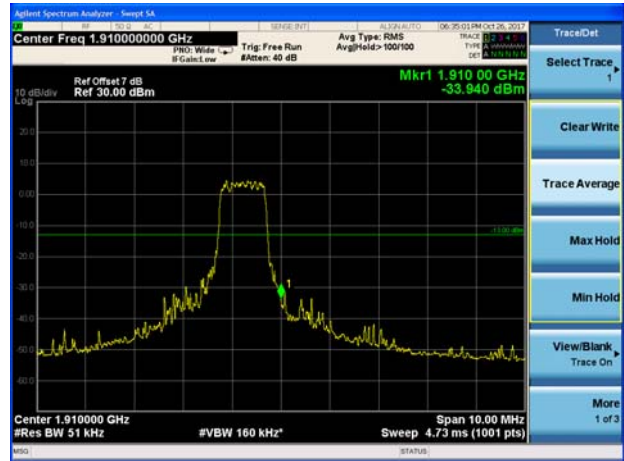


LTE Band 2 5MHz 16QAM 1RB CH-Low

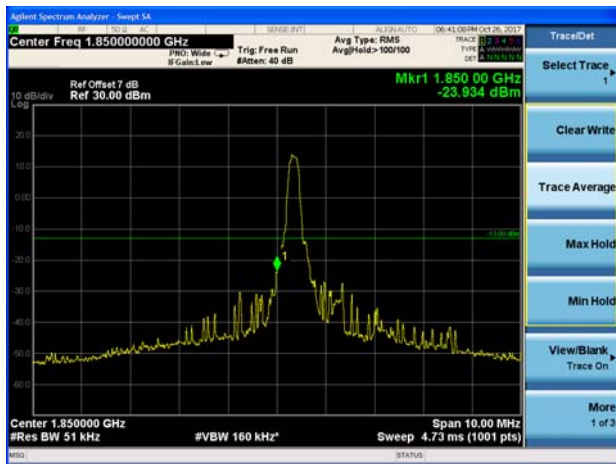


LTE Band 2 5MHz 16QAM 1RB CH-High

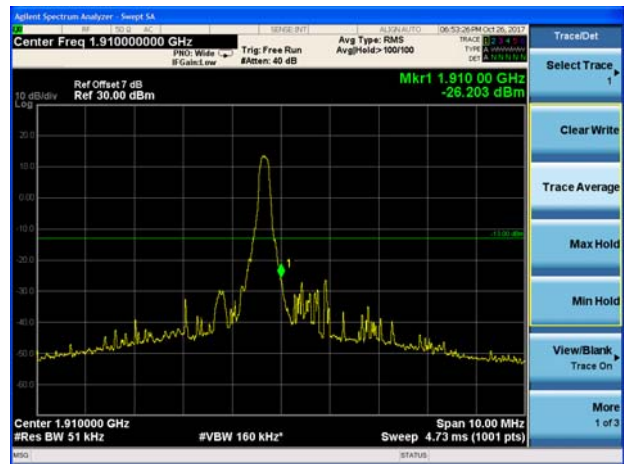

LTE Band 2 5MHz 16QAM 100%RB CH-Low

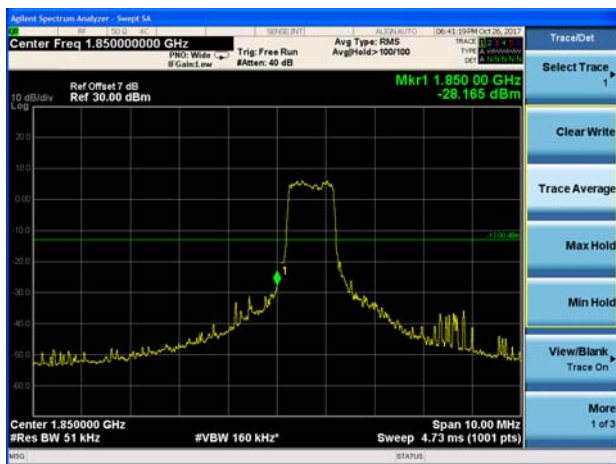


LTE Band 2 5MHz 16QAM 100%RB CH-High

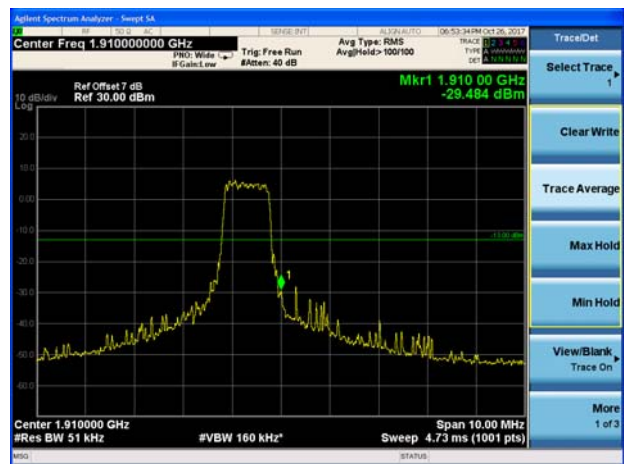





LTE Band 2 10MHz 16QAM 1RB CH-Low

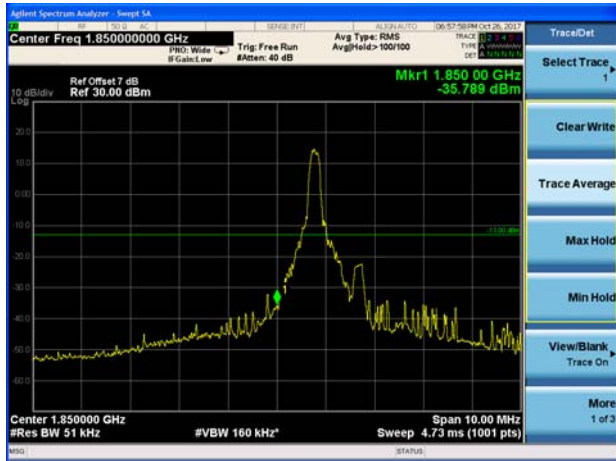

LTE Band 2 10MHz 16QAM 1RB CH-High

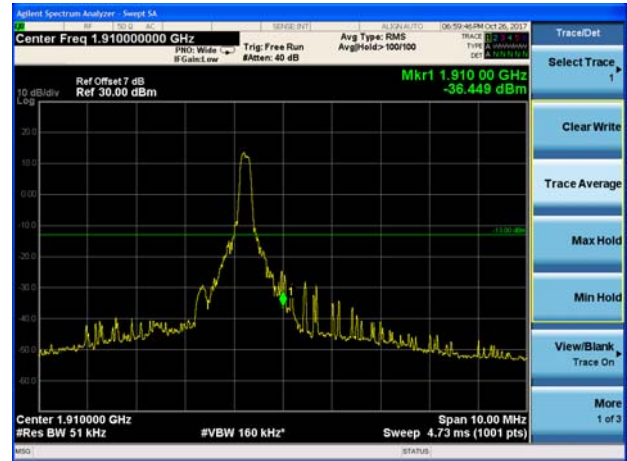


LTE Band 2 10MHz 16QAM 100%RB CH-Low

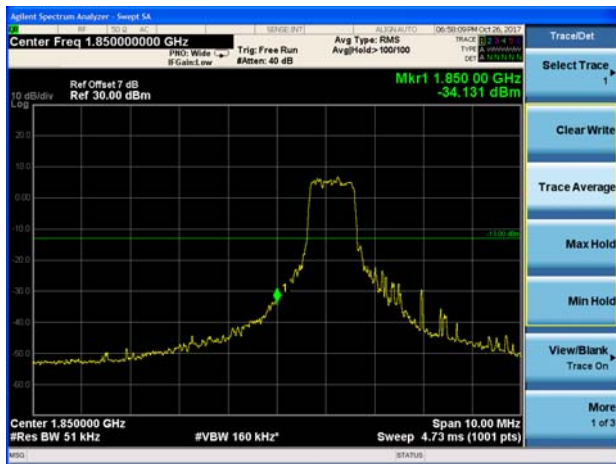


LTE Band 2 10MHz 16QAM 100%RB CH-High



LTE Band 2 15MHz 16QAM 1RB CH-Low

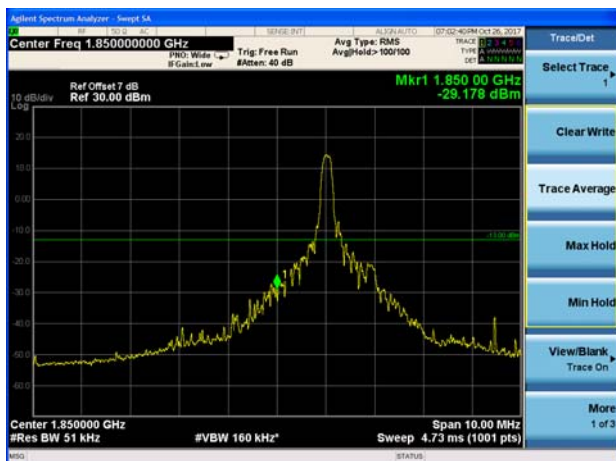


LTE Band 2 15MHz 16QAM 1RB CH-High

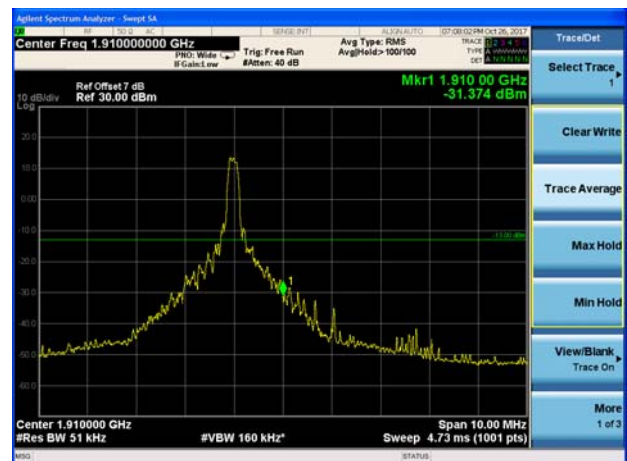





LTE Band 2 15MHz 16QAM 100%RB CH-Low

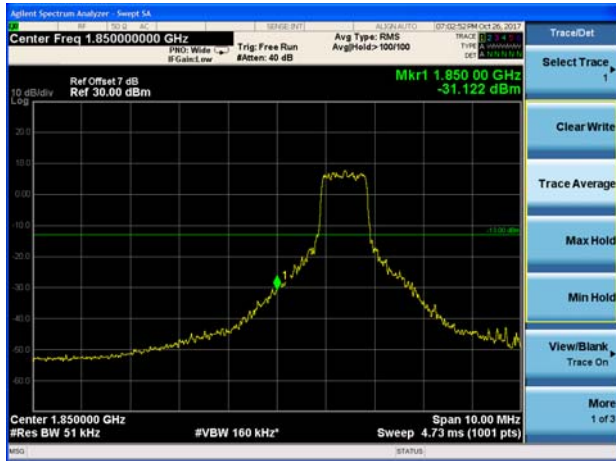


LTE Band 2 15MHz 16QAM 100%RB CH-High

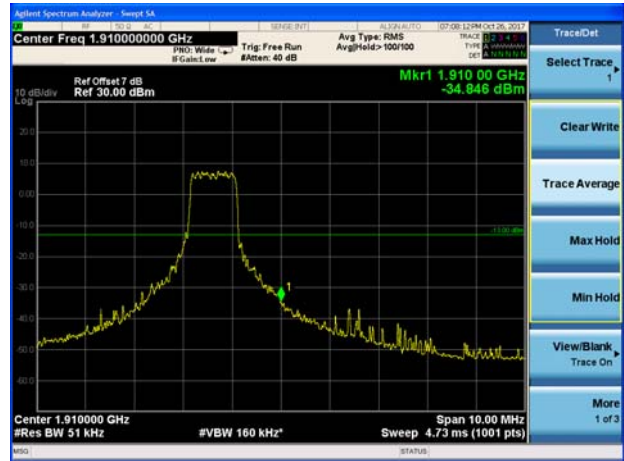


LTE Band 2 20MHz 16QAM 1RB CH-Low

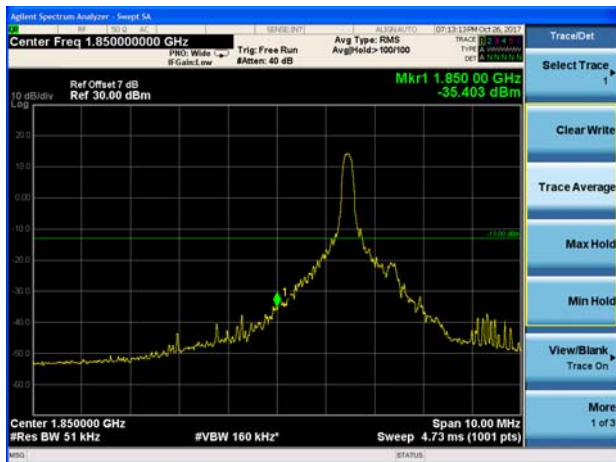


LTE Band 2 20MHz 16QAM 1RB CH-High

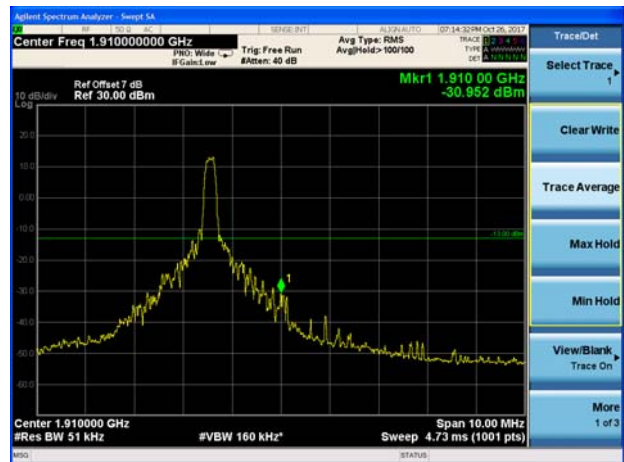

LTE Band 2 20MHz 16QAM 100%RB CH-Low

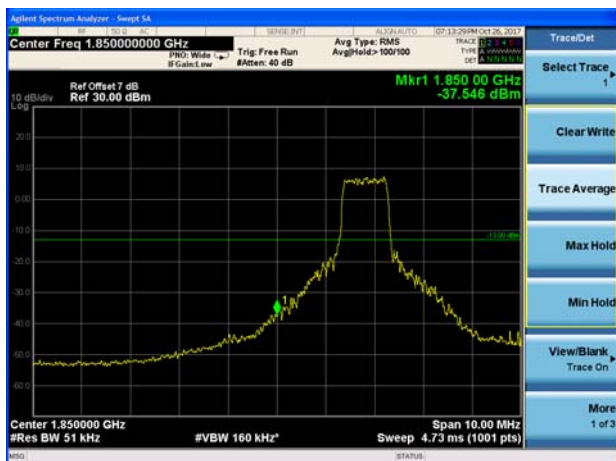

LTE Band 2 20MHz 16QAM 100%RB CH-High

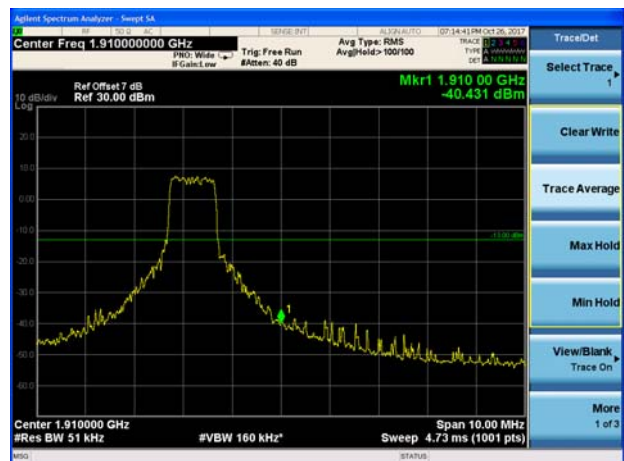

### 5.5. Peak-to-Average Power Ratio (PAPR)

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

Measure the total peak power and record as PPk. And measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$PAPR (dB) = PPk (dBm) - PAvg (dBm).$$

#### Test Setup

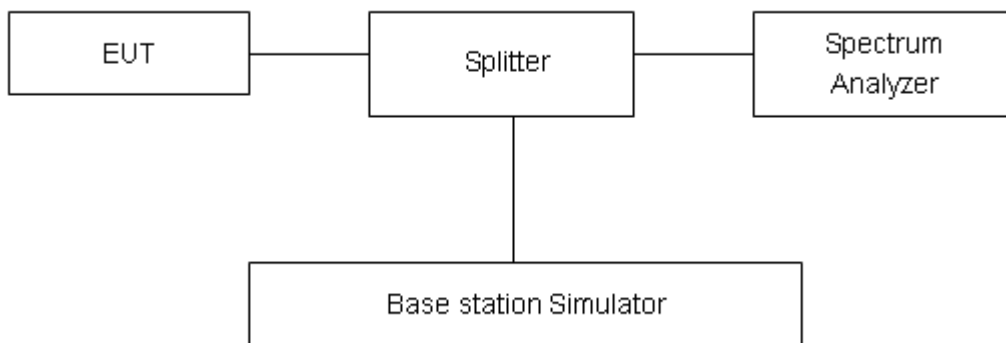

#### Limits

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB in 24.232(d).

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.4$  dB.

**Test Results**

Mode	Bandwidth	Modulation	Channel/ Frequency(MHz)	Peak-to-Average Power Ratio (PAPR)		
				Peak(dBm)	Avg(dBm)	PAPR(dB)
Band2	1.4MHz	QPSK	18900/1880	31.87	23.21	8.66
		16QAM	18900/1880	32.87	22.70	10.17
	3MHz	QPSK	18900/1880	32.30	23.15	9.15
		16QAM	18900/1880	32.83	22.71	10.12
	5MHz	QPSK	18900/1880	32.63	23.46	9.17
		16QAM	18900/1880	32.72	23.29	9.43
	10MHz	QPSK	18900/1880	32.12	23.24	8.88
		16QAM	18900/1880	33.00	23.81	9.19
	15MHz	QPSK	18900/1880	32.04	23.45	8.59
		16QAM	18900/1880	33.40	23.22	10.18
	20MHz	QPSK	18900/1880	32.21	23.07	9.14
		16QAM	18900/1880	33.23	23.70	9.53

## 5.6. Frequency Stability

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

#### 1. Frequency Stability (Temperature Variation)

The temperature inside the climate chamber is varied from -40°C to +85°C in 20°C step size,

(1) With all power removed, the temperature was decreased to 0°C and permitted to stabilize for three hours.

(2) Measure the carrier frequency with the test equipment in a “call mode”. These measurements should be made within 1 minute of powering up the mobile station, to prevent significant self warming.

(3) Repeat the above measurements at 10°C increments from -40°C to +85°C. Allow at least 1.5 hours at each temperature, un-powered, before making measurements.

#### 2. Frequency Stability (Voltage Variation)


The frequency stability shall be measured with variation of primary supply voltage as follows:

(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

(2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery-operating end point which shall be specified by the manufacturer.

This transceiver is specified to operate with an input voltage of between 3.0 V and 4.20 V, with a nominal voltage of 3.6V.

### Test setup

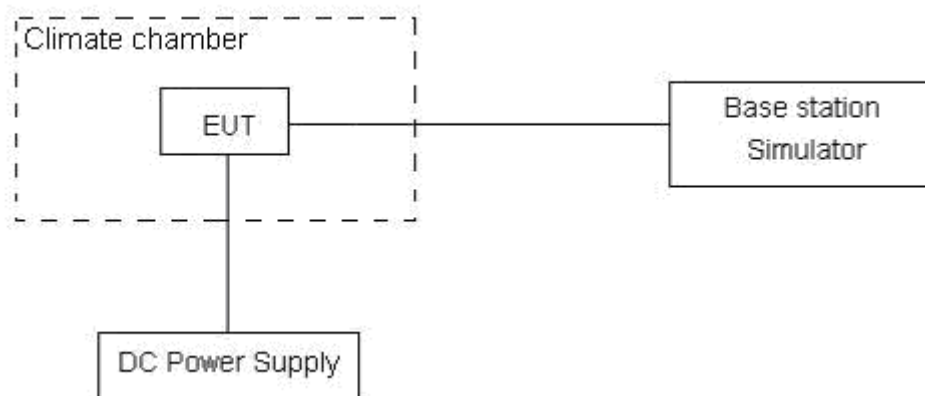



### **Limits**

No specific frequency stability requirements in part 24.235

### **Measurement Uncertainty**

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 3$ ,  $U = 0.01\text{ppm}$ .



## Test Result

Mode	Bandwidth	Channel/ Frequency(MHz)	Test status	Frequency Stability (ppm)	
				QPSK	16QAM
Band2	1.4MHz	18900/1880	-40°C/Normal Voltage	-0.00010	-0.00033
		18900/1880	-30°C/Normal Voltage	-0.00017	-0.00016
		18900/1880	-20°C/Normal Voltage	0.00030	0.00013
		18900/1880	-10°C/Normal Voltage	-0.00039	-0.00027
		18900/1880	0°C/Normal Voltage	-0.00012	-0.00038
		18900/1880	10°C/Normal Voltage	-0.00007	-0.00007
		18900/1880	20°C/Normal Voltage	-0.00043	0.00006
		18900/1880	30°C/Normal Voltage	-0.00006	-0.00011
		18900/1880	40°C/Normal Voltage	-0.00021	-0.00005
		18900/1880	50°C/Normal Voltage	0.00004	-0.00035
		18900/1880	60°C/Normal Voltage	-0.00009	-0.00127
		18900/1880	70°C/Normal Voltage	-0.00112	-0.00142
		18900/1880	80°C/Normal Voltage	-0.00140	-0.00058
		18900/1880	85°C/Normal Voltage	-0.00090	-0.00170
		18900/1880	20°C/Minimum Voltage	-0.00081	-0.00154
		18900/1880	20°C/Maximum Voltage	-0.00190	-0.00005
	3MHz	18900/1880	-40°C/Normal Voltage	-0.00043	-0.00013
		18900/1880	-30°C/Normal Voltage	0.00000	-0.00010
		18900/1880	-20°C/Normal Voltage	-0.00022	-0.00006
		18900/1880	-10°C/Normal Voltage	-0.00015	-0.00015
		18900/1880	0°C/Normal Voltage	-0.00004	-0.00043
		18900/1880	10°C/Normal Voltage	-0.00011	-0.00022
		18900/1880	20°C/Normal Voltage	-0.00028	-0.00043
		18900/1880	30°C/Normal Voltage	-0.00037	-0.00009
		18900/1880	40°C/Normal Voltage	-0.00015	-0.00037
		18900/1880	50°C/Normal Voltage	-0.00022	-0.00012
		18900/1880	60°C/Normal Voltage	0.00006	-0.00085
		18900/1880	70°C/Normal Voltage	-0.00036	-0.00112
		18900/1880	80°C/Normal Voltage	-0.00069	-0.00013
		18900/1880	85°C/Normal Voltage	-0.00047	-0.00051
		18900/1880	20°C/Minimum Voltage	-0.00026	-0.00003
		18900/1880	20°C/Maximum Voltage	-0.00031	-0.00011
	5MHz	18900/1880	-40°C/Normal Voltage	-0.00016	-0.00026
		18900/1880	-30°C/Normal Voltage	0.00023	-0.00008
		18900/1880	-20°C/Normal Voltage	-0.00024	-0.00015
		18900/1880	-10°C/Normal Voltage	-0.00020	-0.00007
18900/1880		0°C/Normal Voltage	-0.00006	0.00001	



		18900/1880	10°C/Normal Voltage	0.00009	-0.00025
		18900/1880	20°C/Normal Voltage	0.00005	-0.00007
		18900/1880	30°C/Normal Voltage	-0.00024	0.00000
		18900/1880	40°C/Normal Voltage	-0.00029	-0.00007
		18900/1880	50°C/Normal Voltage	-0.00013	-0.00022
		18900/1880	60°C/Normal Voltage	-0.00036	-0.00045
		18900/1880	70°C/Normal Voltage	0.00030	-0.00014
		18900/1880	80°C/Normal Voltage	-0.00065	-0.00054
		18900/1880	85°C/Normal Voltage	0.00013	0.00048
		18900/1880	20°C/Minimum Voltage	0.00007	-0.00012
		18900/1880	20°C/Maximum Voltage	0.00008	-0.00015
		10MHz	18900/1880	-40°C/Normal Voltage	-0.00023
	18900/1880		-30°C/Normal Voltage	-0.00010	0.00021
	18900/1880		-20°C/Normal Voltage	-0.00017	-0.00017
	18900/1880		-10°C/Normal Voltage	-0.00034	-0.00004
	18900/1880		0°C/Normal Voltage	-0.00010	-0.00018
	18900/1880		10°C/Normal Voltage	-0.00026	-0.00040
	18900/1880		20°C/Normal Voltage	-0.00007	-0.00042
	18900/1880		30°C/Normal Voltage	-0.00038	-0.00030
	18900/1880		40°C/Normal Voltage	-0.00006	-0.00036
	18900/1880		50°C/Normal Voltage	0.00005	-0.00013
	18900/1880		60°C/Normal Voltage	-0.00037	-0.00019
	18900/1880		70°C/Normal Voltage	-0.00069	-0.00068
	18900/1880		80°C/Normal Voltage	-0.00232	-0.00138
	18900/1880		85°C/Normal Voltage	-0.00071	-0.00031
	18900/1880		20°C/Minimum Voltage	-0.00008	-0.00016
	18900/1880	20°C/Maximum Voltage	-0.00032	-0.00043	
	15MHz	18900/1880	-40°C/Normal Voltage	0.00075	-0.00005
		18900/1880	-30°C/Normal Voltage	0.00013	-0.00031
		18900/1880	-20°C/Normal Voltage	0.00063	-0.00012
		18900/1880	-10°C/Normal Voltage	0.00071	-0.00026
		18900/1880	0°C/Normal Voltage	0.00014	-0.00021
		18900/1880	10°C/Normal Voltage	0.00100	-0.00006
18900/1880		20°C/Normal Voltage	-0.00030	0.00012	
18900/1880		30°C/Normal Voltage	-0.00068	0.00003	
18900/1880		40°C/Normal Voltage	-0.00027	-0.00021	
18900/1880		50°C/Normal Voltage	-0.00007	-0.00005	
18900/1880		60°C/Normal Voltage	-0.00048	-0.00003	
18900/1880		70°C/Normal Voltage	-0.00068	-0.00080	
18900/1880		80°C/Normal Voltage	-0.00021	-0.00031	
18900/1880	85°C/Normal Voltage	-0.00008	-0.00138		





20MHz	18900/1880	20°C/Minimum Voltage	0.00073	0.00021
	18900/1880	20°C/Maximum Voltage	-0.00005	0.00000
	18900/1880	-40°C/Normal Voltage	-0.00021	-0.00053
	18900/1880	-30°C/Normal Voltage	0.00006	-0.00029
	18900/1880	-20°C/Normal Voltage	-0.00002	-0.00058
	18900/1880	-10°C/Normal Voltage	-0.00013	-0.00032
	18900/1880	0°C/Normal Voltage	-0.00006	-0.00050
	18900/1880	10°C/Normal Voltage	-0.00033	-0.00041
	18900/1880	20°C/Normal Voltage	-0.00024	-0.00037
	18900/1880	30°C/Normal Voltage	-0.00026	-0.00021
	18900/1880	40°C/Normal Voltage	-0.00028	-0.00017
	18900/1880	50°C/Normal Voltage	0.00004	-0.00007
	18900/1880	60°C/Normal Voltage	-0.00014	-0.00032
	18900/1880	70°C/Normal Voltage	-0.00113	-0.00028
	18900/1880	80°C/Normal Voltage	-0.00056	-0.00143
	18900/1880	85°C/Normal Voltage	-0.00009	-0.00009
	18900/1880	20°C/Minimum Voltage	-0.00016	-0.00048
	18900/1880	20°C/Maximum Voltage	0.00001	-0.00022

### 5.7. Spurious Emissions at Antenna Terminals


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to Spectrum Analyzer and Base Station Simulator via power Splitter. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 9kHz to the 10th harmonic of the carrier. The peak detector is used.set RBW 1MHz and VBW is 3MHz, Sweep is set to ATUO.

#### Test setup

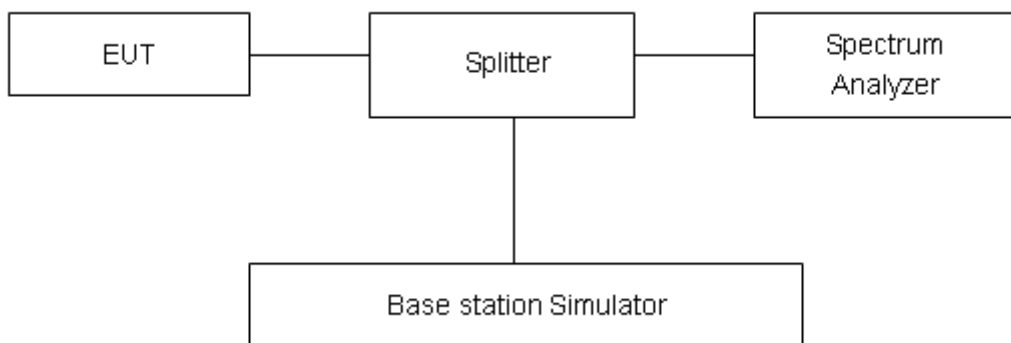

#### Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee’s frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log<sub>10</sub> (P) dB.”

Limit	-13 dBm
-------	---------

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 99.75% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-18GHz	1.407 dB

## Test Result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.  
The signal beyond the limit is carrier.


LTE Band 2 1.4MHz CH-Low 30MHz~3GHz

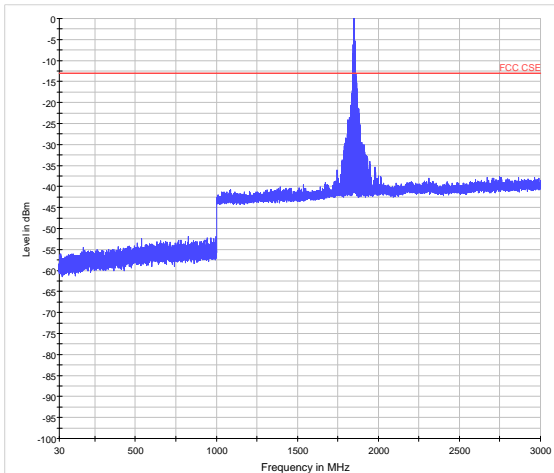


LTE Band 2 1.4MHz CH-Middle 30MHz~3GHz

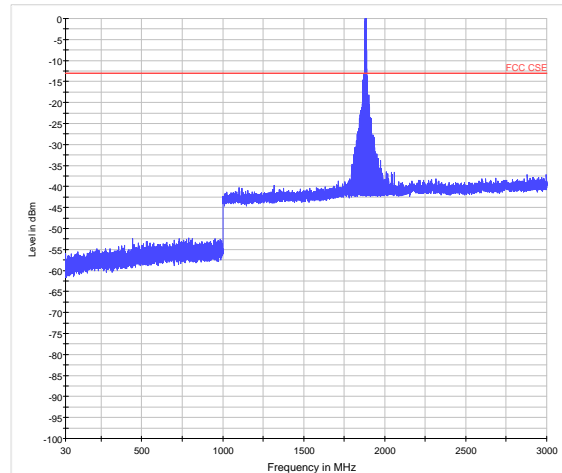

LTE Band 2 1.4MHz CH-Low 3GHz~18GHz

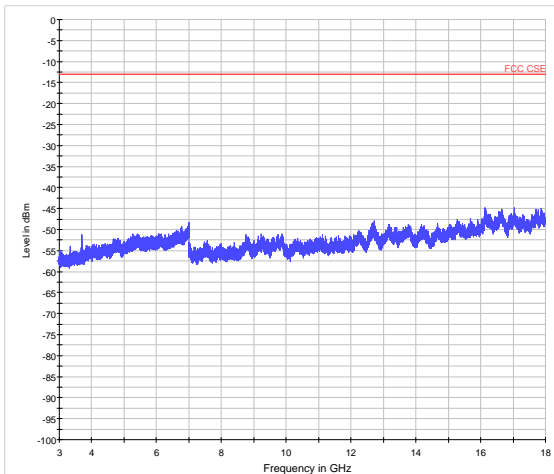


LTE Band 2 1.4MHz CH-Middle 3GHz~18GHz

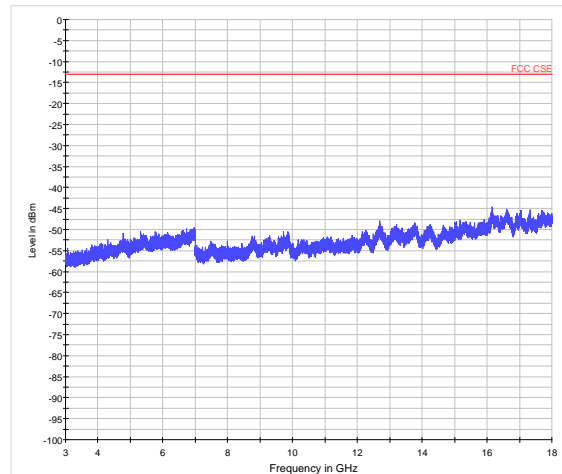





LTE Band 2 1.4MHz CH-Low 18GHz~20GHz

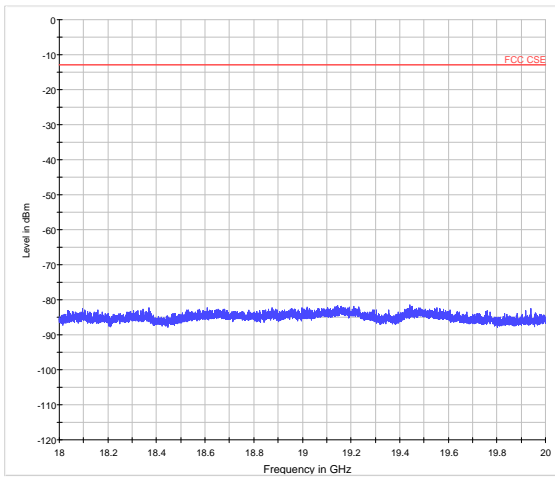


LTE Band 2 1.4MHz CH-Middle 18GHz~20GHz

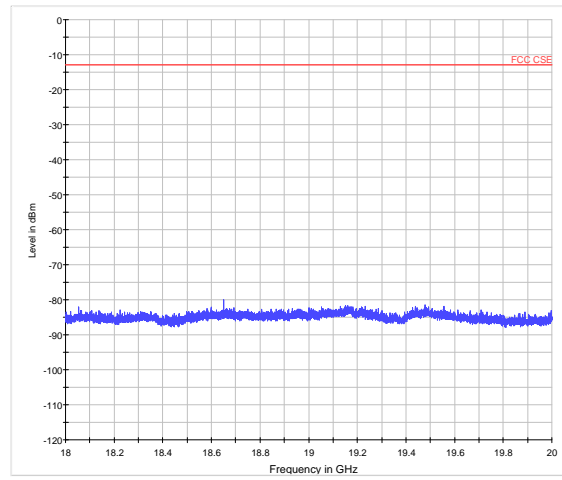


LTE Band 2 1.4MHz CH-High 30MHz~3GHz

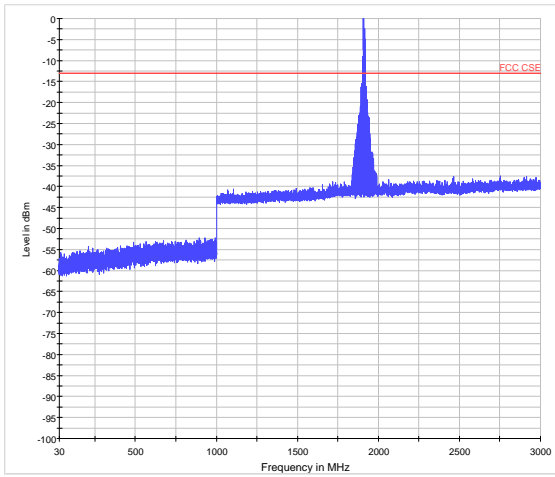


LTE Band 2 3MHz CH-Low 30MHz~3GHz

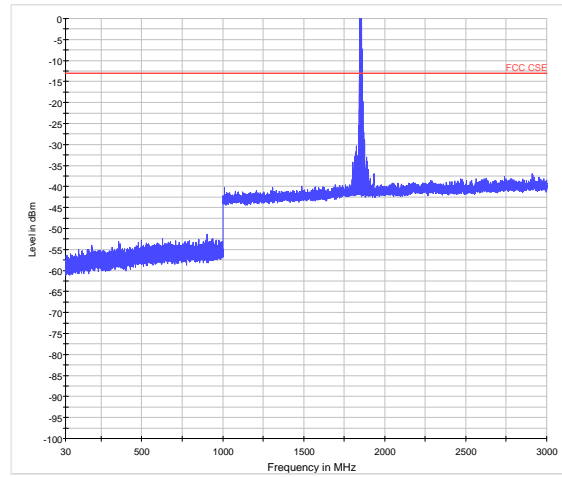

LTE Band 2 1.4MHz CH-High 3GHz~18GHz

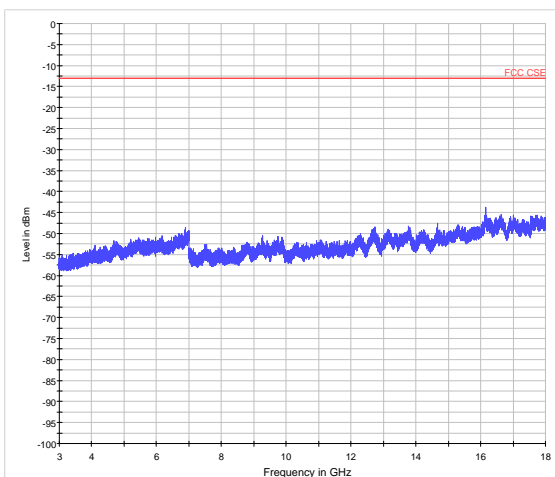


LTE Band 2 3MHz CH-Low 3GHz~18GHz

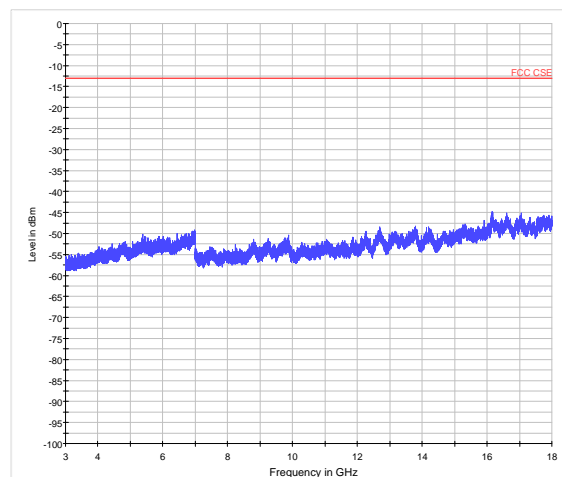





LTE Band 2 1.4MHz CH-High 18GHz~20GHz

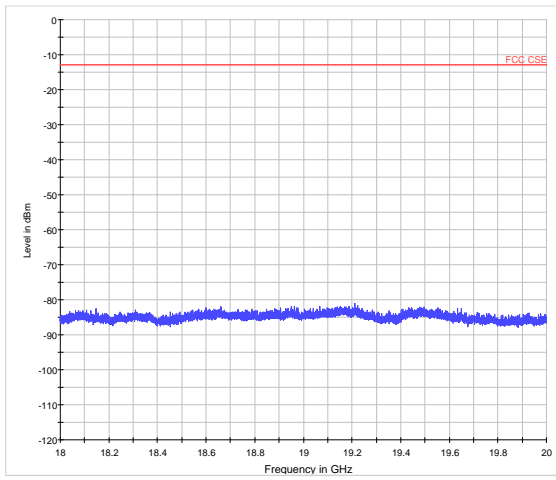


LTE Band 2 3MHz CH-Low 18GHz~20GHz

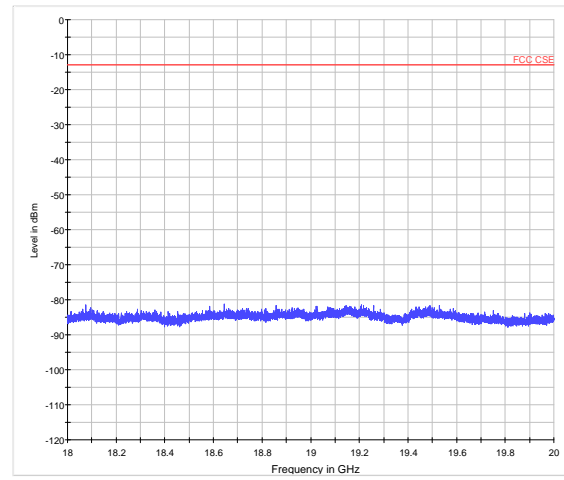


LTE Band 2 3MHz CH-Middle 30MHz~3GHz

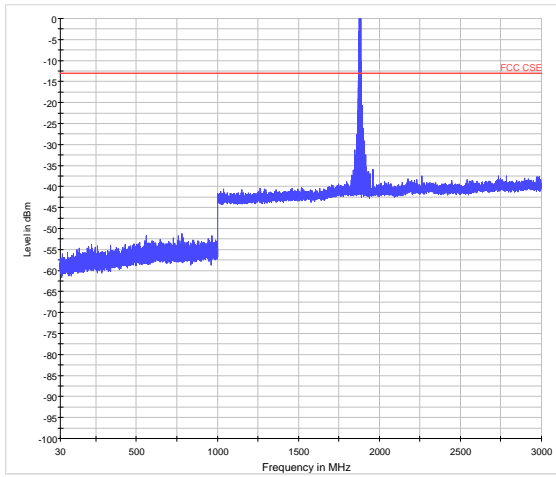


LTE Band 2 3MHz CH-High 30MHz~3GHz

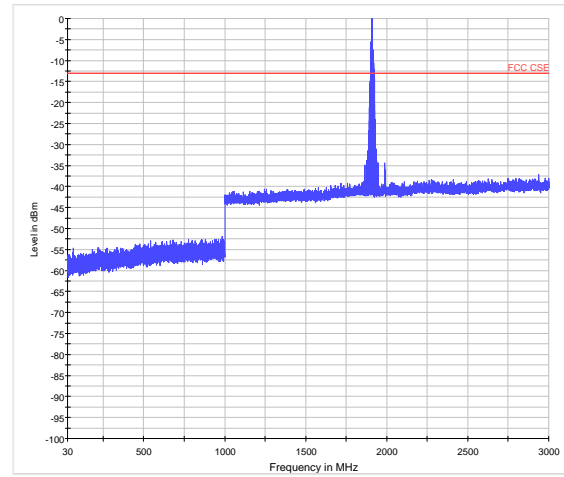

LTE Band 2 3MHz CH-Middle 3GHz~18GHz

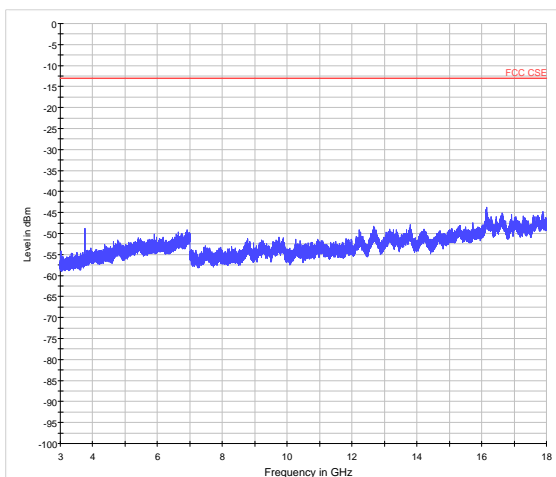


LTE Band 2 3MHz CH-High 3GHz~18GHz

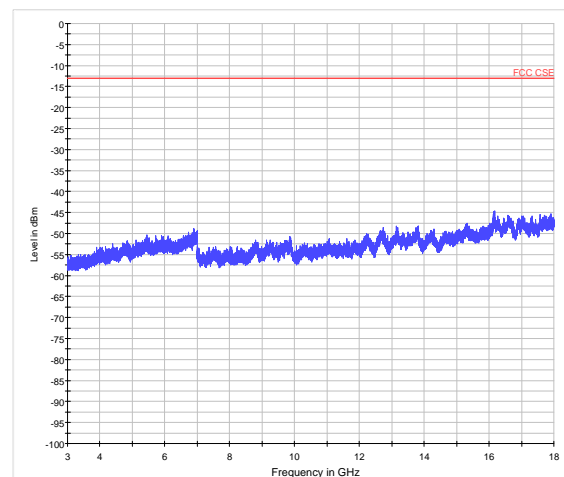





LTE Band 2 3MHz CH-Middle 18GHz~20GHz

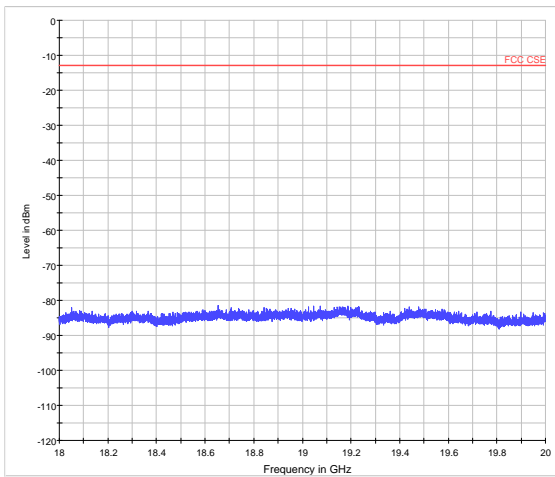


LTE Band 2 3MHz CH-High 18GHz~20GHz

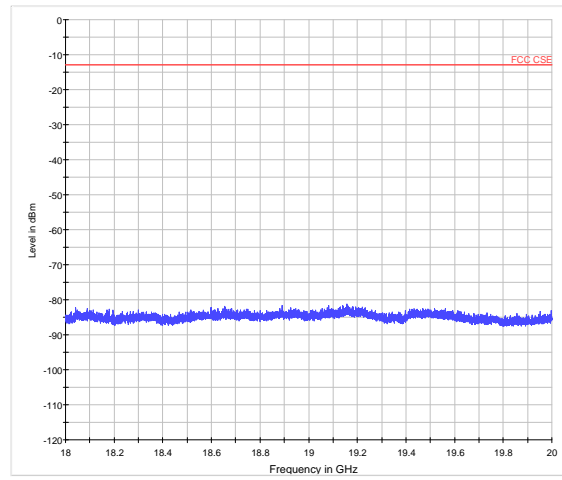


LTE Band 2 5MHz CH-Low 30MHz~3GHz

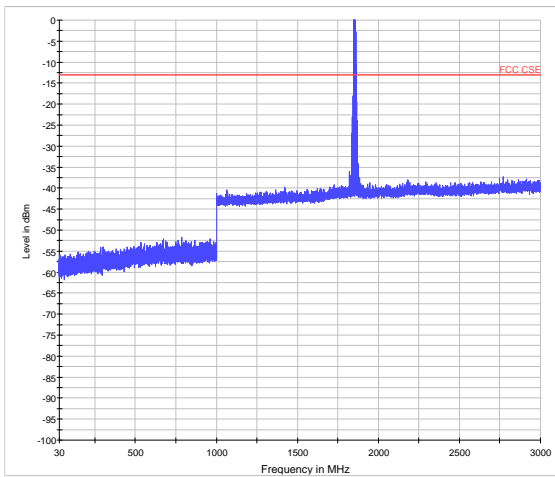


LTE Band 2 5MHz CH-Middle 30MHz~3GHz

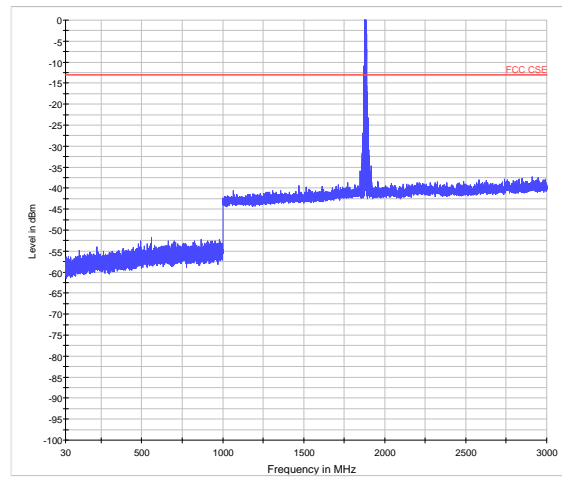

LTE Band 2 5MHz CH-Low 3GHz~18GHz

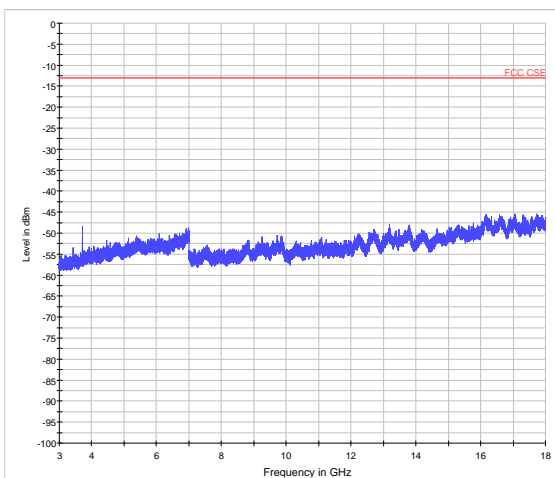


LTE Band 2 5MHz CH-Middle 3GHz~18GHz

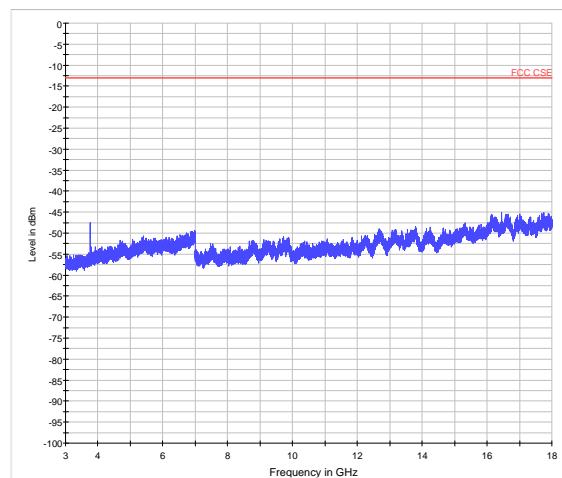





LTE Band 2 5MHz CH-Low 18GHz~20GHz

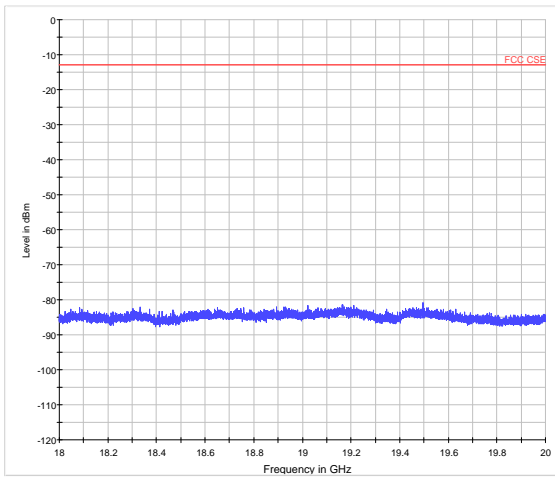


LTE Band 2 5MHz CH-Middle 18GHz~20GHz

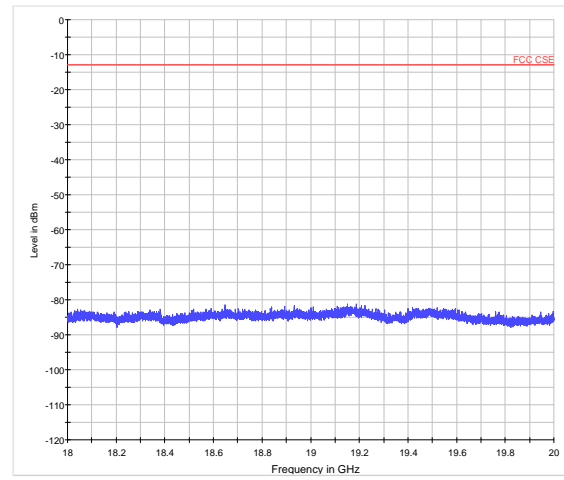


LTE Band 2 5MHz CH-High 30MHz~3GHz

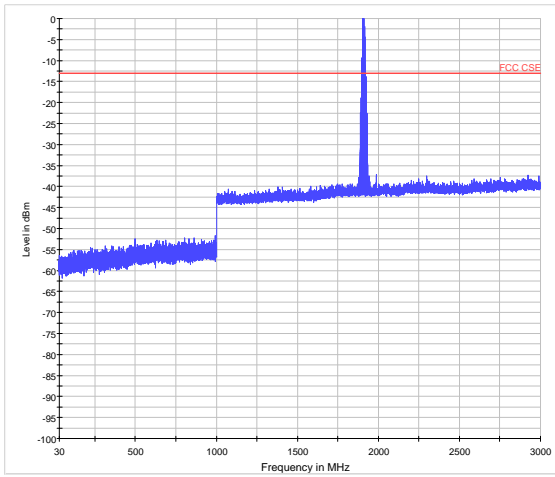


LTE Band 2 10MHz CH-Low 30MHz~3GHz

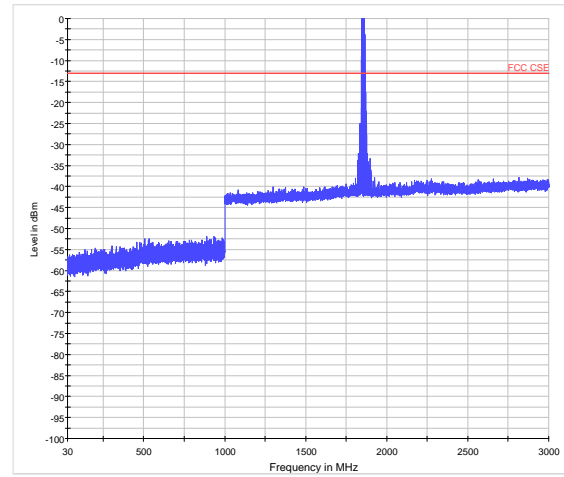

LTE Band 2 5MHz CH-High 3GHz~18GHz

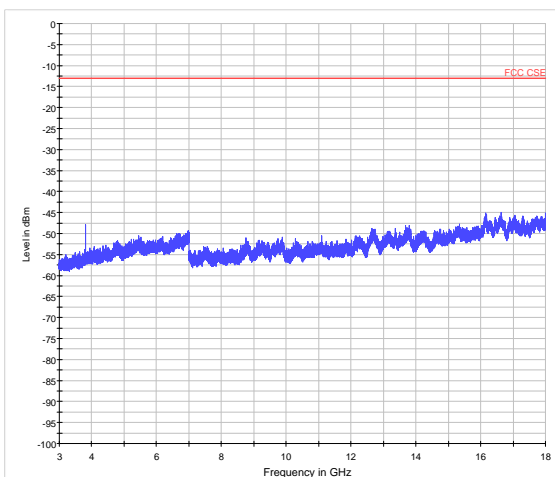


LTE Band 2 10MHz CH-Low 3GHz~18GHz

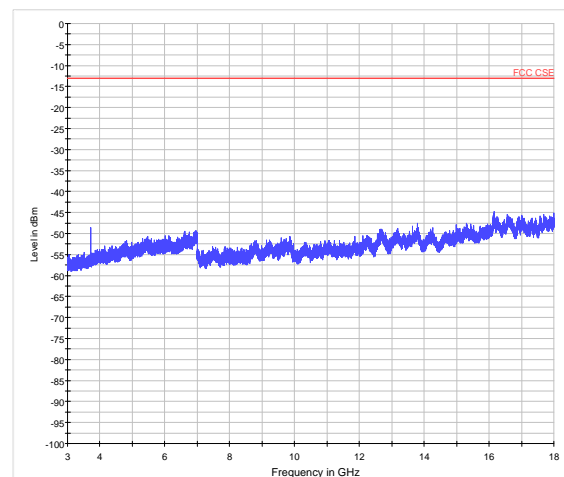





LTE Band 2 5MHz CH-High 18GHz~20GHz

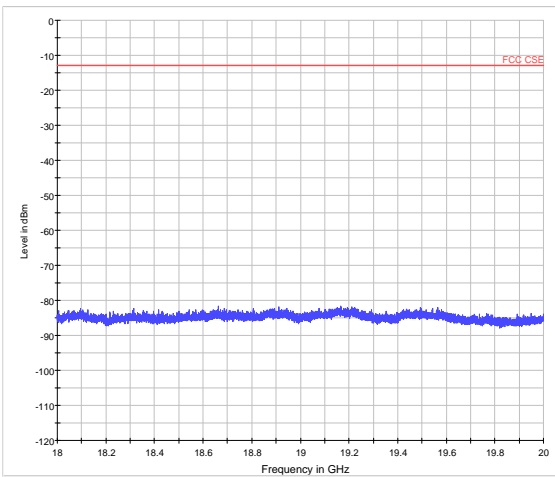


LTE Band 2 10MHz CH-Low 18GHz~20GHz

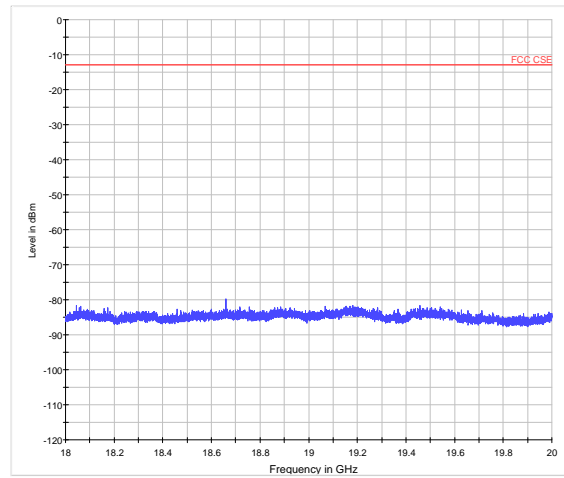


LTE Band 2 10MHz CH-Middle 30MHz~3GHz

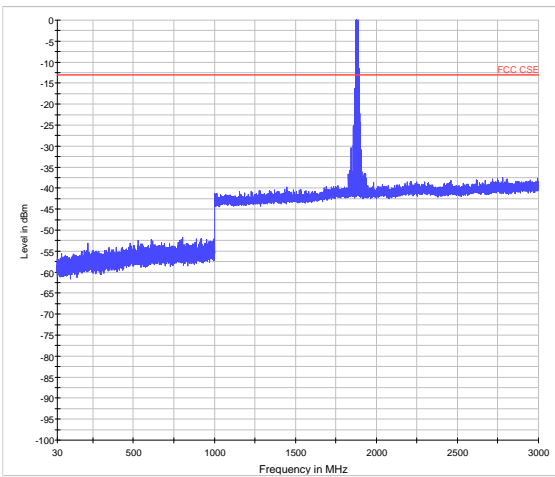


LTE Band 2 10MHz CH-High 30MHz~3GHz

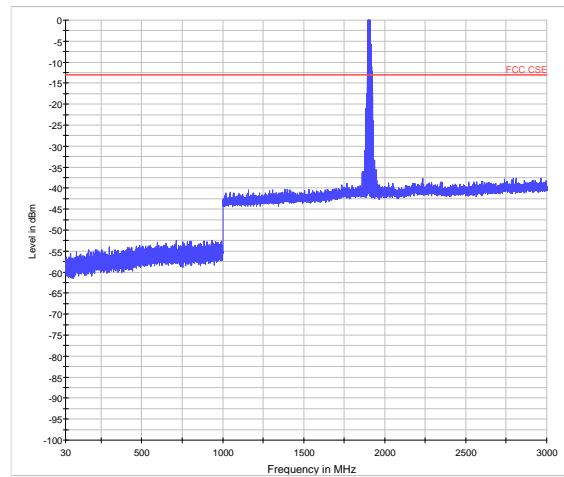

LTE Band 2 10MHz CH-Middle 3GHz~18GHz

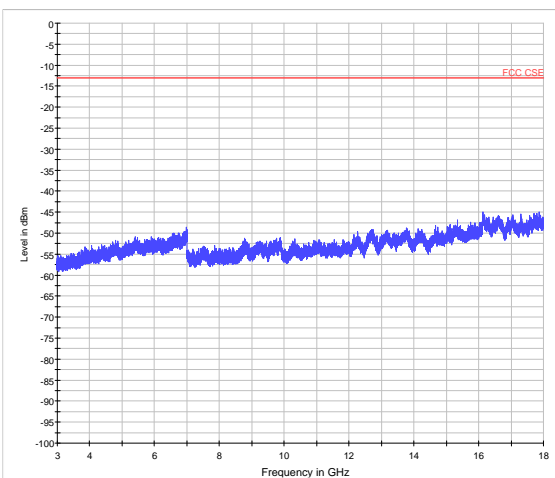


LTE Band 2 10MHz CH-High 3GHz~18GHz

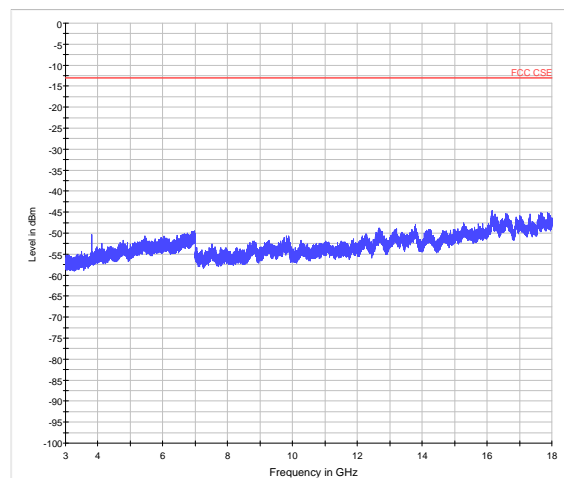







LTE Band 2 10MHz CH-Middle 18GHz~20GHz

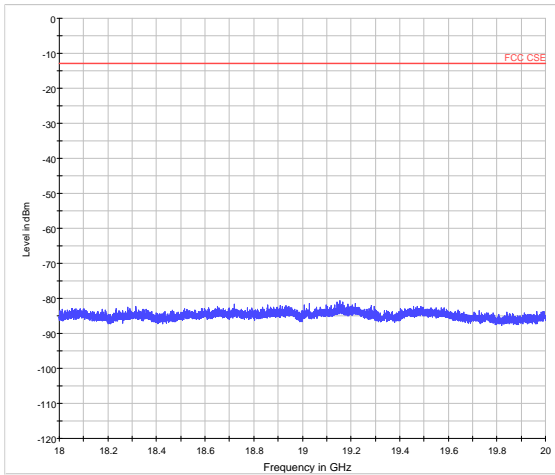


LTE Band 2 10MHz CH-High 18GHz~20GHz

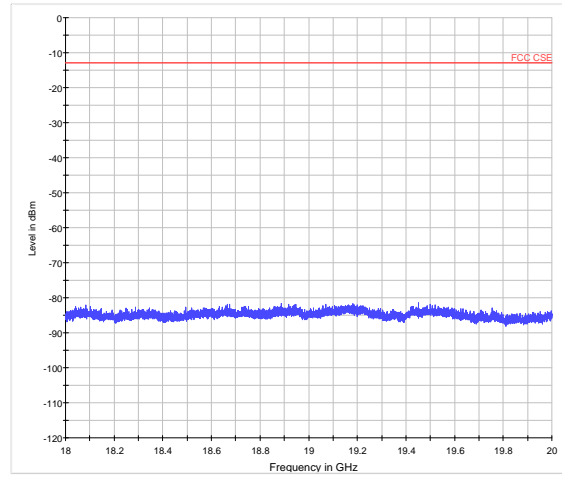


LTE Band 2 15MHz CH-Low 30MHz~3GHz

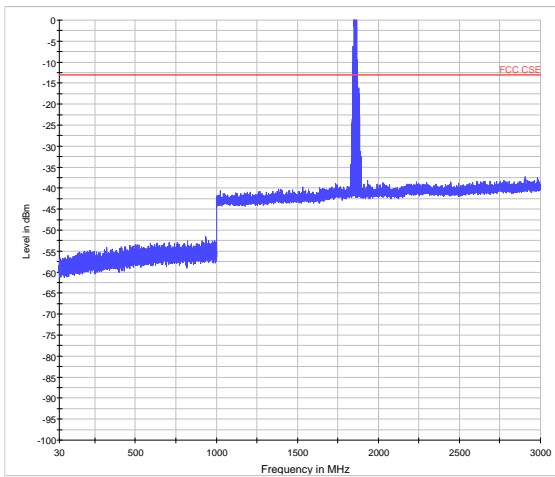


LTE Band 2 15MHz CH-Middle 30MHz~3GHz

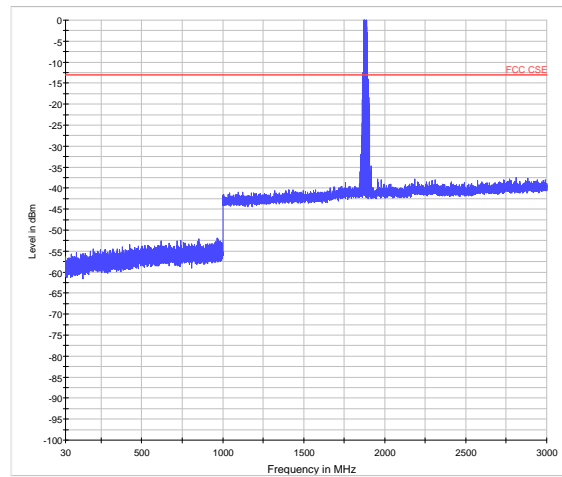

LTE Band 2 15MHz CH-Low 3GHz~18GHz

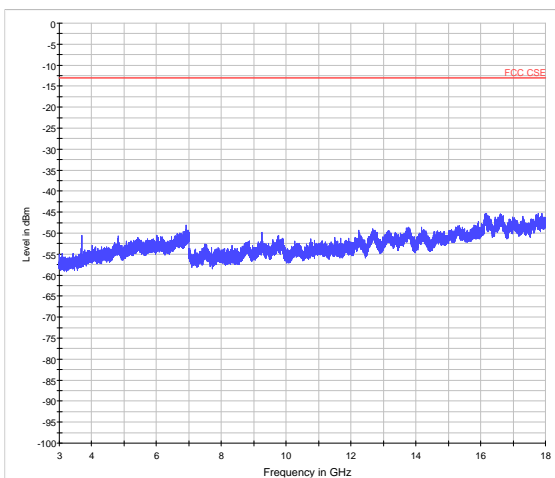


LTE Band 2 15MHz CH-Middle 3GHz~18GHz

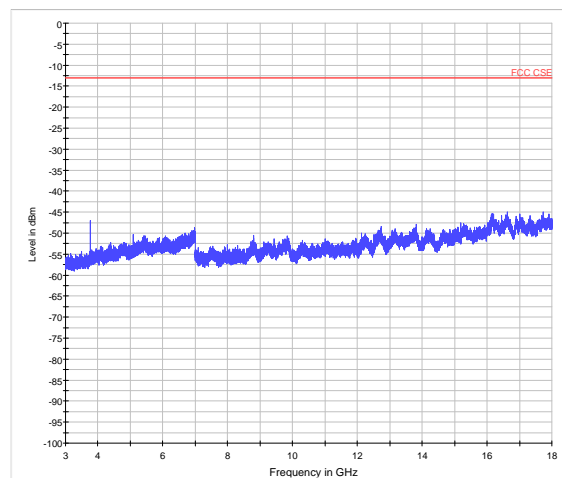





LTE Band 2 15MHz CH-Low 18GHz~20GHz

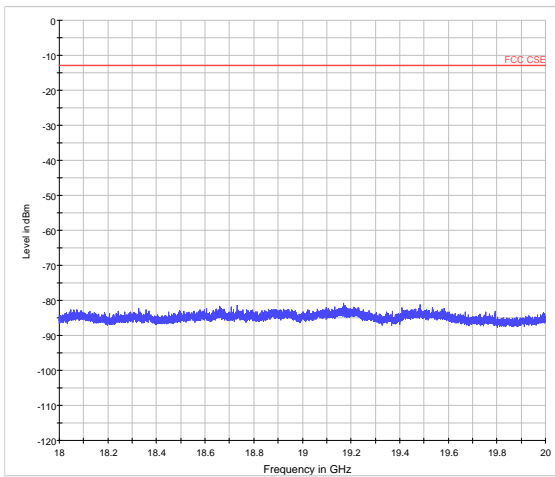


LTE Band 2 15MHz CH-Middle 18GHz~20GHz

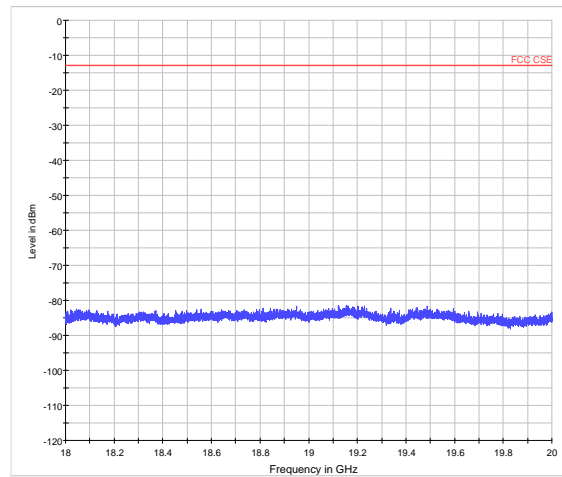


LTE Band 2 15MHz CH-High 30MHz~3GHz

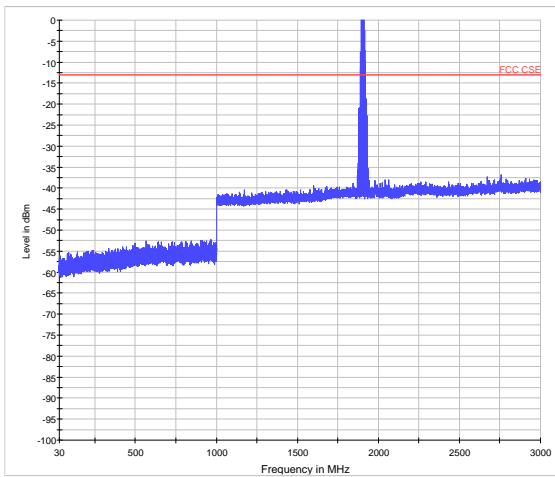


LTE Band 2 20MHz CH-Low 30MHz~3GHz

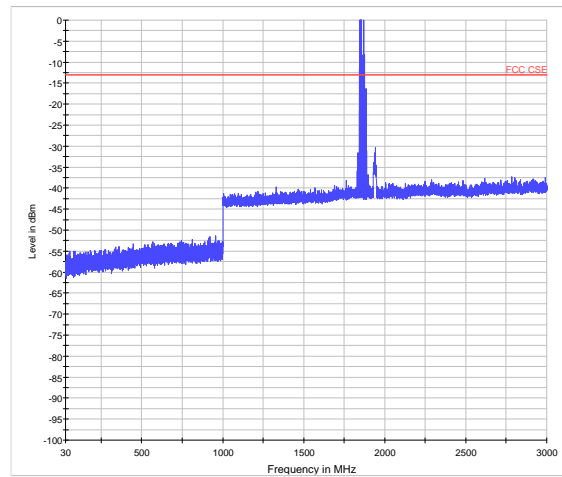

LTE Band 2 15MHz CH-High 3GHz~18GHz

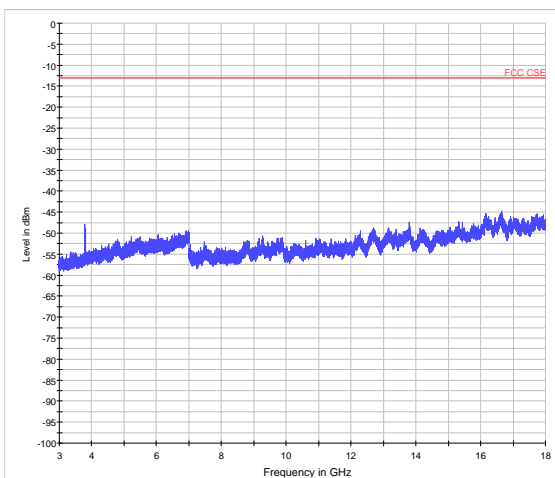


LTE Band 2 20MHz CH-Low 3GHz~18GHz

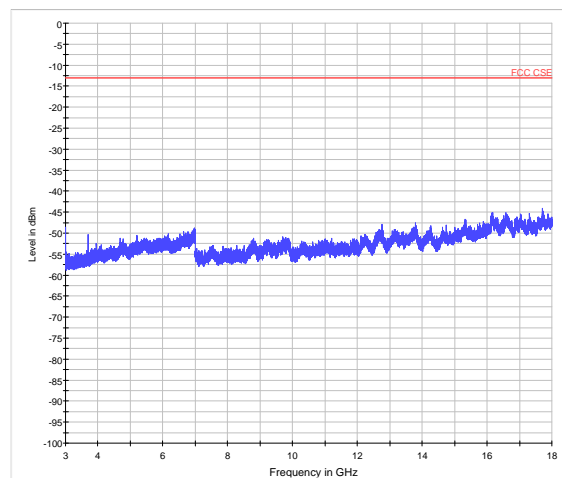





LTE Band 2 15MHz CH-High 18GHz~20GHz

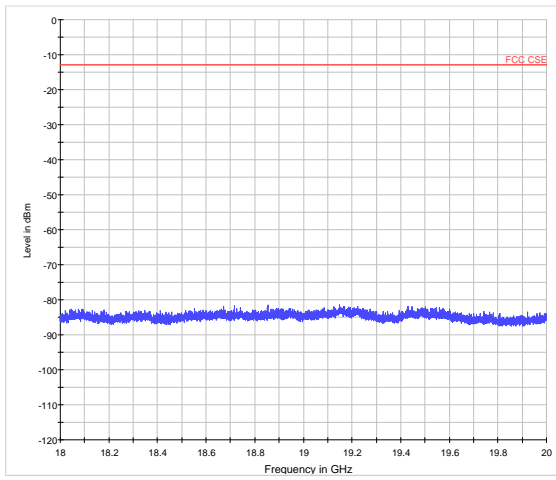


LTE Band 2 20MHz CH-Low 18GHz~20GHz

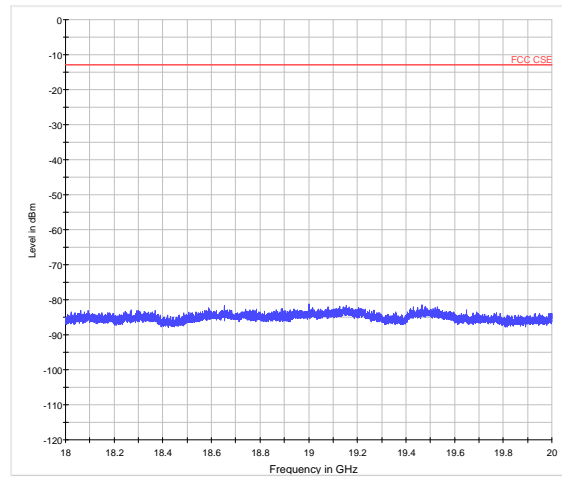


LTE Band 2 20MHz CH-Middle 30MHz~3GHz

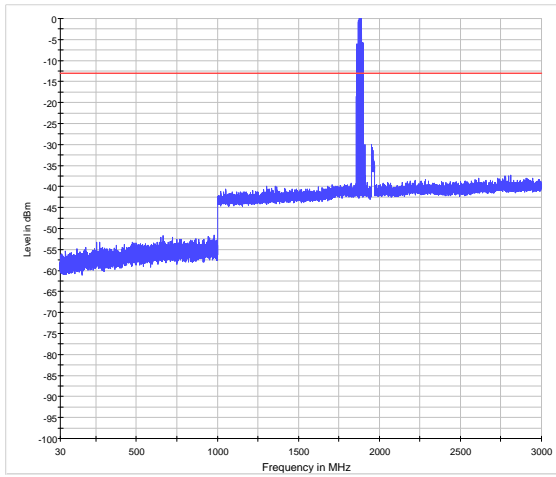


LTE Band 2 20MHz CH-High 30MHz~3GHz

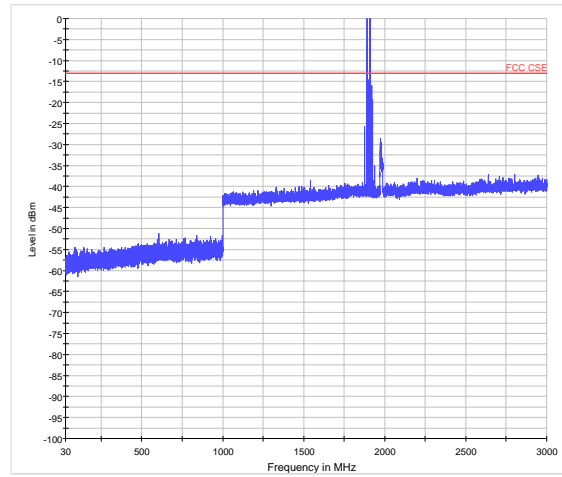

LTE Band 2 20MHz CH-Middle 3GHz~18GHz

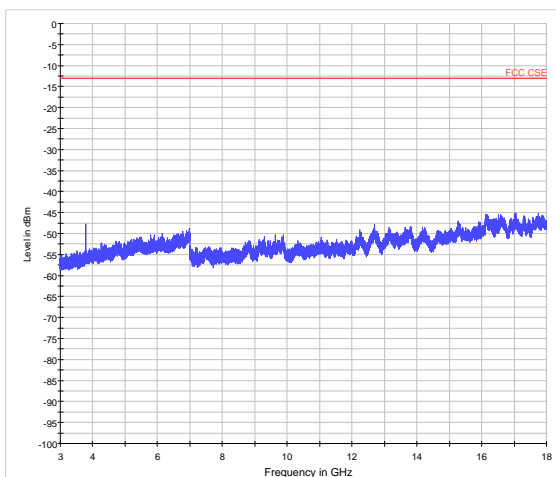


LTE Band 2 20MHz CH-High 3GHz~18GHz

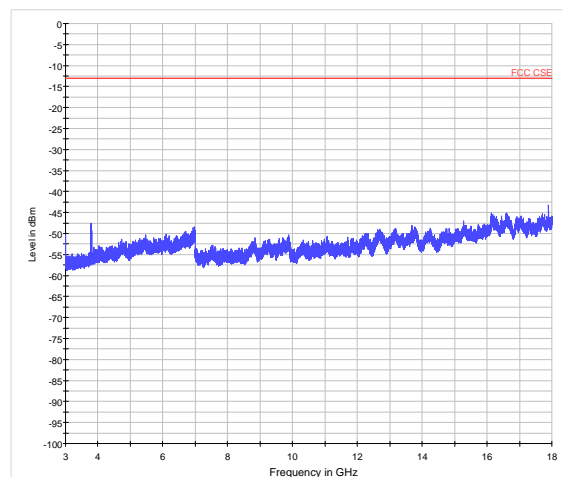




LTE Band 2 20MHz CH-Middle 18GHz~20GHz

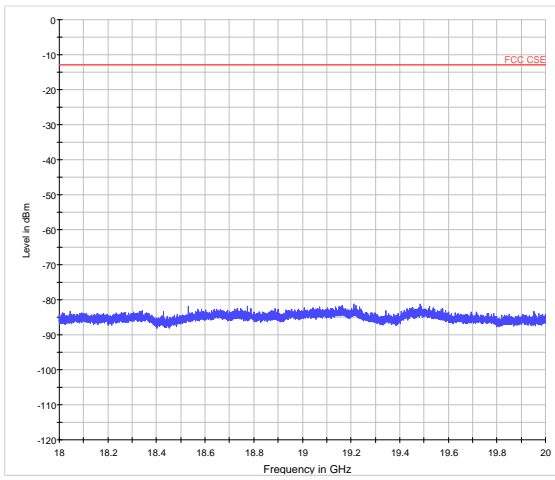

LTE Band 2 20MHz CH-High 18GHz~20GHz

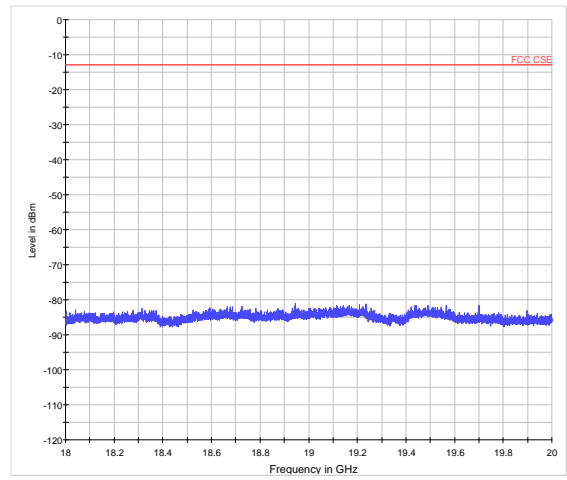

## 5.8. Radiates Spurious Emission

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement


1. The testing follows FCC KDB 971168 v03 Section 5.8 and ANSI/TIA-603-D-2010.
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

**Test setup**

**30MHz~~~ 1GHz**

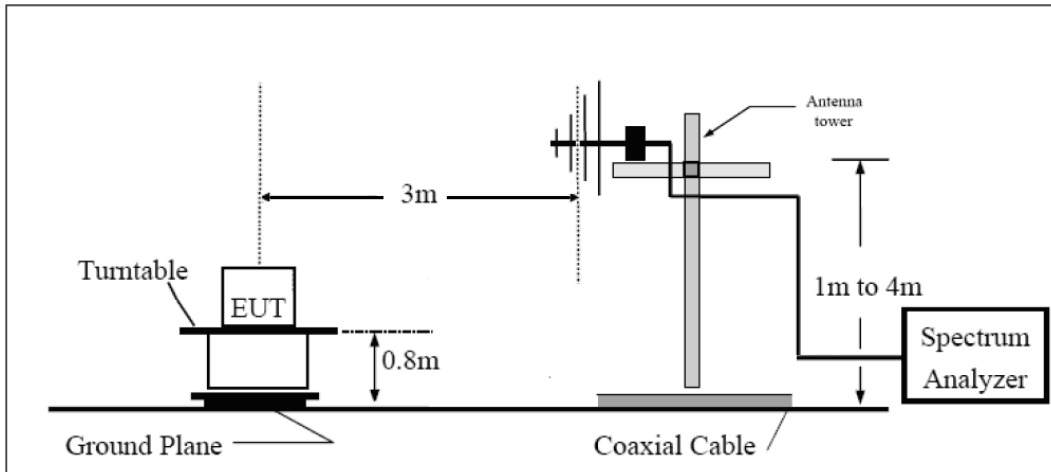

**Above 1GHz**

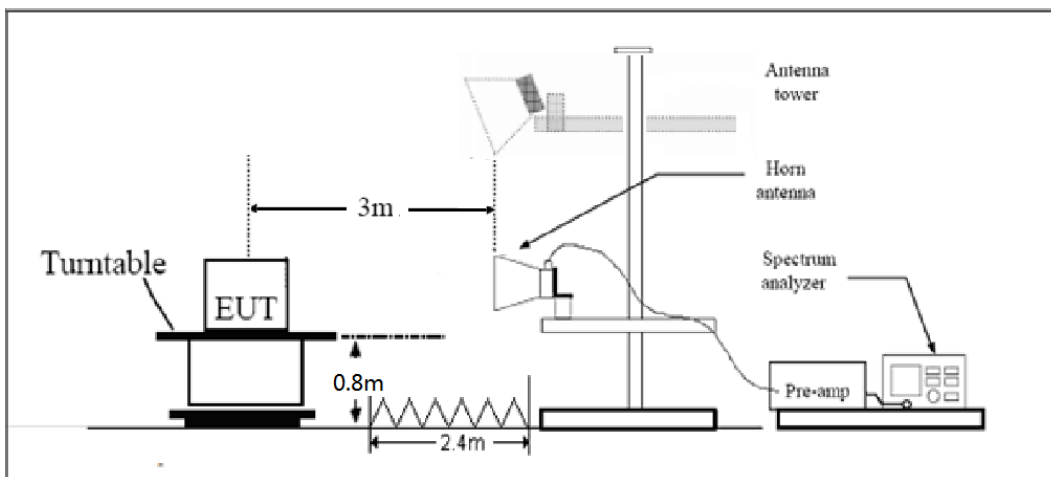

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

**Limits**

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log10 (P) dB.”

Limit	-13 dBm
-------	---------

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Result**

LTE Band 2 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3700.1	-52.39	5.1	11.05	Horizontal	-46.44	-13.00	33.44	225
3	5552.6	-54.31	5.42	12.65	Horizontal	-47.08	-13.00	34.08	135
4	7401.0	-49.65	6.7	13.85	Horizontal	-42.50	-13.00	29.50	0
5	9253.1	-47.50	7.01	14.75	Horizontal	-39.76	-13.00	26.76	90
6	11106.0	-46.62	7.48	15.95	Horizontal	-38.15	-13.00	25.15	180
7	12954.4	-46.11	7.51	16.55	Horizontal	-37.07	-13.00	24.07	135
8	14806.1	-42.22	8.24	15.35	Horizontal	-35.11	-13.00	22.11	45
9	16655.6	-42.97	8.41	14.95	Horizontal	-36.43	-13.00	23.43	225
10	18507.0	-40.91	8.54	15.45	Horizontal	-34.00	-13.00	21.00	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.0	-52.53	5.10	11.05	Horizontal	-46.58	-13.00	33.58	180
3	5640.0	-55.05	5.42	12.65	Horizontal	-47.82	-13.00	34.82	135
4	7520.3	-49.20	6.70	13.85	Horizontal	-42.05	-13.00	29.05	0
5	9397.1	-45.98	7.01	14.75	Horizontal	-38.24	-13.00	25.24	315
6	11281.5	-46.21	7.48	15.95	Horizontal	-37.74	-13.00	24.74	180
7	13160.3	-48.06	7.51	16.55	Horizontal	-39.02	-13.00	26.02	225
8	15041.3	-44.54	8.24	15.35	Horizontal	-37.43	-13.00	24.43	0
9	16921.3	-42.26	8.41	14.95	Horizontal	-35.72	-13.00	22.72	45
10	18800.0	-40.58	8.54	15.45	Horizontal	-33.67	-13.00	20.67	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
 2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.5	-52.58	5.10	11.05	Horizontal	-46.63	-13.00	33.63	180
3	5727.4	-54.75	5.42	12.65	Horizontal	-47.52	-13.00	34.52	135
4	7637.3	-50.09	6.70	13.85	Horizontal	-42.94	-13.00	29.94	0
5	9545.6	-48.67	7.01	14.75	Horizontal	-40.93	-13.00	27.93	315
6	11455.9	-46.18	7.48	15.95	Horizontal	-37.71	-13.00	24.71	180
7	13366.1	-46.33	7.51	16.55	Horizontal	-37.29	-13.00	24.29	225
8	15276.4	-46.10	8.24	15.35	Horizontal	-38.99	-13.00	25.99	0
9	17183.3	-44.28	8.41	14.95	Horizontal	-37.74	-13.00	24.74	45
10	19093.0	-42.22	8.54	15.45	Horizontal	-35.31	-13.00	22.31	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 3MHz CH-LOW

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3702.8	-56.24	5.10	11.05	Horizontal	-50.29	-13.00	37.29	180
3	5554.5	-55.36	5.42	12.65	Horizontal	-48.13	-13.00	35.13	135
4	7405.9	-48.79	6.70	13.85	Horizontal	-41.64	-13.00	28.64	0
5	9258.8	-47.97	7.01	14.75	Horizontal	-40.23	-13.00	27.23	315
6	11109.4	-47.43	7.48	15.95	Horizontal	-38.96	-13.00	25.96	180
7	12961.1	-45.15	7.51	16.55	Horizontal	-36.11	-13.00	23.11	225
8	14812.9	-42.50	8.24	15.35	Horizontal	-35.39	-13.00	22.39	0
9	16663.5	-43.79	8.41	14.95	Horizontal	-37.25	-13.00	24.25	45
10	18515.0	-42.76	8.54	15.45	Horizontal	-35.85	-13.00	22.85	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.





## LTE Band 2 3MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.8	-57.11	5.10	11.05	Horizontal	-51.16	-13.00	38.16	180
3	5641.1	-54.54	5.42	12.65	Horizontal	-47.31	-13.00	34.31	135
4	7520.3	-48.34	6.70	13.85	Horizontal	-41.19	-13.00	28.19	0
5	9400.5	-46.75	7.01	14.75	Horizontal	-39.01	-13.00	26.01	315
6	11279.3	-46.77	7.48	15.95	Horizontal	-38.30	-13.00	25.30	180
7	13160.3	-48.75	7.51	16.55	Horizontal	-39.71	-13.00	26.71	225
8	15040.1	-44.56	8.24	15.35	Horizontal	-37.45	-13.00	24.45	0
9	16918.9	-42.52	8.41	14.95	Horizontal	-35.98	-13.00	22.98	45
10	18800.0	-40.35	8.54	15.45	Horizontal	-33.44	-13.00	20.44	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 3MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3814.9	-52.84	5.10	11.05	Horizontal	-46.89	-13.00	33.89	180
3	5724.8	-54.39	5.42	12.65	Horizontal	-47.16	-13.00	34.16	135
4	7634.6	-49.82	6.70	13.85	Horizontal	-42.67	-13.00	29.67	0
5	9542.3	-49.31	7.01	14.75	Horizontal	-41.57	-13.00	28.57	315
6	11449.1	-45.42	7.48	15.95	Horizontal	-36.95	-13.00	23.95	180
7	13358.3	-45.90	7.51	16.55	Horizontal	-36.86	-13.00	23.86	225
8	15266.3	-45.46	8.24	15.35	Horizontal	-38.35	-13.00	25.35	0
9	17175.4	-43.27	8.41	14.95	Horizontal	-36.73	-13.00	23.73	45
10	19085.0	-41.54	8.54	15.45	Horizontal	-34.63	-13.00	21.63	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 5MGHz CH-LOW

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3705.0	-56.71	5.10	11.05	Horizontal	-50.76	-13.00	37.76	180
3	5557.9	-54.91	5.42	12.65	Horizontal	-47.68	-13.00	34.68	225
4	7409.3	-48.74	6.70	13.85	Horizontal	-41.59	-13.00	28.59	0
5	9262.5	-47.68	7.01	14.75	Horizontal	-39.94	-13.00	26.94	45
6	11115.0	-46.82	7.48	15.95	Horizontal	-38.35	-13.00	25.35	225
7	12967.5	-45.93	7.51	16.55	Horizontal	-36.89	-13.00	23.89	180
8	14820.0	-42.46	8.24	15.35	Horizontal	-35.35	-13.00	22.35	135
9	16672.5	-43.49	8.41	14.95	Horizontal	-36.95	-13.00	23.95	0
10	18525.0	-41.03	8.54	15.45	Horizontal	-34.12	-13.00	21.12	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.4	-55.72	5.10	11.05	Horizontal	-49.77	-13.00	36.77	180
3	5640.4	-54.09	5.42	12.65	Horizontal	-46.86	-13.00	33.86	135
4	7520.6	-48.52	6.70	13.85	Horizontal	-41.37	-13.00	28.37	0
5	9397.1	-46.92	7.01	14.75	Horizontal	-39.18	-13.00	26.18	315
6	11279.3	-45.32	7.48	15.95	Horizontal	-36.85	-13.00	23.85	180
7	13160.3	-47.90	7.51	16.55	Horizontal	-38.86	-13.00	25.86	225
8	150423.8	-45.09	8.24	15.35	Horizontal	-37.98	-13.00	24.98	0
9	16920.0	-42.68	8.41	14.95	Horizontal	-36.14	-13.00	23.14	45
10	18800.0	-41.46	8.54	15.45	Horizontal	-34.55	-13.00	21.55	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 5MGHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.8	-53.01	5.10	11.05	Horizontal	-47.06	-13.00	34.06	180
3	5722.1	-54.30	5.42	12.65	Horizontal	-47.07	-13.00	34.07	135
4	7629.4	-50.22	6.70	13.85	Horizontal	-43.07	-13.00	30.07	0
5	9537.8	-49.45	7.01	14.75	Horizontal	-41.71	-13.00	28.71	315
6	11443.5	-46.29	7.48	15.95	Horizontal	-37.82	-13.00	24.82	180
7	13351.5	-45.87	7.51	16.55	Horizontal	-36.83	-13.00	23.83	225
8	15261.8	-44.87	8.24	15.35	Horizontal	-37.76	-13.00	24.76	0
9	17167.5	-43.78	8.41	14.95	Horizontal	-37.24	-13.00	24.24	45
10	19075.0	-42.27	8.54	15.45	Horizontal	-35.36	-13.00	22.36	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 10MGHz CH-LOW

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3709.9	-56.30	5.10	11.05	Horizontal	-50.35	-13.00	37.35	45
3	5565.0	-55.34	5.42	12.65	Horizontal	-48.11	-13.00	35.11	225
4	7419.8	-49.43	6.70	13.85	Horizontal	-42.28	-13.00	29.28	180
5	9273.4	-47.69	7.01	14.75	Horizontal	-39.95	-13.00	26.95	135
6	111296.3	-47.49	7.48	15.95	Horizontal	-39.02	-13.00	26.02	0
7	12984.8	-47.15	7.51	16.55	Horizontal	-38.11	-13.00	25.11	315
8	14841.0	-41.24	8.24	15.35	Horizontal	-34.13	-13.00	21.13	180
9	16698.4	-44.35	8.41	14.95	Horizontal	-37.81	-13.00	24.81	225
10	18550.0	-42.65	8.54	15.45	Horizontal	-35.74	-13.00	22.74	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.1	-56.20	5.10	11.05	Horizontal	-50.25	-13.00	37.25	180
3	5640.4	-54.65	5.42	12.65	Horizontal	-47.42	-13.00	34.42	135
4	7520.6	-49.49	6.70	13.85	Horizontal	-42.34	-13.00	29.34	0
5	9401.6	-45.21	7.01	14.75	Horizontal	-37.47	-13.00	24.47	315
6	11282.6	-47.09	7.48	15.95	Horizontal	-38.62	-13.00	25.62	180
7	13158.0	-48.03	7.51	16.55	Horizontal	-38.99	-13.00	25.99	225
8	15040.1	-45.76	8.24	15.35	Horizontal	-38.65	-13.00	25.65	0
9	16918.9	-43.02	8.41	14.95	Horizontal	-36.48	-13.00	23.48	45
10	18800.0	-41.47	8.54	15.45	Horizontal	-34.56	-13.00	21.56	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.0	-56.31	5.10	11.05	Horizontal	-50.36	-13.00	37.36	0
3	5715.0	-54.30	5.42	12.65	Horizontal	-47.07	-13.00	34.07	315
4	7618.9	-48.74	6.70	13.85	Horizontal	-41.59	-13.00	28.59	180
5	9527.6	-49.12	7.01	14.75	Horizontal	-41.38	-13.00	28.38	225
6	11427.8	-45.59	7.48	15.95	Horizontal	-37.12	-13.00	24.12	225
7	13334.6	-45.90	7.51	16.55	Horizontal	-36.86	-13.00	23.86	180
8	15238.1	-44.99	8.24	15.35	Horizontal	-37.88	-13.00	24.88	135
9	17146.1	-43.02	8.41	14.95	Horizontal	-36.48	-13.00	23.48	0
10	19050.0	-41.71	8.54	15.45	Horizontal	-34.80	-13.00	21.80	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 15MGHz CH-LOW

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3714.8	-56.50	5.10	11.05	Horizontal	-50.55	-13.00	37.55	180
3	5572.5	-54.92	5.42	12.65	Horizontal	-47.69	-13.00	34.69	180
4	7429.1	-48.90	6.70	13.85	Horizontal	-41.75	-13.00	28.75	225
5	9286.9	-46.67	7.01	14.75	Horizontal	-38.93	-13.00	25.93	0
6	11145.4	-46.95	7.48	15.95	Horizontal	-38.48	-13.00	25.48	45
7	13005.0	-46.99	7.51	16.55	Horizontal	-37.95	-13.00	24.95	225
8	14860.1	-43.24	8.24	15.35	Horizontal	-36.13	-13.00	23.13	0
9	16715.3	-44.11	8.41	14.95	Horizontal	-37.57	-13.00	24.57	315
10	18575.0	-42.04	8.54	15.45	Horizontal	-35.13	-13.00	22.13	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.5	-57.14	5.10	11.05	Horizontal	-51.19	-13.00	38.19	225
3	5640.0	-55.34	5.42	12.65	Horizontal	-48.11	-13.00	35.11	225
4	7519.9	-50.20	6.70	13.85	Horizontal	-43.05	-13.00	30.05	0
5	9401.6	-47.77	7.01	14.75	Horizontal	-40.03	-13.00	27.03	315
6	11279.3	-46.76	7.48	15.95	Horizontal	-38.29	-13.00	25.29	180
7	13161.4	-49.05	7.51	16.55	Horizontal	-40.01	-13.00	27.01	225
8	15041.3	-45.18	8.24	15.35	Horizontal	-38.07	-13.00	25.07	0
9	16921.1	-42.19	8.41	14.95	Horizontal	-35.65	-13.00	22.65	45
10	18800.0	-40.61	8.54	15.45	Horizontal	-33.70	-13.00	20.70	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 15MGHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3805.0	-55.49	5.10	11.05	Horizontal	-49.54	-13.00	36.54	180
3	5707.5	-55.14	5.42	12.65	Horizontal	-47.91	-13.00	34.91	135
4	7610.0	-50.10	6.70	13.85	Horizontal	-42.95	-13.00	29.95	0
5	9512.5	-49.13	7.01	14.75	Horizontal	-41.39	-13.00	28.39	315
6	11415.0	-45.69	7.48	15.95	Horizontal	-37.22	-13.00	24.22	180
7	13317.5	-46.34	7.51	16.55	Horizontal	-37.30	-13.00	24.30	225
8	15220.0	-45.25	8.24	15.35	Horizontal	-38.14	-13.00	25.14	180
9	17122.5	-42.99	8.41	14.95	Horizontal	-36.45	-13.00	23.45	225
10	19025.0	-41.51	8.54	15.45	Horizontal	-34.60	-13.00	21.60	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 20MGHz CH-LOW

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3720.4	-56.72	5.10	11.05	Horizontal	-50.77	-13.00	37.77	45
3	5580.4	-54.41	5.42	12.65	Horizontal	-47.18	-13.00	34.18	225
4	7440.4	-48.71	6.70	13.85	Horizontal	-41.56	-13.00	28.56	180
5	9300.4	-47.24	7.01	14.75	Horizontal	-39.50	-13.00	26.50	135
6	11161.1	-46.93	7.48	15.95	Horizontal	-38.46	-13.00	25.46	0
7	13020.8	-46.52	7.51	16.55	Horizontal	-37.48	-13.00	24.48	225
8	14882.6	-42.31	8.24	15.35	Horizontal	-35.20	-13.00	22.20	0
9	16737.8	-43.82	8.41	14.95	Horizontal	-37.28	-13.00	24.28	45
10	18600.0	-42.10	8.54	15.45	Horizontal	-35.19	-13.00	22.19	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.



## LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3759.8	-57.08	5.10	11.05	Horizontal	-51.13	-13.00	38.13	180
3	5640.4	-55.57	5.42	12.65	Horizontal	-48.34	-13.00	35.34	135
4	7521.4	-48.43	6.70	13.85	Horizontal	-41.28	-13.00	28.28	0
5	9398.3	-47.83	7.01	14.75	Horizontal	-40.09	-13.00	27.09	315
6	11282.6	-46.92	7.48	15.95	Horizontal	-38.45	-13.00	25.45	180
7	13158.0	-48.26	7.51	16.55	Horizontal	-39.22	-13.00	26.22	225
8	15040.1	-46.04	8.24	15.35	Horizontal	-38.93	-13.00	25.93	0
9	16917.8	-42.67	8.41	14.95	Horizontal	-36.13	-13.00	23.13	45
10	18800.0	-41.16	8.54	15.45	Horizontal	-34.25	-13.00	21.25	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## LTE Band 2 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3801.0	-55.79	5.10	11.05	Horizontal	-49.84	-13.00	36.84	180
3	5699.6	-54.31	5.42	12.65	Horizontal	-47.08	-13.00	34.08	135
4	7600.9	-49.64	6.70	13.85	Horizontal	-42.49	-13.00	29.49	0
5	9500.6	-50.68	7.01	14.75	Horizontal	-42.94	-13.00	29.94	315
6	11401.9	-44.57	7.48	15.95	Horizontal	-36.10	-13.00	23.10	180
7	13300.9	-46.17	7.51	16.55	Horizontal	-37.13	-13.00	24.13	225
8	15201.0	-44.32	8.24	15.35	Horizontal	-37.21	-13.00	24.21	0
9	17097.8	-40.59	8.41	14.95	Horizontal	-34.05	-13.00	21.05	45
10	19000.0	-39.02	8.54	15.45	Horizontal	-32.11	-13.00	19.11	225

- Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.  
2.The worst emission was found in the antenna is Horizontal position.

## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
Base Station Simulator	R&S	CMW500	113645	2017-05-14	2018-05-13
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	2017-05-14	2018-05-13
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2017-05-20	2018-05-19
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
Signal generator	R&S	SMB 100A	102594	2017-05-14	2018-05-13
Signal generator	R&S	SMR27	100365	2017-05-14	2018-05-13
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2014-12-06	2017-12-05
Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Climatic Chamber	Re Ce	PT-30B	20101891	2015-07-18	2018-07-17
Horn Antenna	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
RF Cable	Agilent	SMA 15cm	0001	2017-08-04	2018-02-03
Preampflier	R&S	SCU18	102327	2017-06-18	2018-06-17

\*\*\*\*\*END OF REPORT \*\*\*\*\*



## ANNEX A: EUT Appearance and Test Setup

### A.1 EUT Appearance



Front Side





Back Side



Shield  
a: EUT

**Picture 1 EUT and Accessory**

## A.2 Test Setup

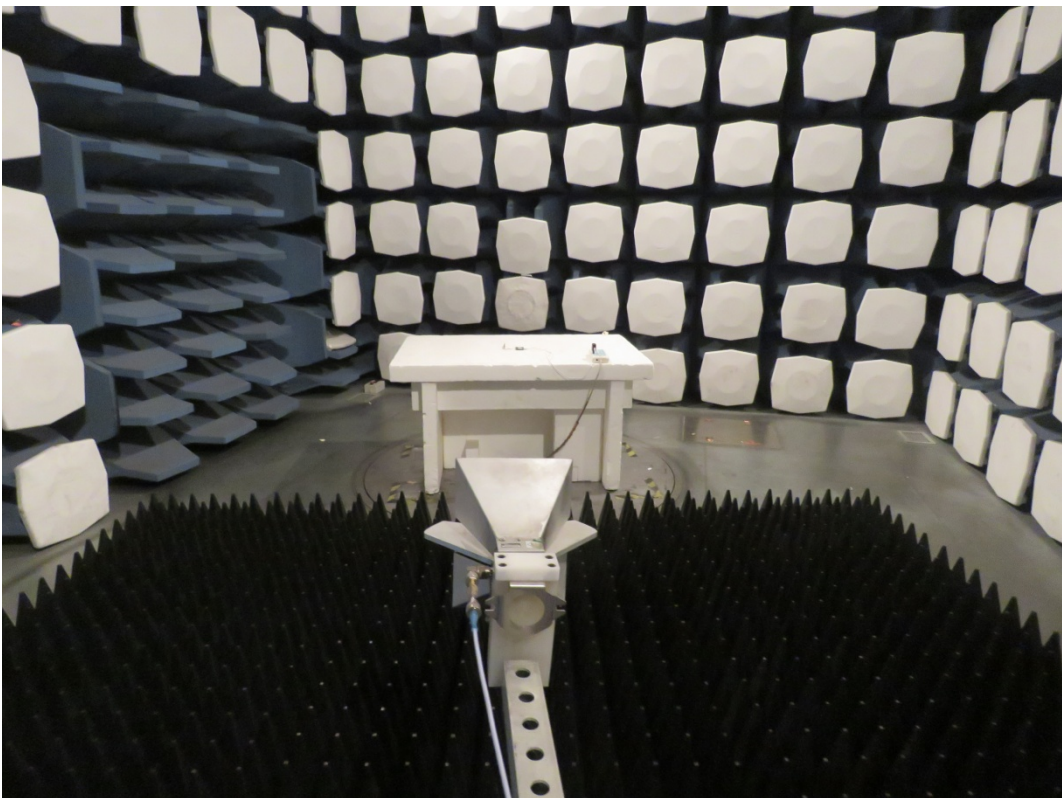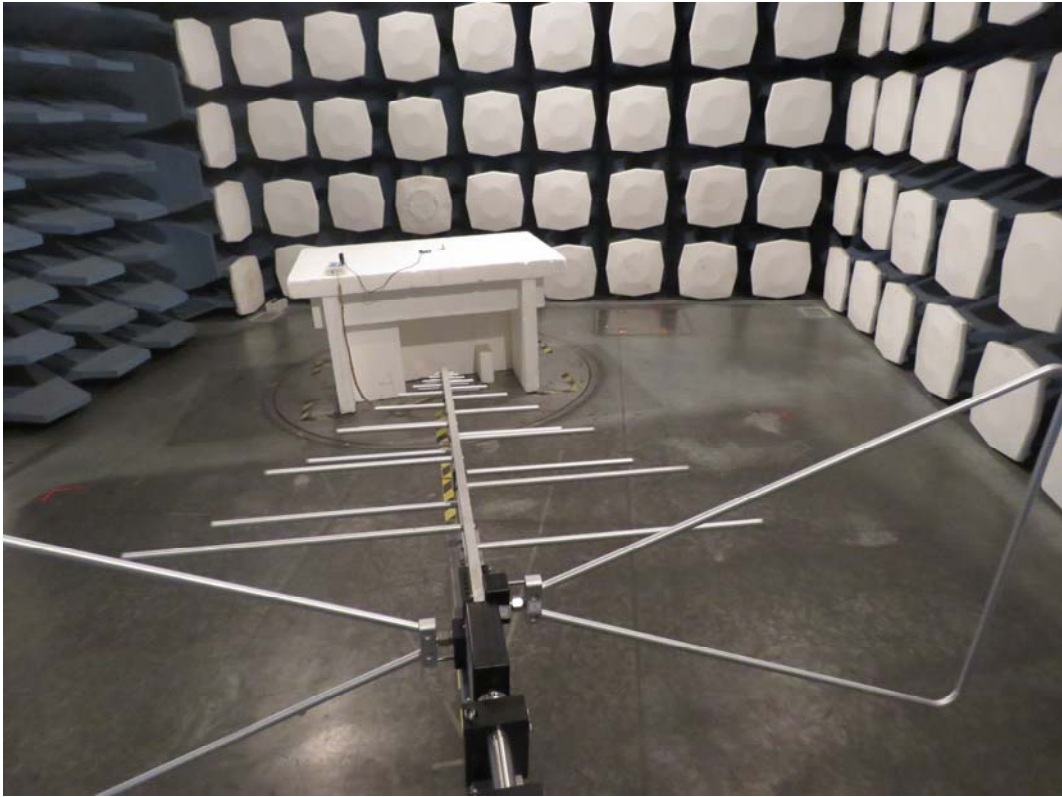

**Picture 2: Radiated Spurious Emissions Test setup**