



Certificate Number: 5055.02

# TEST REPORT FOR WLAN TESTING

---

Report No.: SRTC2021-9004(F)-21022401(F)

Product Name: LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone

Product Model: ZTE 8030

Applicant: ZTE CORPORATION

Manufacturer: ZTE CORPORATION

Specification: FCC Part 15 Subpart C (2020)

FCC ID: SRQ-ZTE8030

The State Radio\_monitoring\_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China

Tel: 86-10-57996183    Fax: 86-10-57996388

## CONTENTS

<b>1. GENERAL INFORMATION.....</b>	<b>2</b>
1.1 NOTES OF THE TEST REPORT .....	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY .....	2
1.3 APPLICANT'S DETAILS .....	2
1.4 MANUFACTURER'S DETAILS .....	2
1.5 TEST ENVIRONMENT .....	3
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST.....</b>	<b>4</b>
2.1 FINAL EQUIPMENT BUILD STATUS.....	4
2.2 DESCRIPTION OF TEST MODES .....	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	5
2.4 EUT OPERATING CONDITIONS.....	7
2.5 SUPPORT EQUIPMENT.....	7
<b>3 REFERENCE SPECIFICATION .....</b>	<b>7</b>
<b>4 KEY TO NOTES AND RESULT CODES.....</b>	<b>8</b>
<b>5 RESULT SUMMARY .....</b>	<b>9</b>
<b>6 TEST RESULT .....</b>	<b>9</b>
6.1 PEAK POWER OUTPUT.....	10
6.2 6dB BANDWIDTH.....	11
6.3 TRANSMITTER POWER SPECTRAL DENSITY.....	12
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT.....	13
6.5 BAND-EDGE MEASUREMENT .....	14
6.6 SPURIOUS RADIATED EMISSIONS.....	15
6.7 AC POWER LINE CONDUCTED EMISSION.....	20
<b>7 MEASUREMENT UNCERTAINTIES .....</b>	<b>22</b>
<b>8 TEST EQUIPMENTS .....</b>	<b>23</b>
<b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....</b>	<b>24</b>
<b>APPENDIX B – TEST DATA OF RADIATED EMISSION .....</b>	<b>24</b>

## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn

### **1.3 Applicant's details**

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Email:	gongyu@zte.com.cn

### **1.4 Manufacturer's details**

Company:	ZTE CORPORATION
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Email:	gongyu@zte.com.cn

## 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-02-24
Testing Start Date:	2021-03-01
Testing End Date:	2021-03-15

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	35

Normal Supply Voltage (V d.c.):	4.0
---------------------------------	-----

## **2 DESCRIPTION OF THE DEVICE UNDER TEST**

### **2.1 Final Equipment Build Status**

Frequency Band	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	802.11b:1Mbps-11Mbps 802.11g:6Mbps-54Mbps 802.11n HT20:MCS0-MCS7
Power Supply	Battery/Charger
Hardware Version	zg7A
Software Version	TEL_MX_ZTE_8030V1.0
IMEI	8861850500002155
Antenna type	Refer to Note
Antenna connector	Refer to Note

#### **Note1: Antenna requirement (FCC part 15.203)**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT is permanently attached.
- There are no provisions for connection to an external antenna.

Note2: The antenna provides to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency Band (GHz)	Antenna type	Connector Type
N/A	N/A	1dBi	2.4GHz~2.4835GHz	Fixed Internal Antenna	N/A

Manufacturers ensure that their designs will not be modified by the user or third party's arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.

Note3: The difference between the variant product and the prototype product is that change the software version ,hardware version and the flash, but no effect on RF parameters. The variant product evaluates the worst case of radiation, the other conducted test results of variant product derive from original product Report No.: SRTC2020-9004(F)-20121101(F).

## 2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

### 2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE < 1G	PLC	APCM	
-	✓	✓	✓	✓	-

Where

RE  $\geq$  1G: Radiated Emission above 1GHz

RE < 1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

#### Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,6,11	DBPSK/ BPSK	1,6,6.5

**Radiated Emission Test (Below 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,6,11	DBPSK/ BPSK	1,6,6.5

**Power Line Conducted Emission Test:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

**Antenna Port Conducted Measurement:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,6,11	DBPSK/ BPSK	1,6,6.5

## 2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery 1
Manufacturer	SCUD( FU JIAN) ELECTRONICS Co., Ltd.
Model Number	Li3949T44P8h906450
Equipment	Battery 2
Manufacturer	Amperex Technology Limited
Model Number	Li3949T44P8h906450
Equipment	Charger
Manufacturer	SHENZHEN RUIJING INDUSTRIAL CO.LTD
Model Number	STC-A5930A1-Z
Equipment	Headset 1
Manufacturer	JUWEI ELECTRONICS CO.,LTD
Model Number	JWEP1036-Z01R
Equipment	Headset 2
Manufacturer	ShenZhen FDC Electronic Co.,Ltd
Model Number	DEM-66
Equipment	USB Cable 1
Manufacturer	Shenzhen Luxshare Precision Industry Co.,Ltd.
Model Number	USB-TC20-W-100-M-L-HF
Equipment	USB Cable 2
Manufacturer	King Power Electronics Co.Ltd.
Model Number	USB-TC20-W-100-M-L-HF

### **3 REFERENCE SPECIFICATION**



Specification	Version	Title
FCC part15 Subpart C	2020	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

### **4 KEY TO NOTES AND RESULT CODES**

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

## 5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e) )	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Tong Daocheng 	Issued date: 20210404

## **6 TEST RESULT**

### **6.1 Peak Power Output**

#### **6.2.1 Test limit**

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

#### **6.2.2 Test Procedure Used**

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

#### **6.2.3 Test Settings**

##### **Peak Power Measurement**


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

##### **Average Power Measurement**

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

#### **6.2.4 Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

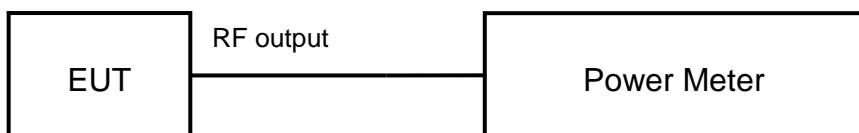

#### **6.2.5 Test result**

The test results are shown in Appendix A.

## 6.2 6dB Bandwidth

### 6.1.1 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

### 6.1.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2


KDB 558074 D01 v05r02 – Section 8.2

### 6.1.3 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### 6.1.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

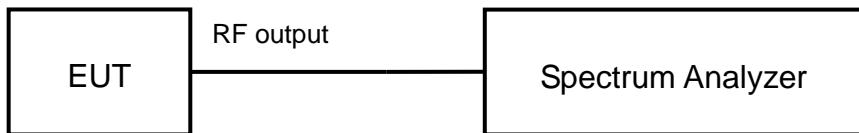

### 6.1.5 Test result

The test results are shown in Appendix A.

## 6.3 Transmitter Power Spectral Density

### 6.3.1 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

### 6.3.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

### 6.3.3 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### 6.3.4 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

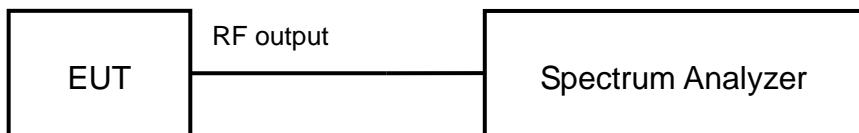

### 6.3.5 Test result

The test results are shown in Appendix A.

## 6.4 Conducted Out of band emission measurement

### 6.4.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.4.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v05r02 – Section 8.5

### 6.4.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 300$  kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

### 6.4.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 300$  kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

### 6.4.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

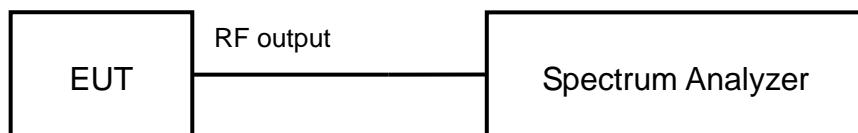

### 6.4.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

## 6.5 Band-edge measurement

### 6.5.1 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

### 6.5.2 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3  
KDB 558074 D01 v05r02 – Section 8.7.2

### 6.5.3 Reference level measurement Settings

Establish a reference level by using the following procedure:


- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  MHz
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 300$  kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

### 6.5.4 Test Settings

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 300$  kHz.
- d) Detector = peak.
- e) Set span to encompass the spectrum to be examined
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level.

### 6.5.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

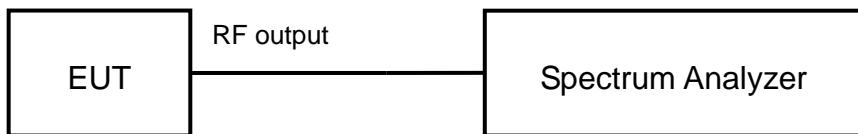

### 6.5.6 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

## 6.6 Spurious Radiated Emissions

### 6.6.1 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

### 6.6.2 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [ μV/m ]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

**Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)**

Frequency [MHz]	Detector	Unit (dB $\mu$ V/m)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

#### Conversion Radiated limits

### 6.6.3 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02r02 – Section 12.2.7

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

2. Signals below 30MHz are not recorded in the report because they are lower than the limits by more than 20dB.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

### For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

### 6.6.5 Test Settings

#### Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

#### Peak Field Strength Measurements per Section 12.2.7of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### 6.6.5 Test Setup


For Radiated emission below 30MHz

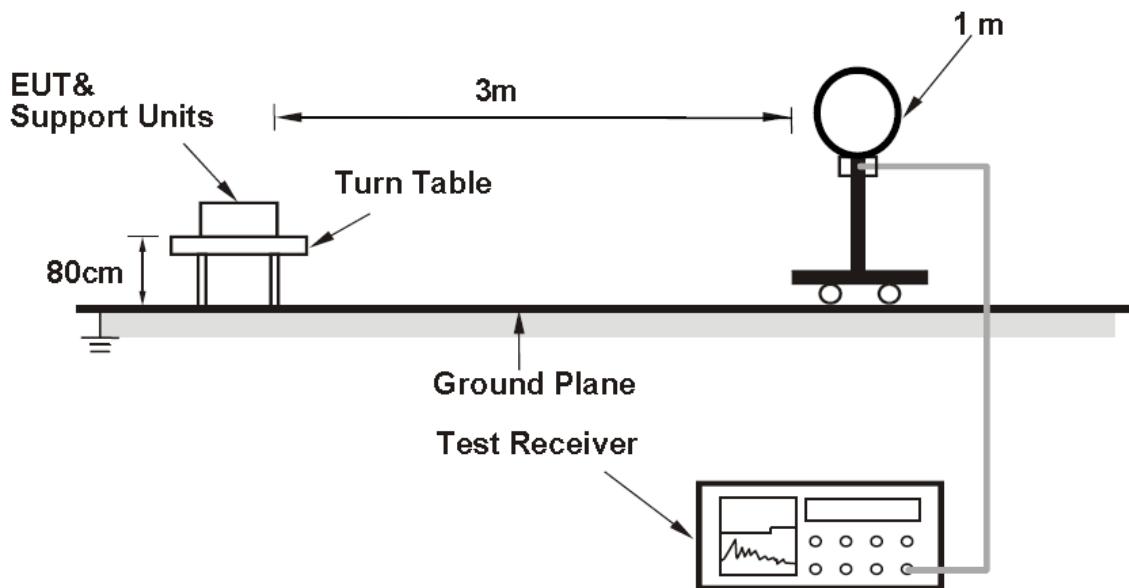

For Radiated emission 30MHz to 1GHz

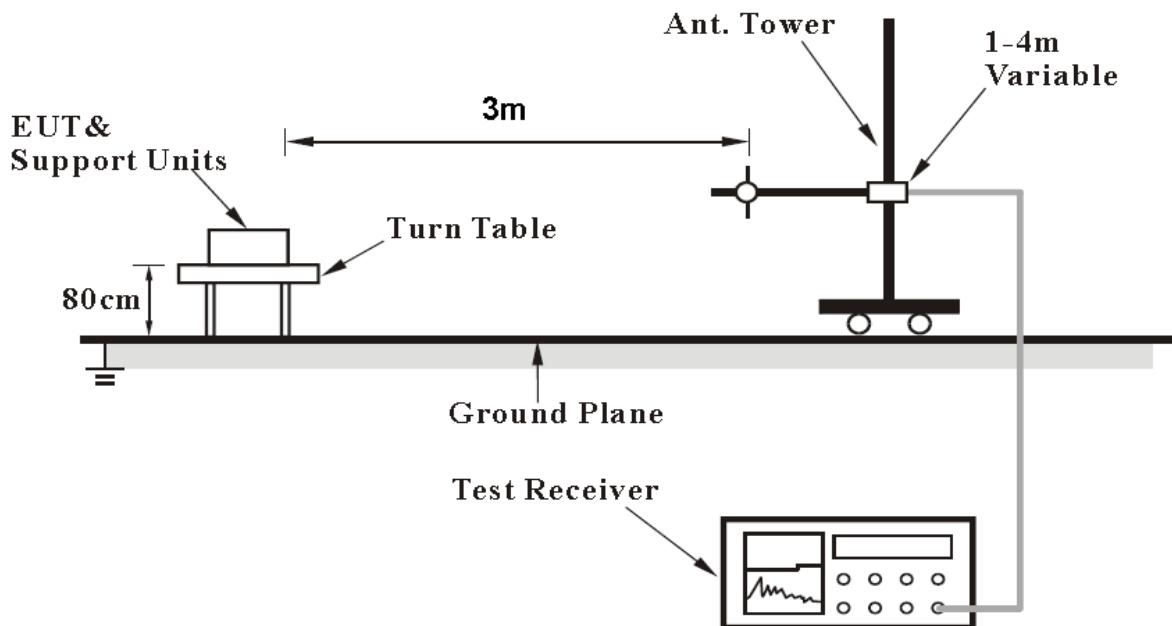

For Radiated emission above 1GHz

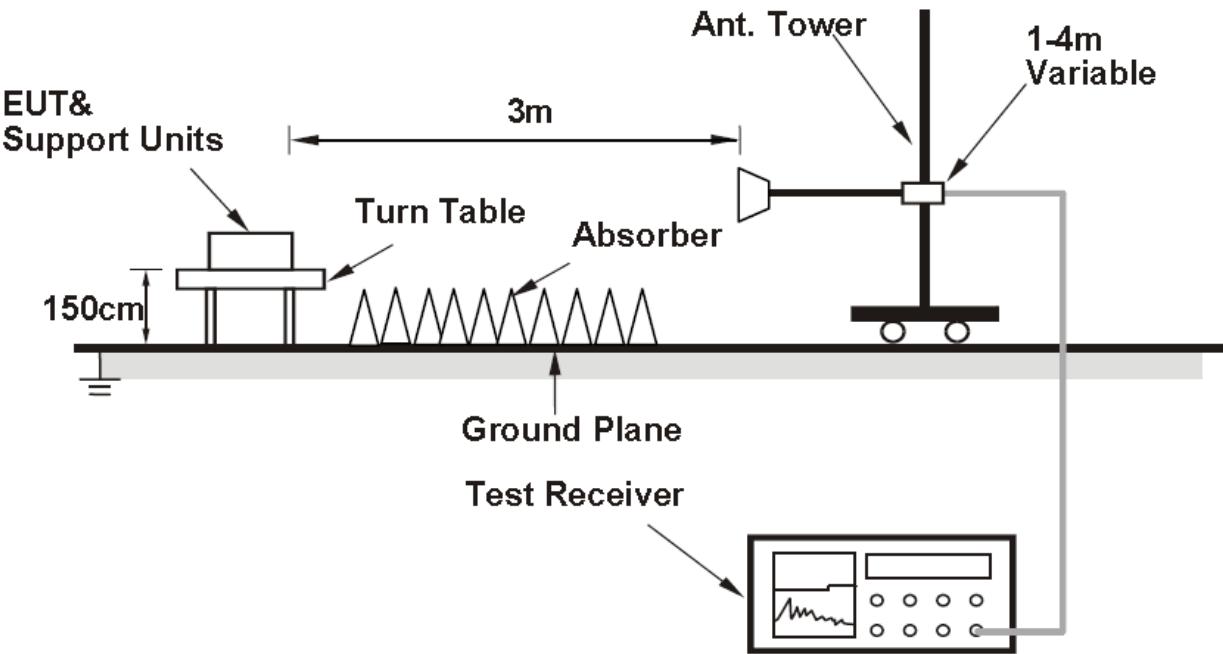

### 6.6.6 Test result

The test results are shown in Appendix B.

## 6.7 AC Power line Conducted Emission

### 6.7.1 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013


### 6.7.2 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

**NOTE:** The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/240V/60Hz.

### 6.7.3 Test Setup

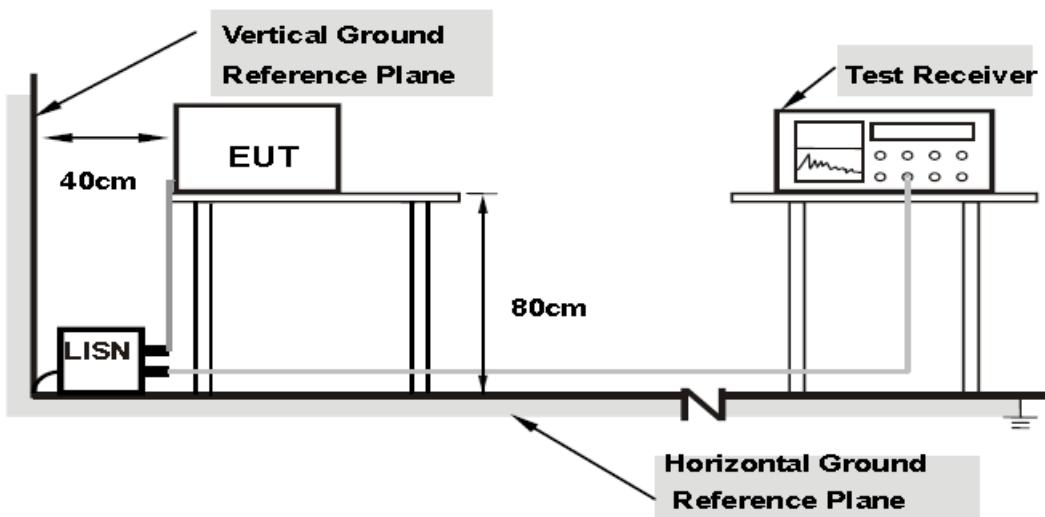

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.4 Test result

The test results are shown in Appendix B.

## **7 MEASUREMENT UNCERTAINTIES**

Items	Uncertainty	
6dB Bandwidth	3kHz	
Peak power output	0.67dB	
Transmitter Power Spectral Density	0.75dB	
Band edge compliance	1.20dB	
Conducted Out of band emission measurement	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB
Spurious Radiated Emissions	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB
AC Power line Conducted Emission	3.92dB	

## **8 TEST EQUIPMENTS**

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2020.08.20	2021.08.19
2.	N9020A Spectrum Analyzer	Agilent	MY48010771	2020.08.20	2021.08.19
3.	Power Meter E4416A	Agilent	MY52370013	2020.04.12	2021.04.12
4.	Power Sensor E9327A	Agilent	MY52420006	2020.04.12	2021.04.12
5.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2020.08.20	2021.08.19
6.	23.18mx16.88mx9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
7.	Turn table Diameter:5m	FRANKONIA	-----	-----	-----
8.	Antenna master SAC(MA4.0)	MATURO	-----	-----	-----
9.	9.080mx5.255mx3.525m Shielding room	FRANKONIA	-----	-----	-----
10.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2020.08.20	2021.08.19
11.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2020.08.20	2021.08.19
12.	ESI 40 EMI test receiver	R&S	100015	2020.08.20	2021.08.19
13.	ESCS30 EMI test receiver	R&S	100029	2020.08.20	2021.08.19
14.	HL562 Receive antenna	R&S	100167	2020.08.20	2021.08.19
15.	ENV216 AMN	R&S	3560.6550.12	2020.08.20	2021.08.19

## APPENDIX A – TEST DATA OF CONDUCTED EMISSION

Offset 1.2dB = Temporary antenna connector loss 0.2dB+ Cable loss 1.0dB

### Duty Cycle

Modulation Type	Frequency (MHz)	Chain	Plot	Duty Cycle	Correction Factor(dB)
802.11b	2412	Chain0	Fig.1	99.64%	0.02
802.11g	2412	Chain0	Fig.2	95.01%	0.22
802.11n HT20	2412	Chain0	Fig.3	94.65%	0.24

Note: Correction Factor=10\*log (1/Duty Cycle)

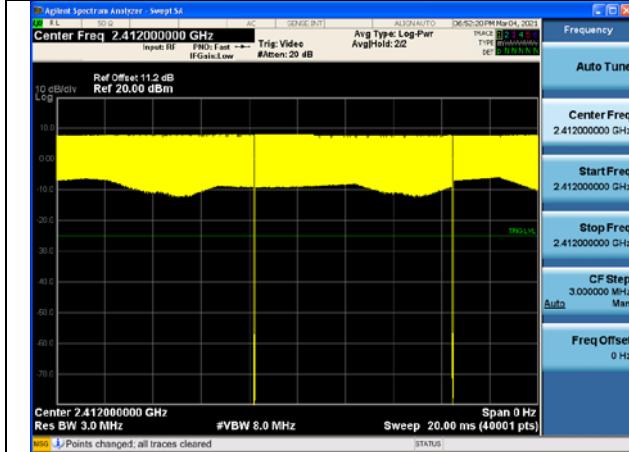


Fig.1

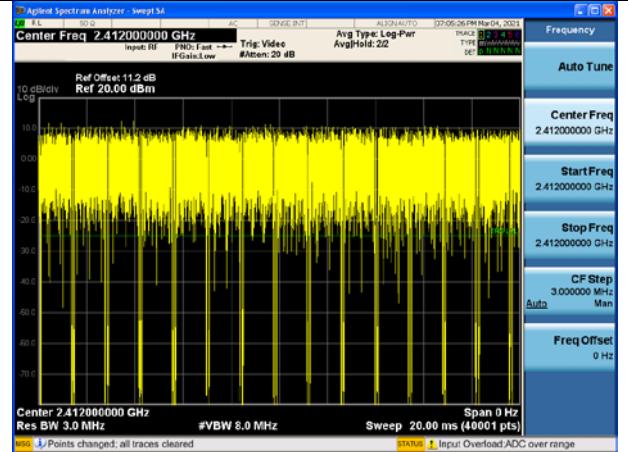


Fig.2

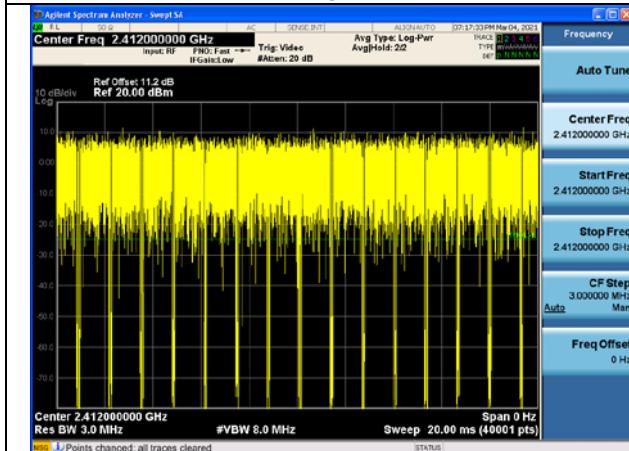


Fig.3

## Conducted power


Mode	Tones/ RU Index	Freq(MHz)	Chain	Peak power output (dBm)	Average power output (dBm)
802.11b	NA	2412MHz	Chain0	22.40	19.40
	NA	2437MHz	Chain0	23.00	20.00
	NA	2462MHz	Chain0	22.00	19.10
802.11g	NA	2412MHz	Chain0	26.70	18.50
	NA	2437MHz	Chain0	27.50	19.20
	NA	2462MHz	Chain0	26.60	18.30
802.11n20M	NA	2412MHz	Chain0	25.90	17.70
	NA	2437MHz	Chain0	26.80	18.60
	NA	2462MHz	Chain0	25.90	17.70

## 6dB Bandwidth


Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	8.31
2437MHz	6	Chain0	8.10
2462MHz	11	Chain0	9.03


Test Mode:802.11b Chain0

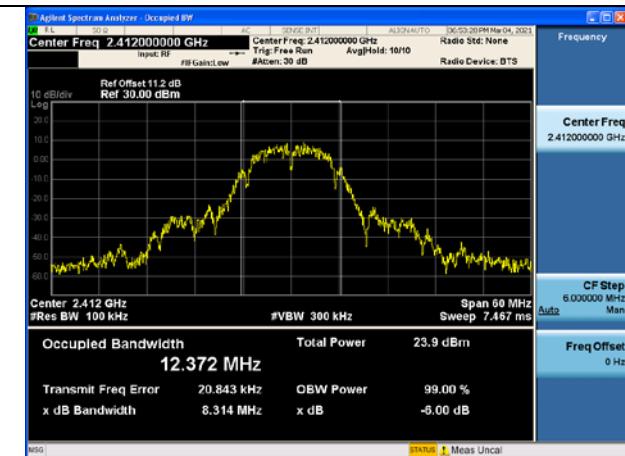

Test Mode:802.11b Chain0

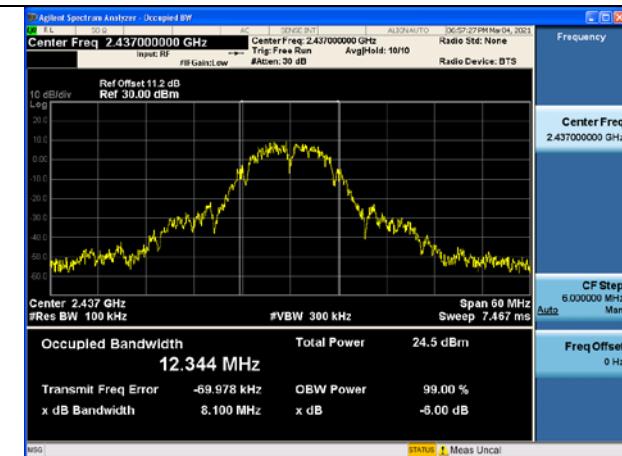


Test Mode:802.11b Chain0

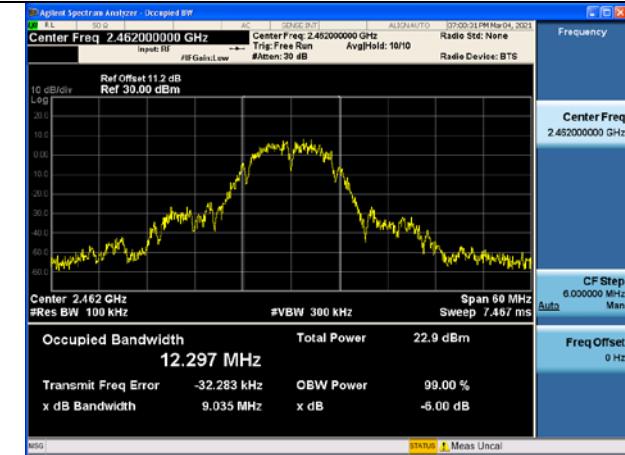


Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	16.45
2437MHz	6	Chain0	16.44
2462MHz	11	Chain0	16.04


Test Mode:802.11g Chain0

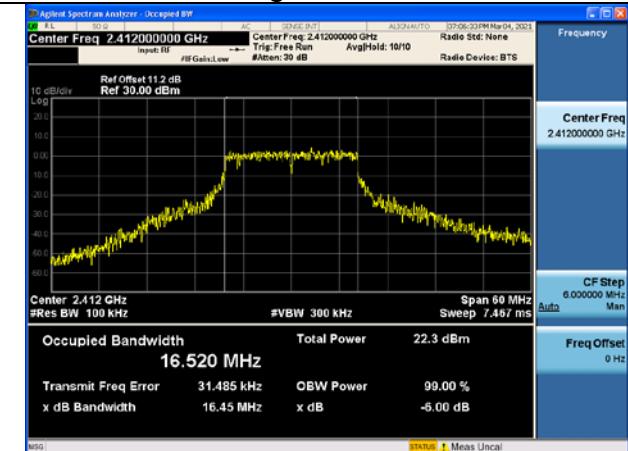

Test Mode:802.11g Chain0

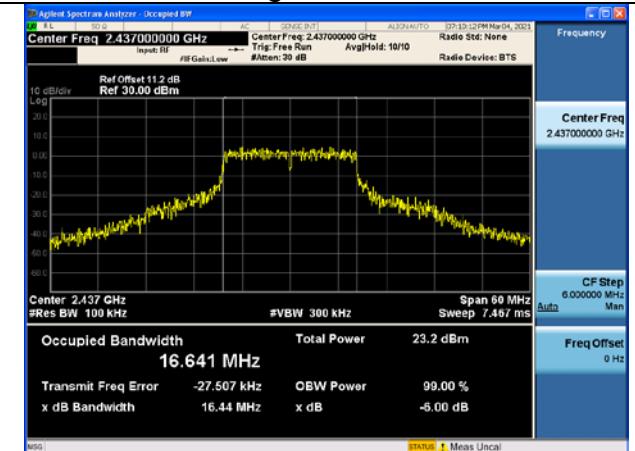


Test Mode:802.11g Chain0

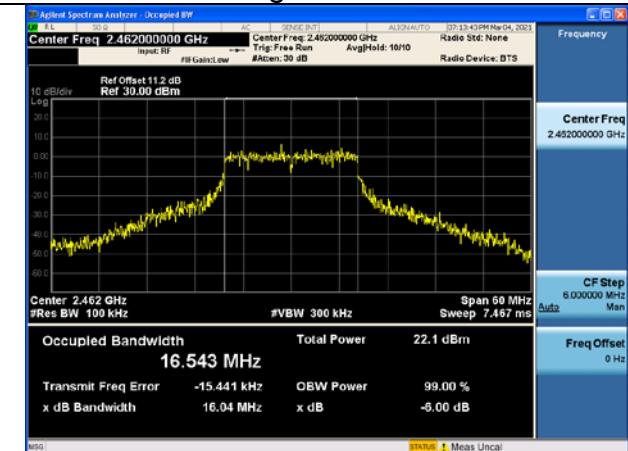


Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	6 dB bandwidth (MHz)
2412MHz	1	Chain0	17.65
2437MHz	6	Chain0	17.56
2462MHz	11	Chain0	17.29


Test Mode:802. 11n HT20 Chain0

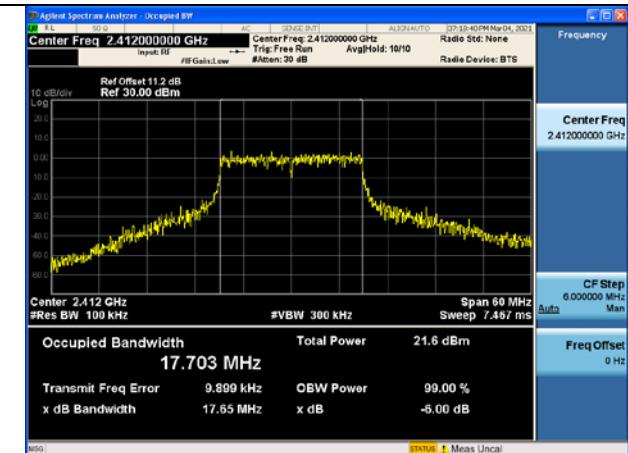

Test Mode:802. 11n HT20 Chain0

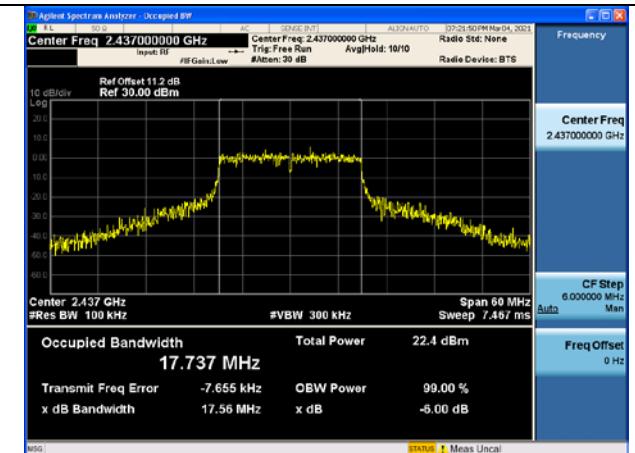

Test Mode:802. 11n HT20 Chain0

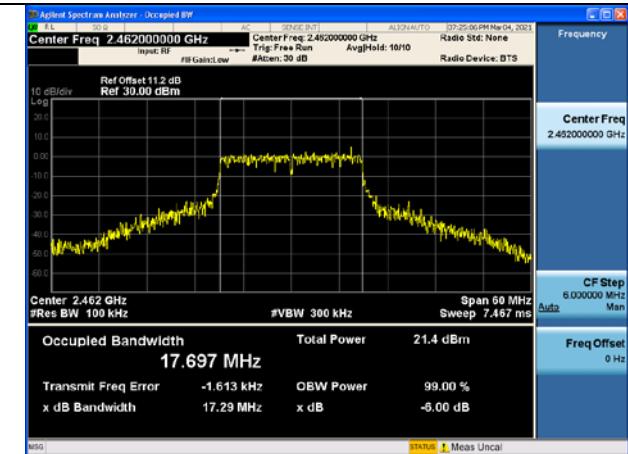


## 99% Bandwidth


Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	12.324
2437MHz	6	Chain0	12.430
2462MHz	11	Chain0	12.239


Test Mode:802.11b Chain0

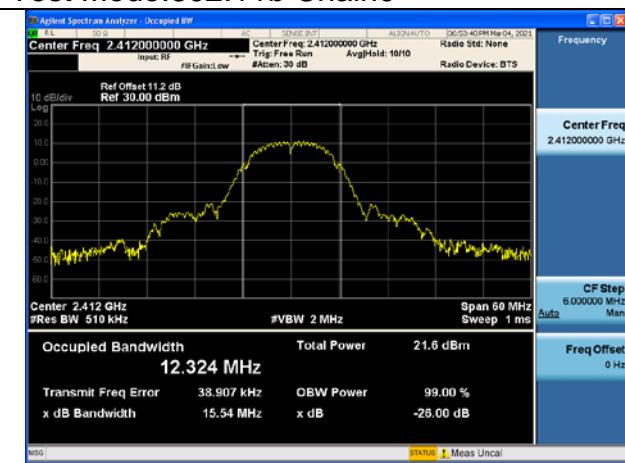

Test Mode:802.11b Chain0

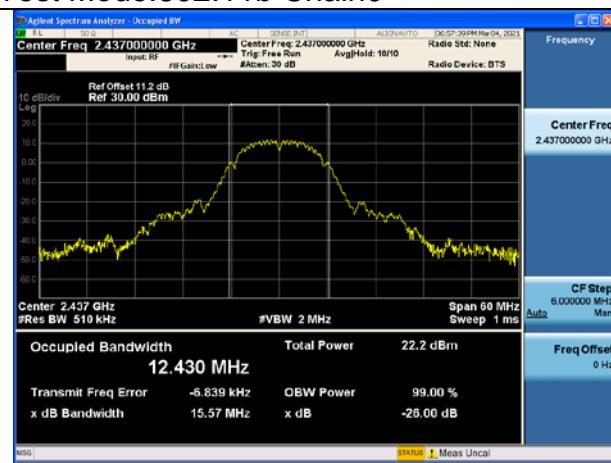


Test Mode:802.11b Chain0

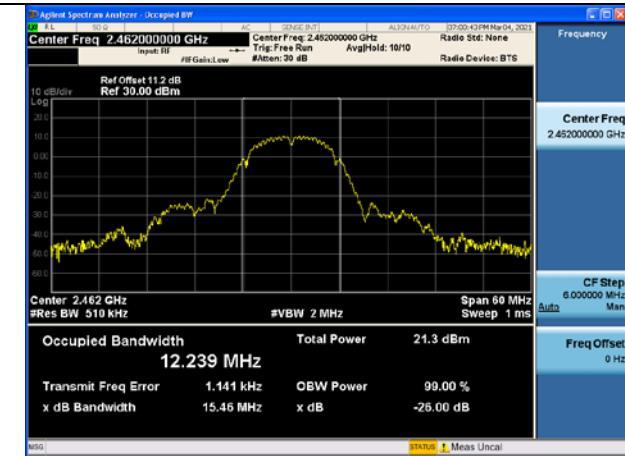


Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	17.138
2437MHz	6	Chain0	17.153
2462MHz	11	Chain0	16.932


Test Mode:802.11g Chain0

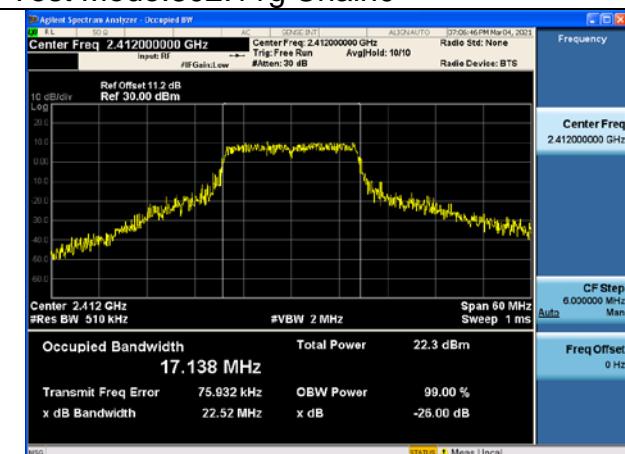

Test Mode:802.11g Chain0

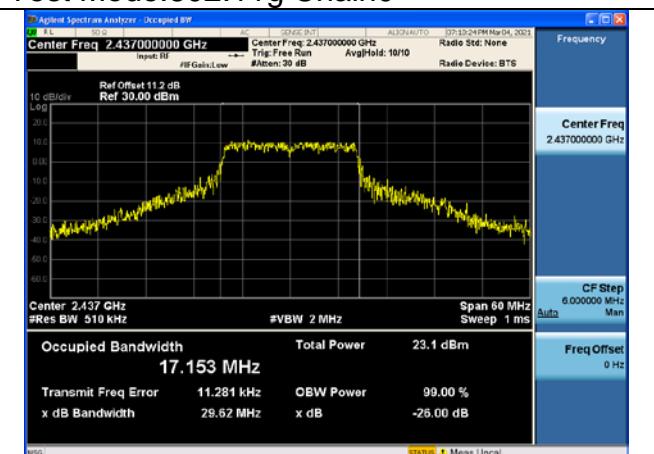


Test Mode:802.11g Chain0

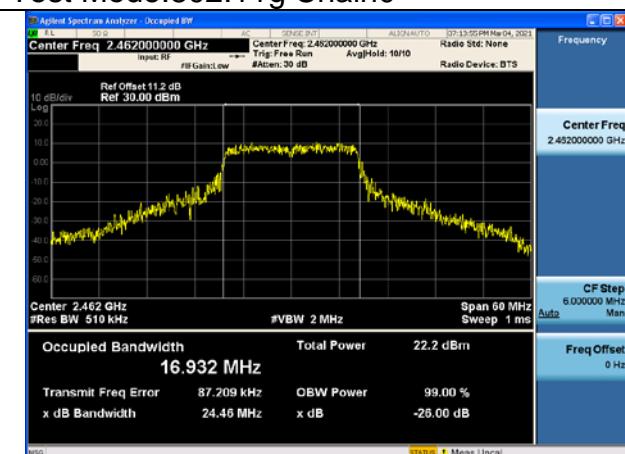


Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	99% bandwidth (MHz)
2412MHz	1	Chain0	17.970
2437MHz	6	Chain0	17.976
2462MHz	11	Chain0	17.925


Test Mode:802. 11n HT20 Chain0

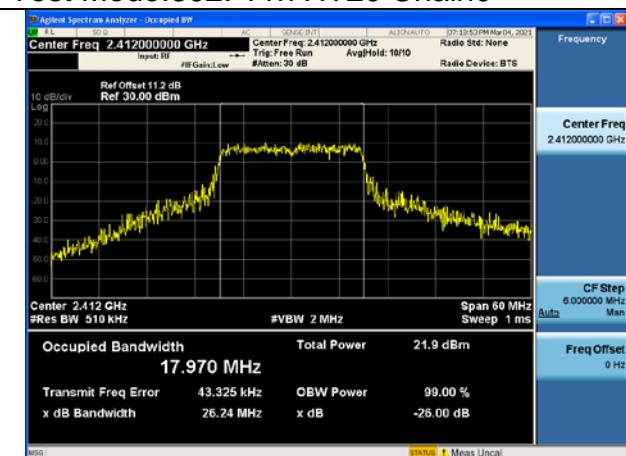

Test Mode:802. 11n HT20 Chain0

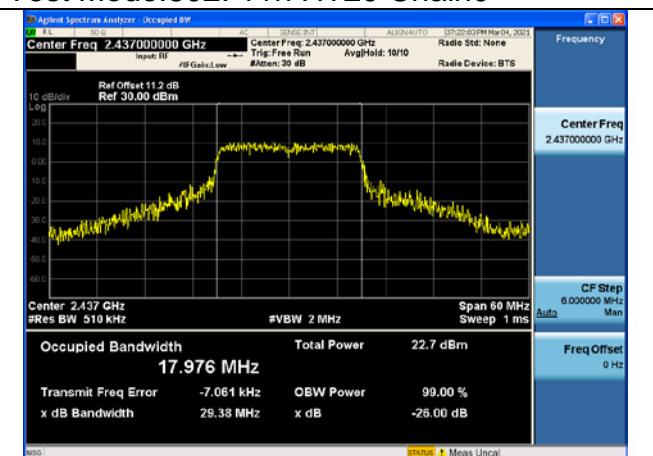

Test Mode:802. 11n HT20 Chain0

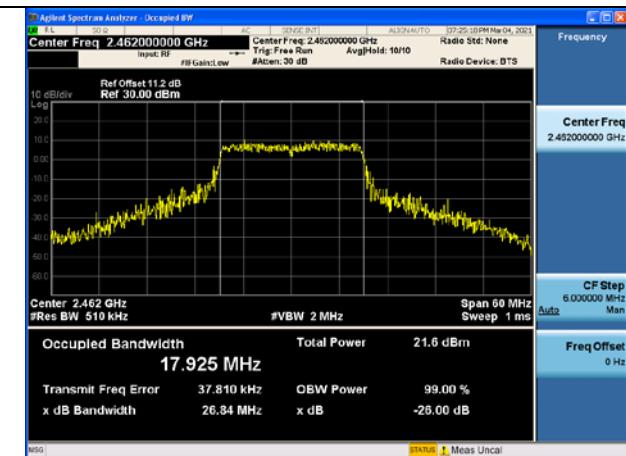


## Transmitter Power Spectral Density

Test Mode:802.11b

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-1.113
2437MHz	6	Chain0	-0.620
2462MHz	11	Chain0	-1.762

Test Mode:802.11b Chain0

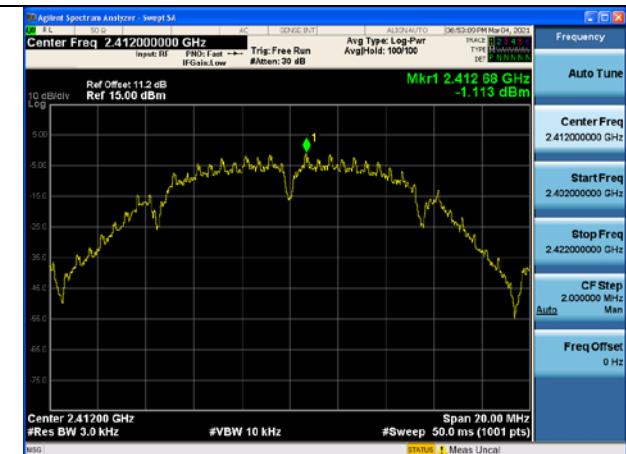

Test Mode:802.11b Chain0



Test Mode:802.11b Chain0



Test Mode:802.11g

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-5.036
2437MHz	6	Chain0	-4.957
2462MHz	11	Chain0	-5.953


Test Mode:802.11g Chain0



Test Mode:802.11g Chain0




Test Mode:802.11g Chain0

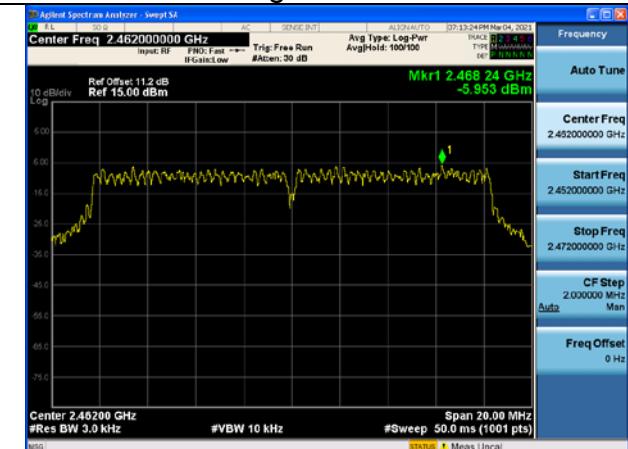

Test Mode:802. 11n HT20

Carrier frequency (MHz)	Channel No.	Chain	Power Density (dBm)
2412MHz	1	Chain0	-6.856
2437MHz	6	Chain0	-5.642
2462MHz	11	Chain0	-6.463


Test Mode:802. 11n HT20 Chain0

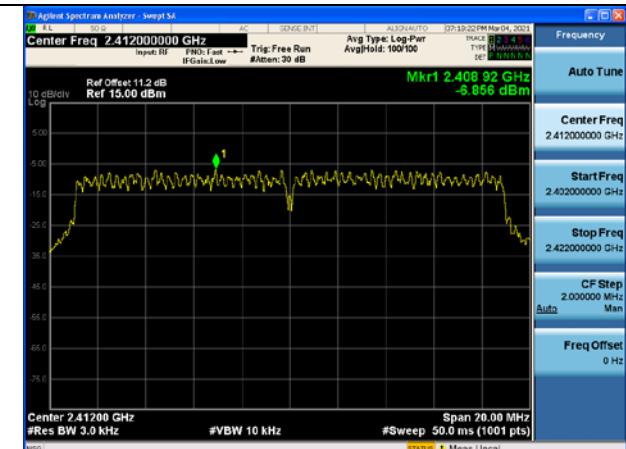

Test Mode:802. 11n HT20 Chain0




Test Mode:802. 11n HT20 Chain0

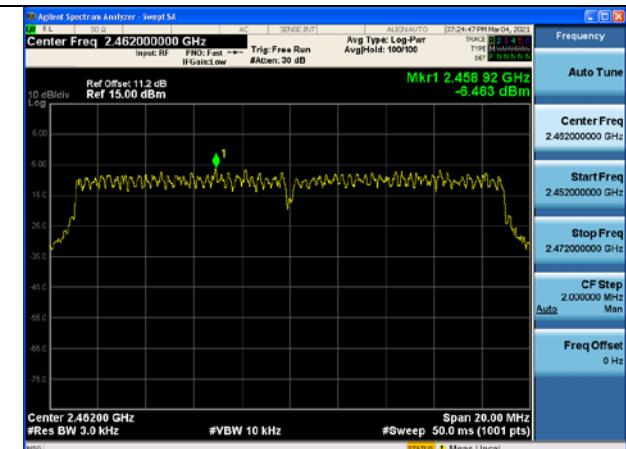


## Conducted Out of band emission measurement

Test Mode:802.11b


Test Mode:802.11b Chain0 CH1

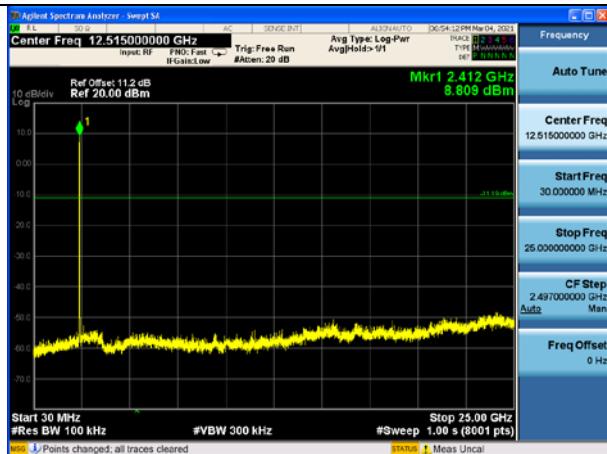

Test Mode:802.11b Chain0 CH6

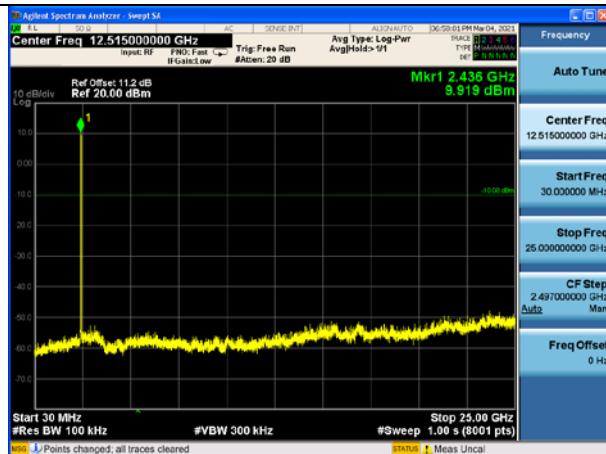


Test Mode:802.11b Chain0 CH11

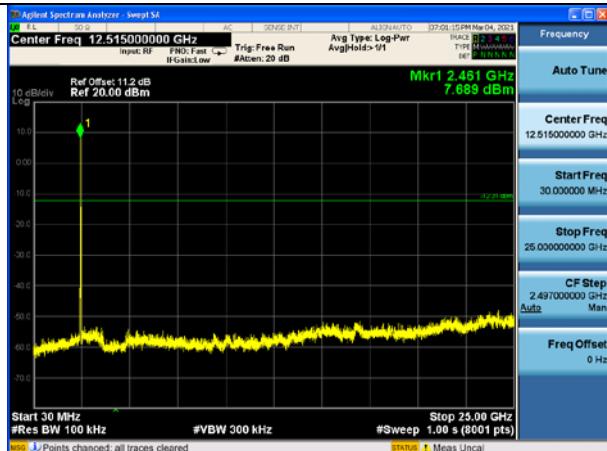


Test Mode:802.11g


Test Mode:802.11g Chain0 CH1

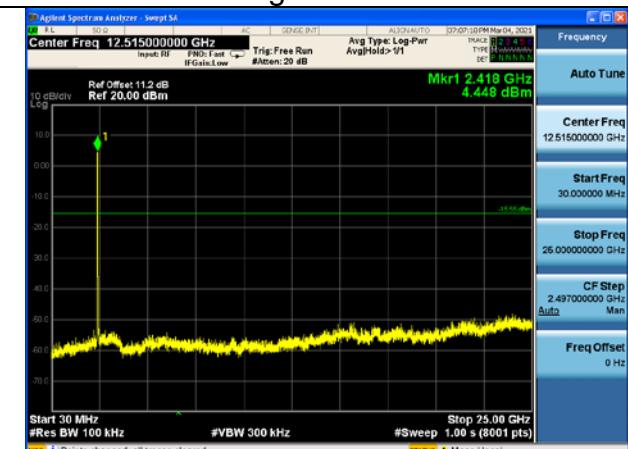

Test Mode:802.11g Chain0 CH6

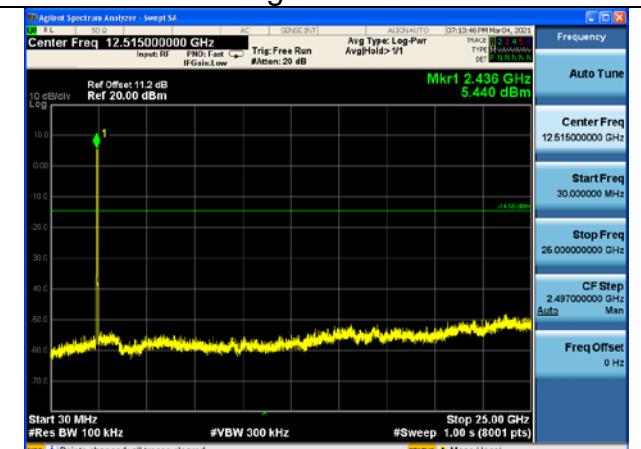


Test Mode:802.11g Chain0 CH11

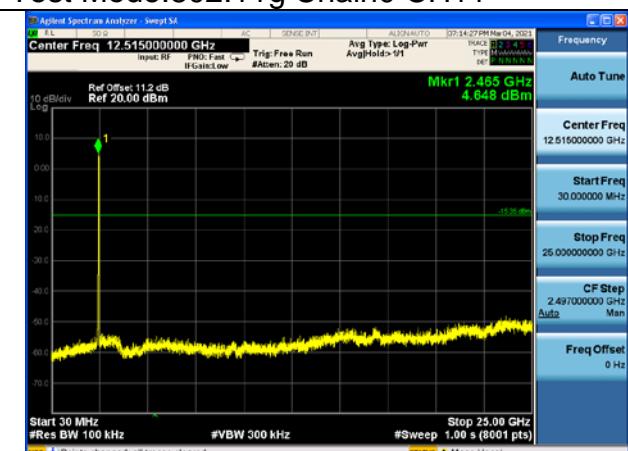


Test Mode:802. 11n HT20


Test Mode:802. 11n HT20 Chain0 CH1

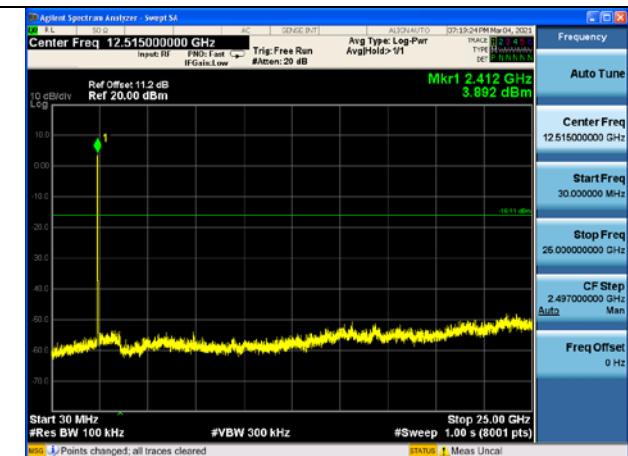

Test Mode:802. 11n HT20 Chain0 CH6

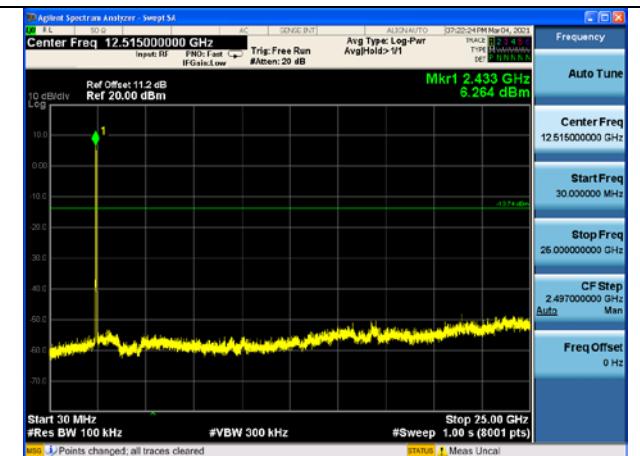

Test Mode:802. 11n HT20 Chain0 CH11

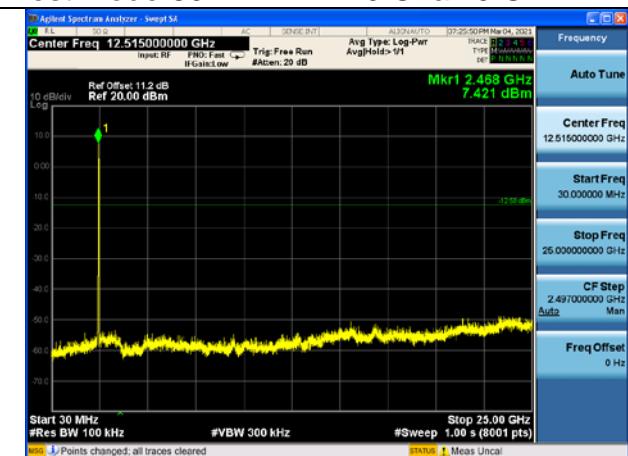

## Band edge measurement

Test Mode:802.11b

Test Mode:802.11b Chain0 CH1




Test Mode:802.11b Chain0 CH11



Test Mode:802.11g

Test Mode:802.11g Chain0 CH1

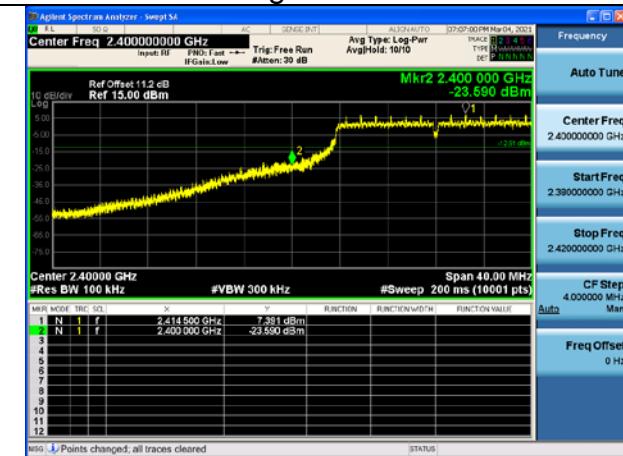


Test Mode:802.11g Chain0 CH11




Test Mode:802.11n HT20

Test Mode:802.11n HT20 Chain0 CH1

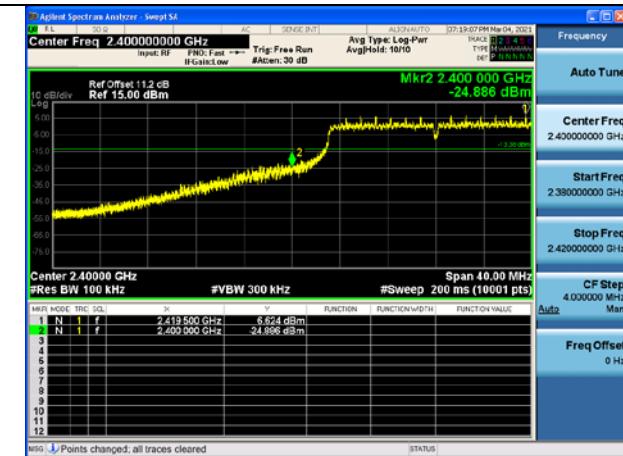

Test Mode:802.11n HT20 Chain0 CH11

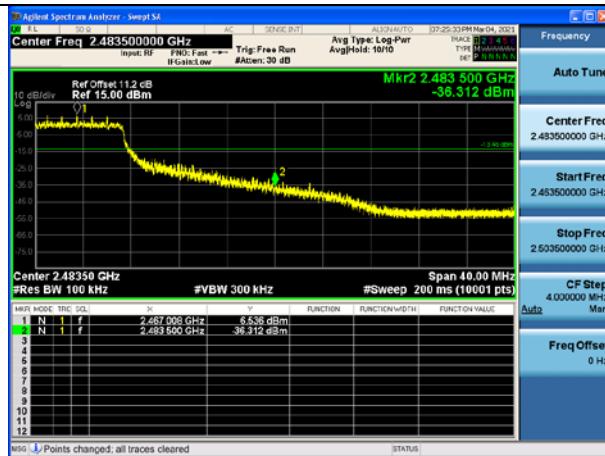

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Emission Band Edge**

The worst case attitude: The mobile lay down.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (105.13 dBuV/m) = (71.13 dB $\mu$ V) + (8.90 dB) + (25.10 1/m), the corresponding frequency is 2412MHz.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	105.13	71.13	N/A	N/A	8.90	25.10
2	2390	45.25	11.25	-28.75	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	103.06	69.06	N/A	N/A	8.90	25.10
2	2390	44.00	10.00	-30.00	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	103.50	69.50	N/A	N/A	8.90	25.10
2	2390	42.81	8.81	-11.19	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	101.26	67.26	N/A	N/A	8.90	25.10
2	2390	42.55	8.55	-11.45	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	99.27	65.27	N/A	N/A	8.90	25.10
2	2483.5	42.25	8.25	-31.75	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	96.53	62.53	N/A	N/A	8.90	25.10
2	2483.5	41.28	7.28	-32.72	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	99.10	65.10	N/A	N/A	8.90	25.10
2	2483.5	37.54	3.54	-16.46	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11b

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	96.75	62.75	N/A	N/A	8.90	25.10
2	2483.5	35.66	1.66	-18.34	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	103.45	69.45	N/A	N/A	8.90	25.10
2	2390	46.44	12.44	-27.56	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	100.69	66.69	N/A	N/A	8.90	25.10
2	2390	45.42	11.42	-28.58	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	102.19	68.19	N/A	N/A	8.90	25.10
2	2390	43.66	9.66	-10.34	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	99.20	65.20	N/A	N/A	8.90	25.10
2	2390	42.33	8.33	-11.67	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	98.99	64.99	N/A	N/A	8.90	25.10
2	2483.5	42.92	8.92	-31.08	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	96.19	62.19	N/A	N/A	8.90	25.10
2	2483.5	42.75	8.75	-31.25	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	97.36	63.36	N/A	N/A	8.90	25.10
2	2483.5	37.82	3.82	-16.18	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11g

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	94.70	60.70	N/A	N/A	8.90	25.10
2	2483.5	36.89	2.89	-17.11	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	102.72	68.72	N/A	N/A	8.90	25.10
2	2390	46.94	12.94	-27.06	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	100.36	66.36	N/A	N/A	8.90	25.10
2	2390	46.70	12.70	-27.30	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	100.72	66.72	N/A	N/A	8.90	25.10
2	2390	42.41	8.41	-11.59	54.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2412	98.60	64.60	N/A	N/A	8.90	25.10
2	2390	42.21	8.21	-11.79	54.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	98.89	64.89	N/A	N/A	8.90	25.10
2	2483.5	42.53	8.53	-31.47	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	96.12	62.12	N/A	N/A	8.90	25.10
2	2483.5	40.88	6.88	-33.12	74.00	8.90	25.10

Carrier frequency (MHz): 2462

Channel No.:11

Test Mode: 802.11n(HT20)

Polarity: Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	97.92	63.92	N/A	N/A	8.90	25.10
2	2483.5	37.02	3.02	-16.98	54.00	8.90	25.10

Carrier frequency (MHz): 2462


Channel No.:11

Test Mode: 802.11n(HT20)

Polarity:Horizontal

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (1/m)
1	2462	95.06	61.06	N/A	N/A	8.90	25.10
2	2483.5	35.04	1.04	-18.96	54.00	8.90	25.10

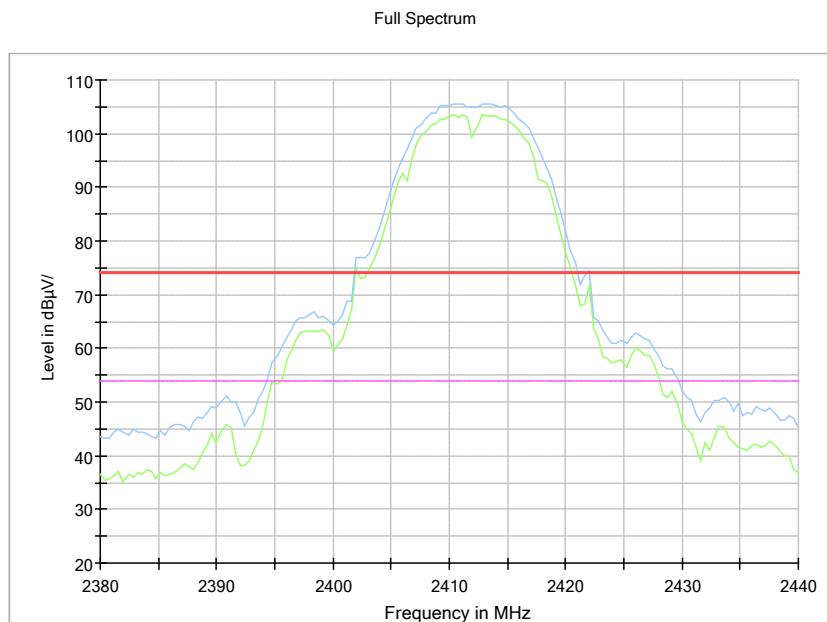

Radiated Emission Band Edge  
Carrier frequency (MHz): 2412  
Channel No.:1  
Test Mode: 802.11b

### **Sample Calculations**

#### Determining Spurious Emissions Levels

A “reference path loss” is established and the  $A_{Rpl}$  is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{mea}} + A_{Rpl}$$

Sample calculation:  $(34.85 \text{ dB}\mu\text{V/m}) = (57.25 \text{ dB}\mu\text{V/m}) + (-22.4 \text{ dB})$ , the corresponding frequency is 71.253500MHz.

The worst case attitude: The mobile lay down.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.253500	34.85	-22.4	57.25	Vertical	40.00
71.687500	34.88	-22.5	57.38	Vertical	40.00
72.141000	35.35	-22.6	57.95	Vertical	40.00
72.166500	35.35	-22.6	57.95	Vertical	40.00
72.363000	35.32	-22.7	58.02	Vertical	40.00
72.392000	35.42	-22.7	58.12	Vertical	40.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.259500	34.73	-22.4	57.13	Vertical	40.00
71.302000	34.77	-22.4	57.17	Vertical	40.00
72.169000	35.28	-22.6	57.88	Vertical	40.00
72.175000	35.29	-22.6	57.89	Vertical	40.00
72.261000	35.31	-22.6	57.91	Vertical	40.00
72.403000	35.30	-22.7	58.00	Vertical	40.00

For 802.11n(HT20) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.222000	34.67	-22.4	57.07	Vertical	40.00
71.816000	34.90	-22.5	57.40	Vertical	40.00
72.010000	35.04	-22.6	57.64	Vertical	40.00
72.217500	35.23	-22.6	57.83	Vertical	40.00
72.326500	35.25	-22.6	57.85	Vertical	40.00
72.843000	34.66	-22.8	57.46	Vertical	40.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
69.362000	33.91	-21.9	55.81	Vertical	40.00
71.179500	34.64	-22.4	57.04	Vertical	40.00
71.633000	34.78	-22.5	57.28	Vertical	40.00
72.107000	34.96	-22.6	57.56	Vertical	40.00
72.480500	35.10	-22.7	57.80	Vertical	40.00
72.834500	34.68	-22.8	57.48	Vertical	40.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.253500	34.72	-22.4	57.12	Vertical	40.00
71.268000	34.77	-22.4	57.17	Vertical	40.00
71.633000	16.55	-22.5	39.05	Vertical	40.00
71.639000	16.47	-22.5	38.97	Vertical	40.00
72.155500	16.70	-22.6	39.30	Vertical	40.00
72.301000	16.79	-22.6	39.39	Vertical	40.00

For 802.11n(HT20) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
69.607000	34.00	-22.0	56.00	Vertical	40.00
71.376000	34.93	-22.4	57.33	Vertical	40.00
71.732500	34.73	-22.5	57.23	Vertical	40.00
72.358000	34.83	-22.7	57.53	Vertical	40.00
72.537500	34.84	-22.7	57.54	Vertical	40.00
72.637000	34.82	-22.7	57.52	Vertical	40.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
69.545000	34.04	-22.0	56.04	Vertical	40.00
69.573000	33.96	-22.0	55.96	Vertical	40.00
71.331000	16.49	-22.4	38.89	Vertical	40.00
71.530000	16.69	-22.5	39.19	Vertical	40.00
71.573500	16.60	-22.5	39.10	Vertical	40.00
72.803000	16.75	-22.8	39.55	Vertical	40.00



For 802.11g Channel No.:11



Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.291000	34.97	-22.4	57.37	Vertical	40.00
71.590500	35.11	-22.5	57.61	Vertical	40.00
71.627000	35.06	-22.5	57.56	Vertical	40.00
71.633000	35.12	-22.5	57.62	Vertical	40.00
71.684000	35.11	-22.5	57.61	Vertical	40.00
71.798000	34.99	-22.5	57.49	Vertical	40.00



For 802.11n(HT20) Channel No.:11


Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
71.379500	34.99	-22.4	57.39	Vertical	40.00
71.396500	35.16	-22.4	57.56	Vertical	40.00
71.622000	35.21	-22.5	57.71	Vertical	40.00
71.647500	35.26	-22.5	57.76	Vertical	40.00
71.684000	35.25	-22.5	57.75	Vertical	40.00
71.707000	35.23	-22.5	57.73	Vertical	40.00

Carrier frequency (MHz): 2412  
 Channel No.:1

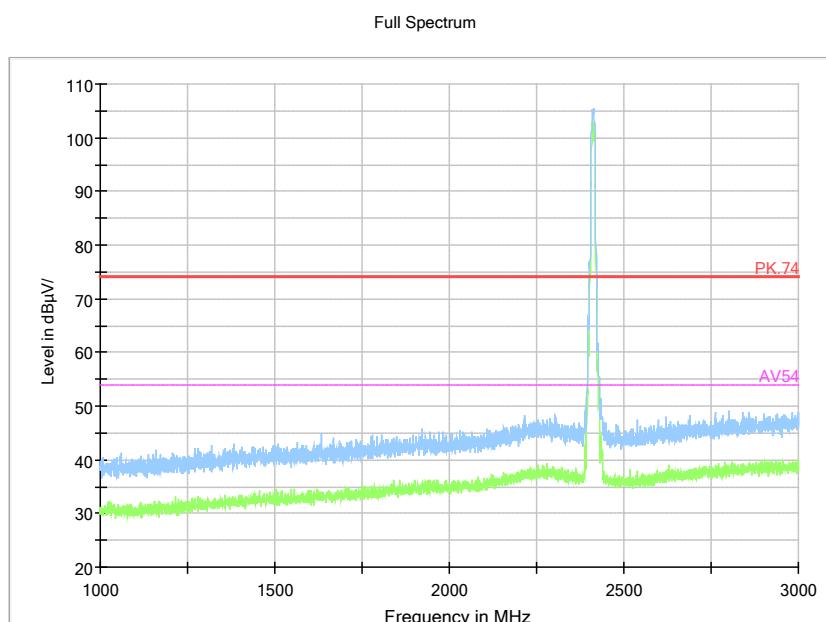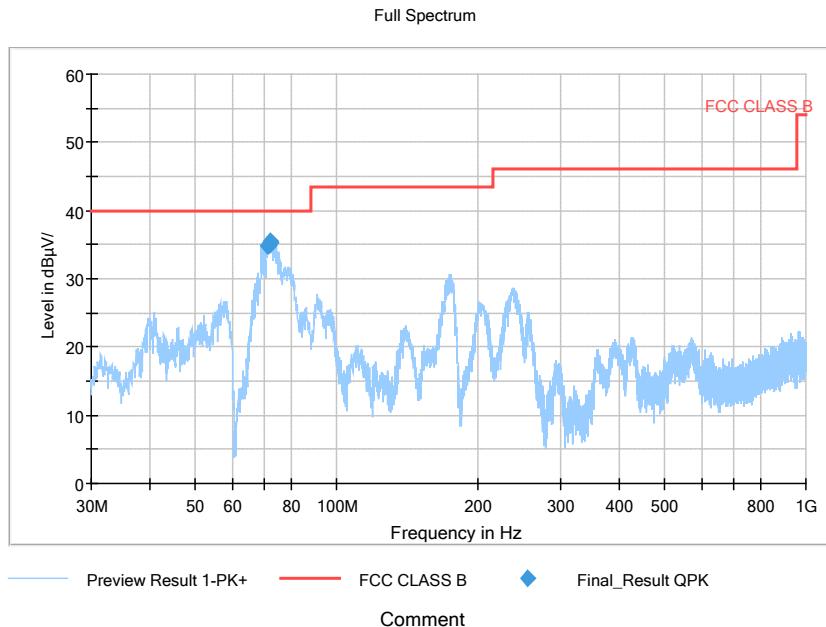


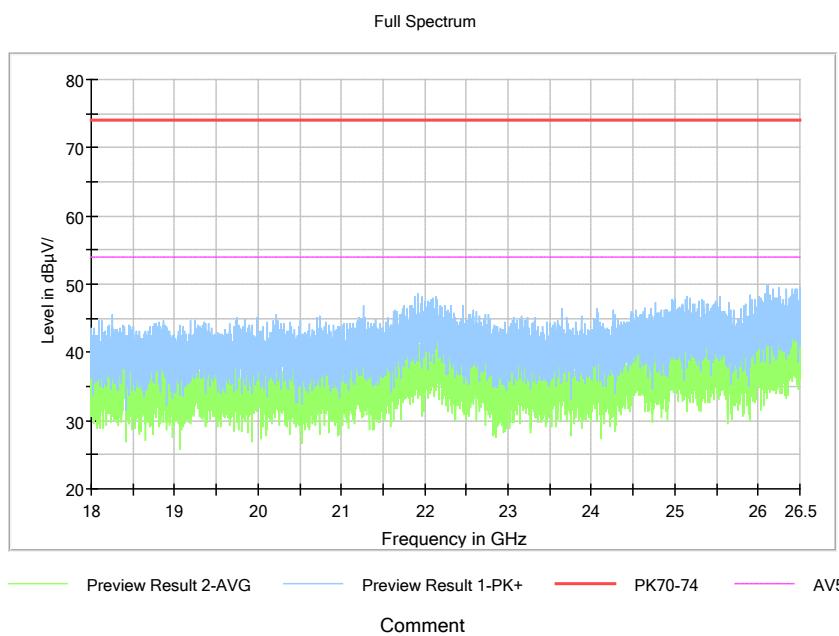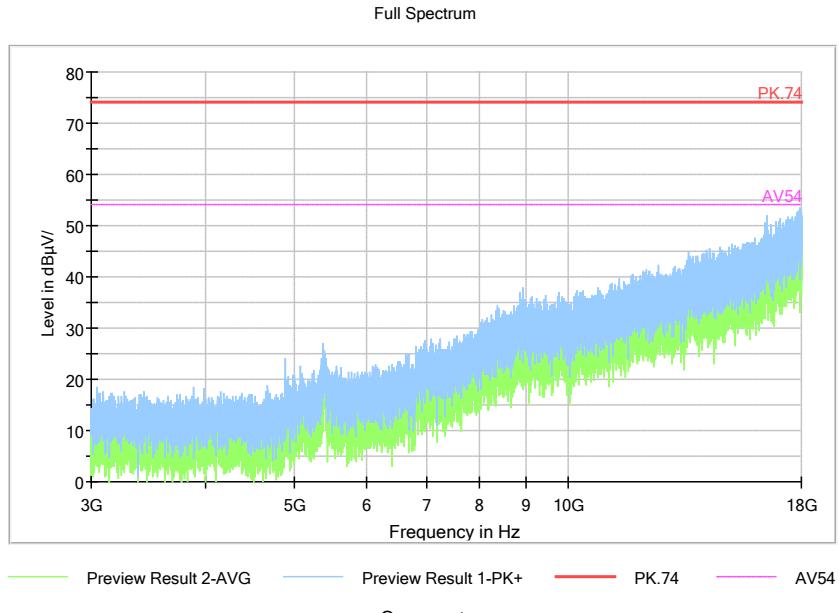

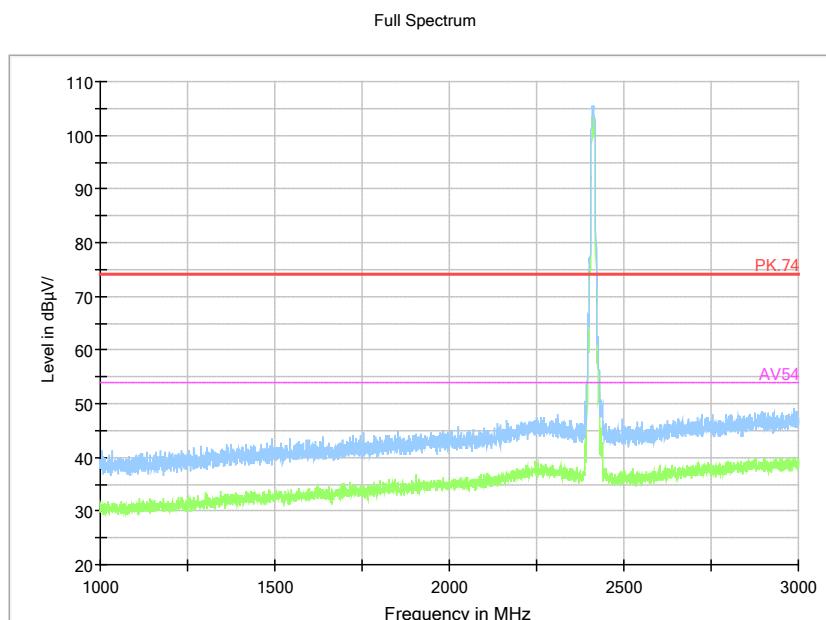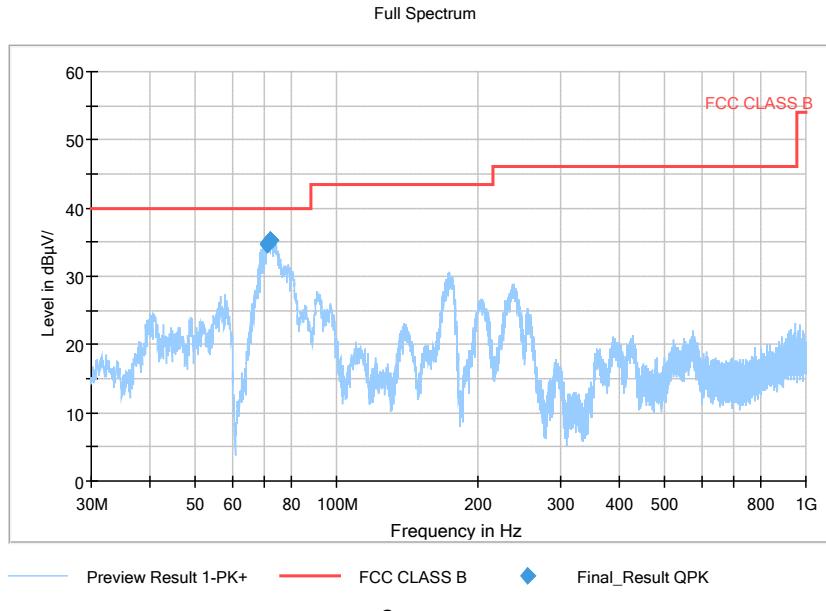


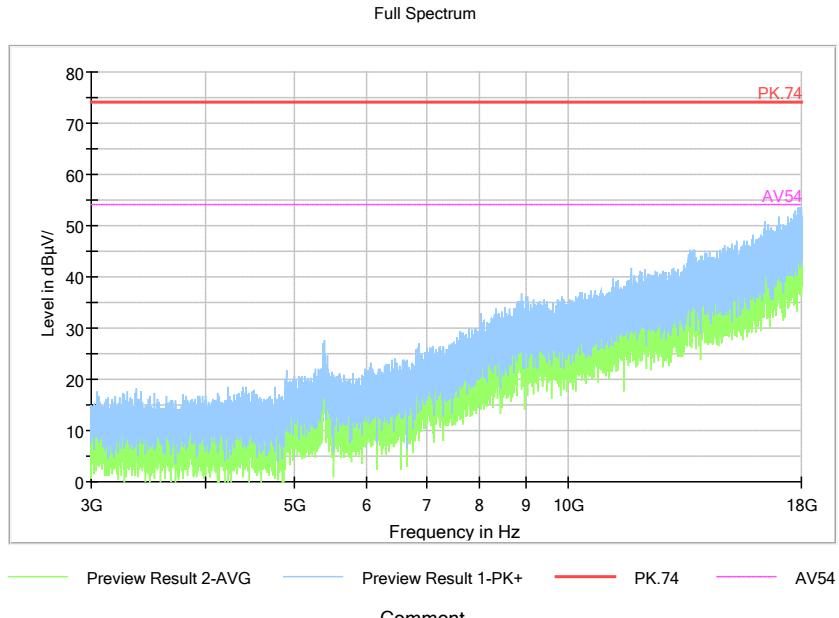


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11g

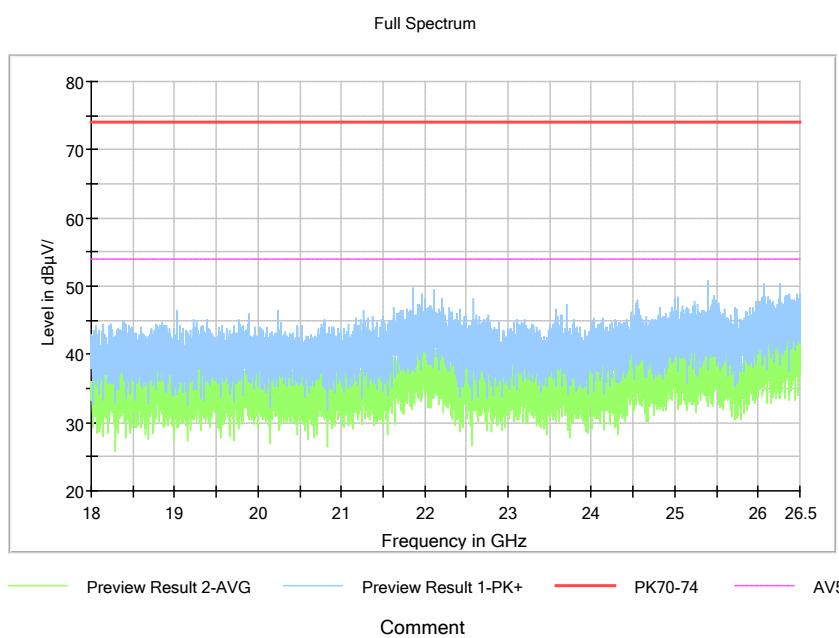


Frequency Range: 18GHz -25GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11g

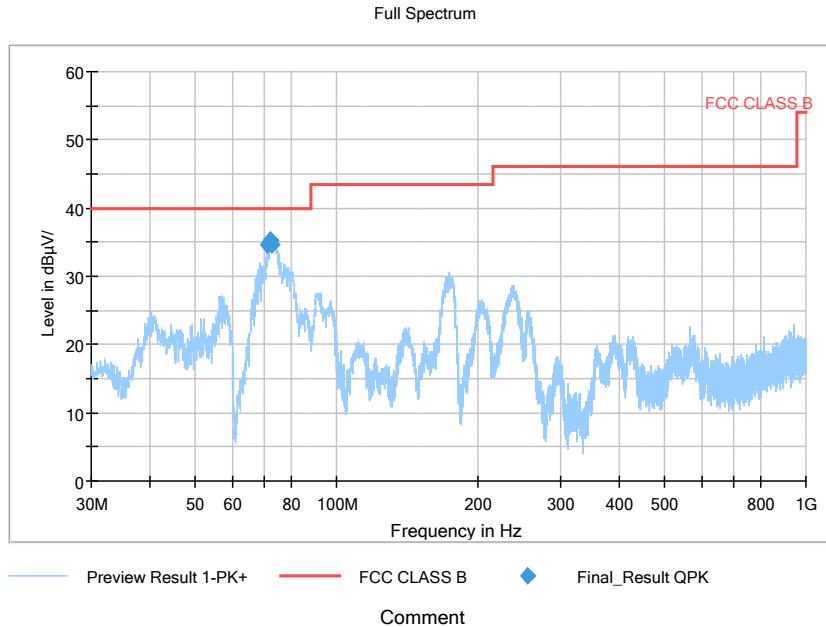


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

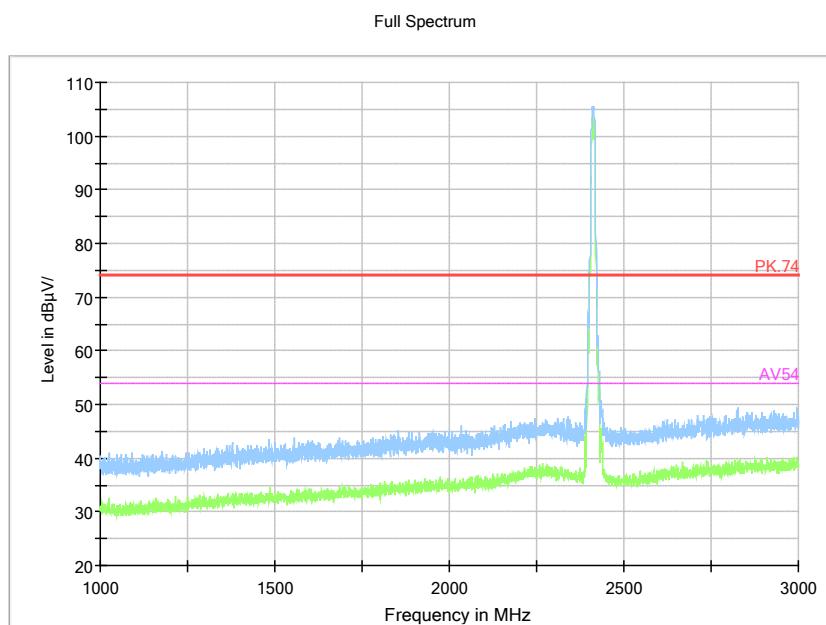

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

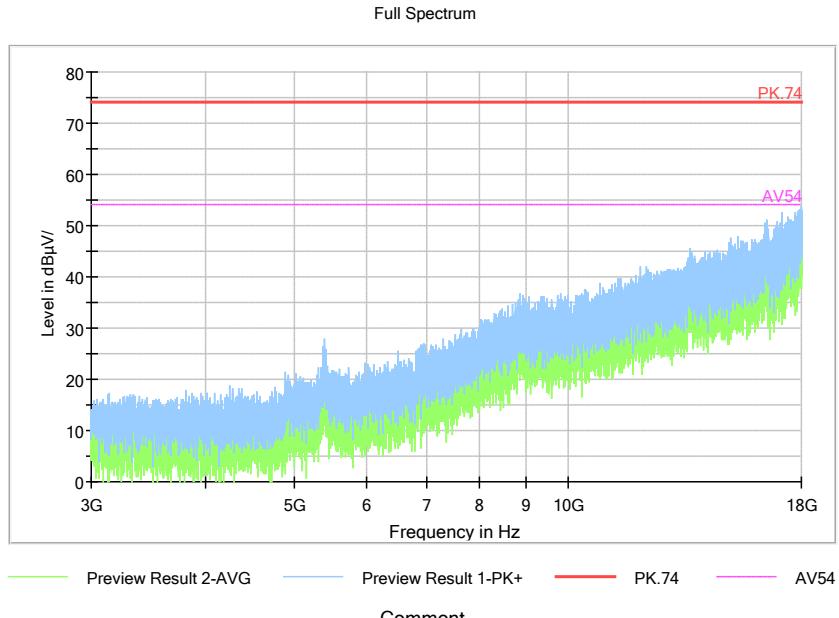


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

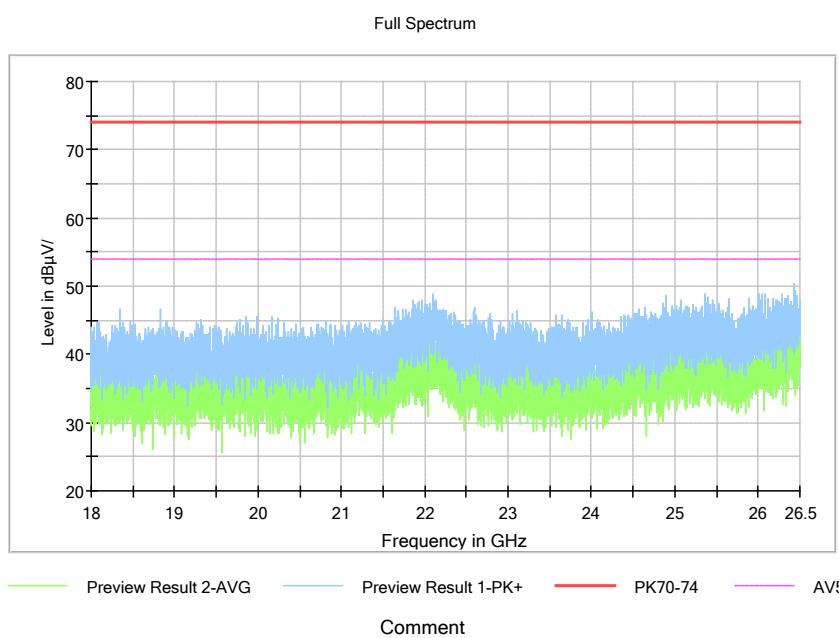


Frequency Range: 18GHz -25GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)


Carrier frequency (MHz): 2437  
 Channel No.:6

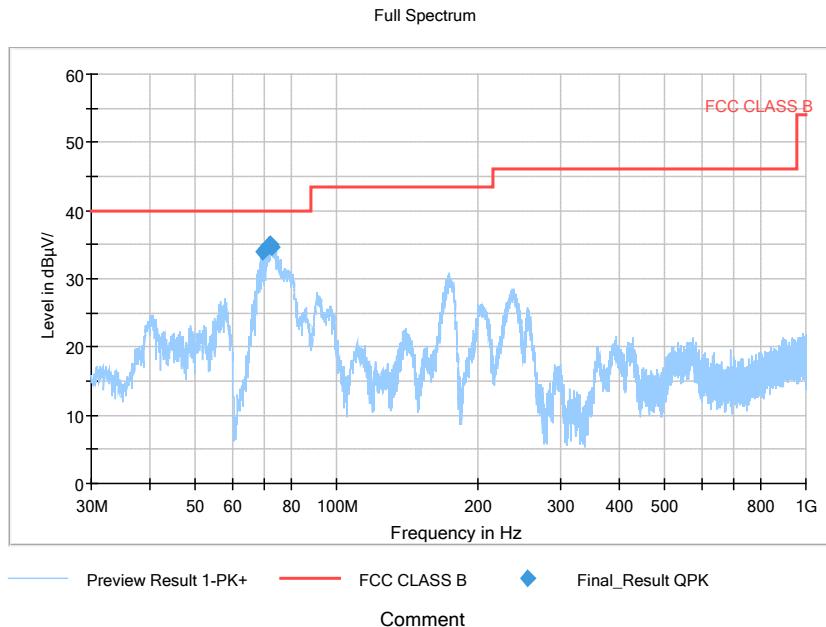


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11b

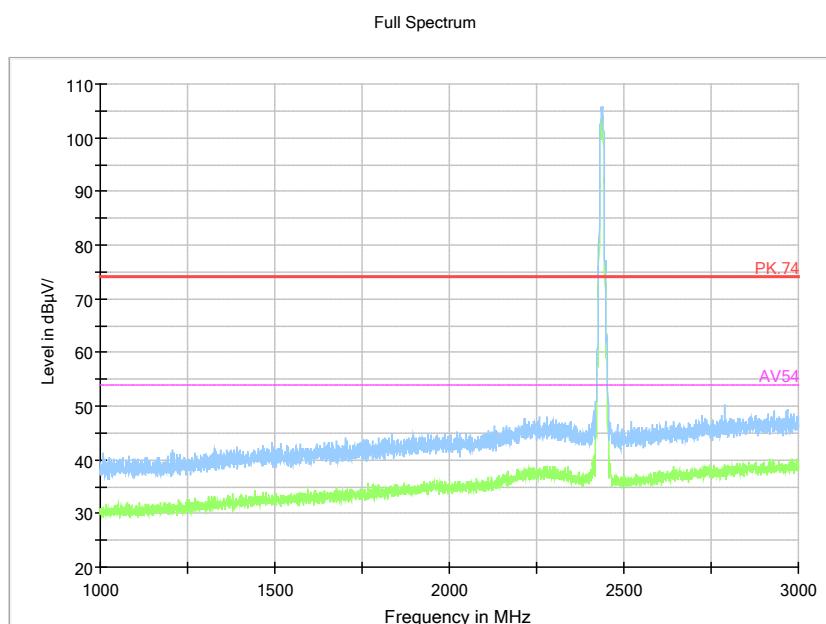

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11b

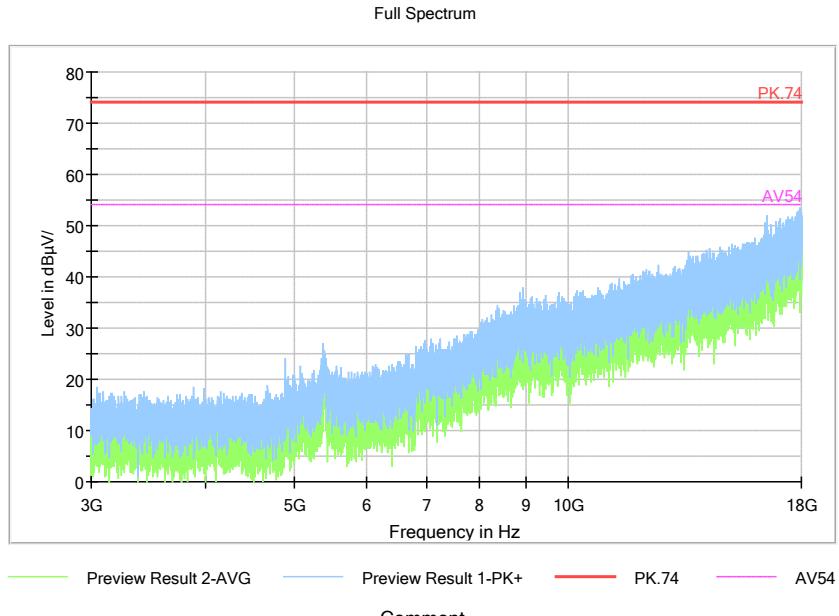


Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11b

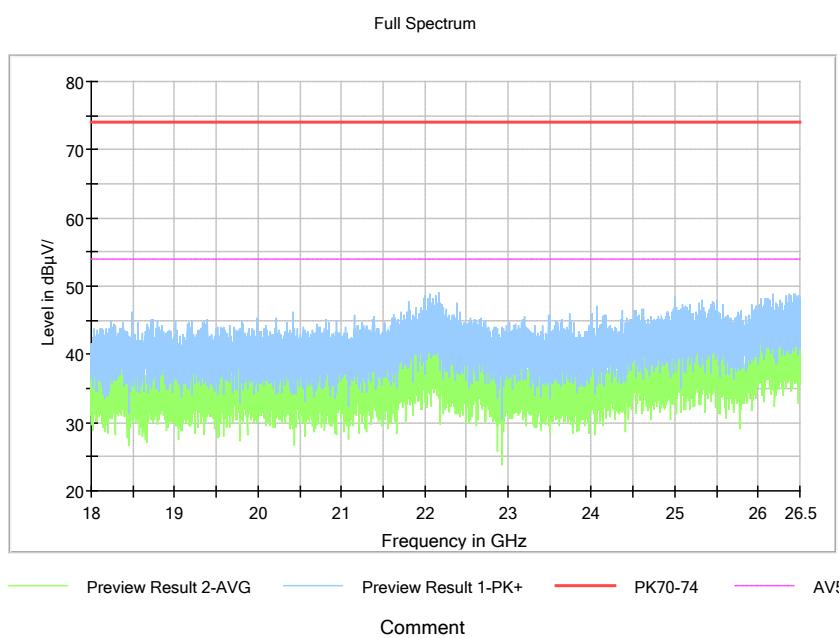




Frequency Range: 18GHz -25GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11b


Full Spectrum

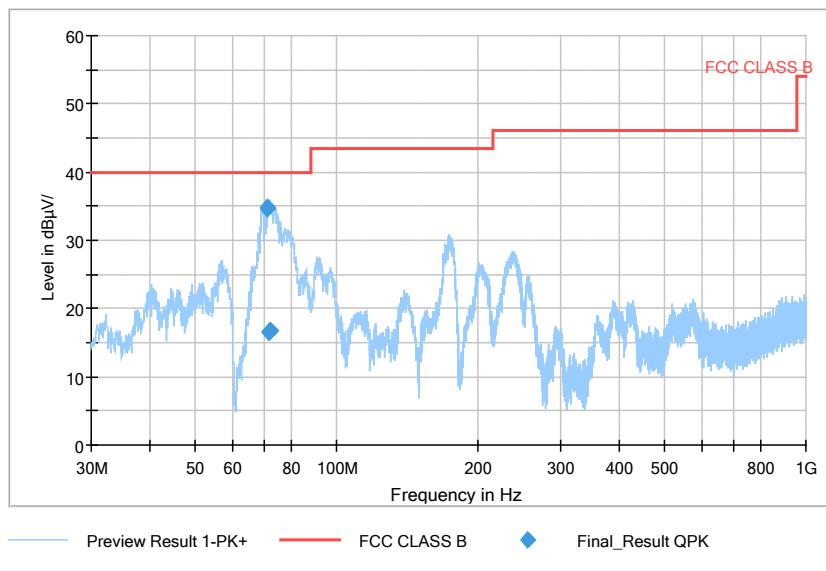


Full Spectrum

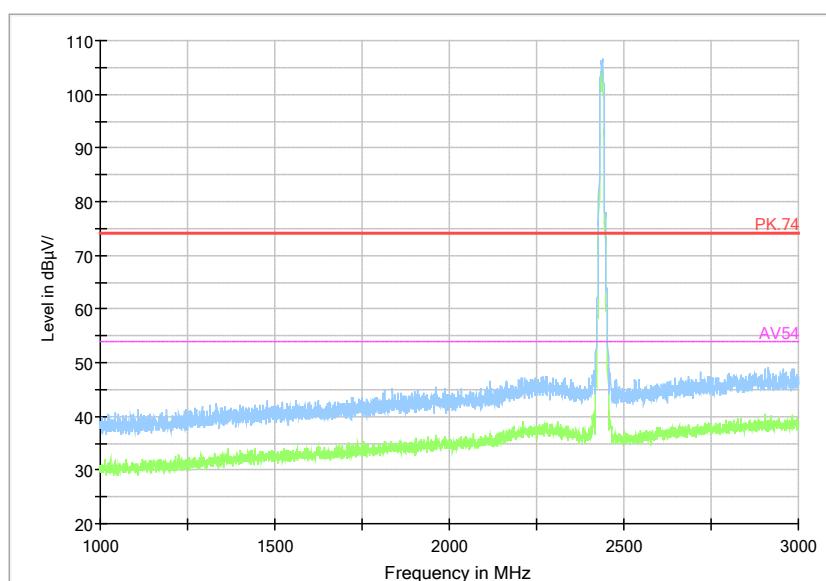

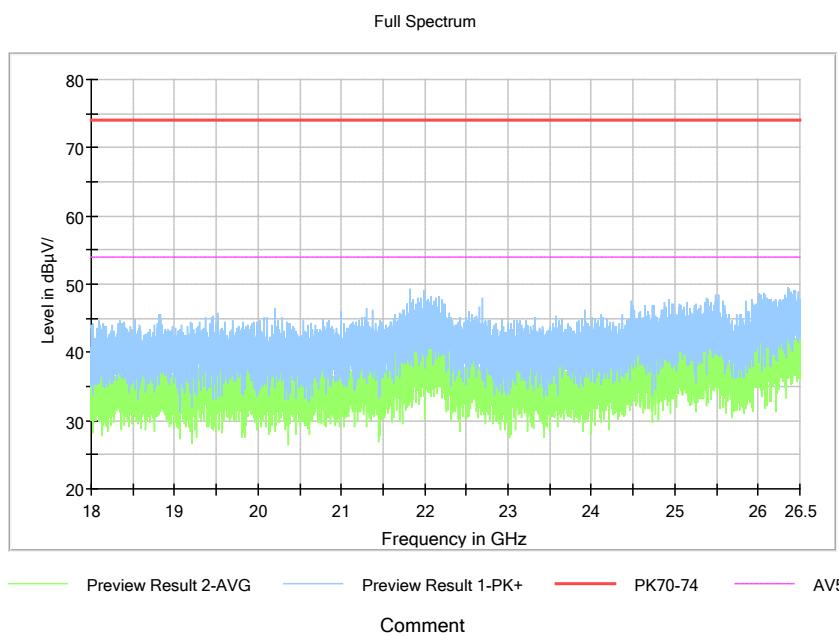
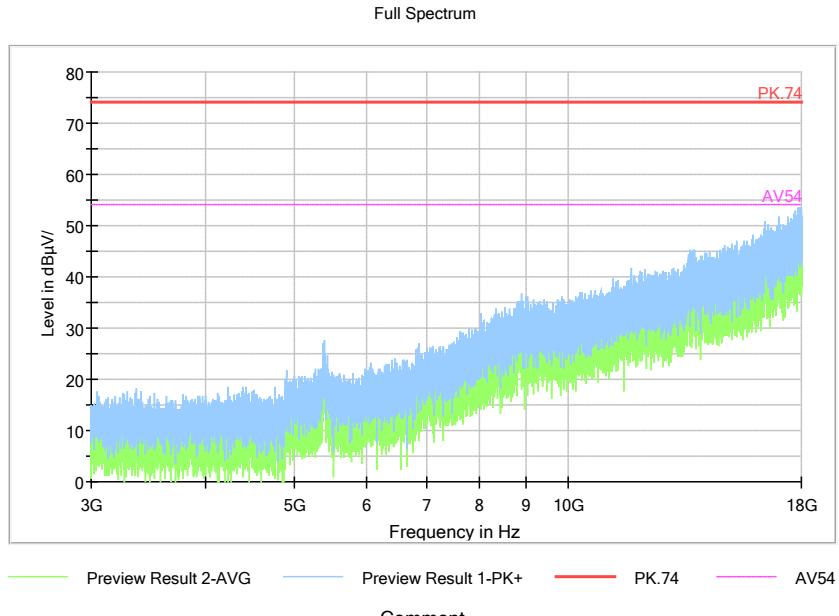


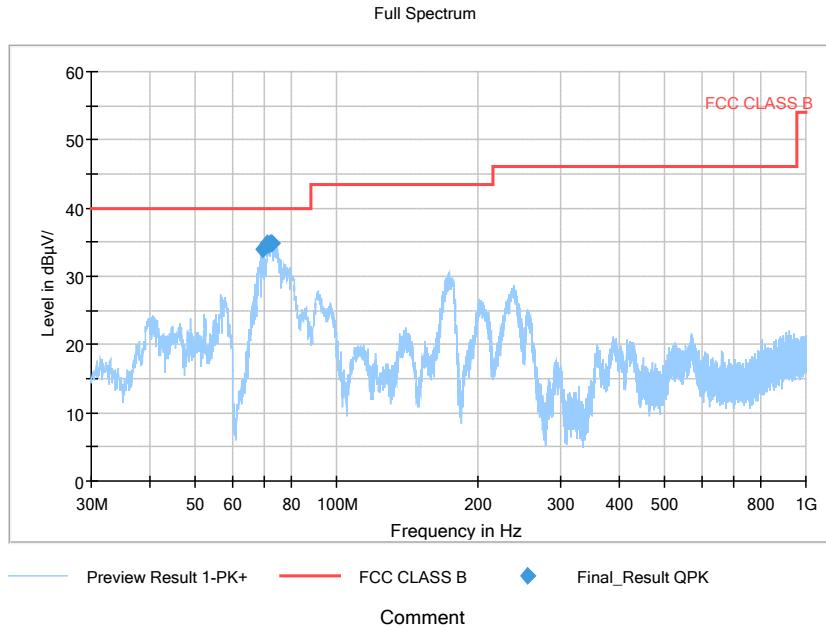


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

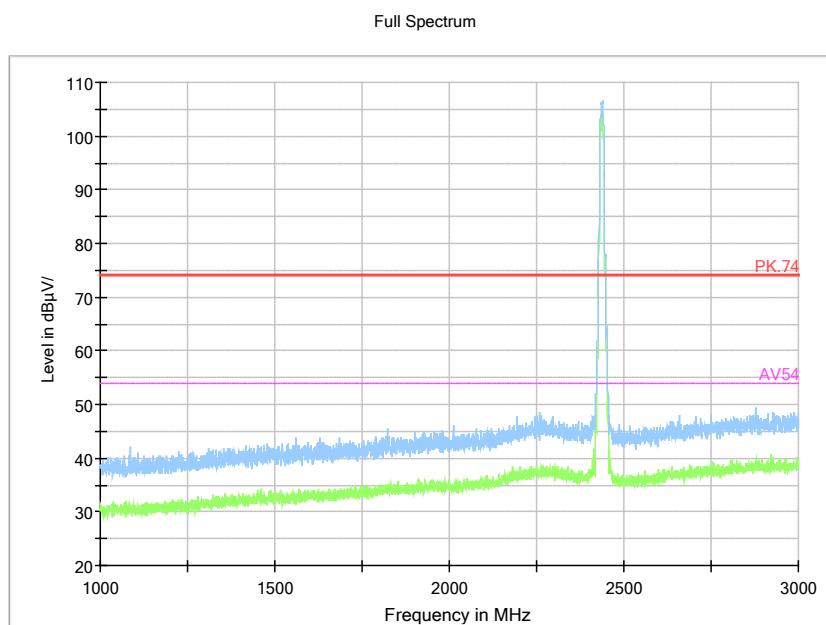


Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

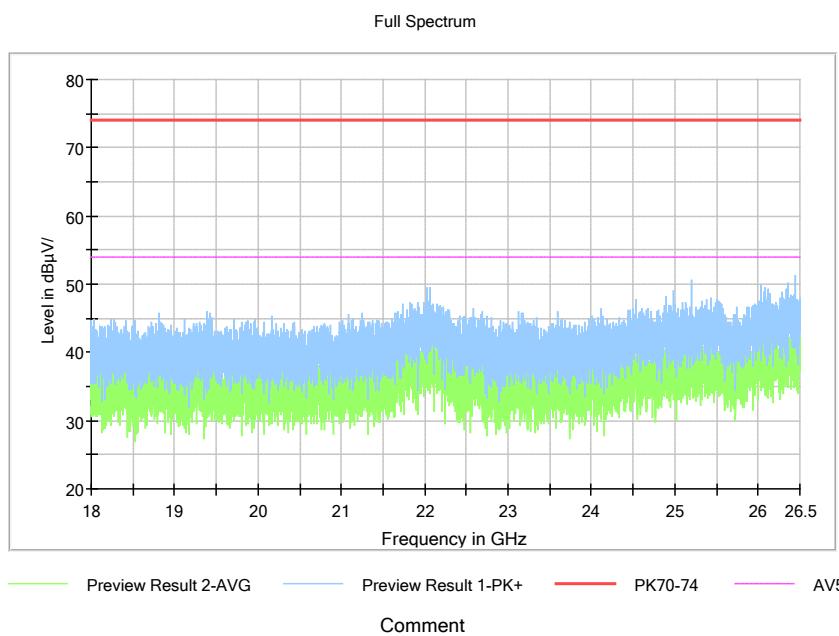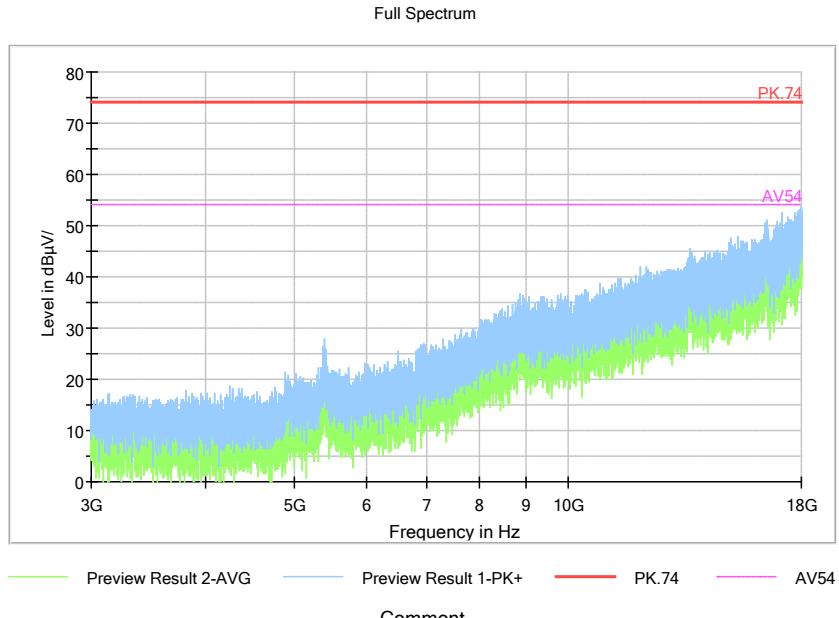


Carrier frequency (MHz): 2462  
 Channel No.:11

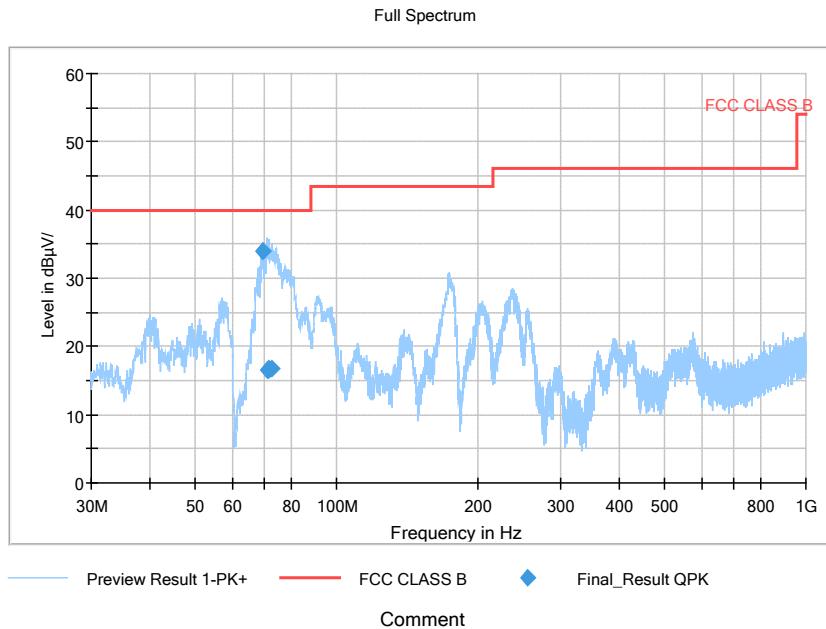


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11b

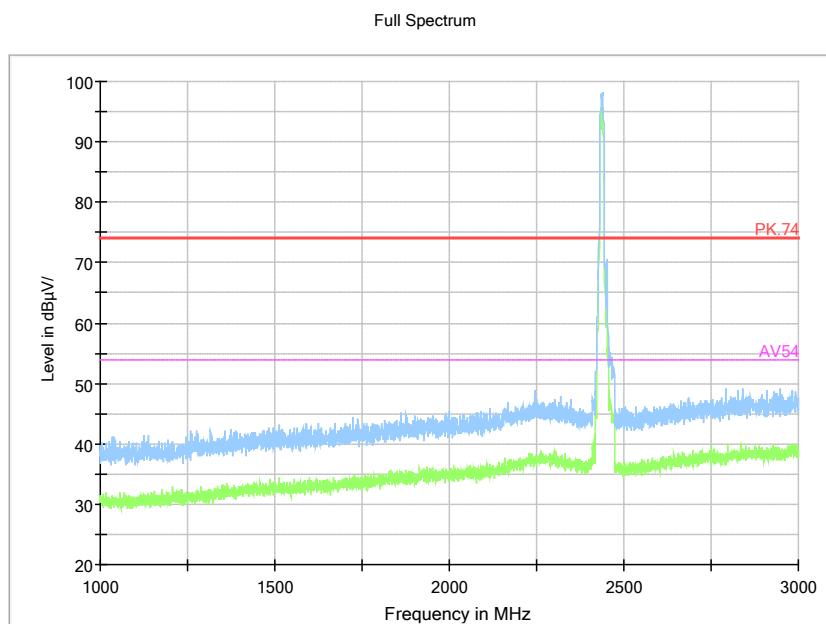


Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11b

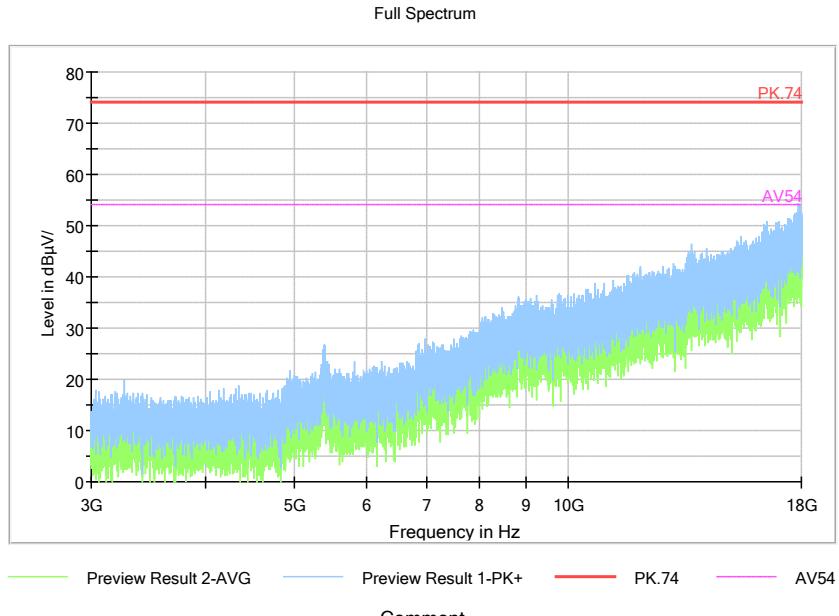


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

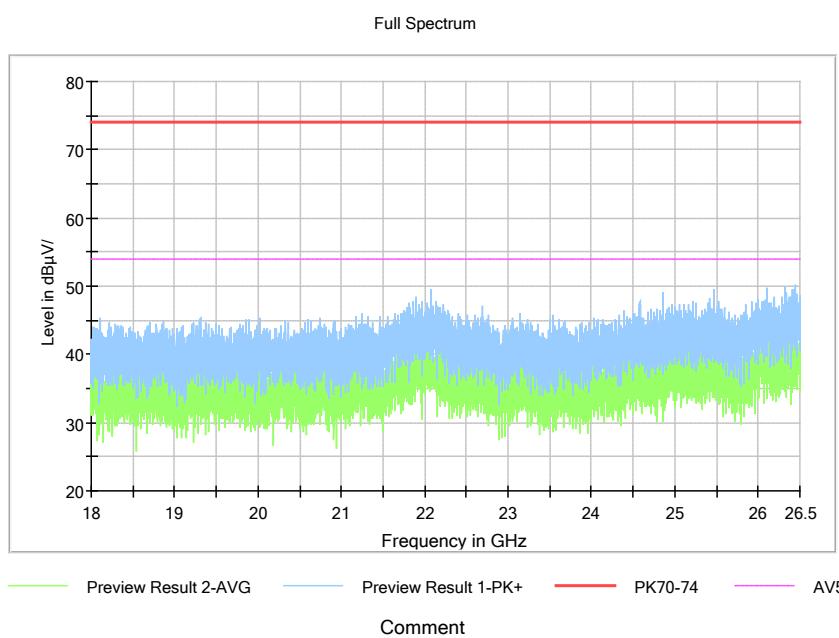


Frequency Range: 18GHz -25GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11b

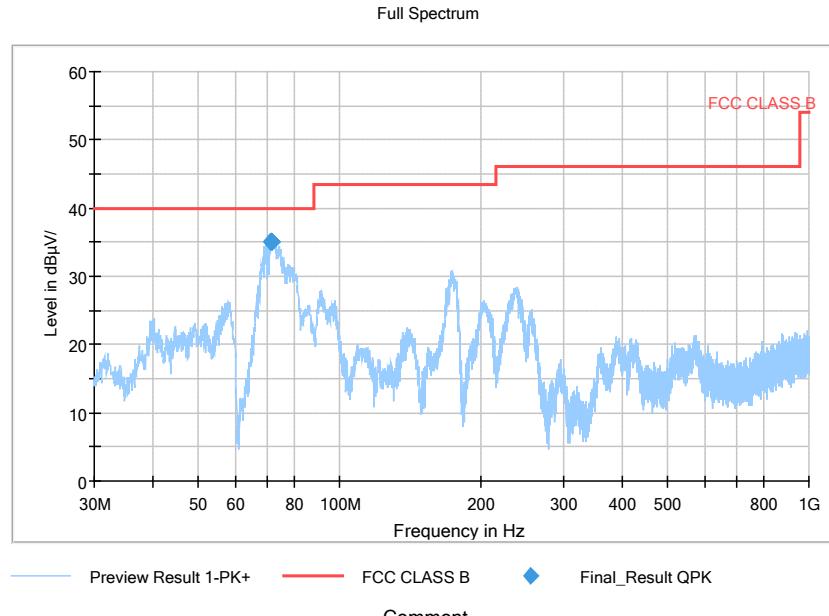


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Modulation type: 802.11g

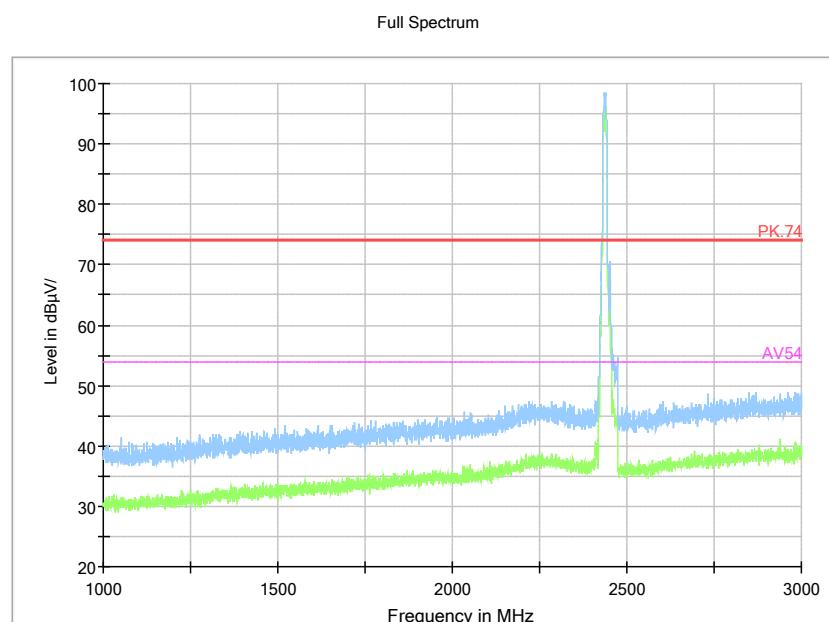


Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11g

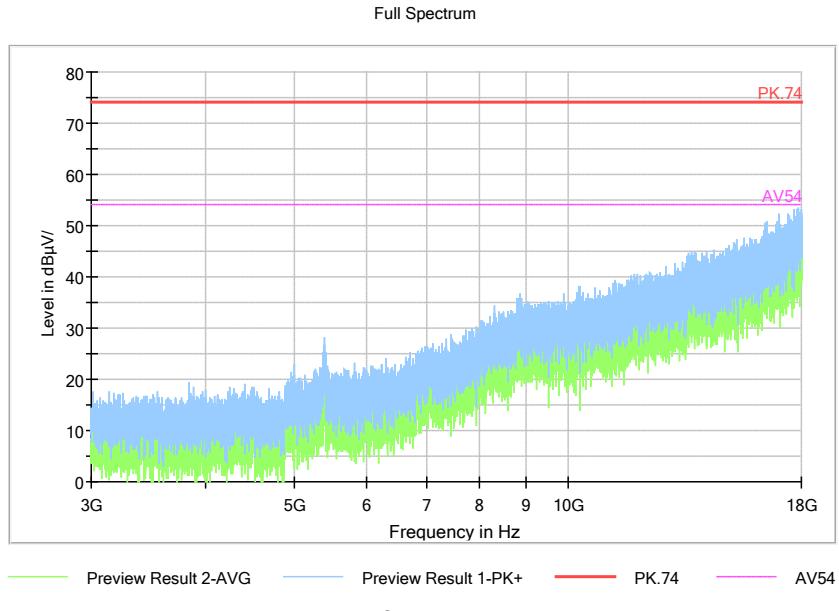


Frequency Range: 6GHz -18GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

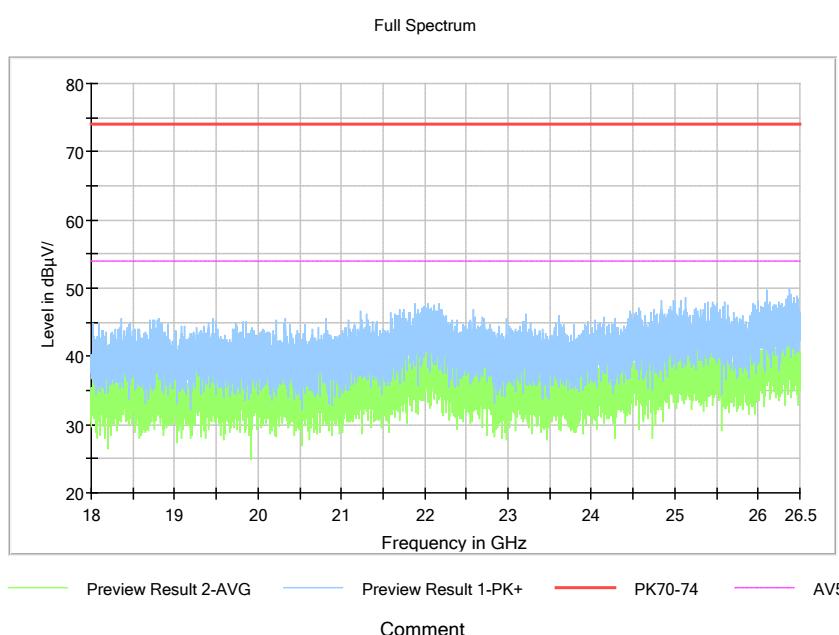


Frequency Range: 18GHz -25GHz  
Detector: Av mode and PK mode  
Modulation type: 802.11g

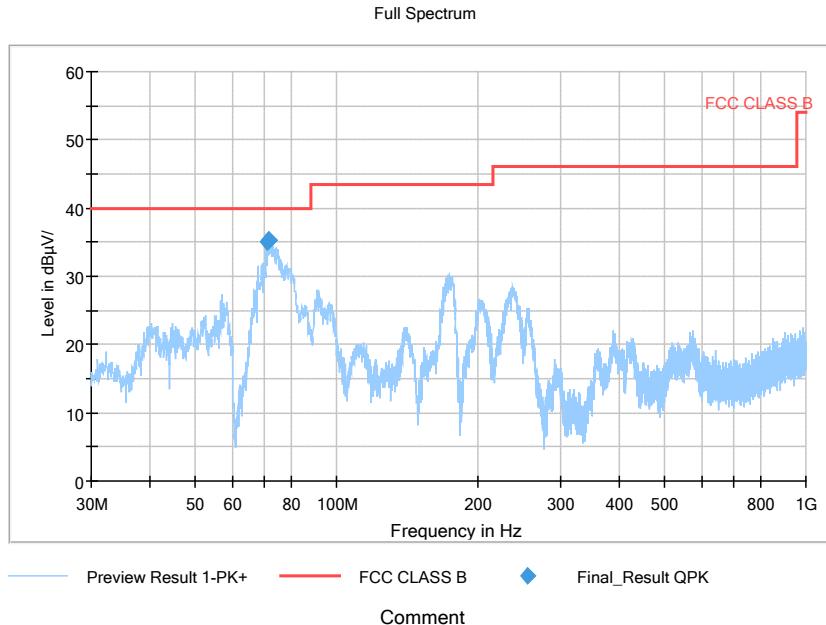


Frequency Range: 30MHz -1GHz  
 Detector: QP mode  
 Test Mode: 802.11n(HT20)

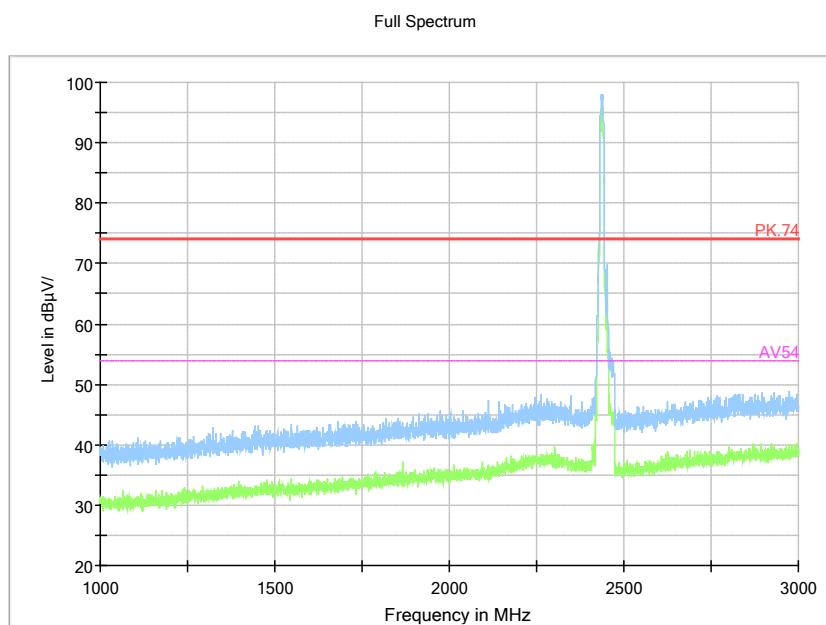

Frequency Range: 1GHz -6GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

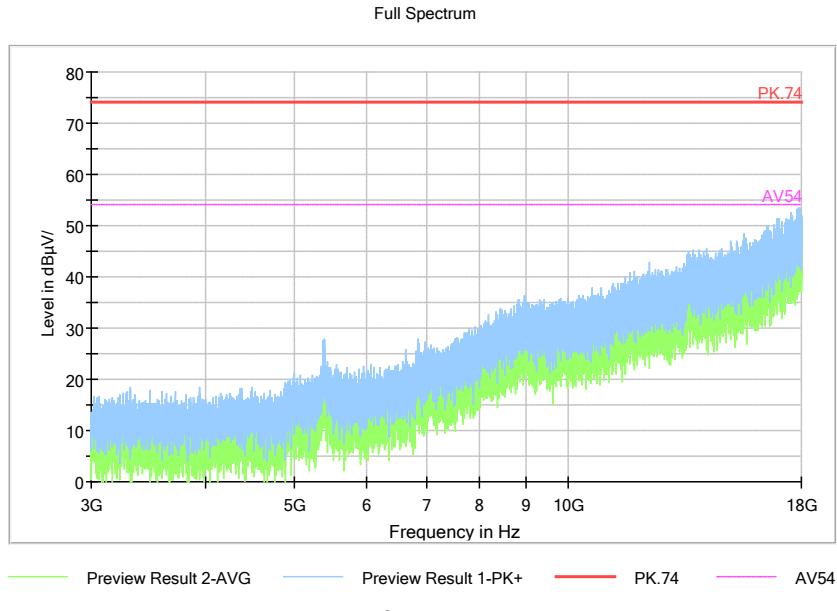

Frequency Range: 6GHz -18GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)

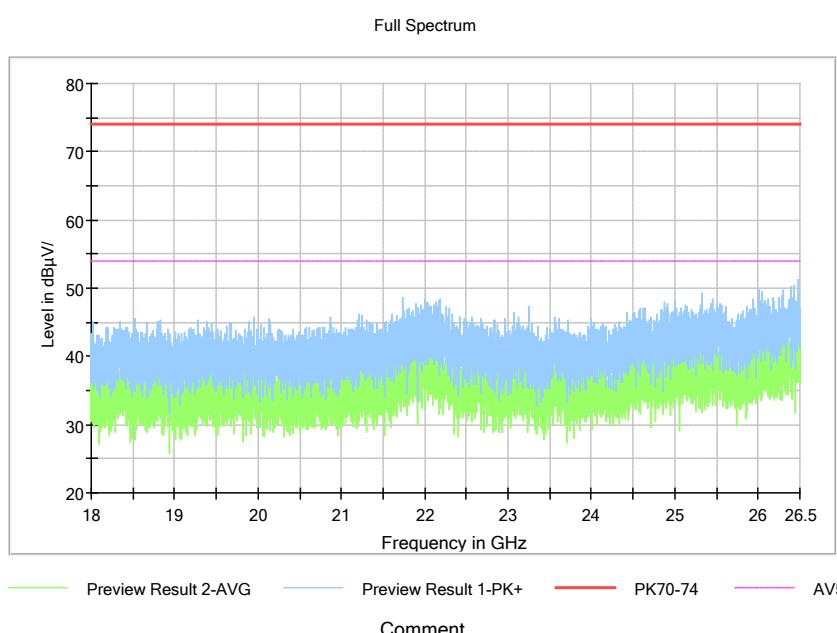

Frequency Range: 18GHz -25GHz  
 Detector: Av mode and PK mode  
 Modulation type: 802.11n(HT20)


## AC Power line Conducted Emission

A "reference path loss" Corr.(dB) is established and the  $L_{cable} + ATT + VDF$  is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{result} = P_{mea} + \text{Corr.}(dB)$$

Sample calculation:  $(33.08 \text{ dB}\mu\text{V}) = (3.38 \text{ dB}\mu\text{V}) + (29.7 \text{ dB})$ , the corresponding frequency is 0.175586MHz.

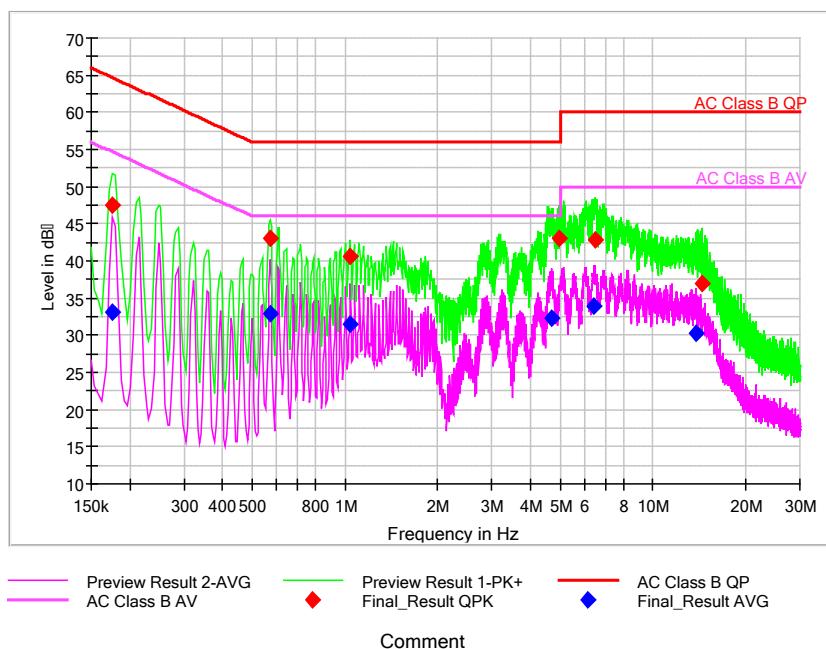

### MEASUREMENT RESULT:

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Corr. (dB)	Pmea QuasiPeak (dB $\mu$ V)	Pmea Average (dB $\mu$ V)
0.175586	---	33.08	54.69	21.61	L1	29.7	---	3.38
0.175586	47.42	---	64.69	17.27	L1	29.7	17.72	---
0.572164	---	32.84	46.00	13.16	L1	29.7	---	3.14
0.572164	43.10	---	56.00	12.90	L1	29.7	13.4	---
1.041236	40.52	---	56.00	15.48	L1	29.8	10.72	---
1.041236	---	31.52	46.00	14.48	N	29.8	---	1.72
4.687200	---	32.33	46.00	13.67	N	29.8	---	2.53
4.960114	43.06	---	56.00	12.94	L1	29.8	13.26	---
6.448350	---	33.88	50.00	16.12	L1	29.8	---	4.08
6.473936	42.85	---	60.00	17.15	L1	29.8	13.05	---
13.829829	---	30.34	50.00	19.66	L1	30.0	---	0.34
14.371393	36.90	---	60.00	23.10	L1	30.0	6.9	---

---End of Test Report---