



# RF TEST REPORT

**Report No.:** SET2021-01818

**Product Name:** LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

**FCC ID:** SRQ- ZTEA31LITE

**Model No. :** ZTE Blade A31 Lite

**Marketing Name:** ZTE Blade A31 Lite

**Applicant:** ZTE Corporation.

**Address:** ZTE Plaza, Keji Road South, Shenzhen, China.

**Dates of Testing:** 01/20/2021 —02/05/2021

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338      **Fax:** 86 755 26627238

This test report consists of 74 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product.....:** LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

**Brand Name.....:** ZTE

**Trade Name.....:** ZTE

**Applicant.....:** ZTE Corporation.

**Applicant Address.....:** ZTE Plaza, Keji Road South, Shenzhen, China.

**Manufacturer.....:** ZTE Corporation.

**Manufacturer Address.....:** ZTE Plaza, Keji Road South, Shenzhen, China.

**Test Standards.....:** 47 CFR FCC Part 2/22/24/27

**Test Result.....:** PASS

**Tested by.....:**

*Vincent*

2021.02.05

Vincent, Test Engineer

**Reviewed by.....:**

*Chris You*

2021.02.05

Chris You, Senior Engineer

**Approved by.....:**

*Shuangwen Zhang*

2021.02.05

Shuangwen Zhang, Manager



## Table of Contents

|            |   |           |
|------------|---|-----------|
| <b>1.</b>  | <b>GENERAL INFORMATION .....</b>  | <b>5</b>  |
| <b>1.1</b> | <b>EUT Description .....</b>  | <b>5</b>  |
| <b>1.2</b> | <b>Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....</b> | <b>6</b>  |
| <b>1.3</b> | <b>Test Standards and Results .....</b>   | <b>7</b>  |
| <b>1.4</b> | <b>Test Configuration of Equipment under Test.....</b>                            | <b>8</b>  |
| <b>1.5</b> | <b>Measurement Results Explanation Example .....</b>                              | <b>9</b>  |
| <b>1.6</b> | <b>Facilities and Accreditations .....</b>  | <b>9</b>  |
| <b>2.</b>  | <b>47 CFR PART 2, PART 22H &amp; 24E 27L REQUIREMENTS .....</b>                   | <b>10</b> |
| <b>2.1</b> | <b>Conducted RF Output Power .....</b>  | <b>10</b> |
| <b>2.2</b> | <b>Peak to Average Ratio.....</b>   | <b>13</b> |
| <b>2.3</b> | <b>99% Occupied Bandwidth and 26dB Bandwidth Measurement .....</b>                | <b>15</b> |
| <b>2.4</b> | <b>Frequency Stability .....</b>  | <b>24</b> |
| <b>2.5</b> | <b>Conducted Out of Band Emissions .....</b>                                      | <b>28</b> |
| <b>2.6</b> | <b>Bandedge .....</b>   | <b>51</b> |
| <b>2.7</b> | <b>Transmitter Radiated Power (EIRP/ERP) .....</b>                                | <b>59</b> |
| <b>2.8</b> | <b>Radiated Spurious Emissions .....</b>  | <b>64</b> |
| <b>3.</b>  | <b>LIST OF MEASURING EQUIPMENT .....</b>  | <b>73</b> |
| <b>4.</b>  | <b>UNCERTAINTY OF EVALUATION .....</b>  | <b>74</b> |



| Change History |            |                   |
|----------------|------------|-------------------|
| Issue          | Date       | Reason for change |
| 1.0            | 2021.02.05 | First edition     |
|                |            |                   |
|                |            |                   |



# 1. GENERAL INFORMATION

## 1.1 EUT Description

|                                    |   |
|------------------------------------|---|
| EUT Type                           | LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone   |
| EUT supports Radios application    | GPRS/EDGE/WCDMA/HSPA  |
| Multi Slot Class                   | GPRS: Multi slot Class12, EGPRS: Multi slot Class12   |
| Test Band<br>Frequency Range       | <p>GSM 850MHz:<br/>Tx: 824.2 - 848.8MHz (at intervals of 200kHz);<br/>Rx: 869.2 - 893.8MHz (at intervals of 200kHz)</p> <p>GSM 1900MHz:<br/>Tx: 1850.2 - 1909.8MHz (at intervals of 200kHz);<br/>Rx: 1930.2 - 1989.8MHz (at intervals of 200kHz)</p> <p>WCDMA 850MHz<br/>Tx: 826.4 - 846.6MHz (at intervals of 200kHz);<br/>Rx: 871.4 - 891.6MHz (at intervals of 200kHz)</p> <p>WCDMA 1900MHz<br/>Tx: 1852.4 - 1907.6MHz (at intervals of 200kHz);<br/>Rx: 1932.4 - 1987.6MHz (at intervals of 200kHz)</p> <p>WCDMA 1700MHz<br/>Tx: 1712.4 - 1752.6MHz (at intervals of 200kHz);<br/>Rx: 2112.4 - 2152.6MHz (at intervals of 200kHz)</p> |
| Maximum Output Power to<br>Antenna | <p>GSM 850: 32.30dBm<br/>GSM 1900: 30.30dBm<br/>EDGE 850: 26.40dBm<br/>EDGE 1900: 25.40dBm<br/>WCDMA 850: 23.01dBm<br/>WCDMA 1900: 23.63dBm<br/>WCDMA 1700: 23.38dBm</p>  |
| Type of Modulation                 | <p>GSM / GPRS:GMSK<br/>EDGE:GMSK / 8PSK<br/>WCDMA: QPSK(Uplink)<br/>HSDPA:QPSK(Uplink)<br/>HSUPA:QPSK(Uplink)</p>   |
| Antenna Type                       | Internal Antenna  |

**1.2 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator**

| System                     | Type of Modulation | Emission Designator | Frequency Tolerance (ppm) | Maximum ERP/EIRP(W) |
|----------------------------|--------------------|---------------------|---------------------------|---------------------|
| GSM 850                    | GMSK               | 247KGXW             | 0.0093                    | 1.879               |
| GSM 1900                   | GMSK               | 250KGXW             | 0.0074                    | 1.242               |
| EDGE 850                   | 8PSK               | 244KG7W             | 0.0084                    | 0.381               |
| EDGE 1900                  | 8PSK               | 242KG7W             | 0.0089                    | 0.333               |
| WCDMA 850<br>RMC 12.2Kbps  | QPSK               | 4M16F9W             | 0.0102                    | 0.196               |
| WCDMA 1900<br>RMC 12.2Kbps | QPSK               | 4M16F9W             | 0.0096                    | 0.216               |
| WCDMA 1700<br>RMC 12.2Kbps | QPSK               | 4M16F9W             | 0.0095                    | 0.223               |



### 1.3 Test Standards and Results

1. 47 CFR Part 2, 22(H), 24(E), 27(L)
2. ANSI C63.26:2015
3. FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Test detailed items/section required by FCC rules and results are as below:

| No. | Section                                      | Description                         | Limit                                 | Result |
|-----|--|-------------------------------------|---------------------------------------|--------|
|     | FCC  |                                     |                                       |        |
| 1   | 2.1046                                       | Conducted Output Power              | Reporting Only                        | PASS   |
| 2   | 24.232(d)<br>27.50(d)                        | Peak to Average Ratio               | < 13dBm                               | PASS   |
| 3   | 2.1049<br>22.917(b)<br>24.238(b)<br>27.53(g) | Occupied Bandwidth                  | Reporting Only                        | PASS   |
| 4   | 2.1055<br>22.355<br>24.235<br>27.54          | Frequency Stability                 | $\leq \pm 2.5\text{ppm}$              | PASS   |
| 5   | 2.1051<br>22.917<br>24.238<br>27.53          | Conducted Out of Band Emissions     | $< 43 + 10\log_{10}(P[\text{Watts}])$ | PASS   |
| 6   | 2.1051<br>22.917<br>24.238<br>27.53          | Band Edge                           | $< 43 + 10\log_{10}(P[\text{Watts}])$ | PASS   |
| 7   | 22.913                                       | Effective Radiated Power            | < 7Watts                              | PASS   |
|     | 24.232                                       | Equivalent Isotropic Radiated Power | < 2Watts                              | PASS   |
|     | 27.50(d)                                     | Effective Radiated Power            | < 1Watts                              | PASS   |

|   |                                     |                                |                                     |      |
|---|-------------------------------------|--------------------------------|-------------------------------------|------|
| 8 | 2.1053<br>22.917<br>24.238<br>27.53 | Radiated Spurious<br>Emissions | $< 43 + 10 \log_{10}$<br>(P[Watts]) | PASS |
|---|-------------------------------------|--------------------------------|-------------------------------------|------|

#### 1.4 Test Configuration of Equipment under Test

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 20000 MHz for GSM1900 and WCDMA Band II.
3. 30 MHz to 18000 MHz for WCDMA Band IV.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

| Test Modes    |                   |                   |
|---------------|-------------------|-------------------|
| Band          | Radiated TCs      | Conducted TCs     |
| GSM 850       | GPRS Link         | GPRS Link         |
|               | GPRS Link         | GPRS Link         |
| GSM 1900      | GPRS Link         | GPRS Link         |
|               | GPRS Link         | GPRS Link         |
| WCDMA Band V  | RMC 12.2Kbps Link | RMC 12.2Kbps Link |
| WCDMA Band II | RMC 12.2Kbps Link | RMC 12.2Kbps Link |
| WCDMA Band IV | RMC 12.2Kbps Link | RMC 12.2Kbps Link |

Note: The maximum power levels are chosen to test as the worst case configuration as follows:

GPRS mode for GMSK modulation,

EDGE multi-slot class 8 mode for 8PSK modulation,

RMC 12.2Kbps mode for WCDMA band V,

RMC 12.2Kbps mode for WCDMA band II,

RMC 12.2Kbps mode for WCDMA band IV, only these modes were used for all tests.





## 1.5 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6B and 10dB attenuator.

Example:

$$\begin{aligned}\text{Offset (dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 7.5 + 10 = 17.5(\text{dB})\end{aligned}$$

## 1.6 Facilities and Accreditations

### 1.6.1 Test Facilities

#### FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30th, 2021.

#### ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30th, 2021

#### A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.6.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

|                             |                |
|-----------------------------|----------------|
| Temperature (°C):           | 15°C - 35°C    |
| Relative Humidity (%):      | 30% - 60%      |
| Atmospheric Pressure (kPa): | 86KPa - 106KPa |

## 2. 47 CFR PART 2, PART 22H & 24E 27L REQUIREMENTS

### 2.1 Conducted RF Output Power

#### 2.1.1 Definition

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


#### 2.1.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

#### 2.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

#### 2.1.4 Test Setup





## 2.1.5 Test Results of Conducted Output Power

### 1. Test Verdict:

| Band            | Channel | Frequency (MHz) | Measured Output Power dBm | Verdict |
|-----------------|---------|-----------------|---------------------------|---------|
| GSM<br>850MHz   | 128     | 824.2           | 31.3                      | PASS    |
|                 | 190     | 836.6           | 31.0                      | PASS    |
|                 | 251     | 848.8           | 31.2                      | PASS    |
| GSM<br>1900MHz  | 512     | 1850.2          | 28.2                      | PASS    |
|                 | 661     | 1880.0          | 28.1                      | PASS    |
|                 | 810     | 1909.8          | 28.4                      | PASS    |
| GPRS<br>850MHz  | 128     | 824.2           | 31.3                      | PASS    |
|                 | 190     | 836.6           | 31.4                      | PASS    |
|                 | 251     | 848.8           | 31.2                      | PASS    |
| GPRS<br>1900MHz | 512     | 1850.2          | 28.1                      | PASS    |
|                 | 661     | 1880.0          | 28.2                      | PASS    |
|                 | 810     | 1909.8          | 28.1                      | PASS    |
| EDGE<br>850MHz  | 128     | 824.2           | 25.7                      | PASS    |
|                 | 190     | 836.6           | 25.7                      | PASS    |
|                 | 251     | 848.8           | 25.6                      | PASS    |
| EDGE<br>1900MHz | 512     | 1850.2          | 25.7                      | PASS    |
|                 | 661     | 1880.0          | 25.5                      | PASS    |
|                 | 810     | 1909.8          | 25.6                      | PASS    |

Note 1: For the GPRS model, all the slots were tested and just the worst data was record in this report.



2. WCDMA Model Test Verdict:

| UMTS1900<br>(Band II) |              | Average Power (dBm) |        |        |
|-----------------------|--------------|---------------------|--------|--------|
|                       |              | 9262CH              | 9400CH | 9538CH |
| WCDMA                 | 12.2kbps RMC | 22.72               | 22.81  | 22.91  |
| HSDPA                 | Subtest 1    | 22.64               | 22.13  | 22.23  |
|                       | Subtest 2    | 22.23               | 21.72  | 21.82  |
|                       | Subtest 3    | 21.84               | 21.33  | 21.43  |
|                       | Subtest 4    | 21.63               | 21.12  | 21.22  |
| HSUPA                 | Subtest 1    | 22.54               | 22.63  | 22.46  |
|                       | Subtest 2    | 22.09               | 22.18  | 22.01  |
|                       | Subtest 3    | 21.72               | 21.79  | 21.62  |
|                       | Subtest 4    | 21.42               | 21.51  | 21.34  |
|                       | Subtest 5    | 21.23               | 21.32  | 21.15  |
| UMTS1700<br>(Band IV) |              | Average Power (dBm) |        |        |
|                       |              | 1313CH              | 1413CH | 1513CH |
| WCDMA                 | 12.2kbps RMC | 22.59               | 22.34  | 22.78  |
| HSDPA                 | Subtest 1    | 22.59               | 22.34  | 22.78  |
|                       | Subtest 2    | 21.91               | 21.66  | 22.12  |
|                       | Subtest 3    | 21.50               | 21.25  | 21.69  |
|                       | Subtest 4    | 21.11               | 20.86  | 21.32  |
| HSUPA                 | Subtest 1    | 20.90               | 20.65  | 21.09  |
|                       | Subtest 2    | 22.47               | 22.23  | 22.70  |
|                       | Subtest 3    | 21.67               | 22.11  | 22.63  |
|                       | Subtest 4    | 21.28               | 21.72  | 22.24  |
|                       | Subtest 5    | 21.12               | 21.44  | 21.96  |
| UMTS850<br>(Band V)   |              | Average Power (dBm) |        |        |
|                       |              | 4132CH              | 4183CH | 4233CH |
| WCDMA                 | 12.2kbps RMC | 22.83               | 23.01  | 22.92  |
| HSDPA                 | Subtest 1    | 22.15               | 22.33  | 22.24  |
|                       | Subtest 2    | 21.74               | 21.92  | 21.83  |
|                       | Subtest 3    | 21.35               | 21.53  | 21.44  |
|                       | Subtest 4    | 21.14               | 21.32  | 21.23  |
| HSUPA                 | Subtest 1    | 22.72               | 22.93  | 22.32  |
|                       | Subtest 2    | 22.61               | 22.86  | 22.74  |
|                       | Subtest 3    | 22.21               | 22.47  | 22.35  |
|                       | Subtest 4    | 21.93               | 22.19  | 22.07  |
|                       | Subtest 5    | 21.74               | 22.00  | 21.88  |

## **2.2 Peak to Average Ratio**

### **2.2.1 Definition**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### **2.2.2 Measuring Instruments**

The measuring equipment is listed in the section 3 of this test report.

### **2.2.3 Test Procedures**

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
4. For UMTS operating modes:
  - a. Set the CCDF (Complementary Cumulative Distribution Function) option on the spectrum analyzer.
  - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

### 2.2.4 Test Setup

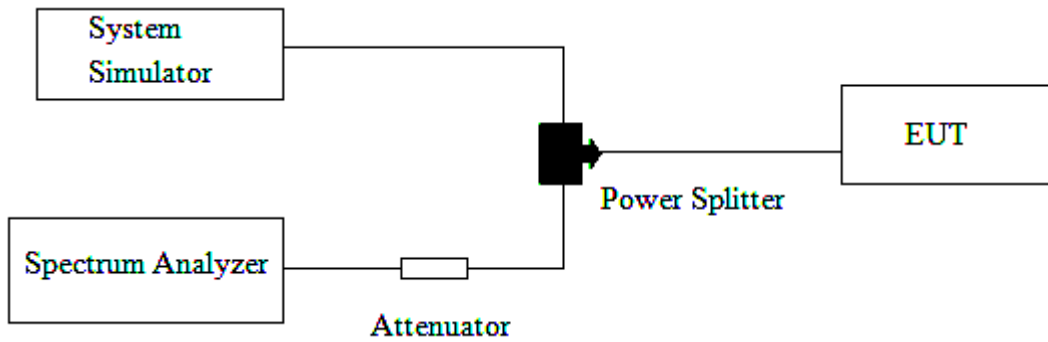

### 2.2.5 Test Results of Peak-to-Average Ratio

| Band             | Channel | Frequency (MHz) | Peak to Average ratio | Limit | Verdict |
|------------------|---------|-----------------|-----------------------|-------|---------|
|                  |         |                 | dB                    | dB    |         |
| GSM<br>1900MHz   | 512     | 1850.2          | 0.1                   | 13    | PASS    |
|                  | 661     | 1880.0          | 0.2                   |       | PASS    |
|                  | 810     | 1909.8          | 0.3                   |       | PASS    |
| EDGE<br>1900MHz  | 512     | 1850.2          | 4.48                  | 13    | PASS    |
|                  | 661     | 1880.0          | 4.1                   |       | PASS    |
|                  | 810     | 1909.8          | 3.5                   |       | PASS    |
| WCDMA<br>1900MHz | 9262    | 1852.4          | 2.41                  | 13    | PASS    |
|                  | 9400    | 1880.0          | 2.12                  |       | PASS    |
|                  | 9538    | 1907.6          | 2.9                   |       | PASS    |
| WCDMA<br>1700MHz | 1312    | 1712.4          | 2.97                  | 13    | PASS    |
|                  | 1412    | 1732.4          | 2.71                  |       | PASS    |
|                  | 1513    | 1752.6          | 2.99                  |       | PASS    |

## 2.3 99% Occupied Bandwidth and 26dB Bandwidth Measurement

### 2.3.1 Definition

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 2.3.2 Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.


### 2.3.3 Test Procedures

1. The testing follows FCC KDB 971168 D01 v03r01 Section 4.2.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

### 2.3.4 Test Setup

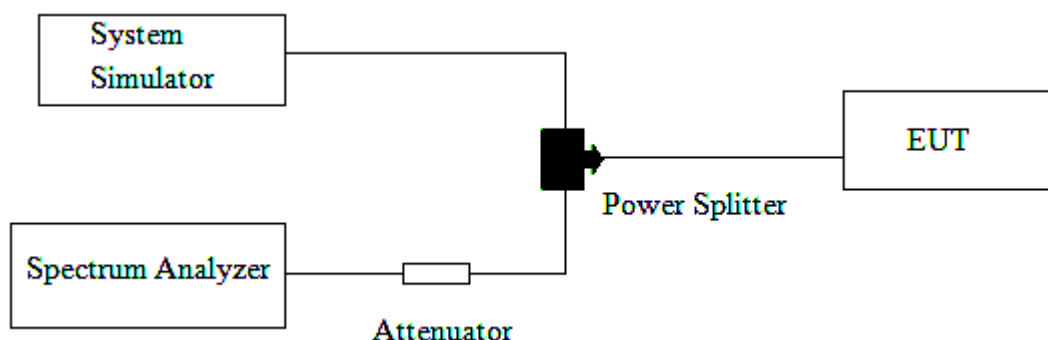



### 2.3.5 Test Results of 99% Occupied Bandwidth and 26dB Bandwidth

| Band          | Channel | Frequency (MHz) | 26dB bandwidth (KHz) | 99% Occupied Bandwidth (KHz) | Refer to Plot |
|---------------|---------|-----------------|----------------------|------------------------------|---------------|
| GSM 850MHz    | 128     | 824.2           | 319.1                | 246.5                        | Plot A1       |
|               | 190     | 836.6           | 315.2                | 247.15                       | Plot A2       |
|               | 251     | 848.8           | 310.1                | 243.59                       | Plot A3       |
| GSM 1900MHz   | 512     | 1850.2          | 315.6                | 250.9                        | Plot B1       |
|               | 661     | 1880.0          | 324.7                | 247.79                       | Plot B2       |
|               | 810     | 1909.8          | 322.5                | 250.35                       | Plot B3       |
| EDGE 850MHz   | 128     | 824.2           | 292.1                | 234.86                       | Plot C1       |
|               | 190     | 836.6           | 301.4                | 243.59                       | Plot C2       |
|               | 251     | 848.8           | 303.1                | 238.4                        | Plot C3       |
| EDGE 1900MHz  | 512     | 1850.2          | 296                  | 237.8                        | Plot D1       |
|               | 661     | 1880.0          | 315.1                | 240.7                        | Plot D2       |
|               | 810     | 1909.8          | 307.2                | 241.79                       | Plot D3       |
| WCDMA 850MHz  | 4132    | 826.4           | 4670                 | 4161.7                       | Plot E1       |
|               | 4183    | 836.6           | 4675                 | 4158                         | Plot E2       |
|               | 4233    | 846.6           | 4661                 | 4147.8                       | Plot E3       |
| WCDMA 1900MHz | 9262    | 1852.4          | 4667                 | 4155.3                       | Plot F1       |
|               | 9400    | 1880            | 4664                 | 4152.9                       | Plot F2       |
|               | 9538    | 1907.6          | 4674                 | 4158.6                       | Plot F3       |
| WCDMA 1700MHz | 1312    | 1712.4          | 4673                 | 4157.4                       | Plot G1       |
|               | 1412    | 1732.4          | 4680                 | 4160.6                       | Plot G2       |
|               | 1513    | 1752.6          | 4671                 | 4153.6                       | Plot G3       |




### 2.3.6 Test Results (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth




(Plot A1: GSM 850MHz Channel = 128 Occupied bandwidth)




(Plot A2: GSM 850MHz Channel = 190 Occupied bandwidth)

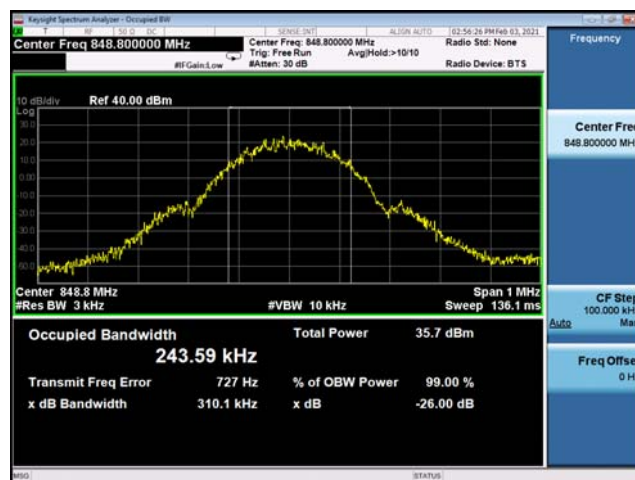

(Plot A3: GSM 850MHz Channel = 251 Occupied bandwidth)

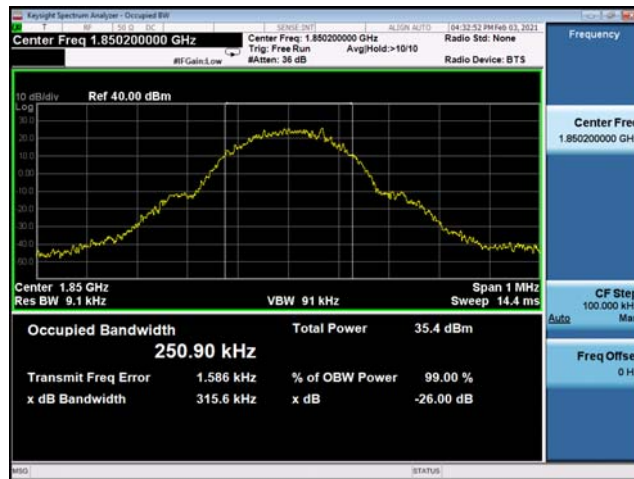


(Plot B1: GSM 1900MHz Channel = 512 Occupied bandwidth)

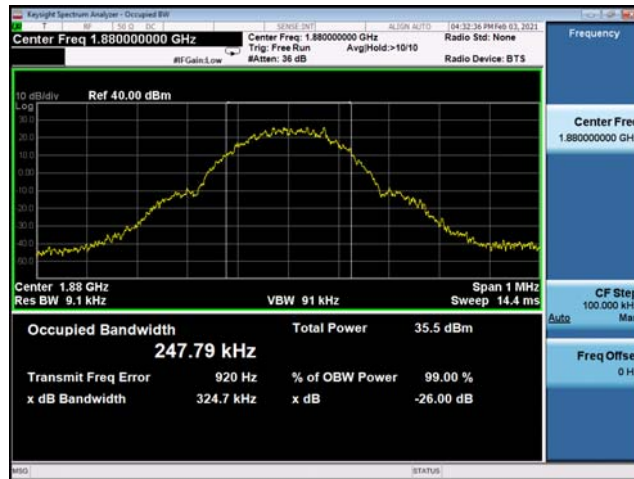

(Plot B2: GSM 1900MHz Channel = 661 Occupied bandwidth)



(Plot B3: GSM 1900MHz Channel = 810 Occupied bandwidth)

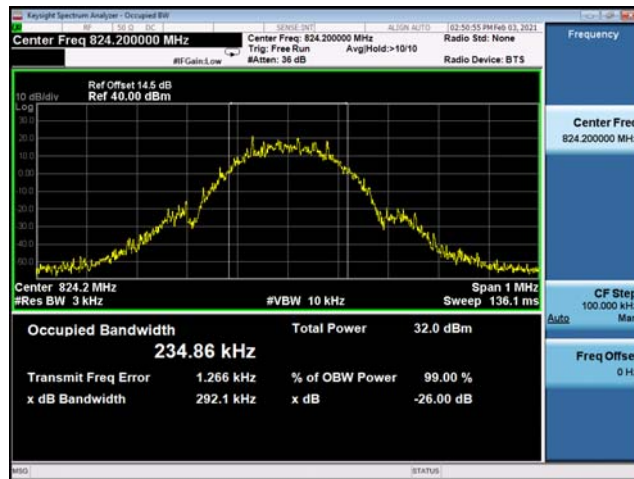


(Plot C1: EDGE 850MHz Channel = 128 Occupied bandwidth)



(Plot C2: EDGE 850MHz Channel = 190 Occupied bandwidth)



(Plot C3: EDGE 850MHz Channel = 251 Occupied bandwidth)

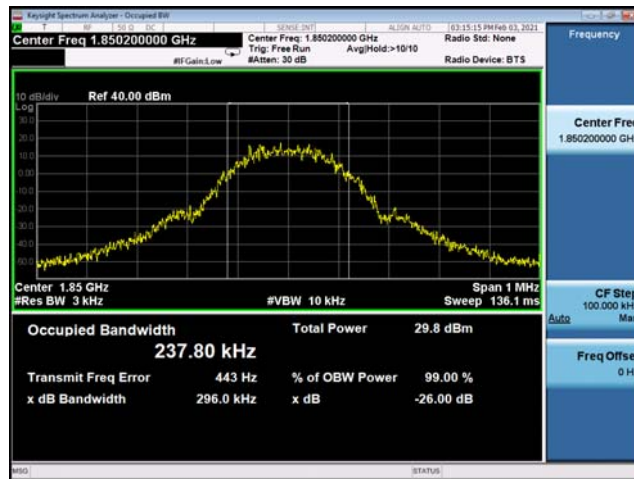

(Plot D1: EDGE 1900MHz Channel = 512 Occupied bandwidth)



(Plot D2: EDGE 1900MHz Channel = 661 Occupied bandwidth)



(Plot D3: EDGE 1900MHz Channel = 810 Occupied bandwidth)




(Plot E1: WCDMA 850MHz Channel = 4132 Occupied bandwidth)



(Plot E2: WCDMA 850MHz Channel = 4183 Occupied bandwidth)



(Plot E3: WCDMA 850MHz Channel = 4233 Occupied bandwidth)

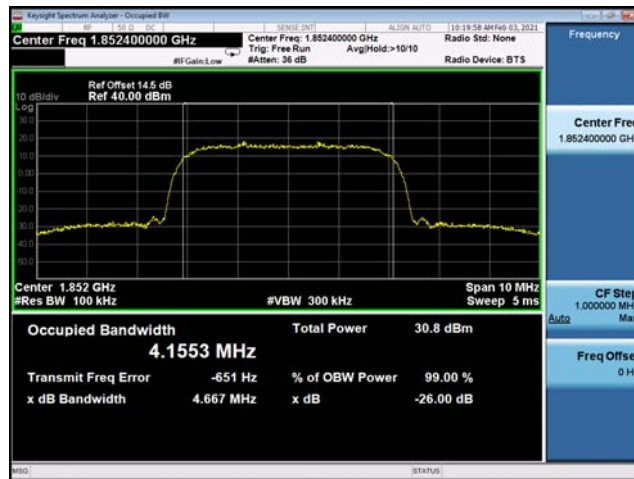

(Plot F1: WCDMA 1900MHz Channel = 9262 Occupied bandwidth)



(Plot F2: WCDMA 1900MHz Channel = 9400 Occupied bandwidth)



(Plot F3: WCDMA 1900MHz Channel = 9538 Occupied bandwidth)



(Plot G1: WCDMA 1700MHz Channel = 1312 bandwidth)



(Plot G2: WCDMA 1700 MHz Channel = 1412 bandwidth)



(Plot G3: WCDMA 1700 MHz Channel = 1513 bandwidth)

## **2.4 Frequency Stability**

### **2.4.1 Requirement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **2.4.2 Measuring Instruments**

The measuring equipment is listed in the section 3 of this test report.

### **2.4.3 Test Procedures for Temperature Variation**


1. The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **2.4.4 Test Procedures for Voltage Variation**

1. The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.



### 2.4.5 Test Setup

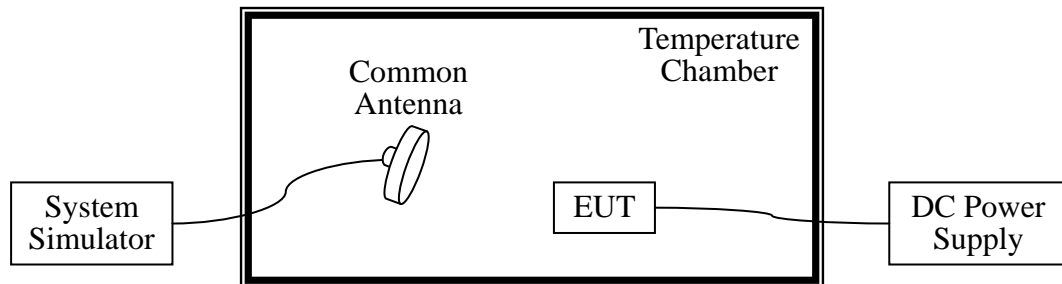

### 2.4.6 Test Results of Frequency Stability

GSM 850MHz Band

|             |         |            |          |
|-------------|---------|------------|----------|
| Band:       | GSM 850 | Channel:   | 190      |
| Limit(ppm): | 2.5     | Frequency: | 836.6MHz |

| Power (VDC) | Temperature (°C) | GSM             | EDGE            | Result |
|-------------|------------------|-----------------|-----------------|--------|
|             |                  | Deviation (ppm) | Deviation (ppm) |        |
| 3.85        | -30              | 0.0068          | 0.0038          | PASS   |
|             | -20              | 0.0022          | 0.0060          |        |
|             | -10              | 0.0054          | 0.0067          |        |
|             | 0                | 0.0045          | 0.0046          |        |
|             | +10              | 0.0051          | 0.0042          |        |
|             | +20              | <b>0.0093</b>   | <b>0.0084</b>   |        |
|             | +30              | 0.0057          | 0.0047          |        |
|             | +40              | 0.0053          | 0.0045          |        |
|             | +50              | 0.0064          | 0.0043          |        |
| 4.4         | +25              | 0.0067          | 0.0056          |        |
| 3.4         | +25              | 0.0059          | 0.0066          |        |



GSM 1900MHz Band

|             |          |            |           |
|-------------|----------|------------|-----------|
| Band:       | GSM 1900 | Channel:   | 661       |
| Limit(ppm): | 2.5      | Frequency: | 1880.0MHz |

| Power (VDC) | Temperature (°C) | GSM             | EDGE            | Result |
|-------------|------------------|-----------------|-----------------|--------|
|             |                  | Deviation (ppm) | Deviation (ppm) |        |
| 3.87        | -30              | 0.0047          | 0.0065          | PASS   |
|             | -20              | 0.0046          | 0.0028          |        |
|             | -10              | 0.0054          | 0.0028          |        |
|             | 0                | 0.0064          | 0.0034          |        |
|             | +10              | <b>0.0074</b>   | 0.0064          |        |
|             | +20              | 0.0058          | 0.0065          |        |
|             | +30              | 0.0047          | 0.0056          |        |
|             | +40              | 0.0059          | 0.0062          |        |
|             | +50              | 0.0043          | <b>0.0089</b>   |        |
| 4.4         | +25              | 0.0045          | 0.0051          |        |
| 3.6         | +25              | 0.0047          | 0.0034          |        |

WCDMA 850MHz Band

|             |              |            |          |
|-------------|--------------|------------|----------|
| Band:       | WCDMA Band V | Channel:   | 4183     |
| Limit(ppm): | 2.5          | Frequency: | 836.6MHz |

| Power (VDC) | Temperature (°C) | RMC 12.2Kbps    | Result |
|-------------|------------------|-----------------|--------|
|             |                  | Deviation (ppm) |        |
| 3.87        | -30              | 0.0066          | PASS   |
|             | -20              | 0.0065          |        |
|             | -10              | 0.0073          |        |
|             | 0                | 0.0083          |        |
|             | +10              | <b>0.0111</b>   |        |
|             | +20              | 0.0077          |        |
|             | +30              | 0.0066          |        |
|             | +40              | 0.0078          |        |
|             | +50              | 0.0062          |        |
| 4.4         | +25              | 0.0064          |        |
| 3.6         | +25              | 0.0066          |        |



WCDMA 1900MHz Band

|             |               |            |           |
|-------------|---------------|------------|-----------|
| Band:       | WCDMA Band II | Channel:   | 9400      |
| Limit(ppm): | 2.5           | Frequency: | 1880.0MHz |

| Power (VDC) | Temperature (°C) | RMC 12.2Kbps    | Result |
|-------------|------------------|-----------------|--------|
|             |                  | Deviation (ppm) |        |
| 3.87        | -30              | 0.0075          | PASS   |
|             | -20              | 0.0055          |        |
|             | -10              | <b>0.0096</b>   |        |
|             | 0                | 0.0094          |        |
|             | +10              | 0.0080          |        |
|             | +20              | 0.0050          |        |
|             | +30              | 0.0054          |        |
|             | +40              | 0.0028          |        |
| +50         | 0.0033           |                 |        |
| 4.4         | +25              | 0.0040          |        |
| 3.6         | +25              | 0.0051          |        |

WCDMA 1700MHz Band

|             |               |            |           |
|-------------|---------------|------------|-----------|
| Band:       | WCDMA Band IV | Channel:   | 1412      |
| Limit(ppm): | 2.5           | Frequency: | 1732.4MHz |

| Power (VDC) | Temperature (°C) | RMC 12.2Kbps    | Result |
|-------------|------------------|-----------------|--------|
|             |                  | Deviation (ppm) |        |
| 3.87        | -30              | 0.0075          | PASS   |
|             | -20              | 0.0081          |        |
|             | -10              | 0.0083          |        |
|             | 0                | <b>0.0095</b>   |        |
|             | +10              | 0.0045          |        |
|             | +20              | 0.0064          |        |
|             | +30              | 0.0058          |        |
|             | +40              | 0.0036          |        |
| +50         | 0.0044           |                 |        |
| 4.4         | +25              | 0.0041          |        |
| 3.6         | +25              | 0.0054          |        |

## **2.5 Conducted Out of Band Emissions**

### **2.5.1 Requirement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


### **2.5.2 Measuring Instruments**

The measuring equipment is listed in the section 3 of this test report.

### **2.5.3 Test Procedures**


1. The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13\text{dBm}$ .
8. For 9KHz to 30MHz: the amplitude of spurious emissions are attenuated by more than 20dB below the permissible value has no need to be reported.

### 2.5.4 Test Setup

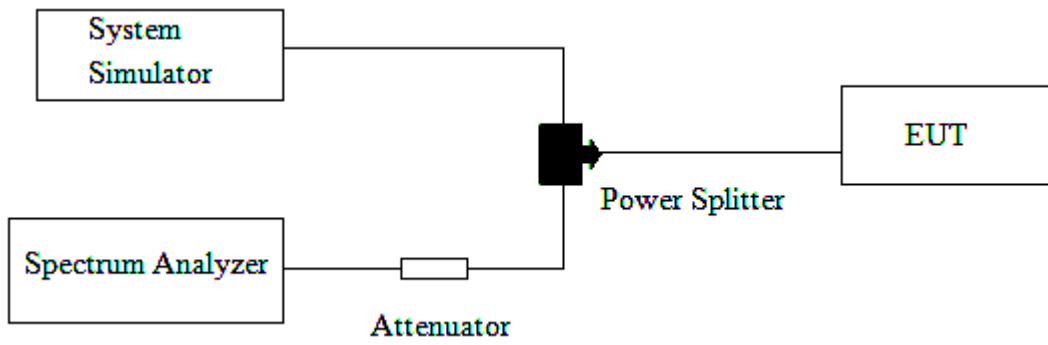


### 2.5.5 Test Result (Plots) of Conducted Spurious Emission


Note: For 9 KHz to 30MHz: the amplitude of spurious emissions is attenuated by more than 20dB below the permissible value, so we not provide the test result here.

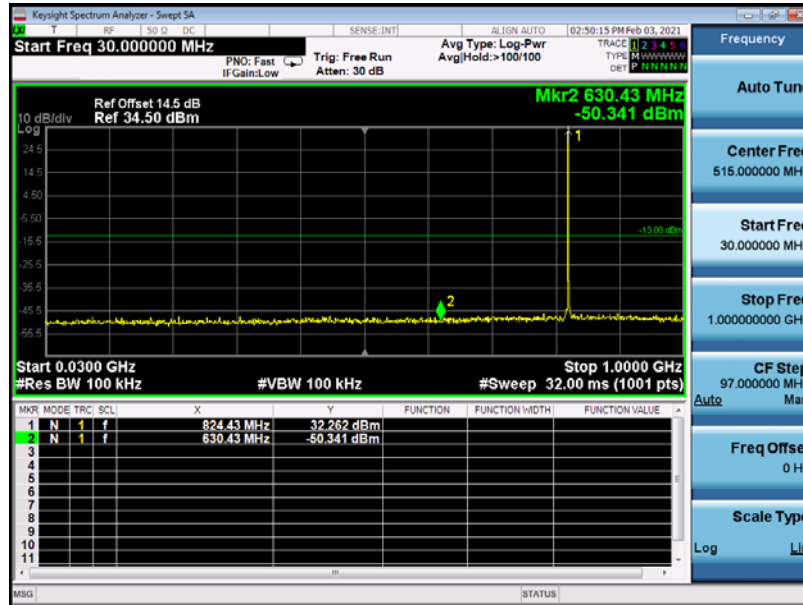


GSM 850MHz Channel = 128, 30MHz to 1GHz

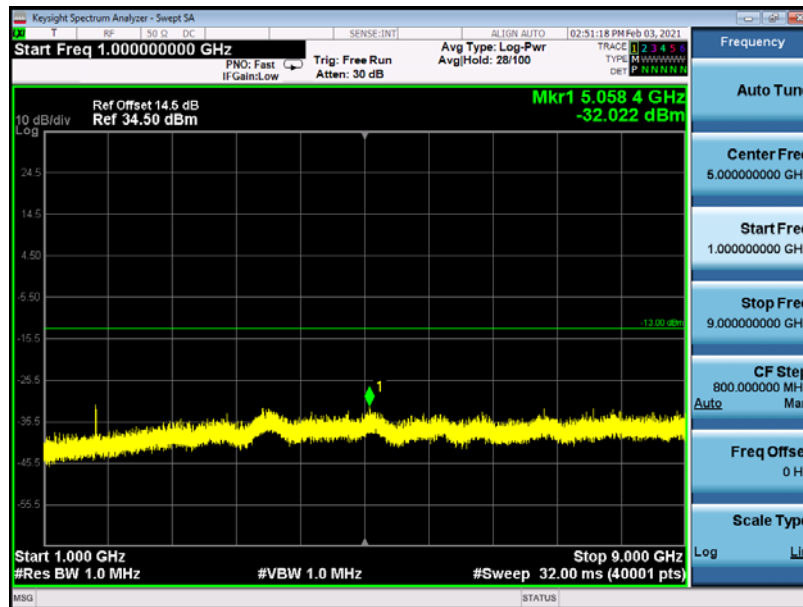


GSM 850MHz Channel = 128, 1GHz to 9GHz

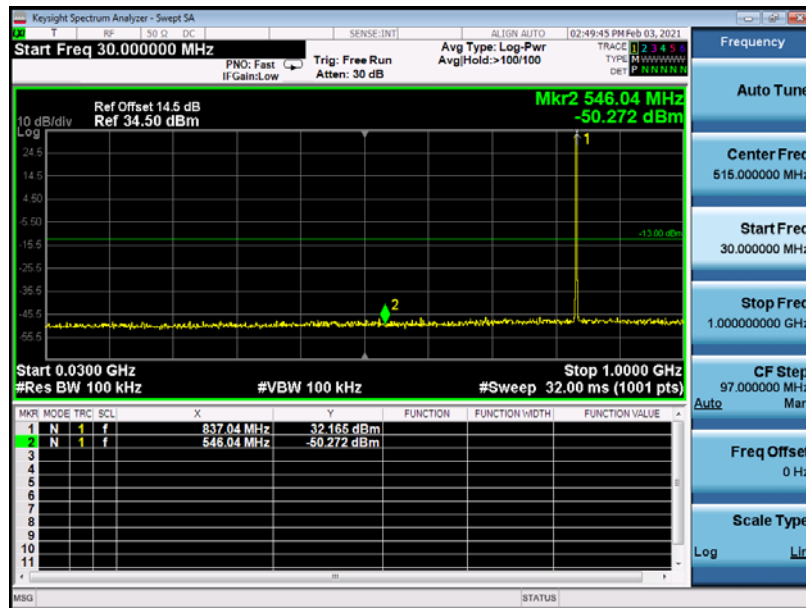


GSM 850MHz Channel = 190, 30MHz to 1GHz

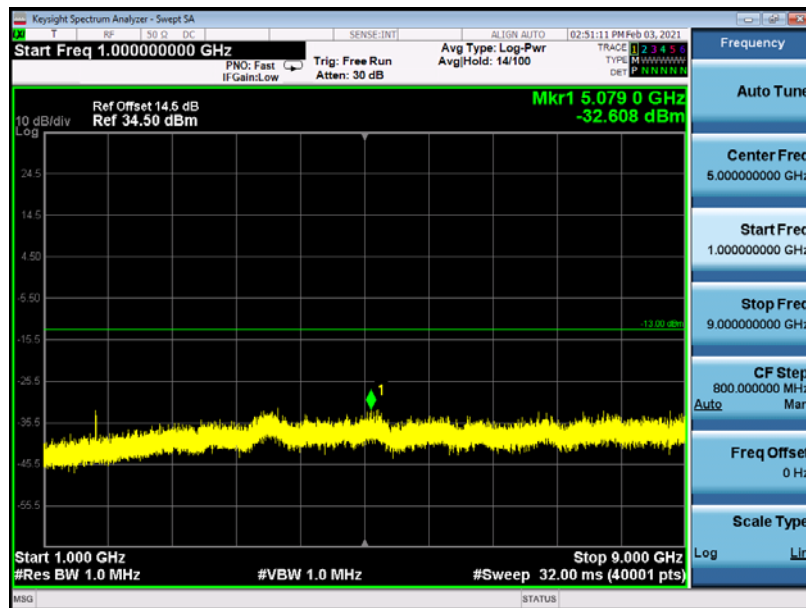

GSM 850MHz Channel = 190, 1GHz to 9GHz

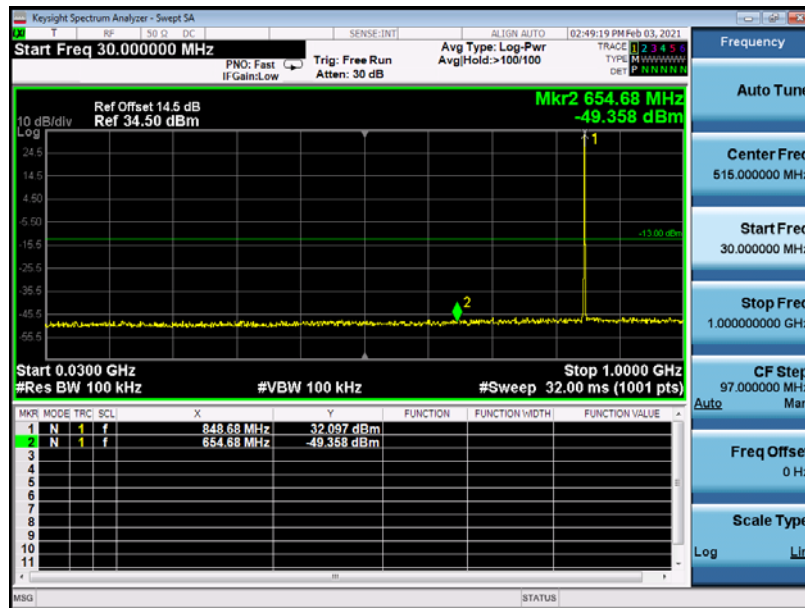


GSM 850MHz Channel = 251, 30MHz to 1GHz

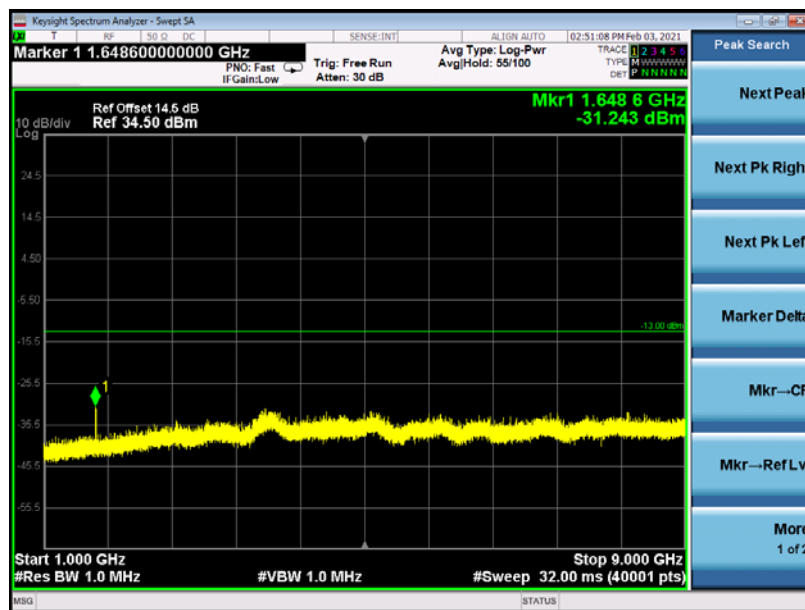


GSM 850MHz Channel = 251, 1GHz to 9GHz




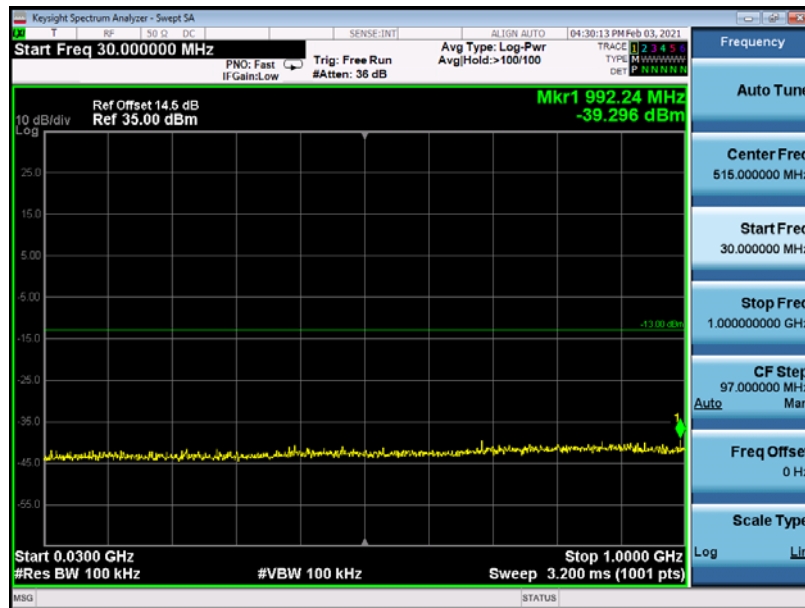


GSM 1900MHz Channel = 512, 30MHz to 1GHz

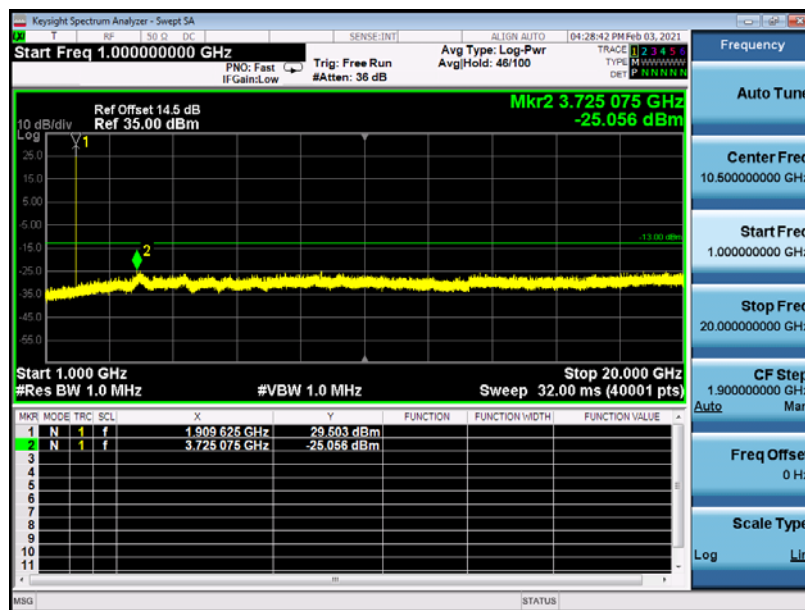


GSM 1900MHz Channel = 512, 1GHz to 20GHz

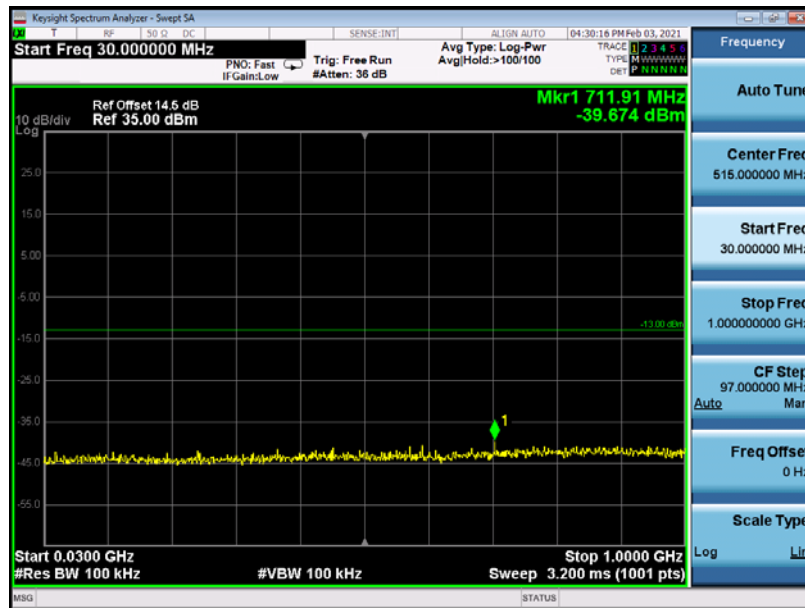


GSM 1900MHz Channel = 661, 30MHz to 1GHz

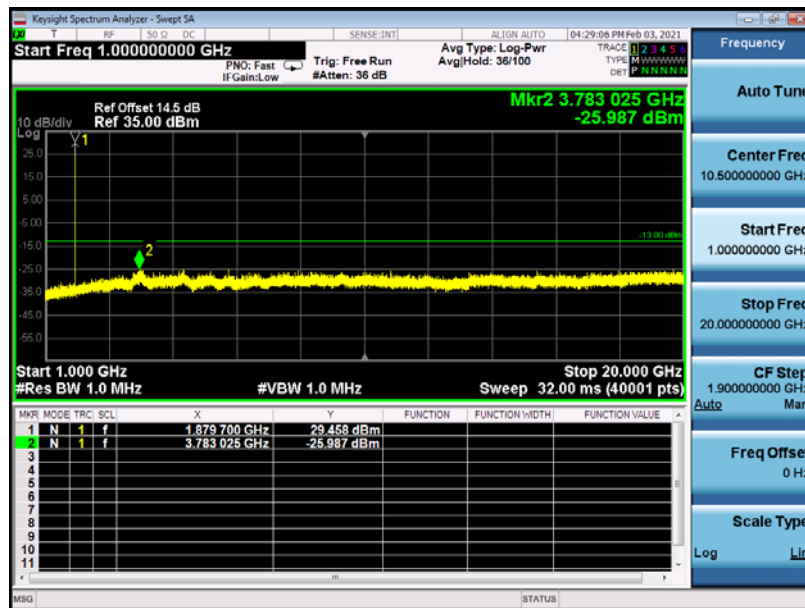


GSM 1900MHz Channel = 661, 1GHz to 20GHz

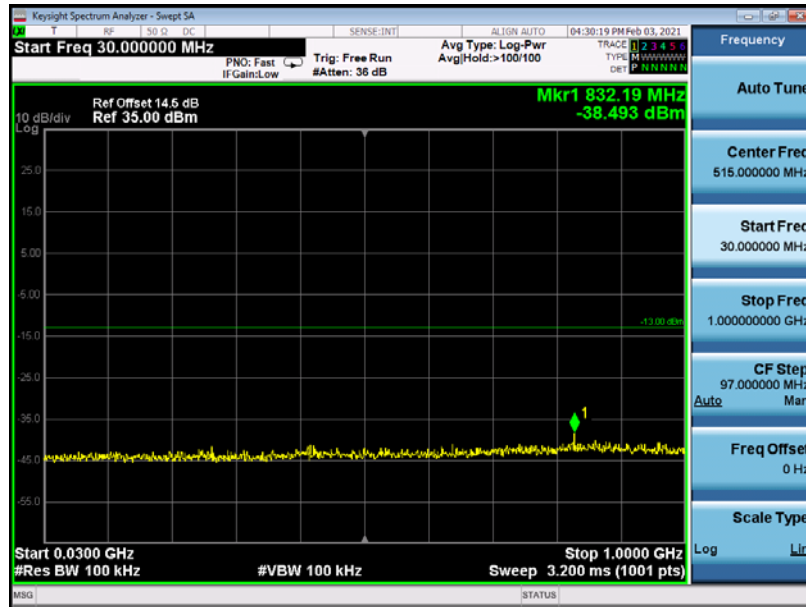


GSM 1900MHz Channel = 810, 30MHz to 1GHz

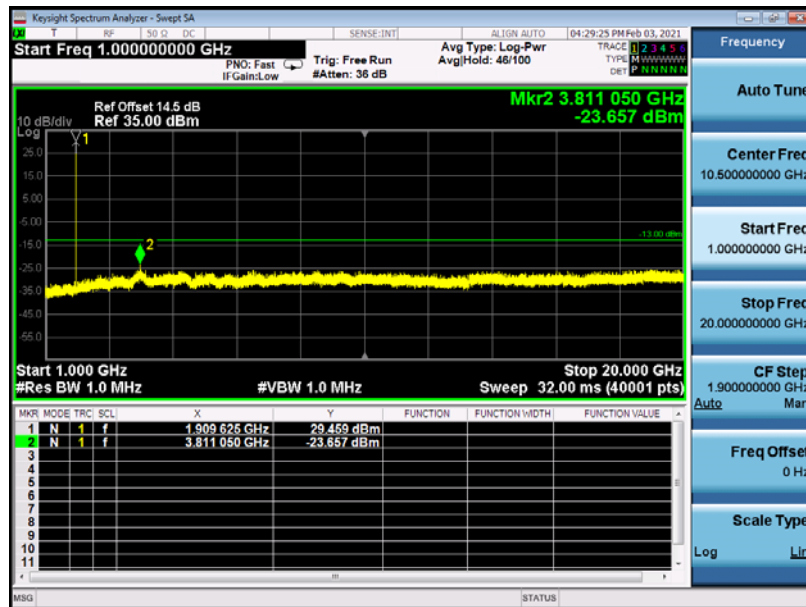


GSM 1900MHz Channel = 810, 1GHz to 20GHz

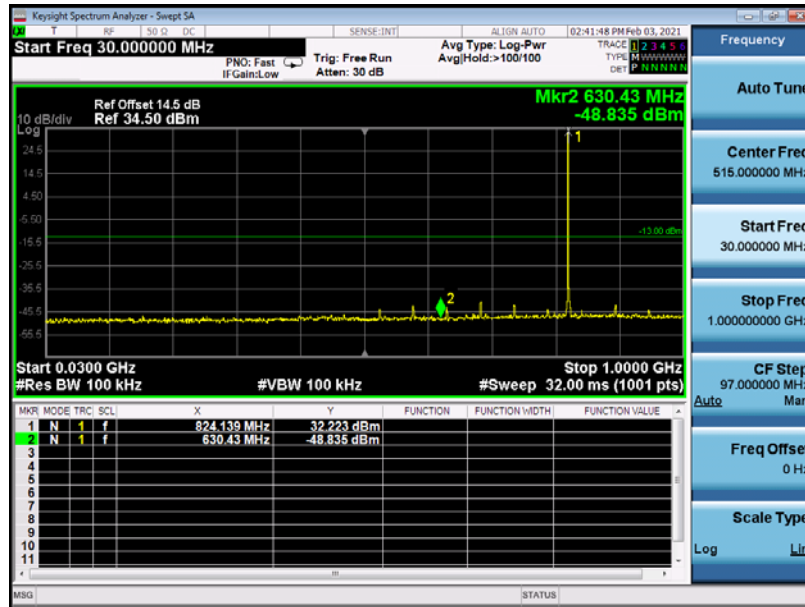


EDGE 850MHz Channel = 128, 30MHz to 1GHz

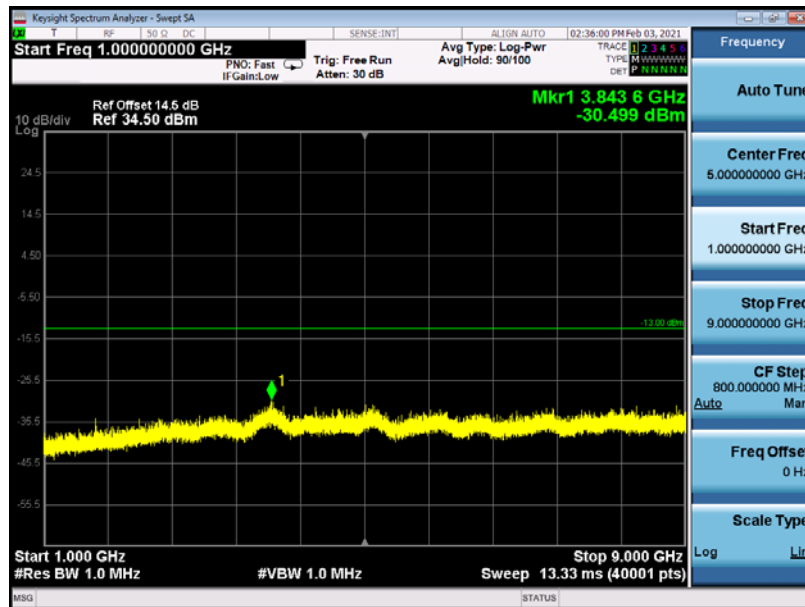


EDGE 850MHz Channel = 128, 1GHz to 9GHz

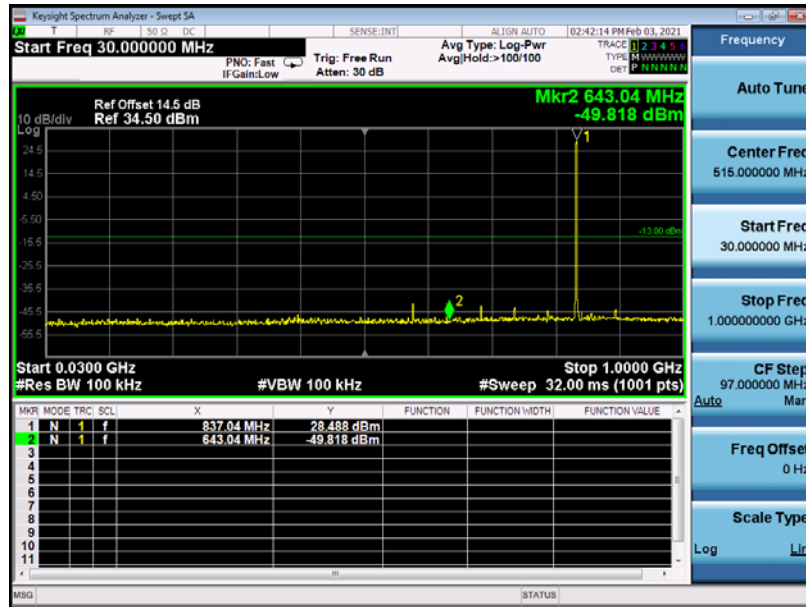


EDGE 850MHz Channel = 190, 30MHz to 1GHz

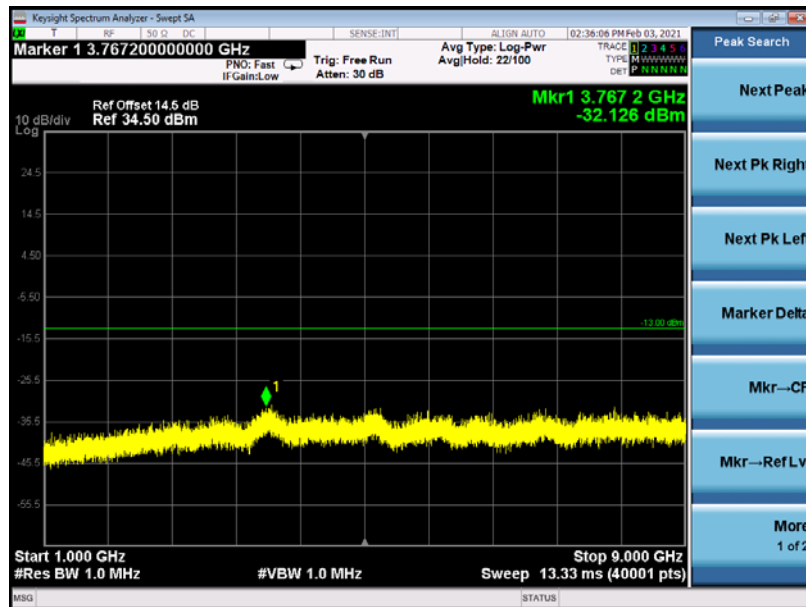


EDGE 850MHz Channel = 190, 1GHz to 9GHz

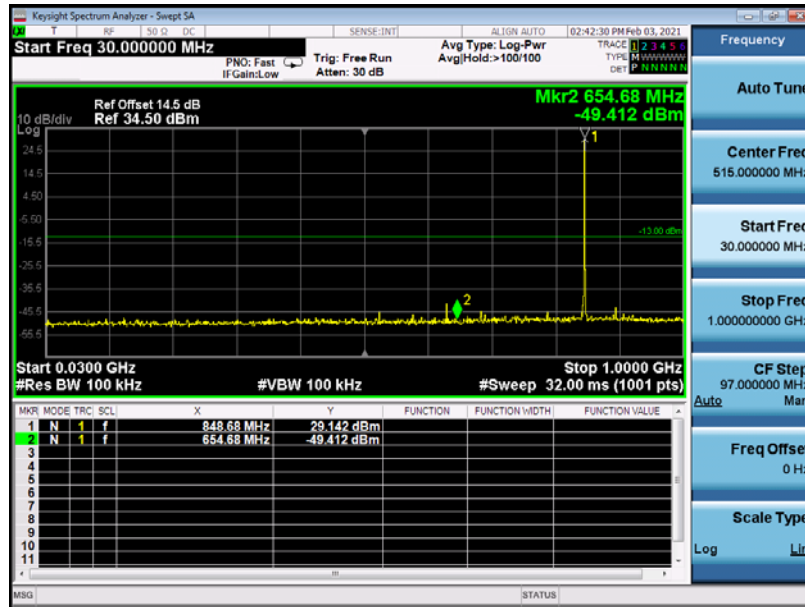


EDGE 850MHz Channel = 251, 30MHz to 1GHz

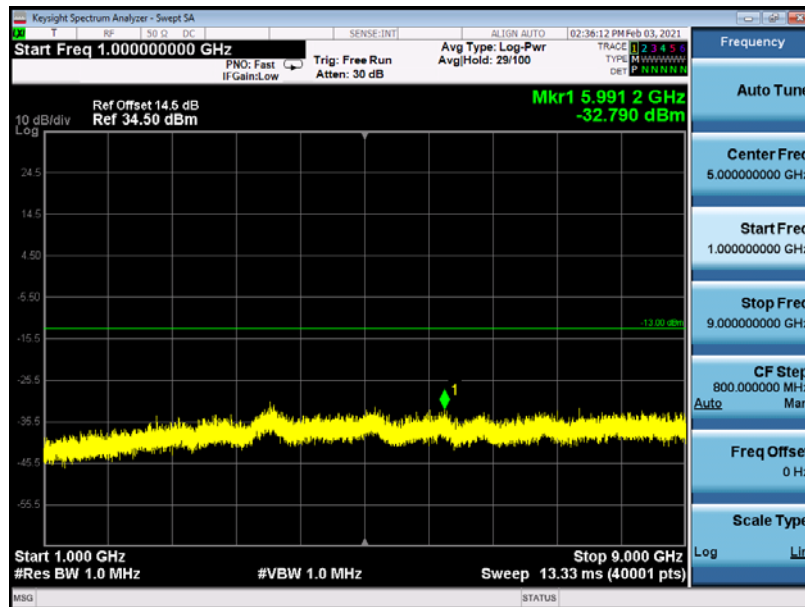


EDGE 850MHz Channel = 251, 1GHz to 9GHz

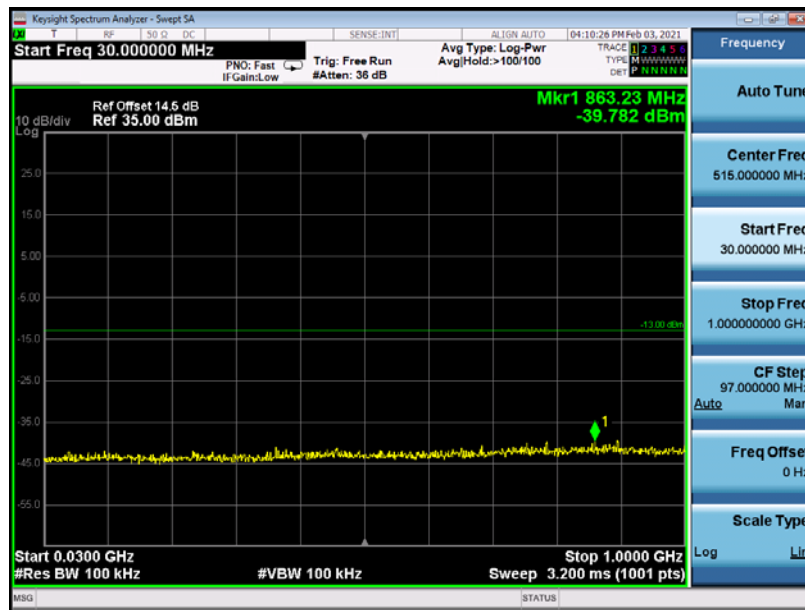


EDGE 1900MHz Channel = 512, 30MHz to 1GHz

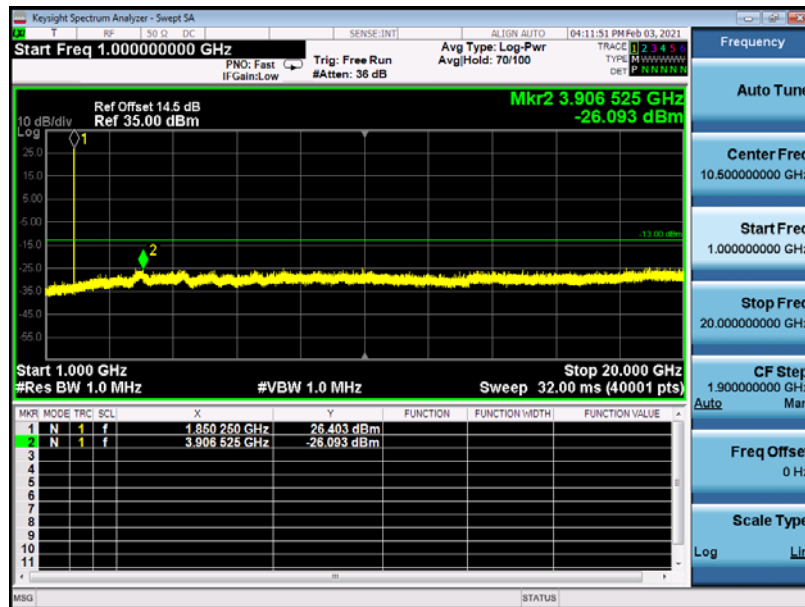

EDGE 1900MHz Channel = 512, 1GHz to 20GHz

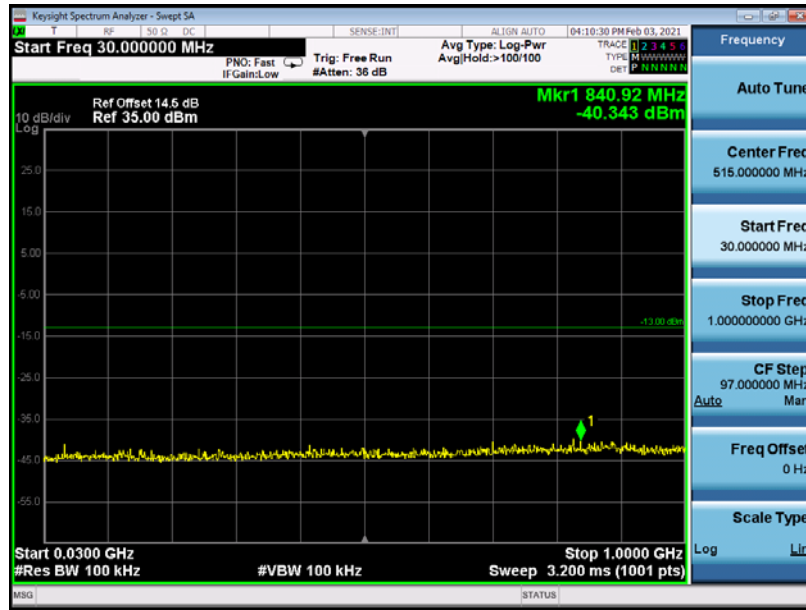


EDGE 1900MHz Channel = 661, 30MHz to 1GHz

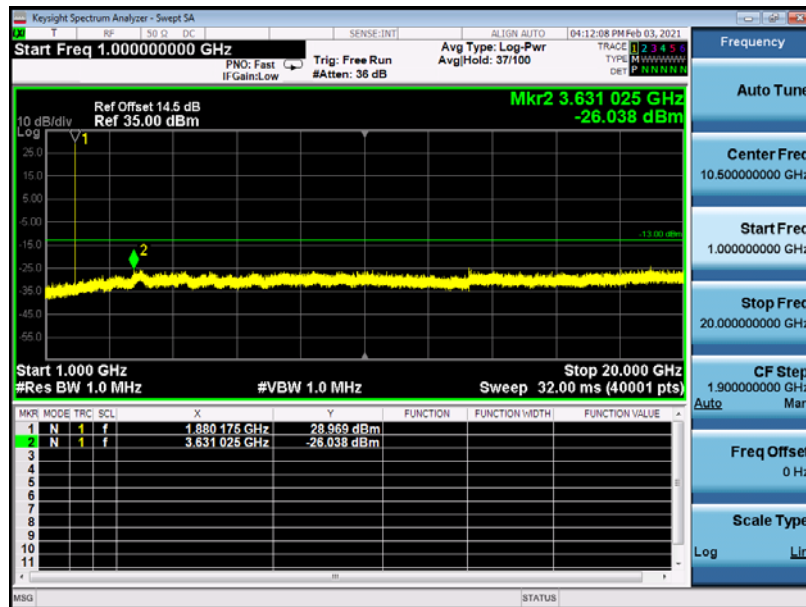


EDGE 1900MHz Channel = 661, 1GHz to 20GHz




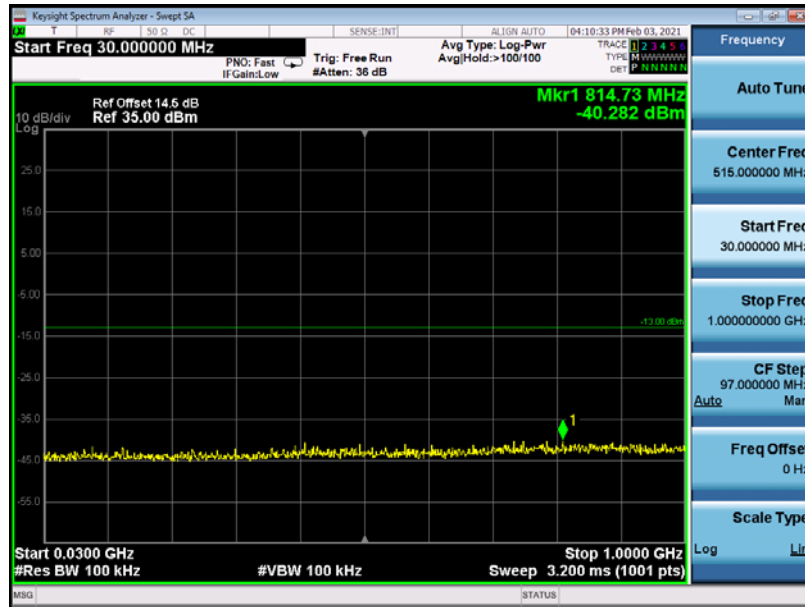


EDGE 1900MHz Channel = 810, 30MHz to 1GHz

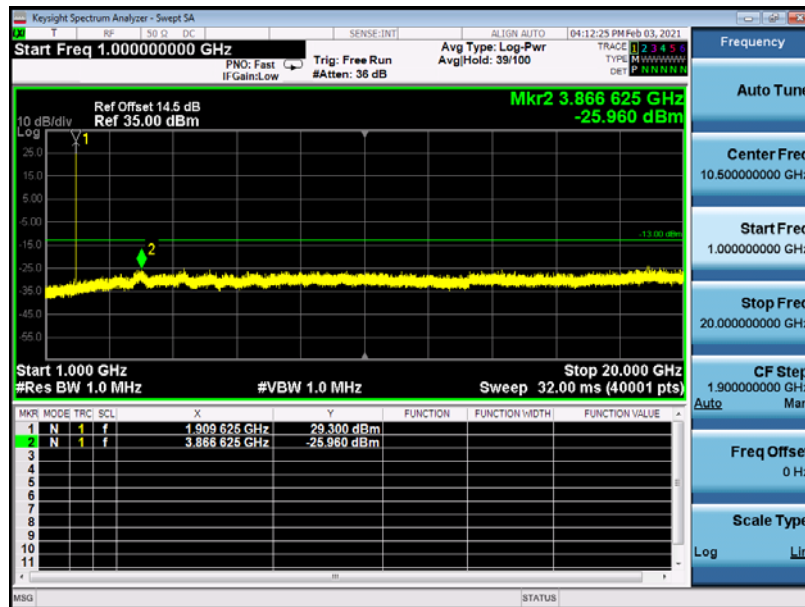


EDGE 1900MHz Channel = 810, 1GHz to 20GHz

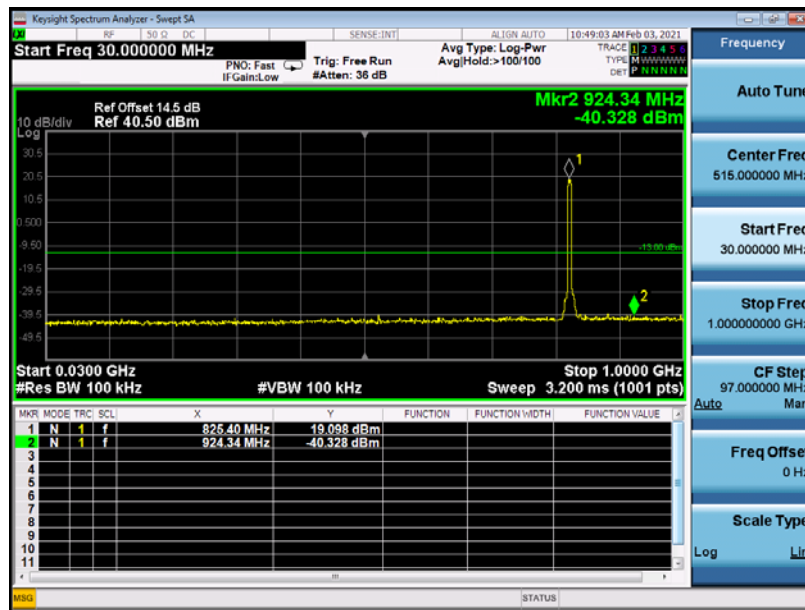


WCDMA850MHz Channel = 4132, 30MHz to 1GHz

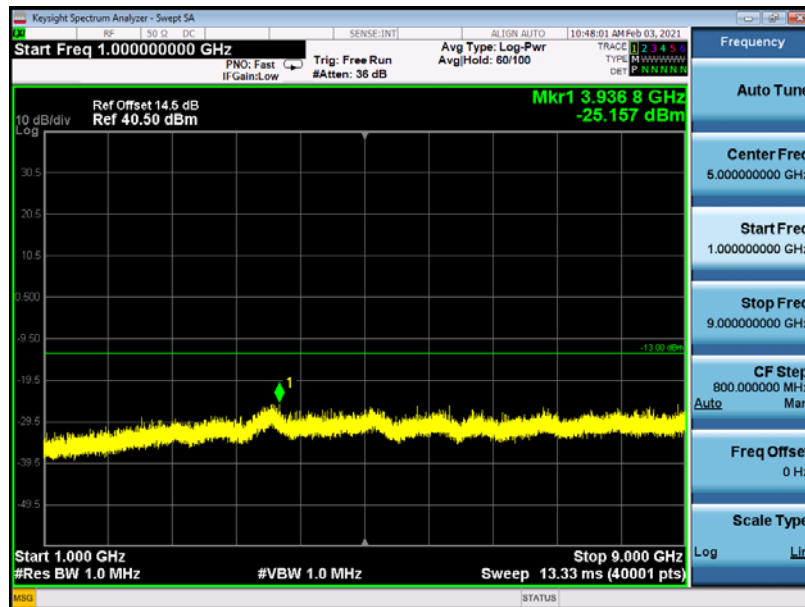


WCDMA850MHz Channel = 4132, 1GHz to 9GHz

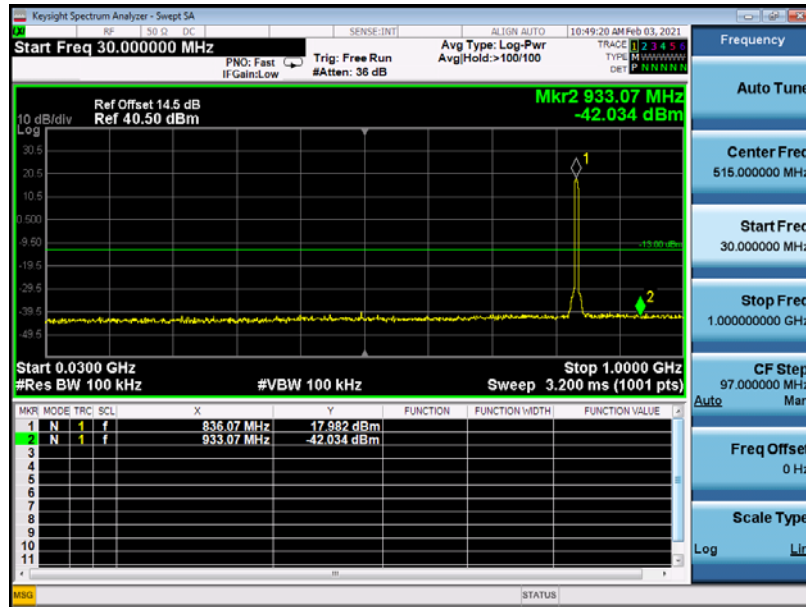


WCDMA850MHz Channel = 4183, 30MHz to 1GHz

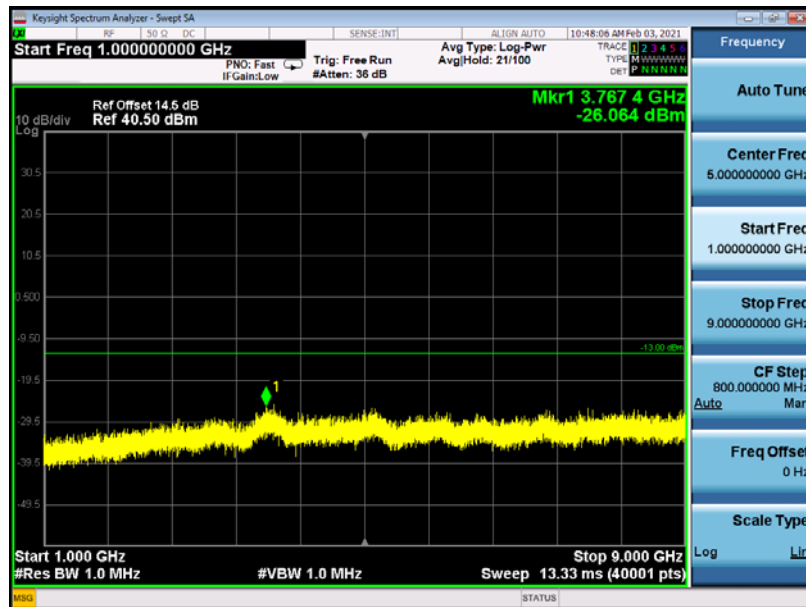


WCDMA850MHz Channel = 4183, 1GHz to 9GHz

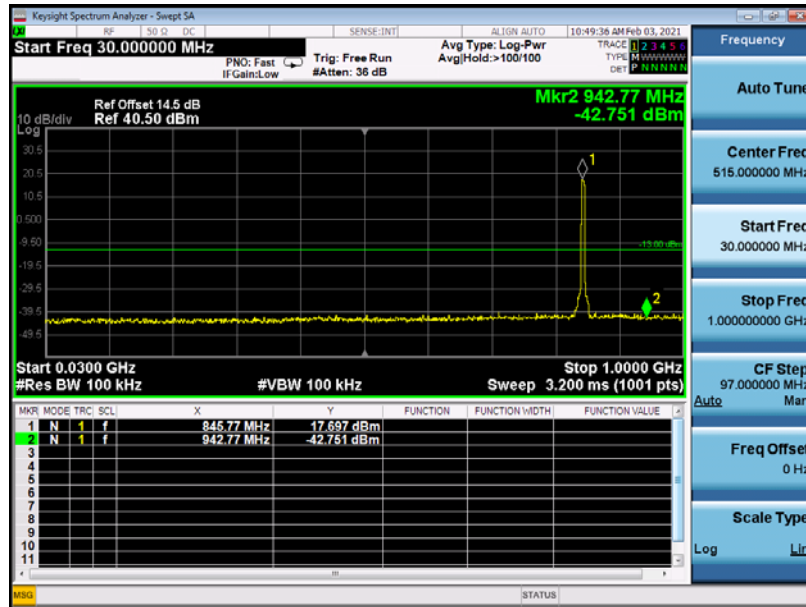


WCDMA850MHz Channel = 4233, 30MHz to 1GHz

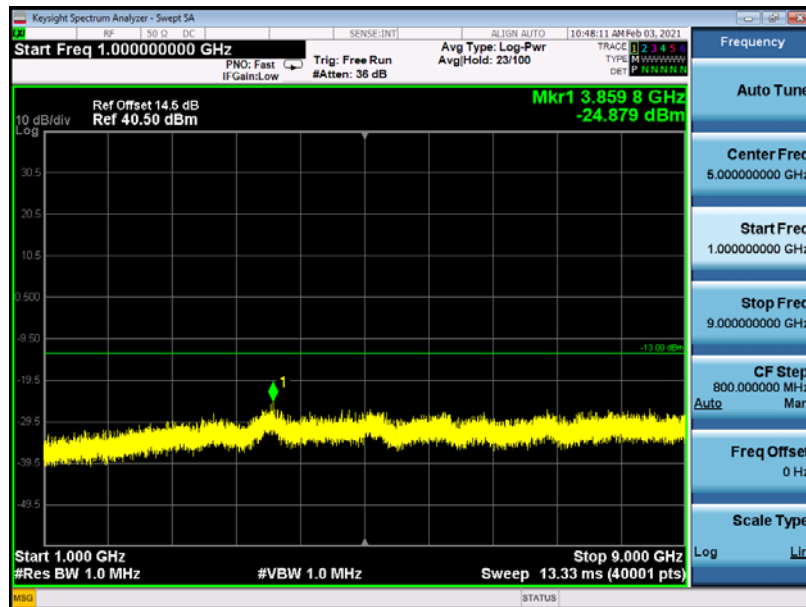


WCDMA850MHz Channel = 4233, 1GHz to 9GHz

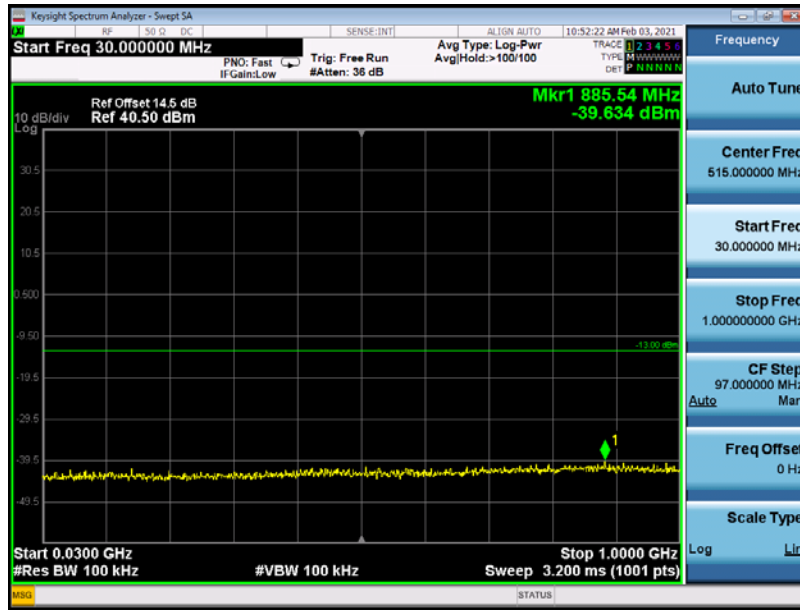


WCDMA1900MHz Channel = 9262, 30MHz to 1GHz

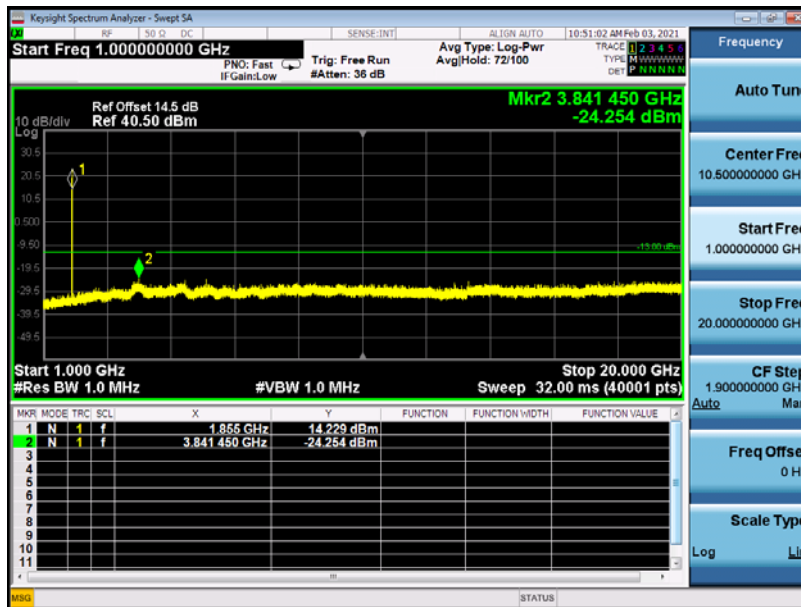


WCDMA1900MHz Channel = 9262, 1GHz to 20GHz

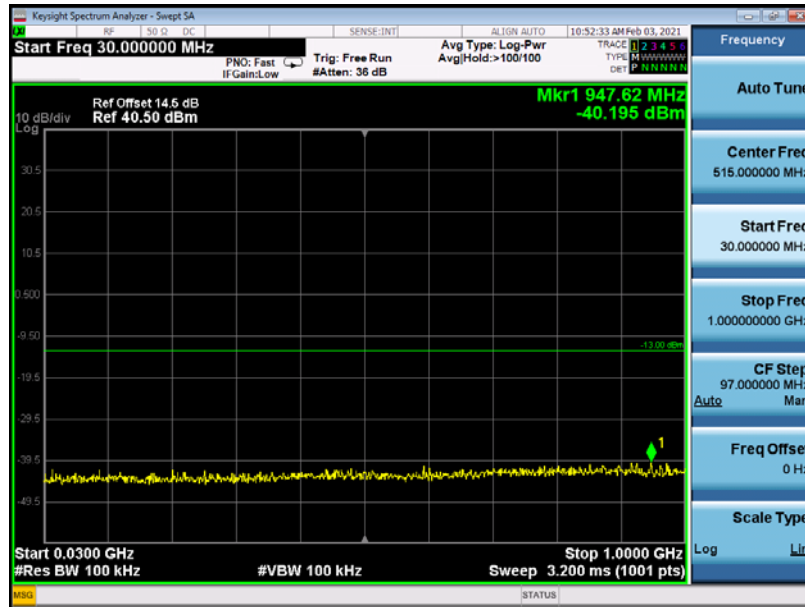


WCDMA1900MHz Channel = 9400, 30MHz to 1GHz

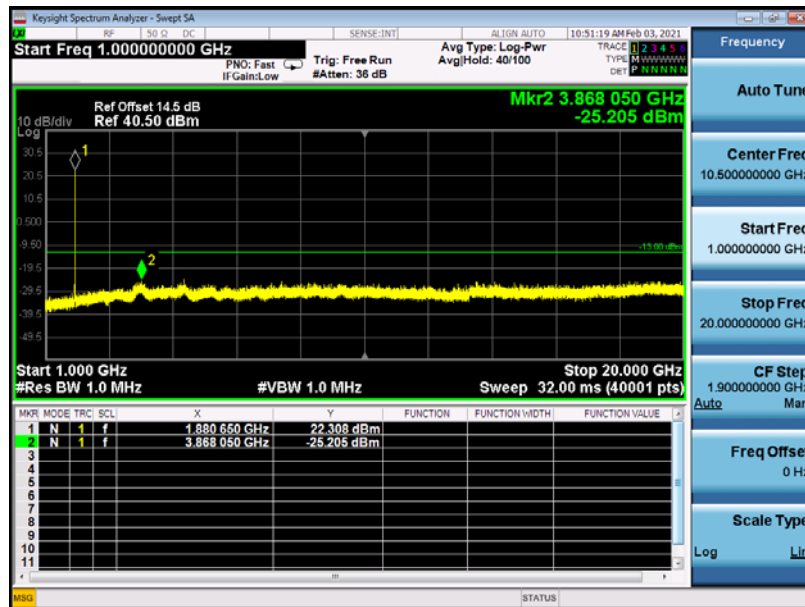


WCDMA1900MHz Channel = 9400, 1GHz to 20GHz

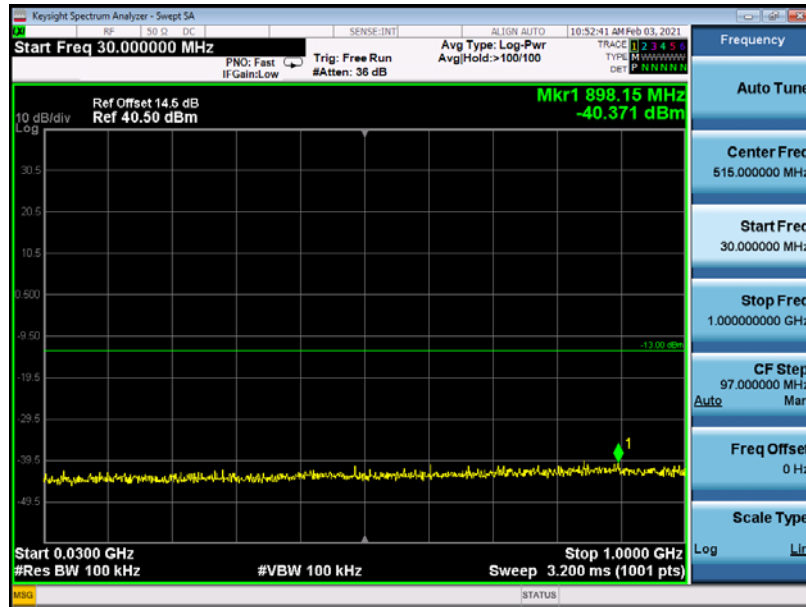


WCDMA1900MHz Channel = 9538, 30MHz to 1GHz

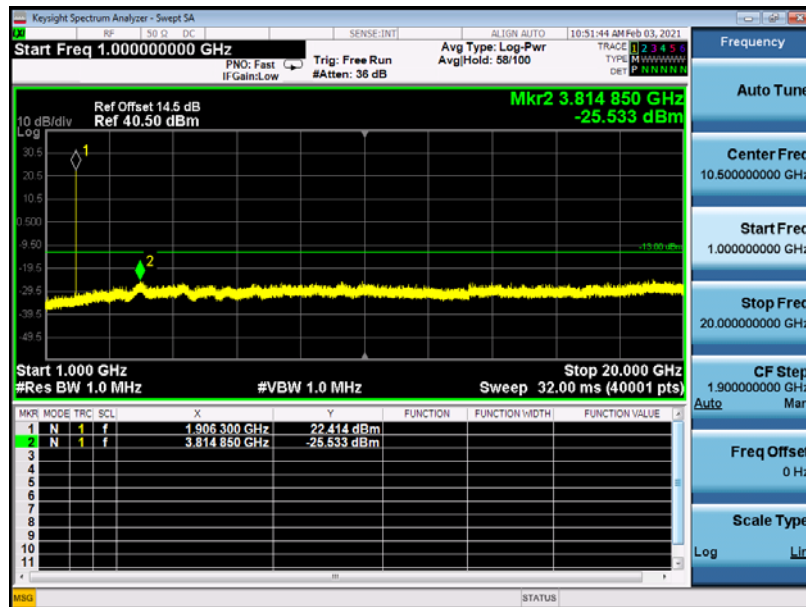

WCDMA1900MHz Channel = 9538 1GHz to 20GHz

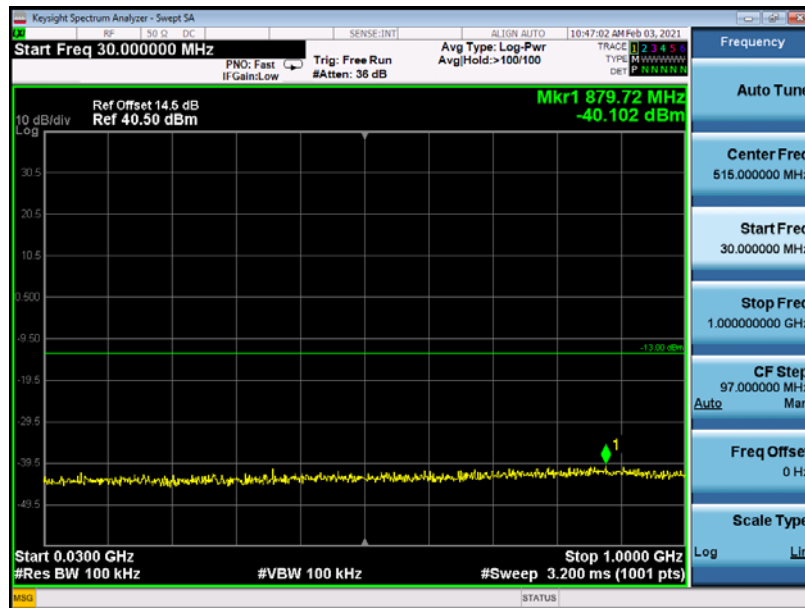


WCDMA1700MHz Channel = 1312, 30MHz to 1GHz

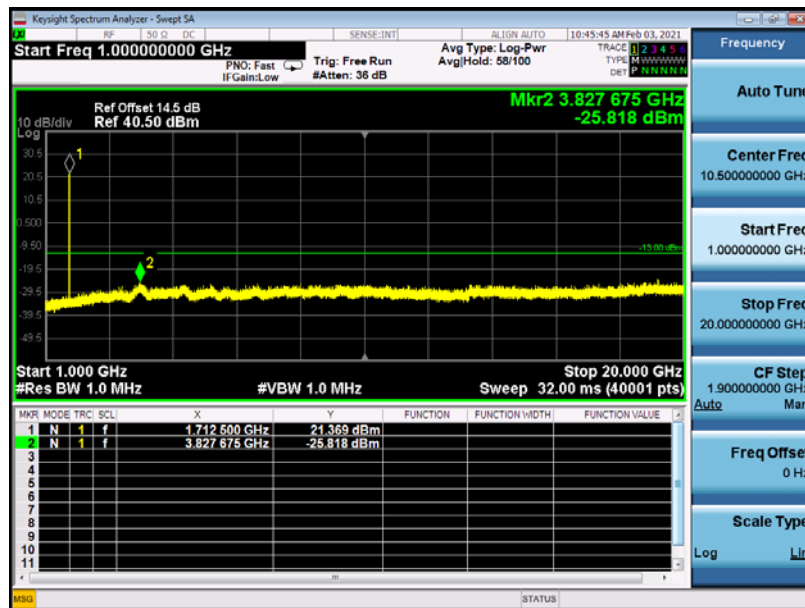


WCDMA1700MHz Channel = 1312, 1GHz to 18GHz




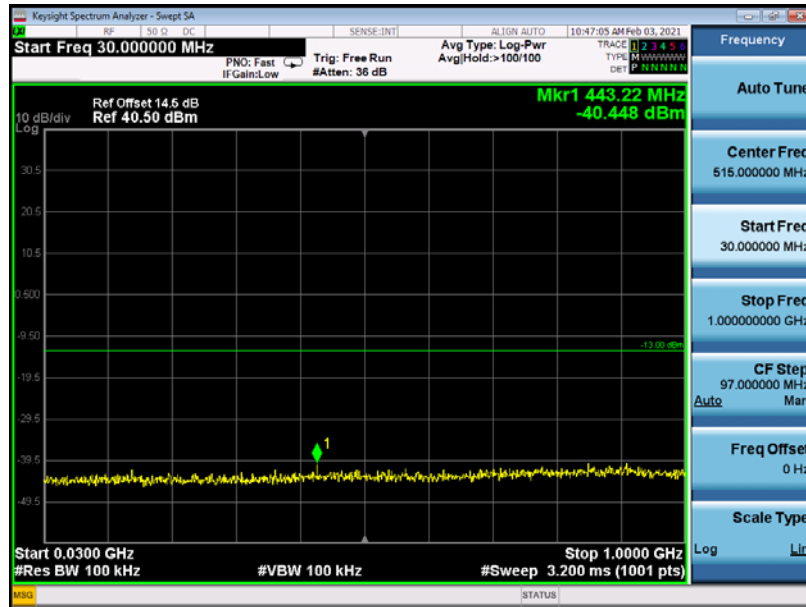


WCDMA1700MHz Channel = 1414, 30MHz to 1GHz

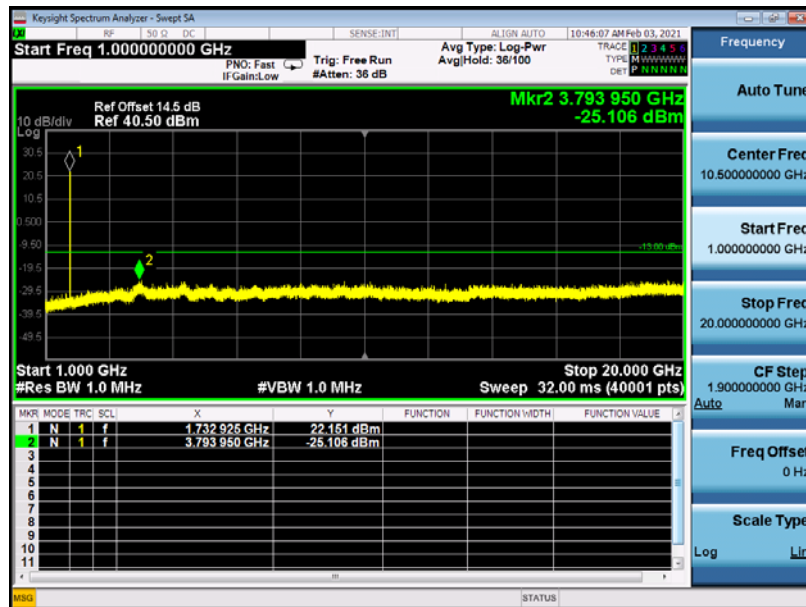

WCDMA1700MHz Channel = 1414, 1GHz to 18GHz

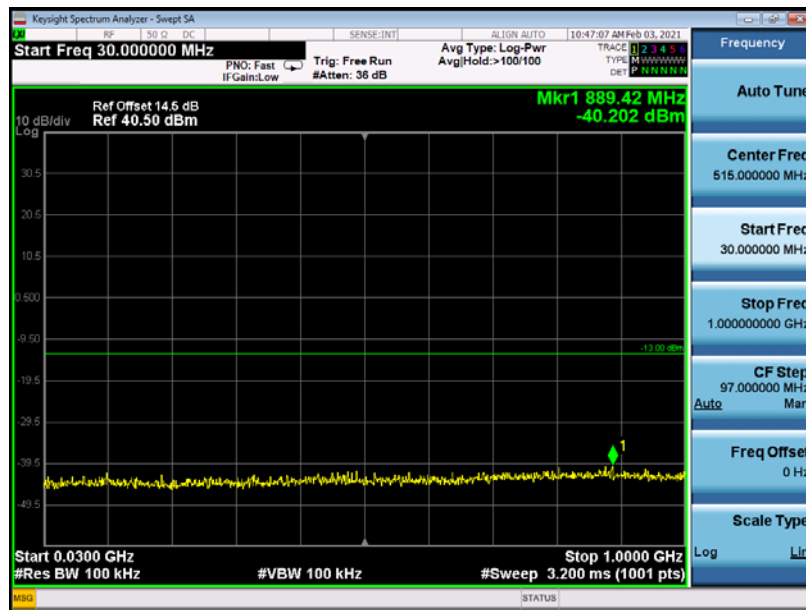

WCDMA1700MHz Channel = 1513, 30MHz to 1GHz

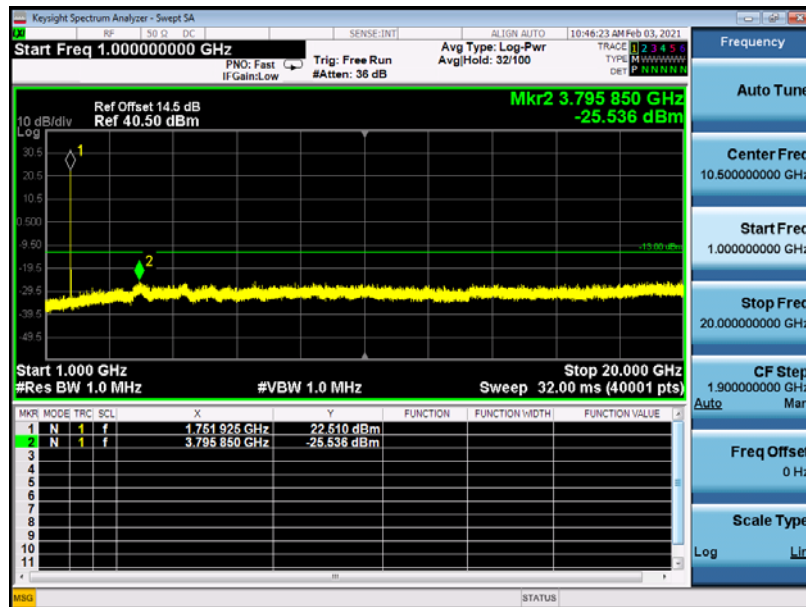

WCDMA1700MHz Channel = 1513, 1GHz to 18GHz