

---

# TEST REPORT FOR GSM TESTING

---

Report No.: SRTC2022-9004(F)-22011003(A)

Product Name: LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone

Product Model: ZTE Blade A32

Applicant: ZTE CORPORATION

Manufacturer: ZTE CORPORATION

Specification: FCC Part 24E, Part 22H, Part 2 (2020)

FCC ID: SRQ-ZTEA32-2

The State Radio\_monitoring\_center Testing Center (SRTC)  
15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R.China  
Tel: 86-10-57996183 Fax: 86-10-57996388

## CONTENTS

<b>1. GENERAL INFORMATION</b> .....	2
1.1 Notes of the test report.....	2
1.2 Information about the testing laboratory.....	2
1.3 Applicant's details.....	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST</b> .....	4
2.1 Final Equipment Build Status.....	4
2.2 Support Equipment.....	4
<b>3 REFERENCE SPECIFICATION</b> .....	5
<b>4 KEY TO NOTES AND RESULT CODES</b> .....	5
<b>5 RESULT SUMMARY</b> .....	6
<b>6 TEST RESULT</b> .....	7
6.1 RF Power Output.....	7
6.2 Effective Radiated Power and Effective Isotropic Radiated Power.....	8
6.3 Occupied Bandwidth.....	9
6.4 Emission Bandwidth.....	10
6.5 Spurious Emissions at antenna terminal.....	11
6.6 Band Edges Compliance.....	12
6.7 Frequency Stability.....	13
6.8 Radiated Spurious Emissions.....	14
6.9 Peak-Average Ratio.....	16
<b>7 MEASUREMENT UNCERTAINTIES</b> .....	17
<b>8 TEST EQUIPMENTS</b> .....	18
<b>APPENDIX A – TEST DATA OF CONDUCTED EMISSION</b> .....	19
<b>APPENDIX B – TEST DATA OF RADIATED EMISSION</b> .....	82

## 1. GENERAL INFORMATION

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### 1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiaf@srtc.org.cn
Designation Number:	CN1267
Registration number:	239125

### 1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

### 1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

## 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021-01-10
Testing Start Date:	2021-01-24
Testing End Date:	2022-02-09

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient:	25	40
Maximum Extreme:	55	---
Minimum Extreme:	-10	---

Normal Supply Voltage (V d.c.):	3.85
Maximum Extreme Supply Voltage (V d.c.):	4.40
Minimum Extreme Supply Voltage (V d.c.):	3.60

## 2 DESCRIPTION OF THE DEVICE UNDER TEST

### 2.1 Final Equipment Build Status

Frequency Range:	GSM850: Tx:824~849MHz Rx:869~894MHz PCS1900: Tx:1850~1910MHz Rx:1930~1990MHz
Modulation Type:	GPRS:GMSK EDGE: GMSK/8PSK
Emission Designator:	300KGXW/300KG7W
Duplex Mode:	FDD
Duplex Spacing:	GSM850:45MHz PCS1900:80MHz
Antenna Type:	Internal Antenna
Antenna Gain:	GSM850: -1.6dBi /PCS1900: -0.6dBi ERP = EIRP(Power+Gain) – 2.15 (dB)
Power Supply:	Charger
Software Revision:	W1.0.0_A32
Hardware Revision:	19765_1_10M11
IMEI	860855060001803

### 2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

N/A

### **3 REFERENCE SPECIFICATION**

Specification	Version	Title
FCC Part2	2020	Frequency allocations and radio treaty matters; general rules and regulations
FCC Part22	2020	Public mobile services
FCC Part24	2020	Personal communications services
ANSI C63.26	2020	American national standard for compliance testing of transmitters used in licensed radio services
KDB 971168 D01	April 9, 2018	Measurement guidance for certification of licensed digital transmitters
TIA-603-E-2016	March 2016	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards




### **4 KEY TO NOTES AND RESULT CODES**

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
NT	Normal Temperature
NV	Nominal voltage
HV	High voltage
LV	Low voltage

## 5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	2.1046	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)(5)/24.232(c)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	2.1049	Pass
5	Spurious Emissions at antenna terminals	2.1051/22.917(a)/24.238(a)	Pass
6	Band Edges Compliance	2.1051/22.917(a)/24.238(a)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238(a)	Pass
9	Peak-Average Ratio	24.232(d)	Pass


This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. Wang Hao 	Issued date:  20220215

## **6 TEST RESULT**

### **6.1 RF Power Output**

Rule Part(s)  
FCC Part 2.1046

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration. The measurement will be conducted at three channels (Low, Middle and High channels)

Limits: No specific conduct power requirements in part 2.1046.

Test result:

The test results are shown in Appendix A.




## 6.2 Effective Radiated Power and Effective Isotropic Radiated Power

Rule Part(s)

FCC Part 22.913(a)(5)/Part 24.232(c)

Test setup:



Test procedure:

KDB 971168 D01 v03r01 – Section 5.6

Test Settings

Subclause 5.2.5.5 of ANSI C63.26-2015 is applicable, along with the following provisions. For personal/portable radios utilizing an integral antenna, the factor LC is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant. The minimum cable loss should be used in this equation.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

Limits for GSM850:

Operation Mode	Power Step	E.R.P. (dBm)
GSM	5	≤38.45
GPRS	3	≤38.45
EDGE	6	≤38.45

Limits for PCS1900:

Operation Mode	Power Step	E.I.R.P. (dBm)
GSM	0	≤33
GPRS	3	≤33
EDGE	5	≤33


Test result:

The test results are shown in Appendix A.

### 6.3 Occupied Bandwidth

Rule Part(s)  
Part 2.1049

Test Setup:

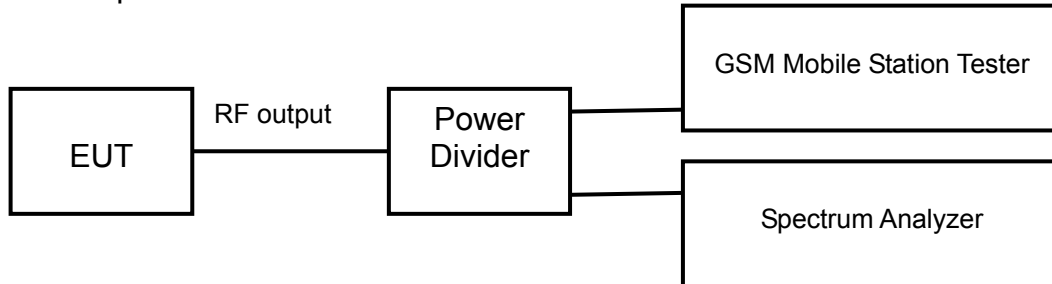

Test procedure:  
KDB 971168 D01 v03r01 – Section 4.2

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7


Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:  
The test results are shown in Appendix A.

## 6.4 Emission Bandwidth-

Rule Part(s)  
Part 2.1049

Test Setup:

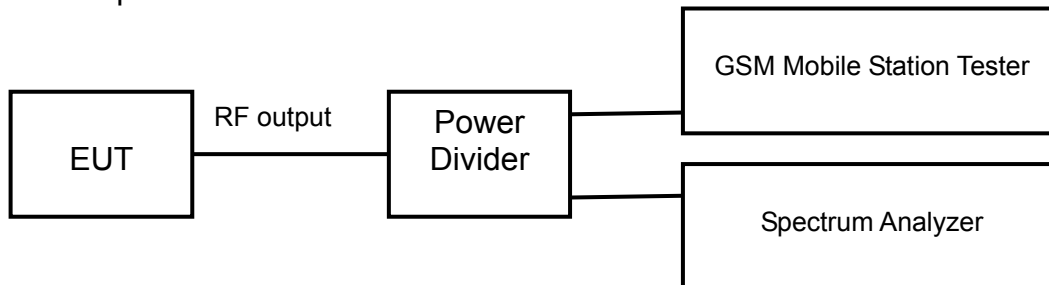

Test procedure:  
KDB 971168 D01 v03r01 – Section 4.2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the emission bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


The test results are shown in Appendix A.

## 6.5 Spurious Emissions at antenna terminal

Rule Part(s)

FCC Part 2.1053/22.917 (a)/ 24.238(a)

Test Setup:

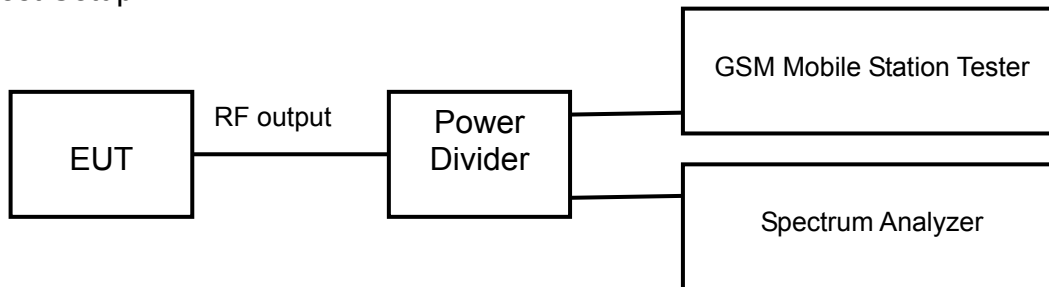

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz for Cell, 20GHz for PCS
2. RBW=100 kHz (For below 1GHz), 1MHz (For above 1GHz)
3. VBW  $\geq 3 \times$  RBW
4. Detector = RMS
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits:

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{[Watts]}})$ , where P is the transmitter power in Watts.

Test result:


The test results are shown in Appendix A.

## 6.6 Band Edges Compliance

Rule Part (s)

FCC Part 2.1051/ 22.917(a) /Part 24.238(a)

Test Setup:

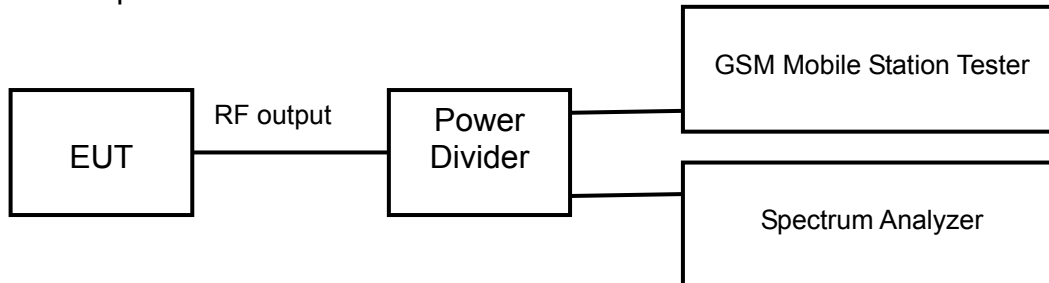

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span=2MHz
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit: The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P_{\text{Watts}})$ , where P is the transmitter power in Watts.

Test result:


The test results are shown in Appendix A.

## 6.7 Frequency Stability

Rule Part(s)

FCC Part 2.1055/22.355 /Part 24.235

Test setup:

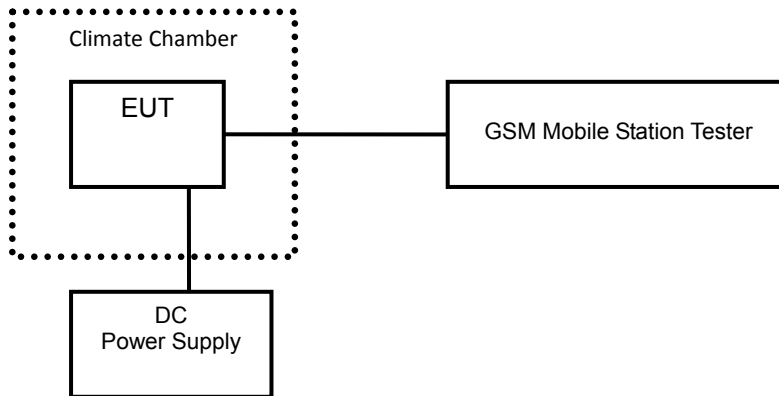

Test Procedure:

ANSI/TIA-603-E-2016

### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The temperature range can be declared by the manufacturer). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.


Test result:

The test results are shown in Appendix A.

## 6.8 Radiated Spurious Emissions

Rule Part(s)  
FCC Part2.1053/ 22.917(a)/Part 24.238(a)

Test Setup:

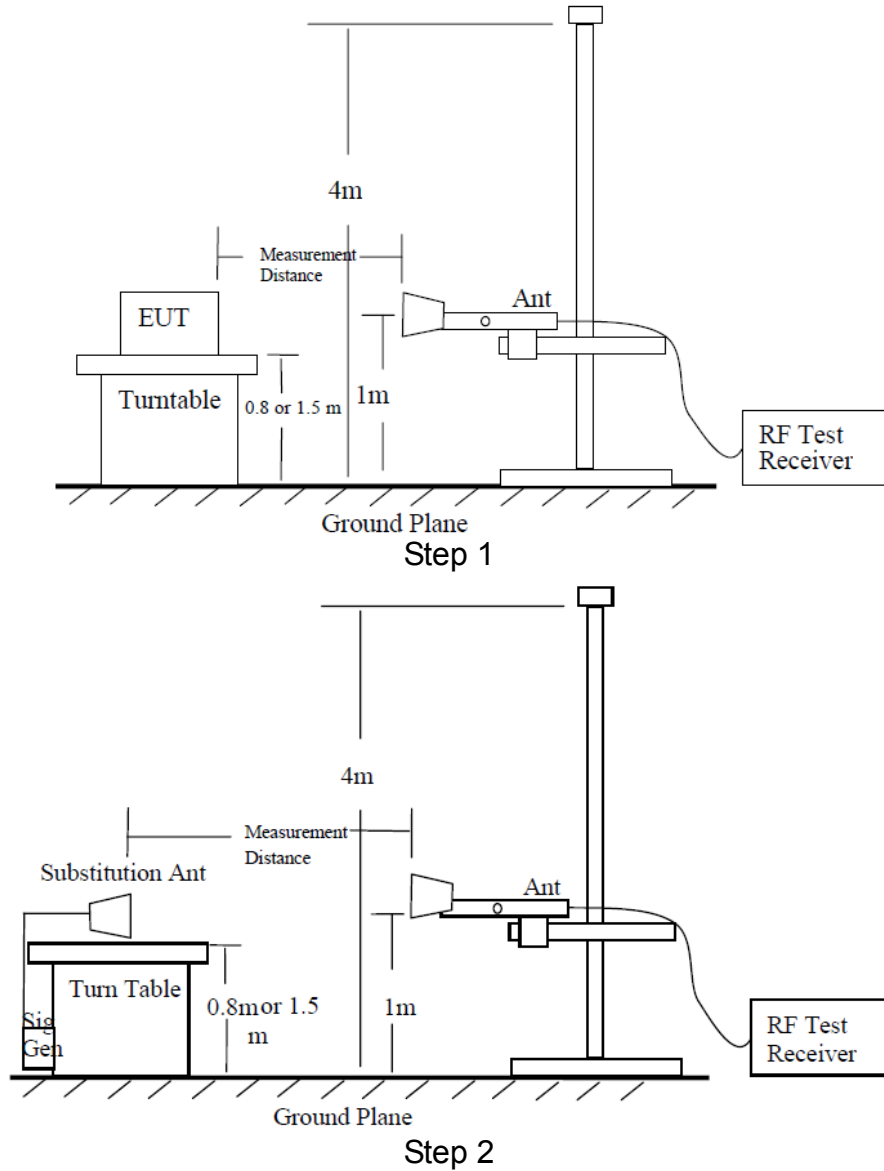

Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m (f<1GHz)/ 1.5m (f>1GHz) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz (f<1GHz)/1MHz (f>1GHz). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (P<sub>mea</sub>) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (P<sub>r</sub>). The power of signal source (P<sub>mea</sub>) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (P<sub>ca</sub>) and the Substitution Antenna Gain (G<sub>a</sub>).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_{\text{a}}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP – 2.15 (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_{\text{a}} = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Note: We tested both horizontal and vertical polarization, but only the largest numerical polarity of the two polarities was recorded in the final report.

Test result:


The test results are shown in Appendix B.



## 6.9 Peak-Average Ratio

Rule Part(s)  
FCC Part 24.232(d)

Test Setup:

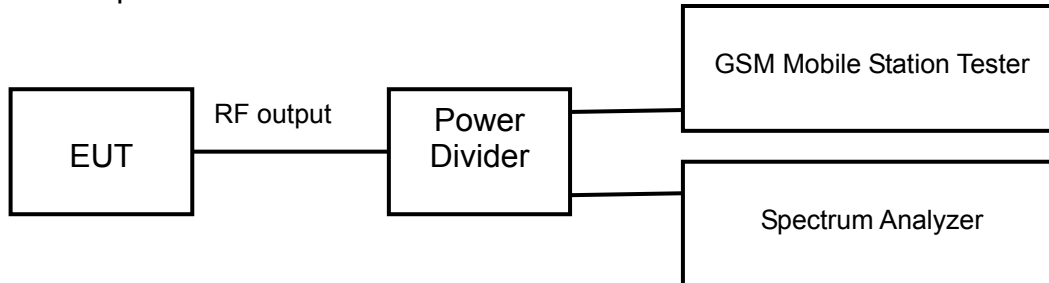

Test procedure:  
KDB 971168 D01 v03r01 – Section 5.7.1

Test settings:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits: the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A

## 7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
RF Power Output	0.6 dB	
Effective Radiated Power and Effective Isotropic Radiated Power	0.6 dB	
Occupied Bandwidth	3kHz	
Emission Bandwidth	3kHz	
Peak-Average Ratio	0.8dB	
Frequency Stability	48Hz	
Band Edges Compliance	1.2dB	
Spurious Emissions at antenna terminal	9kHz~2GHz	1.2dB
	2G~3.6GHz	1.4dB
	3.6G~8GHz	2.2dB
	8G~12.75GHz	2.7dB
Radiated Emission Measurement	30MHz~200MHz	4.88dB
	200MHz~1GHz	4.87dB
	1GHz~18GHz	4.58dB
	18GHz~40GHz	4.35dB

## 8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Date	Calibration Due Date
1	Mobile Station Tester / MT8820C	Anritsu	6201300660	2021.06.21	2022.06.20
2	Radio Communication Station / CMW500	R&S	161702	2021.06.21	2022.06.20
3	Spectrum Analyzer / FSV40	R&S	101065	2021.06.21	2022.06.20
4	Spectrum Analyzer / N9020A	Agilent	MY48010771	2021.05.18	2022.05.17
5	Power Divider / 11667A	HP	19632	2021.06.21	2022.06.20
6	DC Power Supply / E3645A	Agilent	MY40000741	2021.04.22	2022.04.21
7	Temperature chamber / SH241	ESPEC	92013758	2021.06.21	2022.06.20
8	Fully-Anechoic Chamber / 12.65m×8.03m×7.50m	FRANKONIA	----	----	----
9	Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m	FRANKONIA	---	----	----
10	Turn table Diameter:1m	FRANKONIA	----	----	----
11	Turn table Diameter:5m	FRANKONIA	----	----	----
12	Antenna master FAC(MA4.0)	MATURO	----	----	----
13	Antenna master SAC(MA4.0)	MATURO	----	----	----
14	Shielding room / 9.080m×5.255m×3.525m	FRANKONIA	----	----	----
15	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100512	2021.06.21	2022.06.20
16	Double-Ridged Waveguide Horn Antenna / HF 907	R&S	100513	2021.06.21	2022.06.20
17	Ultra log antenna / HL562	R&S	100016	2021.06.21	2022.06.20
18	Receive antenna /3160-09	SCHWARZ-BECK	002058-002	2021.06.21	2022.06.20
19	EMI test receiver / ESI 40	R&S	100015	2021.06.21	2022.06.20
20	EMI test receiver / ESCS30	R&S	100029	2021.06.21	2022.06.20
21	Receive antenna / HL562	R&S	100167	2021.06.21	2022.06.20
22	AMN / ENV216	R&S	3560.6550.12	2021.06.21	2022.06.20

## **APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

### **1. RF Power Output**

#### **GSM850**

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
824.2	128	32.58
836.6	190	32.74
848.8	251	32.76

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	4Down1Up	26.16
836.6	190		26.39
848.8	251		26.44
824.2	128	3Down2Up	28.38
836.6	190		28.48
848.8	251		28.64
824.2	128	2Down3Up	30.27
836.6	190		30.47
848.8	251		30.50
824.2	128	1Down4Up	32.40
836.6	190		32.59
848.8	251		32.61

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
824.2	128	4Down1Up	26.17
836.6	190		26.40
848.8	251		26.45
824.2	128	3Down2Up	28.40
836.6	190		28.59
848.8	251		28.62
824.2	128	2Down3Up	30.29
836.6	190		30.46
848.8	251		30.50
824.2	128	1Down4Up	32.38
836.6	190		32.51
848.8	251		32.62

**2. Occupied Bandwidth**

**GSM850**

GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	238.97
836.6	190	243.98
848.8	251	242.25

GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	240.66
836.6	190	247.05
848.8	251	242.52

EGPRS (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
824.2	128	245.03
836.6	190	249.24
848.8	251	240.32

**GSM850**


GSM MODE:

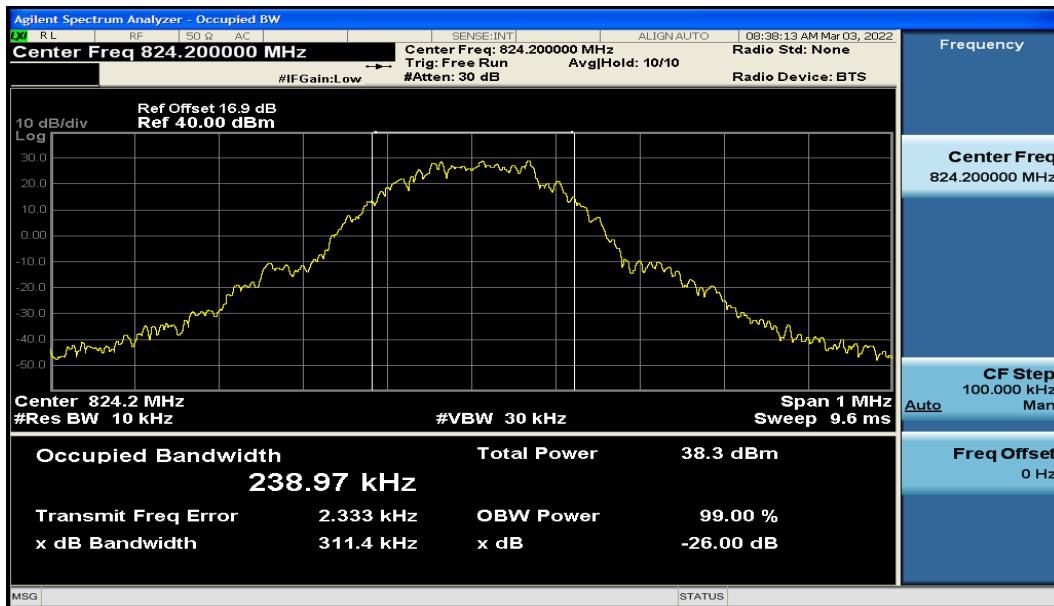

Channel 128

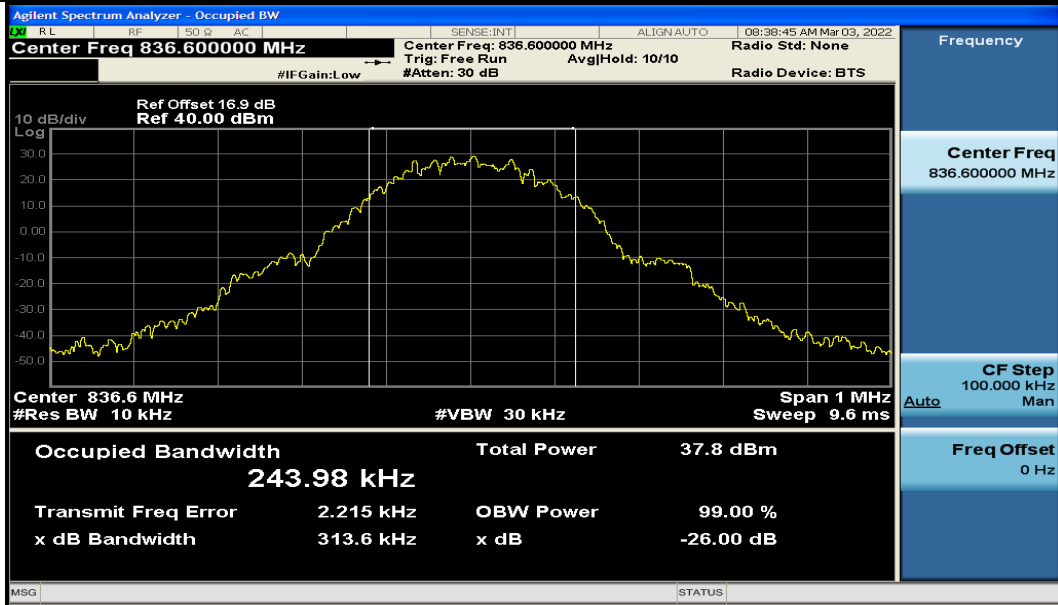


Channel 190

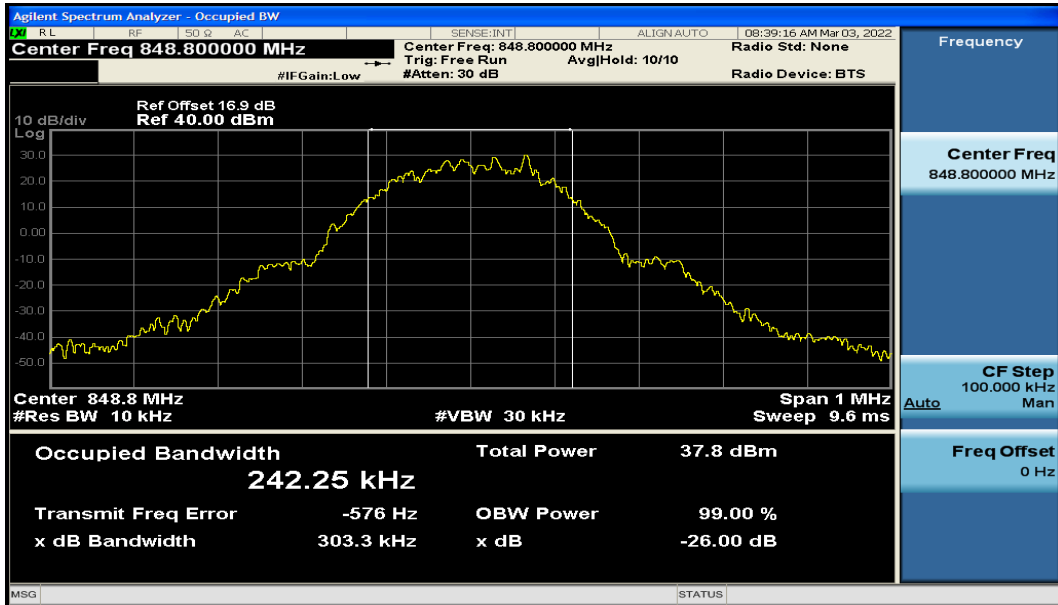


Channel 251


GPRS MODE:

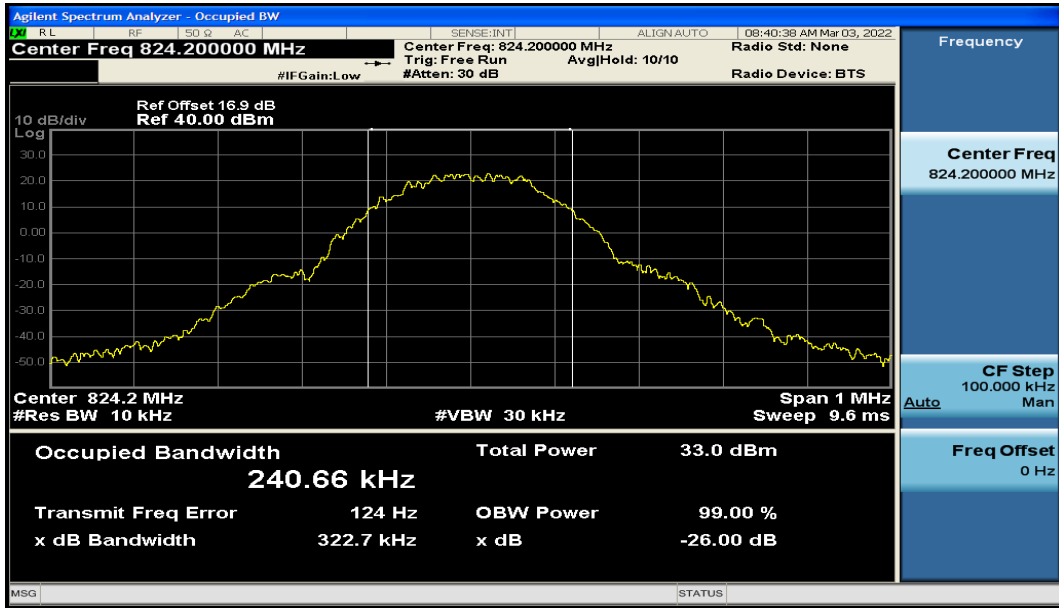

Channel 128

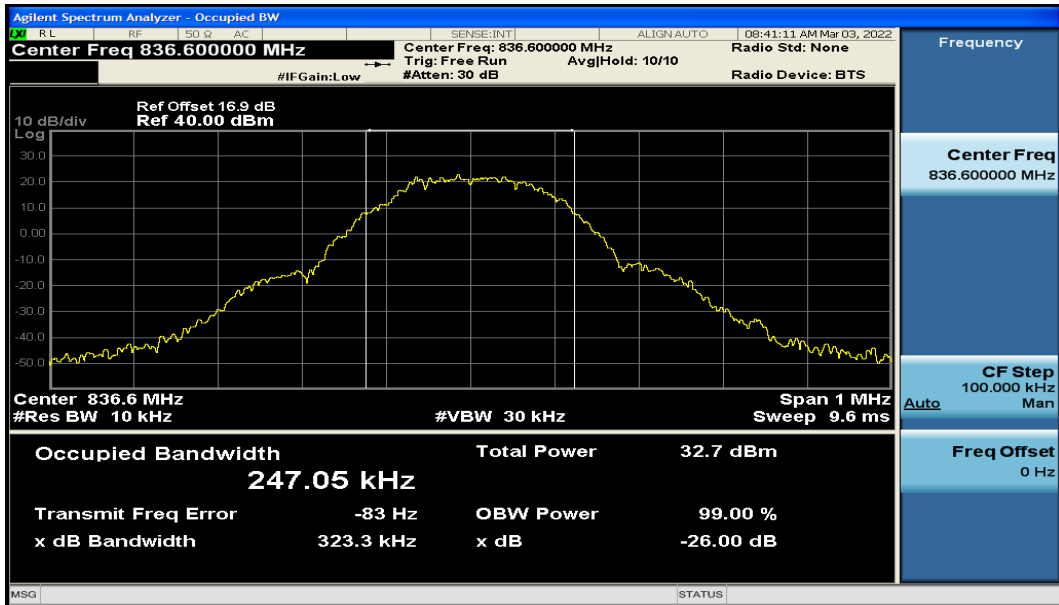


Channel 190

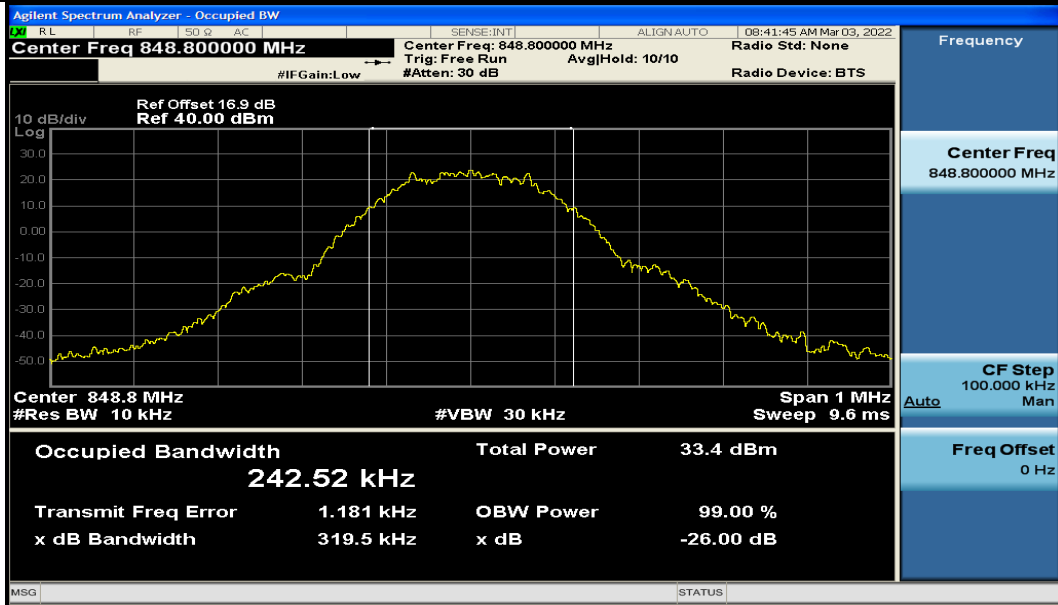


Channel 251

EGPRS (8PSK) MODE:

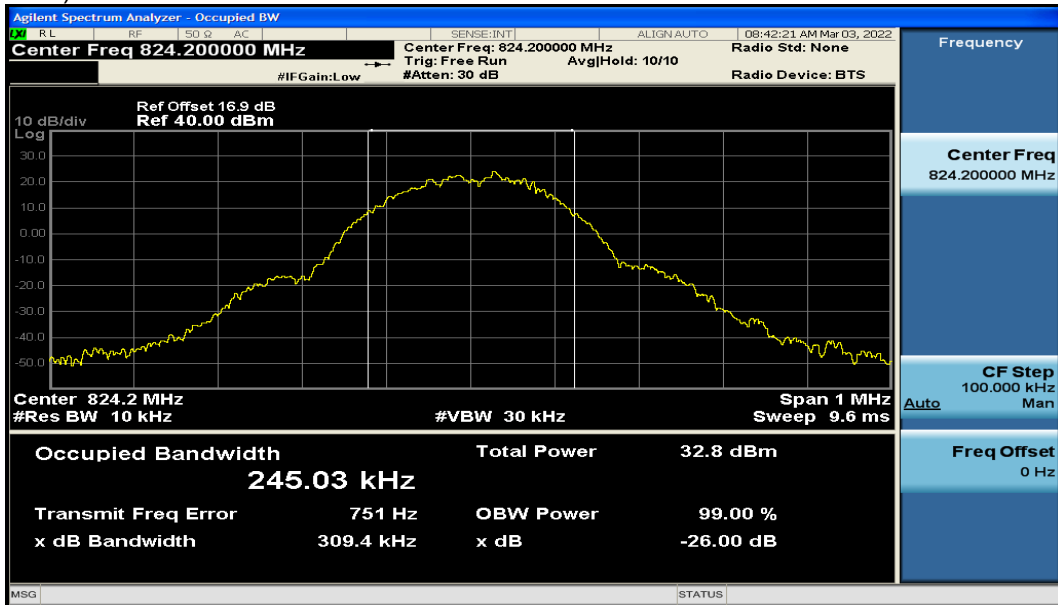


Channel 128



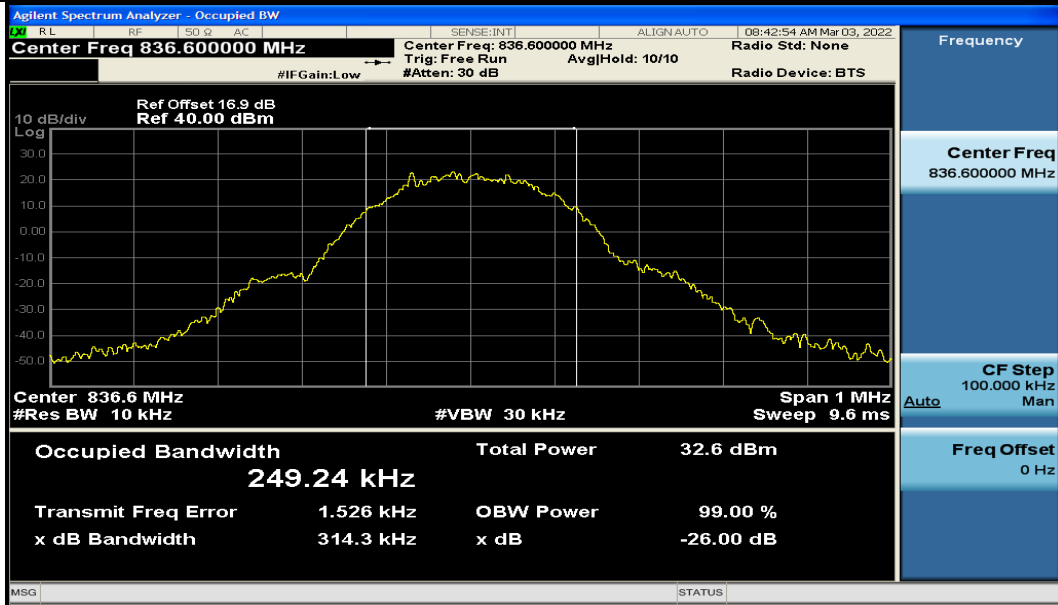

Channel 190

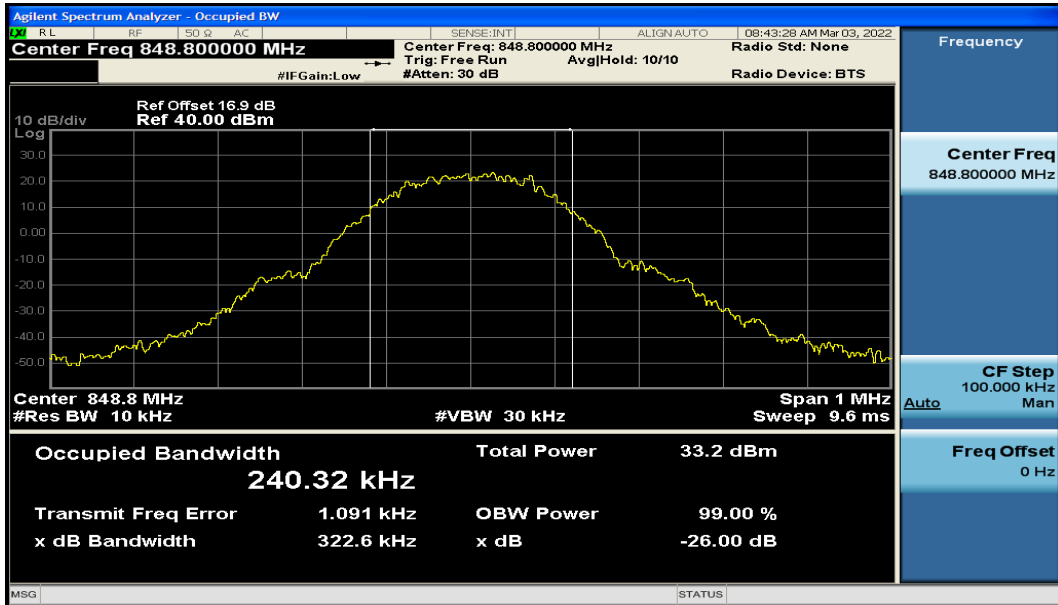

Channel 251

### 3. Emission Bandwidth

#### GSM850

GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
824.2	128	311.45
836.6	190	313.56
848.8	251	303.30

GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB (kHz)
824.2	128	322.70
836.6	190	323.33
848.8	251	319.50

EGPRS (8PSK) MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
824.2	128	309.41
836.6	190	314.26
848.8	251	322.57

#### GSM850


GSM MODE:

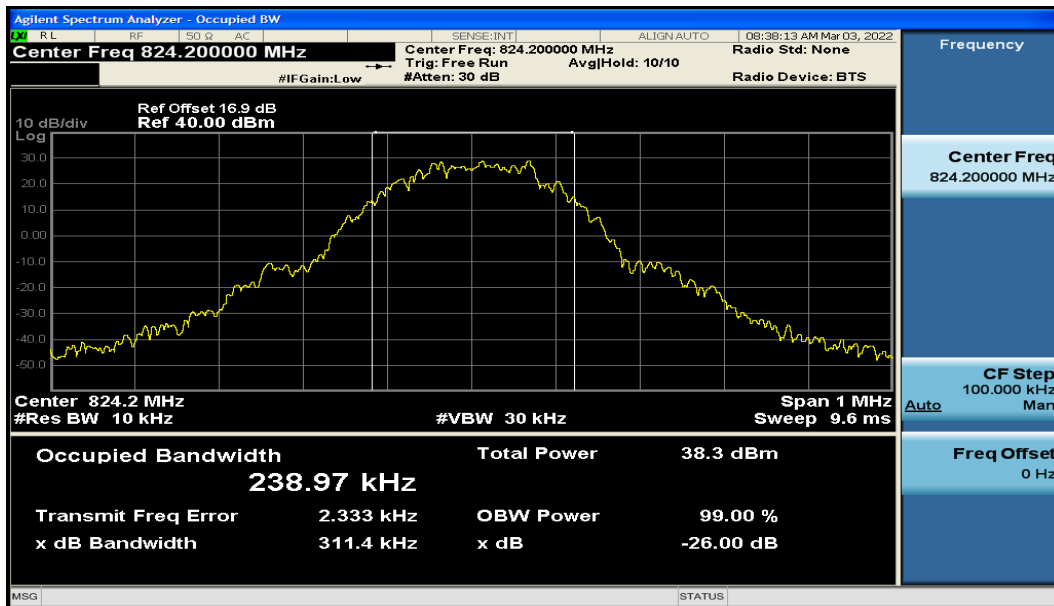

Channel 128

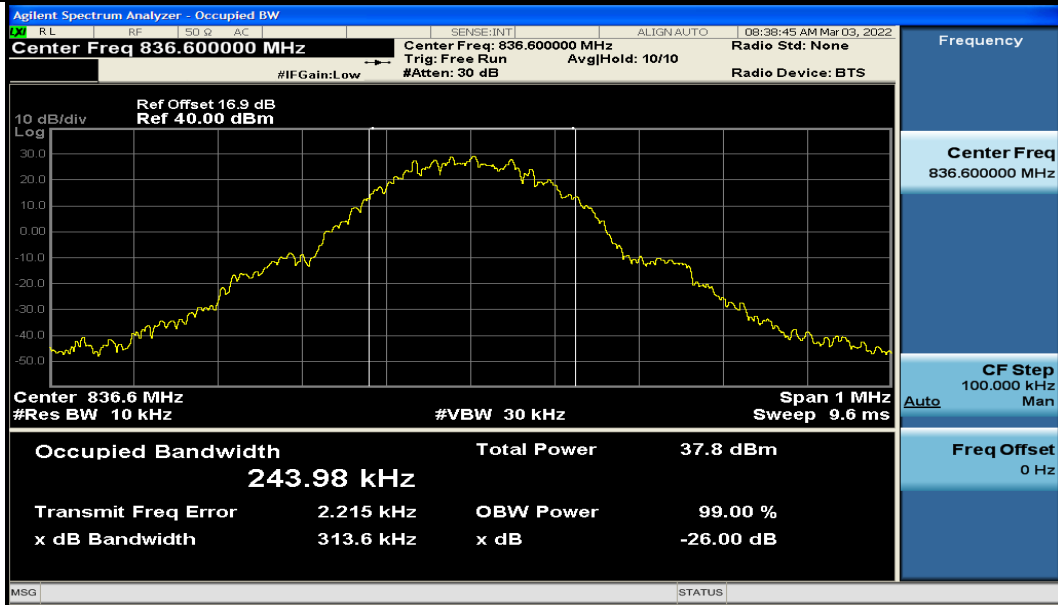


Channel 190

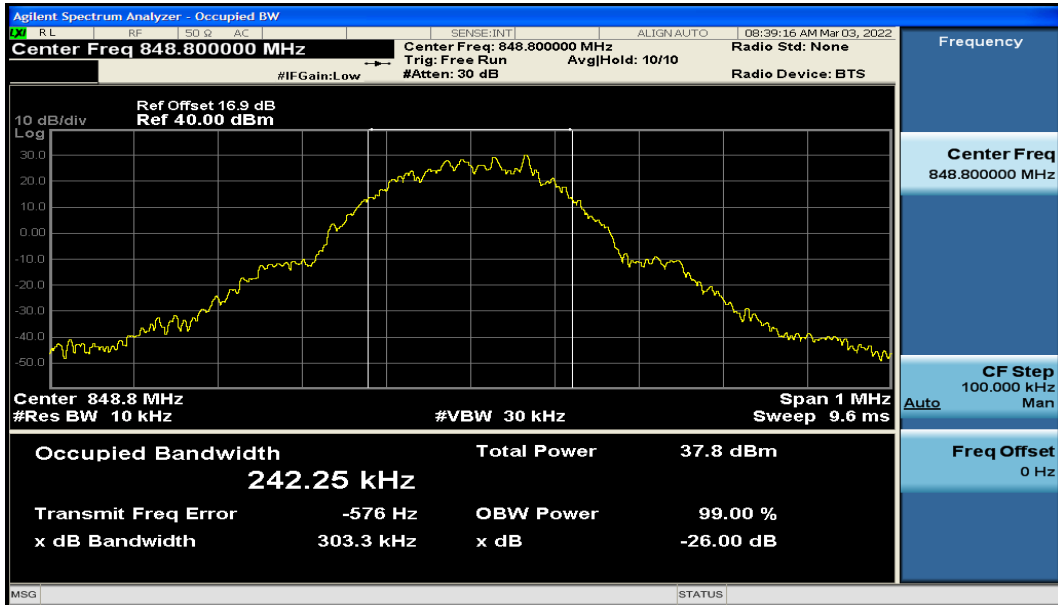


Channel 251


GPRS MODE:

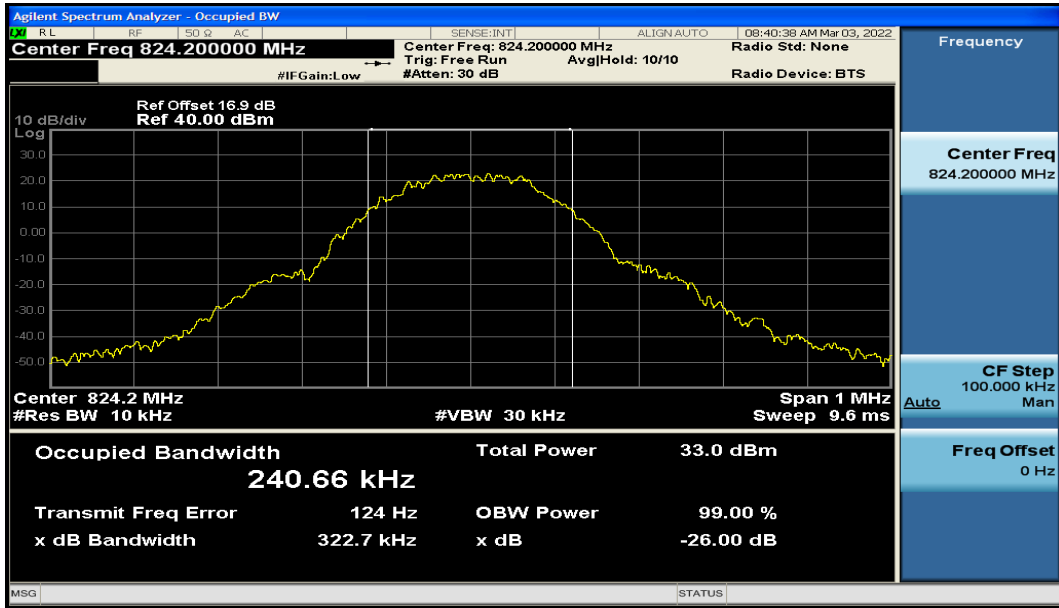

Channel 128

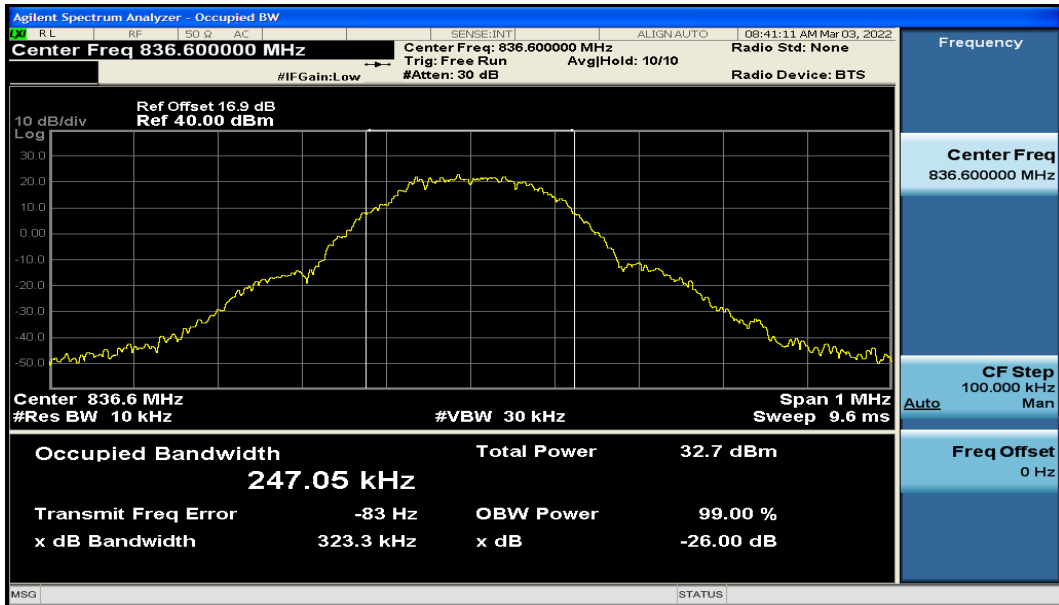


Channel 190

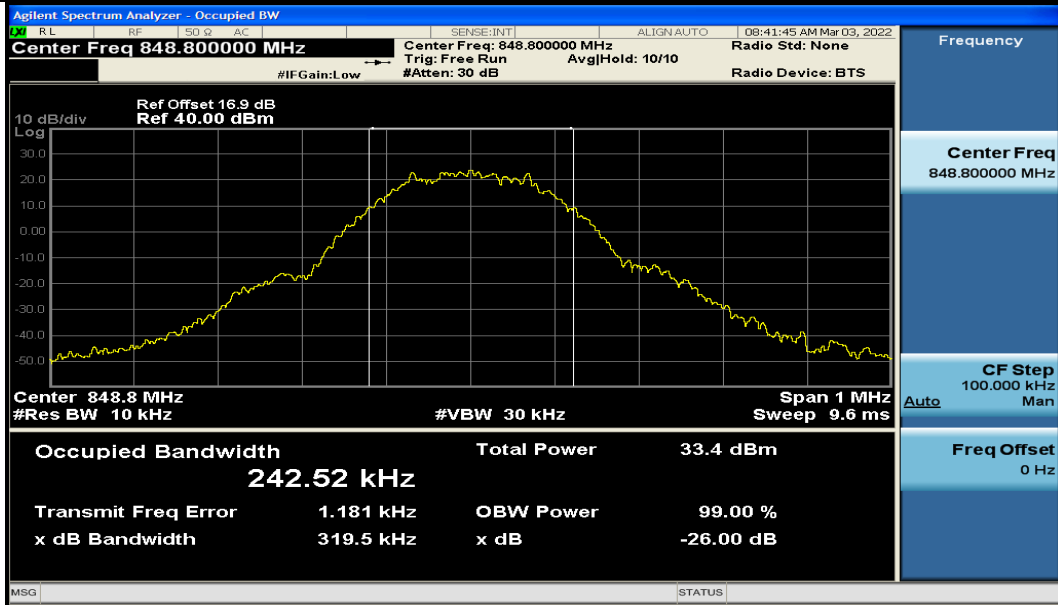


Channel 251


EGPRS (8PSK) MODE:

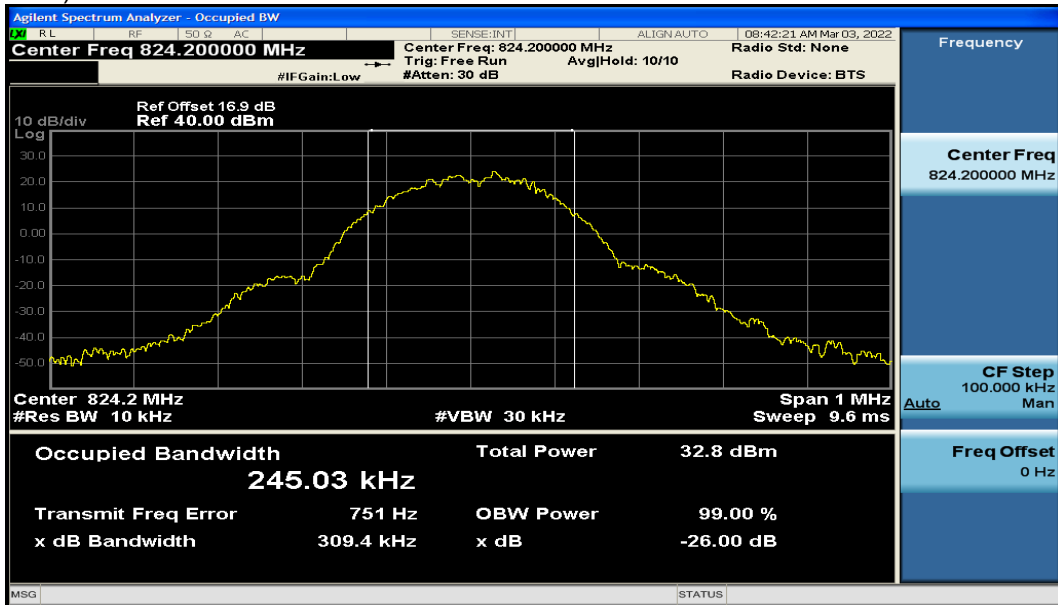

Channel 128

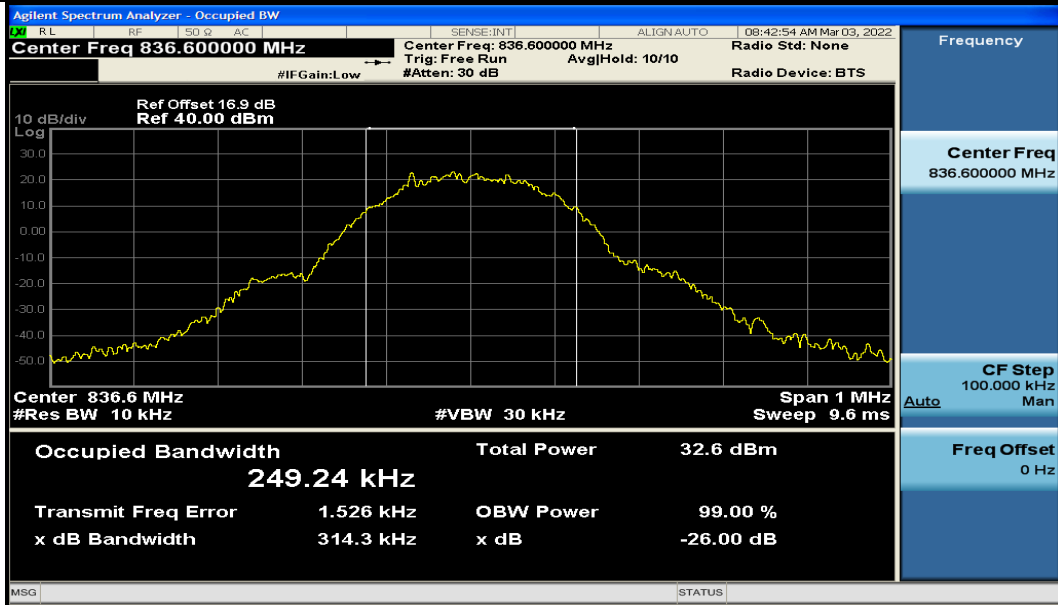


Channel 190

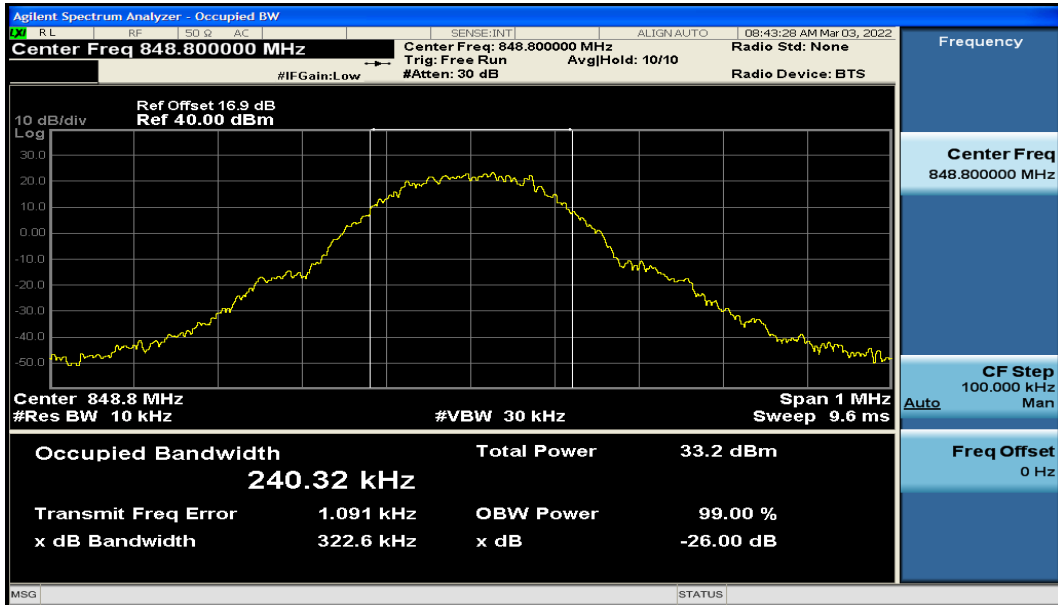


Channel 251


**4. Spurious Emissions at antenna terminal**  
**GSM850**  
GSM MODE:

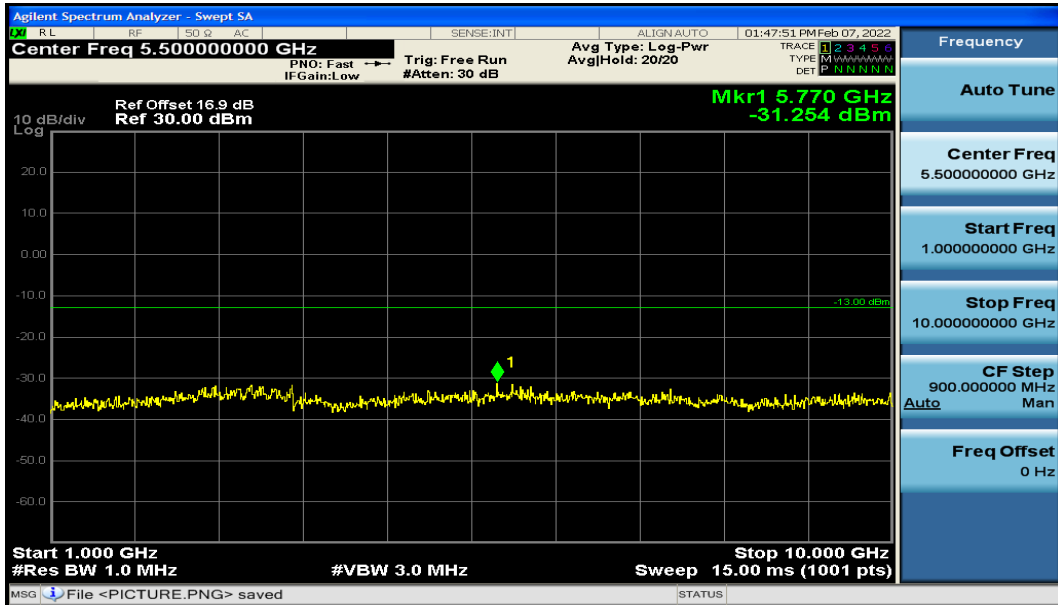


Channel 128

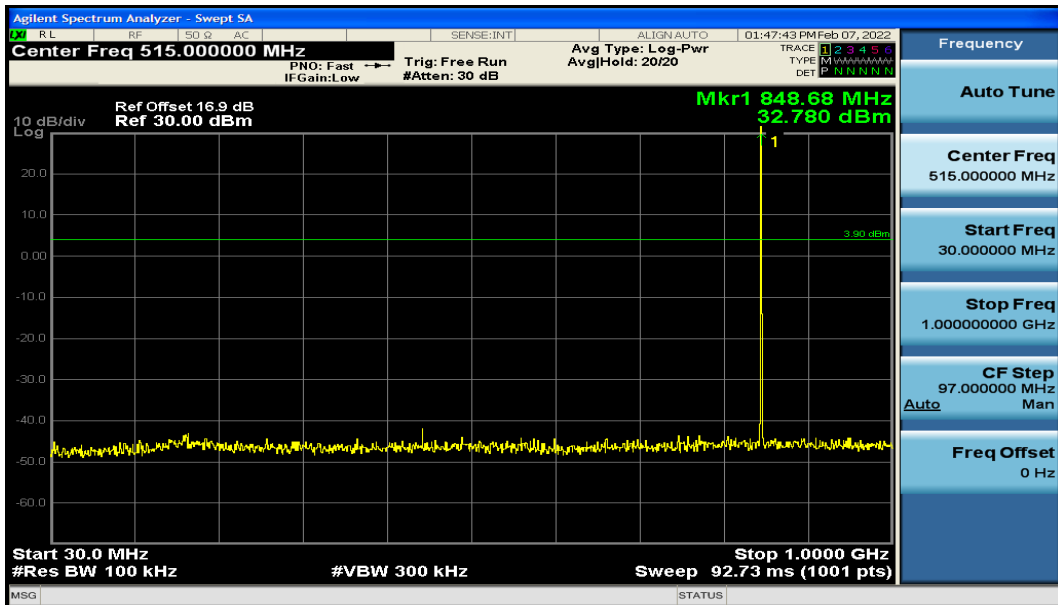

Channel 128

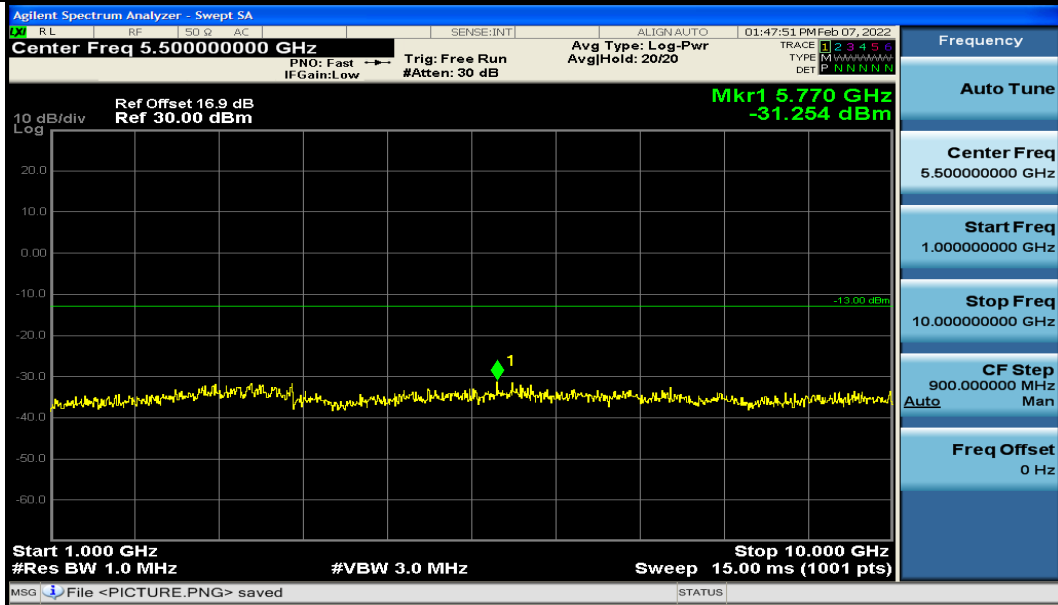


Channel 190

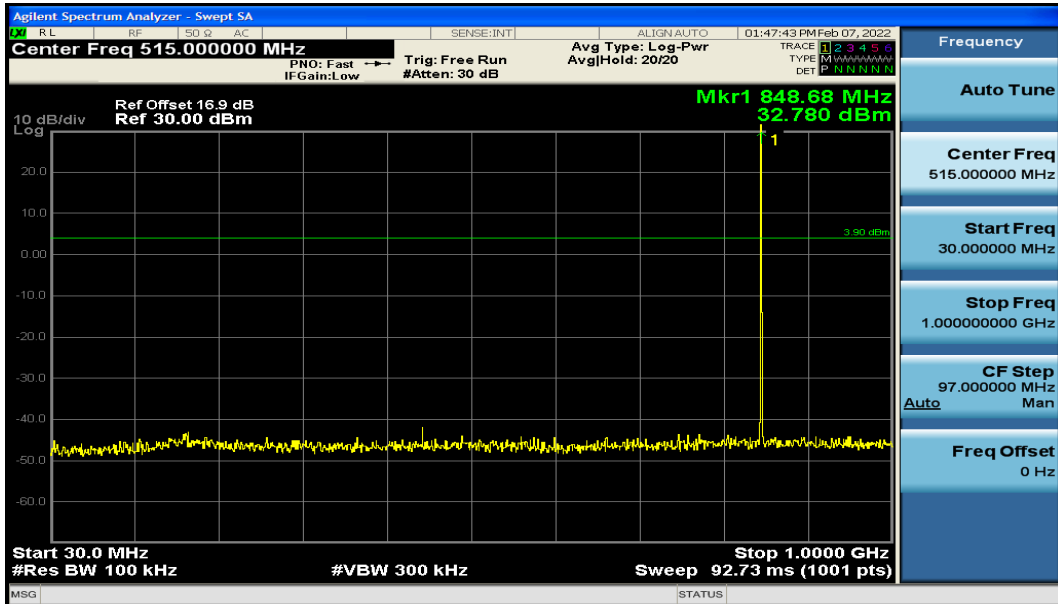


Channel 190



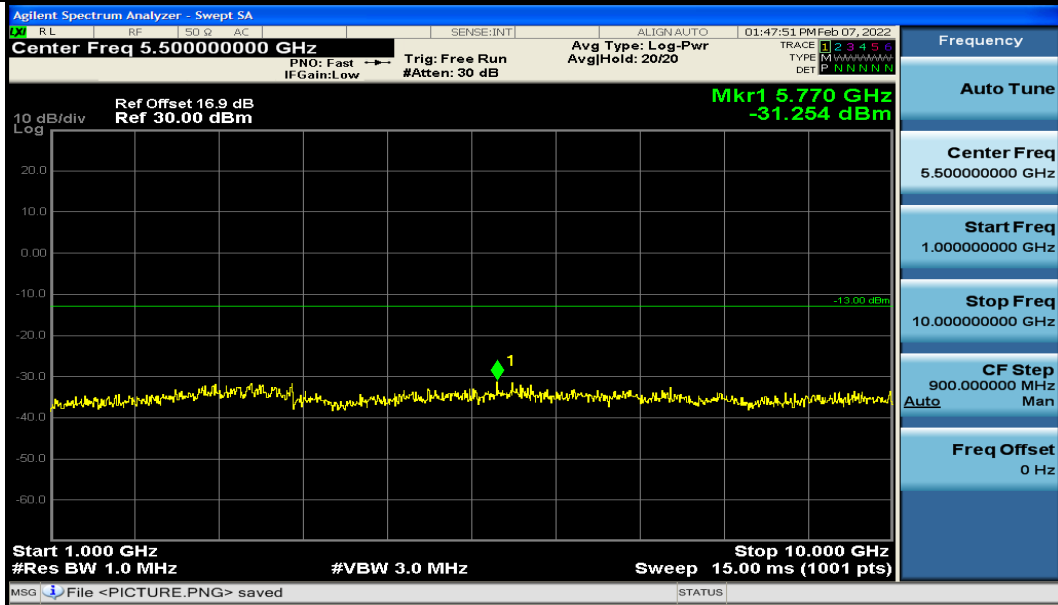


Channel 251

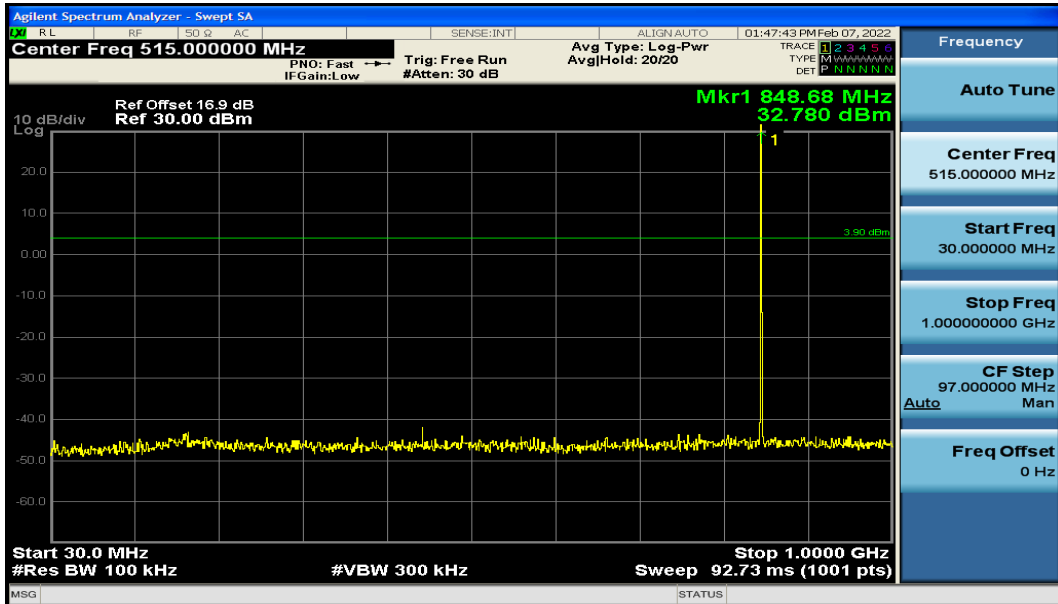


Channel 251


GPRS MODE:

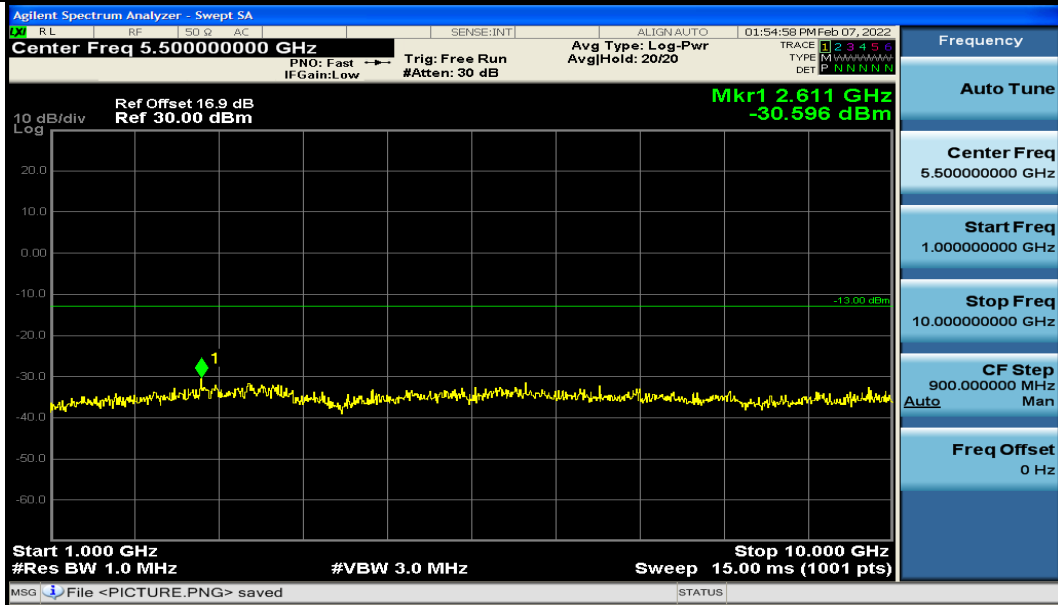


Channel 128

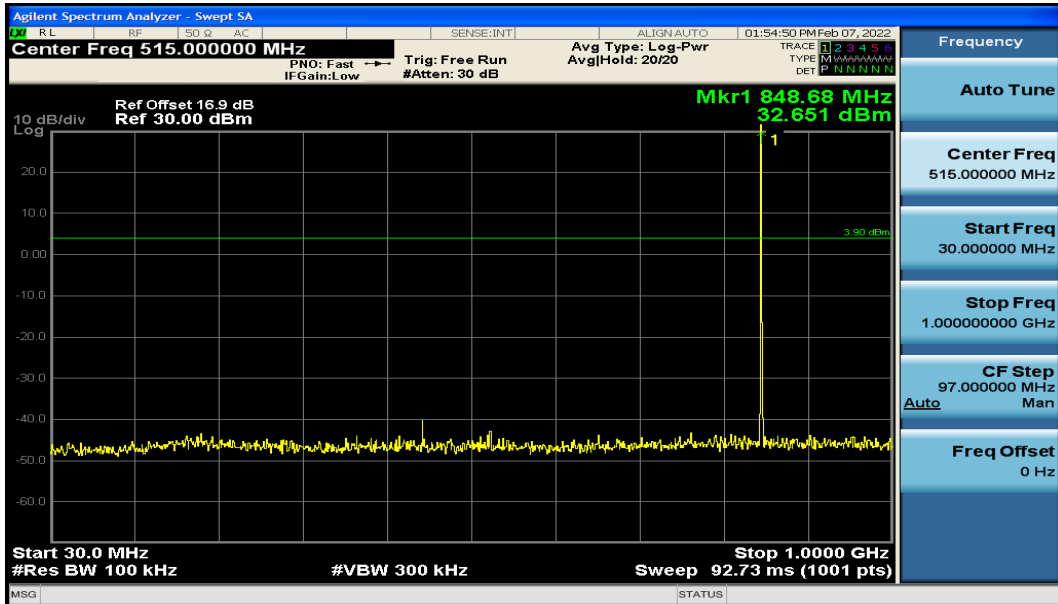


Channel 128

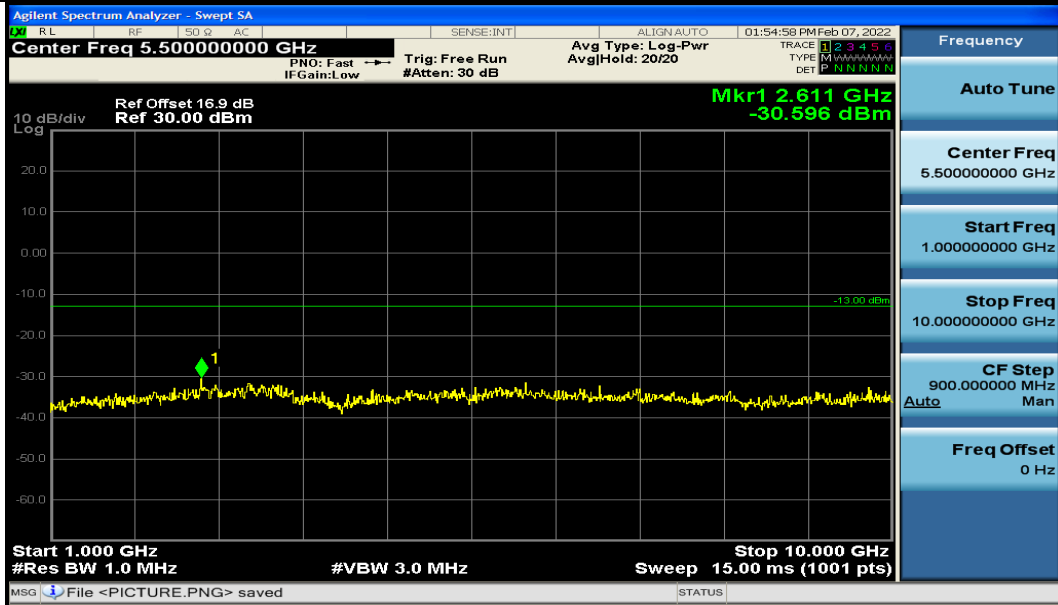


Channel 190

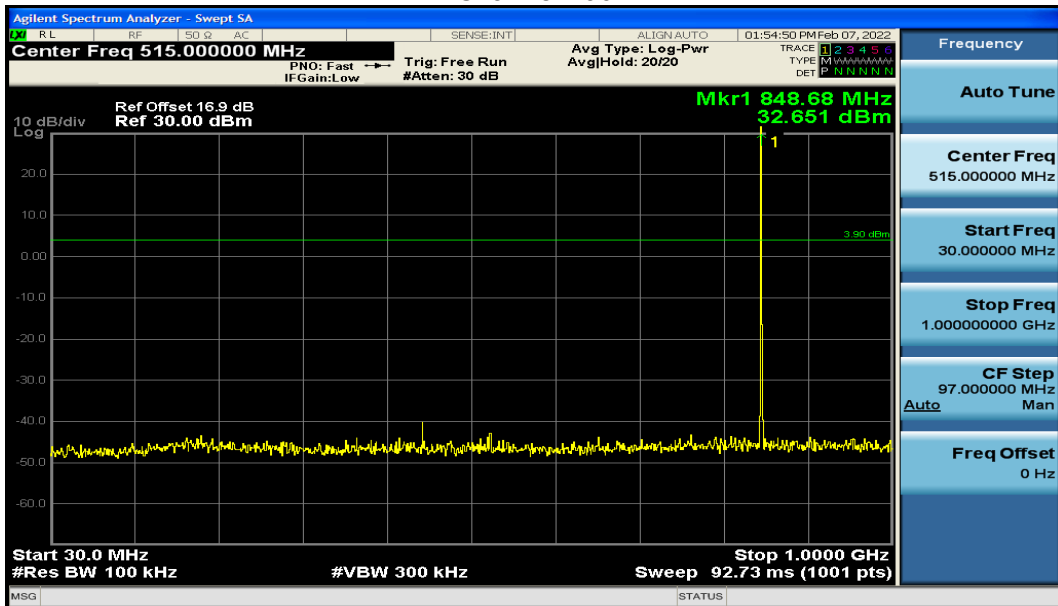

Channel 190

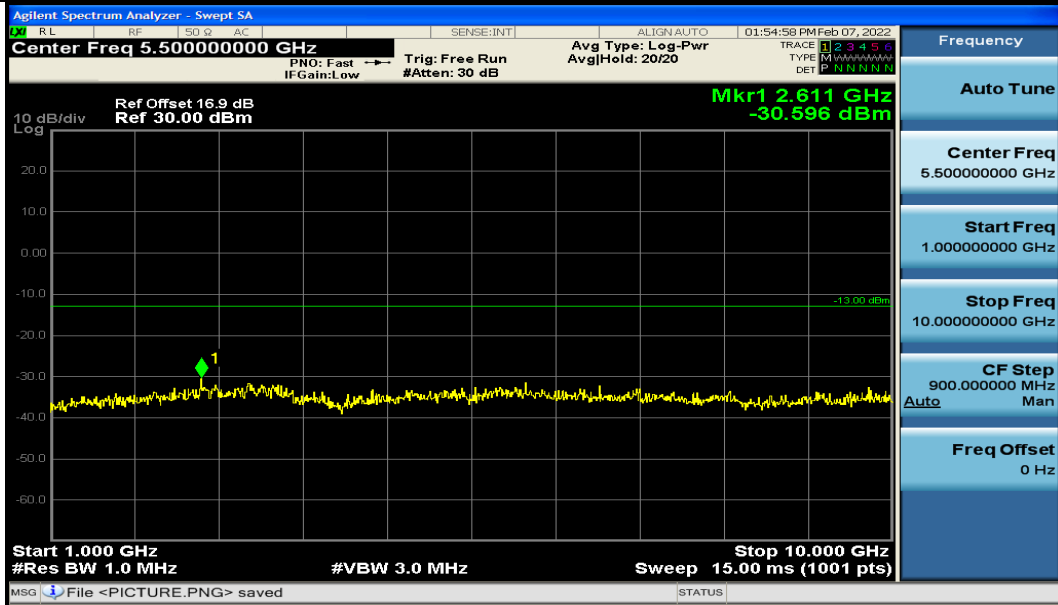


Channel 251

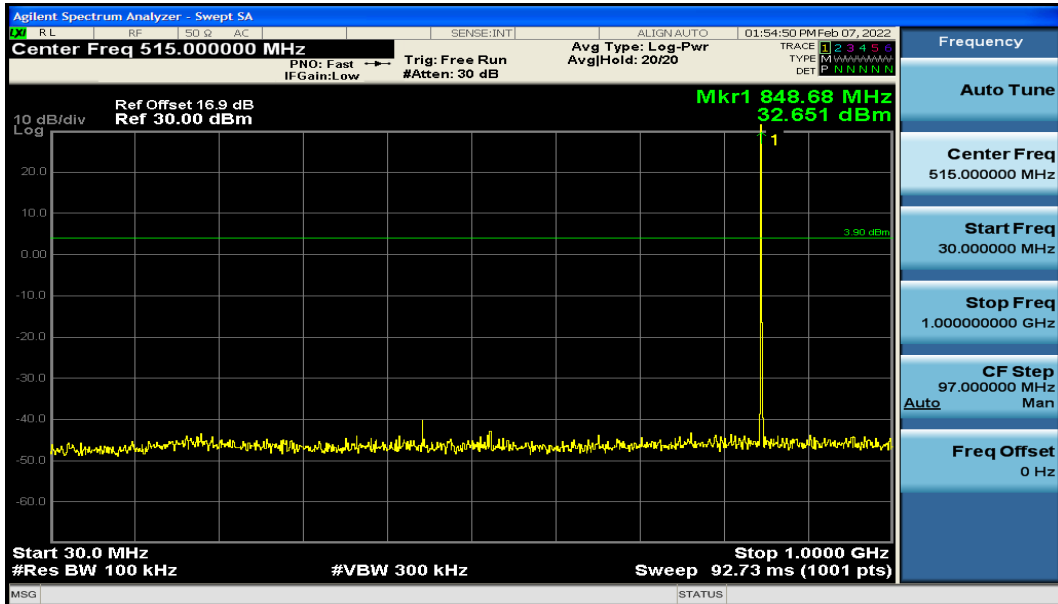


Channel 251


EGPRS (8PSK) MODE:

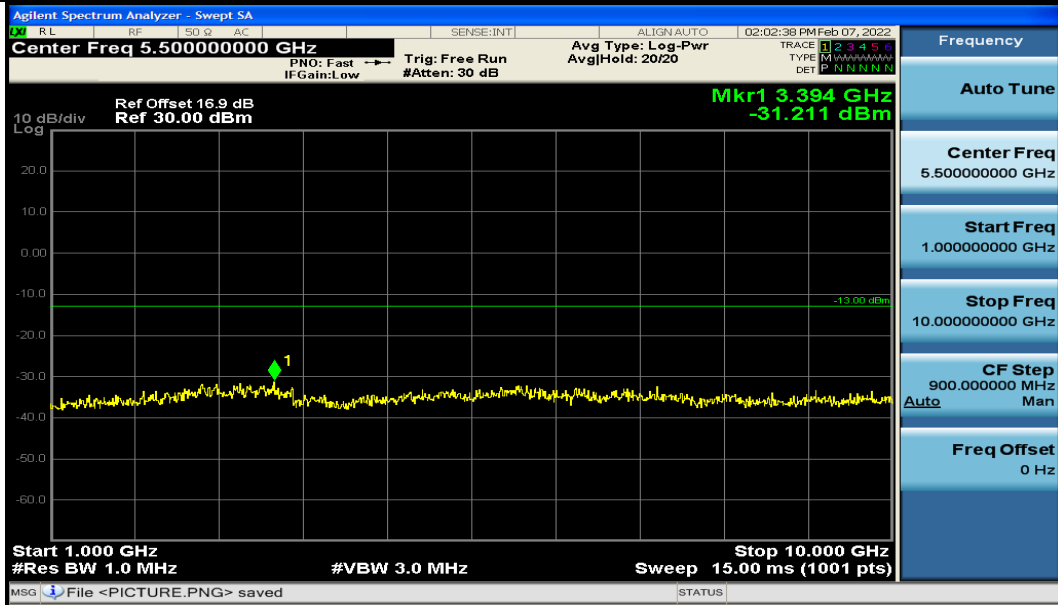


Channel 128

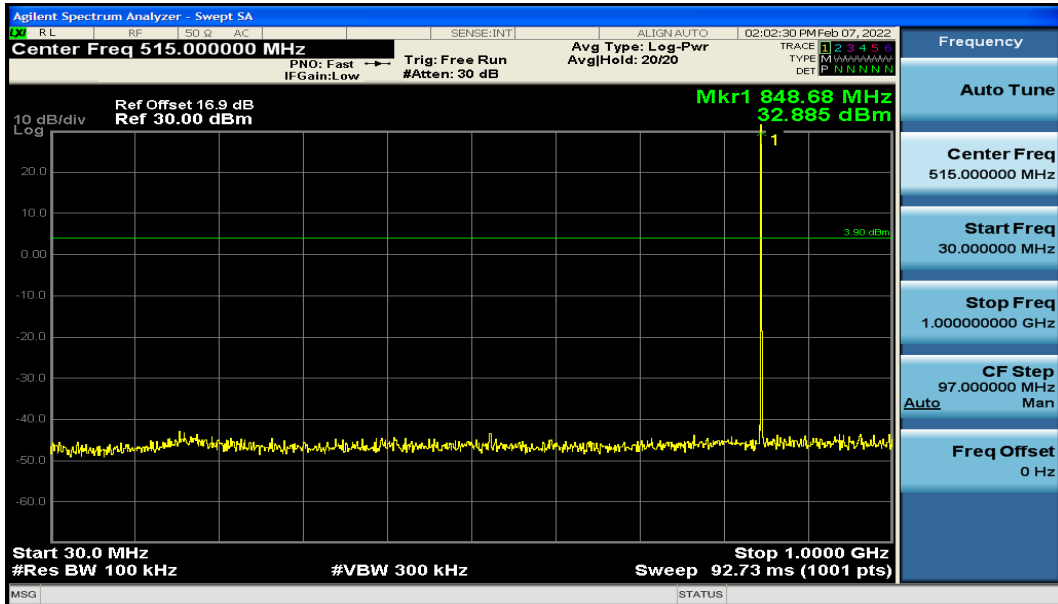


Channel 128

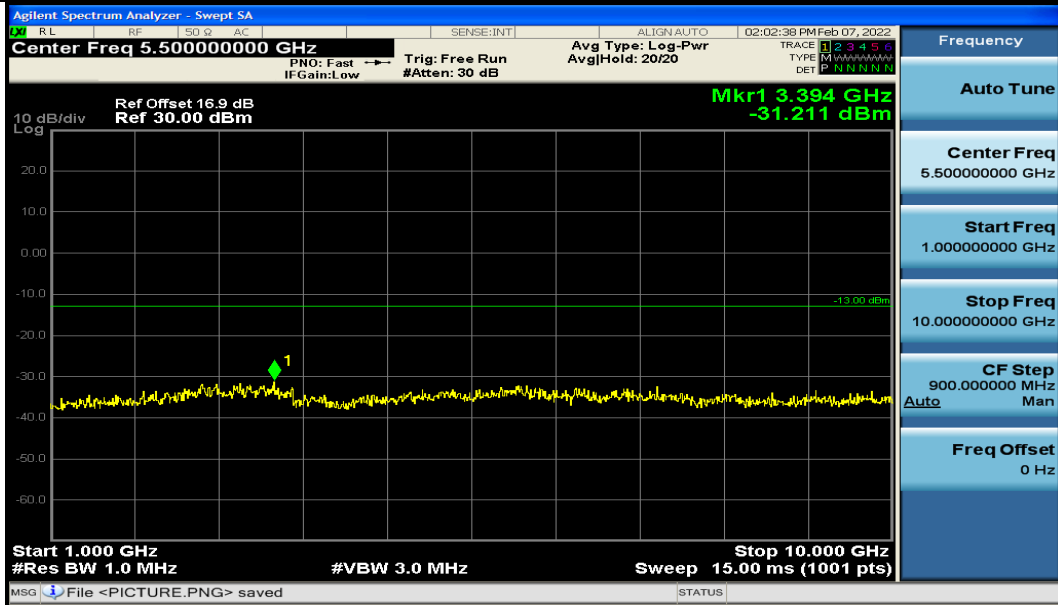


Channel 190

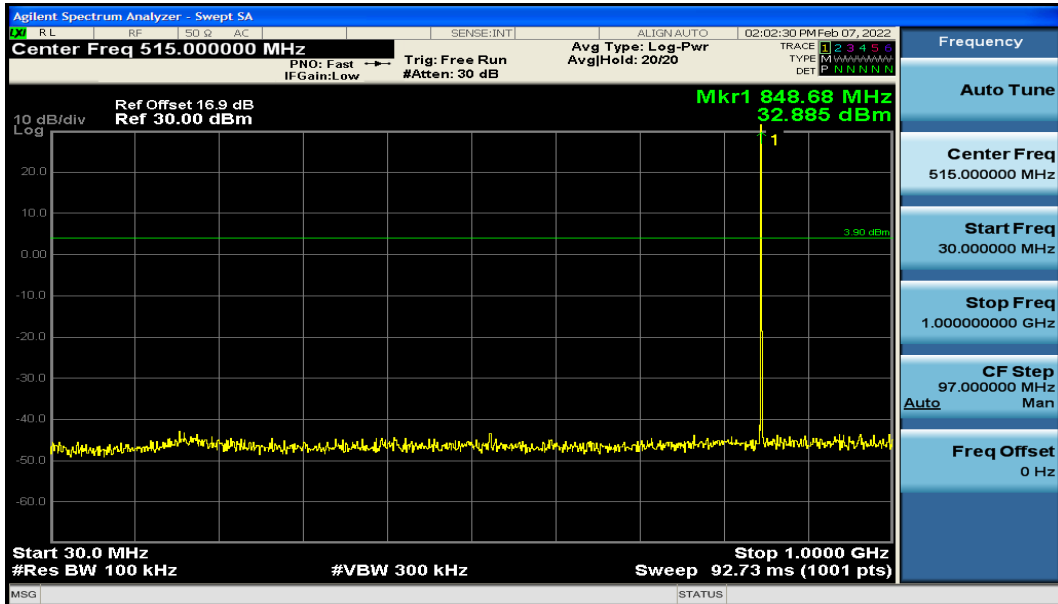

Channel 190

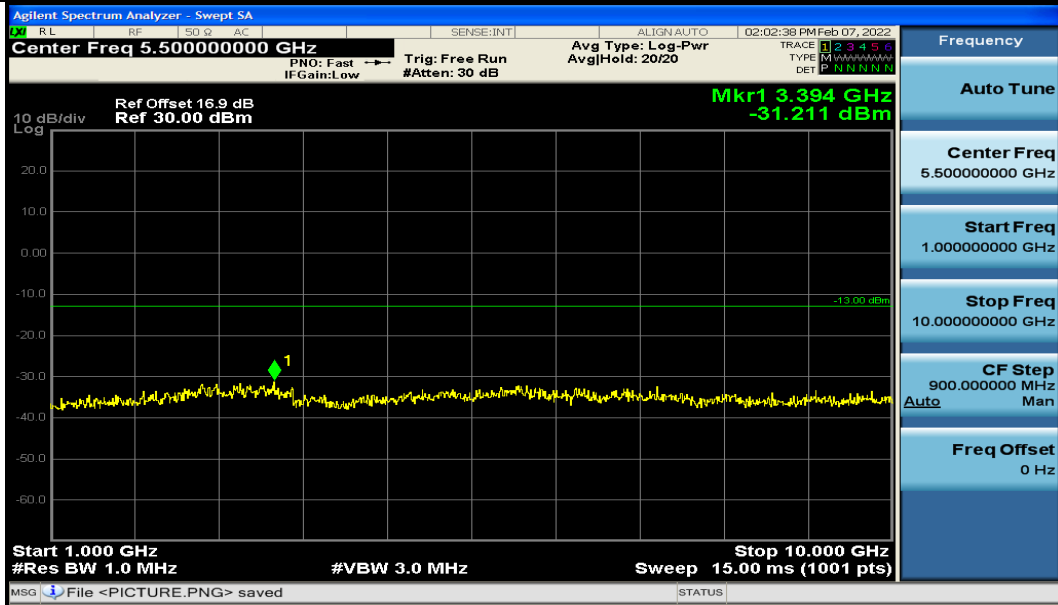


Channel 251

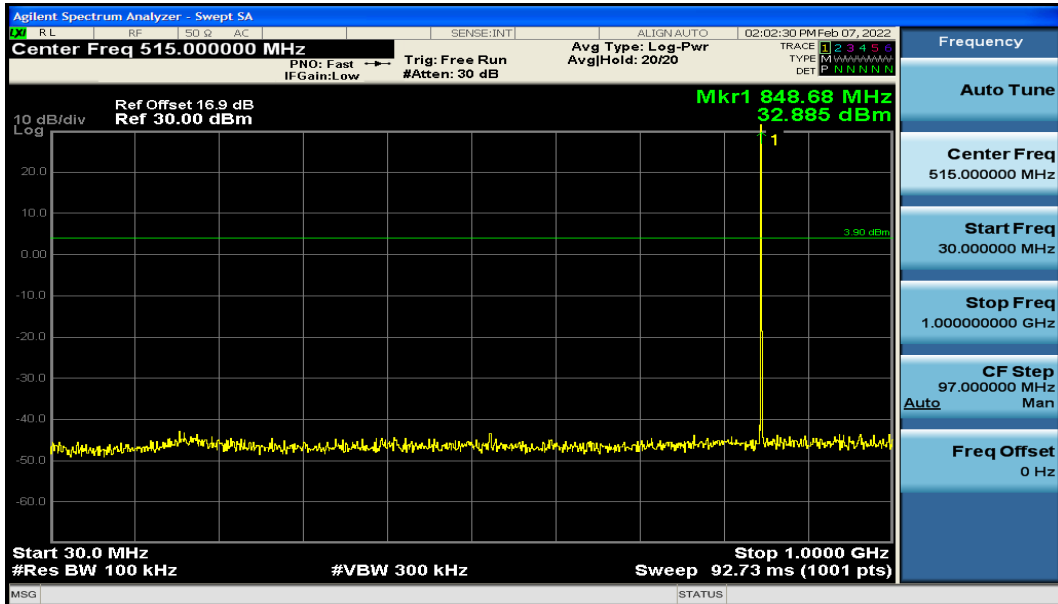


Channel 251

**5. Band Edges Compliance**  
**GSM850**  
GSM MODE:

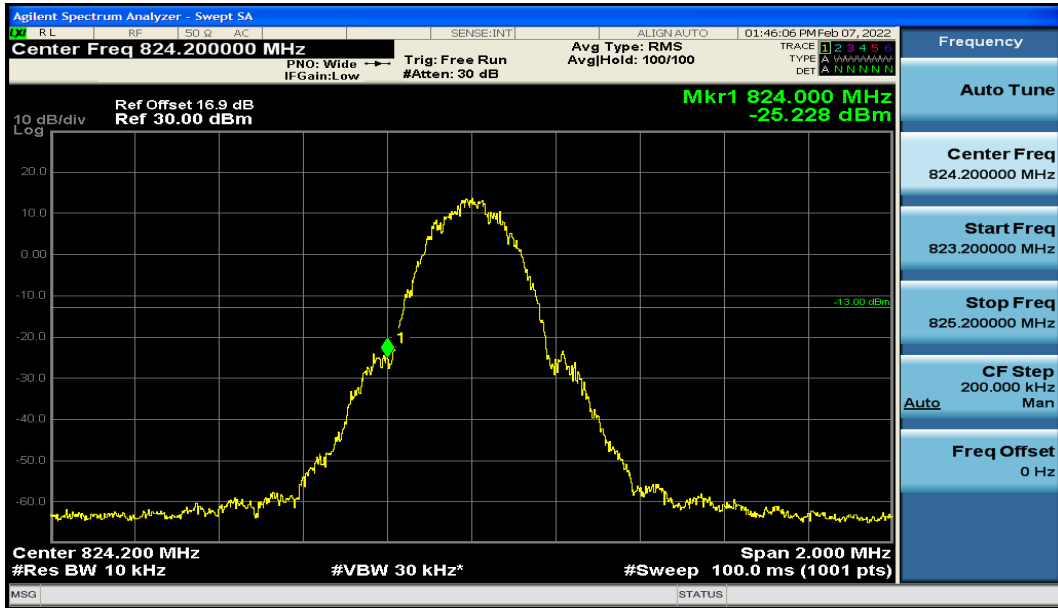


Channel 128

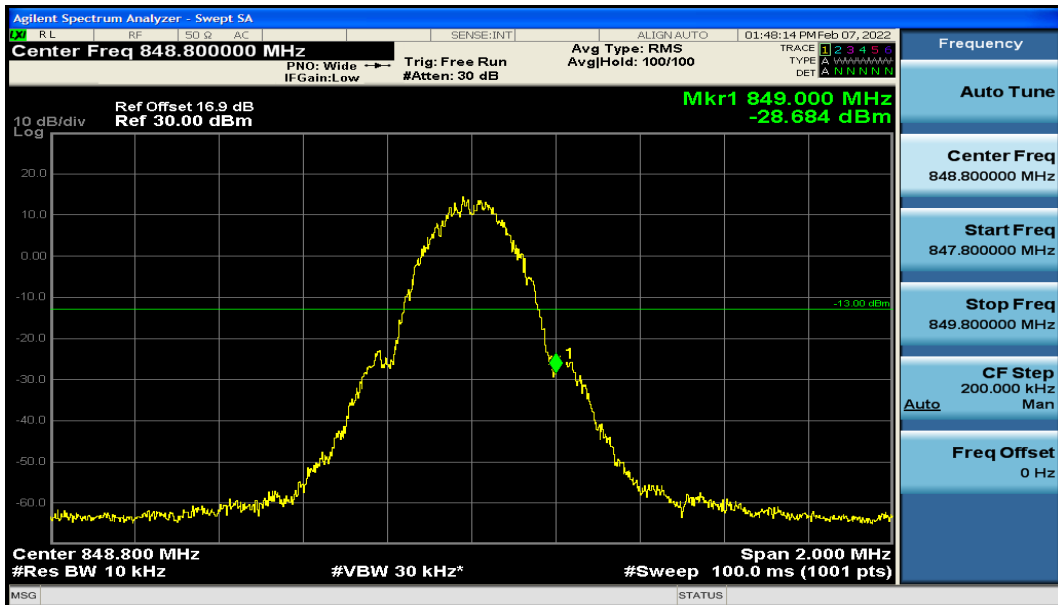


Channel 251

GPRS MODE:



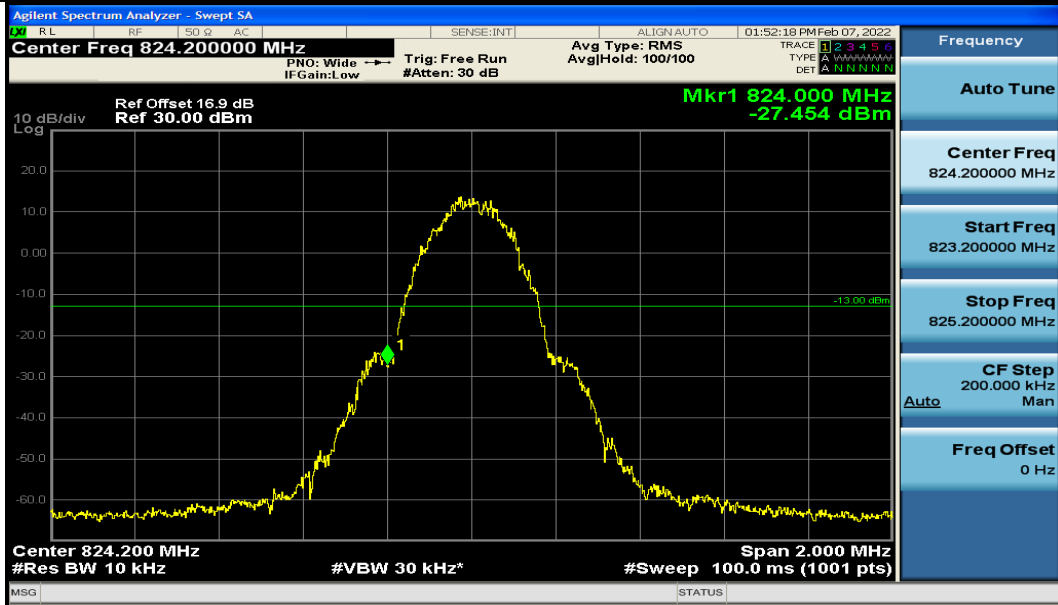


Channel 128

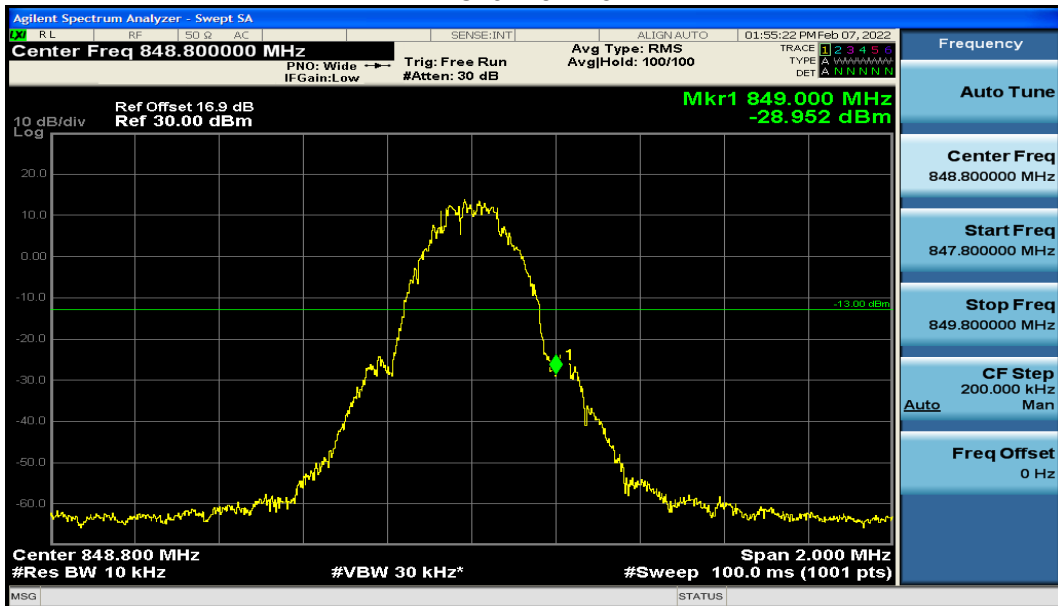


Channel 251

EGPRS (8PSK) MODE:

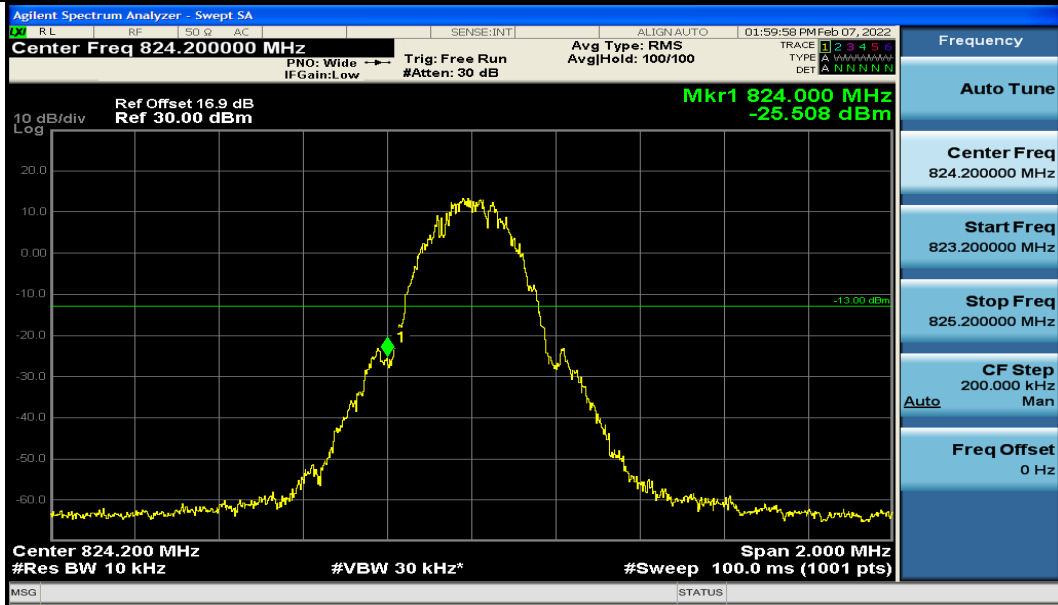

Channel 128

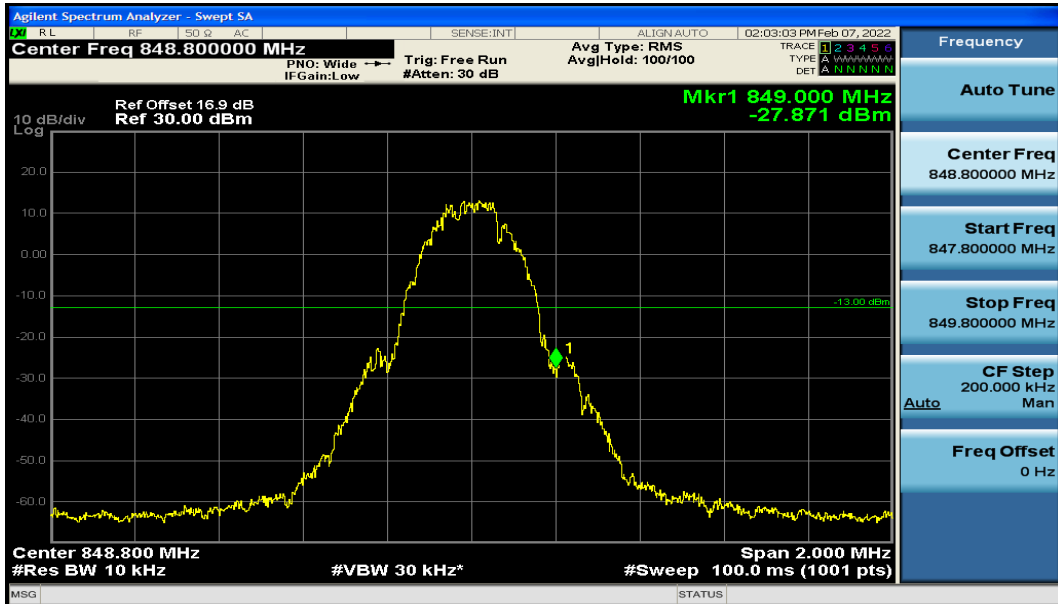

Channel 251

## 6. Frequency Stability

### GSM850

GSM MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 190	Channel 251
-10	-0.013	-0.008	-0.010
0	-0.011	-0.009	-0.007
+10	-0.011	-0.003	-0.008
+30	-0.012	-0.006	0.000
+40	-0.010	-0.005	-0.002
+55	-0.003	-0.009	-0.009
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 190	Channel 251
LV	-0.004	0.004	0.005
HV	-0.010	-0.008	-0.006



GPRS MODE:


Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 190	Channel 251
-10	-0.004	-0.009	-0.017
0	-0.006	-0.001	-0.014
+10	0.002	0.000	-0.017
+30	0.002	-0.003	-0.014
+40	-0.001	-0.008	-0.019
+55	-0.005	-0.006	-0.019
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 190	Channel 251
LV	0.006	-0.005	-0.010
HV	-0.006	-0.009	-0.015

EGPRS (8PSK) MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 128	Channel 190	Channel 251
-10	-0.005	-0.006	-0.010
0	-0.003	0.000	-0.010
+10	-0.009	-0.009	-0.013
+30	-0.004	-0.002	-0.009
+40	-0.009	-0.008	-0.015
+55	-0.012	-0.006	-0.014
Voltage	Test Result (ppm)@NT		
	Channel 128	Channel 190	Channel 251
LV	0.002	-0.004	-0.003
HV	-0.003	-0.007	-0.012


**7. Peak-Average Ratio**  
**GSM850**  
GSM MODE:

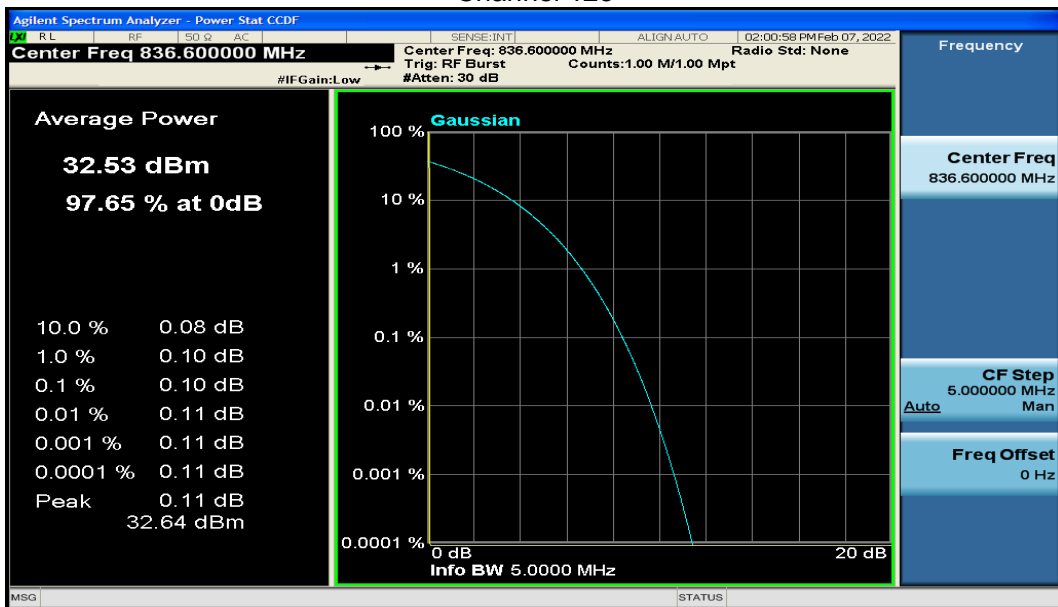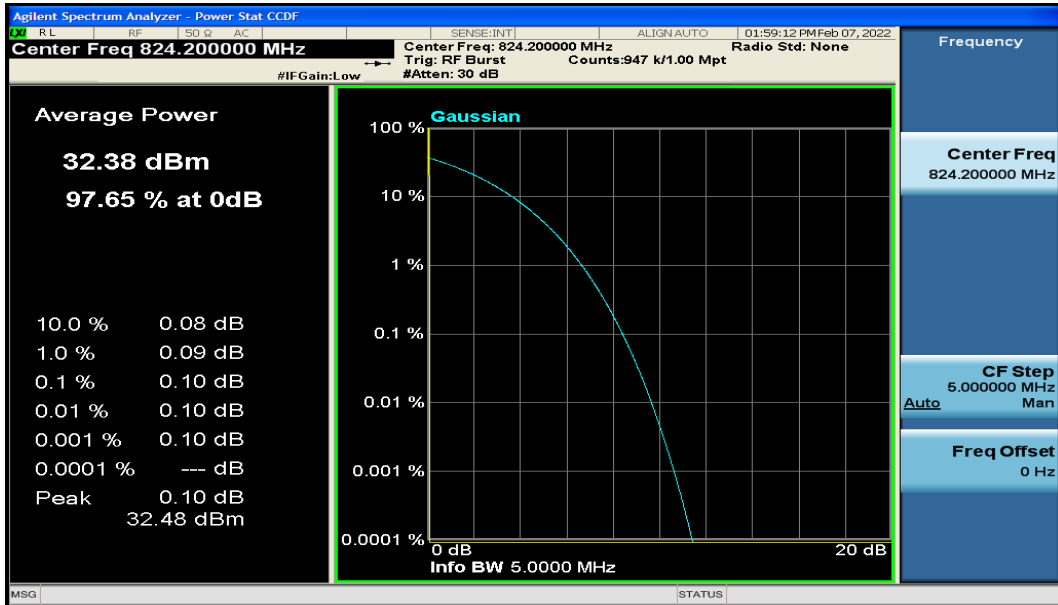

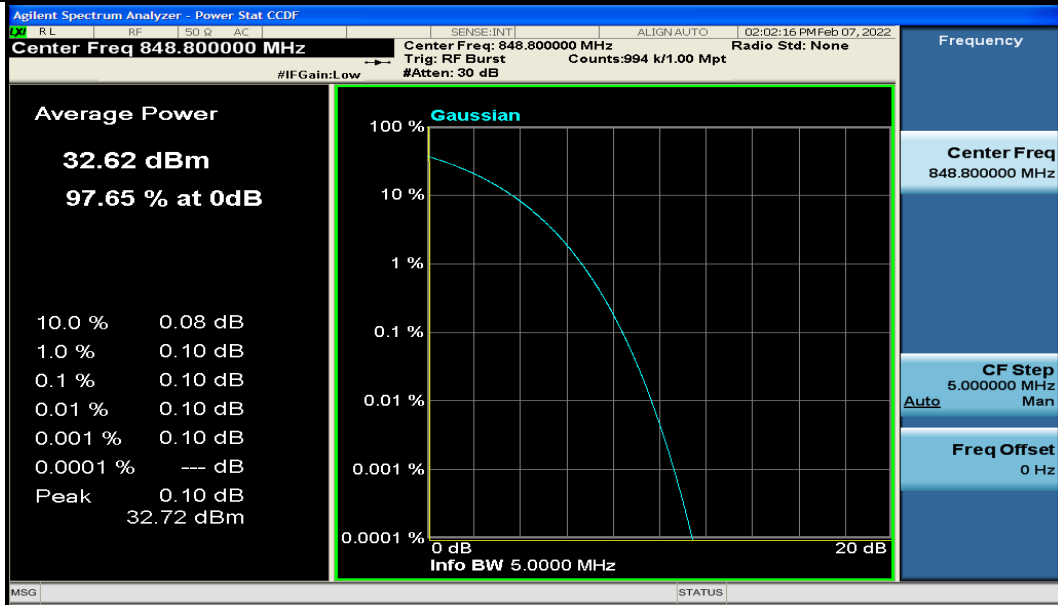


Channel 251


GPRS MODE:

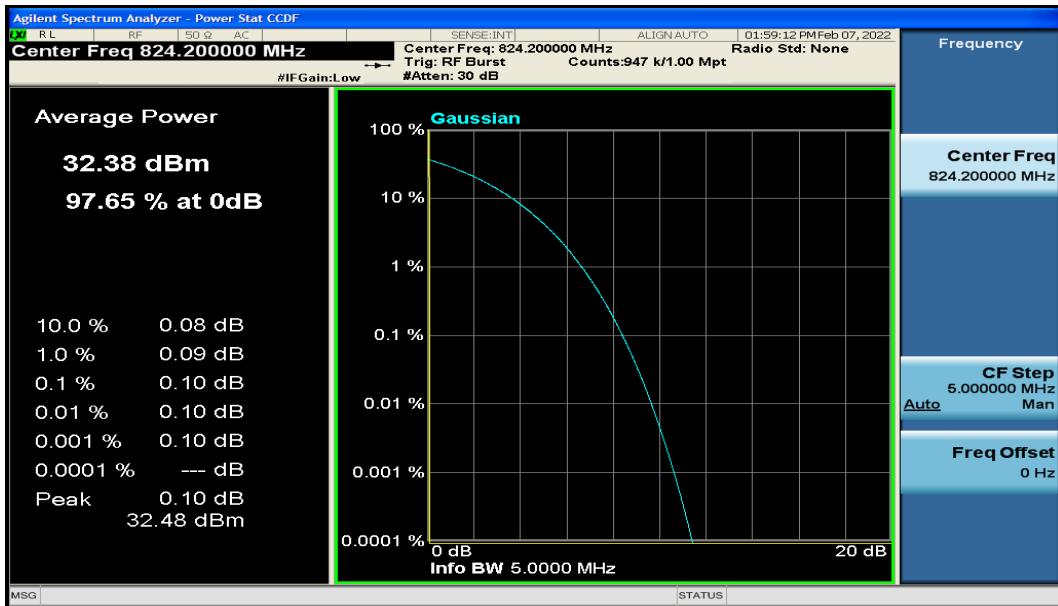

Channel 128

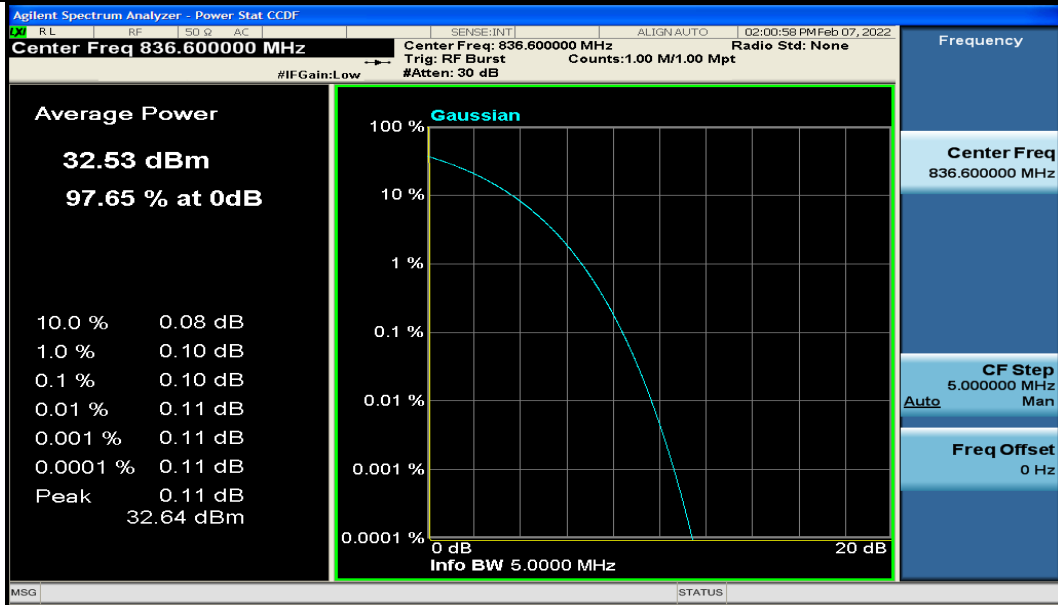


Channel 190

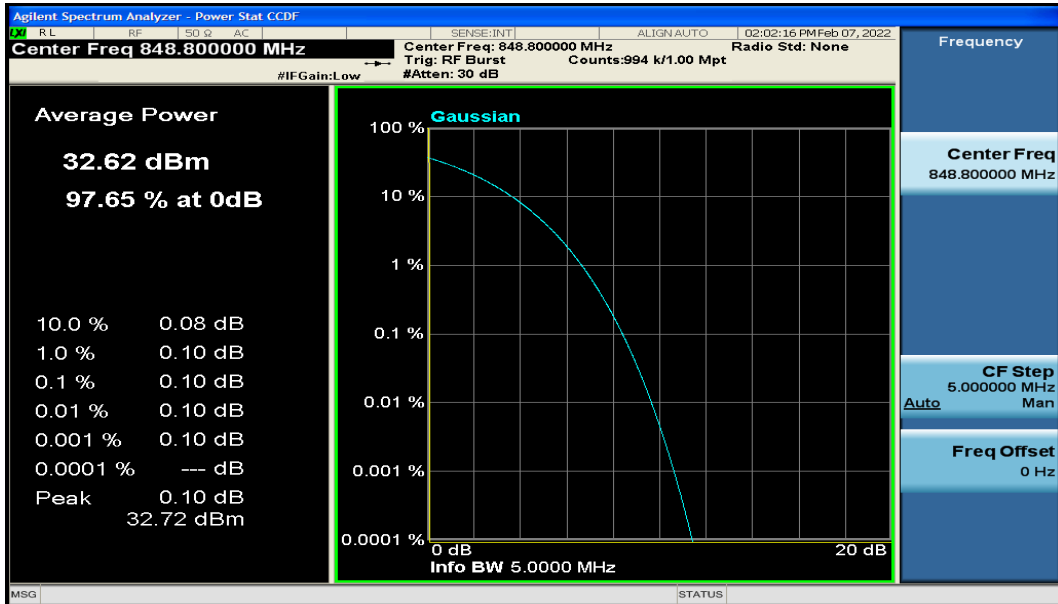


Channel 251


EGPRS (8PSK) MODE:

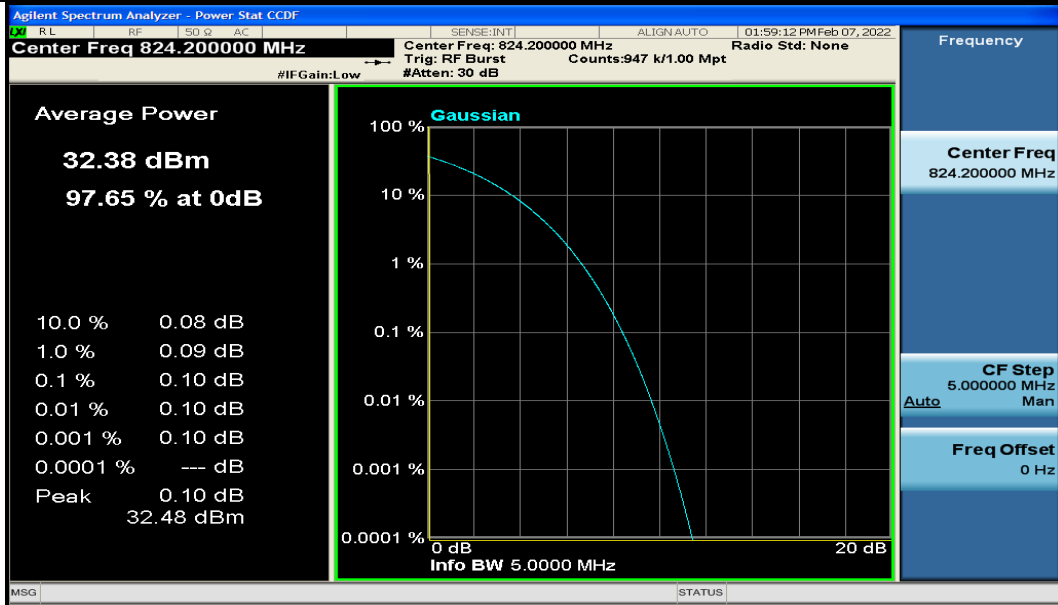

Channel 128

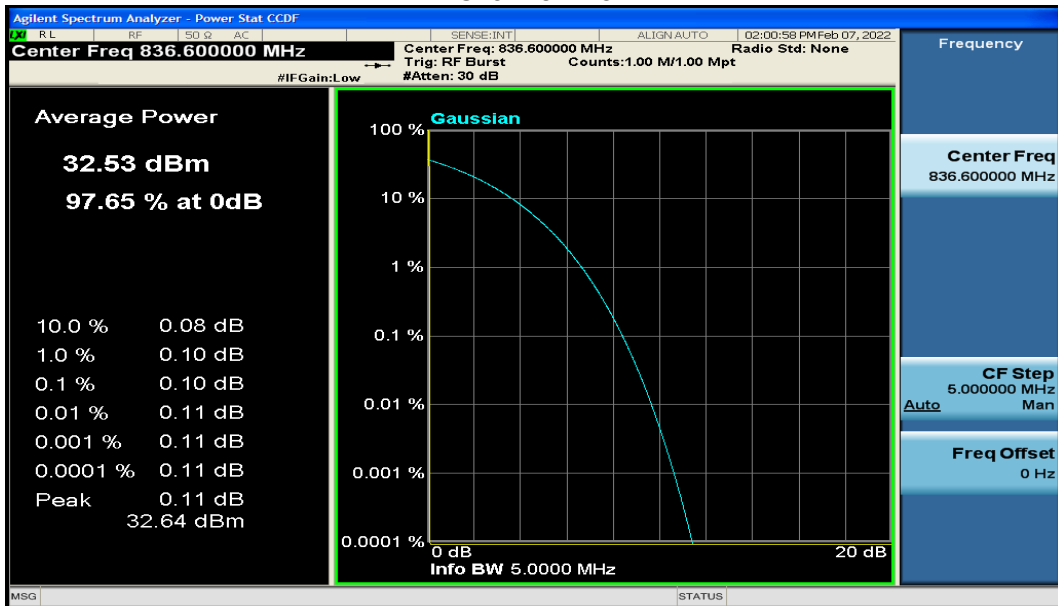

Channel 190

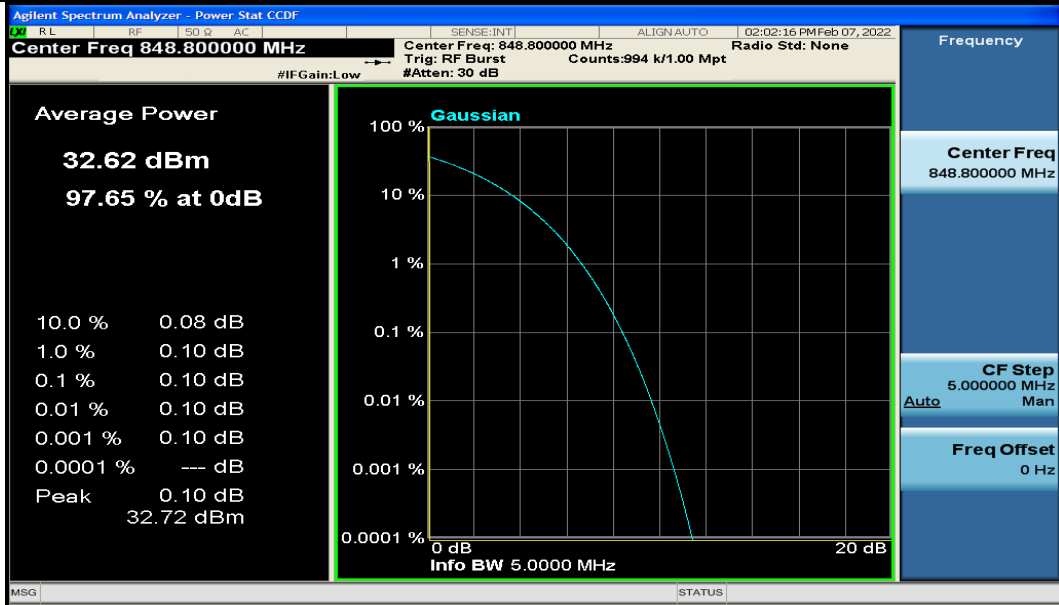

Channel 251



## 8. Effective Radiated Power and Effective Isotropic Radiated Power

### GSM850

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
824.2	128	32.58	28.83	0.764
836.6	190	32.74	28.99	0.793
848.8	251	32.76	29.01	0.796

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
824.2	128	4Down1Up	26.16	22.41	0.174
836.6	190		26.39	22.64	0.184
848.8	251		26.44	22.69	0.186
824.2	128	3Down2Up	28.38	24.63	0.290
836.6	190		28.48	24.73	0.297
848.8	251		28.64	24.89	0.308
824.2	128	2Down3Up	30.27	26.52	0.449
836.6	190		30.47	26.72	0.470
848.8	251		30.50	26.75	0.473
824.2	128	1Down4Up	32.40	28.65	0.733
836.6	190		32.59	28.84	0.766
848.8	251		32.61	28.86	0.769

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
824.2	128	4Down1Up	26.17	22.42	0.175
836.6	190		26.40	22.65	0.184
848.8	251		26.45	22.70	0.186
824.2	128	3Down2Up	28.40	24.65	0.292
836.6	190		28.59	24.84	0.305
848.8	251		28.62	24.87	0.307
824.2	128	2Down3Up	30.29	26.54	0.451
836.6	190		30.46	26.71	0.469
848.8	251		30.50	26.75	0.473
824.2	128	1Down4Up	32.38	28.63	0.729
836.6	190		32.51	28.76	0.752
848.8	251		32.62	28.87	0.771

GSM900 Result

1. RF Power Output

PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1850.2	512	29.04
1880	661	28.92
1909.8	810	29.03

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	23.09
1880	661		22.77
1909.8	810		22.58
1850.2	512	3Down2Up	25.00
1880	661		24.67
1909.8	810		24.57
1850.2	512	2Down3Up	27.14
1880	661		26.84
1909.8	810		26.75
1850.2	512	1Down4Up	28.82
1880	661		28.79
1909.8	810		28.92

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)
1850.2	512	4Down1Up	22.99
1880	661		22.71
1909.8	810		22.55
1850.2	512	3Down2Up	24.92
1880	661		24.60
1909.8	810		24.49
1850.2	512	2Down3Up	27.08
1880	661		26.80
1909.8	810		26.72
1850.2	512	1Down4Up	28.77
1880	661		28.79
1909.8	810		28.89

**2. Occupied Bandwidth  
PCS1900**

GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	238.87
1880	661	244.43
1909.8	810	238.60


GPRS MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	238.61
1880	661	244.70
1909.8	810	240.22


EGPRS (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (kHz)
1850.2	512	243.63
1880	661	246.03
1909.8	810	244.50


GSM MODE:

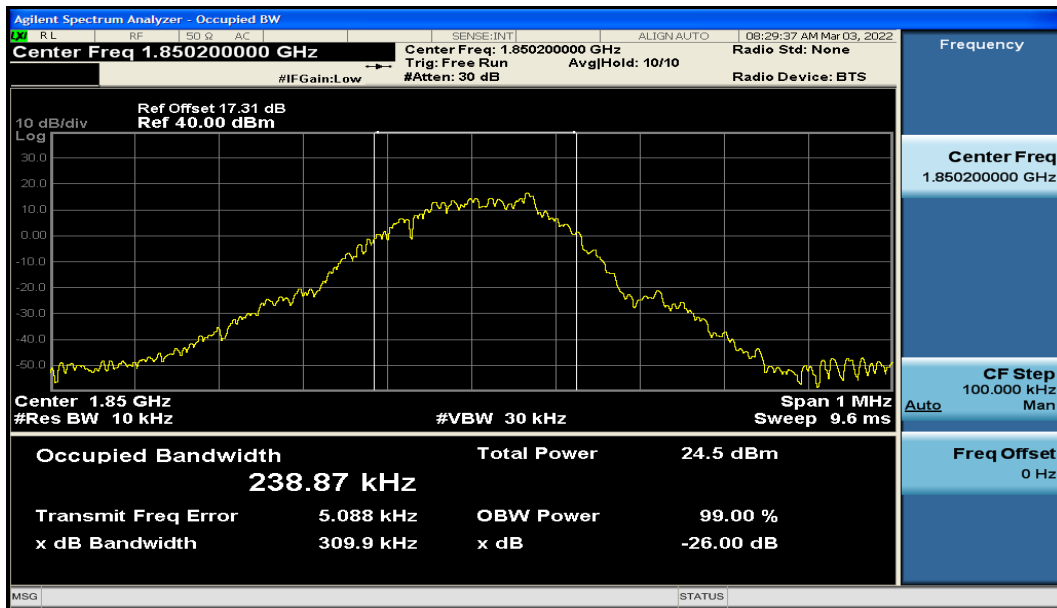

Channel 512

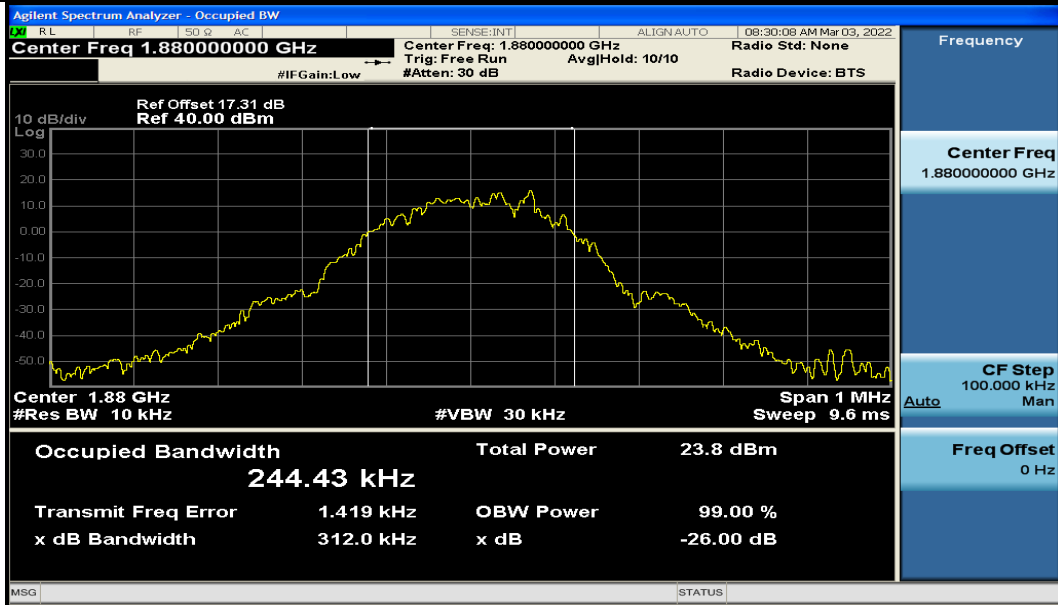


Channel 661

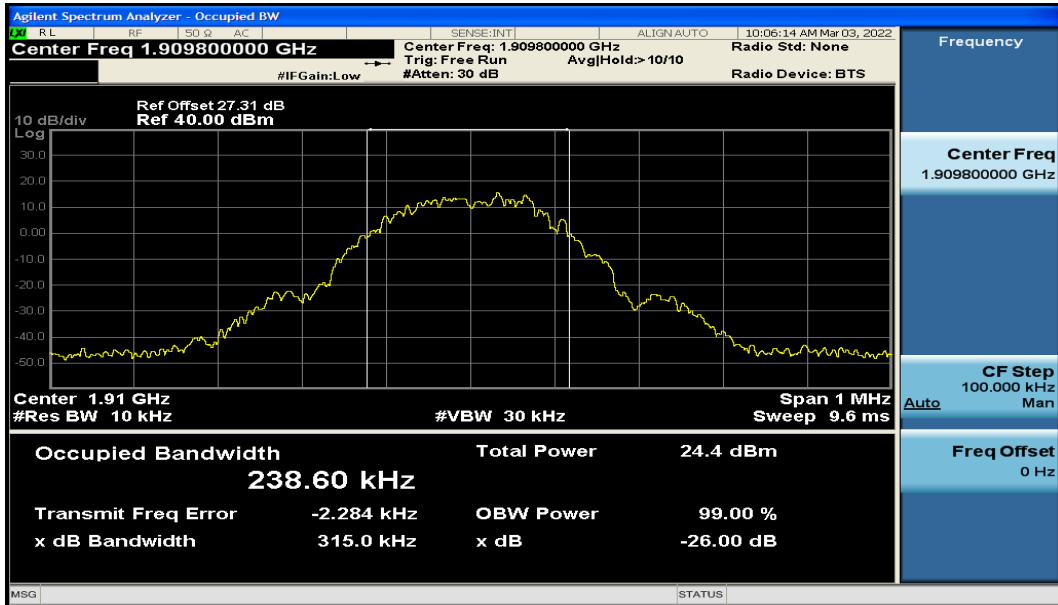


Channel 810


GPRS MODE:

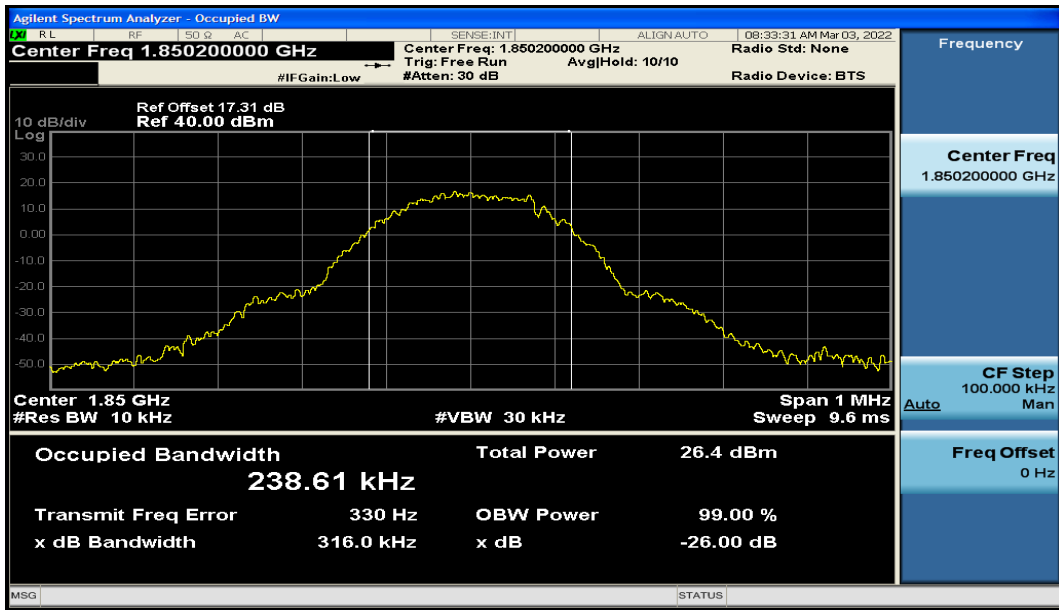

Channel 512

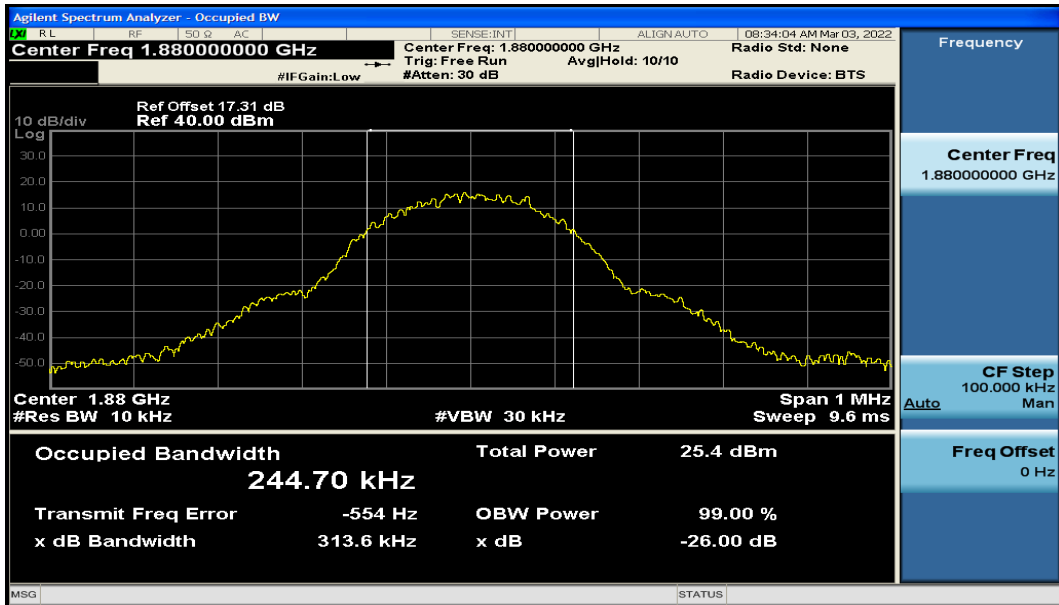


Channel 661

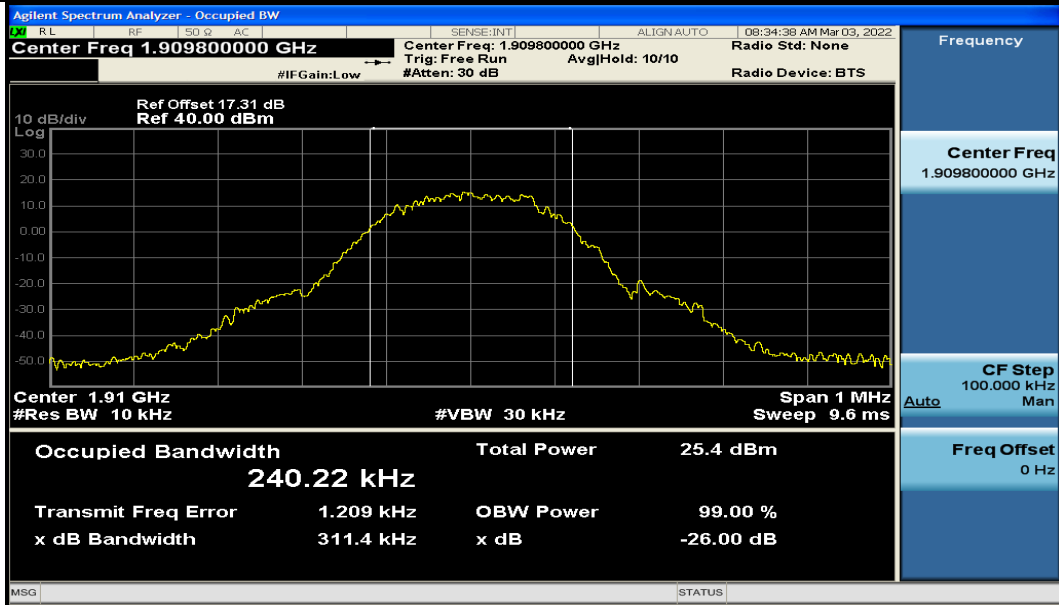


Channel 810


EGPRS (8PSK) MODE:

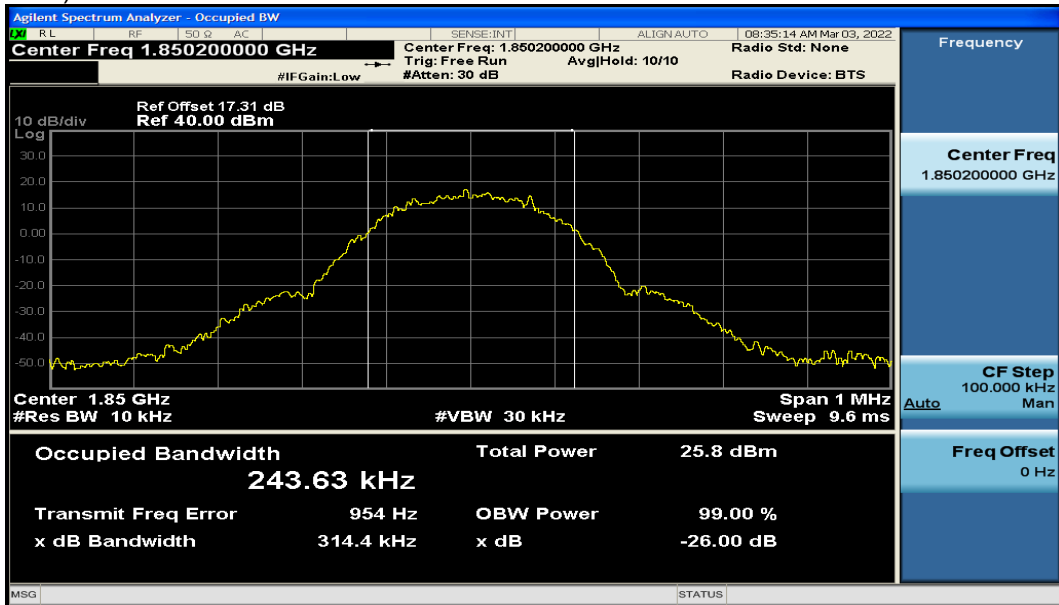

Channel 512

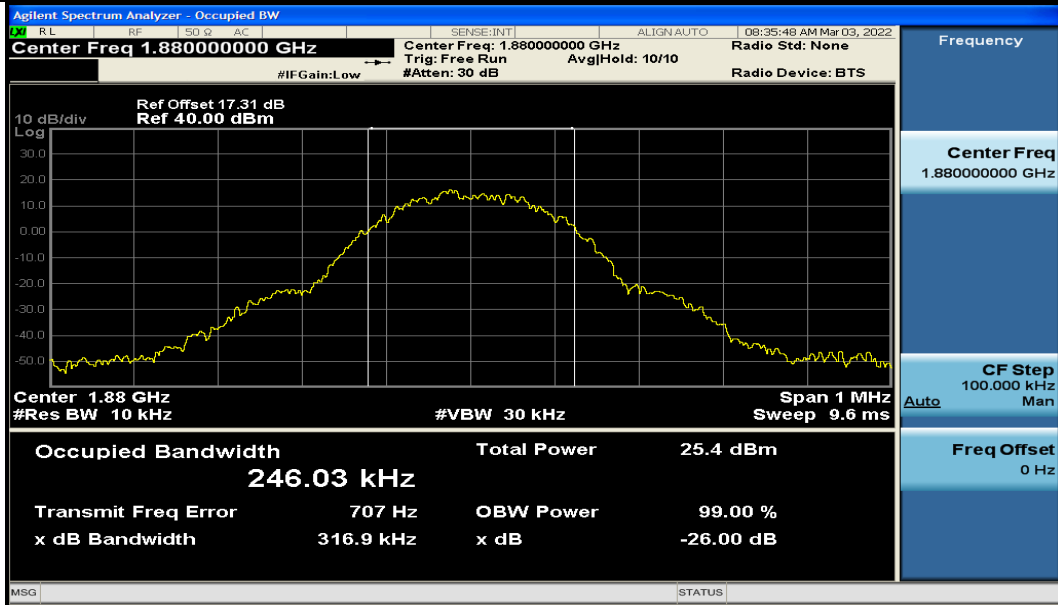

Channel 661

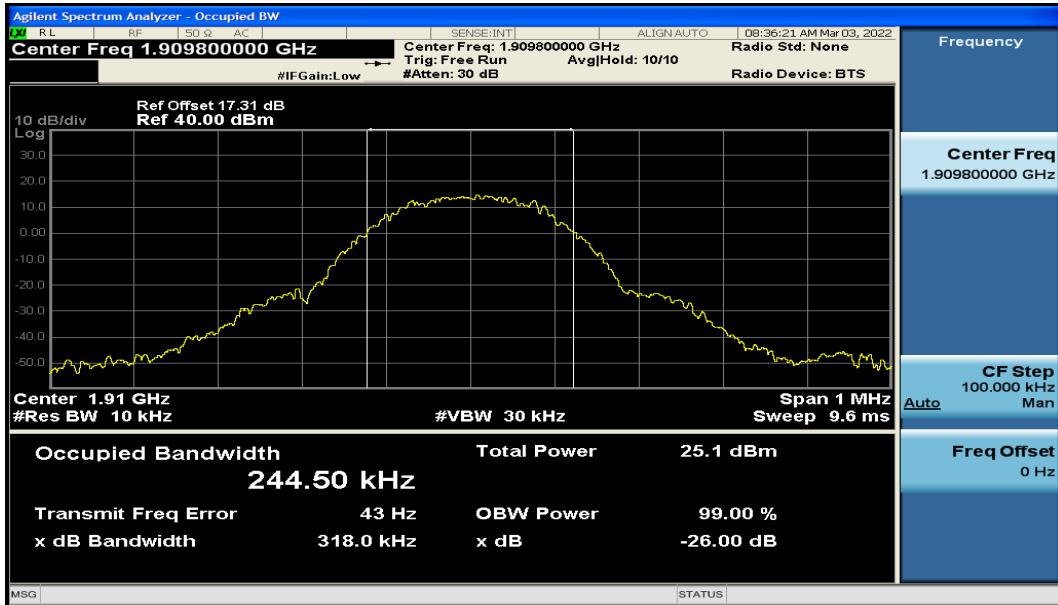

Channel 810

### 9. Emission Bandwidth

GSM MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
1850.2	512	309.90
1880	661	311.96
1909.8	810	314.98

GPRS MODE:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB (kHz)
1850.2	512	316.05
1880	661	313.57
1909.8	810	311.42

EGPRS (8PSK) MODE:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dB transmitter power(kHz)
1850.2	512	314.41
1880	661	316.91
1909.8	810	318.02


### PCS1900

GSM MODE:

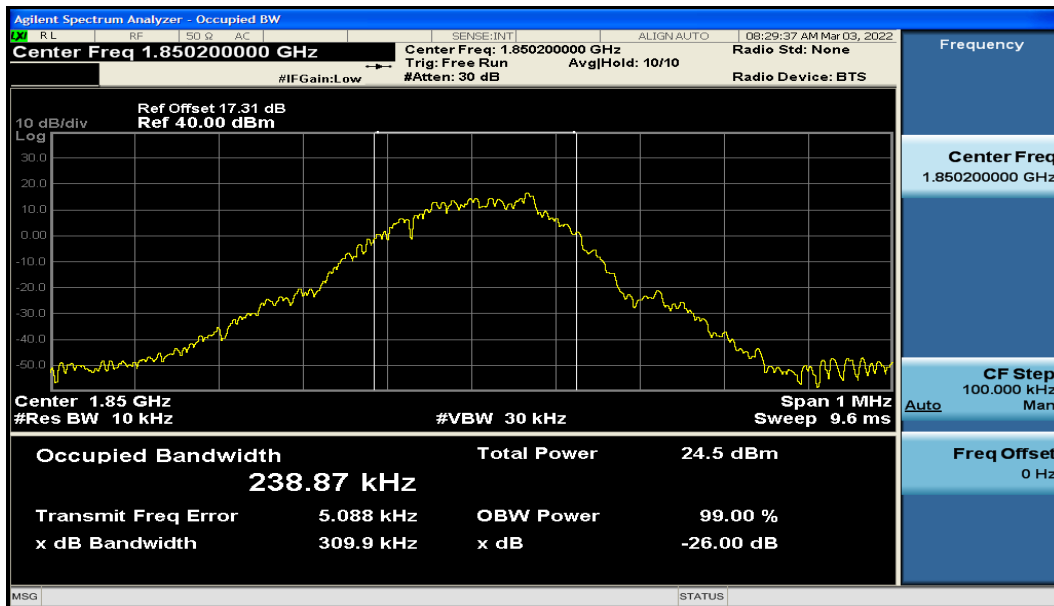


Channel 512



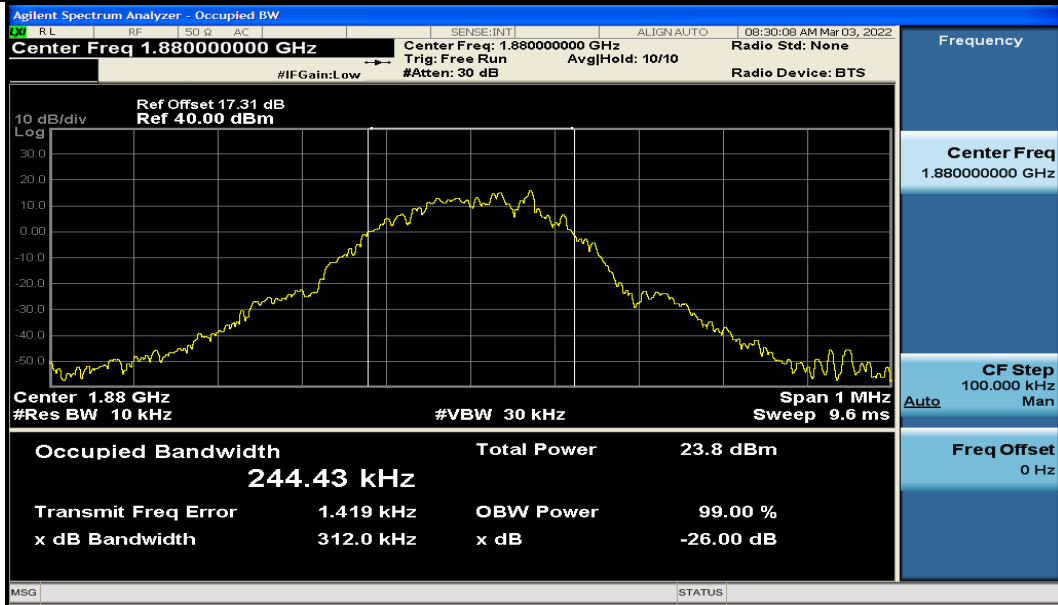


Channel 661

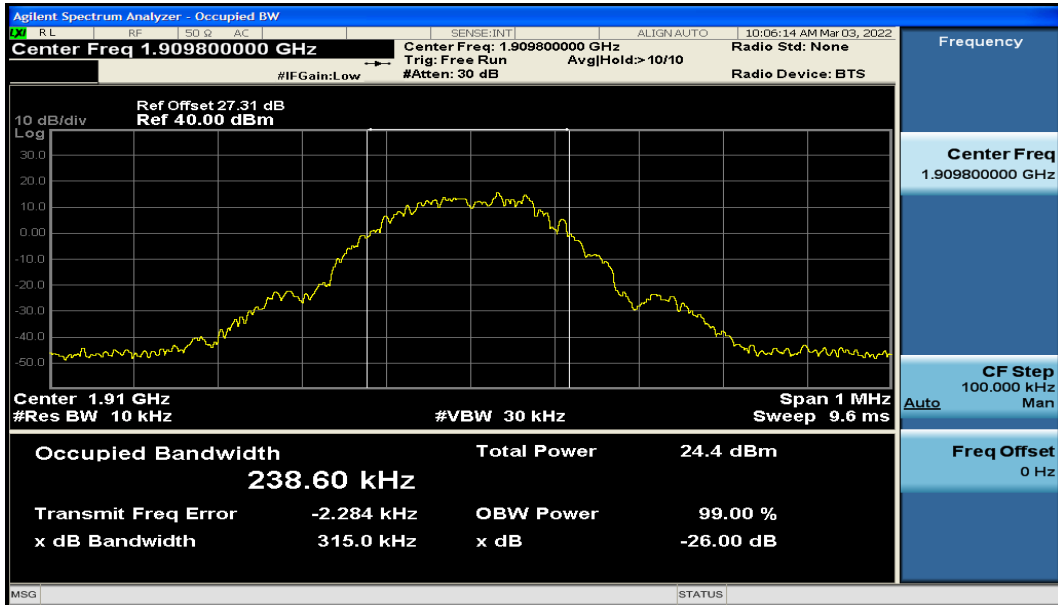


Channel 810


GPRS MODE:

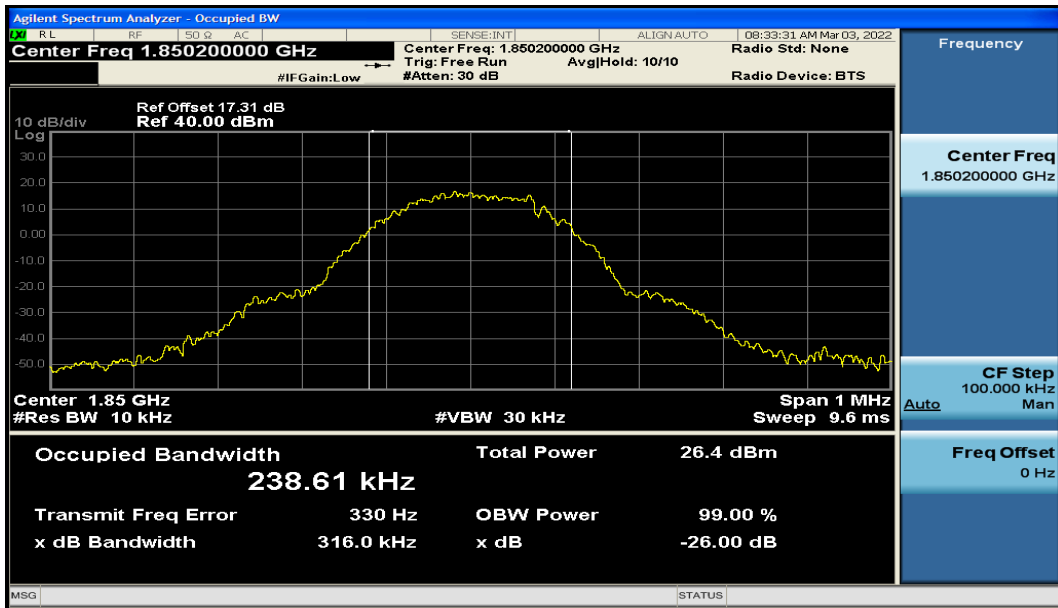

Channel 512

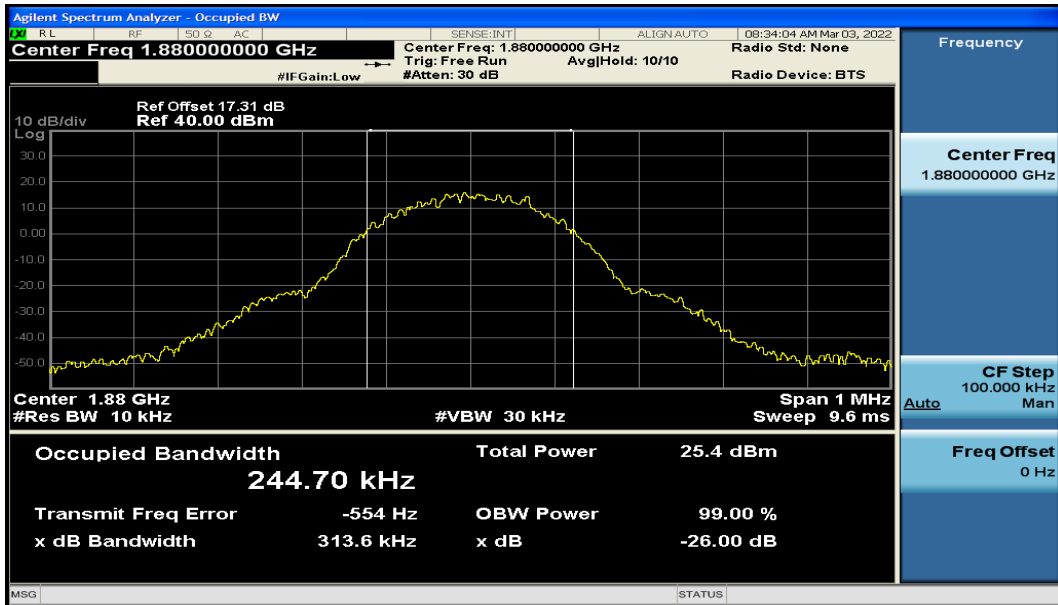


Channel 661

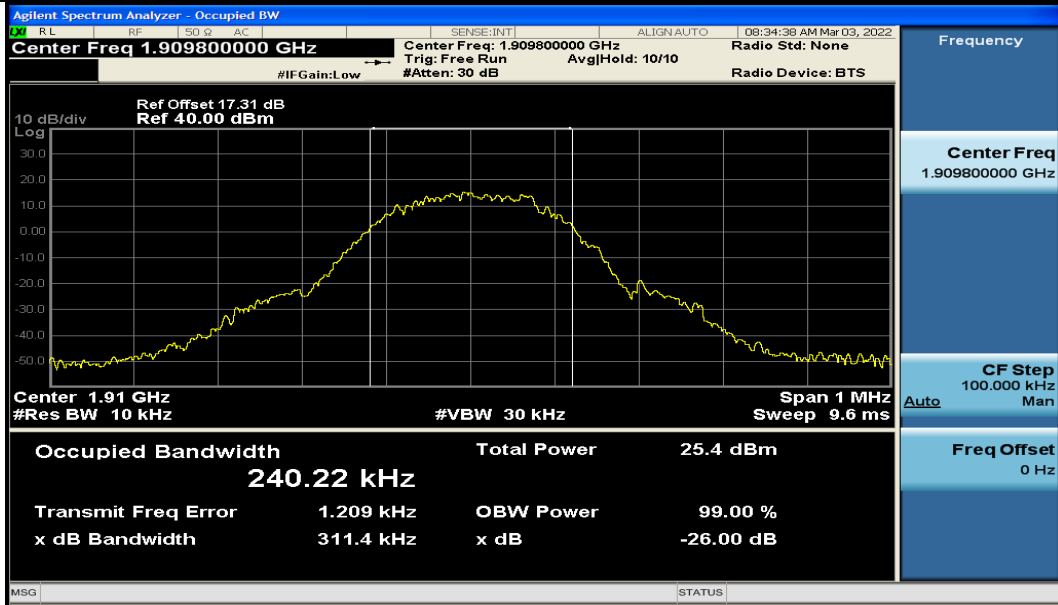


Channel 810


EGPRS (8PSK) MODE:

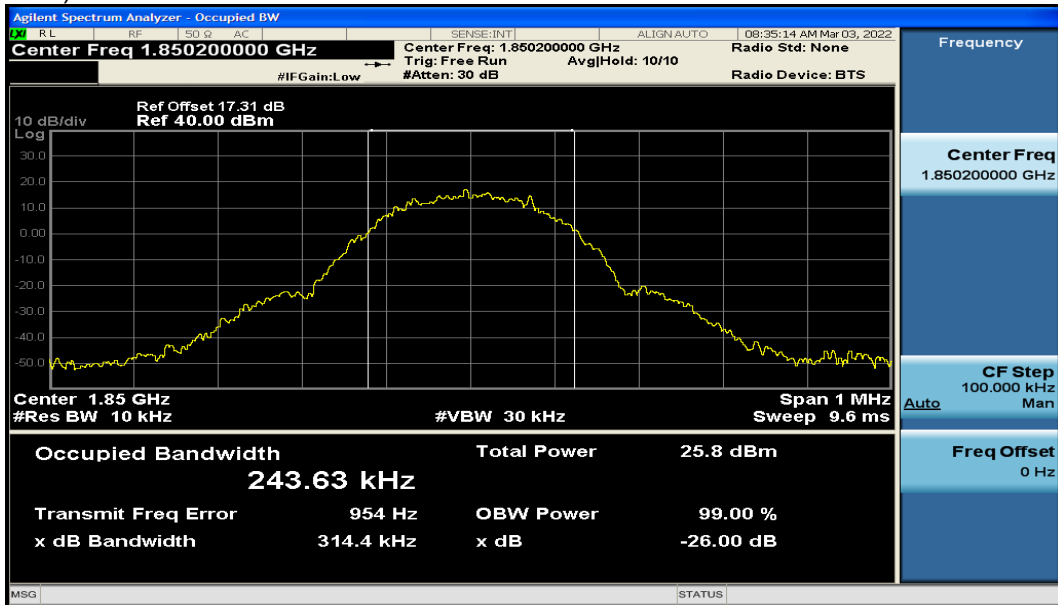

Channel 512

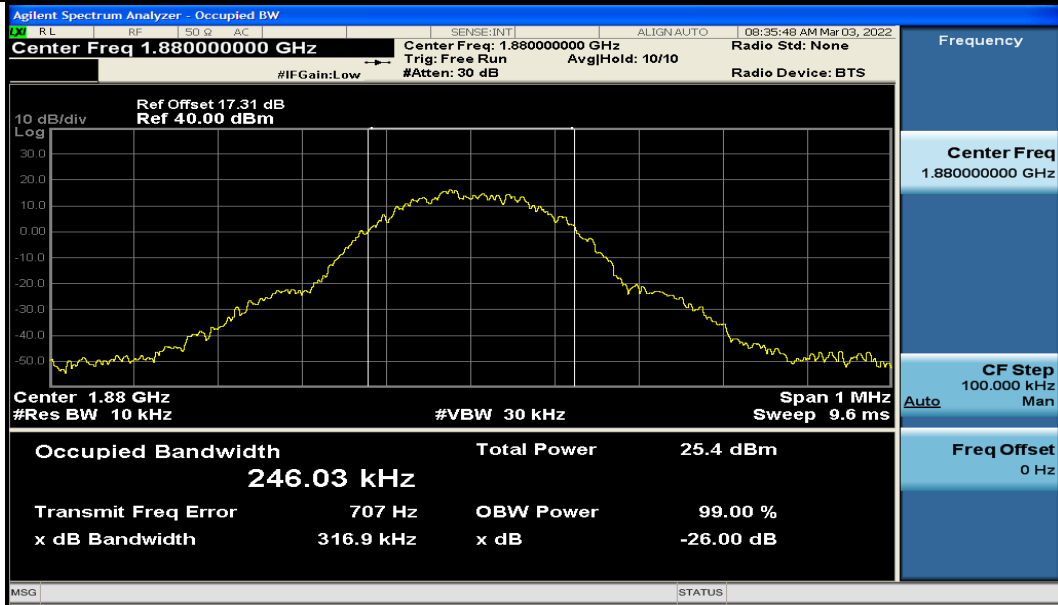


Channel 661

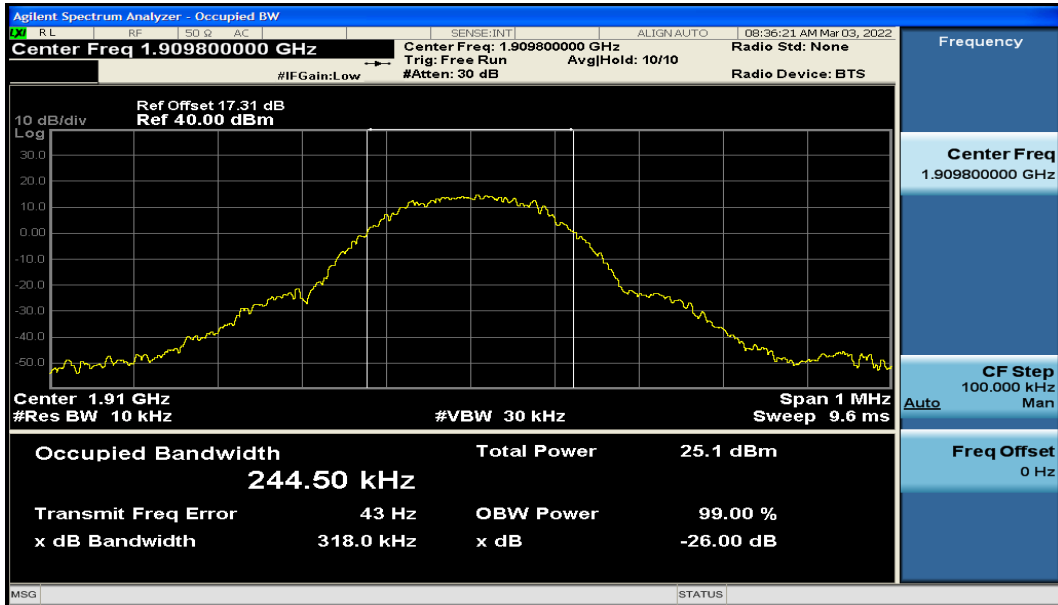


Channel 810


**3. Spurious Emissions at antenna terminal**  
**PCS1900**  
**GSM MODE:**

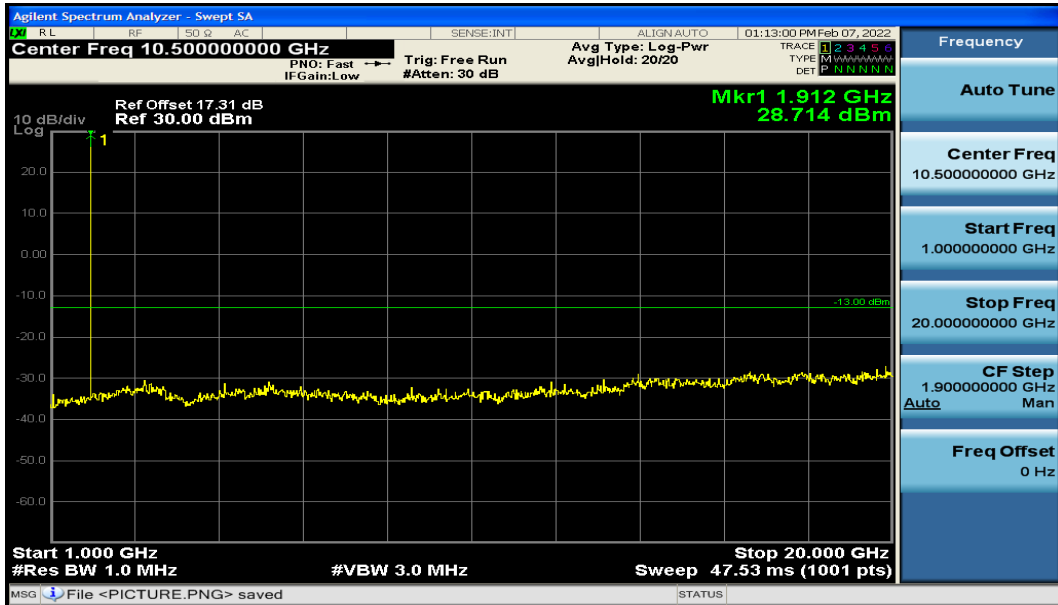


Channel 512

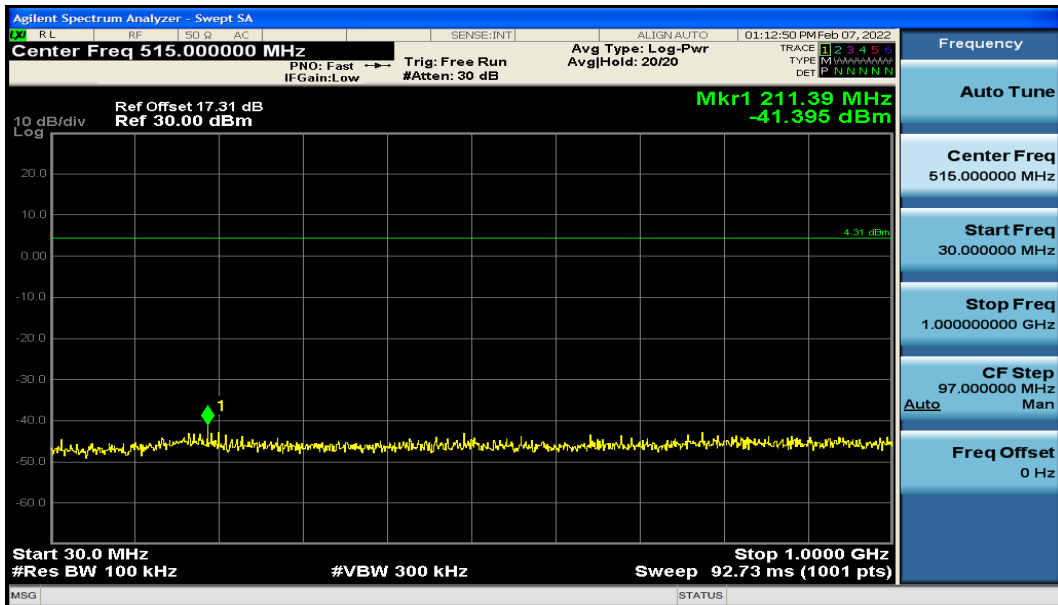


Channel 512

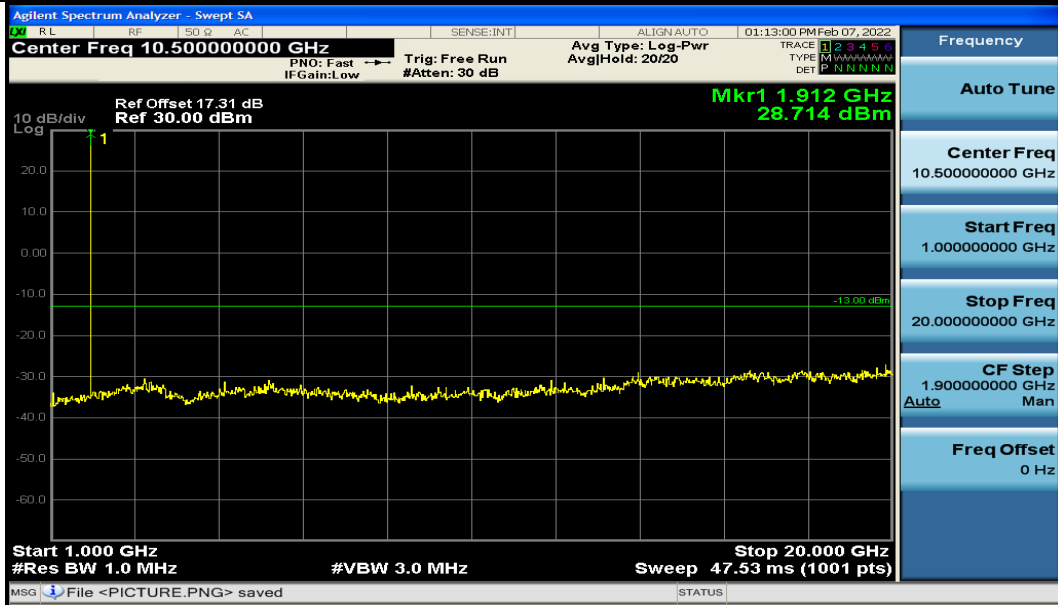


Channel 661

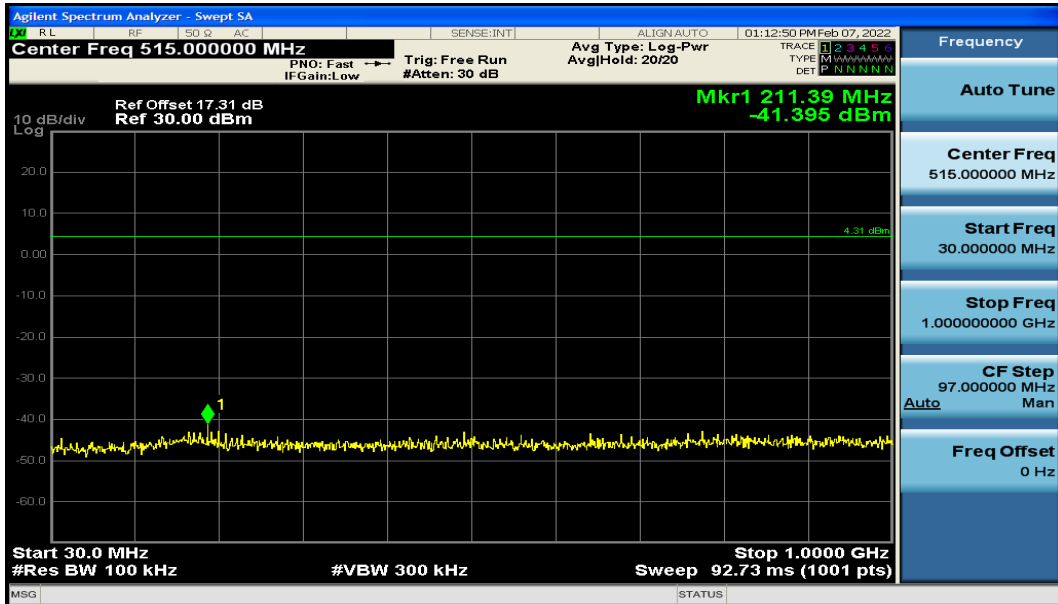

Channel 661

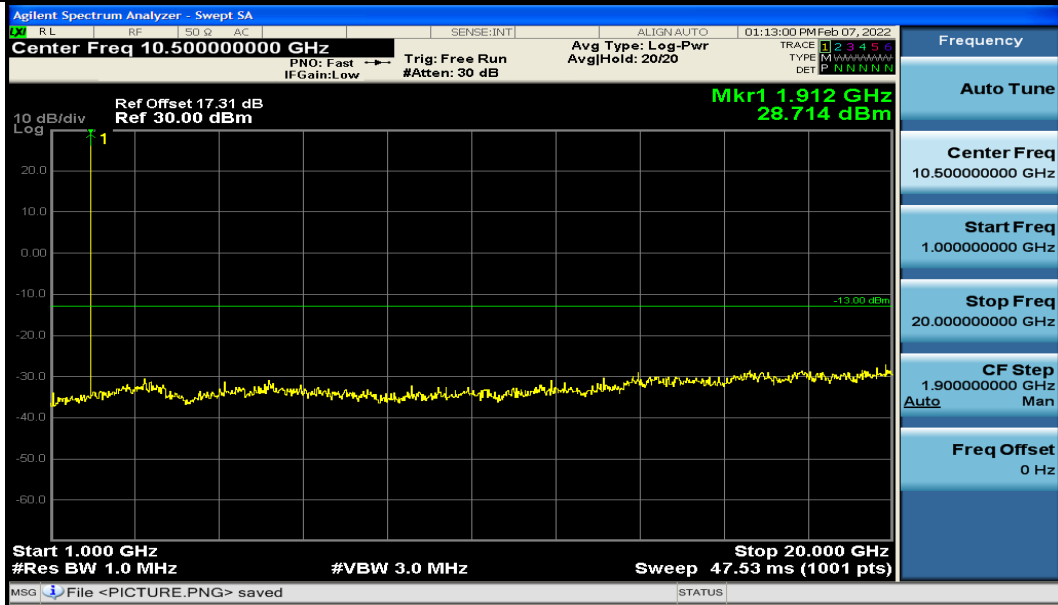


Channel 810

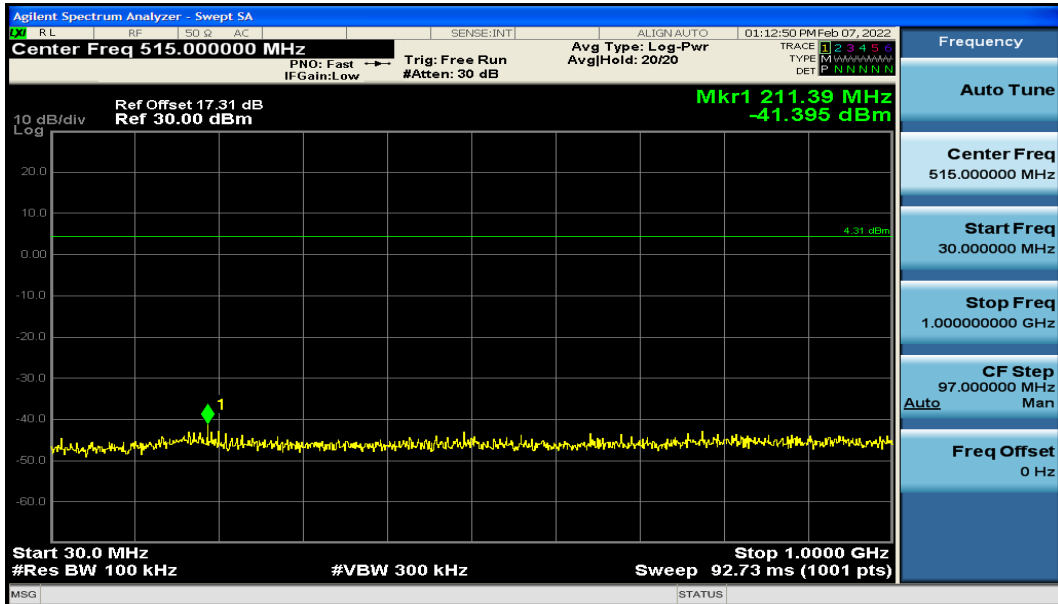


Channel 810

GPRS MODE:

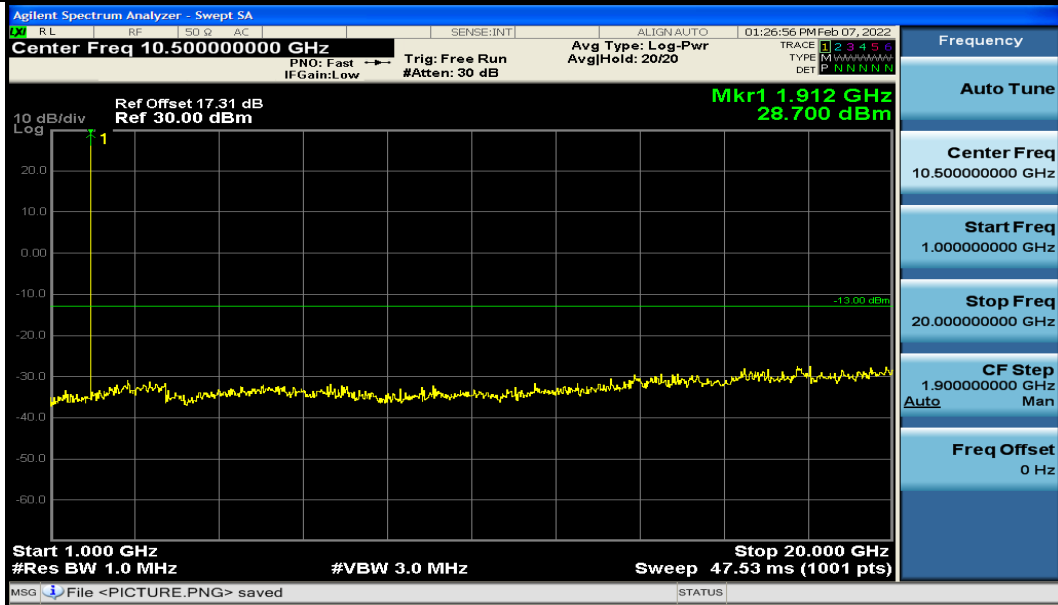


Channel 512

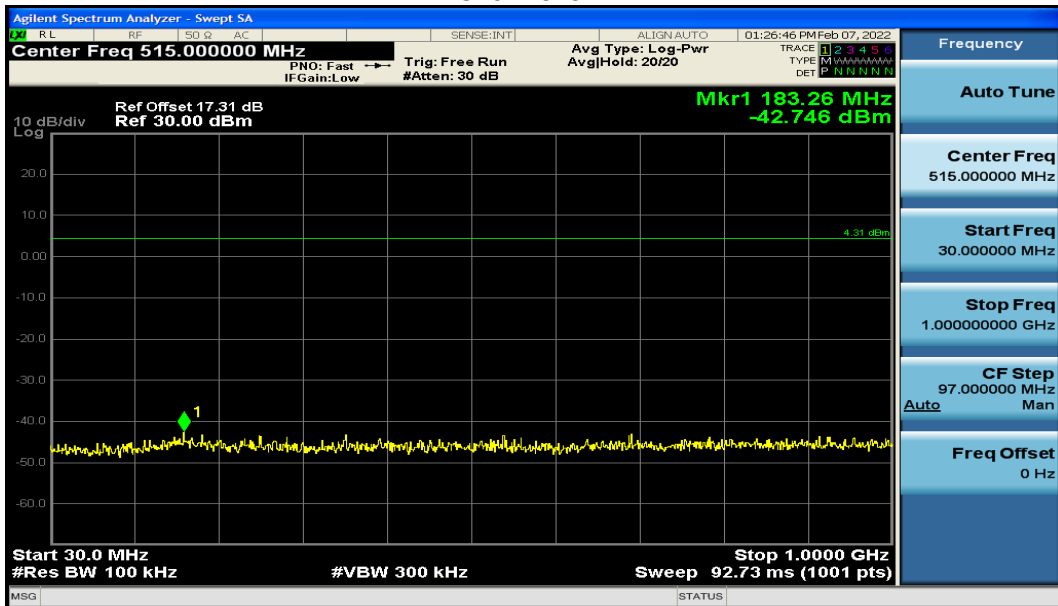


Channel 512




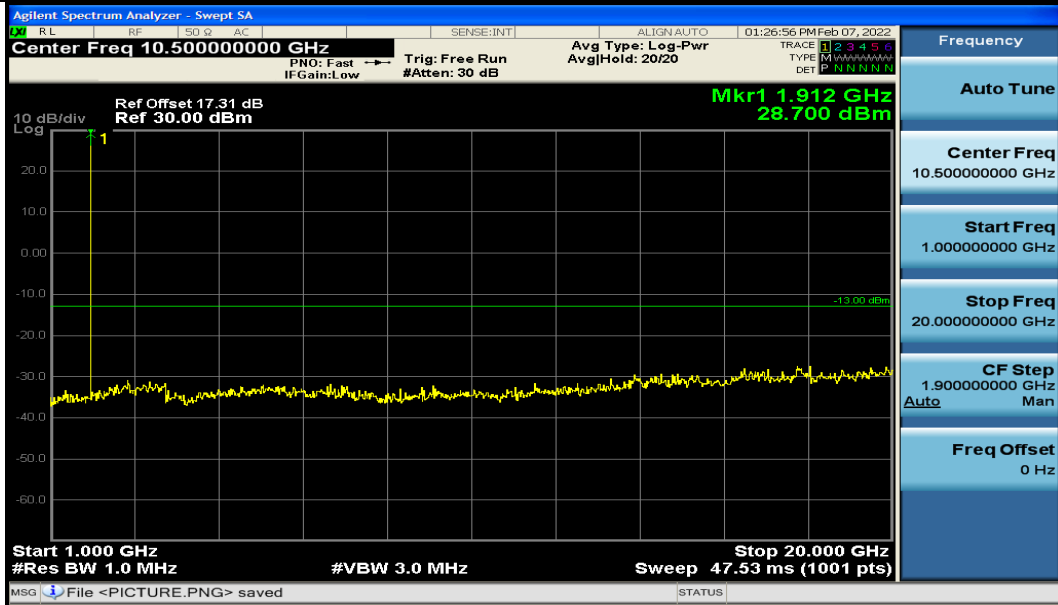


Channel 661

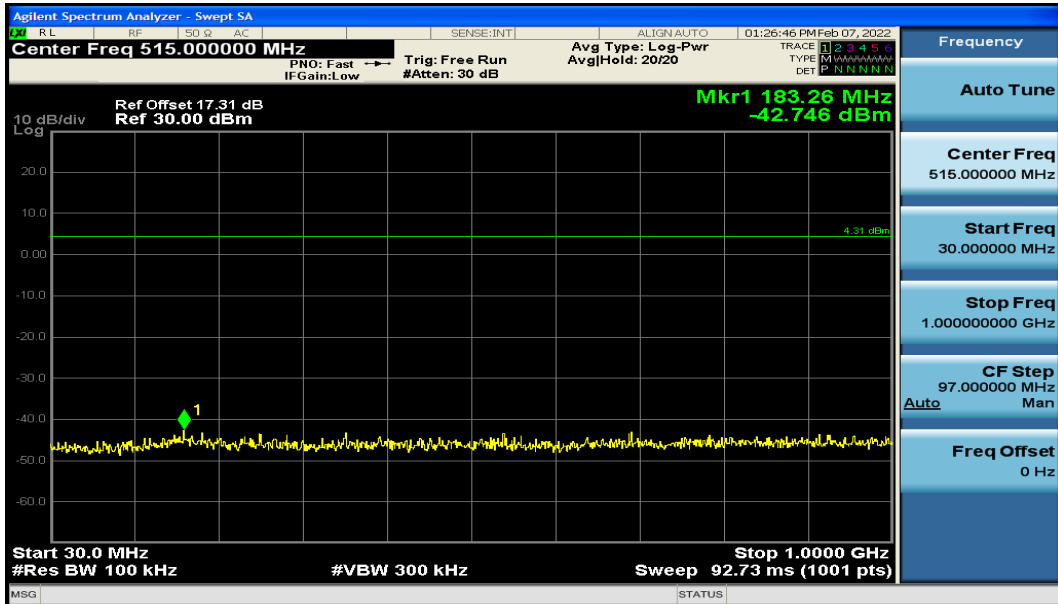

Channel 661

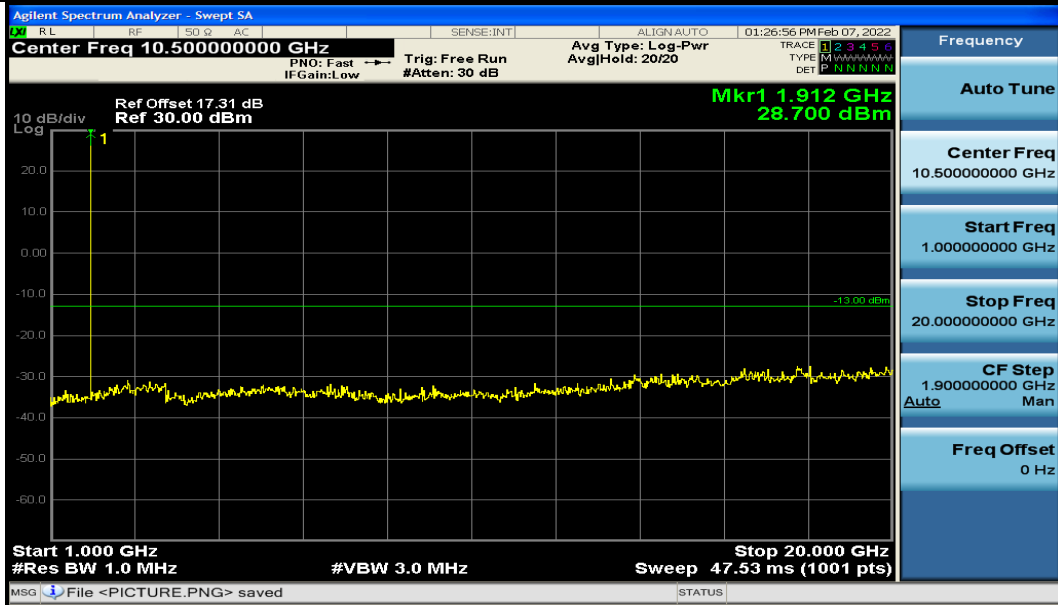


Channel 810

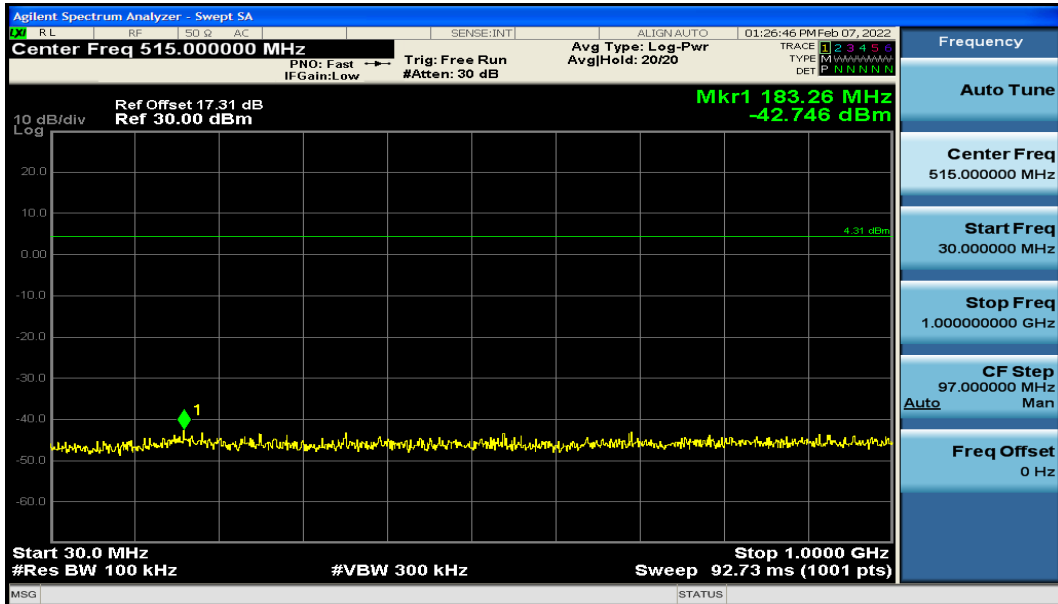


Channel 810


EGPRS (8PSK) MODE:

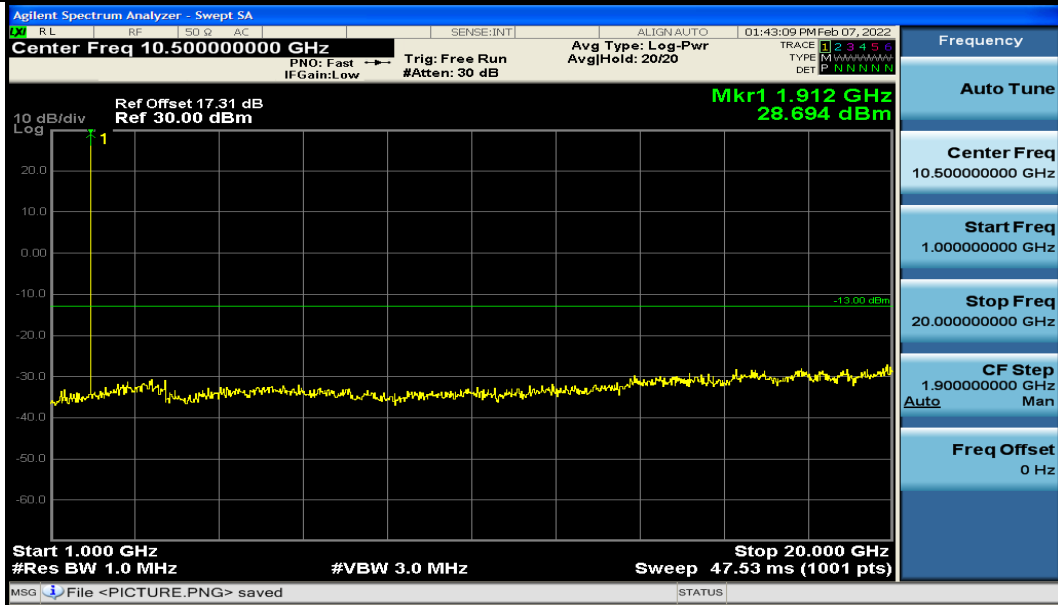


Channel 512

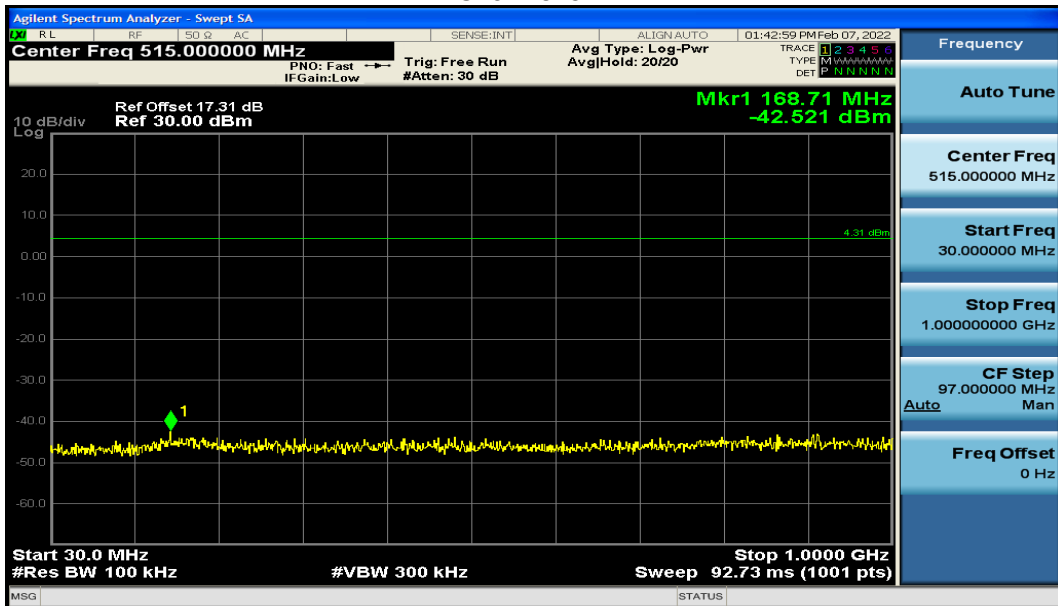


Channel 512

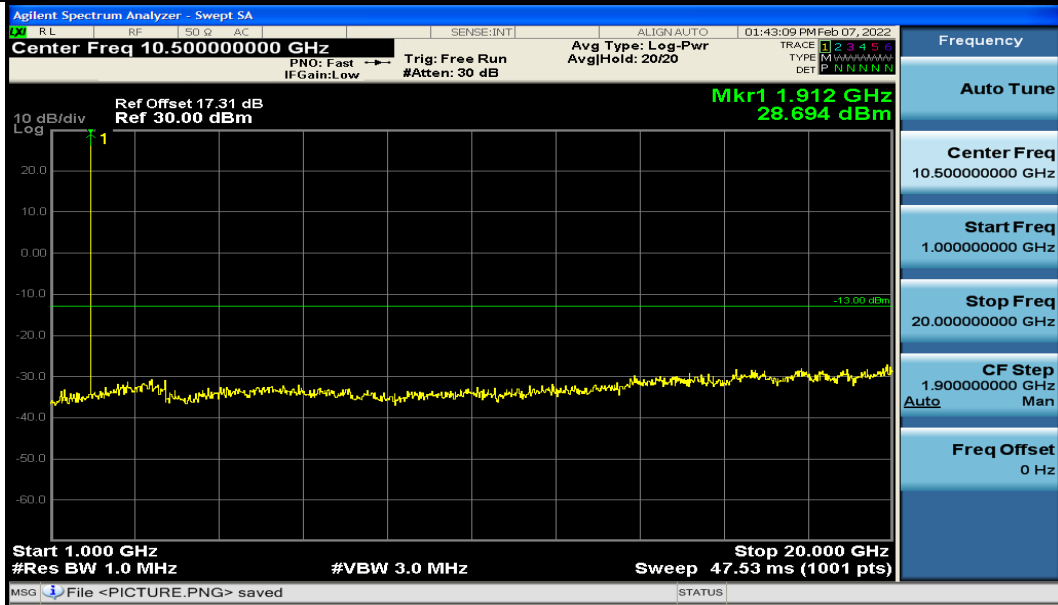


Channel 661

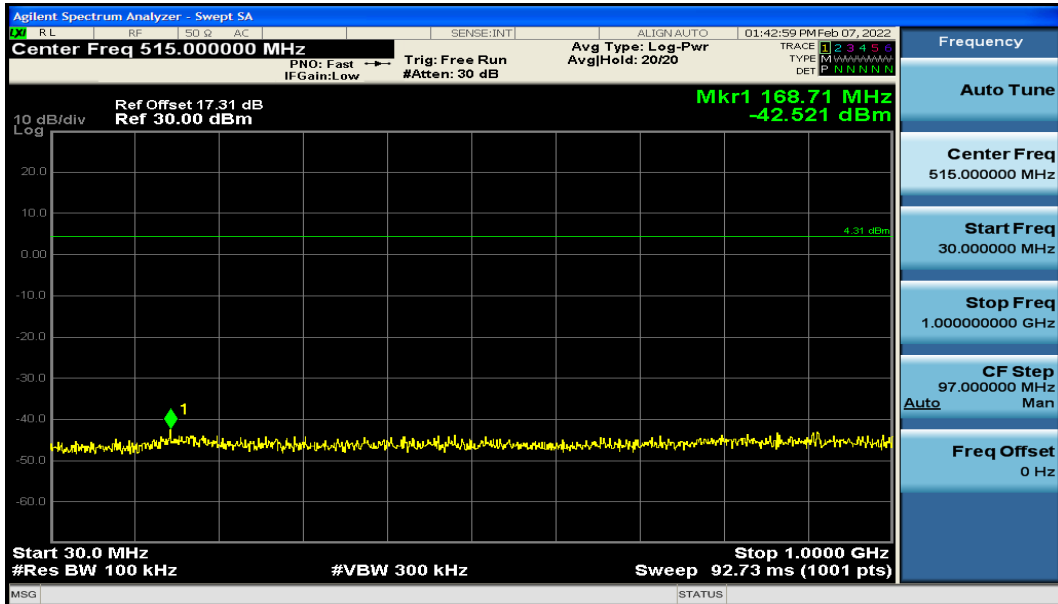

Channel 661

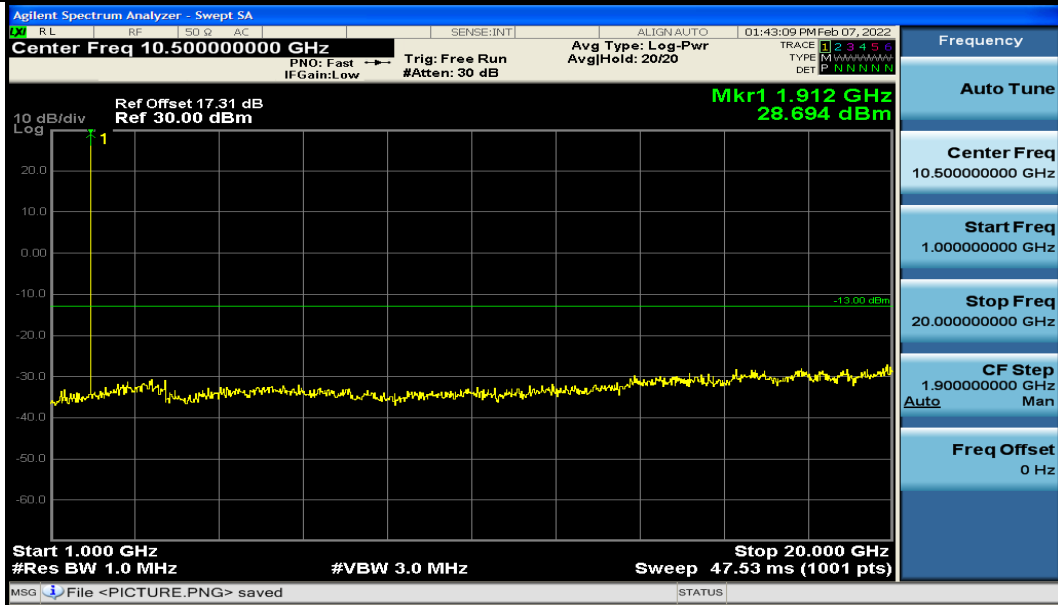


Channel 810

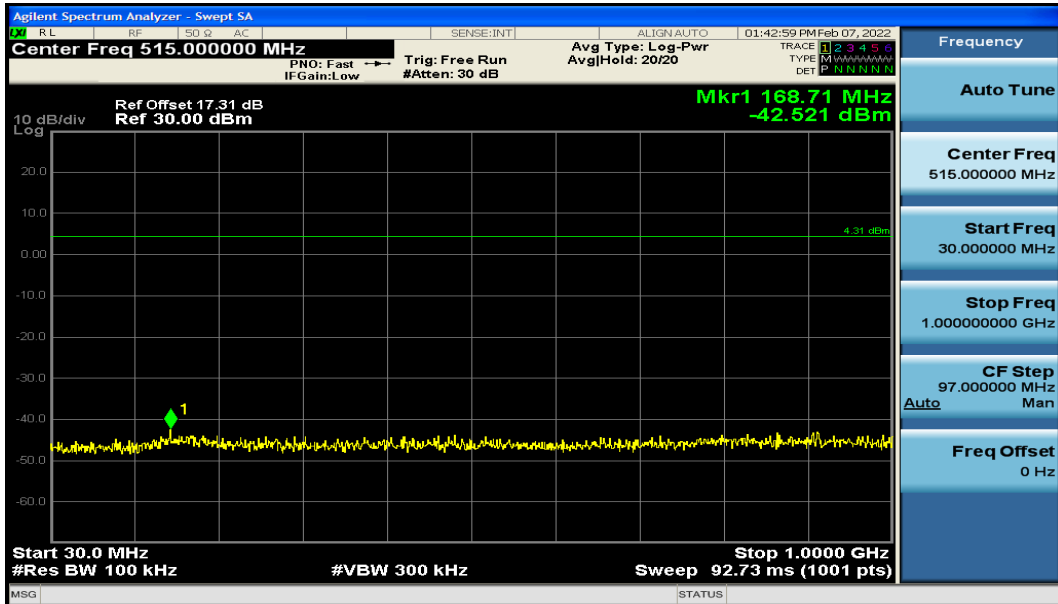


Channel 810


**4. Band Edges Compliance**  
**PCS1900**  
**GSM MODE:**

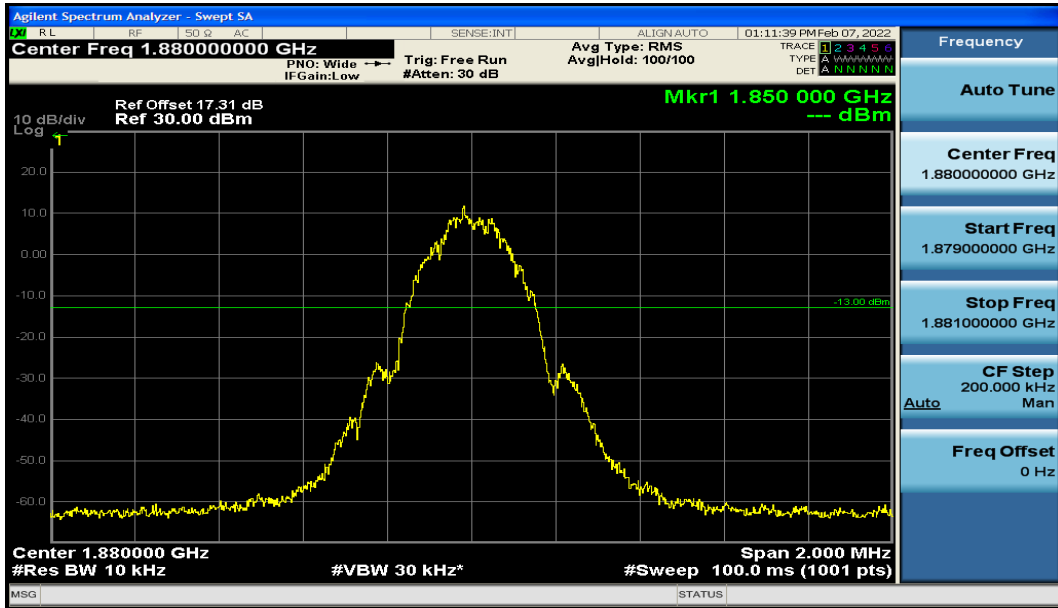


Channel 512

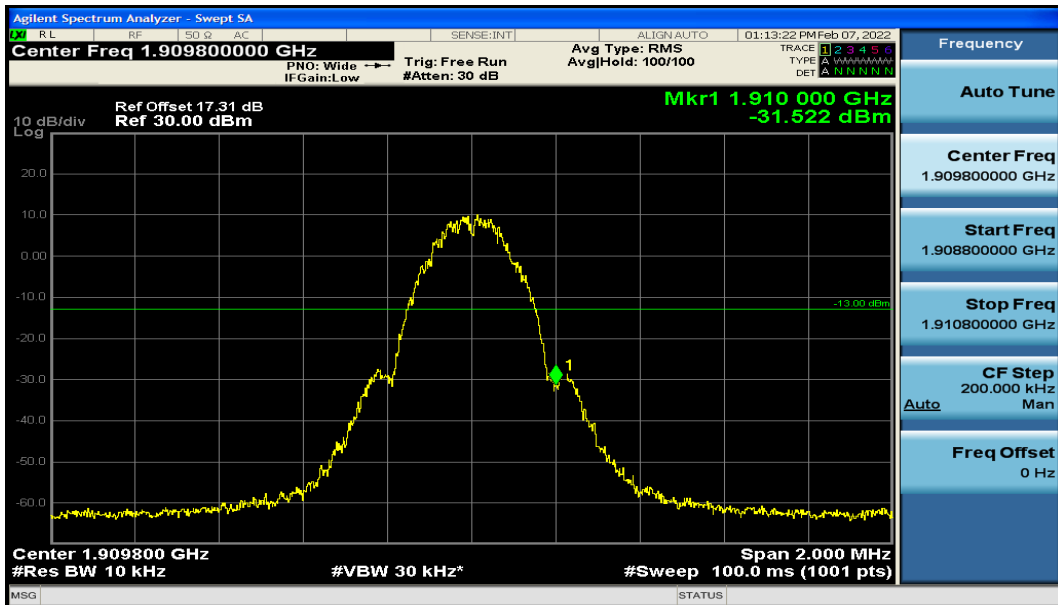

Channel 661

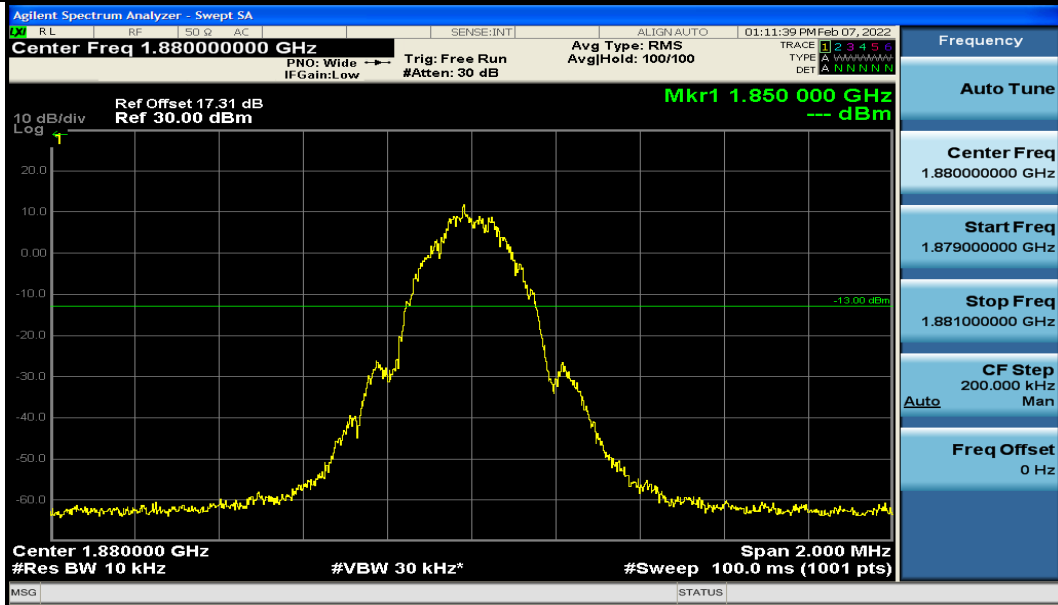


Channel 661

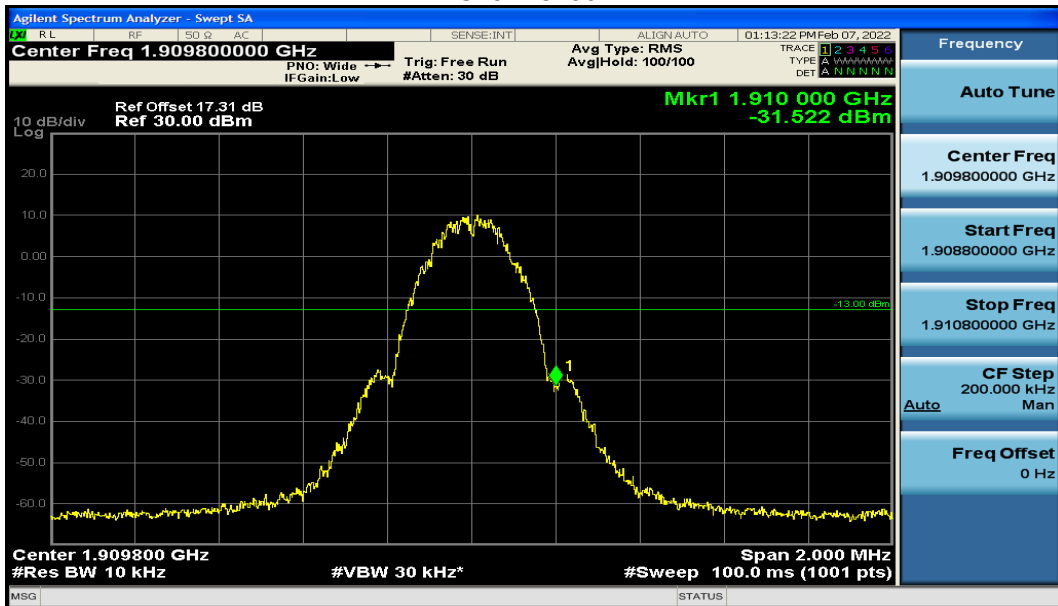


Channel 810

GPRS MODE:

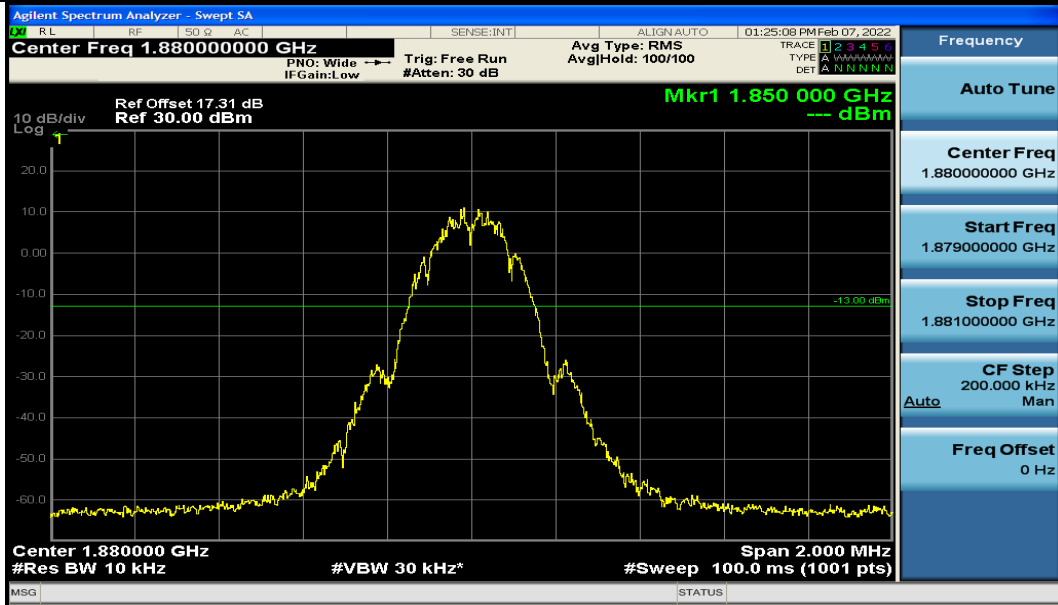


Channel 512

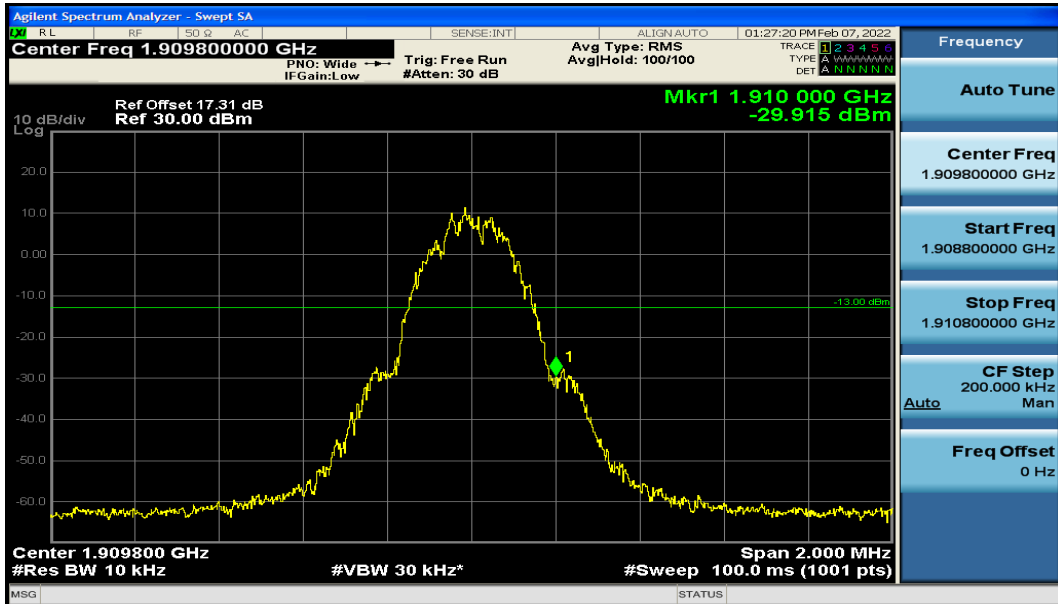


Channel 661



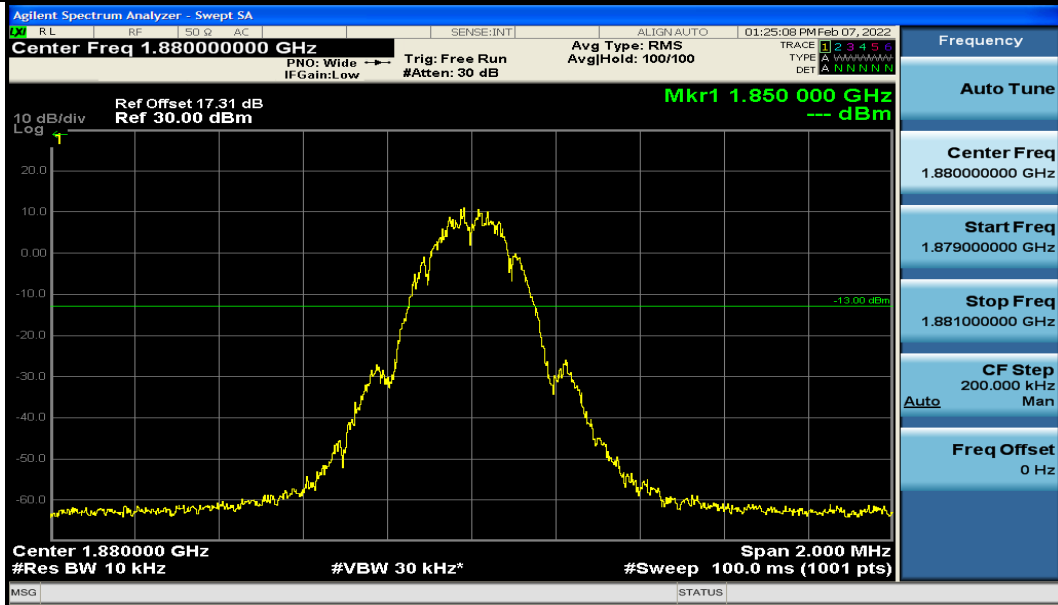


Channel 661

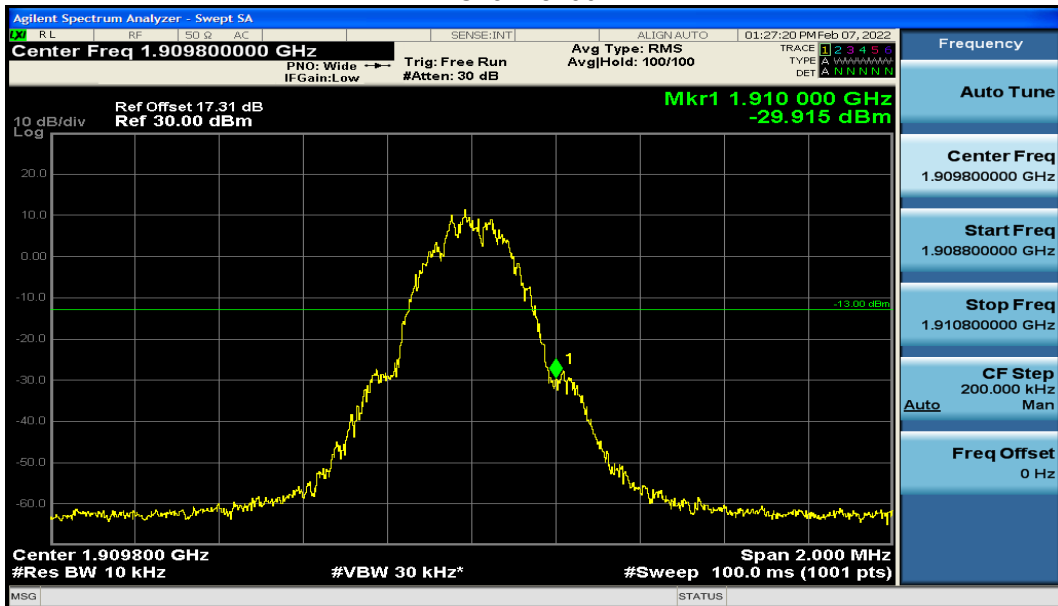


Channel 810


EGPRS (8PSK) MODE:

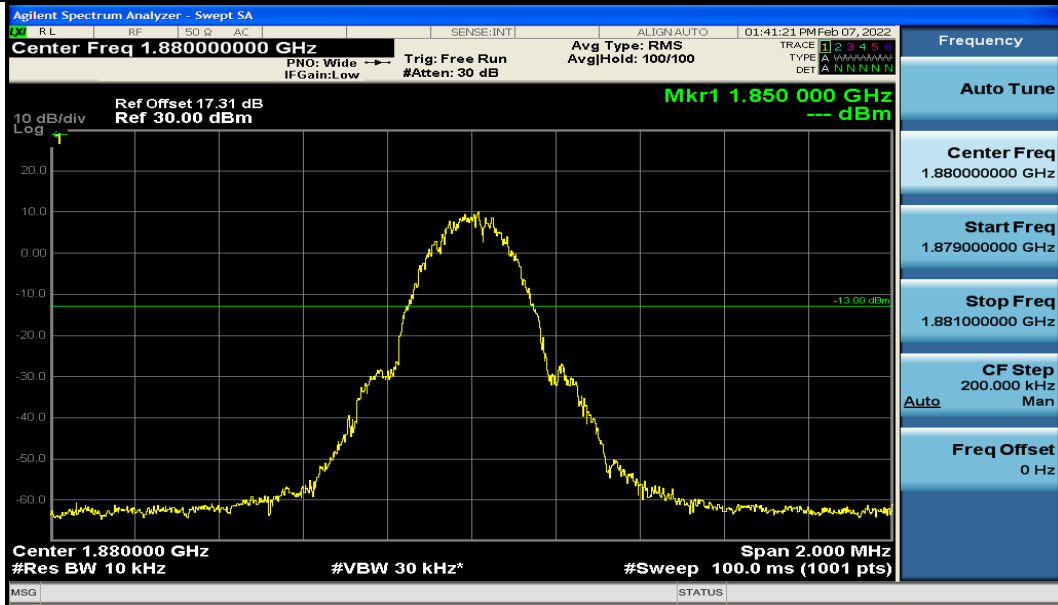


Channel 512

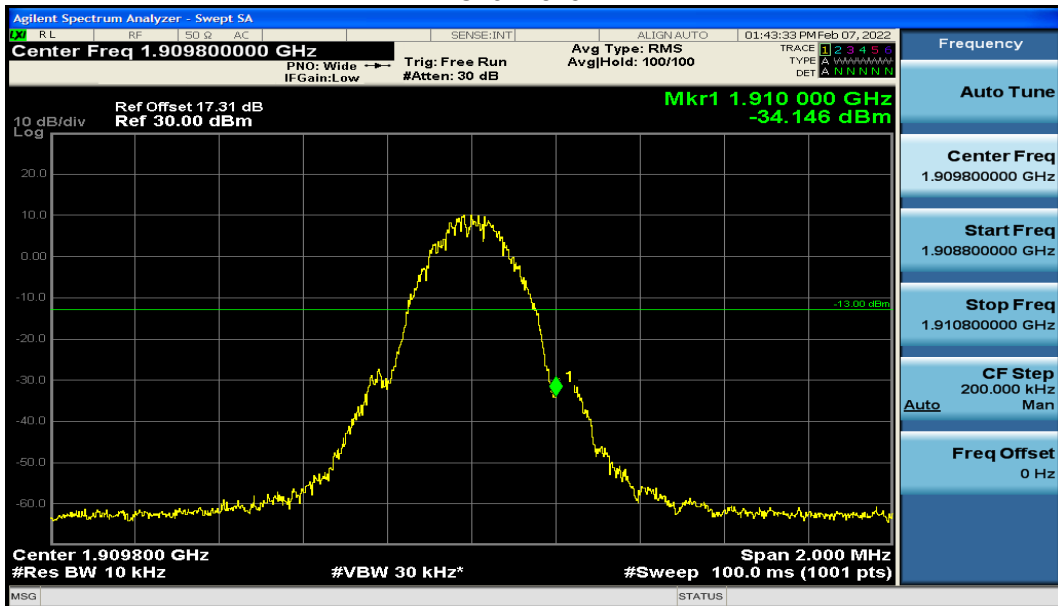

Channel 661

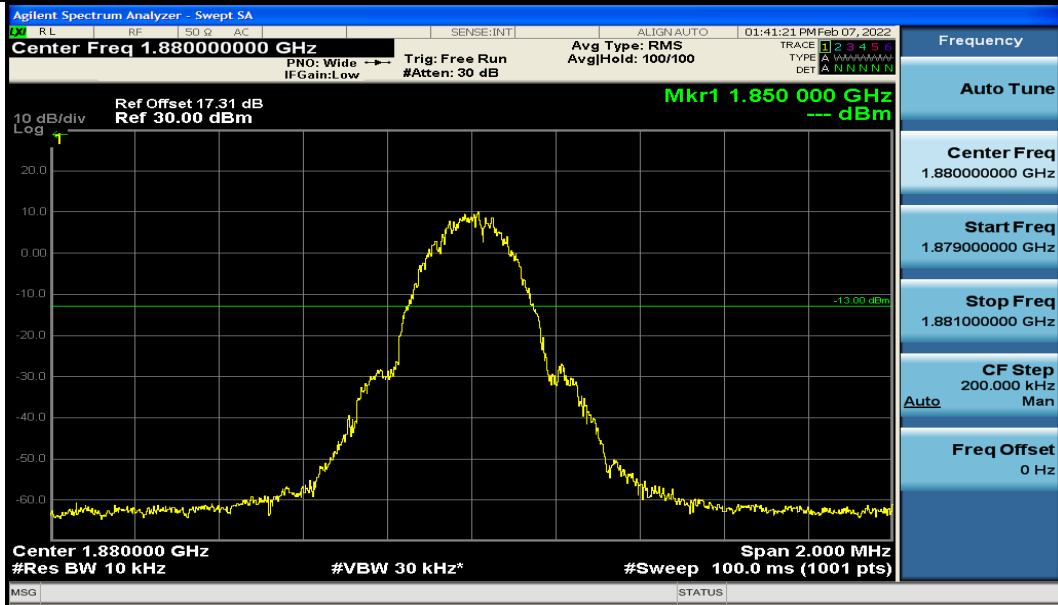

Channel 661

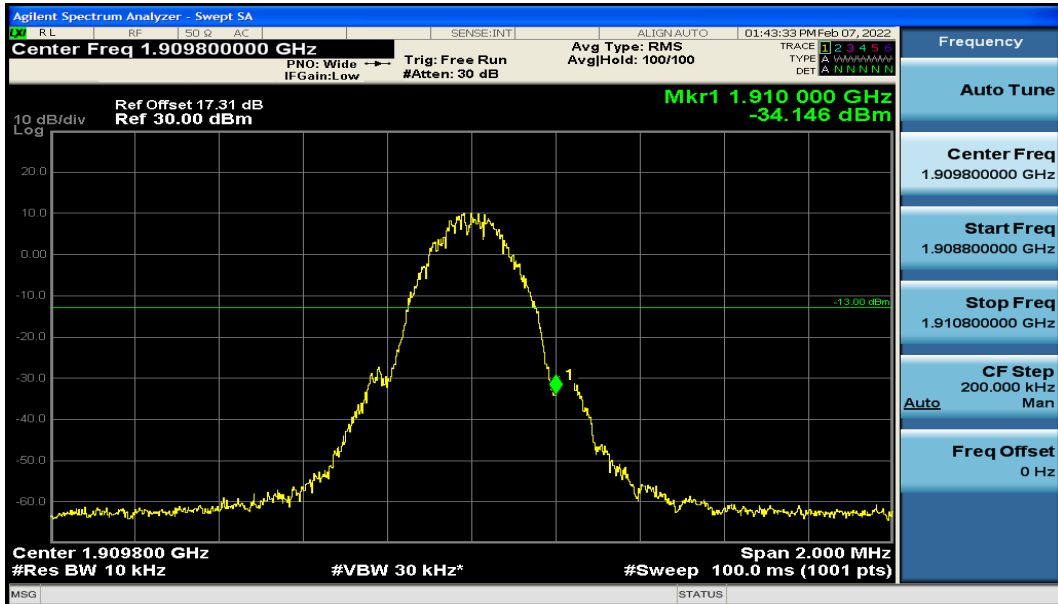

Channel 810

## 5. Frequency Stability

### PCS1900

GSM MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	-0.006	-0.003	-0.008
0	-0.005	-0.004	-0.007
+10	-0.003	0.002	-0.006
+30	0.004	0.009	0.004
+40	-0.002	-0.002	-0.001
+55	-0.006	0.003	-0.009
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	-0.005	-0.001	-0.005
HV	-0.005	0.000	-0.008



GPRS MODE:


Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	0.007	-0.007	-0.004
0	-0.001	-0.010	-0.004
+10	0.000	-0.007	-0.005
+30	0.009	-0.004	0.011
+40	0.008	-0.005	-0.001
+55	-0.001	-0.007	-0.004
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	-0.001	-0.009	-0.004
HV	-0.002	-0.010	-0.003

EGPRS (8PSK) MODE:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 512	Channel 661	Channel 810
-10	-0.005	-0.003	-0.004
0	-0.004	-0.005	-0.002
+10	-0.003	-0.002	0.000
+30	0.005	0.006	0.006
+40	-0.003	0.000	0.001
+55	-0.001	-0.005	0.002
Voltage	Test Result (ppm)@NT		
	Channel 512	Channel 661	Channel 810
LV	-0.002	0.002	0.004
HV	-0.001	-0.001	-0.002


**6. Peak-Average Ratio**  
**PCS1900**  
**GSM MODE:**

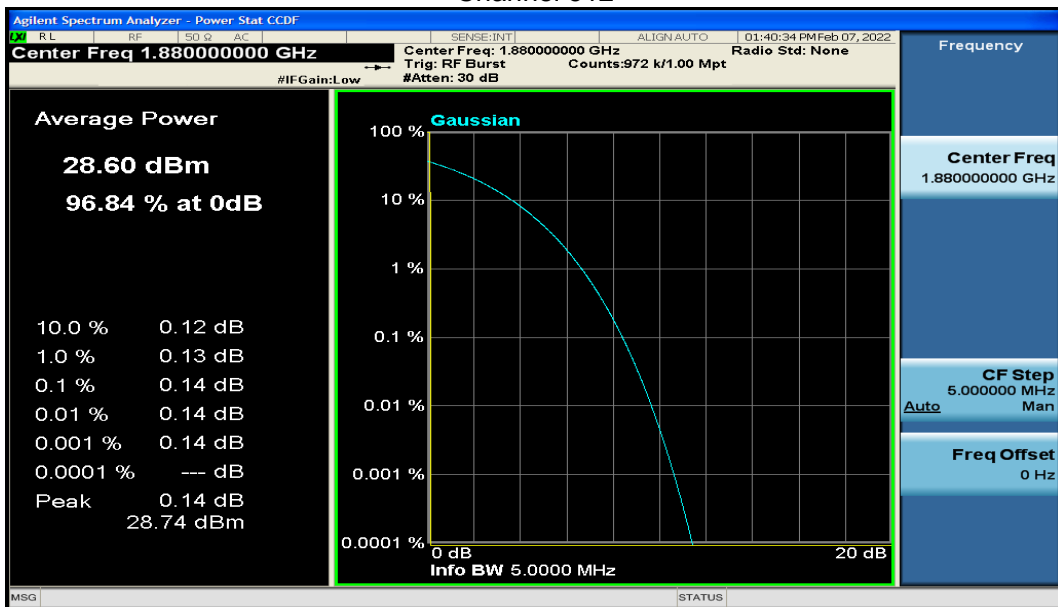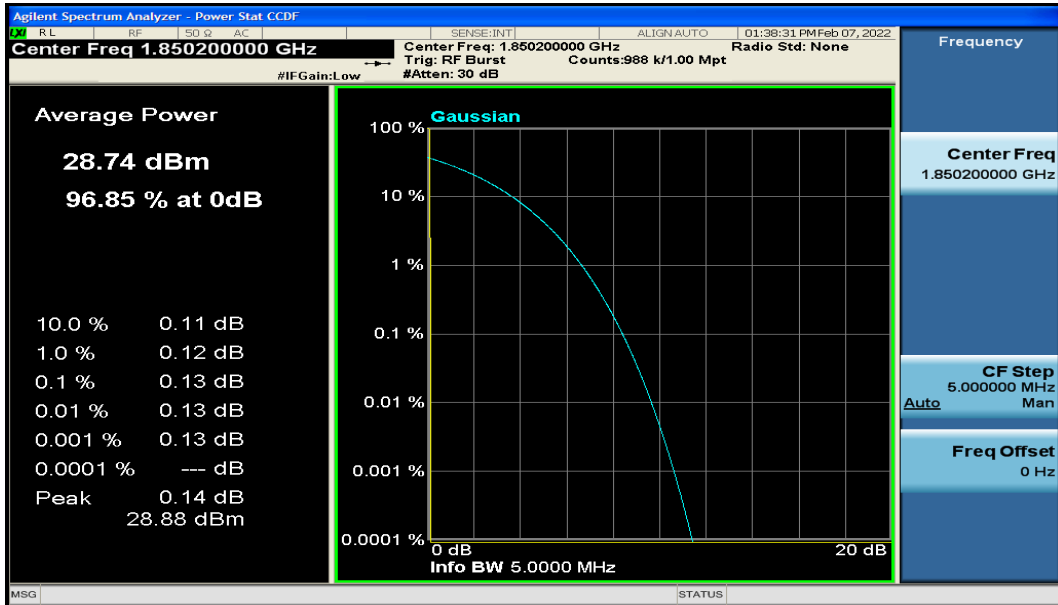


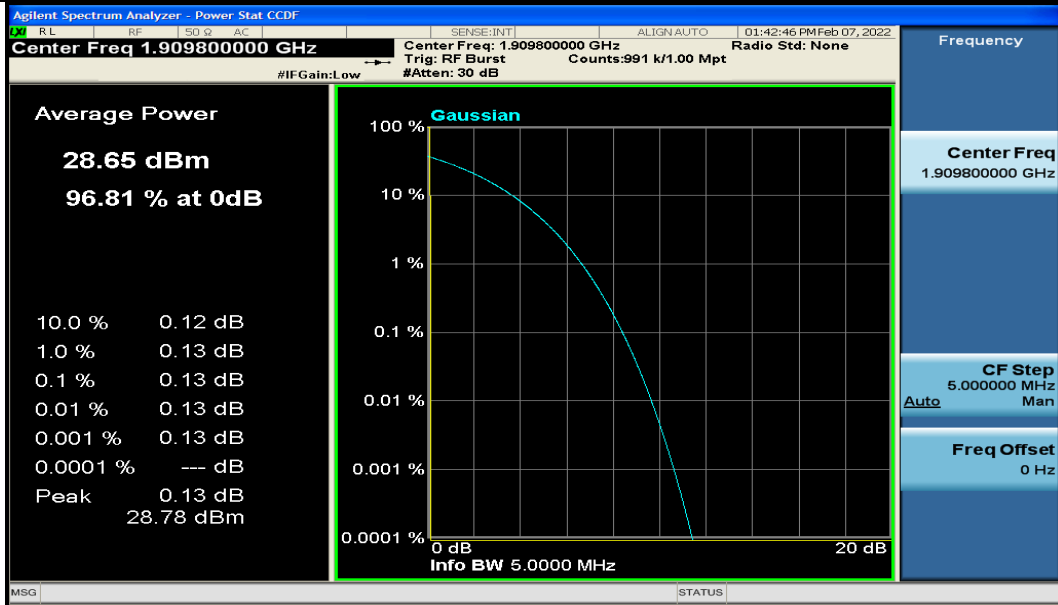


Channel 810


GPRS MODE:

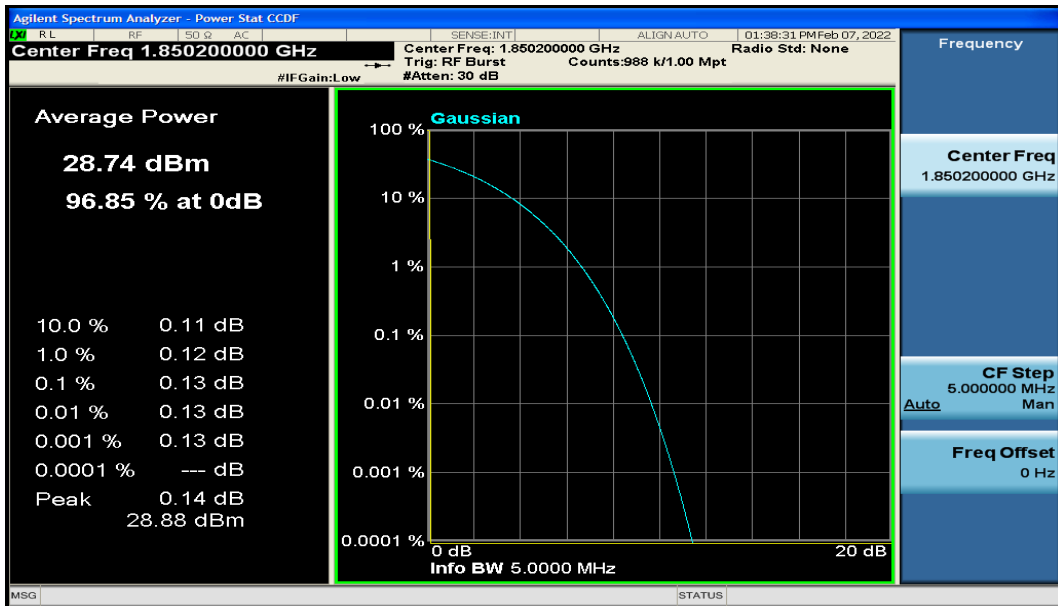


Channel 512

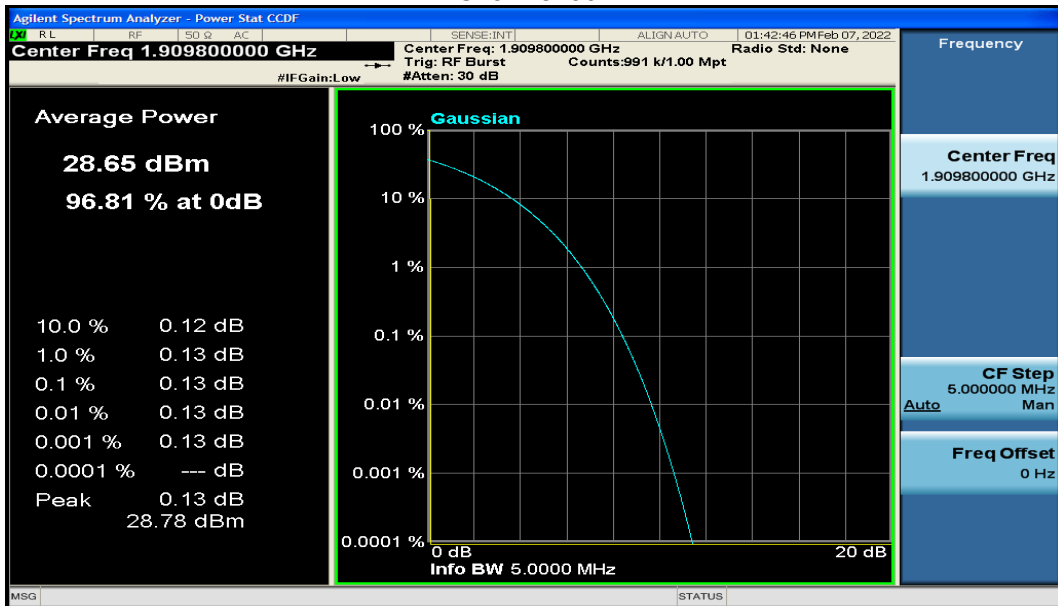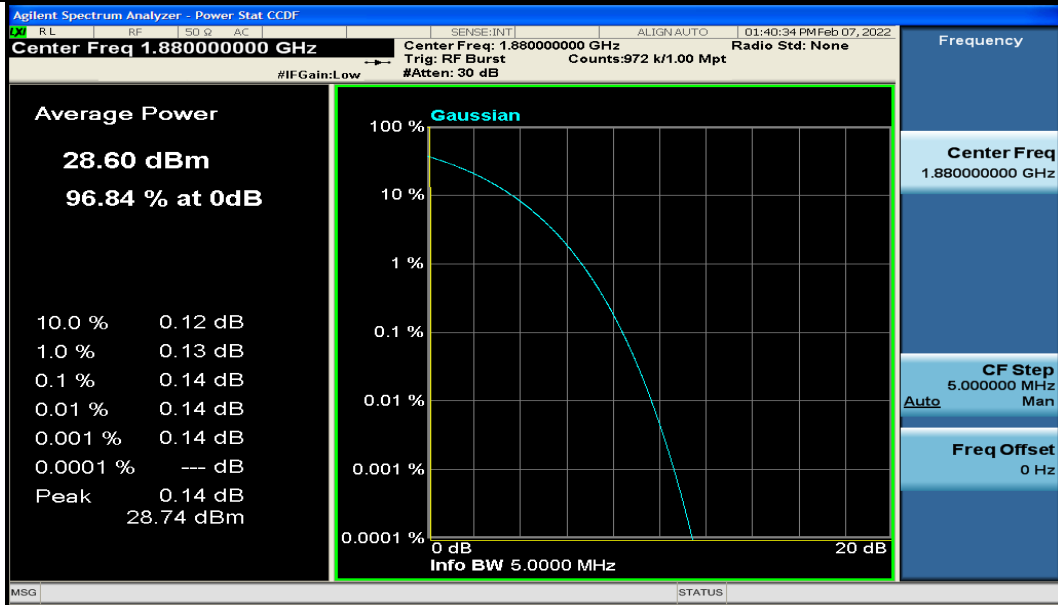

EGPRS (8PSK) MODE:

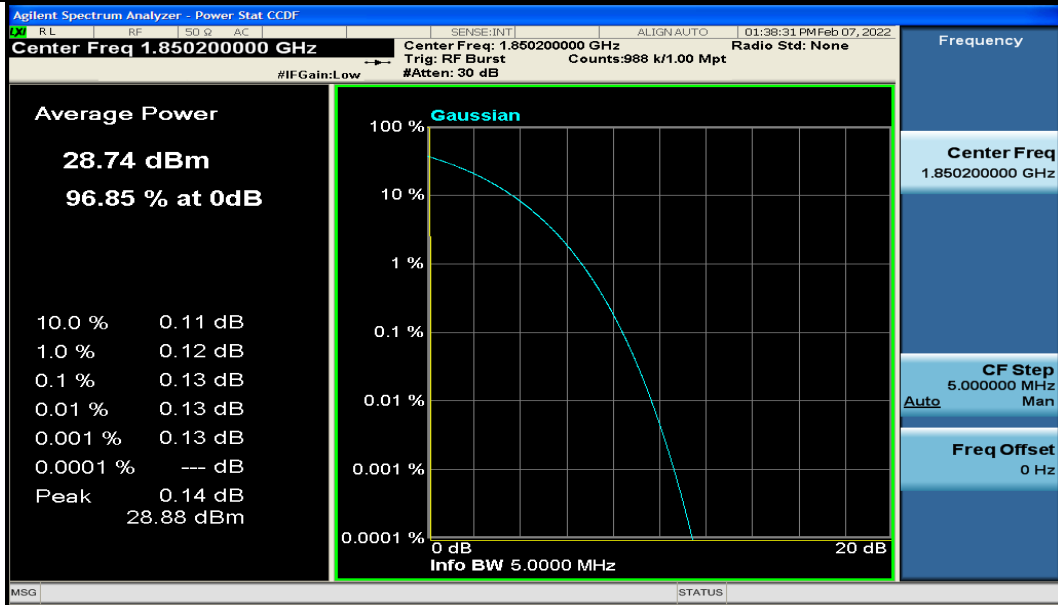


Channel 512

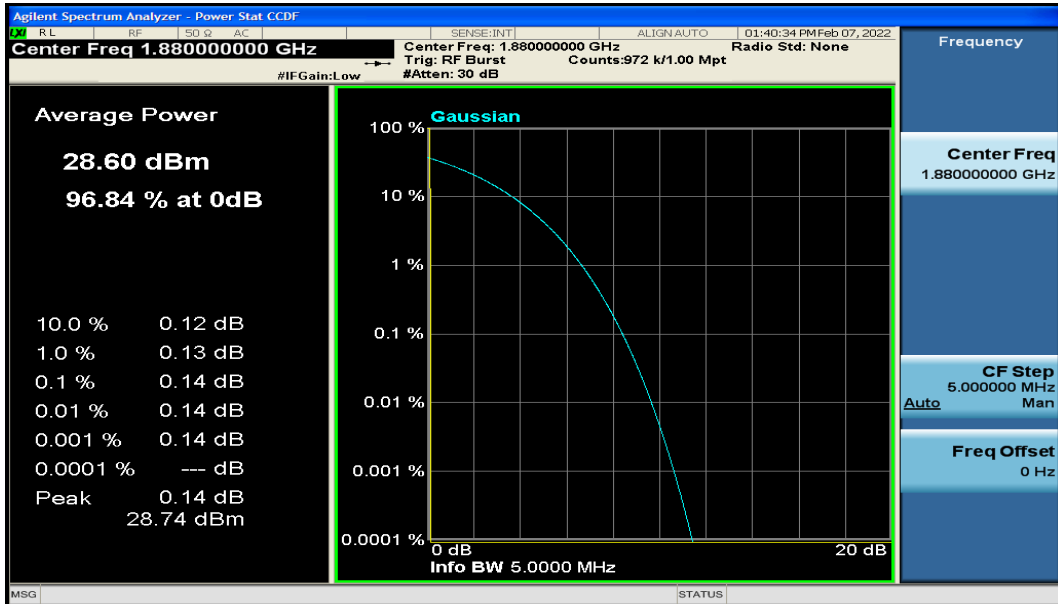

Channel 661



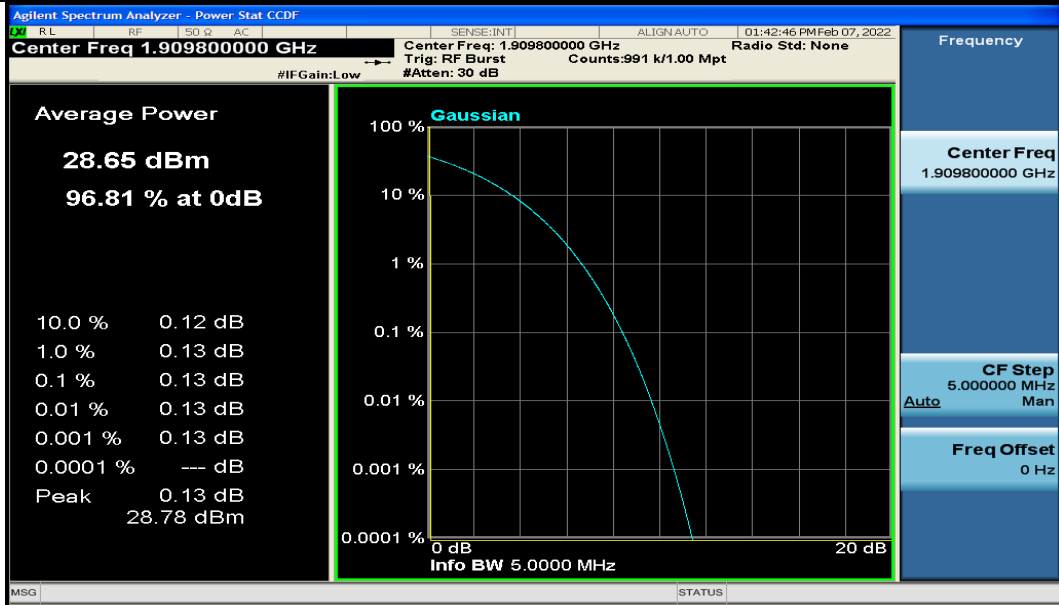

Channel 810

## 7. Effective Radiated Power and Effective Isotropic Radiated Power

### PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
1850.2	512	29.04	28.44	0.698
1880	661	28.92	28.32	0.679
1909.8	810	29.03	28.43	0.697

GPRS Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
1850.2	512	4Down1Up	23.09	22.49	0.177
1880	661		22.77	22.17	0.165
1909.8	810		22.58	21.98	0.158
1850.2	512	3Down2Up	25.00	24.40	0.275
1880	661		24.67	24.07	0.255
1909.8	810		24.57	23.97	0.249
1850.2	512	2Down3Up	27.14	26.54	0.451
1880	661		26.84	26.24	0.421
1909.8	810		26.75	26.15	0.412
1850.2	512	1Down4Up	28.82	28.22	0.664
1880	661		28.79	28.19	0.659
1909.8	810		28.92	28.32	0.679

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	Conducted Power (dBm)	ERP/EIRP (dBm)	ERP/EIRP (W)
1850.2	512	4Down1Up	22.99	22.39	0.173
1880	661		22.71	22.11	0.163
1909.8	810		22.55	21.95	0.157
1850.2	512	3Down2Up	24.92	24.32	0.270
1880	661		24.60	24.00	0.251
1909.8	810		24.49	23.89	0.245
1850.2	512	2Down3Up	27.08	26.48	0.445
1880	661		26.80	26.20	0.417
1909.8	810		26.72	26.12	0.409
1850.2	512	1Down4Up	28.77	28.17	0.656
1880	661		28.79	28.19	0.659
1909.8	810		28.89	28.29	0.675

## **APPENDIX B – TEST DATA OF RADIATED EMISSION**

### **Radiated Spurious Emissions**

Note: The worst channel results are reflected in the report.

Note: The scanned graph represents the maximum of both horizontal and vertical polarizations and is not a single horizontal or vertical polarization scan.

### **Radiated Spurious Emissions**

#### **850 Test result**

#### **GSM/GPRS MODE Channel 189:**

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
6094.710938	-53.54	-13	Vertical
6949.968750	-52.43	-13	Vertical
8101.687500	-55.38	-13	Vertical
8771.695313	-53.77	-13	Vertical
10755.515625	-53.81	-13	Vertical
12749.390625	-52.35	-13	Vertical

#### **EDGE (8PSK) MODE Channel 189:**

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
6094.101563	-53.27	-13	Vertical
6875.320313	-52.68	-13	Vertical
8111.742188	-55.32	-13	Vertical
8745.796875	-53.87	-13	Vertical
10778.976563	-53.60	-13	Vertical
12726.539063	-52.48	-13	Vertical

#### **1900 Test result**

#### **GSM/GPRS MODE Channel 661:**

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
6099.843750	-53.52	-13	Vertical
6888.750000	-52.66	-13	Vertical
8767.500000	-53.64	-13	Vertical
11519.062500	-52.69	-13	Vertical
15016.406250	-46.64	-13	Vertical
17947.968750	-39.99	-13	Vertical

**EDGE (8PSK) MODE Channel 661:**

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
6090.937500	-53.40	-13	Vertical
6892.031250	-52.75	-13	Vertical
8735.156250	-53.83	-13	Vertical
11505.937500	-52.66	-13	Vertical
15007.968750	-46.78	-13	Vertical
17950.312500	-40.15	-13	Vertical

---End of Test Report---