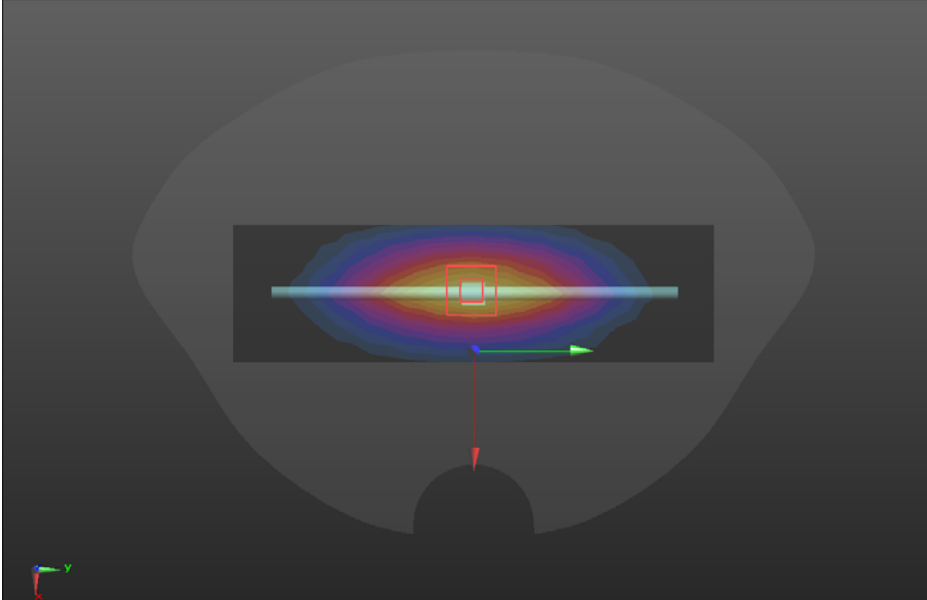
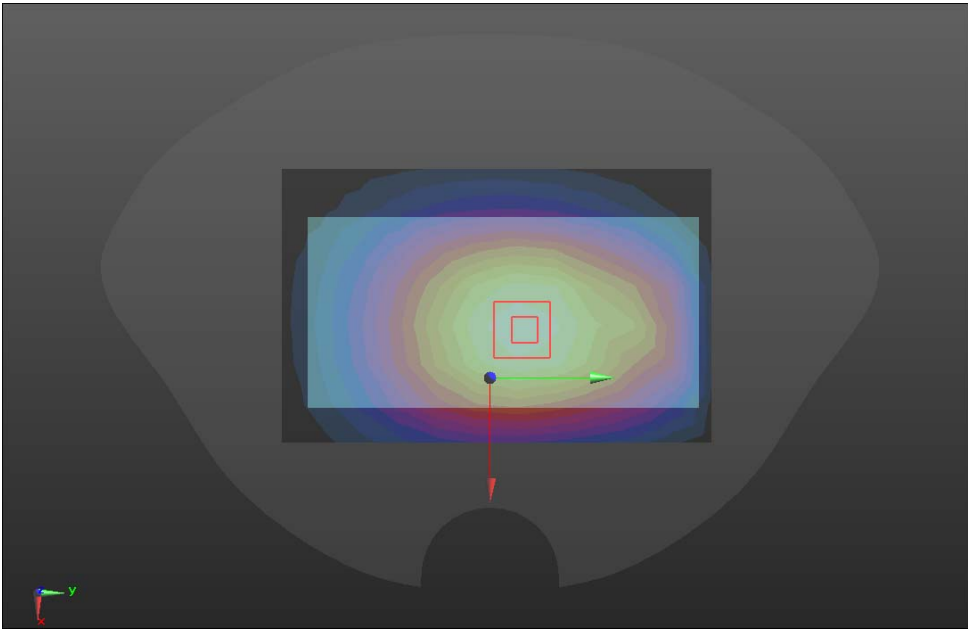


ANNEX A – TEST PLOTS

System check	750MHz(2022.01.19)
<p>Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 43.07$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72) @ 750 MHz; Calibrated: 10/20/2021 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 10/8/2021 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>750/Dipole 750MHz/Area Scan (5x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.83 W/kg</p> <p>750/Dipole 750MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 58.50 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.24 W/kg SAR(1 g) = 2.14 W/kg; SAR(10 g) = 1.47 W/kg Maximum value of SAR (measured) = 2.85 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

LTE Band 28

Body worn	Back (2022.01.19)
<p>Communication System: UID 0, LTE BAND28 (0); Frequency: 728 MHz; Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 728 \text{ MHz}$; $\sigma = 0.888 \text{ S/m}$; $\epsilon_r = 42.011$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> Probe: EX3DV4 - SN3708; ConvF(9.72, 9.72, 9.72); Calibrated: 10/20/2021 Sensor-Surface: 1.4mm (Mechanical Surface Detection) Electronics: DAE4 Sn720; Calibrated: 10/8/2021 Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) <p>BACK/LTE B28/Area Scan (8x12x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.535 W/kg</p> <p>BACK/LTE B28/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 25.02 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.591 W/kg SAR(1 g) = 0.44 W/kg; SAR(10 g) = 0.338 W/kg Maximum value of SAR (measured) = 0.544 W/kg</p> 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.