



RF TEST REPORT

Applicant ZTE Corporation

FCC ID SRQ-ZTEBLADEA321

Product LTE/WCDMA/GSM (GPRS)
Multi-Mode Digital Mobile Phone

Brand ZTE

Model ZTE BLADE A321
/ ZTE BLADE A320SE

Report No. RXA1706-0187RF04

Issue Date July 13, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Xianqing Li

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	8
4. Test Configuration	9
5. Test Case Results	10
5.1. Average Power Output –Conducted.....	10
5.2. 6dB Bandwidth	14
5.3. Band Edge	18
5.4. Power Spectral Density	20
5.5. Spurious RF Conducted Emissions.....	24
5.6. Radiated Emissions in the Restricted Band	30
5.7. Radiates Emission	35
5.8. Conducted Emission	63
6. Main Test Instruments.....	70
ANNEX A: EUT Appearance and Test Setup	71
A.1 EUT Appearance	71
A.2 Test Setup	73



Summary of measurement results

Number	Summary of measurements of results	Clause in FCC rules	Verdict
1	Maximum Average conducted output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Radiated Emissions in restricted frequency bands	15.247(d),15.205,15.209	PASS
7	Radiated Emissions	15.247(d),15.205,15.209	PASS
8	Conducted Emissions	15.207	PASS
Date of Testing: June 16, 2017~ July 7, 2017			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (recognition number is 428261)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com



2. General Description of Equipment under Test

Client Information

Applicant	ZTE Corporation
Applicant address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China
Manufacturer	ZTE Corporation
Manufacturer address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P.R.China

General information

EUT Description	
Model:	ZTE BLADE A321 / ZTE BLADE A320SE
IMEI:	865984030000177
Hardware Version:	ucuA
Software Version:	GEN_LA_A321_V1.0
Power Supply:	Battery/AC adapter
Antenna Type:	Internal Antenna
Antenna Gain:	2.20 dBi for 2412MHz/2402MHz 2.03 dBi for 2437MHz/2441MHz 1.62 dBi for 2462MHz/2480MHz
additional beamforming gain:	0 dB
Test Mode:	Bluetooth(Low Energy) 802.11b 802.11g, 802.11n(HT20);
Modulation Type:	BLE :GFSK 802.11b: DSSS; 802.11g/n(HT20): OFDM
Max. Conducted Power	Wi-Fi 2.4G :17.47dBm BLE : 0.52 dBm
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz BLE: 2402 ~2480 MHz
EUT Accessory	
Battery	Manufacturer: BYD Model: Li3822T43P4h736040 Power Rating: DC 3.8V, 2200mAh, Li-ion
Adapter	Manufacturer: DOCOKOM Model: STC-A508A-Z
USB Cable	99cm Cable, Shielded
Note: The information of the EUT is declared by the manufacturer.	

3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

- **FCC CFR47 Part 15C (2017) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**

4. Test Configuration

Test Mode

The EUT was programmed to be in continuously transmitting mode and the transmit duty cycle is not less than 98%.

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Band	Data Rate
Bluetooth(Low Energy)	1Mbps
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

5. Test Case Results

5.1. Average Power Output –Conducted


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. The Average detector is used. We use Maximum Average Conducted Output Power Level Method in KDB 558074 D01 for this test.

Test Setup



Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Average Output Power	$\leq 1W$ (30dBm)
----------------------	-------------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.44$ dB.


**Test Results**

Network Standards	Carrier frequency (MHz)	Average Output Power (dBm)	Limit (dBm)	Conclusion
802.11b	2412	16.57	30	PASS
	2437	17.47	30	PASS
	2462	14.91	30	PASS
802.11g	2412	12.39	30	PASS
	2437	13.19	30	PASS
	2462	10.37	30	PASS
802.11n HT20	2412	10.54	30	PASS
	2437	11.29	30	PASS
	2462	8.480	30	PASS
Bluetooth (Low Energy)	2402	-0.300	30	PASS
	2440	0.520	30	PASS
	2480	-1.120	30	PASS

802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412

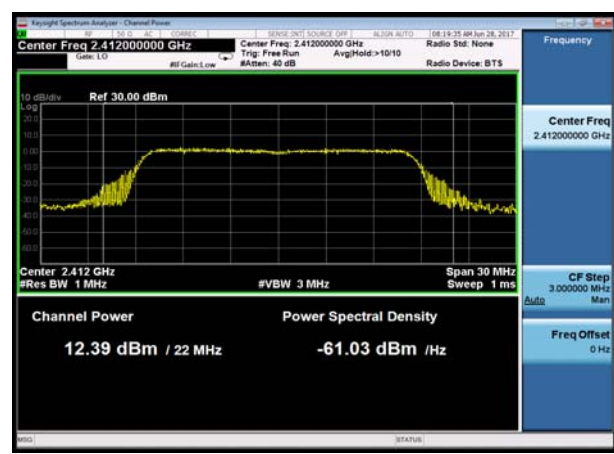


802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437

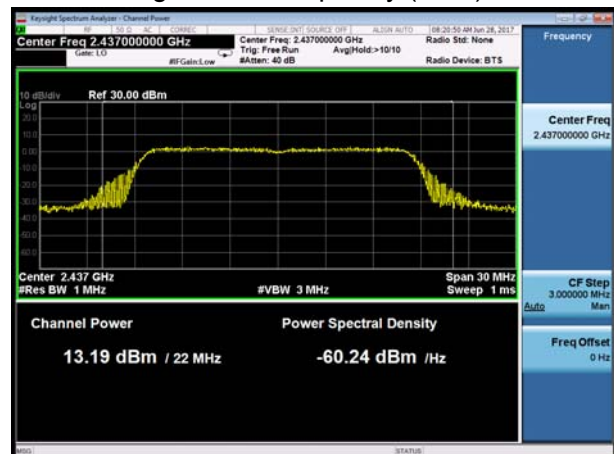


802.11b, Carrier frequency (MHz): 2462

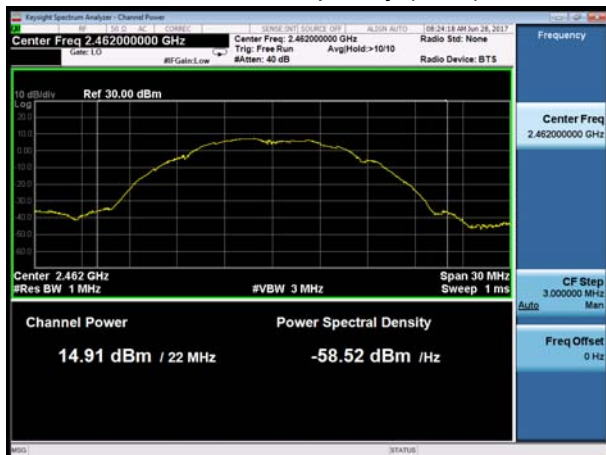


802.11g, Carrier frequency (MHz): 2462

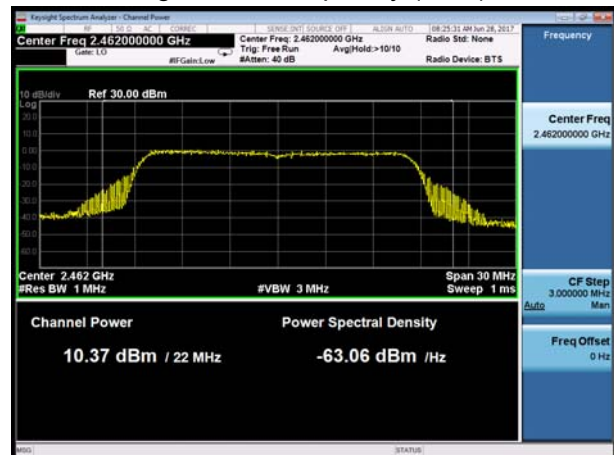


802.11n(HT20), Carrier frequency (MHz): 2412

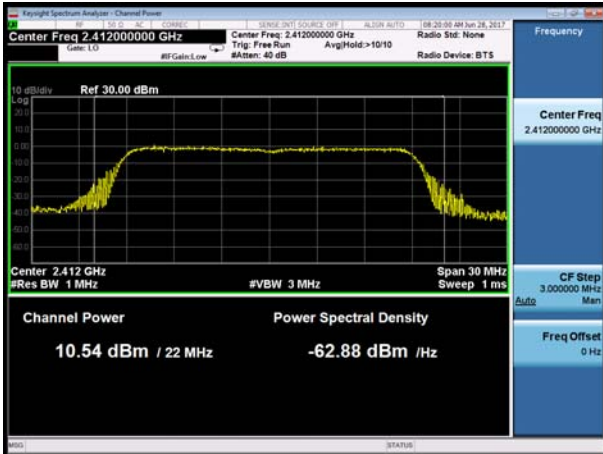


BLE Carrier frequency (MHz): 2402

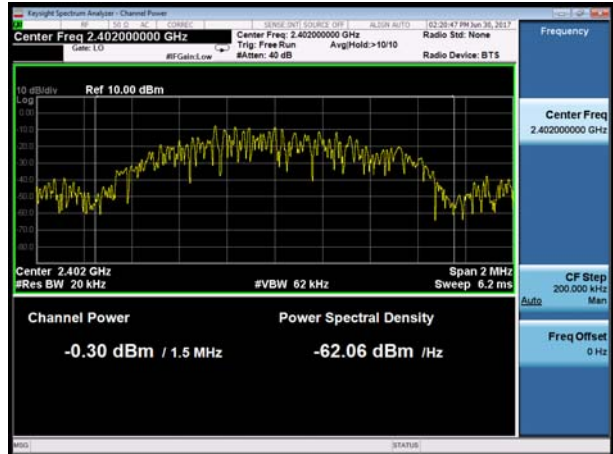


802.11n(HT20), Carrier frequency (MHz): 2437

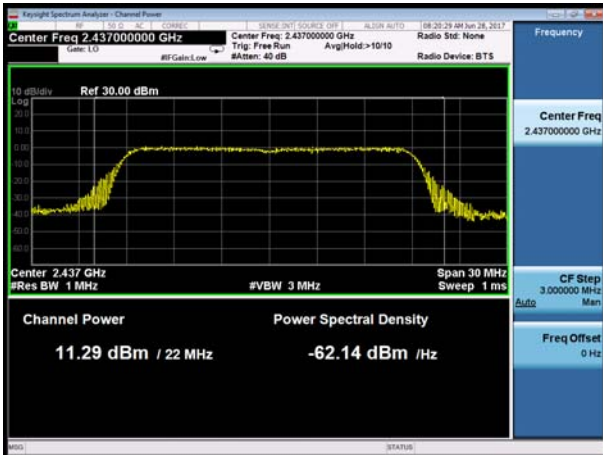

BLE Carrier frequency (MHz): 2440

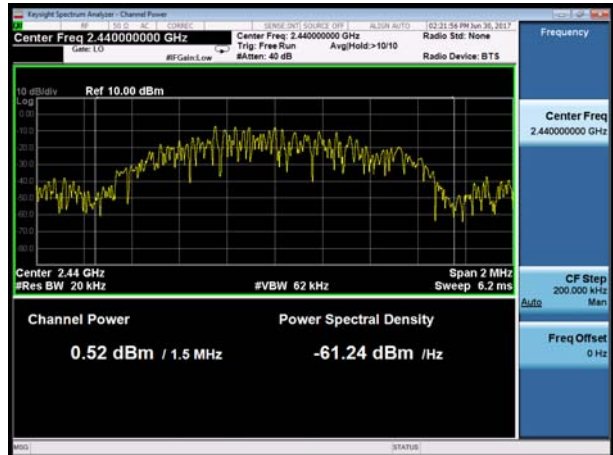

802.11n(HT20), Carrier frequency (MHz): 2462

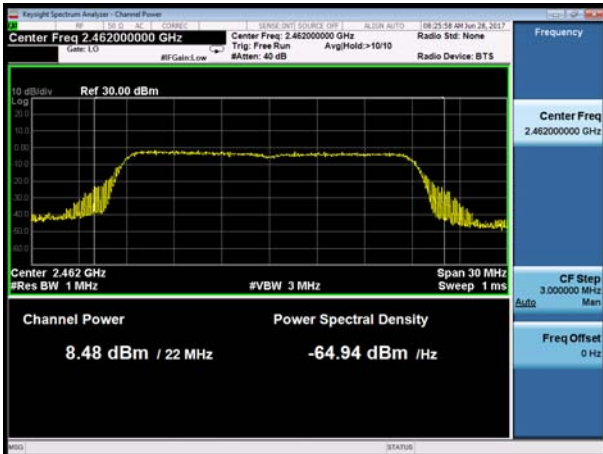

BLE Carrier frequency (MHz): 2480



5.2. 6dB Bandwidth


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer.

Test Setup



Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

minimum 6 dB bandwidth	≥ 500 kHz
------------------------	-----------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

**Test Results:**

Network Standards	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	13.357	8.093	500	PASS
	2437	13.402	8.580	500	PASS
	2462	13.165	8.570	500	PASS
802.11g	2412	16.605	16.380	500	PASS
	2437	16.585	16.380	500	PASS
	2462	16.566	16.400	500	PASS
802.11n HT20	2412	17.736	17.610	500	PASS
	2437	17.706	17.610	500	PASS
	2462	17.722	17.600	500	PASS
Bluetooth (Low Energy)	2402	1.0864	0.6977	500	PASS
	2440	1.0857	0.6953	500	PASS
	2480	1.0850	0.7038	500	PASS



802.11b, Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437

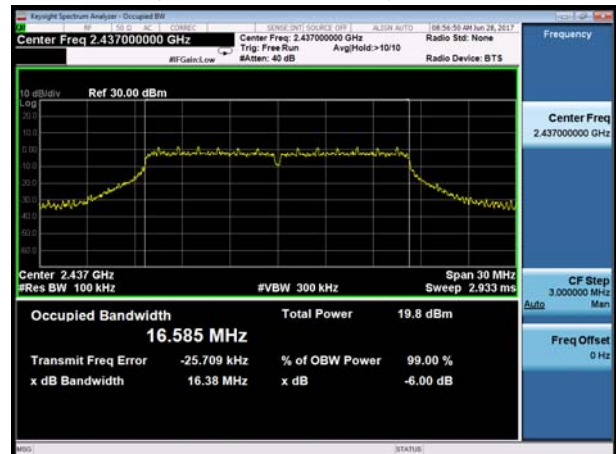


802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462

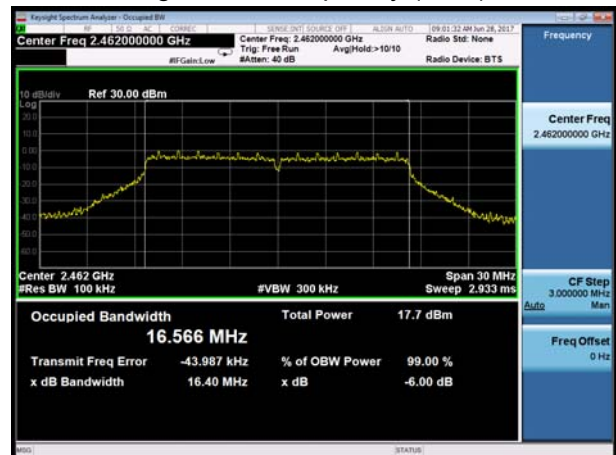

802.11n(HT20), Carrier frequency (MHz): 2412

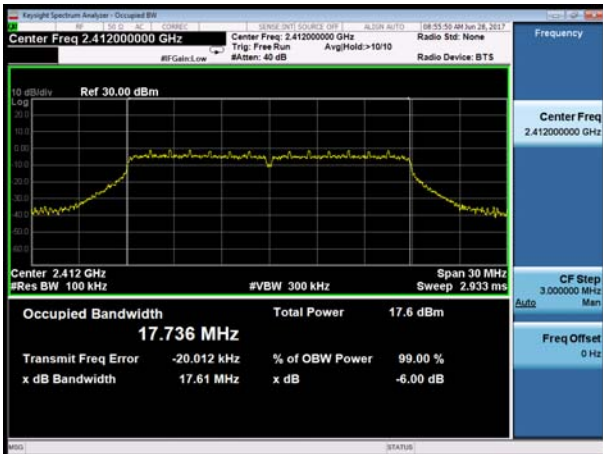

BLE Carrier frequency (MHz): 2402




802.11n(HT20), Carrier frequency (MHz): 2437



BLE Carrier frequency (MHz): 2440



802.11n(HT20), Carrier frequency (MHz): 2462

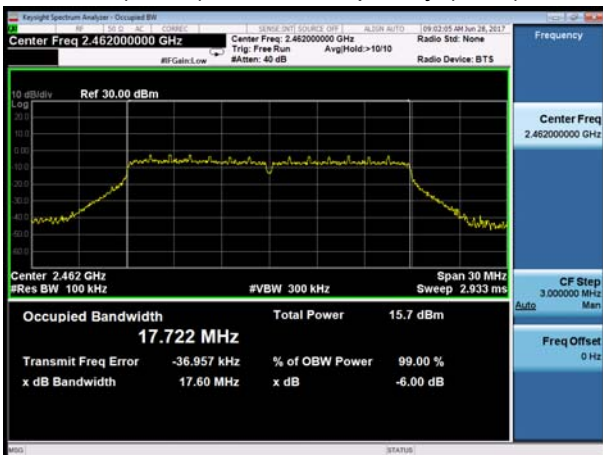

BLE Carrier frequency (MHz): 2480



5.3. Band Edge


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

Test Setup



Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.”


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
2GHz-3GHz	1.407 dB



Test Results: PASS

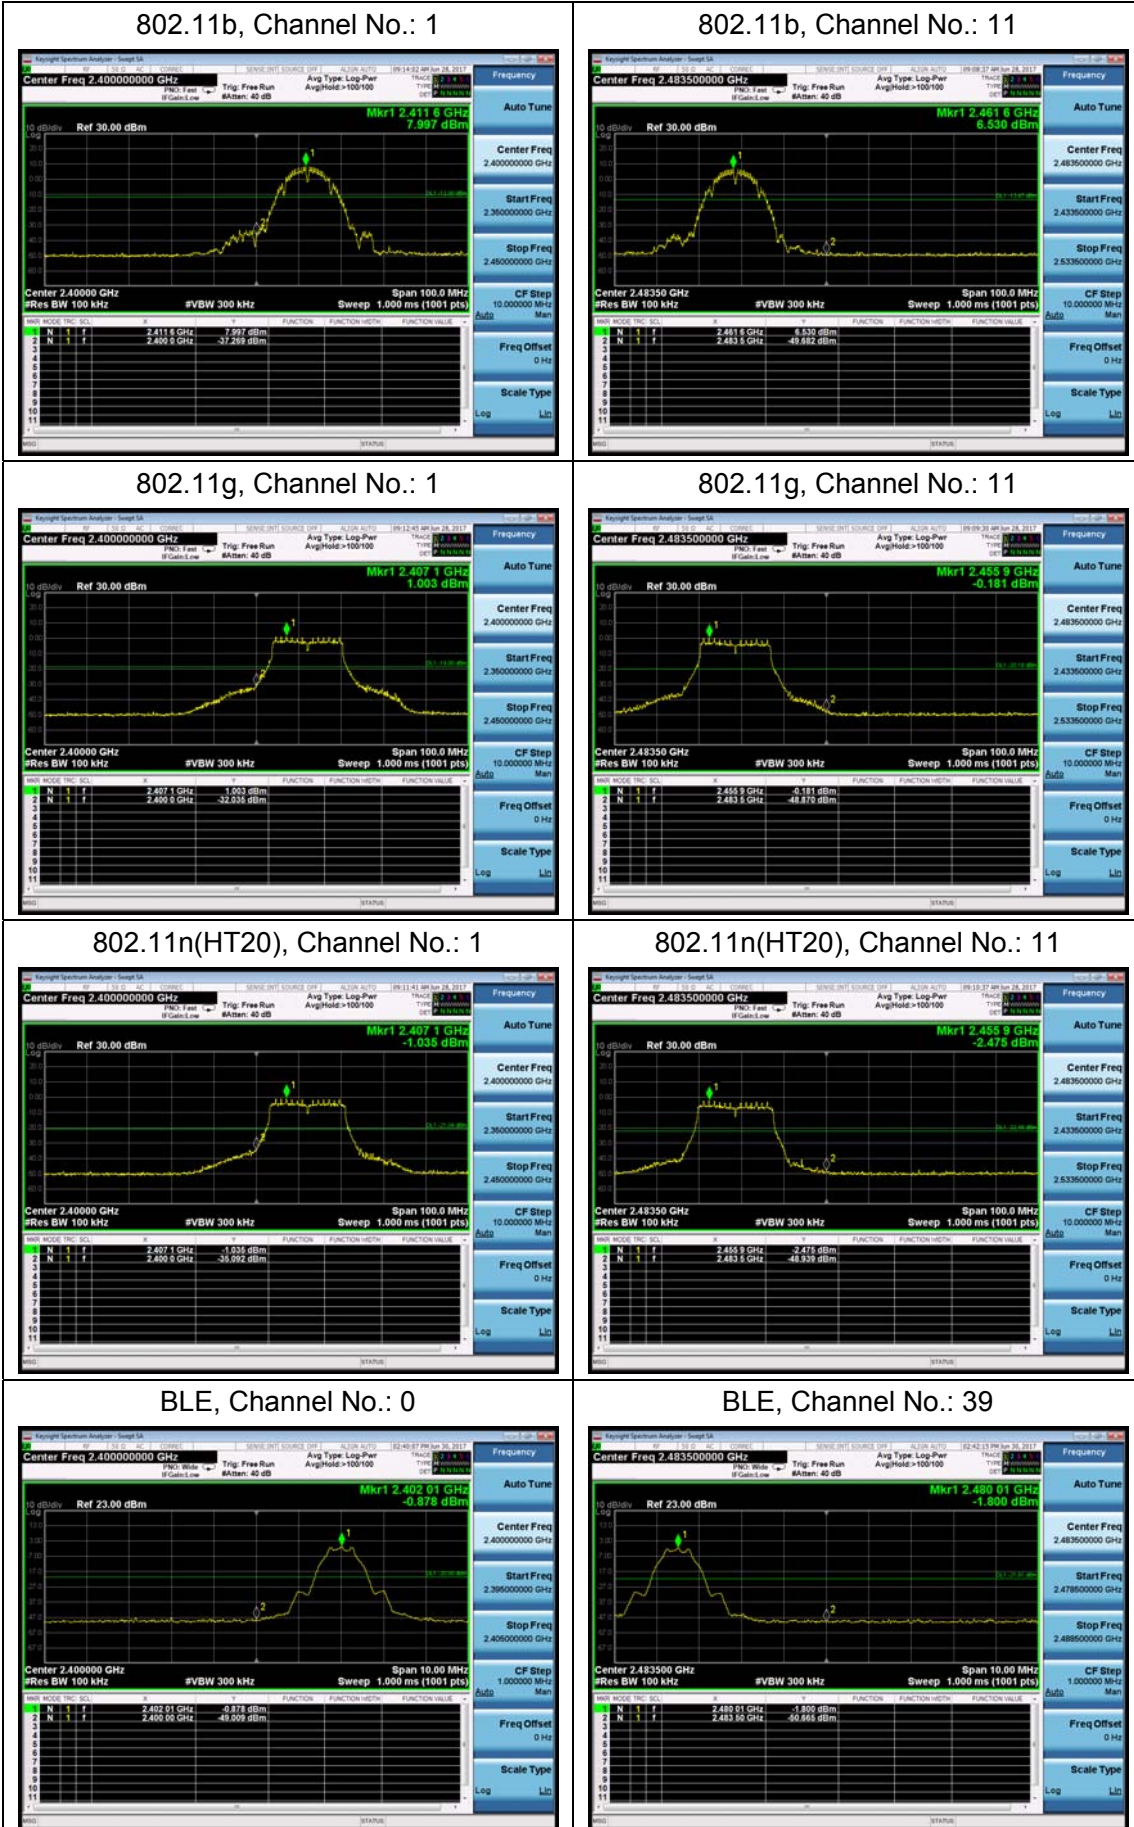

5.4. Power Spectral Density

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable.

RBW is set to 3 kHz and VBW is set to 10 kHz for BLE/ Wi-Fi 2.4G on spectrum analyzer.

Set the span to 1.5 times the DTS channel bandwidth. Sweep time = auto couple. Trace mode = max hold. The Average power spectral density is recorded.

Test setup



Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

Limits	≤ 8 dBm / 3kHz
--------	----------------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.75\text{dB}$.


**Test Results:**

Network Standards	Channel Number	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	-16.149	8	PASS
	6	-15.440	8	PASS
	11	-17.542	8	PASS
802.11g	1	-23.366	8	PASS
	6	-22.531	8	PASS
	11	-24.572	8	PASS
802.11n HT20	1	-25.509	8	PASS
	6	-25.068	8	PASS
	11	-26.681	8	PASS
Bluetooth (Low Energy)	0	-19.468	8	PASS
	19	-18.857	8	PASS
	39	-20.672	8	PASS

802.11b, Channel No.: 1



802.11g, Channel No.: 1

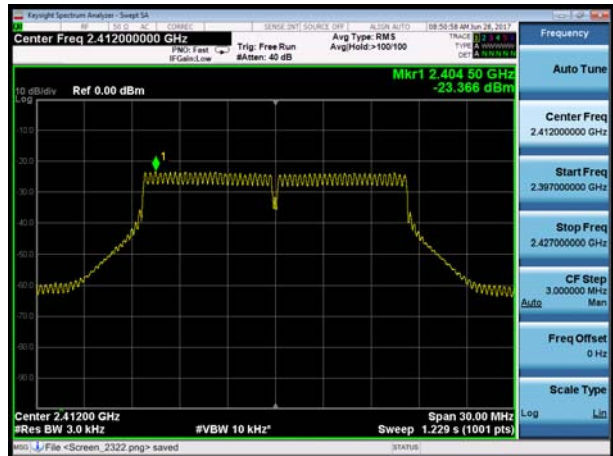

802.11b, Channel No.: 6



802.11g, Channel No.: 6








802.11b, Channel No.: 11



802.11g, Channel No.: 11



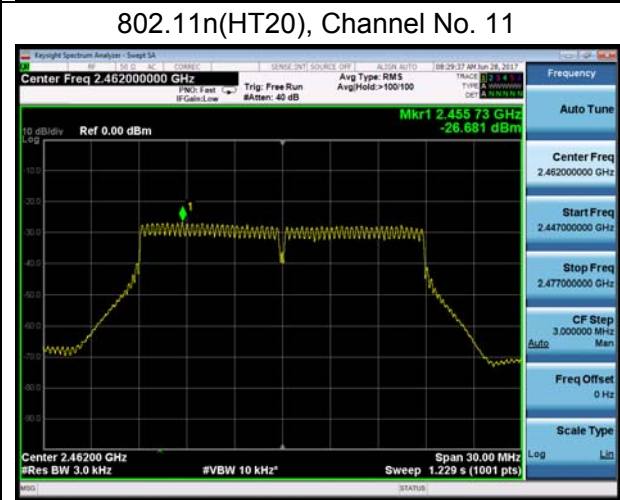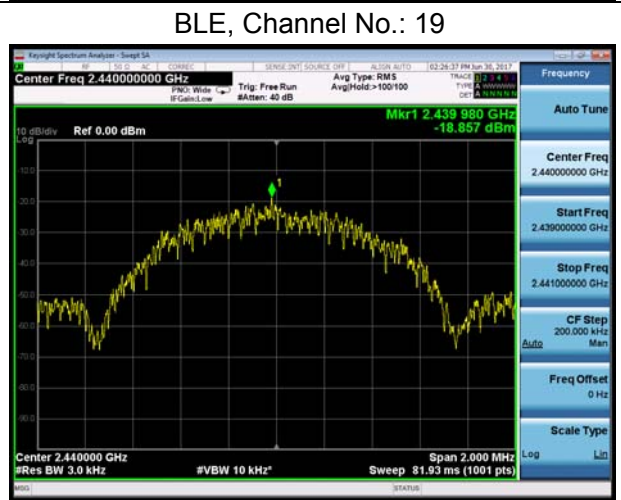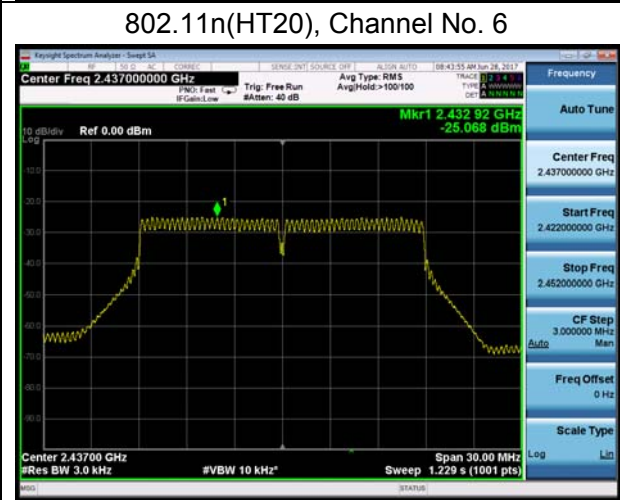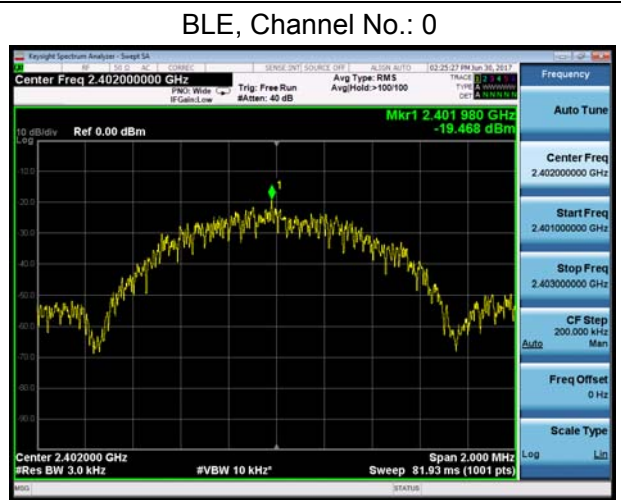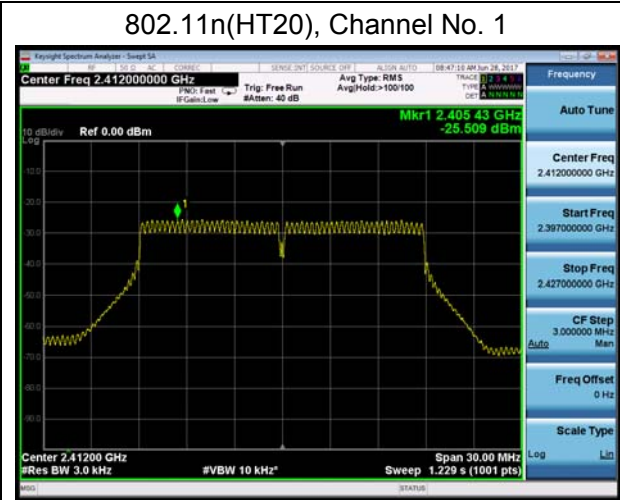

5.5. Spurious RF Conducted Emissions

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

Test setup



Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.”

Network Standards	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	4.595	-15.405
	2437	7.446	-12.554
	2462	5.452	-14.548
802.11g	2412	-1.762	-21.762
	2437	0.518	-19.482
	2462	-1.830	-21.830
802.11n HT20	2412	-3.850	-23.850
	2437	-1.797	-21.797
	2462	-6.256	-26.256
Bluetooth (Low Energy)	2402	-3.444	-23.444
	2440	-3.074	-23.074
	2480	-3.659	-23.659


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB


Test Results:

If disturbances were found more than 20dB below limit line, the mark is not required for the EUT.
The signal beyond the limit is carrier.

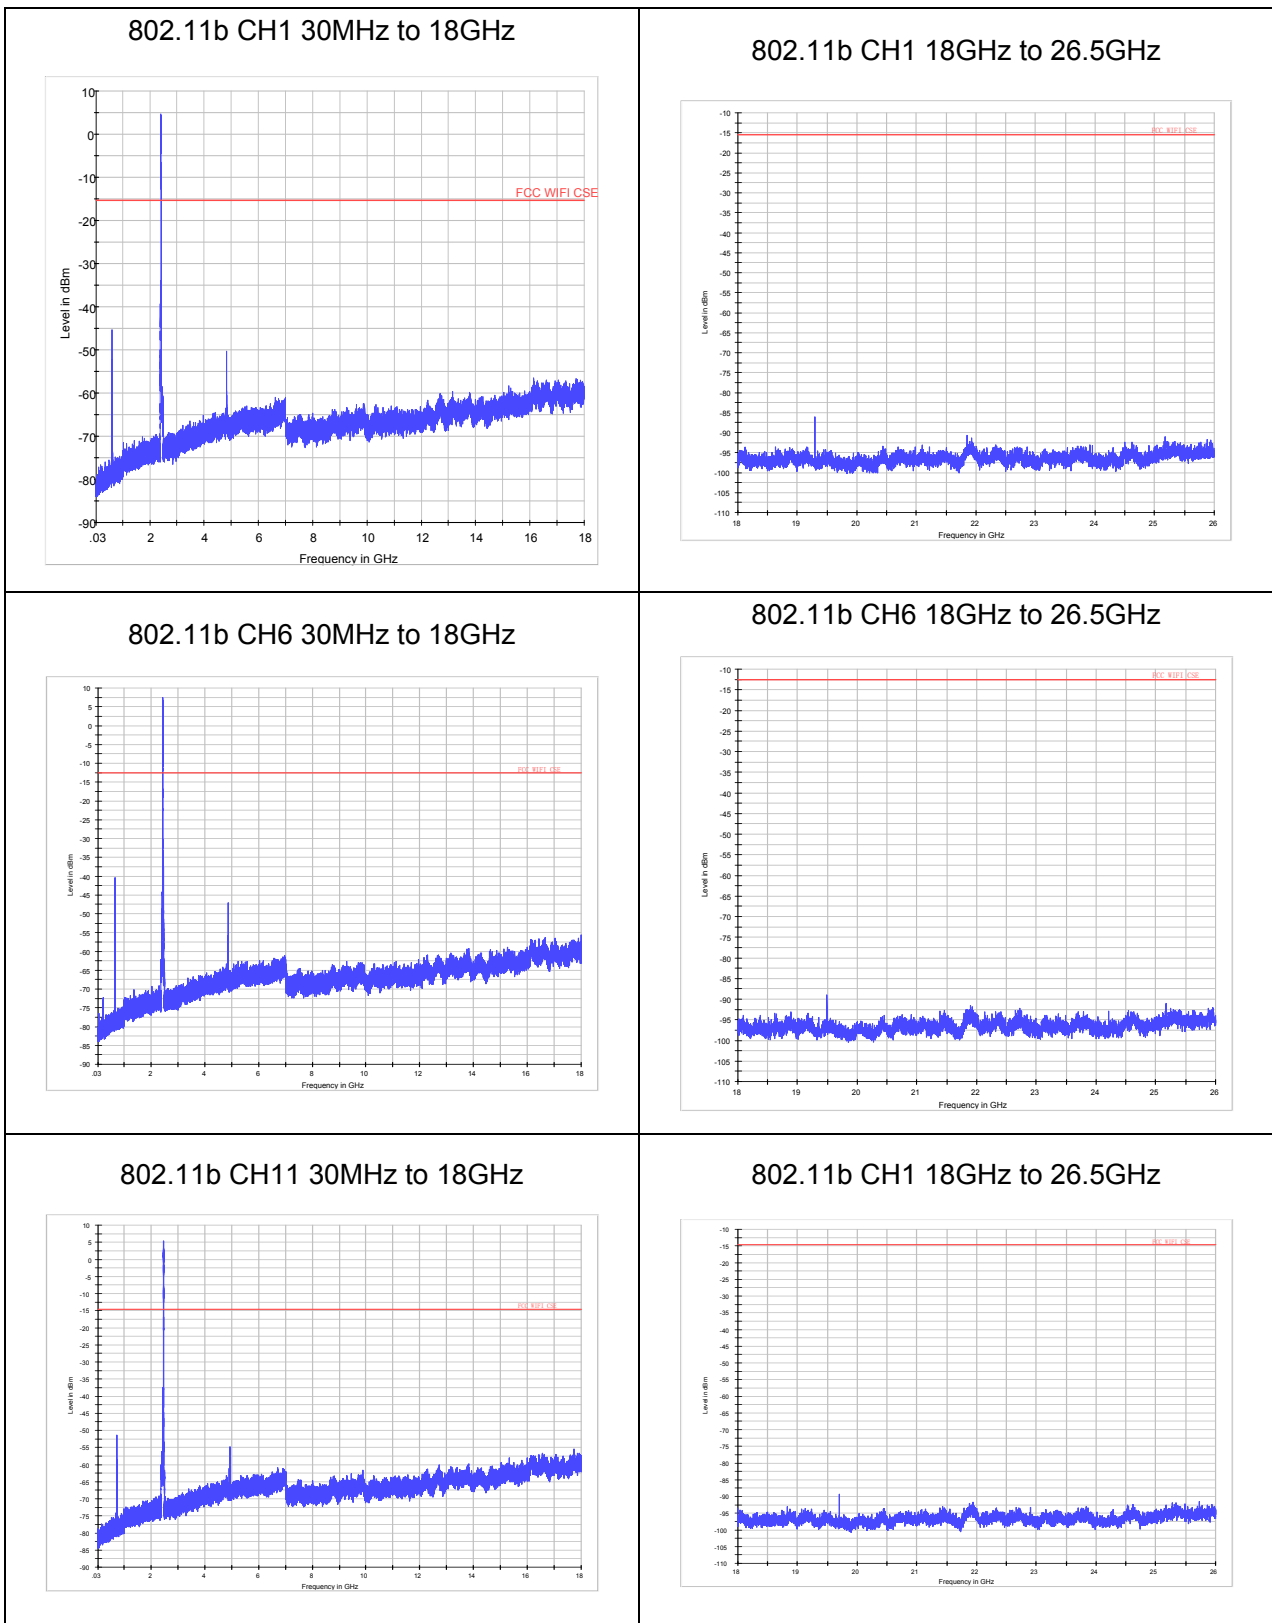





802.11g CH1 30MHz to 18GHz

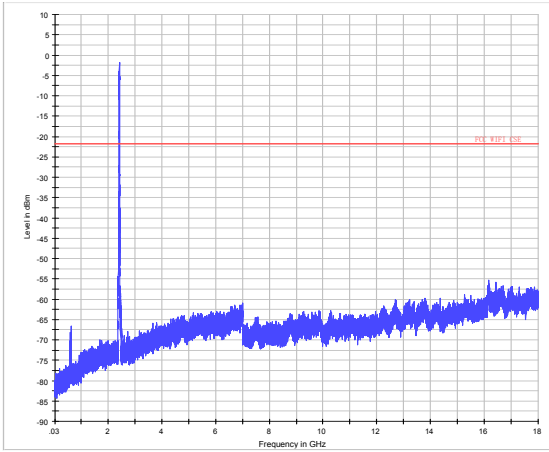


802.11g CH1 18GHz to 26.5GHz

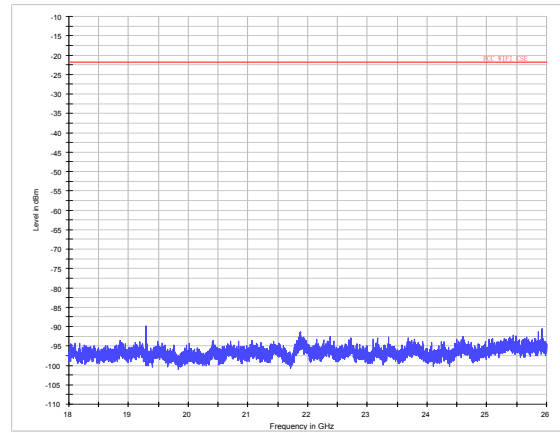


802.11g CH6 30MHz to 18GHz

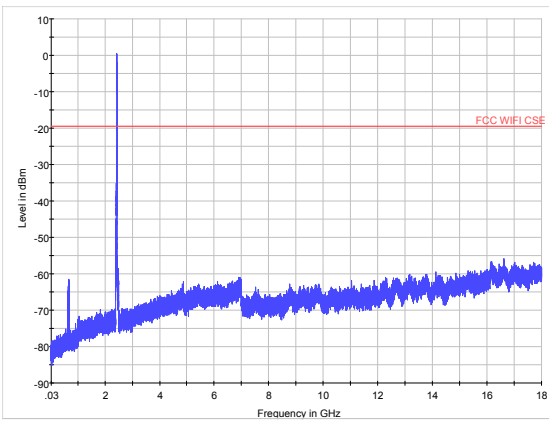


802.11g CH6 18GHz to 26.5GHz

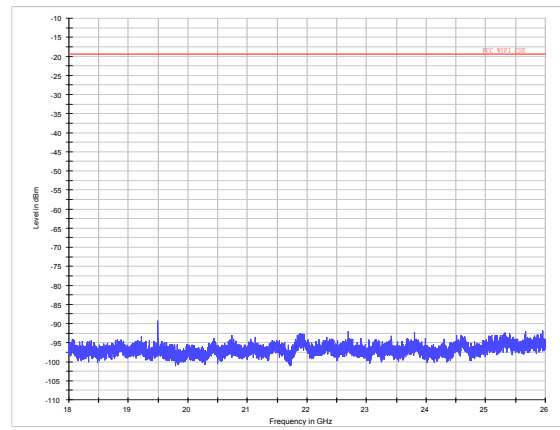


802.11g CH11 30MHz to 18GHz

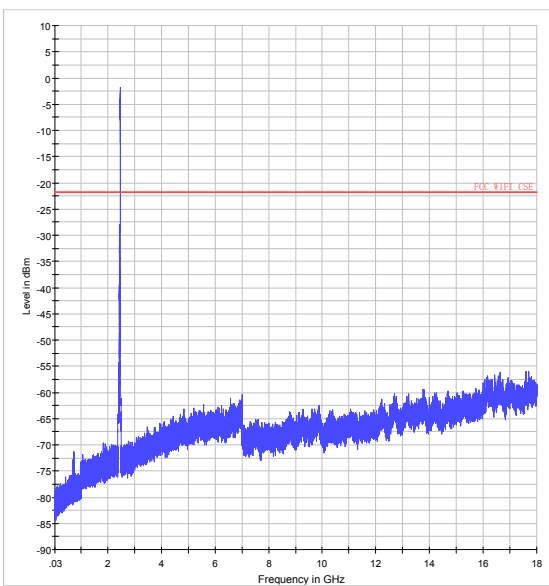


802.11g CH11 18GHz to 26.5GHz

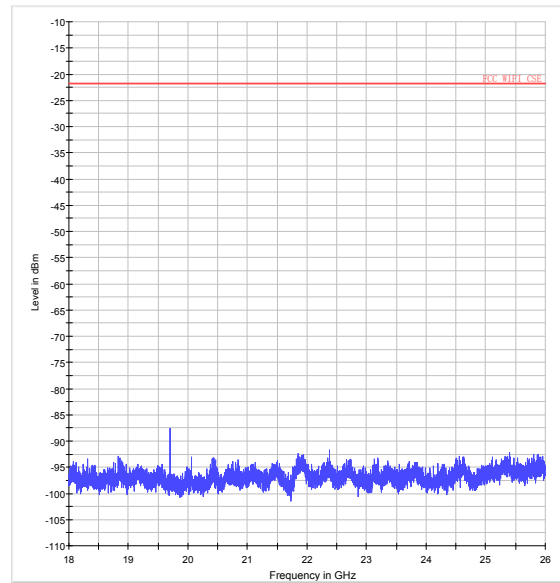


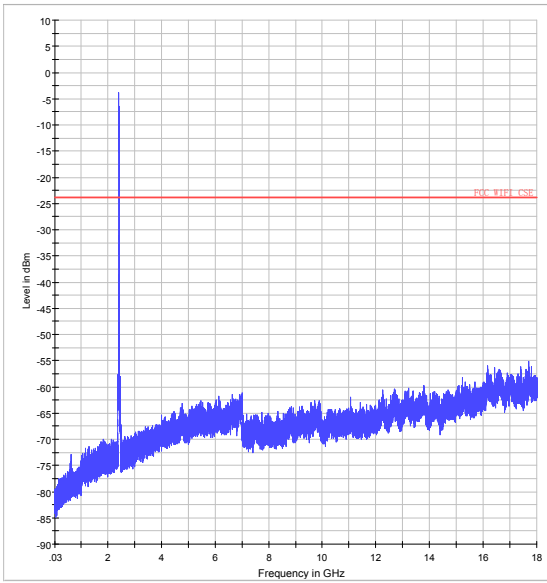


802.11n (HT20) CH1 30MHz to 18GHz

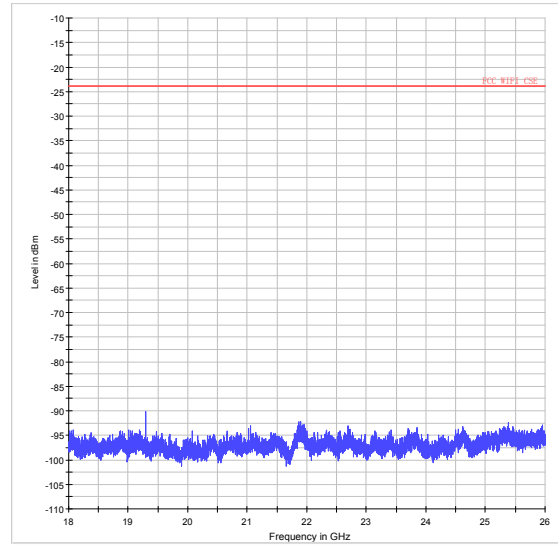


802.11n (HT20) CH1 18GHz to 26.5GHz

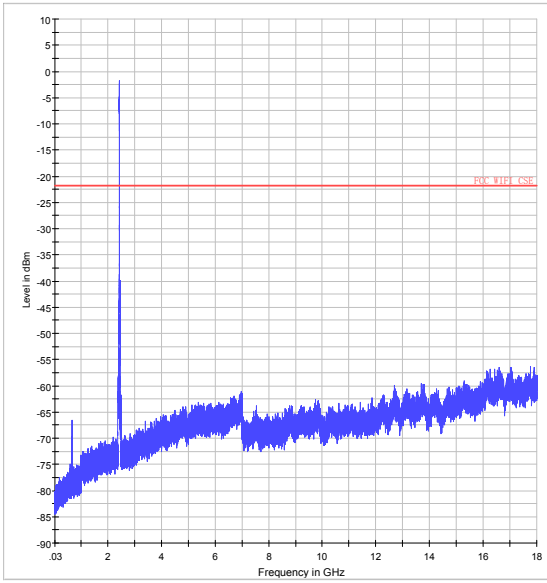


802.11n (HT20) CH6 30MHz to 18GHz

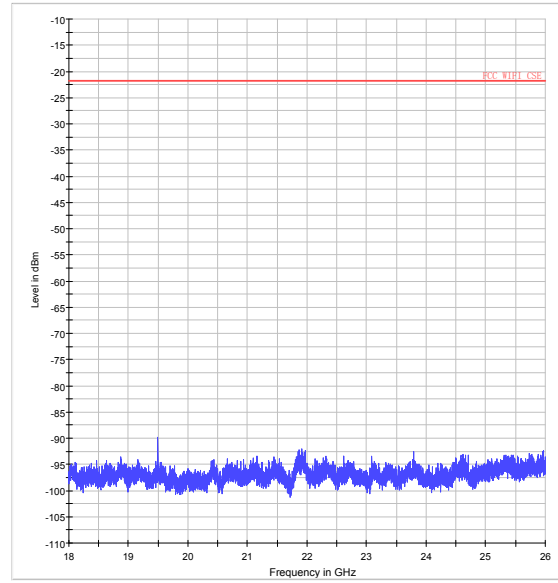

802.11n (HT20) CH6 18GHz to 26.5GHz

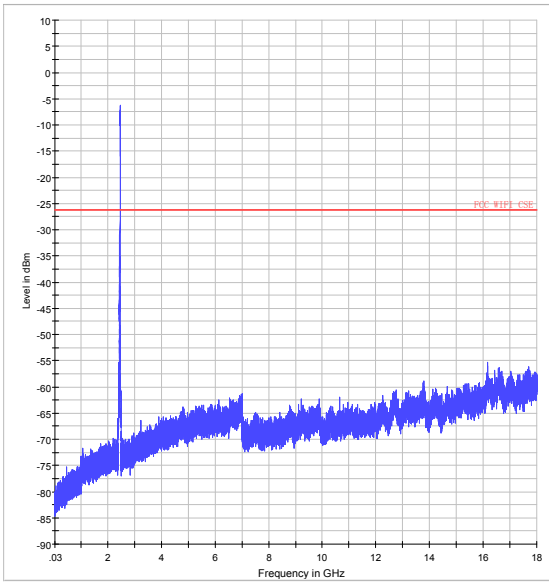

802.11n (HT20) CH11 30MHz to 18GHz

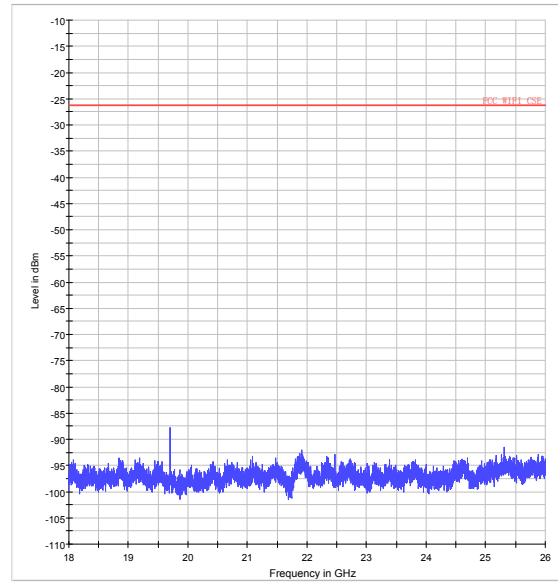

802.11n (HT20) CH11 18GHz to 26.5GHz

5.6. Radiated Emissions in the Restricted Band

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. RBW is set to 100kHz. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

Set the spectrum analyzer in the following:


- (a) PEAK: RBW=1MHz /VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz /VBW=3MHz / Sweep=AUTO

This setting method can refer to **KDB 558074**.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Y axis) and the antenna is vertical.

The test is in transmitting mode.

Test setup

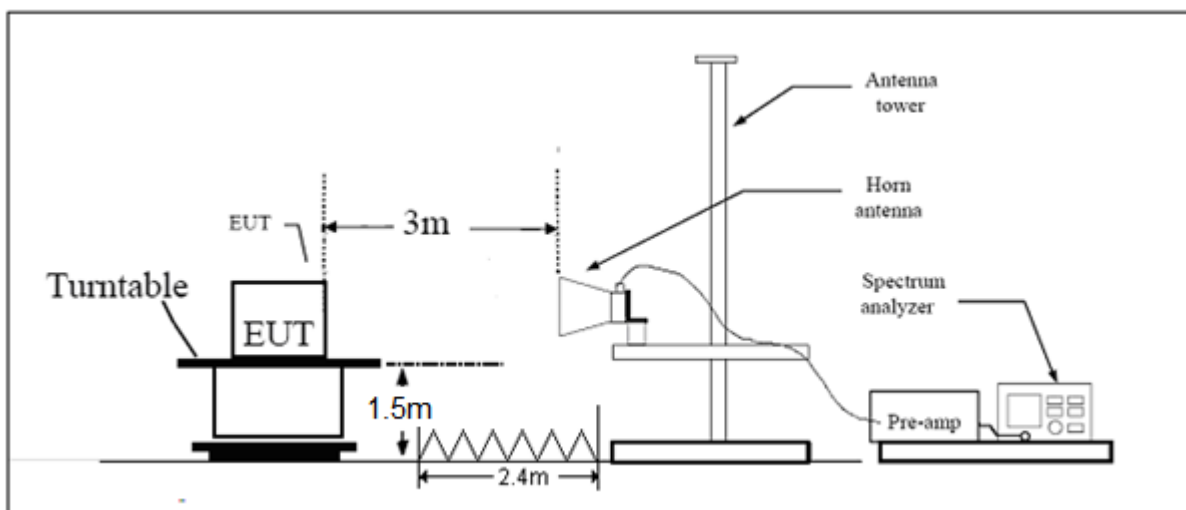

Note: Area side: 2.4mX3.6m

Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m


Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.


Test Results: PASS

The signal beyond the limit is carrier.


802.11b-Channel 1: Peak

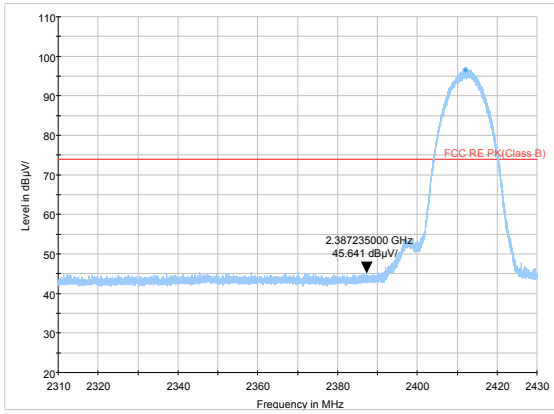


802.11b-Channel 11: Peak

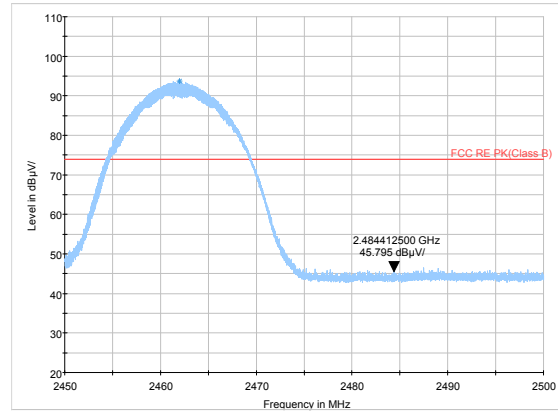


802.11b-Channel 1: Average

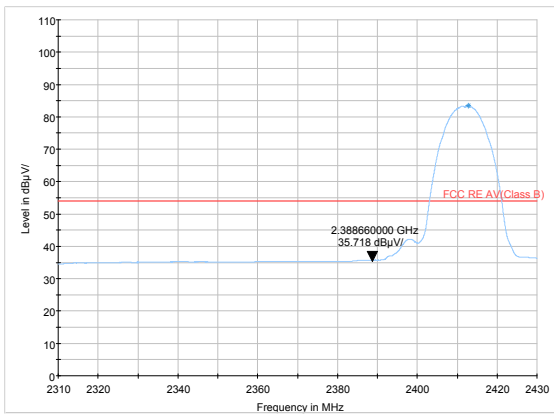


802.11b-Channel 11: Average

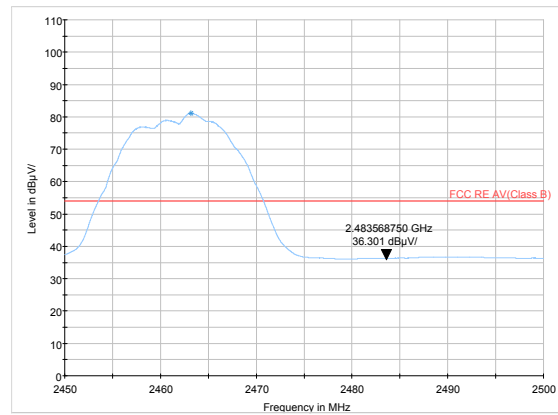

802.11g-Channel 1: Peak

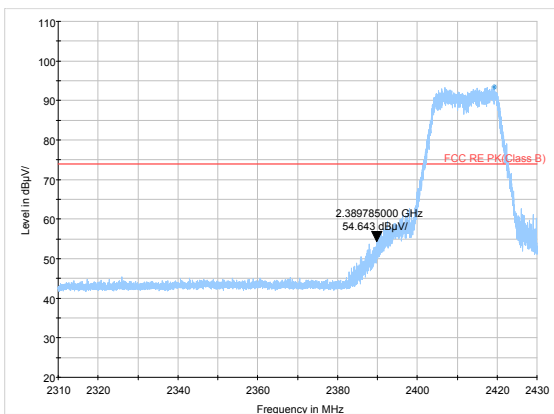


802.11g-Channel 11: Peak

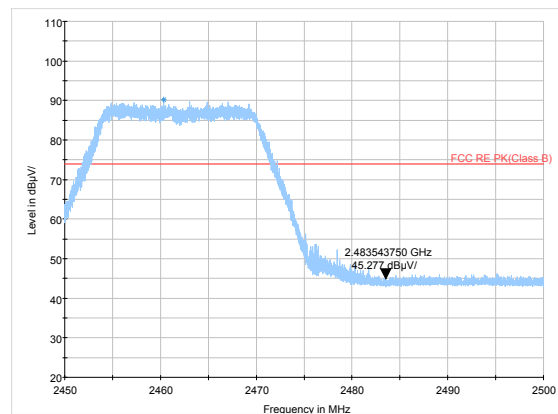





802.11g-Channel 1: Average

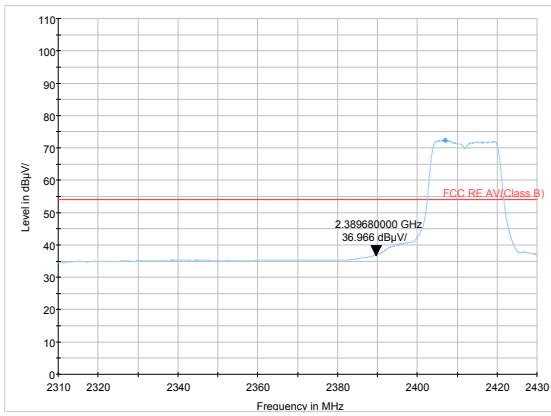


802.11g-Channel 11: Average

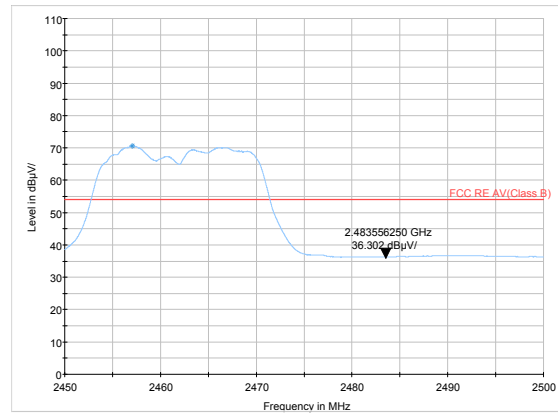


802.11n HT20 -Channel 1: Peak

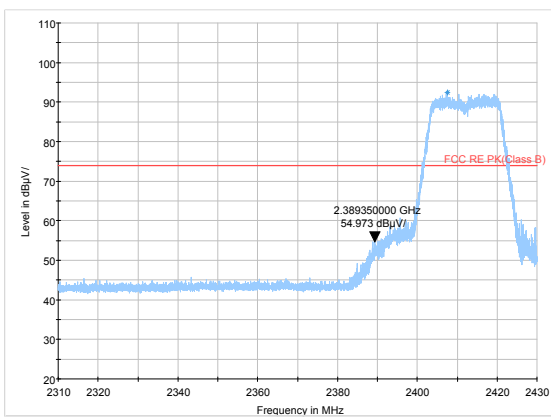


802.11n HT20-Channel 11: Peak

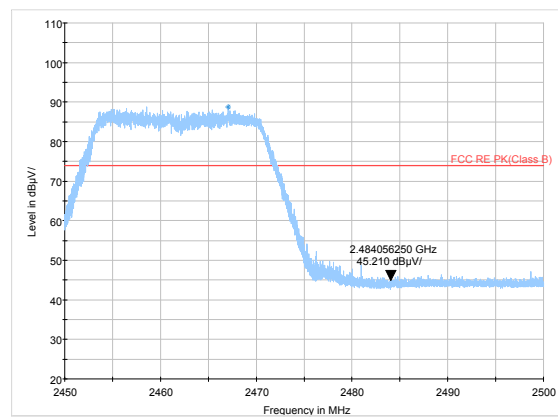

802.11n HT20-Channel 1: Average

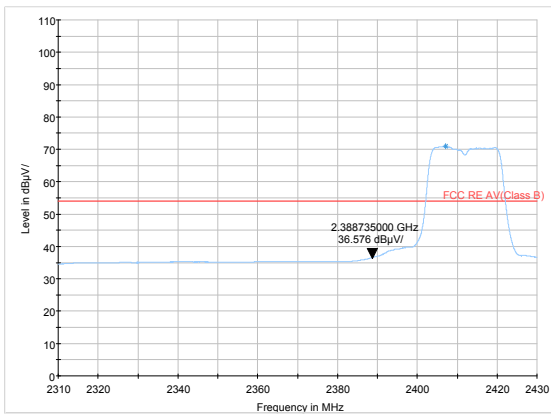


802.11n HT20-Channel 11: Average

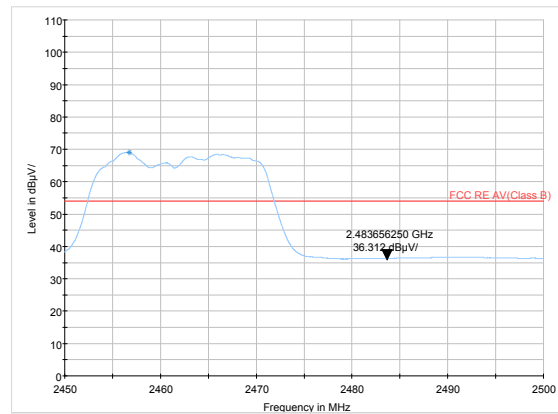





BLE -Channel 0: Peak

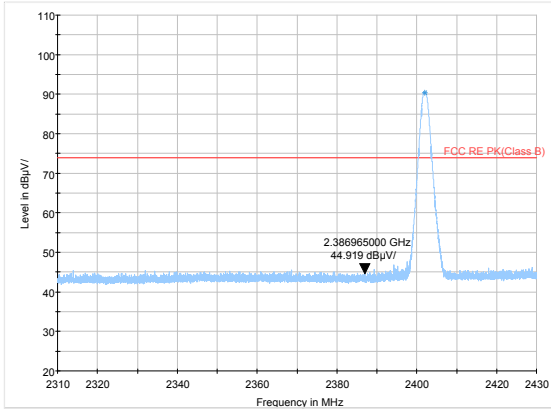


BLE -Channel 39: Peak

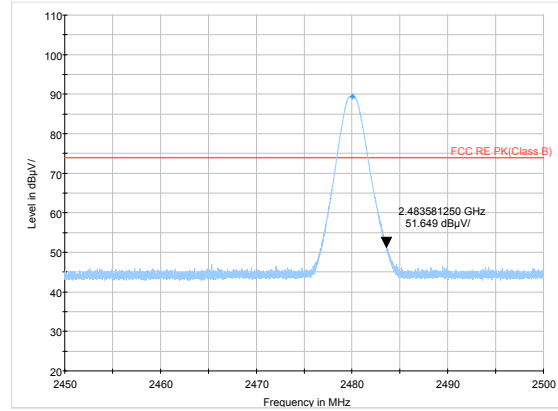

BLE -Channel 0: Average

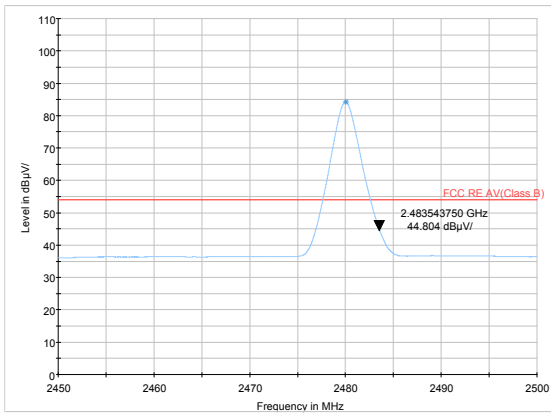

BLE -Channel 39: Average

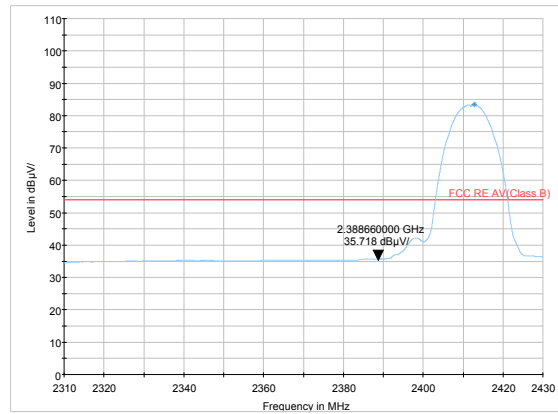

5.7. Radiates Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.


The test is in transmitting mode.

Test setup


9KHz ~ 30MHz

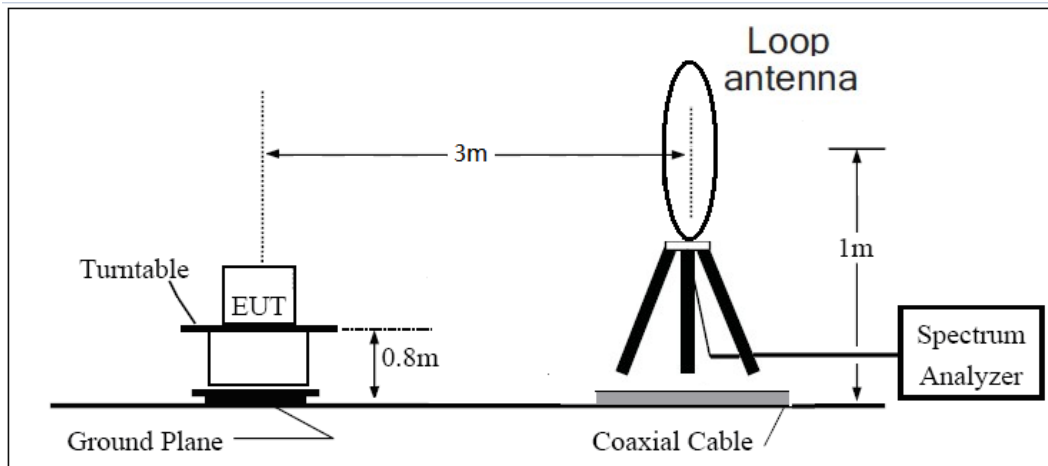

30MHz ~ 1GHz

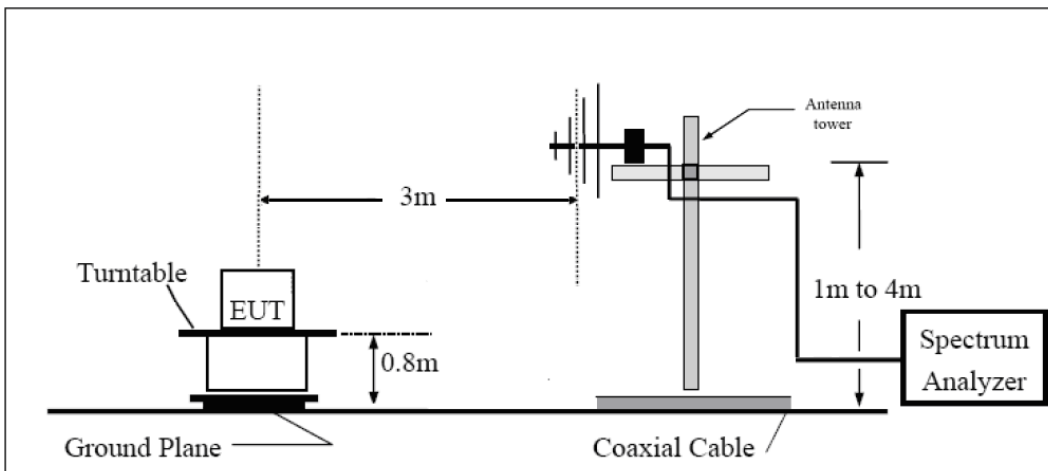

Above 1GHz

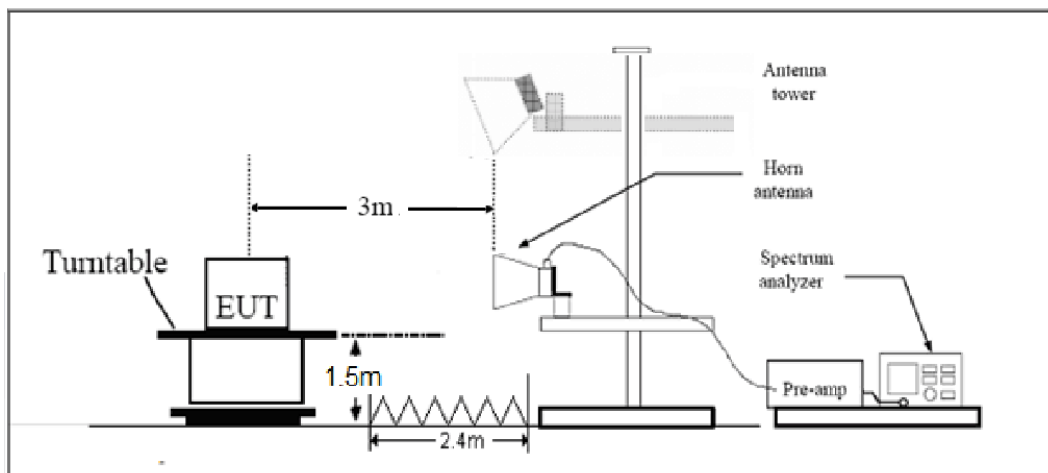

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test result


Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

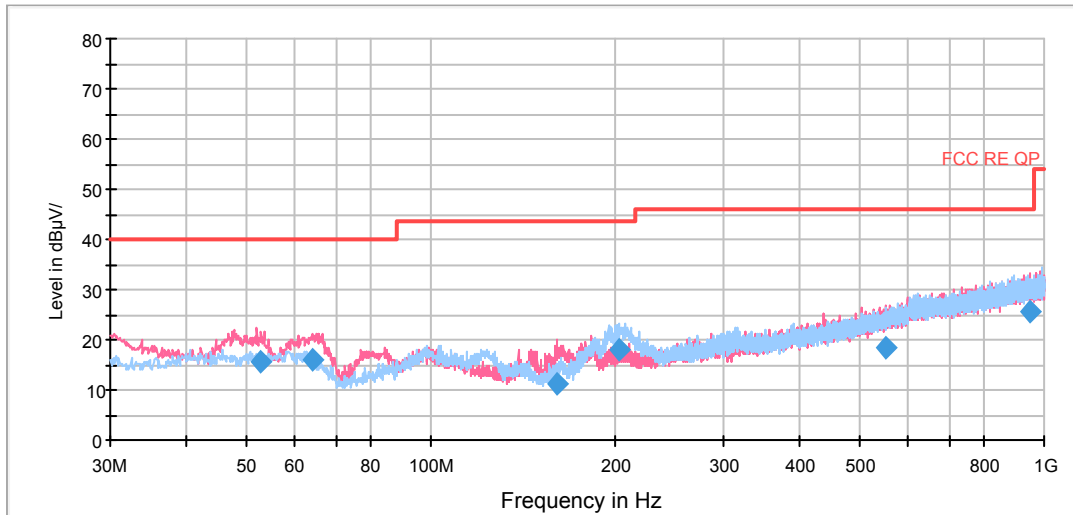

Radiates Emission from 30MHz to 1GHz



802.11b CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1090.250000	45.1	105.0	V	198.0	54.0	-8.9	28.9	74
1275.000000	42.1	105.0	V	0.0	49.8	-7.7	31.9	74
1583.000000	43.8	105.0	V	225.0	50.1	-6.3	30.2	74
1998.000000	48.2	105.0	V	330.0	51.6	-3.4	25.8	74
2467.500000	45.1	105.0	H	139.0	45.5	-0.4	28.9	74
2927.250000	48.0	105.0	H	255.0	46.3	1.7	26.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1190.250000	28.2	105.0	V	0.0	36.4	-8.2	25.8	54
1422.250000	28.6	105.0	V	280.0	35.5	-6.9	25.4	54
1731.750000	30.1	105.0	H	0.0	34.9	-4.8	23.9	54
1801.500000	33.0	105.0	V	262.0	36.9	-3.9	21.0	54
2467.250000	34.0	105.0	V	50.0	34.4	-0.4	20.0	54
2934.500000	37.0	105.0	V	25.0	35.2	1.8	17.0	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

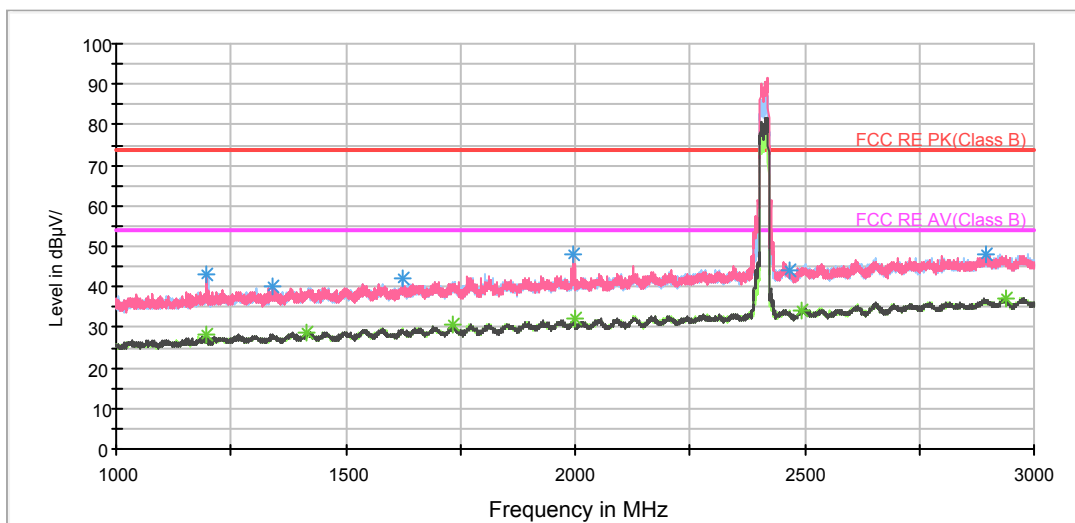

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

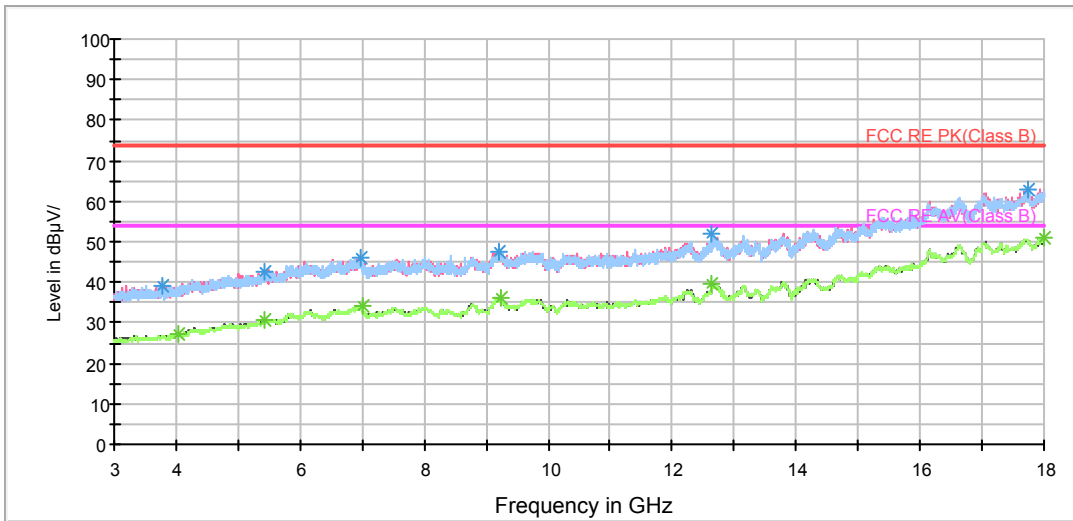

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

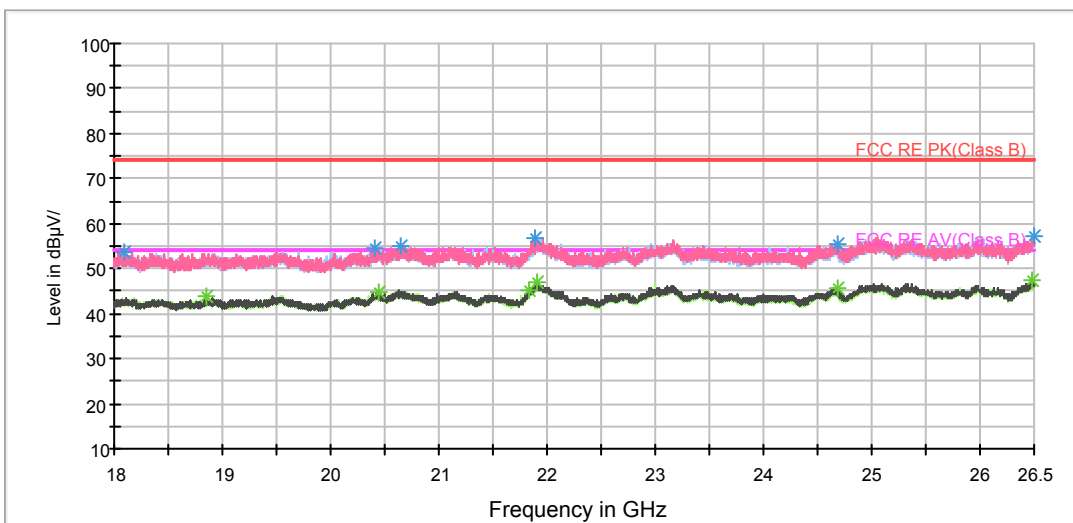

Radiates Emission from 18GHz to 26.5GHz



802.11b CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	44.4	105.0	H	49.0	52.6	-8.2	29.6	74
1440.750000	40.8	105.0	V	0.0	47.7	-6.9	33.2	74
1729.000000	41.3	105.0	V	110.0	46.4	-5.1	32.7	74
1992.250000	46.5	105.0	V	353.0	49.8	-3.3	27.5	74
2496.750000	46.1	105.0	H	346.0	46.1	0.0	27.9	74
2970.500000	48.3	105.0	V	353.0	46.1	2.2	25.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	28.6	105.0	H	49.0	36.8	-8.2	25.4	54
1420.500000	28.7	105.0	V	136.0	35.6	-6.9	25.3	54
1657.250000	30.2	105.0	H	312.0	35.4	-5.2	23.8	54
2053.500000	32.0	105.0	H	212.0	35.2	-3.2	22.0	54
2501.250000	34.2	105.0	H	0.0	34.4	-0.2	19.8	54
2970.750000	37.0	105.0	H	0.0	34.8	2.2	17.0	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

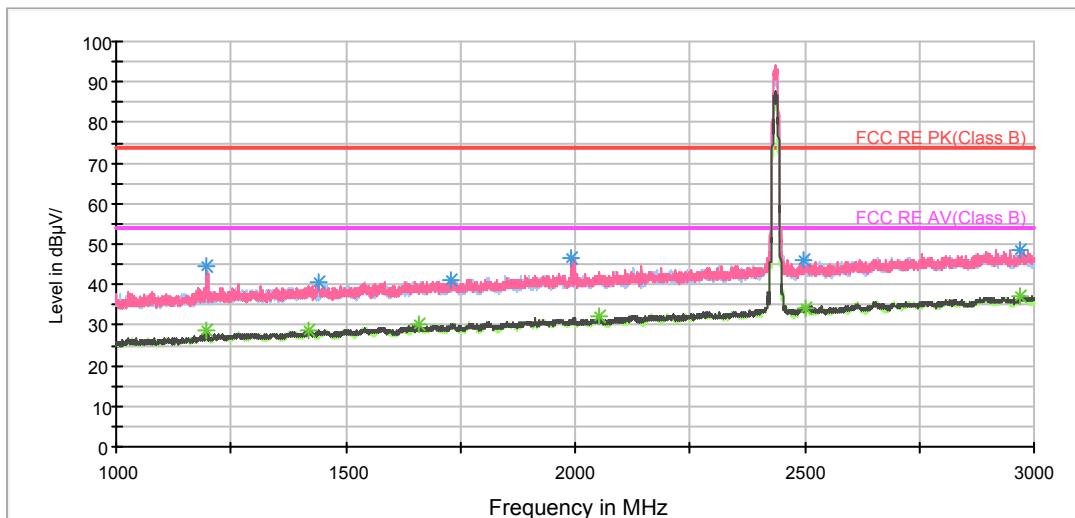


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

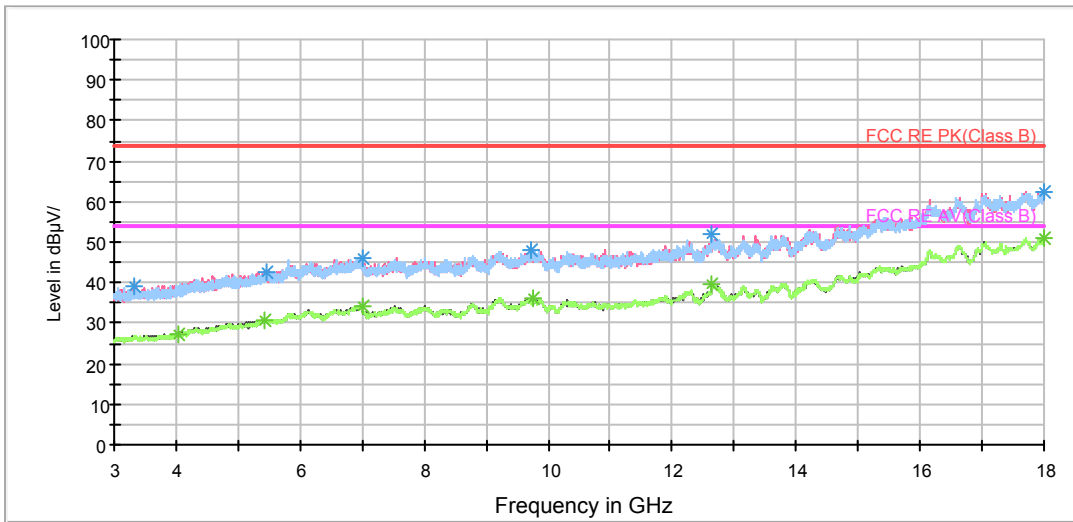

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

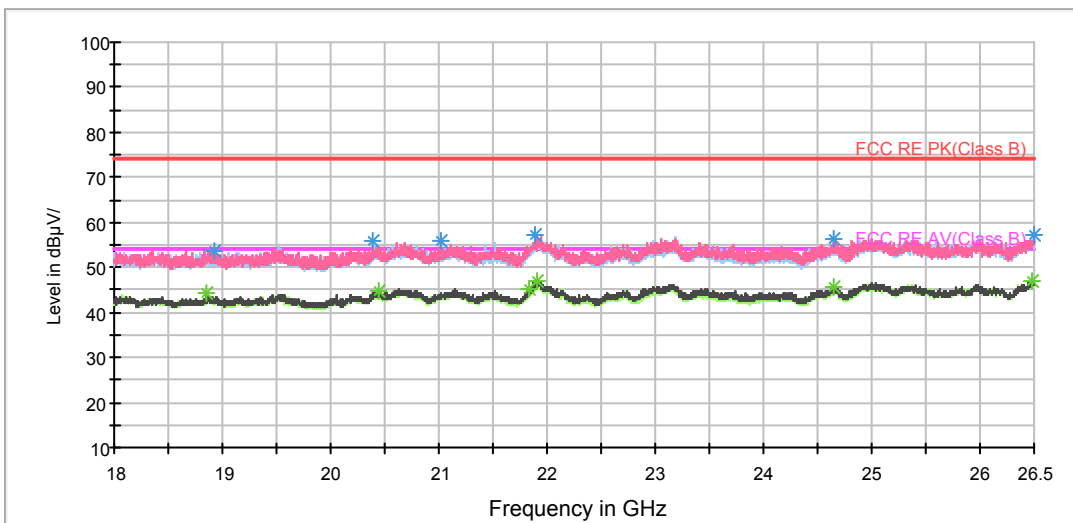

Radiates Emission from 18GHz to 26.5GHz



802.11b CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.250000	46.2	105.0	V	166.0	54.4	-8.2	27.8	74
1421.500000	40.1	105.0	H	89.0	47.0	-6.9	33.9	74
1694.250000	40.6	105.0	V	54.0	45.6	-5.0	33.4	74
2000.000000	48.1	105.0	V	342.0	51.5	-3.4	25.9	74
2536.500000	45.1	105.0	V	123.0	45.5	-0.4	28.9	74
2944.000000	48.0	105.0	H	310.0	46.0	2.0	26.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1199.250000	28.6	105.0	V	166.0	36.8	-8.2	25.4	54
1423.750000	28.5	105.0	H	97.0	35.4	-6.9	25.5	54
1731.250000	30.3	105.0	V	149.0	35.2	-4.9	23.7	54
1889.000000	32.1	105.0	V	320.0	36.5	-4.4	21.9	54
2534.250000	34.4	105.0	V	11.0	34.8	-0.4	19.6	54
2971.250000	37.1	105.0	H	259.0	34.9	2.2	16.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

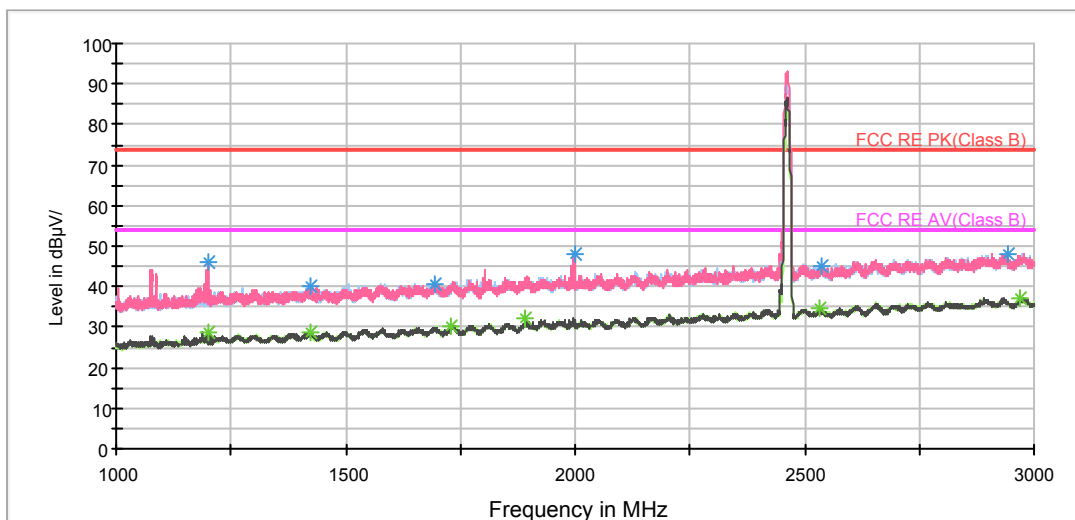


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

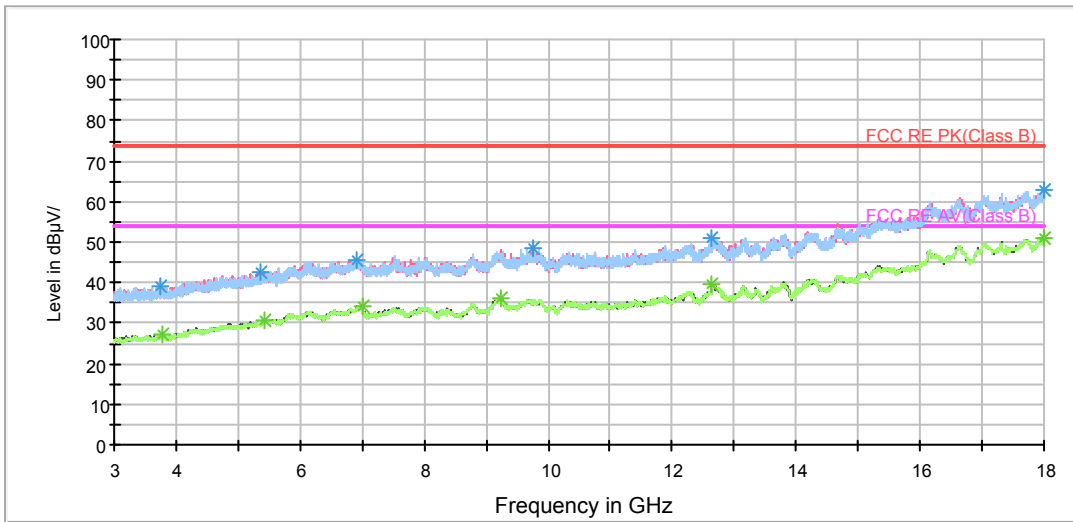

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

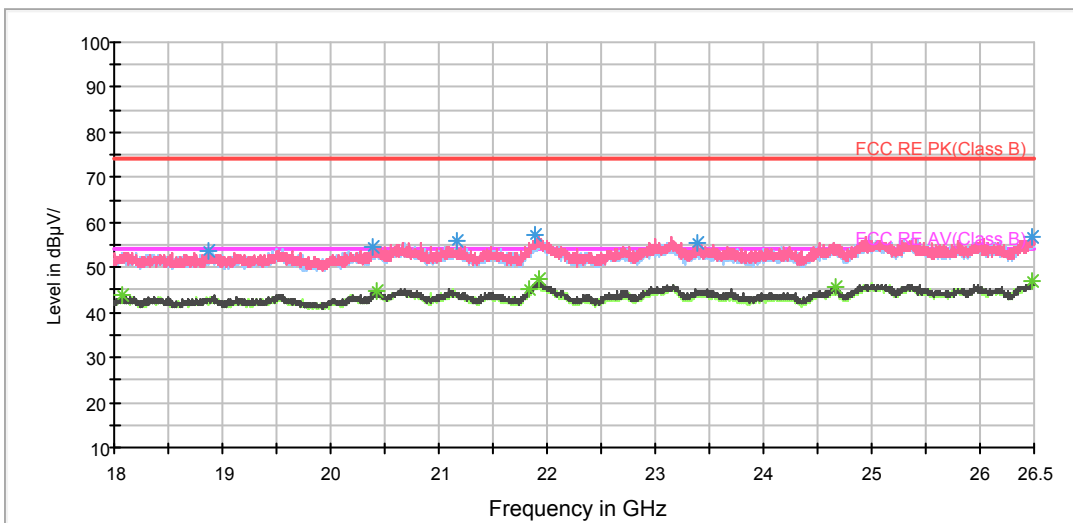

Radiates Emission from 18GHz to 26.5GHz



802.11g CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.000000	44.7	105.0	V	200.0	52.9	-8.2	29.3	74
1439.250000	40.9	105.0	V	0.0	47.8	-6.9	33.1	74
1697.750000	41.7	105.0	H	258.0	46.7	-5.0	32.3	74
1997.750000	50.1	105.0	V	321.0	53.4	-3.3	23.9	74
2477.750000	45.0	105.0	V	0.0	45.4	-0.4	29.0	74
2976.750000	48.3	105.0	H	333.0	46.1	2.2	25.7	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	29.2	105.0	V	183.0	37.4	-8.2	24.8	54
1419.500000	28.8	105.0	H	342.0	35.7	-6.9	25.2	54
1717.500000	30.1	105.0	V	71.0	35.0	-4.9	23.9	54
1997.750000	32.7	105.0	V	321.0	36.0	-3.3	21.3	54
2494.250000	34.5	105.0	H	258.0	34.3	0.2	19.5	54
2974.250000	37.1	105.0	V	246.0	34.9	2.2	16.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

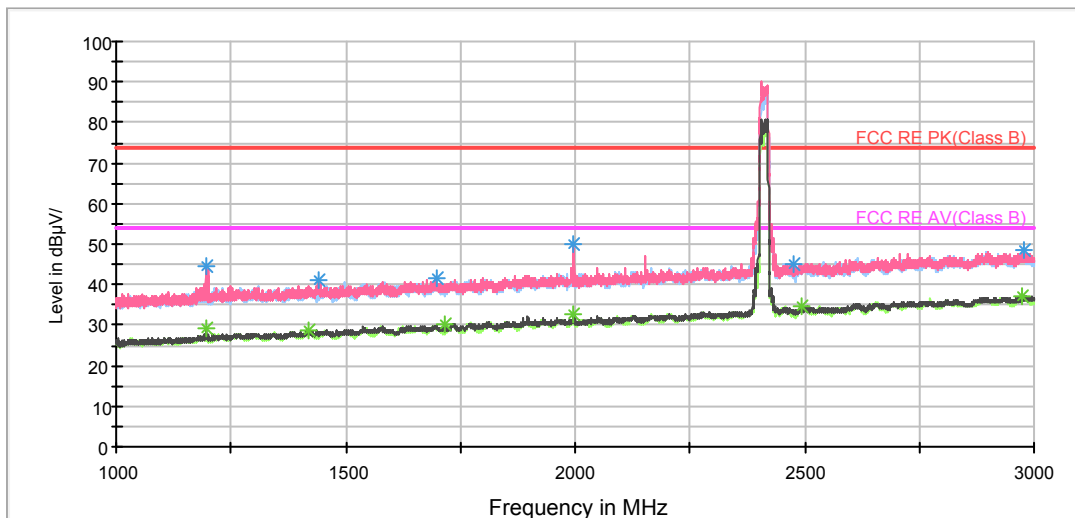


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

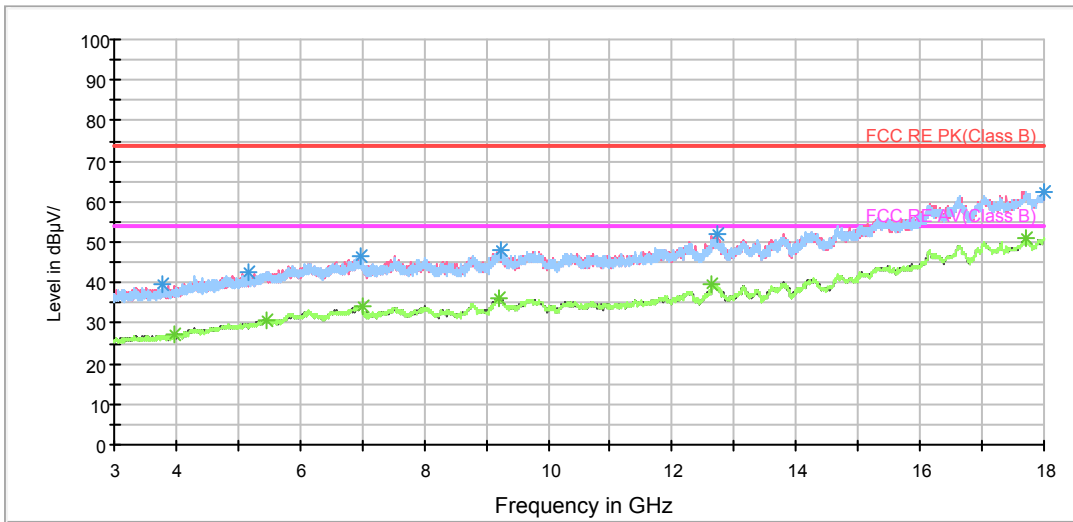

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

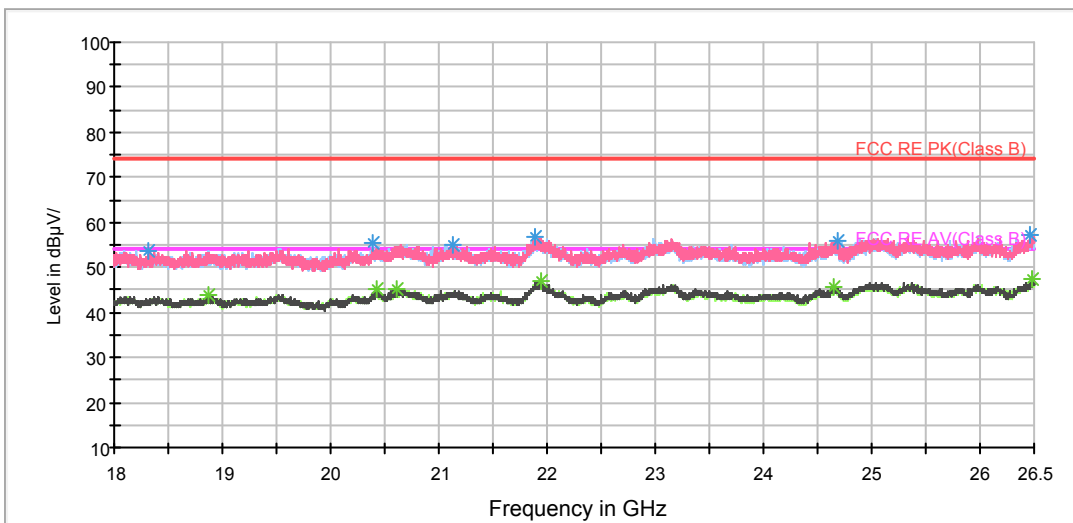

Radiates Emission from 18GHz to 26.5GHz



802.11g CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	44.7	105.0	H	0.0	52.9	-8.2	29.3	74
1439.750000	40.9	105.0	V	0.0	47.8	-6.9	33.1	74
1689.500000	41.3	105.0	V	8.0	46.3	-5.0	32.7	74
1991.500000	48.4	105.0	V	353.0	51.7	-3.3	25.6	74
2533.500000	45.1	105.0	H	252.0	45.5	-0.4	28.9	74
2910.000000	48.7	105.0	H	279.0	46.8	1.9	25.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.250000	29.0	105.0	V	0.0	37.2	-8.2	25.0	54
1417.750000	28.8	105.0	H	234.0	35.7	-6.9	25.2	54
1732.000000	30.3	105.0	H	270.0	35.1	-4.8	23.7	54
1999.000000	32.0	105.0	V	329.0	35.4	-3.4	22.0	54
2534.250000	34.4	105.0	H	331.0	34.8	-0.4	19.6	54
2980.000000	37.4	105.0	V	270.0	35.2	2.2	16.6	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

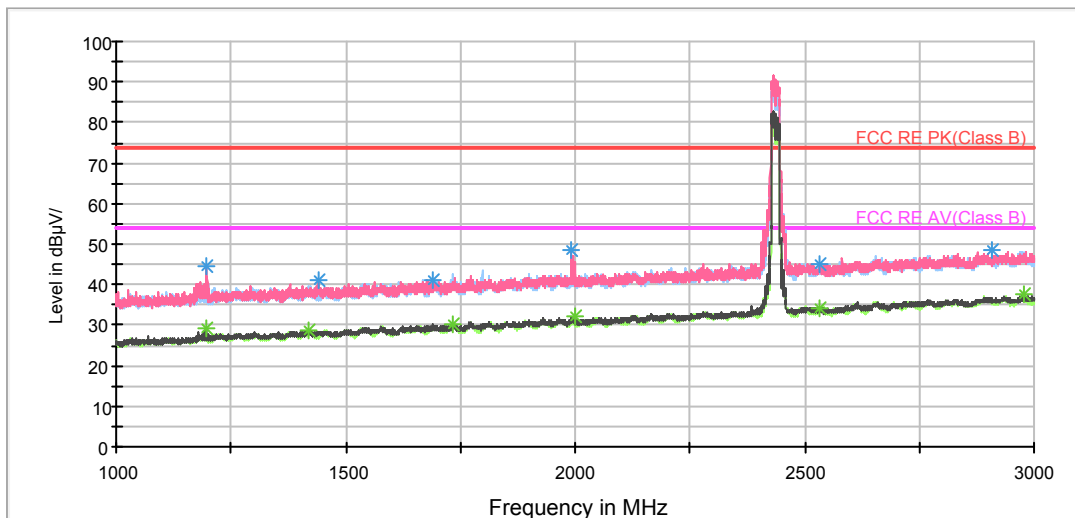


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

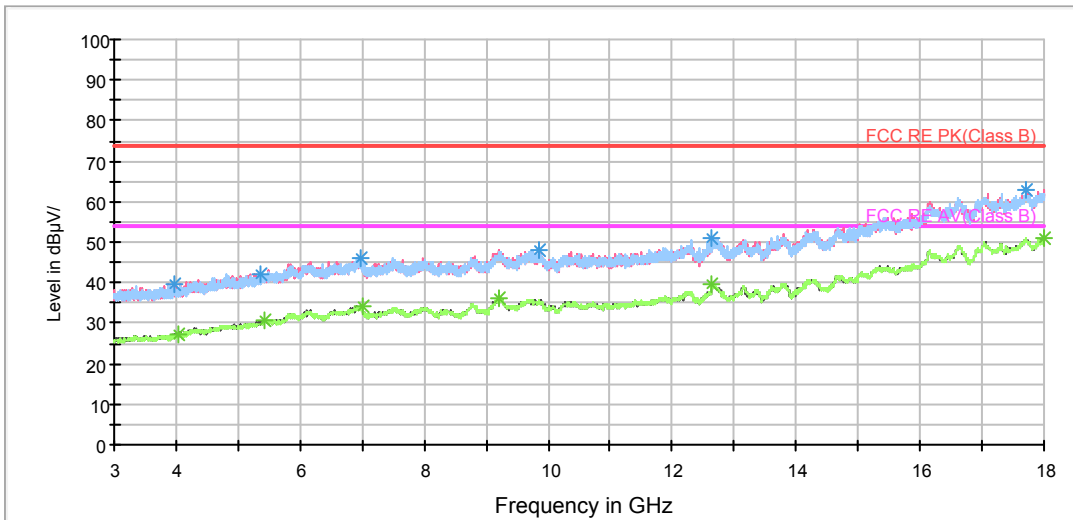

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

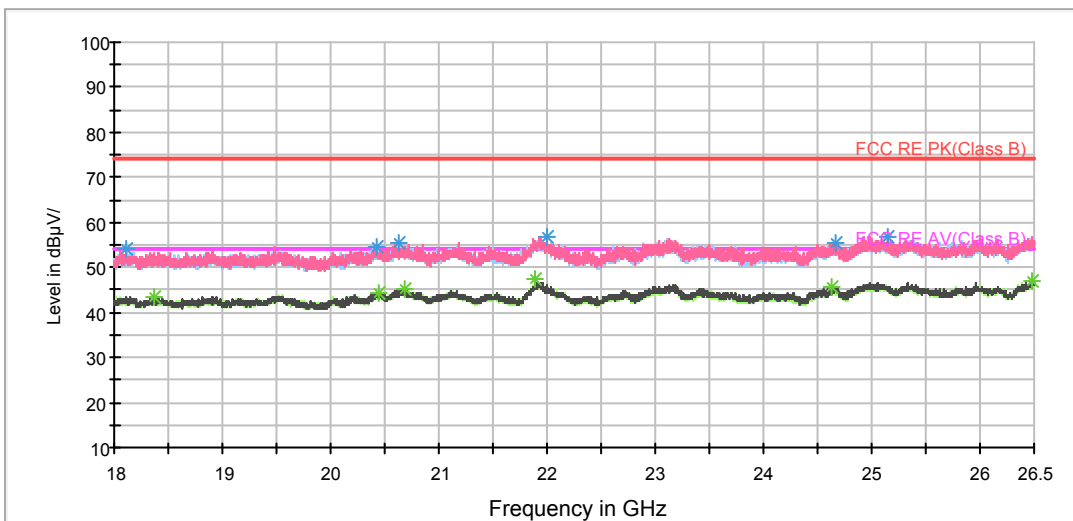

Radiates Emission from 18GHz to 26.5GHz



802.11g CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.750000	44.4	105.0	V	182.0	52.6	-8.2	29.6	74
1382.750000	39.9	105.0	V	24.0	46.9	-7.0	34.1	74
1729.500000	41.6	105.0	V	68.0	46.6	-5.0	32.4	74
1991.250000	49.8	105.0	V	330.0	53.1	-3.3	24.2	74
2534.500000	46.2	105.0	V	182.0	46.6	-0.4	27.8	74
2978.500000	48.4	105.0	H	127.0	46.2	2.2	25.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.750000	28.5	105.0	H	315.0	36.7	-8.2	25.5	54
1416.250000	28.7	105.0	V	94.0	35.7	-7.0	25.3	54
1730.500000	30.5	105.0	V	42.0	35.4	-4.9	23.5	54
1999.250000	32.0	105.0	V	310.0	35.4	-3.4	22.0	54
2535.000000	34.5	105.0	V	59.0	34.9	-0.4	19.5	54
2970.000000	37.1	105.0	H	333.0	34.9	2.2	16.9	54


Remark: 1. Correction Factor = Antenna fact or+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

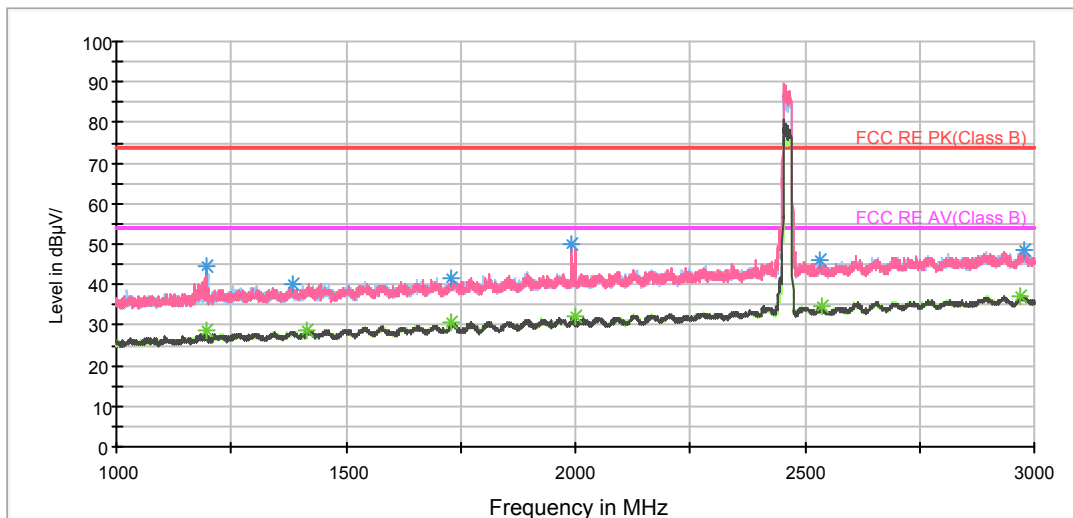


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

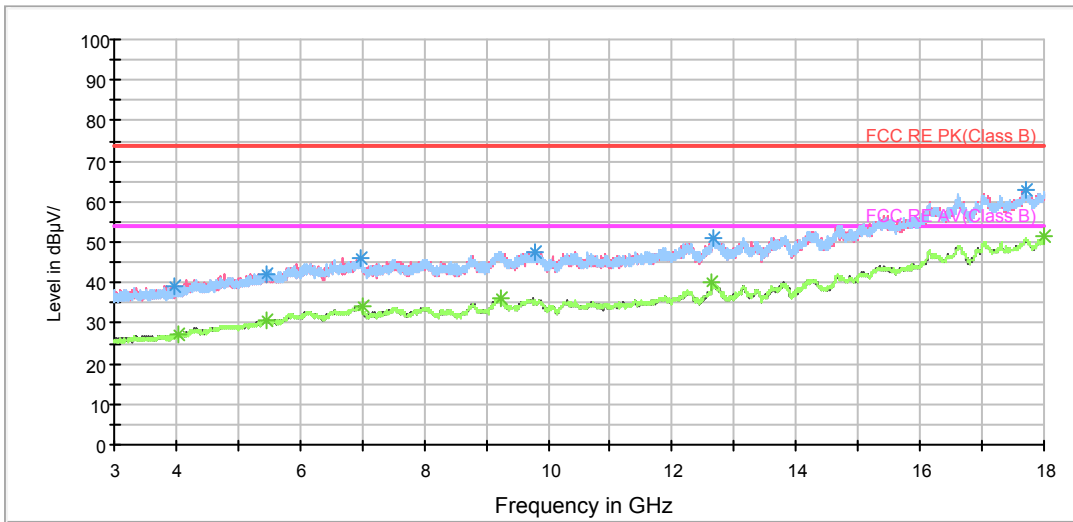

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

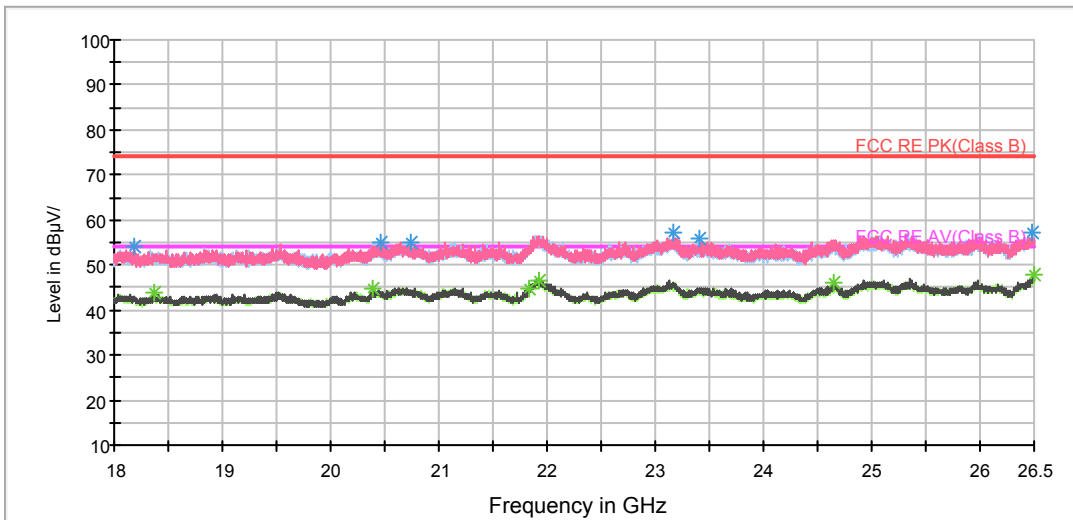

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH1


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.000000	43.3	105.0	V	176.0	51.5	-8.2	30.7	74
1339.250000	40.1	105.0	H	0.0	47.5	-7.4	33.9	74
1625.500000	41.8	105.0	H	255.0	46.6	-4.8	32.2	74
1996.000000	48.2	105.0	V	330.0	51.5	-3.3	25.8	74
2469.000000	44.0	105.0	H	66.0	44.4	-0.4	30.0	74
2895.750000	48.2	105.0	V	104.0	46.1	2.1	25.8	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.000000	28.3	105.0	H	0.0	36.5	-8.2	25.7	54
1414.250000	28.8	105.0	H	352.0	35.8	-7.0	25.2	54
1731.500000	30.5	105.0	V	86.0	35.3	-4.8	23.5	54
1998.500000	32.0	105.0	V	301.0	35.4	-3.4	22.0	54
2495.250000	34.3	105.0	V	0.0	34.2	0.1	19.7	54
2937.000000	37.1	105.0	H	282.0	35.2	1.9	16.9	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

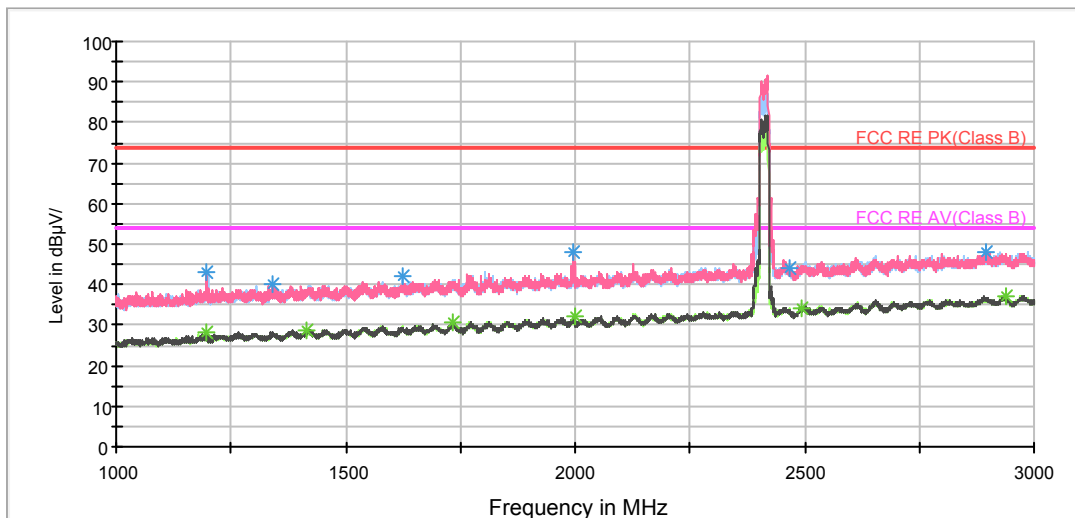


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

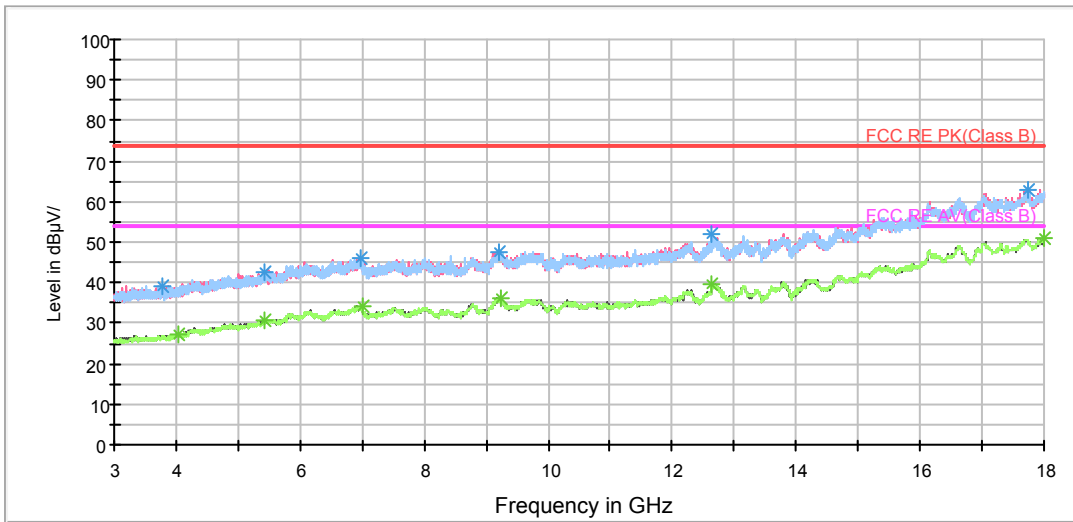

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

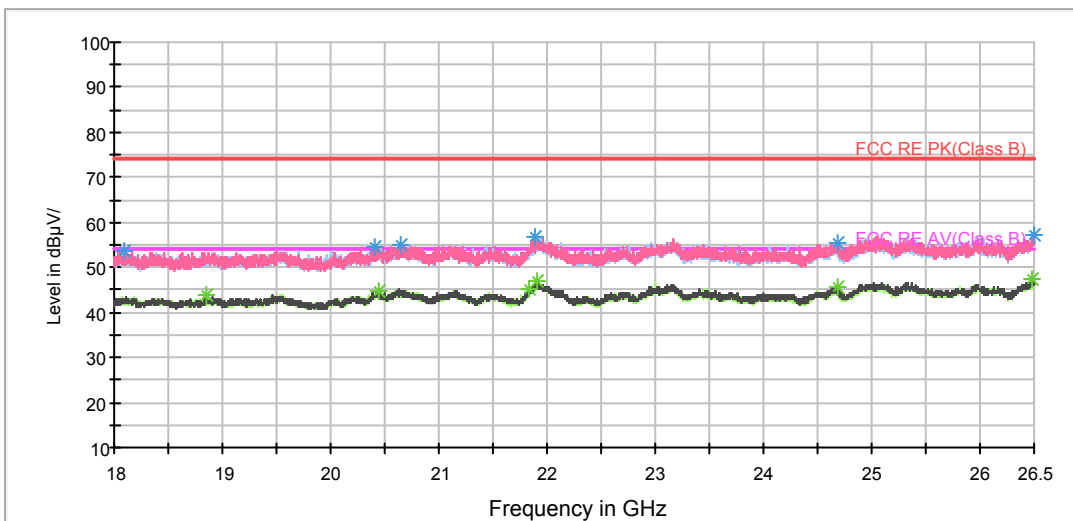

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH6


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	44.5	105.0	V	3.0	52.7	-8.2	29.5	74
1436.250000	40.2	105.0	V	0.0	47.1	-6.9	33.8	74
1710.750000	41.5	105.0	V	0.0	46.3	-4.8	32.5	74
1996.000000	49.7	105.0	V	320.0	53.0	-3.3	24.3	74
2534.000000	45.6	105.0	V	223.0	46.0	-0.4	28.4	74
2967.250000	48.0	105.0	H	0.0	45.8	2.2	26.0	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.500000	27.8	105.0	V	3.0	36.0	-8.2	26.2	54
1382.000000	28.8	105.0	V	130.0	35.8	-7.0	25.2	54
1697.000000	30.1	105.0	V	0.0	35.1	-5.0	23.9	54
1996.000000	32.4	105.0	V	320.0	35.7	-3.3	21.6	54
2490.500000	33.5	105.0	H	0.0	33.2	0.3	20.5	54
2990.000000	37.0	105.0	V	83.0	34.8	2.2	17.0	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

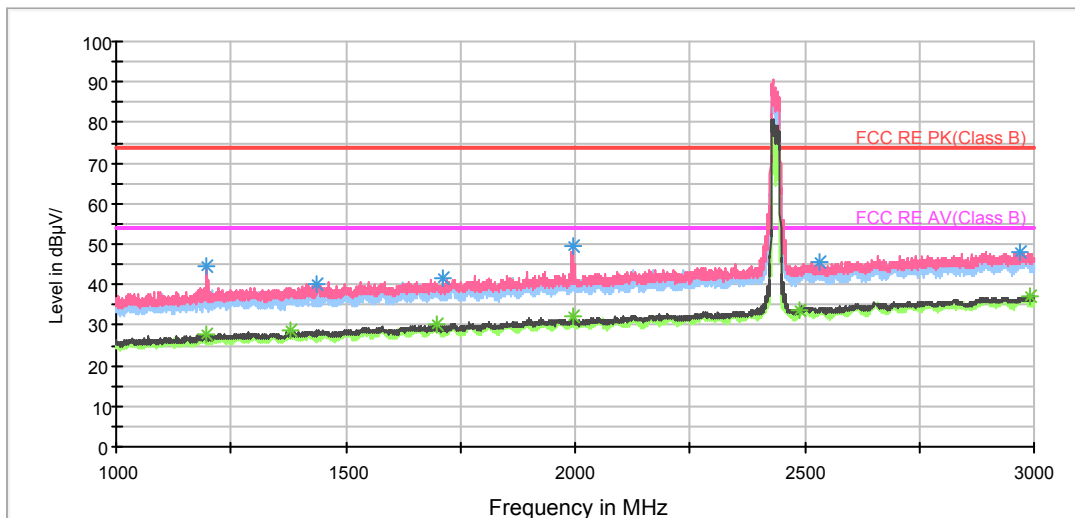


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

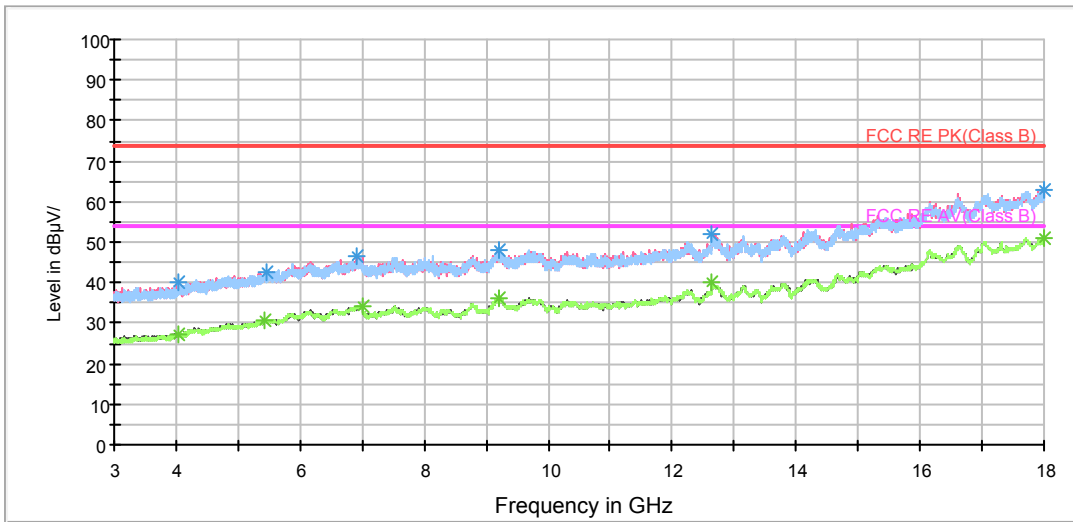

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

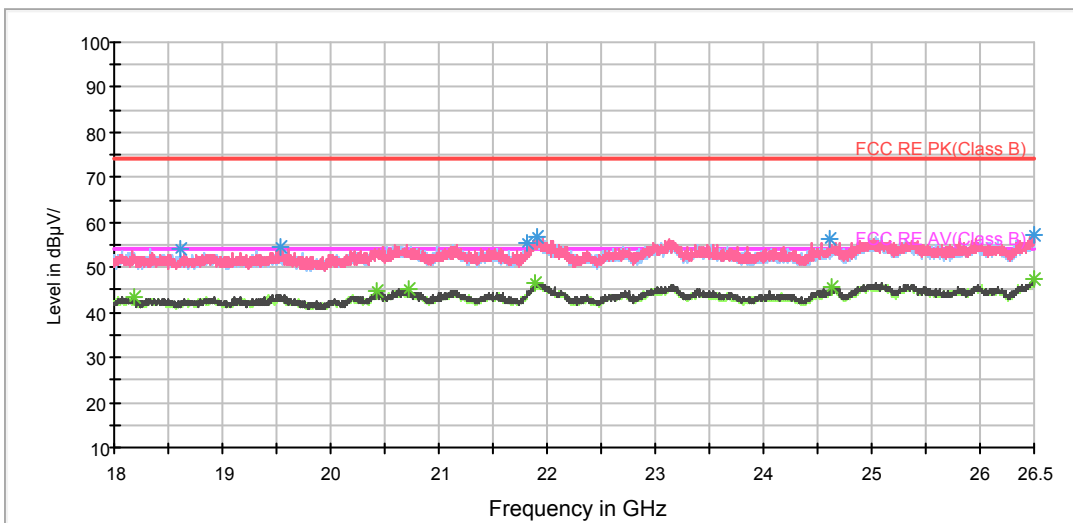

Radiates Emission from 18GHz to 26.5GHz



802.11n (HT20) CH11


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1197.750000	44.9	105.0	V	161.0	53.1	-8.2	29.1	74
1439.500000	40.1	105.0	V	0.0	47.0	-6.9	33.9	74
1691.750000	41.5	105.0	H	309.0	46.5	-5.0	32.5	74
1997.750000	46.4	105.0	V	341.0	49.7	-3.3	27.6	74
2528.500000	45.1	105.0	V	242.0	45.4	-0.3	28.9	74
2969.750000	48.4	105.0	V	50.0	46.2	2.2	25.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1195.250000	28.8	105.0	V	0.0	37.0	-8.2	25.2	54
1423.250000	28.7	105.0	H	194.0	35.6	-6.9	25.3	54
1731.500000	30.3	105.0	V	33.0	35.1	-4.8	23.7	54
1997.750000	31.9	105.0	V	341.0	35.2	-3.3	22.1	54
2535.500000	34.6	105.0	V	0.0	35.0	-0.4	19.4	54
2972.000000	37.2	105.0	H	204.0	35.0	2.2	16.8	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

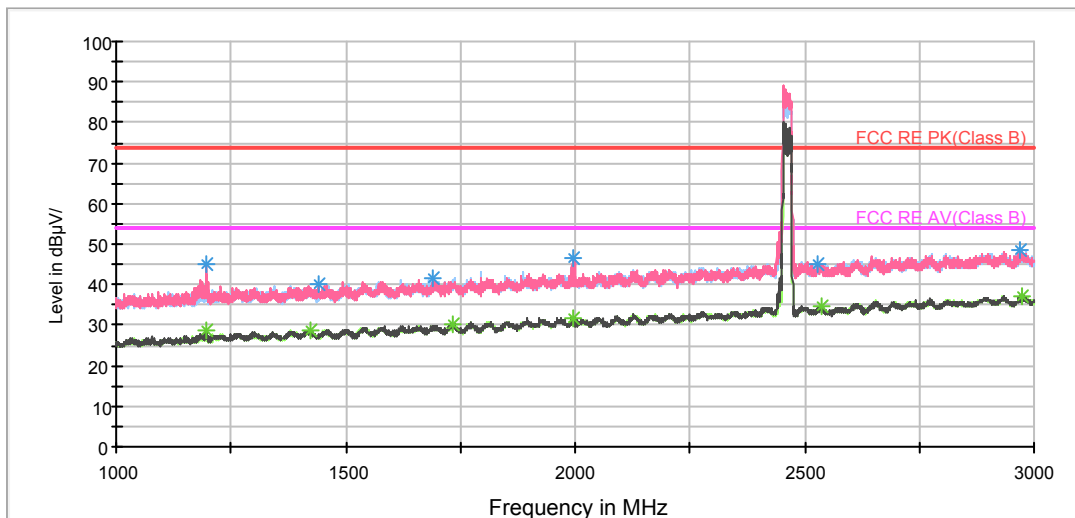


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

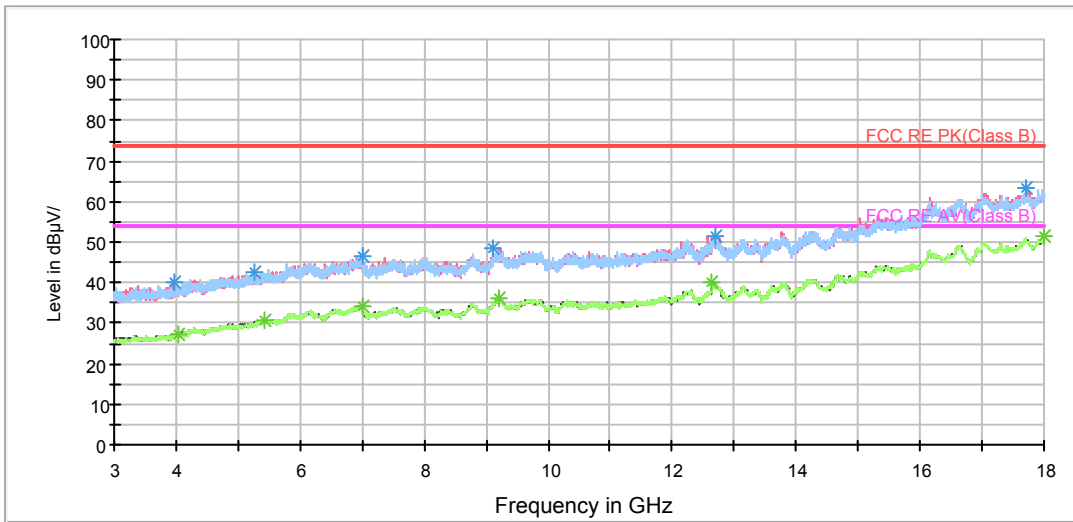

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

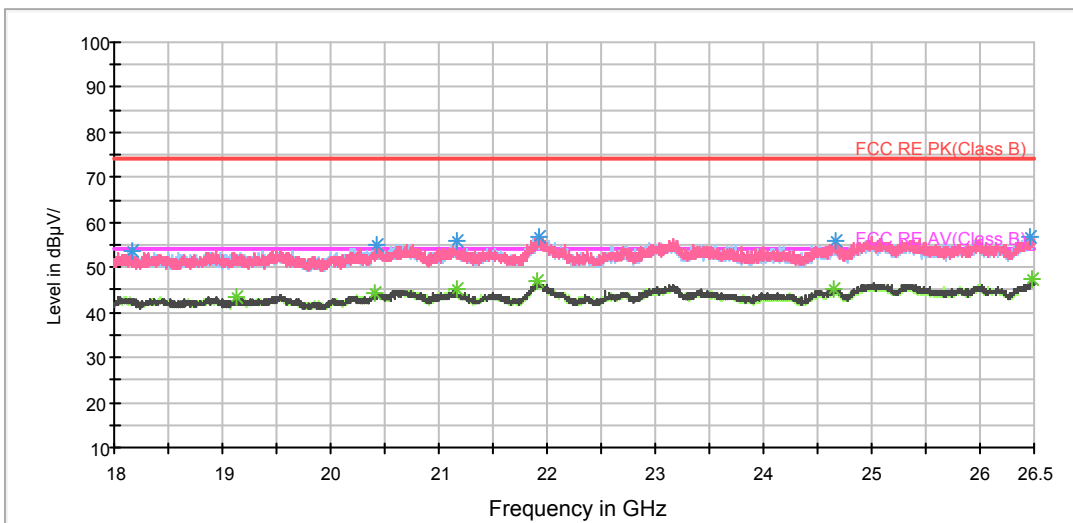

Radiates Emission from 18GHz to 26.5GHz

BLE-Channel 0


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	45.4	202.0	V	148.0	53.6	-8.2	28.6	74
1394.000000	40.2	202.0	H	113.0	47.3	-7.1	33.8	74
1578.500000	41.7	202.0	V	357.0	48.0	-6.3	32.3	74
1993.500000	50.4	102.0	V	148.0	53.7	-3.3	23.6	74
2460.000000	45.8	102.0	V	91.0	46.3	-0.5	28.2	74
2892.500000	49.4	202.0	V	133.0	47.3	2.1	24.6	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1198.000000	29.0	202.0	V	148.0	37.2	-8.2	25.0	54
1414.500000	28.9	103.0	H	124.0	35.9	-7.0	25.1	54
1696.250000	30.4	202.0	H	55.0	35.4	-5.0	23.6	54
1967.500000	33.0	202.0	V	281.0	36.5	-3.5	21.0	54
2455.000000	34.8	103.0	H	170.0	35.4	-0.6	19.2	54
2970.000000	37.3	102.0	V	10.0	35.1	2.2	16.7	54


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

RE 1G-3GHz PK+AV

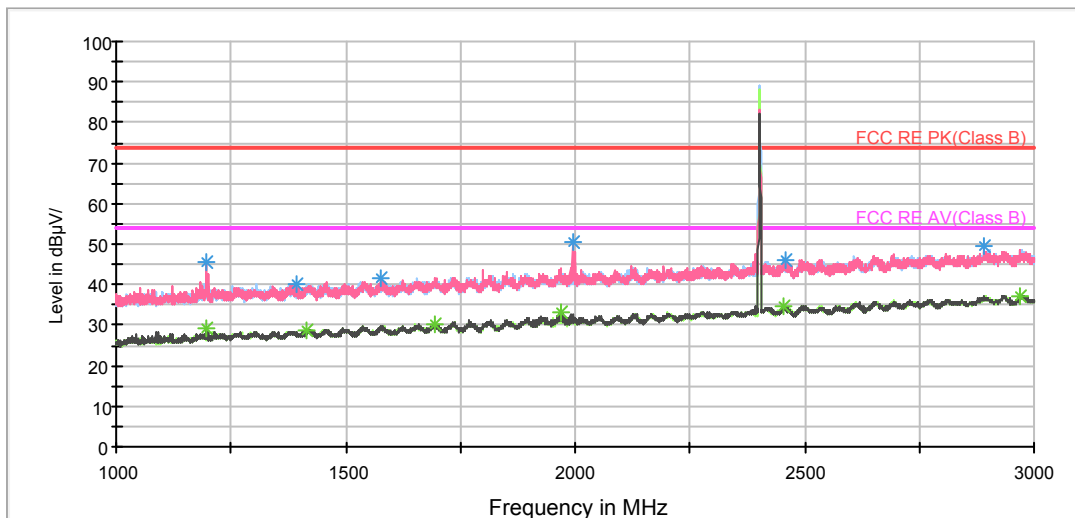


Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

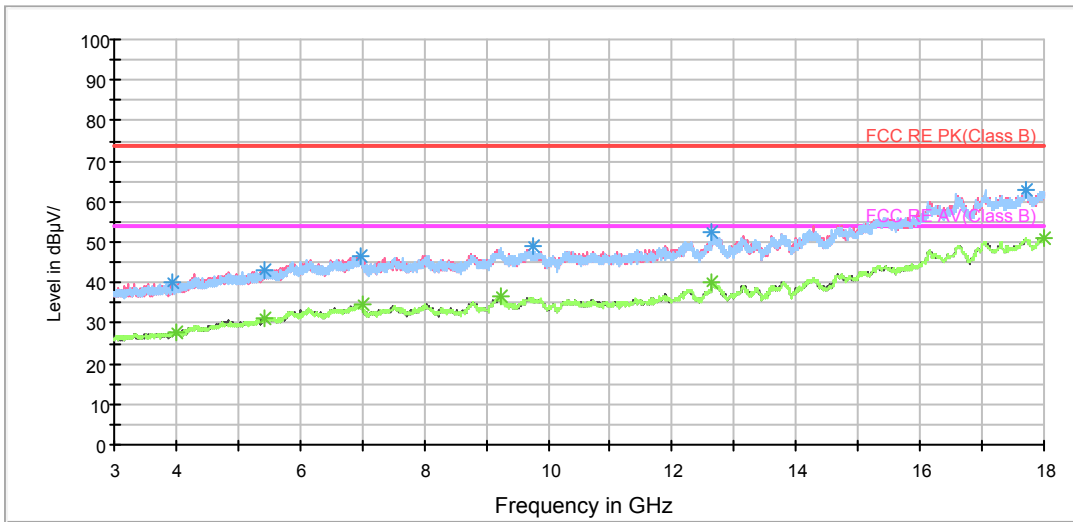

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

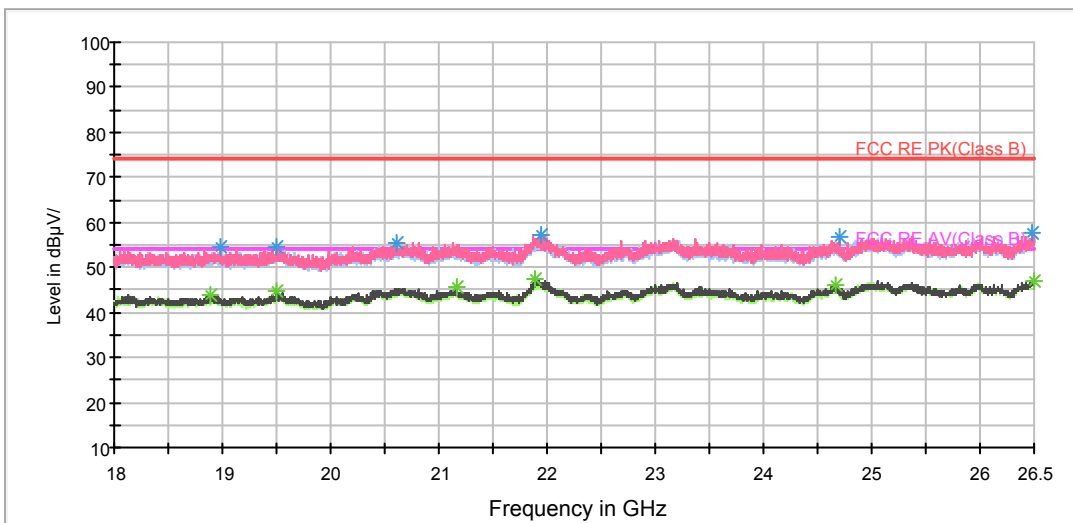

Radiates Emission from 18GHz to 26.5GHz



BLE-Channel19


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1196.250000	46.1	202.0	V	163.0	54.3	-8.2	27.9	74
1201.000000	44.0	202.0	V	321.0	52.2	-8.2	30.0	74
1698.500000	42.1	102.0	V	205.0	47.1	-5.0	31.9	74
1998.500000	48.5	102.0	V	70.0	51.9	-3.4	25.5	74
2488.250000	45.3	102.0	H	279.0	45.1	0.2	28.7	74
2894.750000	48.5	102.0	V	161.0	46.4	2.1	25.5	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1077.000000	28.7	102.0	V	152.0	37.5	-8.8	25.3	54
1419.250000	28.8	102.0	V	34.0	35.7	-6.9	25.2	54
1732.000000	30.3	102.0	V	0.0	35.1	-4.8	23.7	54
1989.500000	32.8	202.0	V	180.0	36.2	-3.4	21.2	54
2500.500000	34.7	102.0	V	0.0	34.9	-0.2	19.3	54
2972.750000	37.4	202.0	H	29.0	35.2	2.2	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

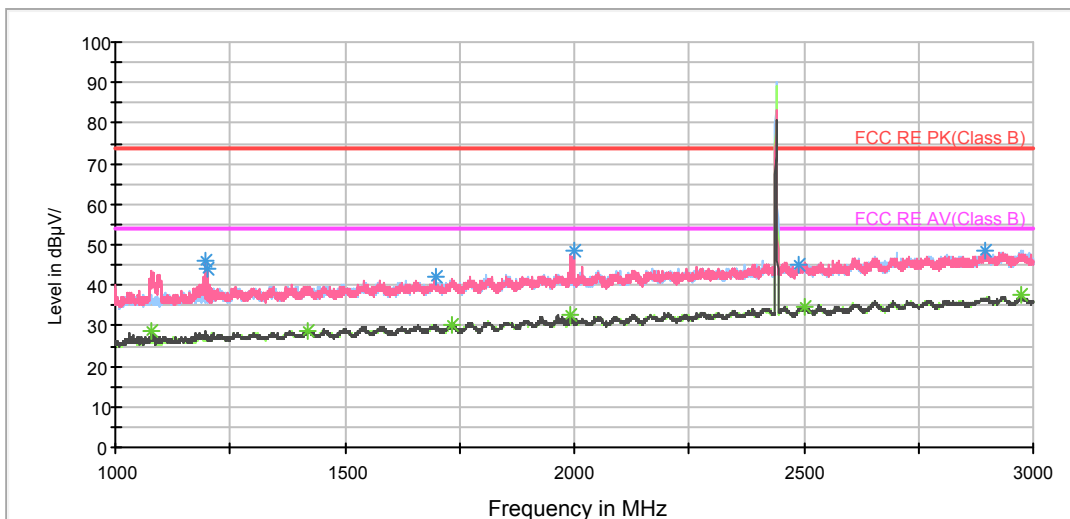

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

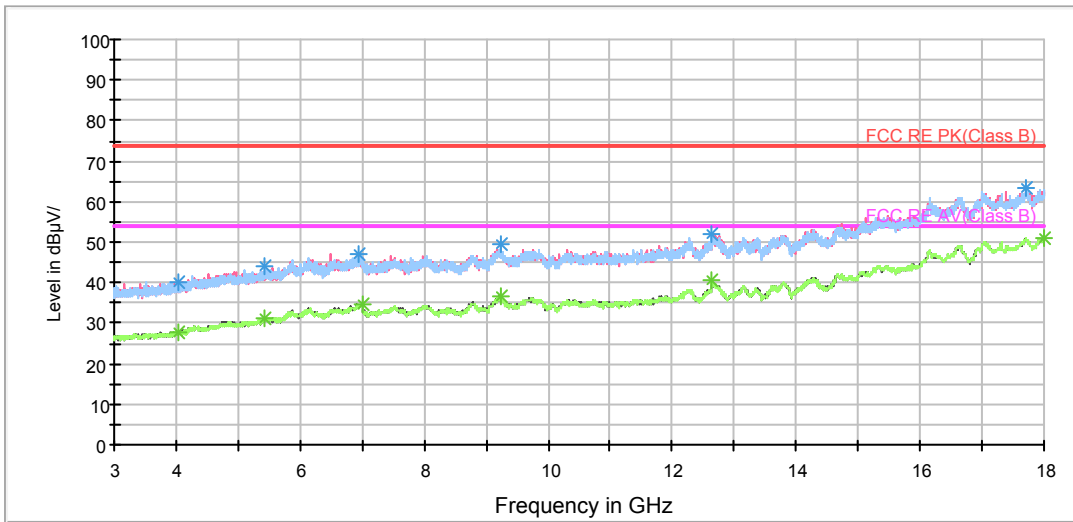

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

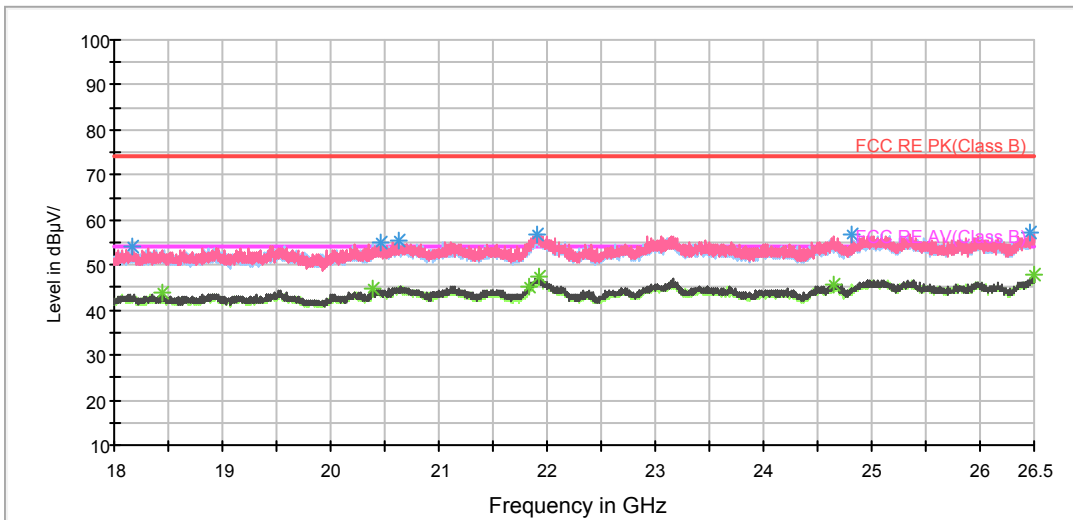

Radiates Emission from 18GHz to 26.5GHz



BLE-Channel39


Frequency (MHz)	Peak (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1095.750000	47.0	102.0	V	169.0	55.9	-8.9	27.0	74
1439.750000	40.8	202.0	H	57.0	47.7	-6.9	33.2	74
1571.000000	43.4	102.0	V	169.0	49.9	-6.5	30.6	74
1998.250000	49.2	102.0	V	187.0	52.6	-3.4	24.8	74
2399.000000	48.3	202.0	V	154.0	49.6	-1.3	25.7	74
2897.500000	48.7	102.0	V	0.0	46.6	2.1	25.3	74

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

Frequency (MHz)	Average (dBuV/m)	Height (cm)	Polarization	Azimuth (deg)	Reading value (dBuV/m)	Correct Factor (dB)	Margin (dB)	Limit (dBuV/m)
1095.000000	29.1	102.0	V	169.0	38.0	-8.9	24.9	54
1420.000000	28.7	102.0	V	37.0	35.6	-6.9	25.3	54
1730.500000	30.5	202.0	H	48.0	35.4	-4.9	23.5	54
1994.250000	32.5	202.0	V	135.0	35.7	-3.2	21.5	54
2401.250000	32.5	102.0	H	0.0	33.7	-1.2	21.5	54
2973.750000	37.4	102.0	V	150.0	35.2	2.2	16.6	54

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


RE 1G-3GHz PK+AV

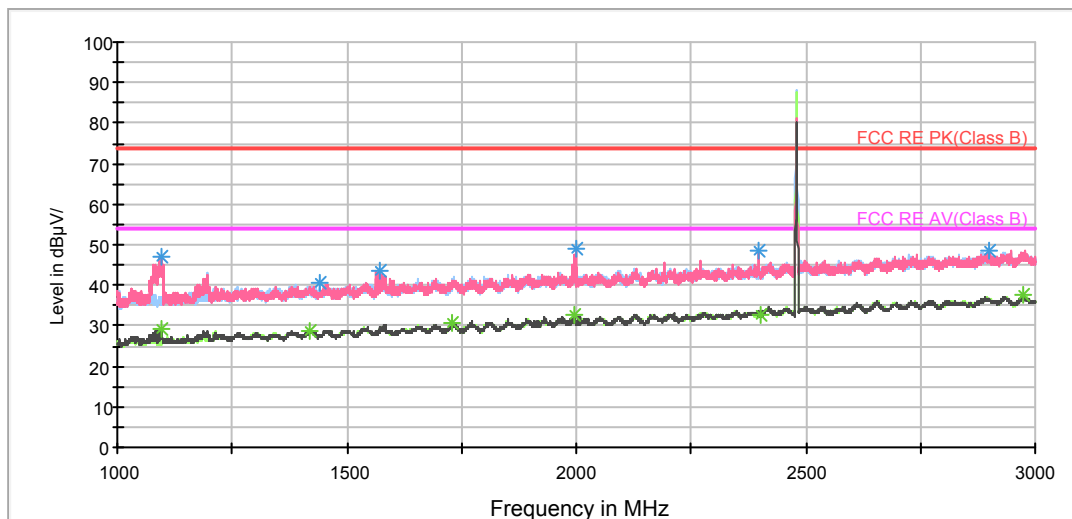

Note: The signal beyond the limit is carrier.


Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV_BELL SWEEP

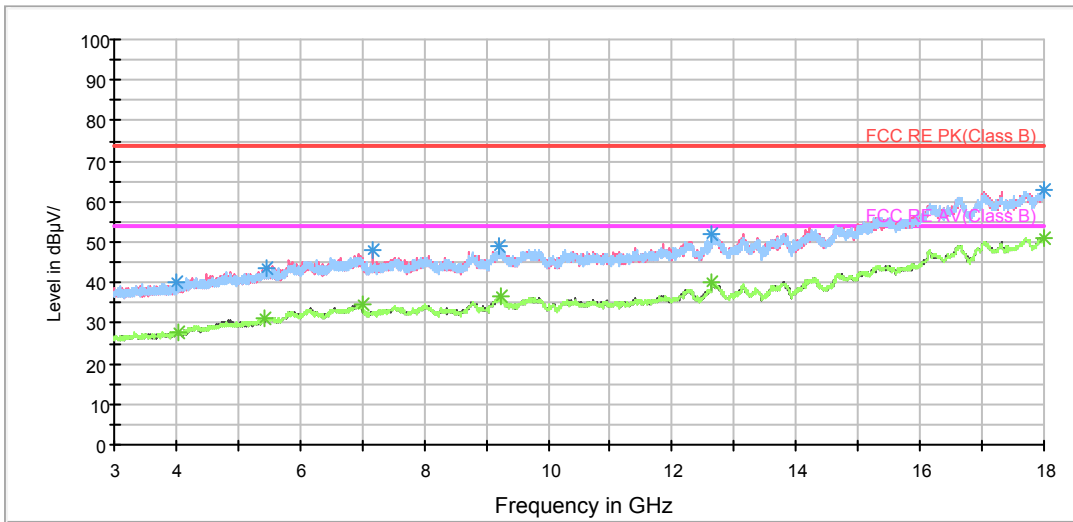

Radiates Emission from 3GHz to 18GHz

RE 18-26.5GHz PK+AV

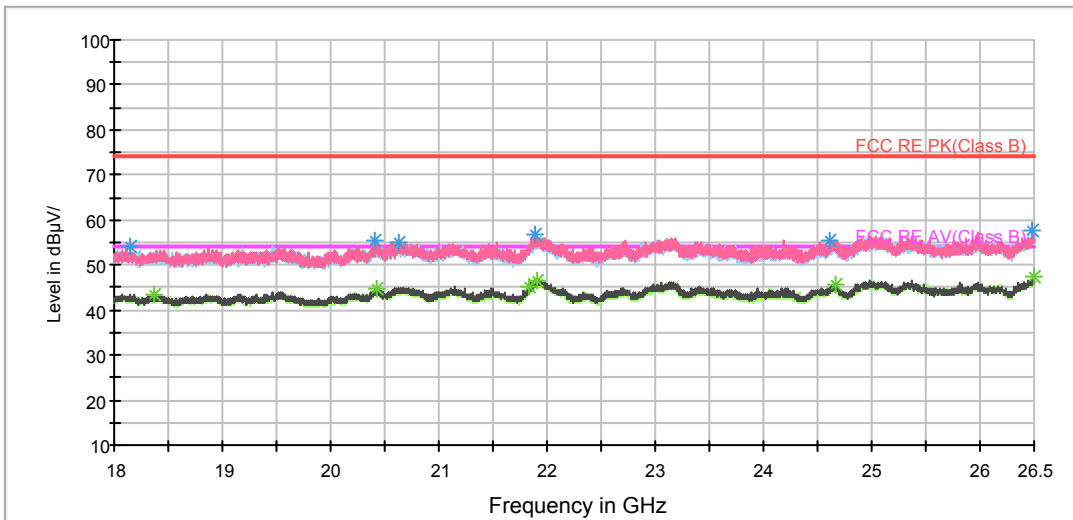

Radiates Emission from 18GHz to 26.5GHz

5.8. Conducted Emission

Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

Test Setup

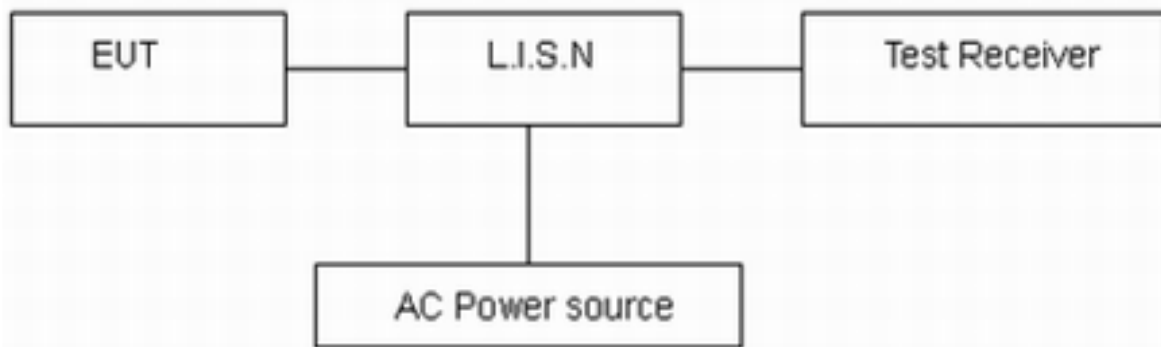

Note: AC Power source is used to change the voltage 110V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

*: Decreases with the logarithm of the frequency.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 2.69$ dB.



Test Results:

Following plots, Blue trace uses the peak detection and Green trace uses the average detection.

802.11b, Channel No.: 1

L Line

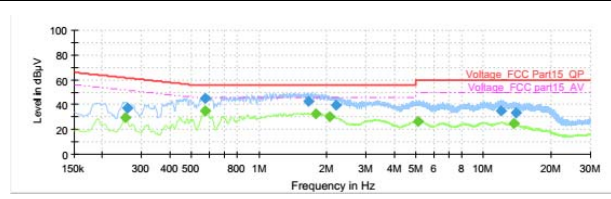


Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

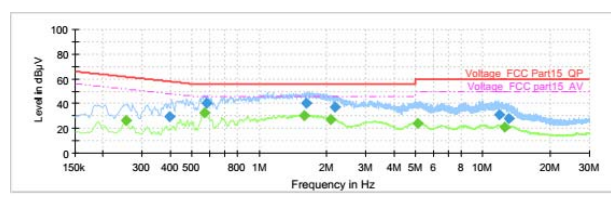


Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

802.11b, Channel No.: 6

L Line

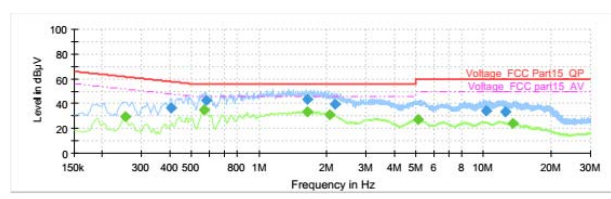


Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line


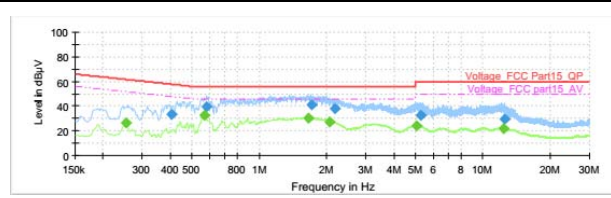


Table with 11 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.




802.11b, Channel No.: 11

L Line

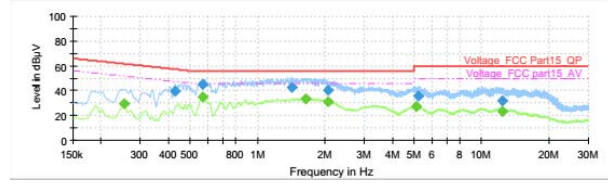

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.18	51.64	22.46	1000.0	9.000	L1	ON	19.1
0.426750	39.35	---	57.32	17.96	1000.0	9.000	L1	ON	19.2
0.568500	44.74	---	56.00	11.26	1000.0	9.000	L1	ON	19.3
0.570750	---	34.73	46.00	11.27	1000.0	9.000	L1	ON	19.3
1.419000	42.97	---	56.00	13.03	1000.0	9.000	L1	ON	19.2
1.646250	---	33.27	46.00	12.74	1000.0	9.000	L1	ON	19.2
2.053500	---	30.72	46.00	15.28	1000.0	9.000	L1	ON	19.1
2.071500	39.94	---	56.00	16.06	1000.0	9.000	L1	ON	19.1
5.095500	---	26.80	50.00	23.20	1000.0	9.000	L1	ON	19.1
5.217000	35.85	---	60.00	24.15	1000.0	9.000	L1	ON	19.1
12.383250	31.91	---	60.00	28.09	1000.0	9.000	L1	ON	19.4
12.410250	---	23.12	50.00	26.88	1000.0	9.000	L1	ON	19.4


N Line

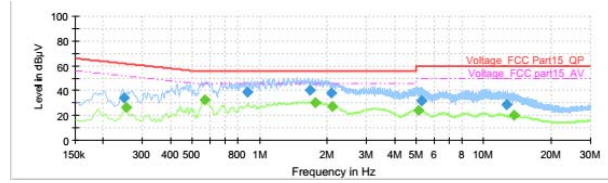

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.246750	34.25	---	61.87	27.61	1000.0	9.000	N	ON	19.1
0.253500	---	26.99	51.64	25.56	1000.0	9.000	N	ON	19.1
0.568500	---	32.77	46.00	13.23	1000.0	9.000	N	ON	19.3
0.883500	39.01	---	56.00	16.99	1000.0	9.000	N	ON	19.2
1.671000	40.11	---	56.00	15.89	1000.0	9.000	N	ON	19.2
1.779000	---	30.57	46.00	15.43	1000.0	9.000	N	ON	19.2
2.078250	38.37	---	56.00	17.63	1000.0	9.000	N	ON	19.1
2.098500	---	27.43	46.00	18.57	1000.0	9.000	N	ON	19.1
5.086500	---	24.39	50.00	25.61	1000.0	9.000	N	ON	19.1
5.271000	31.86	---	60.00	28.14	1000.0	9.000	N	ON	19.1
12.639750	28.43	---	60.00	31.57	1000.0	9.000	N	ON	19.4
13.674750	---	19.99	50.00	30.01	1000.0	9.000	N	ON	19.5


802.11g, Channel No.: 1

L Line

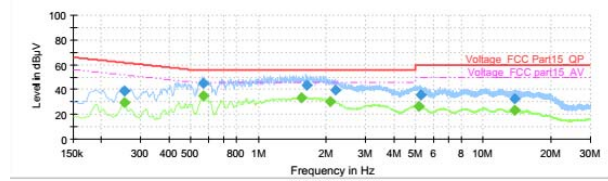

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.20	51.64	22.44	1000.0	9.000	L1	ON	19.1
0.253500	38.40	---	61.64	23.25	1000.0	9.000	L1	ON	19.1
0.568500	---	34.93	46.00	11.07	1000.0	9.000	L1	ON	19.3
0.568500	44.66	---	56.00	11.34	1000.0	9.000	L1	ON	19.3
1.554000	---	33.19	46.00	12.81	1000.0	9.000	L1	ON	19.2
1.646250	43.36	---	56.00	12.64	1000.0	9.000	L1	ON	19.2
2.094000	---	30.58	46.00	15.42	1000.0	9.000	L1	ON	19.1
2.199750	39.70	---	56.00	16.30	1000.0	9.000	L1	ON	19.1
5.154000	---	26.62	50.00	23.38	1000.0	9.000	L1	ON	19.1
5.277750	35.45	---	60.00	24.55	1000.0	9.000	L1	ON	19.1
13.760250	---	23.41	50.00	26.59	1000.0	9.000	L1	ON	19.5
13.832250	32.21	---	60.00	27.79	1000.0	9.000	L1	ON	19.5

N Line

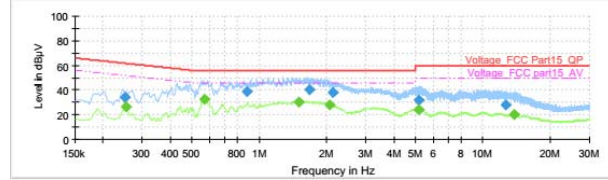


Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.251250	34.11	---	61.72	27.60	1000.0	9.000	N	ON	19.1
0.253500	---	26.06	51.64	25.58	1000.0	9.000	N	ON	19.1
0.568500	---	32.76	46.00	13.24	1000.0	9.000	N	ON	19.3
0.879000	38.56	---	56.00	17.44	1000.0	9.000	N	ON	19.2
1.504500	---	30.44	46.00	15.56	1000.0	9.000	N	ON	19.2
1.677750	40.39	---	56.00	15.61	1000.0	9.000	N	ON	19.2
2.057500	---	27.76	46.00	18.24	1000.0	9.000	N	ON	19.1
2.136750	37.64	---	56.00	18.36	1000.0	9.000	N	ON	19.1
5.151750	---	24.13	50.00	25.87	1000.0	9.000	N	ON	19.1
5.158500	32.16	---	60.00	27.84	1000.0	9.000	N	ON	19.1
12.711750	28.22	---	60.00	31.78	1000.0	9.000	N	ON	19.5
13.744500	---	20.15	50.00	29.85	1000.0	9.000	N	ON	19.4




802.11g, Channel No.: 6

L Line

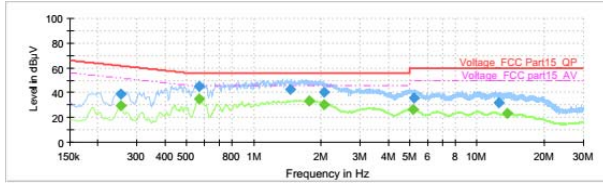

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	29.22	51.64	22.42	1000.0	9.000	L1	ON	19.1
0.253500	38.40	---	61.64	23.24	1000.0	9.000	L1	ON	19.1
0.568500	---	34.90	46.00	11.10	1000.0	9.000	L1	ON	19.3
0.570750	44.80	---	56.00	11.20	1000.0	9.000	L1	ON	19.3
1.452750	42.43	---	56.00	13.57	1000.0	9.000	L1	ON	19.2
1.779000	---	33.21	46.00	12.79	1000.0	9.000	L1	ON	19.2
2.055750	40.09	---	56.00	15.91	1000.0	9.000	L1	ON	19.1
2.073750	---	30.50	46.00	15.50	1000.0	9.000	L1	ON	19.1
5.151750	---	26.63	50.00	23.37	1000.0	9.000	L1	ON	19.1
5.219250	35.72	---	60.00	24.28	1000.0	9.000	L1	ON	19.1
12.534000	31.45	---	60.00	28.55	1000.0	9.000	L1	ON	19.4
13.701750	---	23.40	50.00	26.60	1000.0	9.000	L1	ON	19.5


N Line

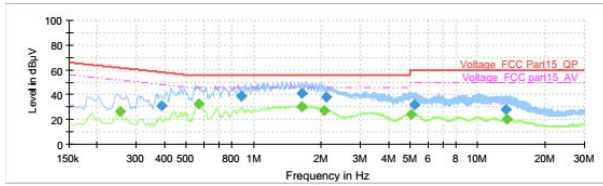

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.253500	---	26.15	51.64	25.49	1000.0	9.000	N	ON	19.1
0.386250	30.77	---	58.14	27.37	1000.0	9.000	N	ON	19.2
0.568500	---	32.71	46.00	13.29	1000.0	9.000	N	ON	19.3
0.879000	38.81	---	56.00	17.19	1000.0	9.000	N	ON	19.2
1.646250	41.15	---	56.00	14.85	1000.0	9.000	N	ON	19.2
1.646250	---	30.54	46.00	15.46	1000.0	9.000	N	ON	19.2
2.069250	---	27.50	46.00	18.50	1000.0	9.000	N	ON	19.1
2.105250	37.91	---	56.00	18.09	1000.0	9.000	N	ON	19.1
5.048250	---	24.09	50.00	25.91	1000.0	9.000	N	ON	19.1
5.221500	32.01	---	60.00	27.99	1000.0	9.000	N	ON	19.1
13.393500	28.14	---	60.00	31.86	1000.0	9.000	N	ON	19.5
13.580250	---	19.95	50.00	30.05	1000.0	9.000	N	ON	19.5


802.11g, Channel No.: 11

L Line

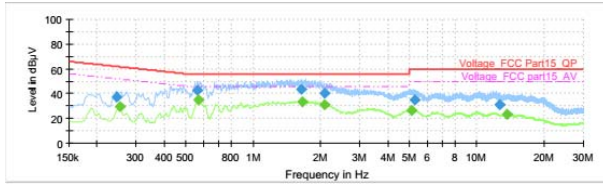

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	37.35	---	61.94	24.59	1000.0	9.000	L1	ON	19.1
0.253500	---	29.24	51.64	22.41	1000.0	9.000	L1	ON	19.1
0.564000	43.00	---	56.00	13.00	1000.0	9.000	L1	ON	19.3
0.568500	---	34.91	46.00	11.09	1000.0	9.000	L1	ON	19.3
1.646250	43.50	---	56.00	12.50	1000.0	9.000	L1	ON	19.2
1.657500	---	33.39	46.00	12.61	1000.0	9.000	L1	ON	19.2
2.078250	40.19	---	56.00	15.81	1000.0	9.000	L1	ON	19.1
2.091750	---	30.63	46.00	15.37	1000.0	9.000	L1	ON	19.1
5.084250	---	26.66	50.00	23.34	1000.0	9.000	L1	ON	19.1
5.293500	35.25	---	60.00	24.75	1000.0	9.000	L1	ON	19.1
12.644250	31.04	---	60.00	28.96	1000.0	9.000	L1	ON	19.5
13.692750	---	23.34	50.00	26.66	1000.0	9.000	L1	ON	19.5

N Line

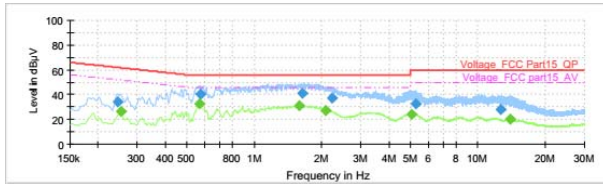

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.244500	34.00	---	61.94	27.94	1000.0	9.000	N	ON	19.1
0.253500	---	26.10	51.64	25.54	1000.0	9.000	N	ON	19.1
0.568500	---	32.77	46.00	13.23	1000.0	9.000	N	ON	19.3
0.577500	40.32	---	56.00	15.68	1000.0	9.000	N	ON	19.3
1.592250	---	30.62	46.00	15.38	1000.0	9.000	N	ON	19.2
1.648500	41.17	---	56.00	14.83	1000.0	9.000	N	ON	19.2
2.087250	---	27.51	46.00	18.49	1000.0	9.000	N	ON	19.1
2.217750	37.58	---	56.00	18.42	1000.0	9.000	N	ON	19.1
5.070750	---	24.00	50.00	26.00	1000.0	9.000	N	ON	19.1
5.264250	32.53	---	60.00	27.47	1000.0	9.000	N	ON	19.1
12.662250	27.88	---	60.00	32.12	1000.0	9.000	N	ON	19.4
13.965000	---	19.96	50.00	30.04	1000.0	9.000	N	ON	19.4



802.11n(HT20), Channel No.: 1

L Line

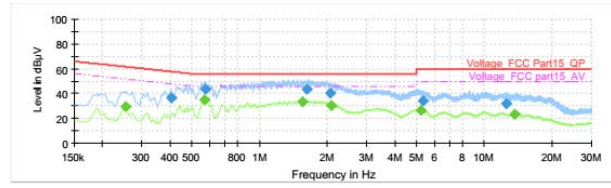


Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

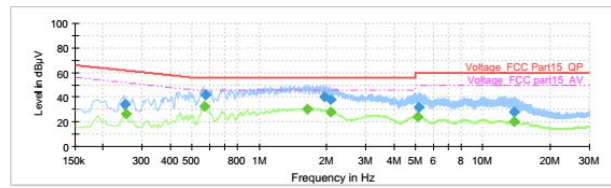


Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

802.11n(HT20), Channel No.: 6

L Line

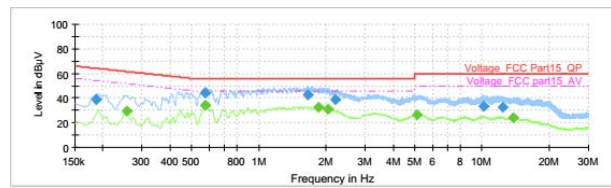


Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

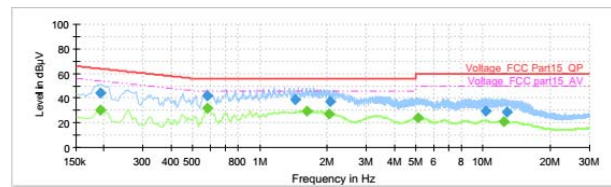


Table with 10 columns: Frequency (MHz), QuasiPeak (dBµV), Average (dBµV), Limit (dBµV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.



802.11n(HT20), Channel No.: 11

L Line

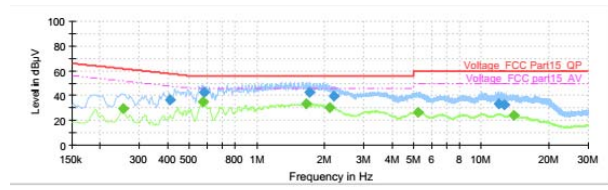


Table with 10 columns: Frequency (MHz), QuasiPeak (dBuV), Average (dBuV), Limit (dBuV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line

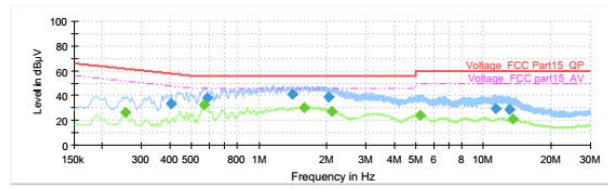


Table with 10 columns: Frequency (MHz), QuasiPeak (dBuV), Average (dBuV), Limit (dBuV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

BLE, Channel No.: 0

L Line

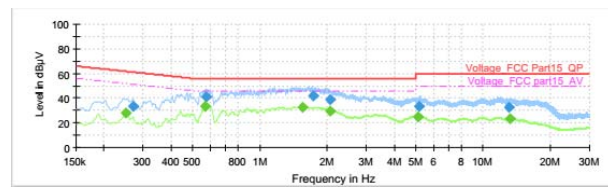


Table with 10 columns: Frequency (MHz), QuasiPeak (dBuV), Average (dBuV), Limit (dBuV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.

N Line


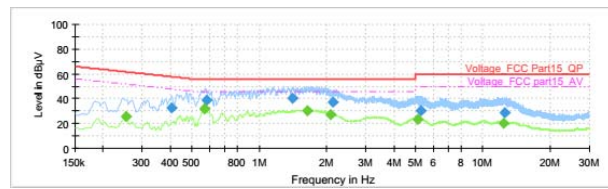


Table with 10 columns: Frequency (MHz), QuasiPeak (dBuV), Average (dBuV), Limit (dBuV), Margin (dB), Meas. Time (ms), Bandwidth (kHz), Line, Filter, Corr. (dB). Contains 15 rows of test data.




BLE, Channel No.: 19

L Line

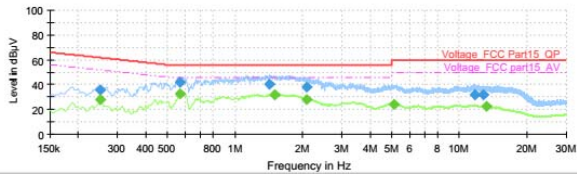

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.251250	---	27.56	51.72	24.16	1000.0	9.000	L1	ON	19.1
0.251250	35.93	---	61.72	25.78	1000.0	9.000	L1	ON	19.1
0.566250	---	32.44	46.00	13.56	1000.0	9.000	L1	ON	19.3
0.566250	41.61	---	56.00	14.39	1000.0	9.000	L1	ON	19.3
1.430250	40.45	---	56.00	15.55	1000.0	9.000	L1	ON	19.2
1.502250	---	31.68	46.00	14.32	1000.0	9.000	L1	ON	19.2
2.085000	---	28.06	46.00	17.94	1000.0	9.000	L1	ON	19.1
2.096250	37.89	---	56.00	18.11	1000.0	9.000	L1	ON	19.1
5.136000	---	24.06	50.00	25.94	1000.0	9.000	L1	ON	19.1
11.674500	31.56	---	60.00	28.44	1000.0	9.000	L1	ON	19.4
12.813000	31.52	---	60.00	28.48	1000.0	9.000	L1	ON	19.5
13.182000	---	22.57	50.00	27.43	1000.0	9.000	L1	ON	19.5


N Line

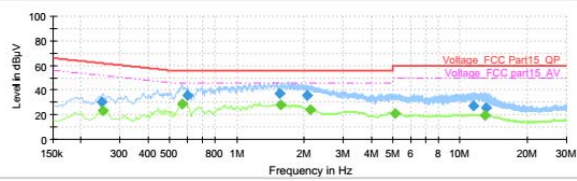

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.249000	30.38	---	61.79	31.41	1000.0	9.000	N	ON	19.1
0.251250	---	23.34	51.72	28.37	1000.0	9.000	N	ON	19.1
0.570750	---	28.82	46.00	17.18	1000.0	9.000	N	ON	19.3
0.600000	35.93	---	56.00	20.07	1000.0	9.000	N	ON	19.3
1.556250	36.99	---	56.00	19.01	1000.0	9.000	N	ON	19.2
1.567500	---	28.11	46.00	17.89	1000.0	9.000	N	ON	19.2
2.064750	35.29	---	56.00	20.71	1000.0	9.000	N	ON	19.1
2.143500	---	23.99	46.00	22.01	1000.0	9.000	N	ON	19.1
5.113500	---	21.31	50.00	28.69	1000.0	9.000	N	ON	19.1
11.451750	26.88	---	60.00	33.12	1000.0	9.000	N	ON	19.4
12.916500	---	19.29	50.00	30.71	1000.0	9.000	N	ON	19.5
13.090750	25.80	---	60.00	34.20	1000.0	9.000	N	ON	19.5


BLE, Channel No.: 39

L Line

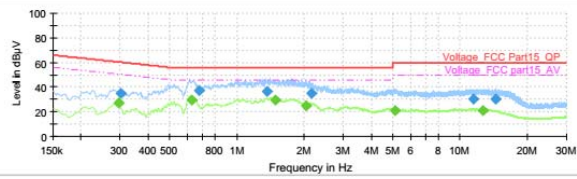

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.296250	---	26.79	50.35	23.56	1000.0	9.000	L1	ON	19.2
0.300750	34.93	---	60.22	25.29	1000.0	9.000	L1	ON	19.2
0.627000	---	29.32	46.00	16.68	1000.0	9.000	L1	ON	19.3
0.676500	36.99	---	56.00	19.01	1000.0	9.000	L1	ON	19.3
1.367250	36.81	---	56.00	19.39	1000.0	9.000	L1	ON	19.2
1.482000	---	29.49	46.00	16.51	1000.0	9.000	L1	ON	19.2
2.040000	---	24.46	46.00	21.54	1000.0	9.000	L1	ON	19.1
2.152500	34.68	---	56.00	21.32	1000.0	9.000	L1	ON	19.1
5.111250	---	20.89	50.00	29.11	1000.0	9.000	L1	ON	19.1
11.418000	30.45	---	60.00	29.55	1000.0	9.000	L1	ON	19.4
12.608250	---	20.83	50.00	29.17	1000.0	9.000	L1	ON	19.5
14.439750	30.08	---	60.00	29.92	1000.0	9.000	L1	ON	19.5

N Line

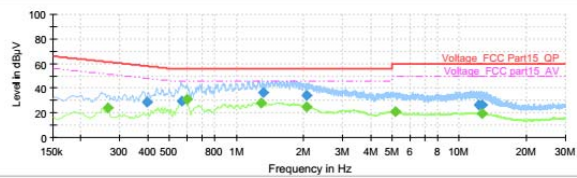

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.264750	---	23.77	51.28	27.51	1000.0	9.000	N	ON	19.1
0.397500	28.62	---	57.91	29.29	1000.0	9.000	N	ON	19.2
0.566250	29.54	---	56.00	26.46	1000.0	9.000	N	ON	19.3
0.600000	---	31.39	46.00	14.61	1000.0	9.000	N	ON	19.3
1.286250	---	28.07	46.00	17.93	1000.0	9.000	N	ON	19.2
1.313250	36.26	---	56.00	19.74	1000.0	9.000	N	ON	19.2
2.069250	33.85	---	56.00	22.15	1000.0	9.000	N	ON	19.1
2.089250	---	24.78	46.00	21.22	1000.0	9.000	N	ON	19.1
5.185500	---	21.05	50.00	28.95	1000.0	9.000	N	ON	19.1
12.194250	26.14	---	60.00	33.86	1000.0	9.000	N	ON	19.4
12.608250	---	19.24	50.00	30.76	1000.0	9.000	N	ON	19.4
12.642000	26.52	---	60.00	33.48	1000.0	9.000	N	ON	19.4



6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Time
BT Base Station Simulator	R&S	CBT	100271	2017-05-14	2018-05-13
Spectrum Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
EMI Test Receiver	R&S	ESCI	100948	2017-05-20	2018-05-19
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-201	2014-12-06	2017-12-05
Double Ridged Waveguide Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-02-18	2020-02-17
Standard Gain Horn	ETS-Lindgren	3160-09	00102644	2015-01-30	2018-01-29
EMI Test Receiver	R&S	ESCS30	100138	2016-12-16	2017-12-15
LISN	R&S	ENV216	101171	2016-12-16	2019-12-15
Spectrum Analyzer	Agilent	N9010A	MY47191109	2017-05-20	2018-05-19
RF Cable	Agilent	SMA 15cm	0001	2017-02-06	2017-08-05

*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side



Back Side


a: EUT



b: Battery




c: Adapter

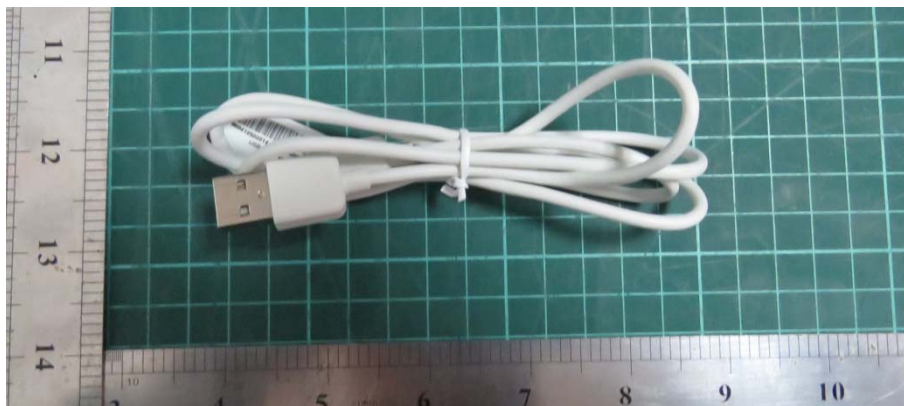


d: USB Cable

Picture 1 EUT and Accessory

A.2 Test Setup

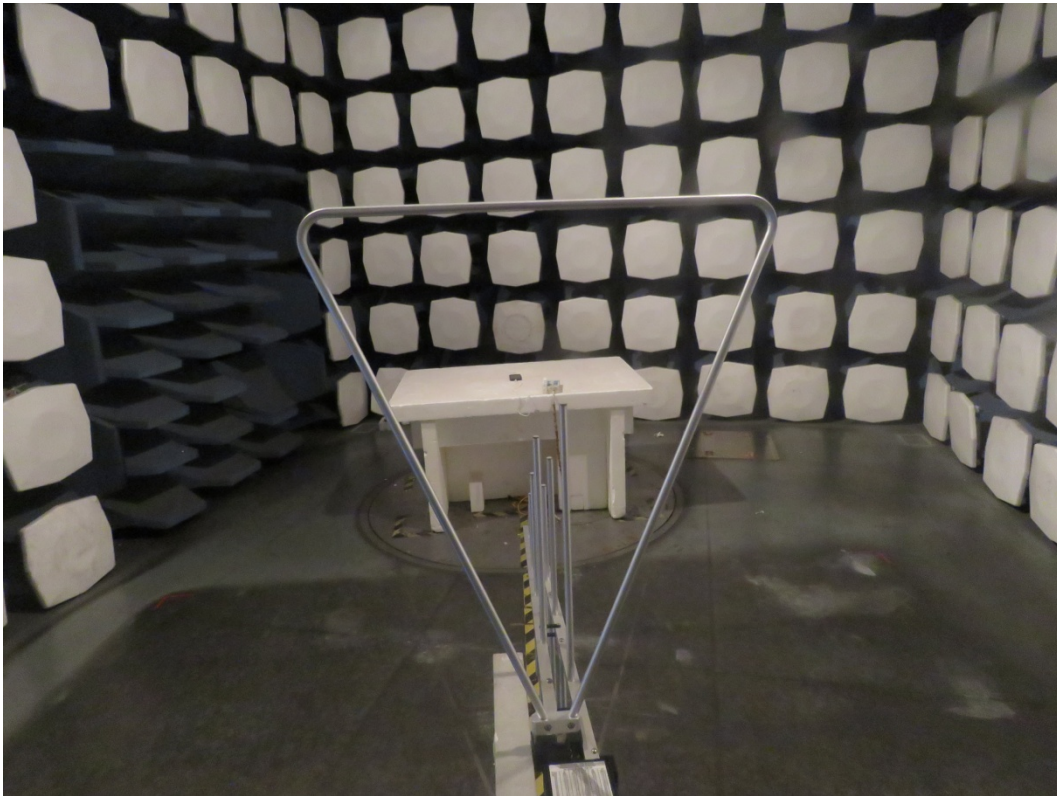

Below 1GHz

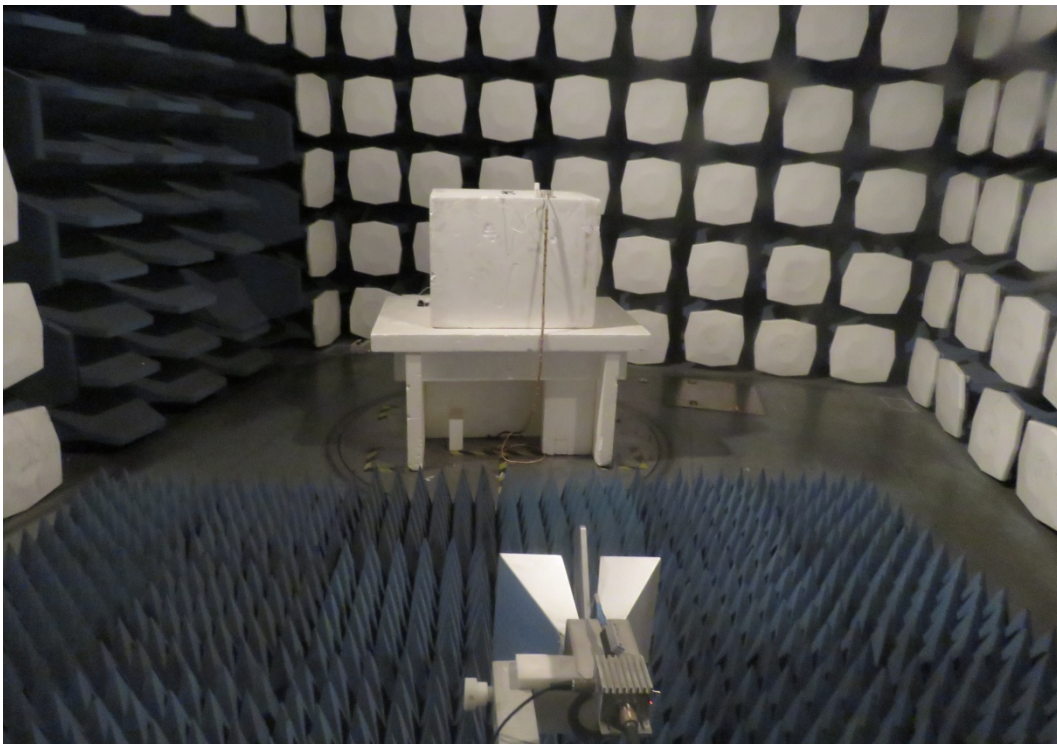

Above 1GHz

Picture 2 Radiated Emission Test Setup



Picture 3 Conducted Emission Test Setup