
TEST REPORT FOR WLAN TESTING

Report No.: SRTC2020-9004(F)-20022402(F)

Product Name: LTE/WCDMA/GSM (GPRS) Multi-Mode Wireless Router

Product Model: MF286R

Applicant: ZTE Corporation.

Manufacturer: ZTE Corporation.

Specification: FCC Part 15 Subpart C (2019)

FCC ID: SRQ-MF286R

The State Radio_monitoring_center Testing Center (SRTC)
15th Building, No.30 Shixing Street, Shijingshan District,
Beijing, P.R.China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. GENERAL INFORMATION	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT'S DETAILS	2
1.4 MANUFACTURER'S DETAILS	2
1.5 TEST ENVIRONMENT	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS	4
2.2 DESCRIPTION OF TEST MODES	5
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	5
2.3 DUTY CYCLE OF TEST SIGNAL	6
2.4 EUT OPERATING CONDITIONS	7
2.5 SUPPORT EQUIPMENT	7
3 REFERENCE SPECIFICATION	8
4 KEY TO NOTES AND RESULT CODES	8
5 RESULT SUMMARY	9
6 TEST RESULT	10
6.1 PEAK POWER OUTPUT	10
6.2 6dB BANDWIDTH	11
6.3 TRANSMITTER POWER SPECTRAL DENSITY	12
6.4 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	13
6.5 BAND-EDGE MEASUREMENT	14
6.6 SPURIOUS RADIATED EMISSIONS	15
6.7 AC POWER LINE CONDUCTED EMISSION	20
7 MEASUREMENT UNCERTAINTIES	22
8 TEST EQUIPMENTS	23
APPENDIX A – TEST DATA OF CONDUCTED EMISSION	24
APPENDIX B – TEST DATA OF RADIATED EMISSION	61

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC). The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiat@srtc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation.
Address:	ZTE Plaza, Keji Road South,Hi-Tech, Industrial Park, Nanshan District,Shenzhen, P.R.China
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	021-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation.
Address:	ZTE Plaza, Keji Road South,Hi-Tech, Industrial Park, Nanshan District,Shenzhen, P.R.China
City:	Shenzhen
Country or Region:	China
Contacted person:	Gong Yu
Tel:	021-68895397
Fax:	---
Email:	gongyu@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2020-02-24
Testing Start Date:	2020-02-25
Testing End Date:	2020-03-09

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	30
Maximum Extreme	55	---
Minimum Extreme	-20	---

Normal Supply Voltage (V d.c.):	12.0
Maximum Extreme Supply Voltage (V d.c.):	13.2
Minimum Extreme Supply Voltage (V d.c.):	10.8

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Frequency Band	2.412GHz~2.462GHz
Number of Channel For 20MHz	11
Number of Channel For 40MHz	7
Modulation Type	DBPSK/DQPSK/CCK/BPSK/QPSK/16QAM/64QAM
Duplex Mode	TDD
Channel Spacing	5MHz
Data Rate	802.11b:1Mbps-11Mbps 802.11g:6Mbps-54Mbps 802.11n HT20:MCS0-MCS7 802.11n HT40:MCS0-MCS7
Power Supply	Battery/Charger
Hardware Version	dqdA
Software Version	BD_LAMEIMF286RMODULEV1.0.0B02
IMEI	867709041132919
Antenna type	Refer to Note
Antenna connector	Refer to Note

Note: Antenna requirement (FCC part 15.203)

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

- The antenna(s) of the EUT are permanently attached.
- There are no provisions for connection to an external antenna.

Note: The antenna provide to the EUT, please refer to the following table:

Brand	Model	Antenna gain	Frequency range(GHz)	Antenna type	Connector Type
N/A	N/A	2.5dBi	2.412GHz~2.462GHz	Fixed Internal Antenna	N/A
Manufacturers ensure that their designs will not be modified by the user or third parties arbitrary antenna parameters and performance. The EUT complies with the requirement of §15.203.					

2.2 Description of Test Modes

11 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	---	---

2.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	-
-	√	√	√	√	-

Where

RE $\geq$ 1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5,13.5

Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK/ BPSK	1,6,6.5,13.5

Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	6	DBPSK	1

Antenna Port Conducted Measurement:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	DATA RATE (Mbps)
1 to 11	1,3, 6,9, 11	DBPSK/ BPSK	1,6,6.5,13.5

2.3 Duty Cycle of Test Signal

Modulation Type	Data Rate	Duty Cycle	Correction factor
11b	1Mbps	99.5%	0.01dB
11g	6Mbps	97.2%	0.11dB
11n(HT20)	6.5Mbps	97.0%	0.11dB
11n(HT40))	13.5 Mbps	95.6%	0.20dB

Duty cycle of test signal is > 98 %, duty factor shall not be considered.

Correction factor = $10 \cdot \log (1/\text{duty cycle})$

2.4 EUT Operating conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

2.5 Support Equipment

The following support equipment was used to exercise the DUT during testing:
NA.

3 REFERENCE SPECIFICATION



Specification	Version	Title
FCC part15 Subpart C	2019	Intentional radiators
ANSI C63.10	2013	Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074D01 V05R02r02	April 2, 2019	Guidance for compliance measurements on Digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

4 KEY TO NOTES AND RESULT CODES

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.

5 RESULT SUMMARY

No.	Test case	Reference	Verdict
1	Transmitter Output Power	15.247(b)(3)	Pass
2	6dB Bandwidth	15.247(a)(2)	Pass
3	Transmitter Power Spectral Density	15.247(e))	Pass
4	Conducted Out of band emission measurement	15.247(d)	Pass
5	Band Edge	15.247(d)	Pass
6	Spurious Radiated Emissions	15.205/15.209	Pass
7	AC Power line Conducted Emission	15.207	Pass
8	Antenna requirement	15.203	Pass(refer to section 2.1)

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Mr. Li Bin 
Tested by: Mr. He Dengshun 	Issued date: 20200312

6 TEST RESULT

6.1 Peak Power Output

6.1.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.2.2 Test limit

Part15.247 (b) (3)

The maximum permissible conducted output power is 1 Watt.

6.2.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.9.1.3

ANSI C63.10-2013 – Section 11.9.2.3.2

KDB 558074 D01 v05r02 – Section 8.3.1.3

6.2.4 Test Settings

Peak Power Measurement


The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

6.2.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.2.6 Test result

The test results are shown in Appendix A.

6.2 6dB Bandwidth

6.2.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.1.2 Test limit

Part15.247 (a) (2)

The minimum permissible 6dB bandwidth is 500 kHz

6.1.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.8.2 Option 2

KDB 558074 D01 v05r02 – Section 8.2

6.1.4 Test Settings

1. The signal analyzers' automatic bandwidth measurement capability of the spectrum analyzer was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.

2. RBW = 100 kHz

3. VBW $\geq 3 \times$ RBW

4. Detector = Peak


5. Trace mode = max hold

6. Sweep = auto couple

7. The trace was allowed to stabilize

6.1.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.1.6 Test result

The test results are shown in Appendix A.

6.3 Transmitter Power Spectral Density

6.3.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.3.2 Test limit

Part15.247 (e)

The maximum permissible power spectral density is 8.0dBm in any 3 kHz band.

6.3.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.10.2 Method PKPSD


KDB 558074 D01 v05r02 – Section 8.4

6.3.4 Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3 kHz
4. VBW = 10 kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.3.5 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.3.7 Test result

The test results are shown in Appendix A.

6.4 Conducted Out of band emission measurement

6.4.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.4.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.4.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.5

6.4.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.4.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.4.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.4.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.5 Band-edge measurement

6.5.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.5.2 Test limit

Part 15.247(d): The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth.

6.5.3 Test Procedure Used

ANSI C63.10-2013 – Section 11.11.3

KDB 558074 D01 v05r02 – Section 8.7.2

6.5.4 Reference level measurement Settings

Establish a reference level by using the following procedure:


- Set instrument center frequency to DTS channel center frequency.
- Set the span to ≥ 1.5 MHz
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum PSD level.

6.5.5 Test Settings

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Set span to encompass the spectrum to be examined
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5.6 Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



6.5.7 Test result

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement. The test results are shown in Appendix A.

6.6 Spurious Radiated Emissions

6.6.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.6.2 Test Description

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

6.6.3 Test limit

Part15.205, 15.209, 15.247(d)

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in below Table per Section 15.209. The spectrum shall be investigated from the lowest radio frequency signal generated in the device

Frequency [MHz]	Field strength [$\mu\text{V/m}$]	Measured Distance [meters]
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Limits

Part15.35(b):

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit

Used conversion factor: Limit (dB $\mu\text{V/m}$) = 20 log (Limit ($\mu\text{V/m}$)/1 $\mu\text{V/m}$)

Frequency [MHz]	Detector	Unit (dB $\mu\text{V/m}$)
30~88	Quasi-peak	40.0
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46.0
960~1000	Quasi-peak	54.0
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54.0
	Peak	74.0

Conversion Radiated limits

6.6.4 Test Procedure Used

KDB 558074 D01 DTS Meas Guidance v05r02r02 – Section 12.2.7

For Radiated emission below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and recorded the reading with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer complied the following setting:

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz

For Radiated emission above 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground in chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and recorded the reading with Maximum Hold Mode when the test frequency is below 1 GHz.
- The test-receiver system was set to peak and average detector and recorded the reading with Maximum Hold Mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Average detection (AV) at frequency above 1GHz. If duty cycle of test signal is < 98%, the duty factor need added to measured value.
4. All modes of operation were investigated and the worst-case emissions are reported.

6.6.5 Test Settings

Average Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)

Frequency	Detector
<1000MHz	Quasi-peak
>1000MHz	Peak and average

Peak Field Strength Measurements per Section 12.2.7 of KDB 558074 (Part 15.35)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in following table

Frequency	RBW
9-150kHz	200-300Hz
0.15-30MHz	9-10kHz
30-1000MHz	100-120kHz
>1000MHz	1MHz


3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.6 Test Setup


For Radiated emission below 30MHz

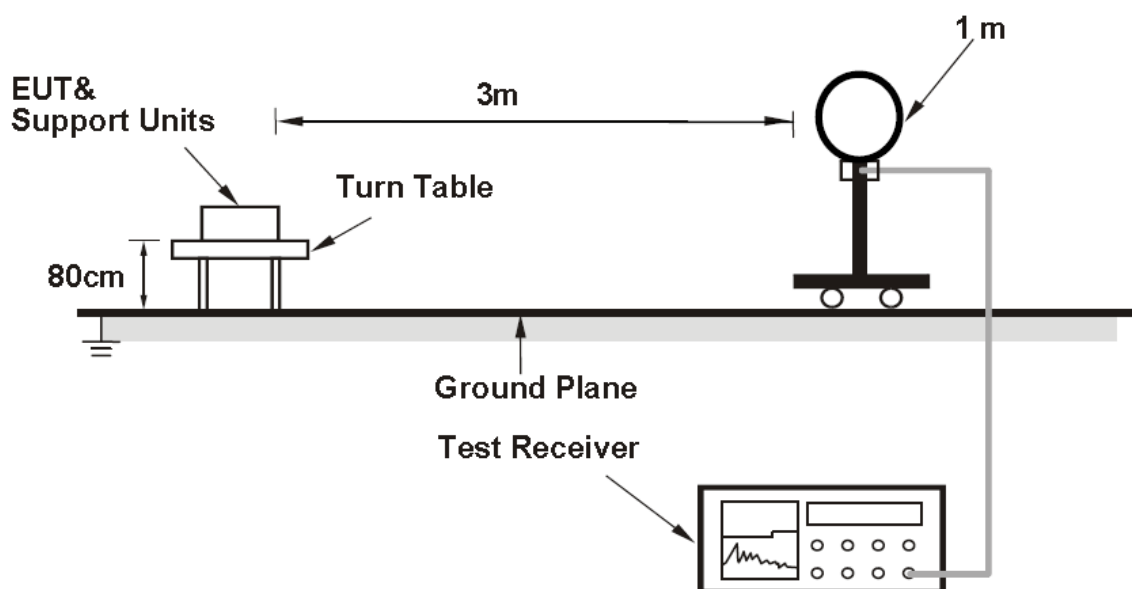

For Radiated emission 30MHz to 1GHz

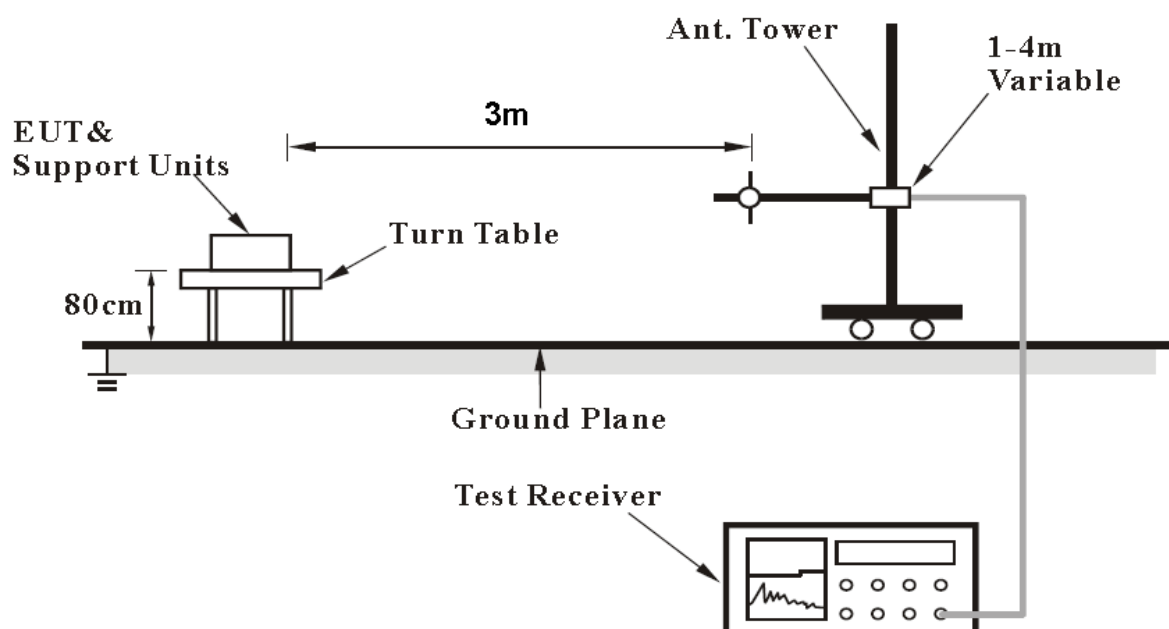

For Radiated emission above 1GHz

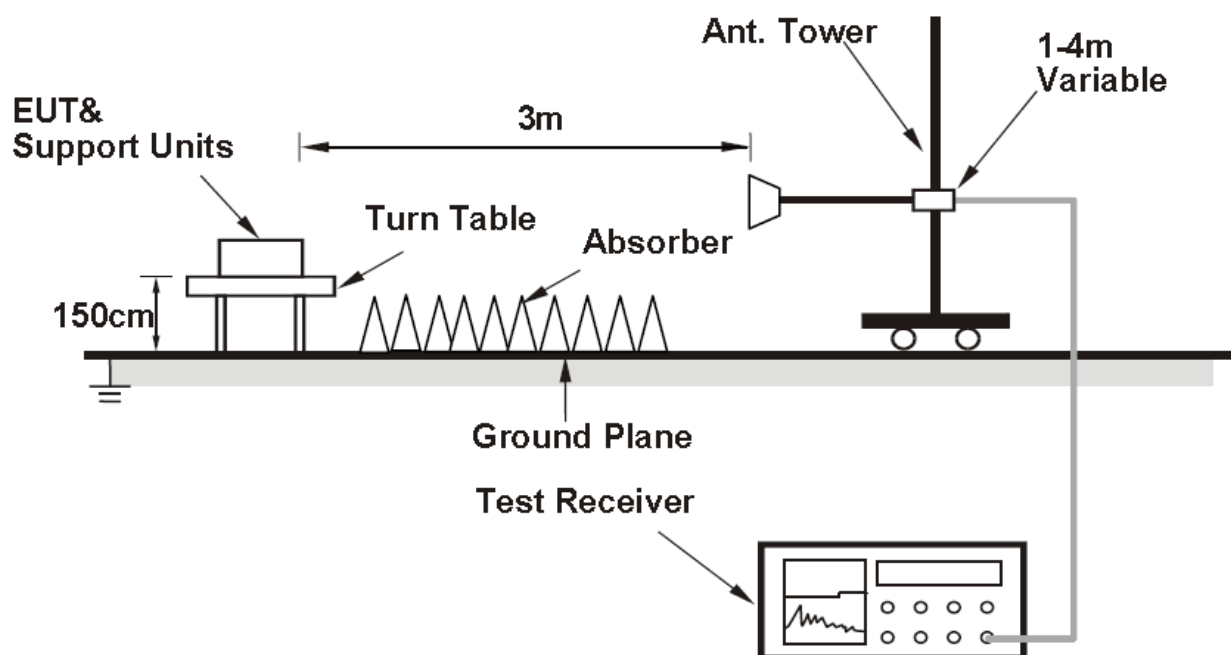

6.6.7 Test result

The test results are shown in Appendix B.

6.7 AC Power line Conducted Emission

6.7.1 Ambient condition

Temperature	Relative humidity	Pressure
25°C	30%	101.5kPa

6.7.2 Test limit

FCC Part15.207

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

The measurement is made according to ANSI C63.10-2013

6.7.3 Test Procedures

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.


b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

The EUT shall test under the power AC120V/60Hz.

6.7.4 Test Setup

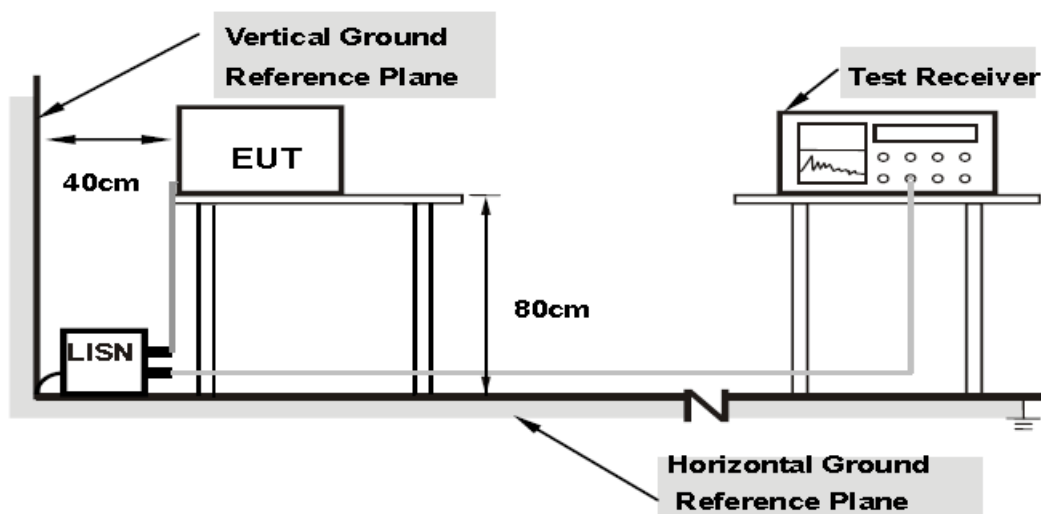

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.5 Test result

The test results are shown in Appendix B.

7 MEASUREMENT UNCERTAINTIES

Items	Uncertainty	
Occupied Bandwidth	3kHz	
Peak power output	0.67dB	
Band edge compliance	1.20dB	
Spurious emissions	30MHz~1GHz	2.83dB
	1GHz~12.75GHz	2.50dB
	12.75GHz~25GHz	2.75dB

8 TEST EQUIPMENTS

No.	Name/ Model	Manufacturer	S/N	Cal date	Cal Due date
1.	Spectrum Analyzer FSV	ROHDE&SCHWARZ	101065	2019.08.20	2020.08.19
2.	Power Meter E4416A	Agilent	MY52370013	2019.03.01	2020.02.29
3.	Power Sensor E9327A	Agilent	MY52420006	2020.03.01	2021.02.28
4.	Attenuator 6810.17.B	HUBER+SUHNER	768710	2019.08.20	2020.08.19
5.	23.18m×16.88m×9.60m Semi-Anechoic Chamber	FRANKONIA	---	----	----
6.	Turn table Diameter:5m	FRANKONIA	----	----	----
7.	Antenna master SAC(MA4.0)	MATURO	----	----	----
8.	9.080m×5.255m×3.525m Shielding room	FRANKONIA	----	----	----
9.	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2019.08.20	2020.08.19
10.	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2019.08.20	2020.08.19
11.	ESI 40 EMI test receiver	R&S	100015	2019.08.20	2020.08.19
12.	ESCS30 EMI test receiver	R&S	100029	2019.08.20	2020.08.19
13.	HL562 Receive antenna	R&S	100167	2019.08.20	2020.08.19
14.	ENV216 AMN	R&S	3560.6550.12	2019.08.20	2020.08.19

APPENDIX A – TEST DATA OF CONDUCTED EMISSION

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1Mbps
802.11g	6Mbps
802.11n HT20	MCS0(6.5 Mbps)
802.11n HT40	MCS0(13.5 Mbps)

We chose the Worst-modes are shown as following table:

Test Mode	Ant	Note
802.11b	SISO Ant0	---
802.11g	SISO Ant0	---
802.11n HT20	SISO Ant0	---
802.11n HT40	SISO Ant0	---
802.11n HT20	MIMO 2*2 Ant0+Ant1	Cover 802.11n HT20 MIMO 3*3
802.11n HT20	MIMO 2*2 Ant0+Ant2	Cover 802.11n HT20 MIMO 3*3
802.11n HT20	MIMO 2*2 Ant1+Ant2	Cover 802.11n HT20 MIMO 3*3
802.11n HT20	MIMO 3*3 Ant0+Ant1+Ant3	---
802.11n HT40	MIMO 2*2 Ant0+Ant1	Cover 802.11n HT40 MIMO 3*3
802.11n HT40	MIMO 2*2 Ant0+Ant2	Cover 802.11n HT40 MIMO 3*3
802.11n HT40	MIMO 2*2 Ant1+Ant2	Cover 802.11n HT40 MIMO 3*3
802.11n HT40	MIMO 3*3 Ant0+Ant1+Ant3	---

Directional Antenna Gain

The TX chains are correlated and the antenna gain is unequal among the chains. The directional gain is:

Band	Chain0 Antenna Gain(dBi)	Chain1 Antenna Gain(dBi)	Chain1 Antenna Gain(dBi)	Correlated Chains Directional Gain(dBi)
2.4GHz	2.5	2.5	2.5	7.27

Antenna Gain and Limits

Band	Correlated Chains Directional Gain (dBi)	Power Limit (dBm)	PSD Limit
2.4GHz	7.27	28.73	8dBm/3kHz

Conducted power

Modulation type	Ant	Peak power output (dBm)		
		2412MHz	2437MHz	2462MHz
802.11b	Ant0	22.19	20.81	20.49
802.11b	Ant1	22.17	20.78	20.34
802.11b	Ant2	22.16	20.79	20.28
802.11g	Ant0	25.34	24.32	24.16
802.11g	Ant1	25.28	24.27	24.16
802.11g	Ant2	25.19	24.28	24.14
11n HT20	Ant0	23.71	22.53	22.64
11n HT20	Ant1	23.66	22.28	22.51
11n HT20	Ant2	23.67	22.19	22.52
11n HT20 MIMO 2*2	Ant0+Ant1	26.70	25.42	25.59
11n HT20 MIMO 2*2	Ant0+Ant2	26.70	25.37	25.59
11n HT20 MIMO 2*2	Ant1+Ant2	26.68	25.25	25.53
11n HT20 MIMO 3*3	Ant0+Ant1+Ant2	28.45	27.11	27.33
Modulation type	Ant	Peak power output (dBm)		
		2422MHz	2437MHz	2452MHz
11n HT40	Ant0	22.88	22.39	22.13
11n HT40	Ant1	22.86	22.35	21.69
11n HT40	Ant2	22.75	22.28	21.96
11n HT40 MIMO 2*2	Ant0+Ant1	25.88	25.38	24.93
11n HT40 MIMO 2*2	Ant0+Ant2	25.83	25.35	25.06
11n HT40 MIMO 2*2	Ant1+Ant2	25.82	25.33	24.84
11n HT40 MIMO 3*3	Ant0+Ant1+Ant2	27.60	27.11	26.70

Modulation type	Ant	Average power output (dBm)		
		2412MHz	2437MHz	2462MHz
802.11b	Ant0	19.58	17.76	17.53
802.11b	Ant1	19.47	17.68	17.47
802.11b	Ant2	19.52	17.73	17.52
802.11g	Ant0	17.12	15.84	15.80
802.11g	Ant1	17.08	15.79	15.78
802.11g	Ant2	17.06	15.82	15.69
11n HT20	Ant0	17.44	15.59	15.64
11n HT20	Ant1	17.38	15.47	15.57
11n HT20	Ant2	17.27	15.54	15.48
11n HT20 MIMO 2*2	Ant0+Ant1	20.42	18.54	18.62
11n HT20 MIMO 2*2	Ant0+Ant2	20.37	18.58	18.57
11n HT20 MIMO 2*2	Ant1+Ant2	20.34	18.52	18.54
11n HT20 MIMO 3*3	Ant0+Ant1+Ant2	22.14	20.30	20.34
Modulation type	Ant	Average power output (dBm)		
		2422MHz	2437MHz	2452MHz
11n HT40	Ant0	16.14	15.34	14.55
11n HT40	Ant1	16.13	15.08	14.47
11n HT40	Ant2	16.07	15.11	14.36
11n HT40 MIMO 2*2	Ant0+Ant1	19.15	18.22	17.52
11n HT40 MIMO 2*2	Ant0+Ant2	19.12	18.24	17.47
11n HT40 MIMO 2*2	Ant1+Ant2	19.11	18.11	17.43
11n HT40 MIMO 3*3	Ant0+Ant1+Ant2	20.88	19.95	19.23


6dB Bandwidth

Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.3dB+ Cable loss 1.2dB


Test Mode: 802.11b (SISO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	9.64
2437	6	10.03
2462	11	10.12


CH1

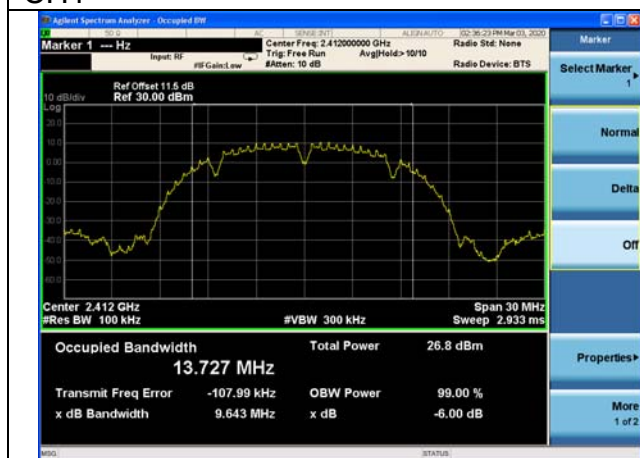

CH6

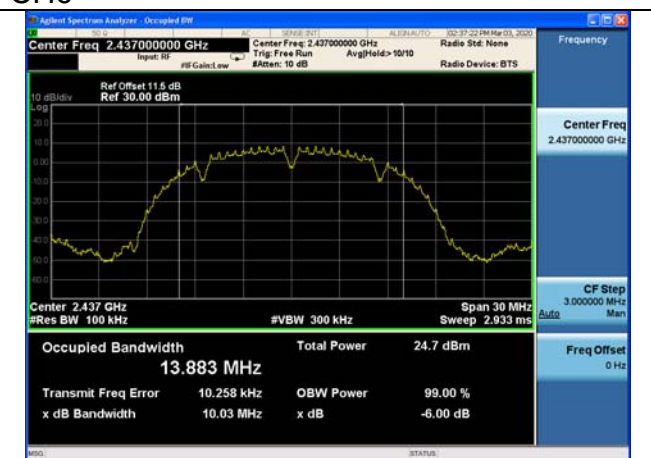


CH11

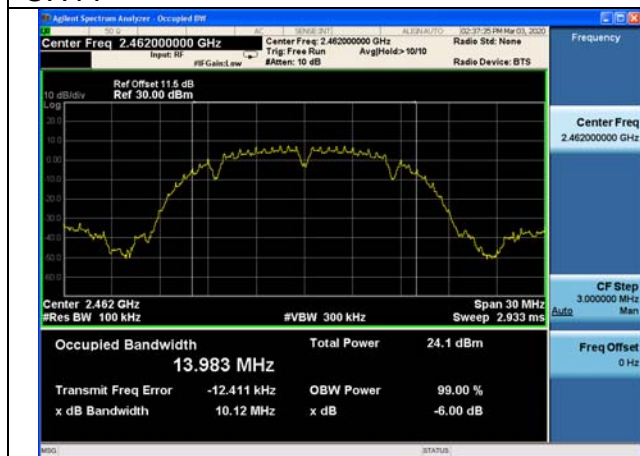


Test Mode: 802.11g (SISO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.03
2437	6	15.09
2462	11	15.12


CH1

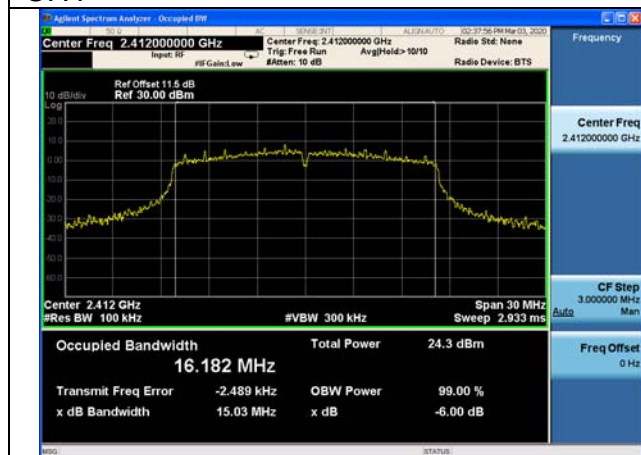

CH6

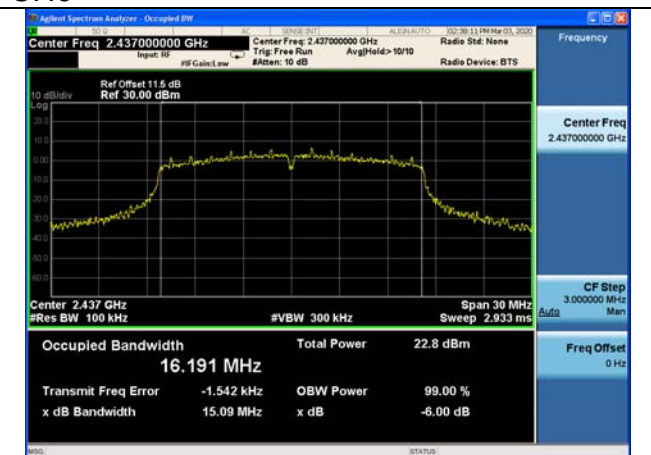


CH11

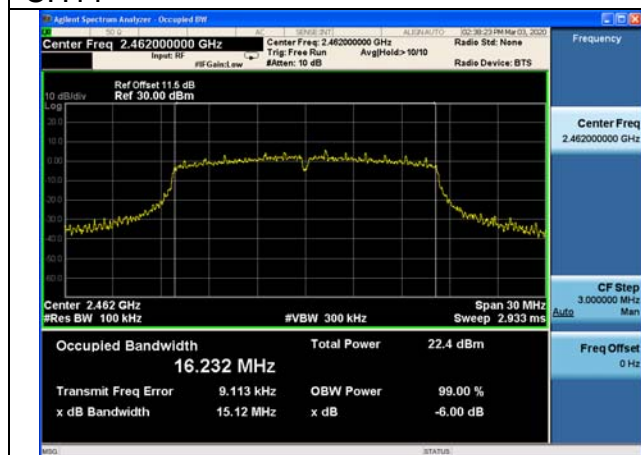


Test Mode: 802.11n (HT20) (SISO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.07
2437	6	15.11
2462	11	15.12


CH1

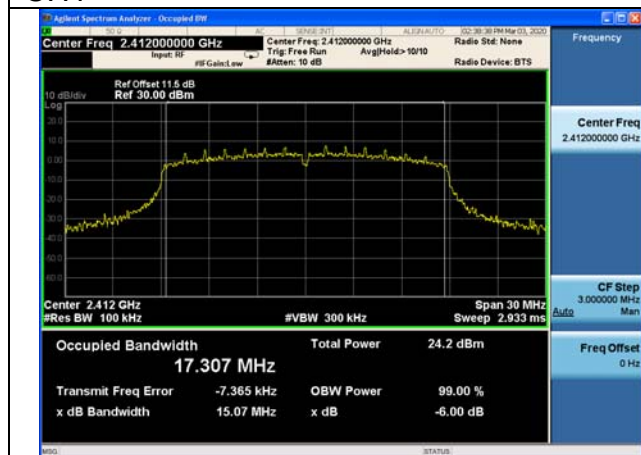

CH6

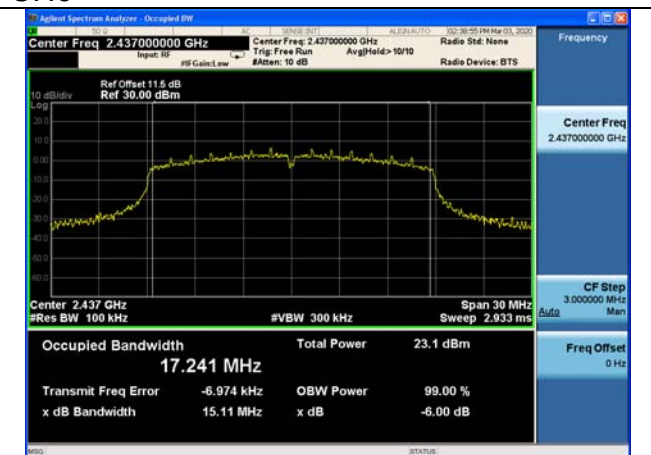

CH11

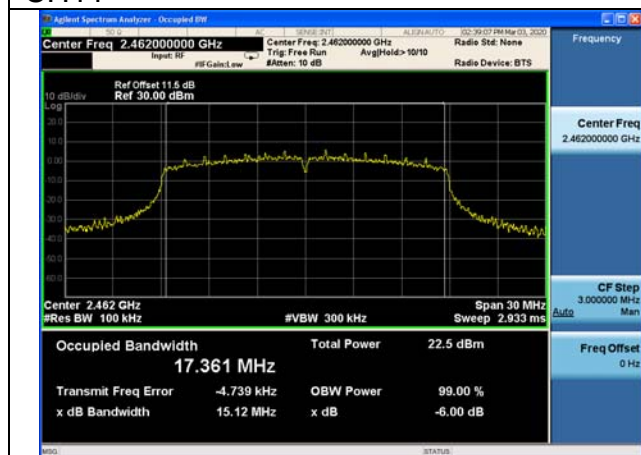


Test Mode: 802.11n (HT20) (MIMO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.10
2437	6	15.08
2462	11	15.12


CH1



CH6

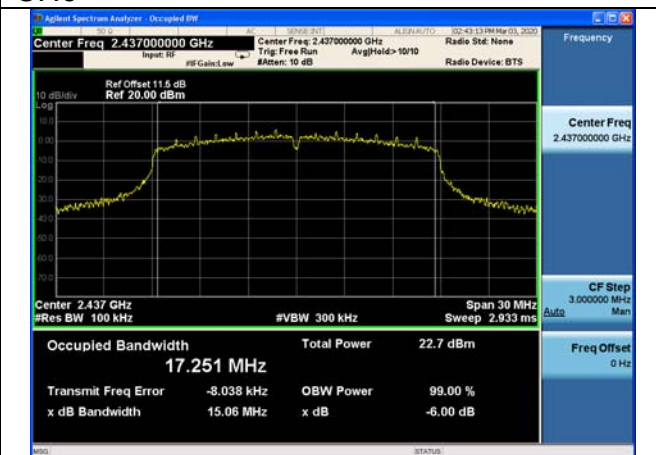


CH11

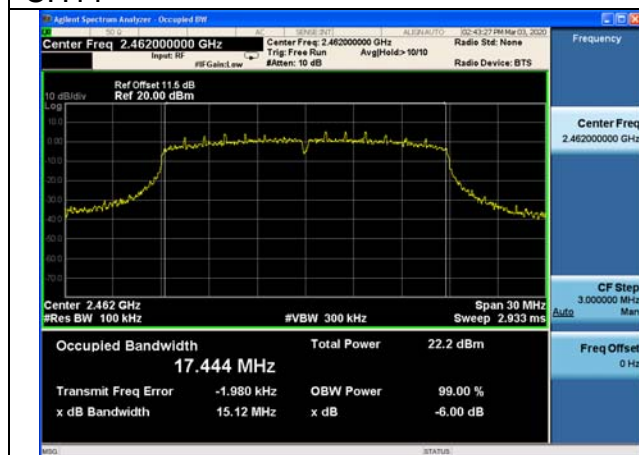


Test Mode: 802.11n (HT20) (MIMO Ant1)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.09
2437	6	15.01
2462	11	15.14


CH1

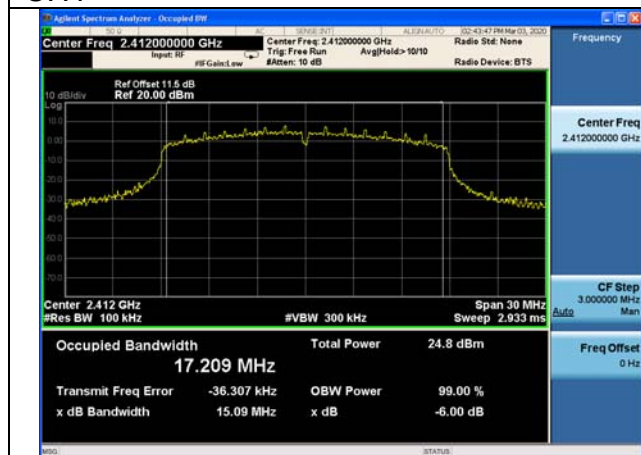

CH6

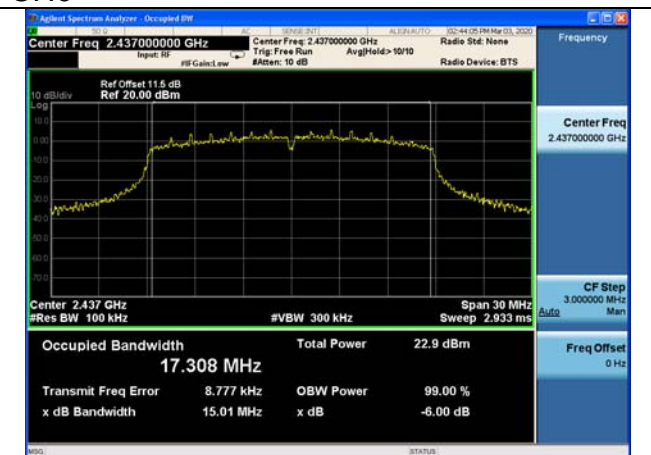


CH11

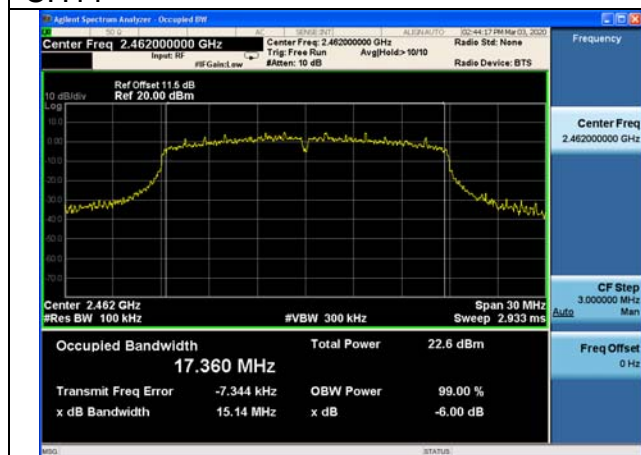


Test Mode: 802.11n (HT20) (MIMO Ant2)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2412	1	15.06
2437	6	15.11
2462	11	15.10


CH1

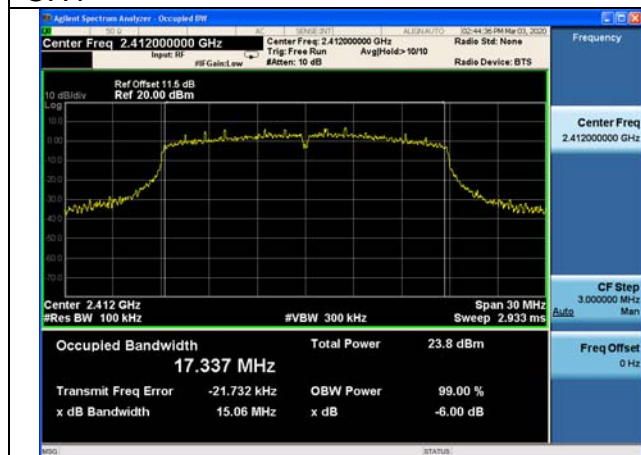

CH6

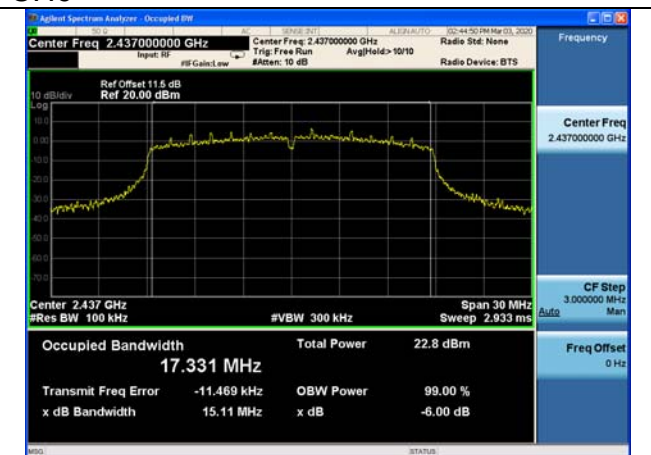


CH11

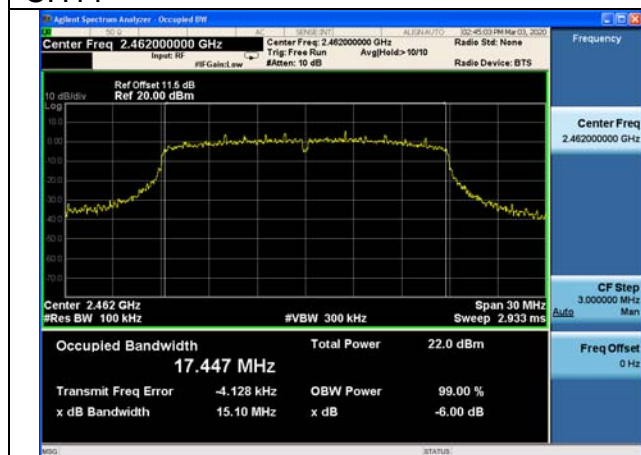


Test Mode: 802.11n (HT40) (SISO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	31.28
2437	6	30.07
2452	9	30.13


CH3

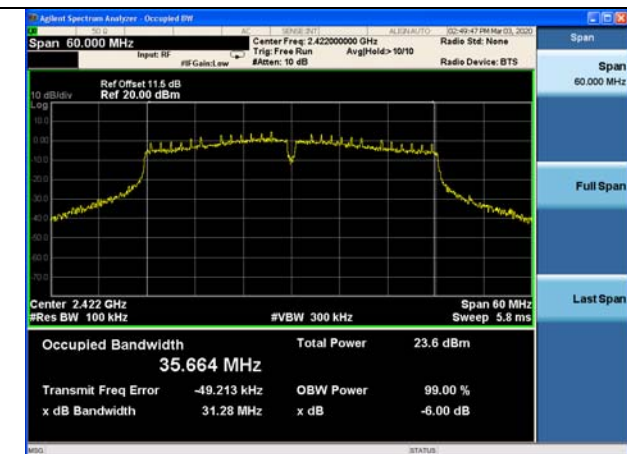

CH6

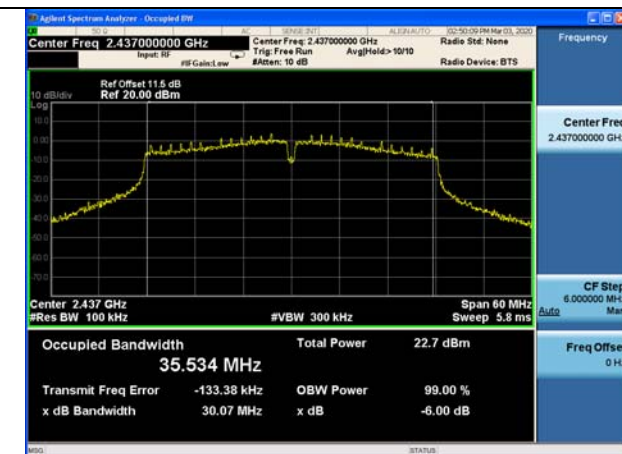


CH9

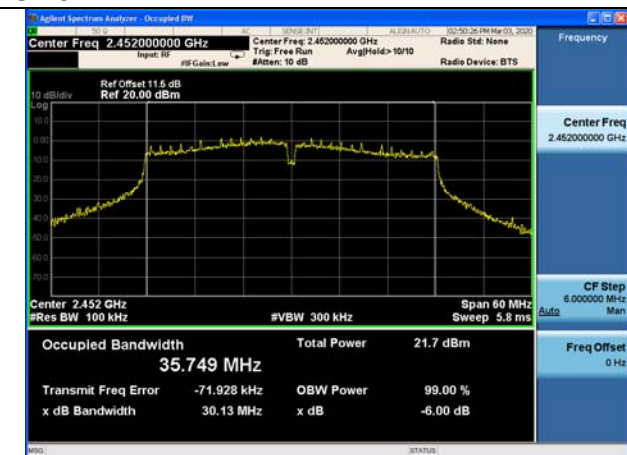

Test Mode: 802.11n (HT40) (MIMO Ant0)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	31.26
2437	6	30.09
2452	9	31.31


CH3

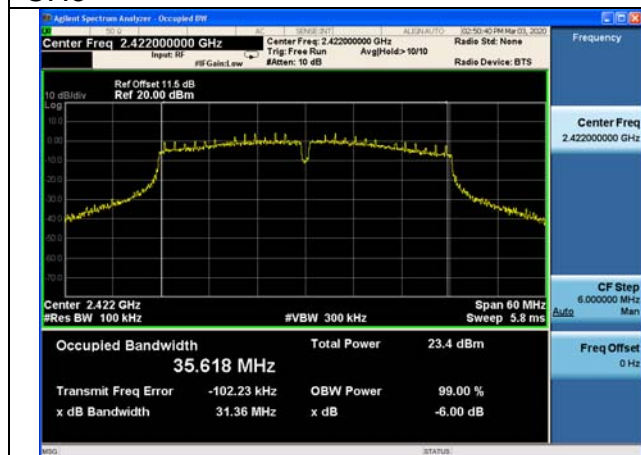

CH6




CH9

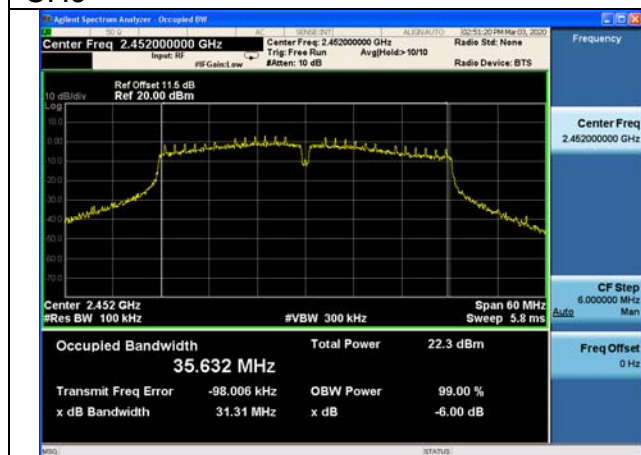


Test Mode: 802.11n (HT40) (MIMO Ant1)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	33.84
2437	6	30.11
2452	9	30.09


CH3

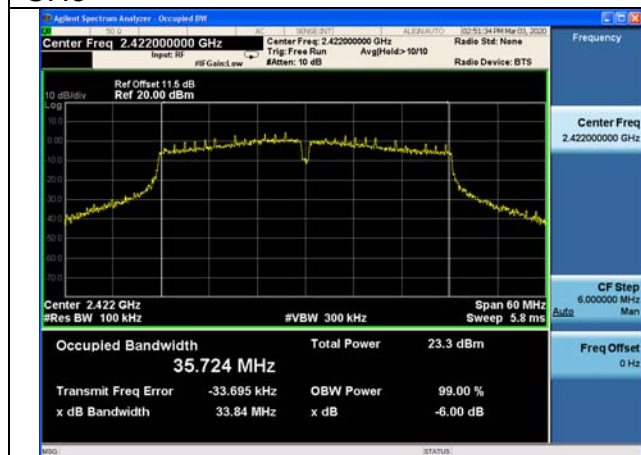

CH6

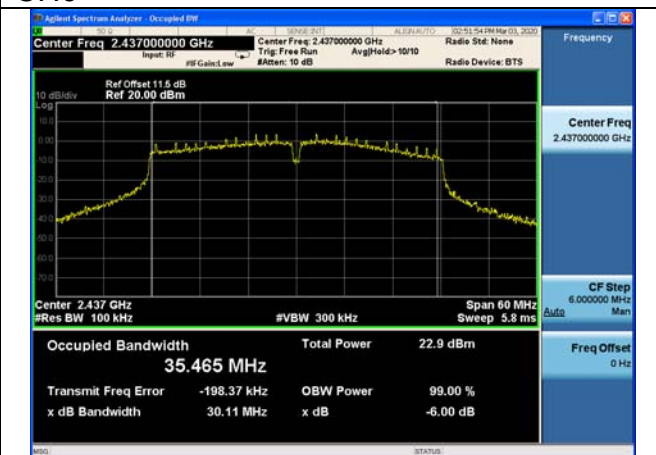


CH9

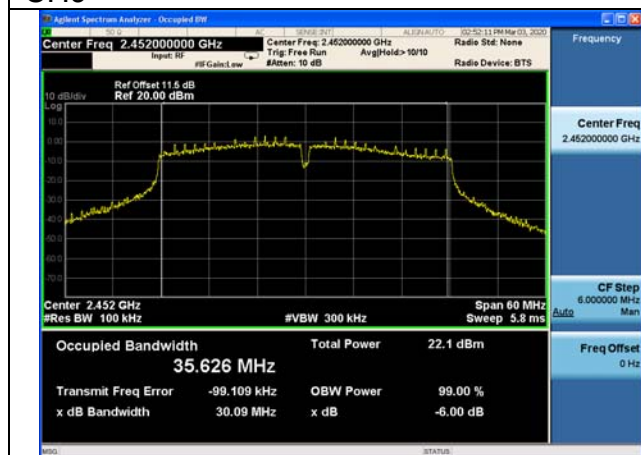


Test Mode: 802.11n (HT40) (MIMO Ant2)

Carrier frequency (MHz)	Channel No.	6 dB bandwidth(MHz)
2422	3	32.59
2437	6	31.28
2452	9	30.00


CH3

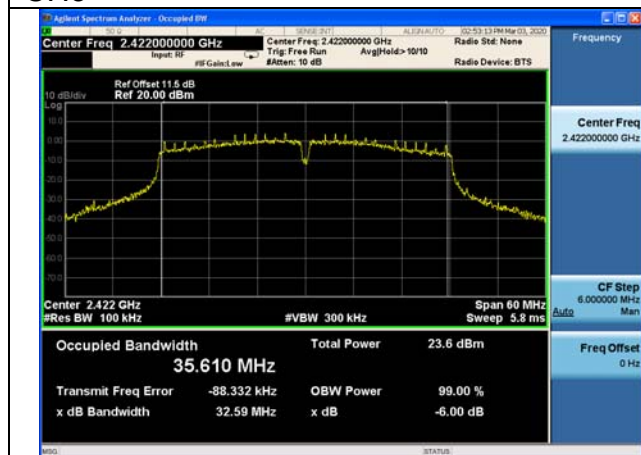

CH6

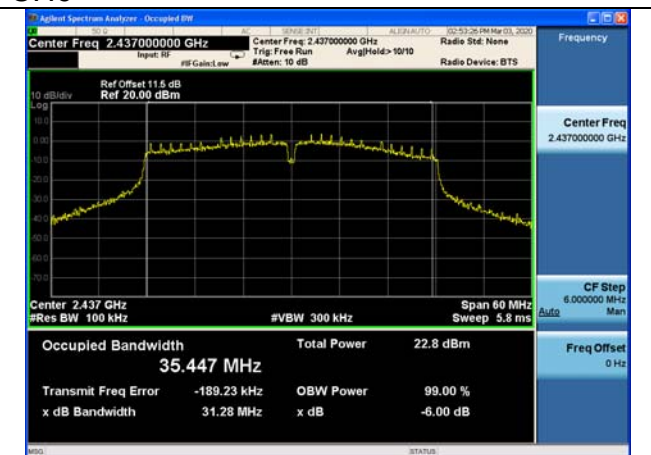

CH9

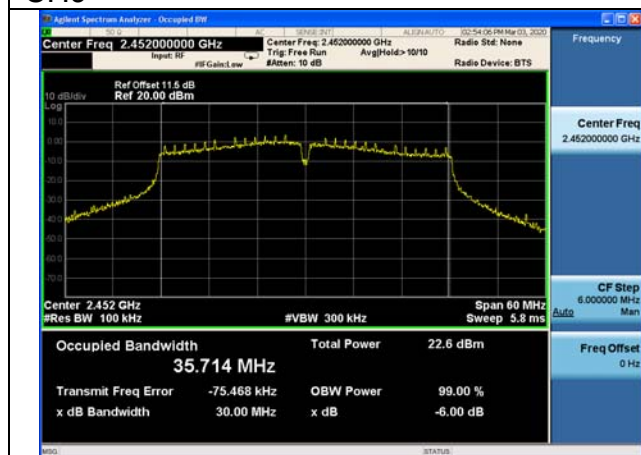


Transmitter Power Spectral Density

Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.3dB+ Cable loss 1.2dB

Test Mode: 802.11b (SISO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-2.735
2437	6	-6.863
2462	11	-6.437

CH1

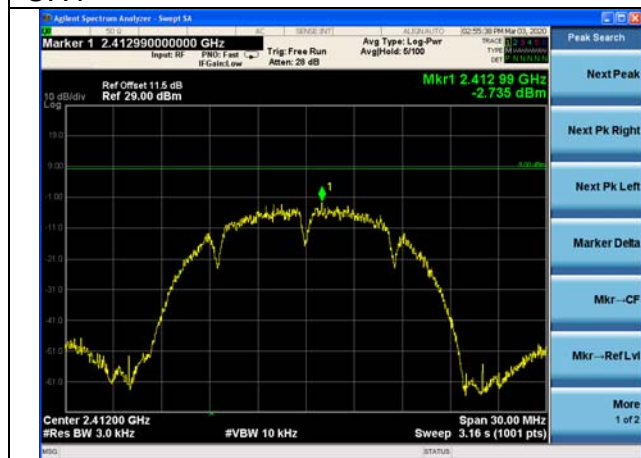

CH6




CH11




Test Mode: 802.11g (SISO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-6.687
2442	6	-6.865
2472	11	-8.484


CH1

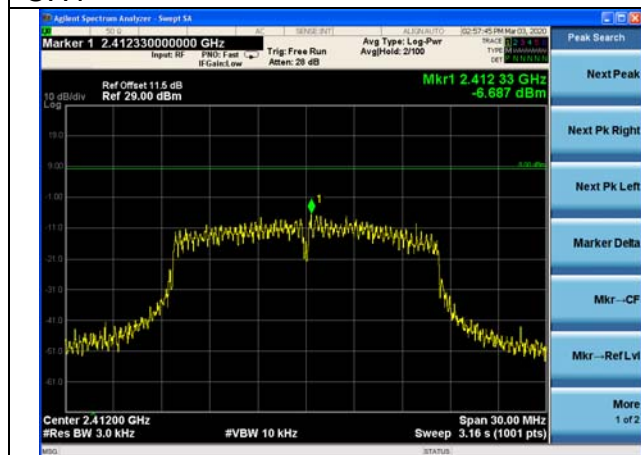

CH6

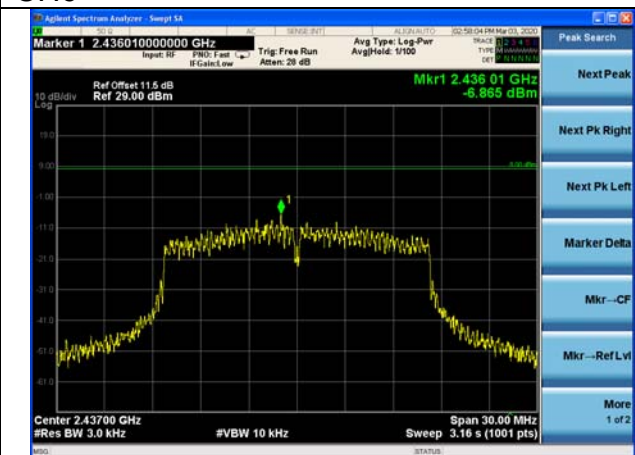


CH11

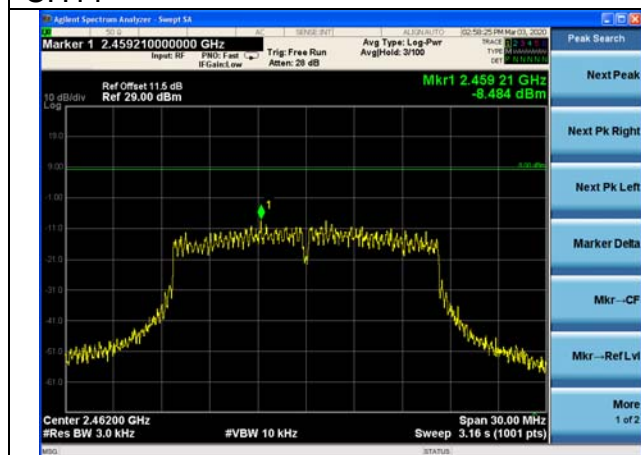


Test Mode: 802.11n (HT20) (SISO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-7.533
2437	6	-8.479
2462	11	-10.071


CH1

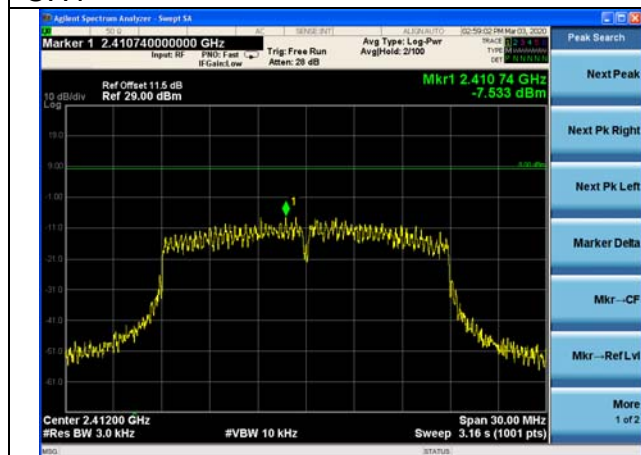

CH6

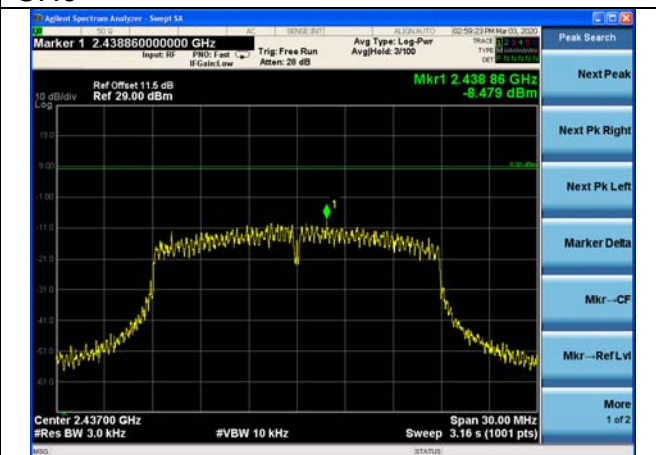


CH11

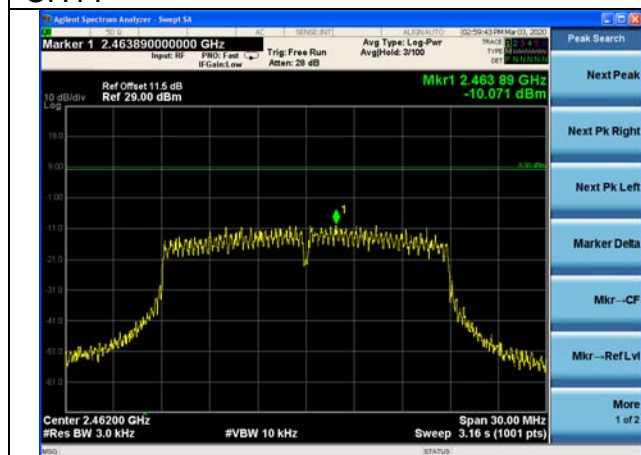


Test Mode: 802.11n (HT20) (MIMO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-8.021
2437	6	-9.211
2462	11	-8.073


CH1

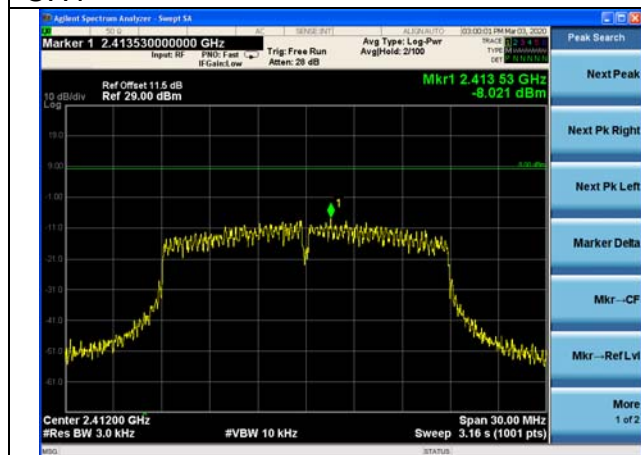

CH6

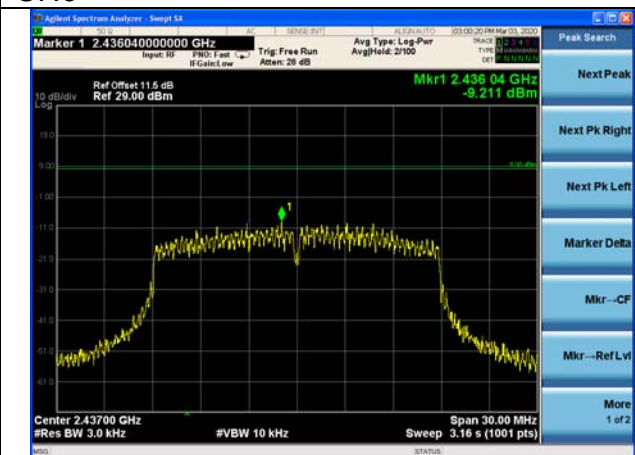


CH11

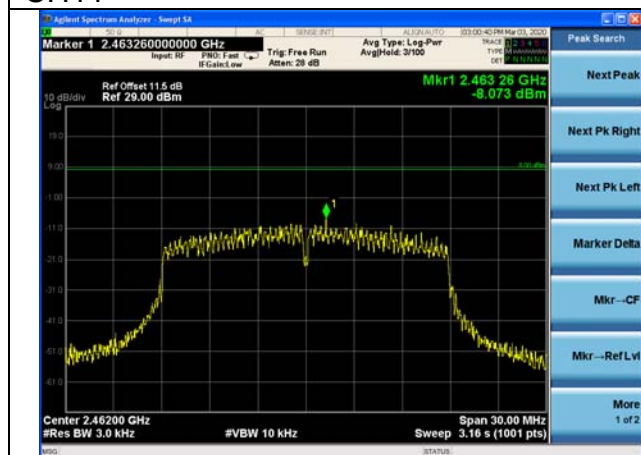


Test Mode: 802.11n (HT20) (MIMO Ant1)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-7.250
2437	6	-9.732
2462	11	-8.936


CH1

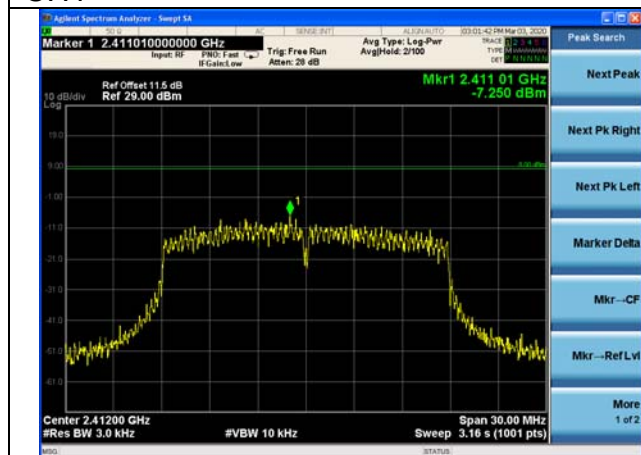

CH6

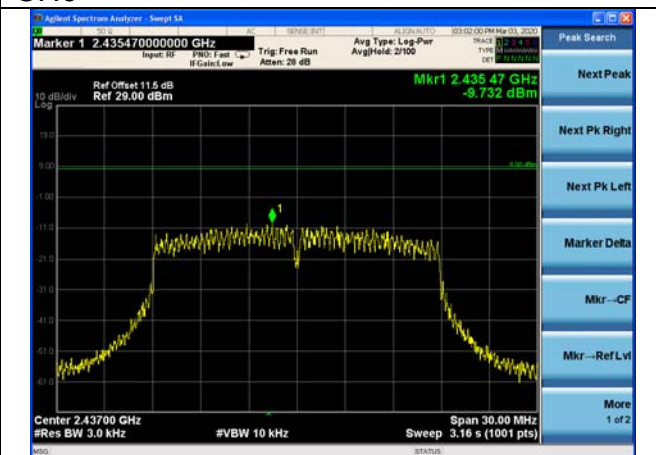


CH11

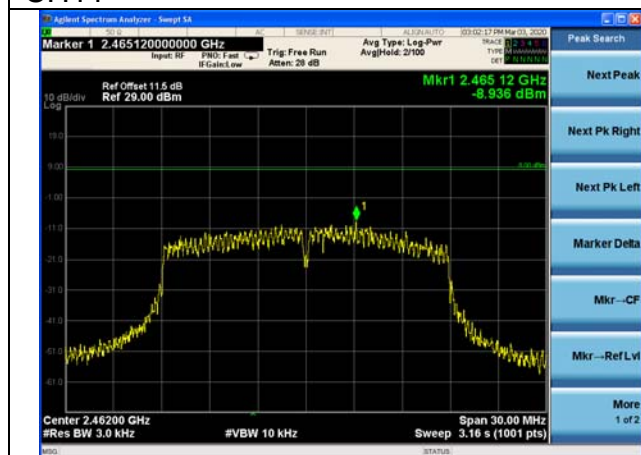


Test Mode: 802.11n (HT20) (MIMO Ant2)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-7.150
2437	6	-6.512
2462	11	-10.490


CH1

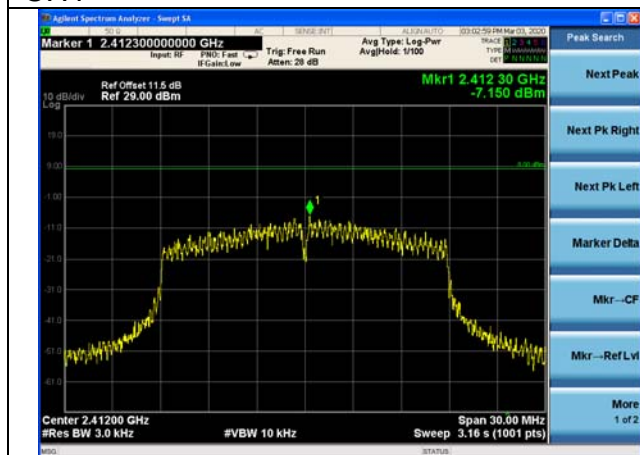

CH6

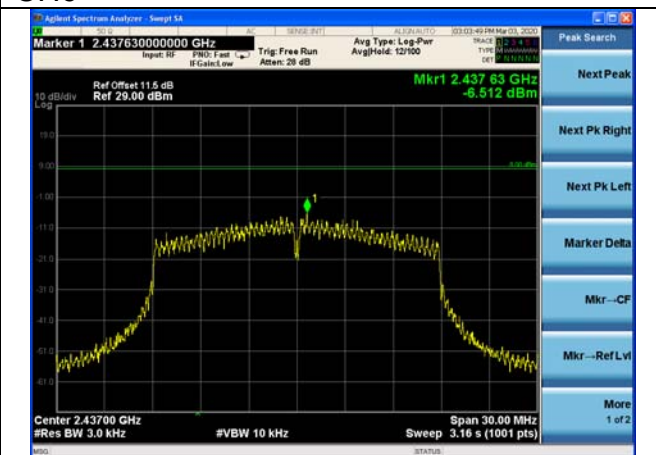

CH11

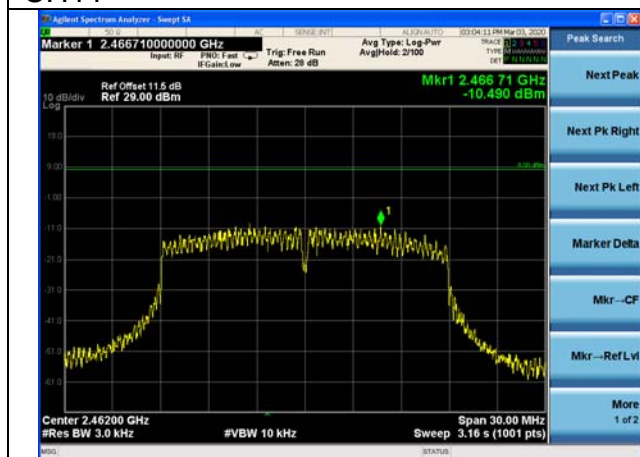


Test Mode: 802.11n (HT20) (MIMO Ant0+Ant1+Ant2)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2412	1	-2.685
2437	6	-3.472
2462	11	-4.284


Test Mode: 802.11n (HT40) (SISO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-11.198
2437	6	-11.763
2452	9	-12.979


CH3

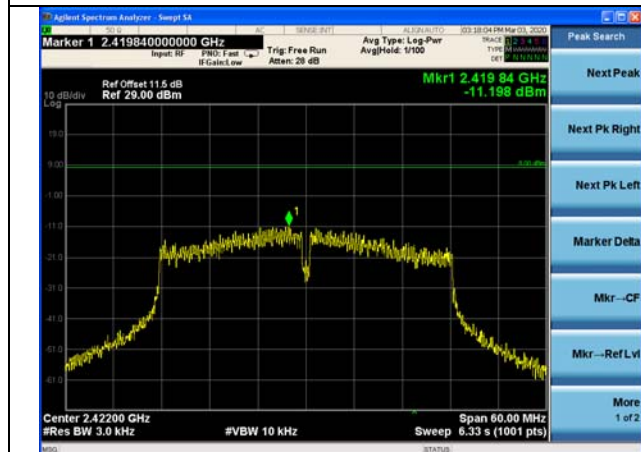

CH6

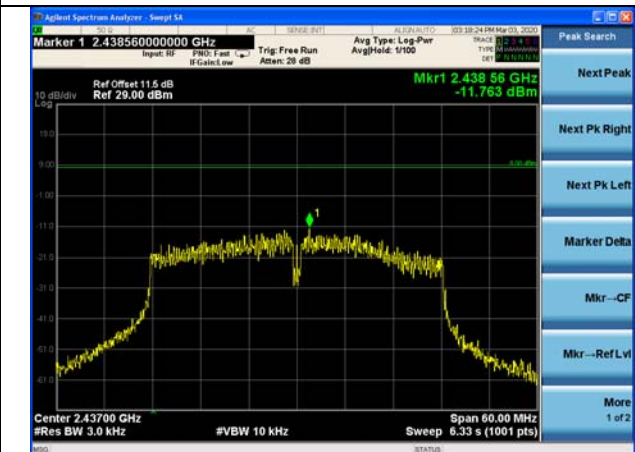


CH9

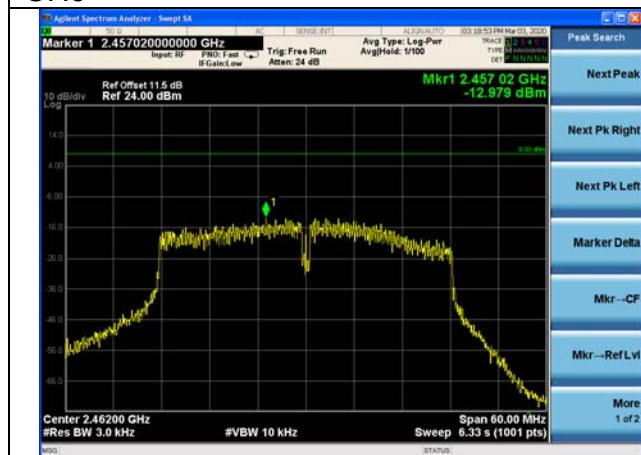


Test Mode: 802.11n (HT40) (MIMO Ant0)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-11.226
2437	6	-9.561
2452	9	-11.250


CH3

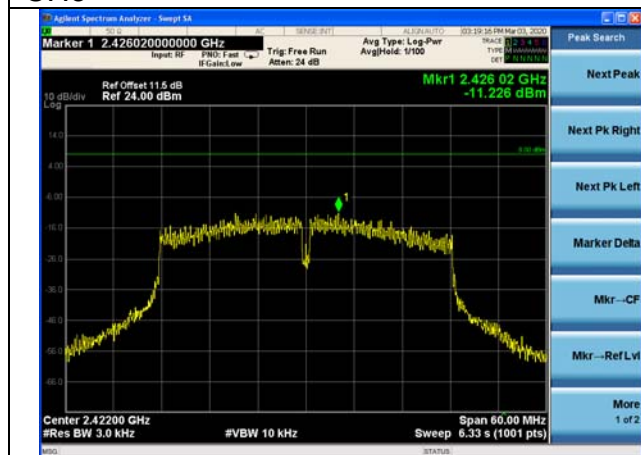

CH6

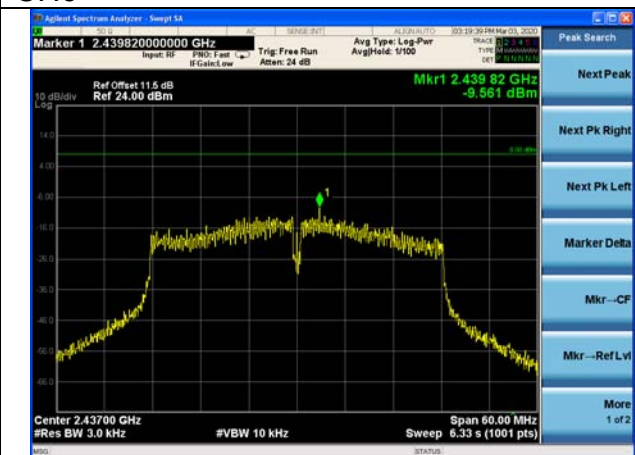


CH9

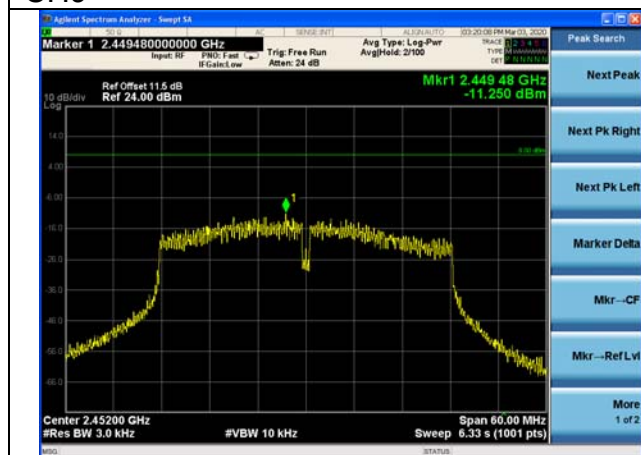


Test Mode: 802.11n (HT40) (MIMO Ant1)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-9.244
2437	6	-11.787
2452	9	-12.350


CH3

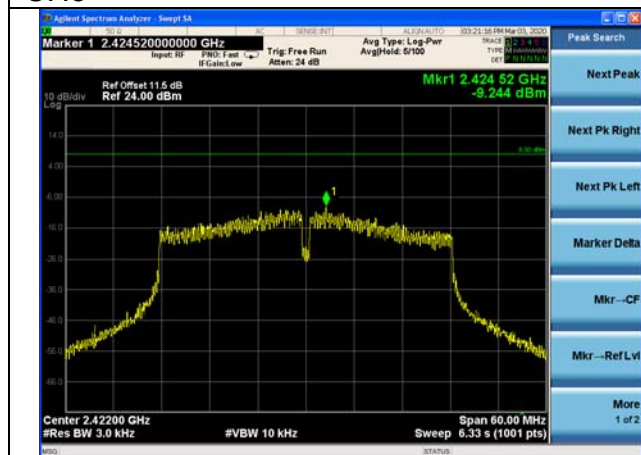

CH6

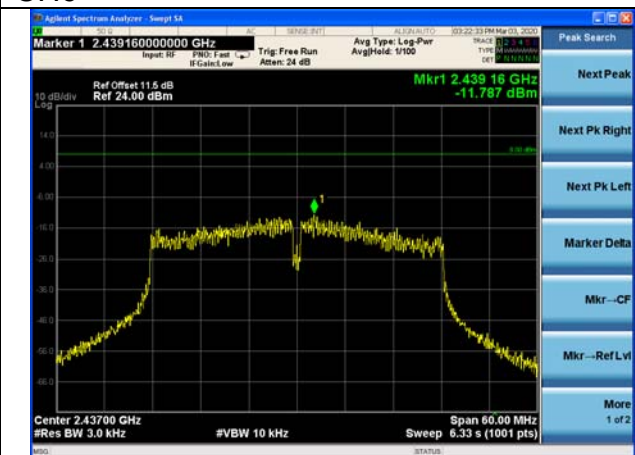


CH9

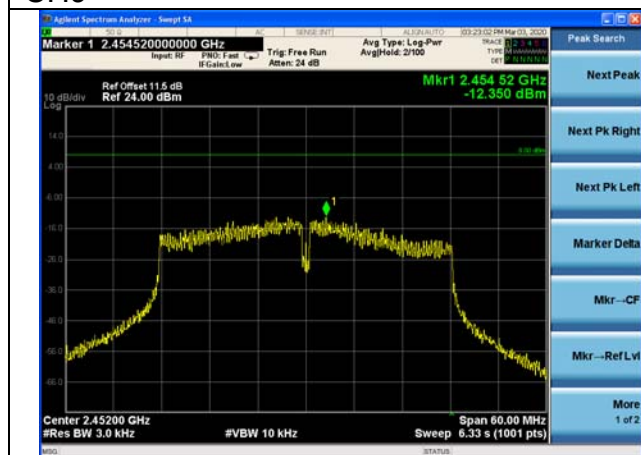


Test Mode: 802.11n (HT40) (MIMO Ant2)

Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-10.896
2437	6	-10.275
2452	9	-11.157


CH3

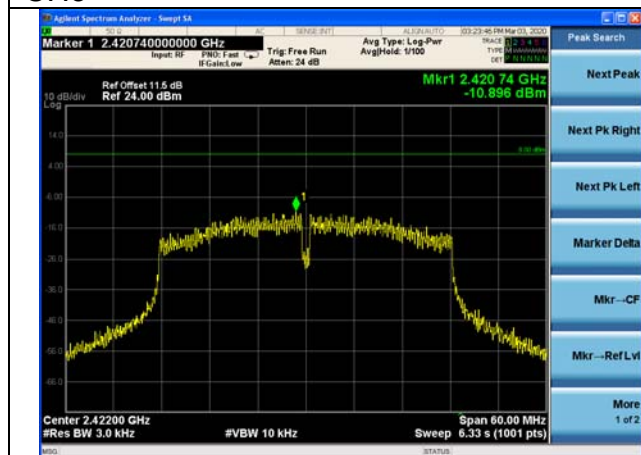

CH6

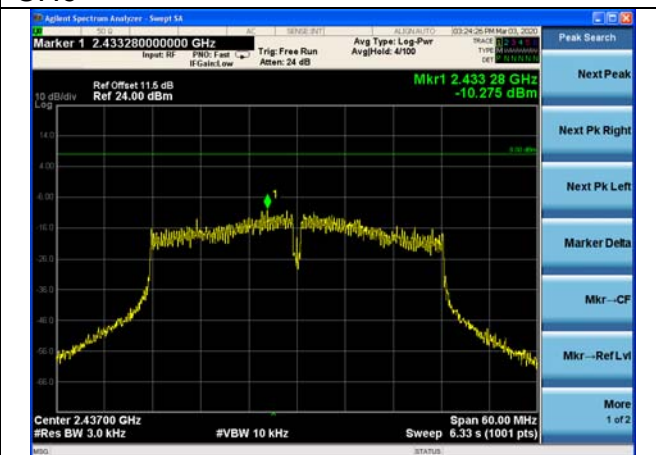

CH9

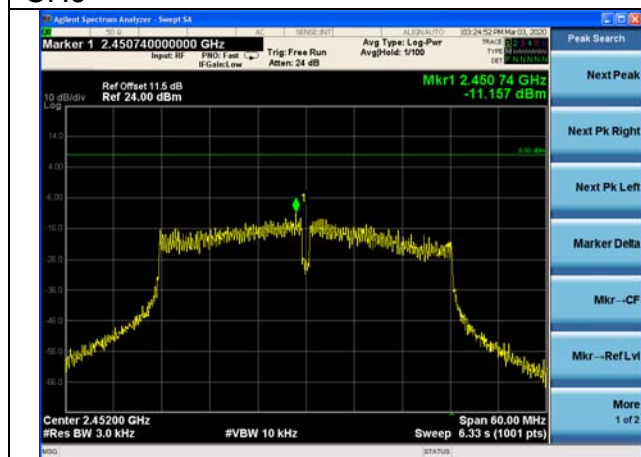

Test Mode: 802.11n (HT40) (MIMO Ant0+Ant1+Ant2)



Carrier frequency (MHz)	Channel No	Power Density (dBm)
2422	3	-5.594
2437	6	-5.674
2452	9	-6.782

Conducted Out of band emission measurement



Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.3dB+ Cable loss 1.2dB

Test Mode: 802.11b (SISO Ant0)



CH1

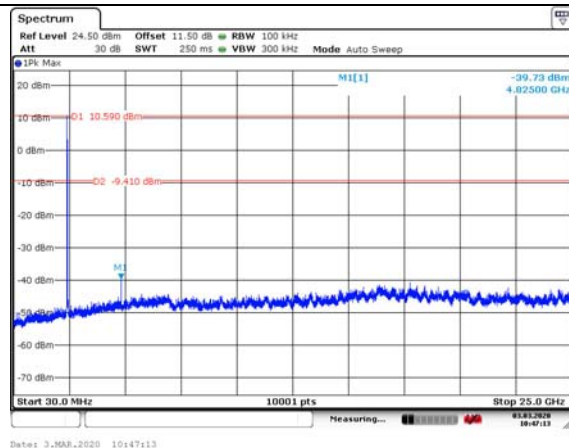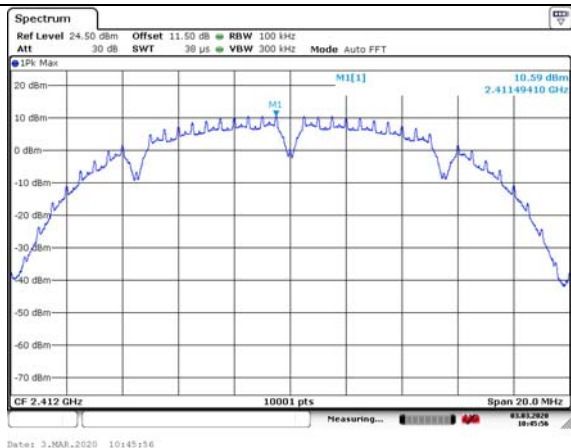

CH6

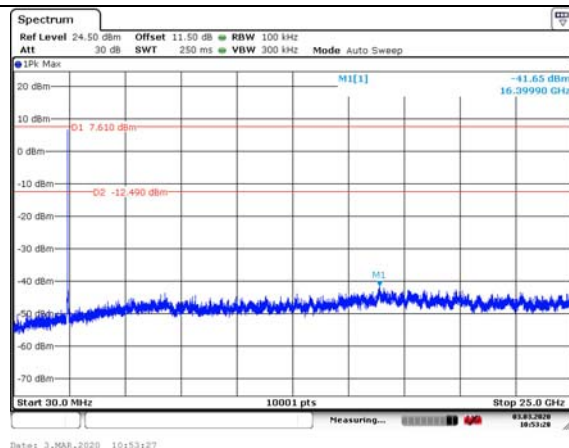
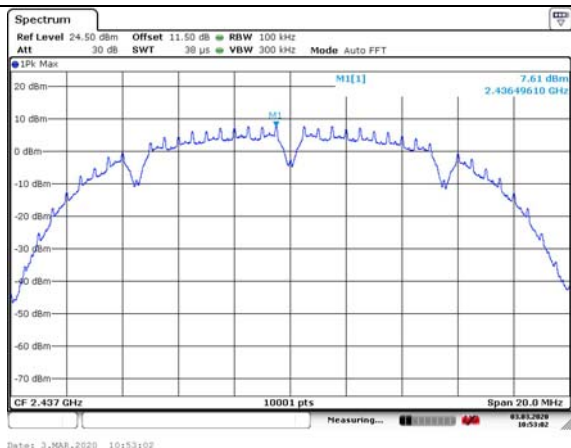


CH11

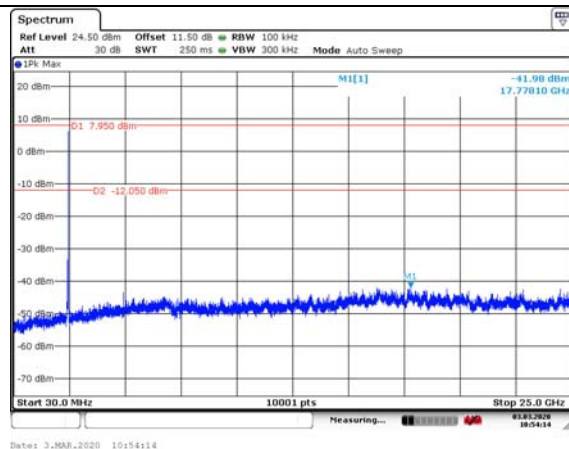
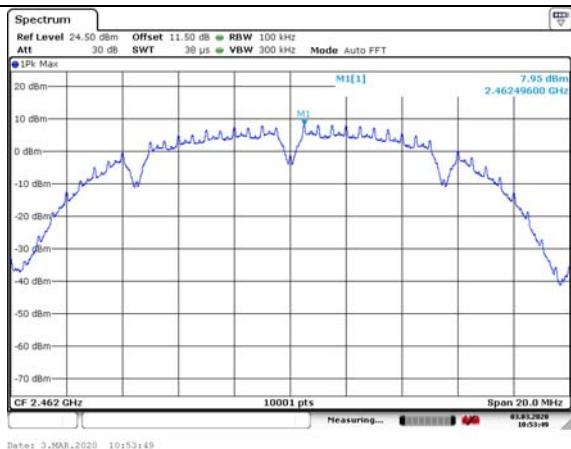


Test Mode: 802.11g (SISO Ant0)



CH1

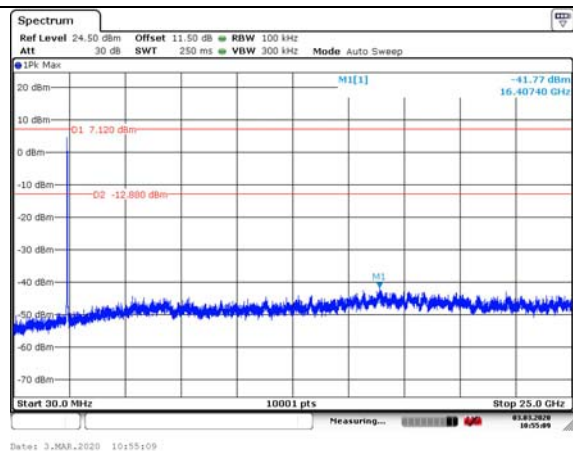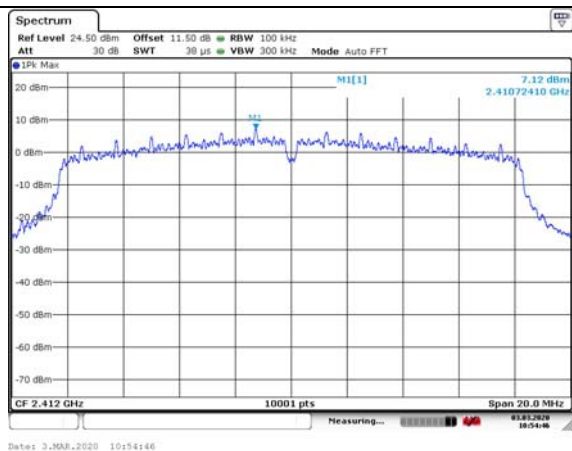

CH6

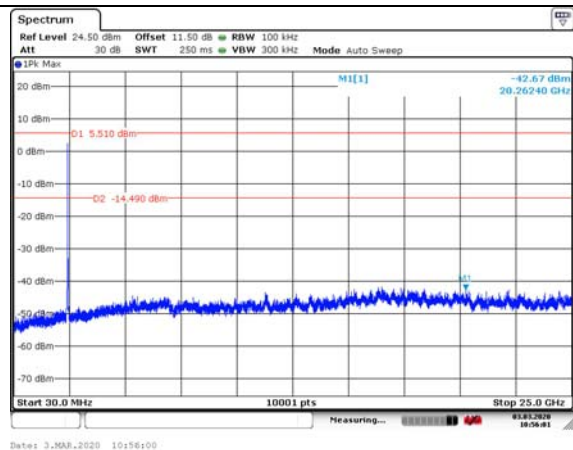
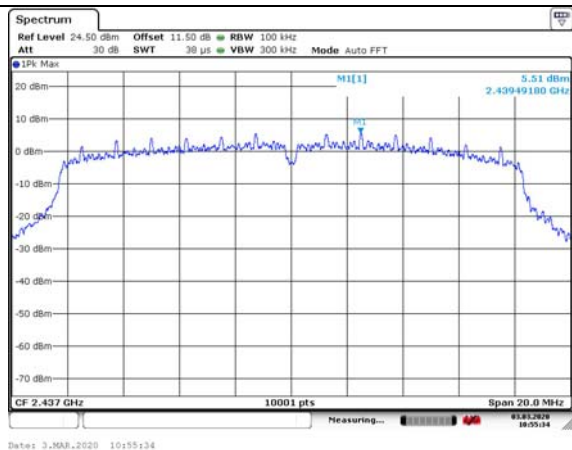


CH11

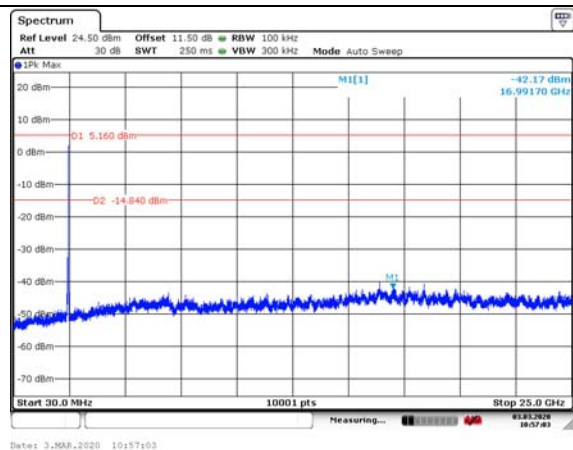
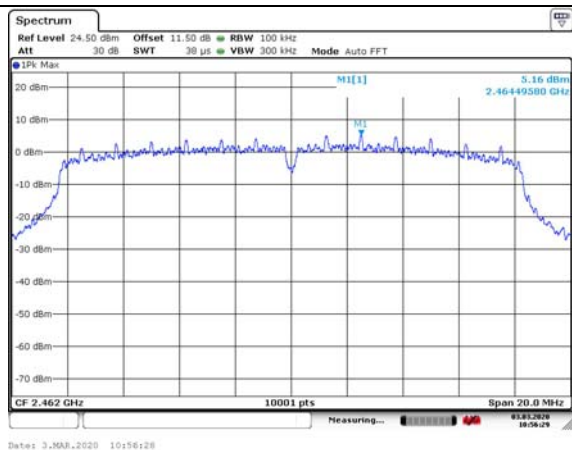


Test Mode: 802.11n (HT20) (SISO Ant0)



CH1

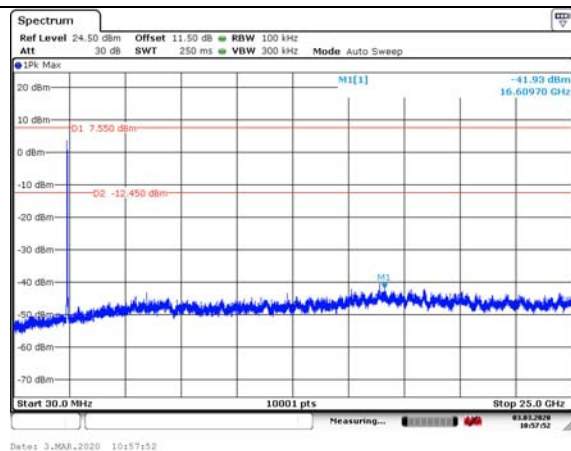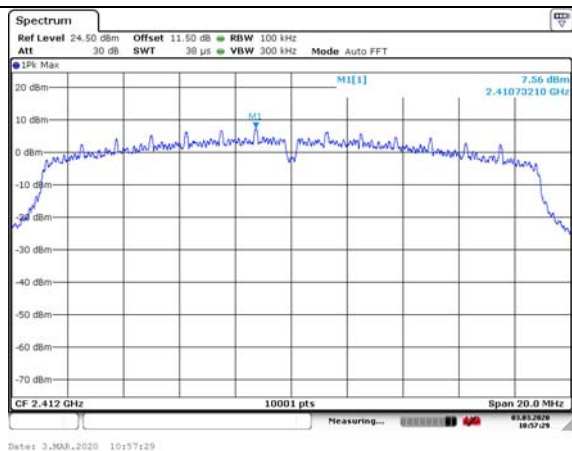

CH6

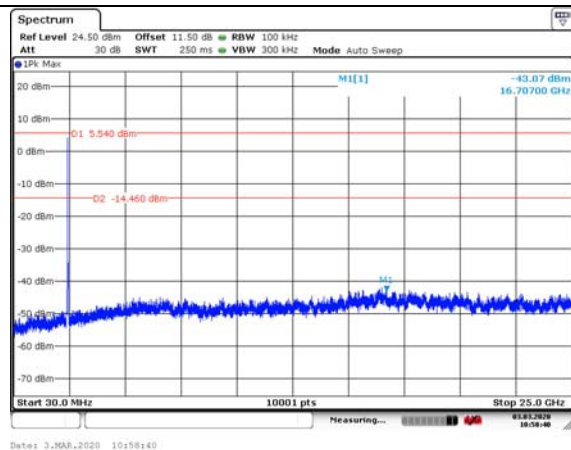
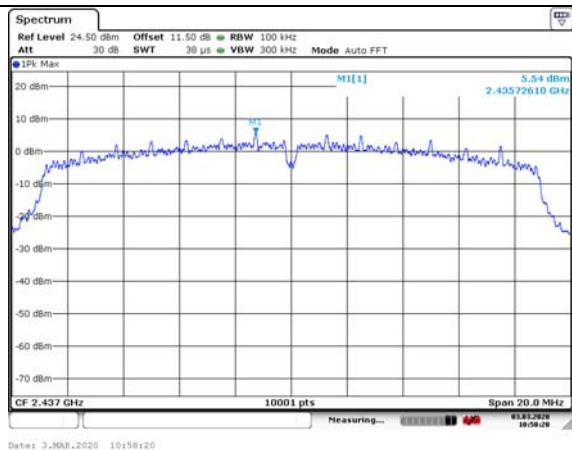


CH11

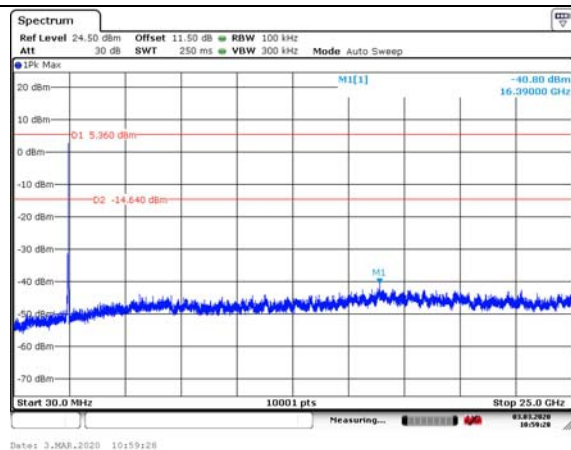
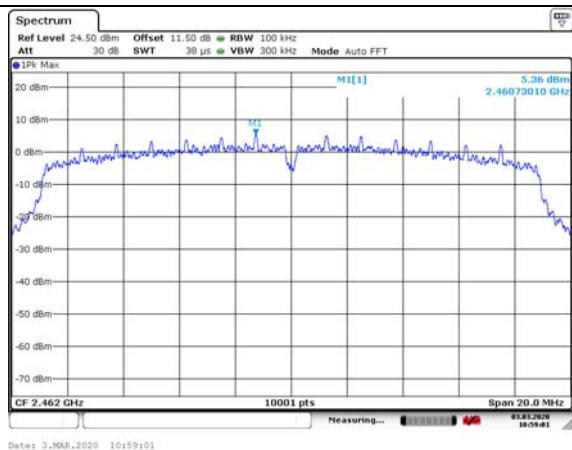


Test Mode: 802.11n (HT20) (MIMO Ant0)



CH1

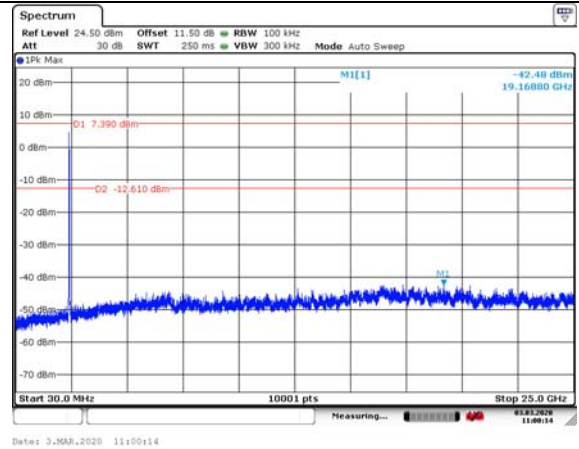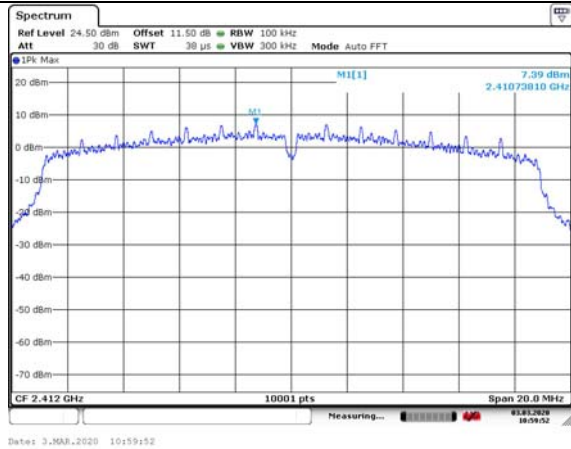

CH6

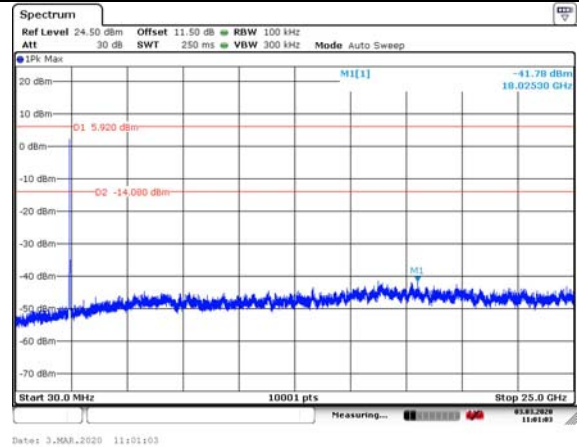
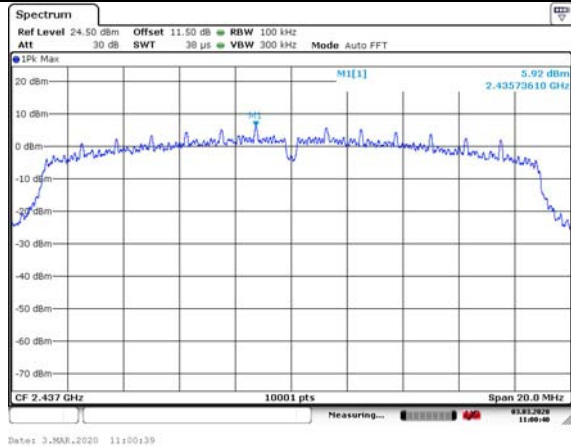


CH11

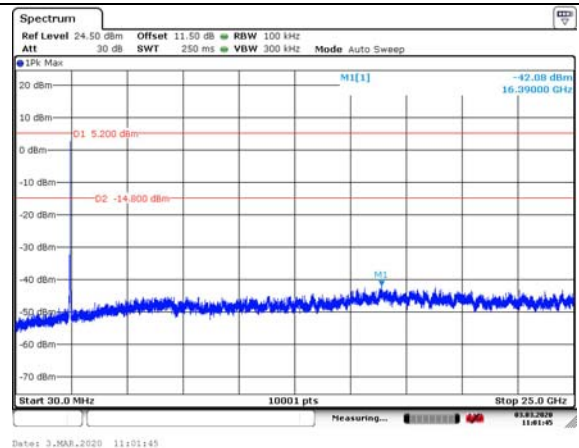
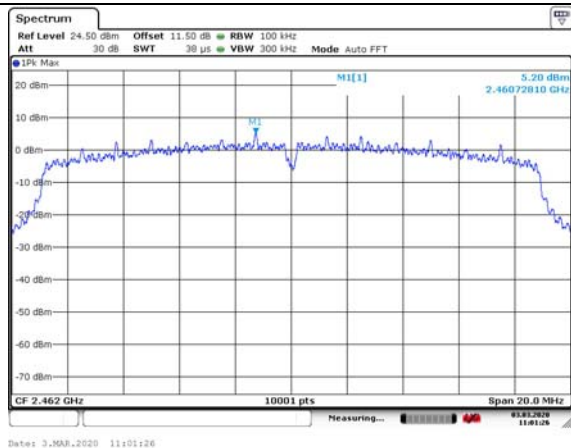


Test Mode: 802.11n (HT20) (MIMO Ant1)



CH1

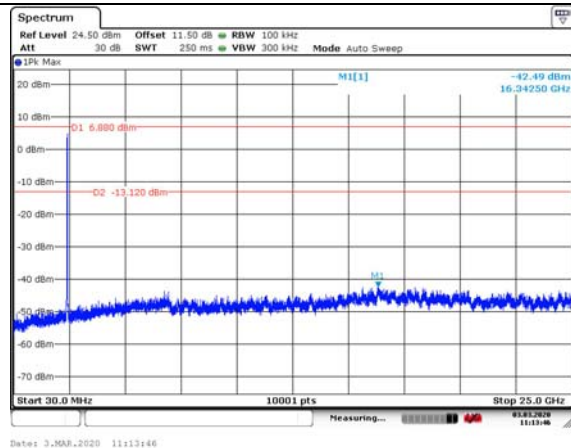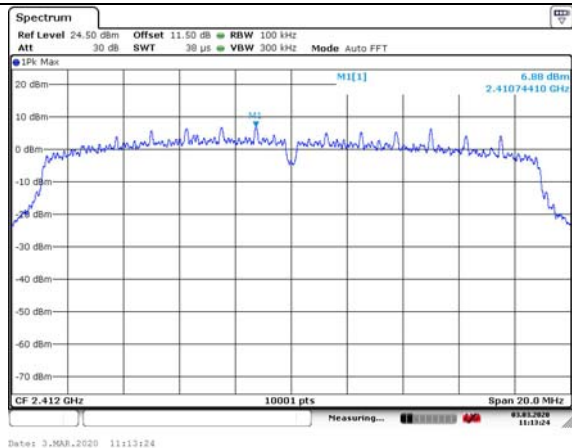

CH6

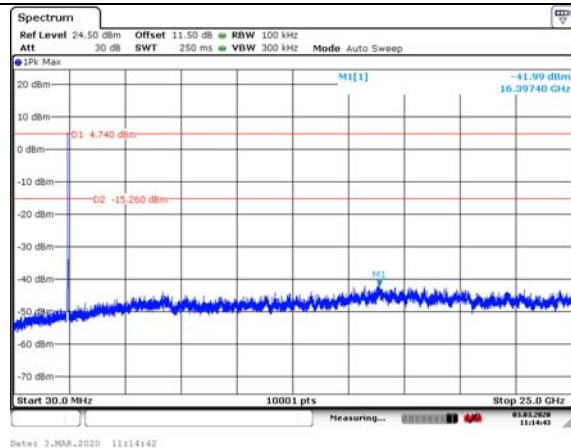
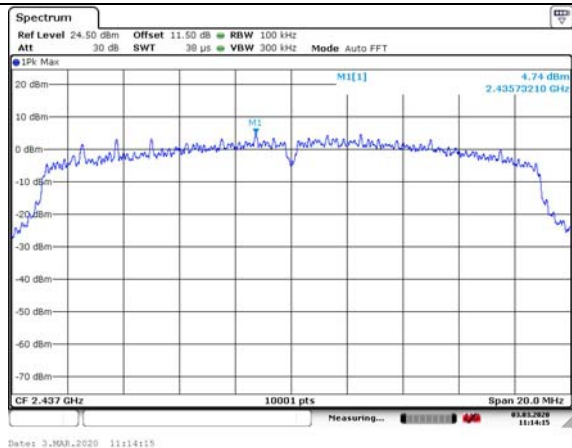


CH11

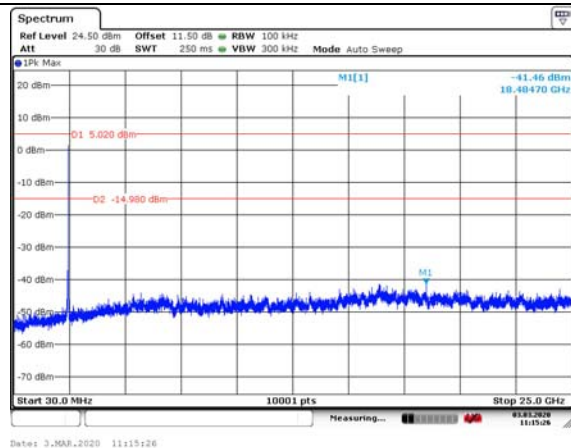
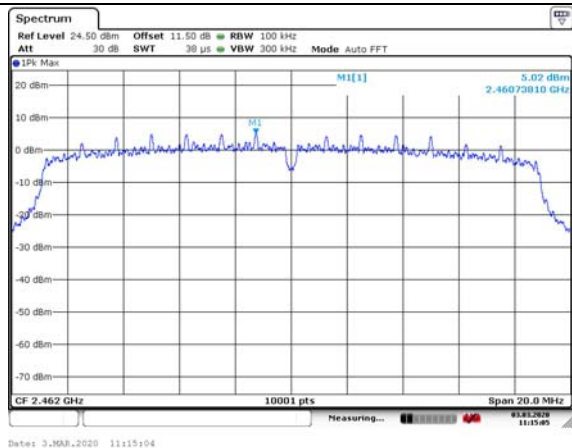


Test Mode: 802.11n (HT20) (MIMO Ant2)



CH1

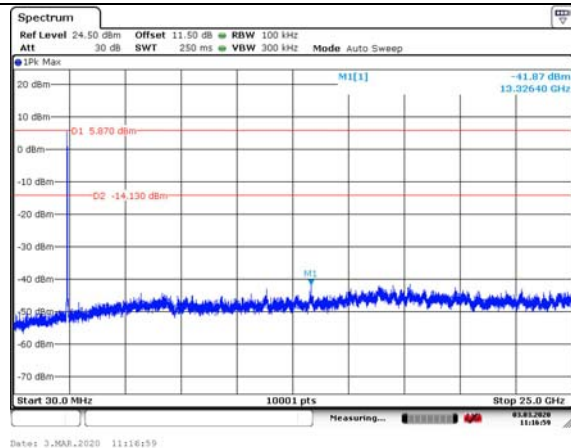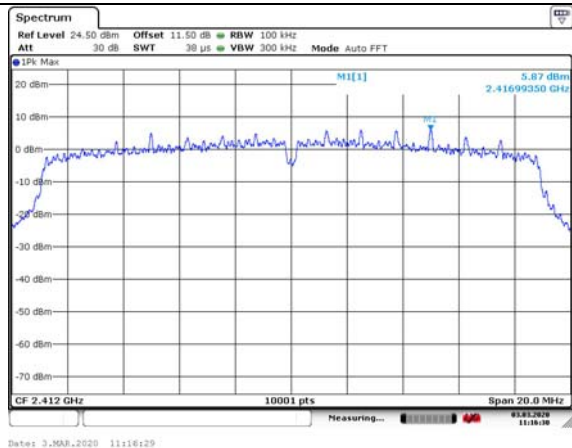

CH6

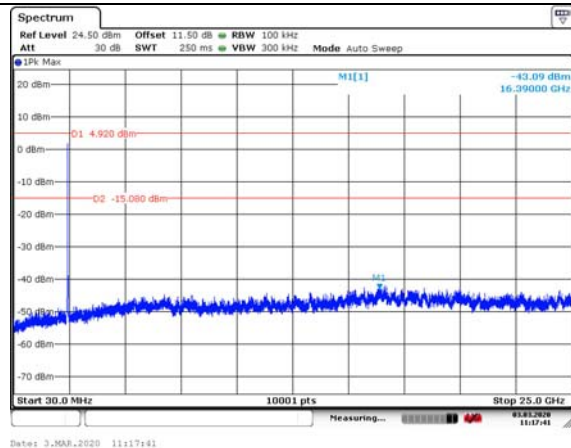
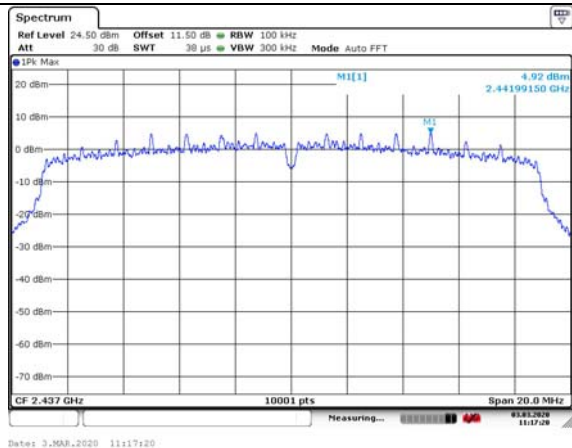


CH11

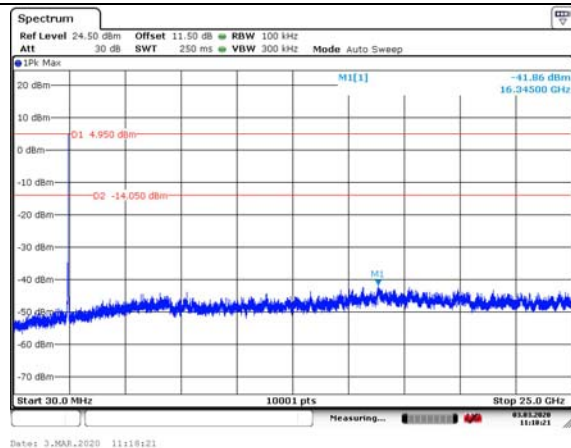
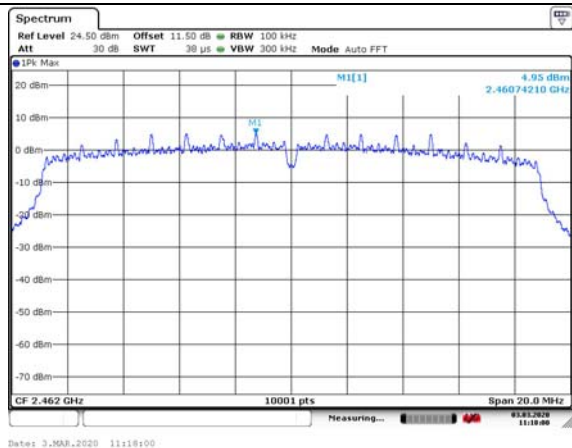


Test Mode: 802.11n (HT40) (SISO Ant0)



CH3

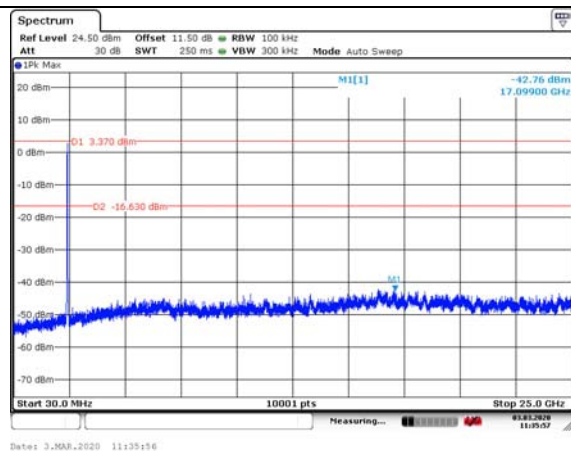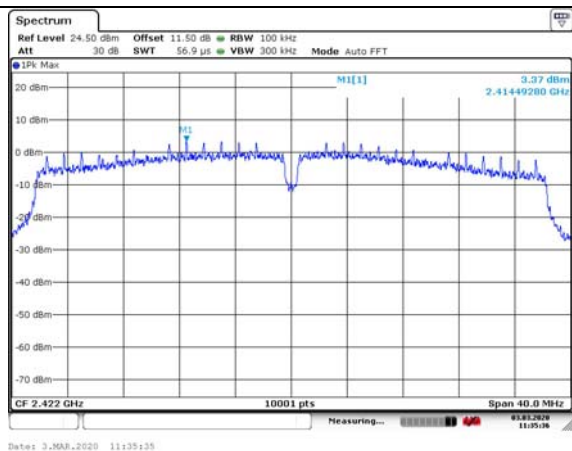

CH6

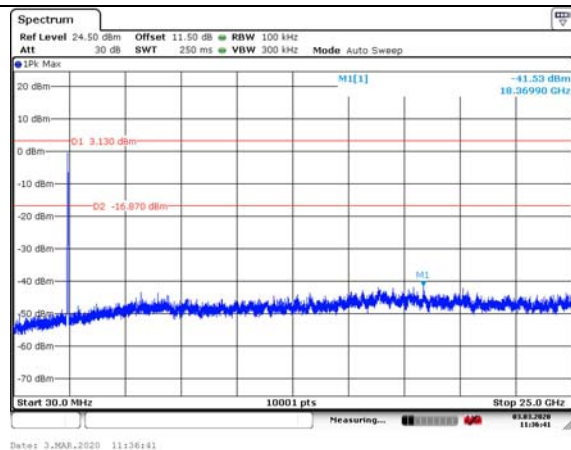
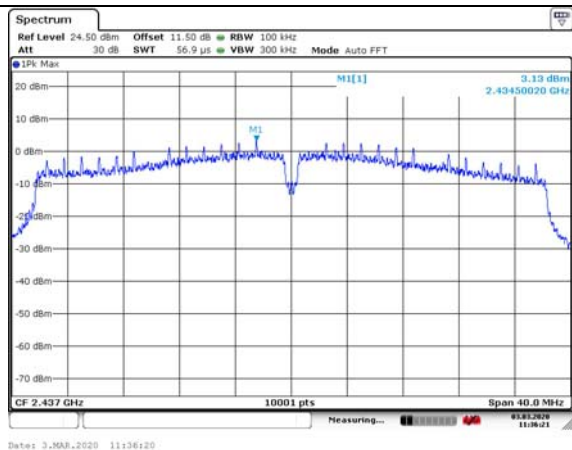


CH9

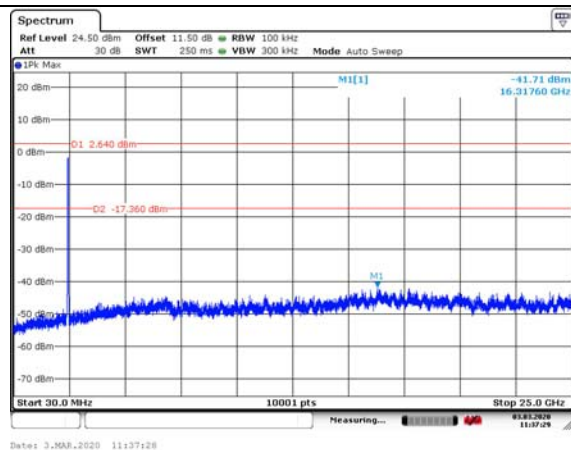
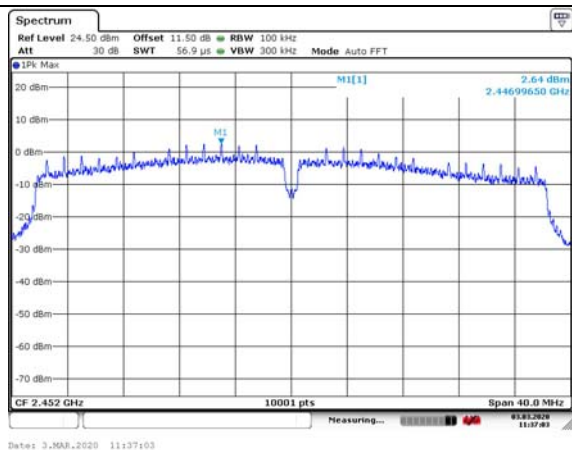


Test Mode: 802.11n (HT40) (MIMO Ant0)



CH3

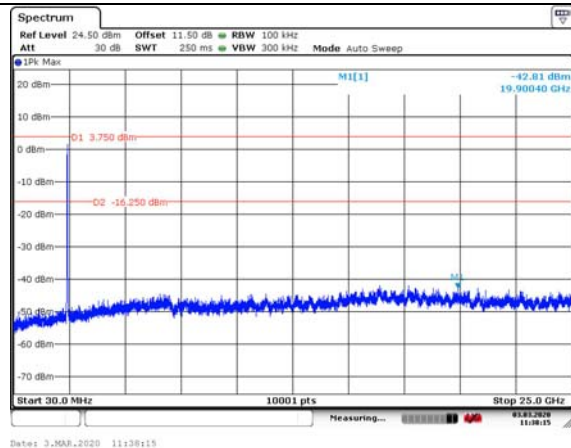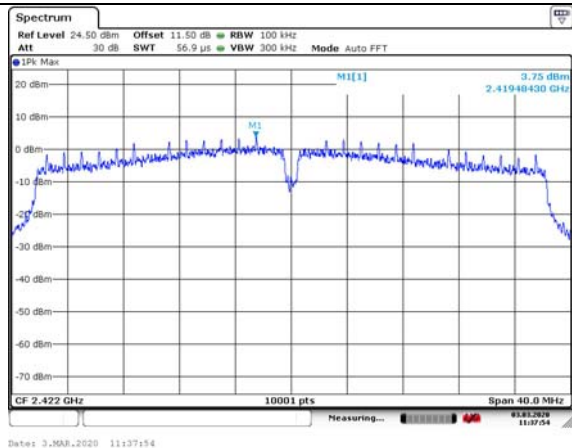

CH6

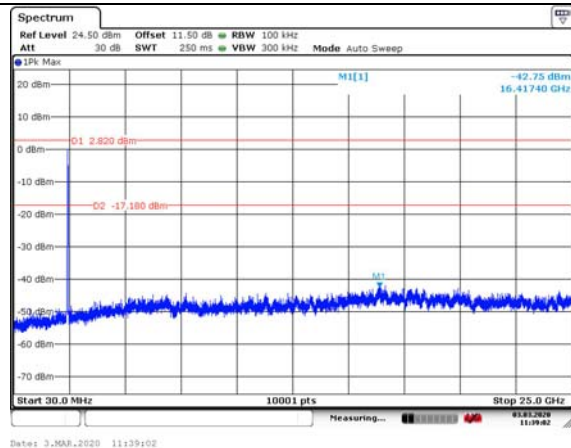
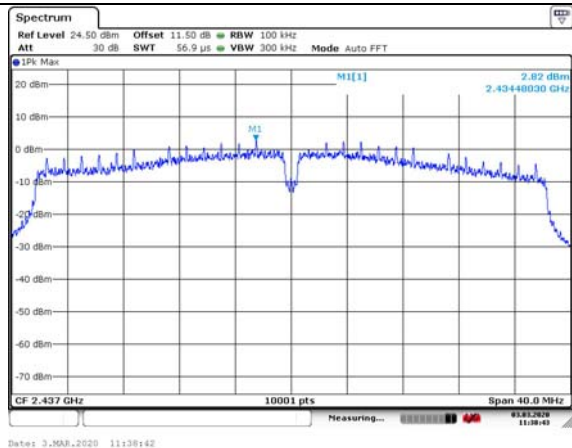


CH9

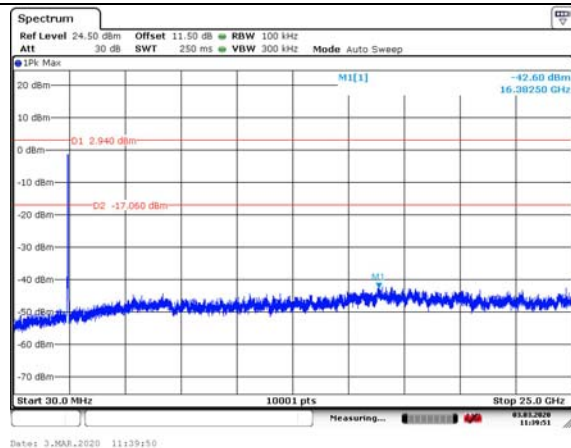
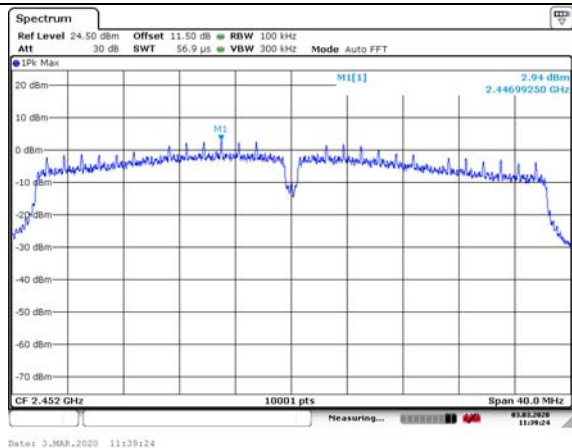


Test Mode: 802.11n (HT40) (MIMO Ant1)



CH3

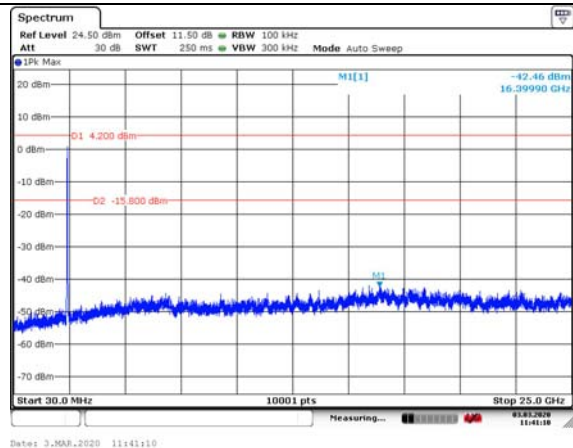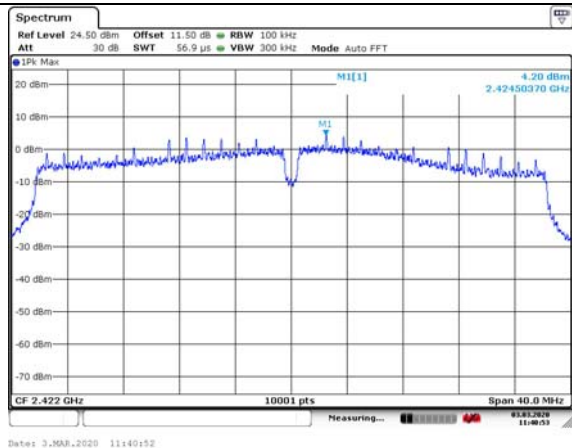

CH6

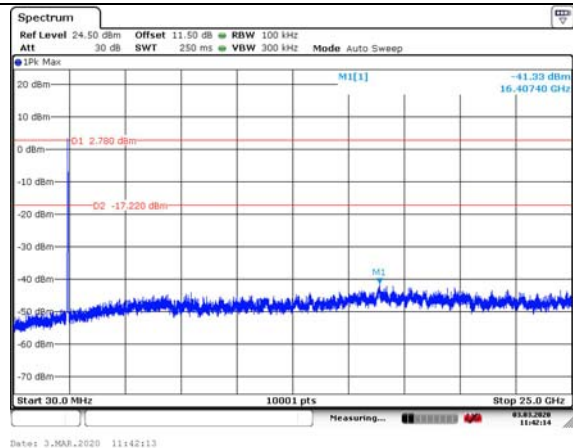
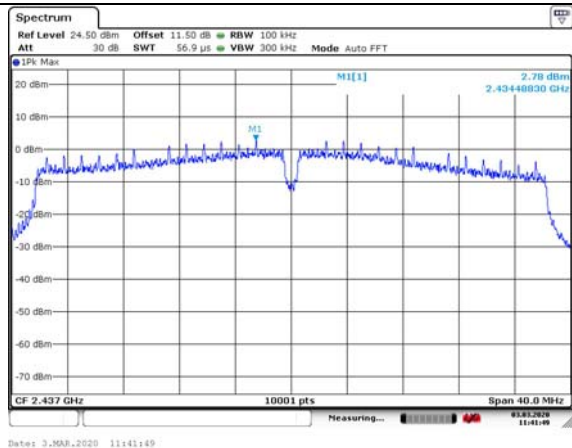


CH9

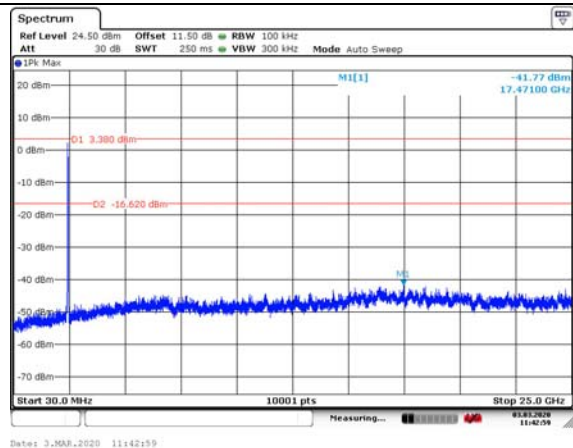
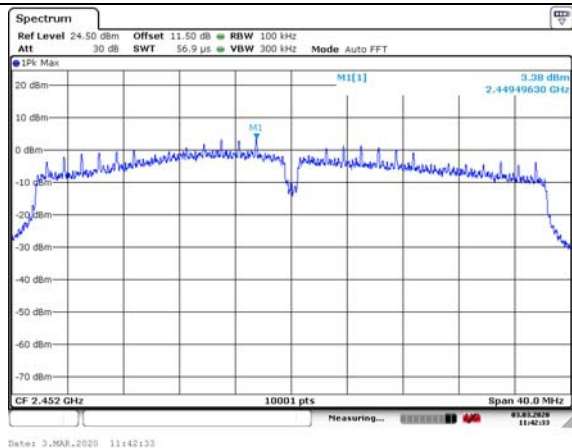


Test Mode: 802.11n (HT40) (MIMO Ant2)



CH3

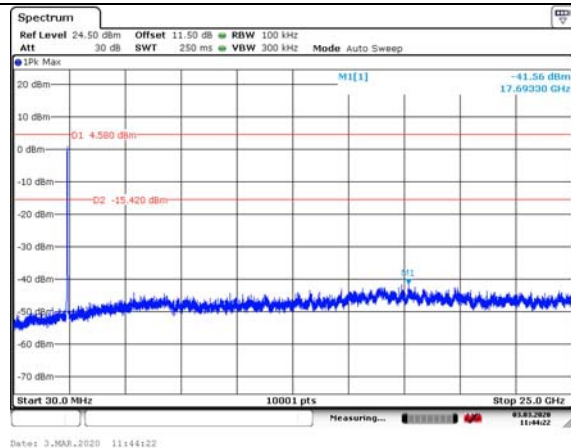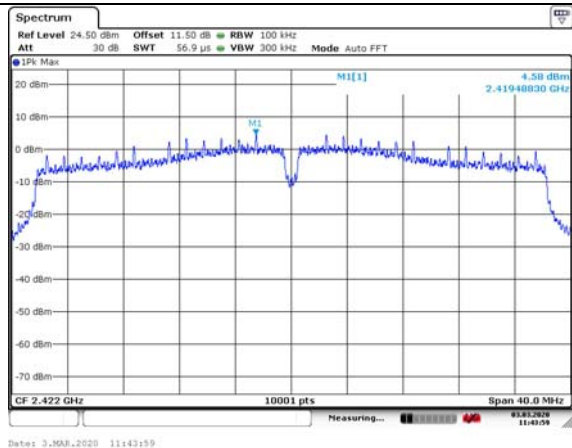

CH6

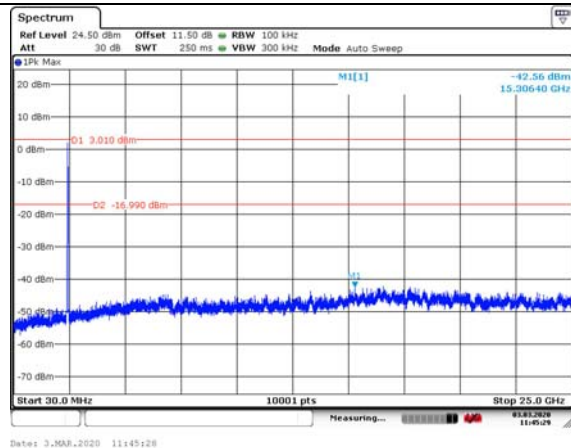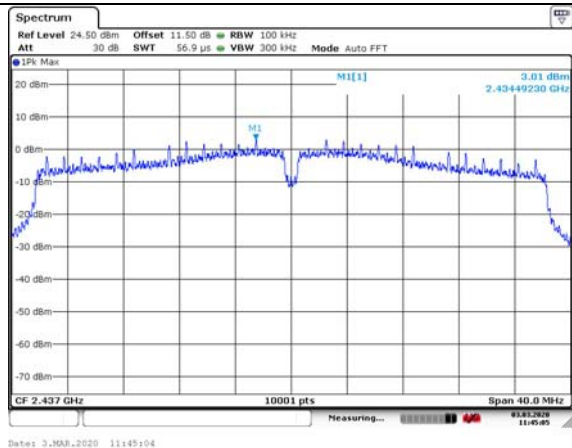

CH9

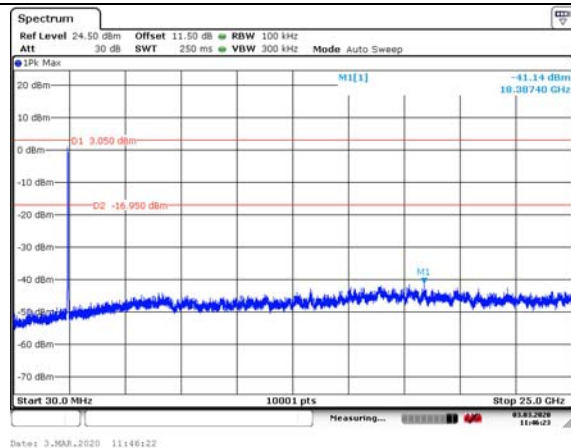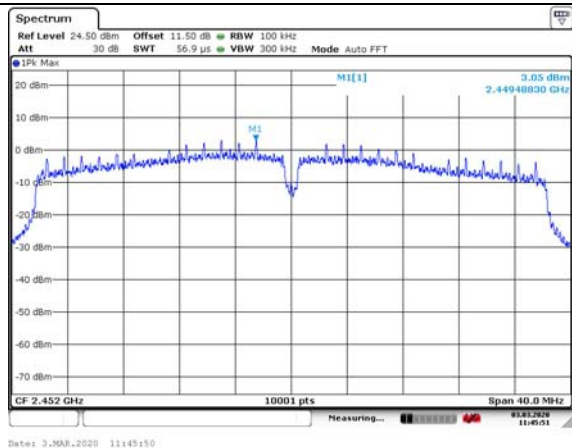


Band edge measurement (RF Conducted measurement)


Offset 11.5dB = Attenuator 10dB+ Temporary antenna connector loss 0.3dB+ Cable loss 1.2dB

Test Mode: 802.11b (SISO Ant0)

CH1

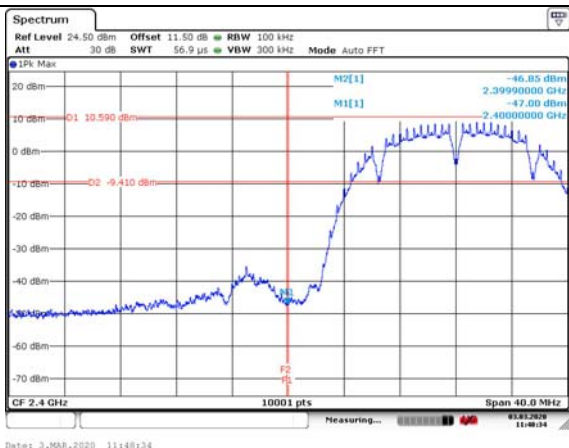


CH11

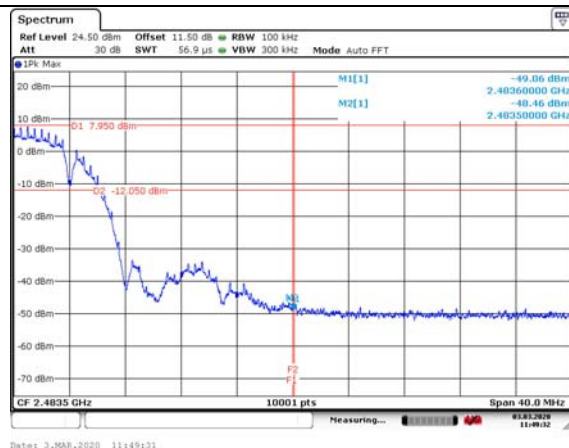


Test Mode: 802.11g (SISO Ant0)

CH1

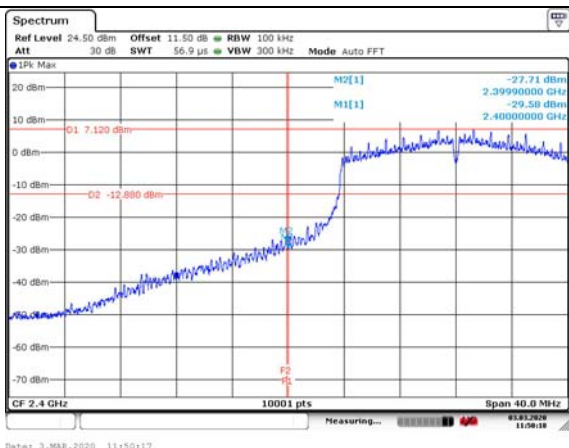


CH11

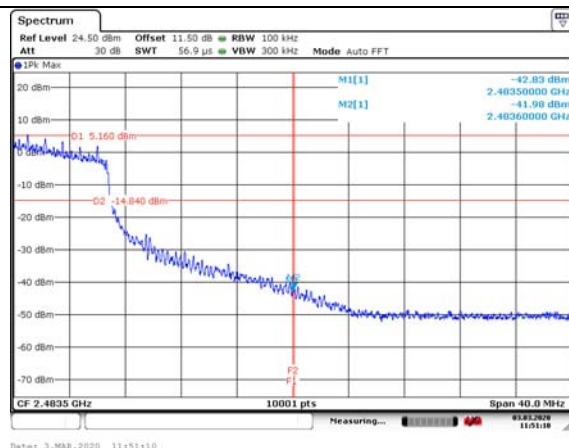


Test Mode: 802.11n (HT20) (SISO Ant0)

CH1

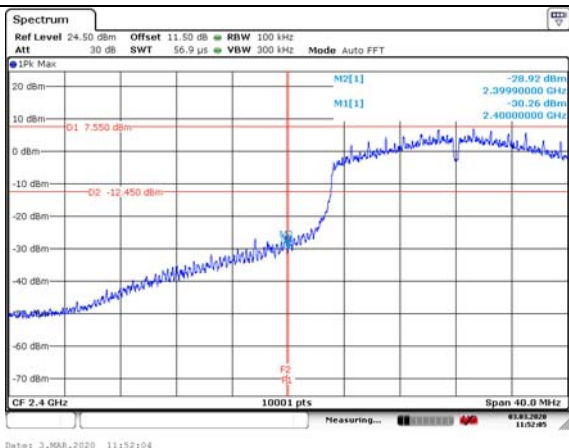


CH11

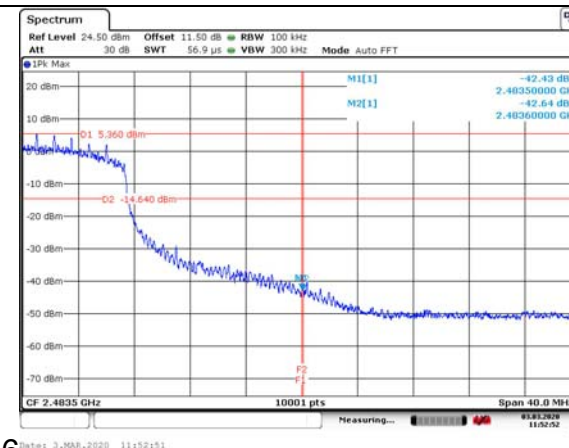


6

Test Mode: 802.11n (HT20) (MIMO Ant0)

CH1

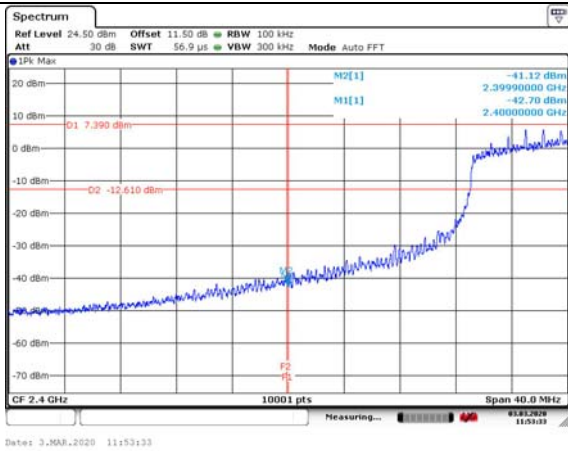


CH11

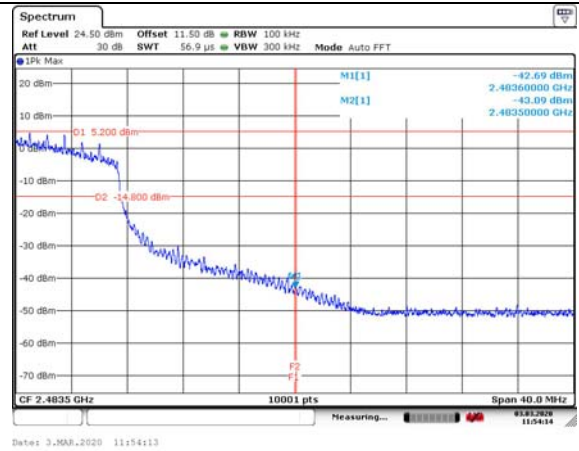


Test Mode: 802.11n (HT20) (MIMO Ant1)

CH1

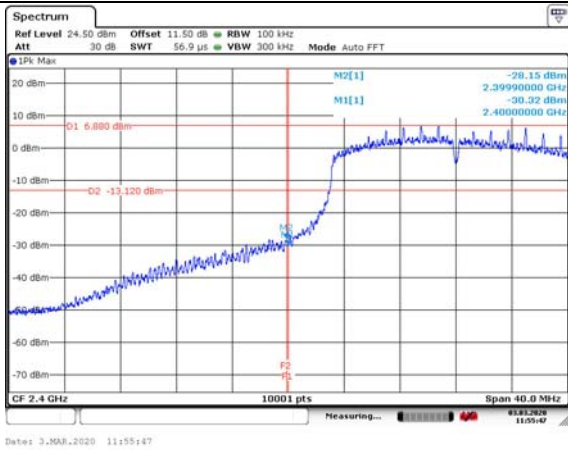


CH11

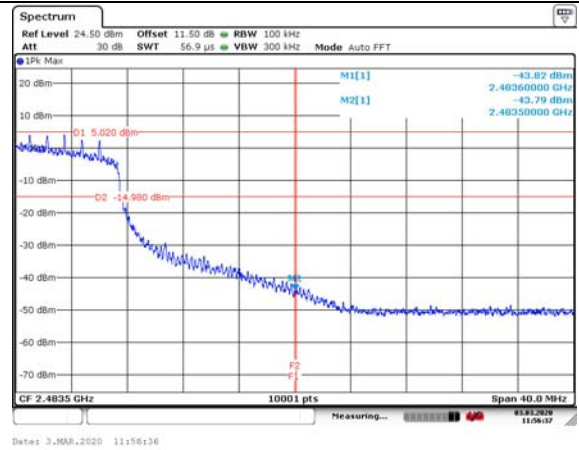


Test Mode: 802.11n (HT20) (MIMO Ant2)

CH1

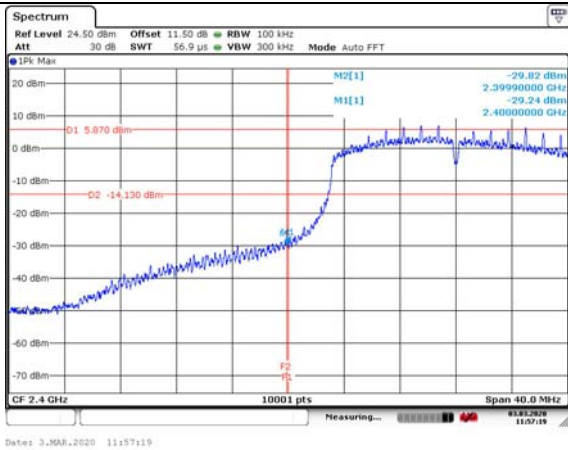


CH11

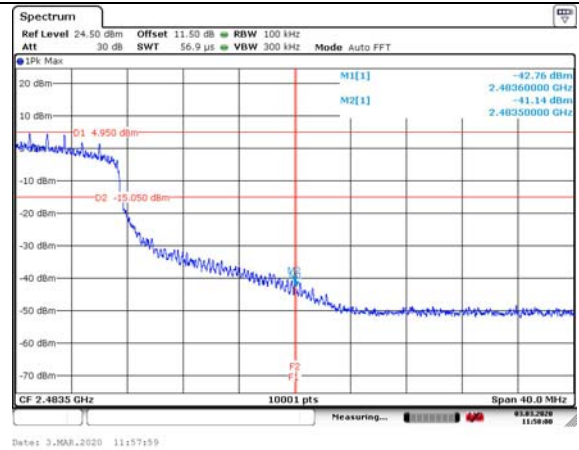


Test Mode: 802.11n (HT40) (SISO Ant0)

CH3

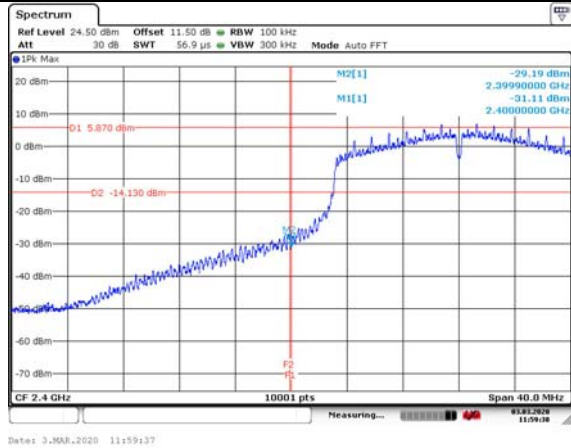


CH9

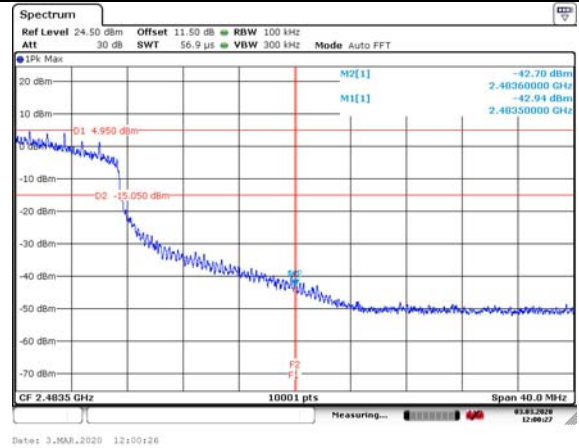


Test Mode: 802.11n (HT40) (MIMO Ant0)

CH3

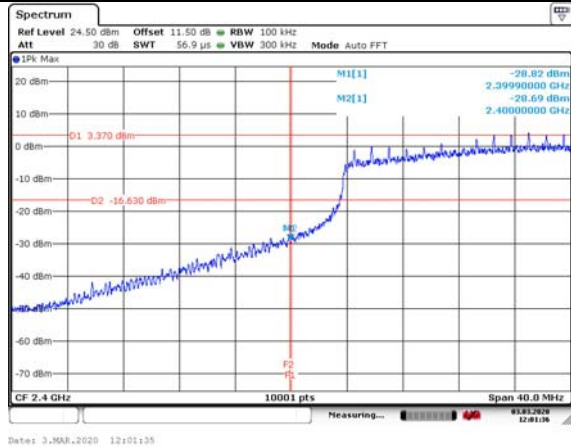


CH9

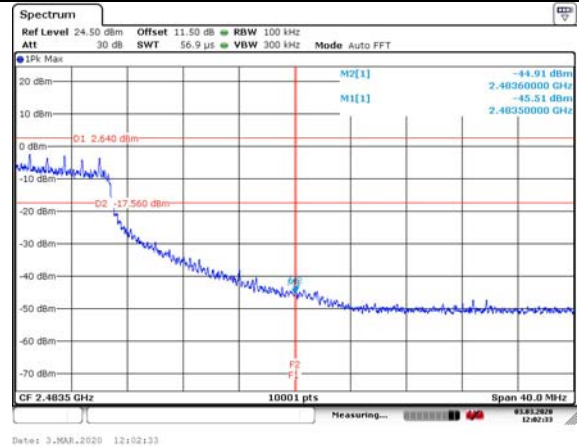


Test Mode: 802.11n (HT40) (MIMO Ant1)

CH3

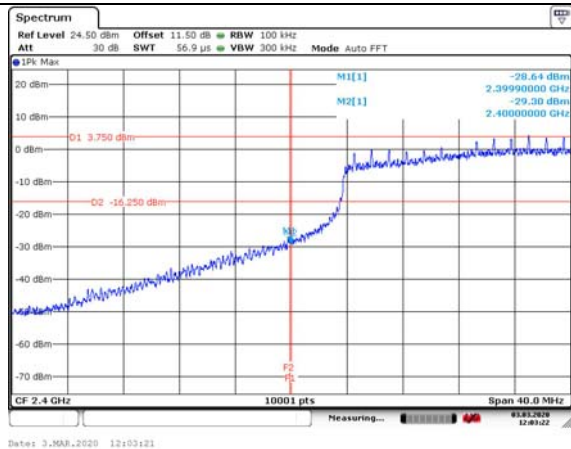


CH9

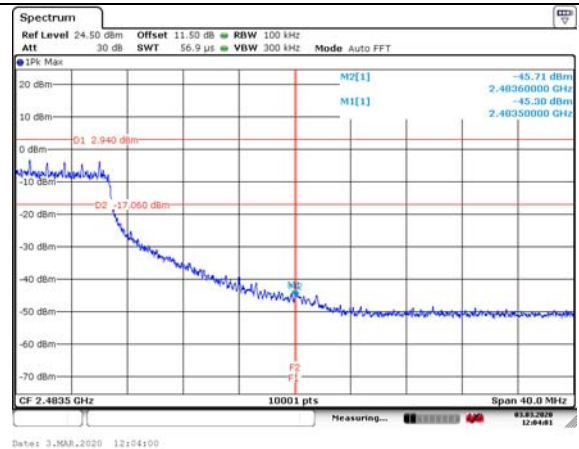


Test Mode: 802.11n (HT40) (MIMO Ant2)

CH3

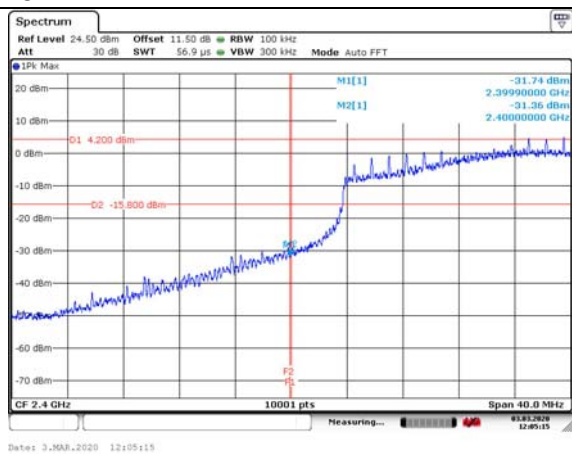

CH9

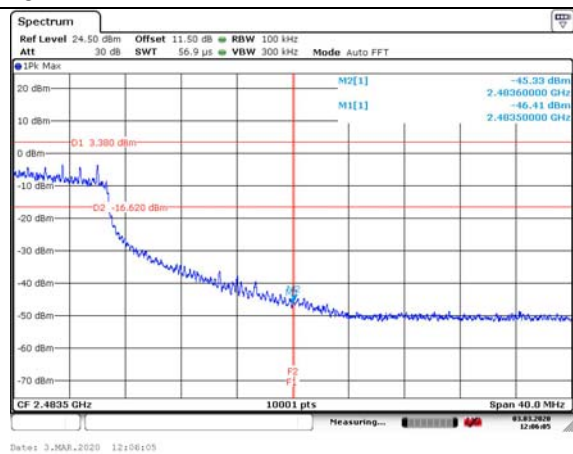

APPENDIX B – TEST DATA OF RADIATED EMISSION

Radiated Emission Band Edge

The worst case attitude: Ant0 and MIMO.

The measurement results are obtained as described below:

Measure Level = Reading Level + cable loss + antenna factor

Sample calculation: (107.18 dBuV/m) = (73.18 dBμV) + (8.90 dB) + (25.10 dB), the corresponding frequency is 2412MHz.

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	104.81	70.81	N/A	N/A	8.90	25.10
2	2390	52.11	18.11	-21.89	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Horizontal

Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	99.69	65.69	N/A	N/A	8.90	25.10
2	2390	47.03	13.03	-26.97	74.00	8.90	25.10

Carrier frequency (MHz): 2412

Channel No.:1

Test Mode: 802.11b

Polarity:Vertical

Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.05	64.05	N/A	N/A	8.90	25.10
2	2390	40.00	6.00	-14.00	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	97.83	63.83	N/A	N/A	8.90	25.10
2	2390	40.50	6.50	-13.50	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	105.55	71.55	N/A	N/A	8.90	25.10
2	2483.5	52.25	18.25	-21.75	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.86	66.86	N/A	N/A	8.90	25.10
2	2483.5	49.27	15.27	-24.73	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	101.26	67.26	N/A	N/A	8.90	25.10
2	2483.5	41.72	7.72	-12.28	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11b
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	98.46	64.46	N/A	N/A	8.90	25.10
2	2483.5	40.79	6.79	-13.21	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	106.07	72.07	N/A	N/A	8.90	25.10
2	2390	52.84	18.84	-21.16	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	100.67	66.67	N/A	N/A	8.90	25.10
2	2390	48.81	14.81	-25.19	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.02	64.02	N/A	N/A	8.90	25.10
2	2390	41.20	7.20	-12.80	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	96.30	62.30	N/A	N/A	8.90	25.10
2	2390	40.31	6.31	-13.69	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	106.54	72.54	N/A	N/A	8.90	25.10
2	2483.5	50.97	16.97	-23.03	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	99.43	65.43	N/A	N/A	8.90	25.10
2	2483.5	50.03	16.03	-23.97	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	99.51	65.51	N/A	N/A	8.90	25.10
2	2483.5	41.52	7.52	-12.48	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11g
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	95.30	61.30	N/A	N/A	8.90	25.10
2	2483.5	40.02	6.02	-13.98	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	108.01	74.01	N/A	N/A	8.90	25.10
2	2390	52.37	18.37	-21.63	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20 MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	102.11	68.11	N/A	N/A	8.90	25.10
2	2390	49.13	15.13	-24.87	74.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	99.85	65.85	N/A	N/A	8.90	25.10
2	2390	40.47	6.47	-13.53	54.00	8.90	25.10

Carrier frequency (MHz): 2412
Channel No.:1
Test Mode: 802.11n(HT20 MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2412	98.87	64.87	N/A	N/A	8.90	25.10
2	2390	40.34	6.34	-13.66	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	107.03	73.03	N/A	N/A	8.90	25.10
2	2483.5	52.13	18.13	-21.87	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20 MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	100.06	66.06	N/A	N/A	8.90	25.10
2	2483.5	50.21	16.21	-23.79	74.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	99.48	65.48	N/A	N/A	8.90	25.10
2	2483.5	40.45	6.45	-13.55	54.00	8.90	25.10

Carrier frequency (MHz): 2462
Channel No.:11
Test Mode: 802.11n(HT20 MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2462	97.06	63.06	N/A	N/A	8.90	25.10
2	2483.5	40.13	6.13	-13.87	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	104.04	70.04	N/A	N/A	8.90	25.10
2	2390	53.76	19.76	-20.24	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40 MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	100.02	66.02	N/A	N/A	8.90	25.10
2	2390	49.93	15.93	-24.07	74.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	101.04	67.04	N/A	N/A	8.90	25.10
2	2390	40.26	6.26	-13.74	54.00	8.90	25.10

Carrier frequency (MHz): 2422
Channel No.:3
Test Mode: 802.11n(HT40 MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2422	97.51	63.51	N/A	N/A	8.90	25.10
2	2390	39.49	5.49	-14.51	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40 MIMO)
Polarity: Vertical
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	108.01	74.01	N/A	N/A	8.90	25.10
2	2483.5	53.42	19.42	-20.58	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40 MIMO)
Polarity:Horizontal
Detector: Peak

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	101.00	67.00	N/A	N/A	8.90	25.10
2	2483.5	50.30	16.30	-23.70	74.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.:9
Test Mode: 802.11n(HT40 MIMO)
Polarity: Vertical
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	98.76	64.76	N/A	N/A	8.90	25.10
2	2483.5	42.02	8.02	-11.98	54.00	8.90	25.10

Carrier frequency (MHz): 2452
Channel No.9
Test Mode: 802.11n(HT40 MIMO)
Polarity:Horizontal
Detector: Average

No	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	cable loss (dB)	antenna factor (dB)
1	2452	95.04	61.04	N/A	N/A	8.90	25.10
2	2483.5	40.21	6.21	-13.79	54.00	8.90	25.10

Sample Calculations

Determining Spurious Emissions Levels

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result= $P_{mea} + A_{Rpl}$

Sample calculation: $(28.43 \text{ dB}\mu\text{V/m}) = (46.13 \text{ dB}\mu\text{V}) + (-17.7 \text{ dB/m})$, the corresponding frequency is 43.677000MHz.

The worst case attitude: Ant0 and MIMO.

For 802.11b Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.9635	32.52	-17.2	49.72	Vertical	40.00
52.4755	33.26	-17.4	50.66	Vertical	40.00
53.7425	31.55	-17.6	49.15	Vertical	40.00
53.979	32.72	-17.6	50.32	Vertical	40.00
53.9815	32.55	-17.6	50.15	Vertical	40.00
54.8895	31.29	-17.8	49.09	Vertical	40.00

For 802.11g Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.932	30.91	-17.2	48.11	Vertical	40.00
52.4755	33.4	-17.4	50.8	Vertical	40.00
53.9195	32.44	-17.6	50.04	Vertical	40.00
53.9535	32.65	-17.6	50.25	Vertical	40.00
53.9705	32.72	-17.6	50.32	Vertical	40.00
53.9875	32.7	-17.6	50.3	Vertical	40.00

For 802.11n(HT20 MIMO) Channel No.:1

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.972	32.87	-17.2	50.07	Vertical	40.00
52.467	33.45	-17.4	50.85	Vertical	40.00
52.484	33.29	-17.4	50.69	Vertical	40.00
53.9535	32.5	-17.6	50.1	Vertical	40.00
53.9705	32.8	-17.6	50.4	Vertical	40.00
53.99	32.38	-17.6	49.98	Vertical	40.00

For 802.11b Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.4585	33.33	-17.4	50.73	Vertical	40.00
52.4755	33.62	-17.4	51.02	Vertical	40.00
53.9645	32.66	-17.6	50.26	Vertical	40.00
53.9705	32.81	-17.6	50.41	Vertical	40.00
53.9815	32.58	-17.6	50.18	Vertical	40.00
53.9875	32.6	-17.6	50.2	Vertical	40.00

For 802.11g Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.4755	33.37	-17.4	50.77	Vertical	40.00
53.9705	32.42	-17.6	50.02	Vertical	40.00
53.973	32.91	-17.6	50.51	Vertical	40.00
53.9875	33.03	-17.6	50.63	Vertical	40.00
54.1355	31.5	-17.7	49.2	Vertical	40.00
54.5525	31.62	-17.7	49.32	Vertical	40.00

For 802.11n(HT20 MIMO) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
38.961	30.2	-18.5	48.7	Vertical	40.00
52.4755	33.42	-17.4	50.82	Vertical	40.00
53.386	31.34	-17.6	48.94	Vertical	40.00
53.962	32.67	-17.6	50.27	Vertical	40.00
53.985	32.48	-17.6	50.08	Vertical	40.00
53.9875	32.71	-17.6	50.31	Vertical	40.00

For 802.11b Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.4755	33.47	-17.4	50.87	Vertical	40.00
53.9645	33.24	-17.6	50.84	Vertical	40.00
53.979	32.81	-17.6	50.41	Vertical	40.00
53.9815	32.7	-17.6	50.3	Vertical	40.00
54.2555	31.44	-17.7	49.14	Vertical	40.00
54.3125	32.15	-17.7	49.85	Vertical	40.00

For 802.11g Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.4645	33.19	-17.4	50.59	Vertical	40.00
52.4755	33.81	-17.4	51.21	Vertical	40.00
53.5655	31.51	-17.6	49.11	Vertical	40.00
53.979	32.29	-17.6	49.89	Vertical	40.00
55.434	31.49	-17.8	49.29	Vertical	40.00
56.9775	28.88	-18	46.88	Vertical	40.00

For 802.11n(HT20 MIMO) Channel No.:11

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.955	31.86	-17.2	49.06	Vertical	40.00
52.4755	33.44	-17.4	50.84	Vertical	40.00
53.945	33.04	-17.6	50.64	Vertical	40.00
53.979	32.73	-17.6	50.33	Vertical	40.00
54.207	32.18	-17.7	49.88	Vertical	40.00
54.27	31.65	-17.7	49.35	Vertical	40.00

For 802.11n(HT40 MIMO) Channel No.:3

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
38.9925	30.49	-18.5	48.99	Vertical	40.00
53.95	32.48	-17.6	50.08	Vertical	40.00
53.968	32.51	-17.6	50.11	Vertical	40.00
53.9705	32.9	-17.6	50.5	Vertical	40.00
53.985	32.53	-17.6	50.13	Vertical	40.00
54.424	30.76	-17.7	48.46	Vertical	40.00


For 802.11n(HT40 MIMO) Channel No.:6

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
50.972	31.9	-17.2	49.1	Vertical	40.00
52.4585	33.4	-17.4	50.8	Vertical	40.00
52.484	33.08	-17.4	50.48	Vertical	40.00
52.495	32.94	-17.4	50.34	Vertical	40.00
53.9815	32.53	-17.6	50.13	Vertical	40.00
53.9875	32.42	-17.6	50.02	Vertical	40.00


For 802.11n(HT40 MIMO) Channel No.:9

Frequency(MHz)	Result(dBuV/m)	ARpl (dB)	Pmea (dBuV/m)	Polarity	Limit (dBuV/m)
52.4755	33.49	-17.4	50.89	Vertical	40.00
53.7825	31.5	-17.6	49.1	Vertical	40.00
53.9195	32.02	-17.6	49.62	Vertical	40.00
53.9705	32.36	-17.6	49.96	Vertical	40.00
54.144	31.49	-17.7	49.19	Vertical	40.00
54.321	31.41	-17.7	49.11	Vertical	40.00

Carrier frequency (MHz): 2412
Channel No.:1

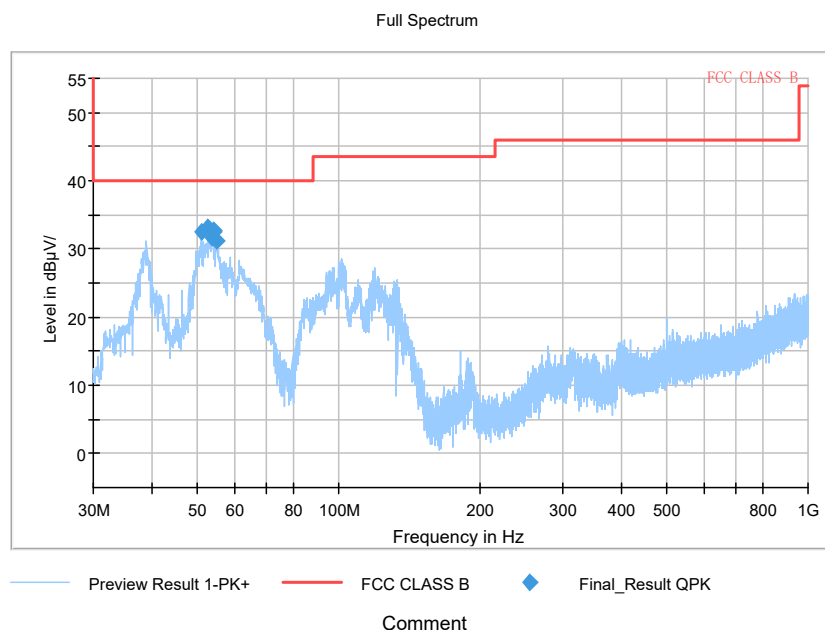


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

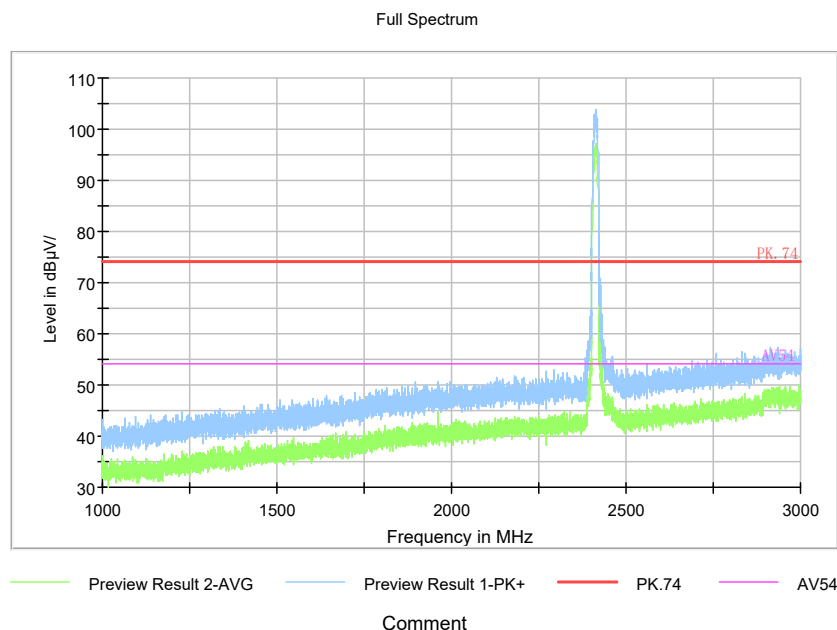

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

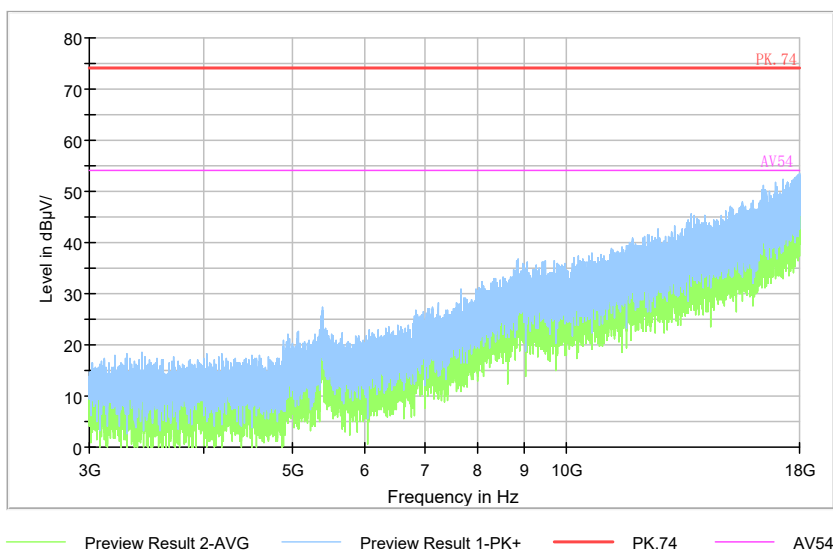

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

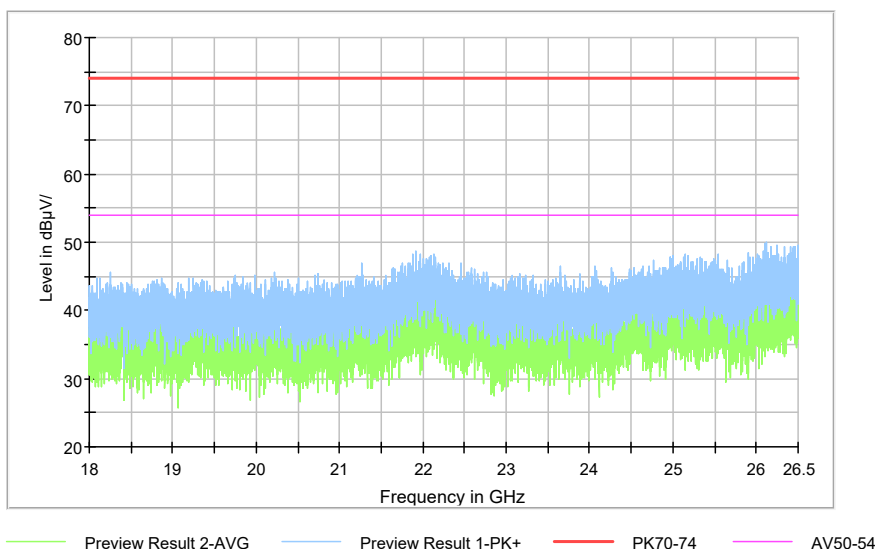

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

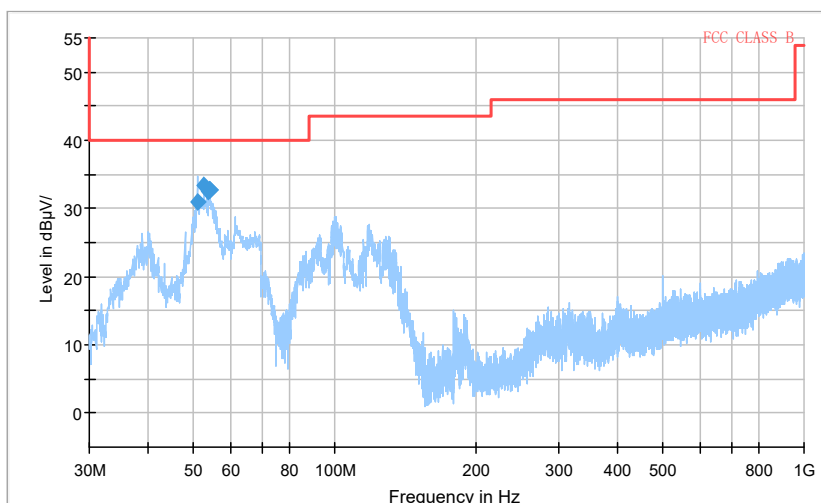

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g


Full Spectrum

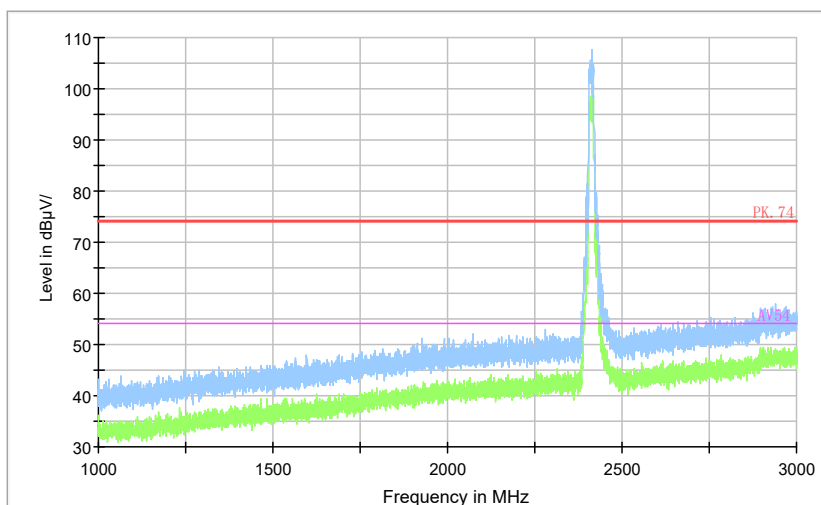

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

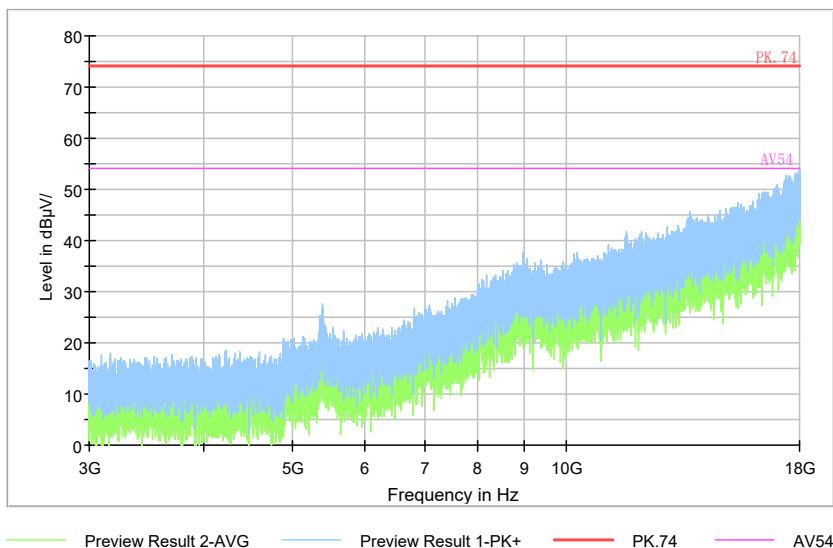

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11g


Full Spectrum

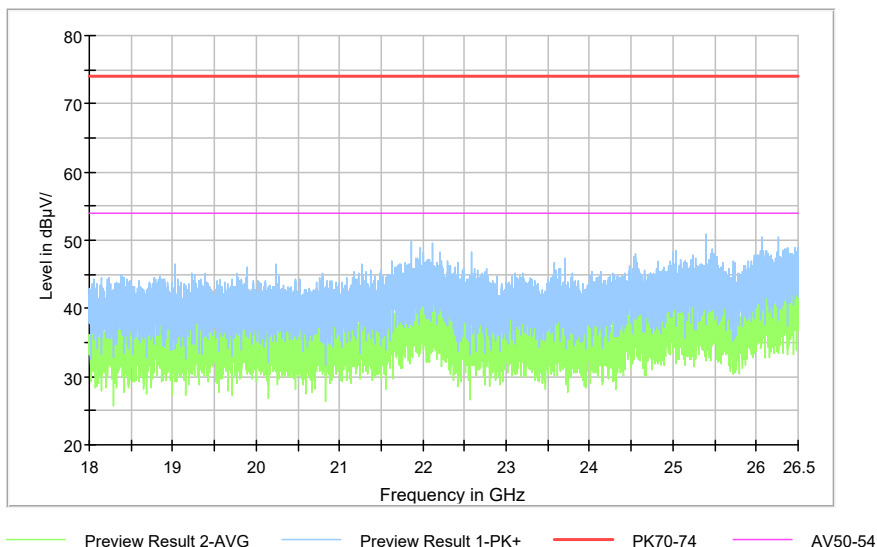

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11g

Full Spectrum

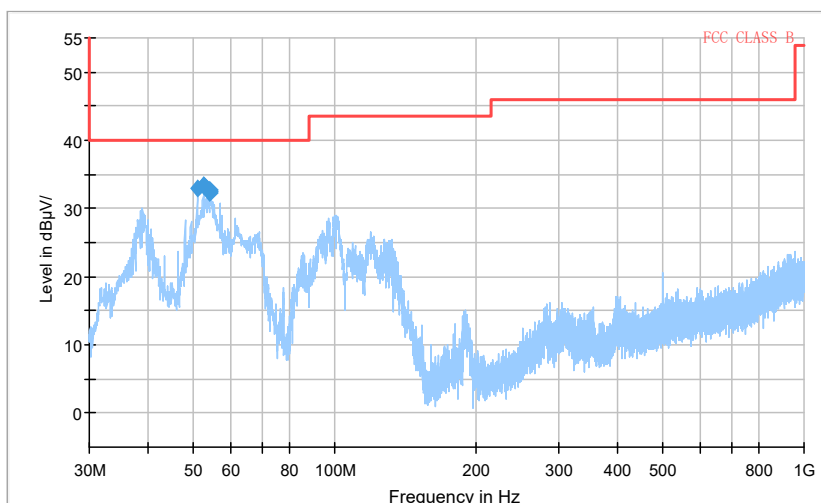


Comment

Frequency Range: 30MHz -1GHz

Detector: QP mode

Test Mode: 802.11n(HT20 MIMO)

Full Spectrum

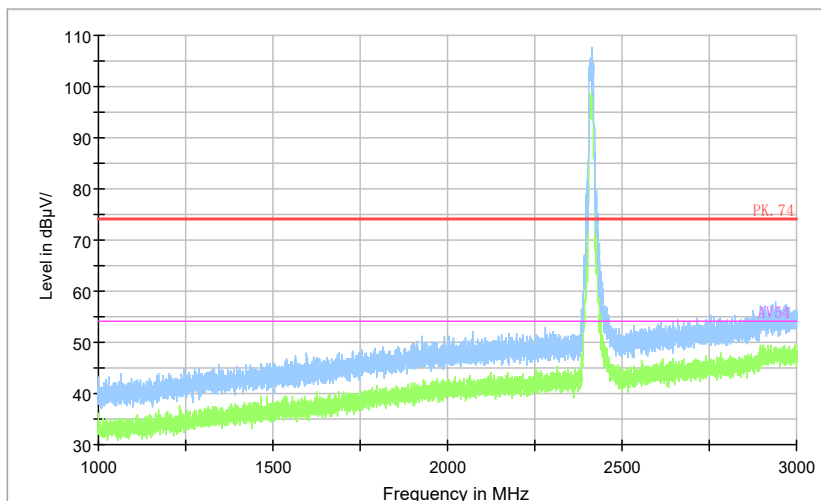


Comment

Frequency Range: 1GHz -3GHz

Detector: Av mode and PK mode

Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

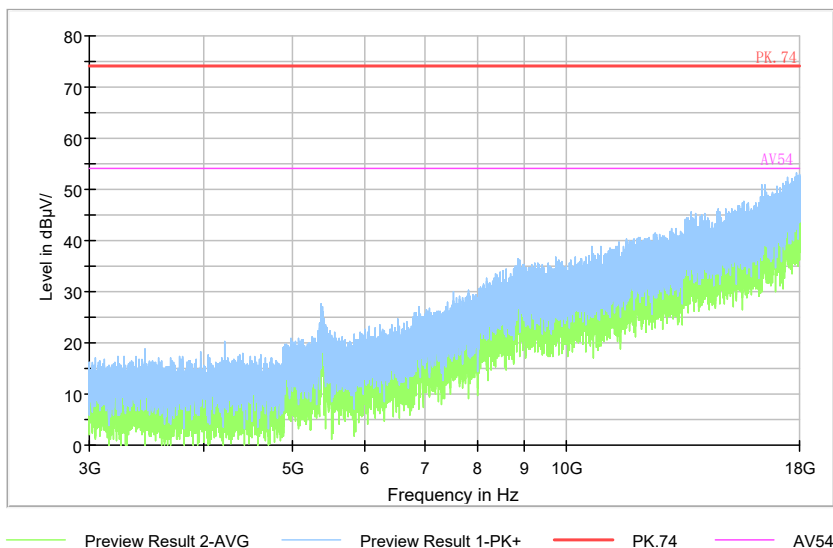

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20 MIMO)


Full Spectrum

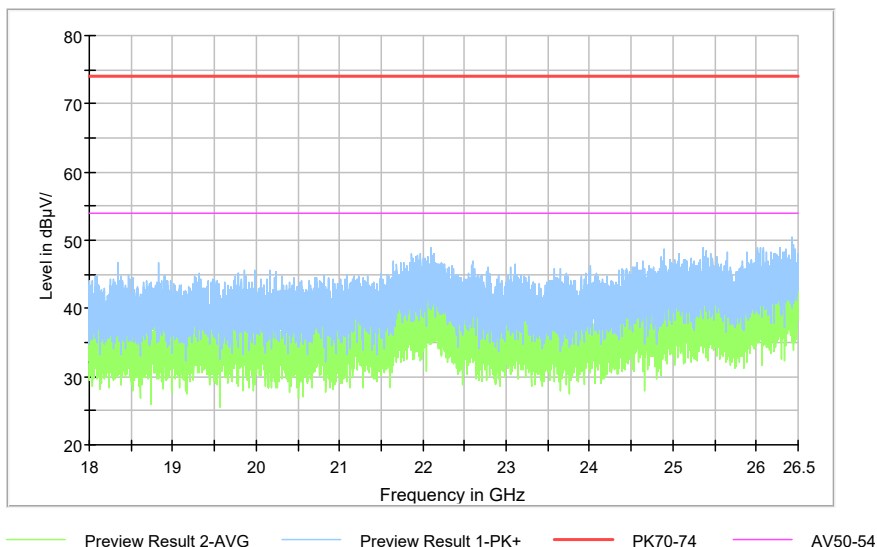


Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11n(HT20)

Carrier frequency (MHz): 2437
Channel No.:6

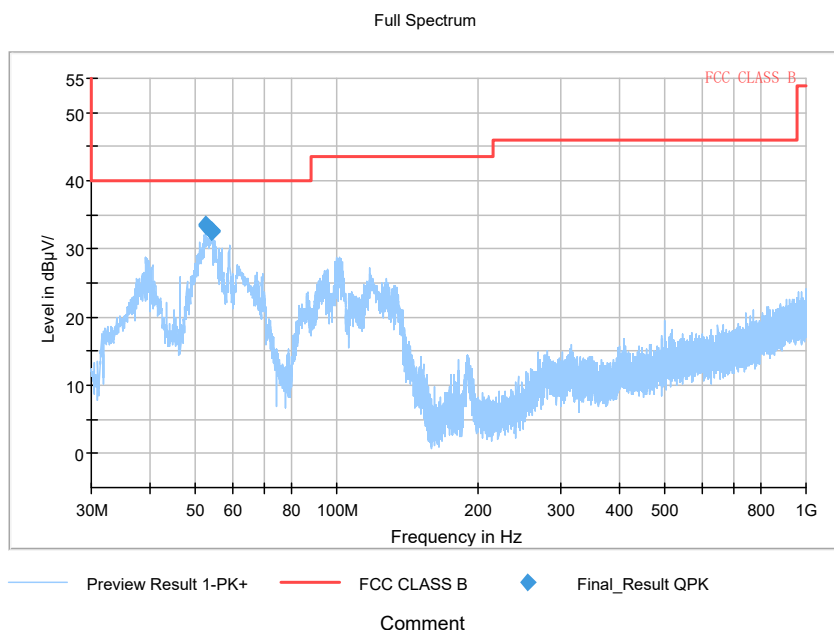


Frequency Range: 30MHz -1GHz
Detector: QP mode
Test Mode: 802.11b

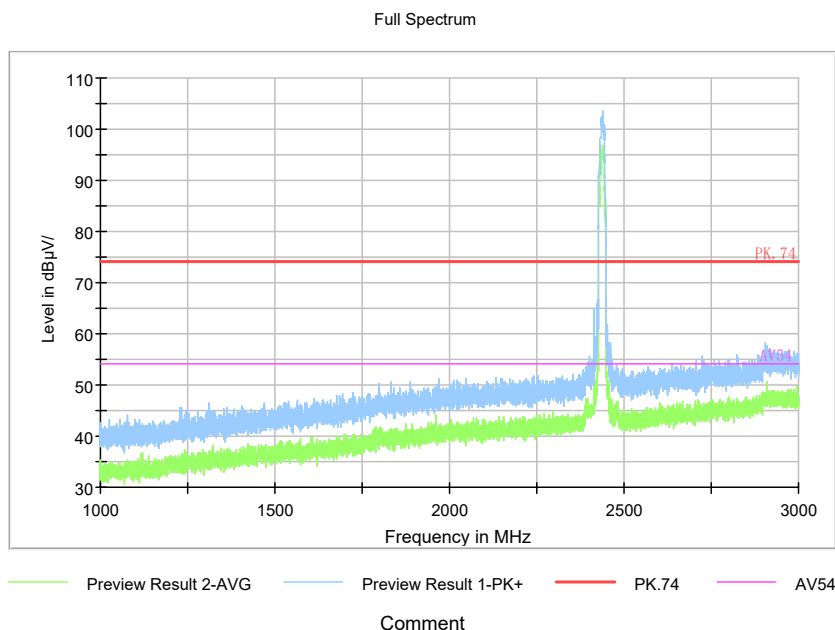

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

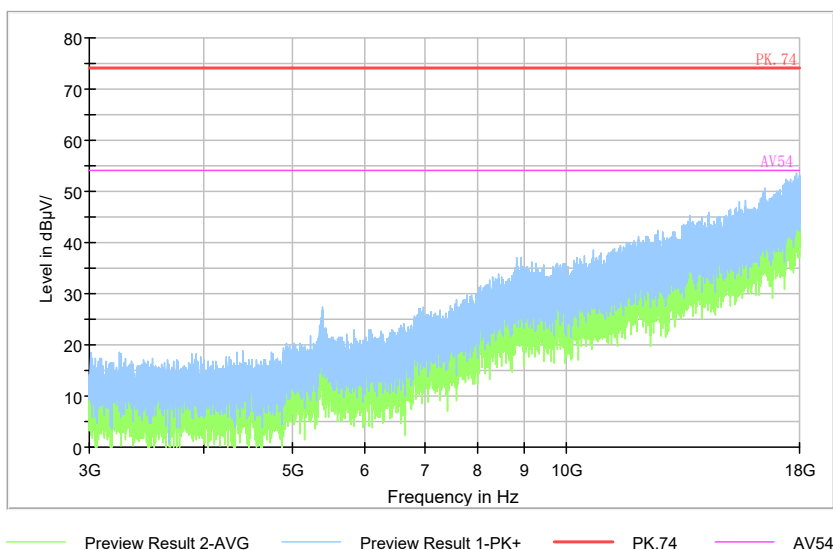

Comment

Frequency Range: 3GHz -18GHz
Detector: Av mode and PK mode
Modulation type: 802.11b


Full Spectrum

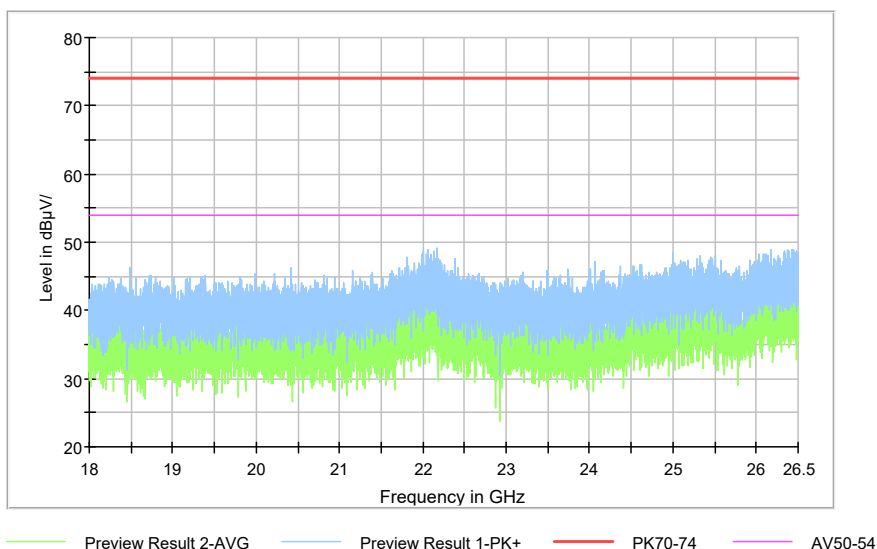

Comment

Frequency Range: 18GHz -25GHz
Detector: Av mode and PK mode
Modulation type: 802.11b

Full Spectrum

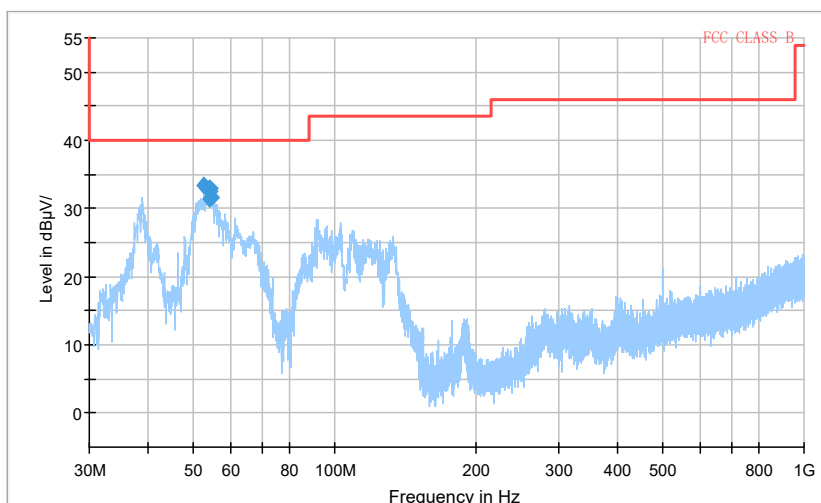


Preview Result 1-PK+ FCC CLASS B Final_Result QPK

Comment

Frequency Range: 30MHz -1GHz
Detector: QP mode
Modulation type: 802.11g

Full Spectrum

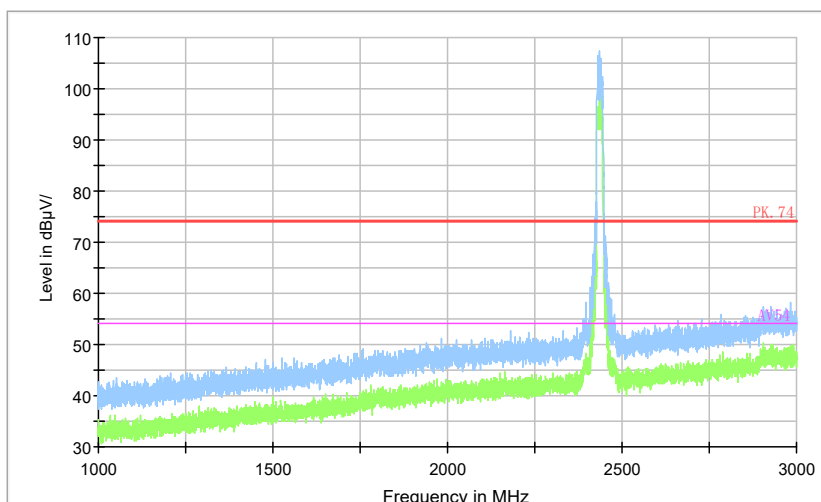

Preview Result 2-AVG Preview Result 1-PK+ PK.74 AV54

Comment

Frequency Range: 1GHz -3GHz
Detector: Av mode and PK mode
Modulation type: 802.11g