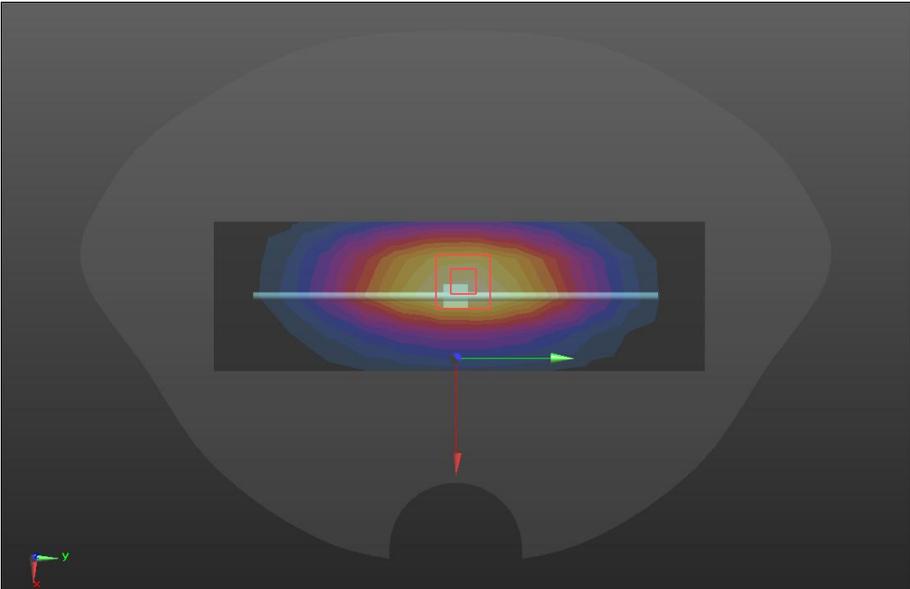
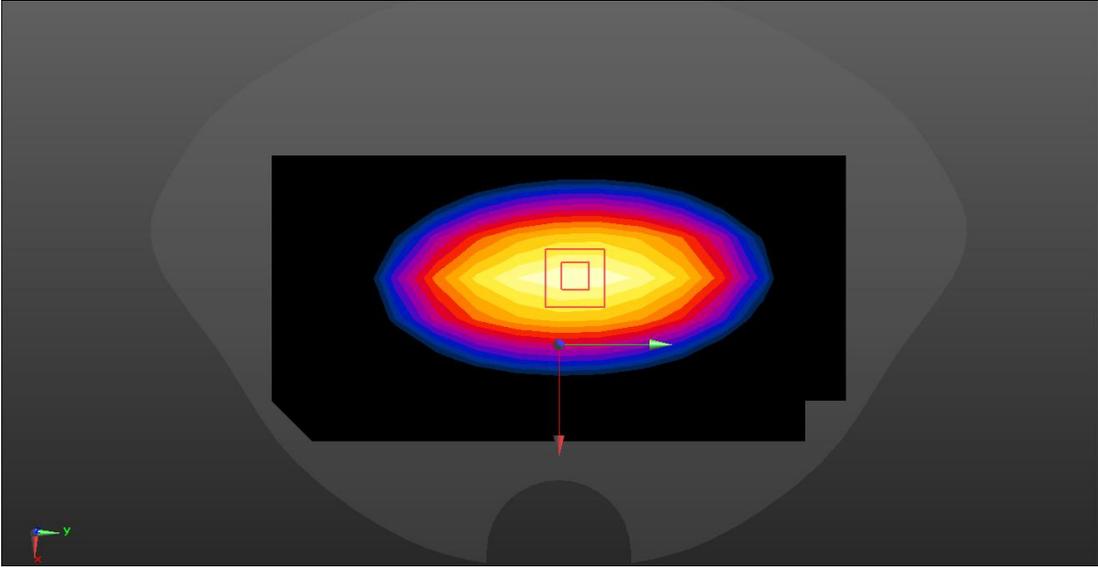


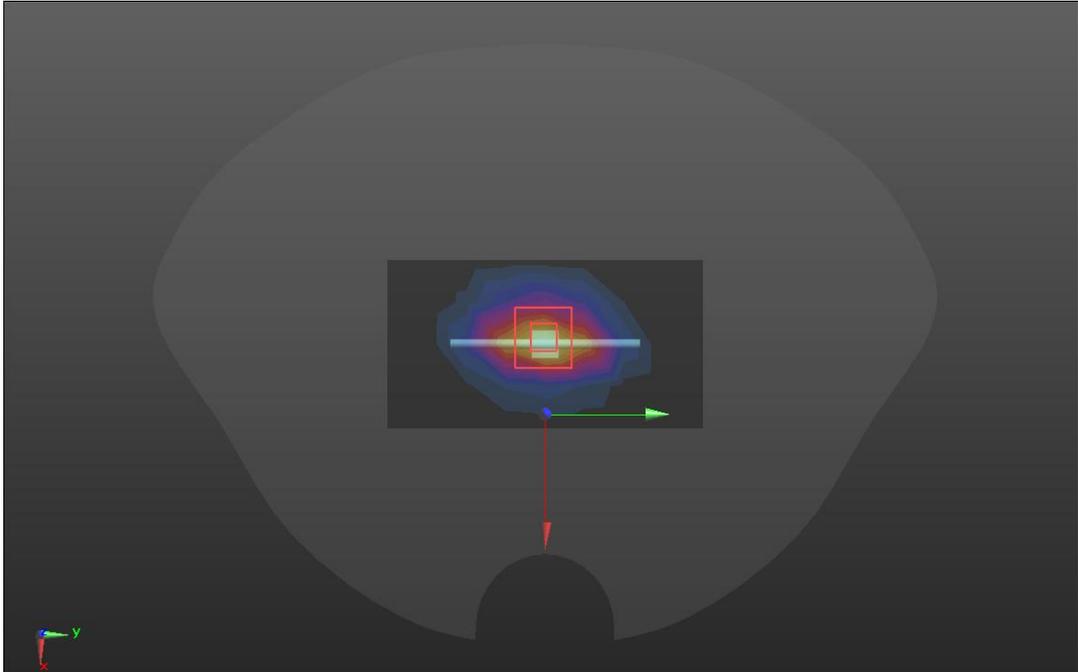
**ANNEX A – TEST PLOTS**

System check	835MHz
<p>Communication System: UID 0, CW (0); Frequency: 835 MH; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.89 \text{ S/m}</math>; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 835 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>D835/Dipole 835MHz/Area Scan (5x14x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 2.71 W/kg</p> <p><b>D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 56.70 V/m; Power Drift = 0.05 dB            Peak SAR (extrapolated) = 3.50 W/kg  <b>SAR(1 g) = 2.32 W/kg; SAR(10 g) = 1.52 W/kg</b>            Maximum value of SAR (measured) = 3.04 W/kg</p> 	

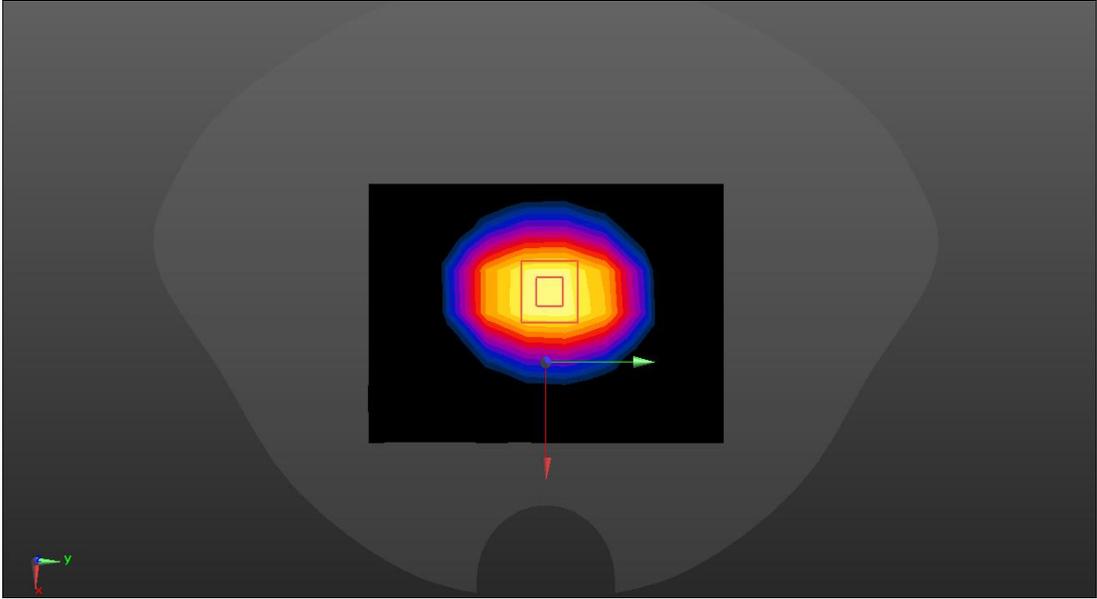
SRTC performed system check by using 250mw at antenna port

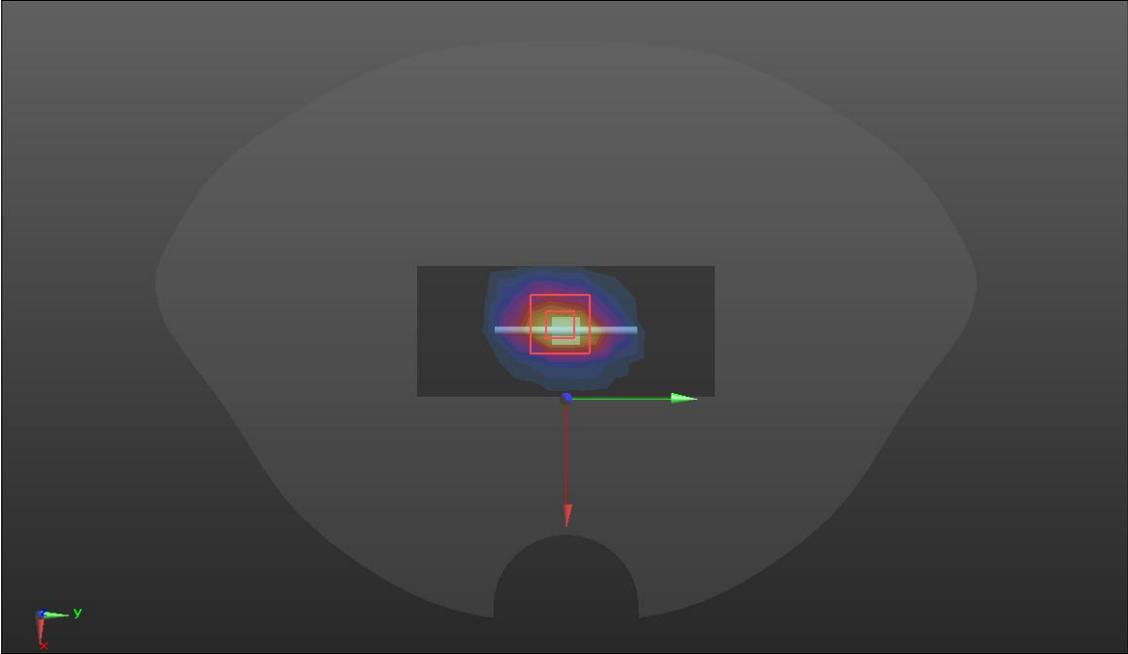
System check	835MHz
<p>Communication System: UID 0, OFDM (0); Frequency: 835 MH; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 835 \text{ MHz}</math>; <math>\sigma = 0.89 \text{ S/m}</math>; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13) @ 835 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>D835/Dipole 835MHz/Area Scan (5x14x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 2.95 W/kg</p> <p><b>D835/Dipole 835MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 54.60 V/m; Power Drift = 0.04 dB            Peak SAR (extrapolated) = 3.67 W/kg  <b>SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.68 W/kg</b>            Maximum value of SAR (measured) = 3.45 W/kg</p> 	

SRTC performed system check by using 250mw at antenna port

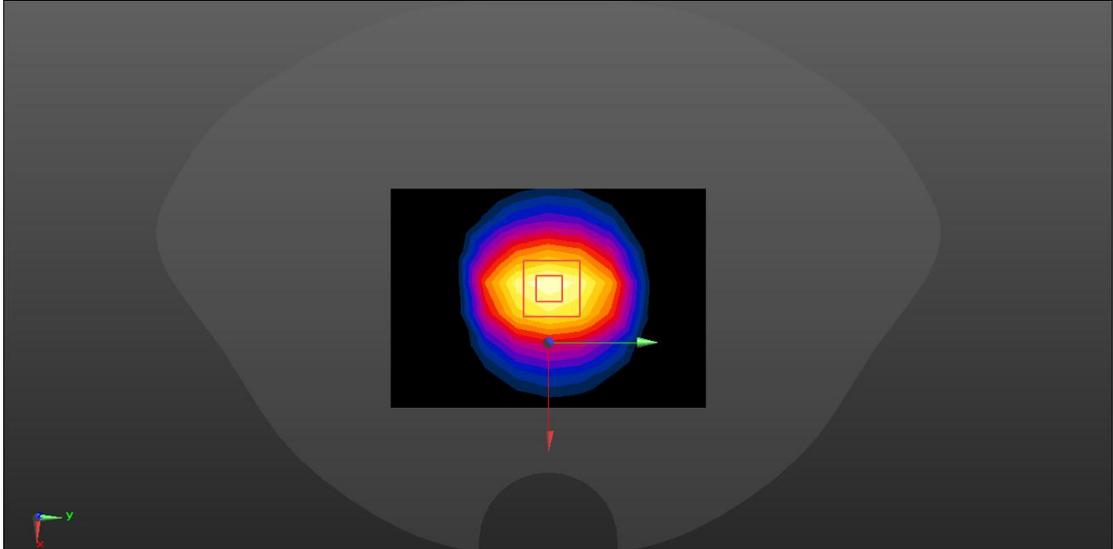
System check	1800MHz
<p>Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.34 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08) @ 1800 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li><b>D1800/Dipole 1800MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm              Maximum value of SAR (measured) = 15.3 W/kg</li> <li><b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm              Reference Value = 107.8 V/m; Power Drift = 0.05 dB              Peak SAR (extrapolated) = 18.7 W/kg  <b>SAR(1 g) = 10.0 W/kg; SAR(10 g) = 5.22 W/kg</b>              Maximum value of SAR (measured) = 15.6 W/kg</li> </ul> 	

SRTC performed system check by using 250mw at antenna port

System check	1800MHz
<p>Communication System: UID 0, OFDM (0); Frequency: 1800 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 1800 \text{ MHz}</math>; <math>\sigma = 1.34 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08) @ 1800 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li><b>D1800/Dipole 1800MHz/Area Scan (5x9x1):</b> Measurement grid: dx=15mm, dy=15mm              Maximum value of SAR (measured) = 17.3 W/kg</li> <li><b>D1800/Dipole 1800MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm              Reference Value = 109.8 V/m; Power Drift = 0.04 dB              Peak SAR (extrapolated) = 19.5W/kg  <b>SAR(1 g) = 10.09 W/kg; SAR(10 g) = 5.24W/kg</b>              Maximum value of SAR (measured) = 15.8 W/kg</li> </ul> 	

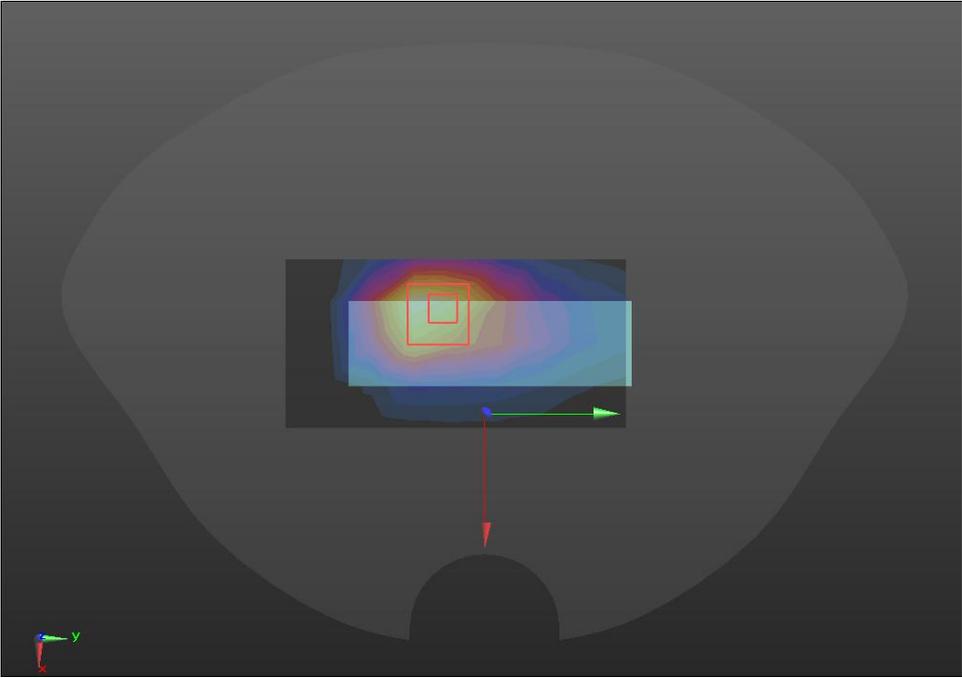
System check	2450MHz
<p>Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2450 \text{ MHz}</math>; <math>\sigma = 1.81 \text{ S/m}</math>; <math>\epsilon_r = 37.30</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2021/8/27</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li>• <b>D2450/Dipole 2450MHz/Area Scan (5x10x1)</b>: Measurement grid: <math>dx=12\text{mm}</math>, <math>dy=12\text{mm}</math>                Maximum value of SAR (measured) = 18.1 W/kg</li> <li>• <b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0</b>: Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>                Reference Value = 107.6 V/m; Power Drift = 0.06 dB                Peak SAR (extrapolated) = 25.1 W/kg  <b>SAR(1 g) = 12.69 W/kg; SAR(10 g) = 6.36 W/kg</b>                Maximum value of SAR (measured) = 20.3 W/kg</li> </ul> 	

SRTC performed system check by using 250mw at antenna port

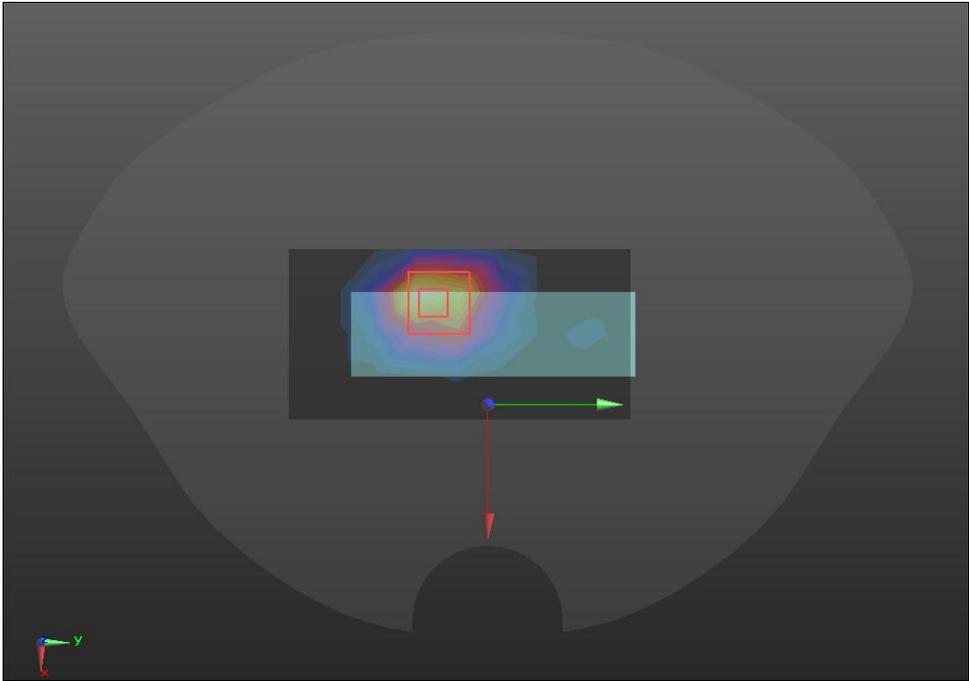
System check	2450MHz
<p>Communication System: UID 0, OFDM (0); Frequency: 2450 MHz; Duty Cycle: 1:1            Medium parameters used: <math>f = 2450</math> MHz; <math>\sigma = 1.81</math> S/m; <math>\epsilon_r = 37.30</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5) @ 2450 MHz; Calibrated: 2021/8/27</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> <li><b>D2450/Dipole 2450MHz/Area Scan (5x10x1):</b> Measurement grid: dx=12mm, dy=12mm                Maximum value of SAR (measured) = 19.2 W/kg</li> <li><b>D2450/Dipole 2450MHz/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                Reference Value = 113.9V/m; Power Drift = 0.01 dB                Peak SAR (extrapolated) = 26.7 W/kg  <b>SAR(1 g) = 13.66 W/kg; SAR(10 g) = 6.53 W/kg</b>                Maximum value of SAR (measured) = 22.2 W/kg</li> </ul> 	

SRTC performed system check by using 250mw at antenna port

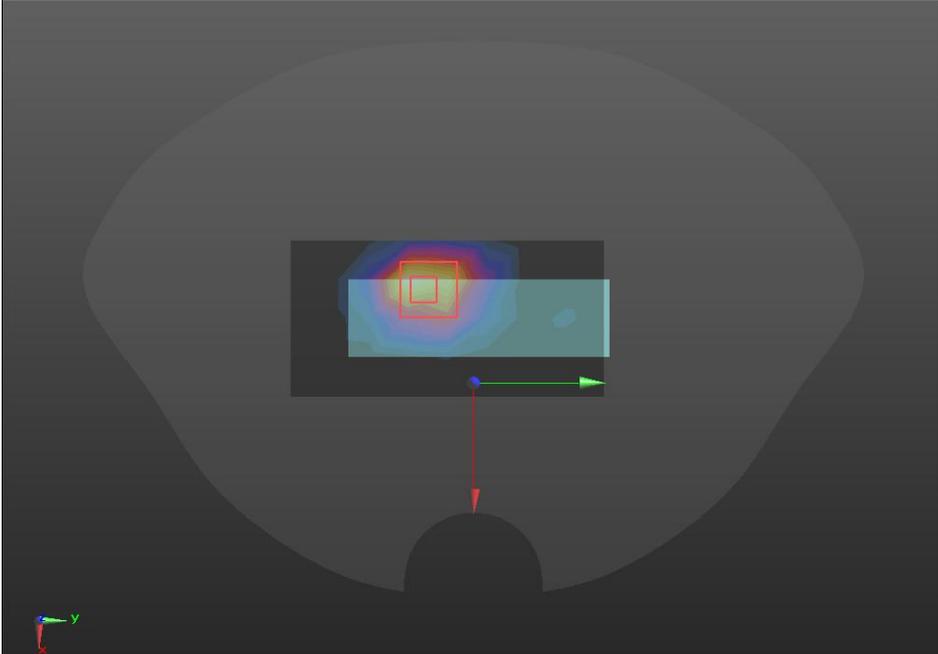
**GSM 850**

Body-worn Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 3:8            Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/GSM 850/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.479 W/kg</p> <p><b>Back/GSM 850/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 18.56 V/m; Power Drift = -0.08 dB            Peak SAR (extrapolated) = 0.596 W/kg  <b>SAR(1 g) = 0.345 W/kg; SAR(10 g) = 0.178 W/kg</b>            Maximum value of SAR (measured) = 0.534 W/kg</p> 	

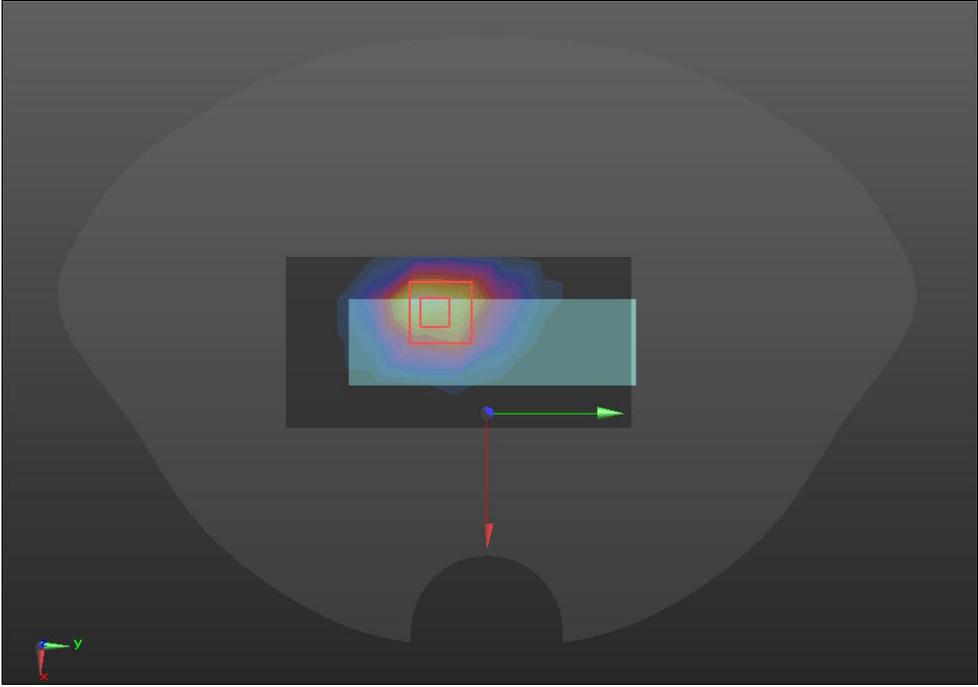
**GSM 1900**

Body-worn Hotspot	Back
<p>Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 3:8            Medium parameters used (interpolated): <math>f = 1880 \text{ MHz}</math>; <math>\sigma = 1.34 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/GSM 1900/Area Scan (9x5x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 0.377 W/kg</p> <p><b>Back/GSM 1900/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 9.893 V/m; Power Drift = -0.01 dB            Peak SAR (extrapolated) = 0.492 W/kg  <b>SAR(1 g) = 0.266 W/kg; SAR(10 g) = 0.140 W/kg</b>            Maximum value of SAR (measured) = 0.397 W/kg</p> 	

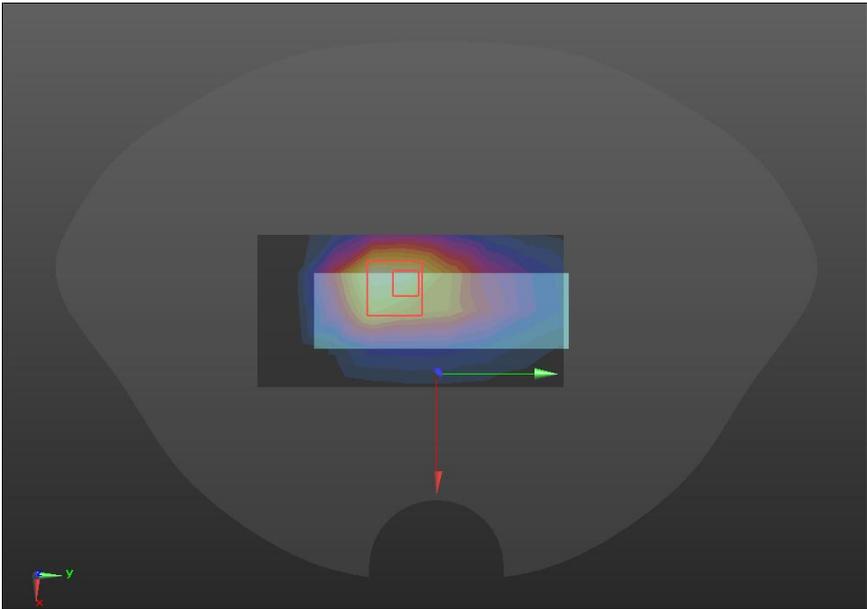
**WCDMA BAND II**

Body-worn Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND2 (0); Frequency: 1880 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1880 \text{ MHz}</math>; <math>\sigma = 1.34 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/WCDMA B2/Area Scan (9x5x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 0.320 W/kg</p> <p><b>Back/WCDMA B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>, <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 9.027 V/m; Power Drift = -0.02 dB            Peak SAR (extrapolated) = 0.425 W/kg  <b>SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.122 W/kg</b>            Maximum value of SAR (measured) = 0.343 W/kg</p> 	

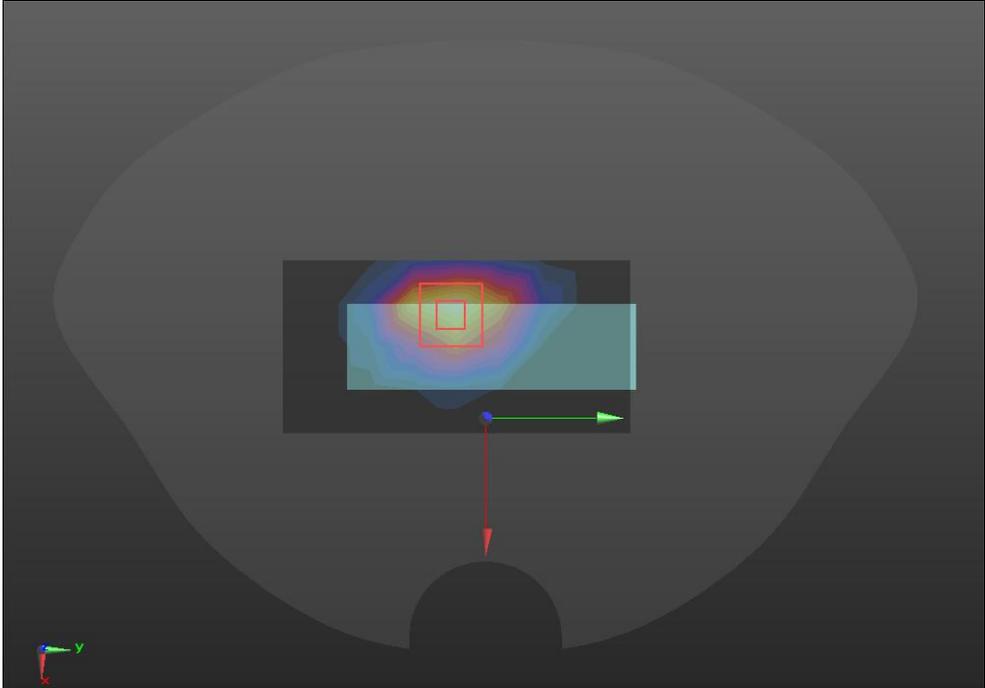
**WCDMA BAND IV**

Body-worn Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND4 (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1732.6</math> MHz; <math>\sigma = 1.34</math> S/m; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/WCDMA B4/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.219 W/kg</p> <p><b>Back/WCDMA B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 7.880 V/m; Power Drift = 0.15 dB            Peak SAR (extrapolated) = 0.283 W/kg  <b>SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.087 W/kg</b>            Maximum value of SAR (measured) = 0.234 W/kg</p> 	

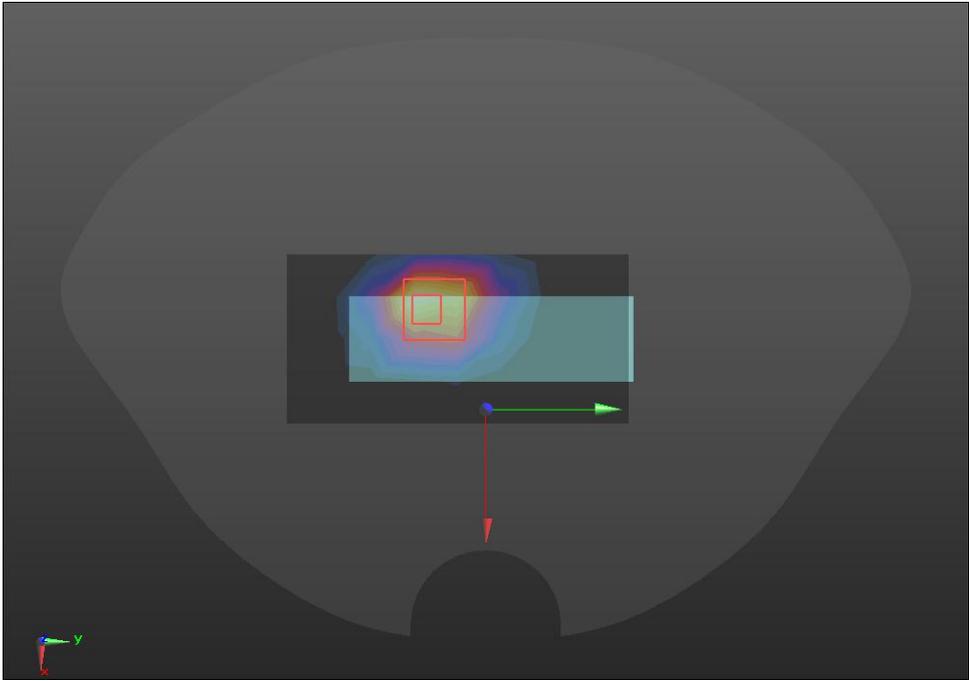
**WCDMA BAND V**

Body-worn Hotspot	Back
<p>Communication System: UID 0, WCDMA BAND 5 (0); Frequency: 836.6 MHz; Duty Cycle: 1:1                      Medium parameters used (interpolated): <math>f = 836.6</math> MHz; <math>\sigma = 0.89</math> S/m; <math>\epsilon_r = 41.29</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>                      Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(6.13, 6.13, 6.13); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/WCDMA B5/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm                      Maximum value of SAR (measured) = 0.413 W/kg</p> <p><b>Back/WCDMA B5/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm                      Reference Value = 15.44 V/m; Power Drift = 0.14 dB                      Peak SAR (extrapolated) = 0.543 W/kg  <b>SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.119 W/kg</b>                      Maximum value of SAR (measured) = 0.437 W/kg</p> 	

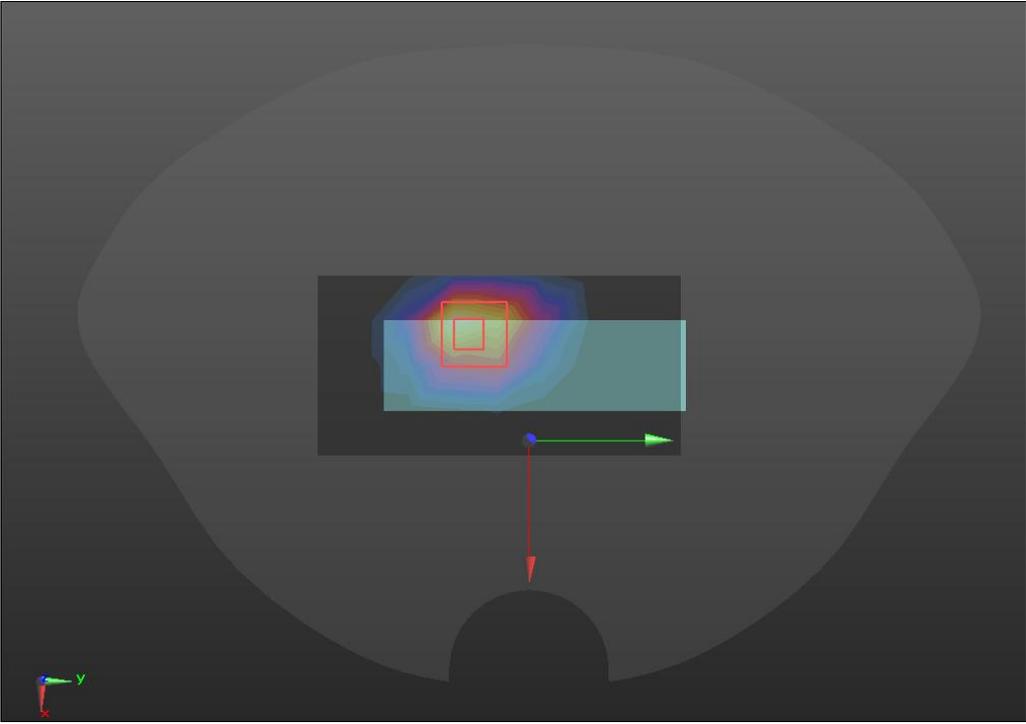
**LTE Band 2**

Body-worn Hotspot	Back
<p>Communication System: UID 0, LTE band 02 (0); Frequency: 1880 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1880</math> MHz; <math>\sigma = 1.34</math> S/m; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B2/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.965 W/kg</p> <p><b>Back/LTE B2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 19.74 V/m; Power Drift = -0.00dB            Peak SAR (extrapolated) = 1.14 W/kg  <b>SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.374 W/kg</b>            Maximum value of SAR (measured) = 0.940 W/kg</p> 	

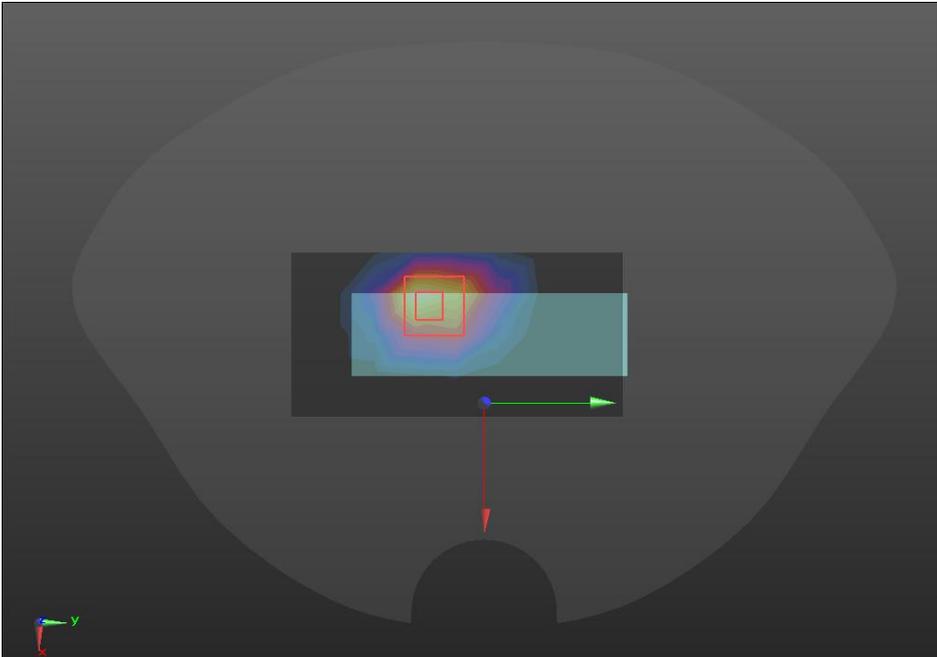
**LTE BAND 4**

Body-worn Hotspot	Back
<p>Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1732.5 \text{ MHz}</math>; <math>\sigma = 1.34 \text{ S/m}</math>; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B4/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.369 W/kg</p> <p><b>Back/LTE B4/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 10.57 V/m; Power Drift = -0.08 dB            Peak SAR (extrapolated) = 0.507 W/kg  <b>SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.135 W/kg</b>            Maximum value of SAR (measured) = 0.438 W/kg</p> 	

**LTE BAND 7**

Body-worn Hotspot	Back
<p>Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 2535 \text{ MHz}</math>; <math>\sigma = 1.81 \text{ S/m}</math>; <math>\epsilon_r = 37.30</math>; <math>\rho = 1000 \text{ kg/m}^3</math>            Phantom section: Right Section DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>Probe: ES3DV3 - SN3127; ConvF(4.5, 4.5, 4.5); Calibrated: 2021/8/27;</li> <li>Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B28 2/Area Scan (9x5x1):</b> Measurement grid: <math>dx=15\text{mm}</math>, <math>dy=15\text{mm}</math>            Maximum value of SAR (measured) = 0.031 W/kg  <b>Back/LTE B28 2/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: <math>dx=8\text{mm}</math>,  <math>dy=8\text{mm}</math>, <math>dz=5\text{mm}</math>            Reference Value = 38.94 V/m; Power Drift = -0.16 dB            Peak SAR (extrapolated) = 0.051 W/kg  <b>SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.004 W/kg</b>            Maximum value of SAR (measured) = 0.035 W/kg</p> 	

**LTE BAND 66**

Body-worn Hotspot	Back
<p>Communication System: UID 0, LTE band 66 (0); Frequency: 1745 MHz; Duty Cycle: 1:1            Medium parameters used (interpolated): <math>f = 1745</math> MHz; <math>\sigma = 1.34</math> S/m; <math>\epsilon_r = 40.05</math>; <math>\rho = 1000</math> kg/m<sup>3</sup>            Phantom section: Flat Section</p> <p>DASY5 Configuration:</p> <ul style="list-style-type: none"> <li>• Probe: ES3DV3 - SN3127; ConvF(5.08, 5.08, 5.08); Calibrated: 2021/8/27;</li> <li>• Sensor-Surface: 3mm (Mechanical Surface Detection)</li> <li>• Electronics: DAE4 Sn546; Calibrated: 2021/8/25</li> <li>• Phantom: Twin-SAM 1660; Type: QD 000 P40 CD; Serial: 1660</li> <li>• Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)</li> </ul> <p><b>Back/LTE B66/Area Scan (9x5x1):</b> Measurement grid: dx=15mm, dy=15mm            Maximum value of SAR (measured) = 0.416 W/kg</p> <p><b>Back/LTE B66/Zoom Scan (5x5x7)/Cube 0:</b> Measurement grid: dx=8mm, dy=8mm, dz=5mm            Reference Value = 8.562 V/m; Power Drift = -0.05 dB            Peak SAR (extrapolated) = 0.502 W/kg  <b>SAR(1 g) = 0.306 W/kg; SAR(10 g) = 0.118 W/kg</b>            Maximum value of SAR (measured) = 0.423 W/kg</p> 	

Note: All the modulated signal with different PAR (refers to RF WWAN report) already take into account, but not mentioned in this inherent log file template.