



REPORT No. : SZ16030142E01

FCC TEST REPORT

APPLICANT : ZTE Corporation

PRODUCT NAME : LTE Mutil-Mode Digital Mobile Phone

MODEL NAME : Z861BL

TRADE NAME : ZTE

BRAND NAME : ZTE

FCC ID : SRQ-Z861BL

STANDARD(S) : 47 CFR Part 15 Subpart B

TEST DATE : 2016-04-05 to 2016-04-27

ISSUE DATE : 2016-05-19

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.



NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



DIRECTORY

1. TECHNICAL INFORMATION	5
1.1. APPLICANT INFORMATION	5
1.2. EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
2. TEST RESULTS	7
2.1. APPLIED REFERENCE DOCUMENTS	7
3. TEST CONDITIONS SETTING	8
3.1. TEST MODE	8
3.2. TEST SETUP AND EQUIPMENTS LIST	9
3.2.1. CONDUCTED EMISSION	9
3.2.2. RADIATED EMISSION	10
4. 47 CFR PART 15B REQUIREMENTS	12
4.1. CONDUCTED EMISSION	12
4.1.1. REQUIREMENT	12
4.1.2. TEST DESCRIPTION	12
4.1.3. TEST RESULT	12
4.2. RADIATED EMISSION	15
4.2.1. REQUIREMENT	15
4.2.2. TEST DESCRIPTION	15
4.2.3. FREQUENCY RANGE OF MEASUREMENT	16
4.2.4. TEST RESULT	16
ANNEX A TEST SETUP PHOTOS	19
ANNEX B TEST UNCERTAINTY	22
ANNEX C TESTING LABORATORY INFORMATION	23



REPORT No. : SZ16030142E01

1. IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY23
2. IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION.....23
3. ACCREDITATION CERTIFICATE23
4. TEST ENVIRONMENT CONDITIONS23

Change History

Issue	Date	Reason for change
1.0	2016-05-19	First edition



REPORT No. : SZ16030142E01

Test Report Declaration

Applicant	ZTE Corporation
Applicant Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China
Manufacturer	ZTE Corporation
Manufacturer Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R.China
Product Name	LTE Mutil-Mode Digital Mobile Phone
Model Name	Z861BL
Brand Name	ZTE
HW Version	Z861BLHWV1.0
SW Version	Z861BLV0.0.0B02
Test Standards	47 CFR Part 15 Subpart B
Test Result	PASS

Tested by : He Wenjie
He Wenjie (Test Engineer)

Reviewed by : Xiao Xiong
Xiao Xiong (EMC Manager)

Approved by : Zeng Dexin
Zeng Dexin (Chief Engineer)



1. Technical Information

Note: Provided by applicant

1.1. Applicant Information

Company: ZTE Corporation
Address: ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District,
Shenzhen, Guangdong, P.R.China

1.2. Equipment under Test (EUT) Description

EUT Type:	LTE Mutil-Mode Digital Mobile
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	Z861BLHWV1.0
Software Version:	Z861BLV0.0.0B02

Power supply:	Battery	
	Brand Name:	N/A
	Model No.:	Li3925T44P8h786035
	Serial No.:	(N/A, marked #1 by test site)
	Capacity:	2540mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
Ancillary Equipment1:	AC Adapter (Charger for Battery)	
	Brand Name:	N/A
	Model No.:	STC-A51A-Z
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 250mA
	Rated Output:	= 5V, 1000mA
	Manufacturer:	Shenzhen Dokocom Energy Technology Co., Ltd.
Ancillary Equipment2:	AC Adapter (Charger for Battery)	
	Brand Name:	N/A
	Model No.:	STC-A51A-Z
	Serial No.:	(N/A, marked #1 by test site)
	Rated Input:	~ 100-240V, 50/60Hz, 250mA
	Rated Output:	= 5V, 1000mA
	Manufacturer:	RUIDE SURVEYING INSTRUMENT CO., LTD.



NOTE:

1. The two adapters were tested respectively with the EUT, the worst case (Manufacturer RUIDE SURVEYING INSTRUMENT CO., LTD.) is recorded in this report.
2. The EUT is a LTE Mutil-Mode Digital Mobile, it supports GSM850MHz, 1900MHz, GPRS, EGPRS, WCDMA Band II , Band IV , Band V , HSDPA, HSUPA, HSPA+, FDD-LTE Band2/4/5/12, GPS, ISM 2.4GHz Bluetooth band and WIFI (802.11b/g/n) band.
3. It is equipped with a T-Flash card slot, a Micro-B USB port which can be connected to the ancillary equipments. It supports FM function.
4. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15(May 17, 2016 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.107	Conducted Emission	2016.04.26	PASS
2	15.109	Radiated Emission	2016.04.26	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



3. Test Conditions Setting


3.1. Test Mode

1	The first test mode (Data Transmission) The EUT configuration of the emission tests is EUT + Battery + T-Flash Card + PC. In this test mode, the EUT with a T-Flash Card embedded was connected to a PC via the Micro-B USB port. During the measurement, the data is transmitting between the PC and the T-Flash Card of the EUT.
2	The second test mode (Standby) The EUT configuration of the emission tests is EUT + Battery + Charger. During the measurement, the EUT was charged by its adapter and turned on.
Note: All test modes are performed, only the worse case (Data Transmission) is recorded in this report.	

3.2. Test Setup and Equipments List

3.2.1. Conducted Emission

A. Test Setup:

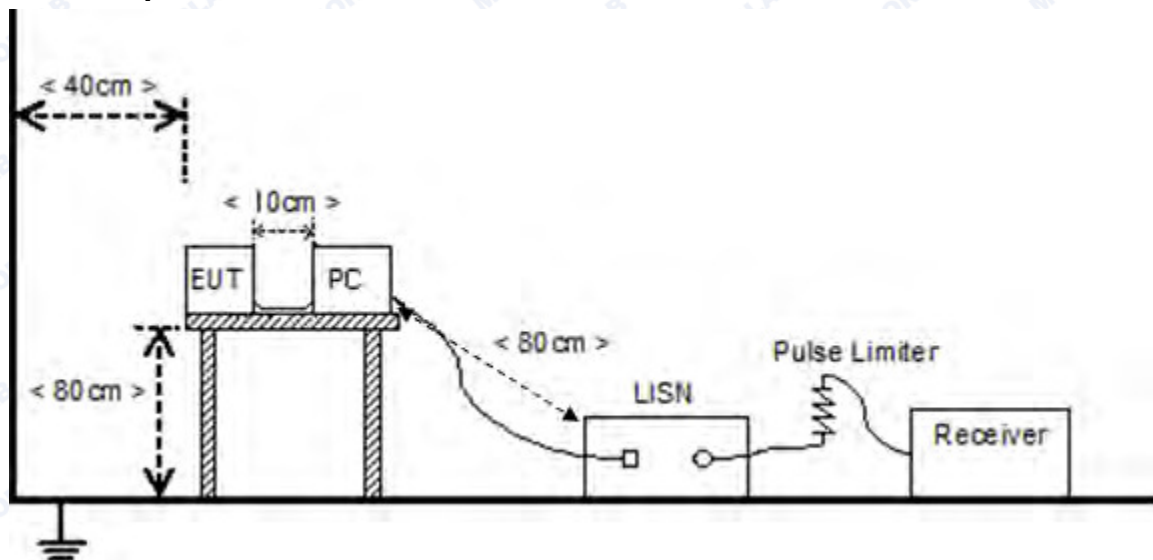

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
Receiver	Narda	PMM 9010	595WX11007	2015.5.07	2016.5.06
LISN	Schwarzbeck	NSLK 8127	812744	2015.6.18	2016.6.17
Pulse Limiter (20dB)	VTSD	9561D	9537	2015.5.07	2016.5.06
PC	Apple	A1370	C02FQ2PYD DQW	N/A	N/A


3.2.2. Radiated Emission

A. Test Setup:

1. For radiated emissions from 30MHz to 1GHz

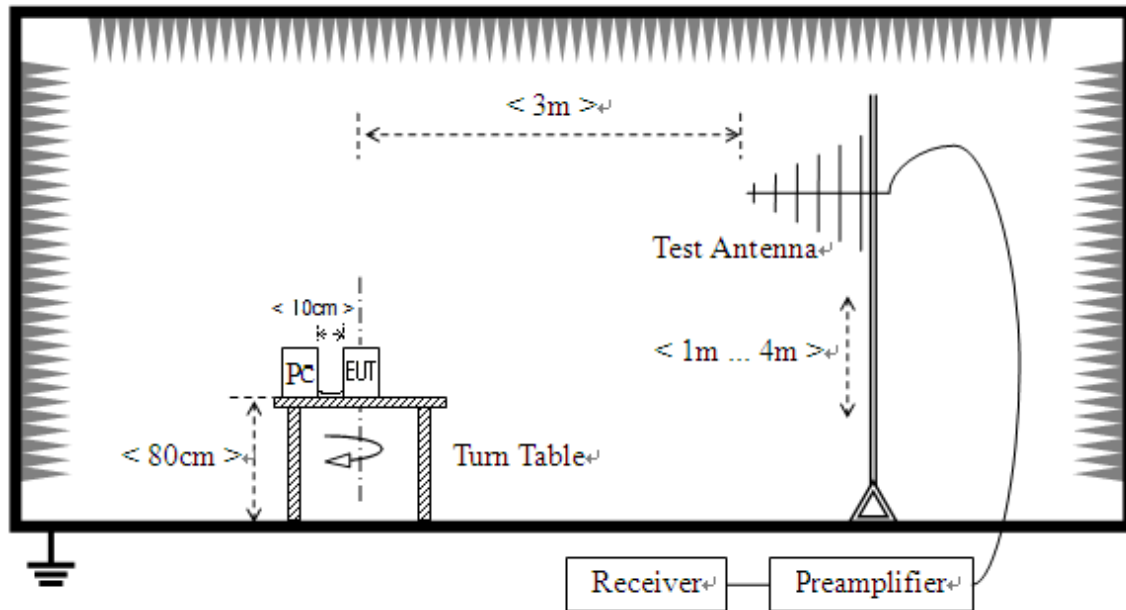

2. For radiated emissions above 1GHz

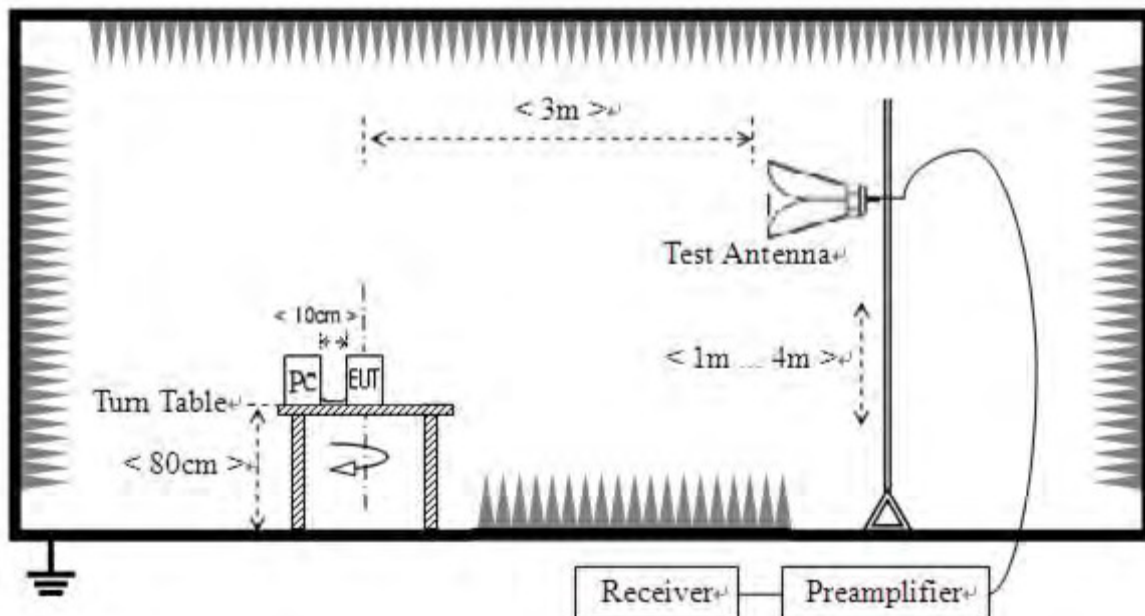



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2015.5.07	2016.5.06
Semi-Anechoic Chamber	Albatross	9m*6m*6m	N/A	2015.5.14	2016.5.13
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2015.6.23	2016.6.22
Test Antenna - Horn	Schwarzbeck	BBHA9120 C	9120C-384	2016.1.13	2017.1.12
PC	Apple	A1370	C02FQ2PYD DQW	N/A	N/A



4. 47 CFR Part 15B Requirements

4.1. Conducted Emission

4.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.


4.1.2. Test Description

See section 3.2.1 of this report.


4.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

A. Test Plot and Suspicious Points:

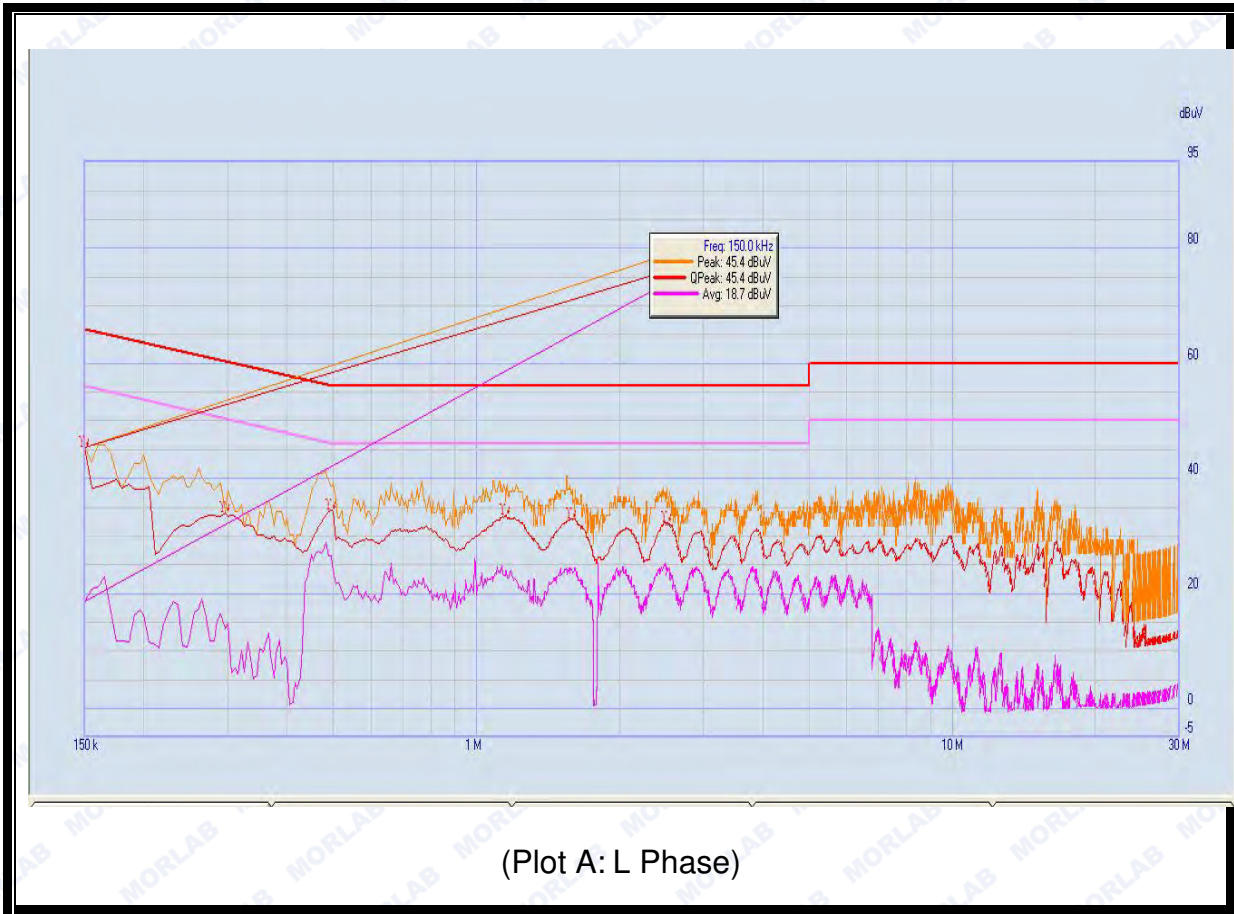

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	45.40	18.70	66.00	56.00	Line	PASS
2	0.295	33.98	13.95	61.86	51.86		PASS
3	0.495	34.42	26.60	56.14	46.14		PASS
4	1.145	33.40	23.18	56.00	46.00		PASS
5	1.585	33.07	24.21	56.00	46.00		PASS
6	2.51	32.33	23.89	56.00	46.00		PASS

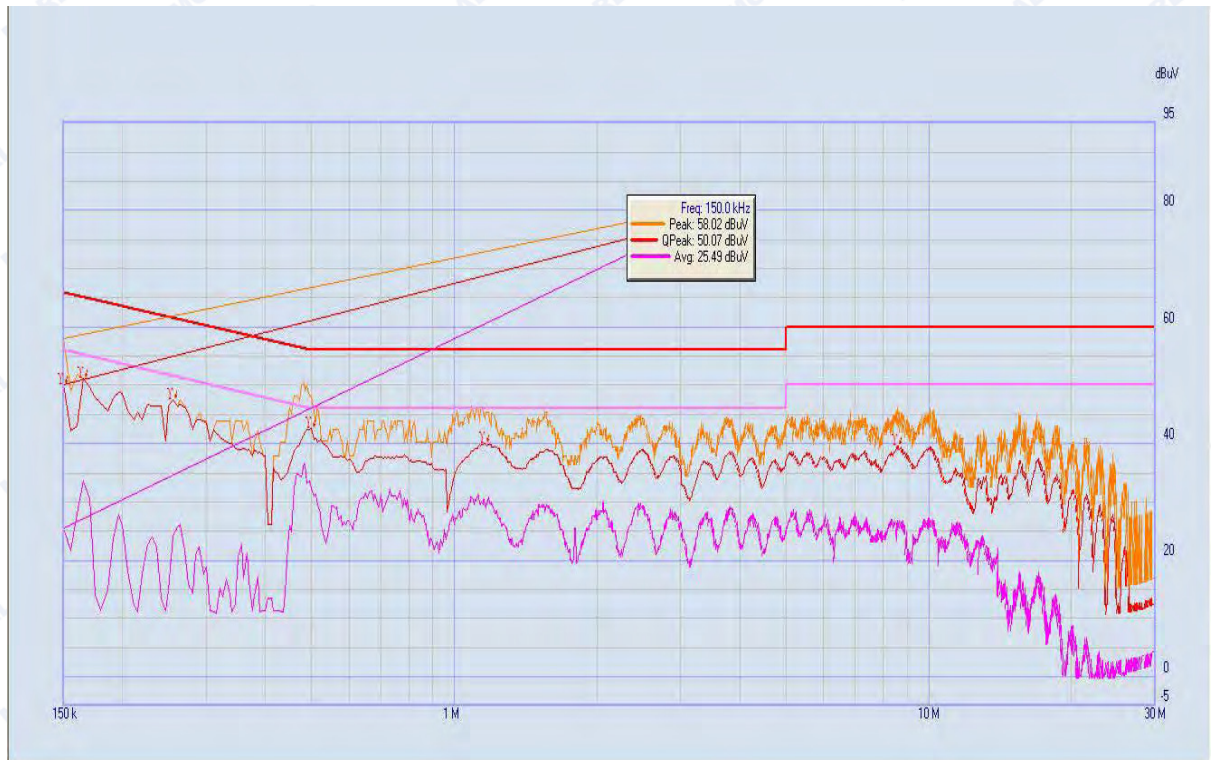

(Plot B: N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	50.07	25.49	66.00	56.00	Neutral	PASS
2	0.165	51.18	33.72	65.57	55.57		PASS
3	0.255	47.47	24.26	63.00	53.00		PASS
4	0.50	42.54	32.39	56.00	46.00		PASS
5	1.16	40.04	29.48	56.00	46.00		PASS
6	8.57	39.56	26.67	60.00	50.00		PASS

Result: Pass



4.2. Radiated Emission

4.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	($\mu\text{V/m}$)	($\text{dB}\mu\text{V/m}$)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35 (b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in $\text{dB}\mu\text{V/m}$ is calculated by $20\log$ Emission Level ($\mu\text{V/m}$).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $L_{d1} = L_{d2} * (d_2/d_1)^2$.

Example:

F.S Limit at 30m distance is $30\mu\text{V/m}$, then F.S Limitation at 3m distance is adjusted as

$$L_{d1} = L_1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}$$

4.2.2. Test Description

See section 3.2.2 of this report.



4.2.3. Frequency range of measurement

According to 15.33(b) (1), the frequency range of radiated measurement for the EUT is listed in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.


4.2.4. Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

A. Test Plots and Suspicious Points:

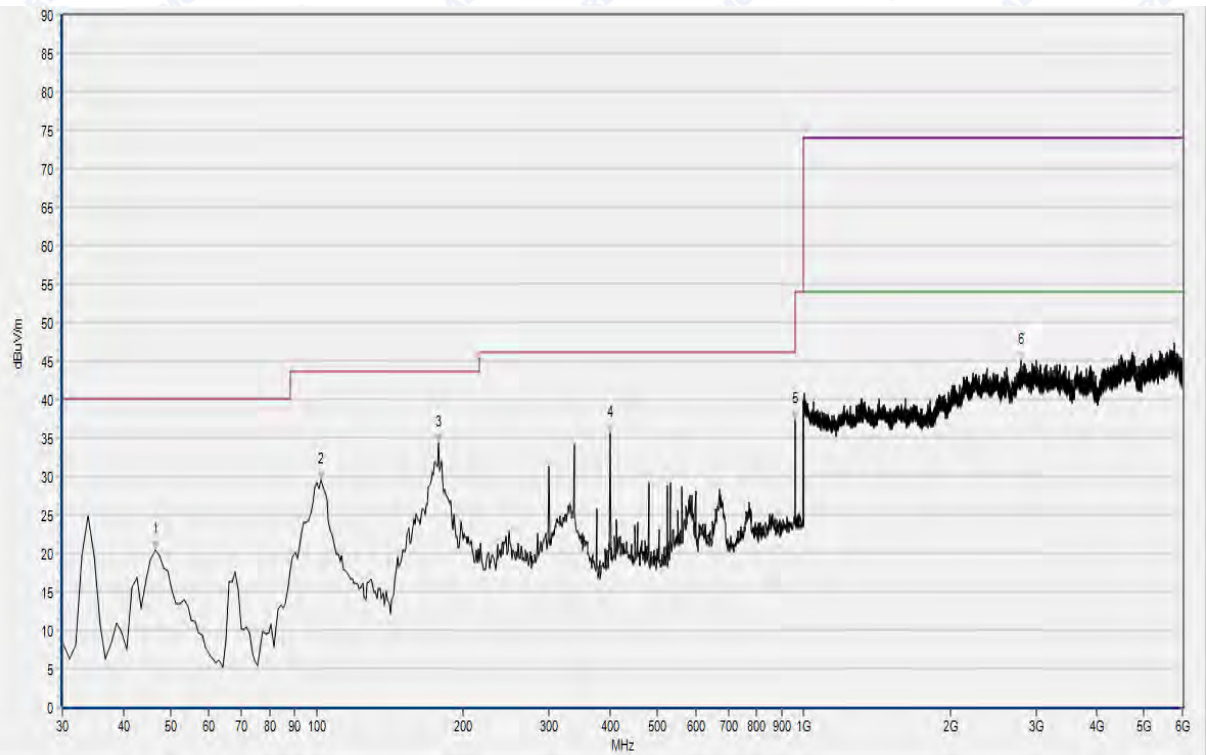

(Plot A: 30MHz – 6GHz, Test Antenna Vertical)

No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	46.490	N.A.	20.33	N.A.	N.A.	40.00	N.A.	V	PASS
2	101.780	N.A.	29.53	N.A.	N.A.	43.50	N.A.	V	PASS
3	177.440	N.A.	34.26	N.A.	N.A.	43.50	N.A.	V	PASS
4	399.570	N.A.	35.47	N.A.	N.A.	46.00	N.A.	V	PASS
5	960.230	N.A.	37.30	N.A.	N.A.	54.00	N.A.	V	PASS
6	2799.680	44.93	N.A.	36.15	74.00	N.A.	54.00	V	PASS

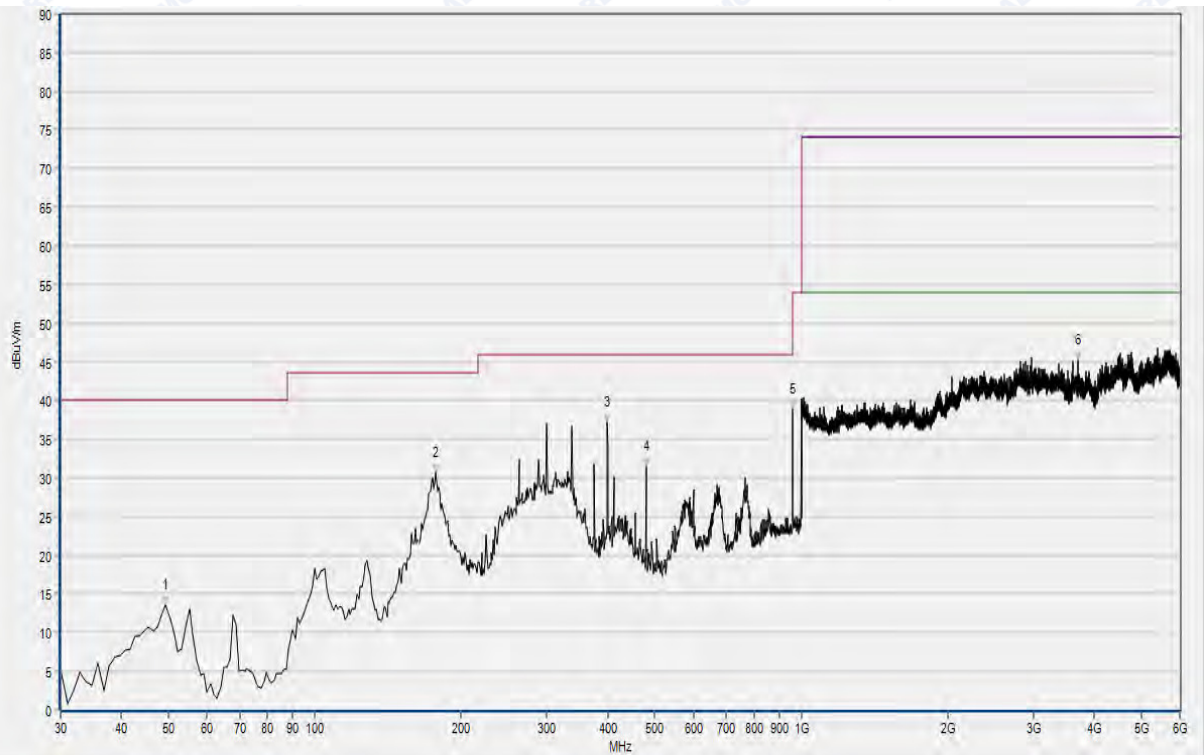

(Plot B: 30MHz – 6GHz, Test Antenna Horizontal)

No.	Fre. MHz	Pk dBμV/m	QP dBμV/m	AV dBμV/m	Limit-PK dBμV/m	Limit-QP dBμV/m	Limit-AV dBμV/m	ANT	Verdict
1	49.400	N.A.	13.64	N.A.	N.A.	40.00	N.A.	H	PASS
2	177.440	N.A.	30.72	N.A.	N.A.	43.50	N.A.	H	PASS
3	399.570	N.A.	37.26	N.A.	N.A.	46.00	N.A.	H	PASS
4	480.080	N.A.	31.59	N.A.	N.A.	46.00	N.A.	H	PASS
5	960.230	N.A.	38.85	N.A.	N.A.	54.00	N.A.	H	PASS
6	3702.080	45.27	N.A.	38.44	74.00	N.A.	54.00	H	PASS

Result: Pass



Annex A Test Setup Photos



1. Conducted emission main's port front view






REPORT No. : SZ16030142E01

2. Conducted emission main's port side view

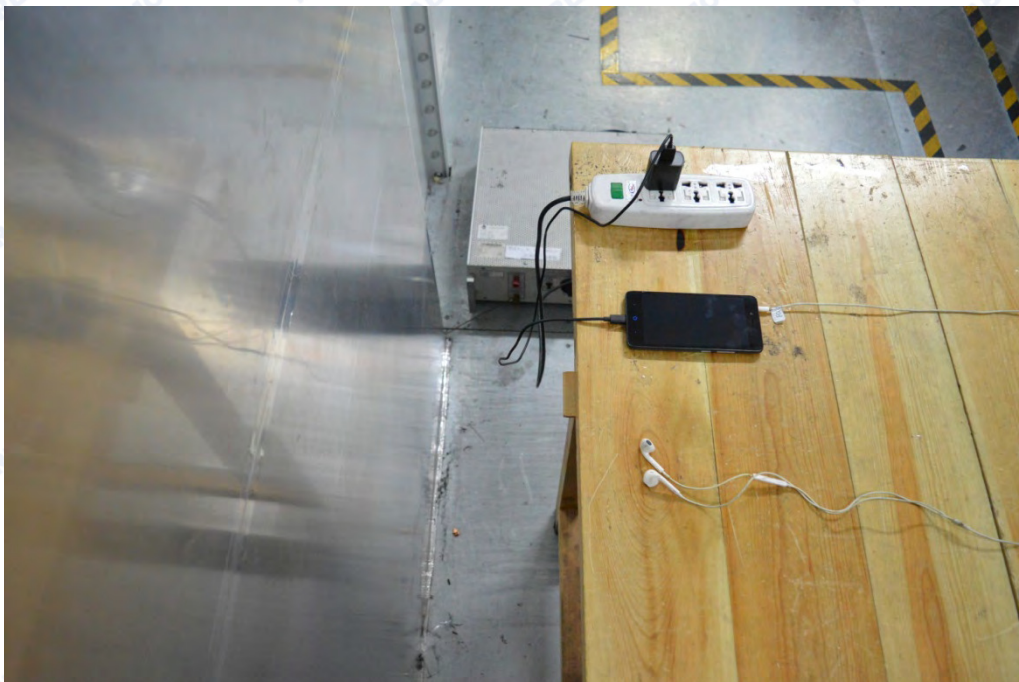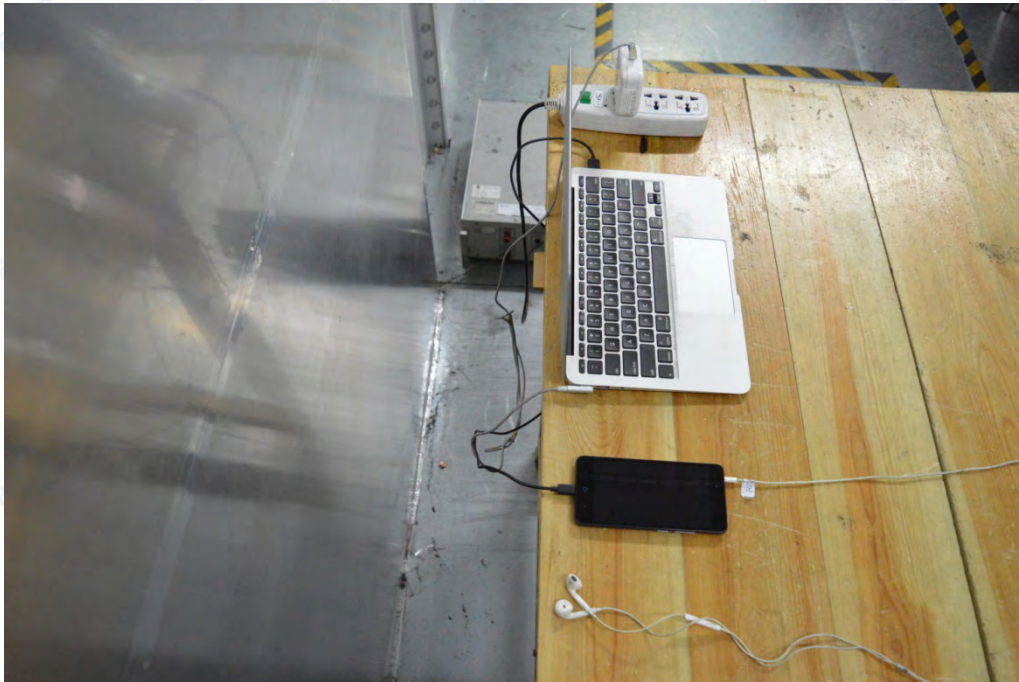

3. Radiated emission (30MHz-1GHz)

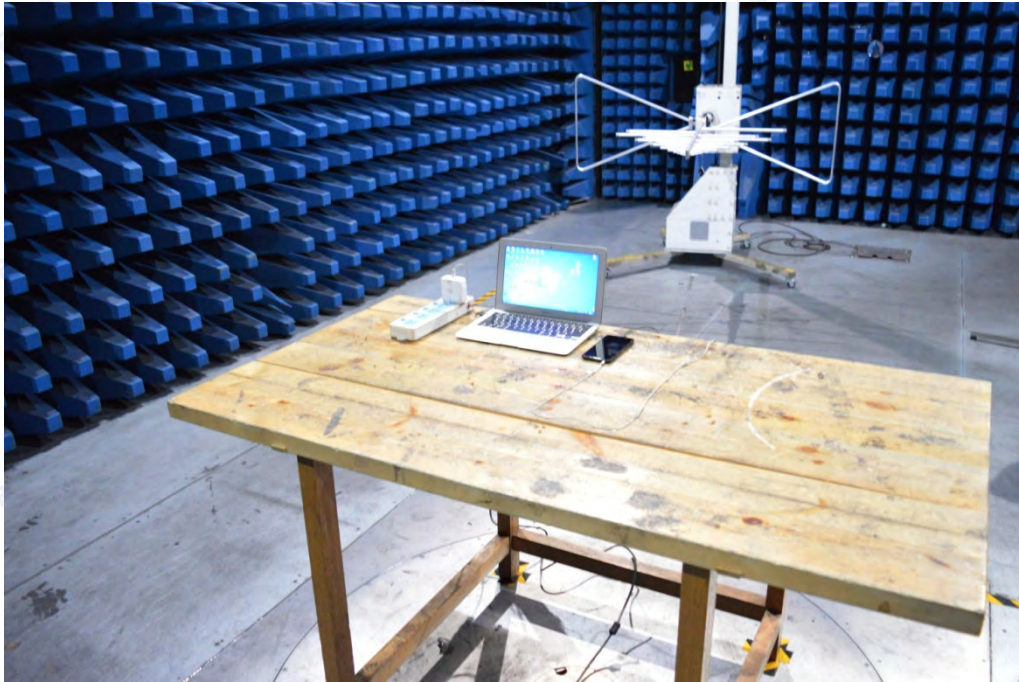

4. Radiated emission (above 1GHz)





Annex B Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$\pm 1.8\text{dB}$
Uncertainty of Radiated Emission:	$\pm 3.1\text{dB}$



Annex C Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory: The FCC registration number is 695796.
(Shenzhen Morlab Communications Technology Co., Ltd.)

4. Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

***** END OF REPORT *****