



# HAC TEST REPORT

**Applicant** ZTE Corporation  
**FCC ID** SRQ-Z861BL  
**Product** LTE Mutil-Mode Digital Mobile Phone  
**Model** Z861BL  
**Report No.** RXA1605-0091HAC  
**Issue Date** May 18, 2016

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **ANSI C63.19-2011**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Liang Ye

Approved by: Jiangpeng Lan

Reviewed by: Kai Xu



**TA Technology (Shanghai) Co., Ltd.**

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## Table of Contents

|       |                                                           |    |
|-------|-----------------------------------------------------------|----|
| 1     | Test Laboratory.....                                      | 3  |
| 1.1   | Notes of the Test Report .....                            | 3  |
| 1.2   | Test facility .....                                       | 3  |
| 1.3   | Testing Location.....                                     | 4  |
| 1.4   | Laboratory Environment.....                               | 4  |
| 2     | Statement of Compliance .....                             | 5  |
| 3     | Description of Equipment under Test.....                  | 6  |
| 4     | Test Specification and Operational Conditions .....       | 9  |
| 4.1   | Test Specification.....                                   | 9  |
| 5     | Test Information.....                                     | 10 |
| 5.1   | Operational Conditions during Test.....                   | 10 |
| 5.1.1 | General Description of Test Procedures .....              | 10 |
| 5.1.2 | GSM Test Configuration.....                               | 10 |
| 5.1.3 | WCDMA Test Configuration .....                            | 10 |
| 5.2   | T-Coil Measurements System Configuration .....            | 10 |
| 5.2.1 | T-coil Measurement Set-up .....                           | 10 |
| 5.2.2 | AM1D Probe.....                                           | 13 |
| 5.2.3 | Audio Magnetic Measurement Instrument (AMMI) .....        | 14 |
| 5.2.4 | Helmholtz Calibration Coil (AMCC) .....                   | 15 |
| 5.2.5 | Test Arch Phantom & Phone Positioner .....                | 15 |
| 5.3   | T-Coil measurement points and reference plane .....       | 16 |
| 5.4   | T-Coil Test Procedures .....                              | 17 |
| 6     | T-Coil Performance Requirements .....                     | 19 |
| 6.1   | T-Coil coupling field intensity.....                      | 19 |
| 6.2   | Frequency response .....                                  | 19 |
| 6.3   | Signal quality .....                                      | 20 |
| 7     | Summary Test Results.....                                 | 21 |
| 7.1   | GSM 850 .....                                             | 21 |
| 7.2   | GSM 1900 .....                                            | 22 |
| 7.3   | WCDMA Band II.....                                        | 23 |
| 7.4   | WCDMA Band IV .....                                       | 24 |
| 7.5   | WCDMA Band V .....                                        | 25 |
| 8     | Measurement Uncertainty .....                             | 26 |
| 9     | Main Test Instruments .....                               | 28 |
|       | ANNEX A: Test Layout.....                                 | 29 |
|       | ANNEX B: Graph Results.....                               | 30 |
|       | ANNEX C: Probe Calibration Certificate.....               | 55 |
|       | ANNEX D: DAE4 Calibration Certificate .....               | 58 |
|       | ANNEX E: The EUT Appearances and Test Configuration ..... | 61 |



# 1 Test Laboratory

## 1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd**. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by CNAS or any government agencies.

## 1.2 Test facility

### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

### **FCC (recognition number is 428261)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

### **VCCI (recognition number is C-4595, T-2154, R-4113, G-766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

### 1.4 Laboratory Environment

|                                                                                                                                                                                                 |                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|
| Temperature                                                                                                                                                                                     | Min. = 18°C, Max. = 28 °C |
| Relative humidity                                                                                                                                                                               | Min. = 0%, Max. = 80%     |
| Ground system resistance                                                                                                                                                                        | < 0.5 $\Omega$            |
| Ambient noise is checked and found very low and in compliance with requirement of standards.<br>Reflection of surrounding objects is minimized and in compliance with requirement of standards. |                           |



## 2 Statement of Compliance

Table 2.1: T-Coil signal quality categories of each tested Mode

| Band                          | Category |
|-------------------------------|----------|
| GSM 850                       | T3       |
| GSM 1900                      | T3       |
| WCDMA Band II                 | T4       |
| WCDMA Band IV                 | T4       |
| WCDMA Band V                  | T4       |
| Date of Testing: May 17, 2016 |          |



### 3 Description of Equipment under Test

#### Client Information

|                             |                                                                               |
|-----------------------------|-------------------------------------------------------------------------------|
| <b>Applicant</b>            | ZTE Corporation                                                               |
| <b>Applicant address</b>    | ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District |
| <b>Manufacturer</b>         | ZTE Corporation                                                               |
| <b>Manufacturer address</b> | ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District |

**General Technologies**

|                                            |                                                                                                       |                 |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------|-----------------|
| Device Type:                               | Portable Device                                                                                       |                 |
| EUT Stage:                                 | Production Unit                                                                                       |                 |
| Model:                                     | Z861BL                                                                                                |                 |
| MEID:                                      | 861267030009354                                                                                       |                 |
| Hardware Version:                          | Z861BLHWV1.0                                                                                          |                 |
| Software Version:                          | Z861BLV0.0.0B02                                                                                       |                 |
| Antenna Type:                              | Internal Antenna                                                                                      |                 |
| Device Operating Configurations:           |                                                                                                       |                 |
| Tested Mode(s):                            | GSM 850/GSM 1900;<br>WCDMA Band II/IV/V                                                               |                 |
| Test Modulation:                           | (GSM)GMSK;(WCDMA) QPSK;                                                                               |                 |
| Operating Frequency Range(s):              | Mode                                                                                                  | Tx (MHz)        |
|                                            | GSM 850                                                                                               | 824.2 ~ 848.8   |
|                                            | GSM 1900                                                                                              | 1850.2 ~ 1909.8 |
|                                            | WCDMA Band II                                                                                         | 1852.4 ~ 1907.6 |
|                                            | WCDMA Band IV                                                                                         | 1712.4 ~ 1752.6 |
|                                            | WCDMA Band V                                                                                          | 826.4 ~ 846.6   |
| Power Class:                               | GSM 850: 4<br>GSM 1900: 1<br>WCDMA Band II/IV/VIII: 3                                                 |                 |
| Power Level:                               | GSM 850: level 5<br>GSM 1900: level 0<br>WCDMA Band II/IV/VIII: Tested with Power Control All up bits |                 |
| Test Channel/<br>Frequency(MHz):<br>Middle | 190/836.6                                                                                             | (GSM 850)       |
|                                            | 661/1880                                                                                              | (GSM 1900)      |
|                                            | 9400/1880                                                                                             | (WCDMA Band II) |
|                                            | 1412/1732.4                                                                                           | (WCDMA Band IV) |
|                                            | 4183/836.6                                                                                            | (WCDMA Band V)  |
| Accessory Equipment                        |                                                                                                       |                 |
| Battery                                    | Manufacturer: RUIDE(SHENZHEN) ELECTRONICAL INDOSTRIAL CO.,LTD<br>Model: Li3925T44P8h786035            |                 |
| Adapter                                    | Manufacturer: SCUD(FUJIAN)ELECTRONICS<br>Model: Li3925T44P8h786035                                    |                 |



| Air-Interface                                                                        | Band (MHz)                       | Type | HAC tested | Simultaneous Transmissions Note: Not to be tested                                                                                                      | Reduced power 20.19(c)(1) | Voice Over Digital Transport (Data) |
|--------------------------------------------------------------------------------------|----------------------------------|------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-------------------------------------|
| GSM                                                                                  | 850                              | VO   | Yes        | Yes<br>BT and Wi-Fi                                                                                                                                    | NA                        | NA                                  |
|                                                                                      | 1900                             | VO   |            |                                                                                                                                                        | NO                        | NA                                  |
|                                                                                      | GPRS/EGPRS                       | DT   | NA         | Yes<br>BT and Wi-Fi                                                                                                                                    | NA                        | NA                                  |
| WCDMA                                                                                | Band II                          | VO   | Yes        | Yes<br>BT and Wi-Fi                                                                                                                                    | NA                        | NA                                  |
|                                                                                      | Band IV                          | VO   | Yes        |                                                                                                                                                        | NA                        | NA                                  |
|                                                                                      | Band V                           | VO   | Yes        |                                                                                                                                                        | NA                        | NA                                  |
|                                                                                      | HSDPA/HSUPA /HSPA+/DC-HS DPA/RMC | DT   | NA         | Yes<br>BT and Wi-Fi                                                                                                                                    | NA                        | NA                                  |
| Wi-Fi                                                                                | 2450                             | DT   | NA         | Yes<br>GSM, WCDMA,                                                                                                                                     | NA                        | NA                                  |
| Bluetooth (BT)                                                                       | 2440                             | DT   | NA         | Yes<br>GSM, WCDMA,                                                                                                                                     | NA                        | NA                                  |
| VO Voice CMRS/PSTN Service only<br>V/D Voice CMRS/PSTN and Data Service<br>Transport |                                  |      |            | *HAC Rating was based on concurrent voice and data modes, Non current mode was found to DT Digital represent worst case rating for both M and T rating |                           |                                     |



## **4 Test Specification and Operational Conditions**

### **4.1 Test Specification**

The tests documented in this report were performed in accordance with the following:

**ANSI C63.19-2011**

**KDB285076 D01 HAC Guidance v04**

**KDB285076 D02 T-Coil testing for CMRS IP v01r01**

## 5 Test Information

### 5.1 Operational Conditions during Test

#### 5.1.1 General Description of Test Procedures

The phone was tested in all normal configurations for the ear use. The EUT is mounted in the device holder equivalent as for classic dosimeter measurements. The acoustic output of the EUT shall coincide with the center point of the area formed by the dielectric wire and the middle bar of the arch's top frame. The EUT shall be moved vertically upwards until it touches the frame. The fine adjustment is possible by sliding the complete EUT holder on the yellow base plate of the Test Arch phantom. During the test, the EUT is selected on T-Coil mode, the LCD backlight is turn off and volume is adjusted to maximum level.

No associated T-coil measurement has been made in accordance with the guidance issued by OET in KDB publication 285076 D02 T-Coil testing for CMRS IP.

#### 5.1.2 GSM Test Configuration

A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 190 respectively in the case of GSM 850, allocated to 661 respectively in the case of GSM 1900. T-Coil configurations is measured in Speechcod/Hendset Low using System Simulator (SS) of CMU200, at the same time the EUT shall be operated at its maximum RF output power setting.

#### 5.1.3 WCDMA Test Configuration


A communication link is set up with a System Simulator (SS) by RF cable, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) are allocated to 9400 respectively in the case of WCDMA Band II, allocated to 1413 respectively in the case of WCDMA Band IV, allocated to 4183 respectively in the case of WCDMA Band V. T-Coil configurations is measured in voice mode with 12.2kps RMC using System Simulator (SS) of CMU200, at the same time the EUT shall be operated at its maximum RF output power setting.

### 5.2 T-Coil Measurements System Configuration

#### 5.2.1 T-coil Measurement Set-up

These measurements are performed using the DASY5 automated dosimetric assessment system. It is made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland. It consists of high precision robotics system (Stäubli), robot controller, Intel Core computer, near-field probe, probe alignment sensor. The robot is a six-axis industrial robot performing precise movements. Cell

controller systems contain the power supply, robot controller, teach pendant (Joystick) and remote control, and are used to drive the robot motors. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

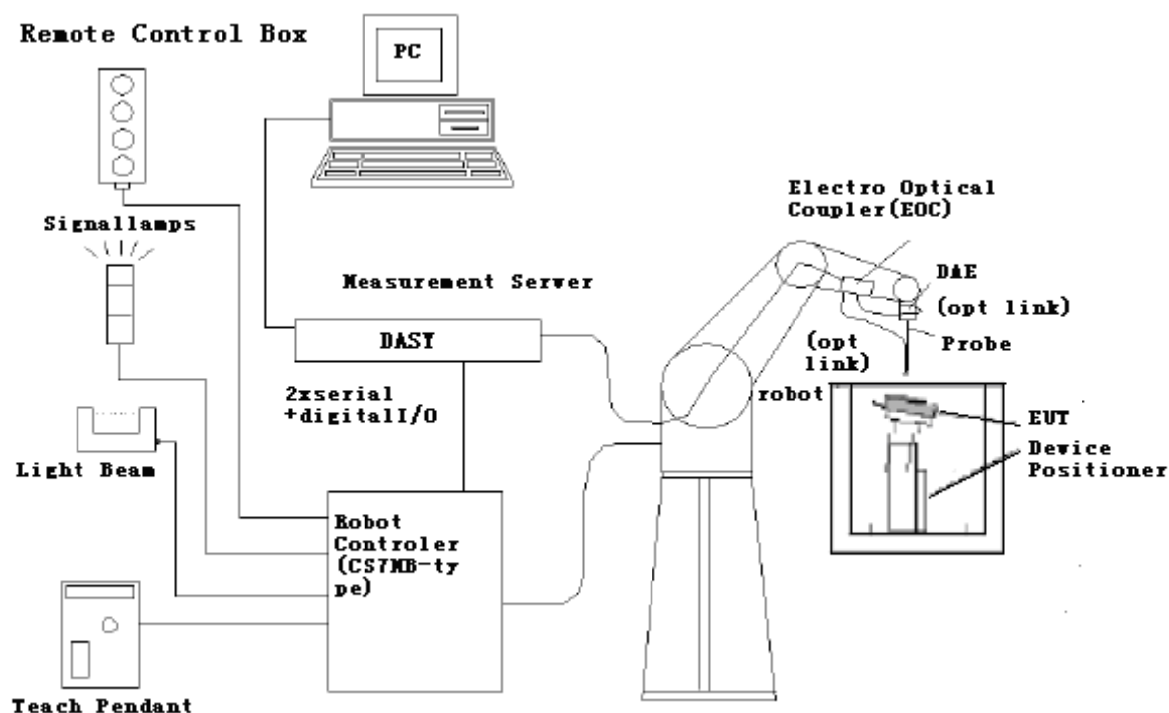

**Figure 1 T-Coil Test Measurement Set-up**

The DAE4 consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

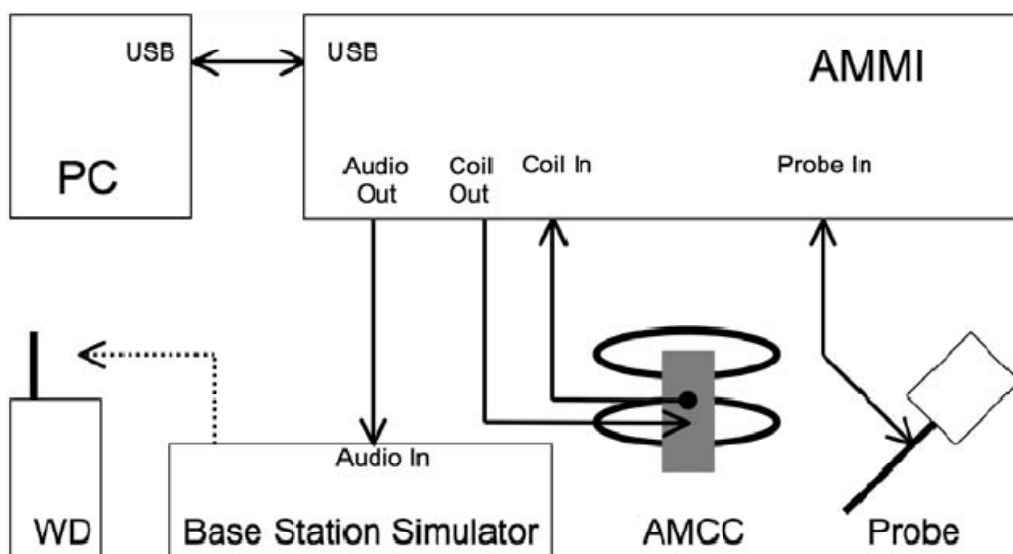


Figure 2 T-Coil Test Measurement Set-up

### 5.2.2 AM1D Probe

The AM1D probe is an active probe with a single sensor. It is fully RF-shielded and has a rounded tip 6mm in diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides. The symmetric signal preamplifier in the probe is fed via the shielded symmetric output cable from the AMMI with a 48V “phantom” voltage supply. The 7-pin connector on the back in the axis of the probe does not carry any signals. It is mounted to the DAE for the correct orientation of the sensor. If the probe axis is tilted 54.7 degree from the vertical, the sensor is approximately vertical when the signal connector is at the underside of the probe (cable hanging downwards).

#### Specification

|                 |                                                                    |
|-----------------|--------------------------------------------------------------------|
| frequency range | 0.1 - 20 kHz (RF sensitivity <-100 dB, fully RF shielded)          |
| sensitivity     | <-50 dB A/m @ 1 kHz                                                |
| pre-amplifier   | 40 dB, symmetric                                                   |
| dimensions      | tip diameter / length: 6 / 290 mm, sensor according to ANSI-C63.19 |



**Figure 3 AM1D Probe**

### 5.2.3 Audio Magnetic Measurement Instrument (AMMI)

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals, and a USB interface.



Figure 4 AMMI front panel

Port description:

|                  |                                                                              |
|------------------|------------------------------------------------------------------------------|
| <b>Audio Out</b> | BNC, audio signal to the base station simulator, for >500Ohm load            |
| <b>Coil Out</b>  | BNC, test and calibration signal to the AMCC (top connector), for 50Ohm load |
| <b>Coil In</b>   | XLR, monitor signal from the AMCC BNO connector, 600 Ohm                     |
| <b>Probe In</b>  | XLR, probe signal and phantom supply to the probe Lemo connector             |

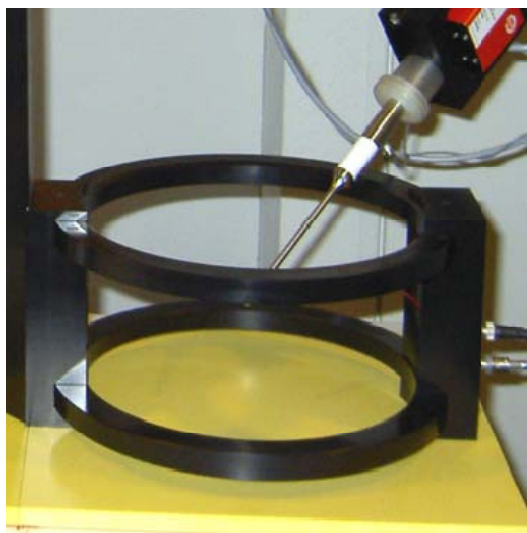


Figure 5 AMMI rear side

|                               |                                                                           |
|-------------------------------|---------------------------------------------------------------------------|
| <b>Sampling rate</b>          | 48 kHz / 24 bit                                                           |
| <b>Dynamic range</b>          | 85 dB                                                                     |
| <b>Test signal generation</b> | User selectable and predefined (vis PC)                                   |
| <b>Calibration</b>            | Auto-calibration / full system calibration using AMCC with monitor output |
| <b>Dimensions</b>             | 482 x 65 x 270 mm                                                         |

## 5.2.4 Helmholtz Calibration Coil (AMCC)

The Audio Magnetic Calibration coil is a Helmholtz Coil designed for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction. The DC input resistance is adjusted by a series resistor to approximately 50Ohm, and a shunt resistor of 100hm permits monitoring the current with a scale of 1:10



**Figure 6 AMCC**

Port description:

| Signal       | Connector | Resistance                                    |
|--------------|-----------|-----------------------------------------------|
| Coil In      | BNC       | Typically 50Ohm                               |
| Coil Monitor | BNO       | 100hm $\pm$ 1% (100mV corresponding to 1 A/m) |

Specification:

|                   |                                              |
|-------------------|----------------------------------------------|
| <b>Dimensions</b> | 370 x 370 x 196 mm, according to ANSI-C63.19 |
|-------------------|----------------------------------------------|

## 5.2.5 Test Arch Phantom & Phone Positioner

The Test Arch phantom should be positioned horizontally on a stable surface. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. It enables easy and well defined positioning of the phone and validation dipoles as well as simple teaching of the robot (Dimensions: 370 x 370 x 370 mm).

The Device reference point is set for the EUT at 6.3 mm, the Grid reference point is on the upper surface at the origin of the coordinates, and the “user point \Height Check 0.5 mm” is 0.5mm above the center, allowing verication of the gap of 0.5mm while the probe is positioned there.

The Phone Positioner supports accurate and reliable positioning of any phone with effect on near field  $< \pm 0.5$  dB.




**Figure 7 T-coil Phantom & Device Holder**

### 5.3 T-Coil measurement points and reference plane

The following figure illustrates the standard probe orientations. Position 1 is the perpendicular orientation of the probe coil; orientation 2 is the transverse orientation. The space between the measurement positions is not fixed. It is recommended that a scan of the WD be performed for each probe coil orientation and that the maximum level recorded be used as the reading for that orientation of the probe coil.

- 1) The reference plane is the planar area that contains the highest point in the area of the phone that normally rests against the user's ear. It is parallel to the centerline of the receiver area of the phone and is defined by the points of the receiver-end of the EUT handset, which, in normal handset use, rest against the ear.
- 2) The measurement plane is parallel to, and 10 mm in front of, the reference plane.
- 3) The reference axis is normal to the reference plane and passes through the center of the receiver speaker section (or the center of the hole array); or may be centered on a secondary inductive source. The actual location of the measurement point shall be noted in the test report as the measurement reference point.
- 4) The measurement points may be located where the axial and radial field intensity measurements are optimum with regard to the requirements. However, the measurement points should be near the acoustic output of the EUT and shall be located in the same half of the phone as the EUT receiver. In a EUT handset with a centered receiver and a circularly symmetrical magnetic field, the measurement axis and the reference axis would coincide.

- 5) The relative spacing of each measurement orientation is not fixed. The axial and two radial orientations should be chosen to select the optimal position.
- 6) The measurement point for the axial position is located 10 mm from the reference plane on the measurement axis.
- 7) The actual location of the measurement point shall be noted in test reports and designated as the measurement reference point.

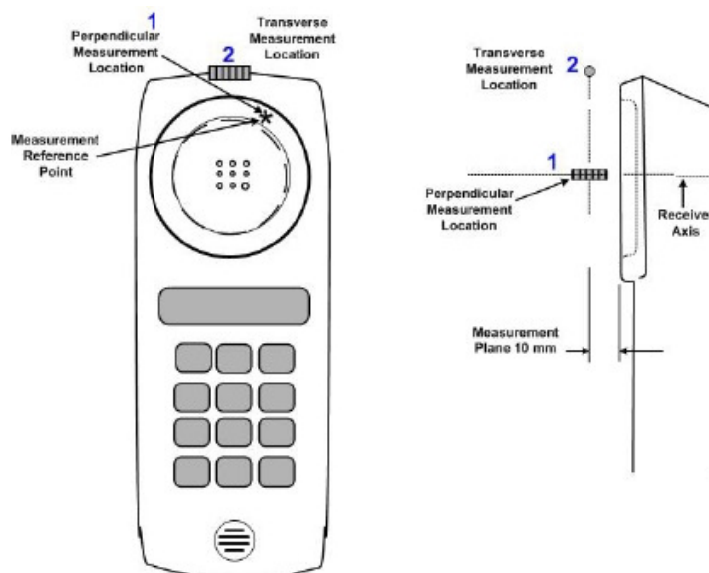

**Figure 8 Axis and planes for EUT audio frequency magnetic field measurements**

## 5.4 T-Coil Test Procedures

**The following illustrate a typical test scan over a wireless communications device:**

- 1) Geometry and signal check: system probe alignment, proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed. A surface calibration was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane using the test Arch.
- 2) Set the reference drive level of signal voice defined in C63.19 per 7.4.2.1.
- 3) The ambient and test system background noise (dB A/m) was measured as well as ABM2 over the full measurement. The maximum noise level must be at least 10dB below the limit of C63.19 per 8.3.2.
- 4) The EUT was positioned in its intended test position, acoustic output point of the device perpendicular to the field probe.
- 5) The EUT operation for maximum rated RF output power was configured and connected by using of coaxial cable connection to the base station simulator at the test channel and other normal operating parameters as intended for the test. The battery was ensured to be fully charged before each test. The center sub-grid was centered over the center of the acoustic output (also audio band magnetic output, if applicable). The EUT audio output was positioned tangent (as physically possible) to the measurement plane.
- 6) The EUT's RF emission field was eliminated from T-coil results by using a well RF-shielding of the probe, AM1D, and by using of coaxial cable connection to a Base Station Simulator. One test channel was pre-measurement to avoid this possibility.
- 7) Determined the optimal measurement locations for the EUT by following the three steps, coarse



resolution scan, fine resolution scans, and point measurement, as described in C63.19 per 7.4.4.2. At each measurement locations, samples in the measurement window duration were evaluated to get ABM1 and the signal spectrum. The noise measurement was performed after the scan with the signal, the same happened, just with the voice signal switched off. The ABM2 was calculated from this second scan.

8) All results resulting from a measurement point in a T-Coil job were calculated from the signal samples during this window interval. ABM values were averaged over the sequence of there samples.

9) At an optimal point measurement, the SNR (ABM1/ABM2) was calculated for axial,radial transverse and radial longitudinal orientation, and the frequency response was measured in axial axis.

10) Corrected for the frequency response after the EUT measurement since the DASY5 system had known the spectrum of the input signal by using a reference job.

11) In SEMCAD postprocessing, the spectral points are in addition scaled with the high-pass (half-band) and the A-weighting, bandwidth compensated factor (BWC) and those results are final as shown in this report.

## 6 T-Coil Performance Requirements


In order to be rated for T-Coil use, a EUT shall meet the requirements for signal level and signal quality contained in this part.

### 6.1 T-Coil coupling field intensity

When measured as specified in ANSI C63.19, the T-Coil signal shall be  $\geq -18$  dB (A/m) at 1 kHz, in a 1/3 octave band filter for all orientations.


### 6.2 Frequency response

The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this sub-clause, over the frequency range 300 Hz to 3000 Hz. The following figures provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

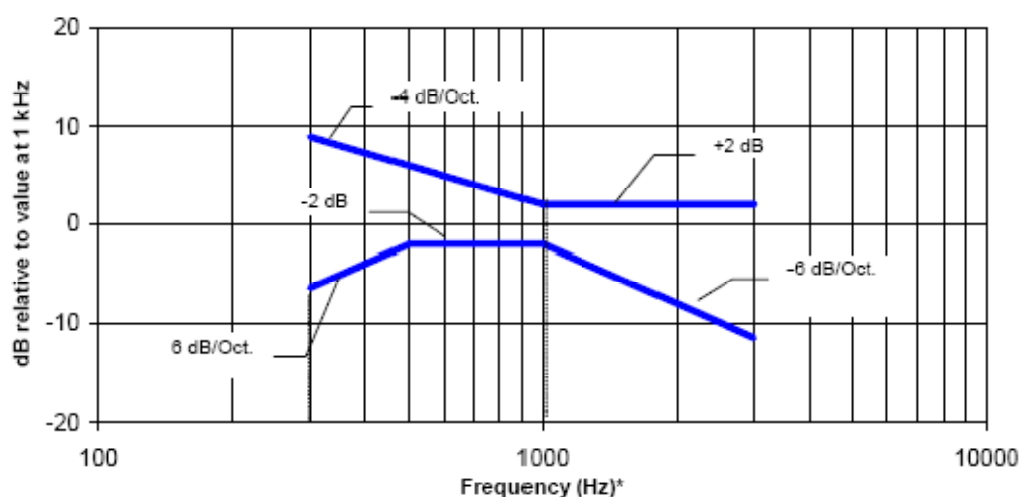

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 9 Magnetic field frequency response for EUTs with a field  $\leq -15$  dB (A/m) at 1 kHz**

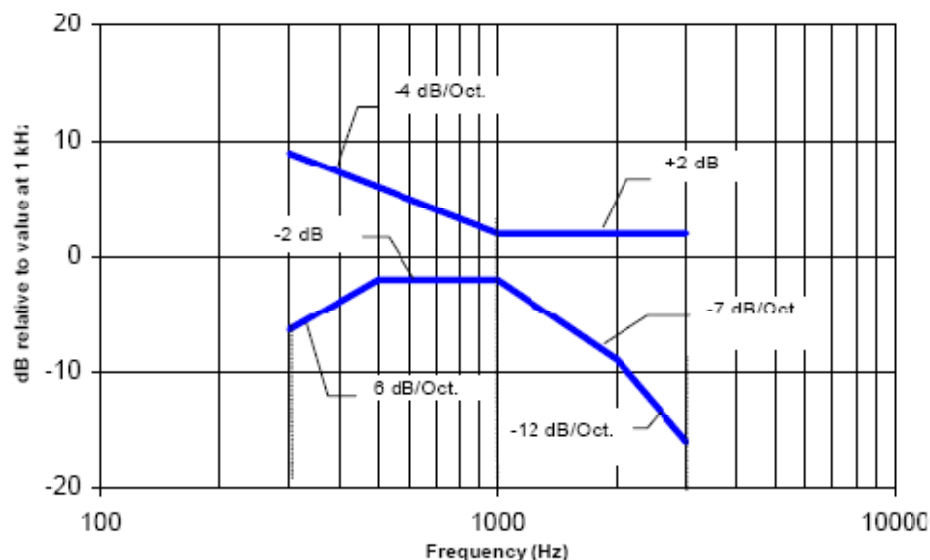

NOTE—Frequency response is between 300 Hz and 3000 Hz.

**Figure 10 Magnetic field frequency response for EUTs with a field that exceeds  $-15$  dB(A/m) at 1 kHz**

### 6.3 Signal quality

This part provides the signal quality requirement for the intended T-Coil signal from a EUT. Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criteria that can be measured is the RF immunity in T-Coil mode. This is measured using the same procedure as for the audio coupling mode and at the same levels.

The worst signal quality of the two T-Coil signal measurements shall be used to determine the T-Coil mode category per Table 1

**Table 1: T-Coil signal quality categories**

| Category    | Telephone parameters<br>WD signal quality<br>[(signal + noise) – to – noise ratio in decibels] |
|-------------|------------------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                                  |
| Category T2 | 10 dB to 20 dB                                                                                 |
| Category T3 | 20 dB to 30 dB                                                                                 |
| Category T4 | > 30 dB                                                                                        |


## 7 Summary Test Results

### 7.1 GSM 850

| Band-Channel  | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|---------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| GSM 850-CH190 | y (Radial):       | (-8.3,4.2,3.7)                 | -10.05                          | 35.66              | Pass               | T4       |
|               | z (Axial):        | (-12.5,0,3.7)                  | -5.84                           | 24.50              | Pass               | T3       |


General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f)

Loc: -12.5, 0, 3.7 mm Diff: 2dB

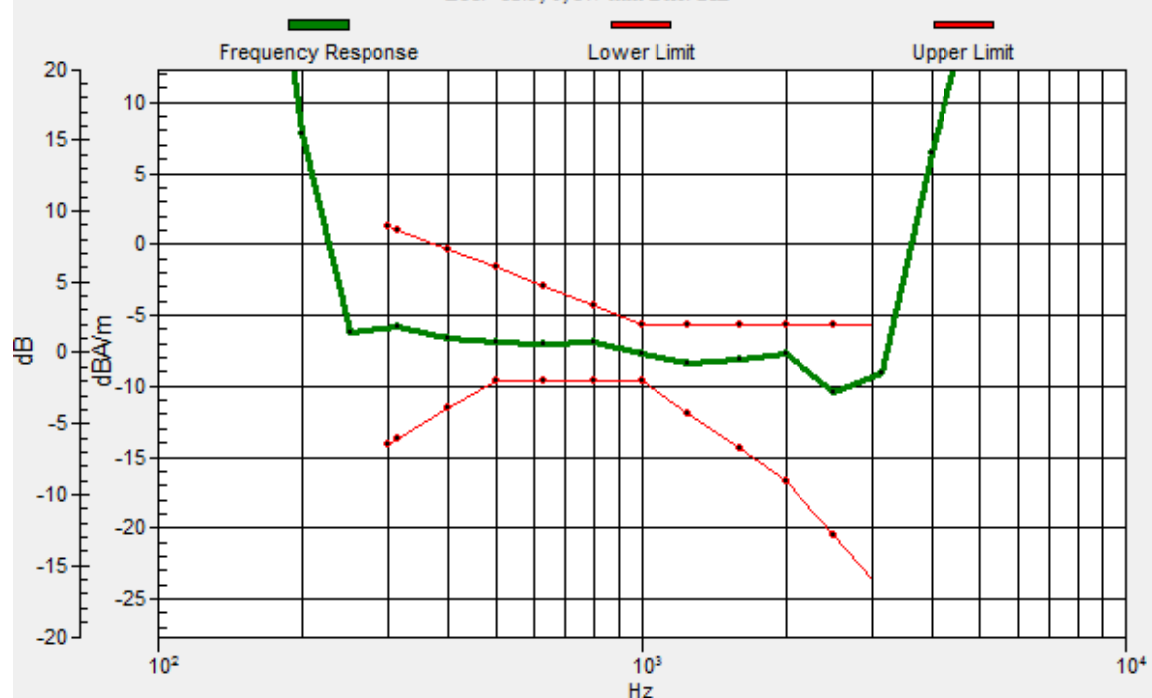


## 7.2 GSM 1900

| Band-Channel   | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|----------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| GSM 1900-CH661 | y (Radial):       | (-4.2,4.2,3.7)                 | -5.93                           | 34.92              | Pass               | T4       |
|                | z (Axial):        | (-12.5,0,3.7)                  | -5.90                           | 24.06              | Pass               | T3       |

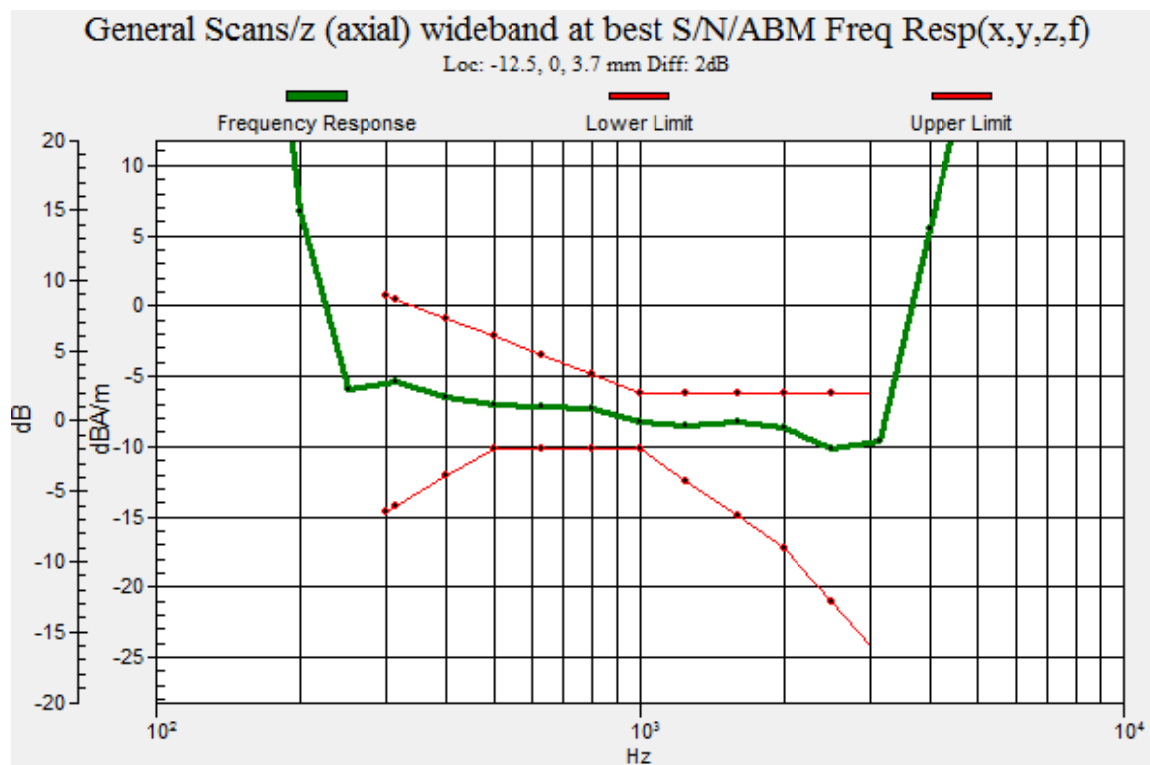


### 7.3 WCDMA Band II

| Band-Channel             | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|--------------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band II<br>-CH9400 | y (Radial):       | (-8.3,8.3,3.7)                 | -4.69                           | 37.95              | Pass               | T4       |
|                          | z (Axial):        | (-8.3,-4.2,3.7)                | 0.66                            | 37.77              | Pass               | T4       |

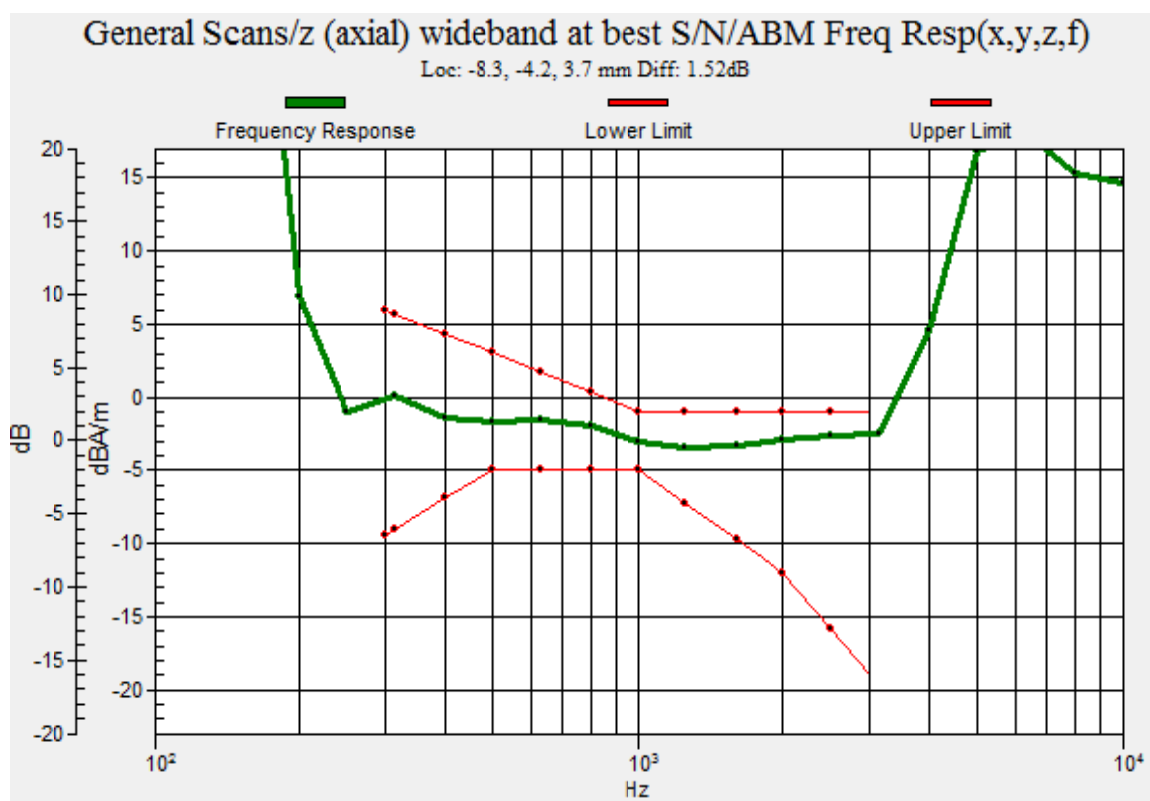


## 7.4 WCDMA Band IV

| Band-Channel             | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|--------------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band IV<br>-CH1413 | y (Radial):       | (-8.3,8.3,3.7)                 | -4.61                           | 38.05              | Pass               | T4       |
|                          | z (Axial):        | (-4.2,-4.2,3.7)                | 4.98                            | 37.81              | Pass               | T4       |

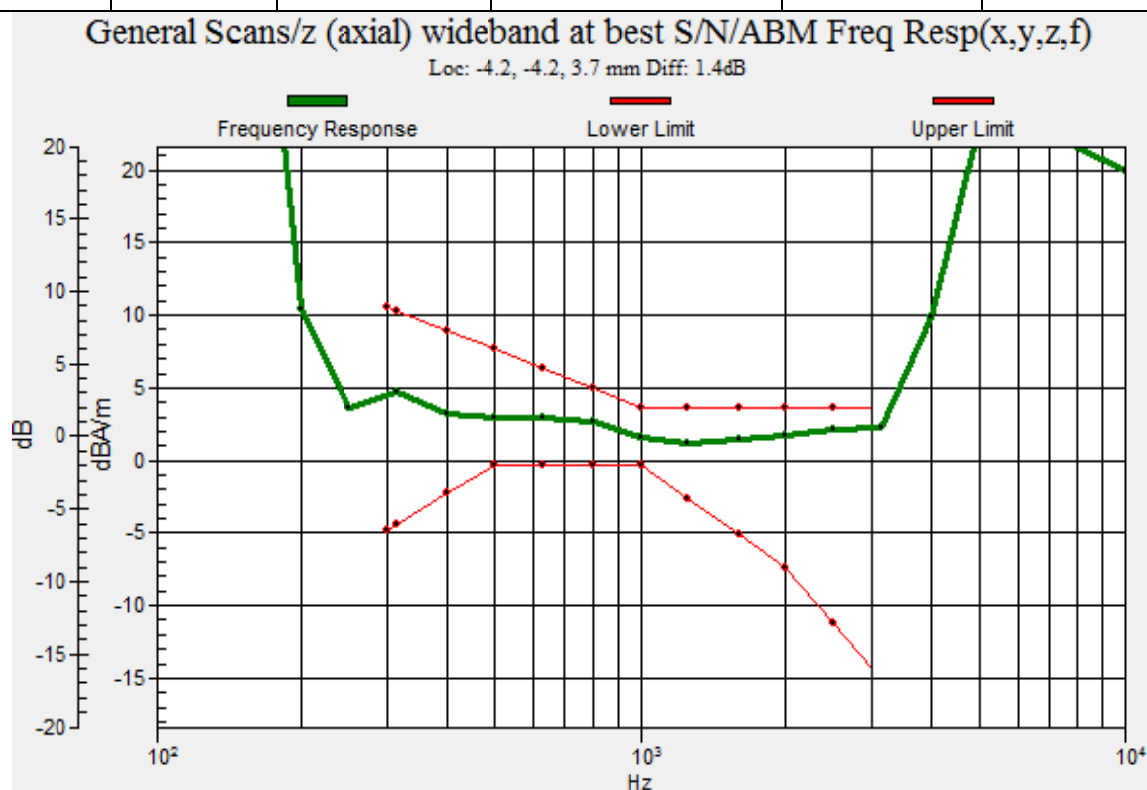

## 7.5 WCDMA Band V

| Band-Channel            | Probe Orientation | Measurement Position (x,y)[mm] | ABM1 $\geq$ -18dB(A/m) (Signal) | SNR(ABM1/ABM2)(dB) | Frequency Response | T-Rating |
|-------------------------|-------------------|--------------------------------|---------------------------------|--------------------|--------------------|----------|
| WCDMA Band V<br>-CH4183 | y (Radial):       | (-8.3,8.3,3.7)                 | -4.58                           | 38.05              | Pass               | T4       |
|                         | z (Axial):        | (-4.2,-4.2,3.7)                | 4.97                            | 37.43              | Pass               | T4       |

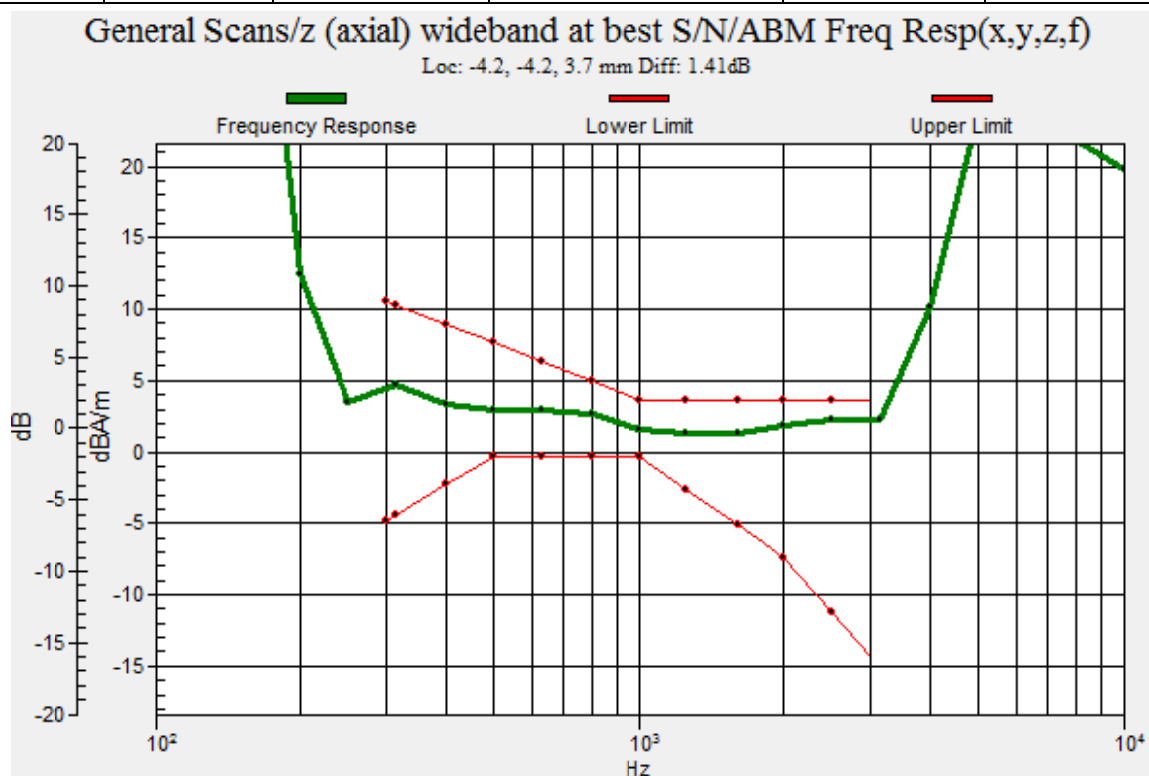



## 8 Measurement Uncertainty

| No.                      | Error source                         | Type | Uncertainty Value $a_i$ (%) | Prob. Dist. | k          | ABM 1 $c_i$ | ABM2 $c_i$ | Std. Unc. ABM1 $u_i$ (%) | Std. Unc. ABM2 $u_i$ (%) | Degree of freedom $V_{eff}$ or $v_i$ |
|--------------------------|--------------------------------------|------|-----------------------------|-------------|------------|-------------|------------|--------------------------|--------------------------|--------------------------------------|
| 1                        | System Repeatability                 | A    | 0.016                       | N           | 1          | 1           | 1          | 0.016                    | 0.016                    | 9                                    |
| <b>Probe Sensitivity</b> |                                      |      |                             |             |            |             |            |                          |                          |                                      |
| 2                        | Reference Level                      | B    | 3.0                         | R           | $\sqrt{3}$ | 1           | 1          | 3.0                      | 3.0                      | $\infty$                             |
| 3                        | AMCC Geometry                        | B    | 0.4                         | R           | $\sqrt{3}$ | 1           | 1          | 0.2                      | 0.2                      | $\infty$                             |
| 4                        | AMCC Current                         | B    | 0.6                         | R           | $\sqrt{3}$ | 1           | 1          | 0.4                      | 0.4                      | $\infty$                             |
| 5                        | Probe Positioning during Calibration | B    | 0.1                         | R           | $\sqrt{3}$ | 1           | 1          | 0.1                      | 0.1                      | $\infty$                             |
| 6                        | Noise Contribution                   | B    | 0.7                         | R           | $\sqrt{3}$ | 0.014<br>3  | 1          | 0.0                      | 0.4                      | $\infty$                             |
| 7                        | Frequency Slope                      | B    | 5.9                         | R           | $\sqrt{3}$ | 0.1         | 1          | 0.3                      | 3.5                      | $\infty$                             |
| <b>Probe System</b>      |                                      |      |                             |             |            |             |            |                          |                          |                                      |
| 8                        | Repeatability / Drift                | B    | 1.0                         | R           | $\sqrt{3}$ | 1           | 1          | 0.6                      | 0.6                      | $\infty$                             |
| 9                        | Linearity / Dynamic Range            | B    | 0.6                         | N           | 1          | 1           | 1          | 0.4                      | 0.4                      | $\infty$                             |
| 10                       | Acoustic Noise                       | B    | 1.0                         | R           | $\sqrt{3}$ | 0.1         | 1          | 0.1                      | 0.6                      | $\infty$                             |
| 11                       | Probe Angle                          | B    | 2.3                         | R           | $\sqrt{3}$ | 1           | 1          | 1.4                      | 1.4                      | $\infty$                             |
| 12                       | Spectral Processing                  | B    | 0.9                         | R           | $\sqrt{3}$ | 1           | 1          | 0.5                      | 0.5                      | $\infty$                             |
| 13                       | Integration Time                     | B    | 0.6                         | N           | 1          | 1           | 5          | 0.6                      | 3.0                      | $\infty$                             |
| 14                       | Field Distribution                   | B    | 0.2                         | R           | $\sqrt{3}$ | 1           | 1          | 0.1                      | 0.1                      | $\infty$                             |
| <b>Test Signal</b>       |                                      |      |                             |             |            |             |            |                          |                          |                                      |
| 15                       | Ref.Signal Spectral Response         | B    | 0.6                         | R           | $\sqrt{3}$ | 0           | 1          | 0.0                      | 0.4                      | $\infty$                             |
| <b>Positioning</b>       |                                      |      |                             |             |            |             |            |                          |                          |                                      |
| 16                       | Probe Positioning                    | B    | 1.9                         | R           | $\sqrt{3}$ | 1           | 1          | 1.1                      | 1.1                      | $\infty$                             |
| 17                       | Phantom Thickness                    | B    | 0.9                         | R           | $\sqrt{3}$ | 1           | 1          | 0.5                      | 0.5                      | $\infty$                             |



|                                       |                       |                                             |     |   |            |   |     |     |      |          |
|---------------------------------------|-----------------------|---------------------------------------------|-----|---|------------|---|-----|-----|------|----------|
| 18                                    | EUT Positioning       | B                                           | 1.9 | R | $\sqrt{3}$ | 1 | 1   | 1.1 | 1.1  | $\infty$ |
| <b>External Contributions</b>         |                       |                                             |     |   |            |   |     |     |      |          |
| 19                                    | RF Interference       | B                                           | 0.0 | R | $\sqrt{3}$ | 1 | 0.3 | 0.0 | 0.0  | $\infty$ |
| 20                                    | Test Signal Variation | B                                           | 2.0 | R | $\sqrt{3}$ | 1 | 1   | 1.2 | 1.2  | $\infty$ |
| Combined Std. Uncertainty (ABM Field) |                       | $u_c' = \sqrt{\sum_{i=1}^{20} c_i^2 u_i^2}$ |     |   |            |   |     | 4.1 | 6.1  |          |
| Expanded Std. Uncertainty             |                       | $u_e = 2u_c$                                |     | N | $k = 2$    |   | 8.2 |     | 12.2 |          |



## 9 Main Test Instruments

| Name                                 | Type                           | Serial Number | Last Cal.  | Cal. Due Date |
|--------------------------------------|--------------------------------|---------------|------------|---------------|
| Audio Magnetic 1D Field Probe        | AM1DV3                         | 3082          | 2014-11-13 | 2016-11-12    |
| Audio Magnetic Calibration Coil      | SD HAC P02A                    | 1112          | N/A        | N/A           |
| Audio Measuring Instrument           | AMMI                           | 1101          | N/A        | N/A           |
| DAE                                  | DAE4                           | 871           | 2015-11-17 | 2016-11-16    |
| Software                             | DASY5, V5.2 Build 162          | N/A           | N/A        | N/A           |
| Software                             | SEMCAD X Version 14.0 Build 59 | N/A           | N/A        | N/A           |
| Universal Radio Communication Tester | CMU 200                        | 118133        | 2015-05-22 | 2016-05-21    |
| TMFS                                 | TMFS                           | 1018          | 2015-12-02 | 2016-12-01    |
| Hygrothermograph                     | NT-311                         | 20150731      | 2015-07-16 | 2016-07-15    |

\*\*\*\*\*END OF REPORT \*\*\*\*\*

## ANNEX A: Test Layout



Picture 1: HAC T-Coil System Layout

## ANNEX B: Graph Results

### T-Coil GSM 850 Y transversal

Date: 2016/5/17

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

### Z861BL GSM850 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM

**Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

#### Cursor:

ABM1 comp = -0.10 dBA/m

BWC Factor = 0.17 dB

Location: 0, 8.3, 3.7 mm

### Z861BL GSM850 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM

**SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 35.66 dB

ABM1 comp = -10.05 dBA/m

BWC Factor = 0.17 dB

Location: -8.3, 4.2, 3.7 mm

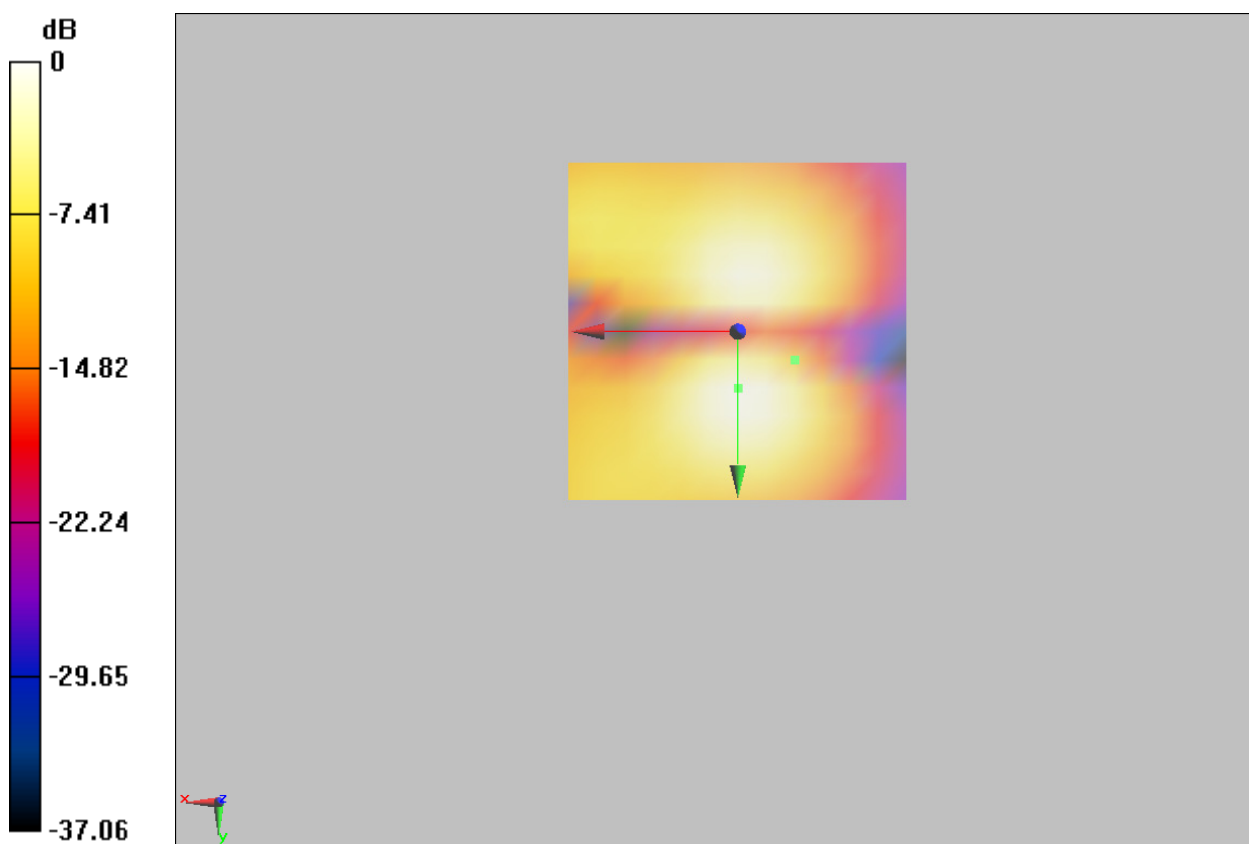

0 dB = 1.000 A/m = 0.00 dBA/m

**Figure 11 T-Coil GSM 850 Y transversal**

**T-Coil GSM 850 Z Axial**

Date: 2016/5/17

Communication System: UID 0, GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.69 dBA/m

BWC Factor = 0.17 dB

Location: 0, 0, 3.7 mm

**Z861BL GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm



| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 24.35 dB

ABM1 comp = -5.84 dBA/m

BWC Factor = 0.17 dB

Location: -12.5, 0, 3.7 mm

**Z861BL GSM850 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best S/N/ABM****Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 2.00 dB

BWC Factor = 10.81 dB

Location: -12.5, 0, 3.7 mm

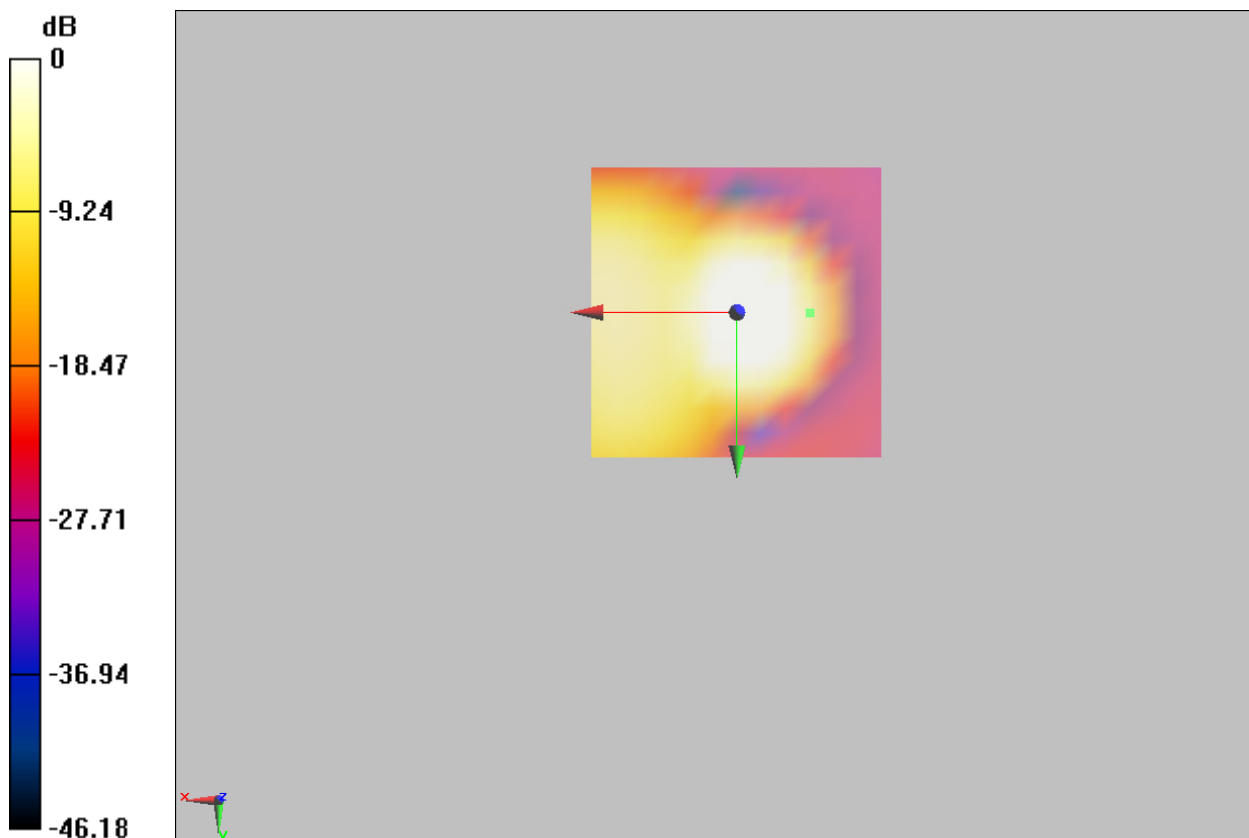

0 dB = 1.000 A/m = 0.00 dBA/m

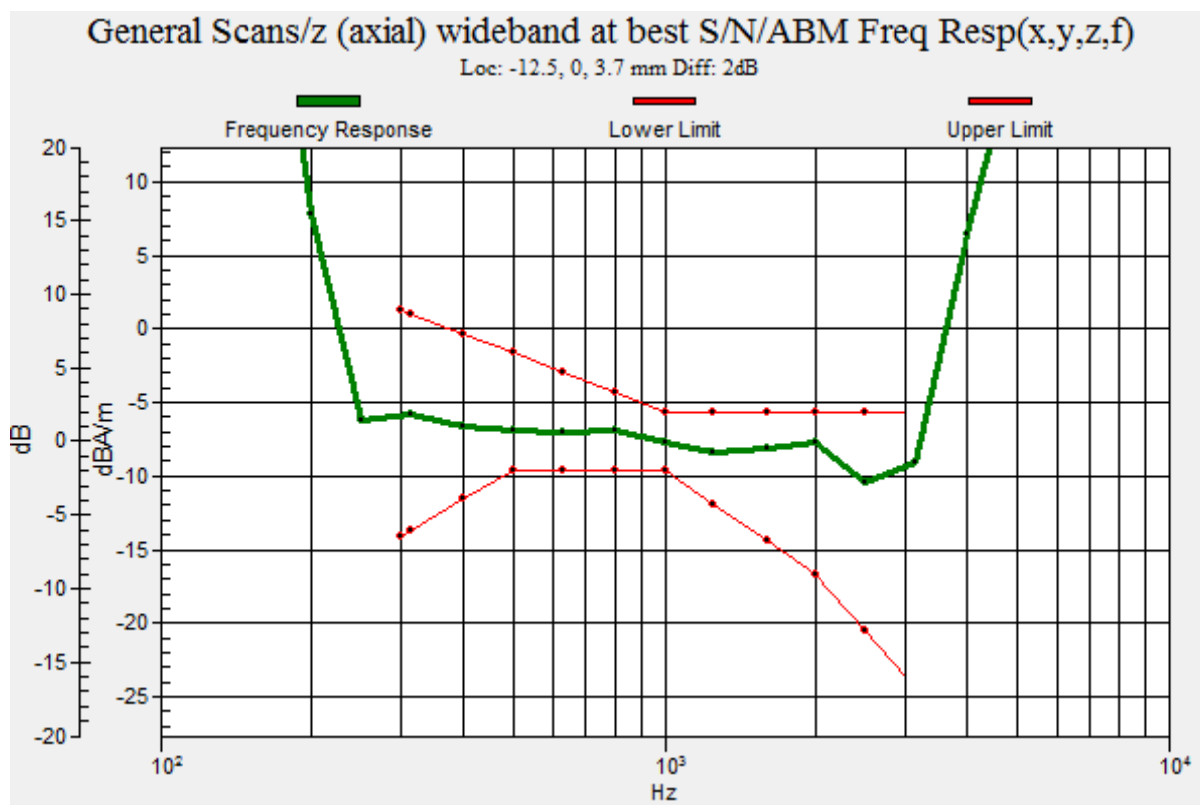


Figure 12 T-Coil GSM 850 Z Axial

**T-Coil GSM 1900 Y transversal**

Date: 2016/5/17

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = -0.22 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

**Z861BL GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 34.92 dB

ABM1 comp = -5.93 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, 4.2, 3.7 mm

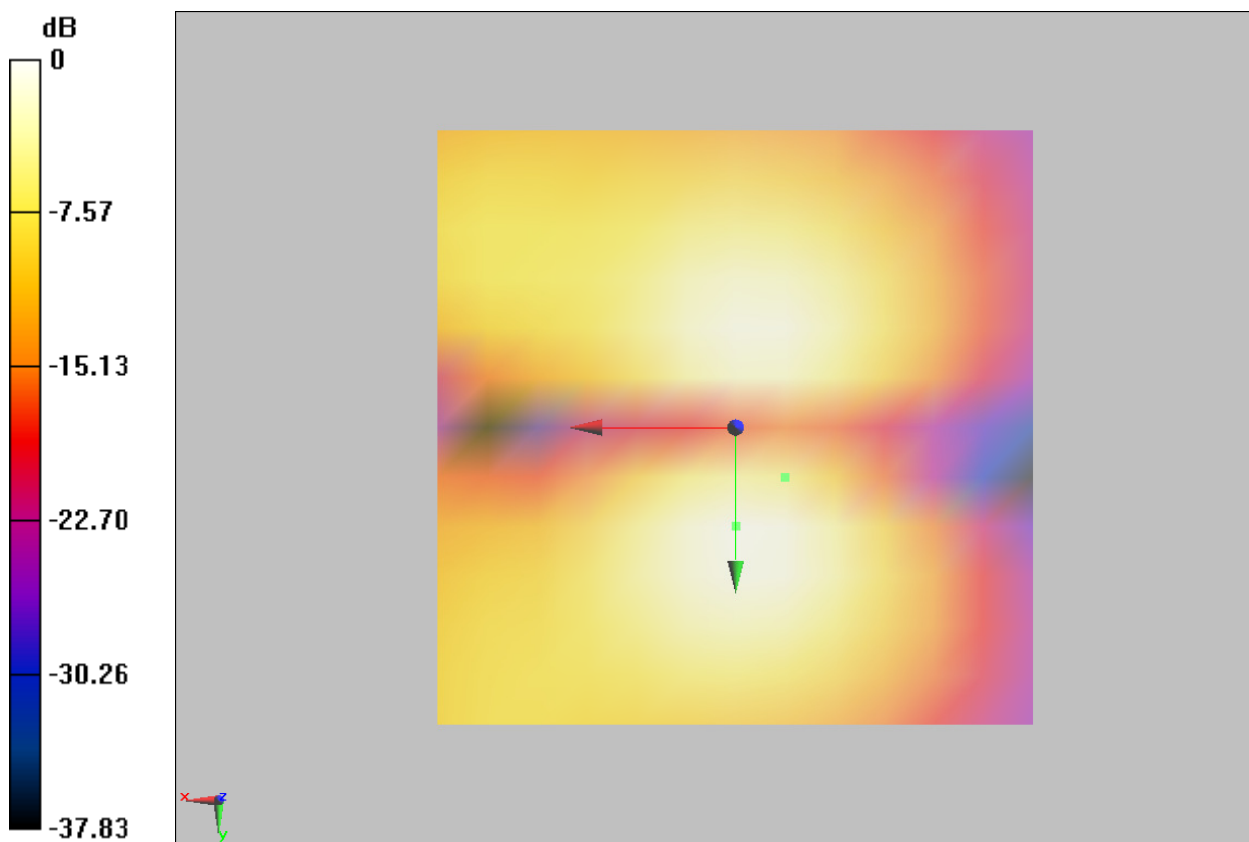

0 dB = 1.000 A/m = 0.00 dBA/m

**Figure 13 T-Coil GSM 1900 Y transversal**

**T-Coil GSM 1900 Z Axial**

Date: 2016/5/17

Communication System: UID 0, GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8.30042

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.78 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**Z861BL GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm



| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 24.06 dB

ABM1 comp = -5.90 dBA/m

BWC Factor = 0.16 dB

Location: -12.5, 0, 3.7 mm

**Z861BL GSM1900 HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 2.00 dB

BWC Factor = 10.81 dB

Location: -12.5, 0, 3.7 mm

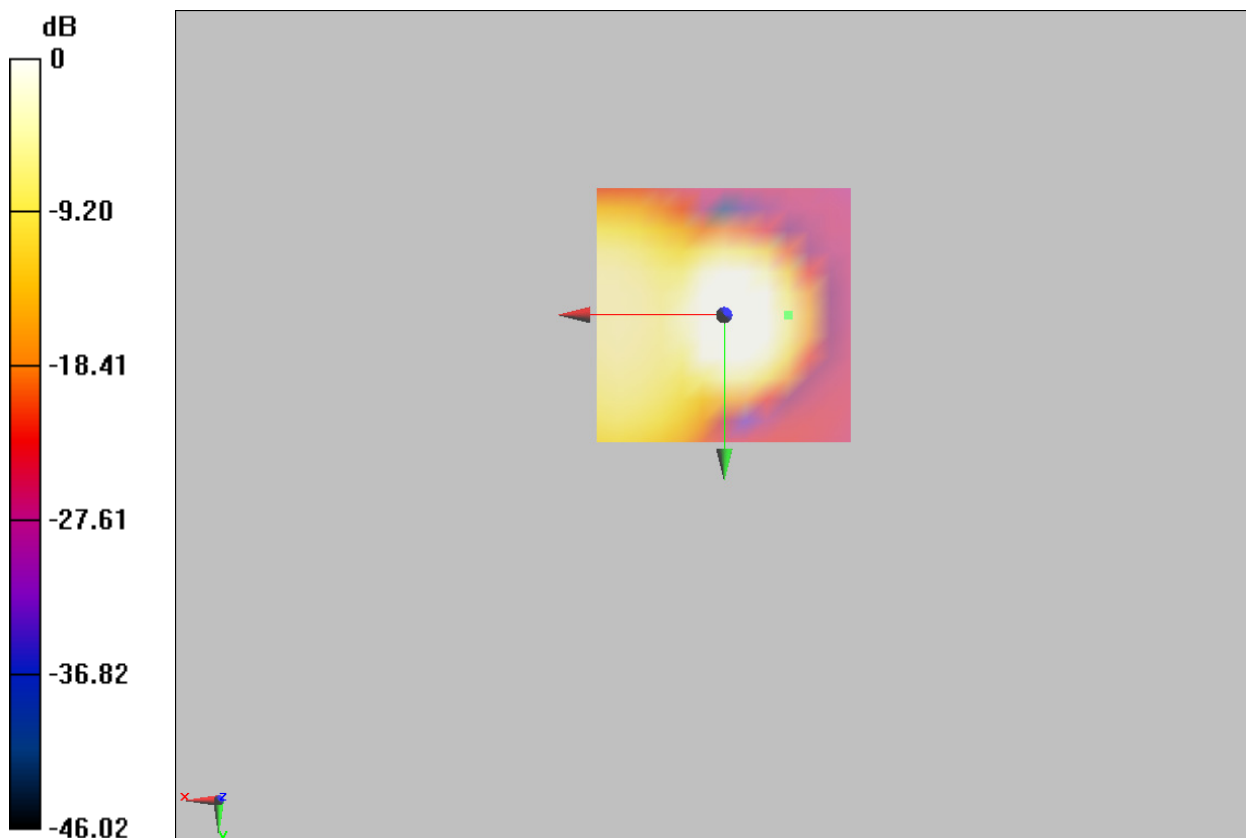

0 dB = 1.000 A/m = 0.00 dBA/m

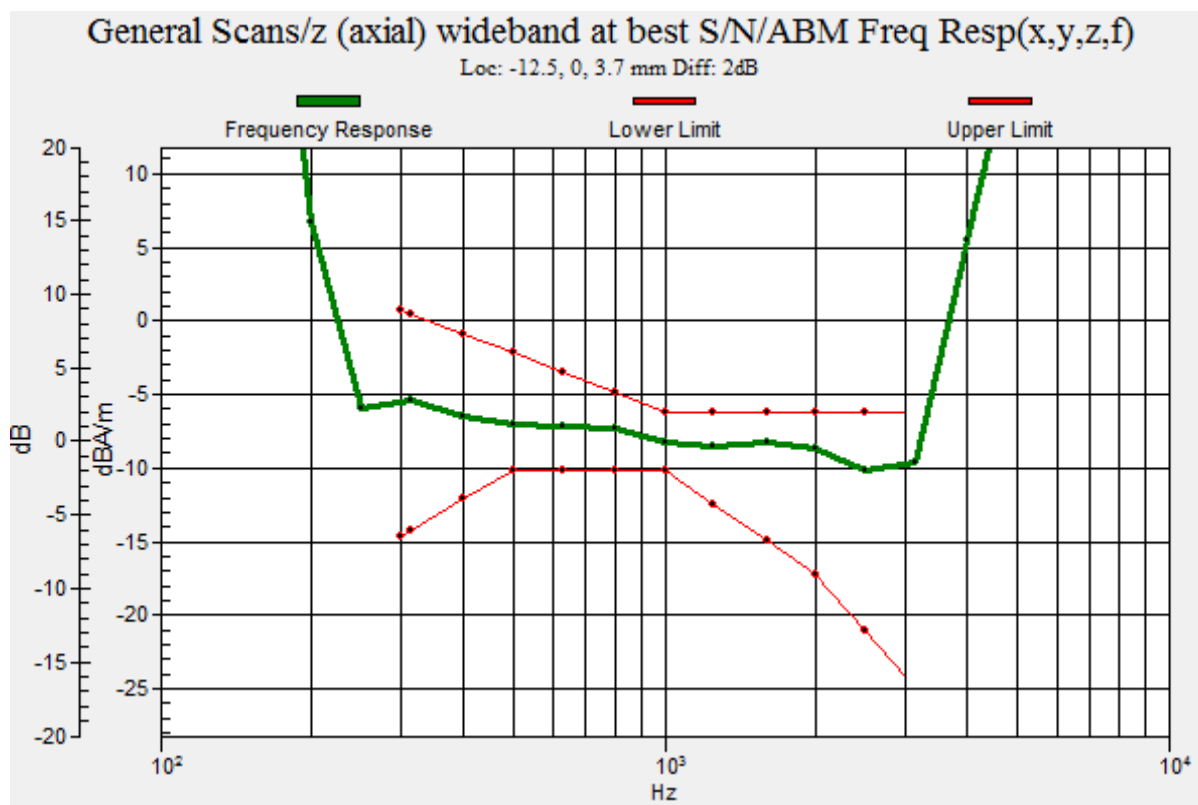


Figure 14 T-Coil GSM 1900 Z Axial

**T-Coil WCDMA Band II Y transversal**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA II HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = -0.48 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

**Z861BL WCDMA II HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 37.95 dB

ABM1 comp = -4.69 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 8.3, 3.7 mm

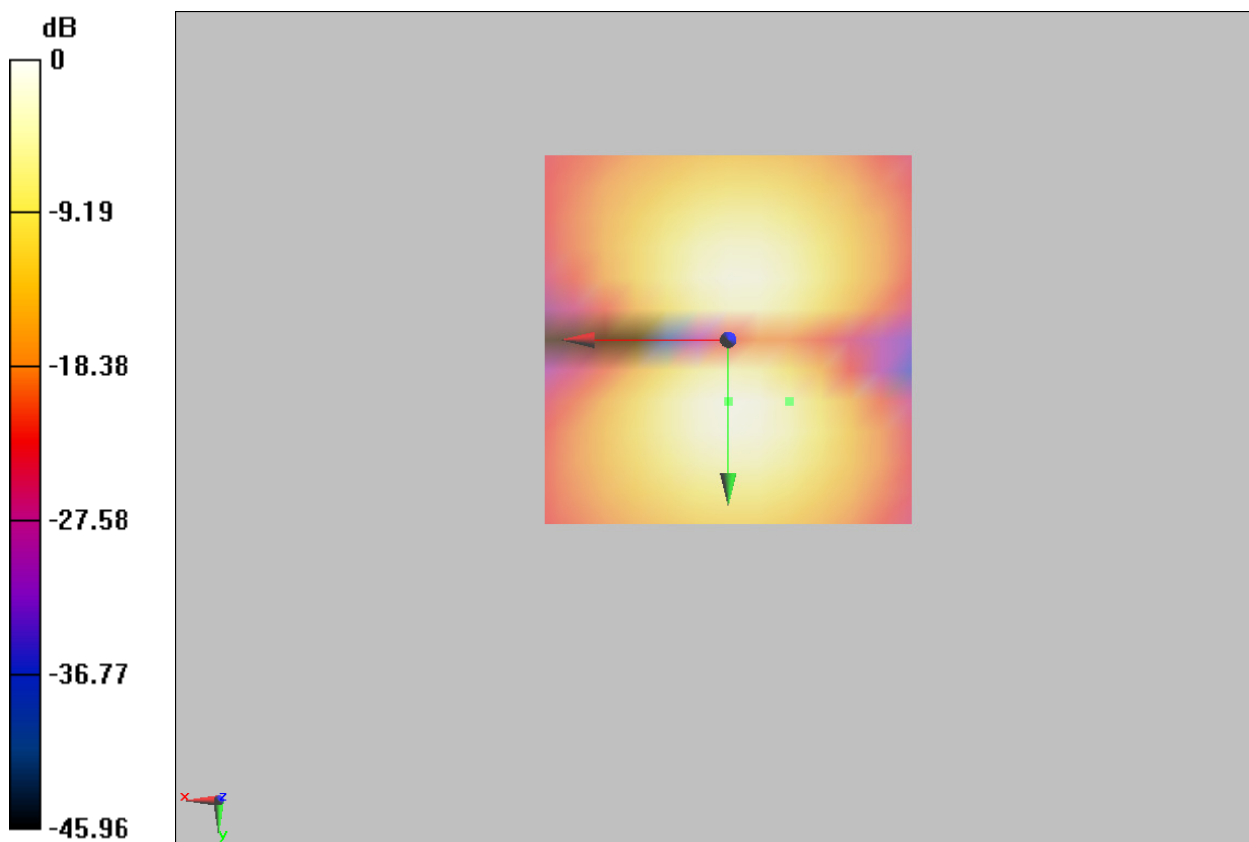

0 dB = 1.000 A/m = 0.00 dBA/m

**Figure 15 T-Coil WCDMA Band II Y transversal**

**T-Coil WCDMA Band II Z Axial**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA II HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.62 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**Z861BL WCDMA II HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm



| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 37.77 dB

ABM1 comp = 0.66 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, -4.2, 3.7 mm

**Z861BL WCDMA II HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 1.52 dB

BWC Factor = 10.81 dB

Location: -8.3, -4.2, 3.7 mm

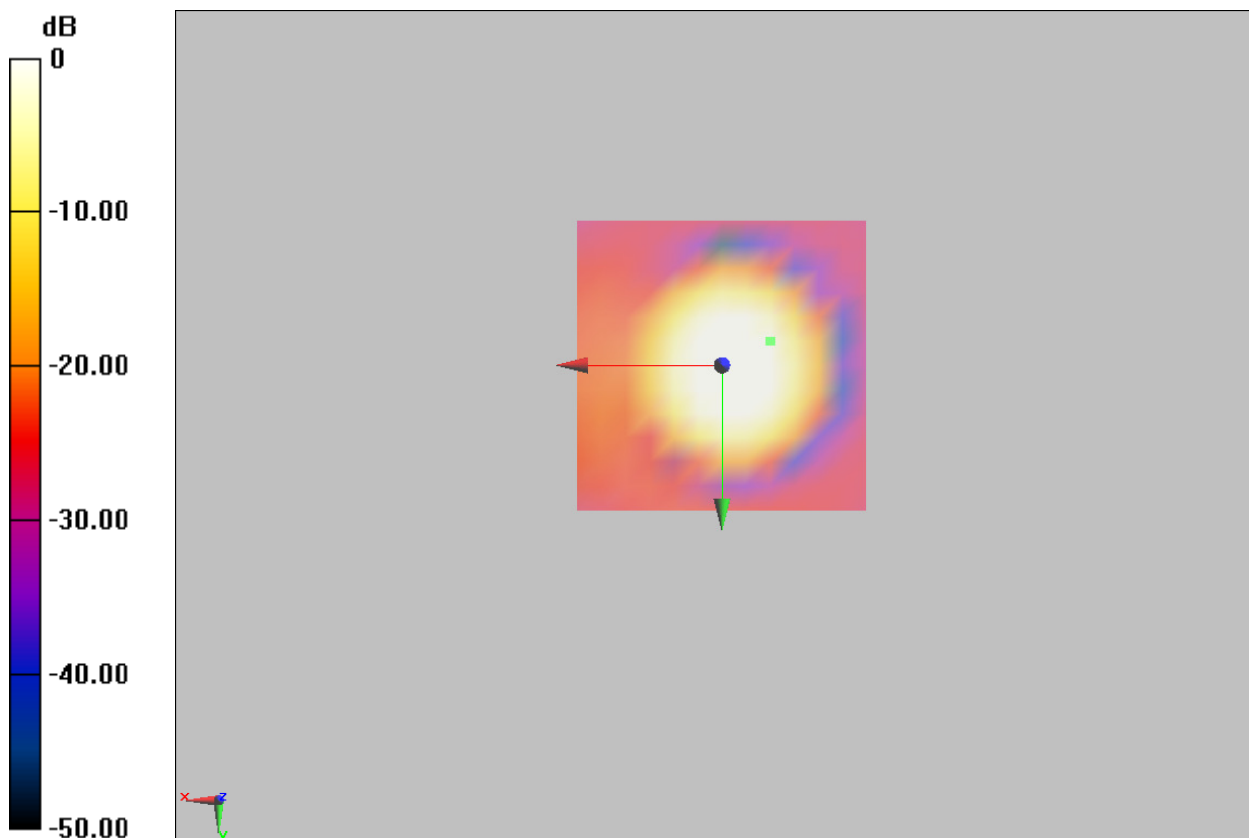

0 dB = 1.000 A/m = 0.00 dBA/m

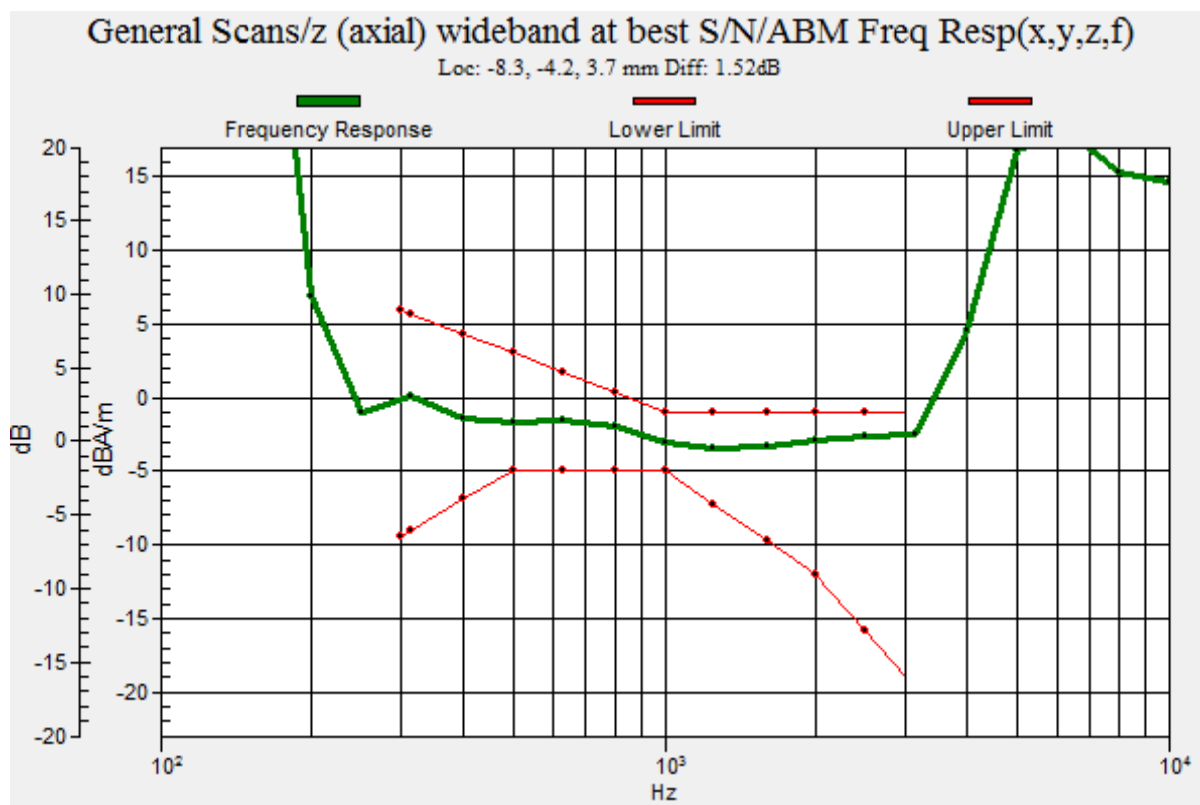


Figure 16 T-Coil WCDMA Band II Z Axial

**T-Coil WCDMA Band IV Y transversal**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA IV HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = -0.44 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

**Z861BL WCDMA IV HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 38.05 dB

ABM1 comp = -4.61 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 8.3, 3.7 mm

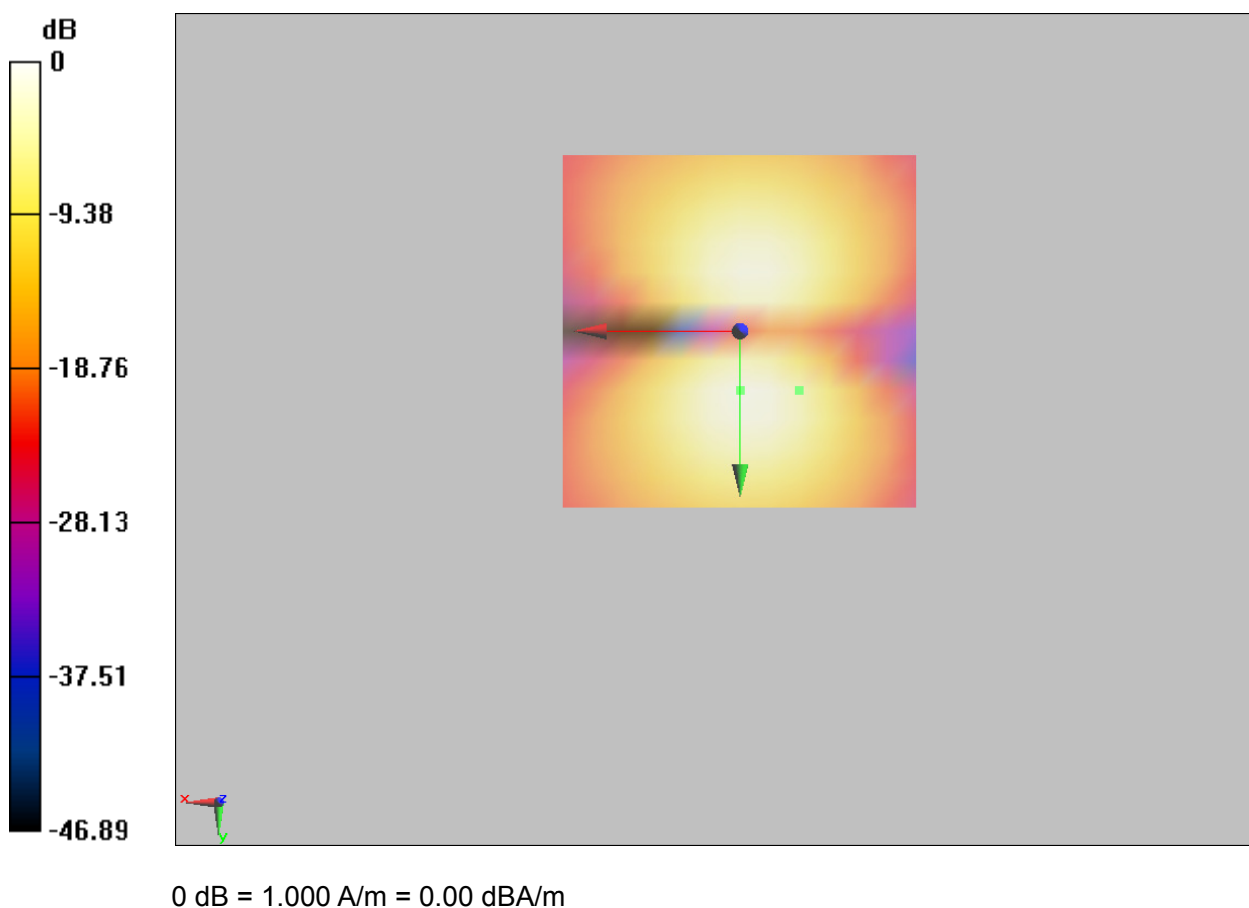

**Figure 17 T-Coil WCDMA Band IV Y transversal**

**T-Coil WCDMA Band IV Z Axial**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA IV HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.47 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**Z861BL WCDMA IV HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm



| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 37.81 dB

ABM1 comp = 4.98 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -4.2, 3.7 mm

**Z861BL WCDMA IV HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 1.40 dB

BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm

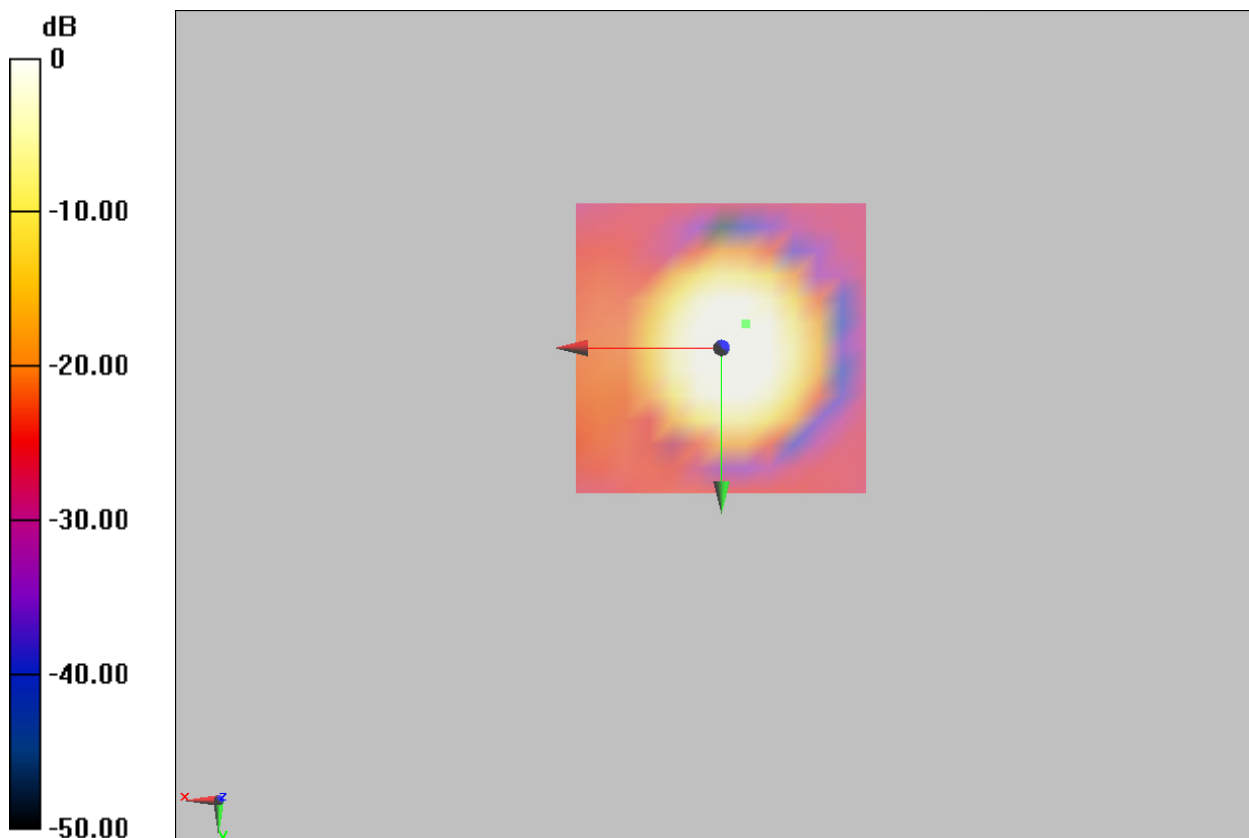

0 dB = 1.000 A/m = 0.00 dBA/m

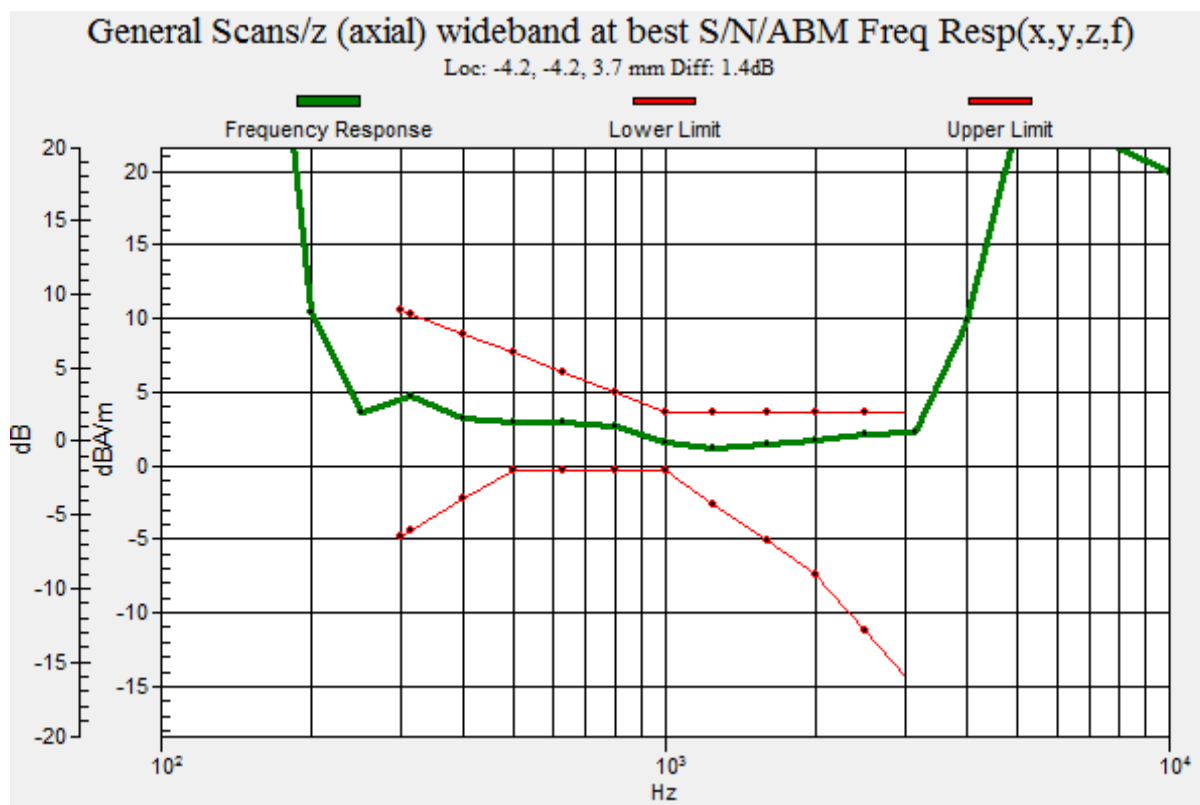


Figure 18 T-Coil WCDMA Band IV Z Axial

**T-Coil WCDMA Band V Y transversal**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA V HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = -0.44 dBA/m

BWC Factor = 0.16 dB

Location: 0, 8.3, 3.7 mm

**Z861BL WCDMA V HAC\_TCoil\_WD\_Emission/General Scans/y (transversal) 4.2mm 50 x 50/ABM SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |


**Cursor:**

ABM1/ABM2 = 38.05 dB

ABM1 comp = -4.58 dBA/m

BWC Factor = 0.16 dB

Location: -8.3, 8.3, 3.7 mm

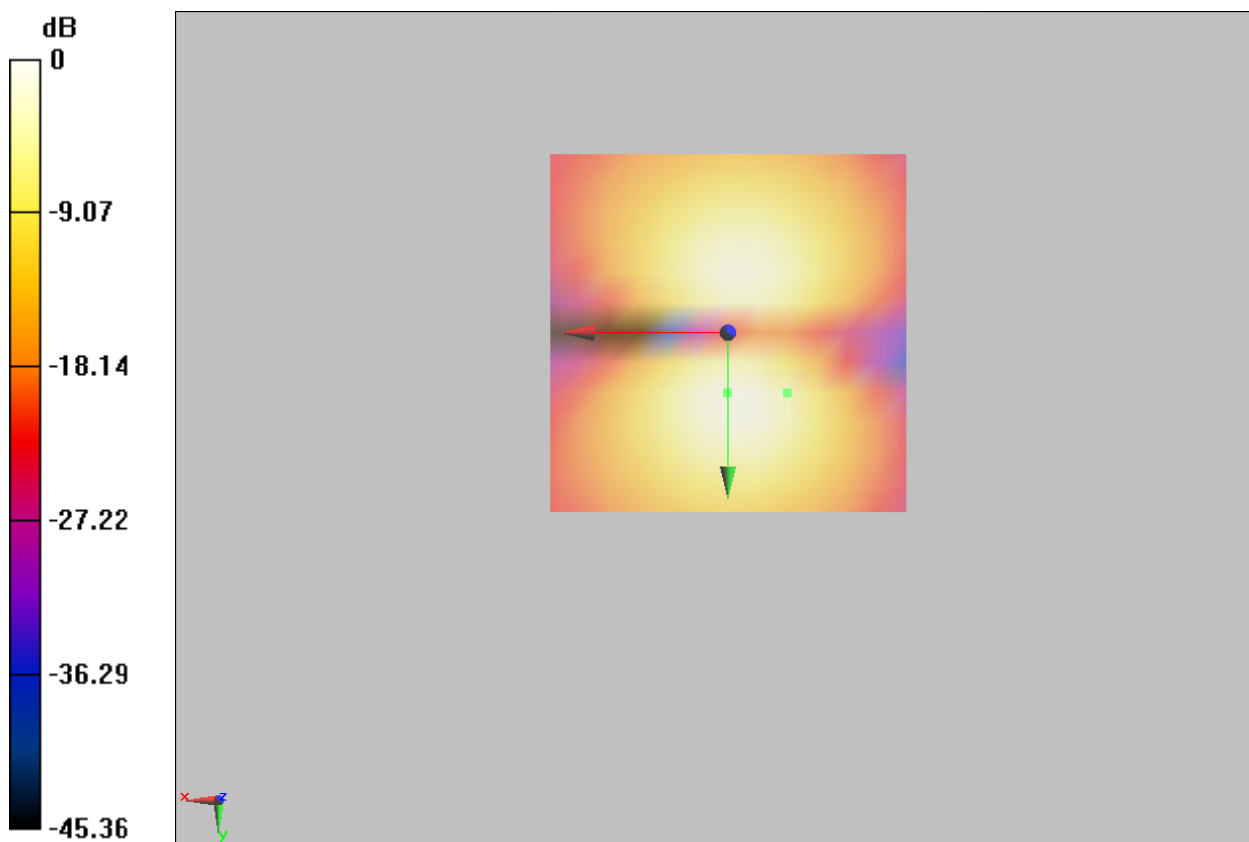

0 dB = 1.000 A/m = 0.00 dBA/m

**Figure 19 T-Coil WCDMA Band V Y transversal**

**T-Coil WCDMA Band V Z Axial**

Date: 2016/5/17

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 1$  kg/m<sup>3</sup>

Ambient Temperature: 22.3 °C      Liquid Temperature: 21.5 °C

Phantom section: TCoil Section

DASY5 Configuration:

Sensor-Surface: 4mm (Mechanical Surface Detection)

Probe: AM1DV3 - 3082; Calibrated: 2014/11/13

Electronics: DAE4 Sn871; Calibrated: 2015/11/17

Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;

Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Z861BL WCDMA V HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****Signal(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1 comp = 7.42 dBA/m

BWC Factor = 0.16 dB

Location: 0, 0, 3.7 mm

**Z861BL WCDMA V HAC\_TCoil\_WD\_Emission/General Scans/z (axial) 4.2mm 50 x 50/ABM****SNR(x,y,z) (13x13x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_1kHz\_1s.wav

Output Gain: 33.76

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm



| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

ABM1/ABM2 = 37.43 dB

ABM1 comp = 4.97 dBA/m

BWC Factor = 0.16 dB

Location: -4.2, -4.2, 3.7 mm

**Z861BL WCDMA V HAC\_TCoil\_WD\_Emission/General Scans/z (axial) wideband at best****S/N/ABM Freq Resp(x,y,z,f) (1x1x1):** Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k\_voice\_300-3000\_2s.wav

Output Gain: 66.12

Measure Window Start: 300ms

Measure Window Length: 2000ms

BWC applied: 10.81 dB

Device Reference Point: 0, 0, -6.3 mm


| Category    | Telephone parameters WD signal quality<br>[(signal+noise)-to-noise ratio in decibels] |
|-------------|---------------------------------------------------------------------------------------|
| Category T1 | 0 dB to 10 dB                                                                         |
| Category T2 | 10 dB to 20 dB                                                                        |
| Category T3 | 20 dB to 30 dB                                                                        |
| Category T4 | > 30 dB                                                                               |

**Cursor:**

Diff = 1.41 dB

BWC Factor = 10.81 dB

Location: -4.2, -4.2, 3.7 mm

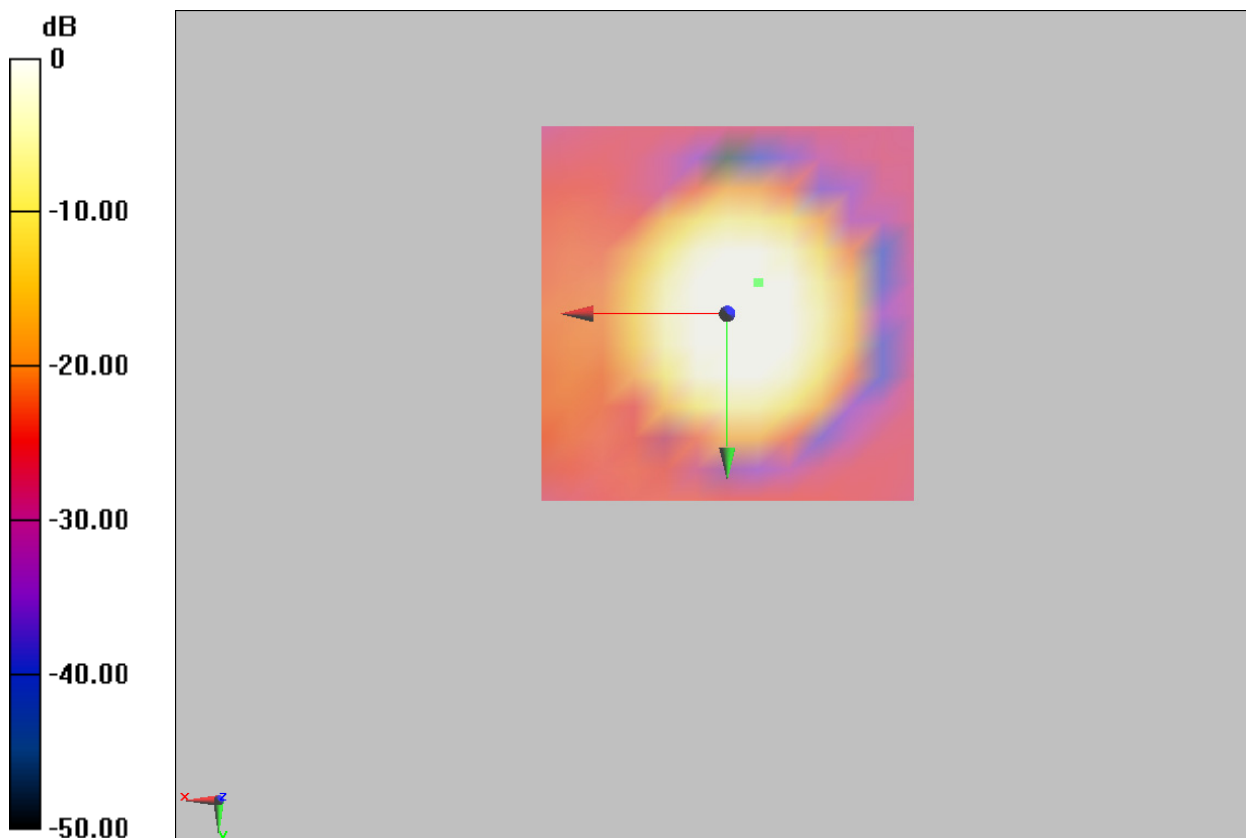

0 dB = 1.000 A/m = 0.00 dBA/m

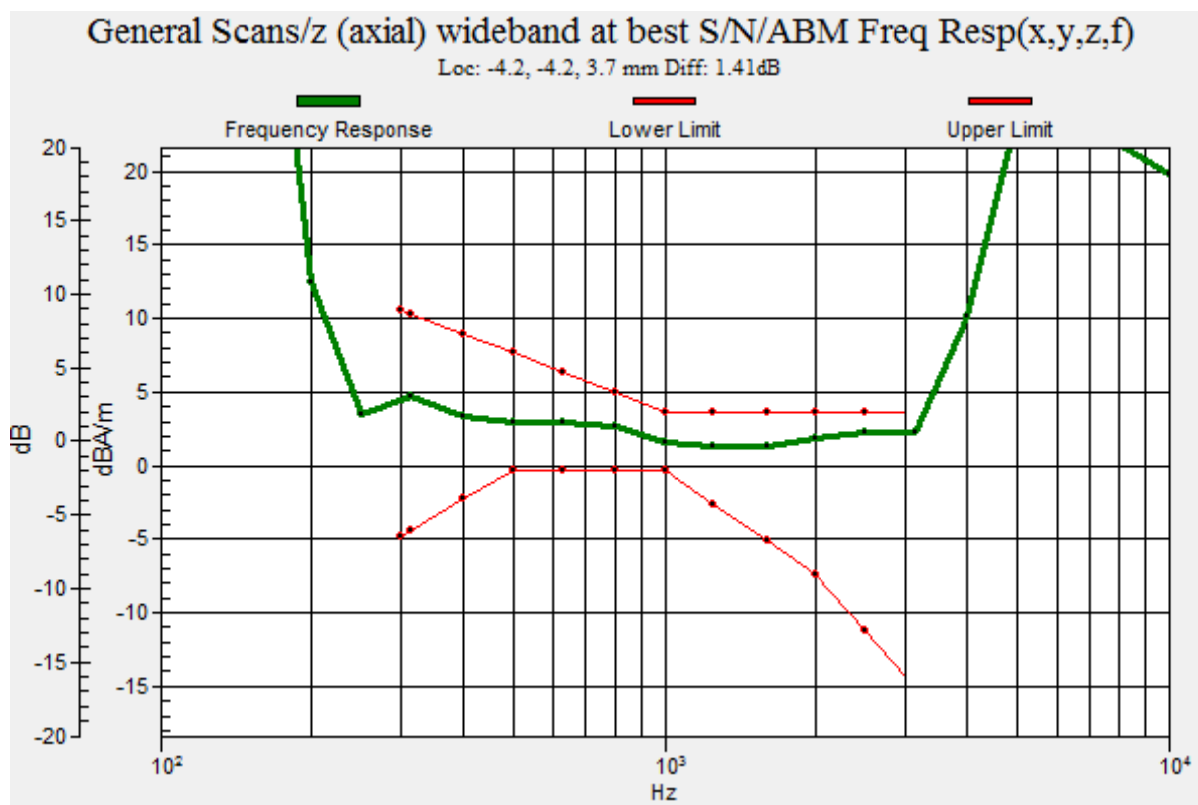


Figure 20 T-Coil WCDMA Band V Z Axial

## ANNEX C: Probe Calibration Certificate

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **TA-Shanghai (Auden)**

Certificate No: **AM1DV3-3082\_Nov14**

### CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3082**

Calibration procedure(s) **QA CAL-24.v3**  
Calibration procedure for AM1D magnetic field probes and TMFS in the audio range

Calibration date: **November 13, 2014**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .



Calibration Equipment used (M&TE critical for calibration)

| Primary Standards               | ID #        | Cal Date (Certificate No.)        | Scheduled Calibration |
|---------------------------------|-------------|-----------------------------------|-----------------------|
| Keithley Multimeter Type 2001   | SN: 0810278 | 03-Oct-14 (No:15573)              | Oct-15                |
| Reference Probe AM1DV2          | SN: 1008    | 14-Jan-14 (No. AM1D-1008_Jan14)   | Jan-15                |
| DAE4                            | SN: 781     | 12-Sep-14 (No. DAE4-781_Sep14)    | Sep-15                |
| Secondary Standards             | ID #        | Check Date (in house)             | Scheduled Check       |
| AMCC                            | 1050        | 01-Oct-13 (in house check Oct-13) | Oct-16                |
| AMMI Audio Measuring Instrument | 1062        | 26-Sep-12 (in house check Sep-12) | Sep-15                |

Calibrated by: **Name**  
**Leif Klysner** **Function**  
**Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: November 13, 2014

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

## References

- [1] ANSI-C63.19-2007  
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011  
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

## Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

## Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

## Methods Applied and Interpretation of Parameters

- **Coordinate System:** The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- **Functional Test:** The functional test preceding calibration includes test of Noise level  
RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected.  
Frequency response verification from 100 Hz to 10 kHz.
- **Connector Rotation:** The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- **Sensor Angle:** The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.

**Sensitivity:** With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

### AM1D probe identification and configuration data

|           |                                             |
|-----------|---------------------------------------------|
| Item      | <b>AM1DV3</b> Audio Magnetic 1D Field Probe |
| Type No   | SP AM1 001 BA                               |
| Serial No | <b>3082</b>                                 |

|                    |                                    |
|--------------------|------------------------------------|
| Overall length     | 296 mm                             |
| Tip diameter       | 6.0 mm (at the tip)                |
| Sensor offset      | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB                              |

|                       |                                                      |
|-----------------------|------------------------------------------------------|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zürich, Switzerland |
| Manufacturing date    | May 28, 2010                                         |
| Last calibration date | February 17, 2012                                    |

### Calibration data

|                          |                  |                          |                 |
|--------------------------|------------------|--------------------------|-----------------|
| Connector rotation angle | (in DASY system) | <b>4.0 °</b>             | +/- 3.6 ° (k=2) |
| Sensor angle             | (in DASY system) | <b>0.65 °</b>            | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz     | (in DASY system) | <b>0.00739 V / (A/m)</b> | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.



## ANNEX D: DAE4 Calibration Certificate



In Collaboration with  
**s p e a g**  
CALIBRATION LABORATORY

Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



CALIBRATION  
No. L0570

Client : TA(Shanghai)

Certificate No: Z15-97194

## CALIBRATION CERTIFICATE

Object DAE4 - SN: 871

Calibration Procedure(s) FD-Z11-2-002-01  
Calibration Procedure for the Data Acquisition Electronics (DAEx)

Calibration date: November 17, 2015

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&amp;TE critical for calibration)

| Primary Standards      | ID #    | Cal Date(Calibrated by, Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Process Calibrator 753 | 1971018 | 06-July-15 (CTTL, No:J15X04257)          | July-16               |

|                |             |                                   |           |
|----------------|-------------|-----------------------------------|-----------|
| Calibrated by: | Name        | Function                          | Signature |
|                | Yu Zongying | SAR Test Engineer                 |           |
| Reviewed by:   | Qi Dianyuan | SAR Project Leader                |           |
| Approved by:   | Lu Bingsong | Deputy Director of the laboratory |           |

Issued: November 18, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z15-97194

Page 1 of 3




Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: ttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.51 Xueyuan Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2218 Fax: +86-10-62304633-2209  
E-mail: cttl@chinattl.com Http://www.chinattl.cn

### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Calibration Factors | X                         | Y                         | Z                         |
|---------------------|---------------------------|---------------------------|---------------------------|
| High Range          | 404.728 $\pm$ 0.15% (k=2) | 404.712 $\pm$ 0.15% (k=2) | 405.156 $\pm$ 0.15% (k=2) |
| Low Range           | 3.98308 $\pm$ 0.7% (k=2)  | 3.93782 $\pm$ 0.7% (k=2)  | 3.97048 $\pm$ 0.7% (k=2)  |


### Connector Angle

|                                           |                |
|-------------------------------------------|----------------|
| Connector Angle to be used in DASY system | 90.5° $\pm$ 1° |
|-------------------------------------------|----------------|

## ANNEX E: The EUT Appearances and Test Configuration



Picture 2: EUT

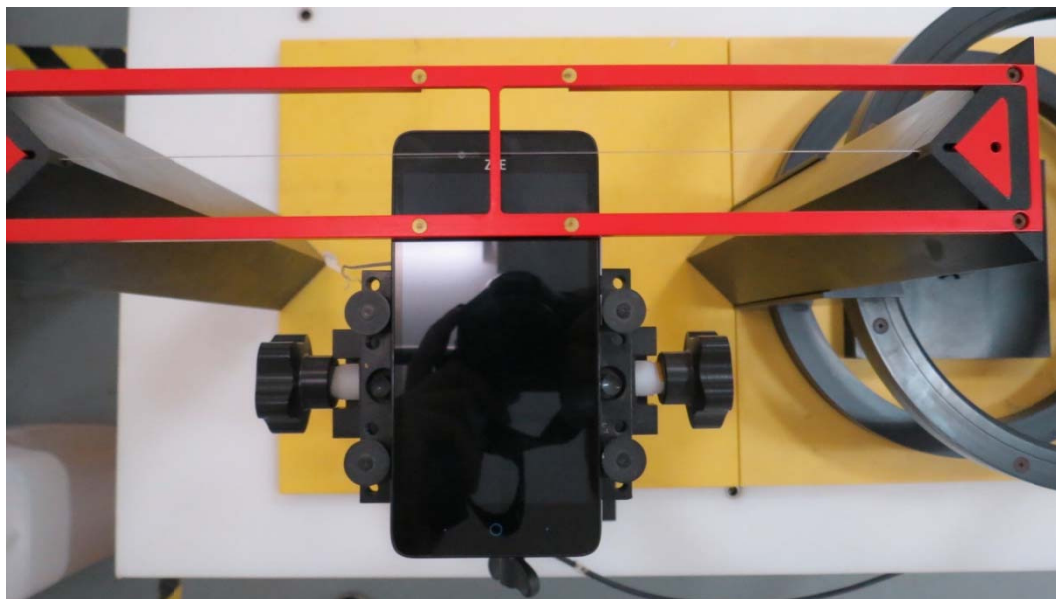

**Picture 3: Test Setup**