



REPORT No.: SZ16030142W02

FCC RF TEST REPORT

APPLICANT : ZTE Corporation

PRODUCT NAME : LTE Mutil-Mode Digital Mobile Phone

MODEL NAME : Z861BL

TRADE NAME : ZTE

BRAND NAME : ZTE

FCC ID : SRQ-Z861BL

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-05-19



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555
[Http://www.morlab.com](http://www.morlab.com)

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	6
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	12
2.3.1 REQUIREMENT	12
2.3.2 TEST DESCRIPTION	12
2.3.3 TEST RESULT	12
2.4 20DB BANDWIDTH	14
2.4.1 DEFINITION	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST PROCEDURE	14
2.4.4 TEST RESULT	14
2.5 CARRIED FREQUENCY SEPARATION	21
2.5.1 DEFINITION	21
2.5.2 TEST DESCRIPTION	21
2.5.3 TEST PROCEDURE	21
2.5.4 TEST RESULT	22
2.6 TIME OF OCCUPANCY (DWELL TIME)	24



2.6.1	REQUIREMENT	24
2.6.2	TEST DESCRIPTION	24
2.6.3	TEST PROCEDURE	24
2.6.4	TEST RESULT	25
2.7	CONDUCTED SPURIOUS EMISSIONS	36
2.7.1	REQUIREMENT	36
2.7.2	TEST DESCRIPTION	36
2.7.3	TEST PROCEDURE	36
2.7.4	TEST RESULT	37
2.8	RESTRICTED FREQUENCY BANDS	49
2.8.1	REQUIREMENT	49
2.8.2	TEST DESCRIPTION	49
2.8.3	TEST PROCEDURE	50
2.8.4	TEST RESULT	50
2.9	CONDUCTED EMISSION	58
2.9.1	REQUIREMENT	58
2.9.2	TEST DESCRIPTION	58
2.9.3	TEST RESULT	59
2.10	RADIATED EMISSION	61
2.10.1	REQUIREMENT	61
2.10.2	TEST DESCRIPTION	62
2.10.3	TEST PROCEDURE	64
2.10.4	TEST RESULT	64
ANNEX A GENERAL INFORMATION		74

Change History		
Issue	Date	Reason for change
1.0	2016-05-19	First edition



REPORT No.: SZ16030142W02

TEST REPORT DECLARATION

Applicant	ZTE Corporation
Applicant Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Manufacturer	ZTE Corporation
Manufacturer Address	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Product Name	LTE Mutil-Mode Digital Mobile Phone
Model Name	Z861BL
Brand Name	ZTE
HW Version	Z861BLHWV1.0
SW Version	Z861BLV0.0.0B02
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-04-06 to 2016-04-26
Test Result	PASS

Tested by : Yuan Ling
Yuan Ling

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	ZTE Corporation
Address:	ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, P.R. China

1.2 Equipment under Test (EUT) Description

Brand Name:	ZTE
Trade Name:	ZTE
Model Name:	Z861BL
Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Bluetooth Version:	2.1+EDR
Antenna Type:	PIFA Antenna
Antenna Gain:	0 dBi

NOTE:

1. The EUT is a LTE Mutil-Mode Digital Mobile Phone, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).
2. The EUT powered by battery. During the test, the EUT powered by a new battery.
3. The EUT connected to the serial port of the computer with a serial communication cable, and then use the dedicated software to control the EUT into the test mode
5. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
01	Z861BLHWV1.0	Z861BLV0.0.0B02

1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>PASS</u>
2	15.247(a)	Number of Hopping Frequency	Apr 12, 2016	<u>PASS</u>
3	15.247(b)	Peak Output Power	Apr 12, 2016	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Apr 12, 2016	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Apr 12, 2016	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Apr 12, 2016	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	Apr 12, 2016	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	Apr 25, 2016	<u>PASS</u>
9	15.209 15.247(d)	Radiated Emission	Apr 24, 2016	<u>PASS</u>
10	15.207	Conducted Emission	Apr 25, 2016	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in DA-00-705 and ANSI C63.10-2013.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2 Test Description

A. Test Setup:

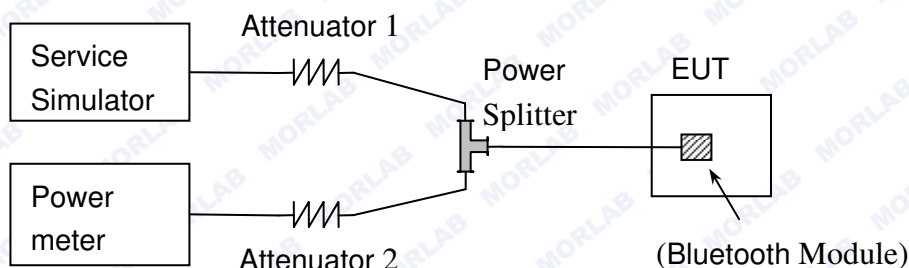

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS

B. Test Plots:

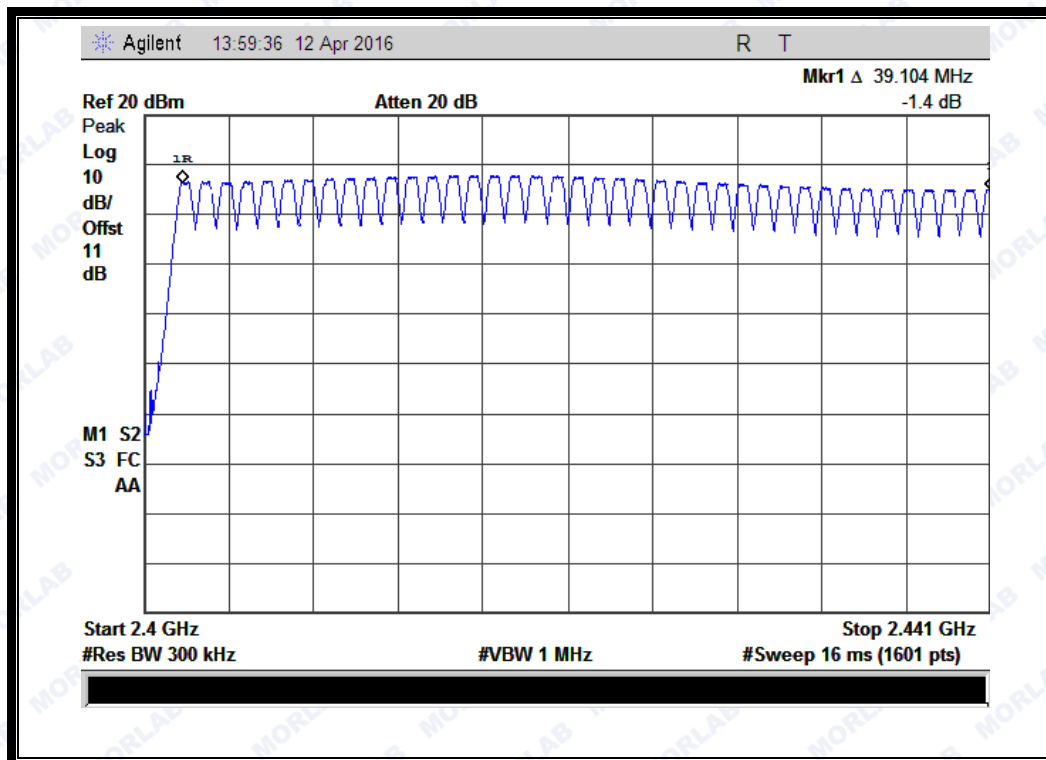




REPORT No.: SZ16030142W02

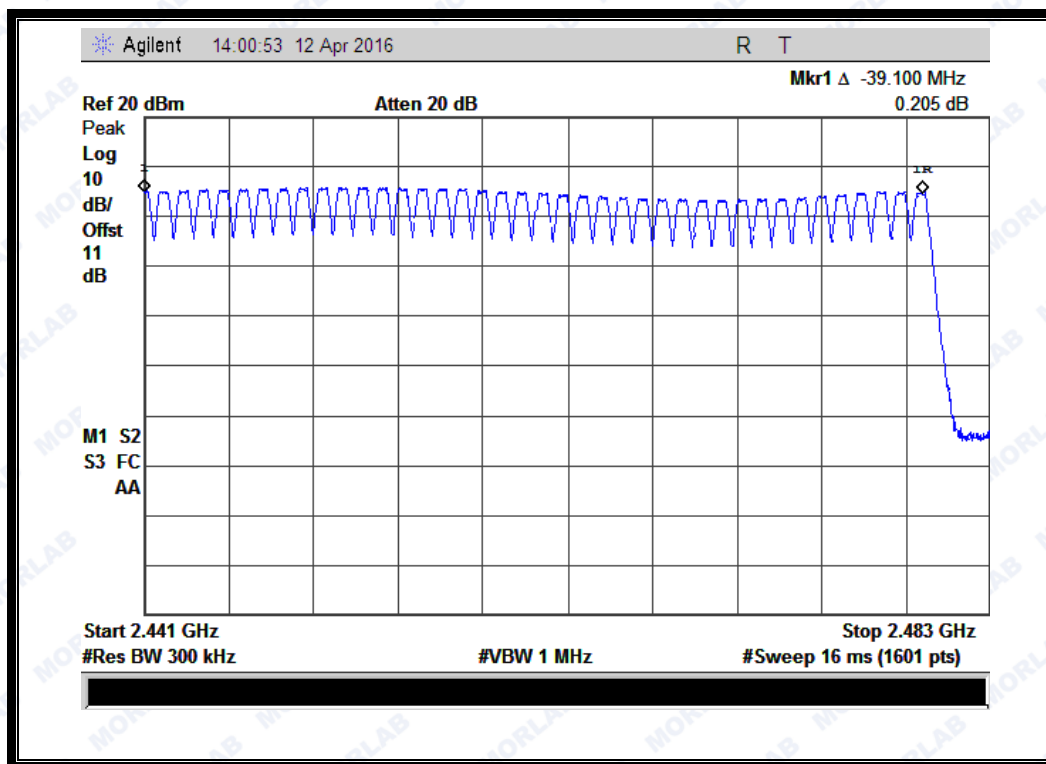


(Plot A: GFSK)

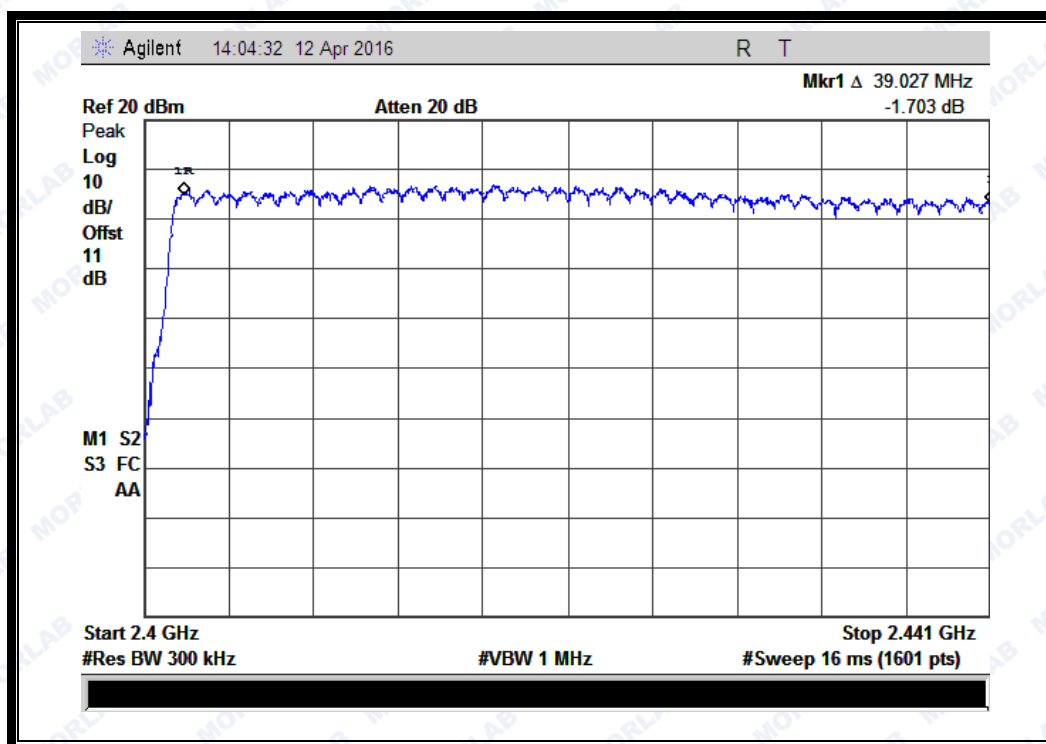




REPORT No.: SZ16030142W02

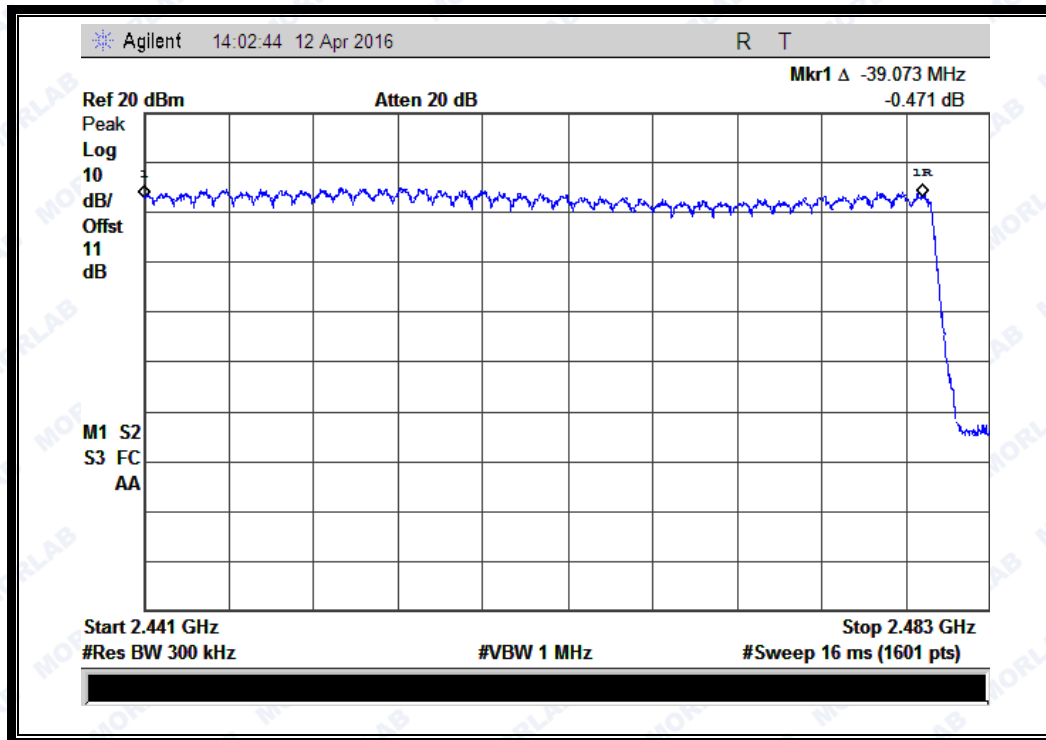

(Plot B: $\pi/4$ -DQPSK)



REPORT No.: SZ16030142W02

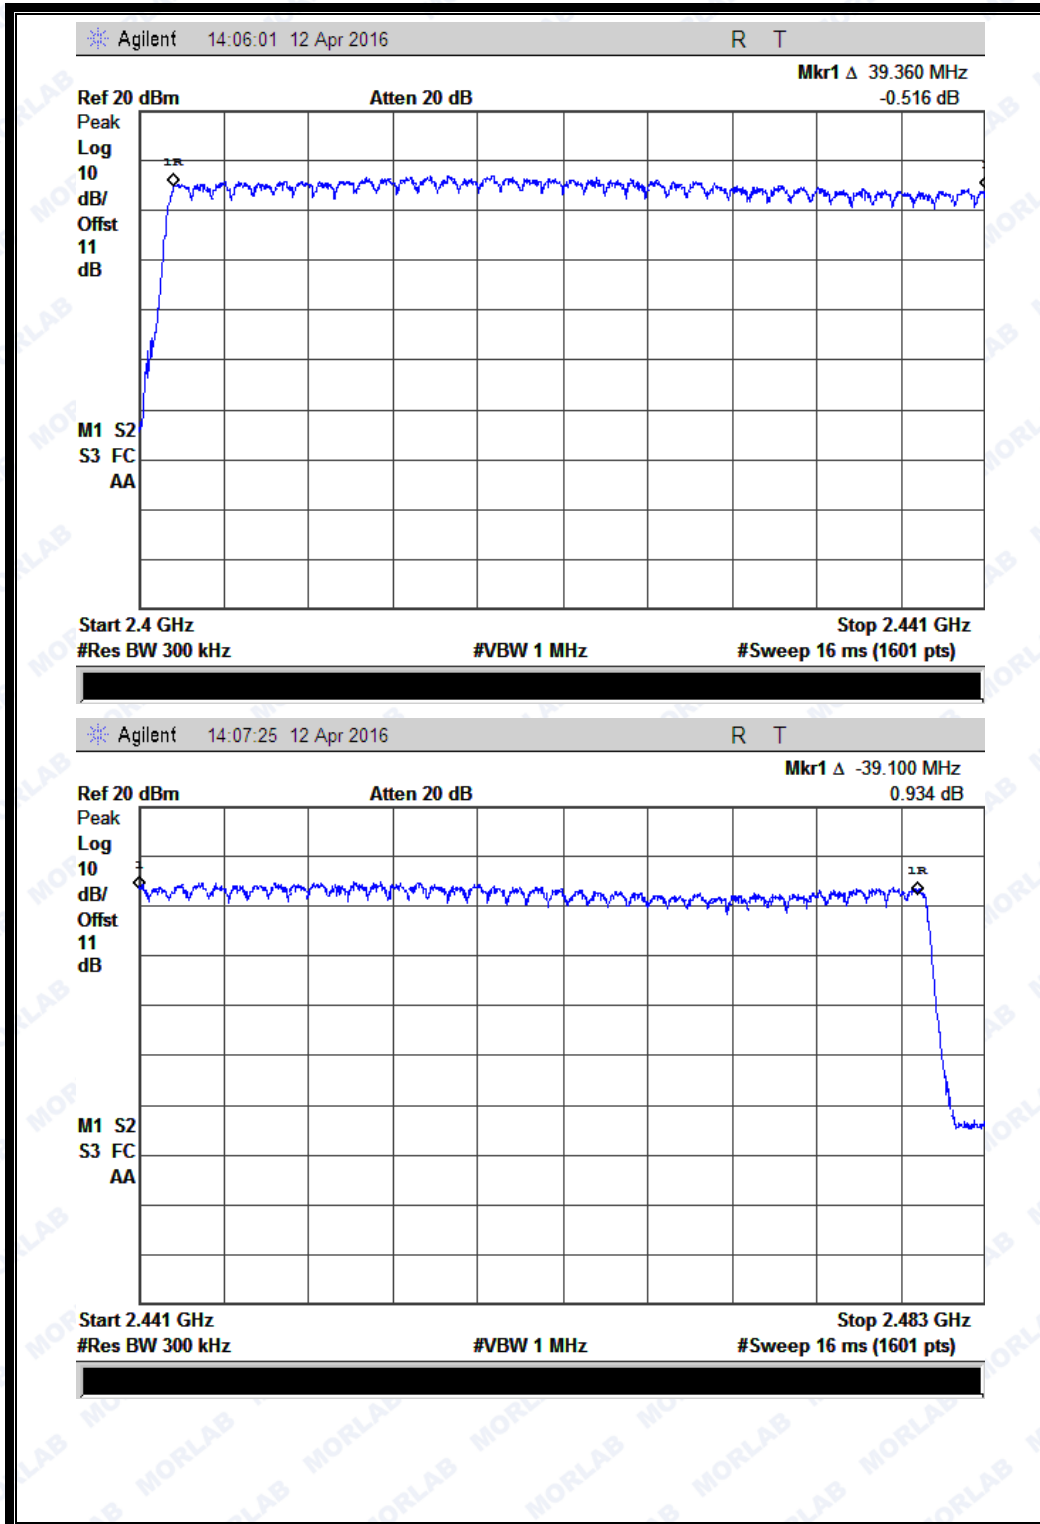

(Plot C: 8- DPSK)


2.3 Peak Output Power

2.3.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2 Test Description

A. Test Setup:

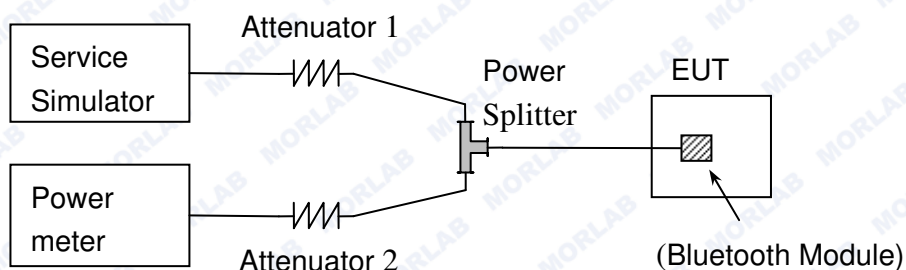

The Bluetooth Module of the EUT is coupled to the Power meter and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by power meter.

**2.3.3.1 GFSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.18	0.00522	20.97	0.125	PASS
39	2441	5.50	0.00355			PASS
78	2480	5.46	0.00352			PASS

2.3.3.2 $\pi/4$ -DQPSK Mode**B. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.41	0.00551	20.97	0.125	PASS
39	2441	5.81	0.00381			PASS
78	2480	5.79	0.00379			PASS

2.3.3.3 8-DPSK Mode**C. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	7.64	0.00581	20.97	0.125	PASS
39	2441	6.04	0.00402			PASS
78	2480	6.00	0.00398			PASS


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

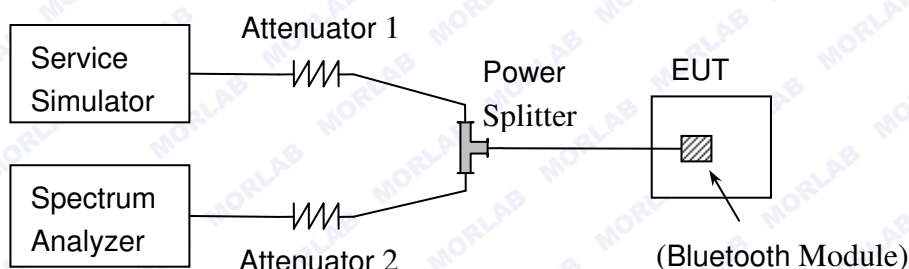

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.




2.4.4.1 GFSK Mode

A. Test Verdict:

The maximum 20dB bandwidth measured is 1.021MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	0.953	Plot A
39	2441	1.021	Plot B
78	2480	0.960	Plot C


B. Test Plots:

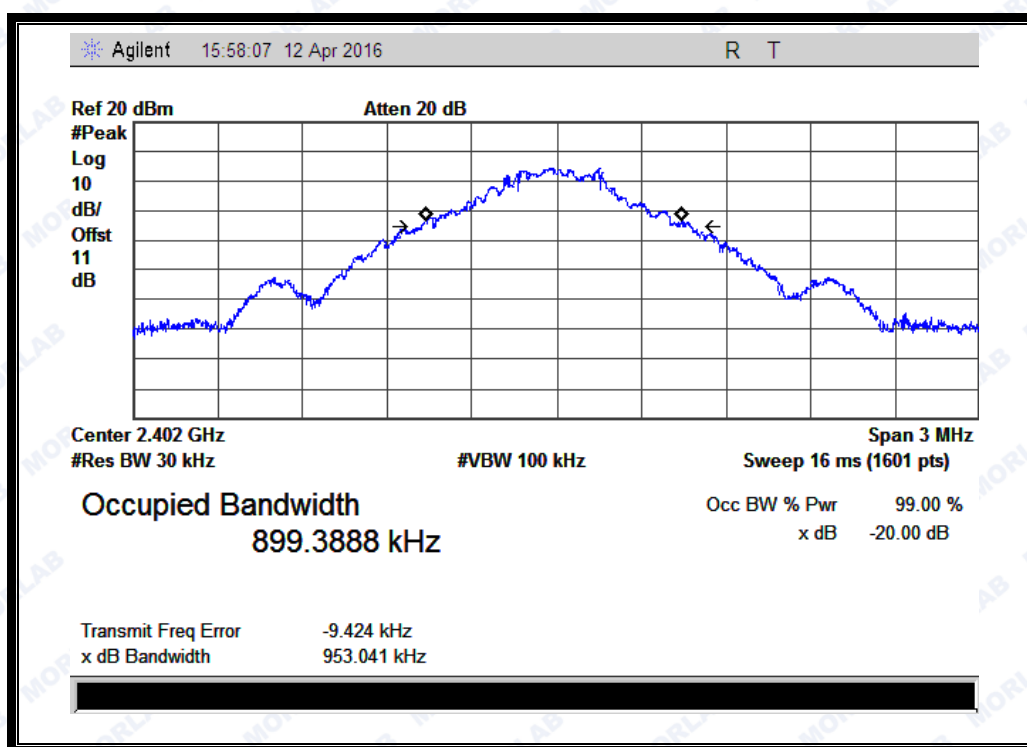


(Plot A: Channel = 2402 @ GFSK)



REPORT No.: SZ16030142W02

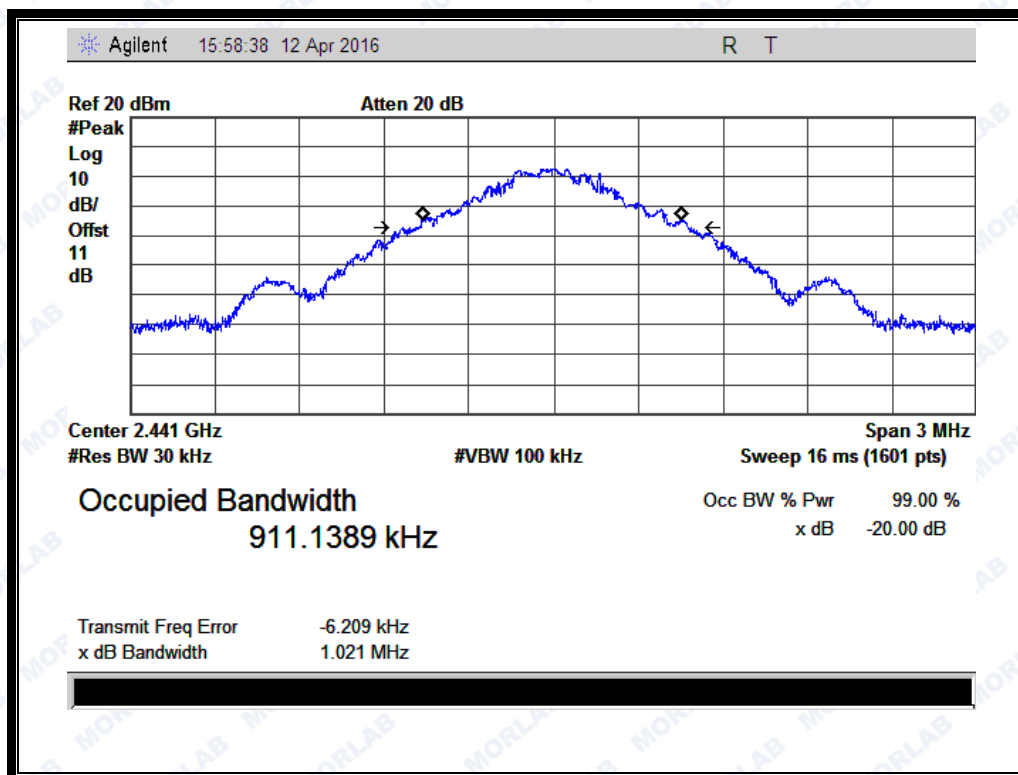

(Plot B: Channel = 2441 @ GFSK)

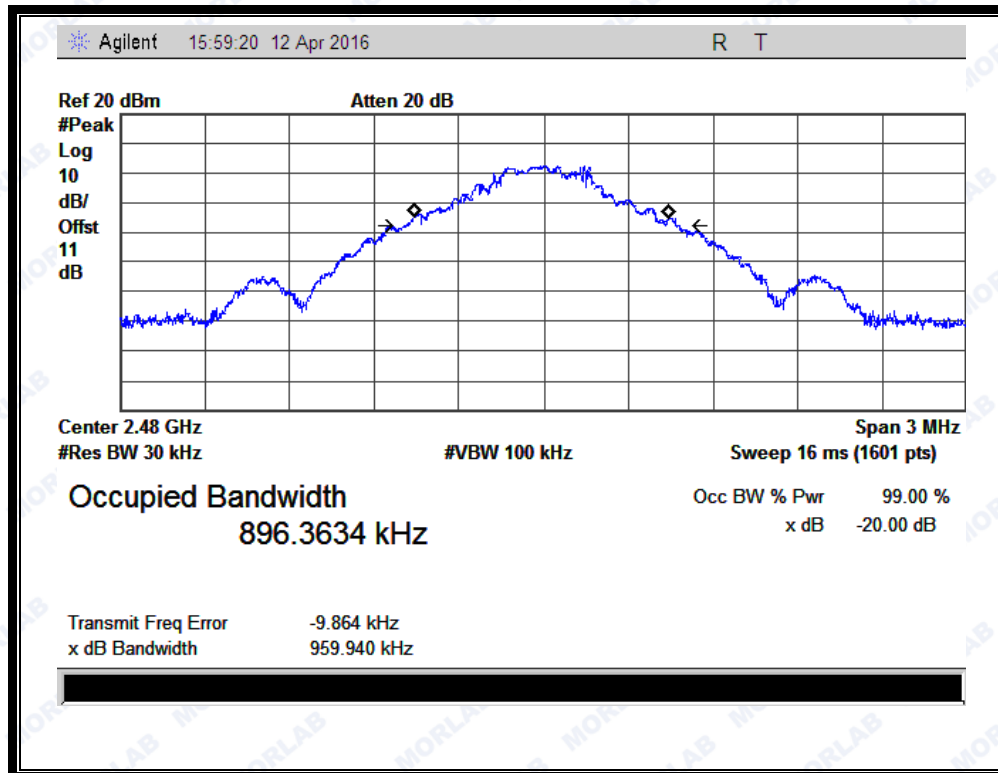

(Plot C: Channel = 2480 @ GFSK)




2.4.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:



The maximum 20dB bandwidth measured is 1.327MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.288	Plot D
39	2441	1.327	Plot E
78	2480	1.290	Plot F

B. Test Plots:

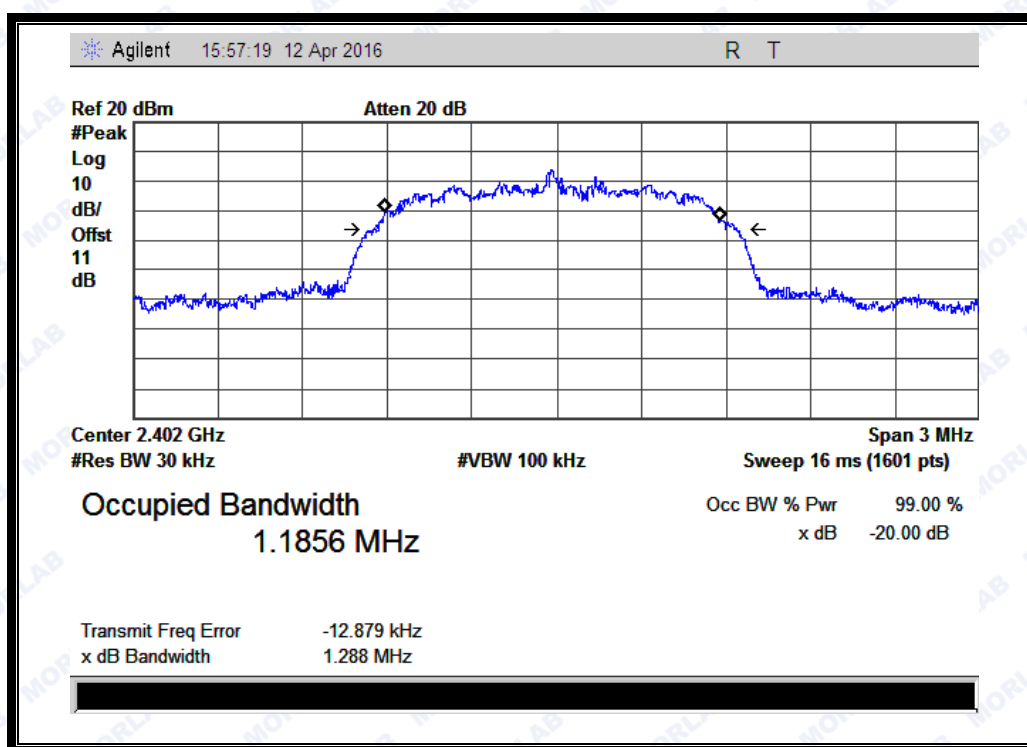

(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)

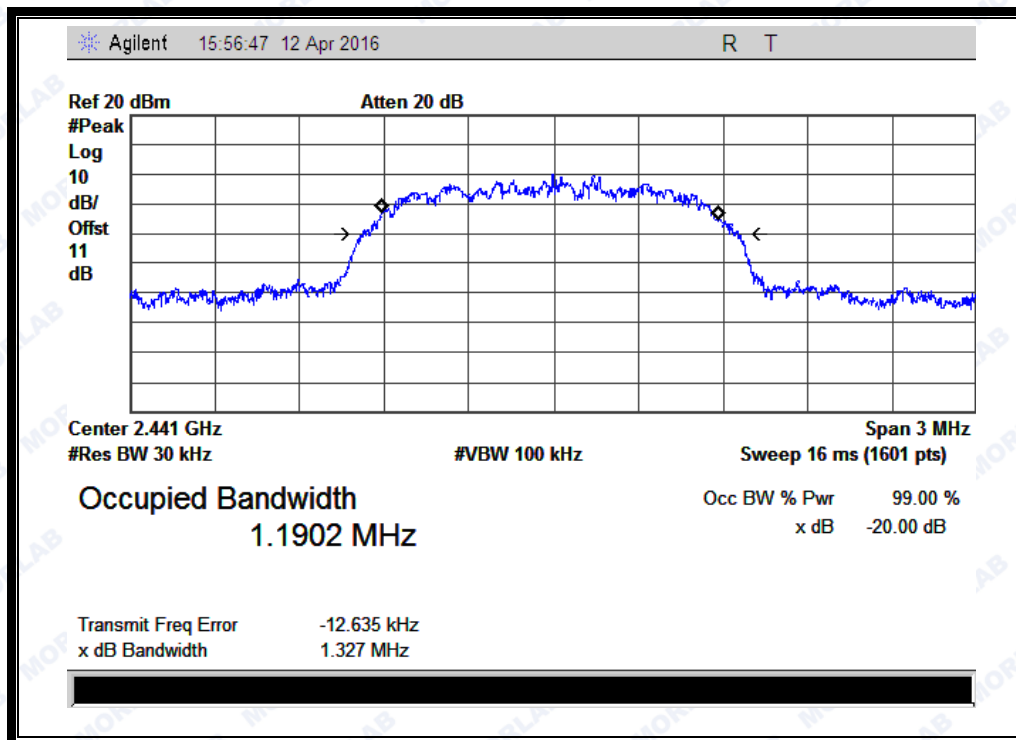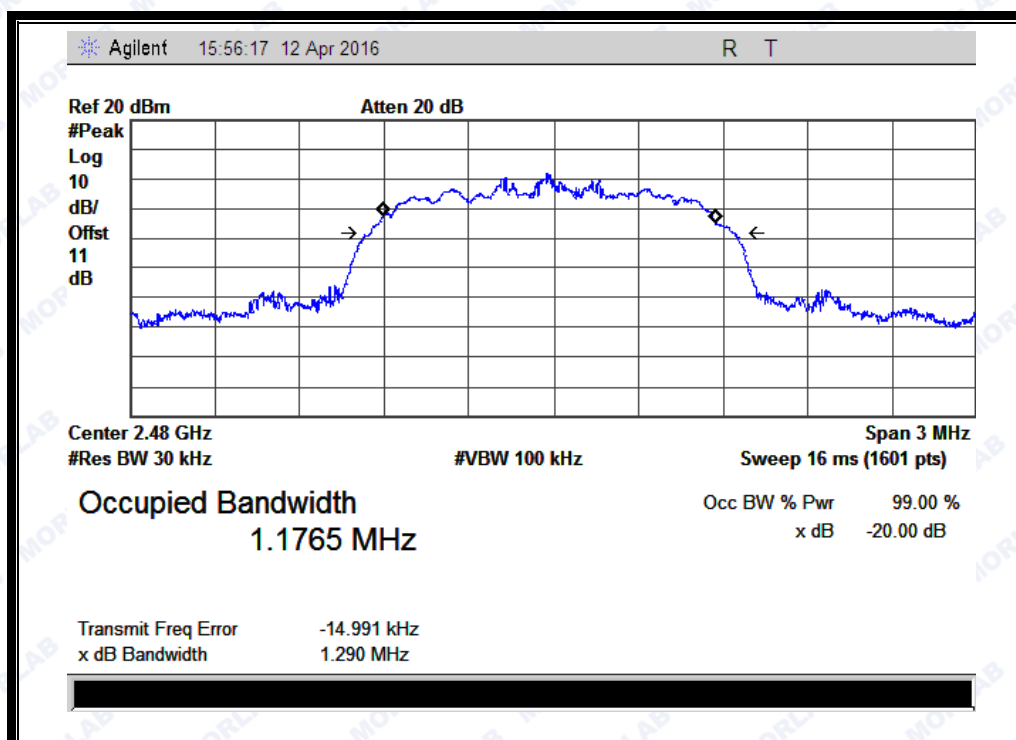(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)



A. Test Verdict:

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.288	Plot G
39	2441	1.289	Plot H
78	2480	1.283	Plot I


The graph displays the Occupied Bandwidth (BW) measurement. The vertical axis is labeled 'Ref 20 dBm', 'Atten 20 dB', '#Peak', 'Log', '10', 'dB/Offst', '11', and 'dB'. The horizontal axis represents frequency. The plot shows a blue line representing the signal spectrum, with a central peak and side lobes. Two diamond markers are placed on the curve, with arrows pointing towards them from the left and right. Below the graph, the following parameters are listed:

- Center 2.402 GHz
- Span 3 MHz
- #Res BW 30 kHz
- #VBW 100 kHz
- Sweep 16 ms (1601 pts)
- Occupied Bandwidth 1.1793 MHz
- Occ BW % Pwr 99.00 %
- x dB -20.00 dB
- Transmit Freq Error -14.467 kHz
- x dB Bandwidth 1.288 MHz


(Plot G: Channel = 2402 @ 8-DPSK)



REPORT No.: SZ16030142W02

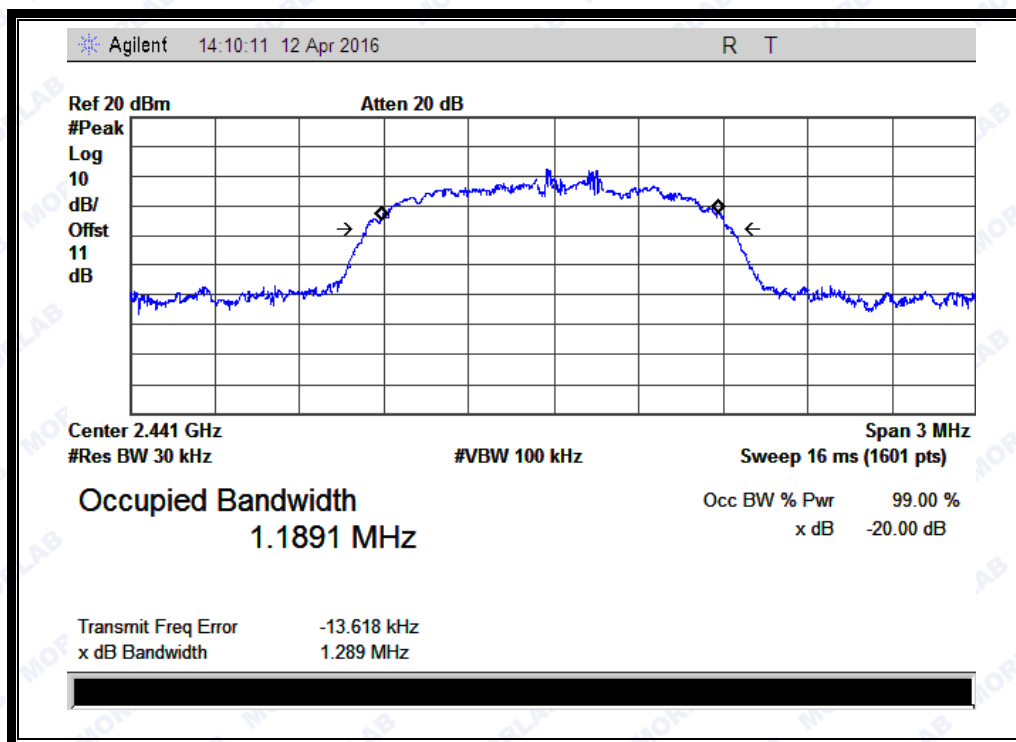

(Plot H: Channel = 2441 @ 8-DPSK)

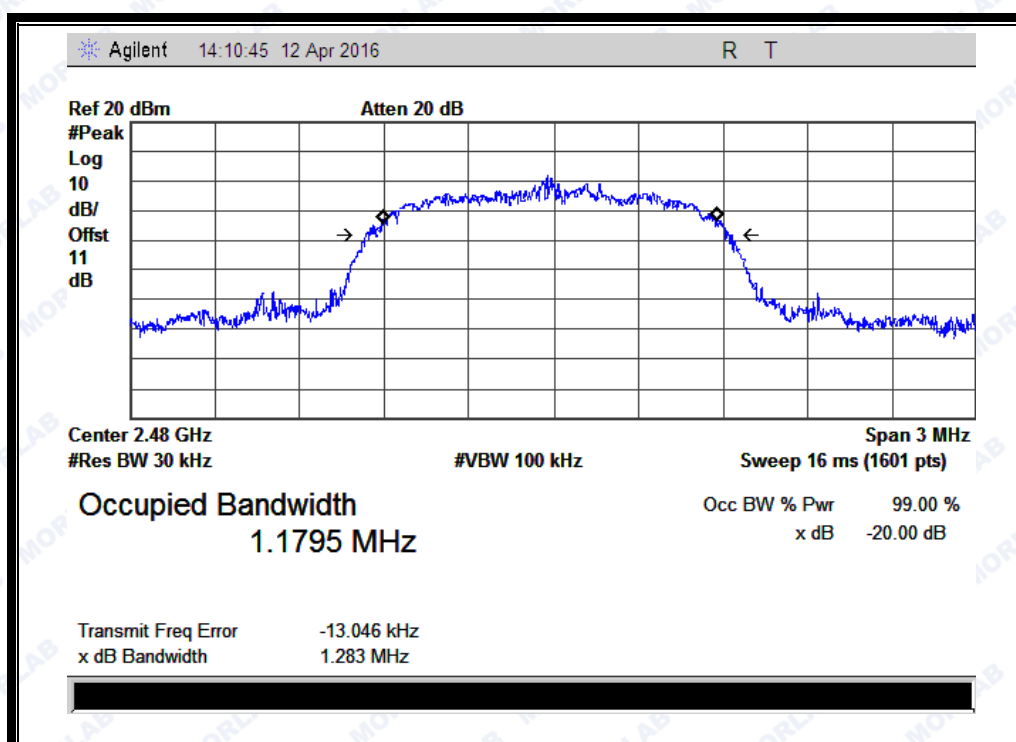

(Plot I: Channel = 2480 @ 8-DPSK)


2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:

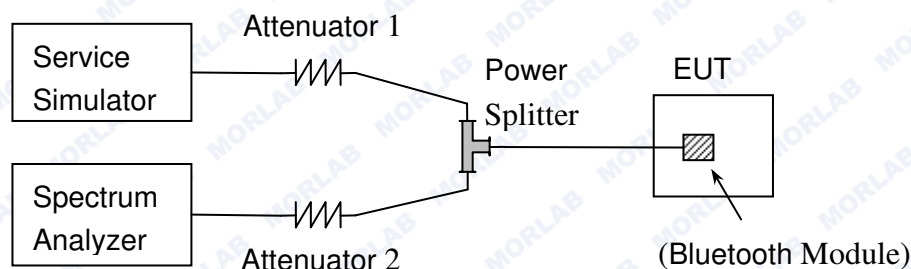

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4 Test Result


The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

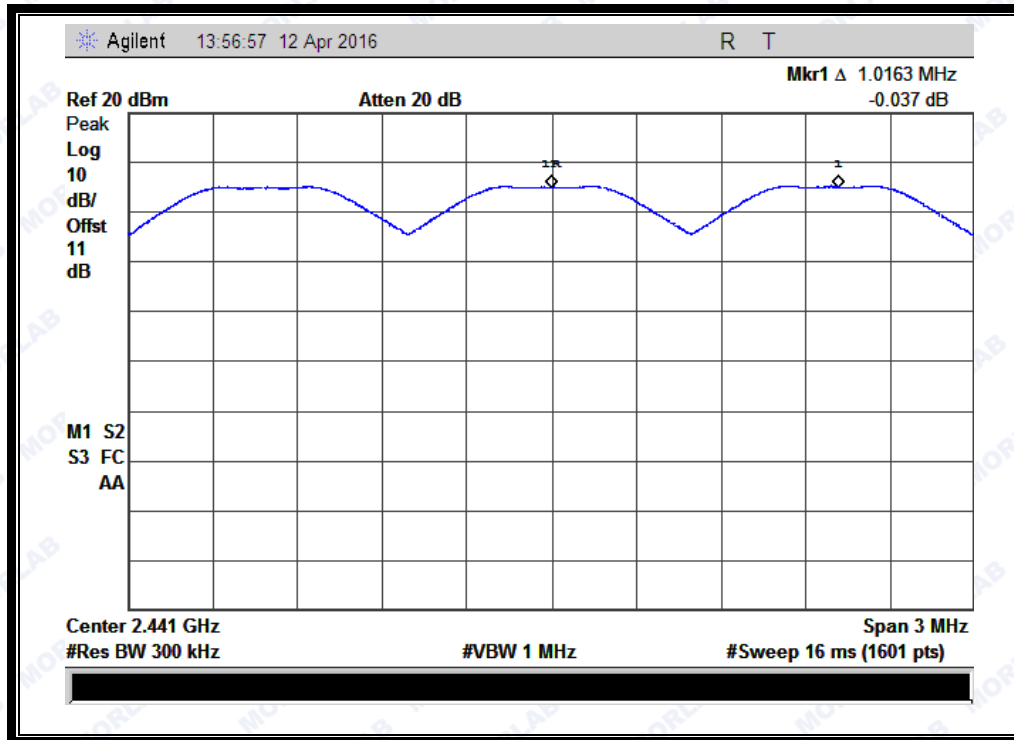


(Plot A: GFSK)



REPORT No.: SZ16030142W02

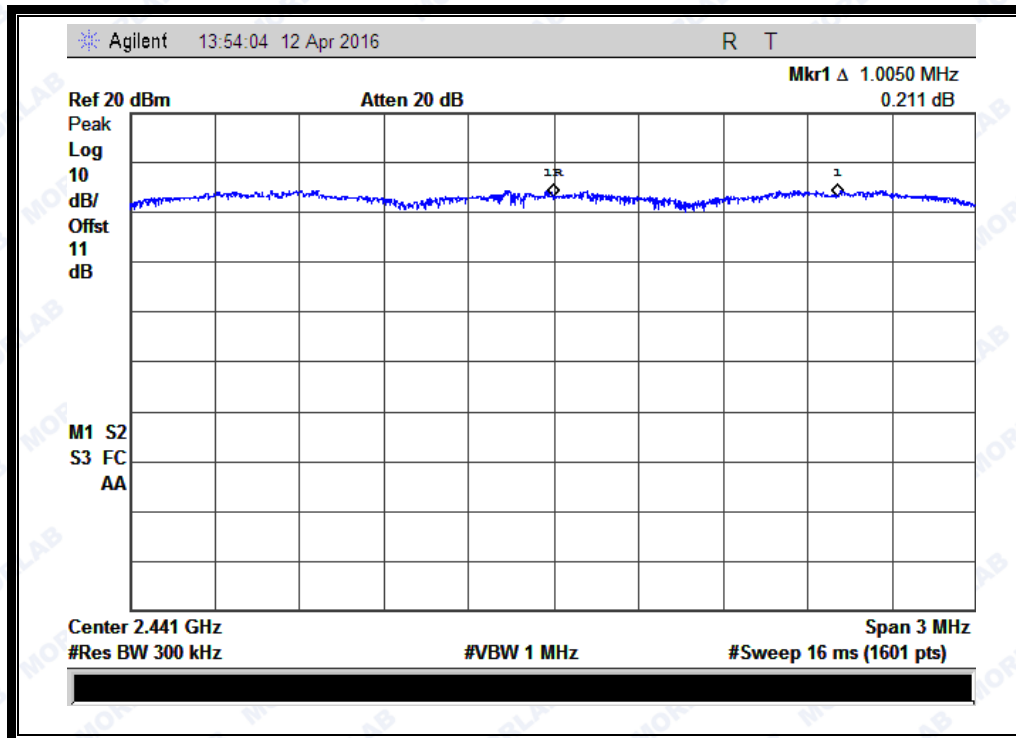

(Plot B: $\pi/4$ -DQPSK)

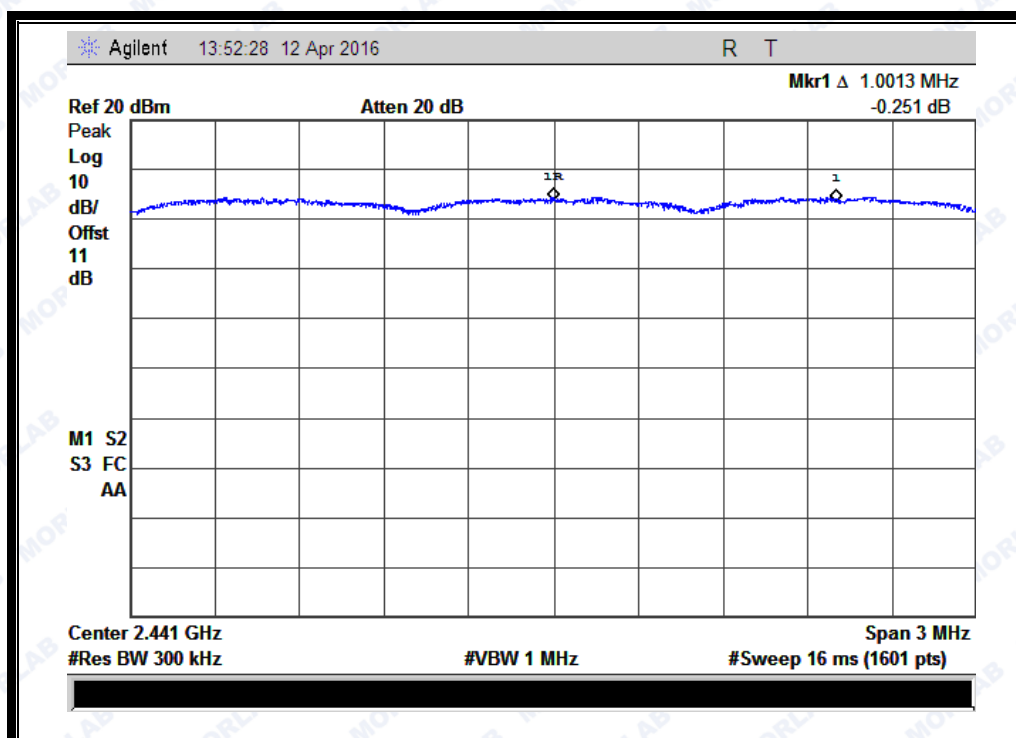

(Plot C: 8-DPSK)


2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2 Test Description

A. Test Setup:

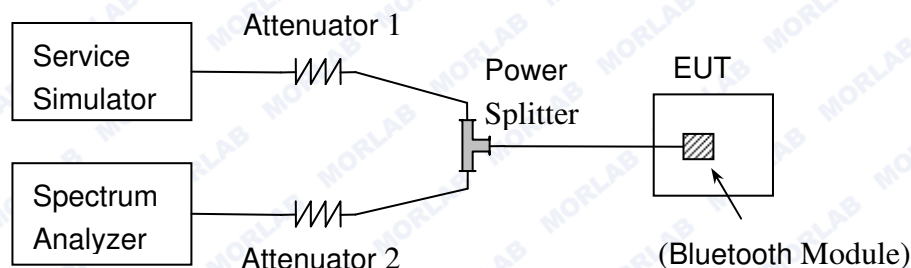

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3 Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.



REPORT No.: SZ16030142W02


2.6.4 Test Result

2.6.4.1 GFSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.31	32	0.00992	0.0992	0.4	PASS
DH3	1.58	14	0.02212	0.2212		PASS
DH5	2.86	13	0.03718	0.3718		PASS

B. Test Plots:

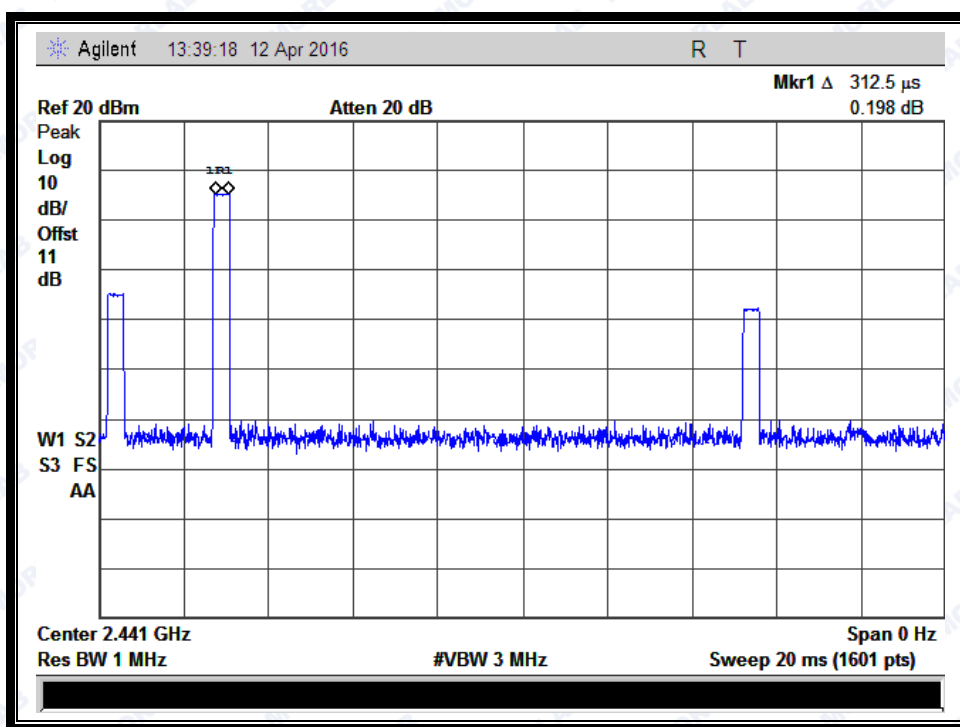




REPORT No.: SZ16030142W02

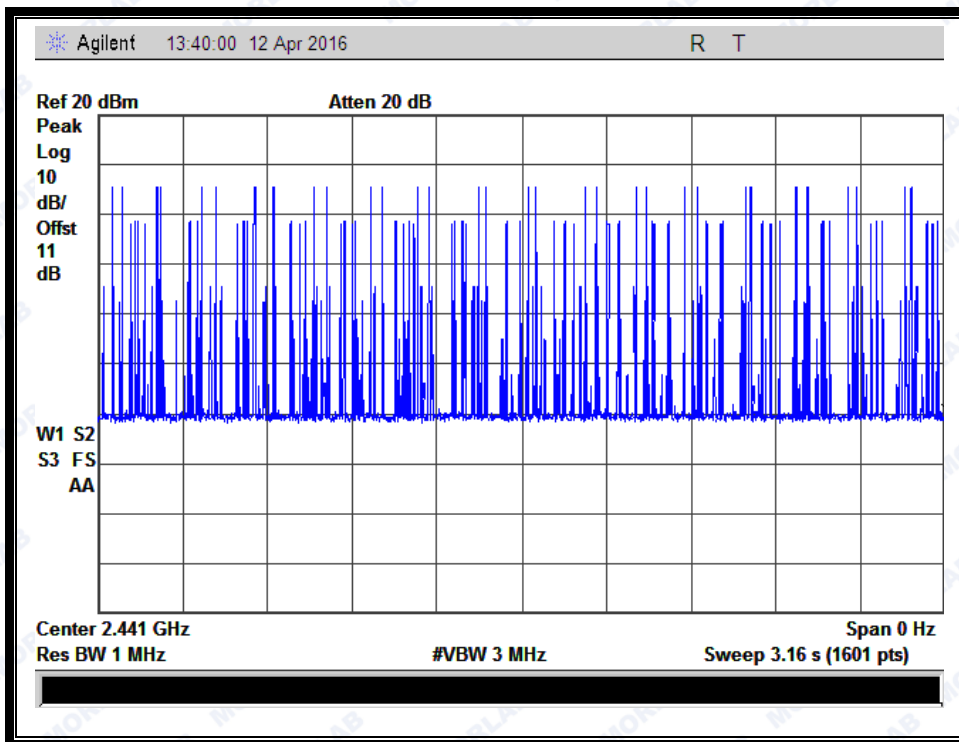


(Plot A: DH1 @ GFSK)

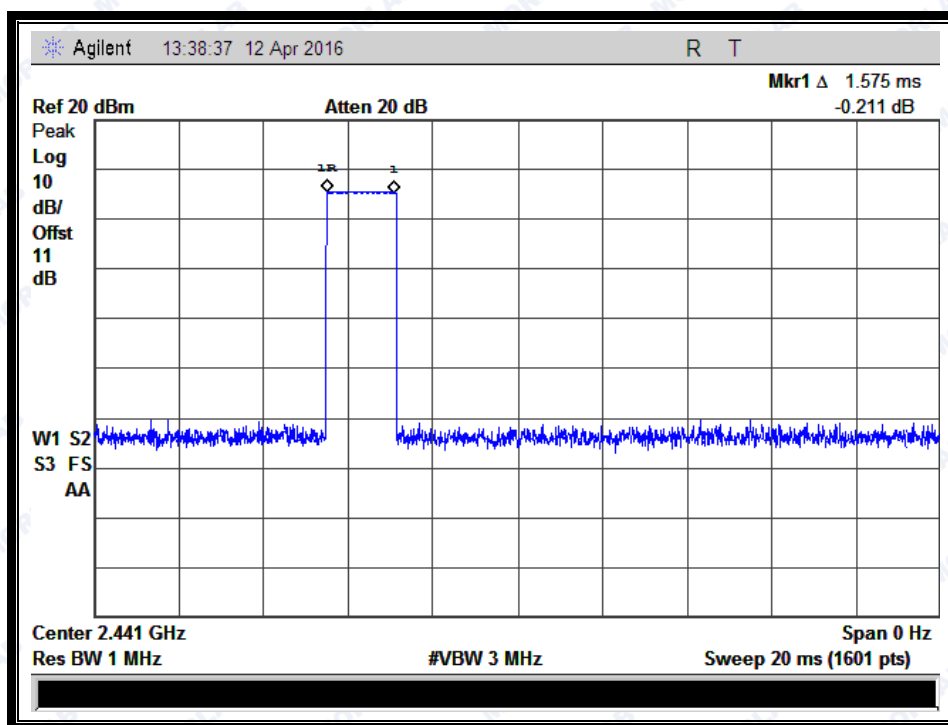




REPORT No.: SZ16030142W02

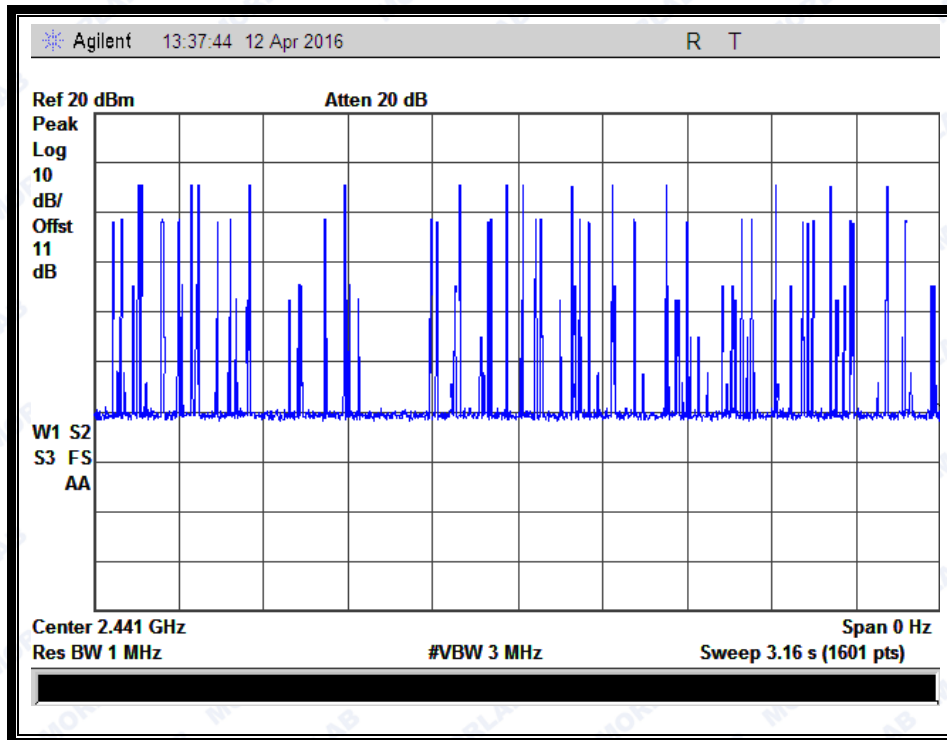


(Plot B: DH3 @ GFSK)

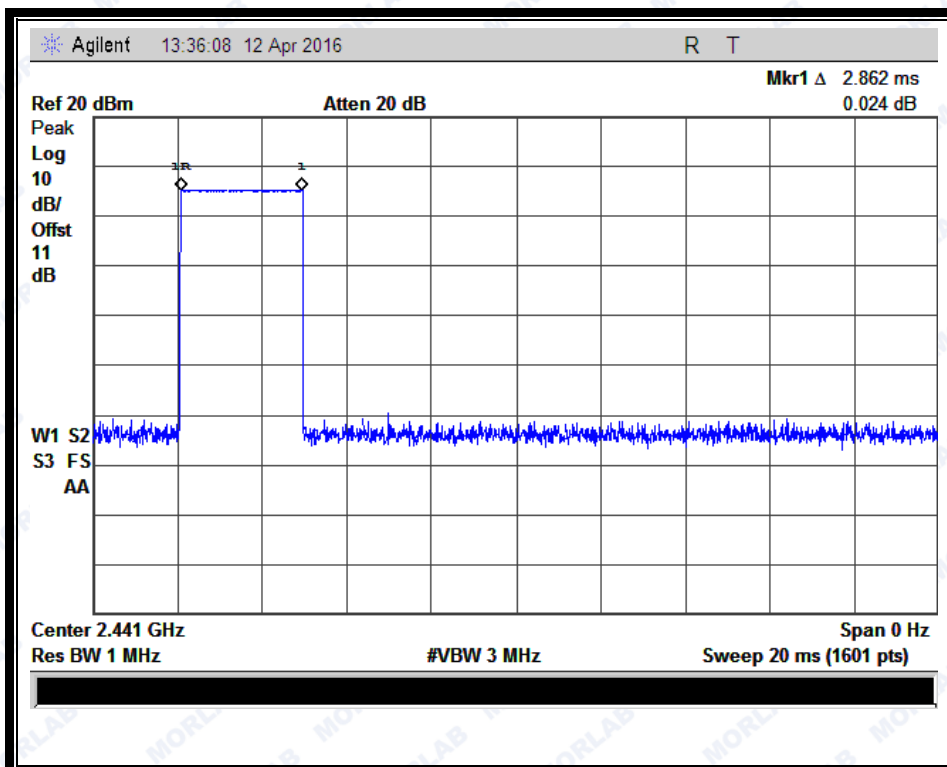



REPORT No.: SZ16030142W02

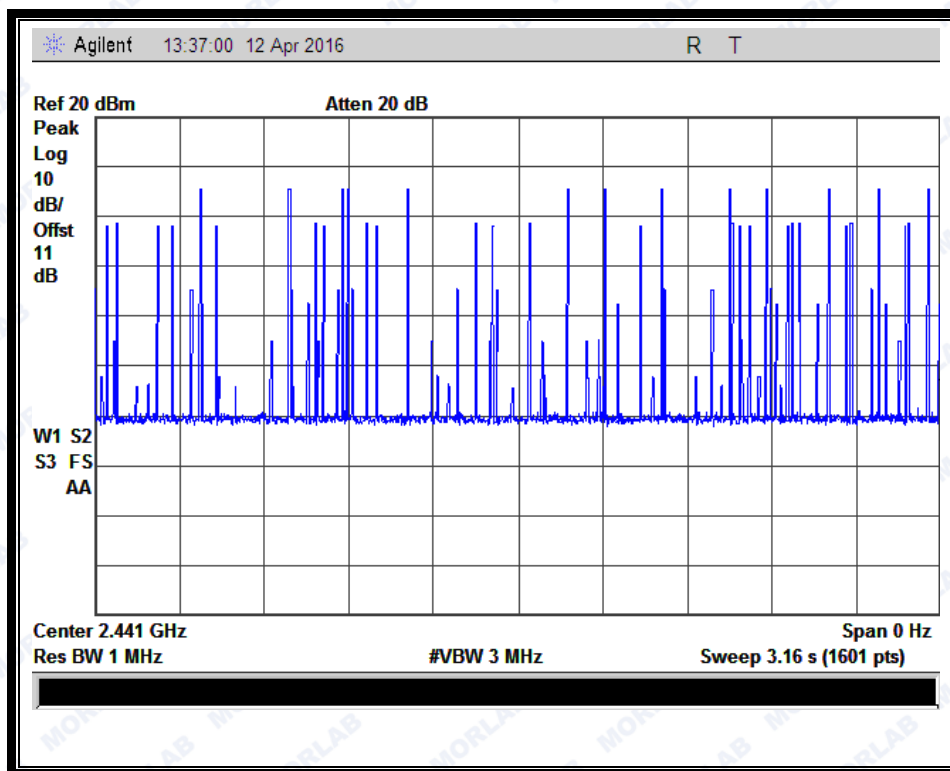

(Plot C: DH5 @ GFSK)

2.6.4.2 $\pi/4$ -DQPSK Mode


A. Test Verdict:

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.36	30	0.01080	0.1080	0.4	PASS
DH3	1.61	13	0.02093	0.2093		PASS
DH5	2.85	9	0.02565	0.2565		PASS

B. Test Plots:




REPORT No.: SZ16030142W02

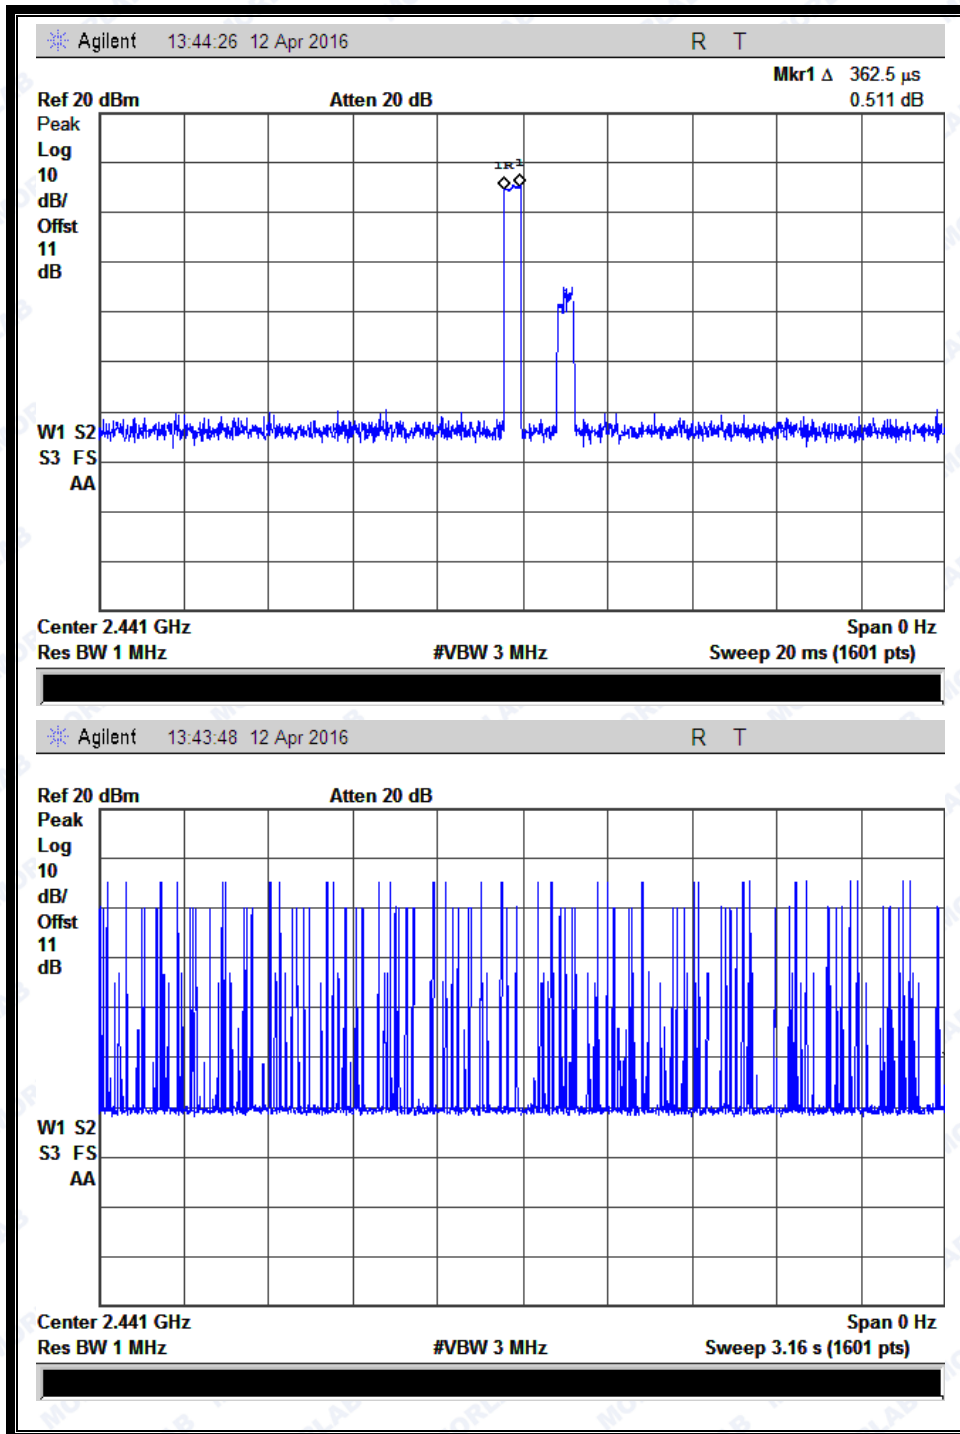

(Plot D: DH1 @ $\pi/4$ -DQPSK)




REPORT No.: SZ16030142W02

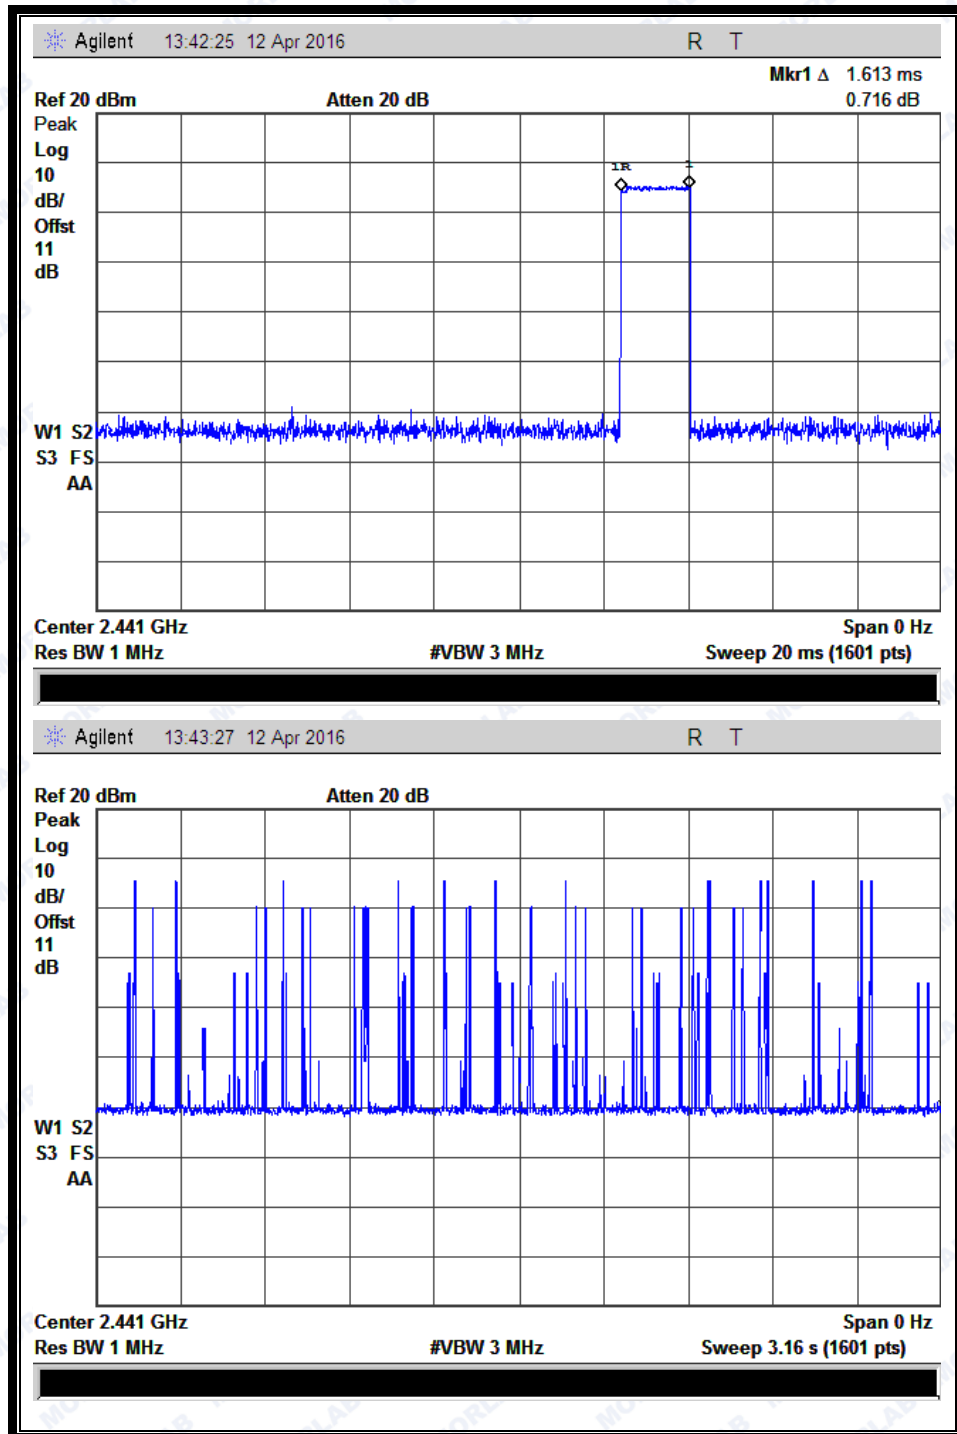

(Plot E: DH3 @ $\pi/4$ -DQPSK)



REPORT No.: SZ16030142W02

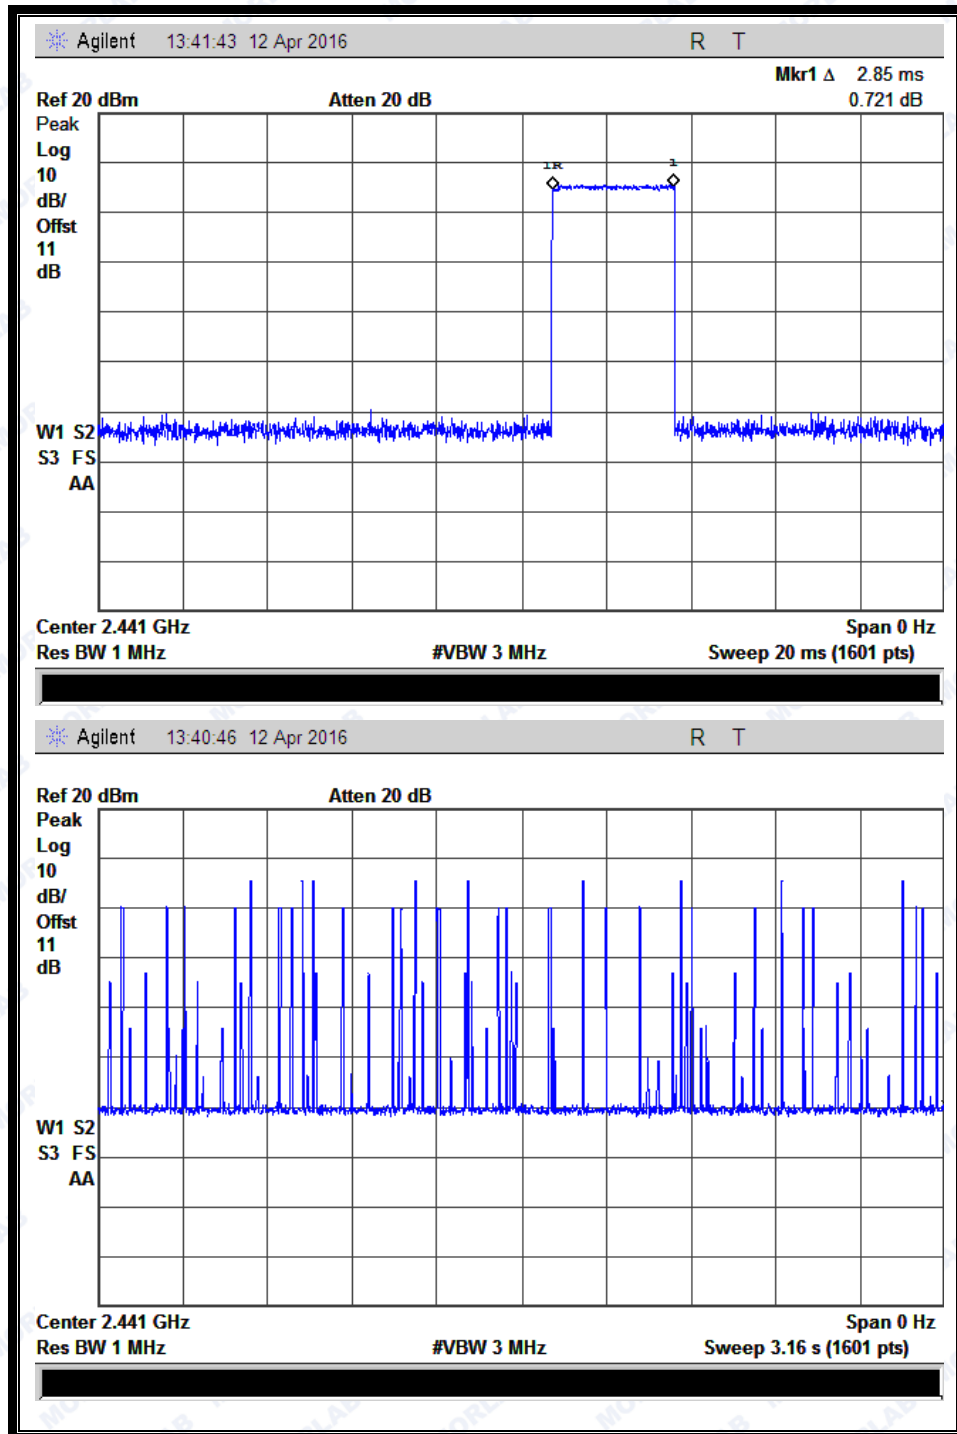

(Plot F: DH5 @ $\pi/4$ -DQPSK)



A. Test Verdict:

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.39	30	0.01170	0.1170	0.4	PASS
DH3	1.58	15	0.02370	0.2370		PASS
DH5	2.83	11	0.03113	0.3113		PASS

Agilent 13:48:44 12 Apr 2016 R T

Ref 20 dBm Atten 20 dB Mkr1 Δ 387.5 μs 0.194 dB


Peak Log 10 dB/ Offst 11 dB

W1 S2 S3 FS AA


Center 2.441 GHz Res BW 1 MHz #VBW 3 MHz Span 0 Hz Sweep 20 ms (1601 pts)



REPORT No.: SZ16030142W02

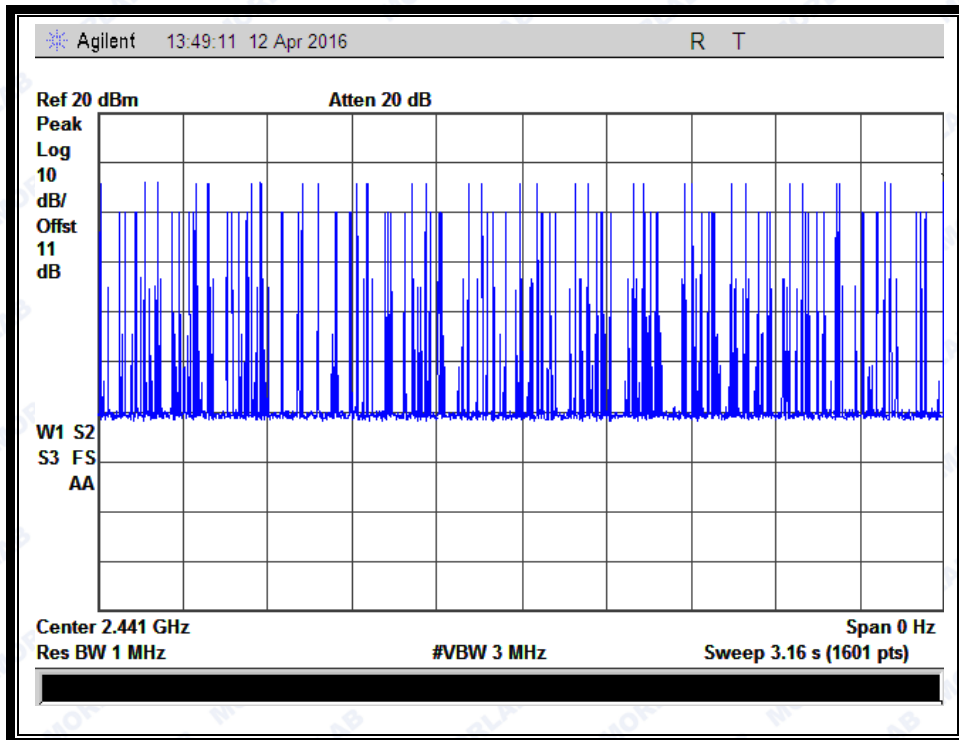


(Plot G: DH1 @ 8-DPSK)

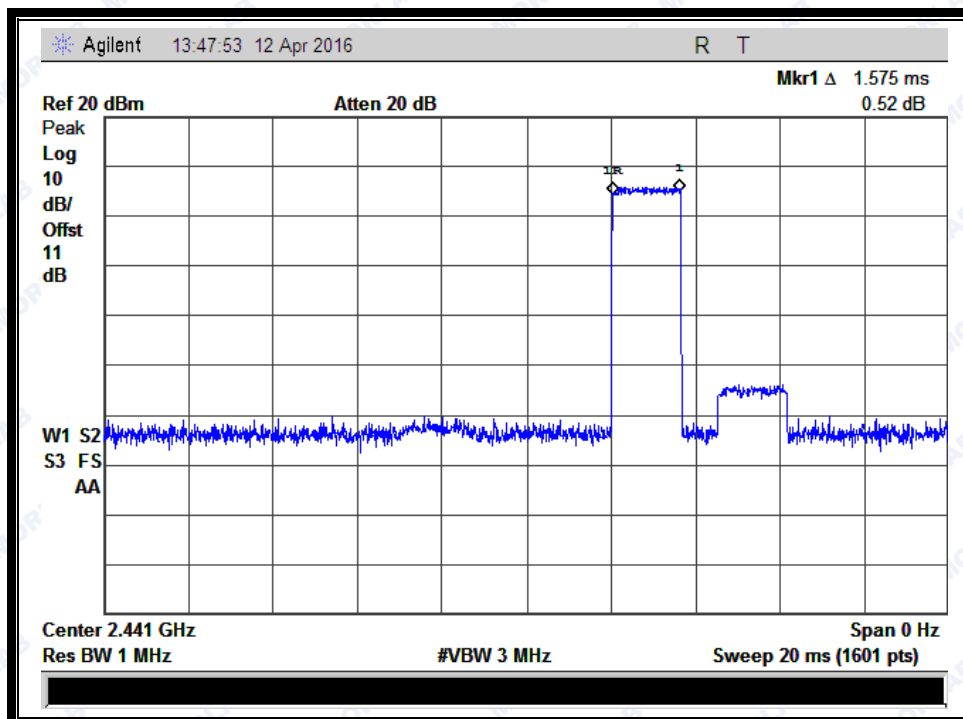





REPORT No.: SZ16030142W02

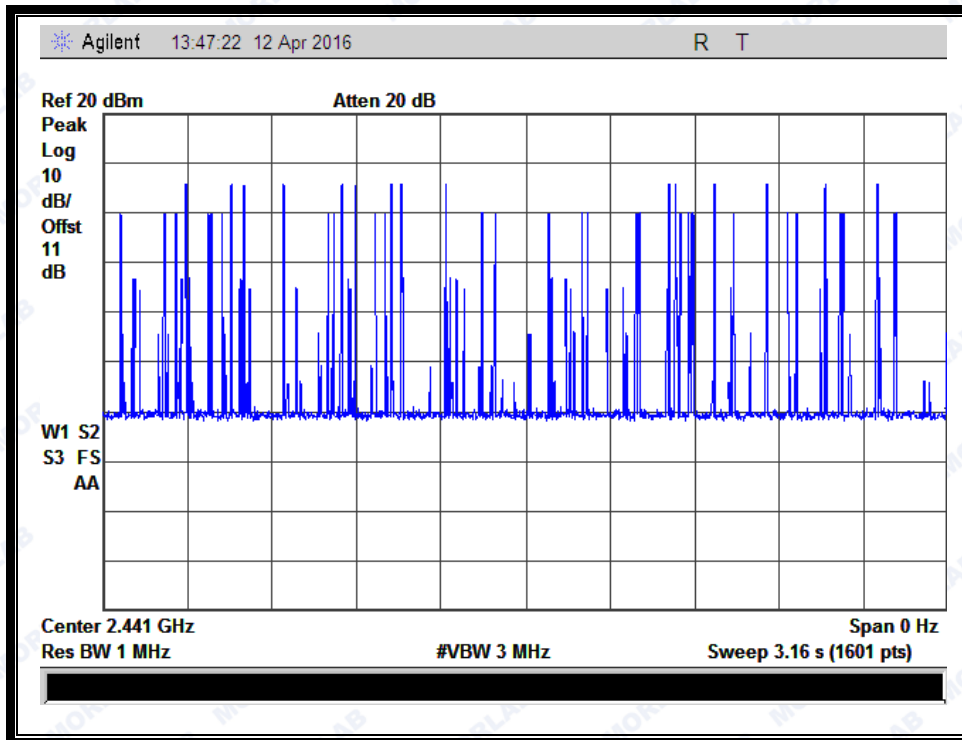

(Plot H: DH3 @ 8-DPSK)

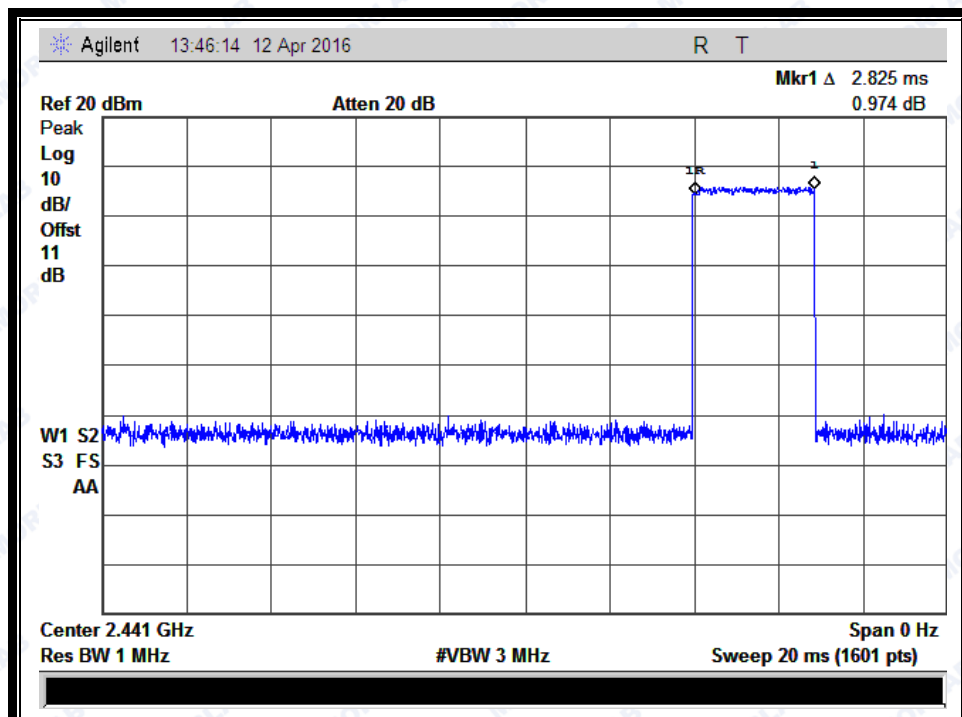




2.7 Conducted Spurious Emissions

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

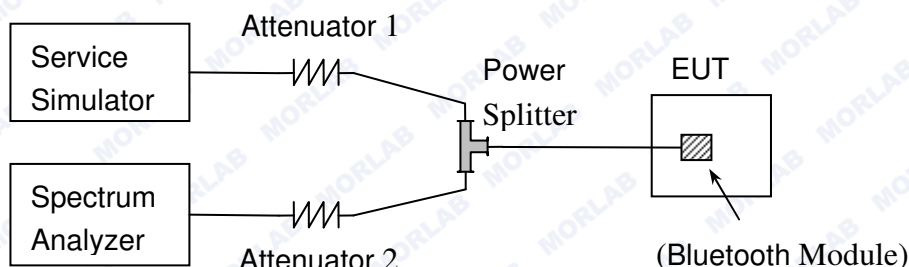

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-42.29	Plot A.1	6.42	-13.58	PASS
39	2441	-43.92	Plot B.1	4.79	-15.21	PASS
78	2480	-42.88	Plot C.1	4.19	-15.81	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

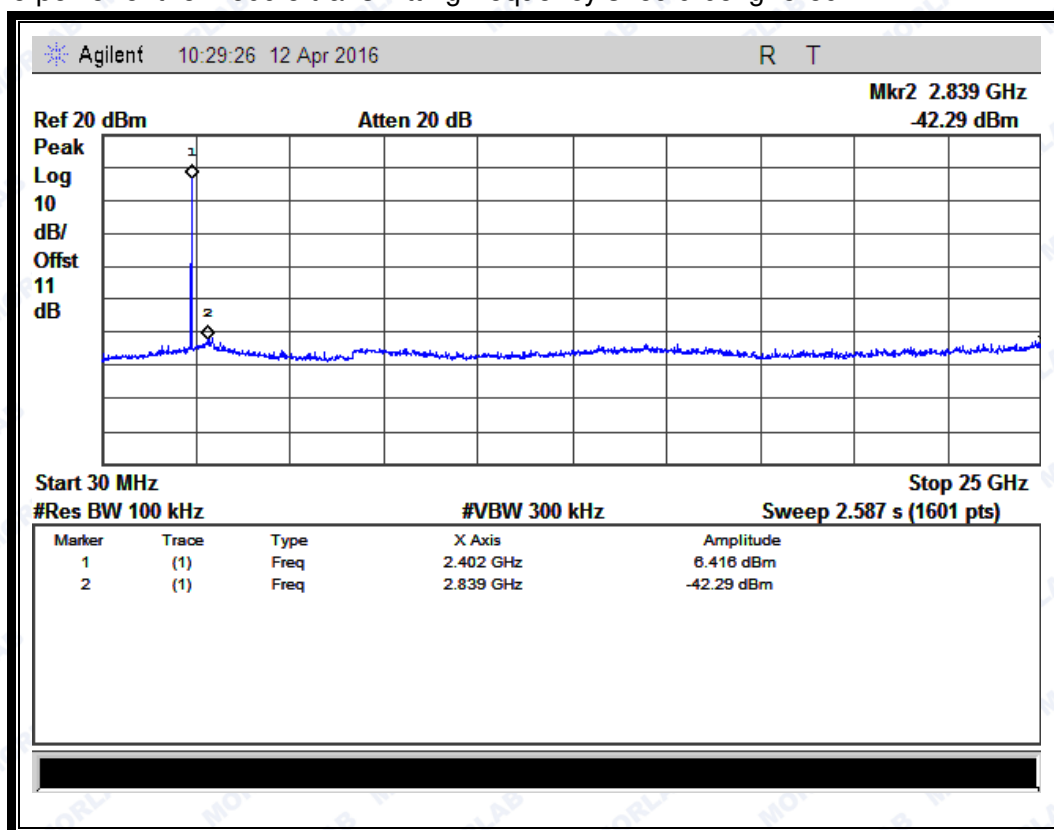


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16030142W02

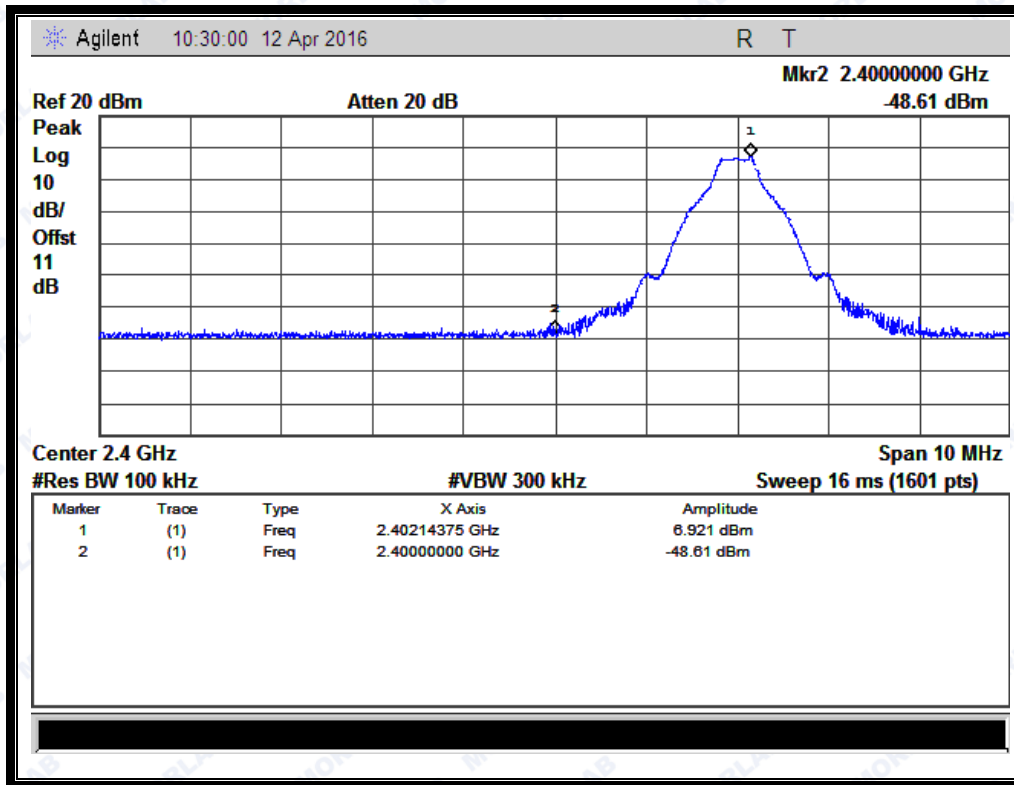


(Channel = 0, Band edge @ GFSK Mode)

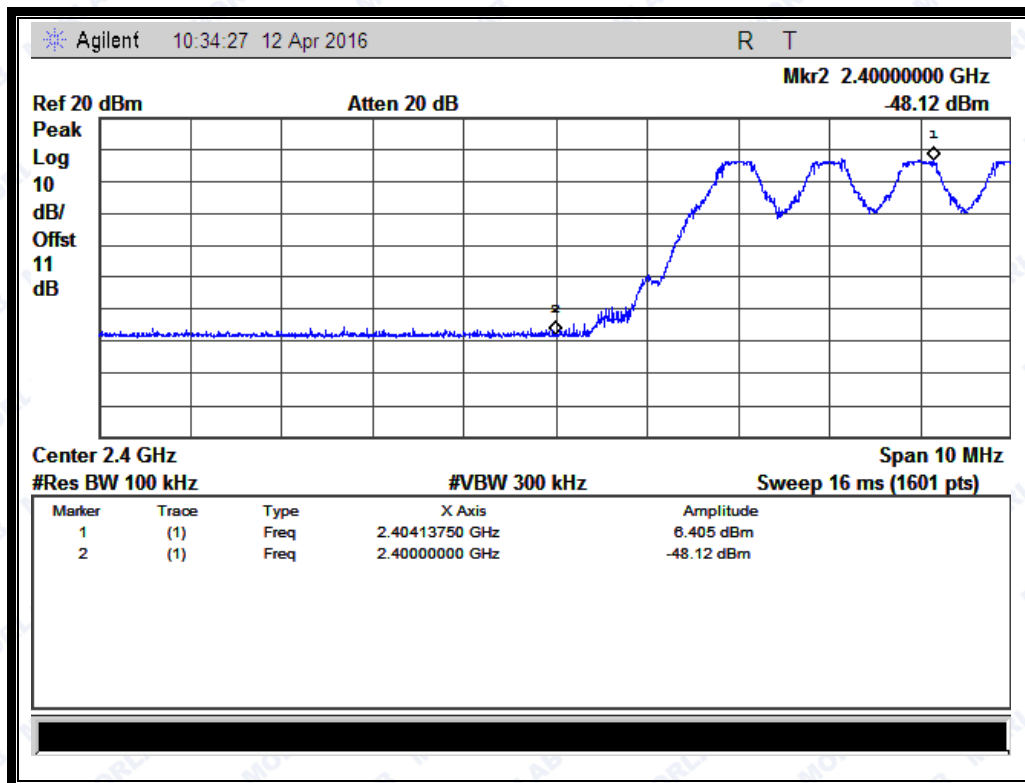


(Channel = 0, Band edge with hopping on @ GFSK Mode)



REPORT No.: SZ16030142W02

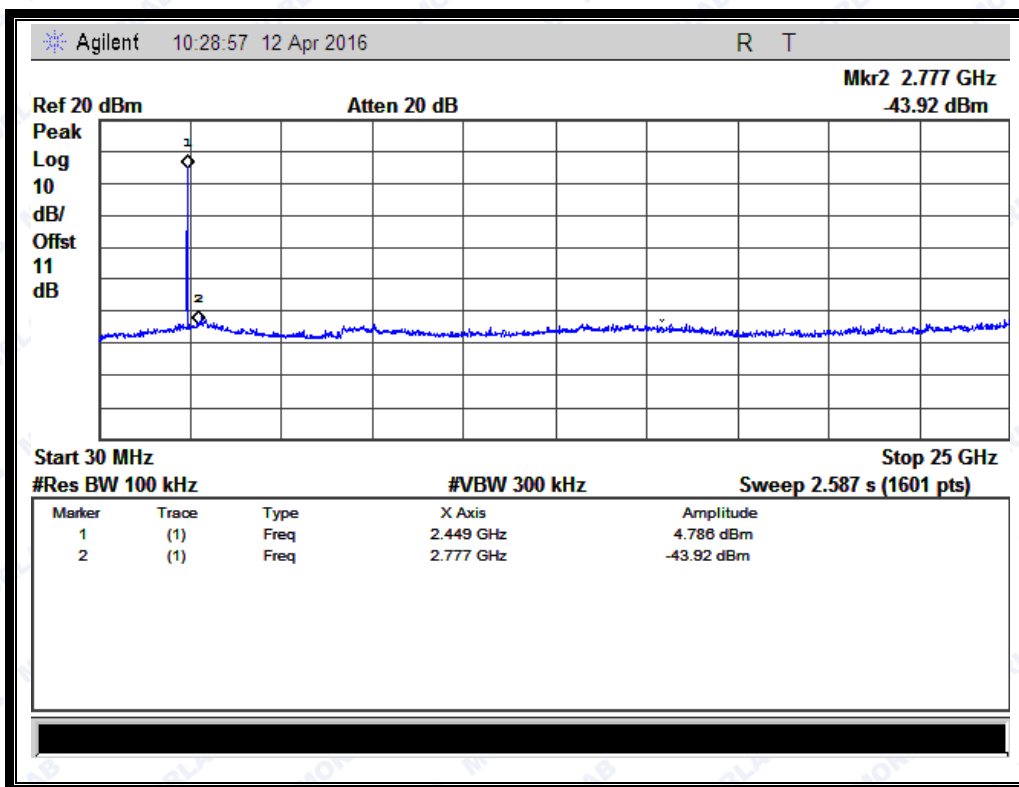


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

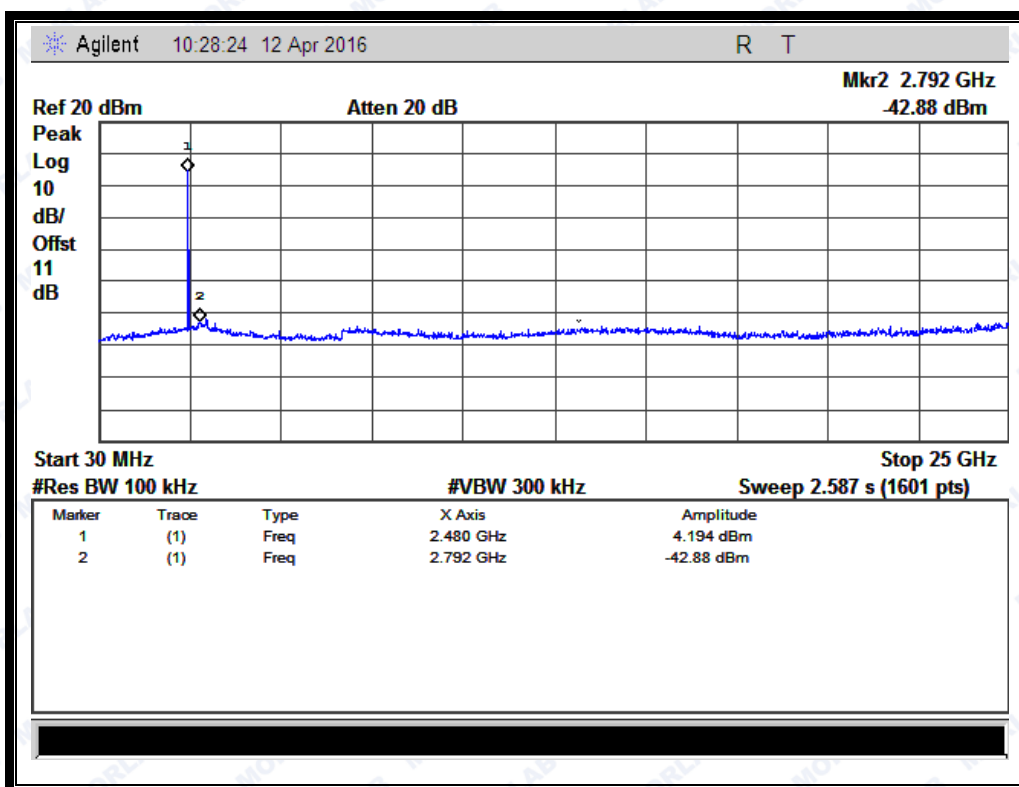


(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)



REPORT No.: SZ16030142W02

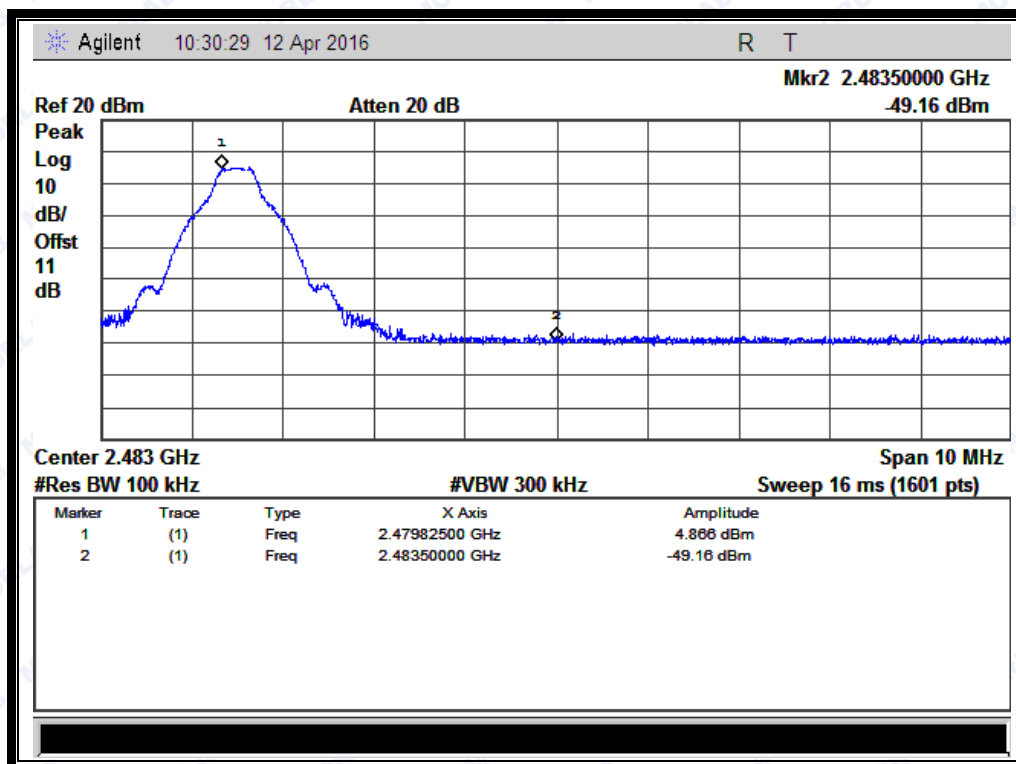

(Channel = 78, Band edge @ GFSK Mode)

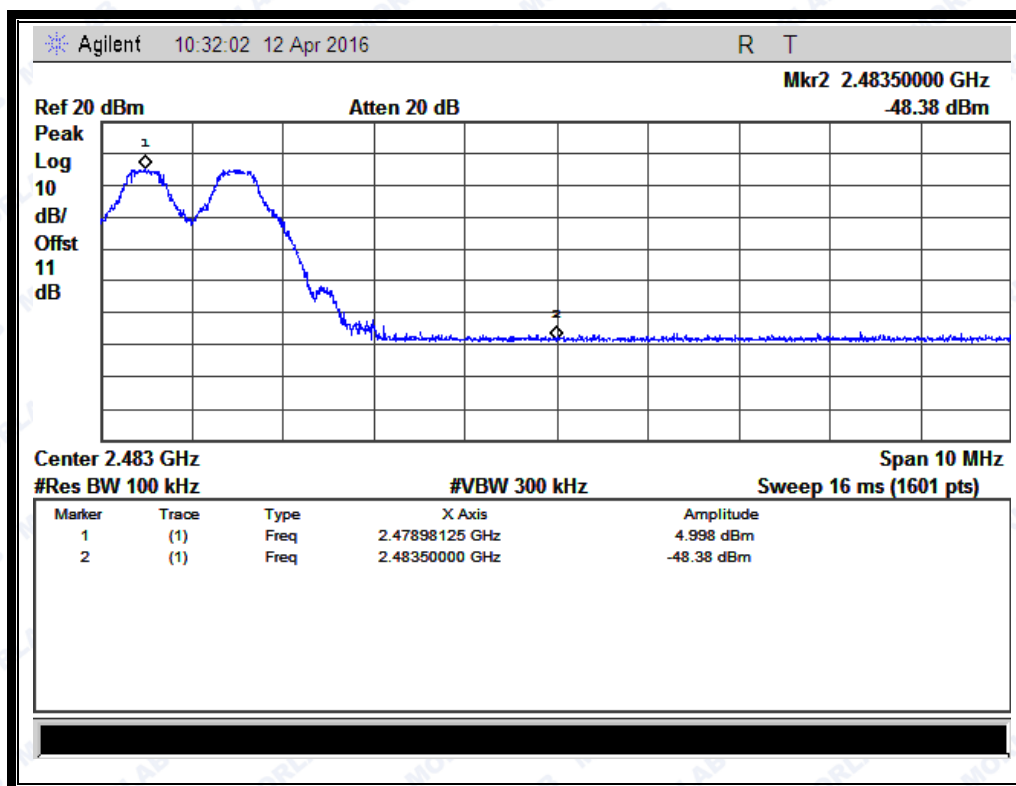

(Channel = 78, Band edge with hopping on @ GFSK Mode)


2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-42.53	Plot D.1	2.87	-17.13	PASS
39	2441	-42.30	Plot E.1	2.45	-17.55	PASS
78	2480	-43.78	Plot F.1	1.05	-18.95	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

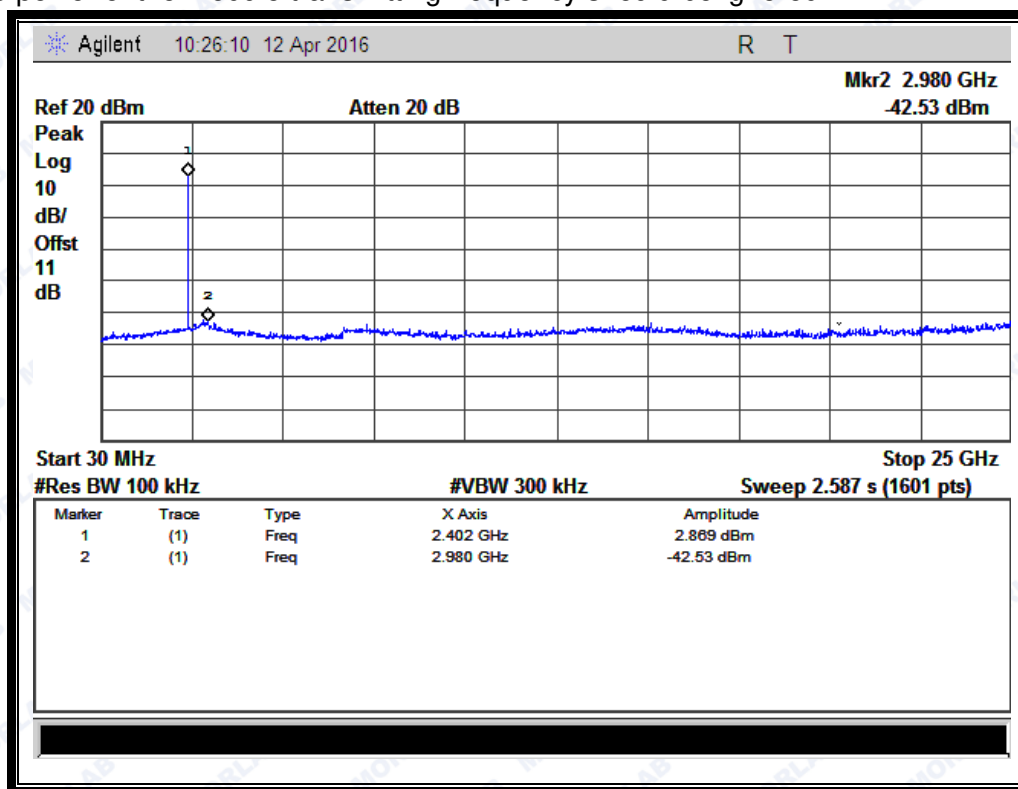


(Plot D.1: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)





REPORT No.: SZ16030142W02

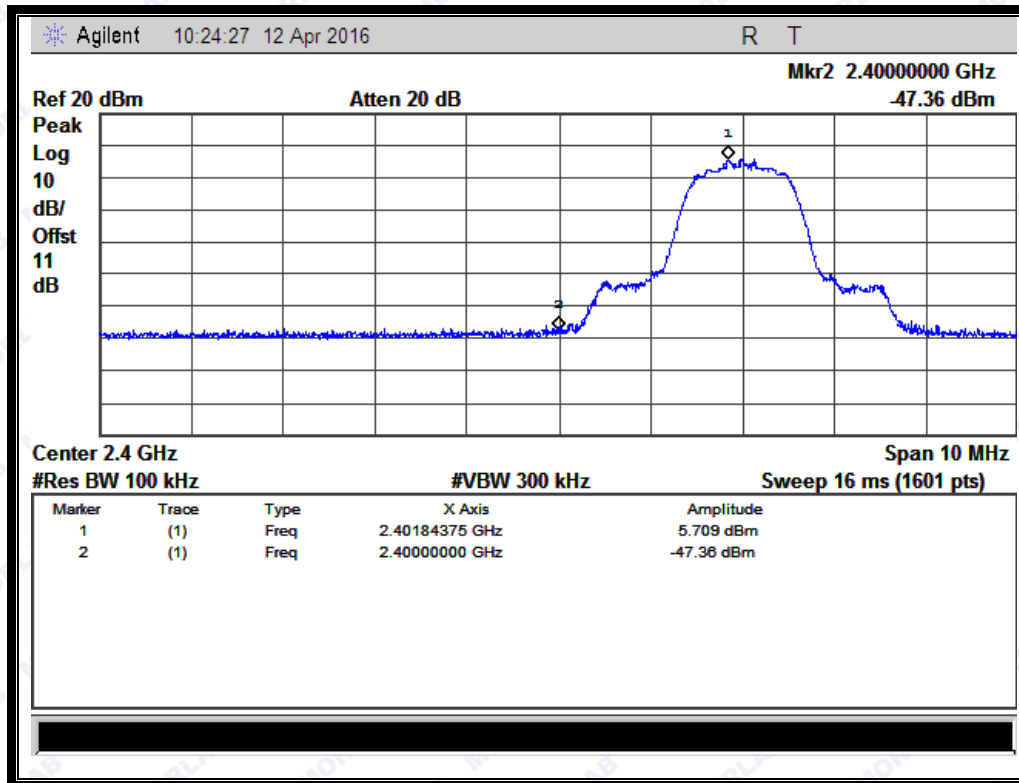

(Channel = 0, Band edge @ $\pi/4$ -DQPSK)

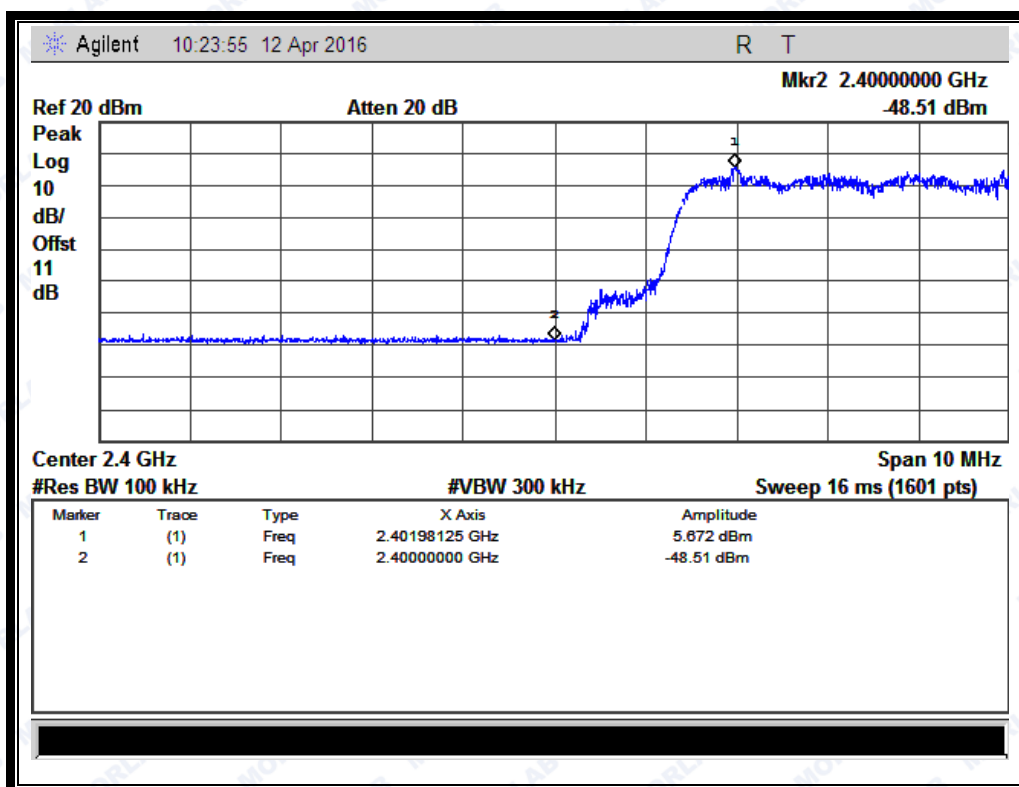


(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)

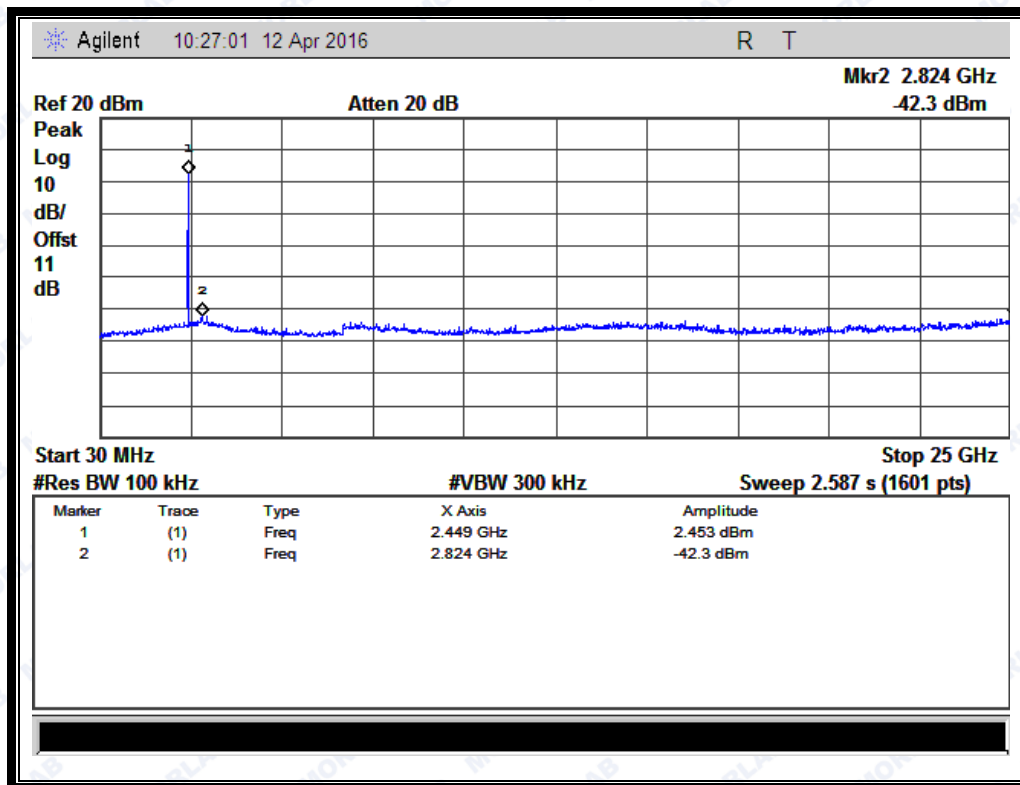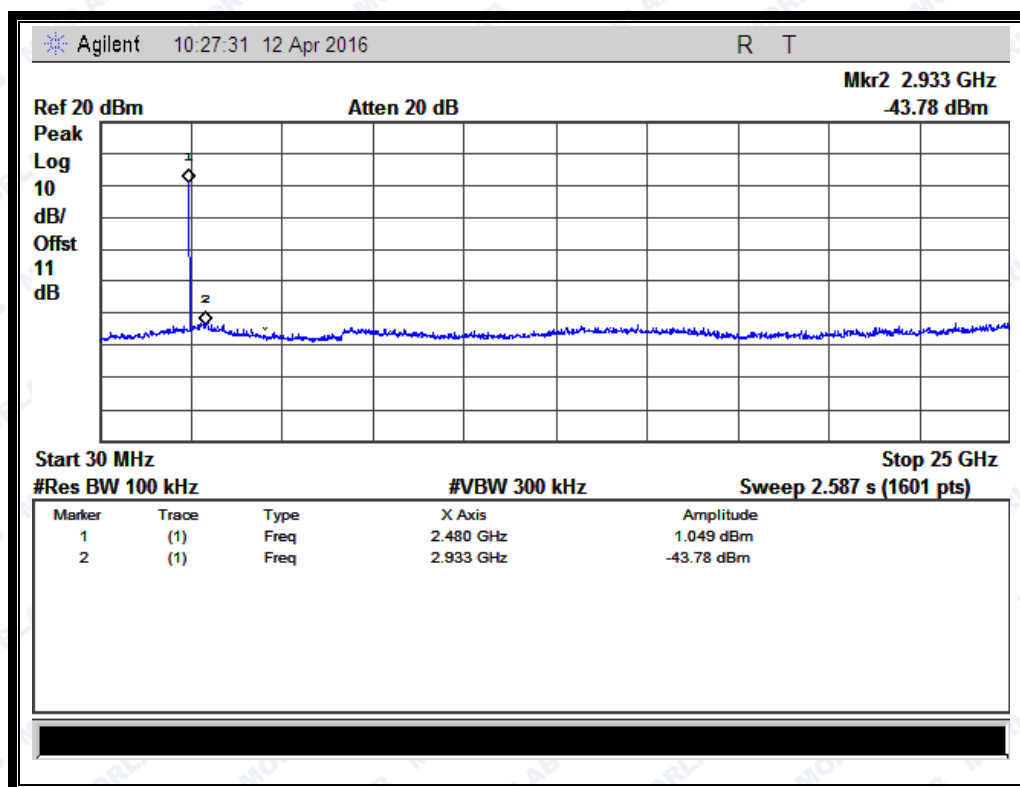
(Plot E.1: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)(Plot F.1: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)



REPORT No.: SZ16030142W02

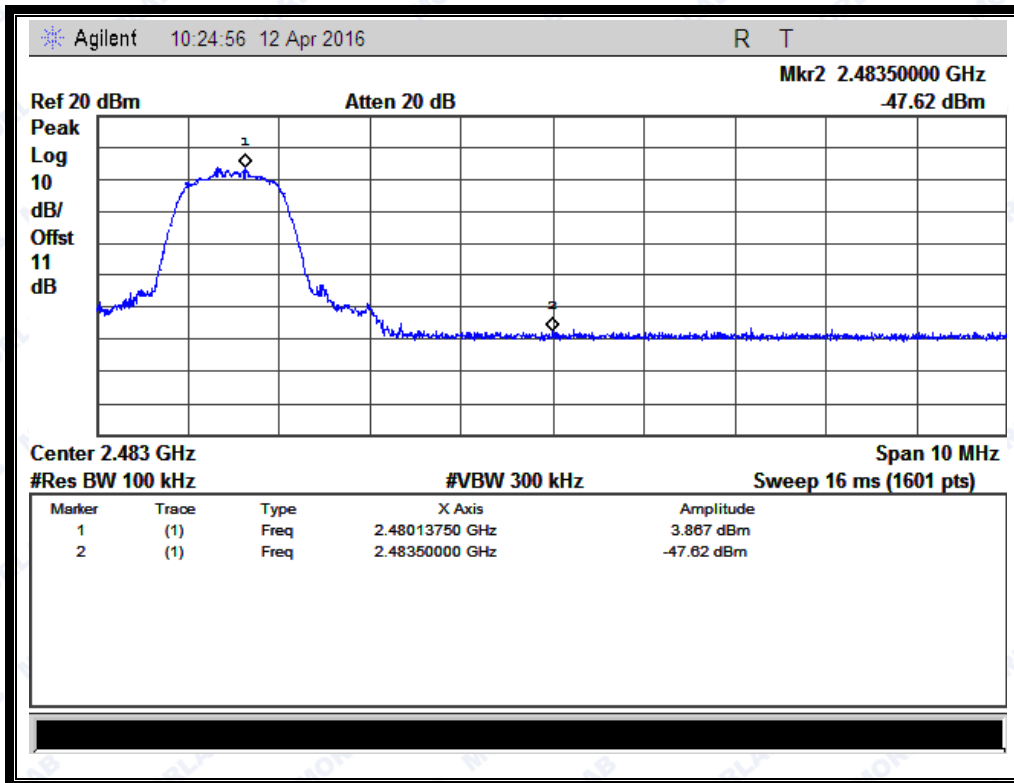

(Channel = 78, Band edge @ $\pi/4$ -DQPSK)

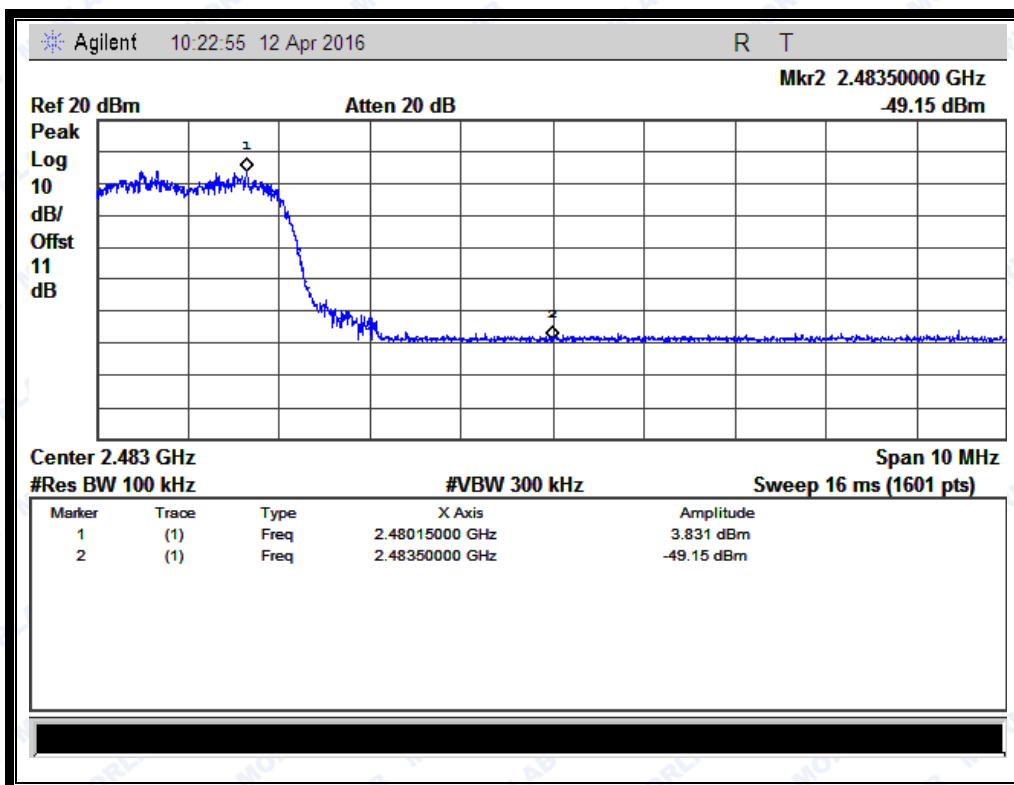


(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)

**2.7.4.3 8-DPSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-40.62	Plot G.1	5.03	-14.97	PASS
39	2441	-42.44	Plot H.1	3.20	-16.80	PASS
78	2480	-41.26	Plot I.1	3.64	-16.36	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

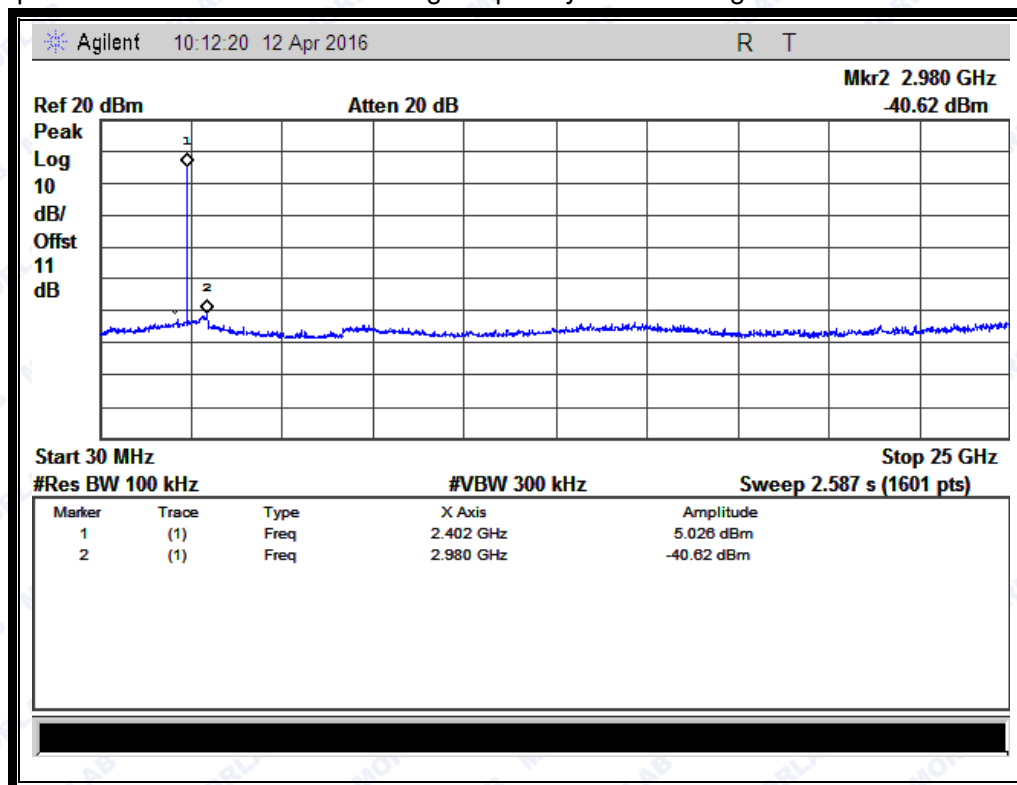


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)



REPORT No.: SZ16030142W02

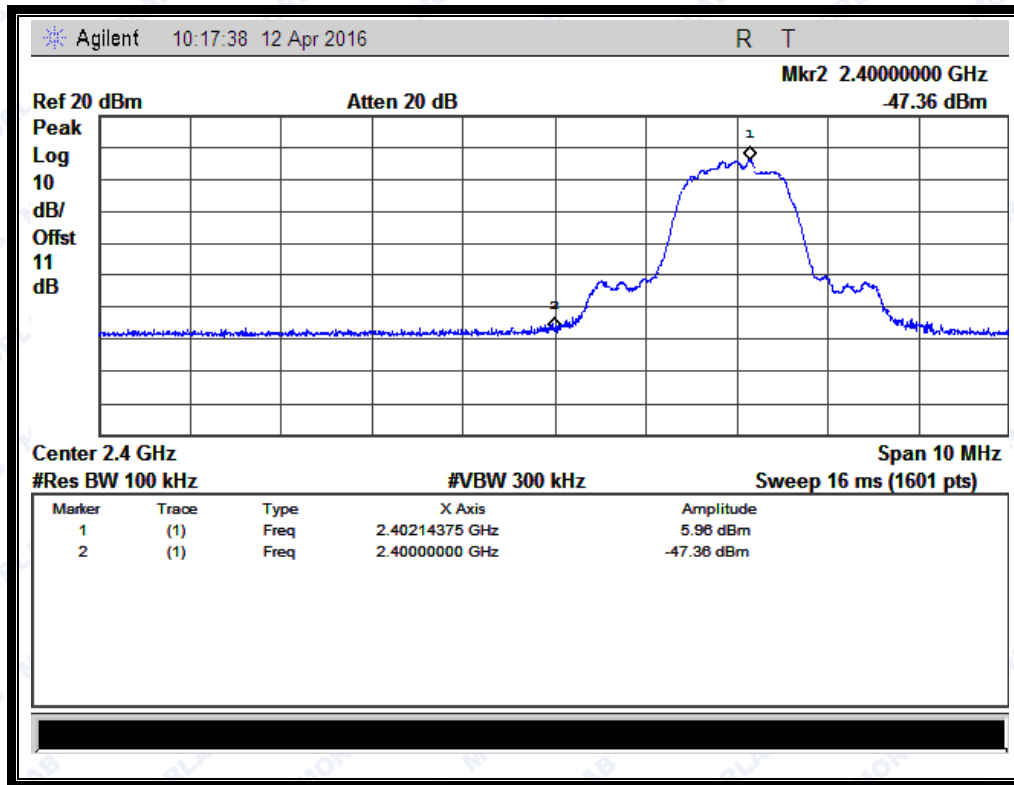


(Channel = 0, Band edge @ 8-DPSK)

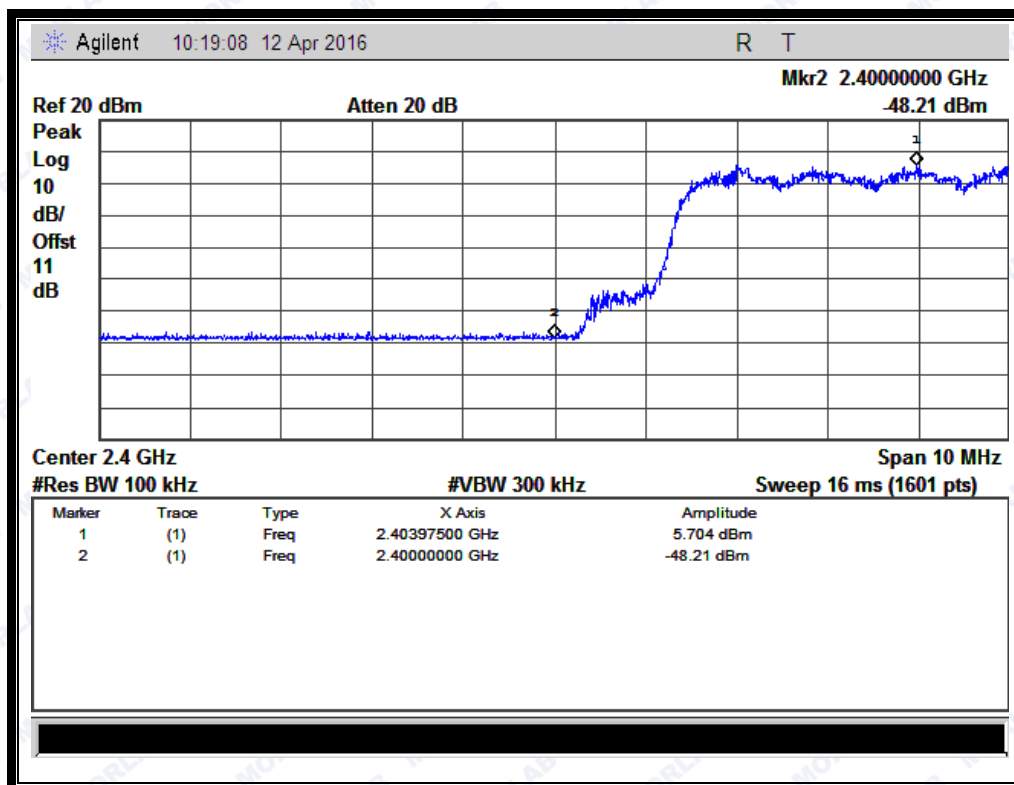


(Channel = 0, Band edge with hopping on @ 8-DPSK)



REPORT No.: SZ16030142W02

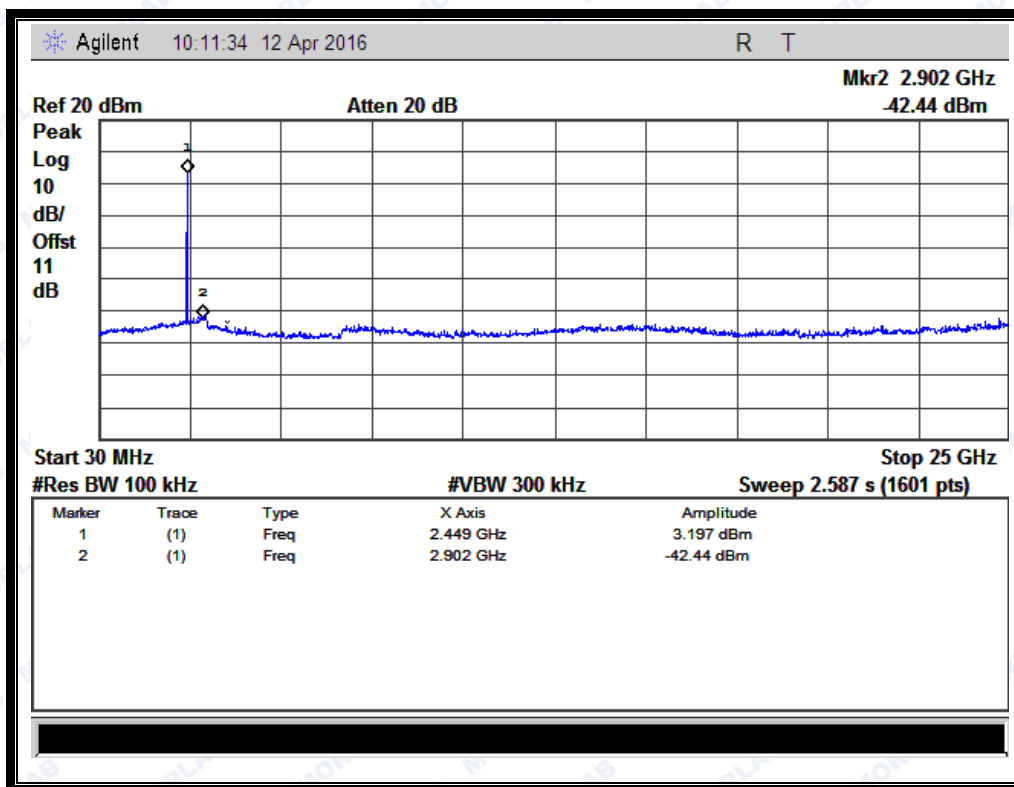


(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

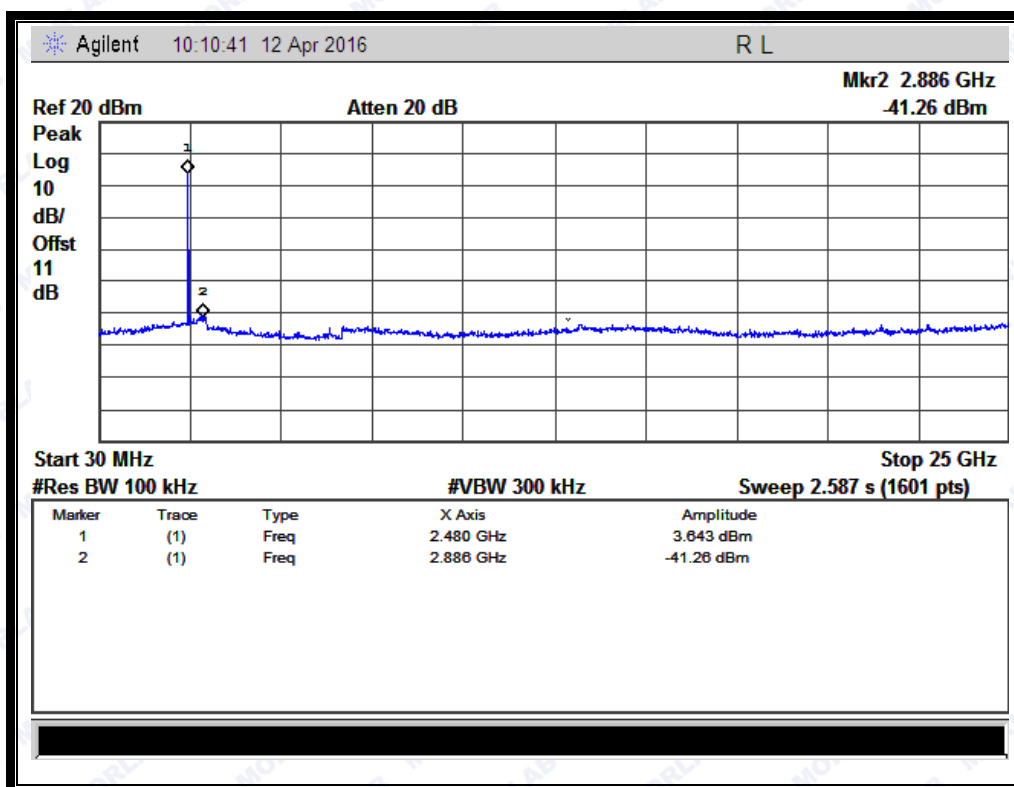


(Plot I.1: Channel = 78, 30MHz to 25GHz @ 8-DPSK)



REPORT No.: SZ16030142W02

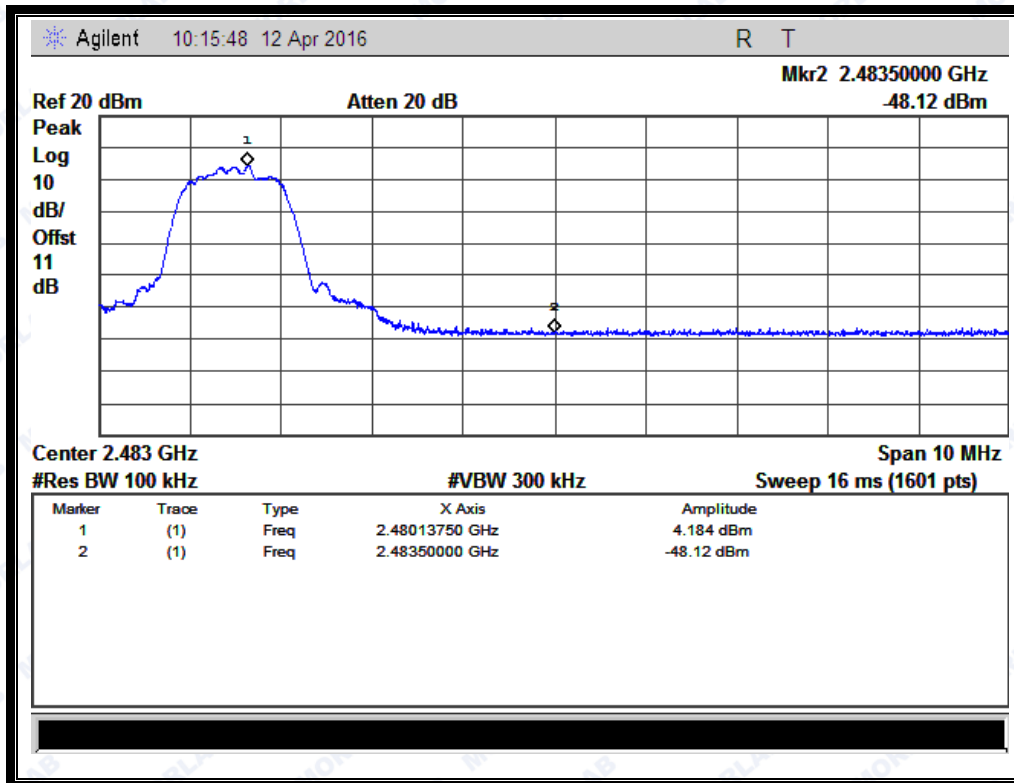

(Plot I.1:Channel = 78, Band edge @ 8-DPSK)

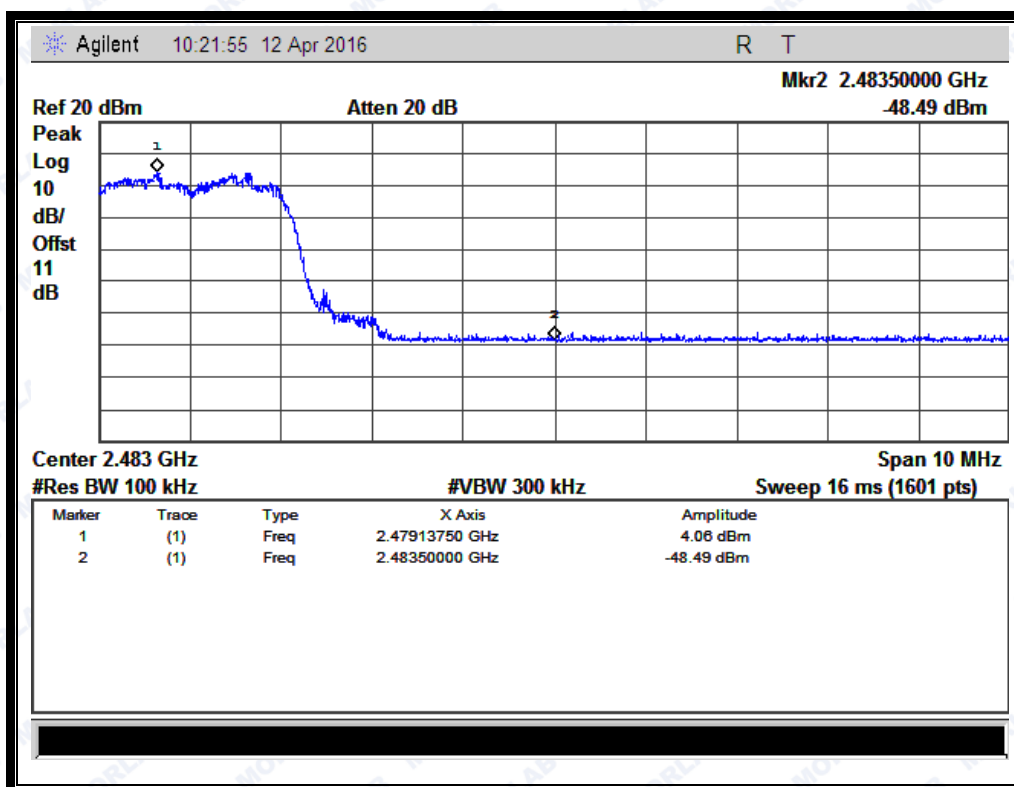

(Plot I.1:Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8 Restricted Frequency Bands

2.8.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2 Test Description

A. Test Setup:

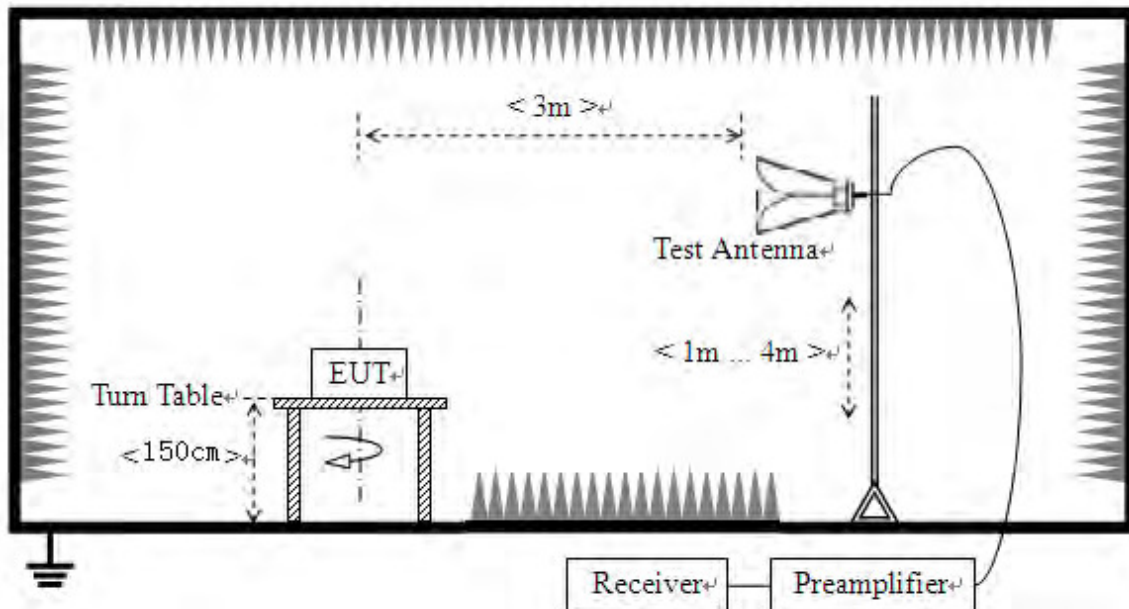

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3 Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

2.8.4.1 GFSK Mode**A. Test Verdict:**


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2370.07	PK	45.30	-33.63	32.56	44.23	74	Pass
0	2377.66	AV	32.72	-33.63	32.56	31.65	54	Pass
78	2488.00	PK	45.38	-33.18	32.50	44.70	74	Pass
78	2486.99	AV	32.77	-33.18	32.50	32.09	54	Pass



B. Test Plots:

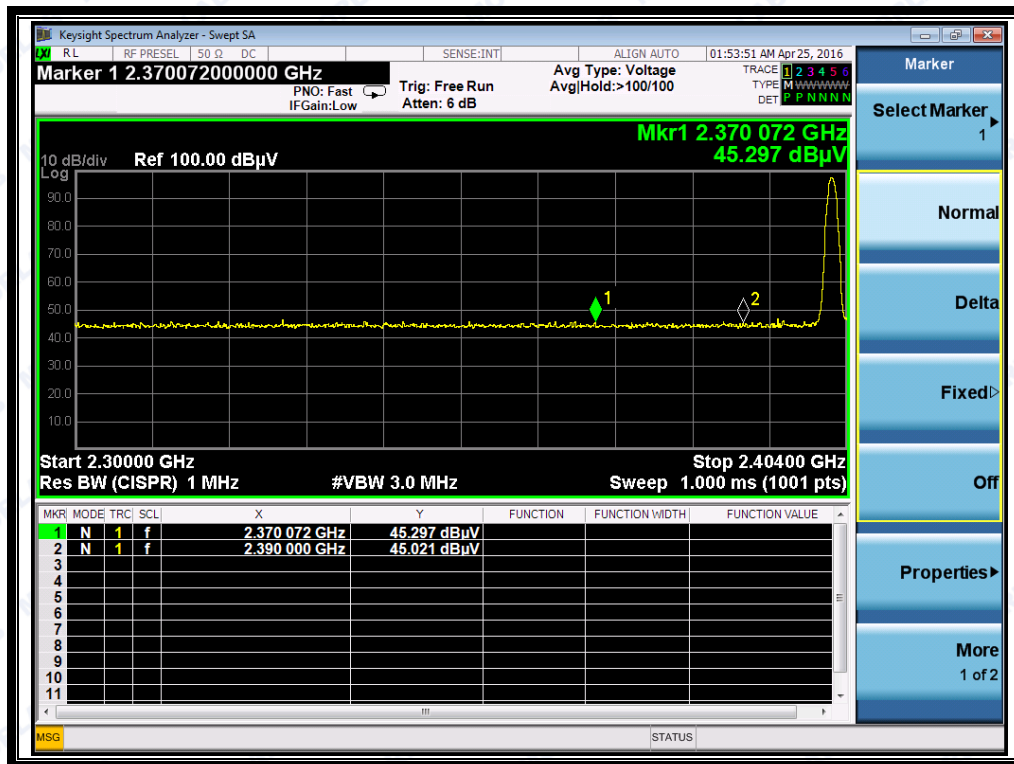


(Plot A1:Channel = 0 PEAK @ GFSK)

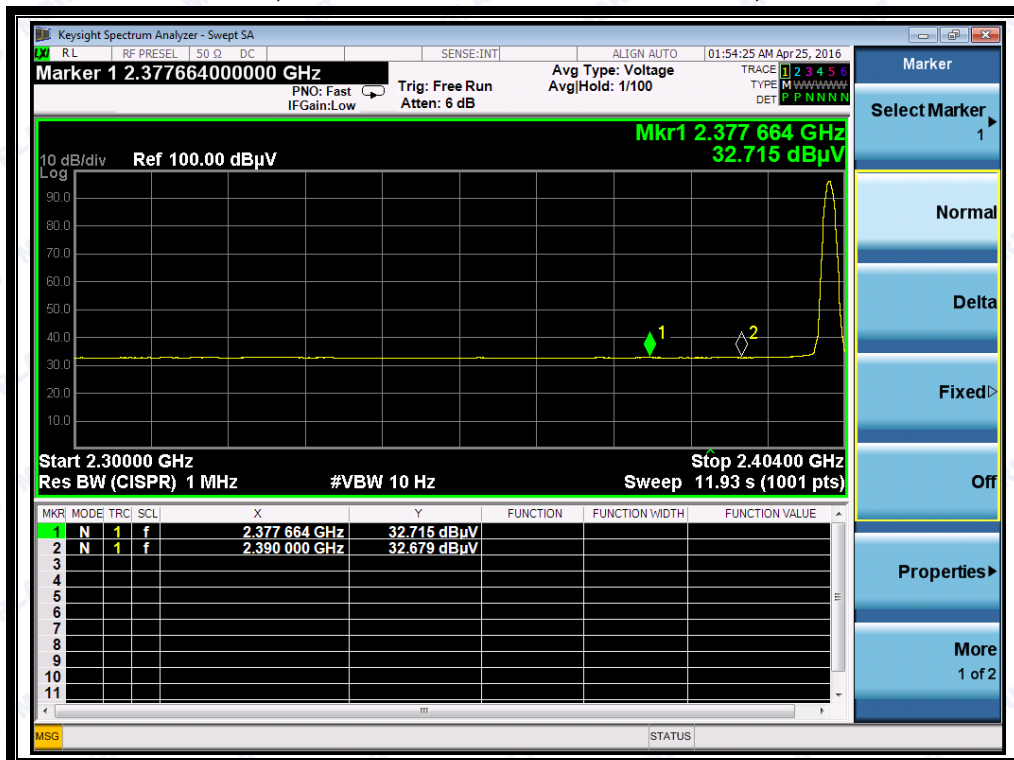


(Plot A2:Channel = 0 AVERAGE @ GFSK)



REPORT No.: SZ16030142W02

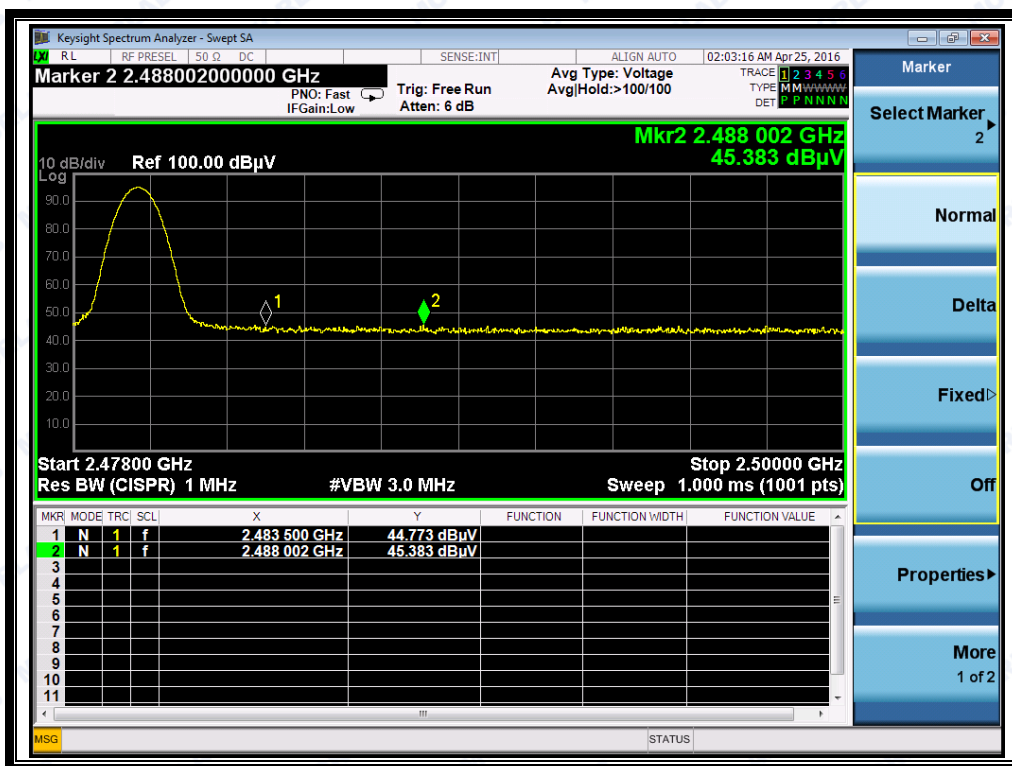

(Plot B1: Channel = 78 PEAK @ GFSK)

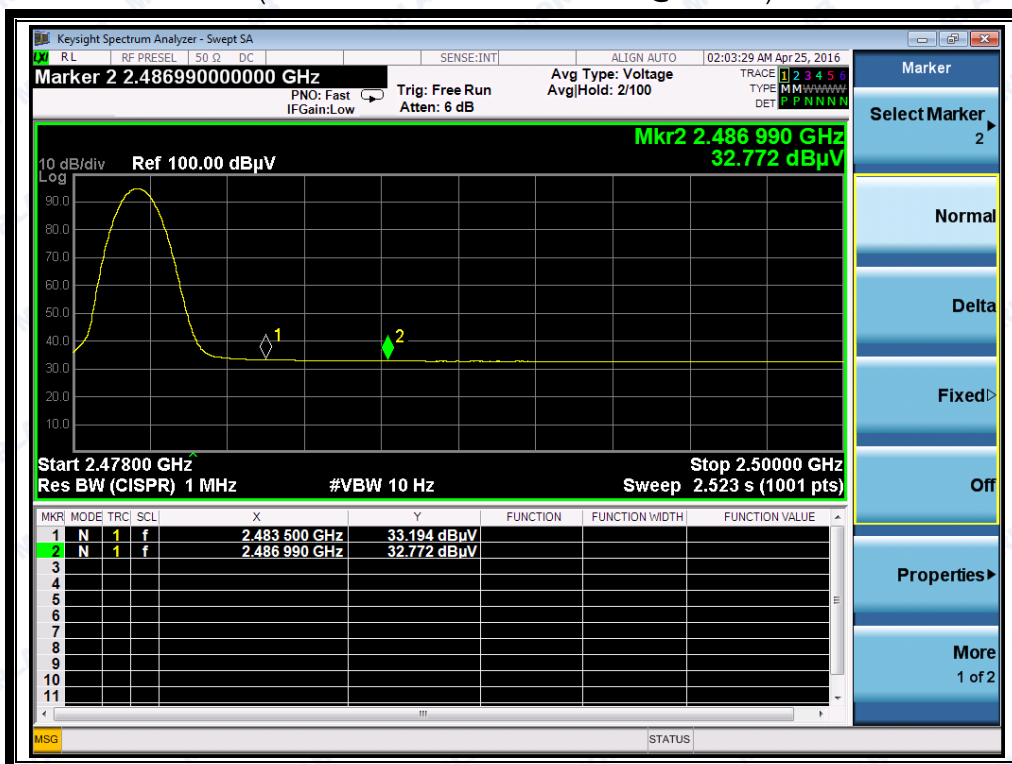

(Plot B2: Channel = 78 AVERAGE @ GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2381.82	PK	44.93	-33.63	32.56	43.86	74	Pass
0	2383.59	AV	32.72	-33.63	32.56	31.56	54	Pass
78	2486.57	PK	44.86	-33.18	32.5	44.18	74	Pass
78	2485.91	AV	33.01	-33.18	32.5	32.33	54	Pass


B. Test Plots:

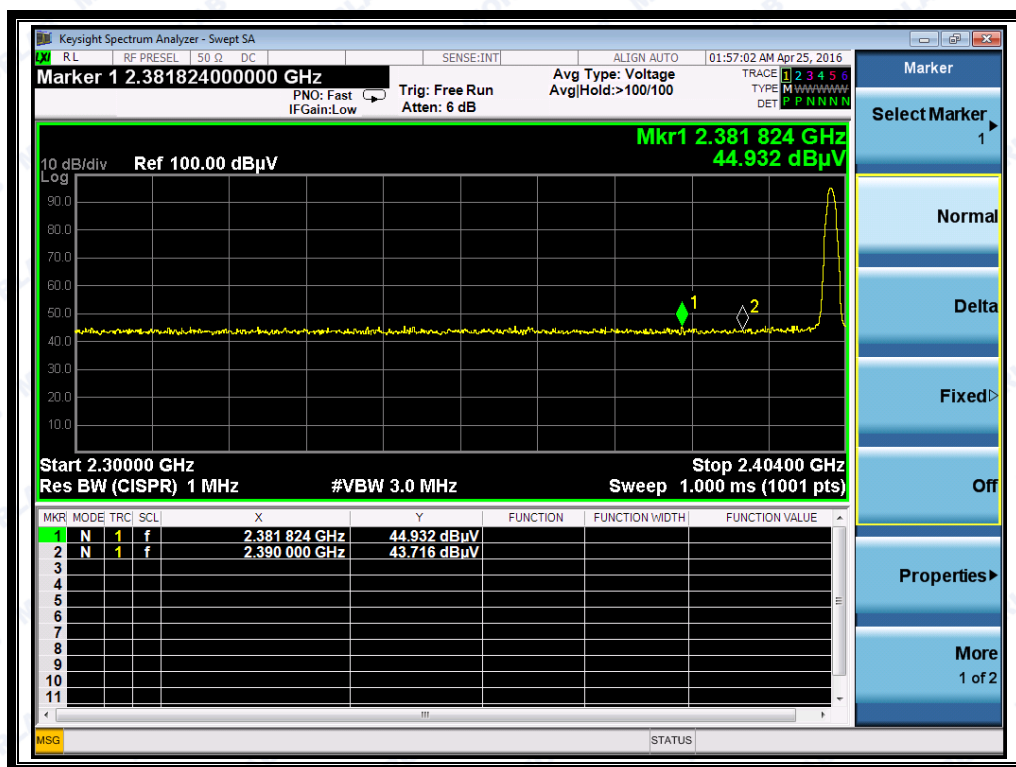


(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)




REPORT No.: SZ16030142W02

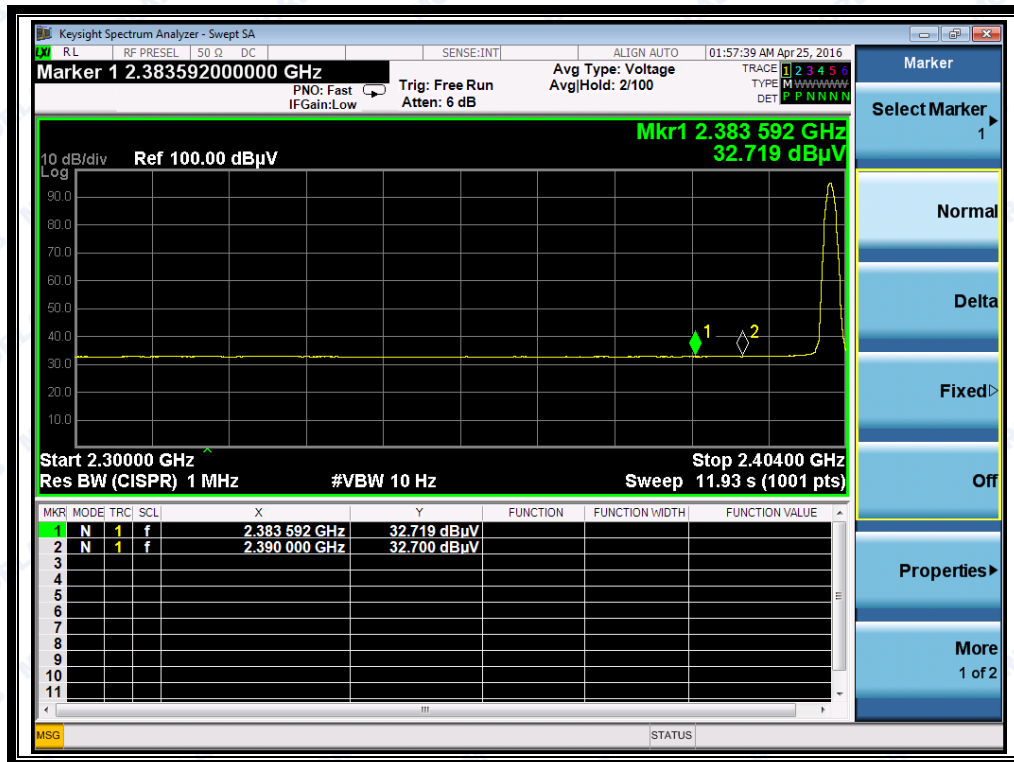

(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)

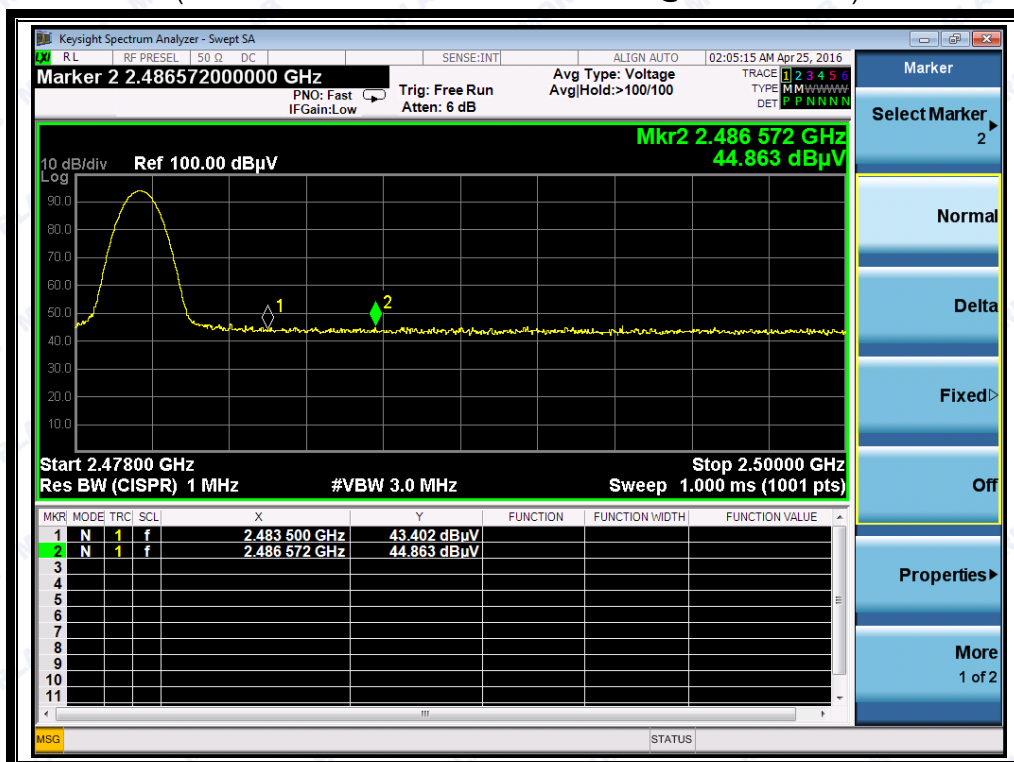

(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)

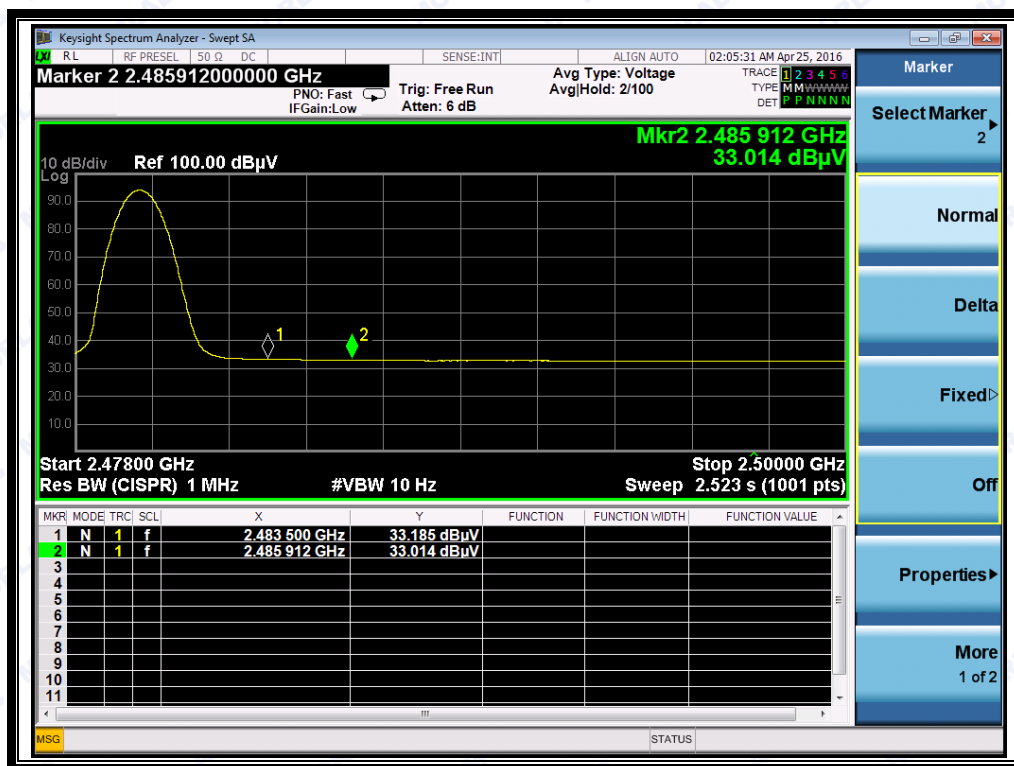
(Plot D2: Channel = 78 AVERAGE@ $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
0	2366.85	PK	45.11	-33.63	32.56	44.04	74	Pass
0	2379.02	AV	32.71	-33.63	32.56	31.64	54	Pass
78	2486.44	PK	45.46	-33.18	32.5	44.78	74	Pass
78	2484.28	AV	33.12	-33.18	32.5	32.44	54	Pass

B. Test Plots:

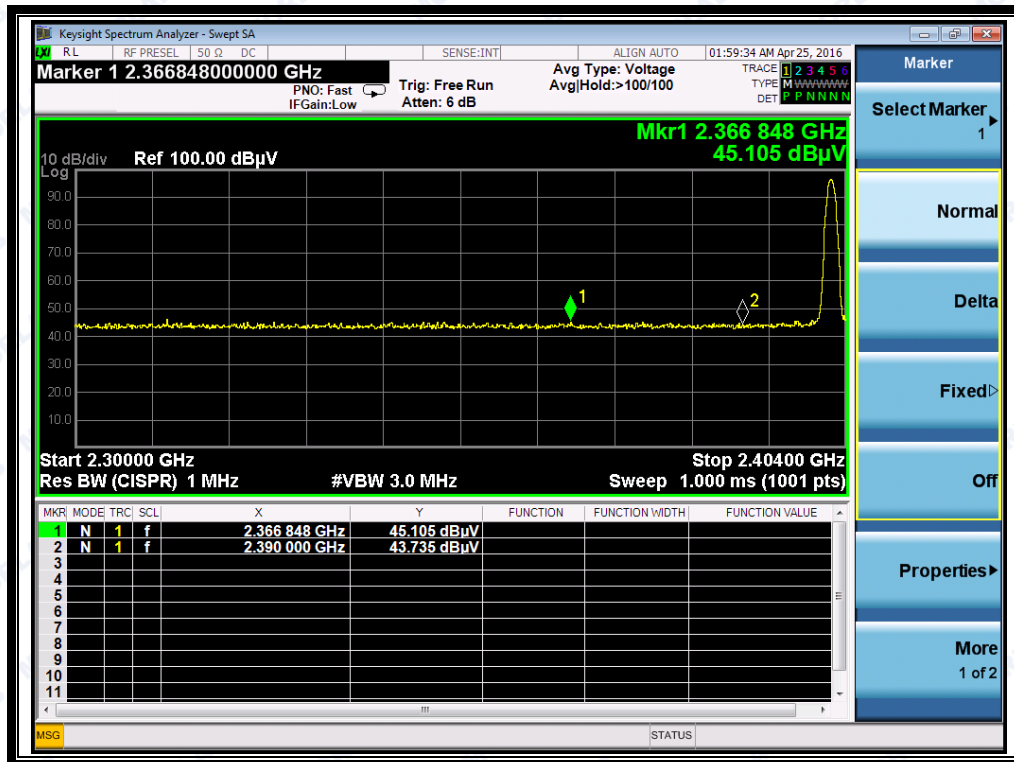


(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

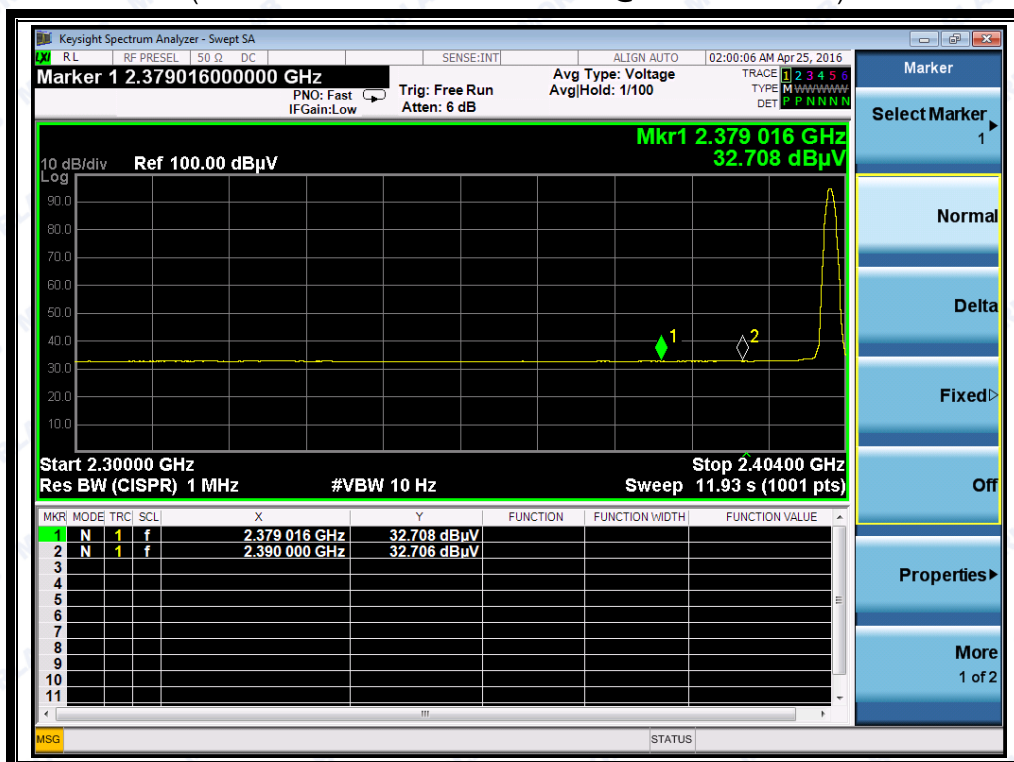


(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)



REPORT No.: SZ16030142W02

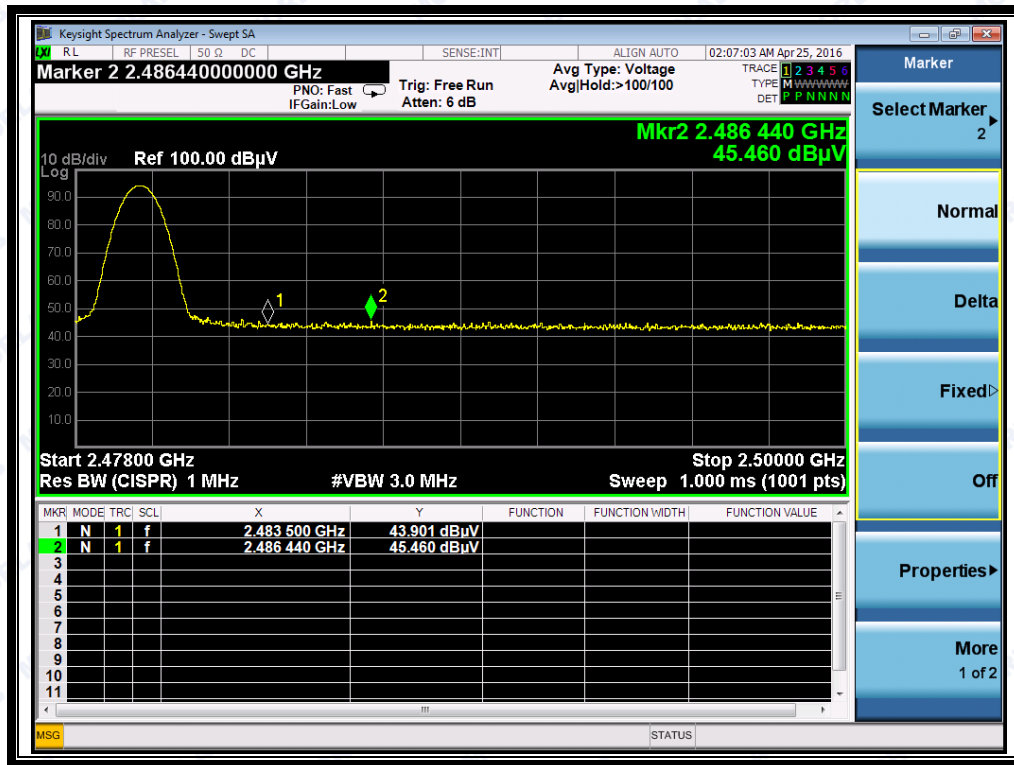

(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)

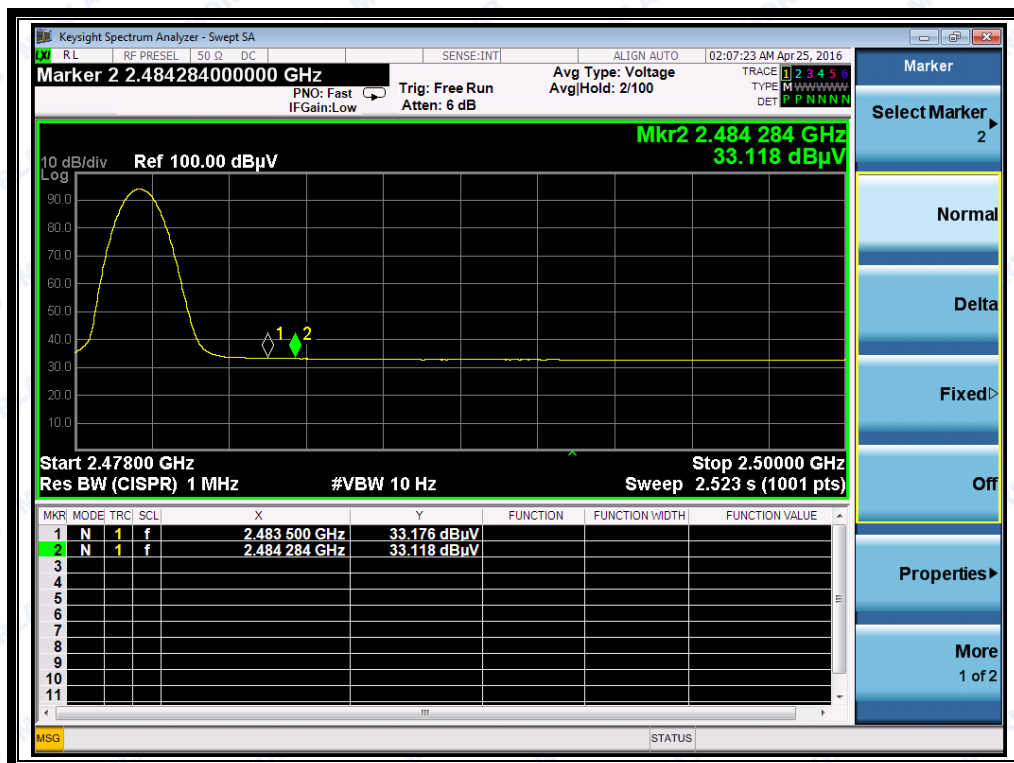

(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9 Conducted Emission

2.9.1 Requirement

According FCC 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2 Test Description

A. Test Setup:

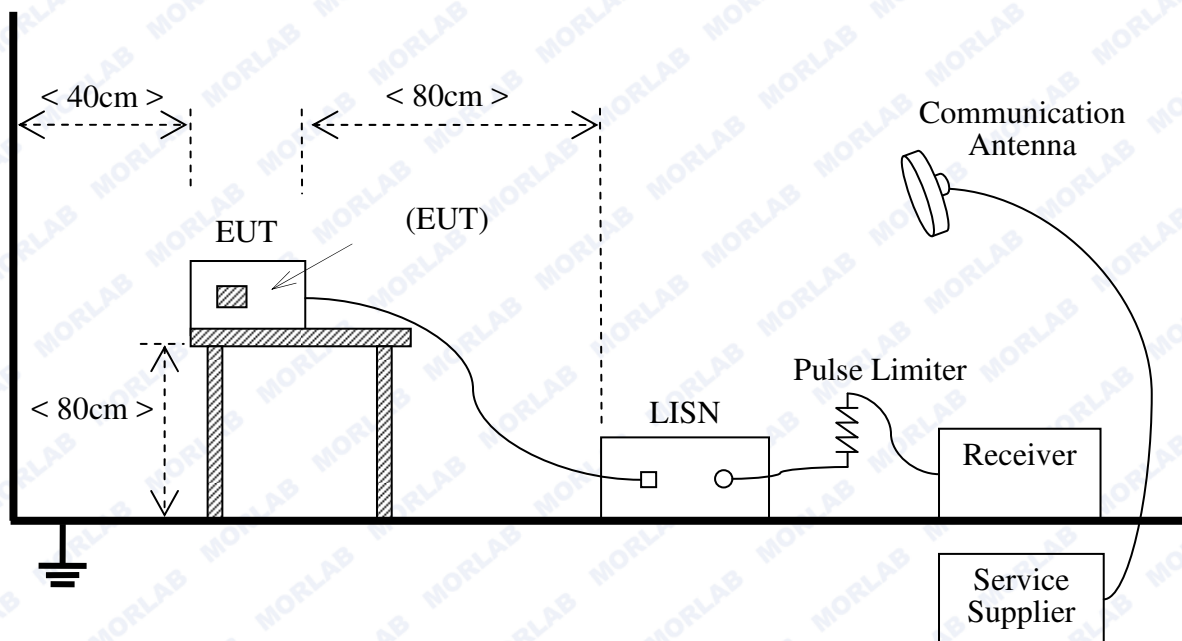

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.4:2014

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at



maximum power.

B. Equipments List:

Please reference ANNEX A(1.4).


2.9.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


B. Test Plots:

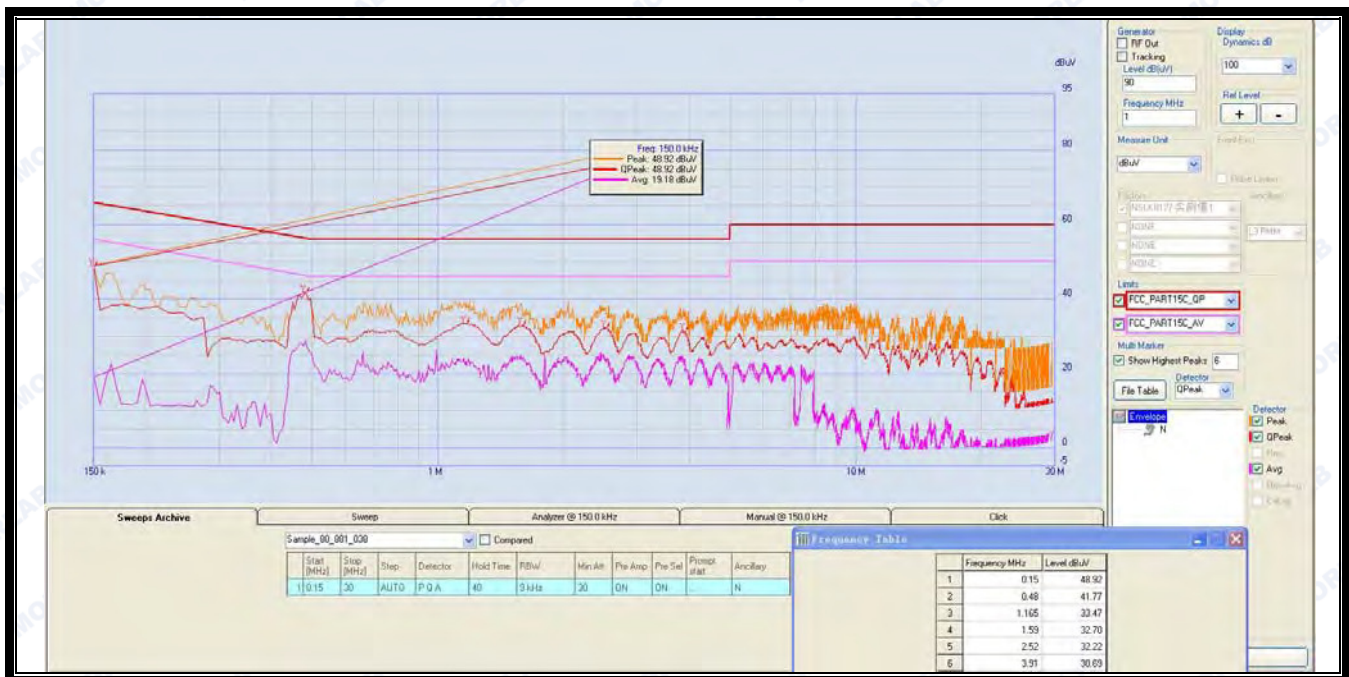

(Plot A: L Phase)



REPORT No.: SZ16030142W02

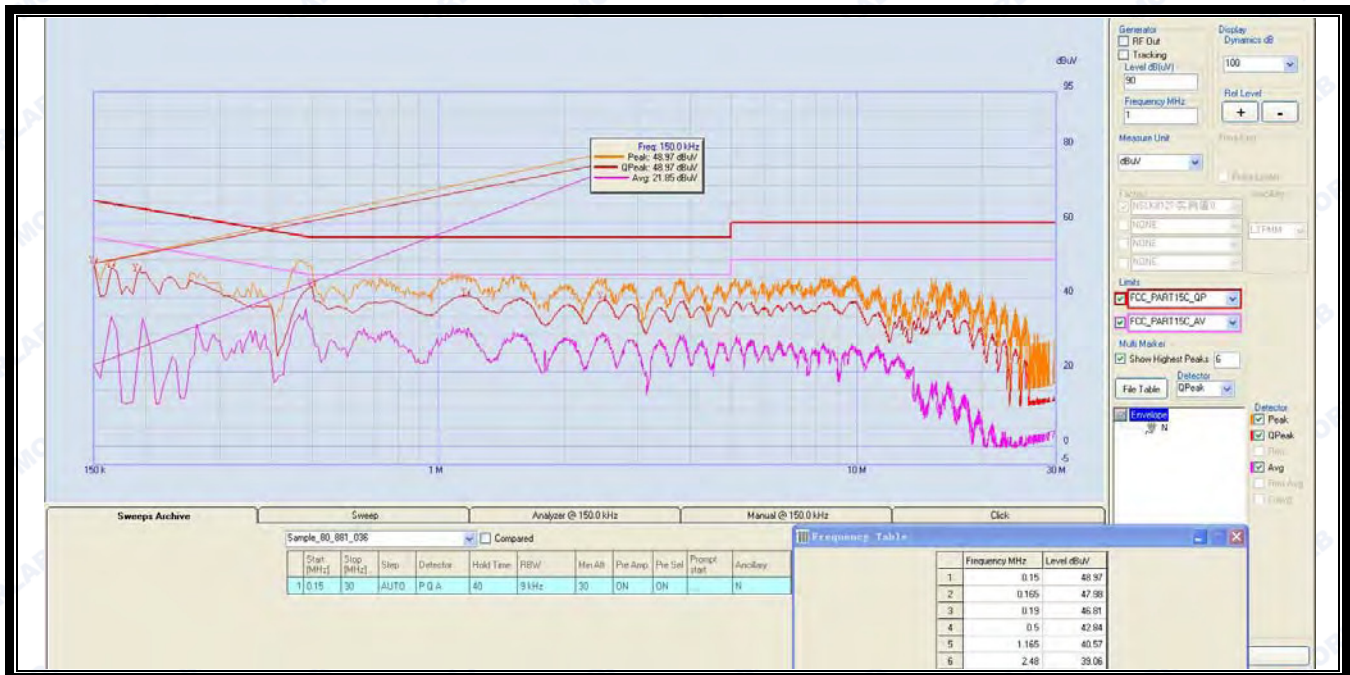

(Plot B: N Phase)



2.10 Radiated Emission

2.10.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

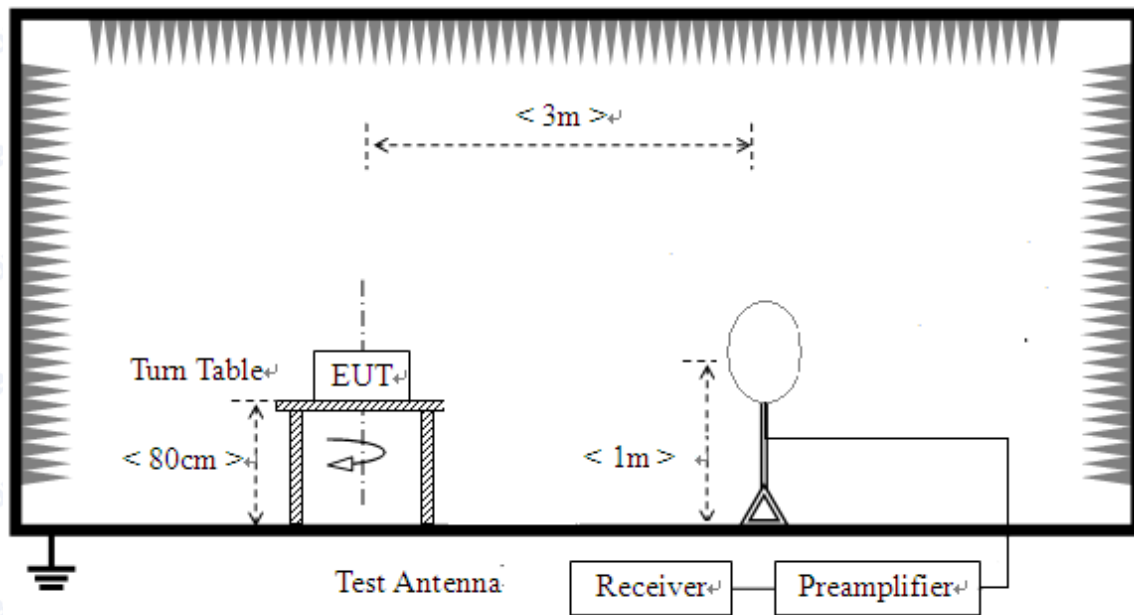

- 2) For radiated emissions from 30MHz to 1GHz

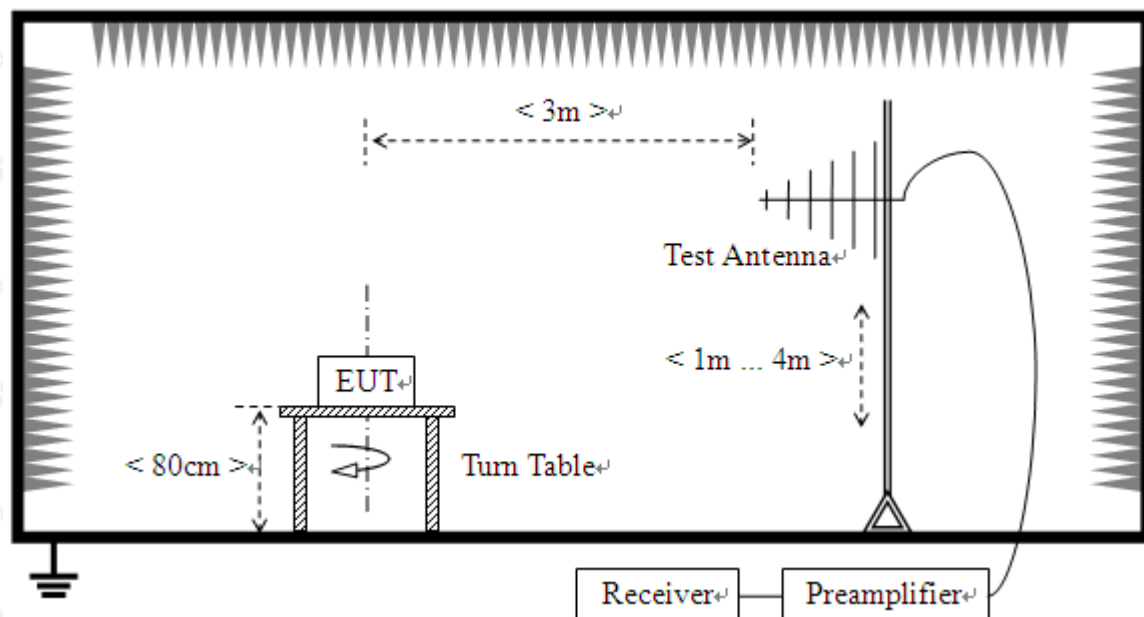

3) For radiated emissions above 1GHz

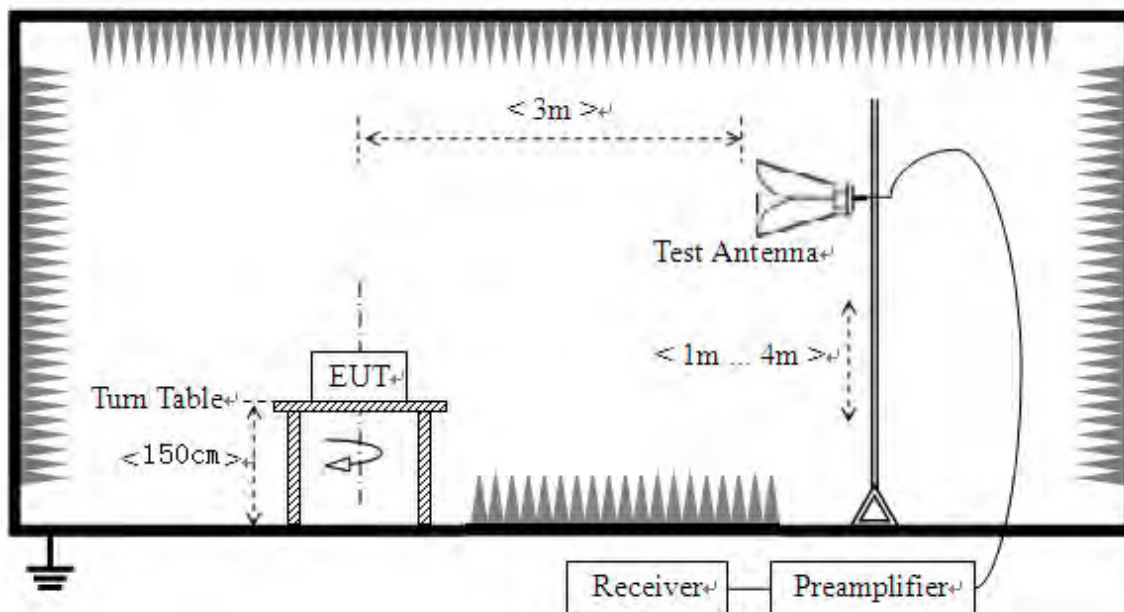

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Please reference ANNEX A(1.4).

2.10.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

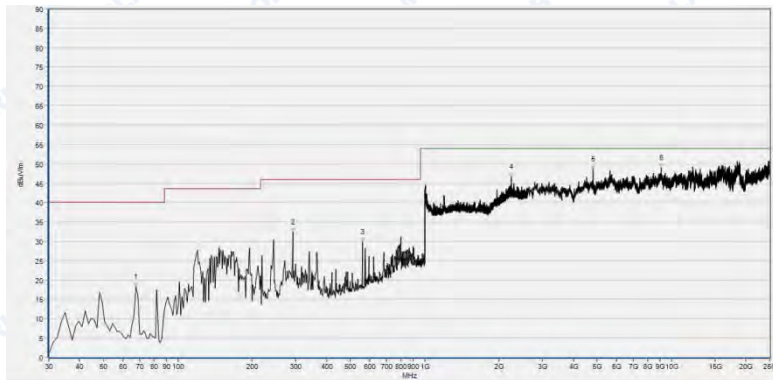**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
67.635	18.20	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
292.228	32.33	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
559.312	29.84	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2245.938	46.57	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4803.746	48.54	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
9064.594	48.98	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
67.635	21.57	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
152.616	26.43	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
1000.000	26.25	N.A	N.A	N.A	54.00	N.A	Vertical	PASS
2233.133	45.63	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4803.746	47.47	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
10209.238	48.95	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)




REPORT No.: SZ16030142W02

Plot for Channel = 39



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
138.048	26.42	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
292.228	29.73	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
856.746	29.83	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2872.922	45.26	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
7011.566	46.69	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
18857.210	49.23	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)

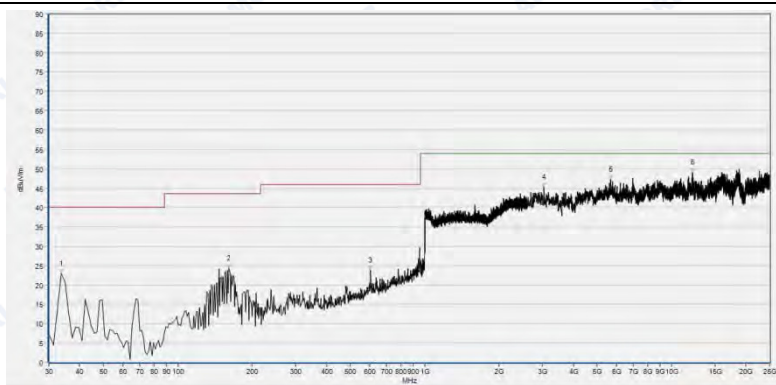


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	22.96	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
161.114	24.37	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
603.016	23.82	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3044.008	45.21	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5655.101	47.24	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12144.135	49.16	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)



Plot for Channel = 78

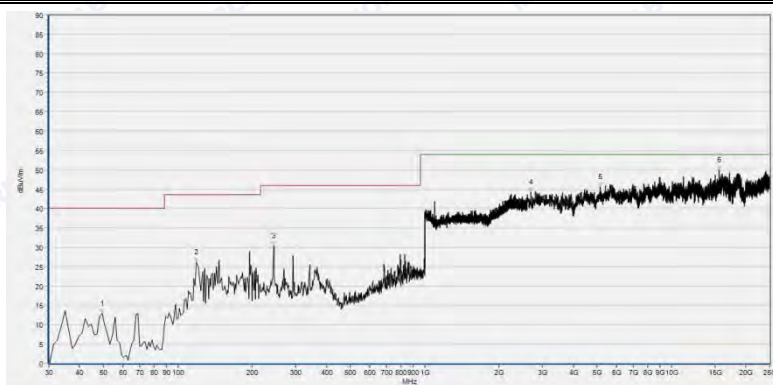


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	12.99	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
118.623	26.18	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
243.667	30.39	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2693.690	44.17	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5133.697	45.63	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15590.289	49.93	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	25.06	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
152.616	26.11	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
593.304	23.67	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2258.103	43.95	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
5406.619	46.36	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
18559.847	49.25	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)

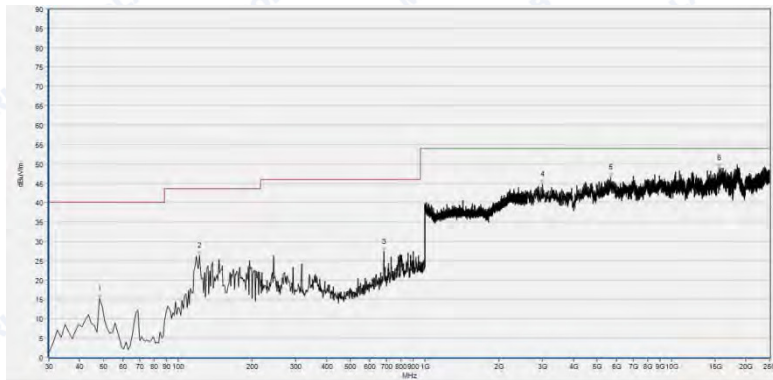**2.10.4.2 $\pi/4$ -DQPSK Mode:****B. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	15.33	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
122.265	26.35	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
683.141	27.26	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3007.347	44.69	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5655.101	46.56	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
15610.656	48.90	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS


(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	19.15	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
152.616	27.39	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
593.304	25.70	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2256.823	46.07	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4730.424	46.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18433.570	49.70	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)




Plot for Channel = 39

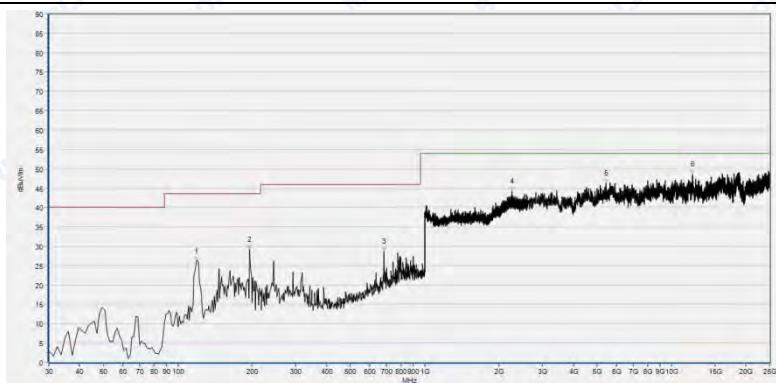

Fre. (MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
118.623	26.20	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
195.106	29.19	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
683.141	28.69	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2260.664	44.28	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5418.840	46.31	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
12164.503	48.60	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

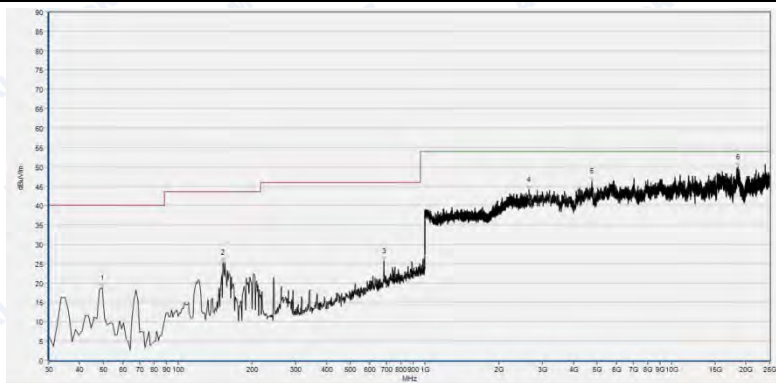


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	18.69	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
152.616	25.36	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
684.355	25.67	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2644.808	44.09	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4767.085	46.34	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18547.627	49.99	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)




REPORT No.: SZ16030142W02

Plot for Channel = 78

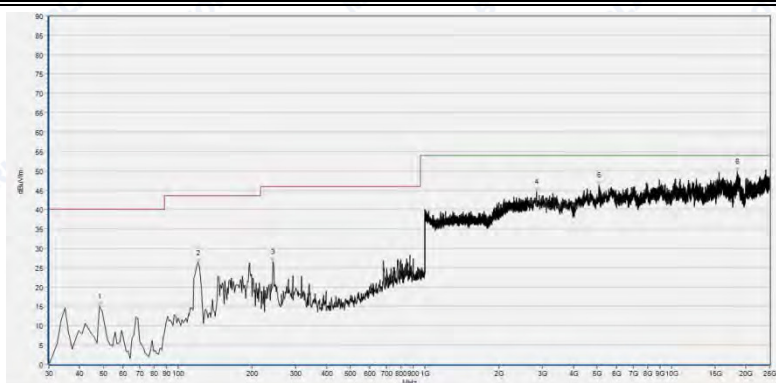


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
48.210	14.90	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
121.051	26.13	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
242.453	26.53	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2840.335	44.50	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5072.595	46.31	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
18482.451	49.72	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

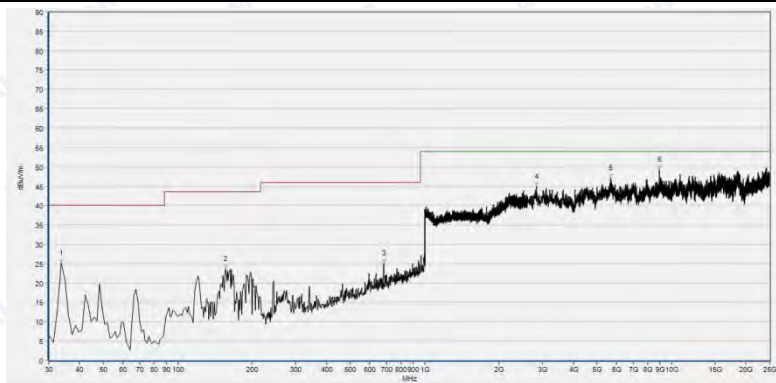(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
33.642	25.16	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
156.258	23.55	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
681.927	25.18	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2832.188	44.93	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5671.395	47.09	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
8934.243	49.34	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)

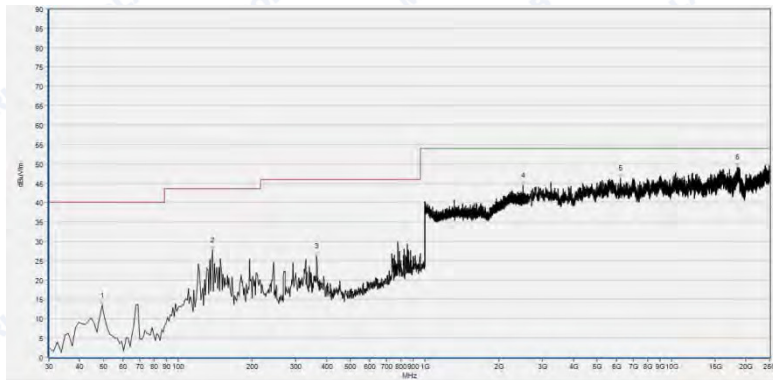**2.10.4.3 8-DPSK Mode:****C. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	13.42	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
138.048	27.66	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
365.069	26.21	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2507.803	44.43	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
6221.313	46.23	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18498.745	49.03	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

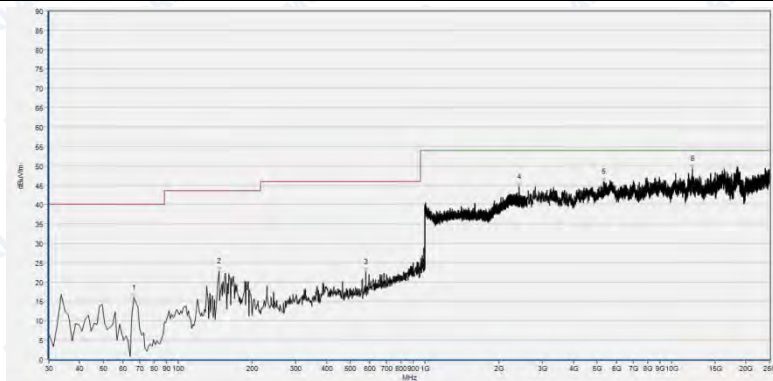


Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
66.421	15.85	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
146.546	22.72	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
577.522	22.62	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2409.844	44.60	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5292.562	45.87	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12180.797	49.26	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)



REPORT No.: SZ16030142W02

Plot for Channel = 39

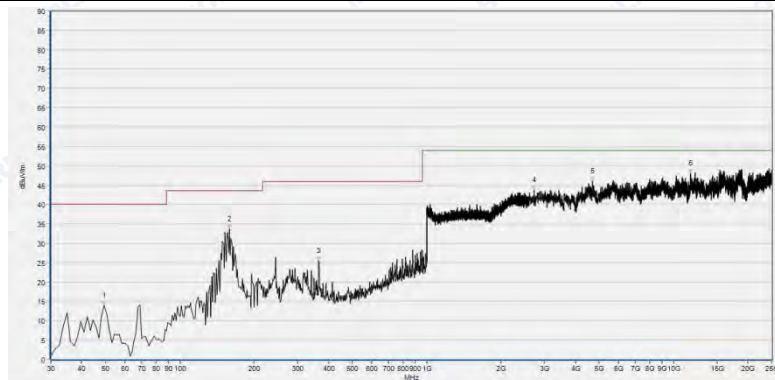

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	13.86	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
158.686	33.69	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
365.069	25.44	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2726.278	43.70	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4685.616	46.14	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11744.935	48.07	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
67.635	15.74	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
156.258	24.70	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
1200.400	43.23	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
2811.820	43.90	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
5435.134	47.12	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
12148.209	48.43	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)




Plot for Channel = 78



Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
49.424	12.96	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
155.044	31.96	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
365.069	25.29	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2689.616	43.69	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
4538.971	46.71	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
18563.921	50.62	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)

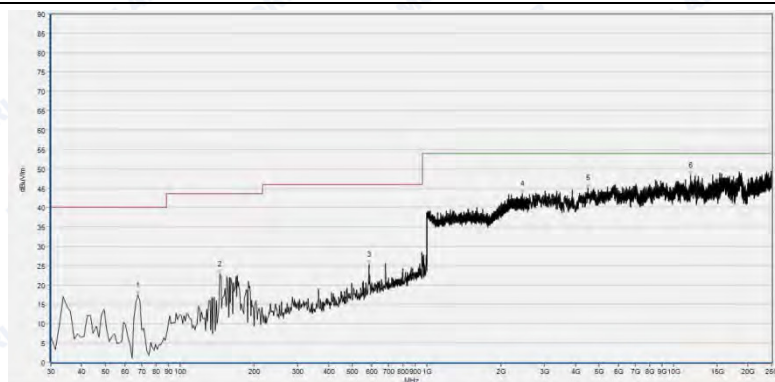

Fre.(MHz)	Pk	QP	AV	Limit-PK	Limit-QP	Limit-AV	Antenna	Verdict
67.635	17.48	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
145.332	22.82	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
582.378	25.26	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
5398.472	45.46	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4502.310	45.06	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
11740.862	48.24	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94



REPORT No.: SZ16030142W02

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$

1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.03.02	2017.03.01
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2016.03.02	2017.03.01
3	EXA Signal Analyzer	MY53470838	N9010A	Agilent	2015.08.26	2016.08.25
4	RF cable	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector Note	CN01	RF03	HUBER-SUHNER	N/A	N/A

Note: The SMA antenna connector is soldered on the PCB board in order to perform conducted tests and this SMA antenna connector is listed in the equipment list.

1.5.2 Radiated Test Equipments

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2015.05.07	2016.05.06
2	Receiver	MY54130016	N9038A	Agilent	2015.05.07	2016.05.06
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2015.05.14	2016.05.13
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.03.02	2017.03.01
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.03.02	2017.03.01
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.03.02	2017.03.01
7	Coaxial cable(N male)	CB02	EMC02	Morlab	N/A	N/A
8	Coaxial cable(N male)	CB03	EMC03	Morlab	N/A	N/A
9	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01
10	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01



REPORT No.: SZ16030142W02

1.5.3 Climate Chamber

Climate Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.02	2017.03.01

1.5.4 Vibration Table

Vibration Table

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.02	2017.03.01

1.5.5 Anechoic Chamber

Anechoic Chamber

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2015.05.14	2016.05.13

1.5.6 Auxiliary Test Equipment

Auxiliary Test Equipment

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	N.A	PU500C	Asus	N.A	N.A

***** END OF REPORT *****