

TEST REPORT FOR SAR TESTING

Report No.: SRTC2021-9004(F)-21030803(H)

Product Name: Multi-Mode Digital Mobile Phone

Product Model: ZTE 9030

Applicant: ZTE Corporation

Manufacturer: ZTE Corporation

Specification: Part 2.1093

IEEE Std 1528

KDB Procedures

FCC ID: SRQ-ZTE9030

The State Radio_monitoring_center Testing Center (SRTC)

15th Building, No.30 Shixing Street, Shijingshan District, Beijing, P.R. China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1. GENERAL INFORMATION.....	2
1.1 NOTES OF THE TEST REPORT	2
1.2 INFORMATION ABOUT THE TESTING LABORATORY	2
1.3 APPLICANT’S DETAILS	2
1.4 MANUFACTURER’S DETAILS.....	2
1.5 TEST ENVIRONMENT.....	3
2. DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 FINAL EQUIPMENT BUILD STATUS.....	4
2.2 SUPPORT EQUIPMENT	5
3. REFERENCE SPECIFICATION.....	6
4. TEST CONDITIONS.....	7
4.1 PICTURE TO DEMONSTRATE THE REQUIRED LIQUID DEPTH	7
4.2 TEST SIGNAL, FREQUENCIES AND OUTPUT POWER	7
4.3 SAR MEASUREMENT SET-UP	7
4.4 PHANTOMS	8
4.5 TISSUE SIMULANTS	8
4.6 DESCRIPTION OF THE TEST PROCEDURE	9
5 RESULT SUMMARY	12
6 TEST RESULT	14
6.1 MANUFACTURING TOLERANCE.....	14
6.2 GSM MEASUREMENT RESULT	31
6.3 WCDMA MEASUREMENT RESULT	34
6.4 LTE MEASUREMENT RESULT	41
6.5 BLUETOOTH MEASUREMENT RESULT	135
6.6 WI-FI MEASUREMENT RESULT	136
6.7 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS.....	139
6.8 RF EXPOSURE CONDITIONS	141
6.9 SYSTEM CHECKING	145
6.10 SAR TEST RESULT	147
6.11 SAR MEASUREMENT VARIABILITY	178
6.12 SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	179
7 MEASUREMENT UNCERTAINTY.....	180
8 TEST EQUIPMENTS.....	182
ANNEX A – TEST PLOTS	185

1. GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 Shixing Street, Shijingshan District, Beijing P.R. China
City:	Beijing
Country or Region:	P.R. China
Contacted person:	Liu Jia
Tel:	+86 10 57996183
Fax:	+86 10 57996388
Email:	liujiarf@srtc.org.cn

1.3 Applicant's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	Guangdong, China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Email:	gongyu@zte.com.cn

1.4 Manufacturer's details

Company:	ZTE Corporation
Address:	ZTE Plaza, #55 Keji Road South, Hi-Tech, Industrial Park, Nanshan District,Guangdong
City:	Shenzhen
Country or Region:	Guangdong, China
Contacted person:	Gong Yu
Tel:	+86-21-68895397
Email:	gongyu@zte.com.cn

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2021.03.10
Testing Start Date:	2021.03.16
Testing End Date:	2021.04.14

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	20	40

Normal Supply Voltage (Vdc.):	3.85
-------------------------------	------

2. DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	<input checked="" type="checkbox"/> GSM Band: GSM850/1900 <input checked="" type="checkbox"/> WCDMA Band: FDD II/IV/V <input checked="" type="checkbox"/> LTE Band: 2/4/5/7/12/13/17/26/38/66 <input checked="" type="checkbox"/> Wi-Fi Band: 2.4GHz <input checked="" type="checkbox"/> Wi-Fi Band: 5GHz UNII-1 UNII-3 <input checked="" type="checkbox"/> BT/BLE
Mode	GSM <input checked="" type="checkbox"/> GPRS (GMSK) <input checked="" type="checkbox"/> EGPRS (GMSK/8PSK) WCDMA <input checked="" type="checkbox"/> UMTS Rel. 99 <input checked="" type="checkbox"/> HSDPA (Rel. 5) <input checked="" type="checkbox"/> HSUPA (Rel. 6) <input type="checkbox"/> HSPA+ (Rel.7) <input type="checkbox"/> DC-HSDPA (Rel.8) Wi-Fi <input checked="" type="checkbox"/> 802.11a <input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n HT20 <input checked="" type="checkbox"/> 802.11n HT40 <input checked="" type="checkbox"/> 802.11ac VHT20 <input checked="" type="checkbox"/> 802.11ac VHT40 <input checked="" type="checkbox"/> 802.11ac VHT80 LTE <input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input checked="" type="checkbox"/> 64QAM
Duty Cycle*	GPRS EDGE(GMSK/8PSK): 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% LTE(FDD): 100% LTE(TDD): 63.3% maximum BT: DH5:80.0 % 2DH5:100.0 % 3DH5:80.0% BLE: 1M:90.0 % WIFI2.4GHz: 11b:98.54 % 11g:82.46% 11n20:88.37 % WIFI5GHz: 11a:87.51% 11n: 78.86% 11ac:79.24%
Multi-Slot Class for GPRS/EDGE	<input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input checked="" type="checkbox"/> Class 12 - Four Up <input type="checkbox"/> Class 33- Four Up
Mobile Phone Capability	<input type="checkbox"/> Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. <input checked="" type="checkbox"/> Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. <input type="checkbox"/> Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services

DTM	Not Supported
Note	For licensed cellular network duty cycle is inherent. For unlicensed network WLAN Duty cycle is depends on the data traffic, and the traffic allocation in operating mode could be the most conservative condition which with 100% duty cycle. SAR measurement also use non signalling mode, so the duty factor shall be taken into consideration.

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Normal
H/W Version	Zh28
S/W Version	TEL_MX_ZTE_9030V1.0
IMEI	867552050001892 867552050001785
Notes	As the information described above, we use test sample offered by the customer. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features.

3. REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	2019	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 447498 D02	v02r01	SAR MEASUREMENT PROCEDURES FOR USB DONGLE TRANSMITTERS
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 248227 D01	v02r02	SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS
KDB 865664 D01	v01r04	SAR Measurement from 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4. TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth is large than 15cm in the used SAM phantoms in flat section, and the depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on middle channel, and few of them were also performed on lowest and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than ± 0.02 mm. Special E-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification; signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528. All tests were carried out using simulants whose dielectric parameters were within $\pm 10\%$ below 3GHz and $\pm 5\%$ above 3GHz of the recommended values when use DASY system according to KDB865664D01. All tests were carried out within 24 hours of measuring the dielectric parameters.

Tissue Stimulant Recipes	
Name	Broadband tissue-equivalent liquid
Type	HBBL600-10000V6 Simulating Liquid
Note: The stimulant could be the same for head and body.	

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

4.6.2 Test Exposure Conditions

4.6.2.1 Head Configuration

Measurements were made in “cheek” and “tilt” positions on both the left hand and right-hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is normally determined according to the actual scene which might be the worst use condition for general exposure. The device's front and rear were oriented facing the phantom since these orientations give higher results for most regular portable devices.

4.6.2.3 Hotspot Configuration

Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge; for the data modes, wireless technologies and frequency bands supporting hotspot mode.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. There are 15 mm x 15 mm (equal or less than 2GHz), 12 mm x 12 mm (from 2GHz~4GHz) and 10mm x 10mm (from 4GHz~6GHz) measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location.

When the reported 1g-SAR estimated by area scan is less than 1.40 w/kg.

Zoom scan was performed by using the configuration mentioned below or more conservative scan area and step to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

Below 3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

2GHz-3GHz: 32mmX32mmX30mm scan area with 8 mm X8 mm X5 mm steps

3GHz-4GHz: 28mmX28mmX28mm scan area with 7 mm X7 mm X4 mm steps

4GHz-5GHz: 25mmX25mmX24mm scan area with 5 mm X5 mm X3 mm steps

5GHz-6GHz: 25mmX25mmX22mm scan area with 5 mm X5 mm X2 mm steps

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A triradiate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighboring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics.

In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

5 RESULT SUMMARY

The maximum reported SAR values for Head/Body-Worn/Hotspot exposure conditions are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.



Standalone Transmission Summary(1g- SAR)						
Exposure Position	Frequency Band	SAR Result(W/kg)	Highest SAR Result(W/kg)		Limit(W/kg)	Result
Head	GSM 850	0.13	0.61			
	GSM 1900	0.25				
	WCDMA Band II	0.20				
	WCDMA Band IV	0.14				
	WCDMA Band V	0.15				
	LTE Band 2	0.23				
	LTE Band 4	0.21				
	LTE Band 5	0.13				
	LTE Band 7	0.46				
	LTE Band 12	0.08				
	LTE Band 13	0.06				
	LTE Band 17	0.03				
	LTE Band 26	0.11				
	LTE Band 38	0.36				
	LTE Band 66	0.20				
	BT/BLE	---				
	WLAN 2.4GHz	0.15				
WLAN 5GHz UNII-1	0.61					
WLAN 5GHz UNII-3	0.52					
Body-Worn (10mm Gap)	GSM 850	0.52	1.10	1.10	1.60	Pass
	GSM 1900	0.92				
	WCDMA Band II	1.10				
	WCDMA Band IV	0.87				
	WCDMA Band V	0.46				
	LTE Band 2	1.04				
	LTE Band 4	0.82				
	LTE Band 5	0.40				
	LTE Band 7	0.97				
	LTE Band 12	0.11				
	LTE Band 13	0.25				
	LTE Band 17	0.10				
	LTE Band 26	0.40				
	LTE Band 38	0.36				
	LTE Band 66	0.74				
	BT/BLE	---				
	WLAN 2.4GHz	0.23				
WLAN 5GHz UNII-1	0.30					
WLAN 5GHz UNII-3	0.29					
Hotspot (10mm Gap)	GSM 850	0.52	1.10			
	GSM 1900	0.92				
	WCDMA Band II	1.10				

WCDMA Band IV	0.87			
WCDMA Band V	0.46			
LTE Band 2	1.04			
LTE Band 4	0.82			
LTE Band 5	0.40			
LTE Band 7	0.97			
LTE Band 12	0.11			
LTE Band 13	0.25			
LTE Band 17	0.10			
LTE Band 26	0.40			
LTE Band 38	0.36			
LTE Band 66	0.74			
BT/BLE	---			
WLAN 2.4GHz	0.23			
WLAN 5GHz UNII-1	0.44			
WLAN 5GHz UNII-3	0.55			

Note: BT/BLE are excluded from SAR test

Simultaneous Transmission Summary

Simultaneous Transmission Summary(1g- SAR)					
Exposure Position	Mode	SAR Result(W/kg)	Highest SAR Result(W/kg)	Limit(W/kg)	Result
Head	LTE Band7 + WLAN 5GHz UNII-1	1.01	1.40	1.60	pass
Body-Worn	WCDMA Band II + WLAN 5GHz UNII-1	1.40			
Hotspot	WCDMA Band II + WLAN 5GHz UNII-1	1.40			

This Test Report Is Approved by: Mr. Peng Zhen 	Review by: Mr. Li Bin 
Tested and issued by: Mr. He Shaowei 	Approved date: 2021/04/15

6 TEST RESULT

6.1 Manufacturing Tolerance

GSM

GSM850

Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
824.2	128	33.5
836.4	189	
848.8	251	

GPRS/EGPRS (GMSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
824.2	128	4Downlink1uplink	33.5
836.4	189		
848.8	251		
824.2	128	3Downlink2uplink	31.5
836.4	189		
848.8	251		
824.2	128	2Downlink3uplink	30.0
836.4	189		
848.8	251		
824.2	128	1Downlink4uplink	28.0
836.4	189		
848.8	251		

EGPRS (8PSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
824.2	128	8PSK 4Downlink1uplink	26.5
836.4	189		
848.8	251		
824.2	128	8PSK 3Downlink2uplink	28.0
836.4	189		
848.8	251		
824.2	128	8PSK 2Downlink3uplink	26.0
836.4	189		
848.8	251		
824.2	128	8PSK 1Downlink4uplink	24.5
836.4	189		
848.8	251		

PCS1900:

Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
1850.2	512	30.5
1880.0	661	
1909.8	810	

GPRS/EGPRS (GMSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
1850.2	512	4Downlink1uplink	30.5
1880.0	661		
1909.8	810		
1850.2	512	3Downlink2uplink	28.0
1880.0	661		
1909.8	810		
1850.2	512	2Downlink3uplink	26.5
1880.0	661		
1909.8	810		
1850.2	512	1Downlink4uplink	24.5
1880.0	661		
1909.8	810		

EGPRS (8PSK):

Carrier frequency (MHz)	Channel No.	TX Mode	Tune up Tolerance (dBm)
1850.2	512	8PSK 4Downlink1uplink	27.0
1880.0	661		
1909.8	810		
1850.2	512	8PSK 3Downlink2uplink	26.0
1880.0	661		
1909.8	810		
1850.2	512	8PSK 2Downlink3uplink	25.5
1880.0	661		
1909.8	810		
1850.2	512	8PSK 1Downlink4uplink	23.5
1880.0	661		
1909.8	810		

WCDMA

WCDMA band II

Mode		Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	23.5
		1880.0	9400	
		1907.6	9538	
HSDPA	Subtest 1	1852.4	9262	23.5
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
HSUPA	Subtest 1	1852.4	9262	23.5
		1880.0	9400	
		1907.6	9538	
	Subtest 2	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 3	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 4	1852.4	9262	
		1880.0	9400	
		1907.6	9538	
	Subtest 5	1852.4	9262	
		1880.0	9400	
		1907.6	9538	

WCDMA band IV

Mode		Carrier frequency (MHz)	Channel No.	Tune up Tolerance (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	25.0
		1732.4	1412	
		1752.6	1513	
HSDPA	Subtest 1	1712.4	1312	24.5
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
HSUPA	Subtest 1	1712.4	1312	24.5
		1732.4	1412	
		1752.6	1513	
	Subtest 2	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 3	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 4	1712.4	1312	
		1732.4	1412	
		1752.6	1513	
	Subtest 5	1712.4	1312	
		1732.4	1412	
		1752.6	1513	

WCDMA band V

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	826.4	4132	24.5
		836.6	4183	
		846.6	4233	
HSDPA	Subtest 1	826.4	4132	24.5
		836.6	4183	
		846.6	4233	
	Subtest 2	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 3	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 4	826.4	4132	
		836.6	4183	
		846.6	4233	
HSUPA	Subtest 1	826.4	4132	25.0
		836.6	4183	
		846.6	4233	
	Subtest 2	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 3	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 4	826.4	4132	
		836.6	4183	
		846.6	4233	
	Subtest 5	826.4	4132	
		836.6	4183	
		846.6	4233	

LTE

Note: RB allocation mentioned below is for all Bandwidths, and the Frequency Range are divided to 3 ranges (Low, Mid, High)

Band 2

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.5
			Mid	
			High	
		50%	Low	24.5
			Mid	
			High	
		100%	Low	23.5
			Mid	
			High	
	16QAM	1	Low	24.0
			Mid	
			High	
		50%	Low	23.5
			Mid	
			High	
		100%	Low	22.5
			Mid	
			High	
	64QAM	1	Low	22.5
			Mid	
			High	
		50%	Low	22.5
			Mid	
			High	
100%		Low	22.5	
		Mid		
		High		

Band 4

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.0
			Mid	
			High	
		50%	Low	25.0
			Mid	
			High	
		100%	Low	24.0
			Mid	
			High	
	16QAM	1	Low	25.0
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Band 5

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.0
			Mid	
			High	
		50%	Low	25.0
			Mid	
			High	
		100%	Low	24.0
			Mid	
			High	
	16QAM	1	Low	24.5
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Band 7

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.0
			Mid	
			High	
		50%	Low	22.5
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	16QAM	1	Low	23.5
			Mid	
			High	
		50%	Low	22.0
			Mid	
			High	
		100%	Low	22.0
			Mid	
			High	
	64QAM	1	Low	22.0
			Mid	
			High	
		50%	Low	22.0
			Mid	
			High	
100%		Low	22.0	
		Mid		
		High		

Band 12

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.0
			Mid	
			High	
		50%	Low	24.5
			Mid	
			High	
		100%	Low	23.5
			Mid	
			High	
	16QAM	1	Low	24.5
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Band 13

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.5
			Mid	
			High	
		50%	Low	23.5
			Mid	
			High	
		100%	Low	23.5
			Mid	
			High	
	16QAM	1	Low	24.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Band 17

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	24.5
			Mid	
			High	
		50%	Low	23.5
			Mid	
			High	
		100%	Low	23.5
			Mid	
			High	
	16QAM	1	Low	24.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
		100%	Low	22.5
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	22.5	
		Mid		
		High		

Band 26

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.0
			Mid	
			High	
		50%	Low	25.0
			Mid	
			High	
		100%	Low	24.0
			Mid	
			High	
	16QAM	1	Low	24.5
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Band 38

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.5
			Mid	
			High	
		50%	Low	24.5
			Mid	
			High	
		100%	Low	24.0
			Mid	
			High	
	16QAM	1	Low	25.0
			Mid	
			High	
		50%	Low	23.5
			Mid	
			High	
		100%	Low	23.5
			Mid	
			High	
	64QAM	1	Low	23.5
			Mid	
			High	
		50%	Low	23.5
			Mid	
			High	
100%		Low	23.5	
		Mid		
		High		

Band 66

BW	Modulation	RB allocation with different offset	Frequency range	Tune up Tolerance (dBm)
All Bandwidth	QPSK	1	Low	25.0
			Mid	
			High	
		50%	Low	25.0
			Mid	
			High	
		100%	Low	24.0
			Mid	
			High	
	16QAM	1	Low	24.5
			Mid	
			High	
		50%	Low	24.0
			Mid	
			High	
		100%	Low	23.0
			Mid	
			High	
	64QAM	1	Low	23.0
			Mid	
			High	
		50%	Low	23.0
			Mid	
			High	
100%		Low	23.0	
		Mid		
		High		

Bluetooth

Modulation type	Tune up Tolerance (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	7.5		
π/4DQPSK	7.5		
8DPSK	7.0		

Bluetooth (BLE)

Modulation type	Tune up Tolerance (dBm)		
	2402MHz (Ch0)	2440MHz (Ch19)	2480MHz (Ch39)
GFSK (LE 1Mbps)	8.0		

WLAN 2.4GHz

Modulation type	Tune up Tolerance (dBm)		
	2412MHz	2437MHz	2462MHz
802.11b	20.5		
802.11g	19.5		
802.11n HT20	18.5		

WLAN 5.2GHz

Mode	Freq (MHz)	Tune up Tolerance (dBm)
802.11a	5180	16.0
	5220	
	5240	
802.11n20M	5180	14.5
	5240	
802.11n40M	5190	12.5
	5230	
802.11ac20M	5180	13.0
	5220	
	5240	
802.11ac40M	5190	12.5
	5230	
802.11ac80M	5210	8.5

WLAN 5.8GHz

Mode	Freq (MHz)	Tune up Tolerance (dBm)
802.11a	5745	15.5
	5785	
	5825	
802.11n20M	5745	15.0
	5785	
	5825	
802.11n40M	5755	12.0
	5795	
802.11ac20M	5745	13.0
	5785	
	5825	
802.11ac40M	5755	12.0
	5795	
802.11ac80M	5775	7.0

6.2 GSM Measurement result

GSM850

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	33.26	24.23
836.4	189	33.30	24.27
848.8	251	33.30	24.27

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	4Downlink1uplink	33.30	24.27
836.4	189		33.36	24.33
848.8	251		33.36	24.33
824.2	128	3Downlink2uplink	31.37	25.35
836.4	189		31.37	25.35
848.8	251		31.35	25.33
824.2	128	2Downlink3uplink	29.55	25.29
836.4	189		29.54	25.28
848.8	251		29.52	25.26
824.2	128	1Downlink4uplink	27.58	24.57
836.4	189		27.58	24.57
848.8	251		27.54	24.53

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
824.2	128	8PSK 4Downlink1uplink	26.43	17.40
836.4	189		26.41	17.38
848.8	251		26.37	17.34
824.2	128	8PSK 3Downlink2uplink	27.84	21.82
836.4	189		26.22	20.20
848.8	251		26.15	20.13
824.2	128	8PSK 2Downlink3uplink	25.05	20.79
836.4	189		25.72	21.46
848.8	251		25.02	20.76
824.2	128	8PSK 1Downlink4uplink	24.32	21.31
836.4	189		23.67	20.66
848.8	251		24.28	21.27

PCS1900

GSM Measured Power:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	30.05	21.02
1880.0	661	29.75	20.72
1909.8	810	29.83	20.80

GPRS/EGPRS (GMSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	4Downlink1uplink	30.05	21.02
1880.0	661		29.75	20.72
1909.8	810		29.85	20.82
1850.2	512	3Downlink2uplink	27.70	21.68
1880.0	661		27.40	21.38
1909.8	810		27.43	21.41
1850.2	512	2Downlink3uplink	26.22	21.96
1880.0	661		25.88	21.62
1909.8	810		25.86	21.60
1850.2	512	1Downlink4uplink	24.21	21.20
1880.0	661		23.90	20.89
1909.8	810		23.86	20.85

EGPRS (8PSK) Measured Power:

Carrier frequency (MHz)	Channel No.	TX Mode	RF Power Output (dBm)	Frame average power(dBm)
1850.2	512	8PSK 4Downlink1uplink	26.16	17.13
1880.0	661		25.82	16.79
1909.8	810		26.90	17.87
1850.2	512	8PSK 3Downlink2uplink	25.91	19.89
1880.0	661		25.68	19.66
1909.8	810		25.58	19.56
1850.2	512	8PSK 2Downlink3uplink	25.27	21.01
1880.0	661		25.07	20.81
1909.8	810		24.88	20.62
1850.2	512	8PSK 1Downlink4uplink	23.35	20.34
1880.0	661		22.88	19.87
1909.8	810		22.71	19.70

Division Factors (for Measured Power and Frame Average Power):

To average the power, the division factor is as follows:

1TX-slot (1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the frame average conducted power, Body-worn SAR measurements are performed with **2TXslots (2uplink)** of GMSK for GPRS850 and **3Txslots (3uplink)** of GMSK for GPRS1900

6.3 WCDMA Measurement result

Release 99

The following procedures are according to FCC KDB Publication 941225 D01.

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	RMC mode AMR mode	12.2kbps RMC 12.2kbps RMC in 3.4 kbps SRB
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Release 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Release 6

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (S F)	$\beta_c\beta_d$	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (S F)	β_{ed} (code s)	CM (² dB)	MP R (d B)	AG ⁽⁴⁾ Inde x	E-TF CI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/25	1039/25	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Release 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.

Release 8

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK

Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.

Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

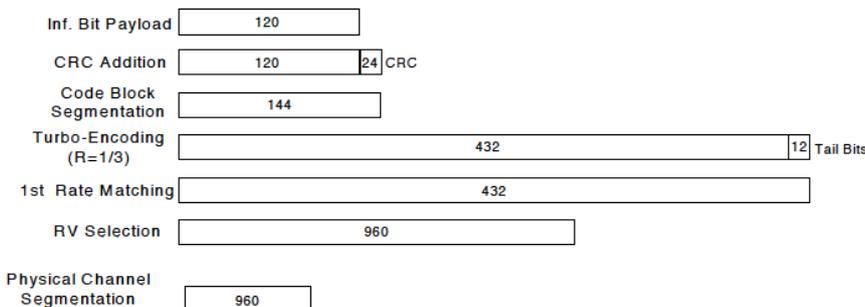


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	$\beta_c\beta_d$	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/18	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

WCDMA band II

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	1852.4	9262	23.30
		1880	9400	23.19
		1907.6	9538	23.35
HSDPA	Subtest1	1852.4	9262	23.25
		1880	9400	23.09
		1907.6	9538	23.22
	Subtest2	1852.4	9262	22.83
		1880	9400	22.72
		1907.6	9538	22.88
	Subtest3	1852.4	9262	23.08
		1880	9400	22.94
		1907.6	9538	23.07
	Subtest4	1852.4	9262	22.78
		1880	9400	22.60
		1907.6	9538	22.75
HSUPA	Subtest1	1852.4	9262	23.15
		1880	9400	23.03
		1907.6	9538	23.12
	Subtest2	1852.4	9262	23.19
		1880	9400	23.02
		1907.6	9538	23.17
	Subtest3	1852.4	9262	23.14
		1880	9400	22.99
		1907.6	9538	23.12
	Subtest4	1852.4	9262	23.20
		1880	9400	23.06
		1907.6	9538	23.22
	Subtest5	1852.4	9262	23.13
		1880	9400	23.00
		1907.6	9538	23.11

WCDMA band IV

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	1712.4	1312	24.53
		1732.6	1413	24.50
		1752.6	1513	24.33
HSDPA	Subtest1	1712.4	1312	24.20
		1732.6	1413	24.08
		1752.6	1513	24.22
	Subtest2	1712.4	1312	24.17
		1732.6	1413	24.08
		1752.6	1513	24.20
	Subtest3	1712.4	1312	24.14
		1732.6	1413	24.06
		1752.6	1513	24.19
	Subtest4	1712.4	1312	24.16
		1732.6	1413	24.05
		1752.6	1513	24.19
HSUPA	Subtest1	1712.4	1312	24.11
		1732.6	1413	24.02
		1752.6	1513	24.18
	Subtest2	1712.4	1312	24.13
		1732.6	1413	23.98
		1752.6	1513	24.21
	Subtest3	1712.4	1312	24.15
		1732.6	1413	24.01
		1752.6	1513	24.19
	Subtest4	1712.4	1312	24.18
		1732.6	1413	24.06
		1752.6	1513	24.22
	Subtest5	1712.4	1312	24.17
		1732.6	1413	24.00
		1752.6	1513	24.20


WCDMA band V

Mode		Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
Release 99	RMC,12.2kbps	826.4	4132	24.25
		836.6	4183	23.42
		846.6	4233	22.34
HSDPA	Subtest1	826.4	4132	24.31
		836.6	4183	21.22
		846.6	4233	20.87
	Subtest2	826.4	4132	24.26
		836.6	4183	20.86
		846.6	4233	20.56
	Subtest3	826.4	4132	22.71
		836.6	4183	20.59
		846.6	4233	19.98
	Subtest4	826.4	4132	22.58
		836.6	4183	20.47
		846.6	4233	19.87
HSUPA	Subtest1	826.4	4132	23.78
		836.6	4183	22.10
		846.6	4233	21.30
	Subtest2	826.4	4132	23.83
		836.6	4183	24.87
		846.6	4233	21.30
	Subtest3	826.4	4132	23.83
		836.6	4183	22.08
		846.6	4233	21.27
	Subtest4	826.4	4132	23.87
		836.6	4183	22.14
		846.6	4233	21.34
	Subtest5	826.4	4132	23.79
		836.6	4183	22.04
		846.6	4233	21.28

Note: UMTS SAR was tested under Rel.99 RMC 12.2kbps mode per KDB Publication 941225 D01.for other higher release configuration, SAR was not required since any average output power was not more than 0.25 dB higher than the RMC level.


6.4 LTE Measurement result

General description: FDD-LTE frame structure

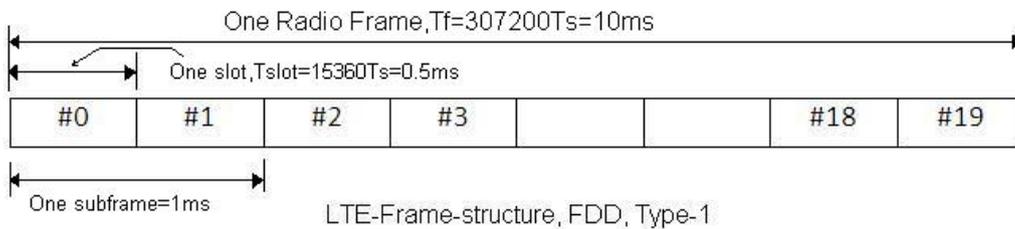

Type 1 is used as LTE FDD frame structure. As shown in the figure above, an LTE TDD frame is made of total 20 slots, each of 0.5ms. Two consecutive time slots will form one subframe. 10 such subframes form one radio frame. One subframe duration is about 1 ms. and the duty cycle is inherent as 100%

TDD-LTE frame structure

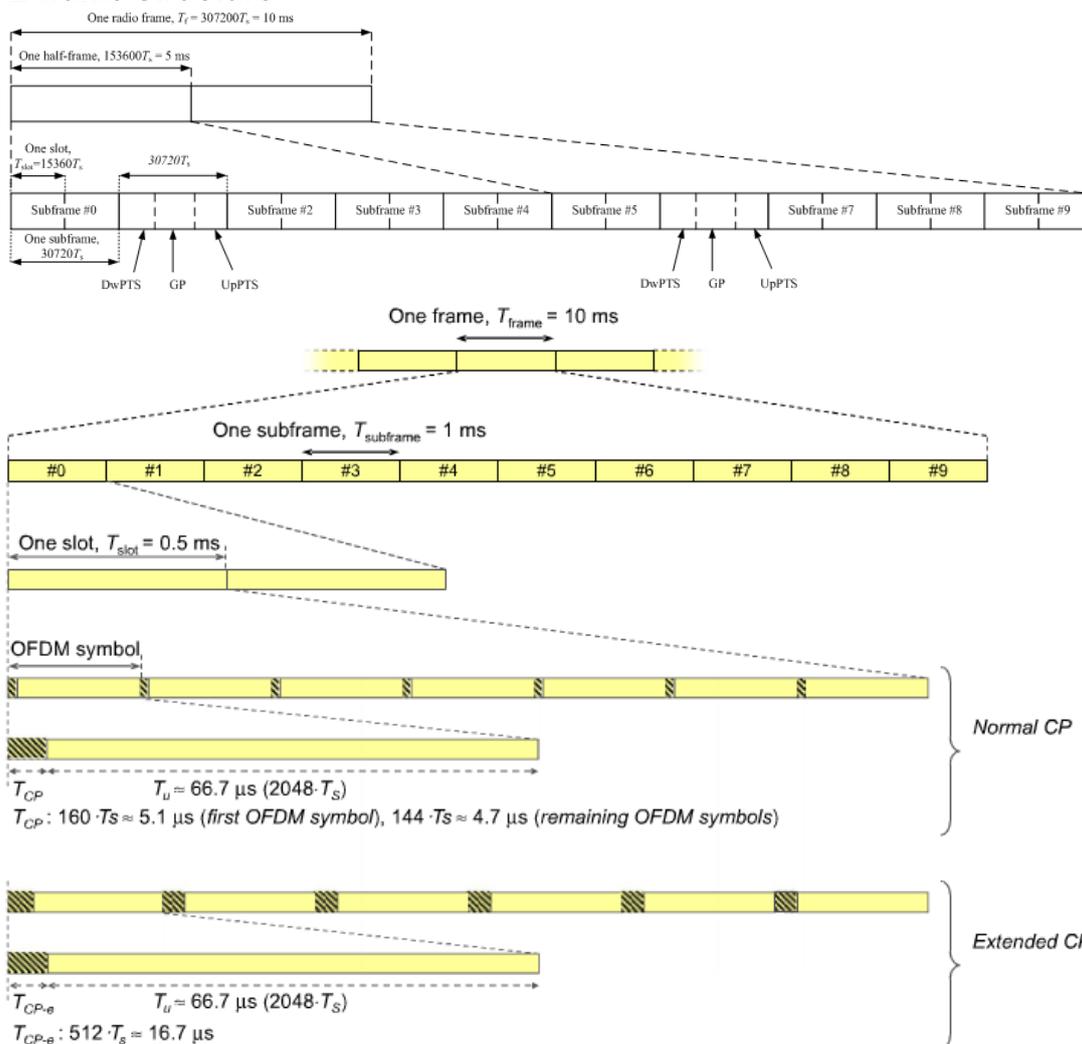

Uplink-downlink configuration

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Special sub-frame configuration

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	2192 · T_s	2560 · T_s	$7680 \cdot T_s$	2192 · T_s	2560 · T_s
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$		
5	$6592 \cdot T_s$	4384 · T_s	5120 · T_s	$20480 \cdot T_s$	4384 · T_s	5120 · T_s
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			-		
8	$24144 \cdot T_s$			-		

Special sub-frame with cyclic prefix uplink

Special sub-frame configuration		Duty factor with normal cyclic prefix in uplink	Duty factor with extended cyclic prefix in uplink
Normal cyclic prefix in downlink	0~4	7.13%	8.33%
	5~9	14.3%	16.7%
Extended cyclic prefix in downlink	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

So we perform SAR test with maximum duty factor equal to 63.3% by using uplink-downlink configuration 0.

Note: One sub-frame is $30720T_s=1\text{ms}$, when Up PTS (uplink) in special sub-frame with extended cyclic prefix, duty factor = $5120/30720=0.167$. There are 5 sub-frames in half frame (3up link), so the final duty factor is $(30720 \cdot 3 + 5120) / (30720 \cdot 5) = 63.3\%$ which we used to evaluate the SAR compliance (worst case)

LTE Band 2

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1850.7	18607	1.4	1	0	23.99
				1	3	23.94
				1	5	24.02
				3	0	24.03
				3	1	24.01
				3	3	24.09
	1880	18900		6	0	23.07
				1	0	23.93
				1	3	23.92
				1	5	23.91
				3	0	24.02
				3	1	24.02
	1909.3	19193		3	3	24.01
				6	0	23.01
				1	0	24.16
				1	3	24.20
				1	5	24.18
				3	0	24.24
16QAM	1850.7	18607	3	1	24.16	
			3	3	24.15	
			6	0	23.12	
			1	0	23.35	
			1	3	23.22	
			1	5	23.74	
	1880	18900	3	0	23.00	
			3	1	23.01	
			3	3	23.27	
			6	0	22.32	
			1	0	22.82	
			1	3	22.99	
	1909.3	19193	1	5	22.94	
			3	0	23.26	
			3	1	23.27	
			3	3	23.27	
			6	0	22.03	
			1	0	23.84	
1909.3	19193	1	3	23.85		
		1	5	23.80		
		3	0	23.33		
		3	1	23.27		
		3	3	23.33		
		6	0	22.38		

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1850.7	18607	1.4	1	0	22.32
				1	3	22.43
				1	5	22.39
				3	0	22.30
				3	1	22.29
				3	3	22.28
				6	0	22.28
	1880	18900		1	0	21.91
				1	3	21.88
				1	5	21.91
				3	0	21.90
				3	1	21.91
				3	3	21.91
				6	0	21.91
	1909.3	19193		1	0	22.39
				1	3	22.38
				1	5	22.39
				3	0	22.39
				3	1	22.39
				3	3	22.39
				6	0	22.39

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1851.5	18615	3	1	0	23.79
				1	8	23.90
				1	14	23.90
				8	0	22.99
				8	4	23.05
				8	7	23.05
	1880	18900		15	0	23.03
				1	0	23.91
				1	8	23.87
				1	14	23.87
				8	0	23.01
				8	4	22.99
	1908.5	19185		8	7	22.99
				15	0	22.89
				1	0	24.08
				1	8	24.11
				1	14	24.19
				8	0	23.06
16QAM	1851.5	18615	8	4	23.09	
			8	7	23.08	
			15	0	23.13	
			1	0	23.30	
			1	8	23.30	
			1	14	23.41	
	1880	18900	8	0	22.39	
			8	4	22.47	
			8	7	22.46	
			15	0	22.21	
			1	0	23.31	
			1	8	23.34	
	1908.5	19185	1	14	23.27	
			8	0	22.12	
			8	4	22.16	
			8	7	22.13	
			15	0	22.09	
			1	0	23.02	
			1	8	23.05	
			1	14	23.05	
			8	0	22.46	
			8	4	22.37	
			8	7	22.38	
			15	0	22.27	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1851.5	18615	3	1	0	22.21
				1	8	22.22
				1	14	22.21
				8	0	22.20
				8	4	22.22
				8	7	22.22
				15	0	22.22
	1880	18900		1	0	22.09
				1	8	22.08
				1	14	22.09
				8	0	22.09
				8	4	22.07
				8	7	22.07
				15	0	22.06
	1908.5	19185		1	0	22.27
				1	8	22.27
				1	14	22.27
				8	0	22.30
				8	4	22.29
				8	7	22.30
				15	0	22.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)		
QPSK	1852.5	18625	5	1	0	24.13		
				1	12	23.96		
				1	24	23.95		
				12	0	23.11		
				12	7	23.09		
				12	13	23.08		
	25	0		23.00				
	1880	18900		1	0	22.10		
				1	12	22.13		
				1	24	22.15		
				12	0	20.96		
				12	7	20.93		
				12	13	23.09		
				25	0	22.96		
				1907.5	19175	1	0	23.99
						1	12	24.03
						1	24	24.01
						12	0	23.24
						12	7	23.11
	12	13				23.10		
	16QAM	1852.5		18625	25	0	23.17	
1			0		22.34			
1			12		22.26			
1			24		22.26			
12			0		22.20			
12			7		22.17			
12		13	22.18					
25		0	22.27					
1880		18900	1	0	23.21			
			1	12	23.21			
			1	24	23.20			
			12	0	22.06			
			12	7	22.10			
			12	13	22.15			
			25	0	22.11			
			1907.5	19175	1	0	22.85	
					1	12	22.99	
					1	24	22.84	
					12	0	22.12	
					12	7	22.15	
12		13			22.15			
25	0	22.17						

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1852.5	18625	5	1	0	22.28
				1	12	22.28
				1	24	22.29
				12	0	22.29
				12	7	22.29
				12	13	22.29
				25	0	22.28
	1880	18900		1	0	22.15
				1	12	22.08
				1	24	22.12
				12	0	22.08
				12	7	22.17
				12	13	22.05
				25	0	22.14
	1907.5	19175		1	0	22.17
				1	12	22.18
				1	24	22.18
				12	0	22.18
				12	7	22.29
				12	13	22.29
				25	0	22.18

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1855	18650	10	1	0	23.95
				1	25	23.93
				1	49	23.92
				25	0	23.10
				25	12	23.05
				25	25	23.05
	1880	18900		50	0	23.04
				1	0	24.03
				1	25	24.03
				1	49	24.03
				25	0	22.96
				25	12	22.95
	1905	19150		25	25	22.95
				50	0	23.03
				1	0	24.02
				1	25	24.06
				1	49	24.15
				25	0	23.15
16QAM	1855	18650	25	12	23.17	
			25	25	23.16	
			50	0	23.10	
			1	0	23.54	
			1	25	23.47	
			1	49	23.48	
	1880	18900	25	0	22.14	
			25	12	22.18	
			25	25	22.15	
			50	0	22.18	
			1	0	23.15	
			1	25	23.21	
	1905	19150	1	49	23.27	
			25	0	22.21	
			25	12	22.26	
			25	25	22.27	
			50	0	22.18	
			1	0	22.94	
			1	25	22.78	
			1	49	22.69	
			25	0	22.46	
			25	12	22.39	
			25	25	22.39	
			50	0	22.27	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1855	18650	10	1	0	22.19
				1	25	22.19
				1	49	22.18
				25	0	22.17
				25	12	22.17
				25	25	22.16
				50	0	22.16
	1880	18900		1	0	22.18
				1	25	22.19
				1	49	22.19
				25	0	22.19
				25	12	22.19
				25	25	22.19
				50	0	22.18
	1905	19150		1	0	22.28
				1	25	22.28
				1	49	22.29
				25	0	22.29
				25	12	22.29
				25	25	22.29
				50	0	22.29

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1857.5	18675	15	1	0	23.91
				1	37	23.86
				1	74	23.86
				36	0	22.94
				36	29	23.07
				36	30	23.06
				75	0	22.96
	1880	18900		1	0	23.97
				1	37	24.03
				1	74	23.97
				36	0	22.93
				36	29	22.98
				36	30	22.97
				75	0	23.01
	1902.5	19125		1	0	23.87
				1	37	23.95
				1	74	23.93
				36	0	23.03
				36	29	23.17
				36	30	23.15
				75	0	23.00
16QAM	1857.5	18675	1	0	23.32	
			1	37	23.29	
			1	74	23.29	
			36	0	22.19	
			36	29	22.14	
			36	30	22.15	
			75	0	22.15	
	1880	18900	1	0	23.71	
			1	37	23.83	
			1	74	23.83	
			36	0	22.11	
			36	29	22.13	
			36	30	22.14	
			75	0	22.06	
	1902.5	19125	1	0	23.55	
			1	37	23.65	
			1	74	23.44	
			36	0	22.23	
			36	29	22.31	
			36	30	22.21	
			75	0	22.13	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1857.5	18675	15	1	0	22.16
				1	37	22.15
				1	74	22.16
				36	0	22.16
				36	29	22.17
				36	30	22.16
				75	0	22.16
	1880	18900		1	0	22.05
				1	37	22.07
				1	74	22.08
				36	0	22.07
				36	29	22.07
				36	30	22.06
				75	0	22.06
	1902.5	19125		1	0	22.13
				1	37	22.13
				1	74	22.14
				36	0	22.14
				36	29	22.14
				36	30	22.14
				75	0	22.25

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1860	18700	20	1	0	24.09
				1	49	24.02
				1	99	24.00
				50	0	23.09
				50	24	22.92
				50	50	22.98
	100	0		22.96		
	1	0		24.08		
	1	49		24.14		
	1	99		24.13		
	50	0		23.05		
	50	24		23.10		
	50	50		23.11		
	100	0		23.07		
	1	0		24.02		
	1	49		24.10		
	1	99		24.14		
	50	0		23.08		
50	24	23.05				
50	50	23.04				
100	0	23.18				
16QAM	1860	18700	1	0	23.31	
			1	49	23.23	
			1	99	23.16	
			50	0	22.23	
			50	24	22.15	
			50	50	22.16	
	100	0	22.03			
	1	0	23.04			
	1	49	23.20			
	1	99	23.08			
	50	0	22.11			
	50	24	22.20			
	50	50	22.21			
	100	0	22.17			
	1	0	23.81			
	1	49	23.92			
	1	99	23.92			
	50	0	22.14			
50	24	22.23				
50	50	22.19				
100	0	22.21				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1860	18700	20	1	0	22.04
				1	49	22.04
				1	99	22.04
				50	0	22.06
				50	24	22.05
				50	50	22.05
				100	0	22.05
	1880	18900		1	0	22.17
				1	49	22.17
				1	99	22.17
				50	0	22.03
				50	24	22.02
				50	50	22.02
				100	0	22.02
	1900	19100		1	0	22.33
				1	49	22.33
				1	99	22.33
				50	0	22.22
				50	24	22.22
				50	50	22.22
				100	0	22.22

LTE Band 4

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	19957	1.4	1	0	24.65
				1	3	24.65
				1	5	24.60
				3	0	24.68
				3	1	24.70
				3	3	24.68
	1732.5	20175		6	0	23.68
				1	0	24.55
				1	3	24.42
				1	5	24.53
				3	0	24.47
				3	1	24.47
	1754.3	20393		3	3	24.60
				6	0	23.46
				1	0	24.34
				1	3	24.22
				1	5	24.44
				3	0	24.21
16QAM	1710.7	19957	3	1	24.31	
			3	3	24.27	
			6	0	23.21	
			1	0	24.47	
			1	3	24.52	
			1	5	24.47	
	1732.5	20175	3	0	23.82	
			3	1	23.88	
			3	3	23.87	
			6	0	22.98	
			1	0	23.77	
			1	3	24.24	
	1754.3	20393	1	5	24.23	
			3	0	23.52	
			3	1	23.78	
			3	3	23.69	
			6	0	22.74	
			1	0	23.42	
1	3	23.40				
1	5	23.30				
3	0	23.28				
3	1	23.25				
3	3	23.26				
6	0	22.66				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	19957	1.4	1	0	22.98
				1	3	22.98
				1	5	22.98
				3	0	22.97
				3	1	22.68
				3	3	22.88
				6	0	22.84
	1732.5	20175		1	0	22.75
				1	3	22.75
				1	5	22.75
				3	0	22.64
				3	1	22.65
				3	3	22.75
				6	0	22.75
	1754.3	20393		1	0	22.54
				1	3	22.50
				1	5	22.33
				3	0	22.35
				3	1	22.35
				3	3	22.34
				6	0	22.40

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	19965	3	1	0	24.73
				1	8	24.46
				1	14	24.53
				8	0	23.64
				8	4	23.62
				8	7	23.63
				15	0	23.69
	1732.5	20175		1	0	24.50
				1	8	24.50
				1	14	24.48
				8	0	23.44
				8	4	23.44
				8	7	23.45
				15	0	23.45
	1753.5	20385		1	0	24.37
				1	8	24.35
				1	14	24.30
				8	0	23.23
				8	4	23.23
				8	7	23.23
				15	0	23.24
16QAM	1711.5	19965	1	0	24.23	
			1	8	24.07	
			1	14	24.06	
			8	0	23.16	
			8	4	23.05	
			8	7	23.04	
			15	0	22.88	
	1732.5	20175	1	0	24.32	
			1	8	24.33	
			1	14	24.20	
			8	0	22.65	
			8	4	22.66	
			8	7	22.63	
			15	0	22.53	
	1753.5	20385	1	0	23.08	
			1	8	23.08	
			1	14	22.97	
			8	0	22.53	
			8	4	22.53	
			8	7	22.53	
			15	0	22.47	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	19965	3	1	0	22.88
				1	8	22.88
				1	14	22.89
				8	0	22.89
				8	4	22.88
				8	7	22.89
				15	0	22.89
	1732.5	20175		1	0	22.61
				1	8	22.61
				1	14	22.54
				8	0	22.58
				8	4	22.68
				8	7	22.62
				15	0	22.58
	1753.5	20385		1	0	22.39
				1	8	22.39
				1	14	22.31
				8	0	22.24
				8	4	22.39
				8	7	22.39
				15	0	22.38

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1712.5	19975	5	1	0	24.65
				1	12	24.59
				1	24	24.58
				12	0	23.75
				12	7	23.61
				12	13	23.61
				25	0	23.55
	1732.5	20175		1	0	24.63
				1	12	24.51
				1	24	24.62
				12	0	23.46
				12	7	23.47
				12	13	23.47
				25	0	23.47
	1752.5	20375		1	0	24.07
				1	12	23.90
				1	24	23.90
				12	0	23.22
				12	7	23.25
				12	13	23.25
				25	0	23.23
16QAM	1712.5	19975	1	0	22.99	
			1	12	22.96	
			1	24	22.97	
			12	0	22.81	
			12	7	22.67	
			12	13	22.67	
			25	0	22.73	
	1732.5	20175	1	0	23.56	
			1	12	23.45	
			1	24	23.68	
			12	0	22.63	
			12	7	22.53	
			12	13	22.53	
			25	0	22.61	
	1752.5	20375	1	0	22.84	
			1	12	22.84	
			1	24	22.84	
			12	0	22.23	
			12	7	22.17	
			12	13	22.17	
			25	0	22.23	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	19975	5	1	0	22.79
				1	12	22.73
				1	24	22.85
				12	0	22.74
				12	7	22.85
				12	13	22.86
				25	0	22.86
	1732.5	20175		1	0	22.60
				1	12	22.62
				1	24	22.61
				12	0	22.61
				12	7	22.62
				12	13	22.62
				25	0	22.62
	1752.5	20375		1	0	22.44
				1	12	22.43
				1	24	22.44
				12	0	22.23
				12	7	22.23
				12	13	22.23
				25	0	22.44

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1715	20000	10	1	0	24.62	
				1	25	24.51	
				1	49	24.49	
				25	0	23.51	
				25	12	23.68	
				25	25	23.68	
	1732.5	20175		50	0	23.54	
				1	0	24.68	
				1	25	24.63	
				1	49	24.43	
				25	0	23.57	
				25	12	23.48	
	1750	20350		25	25	23.48	
				50	0	23.45	
				1	0	24.37	
				1	25	24.37	
				1	49	24.36	
				25	0	23.39	
	16QAM	1715		20000	25	12	23.33
					25	25	23.21
					50	0	23.34
					1	0	24.05
					1	25	23.81
					1	49	23.81
1732.5		20175	25	0	22.79		
			25	12	22.74		
			25	25	22.74		
			50	0	22.65		
			1	0	24.31		
			1	25	24.28		
1750		20350	1	49	24.19		
			25	0	22.71		
			25	12	22.59		
			25	25	22.60		
			50	0	22.63		
			1	0	23.12		
				1	25	23.08	
				1	49	22.92	
				25	0	22.61	
				25	12	22.47	
				25	25	22.47	
				50	0	22.45	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	20000	10	1	0	22.65
				1	25	22.65
				1	49	22.66
				25	0	22.65
				25	12	22.65
				25	25	22.66
				50	0	22.66
	1732.5	20175		1	0	22.63
				1	25	22.63
				1	49	22.63
				25	0	22.64
				25	12	22.64
				25	25	22.64
				50	0	22.64
	1750	20350		1	0	22.45
				1	25	22.45
				1	49	22.45
				25	0	22.45
				25	12	22.45
				25	25	22.32
				50	0	22.32

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	20025	15	1	0	24.70
				1	37	24.50
				1	74	24.48
				36	0	23.60
				36	29	23.51
				36	30	23.51
	1732.5	20175		75	0	23.53
				1	0	24.68
				1	37	24.31
				1	74	24.43
				36	0	23.47
				36	29	23.46
	1747.5	20325		36	30	23.45
				75	0	23.43
				1	0	24.43
				1	37	24.14
				1	74	24.14
				36	0	23.25
16QAM	1717.5	20025	36	29	23.14	
			36	30	23.15	
			75	0	23.23	
			1	0	24.17	
			1	37	24.06	
			1	74	24.05	
	1732.5	20175	36	0	22.72	
			36	29	22.75	
			36	30	22.77	
			75	0	22.79	
			1	0	23.79	
			1	37	23.54	
	1747.5	20325	1	74	23.57	
			36	0	22.75	
			36	29	22.63	
			36	30	22.63	
			75	0	22.62	
			1	0	23.80	
			1	37	23.71	
			1	74	23.68	
			36	0	22.49	
			36	29	22.31	
			36	30	22.31	
			75	0	22.36	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	20025	15	1	0	22.80
				1	37	22.80
				1	74	22.80
				36	0	22.80
				36	29	22.80
				36	30	22.81
				75	0	22.70
	1732.5	20175		1	0	22.62
				1	37	22.62
				1	74	22.62
				36	0	22.62
				36	29	22.63
				36	30	22.62
				75	0	22.63
	1747.5	20325		1	0	22.28
				1	37	22.36
				1	74	22.28
				36	0	22.37
				36	29	22.36
				36	30	22.37
				75	0	22.29

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	20050	20	1	0	24.87
				1	49	24.50
				1	99	24.47
				50	0	23.61
				50	24	23.57
				50	50	23.46
	100	0		23.56		
	1	0		24.56		
	1	49		24.58		
	1	99		24.57		
	50	0		23.64		
	50	24		23.42		
	50	50		23.42		
	100	0		23.43		
	1	0		24.52		
	1	49		24.29		
	1	99		24.28		
	50	0		23.43		
50	24	23.28				
50	50	23.29				
100	0	23.21				
16QAM	1720	20050	20	1	0	23.97
				1	49	23.69
				1	99	23.52
				50	0	22.81
				50	24	22.68
				50	50	22.68
	100	0		22.70		
	1	0		23.75		
	1	49		23.46		
	1	99		23.53		
	50	0		22.60		
	50	24		22.54		
	50	50		22.66		
	100	0		22.57		
	1	0		24.37		
	1	49		24.07		
	1	99		24.08		
	50	0		22.49		
50	24	22.42				
50	50	22.42				
100	0	22.40				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	20050	20	1	0	22.71
				1	49	22.71
				1	99	22.71
				50	0	22.71
				50	24	22.72
				50	50	22.71
				100	0	22.71
	1732.5	20175		1	0	22.57
				1	49	22.57
				1	99	22.57
				50	0	22.57
				50	24	22.57
				50	50	22.64
				100	0	22.56
	1745	20300		1	0	22.40
				1	49	22.40
				1	99	22.40
				50	0	22.41
				50	24	22.41
				50	50	22.41
				100	0	22.41

LTE Band 5

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	20407	1.4	1	0	24.71
				1	3	24.61
				1	5	24.63
				3	0	24.73
				3	1	24.74
				3	3	24.71
	836.5	20525		6	0	23.55
				1	0	24.49
				1	3	24.55
				1	5	24.54
				3	0	24.69
				3	1	24.64
	848.3	20643		3	3	24.64
				6	0	23.61
				1	0	24.47
				1	3	24.44
				1	5	24.42
				3	0	24.58
16QAM	824.7	20407	3	1	24.53	
			3	3	24.52	
			6	0	23.46	
			1	0	23.16	
			1	3	23.18	
			1	5	23.41	
	836.5	20525	3	0	23.82	
			3	1	23.82	
			3	3	23.81	
			6	0	22.92	
			1	0	23.72	
			1	3	23.88	
	848.3	20643	1	5	23.88	
			3	0	23.73	
			3	1	23.65	
			3	3	23.58	
			6	0	22.65	
			1	0	24.07	
1	3	24.01				
1	5	24.13				
3	0	23.45				
3	1	23.41				
3	3	23.31				
6	0	22.79				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	824.7	20407	1.4	1	0	22.92
				1	3	22.92
				1	5	22.91
				3	0	22.90
				3	1	22.90
				3	3	22.89
				6	0	22.89
	836.5	20525		1	0	22.65
				1	3	22.65
				1	5	22.66
				3	0	22.66
				3	1	22.66
				3	3	22.80
				6	0	22.80
	848.3	20643		1	0	22.75
				1	3	22.71
				1	5	22.71
				3	0	22.71
				3	1	22.71
				3	3	22.71
				6	0	22.71

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	20415	3	1	0	24.51
				1	8	24.41
				1	14	24.43
				8	0	23.61
				8	4	23.60
				8	7	23.59
	15	0		23.69		
	836.5	20525		1	0	24.44
				1	8	24.58
				1	14	24.57
				8	0	23.61
				8	4	23.49
				8	7	23.49
	847.5	20635		15	0	23.57
				1	0	24.63
				1	8	24.72
				1	14	24.55
				8	0	23.54
8			4	23.53		
16QAM	825.5	20415	8	7	23.53	
			15	0	23.39	
			1	0	24.07	
			1	8	24.05	
			1	14	24.04	
			8	0	23.05	
	836.5	20525	8	4	23.06	
			8	7	23.06	
			15	0	22.81	
			1	0	24.38	
			1	8	24.48	
			1	14	24.34	
	847.5	20635	8	0	22.75	
			8	4	22.75	
			8	7	22.75	
			15	0	22.73	
			1	0	23.55	
			1	8	23.44	
			1	14	23.41	
			8	0	22.75	
			8	4	22.73	
			8	7	22.73	
			15	0	22.65	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	825.5	20415	3	1	0	22.81
				1	8	22.81
				1	14	22.81
				8	0	22.81
				8	4	22.81
				8	7	22.81
				15	0	22.81
	836.5	20525		1	0	22.77
				1	8	22.68
				1	14	22.68
				8	0	22.68
				8	4	22.68
				8	7	22.67
				15	0	22.74
	847.5	20635		1	0	22.65
				1	8	22.65
				1	14	22.65
				8	0	22.65
				8	4	22.65
				8	7	22.66
				15	0	22.65

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	20425	5	1	0	24.68
				1	12	24.45
				1	24	24.43
				12	0	23.62
				12	7	23.45
				12	13	23.60
				25	0	23.48
	836.5	20525		1	0	24.74
				1	12	24.55
				1	24	24.55
				12	0	23.50
				12	7	23.52
				12	13	23.52
				25	0	23.57
	846.5	20625		1	0	24.58
				1	12	24.47
				1	24	24.46
				12	0	23.48
				12	7	23.45
				12	13	23.45
				25	0	23.66
16QAM	826.5	20425	1	0	22.94	
			1	12	22.80	
			1	24	22.79	
			12	0	22.86	
			12	7	22.70	
			12	13	22.70	
			25	0	22.73	
	836.5	20525	1	0	23.62	
			1	12	23.63	
			1	24	23.75	
			12	0	22.73	
			12	7	22.72	
			12	13	22.62	
			25	0	22.71	
	846.5	20625	1	0	23.61	
			1	12	23.64	
			1	24	23.64	
			12	0	22.58	
			12	7	22.62	
			12	13	22.63	
			25	0	22.70	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	826.5	20425	5	1	0	22.84
				1	12	22.73
				1	24	22.84
				12	0	22.84
				12	7	22.84
				12	13	22.84
				25	0	22.84
	836.5	20525		1	0	22.61
				1	12	22.61
				1	24	22.61
				12	0	22.72
				12	7	22.72
				12	13	22.72
				25	0	22.72
	846.5	20625		1	0	22.50
				1	12	22.50
				1	24	22.50
				12	0	22.50
				12	7	22.64
				12	13	22.50
				25	0	22.64

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	20450	10	1	0	24.48
				1	25	24.55
				1	49	24.44
				25	0	23.59
				25	12	23.45
				25	25	23.44
	836.5	20525		50	0	23.57
				1	0	24.58
				1	25	24.58
				1	49	24.58
				25	0	23.58
				25	12	23.51
	844	20600		25	25	23.52
				50	0	23.56
				1	0	24.58
				1	25	24.52
				1	49	24.51
				25	0	23.48
16QAM	829	20450	25	12	23.64	
			25	25	23.64	
			50	0	23.41	
			1	0	23.88	
			1	25	23.84	
			1	49	23.88	
	836.5	20525	25	0	22.68	
			25	12	22.70	
			25	25	22.70	
			50	0	22.71	
			1	0	24.37	
			1	25	24.30	
	844	20600	1	49	24.31	
			25	0	22.73	
			25	12	22.67	
			25	25	22.63	
			50	0	22.75	
			1	0	23.47	
			1	25	23.51	
			1	49	23.51	
			25	0	22.84	
			25	12	22.83	
			25	25	22.83	
			50	0	22.65	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	829	20450	10	1	0	22.71
				1	25	22.70
				1	49	22.70
				25	0	22.70
				25	12	22.71
				25	25	22.70
				50	0	22.71
	836.5	20525		1	0	22.70
				1	25	22.70
				1	49	22.70
				25	0	22.85
				25	12	22.68
				25	25	22.69
				50	0	22.69
	844	20600		1	0	22.65
				1	25	22.65
				1	49	22.51
				25	0	22.51
				25	12	22.51
				25	25	22.66
				50	0	22.65

LTE Band 7

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	2502.5	20775	5	1	0	23.29	
				1	12	23.13	
				1	24	23.08	
				12	0	22.11	
				12	7	22.02	
				12	13	22.01	
	2535	21100		25	0	22.12	
				1	0	23.37	
				1	12	23.42	
				1	24	23.40	
				12	0	22.31	
				12	7	22.43	
	2567.5	21425		12	13	22.42	
				25	0	22.26	
				1	0	23.12	
				1	12	22.81	
				1	24	22.79	
				12	0	22.33	
	16QAM	2502.5		20775	12	7	22.28
					12	13	22.27
					25	0	22.34
					1	0	21.67
					1	12	21.34
					1	24	21.52
2535		21100	12	0	21.46		
			12	7	21.08		
			12	13	21.07		
			25	0	21.26		
			1	0	22.13		
			1	12	22.07		
2567.5		21425	1	24	22.02		
			12	0	21.31		
			12	7	21.23		
			12	13	21.29		
			25	0	21.62		
			1	0	21.81		
				1	12	21.75	
				1	24	21.87	
				12	0	21.28	
				12	7	21.29	
				12	13	21.27	
				25	0	21.43	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2502.5	20775	5	1	0	21.25
				1	12	21.25
				1	24	21.24
				12	0	21.21
				12	7	21.22
				12	13	21.22
	2535	21100		25	0	21.35
				1	0	21.42
				1	12	21.78
				1	24	21.61
				12	0	21.61
				12	7	21.96
	2567.5	21425		12	13	21.78
				25	0	21.60
				1	0	21.43
				1	12	21.41
				1	24	21.45
				12	0	21.43
				12	7	21.43
				12	13	21.43
				25	0	21.28

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2505	20800	10	1	0	23.21
				1	25	23.07
				1	49	23.07
				25	0	22.19
				25	12	22.25
				25	25	22.25
				50	0	22.12
	2535	21100		1	0	23.25
				1	25	23.40
				1	49	23.40
				25	0	22.33
				25	12	22.46
				25	25	22.46
				50	0	22.38
	2565	21400		1	0	23.47
				1	25	23.30
				1	49	23.29
				25	0	22.34
				25	12	22.29
				25	25	22.29
				50	0	22.37
16QAM	2505	20800	1	0	22.61	
			1	25	22.55	
			1	49	22.27	
			25	0	21.18	
			25	12	21.31	
			25	25	21.31	
			50	0	21.28	
	2535	21100	1	0	23.04	
			1	25	23.21	
			1	49	23.27	
			25	0	21.49	
			25	12	21.49	
			25	25	21.49	
			50	0	21.91	
	2565	21400	1	0	21.97	
			1	25	21.89	
			1	49	21.88	
			25	0	21.45	
			25	12	21.46	
			25	25	21.46	
			50	0	21.42	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2505	20800	10	1	0	21.28
				1	25	21.17
				1	49	21.17
				25	0	21.28
				25	12	21.28
				25	25	21.28
				50	0	21.29
	2535	21100		1	0	21.90
				1	25	21.90
				1	49	21.90
				25	0	21.90
				25	12	21.90
				25	25	21.91
				50	0	21.90
	2565	21400		1	0	21.43
				1	25	21.42
				1	49	21.48
				25	0	21.37
				25	12	21.43
				25	25	21.37
				50	0	21.44

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2507.5	20825	15	1	0	23.40
				1	37	23.09
				1	74	23.08
				36	0	22.01
				36	29	22.32
				36	30	22.20
				75	0	22.34
	2535	21100		1	0	23.30
				1	37	23.36
				1	74	23.34
				36	0	22.36
				36	29	22.44
				36	30	22.23
				75	0	22.28
	2562.5	21375		1	0	23.45
				1	37	23.25
				1	74	23.22
				36	0	22.41
				36	29	22.35
				36	30	22.34
				75	0	22.23
16QAM	2507.5	20825	1	0	22.55	
			1	37	22.42	
			1	74	22.44	
			36	0	21.32	
			36	29	21.31	
			36	30	21.31	
			75	0	21.21	
	2535	21100	1	0	22.58	
			1	37	22.78	
			1	74	22.78	
			36	0	21.42	
			36	29	21.44	
			36	30	21.46	
			75	0	21.87	
	2562.5	21375	1	0	22.90	
			1	37	22.77	
			1	74	22.59	
			36	0	21.35	
			36	29	21.39	
			36	30	21.39	
			75	0	21.37	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2507.5	20825	15	1	0	21.30
				1	37	21.35
				1	74	21.47
				36	0	21.35
				36	29	21.28
				36	30	21.28
				75	0	21.35
	2535	21100		1	0	21.81
				1	37	21.81
				1	74	21.81
				36	0	21.81
				36	29	21.81
				36	30	21.81
				75	0	21.81
	2562.5	21375		1	0	21.37
				1	37	21.38
				1	74	21.39
				36	0	21.39
				36	29	21.39
				36	30	21.39
				75	0	21.40

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2510	20850	20	1	0	23.36
				1	49	23.17
				1	99	23.17
				50	0	22.07
				50	24	22.09
				50	50	22.09
	2535	21100		100	0	22.02
				1	0	23.36
				1	49	23.55
				1	99	23.48
				50	0	22.17
				50	24	22.39
	2560	21350		50	50	22.38
				100	0	22.61
				1	0	23.56
				1	49	23.39
				1	99	23.37
				50	0	22.45
16QAM	2510	20850	50	24	22.21	
			50	50	22.31	
			100	0	22.36	
			1	0	22.07	
			1	49	21.82	
			1	99	21.83	
	2535	21100	50	0	21.24	
			50	24	21.33	
			50	50	21.33	
			100	0	21.61	
			1	0	22.88	
			1	49	23.02	
	2560	21350	1	99	23.02	
			50	0	21.49	
			50	24	21.52	
			50	50	21.52	
			100	0	21.73	
			1	0	23.15	
1	49	23.07				
1	99	22.94				
50	0	21.47				
50	24	21.32				
50	50	21.50				
100	0	21.51				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2510	20850	20	1	0	21.61
				1	49	21.60
				1	99	21.60
				50	0	21.60
				50	24	21.60
				50	50	21.60
				100	0	21.60
	2535	21100		1	0	21.73
				1	49	21.73
				1	99	21.73
				50	0	21.73
				50	24	21.73
				50	50	21.72
				100	0	21.73
	2560	21350		1	0	21.52
				1	49	21.52
				1	99	21.52
				50	0	21.52
				50	24	21.52
				50	50	21.53
				100	0	21.53

LTE Band 12

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	699.7	23017	1.4	1	0	24.22
				1	3	24.23
				1	5	24.25
				3	0	24.24
				3	1	24.22
				3	3	24.36
	707.5	23095		6	0	23.11
				1	0	24.13
				1	3	24.19
				1	5	24.17
				3	0	24.21
				3	1	24.33
	715.3	23173		3	3	24.31
				6	0	23.35
				1	0	24.38
				1	3	24.43
				1	5	24.26
				3	0	24.21
16QAM	699.7	23017	3	1	24.29	
			3	3	24.29	
			6	0	23.28	
			1	0	23.53	
			1	3	23.59	
			1	5	23.63	
	707.5	23095	3	0	23.36	
			3	1	23.30	
			3	3	23.58	
			6	0	22.54	
			1	0	24.12	
			1	3	23.53	
	715.3	23173	1	5	23.53	
			3	0	23.30	
			3	1	23.27	
			3	3	23.28	
			6	0	22.64	
			1	0	23.06	
			1	3	23.07	
			1	5	23.02	
			3	0	23.36	
			3	1	23.40	
			3	3	23.40	
			6	0	22.40	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	699.7	23017	1.4	1	0	22.54
				1	3	22.42
				1	5	22.41
				3	0	22.41
				3	1	22.53
				3	3	22.52
				6	0	22.52
	707.5	23095		1	0	22.59
				1	3	22.59
				1	5	22.59
				3	0	22.59
				3	1	22.65
				3	3	22.42
				6	0	22.42
	715.3	23173		1	0	22.53
				1	3	22.40
				1	5	22.40
				3	0	22.40
				3	1	22.54
				3	3	22.50
				6	0	22.45

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	700.5	23025	3	1	0	24.32
				1	8	24.24
				1	14	24.23
				8	0	23.27
				8	4	23.31
				8	7	23.32
				15	0	23.30
	707.5	23095		1	0	24.39
				1	8	24.17
				1	14	24.15
				8	0	23.21
				8	4	23.29
				8	7	23.28
				15	0	23.16
	714.5	23165		1	0	24.51
				1	8	24.28
				1	14	24.43
				8	0	23.29
				8	4	23.25
				8	7	23.25
				15	0	23.23
16QAM	700.5	23025	1	0	23.54	
			1	8	23.64	
			1	14	23.60	
			8	0	22.51	
			8	4	22.58	
			8	7	22.59	
			15	0	22.45	
	707.5	23095	1	0	23.46	
			1	8	23.51	
			1	14	23.51	
			8	0	22.45	
			8	4	22.46	
			8	7	22.47	
			15	0	22.35	
	714.5	23165	1	0	22.98	
			1	8	22.93	
			1	14	22.93	
			8	0	22.57	
			8	4	22.55	
			8	7	22.55	
			15	0	22.29	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	700.5	23025	3	1	0	22.45
				1	8	22.45
				1	14	22.45
				8	0	22.46
				8	4	22.45
				8	7	22.45
				15	0	22.45
	707.5	23095		1	0	22.30
				1	8	22.41
				1	14	22.46
				8	0	22.47
				8	4	22.27
				8	7	22.30
				15	0	22.42
	714.5	23165		1	0	22.30
				1	8	22.38
				1	14	22.30
				8	0	22.30
				8	4	22.30
				8	7	22.31
				15	0	22.30

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	701.5	23035	5	1	0	24.33
				1	12	24.22
				1	24	24.21
				12	0	23.33
				12	7	23.33
				12	13	23.33
				25	0	23.20
	707.5	23095		1	0	24.21
				1	12	24.24
				1	24	24.23
				12	0	23.29
				12	7	23.15
				12	13	23.15
				25	0	23.33
	713.5	23155		1	0	24.08
				1	12	24.12
				1	24	24.15
				12	0	23.27
				12	7	23.31
				12	13	23.31
				25	0	23.23
16QAM	701.5	23035	1	0	22.51	
			1	12	22.49	
			1	24	22.49	
			12	0	22.29	
			12	7	22.34	
			12	13	22.34	
			25	0	22.51	
	707.5	23095	1	0	22.92	
			1	12	23.31	
			1	24	23.31	
			12	0	22.31	
			12	7	22.38	
			12	13	22.38	
			25	0	22.37	
	713.5	23155	1	0	22.88	
			1	12	22.96	
			1	24	22.96	
			12	0	22.26	
			12	7	22.30	
			12	13	22.30	
			25	0	22.26	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	701.5	23035	5	1	0	22.52
				1	12	22.52
				1	24	22.52
				12	0	22.52
				12	7	22.52
				12	13	22.52
				25	0	22.52
	707.5	23095		1	0	22.37
				1	12	22.37
				1	24	22.37
				12	0	22.37
				12	7	22.37
				12	13	22.37
				25	0	22.37
	713.5	23155		1	0	22.27
				1	12	22.27
				1	24	22.55
				12	0	22.54
				12	7	22.54
				12	13	22.54
				25	0	22.54

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	704	23060	10	1	0	24.26
				1	25	24.04
				1	49	24.18
				25	0	23.24
				25	12	23.25
				25	25	23.25
				50	0	23.28
	707.5	23095		1	0	24.27
				1	25	24.19
				1	49	24.25
				25	0	23.18
				25	12	23.26
				25	25	23.26
				50	0	23.28
	711	23130		1	0	24.19
				1	25	24.32
				1	49	24.32
				25	0	23.18
				25	12	23.31
				25	25	23.32
				50	0	23.13
16QAM	704	23060	1	0	23.75	
			1	25	23.65	
			1	49	23.49	
			25	0	22.40	
			25	12	22.29	
			25	25	22.42	
			50	0	22.47	
	707.5	23095	1	0	23.48	
			1	25	23.49	
			1	49	23.50	
			25	0	22.41	
			25	12	22.39	
			25	25	22.55	
			50	0	22.48	
	711	23130	1	0	22.90	
			1	25	22.83	
			1	49	22.83	
			25	0	22.51	
			25	12	22.49	
			25	25	22.50	
			50	0	22.41	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	704	23060	10	1	0	22.48
				1	25	22.48
				1	49	22.48
				25	0	22.32
				25	12	22.32
				25	25	22.32
				50	0	22.32
	707.5	23095		1	0	22.48
				1	25	22.47
				1	49	22.47
				25	0	22.47
				25	12	22.47
				25	25	22.48
				50	0	22.47
	711	23130		1	0	22.41
				1	25	22.41
				1	49	22.42
				25	0	22.42
				25	12	22.43
				25	25	22.43
				50	0	22.42

LTE Band 13

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	779.5	23205	5	1	0	24.27
				1	12	24.20
				1	24	24.24
				12	0	23.40
				12	7	23.29
				12	13	23.26
	25	0		23.32		
	782	23230		1	0	24.40
				1	12	24.37
				1	24	24.34
				12	0	23.44
				12	7	23.31
				12	13	23.30
	25	0		23.34		
	784.5	23255		1	0	24.26
				1	12	24.19
				1	24	24.18
				12	0	23.24
12			7	23.38		
12			13	23.32		
16QAM	779.5	23205	25	0	23.25	
			1	0	22.64	
			1	12	22.70	
			1	24	22.57	
			12	0	22.52	
			12	7	22.55	
	12	13	22.54			
	25	0	22.60			
	782	23230	1	0	23.62	
			1	12	23.57	
			1	24	23.55	
			12	0	22.45	
			12	7	22.23	
			12	13	22.22	
	25	0	22.43			
	784.5	23255	1	0	23.04	
			1	12	23.05	
			1	24	23.10	
12			0	22.40		
12			7	22.34		
12			13	22.34		
25	0	22.19				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	779.5	23205	5	1	0	22.59
				1	12	22.59
				1	24	22.58
				12	0	22.67
				12	7	22.55
				12	13	22.66
				25	0	22.65
	782	23230		1	0	22.44
				1	12	22.44
				1	24	22.44
				12	0	22.44
				12	7	22.44
				12	13	22.44
				25	0	22.44
	784.5	23255		1	0	22.28
				1	12	22.37
				1	24	22.47
				12	0	22.55
				12	7	22.49
				12	13	22.54
				25	0	22.55

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	782	23230	10	1	0	24.30
				1	25	24.29
				1	49	24.27
				25	0	23.34
				25	12	23.32
				25	25	23.31
				50	0	23.39
16QAM				1	0	23.89
				1	25	23.83
				1	49	23.82
				25	0	22.60
				25	12	22.49
				25	25	22.48
				50	0	22.57
64QAM	782	23230	10	1	0	22.58
				1	25	22.58
				1	49	22.58
				25	0	22.58
				25	12	22.58
				25	25	22.58
				50	0	22.58

LTE Band 17

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	706.5	23755	5	1	0	24.26
				1	12	24.19
				1	24	24.17
				12	0	23.20
				12	7	23.25
				12	13	23.23
	25	0		23.18		
	710	23790		1	0	24.25
				1	12	24.31
				1	24	24.31
				12	0	23.19
				12	7	23.32
				12	13	23.32
	713.5	23825		25	0	23.24
				1	0	24.03
				1	12	24.05
				1	24	24.04
				12	0	23.19
12			7	23.20		
16QAM	706.5	23755	12	13	23.19	
			25	0	23.23	
			1	0	22.59	
			1	12	22.56	
			1	24	22.58	
			12	0	22.33	
	710	23790	12	7	22.29	
			12	13	22.28	
			25	0	22.41	
			1	0	23.04	
			1	12	23.01	
			1	24	23.02	
	713.5	23825	12	0	22.00	
			12	7	22.28	
			12	13	22.44	
			25	0	22.38	
			1	0	23.39	
			1	12	23.29	
1	24	23.03				
12	0	22.38				
12	7	22.08				
12	13	22.17				
25	0	22.49				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	706.5	23755	5	1	0	22.40
				1	12	22.40
				1	24	22.40
				12	0	22.39
				12	7	22.51
				12	13	22.50
	710	23790		25	0	22.50
				1	0	22.38
				1	12	22.37
				1	24	22.37
				12	0	22.37
				12	7	22.36
	713.5	23825		12	13	22.36
				25	0	22.36
				1	0	22.49
				1	12	22.40
				1	24	22.48
				12	0	22.49
				12	7	22.49
				12	13	22.54
				25	0	22.49

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	709	23780	10	1	0	24.17
				1	25	24.12
				1	49	24.08
				25	0	23.28
				25	12	23.28
				25	25	23.28
	710	23790		50	0	23.24
				1	0	24.45
				1	25	24.22
				1	49	24.21
				25	0	23.15
				25	12	23.30
	711	23800		25	25	23.15
				50	0	23.31
				1	0	24.32
				1	25	24.35
				1	49	24.35
				25	0	23.21
16QAM	709	23780	25	12	23.31	
			25	25	23.32	
			50	0	23.24	
			1	0	23.43	
			1	25	23.50	
			1	49	23.56	
	710	23790	25	0	22.38	
			25	12	22.36	
			25	25	22.37	
			50	0	22.37	
			1	0	23.46	
			1	25	23.55	
	711	23800	1	49	23.47	
			25	0	22.38	
			25	12	22.34	
			25	25	22.36	
			50	0	22.46	
			1	0	22.86	
			1	25	23.06	
			1	49	23.06	
			25	0	22.61	
			25	12	22.60	
			25	25	22.61	
			50	0	22.37	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	709	23780	10	1	0	22.37
				1	25	22.36
				1	49	22.36
				25	0	22.36
				25	12	22.36
				25	25	22.08
				50	0	22.36
	710	23790		1	0	22.45
				1	25	22.45
				1	49	22.45
				25	0	22.45
				25	12	22.45
				25	25	22.45
				50	0	22.45
	711	23800		1	0	22.42
				1	25	22.53
				1	49	22.54
				25	0	22.33
				25	12	22.48
				25	25	22.54
				50	0	22.37

LTE Band 26(814-824)

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	814.7	26697	1.4	1	0	24.54
				1	3	24.46
				1	5	24.45
				3	0	24.51
				3	1	24.56
				3	3	24.53
	819	26740		6	0	23.38
				1	0	24.52
				1	3	24.58
				1	5	24.58
				3	0	24.73
				3	1	24.67
	823.3	26783		3	3	24.67
				6	0	23.54
				1	0	24.59
				1	3	24.66
				1	5	24.51
				3	0	24.62
16QAM	814.7	26697	3	1	24.65	
			3	3	24.65	
			6	0	23.57	
			1	0	23.80	
			1	3	23.83	
			1	5	23.89	
	819	26740	3	0	23.69	
			3	1	23.65	
			3	3	23.74	
			6	0	22.78	
			1	0	24.28	
			1	3	24.54	
	823.3	26783	1	5	24.54	
			3	0	23.45	
			3	1	23.44	
			3	3	23.60	
			6	0	22.73	
			1	0	23.22	
823.3	26783	1	3	23.33		
		1	5	23.39		
		3	0	23.53		
		3	1	23.40		
		3	3	23.40		
		6	0	22.80		

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	814.7	26697	1.4	1	0	22.78
				1	3	22.78
				1	5	22.78
				3	0	22.78
				3	1	22.78
				3	3	22.82
				6	0	22.82
	819	26740		1	0	22.73
				1	3	22.74
				1	5	22.74
				3	0	22.74
				3	1	22.74
				3	3	22.85
				6	0	22.85
	823.3	26783		1	0	22.80
				1	3	22.85
				1	5	22.81
				3	0	22.81
				3	1	22.81
				3	3	22.81
				6	0	22.81

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	815.5	26705	3	1	0	24.50
				1	8	24.61
				1	14	24.59
				8	0	23.53
				8	4	23.60
				8	7	23.60
	819	26740		15	0	23.46
				1	0	24.57
				1	8	24.60
				1	14	24.60
				8	0	23.50
				8	4	23.57
	822.5	26775		8	7	23.58
				8	0	23.56
				1	0	24.61
				1	8	24.68
				1	14	24.65
				8	0	23.48
16QAM	815.5	26705	8	4	23.50	
			8	7	23.50	
			15	0	23.42	
			1	0	23.83	
			1	8	23.79	
			1	14	23.79	
	819	26740	8	0	22.95	
			8	4	23.04	
			8	7	23.05	
			15	0	22.65	
			1	0	24.48	
			1	8	24.57	
	822.5	26775	1	14	24.57	
			8	0	22.84	
			8	4	22.84	
			8	7	22.85	
			15	0	22.65	
			1	0	23.12	
			1	8	23.36	
			1	14	23.28	
			8	0	22.92	
			8	4	22.74	
			8	7	22.74	
			15	0	22.67	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	815.5	26705	3	1	0	22.64
				1	8	22.65
				1	14	22.65
				8	0	22.64
				8	4	22.65
				8	7	22.65
				15	0	22.64
	819	26740		1	0	22.57
				1	8	22.62
				1	14	22.70
				8	0	22.63
				8	4	22.63
				8	7	22.63
				15	0	22.63
	822.5	26775		1	0	22.67
				1	8	22.68
				1	14	22.68
				8	0	22.68
				8	4	22.68
				8	7	22.68
				15	0	22.58

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	816.5	26715	5	1	0	24.61
				1	12	24.56
				1	24	24.56
				12	0	23.45
				12	7	23.56
				12	13	23.56
	819	26740		25	0	23.52
				1	0	24.68
				1	12	24.68
				1	24	24.68
				12	0	23.66
				12	7	23.49
	821.5	26765		12	13	23.50
				25	0	23.54
				1	0	24.50
				1	12	24.29
				1	24	24.39
				12	0	23.48
16QAM	816.5	26715	12	7	23.44	
			12	13	23.44	
			25	0	23.48	
			1	0	22.97	
			1	12	22.92	
			1	24	23.05	
	819	26740	12	0	22.61	
			12	7	22.68	
			12	13	22.59	
			25	0	22.76	
			1	0	23.83	
			1	12	23.84	
	821.5	26765	1	24	23.84	
			12	0	22.72	
			12	7	22.69	
			12	13	22.70	
			25	0	22.68	
			1	0	23.66	
1	12	23.11				
1	24	23.26				
12	0	22.55				
12	7	22.44				
12	13	22.44				
25	0	22.53				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	816.5	26715	5	1	0	22.76
				1	12	22.70
				1	24	22.86
				12	0	22.85
				12	7	22.85
				12	13	22.85
				25	0	22.85
	819	26740		1	0	22.68
				1	12	22.68
				1	24	22.57
				12	0	22.57
				12	7	22.68
				12	13	22.68
				25	0	22.57
	821.5	26765		1	0	22.64
				1	12	22.61
				1	24	22.64
				12	0	22.64
				12	7	22.64
				12	13	22.48
				25	0	22.80

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	819	26740	10	1	0	24.40
				1	25	24.44
				1	49	24.47
				25	0	23.55
				25	12	23.50
				25	25	23.50
16QAM				50	0	23.59
				1	0	23.99
				1	25	23.93
				1	49	23.93
				25	0	22.71
				25	12	22.64
64QAM	819	26740	10	25	25	22.65
				50	0	22.70
				1	0	22.70
				1	25	22.69
				1	49	22.70
				25	0	22.70
				25	12	22.70
25	25	22.70				
				50	0	22.70

LTE Band 26(824-849)

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	824.7	26797	1.4	1	0	24.66
				1	3	24.59
				1	5	24.56
				3	0	24.56
				3	1	24.45
				3	3	24.61
	836.5	26915		6	0	23.49
				1	0	24.49
				1	3	24.55
				1	5	24.54
				3	0	24.69
				3	1	24.63
	848.3	27033		3	3	24.63
				6	0	23.53
				1	0	24.47
				1	3	24.49
				1	5	24.47
				3	0	24.62
16QAM	824.7	26797	3	1	24.58	
			3	3	24.57	
			6	0	23.60	
			1	0	23.08	
			1	3	23.10	
			1	5	23.10	
	836.5	26915	3	0	23.40	
			3	1	23.48	
			3	3	23.44	
			6	0	22.70	
			1	0	24.13	
			1	3	24.27	
	848.3	27033	1	5	24.27	
			3	0	23.75	
			3	1	23.81	
			3	3	23.81	
			6	0	22.88	
			1	0	24.40	
1	3	24.43				
1	5	24.42				
3	0	23.41				
3	1	23.34				
3	3	23.35				
6	0	22.51				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	824.7	26797	1.4	1	0	22.69
				1	3	22.68
				1	5	22.68
				3	0	22.67
				3	1	22.68
				3	3	22.67
				6	0	22.67
	836.5	26915		1	0	22.83
				1	3	22.88
				1	5	22.93
				3	0	22.68
				3	1	22.68
				3	3	22.68
				6	0	22.68
	848.3	27033		1	0	22.51
				1	3	22.52
				1	5	22.52
				3	0	22.52
				3	1	22.52
				3	3	22.52
				6	0	22.52

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	825.5	26805	3	1	0	24.37
				1	8	24.45
				1	14	24.43
				8	0	23.59
				8	4	23.59
				8	7	23.58
	15	0		23.51		
	836.5	26915		1	0	24.41
				1	8	24.55
				1	14	24.55
				8	0	23.50
				8	4	23.61
				8	7	23.61
	847.5	27025		15	0	23.57
				1	0	24.61
				1	8	24.60
				1	14	24.65
				8	0	23.52
8			4	23.52		
16QAM	825.5	26805	8	7	23.51	
			15	0	23.37	
			1	0	24.00	
			1	8	23.99	
			1	14	24.04	
			8	0	23.06	
	836.5	26915	8	4	22.99	
			8	7	23.05	
			15	0	22.79	
			1	0	24.49	
			1	8	23.90	
			1	14	23.91	
	847.5	27025	8	0	22.73	
			8	4	22.77	
			8	7	22.63	
			15	0	22.78	
			1	0	23.36	
			1	8	23.47	
			1	14	23.47	
			8	0	22.80	
			8	4	22.71	
			8	7	22.71	
			15	0	22.50	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	825.5	26805	3	1	0	22.67
				1	8	22.68
				1	14	22.68
				8	0	22.68
				8	4	22.80
				8	7	22.68
				15	0	22.80
	836.5	26915		1	0	22.79
				1	8	22.74
				1	14	22.79
				8	0	22.74
				8	4	22.79
				8	7	22.74
				15	0	22.69
	847.5	27025		1	0	22.55
				1	8	22.56
				1	14	22.69
				8	0	22.65
				8	4	22.60
				8	7	22.60
				15	0	22.70

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	826.5	26815	5	1	0	24.52
				1	12	24.45
				1	24	24.53
				12	0	23.53
				12	7	23.57
				12	13	23.56
				25	0	23.59
	836.5	26915		1	0	24.67
				1	12	24.64
				1	24	24.64
				12	0	23.49
				12	7	23.54
				12	13	23.54
				25	0	23.51
	846.5	27015		1	0	24.37
				1	12	24.54
				1	24	24.53
				12	0	23.60
				12	7	23.57
				12	13	23.57
				25	0	23.56
16QAM	826.5	26815	1	0	22.82	
			1	12	22.91	
			1	24	22.90	
			12	0	22.73	
			12	7	22.66	
			12	13	22.66	
			25	0	22.80	
	836.5	26915	1	0	23.64	
			1	12	23.58	
			1	24	23.80	
			12	0	22.67	
			12	7	22.63	
			12	13	22.78	
			25	0	22.70	
	846.5	27015	1	0	23.65	
			1	12	23.60	
			1	24	23.59	
			12	0	22.61	
			12	7	22.65	
			12	13	22.66	
			25	0	22.78	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	826.5	26815	5	1	0	22.80
				1	12	22.80
				1	24	22.79
				12	0	22.79
				12	7	22.79
				12	13	22.79
				25	0	22.79
	836.5	26915		1	0	22.70
				1	12	22.71
				1	24	22.70
				12	0	22.65
				12	7	22.71
				12	13	22.71
				25	0	22.71
	846.5	27015		1	0	22.78
				1	12	22.51
				1	24	22.51
				12	0	22.51
				12	7	22.51
				12	13	22.51
				25	0	22.51

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	829	26840	10	1	0	24.40
				1	25	24.54
				1	49	24.47
				25	0	23.53
				25	12	23.54
				25	25	23.53
				50	0	23.52
	836.5	26915		1	0	24.68
				1	25	24.58
				1	49	24.68
				25	0	23.54
				25	12	23.61
				25	25	23.62
				50	0	23.66
	844	26990		1	0	24.46
				1	25	24.52
				1	49	24.51
				25	0	23.42
				25	12	23.61
				25	25	23.61
				50	0	23.36
16QAM	829	26840	1	0	24.17	
			1	25	24.05	
			1	49	23.97	
			25	0	22.71	
			25	12	22.80	
			25	25	22.80	
			50	0	22.80	
	836.5	26915	1	0	24.41	
			1	25	24.40	
			1	49	24.25	
			25	0	22.72	
			25	12	22.72	
			25	25	22.63	
			50	0	22.79	
	844	26990	1	0	23.49	
			1	25	23.50	
			1	49	23.49	
			25	0	22.87	
			25	12	22.80	
			25	25	22.80	
			50	0	22.60	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	829	26840	10	1	0	22.69
				1	25	22.69
				1	49	22.69
				25	0	22.69
				25	12	22.69
				25	25	22.69
				50	0	22.69
	836.5	26915		1	0	22.80
				1	25	22.80
				1	49	22.80
				25	0	22.69
				25	12	22.80
				25	25	22.70
				50	0	22.80
	844	26990		1	0	22.61
				1	25	22.61
				1	49	22.61
				25	0	22.61
				25	12	22.61
				25	25	22.61
				50	0	22.61

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	831.5	26865	15	1	0	24.50
				1	37	24.46
				1	74	24.46
				36	0	23.49
				36	29	23.60
				36	30	23.61
	836.5	26915		75	0	23.46
				1	0	24.64
				1	37	24.59
				1	74	24.58
				36	0	23.60
				36	29	23.60
	841.5	26965		36	30	23.61
				75	0	23.61
				1	0	24.47
				1	37	24.36
				1	74	24.35
				36	0	23.49
16QAM	831.5	26865	36	29	23.51	
			36	30	23.51	
			75	0	23.43	
			1	0	24.08	
			1	37	24.00	
			1	74	23.92	
	836.5	26915	36	0	22.68	
			36	29	22.70	
			36	30	22.70	
			75	0	22.67	
			1	0	23.80	
			1	37	23.65	
	841.5	26965	1	74	23.61	
			36	0	22.97	
			36	29	22.70	
			36	30	22.70	
			75	0	22.67	
			1	0	24.11	
			1	37	23.94	
			1	74	23.94	
			36	0	22.72	
			36	29	22.59	
			36	30	22.59	
			75	0	22.63	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	831.5	26865	15	1	0	22.67
				1	37	22.66
				1	74	22.66
				36	0	22.78
				36	29	22.77
				36	30	22.77
				75	0	22.66
	836.5	26915		1	0	22.83
				1	37	22.83
				1	74	22.83
				36	0	22.68
				36	29	22.68
				36	30	22.68
				75	0	22.68
	841.5	26965		1	0	22.63
				1	37	22.64
				1	74	22.64
				36	0	22.64
				36	29	22.64
				36	30	22.64
				75	0	22.64

LTE Band 38

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2572.5	37775	5	1	0	24.90
				1	12	24.58
				1	24	24.55
				12	0	23.99
				12	7	23.84
				12	13	23.83
	2595	38000		25	0	23.91
				1	0	23.49
				1	12	23.31
				1	24	23.30
				12	0	23.79
				12	7	23.67
	2617.5	38225		12	13	23.67
				25	0	23.71
				1	0	23.01
				1	12	23.06
				1	24	23.05
				12	0	23.35
16QAM	2572.5	37775	12	7	23.38	
			12	13	23.38	
			25	0	23.36	
			1	0	24.56	
			1	12	24.52	
			1	24	24.52	
	2595	38000	12	0	22.99	
			12	7	22.82	
			12	13	22.82	
			25	0	23.13	
			1	0	23.66	
			1	12	23.49	
	2617.5	38225	1	24	23.49	
			12	0	22.86	
			12	7	22.91	
			12	13	22.91	
			25	0	22.96	
			1	0	23.34	
1	12	23.38				
1	24	23.38				
12	0	22.76				
12	7	22.70				
12	13	22.70				
25	0	22.74				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2572.5	37775	5	1	0	23.13
				1	12	23.13
				1	24	23.13
				12	0	23.13
				12	7	23.13
				12	13	23.13
				25	0	23.13
	2595	38000		1	0	22.96
				1	12	22.96
				1	24	22.96
				12	0	22.96
				12	7	22.96
				12	13	22.96
				25	0	22.95
	2617.5	38225		1	0	22.74
				1	12	22.74
				1	24	22.74
				12	0	22.74
				12	7	22.74
				12	13	22.74
				25	0	22.74

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2575	37800	10	1	0	24.97
				1	25	24.89
				1	49	24.89
				25	0	24.10
				25	12	23.93
				25	25	23.93
	2595	38000		50	0	23.95
				1	0	23.78
				1	25	23.92
				1	49	23.91
				25	0	23.89
				25	12	23.81
	2615	38200		25	25	23.81
				50	0	23.90
				1	0	23.25
				1	25	23.77
				1	49	23.76
				25	0	23.45
16QAM	2575	37800	25	12	23.68	
			25	25	23.67	
			50	0	23.55	
			1	0	24.30	
			1	25	24.22	
			1	49	24.33	
	2595	38000	25	0	23.10	
			25	12	23.04	
			25	25	23.04	
			50	0	23.02	
			1	0	23.75	
			1	25	23.90	
	2615	38200	1	49	23.90	
			25	0	23.00	
			25	12	22.97	
			25	25	22.97	
			50	0	22.99	
			1	0	23.26	
1	25	23.77				
1	49	23.77				
25	0	23.03				
25	12	22.76				
25	25	22.76				
50	0	22.83				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2575	37800	10	1	0	23.02
				1	25	23.02
				1	49	23.02
				25	0	23.02
				25	12	23.02
				25	25	23.02
				50	0	23.02
	2595	38000		1	0	22.99
				1	25	22.99
				1	49	23.00
				25	0	22.99
				25	12	23.00
				25	25	22.99
				50	0	23.00
	2615	38200		1	0	22.83
				1	25	22.83
				1	49	22.83
				25	0	22.83
				25	12	22.83
				25	25	22.83
				50	0	22.83

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2577.5	37825	15	1	0	25.11
				1	37	24.26
				1	74	24.25
				36	0	24.09
				36	29	23.86
				36	30	23.86
				75	0	23.95
	2595	38000		1	0	24.06
				1	37	23.55
				1	74	23.54
				36	0	24.01
				36	29	23.72
				36	30	23.72
				75	0	23.84
	2612.5	38175		1	0	23.54
				1	37	23.47
				1	74	23.47
				36	0	23.53
				36	29	23.50
				36	30	23.49
				75	0	23.49
16QAM	2577.5	37825	1	0	24.25	
			1	37	23.97	
			1	74	23.97	
			36	0	23.07	
			36	29	22.94	
			36	30	22.94	
			75	0	23.16	
	2595	38000	1	0	24.04	
			1	37	23.56	
			1	74	23.55	
			36	0	22.92	
			36	29	22.83	
			36	30	22.83	
			75	0	23.11	
	2612.5	38175	1	0	23.10	
			1	37	22.79	
			1	74	22.79	
			36	0	23.04	
			36	29	23.02	
			36	30	23.02	
			75	0	23.03	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2577.5	37825	15	1	0	23.17
				1	37	23.16
				1	74	23.16
				36	0	23.17
				36	29	23.16
				36	30	23.17
				75	0	23.16
	2595	38000		1	0	23.11
				1	37	23.11
				1	74	23.11
				36	0	23.11
				36	29	23.11
				36	30	23.11
				75	0	23.11
	2612.5	38175		1	0	23.03
				1	37	23.03
				1	74	23.03
				36	0	23.03
				36	29	23.03
				36	30	23.03
				75	0	23.03

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	2580	37850	20	1	0	25.04
				1	49	24.32
				1	99	24.32
				50	0	23.96
				50	24	23.91
				50	50	23.91
				100	0	23.97
	2595	38000		1	0	24.59
				1	49	23.84
				1	99	23.83
				50	0	23.88
				50	24	23.85
				50	50	23.85
				100	0	23.89
	2610	38150		1	0	23.89
				1	49	23.68
				1	99	23.67
				50	0	23.70
				50	24	23.58
				50	50	23.58
				100	0	23.62
16QAM	2580	37850	1	0	24.35	
			1	49	24.15	
			1	99	24.14	
			50	0	23.30	
			50	24	23.21	
			50	50	23.20	
			100	0	23.02	
	2595	38000	1	0	23.64	
			1	49	23.52	
			1	99	23.75	
			50	0	23.11	
			50	24	22.83	
			50	50	22.83	
			100	0	22.94	
	2610	38150	1	0	23.47	
			1	49	23.27	
			1	99	23.27	
			50	0	23.02	
			50	24	22.91	
			50	50	22.92	
			100	0	22.92	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	2580	37850	20	1	0	23.03
				1	49	23.03
				1	99	23.04
				50	0	23.03
				50	24	23.03
				50	50	23.04
				100	0	23.04
	2595	38000		1	0	22.94
				1	49	22.93
				1	99	22.94
				50	0	22.94
				50	24	22.94
				50	50	22.94
				100	0	22.94
	2610	38150		1	0	22.92
				1	49	22.92
				1	99	22.92
				50	0	22.77
				50	24	22.77
				50	50	22.77
				100	0	22.78

LTE Band 66

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1710.7	131979	1.4	1	0	24.46
				1	3	24.61
				1	5	24.56
				3	0	24.56
				3	1	24.58
				3	3	24.57
	6	0		23.51		
	1	0		24.37		
	1	3		24.28		
	1	5		24.28		
	3	0		24.25		
	3	1		24.25		
	3	3		24.24		
	6	0		23.25		
	1	0		24.09		
	1	3		24.03		
	1	5		24.08		
	3	0		24.24		
3	1	24.34				
3	3	24.23				
6	0	23.17				
16QAM	1710.7	131979	1	0	24.36	
			1	3	24.32	
			1	5	24.31	
			3	0	23.65	
			3	1	23.72	
			3	3	23.72	
	6	0	22.80			
	1	0	23.31			
	1	3	23.44			
	1	5	23.40			
	3	0	23.16			
	3	1	23.27			
	3	3	23.25			
	6	0	22.44			
	1	0	23.00			
	1	3	23.10			
	1	5	23.09			
	3	0	23.02			
3	1	22.95				
3	3	22.95				
6	0	22.21				
1779.3	132665	1	0	24.09		
		1	3	24.03		
		1	5	24.08		
		3	0	24.24		
		3	1	24.34		
		3	3	24.23		

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1710.7	131979	1.4	1	0	22.80
				1	3	22.56
				1	5	22.56
				3	0	22.56
				3	1	22.56
				3	3	22.56
				6	0	22.56
	1755	132422		1	0	22.57
				1	3	22.39
				1	5	22.44
				3	0	22.35
				3	1	22.29
				3	3	22.45
				6	0	22.34
	1779.3	132665		1	0	22.17
				1	3	22.21
				1	5	22.21
				3	0	22.17
				3	1	22.24
				3	3	22.17
				6	0	22.17

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1711.5	131987	3	1	0	24.54
				1	8	24.52
				1	14	24.48
				8	0	23.47
				8	4	23.45
				8	7	23.45
	1755	132422		15	0	23.49
				1	0	24.31
				1	8	24.25
				1	14	24.32
				8	0	23.12
				8	4	23.14
	1778.5	132657		8	7	23.13
				15	0	23.13
				1	0	24.07
				1	8	24.10
				1	14	24.03
				8	0	23.14
16QAM	1711.5	131987	8	4	23.08	
			8	7	23.13	
			15	0	23.22	
			1	0	23.42	
			1	8	23.42	
			1	14	23.42	
	1755	132422	8	0	22.77	
			8	4	22.77	
			8	7	22.77	
			15	0	22.72	
			1	0	23.06	
			1	8	23.08	
	1778.5	132657	1	14	23.09	
			8	0	22.54	
			8	4	22.39	
			8	7	22.45	
			15	0	22.44	
			1	0	22.78	
			1	8	22.65	
			1	14	22.80	
			8	0	22.37	
			8	4	22.43	
			8	7	22.43	
			15	0	22.33	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1711.5	131987	3	1	0	22.68
				1	8	22.72
				1	14	22.64
				8	0	22.76
				8	4	22.67
				8	7	22.72
				15	0	22.64
	1755	132422		1	0	22.44
				1	8	22.33
				1	14	22.44
				8	0	22.43
				8	4	22.44
				8	7	22.43
				15	0	22.43
	1778.5	132657		1	0	22.33
				1	8	22.32
				1	14	22.32
				8	0	22.29
				8	4	22.29
				8	7	22.29
				15	0	22.32

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1712.5	131997	5	1	0	24.33	
				1	12	24.40	
				1	24	24.46	
				12	0	23.56	
				12	7	23.46	
				12	13	23.45	
	1755	132422		25	0	23.60	
				1	0	24.12	
				1	12	24.09	
				1	24	24.11	
				12	0	23.18	
				12	7	23.19	
	1777.5	132647		12	13	23.18	
				25	0	23.17	
				1	0	24.15	
				1	12	24.06	
				1	24	24.10	
				12	0	23.14	
	16QAM	1712.5		131997	12	7	23.14
					12	13	23.13
					25	0	23.06
					1	0	23.58
					1	12	23.59
					1	24	23.57
1755		132422	12	0	22.67		
			12	7	22.63		
			12	13	22.60		
			25	0	22.72		
			1	0	22.96		
			1	12	22.92		
1777.5		132647	1	24	23.00		
			12	0	22.22		
			12	7	22.17		
			12	13	22.16		
			25	0	22.22		
			1	0	22.83		
				1	12	22.75	
				1	24	22.86	
				12	0	22.07	
				12	7	22.02	
				12	13	22.00	
				25	0	22.14	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1712.5	131997	5	1	0	22.71
				1	12	22.72
				1	24	22.48
				12	0	22.60
				12	7	22.55
				12	13	22.71
				25	0	22.67
	1755	132422		1	0	22.22
				1	12	22.22
				1	24	22.22
				12	0	22.21
				12	7	22.21
				12	13	22.42
				25	0	22.42
	1777.5	132647		1	0	22.35
				1	12	22.34
				1	24	22.35
				12	0	22.34
				12	7	22.34
				12	13	22.34
				25	0	22.34

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)	
QPSK	1715	132022	10	1	0	24.58	
				1	25	24.57	
				1	49	24.53	
				25	0	23.49	
				25	12	23.62	
				25	25	23.62	
	1755	132422		50	0	23.62	
				1	0	24.22	
				1	25	24.33	
				1	49	24.30	
				25	0	23.26	
				25	12	23.23	
	1775	132622		25	25	23.22	
				50	0	23.18	
				1	0	24.17	
				1	25	24.01	
				1	49	24.05	
				25	0	23.19	
	16QAM	1715		132022	25	12	23.07
					25	25	23.06
					50	0	23.15
					1	0	23.56
					1	25	23.49
					1	49	23.38
1755		132422	25	0	22.87		
			25	12	22.66		
			25	25	22.87		
			50	0	22.80		
			1	0	22.96		
			1	25	22.94		
1775		132622	1	49	22.95		
			25	0	22.47		
			25	12	22.37		
			25	25	22.41		
			50	0	22.35		
			1	0	23.15		
				1	25	22.65	
				1	49	22.74	
				25	0	22.32	
				25	12	22.43	
				25	25	22.42	
				50	0	22.24	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1715	132022	10	1	0	22.64
				1	25	22.56
				1	49	22.73
				25	0	22.77
				25	12	22.69
				25	25	22.65
				50	0	22.68
	1755	132422		1	0	22.35
				1	25	22.34
				1	49	22.34
				25	0	22.34
				25	12	22.33
				25	25	22.33
				50	0	22.33
	1775	132622		1	0	22.24
				1	25	22.20
				1	49	22.31
				25	0	22.23
				25	12	22.35
				25	25	22.30
				50	0	22.35

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1717.5	132047	15	1	0	24.50
				1	37	24.40
				1	74	24.34
				36	0	23.51
				36	29	23.43
				36	30	23.58
	1755	132422		75	0	23.58
				1	0	24.33
				1	37	24.25
				1	74	24.32
				36	0	23.25
				36	29	23.14
	1772.5	132597		36	30	23.13
				75	0	23.05
				1	0	24.04
				1	37	23.91
				1	74	23.92
				36	0	23.27
16QAM	1717.5	132047	36	29	23.09	
			36	30	23.07	
			75	0	23.18	
			1	0	24.04	
			1	37	23.95	
			1	74	23.94	
	1755	132422	36	0	22.58	
			36	29	22.64	
			36	30	22.64	
			75	0	22.66	
			1	0	23.58	
			1	37	23.55	
	1772.5	132597	1	74	23.55	
			36	0	22.33	
			36	29	22.35	
			36	30	22.35	
			75	0	22.26	
			1	0	23.52	
1	37	23.42				
1	74	23.45				
36	0	22.25				
36	29	22.20				
36	30	22.20				
75	0	22.17				

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1717.5	132047	15	1	0	22.66
				1	37	22.65
				1	74	22.65
				36	0	22.65
				36	29	22.65
				36	30	22.64
				75	0	22.64
	1755	132422		1	0	22.25
				1	37	22.25
				1	74	22.26
				36	0	22.26
				36	29	22.26
				36	30	22.26
				75	0	22.24
	1772.5	132597		1	0	22.18
				1	37	22.28
				1	74	22.28
				36	0	22.33
				36	29	22.28
				36	30	22.28
				75	0	22.27

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
QPSK	1720	132072	20	1	0	24.56
				1	49	24.47
				1	99	24.42
				50	0	23.56
				50	24	23.42
				50	50	23.40
				100	0	23.38
	1755	132422		1	0	24.31
				1	49	24.23
				1	99	24.20
				50	0	23.20
				50	24	23.17
				50	50	23.16
				100	0	23.09
	1770	132572		1	0	24.46
				1	49	24.21
				1	99	24.23
				50	0	23.28
				50	24	23.01
				50	50	23.01
				100	0	23.08
16QAM	1720	132072	1	0	24.38	
			1	49	24.26	
			1	99	24.24	
			50	0	22.65	
			50	24	22.64	
			50	50	22.54	
			100	0	22.64	
	1755	132422	1	0	23.96	
			1	49	23.86	
			1	99	23.71	
			50	0	22.23	
			50	24	22.19	
			50	50	22.20	
			100	0	22.28	
	1770	132572	1	0	24.05	
			1	49	23.97	
			1	99	23.81	
			50	0	22.31	
			50	24	22.19	
			50	50	22.19	
			100	0	22.26	

Modulation	Carrier frequency (MHz)	UL Channel	BW	RB Size	RB Offset	Conducted power (dBm)
64QAM	1720	132072	20	1	0	22.63
				1	49	22.63
				1	99	22.62
				50	0	22.63
				50	24	22.64
				50	50	22.64
				100	0	22.63
	1755	132422		1	0	22.28
				1	49	22.28
				1	99	22.28
				50	0	22.28
				50	24	22.28
				50	50	22.27
				100	0	22.27
	1770	132572		1	0	22.27
				1	49	22.27
				1	99	22.27
				50	0	22.27
				50	24	22.27
				50	50	22.28
				100	0	22.27

6.5 Bluetooth Measurement result

BT

Duty Cycle

Modulation Type	Frequency (MHz)	Duty Cycle
GFSK(DH5)	2402	80.00%
π 4/DQPSK(2DH5)	2402	100.00%
8DPSK(3DH5)	2402	80.00%

Conducted Power

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK	7.20	7.38	6.54
π 4DQPSK	6.94	7.13	6.31
8DPSK	6.81	6.99	6.21

BLE

Duty Cycle

Modulation Type	Frequency (MHz)	Duty Cycle
GFSK (LE 1Mbps)	2402	90.00%

Conducted Power

Modulation type	Conducted Average Power(dBm)		
	2402MHz	2440MHz	2480MHz
GFSK (LE 1Mbps)	7.61	7.31	6.95

6.6 Wi-Fi Measurement result

WIFI 2.4GHz

Duty Cycle

Modulation Type	Frequency (MHz)	Chain	Duty Cycle
802.11b	2412	Chain0	98.54%
802.11g	2412	Chain0	82.46%
802.11n HT20	2412	Chain0	88.37%

Conducted power

Mode	Freq(MHz)	Chain	Average power output (dBm)
802.11b	2412MHz	Chain0	18.20
	2437MHz	Chain0	20.30
	2462MHz	Chain0	16.20
802.11g	2412MHz	Chain0	17.10
	2437MHz	Chain0	19.10
	2462MHz	Chain0	15.40
802.11n20M	2412MHz	Chain0	16.40
	2437MHz	Chain0	18.30
	2462MHz	Chain0	14.70

WIFI 5.2GHz

Duty Cycle

Test Mode	Frequency (MHz)	Duty Cycle (%)
802.11a	5180	87.51%
802.11n HT20	5180	78.14%
802.11n HT40	5190	62.66%
802.11ac VHT20	5180	78.61%
802.11ac VHT40	5190	71.28%
802.11ac VHT80	5210	62.91%

Conducted power

Mode	Freq (MHz)	Chain	Conducted average power output(dBm)
802.11a	5180	Chain0	15.61
	5220	Chain0	14.37
	5240	Chain0	14.09
802.11n20M	5180	Chain0	14.50
	5240	Chain0	13.49
802.11n40M	5190	Chain0	12.21
	5230	Chain0	11.30
802.11ac20M	5180	Chain0	12.87
	5220	Chain0	11.87
	5240	Chain0	11.68
802.11ac40M	5190	Chain0	12.21
	5230	Chain0	11.29
802.11ac80M	5210	Chain0	8.21

WIFI 5.8GHz

Duty Cycle

Test Mode	Frequency (MHz)	Duty Cycle (%)
802.11a	5745	85.87%
802.11n HT20	5745	78.86%
802.11n HT40	5755	63.64%
802.11ac VHT20	5745	79.24%
802.11ac VHT40	5755	76.66%
802.11ac VHT80	5775	64.09%

Conducted power

Mode	Freq (MHz)	Chain	Conducted average power output(dBm)
802.11a	5745	Chain0	15.32
	5785	Chain0	13.47
	5825	Chain0	15.36
802.11n20M	5745	Chain0	14.72
	5785	Chain0	12.74
	5825	Chain0	14.64
802.11n40M	5755	Chain0	11.32
	5795	Chain0	11.80
802.11ac20M	5745	Chain0	12.80
	5785	Chain0	10.85
	5825	Chain0	12.76
802.11ac40M	5755	Chain0	11.29
	5795	Chain0	11.67
802.11ac80M	5775	Chain0	6.71

6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Method1:

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- f (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f} \text{ (GHz)})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

Method2:

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.


MHz	5	10	15	20	25	mm
150	39	77	116	155	194	<i>SAR Test Exclusion Threshold (mW)</i>
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Max conducted power adjusted for tune-up tolerance(mW)	Exposure condition	SAR test exclusion threshold (mW)	Standalone SAR Required
BT/BLE	8.0	Head	10	No
		Body-worn/Hotspot	19	No
Wi-Fi 2.4GHz	112.2	Head	10	Yes
		Body-worn/Hotspot	19	Yes
Wi-Fi 5.2GHz	39.81	Head	7	Yes
		Body-worn/Hotspot	13	Yes
Wi-Fi 5.9GHz	35.48	Head	6	Yes
		Body-worn/Hotspot	12	Yes

6.8 RF exposure conditions

Refer to the follow picture “Antenna information” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

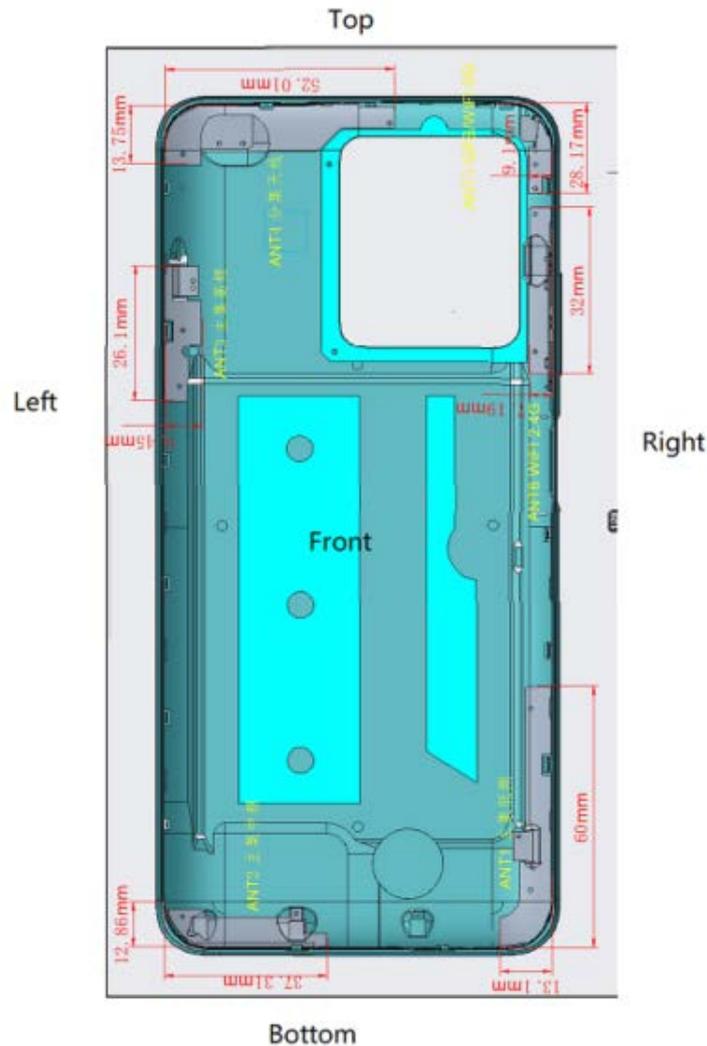

All of Implementation antenna

Antenna1: GSM: 850MHz WCDMA: B5 LTE FDD: B5/B12/B13/B17/B26/B28AB

Antenna2: GSM: 1800/1900 UMTS: B1/B2/B4 LTE: FDD B1/B2/B3/B4/B66 TDD B40

Antenna3: LTE: FDD B7 TDD B38/B41

Antenna4: All band div Antenna

Antenna5: 2.4G WIFI & Bluetooth

Antenna6: 5G WIFI&GPS

Note: we defined these position when we face the screen of EUT, the reason why we perform SAR test for these edges is that the structures of antennas is close to our body, and for the other edges do not necessary cause we already consider the worst case.

6.8.1 Head Exposure Conditions For WWAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

For WLAN

Test Configurations	SAR Required	Note
Left Touch	Yes	/
Left Tilt (15°)	Yes	/
Right Touch	Yes	/
Right Tilt (15°)	Yes	/

For BT/BLE

Test Configurations	SAR Required	Note
Left Touch	No	Excluded from SAR test
Left Tilt (15°)	No	
Right Touch	No	
Right Tilt (15°)	No	

6.8.2 Body Worn Exposure conditions

For WWAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

For WLAN

Test Configurations	SAR Required	Note
Back	Yes	/
Front	Yes	/

For BT/BLE

Test Configurations	SAR Required	Note
Back	No	Excluded from SAR test
Front	No	

6.8.3 Hotspot Exposure conditions For WWAN ANT1

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	No	>25mm
Bottom	Yes	<25mm
Left	No	>25mm
Right	Yes	<25mm

For WWAN ANT2

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	No	>25mm
Bottom	Yes	<25mm
Left	Yes	<25mm
Right	No	>25mm

For WWAN ANT3

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	No	>25mm
Bottom	No	>25mm
Left	Yes	<25mm
Right	No	>25mm

For WLAN ANT5

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	No	>25mm
Left	No	>25mm
Right	Yes	<25mm

For WLAN ANT6

Test Configurations	SAR Required	Antenna-to-edge(s) distances
Back	Yes*	<25mm
Front	Yes*	<25mm
Top	Yes	<25mm
Bottom	No	>25mm
Left	No	>25mm
Right	Yes	<25mm

For BT/BLE

Test Configurations	SAR Required	Note
Back	No	Excluded from SAR test
Front	No	
Top	No	
Bottom	No	
Left	No	
Right	No	

Note*: For hotspot mode, it's not necessary test Rear and Front position for several bands which there is no "hotspot power reduction" scheme. Because we already test these positions without hotspot mode in Body Exposure conditions.

6.9 System Checking

The manufacturer calibrates the probes annually. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Freq. (MHz)	Liquid parameters	measured	Target	Delta (%)	Tolerance (%)	Verdict
750	ϵ_r	41.352	41.90	-1.31	± 5	Pass
	σ [S/m]	0.923	0.89	3.71	± 5	Pass
835	ϵ_r	40.266	41.50	-2.97	± 5	Pass
	σ [S/m]	0.911	0.90	1.22	± 5	Pass
1800	ϵ_r	40.688	40.00	1.72	± 5	Pass
	σ [S/m]	1.418	1.40	1.29	± 5	Pass
2000	ϵ_r	39.844	40.00	-0.39	± 5	Pass
	σ [S/m]	1.427	1.40	1.93	± 5	Pass
2450	ϵ_r	38.343	39.20	-2.19	± 5	Pass
	σ [S/m]	1.866	1.80	3.67	± 5	Pass
2600	ϵ_r	39.672	39.00	1.72	± 5	Pass
	σ [S/m]	1.951	1.96	-0.46	± 5	Pass
5200	ϵ_r	35.69	36.00	-0.86	± 5	Pass
	σ [S/m]	4.60	4.66	-1.29	± 5	Pass
5800	ϵ_r	36.30	35.30	2.83	± 5	Pass
	σ [S/m]	5.42	5.27	2.85	± 5	Pass

Note: For DASY system, the conservative tolerance 5% could expand to 10% when the frequency under 3GHz

A system check measurement was made following once the determination of the dielectric parameters of the simulant, using the dipole validation kit. The system checking results (dielectric parameters and SAR values) are given in the table below.

Freq.(MHz)	SAR measured (normalized to 1W)		Target (Ref. Value)	Delta (%)	Tolerance (%)	Verdict
750	1g	8.28	8.40	-1.43	±10	Pass
	10g	5.60	5.70	-1.75	±10	Pass
835	1g	9.52	9.38	1.49	±10	Pass
	10g	6.42	6.25	2.72	±10	Pass
1800	1g	37.92	38.90	-2.52	±10	Pass
	10g	19.79	20.30	-2.51	±10	Pass
2000	1g	39.32	41.00	-4.10	±10	Pass
	10g	19.97	20.50	-2.59	±10	Pass
2450	1g	53.6	53.00	1.13	±10	Pass
	10g	25.37	24.50	3.55	±10	Pass
2600	1g	56.8	56.50	0.53	±10	Pass
	10g	26.62	25.40	4.80	±10	Pass
5200	1g	76.99	75.9	1.44	±10	Pass
	10g	21.8	21.4	1.87	±10	Pass
5800	1g	76.22	78.5	-2.90	±10	Pass
	10g	21.7	21.9	-0.91	±10	Pass

6.10 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

- a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
- b) All configurations for each device position in a), e.g., antenna extended and retracted, and
- c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Duty Factor = 1 / Duty Cycle(%)

For cellular network:

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor

For WLAN

Reported SAR (W/kg) = Measured SAR (W/kg) * Scaling Factor * Duty factor

2. Per KDB 447498 D01v06, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.
3. The distance between the EUT and the phantom bottom is 10mm.

Mode		Duty cycle	Duty factor	Note
Licensed Frequency	GSM 850	25%	NA	According to the theory, we configured duty cycle with relevant value on the communication tester, so correction factor do not need such as "duty factor"
	GSM 1900	37.5%		
	WCDMA Band	100%		
	FDD-LTE Band	100%		
	TDD-LTE Band	63.3%		
Unlicensed Frequency	BT DH5	90.0%	1.11	SRTC perform SAR test with non-signaling mode, and duty factor shall be considered because of the uncertainty of data traffic.
	WIFI 2.4GHz 802.11b	98.54%	1.01	
	WIFI 5.2GHz 802.11a	87.51%	1.14	
	WIFI 5.8GHz 802.11a	85.87%	1.16	

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 850

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case							Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel	Meas power(dBm)	Tune-up (dBm)	Scaling factor	First	Second	First	Second
GPRS/EDGE GMSK 2TxSlots	Head	Left Cheek	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.13	---	0.13	---
			H	31.35	31.50	1.04	---	---	---	---
		Left tilt	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.07	---	0.07	---
			H	31.35	31.50	1.04	---	---	---	---
		Right Cheek	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.10	---	0.10	---
			H	31.35	31.50	1.04	---	---	---	---
		Right tilt	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.06	---	0.06	---
			H	31.35	31.50	1.04	---	---	---	---
	Body-worn	Back	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.50	---	0.52	---
			H	31.35	31.50	1.04	---	---	---	---
		Front	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.29	---	0.29	---
			H	31.35	31.50	1.04	---	---	---	---
	Hotspot	Back	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.50	---	0.52	---
			H	31.35	31.50	1.04	---	---	---	---
		Front	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.29	---	0.29	---
			H	31.35	31.50	1.04	---	---	---	---
		Top	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	---	---	---	---
			H	31.35	31.50	1.04	---	---	---	---
		Bottom	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.21	---	0.21	---
			H	31.35	31.50	1.04	---	---	---	---
		Left	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	---	---	---	---
			H	31.35	31.50	1.04	---	---	---	---
		Right	L	31.37	31.50	1.03	---	---	---	---
			M	31.37	31.50	1.03	0.13	---	0.13	---
			H	31.35	31.50	1.04	---	---	---	---

Mode: GSM 1900

fL (MHz)=1850.2MHz

fM (MHz)=1880.0MHz

fH (MHz)=1909.8MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Mode	Test case			Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
	Exposure condition	Position	Channel				First	Second	First	Second
GPRS/EDGE GMSK 3TxSlots	Head	Left Cheek	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.22	---	0.25	---
			H	25.86	26.50	1.16	---	---	---	---
		Left tilt	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.11	---	0.12	---
			H	25.86	26.50	1.16	---	---	---	---
		Right Cheek	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.13	---	0.15	---
			H	25.86	26.50	1.16	---	---	---	---
		Right tilt	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.07	---	0.08	---
			H	25.86	26.50	1.16	---	---	---	---
	Body-worn	Back	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.80	---	0.92	---
			H	25.86	26.50	1.16	---	---	---	---
		Front	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.34	---	0.39	---
			H	25.86	26.50	1.16	---	---	---	---
	Hotspot	Back	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.80	---	0.92	---
			H	25.86	26.50	1.16	---	---	---	---
		Front	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.34	---	0.39	---
			H	25.86	26.50	1.16	---	---	---	---
		Top	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	---	---	---	---
			H	25.86	26.50	1.16	---	---	---	---
		Bottom	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.61	---	0.71	---
			H	25.86	26.50	1.16	---	---	---	---
		Left	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	0.21	---	0.24	---
			H	25.86	26.50	1.16	---	---	---	---
		Right	L	26.22	26.50	1.07	---	---	---	---
			M	25.88	26.50	1.15	---	---	---	---
			H	25.86	26.50	1.16	---	---	---	---

Mode: WCDMA BAND II

fL (MHz)= 1852.4MHz

fM (MHz)= 1880.0MHz

fH (MHz)= 1907.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)		
Mode	Exposure condition	Position	Channel				First	Second	First	Second	
RMC	Head	Left Cheek	L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.19	---	0.20	---	
			H	23.35	23.50	1.04	---	---	---	---	
		Left tilt	L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.15	---	0.16	---	
			H	23.35	23.50	1.04	---	---	---	---	
		Right Cheek	L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.16	---	0.17	---	
			H	23.35	23.50	1.04	---	---	---	---	
		Right tilt	L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.09	---	0.09	---	
			H	23.35	23.50	1.04	---	---	---	---	
		Body-worn	Back	L	23.30	23.50	1.05	0.99	0.99	1.04	1.03
				M	23.19	23.50	1.07	1.02	1.01	1.10	1.08
				H	23.35	23.50	1.04	1.01	1.00	1.05	1.04
			Front	L	23.30	23.50	1.05	---	---	---	---
				M	23.19	23.50	1.07	0.41	---	0.44	---
				H	23.35	23.50	1.04	---	---	---	---
		Hotspot	Back	L	23.30	23.50	1.05	0.99	0.99	1.04	1.03
				M	23.19	23.50	1.07	1.02	1.01	1.10	1.08
				H	23.35	23.50	1.04	1.01	1.00	1.05	1.04
			Front	L	23.30	23.50	1.05	---	---	---	---
				M	23.19	23.50	1.07	0.41	---	0.44	---
				H	23.35	23.50	1.04	---	---	---	---
	Top		L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	---	---	---	---	
			H	23.35	23.50	1.04	---	---	---	---	
	Bottom		L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.73	---	0.79	---	
			H	23.35	23.50	1.04	---	---	---	---	
	Left		L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	0.26	---	0.27	---	
			H	23.35	23.50	1.04	---	---	---	---	
	Right		L	23.30	23.50	1.05	---	---	---	---	
			M	23.19	23.50	1.07	---	---	---	---	
			H	23.35	23.50	1.04	---	---	---	---	

Mode: WCDMA BAND IV

fL (MHz)=1712.4MHz fM (MHz)=1732.4MHz fH (MHz)= 1752.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)		
Mode	Exposure condition	Position	Channel				First	Second	First	Second	
RMC	Head	Left Cheek	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.12	---	0.14	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Left tilt	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.09	---	0.10	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Right Cheek	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.10	---	0.11	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Right tilt	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.06	---	0.07	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Body-worn	Back	L	24.53	25.00	1.11	---	---	---	---
				M	24.50	25.00	1.12	0.78	---	0.87	---
				H	24.33	25.00	1.17	---	---	---	---
			Front	L	24.53	25.00	1.11	---	---	---	---
				M	24.50	25.00	1.12	0.31	---	0.35	---
				H	24.33	25.00	1.17	---	---	---	---
	Hotspot	Back	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.78	---	0.87	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Front	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.31	---	0.35	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Top	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	---	---	---	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Bottom	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.54	---	0.61	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Left	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	0.13	---	0.14	---	
			H	24.33	25.00	1.17	---	---	---	---	
		Right	L	24.53	25.00	1.11	---	---	---	---	
			M	24.50	25.00	1.12	---	---	---	---	
			H	24.33	25.00	1.17	---	---	---	---	

Mode: WCDMA BAND V

fL (MHz)=826.4MHz fM (MHz)=836.4MHz fH (MHz)= 846.6MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
RMC	Head	Left Cheek	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.12	---	0.15	---
			H	22.34	24.50	1.64	---	---	---	---
		Left tilt	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.06	---	0.08	---
			H	22.34	24.50	1.64	---	---	---	---
		Right Cheek	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.09	---	0.12	---
			H	22.34	24.50	1.64	---	---	---	---
		Right tilt	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.05	---	0.07	---
			H	22.34	24.50	1.64	---	---	---	---
	Body-worn	Back	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.36	---	0.46	---
			H	22.34	24.50	1.64	---	---	---	---
		Front	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.22	---	0.28	---
			H	22.34	24.50	1.64	---	---	---	---
	Hotspot	Back	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.36	---	0.46	---
			H	22.34	24.50	1.64	---	---	---	---
		Front	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.22	---	0.28	---
			H	22.34	24.50	1.64	---	---	---	---
		Top	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	---	---	---	---
			H	22.34	24.50	1.64	---	---	---	---
		Bottom	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.17	---	0.22	---
			H	22.34	24.50	1.64	---	---	---	---
		Left	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	---	---	---	---
			H	22.34	24.50	1.64	---	---	---	---
		Right	L	24.25	24.50	1.06	---	---	---	---
			M	23.42	24.50	1.28	0.11	---	0.14	---
			H	22.34	24.50	1.64	---	---	---	---

Mode: LTE Band 2

fL (MHz)= 1860MHz fM (MHz)= 1880MHz fH (MHz)= 1900MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.21	---	0.23	---
			H	24.20	24.50	1.07	---	---	---	---
		Left tilt	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.16	---	0.17	---
			H	24.20	24.50	1.07	---	---	---	---
		Right Cheek	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.17	---	0.19	---
			H	24.20	24.50	1.07	---	---	---	---
		Right tilt	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.10	---	0.10	---
			H	24.20	24.50	1.07	---	---	---	---
	Body-worn	Back	L	24.13	24.50	1.09	0.91	0.91	0.99	0.99
			M	24.14	24.50	1.09	0.96	0.94	1.04	1.03
			H	24.20	24.50	1.07	0.91	0.91	0.97	0.97
		Front	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.49	---	0.54	---
			H	24.20	24.50	1.07	---	---	---	---
	Hotspot	Back	L	24.13	24.50	1.09	0.91	0.91	0.99	0.99
			M	24.14	24.50	1.09	0.96	0.94	1.04	1.03
			H	24.20	24.50	1.07	0.91	0.91	0.97	0.97
		Front	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.49	---	0.54	---
			H	24.20	24.50	1.07	---	---	---	---
		Top	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	---	---	---	---
			H	24.20	24.50	1.07	---	---	---	---
		Bottom	L	24.13	24.50	1.09	0.80	0.80	0.87	0.87
			M	24.14	24.50	1.09	0.83	0.83	0.91	0.90
			H	24.20	24.50	1.07	0.81	0.80	0.87	0.86
		Left	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.29	---	0.32	---
			H	24.20	24.50	1.07	---	---	---	---
		Right	L	24.13	24.50	1.09	---	---	---	---
			M	24.14	24.50	1.09	0.15	---	0.17	---
			H	24.20	24.50	1.07	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	24.09	24.50	1.10	---	---	---	---
			M	24.02	24.50	1.12	0.16	---	0.18	---
			H	24.24	24.50	1.06	---	---	---	---
		Left tilt	L	24.09	24.50	1.10	---	---	---	---
			M	24.02	24.50	1.12	0.10	---	0.11	---

		Right Cheek	H	24.24	24.50	1.06	---	---	---	---	
			L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.11	---	0.12	---	
		Right tilt	H	24.24	24.50	1.06	---	---	---	---	
			L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.07	---	0.08	---	
		Body-worn	Back	L	24.09	24.50	1.10	---	---	---	---
				M	24.02	24.50	1.12	0.79	---	0.88	---
				H	24.24	24.50	1.06	---	---	---	---
	Front		L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.44	---	0.50	---	
			H	24.24	24.50	1.06	---	---	---	---	
	Hotspot	Back	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.79	---	0.88	---	
			H	24.24	24.50	1.06	---	---	---	---	
		Front	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.44	---	0.50	---	
			H	24.24	24.50	1.06	---	---	---	---	
		Top	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	---	---	---	---	
			H	24.24	24.50	1.06	---	---	---	---	
		Bottom	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.73	---	0.81	---	
			H	24.24	24.50	1.06	---	---	---	---	
		Left	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.26	---	0.29	---	
			H	24.24	24.50	1.06	---	---	---	---	
		Right	L	24.09	24.50	1.10	---	---	---	---	
			M	24.02	24.50	1.12	0.11	---	0.13	---	
			H	24.24	24.50	1.06	---	---	---	---	

Mode: LTE Band 4

fL (MHz)= 1720MHz

fM (MHz)= 1732.5MHz

fH (MHz)= 1745MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.20	---	0.21	---
			H	24.52	25.00	1.12	---	---	---	---
		Left tilt	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.09	---	0.10	---
			H	24.52	25.00	1.12	---	---	---	---
		Right Cheek	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.10	---	0.11	---
			H	24.52	25.00	1.12	---	---	---	---
		Right tilt	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.05	---	0.06	---
			H	24.52	25.00	1.12	---	---	---	---
	Body-worn	Back	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.76	---	0.82	---
			H	24.52	25.00	1.12	---	---	---	---
		Front	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.31	---	0.33	---
			H	24.52	25.00	1.12	---	---	---	---
	Hotspot	Back	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.76	---	0.82	---
			H	24.52	25.00	1.12	---	---	---	---
		Front	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.31	---	0.33	---
			H	24.52	25.00	1.12	---	---	---	---
		Top	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	---	---	---	---
			H	24.52	25.00	1.12	---	---	---	---
		Bottom	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.52	---	0.56	---
			H	24.52	25.00	1.12	---	---	---	---
		Left	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.12	---	0.13	---
			H	24.52	25.00	1.12	---	---	---	---
		Right	L	24.87	25.00	1.03	---	---	---	---
			M	24.68	25.00	1.08	0.07	---	0.07	---
			H	24.52	25.00	1.12	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.17	---	0.18	---
			H	24.31	25.00	1.17	---	---	---	---
	Left tilt	L	24.70	25.00	1.07	---	---	---	---	
		M	24.60	25.00	1.10	0.08	---	0.08	---	

		Right Cheek	H	24.31	25.00	1.17	---	---	---	---
			L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.08	---	0.09	---
		Right tilt	H	24.31	25.00	1.17	---	---	---	---
			L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.04	---	0.05	---
	Body-worn	Back	H	24.31	25.00	1.17	---	---	---	---
			L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.71	---	0.78	---
		Front	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.29	---	0.31	---
			H	24.31	25.00	1.17	---	---	---	---
	Hotspot	Back	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.71	---	0.78	---
			H	24.31	25.00	1.17	---	---	---	---
		Front	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.29	---	0.31	---
			H	24.31	25.00	1.17	---	---	---	---
		Top	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	---	---	---	---
			H	24.31	25.00	1.17	---	---	---	---
		Bottom	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.49	---	0.54	---
			H	24.31	25.00	1.17	---	---	---	---
		Left	L	24.70	25.00	1.07	---	---	---	---
			M	24.60	25.00	1.10	0.10	---	0.11	---
			H	24.31	25.00	1.17	---	---	---	---
Right	L	24.70	25.00	1.07	---	---	---	---		
	M	24.60	25.00	1.10	0.05	---	0.06	---		
	H	24.31	25.00	1.17	---	---	---	---		

Mode: LTE Band 5

fL (MHz)=829 MHz fM (MHz)=836.5MHz fH (MHz)= 844MHz

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.13	---	0.13	---
			H	24.72	25.00	1.07	---	---	---	---
		Left tilt	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.05	---	0.06	---
			H	24.72	25.00	1.07	---	---	---	---
		Right Cheek	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.08	---	0.09	---
			H	24.72	25.00	1.07	---	---	---	---
		Right tilt	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.05	---	0.05	---
			H	24.72	25.00	1.07	---	---	---	---
	Body-worn	Back	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.38	---	0.40	---
			H	24.72	25.00	1.07	---	---	---	---
		Front	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.21	---	0.22	---
			H	24.72	25.00	1.07	---	---	---	---
	Hotspot	Back	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.38	---	0.40	---
			H	24.72	25.00	1.07	---	---	---	---
		Front	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.21	---	0.22	---
			H	24.72	25.00	1.07	---	---	---	---
		Top	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	---	---	---	---
			H	24.72	25.00	1.07	---	---	---	---
		Bottom	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.17	---	0.18	---
			H	24.72	25.00	1.07	---	---	---	---
		Left	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.07	---	0.07	---
			H	24.72	25.00	1.07	---	---	---	---
		Right	L	24.71	25.00	1.07	---	---	---	---
			M	24.74	25.00	1.06	0.11	---	0.11	---
			H	24.72	25.00	1.07	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.11	---	0.11	---
			H	24.58	25.00	1.10	---	---	---	---
		Left tilt	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.05	---	0.05	---

		Right Cheek	H	24.58	25.00	1.10	---	---	---	---
			L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.07	---	0.07	---
		Right tilt	H	24.58	25.00	1.10	---	---	---	---
			L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.03	---	0.03	---
	Body-worn	Back	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.33	---	0.36	---
			H	24.58	25.00	1.10	---	---	---	---
		Front	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.16	---	0.17	---
			H	24.58	25.00	1.10	---	---	---	---
	Hotspot	Back	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.31	---	0.33	---
			H	24.58	25.00	1.10	---	---	---	---
		Front	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.18	---	0.19	---
			H	24.58	25.00	1.10	---	---	---	---
		Top	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	---	---	---	---
			H	24.58	25.00	1.10	---	---	---	---
		Bottom	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.12	---	0.13	---
			H	24.58	25.00	1.10	---	---	---	---
		Left	L	24.74	25.00	1.06	---	---	---	---
			M	24.69	25.00	1.07	0.05	---	0.05	---
			H	24.58	25.00	1.10	---	---	---	---
Right	L	24.74	25.00	1.06	---	---	---	---		
	M	24.69	25.00	1.07	0.09	---	0.09	---		
	H	24.58	25.00	1.10	---	---	---	---		

Mode: LTE Band 7

fL (MHz)=2510 MHz

fM (MHz)=2535MHz

fH (MHz)= 2560MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.36	---	0.40	---
			H	23.56	24.00	1.11	---	---	---	---
		Left tilt	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.22	---	0.25	---
			H	23.56	24.00	1.11	---	---	---	---
		Right Cheek	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.41	---	0.46	---
			H	23.56	24.00	1.11	---	---	---	---
		Right tilt	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.26	---	0.29	---
			H	23.56	24.00	1.11	---	---	---	---
	Body-worn	Back	L	23.40	24.00	1.15	0.83	0.82	0.95	0.94
			M	23.55	24.00	1.11	0.88	0.87	0.97	0.97
			H	23.56	24.00	1.11	0.82	0.82	0.91	0.90
		Front	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.34	---	0.37	---
			H	23.56	24.00	1.11	---	---	---	---
	Hotspot	Back	L	23.40	24.00	1.15	0.83	0.82	0.95	0.94
			M	23.55	24.00	1.11	0.88	0.87	0.97	0.97
			H	23.56	24.00	1.11	0.82	0.82	0.91	0.90
		Front	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.34	---	0.37	---
			H	23.56	24.00	1.11	---	---	---	---
		Top	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.14	---	0.15	---
			H	23.56	24.00	1.11	---	---	---	---
		Bottom	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.66	---	0.73	---
			H	23.56	24.00	1.11	---	---	---	---
		Left	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	0.00	---	0.00	---
			H	23.56	24.00	1.11	---	---	---	---
		Right	L	23.40	24.00	1.15	---	---	---	---
			M	23.55	24.00	1.11	---	---	---	---
			H	23.56	24.00	1.11	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	22.32	22.50	1.04	---	---	---	---
			M	22.46	22.50	1.01	0.34	---	0.35	---
			H	22.45	22.50	1.01	---	---	---	---
		Left tilt	L	22.32	22.50	1.04	---	---	---	---
			M	22.46	22.50	1.01	0.19	---	0.19	---

	Right Cheek	H	22.45	22.50	1.01	---	---	---	---		
		L	22.32	22.50	1.04	---	---	---	---		
		M	22.46	22.50	1.01	0.37	---	0.37	---		
		H	22.45	22.50	1.01	---	---	---	---		
		Right tilt	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.23	---	0.23	---	
			H	22.45	22.50	1.01	---	---	---	---	
		Body-worn	Back	L	22.32	22.50	1.04	---	---	---	---
				M	22.46	22.50	1.01	0.79	---	0.80	---
	H			22.45	22.50	1.01	---	---	---	---	
	Front		L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.21	---	0.21	---	
			H	22.45	22.50	1.01	---	---	---	---	
	Hotspot	Back	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.79	---	0.80	---	
			H	22.45	22.50	1.01	---	---	---	---	
		Front	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.21	---	0.21	---	
			H	22.45	22.50	1.01	---	---	---	---	
		Top	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.11	---	0.11	---	
			H	22.45	22.50	1.01	---	---	---	---	
		Bottom	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.55	---	0.55	---	
			H	22.45	22.50	1.01	---	---	---	---	
		Left	L	22.32	22.50	1.04	---	---	---	---	
			M	22.46	22.50	1.01	0.00	---	0.00	---	
			H	22.45	22.50	1.01	---	---	---	---	
	Right	L	22.32	22.50	1.04	---	---	---	---		
		M	22.46	22.50	1.01	---	---	---	---		
H		22.45	22.50	1.01	---	---	---	---			

Mode: LTE Band 12

fL (MHz)=704 MHz

fM (MHz)=707.5MHz

fH (MHz)= 711MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)		
Mode	Exposure condition	Position	Channel				First	Second	First	Second	
QPSK 1RB	Head	Left Cheek	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.05	---	0.06	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Left tilt	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.03	---	0.03	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Right Cheek	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.07	---	0.08	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Right tilt	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.04	---	0.04	---	
			H	24.51	25.00	1.12	---	---	---	---	
	Body-worn	Back	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.09	---	0.11	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Front	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.05	---	0.05	---	
			H	24.51	25.00	1.12	---	---	---	---	
	Hotspot	Back	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.09	---	0.11	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Front	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.05	---	0.05	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Top	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	---	---	---	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Bottom	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.00	---	0.00	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Left	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	---	---	---	---	
			H	24.51	25.00	1.12	---	---	---	---	
		Right	L	24.33	25.00	1.17	---	---	---	---	
			M	24.39	25.00	1.15	0.00	---	0.00	---	
			H	24.51	25.00	1.12	---	---	---	---	
	QPSK 50%RB	Head	Left Cheek	L	24.36	24.50	1.03	---	---	---	---
				M	24.33	24.50	1.04	0.04	---	0.04	---
				H	24.29	24.50	1.05	---	---	---	---
		Left tilt	L	24.36	24.50	1.03	---	---	---	---	
			M	24.33	24.50	1.04	0.02	---	0.02	---	

		Right Cheek	H	24.29	24.50	1.05	---	---	---	---
			L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.03	---	0.03	---
		H	24.29	24.50	1.05	---	---	---	---	
		Right tilt	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.02	---	0.02	---
	H		24.29	24.50	1.05	---	---	---	---	
	Body-worn	Back	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.09	---	0.09	---
			H	24.29	24.50	1.05	---	---	---	---
		Front	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.04	---	0.04	---
			H	24.29	24.50	1.05	---	---	---	---
	Hotspot	Back	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.09	---	0.09	---
			H	24.29	24.50	1.05	---	---	---	---
		Front	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.04	---	0.04	---
			H	24.29	24.50	1.05	---	---	---	---
		Top	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	---	---	---	---
			H	24.29	24.50	1.05	---	---	---	---
		Bottom	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	0.00	---	0.00	---
			H	24.29	24.50	1.05	---	---	---	---
		Left	L	24.36	24.50	1.03	---	---	---	---
			M	24.33	24.50	1.04	---	---	---	---
H			24.29	24.50	1.05	---	---	---	---	
Right		L	24.36	24.50	1.03	---	---	---	---	
		M	24.33	24.50	1.04	0.05	---	0.05	---	
		H	24.29	24.50	1.05	---	---	---	---	

Mode: LTE Band 13

fL (MHz)=782 MHz

fM (MHz)=782MHz

fH (MHz)= 782MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)		
Mode	Exposure condition	Position	Channel				First	Second	First	Second	
QPSK 1RB	Head	Left Cheek	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.06	---	0.06	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Left tilt	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.02	---	0.02	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Right Cheek	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.06	---	0.06	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Right tilt	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.03	---	0.03	---	
			H	24.26	24.50	1.06	---	---	---	---	
	Body-worn	Back	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.25	---	0.25	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Front	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.13	---	0.13	---	
			H	24.26	24.50	1.06	---	---	---	---	
	Hotspot	Back	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.25	---	0.25	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Front	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.13	---	0.13	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Top	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	---	---	---	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Bottom	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.10	---	0.10	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Left	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	---	---	---	---	
			H	24.26	24.50	1.06	---	---	---	---	
		Right	L	24.30	24.50	1.05	---	---	---	---	
			M	24.40	24.50	1.02	0.11	---	0.11	---	
			H	24.26	24.50	1.06	---	---	---	---	
	QPSK 50%RB	Head	Left Cheek	L	23.40	23.50	1.02	---	---	---	---
				M	23.44	23.50	1.01	0.02	---	0.02	---
				H	23.38	23.50	1.03	---	---	---	---
			Left tilt	L	23.40	23.50	1.02	---	---	---	---
				M	23.44	23.50	1.01	0.02	---	0.02	---

		Right Cheek	H	23.38	23.50	1.03	---	---	---	---
			L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.04	---	0.04	---
		Right tilt	H	23.38	23.50	1.03	---	---	---	---
			L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.02	---	0.02	---
	Body-worn	Back	H	23.38	23.50	1.03	---	---	---	---
			L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.21	---	0.21	---
		Front	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.12	---	0.12	---
			H	23.38	23.50	1.03	---	---	---	---
	Hotspot	Back	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.21	---	0.21	---
			H	23.38	23.50	1.03	---	---	---	---
		Front	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.12	---	0.12	---
			H	23.38	23.50	1.03	---	---	---	---
		Top	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	---	---	---	---
			H	23.38	23.50	1.03	---	---	---	---
		Bottom	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.08	---	0.08	---
			H	23.38	23.50	1.03	---	---	---	---
		Left	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	---	---	---	---
			H	23.38	23.50	1.03	---	---	---	---
		Right	L	23.40	23.50	1.02	---	---	---	---
			M	23.44	23.50	1.01	0.09	---	0.09	---
			H	23.38	23.50	1.03	---	---	---	---

Mode: LTE Band 17

fL (MHz)=709 MHz

fM (MHz)=710 MHz

fH (MHz)= 711 MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.02	---	0.02	---
			H	24.35	24.50	1.04	---	---	---	---
		Left tilt	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.01	---	0.01	---
			H	24.35	24.50	1.04	---	---	---	---
		Right Cheek	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.03	---	0.03	---
			H	24.35	24.50	1.04	---	---	---	---
		Right tilt	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.02	---	0.02	---
			H	24.35	24.50	1.04	---	---	---	---
	Body-worn	Back	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.10	---	0.10	---
			H	24.35	24.50	1.04	---	---	---	---
		Front	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.05	---	0.05	---
			H	24.35	24.50	1.04	---	---	---	---
	Hotspot	Back	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.10	---	0.10	---
			H	24.35	24.50	1.04	---	---	---	---
		Front	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.05	---	0.05	---
			H	24.35	24.50	1.04	---	---	---	---
		Top	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	---	---	---	---
			H	24.35	24.50	1.04	---	---	---	---
		Bottom	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.00	---	0.00	---
			H	24.35	24.50	1.04	---	---	---	---
		Left	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	---	---	---	---
			H	24.35	24.50	1.04	---	---	---	---
		Right	L	24.26	24.50	1.06	---	---	---	---
			M	24.45	24.50	1.01	0.05	---	0.05	---
			H	24.35	24.50	1.04	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.02	---	0.02	---
			H	23.32	23.50	1.04	---	---	---	---
		Left tilt	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.01	---	0.01	---

	Right Cheek	H	23.32	23.50	1.04	---	---	---	---	
		L	23.28	23.50	1.05	---	---	---	---	
		M	23.32	23.50	1.04	0.01	---	0.01	---	
		H	23.32	23.50	1.04	---	---	---	---	
		Right tilt	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.01	---	0.01	---
	H		23.32	23.50	1.04	---	---	---	---	
	Body-worn	Back	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.08	---	0.08	---
			H	23.32	23.50	1.04	---	---	---	---
		Front	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.04	---	0.04	---
			H	23.32	23.50	1.04	---	---	---	---
	Hotspot	Back	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.08	---	0.08	---
			H	23.32	23.50	1.04	---	---	---	---
		Front	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.04	---	0.04	---
			H	23.32	23.50	1.04	---	---	---	---
		Top	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	---	---	---	---
			H	23.32	23.50	1.04	---	---	---	---
		Bottom	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.00	---	0.00	---
			H	23.32	23.50	1.04	---	---	---	---
		Left	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	---	---	---	---
			H	23.32	23.50	1.04	---	---	---	---
		Right	L	23.28	23.50	1.05	---	---	---	---
			M	23.32	23.50	1.04	0.03	---	0.04	---
H			23.32	23.50	1.04	---	---	---	---	

Mode: LTE Band 26

fL (MHz)= 821.5 MHz fM (MHz)= 831.5MHz fH (MHz)= 841.5MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.10	---	0.11	---
			H	24.65	25.00	1.08	---	---	---	---
		Left tilt	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.05	---	0.06	---
			H	24.65	25.00	1.08	---	---	---	---
		Right Cheek	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.08	---	0.09	---
			H	24.65	25.00	1.08	---	---	---	---
		Right tilt	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.04	---	0.04	---
			H	24.65	25.00	1.08	---	---	---	---
	Body-worn	Back	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.37	---	0.40	---
			H	24.65	25.00	1.08	---	---	---	---
		Front	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.19	---	0.21	---
			H	24.65	25.00	1.08	---	---	---	---
	Hotspot	Back	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.37	---	0.40	---
			H	24.65	25.00	1.08	---	---	---	---
		Front	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.19	---	0.21	---
			H	24.65	25.00	1.08	---	---	---	---
		Top	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	---	---	---	---
			H	24.65	25.00	1.08	---	---	---	---
		Bottom	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.15	---	0.16	---
			H	24.65	25.00	1.08	---	---	---	---
		Left	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	---	---	---	---
			H	24.65	25.00	1.08	---	---	---	---
		Right	L	24.66	25.00	1.08	---	---	---	---
			M	24.68	25.00	1.08	0.10	---	0.11	---
			H	24.65	25.00	1.08	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	24.61	25.00	1.09	---	---	---	---
			M	24.69	25.00	1.07	0.10	---	0.10	---
			H	24.62	25.00	1.09	---	---	---	---
		Left tilt	L	24.61	25.00	1.09	---	---	---	---
			M	24.69	25.00	1.07	0.05	---	0.05	---

		Right Cheek	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.07	---	0.08	---	
		Right tilt	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.04	---	0.04	---	
		Body-worn	Back	H	24.62	25.00	1.09	---	---	---	---
				L	24.61	25.00	1.09	---	---	---	---
				M	24.69	25.00	1.07	0.32	---	0.34	---
	Front		H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.16	---	0.17	---	
	Hotspot	Back	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.32	---	0.34	---	
		Front	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.16	---	0.17	---	
		Top	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	---	---	---	---	
		Bottom	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.11	---	0.12	---	
		Left	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	---	---	---	---	
		Right	H	24.62	25.00	1.09	---	---	---	---	
			L	24.61	25.00	1.09	---	---	---	---	
			M	24.69	25.00	1.07	0.09	---	0.09	---	

Mode: LTE Band 38

fL (MHz)= 2580 MHz fM (MHz)= 2595MHz fH (MHz)= 2610MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left touch	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.16	---	0.20	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
		Left tilt	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.09	---	0.11	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
		Right touch	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.29	---	0.36	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
		Right tilt	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.12	---	0.15	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
	Body-worn	Back	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.29	---	0.36	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
		Front	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.13	---	0.15	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
	Hotspot	Back	L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.29	---	0.36	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
		Front	L	25.11	25.50	1.09	---	---	---	---
L-M			24.85	25.50	1.16	---	---	---	---	
M			24.59	25.50	1.23	0.13	---	0.15	---	
M-H			24.24	25.50	1.34	---	---	---	---	
H			23.89	25.50	1.45	---	---	---	---	
Top		L	25.11	25.50	1.09	---	---	---	---	
	L-M	24.85	25.50	1.16	---	---	---	---		

		Bottom	M	24.59	25.50	1.23	---	---	---	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
			L	25.11	25.50	1.09	---	---	---	---
			L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	---	---	---	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
			L	25.11	25.50	1.09	---	---	---	---
		Left	L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	0.19	---	0.24	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
			L	25.11	25.50	1.09	---	---	---	---
		Right	L-M	24.85	25.50	1.16	---	---	---	---
			M	24.59	25.50	1.23	---	---	---	---
			M-H	24.24	25.50	1.34	---	---	---	---
			H	23.89	25.50	1.45	---	---	---	---
			L	25.11	25.50	1.09	---	---	---	---
		QPSK 50%RB	Head	Left touch	L	24.10	24.50	1.10	---	---
L-M	24.06				24.50	1.11	---	---	---	---
M	24.01				24.50	1.12	0.14	---	0.15	---
M-H	23.86				24.50	1.16	---	---	---	---
H	23.70				24.50	1.20	---	---	---	---
Left tilt	L			24.10	24.50	1.10	---	---	---	---
	L-M			24.06	24.50	1.11	---	---	---	---
	M			24.01	24.50	1.12	0.09	---	0.10	---
	M-H			23.86	24.50	1.16	---	---	---	---
	H			23.70	24.50	1.20	---	---	---	---
Right touch	L		24.10	24.50	1.10	---	---	---	---	
	L-M		24.06	24.50	1.11	---	---	---	---	
	M		24.01	24.50	1.12	0.29	---	0.32	---	
	M-H		23.86	24.50	1.16	---	---	---	---	
	H		23.70	24.50	1.20	---	---	---	---	
Right tilt	L		24.10	24.50	1.10	---	---	---	---	
	L-M		24.06	24.50	1.11	---	---	---	---	
	M		24.01	24.50	1.12	0.12	---	0.13	---	
	M-H		23.86	24.50	1.16	---	---	---	---	
	H		23.70	24.50	1.20	---	---	---	---	
Body-worn	Back	L	24.10	24.50	1.10	---	---	---	---	
		L-M	24.06	24.50	1.11	---	---	---	---	
		M	24.01	24.50	1.12	0.26	---	0.29	---	
		M-H	23.86	24.50	1.16	---	---	---	---	
		H	23.70	24.50	1.20	---	---	---	---	
	Front	L	24.10	24.50	1.10	---	---	---	---	
		L-M	24.06	24.50	1.11	---	---	---	---	

			M	24.01	24.50	1.12	0.12	---	0.14	---		
			M-H	23.86	24.50	1.16	---	---	---	---		
			H	23.70	24.50	1.20	---	---	---	---		
			Back	L	24.10	24.50	1.10	---	---	---	---	
				L-M	24.06	24.50	1.11	---	---	---	---	
				M	24.01	24.50	1.12	0.26	---	0.29	---	
				M-H	23.86	24.50	1.16	---	---	---	---	
				H	23.70	24.50	1.20	---	---	---	---	
				Front	L	24.10	24.50	1.10	---	---	---	---
					L-M	24.06	24.50	1.11	---	---	---	---
					M	24.01	24.50	1.12	0.12	---	0.14	---
					M-H	23.86	24.50	1.16	---	---	---	---
					H	23.70	24.50	1.20	---	---	---	---
				Top	L	24.10	24.50	1.10	---	---	---	---
					L-M	24.06	24.50	1.11	---	---	---	---
			M		24.01	24.50	1.12	---	---	---	---	
			M-H		23.86	24.50	1.16	---	---	---	---	
			H		23.70	24.50	1.20	---	---	---	---	
			Bottom	L	24.10	24.50	1.10	---	---	---	---	
				L-M	24.06	24.50	1.11	---	---	---	---	
				M	24.01	24.50	1.12	---	---	---	---	
				M-H	23.86	24.50	1.16	---	---	---	---	
				H	23.70	24.50	1.20	---	---	---	---	
			Left	L	24.10	24.50	1.10	---	---	---	---	
				L-M	24.06	24.50	1.11	---	---	---	---	
				M	24.01	24.50	1.12	0.159	---	0.178	---	
				M-H	23.86	24.50	1.16	---	---	---	---	
				H	23.70	24.50	1.20	---	---	---	---	
			Right	L	24.10	24.50	1.10	---	---	---	---	
				L-M	24.06	24.50	1.11	---	---	---	---	
M	24.01	24.50		1.12	---	---	---	---				
M-H	23.86	24.50		1.16	---	---	---	---				
H	23.70	24.50		1.20	---	---	---	---				

Mode: LTE Band 66

fL (MHz)= 1720 MHz fM (MHz)= 1745MHz fH (MHz)= 1770MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel				First	Second	First	Second
QPSK 1RB	Head	Left Cheek	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.17	---	0.20	---
			H	24.46	25.00	1.13	---	---	---	---
		Left tilt	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.08	---	0.10	---
			H	24.46	25.00	1.13	---	---	---	---
		Right Cheek	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.10	---	0.11	---
			H	24.46	25.00	1.13	---	---	---	---
		Right tilt	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.04	---	0.05	---
			H	24.46	25.00	1.13	---	---	---	---
	Body-worn	Back	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.64	---	0.74	---
			H	24.46	25.00	1.13	---	---	---	---
		Front	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.27	---	0.31	---
			H	24.46	25.00	1.13	---	---	---	---
	Hotspot	Back	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.64	---	0.74	---
			H	24.46	25.00	1.13	---	---	---	---
		Front	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.27	---	0.31	---
			H	24.46	25.00	1.13	---	---	---	---
		Top	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	---	---	---	---
			H	24.46	25.00	1.13	---	---	---	---
		Bottom	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.47	---	0.55	---
			H	24.46	25.00	1.13	---	---	---	---
		Left	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	0.07	---	0.08	---
			H	24.46	25.00	1.13	---	---	---	---
		Right	L	24.61	25.00	1.09	---	---	---	---
			M	24.37	25.00	1.16	---	---	---	---
			H	24.46	25.00	1.13	---	---	---	---
QPSK 50%RB	Head	Left Cheek	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.16	---	0.19	---
			H	24.34	25.00	1.16	---	---	---	---
	Left tilt	L	24.58	25.00	1.10	---	---	---	---	
		M	24.25	25.00	1.19	0.07	---	0.08	---	

	Right Cheek	H	24.34	25.00	1.16	---	---	---	---	
		L	24.58	25.00	1.10	---	---	---	---	
		M	24.25	25.00	1.19	0.08	---	0.10	---	
		H	24.34	25.00	1.16	---	---	---	---	
		Right tilt	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.03	---	0.04	---
	H		24.34	25.00	1.16	---	---	---	---	
	Body-worn	Back	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.59	---	0.70	---
			H	24.34	25.00	1.16	---	---	---	---
		Front	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.26	---	0.30	---
			H	24.34	25.00	1.16	---	---	---	---
	Hotspot	Back	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.59	---	0.70	---
			H	24.34	25.00	1.16	---	---	---	---
		Front	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.26	---	0.30	---
			H	24.34	25.00	1.16	---	---	---	---
		Top	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	---	---	---	---
			H	24.34	25.00	1.16	---	---	---	---
		Bottom	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.45	---	0.53	---
			H	24.34	25.00	1.16	---	---	---	---
		Left	L	24.58	25.00	1.10	---	---	---	---
			M	24.25	25.00	1.19	0.05	---	0.06	---
H			24.34	25.00	1.16	---	---	---	---	
Right		L	24.58	25.00	1.10	---	---	---	---	
		M	24.25	25.00	1.19	---	---	---	---	
		H	24.34	25.00	1.16	---	---	---	---	

Mode: Wi-Fi 2.4GHz

fL (MHz)=2412MHz fM (MHz)=2437MHz fH (MHz)= 2462MHz

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dBm)	Tune-up (dBm)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)		
Mode	Exposure condition	Position	Channel					First	Second	First	Second	
802.11b	Head	Left Cheek	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.13	---	0.14	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Left tilt	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.08	---	0.08	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Right Cheek	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.14	---	0.15	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Right tilt	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.09	---	0.10	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Body-worn	Back	L	18.20	20.50	1.70	1.01	---	---	---	---
				M	20.30	20.50	1.05	1.01	0.22	---	0.23	---
				H	16.20	20.50	2.69	1.01	---	---	---	---
			Front	L	18.20	20.50	1.70	1.01	---	---	---	---
				M	20.30	20.50	1.05	1.01	0.11	---	0.12	---
				H	16.20	20.50	2.69	1.01	---	---	---	---
	Hotspot	Back	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.22	---	0.23	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Front	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.11	---	0.12	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Top	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.06	---	0.06	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Bottom	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	---	---	---	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Left	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	---	---	---	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	
		Right	L	18.20	20.50	1.70	1.01	---	---	---	---	
			M	20.30	20.50	1.05	1.01	0.18	---	0.20	---	
			H	16.20	20.50	2.69	1.01	---	---	---	---	

Mode: Wi-Fi 5GHz UNII-1
Limit of SAR (W/kg): <1.6W/kg (1g Average)

Test case				Meas power(dB m)	Tune-up(dB m)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
Mode	Exposure condition	Position	Channel					First	Second	First	Second
802.11 a	Head	Left Cheek	L	15.61	16.00	1.09	1.14	0.49	---	0.61	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Left tilt	L	15.61	16.00	1.09	1.14	0.45	---	0.56	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Right Cheek	L	15.61	16.00	1.09	1.14	0.26	---	0.32	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Right tilt	L	15.61	16.00	1.09	1.14	0.29	---	0.36	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
	Body-worn	Back	L	15.61	16.00	1.09	1.14	0.24	---	0.30	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Front	L	15.61	16.00	1.09	1.14	0.10	---	0.12	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
	Hotspot	Back	L	15.61	16.00	1.09	1.14	0.24	---	0.30	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Front	L	15.61	16.00	1.09	1.14	0.10	---	0.12	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Top	L	15.61	16.00	1.09	1.14	0.36	---	0.44	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Bottom	L	15.61	16.00	1.09	1.14	---	---	---	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Left	L	15.61	16.00	1.09	1.14	---	---	---	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---
		Right	L	15.61	16.00	1.09	1.14	0.01	---	0.01	---
			M	14.37	16.00	1.46	1.14	---	---	---	---
			H	14.09	16.00	1.55	1.14	---	---	---	---

Mode: Wi-Fi 5GHz UNII-3

Limit of SAR (W/kg): <1.6W/kg (1g Average)

Mode	Test case			Meas power(dB m)	Tune-up(dB m)	Scaling factor	Duty factor	Meas SAR(w/kg)		Report SAR(w/kg)	
	Exposure condition	Position	Channel					First	Second	First	Second
802.11 a	Head	Left Cheek	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.44	---	0.52	---
		Left tilt	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.42	---	0.50	---
		Right Cheek	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.33	---	0.39	---
		Right tilt	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.37	---	0.45	---
	Body-worn	Back	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.24	---	0.29	---
		Front	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.13	---	0.15	---
	Hotspot	Back	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.24	---	0.29	---
		Front	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.13	---	0.15	---
		Top	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.46	---	0.55	---
		Bottom	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	---	---	---	---
		Left	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	---	---	---	---
		Right	L	15.32	15.50	1.04	1.16	---	---	---	---
			M	13.47	15.50	1.60	1.16	---	---	---	---
			H	15.36	15.50	1.03	1.16	0.14	---	0.16	---

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.12 Simultaneous Transmission SAR Analysis

Antenna numbers of Simultaneous Transmission	Antennas of Simultaneous Transmission	Simultaneous Transmission Modes
2	MAIN ANT+ WLAN/BT ANT	Celluar2/3/4G+ WIFI 2.4GHz Celluar2/3/4G+ WIFI 5GHz

Exposure condition	Position	licenced ANT	unlicenced ANT	Mult-TX	X-MAX
Head	Left cheek	0.40	0.61	1.01	1.01
	Left tilt	0.25	0.56	0.81	
	Right cheek	0.46	0.39	0.85	
	Right tilt	0.29	0.45	0.74	
Body worn	Back	1.10	0.30	1.40	1.40
	Front	0.54	0.15	0.69	
Hotspot	Back	1.10	0.30	1.40	1.40
	Front	0.54	0.15	0.69	
	Top	0.15	0.55	0.70	
	Bottom	0.91	---	0.91	
	Left	0.32	---	0.32	
	Right	0.17	0.20	0.36	

The worst case for 2TX simultaneous transmission happened in back position

Position of worst case	Licensed band	Unlicensed band	Simultaneous SAR(w/kg)
Left Cheek	WCDMA Band2	WIFI 5G UNII-1	1.40

According to the above tables, SAR values < 1.6W/kg meet the compliance.

7 MEASUREMENT UNCERTAINTY

(0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^P	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

(3 - 6 GHz range)

Error Description	Uncert. value	Prob. Dist.	Div.	(c_1) 1g	(c_2) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response ^m	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	$\sqrt{3}$	1	1	±3.9 %	±3.9 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling ^P	±0 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6 %	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9 %	R	$\sqrt{3}$	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) ^{DAK}	±2.5 %	R	$\sqrt{3}$	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity ^{BB}	±3.4 %	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity ^{BB}	±0.4 %	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±12.3 %	±12.2 %	748
Expanded STD Uncertainty						±24.6 %	±24.5 %	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the ‘advanced extrapolation’ algorithm.

The following table lists calibration dates of SPEAG components:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2020.09.30	2021.09.29
Dosimetric E-field Probe	EX3DV4	3708	2020.10.30	2021.10.29
Dipole Validation Kit	D750V3	1101	2020.10.16	2023.10.15
Dipole Validation Kit	D835V2	4d023	2020.10.16	2023.10.15
Dipole Validation Kit	D1800V2	2d084	2020.09.18	2023.09.17
Dipole Validation Kit	D2000V2	1009	2020.10.14	2023.10.13
Dipole Validation Kit	D2450V2	738	2020.10.13	2023.10.12
Dipole Validation Kit	D2600V2	1166	2019.11.08	2022.11.07
Dipole Validation Kit	D5GHzV2	1079	2020.10.10	2023.10.09

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2020.08.20	2021.08.19
Signal Generator	SML 03	103514	2020.08.20	2021.08.19
Power meter	E4417A	MY45101182	2020.08.20	2021.08.19
Power Sensor	E4412A	MY41502214	2020.08.20	2021.08.19
Power Sensor	E4412A	MY41502130	2020.08.20	2021.08.19
Power meter	E4417A	MY45101004	2020.08.20	2021.08.19
Power Sensor	E9300B	MY41496001	2020.08.20	2021.08.19
Power Sensor	E9300B	MY41496003	2020.08.20	2021.08.19
Communication Tester	E5515C	MY48367401	2020.08.20	2021.08.19
Communication Tester	CMW500	161702	2020.08.20	2021.08.19
Communication Tester	MT8820C	6201300660	2020.08.20	2021.08.19
Communication Tester	MT8821C	6201547819	2020.08.20	2021.08.19
Vector Network Analyzer	VNA R140	0011213	2020.09.18	2021.09.17
Dielectric Parameter Probe	DAKS-3.5	1042	2020.09.17	2021.09.16

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

According to KDB 865664 D01 section 3.2.2, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the **SAR target, impedance and return loss** of a dipole have remain stable according to the following requirements.

- 1) The test laboratory must ensure that the required supporting information and documentation are included in the SAR report to qualify for the three-year extended calibration interval; otherwise, the IEEE Std 1528-2013 recommended annual calibration applies.
- 2) Immediate re-calibration is required for the following conditions.
 - a) After a dipole is damaged and properly repaired to meet required specifications.
 - b) When the measured SAR deviates from the calibrated SAR value by more than 10% due to changes in physical, mechanical, electrical or other relevant dipole conditions; i.e., the error is not introduced by incorrect measurement procedures or other issues relating to the SAR measurement system.
 - c) When the most recent return-loss result, measured at least annually, deviates by more than 20% from the previous measurement (i.e. value in dB \times 0.2) or not meeting the required 20 dB minimum return-loss requirement.
 - d) When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5 Ω from the previous measurement

Dipole

SAR target

Refers to system check, measured SAR (1g and 10g) deviates from the Target SAR value of calibration report within 10%.

Impedance and Return loss measured by Network analyzer

The most recent measurement of the real or imaginary parts of the impedance deviates within 5 Ω from the previous measurement. (Data from the last calibration report)

The most recent return-loss result deviates within 20% from the previous measurement. (Data from the last calibration report)

Dipole750 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.8 Ω -4.02j Ω	53.7 Ω -1.63j Ω
Return loss	-25.5 dB	-28.2dB

Dipole835 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	54.5 Ω -6.16j Ω	52.6 Ω -2.37j Ω
Return loss	-34.1 dB	-29.3dB

Dipole1800 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	44.2 Ω +5.06j Ω	48.9 Ω -2.71j Ω
Return loss	-31.8 dB	-30.6dB

Dipole2000 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.9 Ω -3.37j Ω	49.4 Ω -2.46j Ω
Return loss	-28.4 dB	-31.9dB

Dipole2450 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.2 Ω -9.98j Ω	53.3 Ω +6.38j Ω
Return loss	-19.9 dB	-23.1dB

Dipole2600 TSL Parameters		
Parameters	Measured data	Target (Ref. Value)
Impedance	50.4 Ω +6.71j Ω	47.9 Ω -7.80j Ω
Return loss	-23.5 dB	-21.7dB

Dipole5GHz TSL Parameters (5200MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.2 Ω +13.89j Ω	50.2 Ω -10.0j Ω
Return loss	-17.0 dB	-20.0dB

Dipole5GHz TSL Parameters (5300MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	52.0Ω-11.40jΩ	47.2Ω-7.33jΩ
Return loss	-18.4 dB	-21.9dB

Dipole5GHz TSL Parameters (5500MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.6Ω+6.61jΩ	52.0Ω-7.96jΩ
Return loss	-18.6 dB	-21.9dB

Dipole5GHz TSL Parameters (5600MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	53.6Ω+7.31jΩ	55.7Ω-3.78jΩ
Return loss	-22.1 dB	-23.8dB

Dipole5GHz TSL Parameters (5800MHz)		
Parameters	Measured data	Target (Ref. Value)
Impedance	51.6Ω-5.96jΩ	53.7Ω-5.87jΩ
Return loss	-19.0 dB	-23.5dB

ANNEX A – TEST PLOTS

Please refer to the attachment.