



# FCC SAR TEST REPORT

**Report No. :** SET2019-11989

**Product :** LTE/WCDMA/GSM ( GPRS ) Multi-Mode Digital Mobile Phone

**Trade Name:** ZTE

**Model No. :** ZTE Blade A5 2020, EA52020

**FCC ID :** SRQ-ZTEA52020

**Applicant :** ZTE CORPORATION

**Address :** ZTE Plaza, Keji Road South, Shenzhen, China.

**Issued by :** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Lab Location :** Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road, Nanshan, Shenzhen, Guangdong, China

**Tel :** 86 755 26627338      **Fax:** 86 755 26627238

**Mail :** manager@ccic-set.com      **Website:** <http://www.ccic-set.com>

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



### Test Report

**Product** .....: LTE/WCDMA/GSM (GPRS) Multi-Mode Digital Mobile Phone  
**Model No.** .....: ZTE Blade A5 2020  
**Brand Name**.....: ZTE  
**FCC ID**.....: SRQ-ZTEA52020  
**Applicant**.....: ZTE CORPORATION  
**Applicant Address**.....: ZTE Plaza, Keji Road South, Shenzhen, China  
**Manufacturer**.....: ZTE CORPORATION  
**Manufacturer Address**: ZTE Plaza, Keji Road South, Shenzhen, China

**Test Standards**.....: **47CFR §2.1093-** Radiofrequency Radiation Exposure Evaluation: Portable Devices;  
**ANSI C95.1–1992:** Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)  
**IEEE 1528–2013:** IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

**Test Result**.....: Pass  
**Test Date**.....: 2019.08.26-2019.08.30

**Tested by** .....: Mei Chun 2019-09-16  
 Mei Chun, Test Engineer

**Reviewed by**.....: Chris You 2019-09-16  
 Chris You, Senior Engineer

**Approved by**.....: Shuangwen Zhang 2019-09-16  
 Shuangwen Zhang, Manager



## Contents

Test Report .....	2
<b>1. Administrative Data .....</b>	<b>4</b>
<b>2. Equipment Under Test (EUT) .....</b>	<b>5</b>
<b>3. SAR Summary .....</b>	<b>7</b>
<b>4. Specific Absorption Rate (SAR) .....</b>	<b>9</b>
<b>5. Tissue check and recommend Dielectric Parameters .....</b>	<b>13</b>
<b>6. SAR measurement procedure .....</b>	<b>18</b>
<b>7. Conducted RF Output Power .....</b>	<b>19</b>
<b>8. Scaling Factor calculation .....</b>	<b>37</b>
<b>9. Test Results .....</b>	<b>39</b>
<b>10. Simultaneous Transmissions Analysis .....</b>	<b>51</b>
<b>11. Measurement Uncertainty .....</b>	<b>53</b>
<b>12. Equipment List .....</b>	<b>57</b>
ANNEX A: Appendix A: SAR System performance Check Plots.....	58
ANNEX B: Appendix B: SAR Measurement results Plots.....	58
ANNEX C: Appendix C: Calibration reports .....	58
ANNEX D: Appendix D: SAR Test Setup.....	58



## 1. Administrative Data

### 1.1 Testing Laboratory

**Test Site:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

**Address:** Building 28/29, East of Shigu, Xili Industrial Zone, Xili Road, Nanshan, Shenzhen, Guangdong, China

**CNAS Lab Code:** CCIC-SET is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

**NVLAP Lab Code:** CCIC-SET is a third party testing organization accredited by NVLAP according to ISO/IEC 17025. The accreditation certificate number is 201008-0.

**FCC Registration:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN5031, valid time is until December 31, 2019.

**ISED Registration:** CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until Aug. 03, 2019.

**Test Environment** Temperature (°C): 21°C

**Condition:** Relative Humidity (%): 60%

Atmospheric Pressure (kPa): 86KPa-106KPa

## 2. Equipment Under Test (EUT)

### Identification of the Equipment under Test

<b>Device Type:</b>	Portable
<b>Exposure Category:</b>	Population/Uncontrolled
<b>Sample Name:</b>	LTE/WCDMA/GSM ( GPRS ) Multi-Mode Digital Mobile Phone
<b>Brand Name:</b>	ZTE
<b>Model Name:</b>	ZTE Blade A5 2020,EA52020

	Support Band	GSM850MHz/900MHz/1800MHz/1900MHz, WCDMA 850MHz/1700MHz/1900MHz LTE Band 2/4/5/7/66,WIFI 2.4G, BT,GPS												
	Test Band	GSM850MHz/1900MHz, WCDMA 850MHz/1700MHz/1900MHz, LTE Band 2/4/5/7/66,WIFI 2.4G, BT,GPS												
	IMEI No.	865651040003109/865651040005252												
	Device Class	Class B												
	Multi Class	GPRS: Class 12; EGPRS: Class 12												
	Development Stage	Identical Prototype												
<b>General description:</b>	Accessories	Power Supply												
	Hotspot	2.4GHz WLAN support Hotspot mode												
	Antenna type	Internal Antenna												
	Operation mode	GSM /WCDMA / LTE /WIFI												
	Modulation mode	GSM(GMSK),UMTS(QPSK),LTE(QPSK,16QAM,64QAM), WIFI(OFDM/DSSS),BT( GFSK/ $\pi$ /4-DQPSK/8-DPSK)												
	DTM mode	Not support												
	Hardware Version	upmA												
	Software Version	TEL_MX_ZTE_Blade_A5_2020V1.0												
	Battery options :	<table> <tr> <td>Battery B1#</td> <td>Battery B2#</td> </tr> <tr> <td>Model No.:</td> <td>Model No.:</td> </tr> <tr> <td>Li3931T44P8h806139</td> <td>Li3931T44P8h806139</td> </tr> <tr> <td>Capacitance:3100mAh</td> <td>Capacitance:3100mAh</td> </tr> <tr> <td>Rated Voltage:3.85V</td> <td>Rated Voltage:3.85V</td> </tr> <tr> <td>Charge Limit:4.4V</td> <td>Charge Limit:4.4V</td> </tr> </table>	Battery B1#	Battery B2#	Model No.:	Model No.:	Li3931T44P8h806139	Li3931T44P8h806139	Capacitance:3100mAh	Capacitance:3100mAh	Rated Voltage:3.85V	Rated Voltage:3.85V	Charge Limit:4.4V	Charge Limit:4.4V
Battery B1#	Battery B2#													
Model No.:	Model No.:													
Li3931T44P8h806139	Li3931T44P8h806139													
Capacitance:3100mAh	Capacitance:3100mAh													
Rated Voltage:3.85V	Rated Voltage:3.85V													
Charge Limit:4.4V	Charge Limit:4.4V													
	Max. SAR Value	Head: 0.423 W/Kg Body: 1.287 W/Kg(Limit:1.6W/Kg, 10mm distance)												

#### NOTE:

- The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



**EUT testing configuration**

Tested frequency range(s)	Transmitter Frequency Range	Receiver Frequency Range
GSM850:	824-849 MHz	869-894 MHz
GSM1900:	1850-1910 MHz	1930-1990 MHz
UMTS Band II:	1850-1910 MHz	1930-1990 MHz
UMTS Band IV:	1710-1755 MHz	2110-2155 MHz
UMTS Band V:	824-849 MHz	869-894 MHz
LTE Band2:	1850-1910 MHz	1930-1990 MHz
LTE Band4:	1710-1755 MHz	2110-2155 MHz
LTE Band5:	824-849 MHz	869-894 MHz
LTE Band7:	2500-2570 MHz	2620-2690 MHz
LTE Band66:	1710-1780 MHz	2110-2200 MHz
WIFI(tested):	2412-2462 MHz	
Bluetooth:	2402-2480 MHz	
Test channels(low-mid-high):	128-190-251(GSM850)	
	512-661-810(GSM1900)	
	9262-9400-9538(UMTS Band II)	
	1312-1412-1513(UMTS Band IV)	
	4132-4183-4233(UMTS Band V)	
	18700-18900-19100( LTE Band 2 Bandwidth 20M)	
	20050-20175-20300( LTE Band 4 Bandwidth 20M)	
	20450-20525-20600( LTE Band 5 Bandwidth 10M)	
	20850-21100-21350( LTE Band 7 Bandwidth 20M)	
	27310-27460-27560( LTE Band 66 Bandwidth 20M)	
	1-6-11(Wi-Fi 2.4G 802.11b)	
	0-39-78(BT )	

### 3. SAR Summary

#### Highest Standalone SAR Summary

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Head	GSM850	0.313	0.423
	GSM1900	0.060	
	WCDMA Band II	0.413	
	WCDMA Band IV	0.078	
	WCDMA Band V	0.137	
	LTE Band 2	0.121	
	LTE Band 4	0.182	
	LTE Band 5	0.423	
	LTE Band 7	0.219	
	LTE Band 66	0.086	
	WIFI 2.4G 802.11b	0.344	
	BT	0.027	

Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Body-worn (10mm Gap)	GSM850	0.348	1.248
	GSM1900	0.187	
	WCDMA Band II	0.585	
	WCDMA Band IV	0.585	
	WCDMA Band V	0.530	
	LTE Band 2	0.497	
	LTE Band 4	0.672	
	LTE Band 5	0.644	
	LTE Band 7	1.016	
	LTE Band 66	1.248	
	WIFI 2.4G 802.11b	0.255	
	BT	0.041	



Exposure Position	Frequency Band	Scaled 1g-SAR(W/kg)	Highest Scaled 1g-SAR(W/kg)
Hotspot (10mm Gap)	GSM850	0.348	1.287
	GSM1900	0.203	
	WCDMA Band II	0.585	
	WCDMA Band IV	1.146	
	WCDMA Band V	0.638	
	LTE Band 2	0.497	
	LTE Band 4	0.672	
	LTE Band 5	0.644	
	LTE Band 7	1.117	
	LTE Band 66	1.287	
	WIFI 2.4G 802.11b	0.255	

### Highest Simultaneous SAR Summary

Exposure Position	Frequency Band	Highest Scaled 1g-SAR(W/kg)
Hotspot (10mmGap)	WWAN(LTE Band 66)&WIFI 2.4G	1.503



## 4. Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 4.2 Applicable Standards and Limits

### 4.2.1 Applicable Standards

47CFR § 2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI C95.1-1992	Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.( IEEE Std C95.1-1991)
IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 248227 D01	v02r02 802.11 Wi-Fi SAR
KDB 447498 D01	v06 General RF Exposure Guidance
KDB 648474 D04	v01r03 Handset SAR
KDB 865664 D01	v01r04 SAR Measurement 100MHz to 6GHz
KDB 865664 D02	v01r02 SAR Exposure Reporting
KDB 941225 D01	v03r01 3G SAR Procedures
KDB 941225 D05	v02r05 SAR for LTE Devices
KDB 941225 D05A	v01r02 LTE Rel.10 KDB Inquiry Sheet
KDB 941225 D06	v02r01 Hotspot Mode

### 4.2.2 RF exposure Limits

Human Exposure	Uncontrolled Environment General Population
<b>Spatial Peak SAR*</b> (Brain/Body)	<b>1.60 mW/g</b>
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g
<b>Spatial Peak SAR***</b> (Limbs)	4.00 mW/g

The limit applied in this test report is shown in bold letters.

Notes:

\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

### 4.3 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SATIMO. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.




SAM Twin Phantom

### 4.4 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SATIMO as an integral part of the COMOSAR test system.

The device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

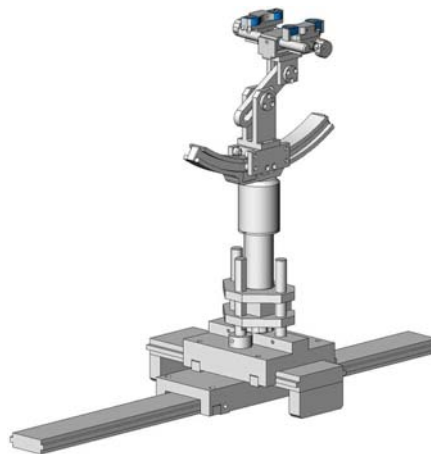

Device holder

### 4.5 Probe Specification




Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	700 MHz to 3 GHz; Linearity: $\pm 0.5$ dB (700 MHz to 3 GHz)
Directivity	$\pm 0.25$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
Dynamic Range	1.5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.5$ dB
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 5 mm Distance from probe tip to dipole centers: <2.7 mm
Application	General dosimetry up to 3 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones
Compatibility	COMOSAR

#### Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

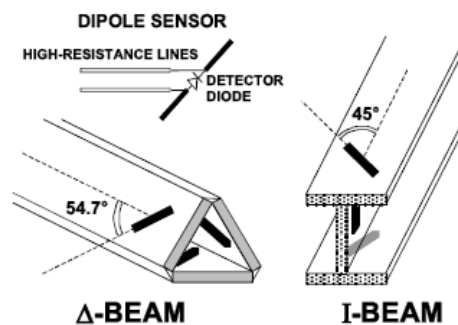

## 5. Tissue check and recommend Dielectric Parameters

### 5.1 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 1: Recommended Dielectric Performance of Tissue

Ingredients (% by weight )	Frequency (MHz)											
	450		835		915		1900		2450		2600	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.46	52.4	41.05	56.0	54.9	40.4	62.7	73.2	55.24	64.49
Salt (Nacl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04	0.5	0.024
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	44.45	32.25
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.2	52.5	39.0	52.5
Conductivity (s/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.80	1.78	1.96	2.16

MSL/HSL750 (Body and Head liquid for 650 – 850 MHz)

Item	Head Tissue Simulation Liquid HSL750 Muscle(body)Tissue Simulation Liquid MSL750			
H2O	Water, 35 – 58%			
Sucrose	Sugar, white, refined, 40-60%			
NaCl	Sodium Chloride, 0-6%			
Hydroxyethyl-cellulose	Medium Viscosity (CAS# 9004-62-0), <0.3%			
Preventol-D7	Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1-0.7%			
Frequency (MHz)	Head $\epsilon_r$	Head $\sigma$ (S/m)	Body $\epsilon_r$	Body $\sigma$ (S/m)
750	41.9	0.89	55.2	0.97

Note: The liquid of 700MHz&2600MHz typical liquid composition is provided by SATIMO.

Frequency:5200/5400/5600/5800MHz	
Ingredients	(% by weight)
Water	78
Mineral oil	11
Emulsifiers	9
Additives and Salt	2

Table 2 Recommended Tissue Dielectric Parameters

Frequency (MHz)	Head Tissue		Body Tissue	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

## 5.2 Simulate liquid

Liquid check results:

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
Target value	835MHz	41.5 ± 5%	0.90 ± 5%
Validation value (2019-08-26)	835MHz	41.47	0.95
Target value	1800MHz	40.5 ± 5%	1.40 ± 5%
Validation value (2019-08-27)	1800MHz	40.91	1.39
Target value	1900MHz	40.5 ± 5%	1.40 ± 5%
Validation value (2019-08-28)	1900MHz	40.70	1.41
Target value	2450MHz	39.2 ± 5%	1.80 ± 5%
Validation value (2019-08-29)	2450MHz	40.21	1.81
Target value	2600MHz	39.0 ± 5%	1.96 ± 5%
Validation value (2019-08-30)	2600MHz	40.00	1.94


Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.2°C; Humidity: 64%;			
/	Frequency	Permittivity $\epsilon$	Conductivity $\sigma$ (S/m)
Target value	835MHz	55.2 ± 5%	0.97 ± 5%
Validation value (2019-08-26)	835MHz	55.50	0.97
Target value	1800MHz	53.3 ± 5%	1.52 ± 5%
Validation value (2019-08-27)	1800MHz	53.79	1.51
Target value	1900MHz	53.3 ± 5%	1.52 ± 5%
Validation value (2019-08-28)	1900MHz	53.55	1.53
Target value	2450MHz	52.7 ± 5%	1.95 ± 5%
Validation value (2019-08-29)	2450MHz	52.82	1.92
Target value	2600MHz	52.5 ± 5%	2.16 ± 5%
Validation value (2019-08-30)	2600MHz	52.60	2.15

## SAR System validation

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The following procedure, recommended for performing validation tests using box phantoms is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

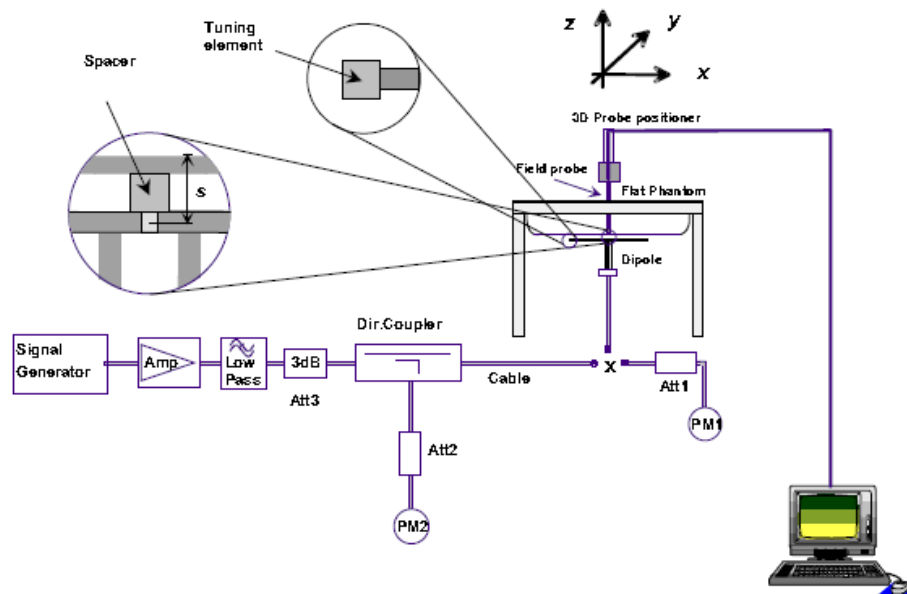

With the SG and Amp and with directional coupler in place, set up the source signal at the relevant frequency and use a power meter to measure the power at the end of the SMA cable that you intend to connect to the balanced dipole. Adjust the SG to make this, say, 0.01W (10 dBm). If this level is too high to read directly with the power meter sensor, insert a calibrated attenuator (e.g. 10 or 20 dB) and make a suitable correction to the power meter reading.

Note 1: In this method, the directional coupler is used for monitoring rather than setting the exact feed power level. If, however, the directional coupler is used for power measurement, you should check the frequency range and power rating of the coupler and measure the coupling factor (referred to output) at the test frequency using a VNA.

Note 2: Remember that the use of a 3dB attenuator (as shown in Figure 8.1 of P1528) means that you need an RF amplifier of 2 times greater power for the same feed power. The other issue is the cable length. You might get up to 1dB of loss per meter of cable, so the cable length after the coupler needs to be quite short.

Note 3: For the validation testing done using CW signals, most power meters are suitable. However, if you are measuring the output of a modulated signal from either a signal generator or a handset, you must ensure that the power meter correctly reads the modulated signals.

The measured 1-gram averaged SAR values of the device against the phantom are provided in Tables 5 and Table 6. The humidity and ambient temperature of test facility



were 64% and 23.2°C respectively. The body phantom were full of the body tissue simulating liquid. The EUT was supplied with full-charged battery for each measurement.

The distance between the back of the EUT and the bottom of the flat phantom is 10 mm (taking into account of the IEEE 1528 and the place of the antenna).

Table 4: Head SAR system validation (1g)

Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			10 mW	1W
835MHz(2019-08-26)	1:1	9.61 ± 10%	0.0877	8.77
1800MHz(2019-08-27)	1:1	37.35 ± 10%	0.3650	36.50
1900MHz(2019-08-28)	1:1	39.35 ± 10%	0.3910	39.10
2450MHz(2019-08-29)	1:1	52.67 ± 10%	0.5034	50.34
2600MHz(2019-08-30)	1:1	55.47 ± 10%	0.5268	52.68

Body SAR system validation (1g)


Frequency	Duty cycle	Target value (W/kg)	Test value (W/kg)	
			10 mW	1W
835MHz(2019-08-26)	1:1	9.88 ± 10%	0.1030	10.30
1800MHz(2019-08-27)	1:1	37.68 ± 10%	0.3807	38.07
1900MHz(2019-08-28)	1:1	38.84 ± 10%	0.4051	40.51
2450MHz(2019-08-29)	1:1	51.42 ± 10%	0.5437	54.37
2600MHz(2019-08-30)	1:1	53.45 ± 10%	0.5741	57.41

\* Note: Target value was referring to the measured value in the calibration certificate of reference dipole.

Note: All SAR values are normalized to 1W forward power.

## 6. SAR measurement procedure

The SAR test against the head phantom was carried out as follow:

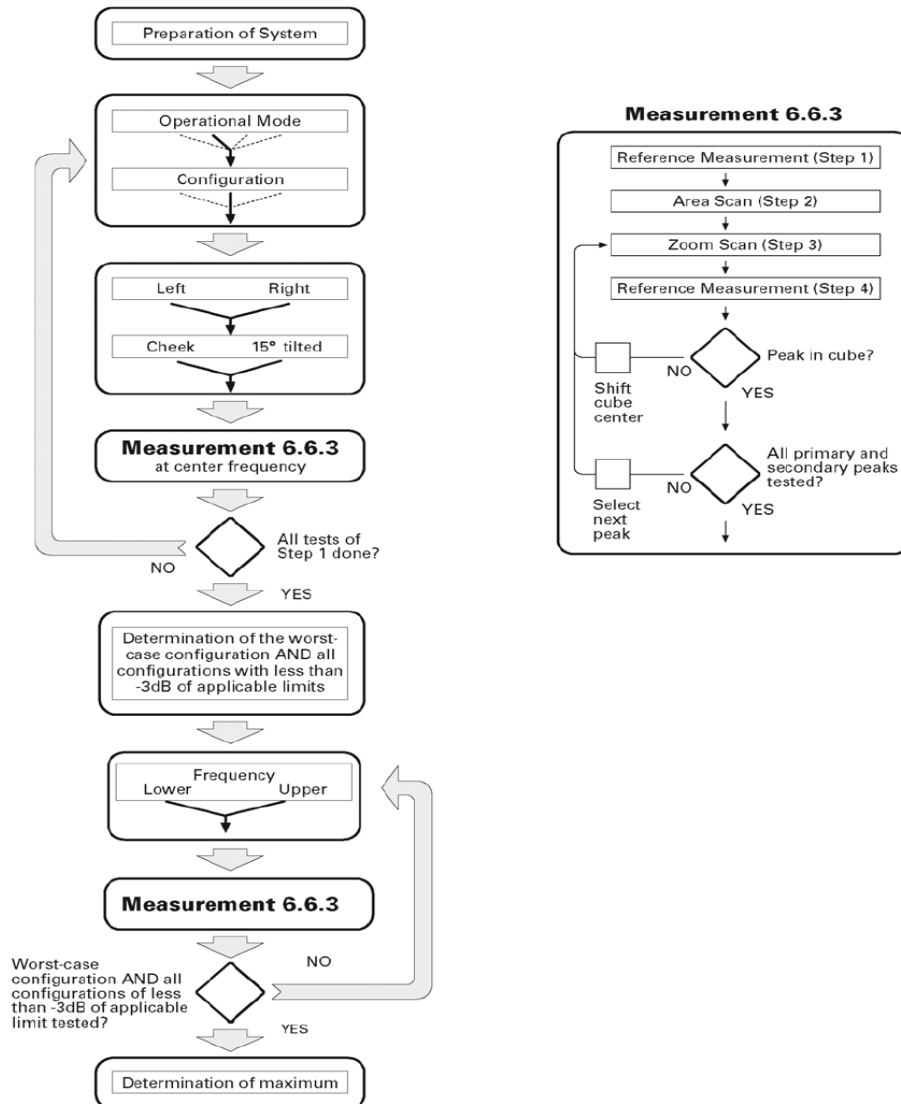

Establish a call with the maximum output power with a base station simulator, the connection between the EUT and the base station simulator is established via air interface.

After an area scan has been done at a fixed distance of 2mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE p1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.

## 7. Conducted RF Output Power

### 7.1 GSM Conducted Power

GSM850		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		128CH	190CH	251CH		28CH	190CH	251CH
GSM (CS)		32.38	32.42	32.20	-9.19	23.19	23.23	23.01
GPRS (GMSK)	1 Tx Slot	32.36	32.40	32.18	-9.19	23.17	23.21	22.99
	2 Tx Slots	30.30	30.38	30.21	-6.13	24.17	24.25	24.08
	3 Tx Slots	28.58	28.66	28.52	-4.42	24.16	24.24	24.10
	4 Tx Slots	27.55	27.62	27.49	-3.18	24.37	24.44	24.31
EDGE (8PSK)	1 Tx Slot	25.40	25.80	25.58	-9.19	16.21	16.61	16.39
	2 Tx Slots	23.22	23.41	23.34	-6.13	17.09	17.28	17.21
	3 Tx Slots	21.57	21.72	21.65	-4.42	17.15	17.30	17.23
	4 Tx Slots	20.52	20.69	20.61	-3.18	17.34	17.51	17.43
GSM1900		Burst-Averaged output Power (dBm)			Division Factors	Frame-Averaged output Power (dBm)		
		512CH	661CH	810CH		512CH	661CH	810CH
GSM (CS)		28.96	29.01	28.88	-9.19	19.77	19.82	19.69
GPRS (GMSK)	1 Tx Slot	29.00	29.03	28.95	-9.19	19.81	19.84	19.76
	2 Tx Slots	27.01	27.05	26.92	-6.13	20.88	20.92	20.79
	3 Tx Slots	25.33	25.39	25.27	-4.42	20.91	20.97	20.85
	4 Tx Slots	24.23	24.28	24.16	-3.18	21.05	21.10	20.98
EDGE (8PSK)	1 Tx Slot	25.88	25.94	25.79	-9.19	16.69	16.75	16.60
	2 Tx Slots	23.76	23.85	23.69	-6.13	17.63	17.72	17.56
	3 Tx Slots	22.53	22.62	22.47	-4.42	18.11	18.20	18.05
	4 Tx Slots	21.44	21.56	21.38	-3.18	18.26	18.38	18.20

**Note:** Per KDB 447498 D01 v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

For hotspot SAR, EUT was performed at GPRS Class 12 multi-slots(4Tx) mode

For Head and Body-worn SAR testing, EUT was set in GSM Voice mode for both GSM850 and GSM1900

#### Timeslot consignations

No. Of Slots	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation	1Up4Down	2UpDown	3UpDown	4Up1Down
Duty Cycle	1:8	1:4	1:2.67	1:2
Crest Factor	-9.03dB	-6.02dB	-4.26dB	-3.01dB

## 7.2 WCDMA Conducted output Power

UMTS1900 (Band II)		Average Power (dBm)		
		9262CH	9400CH	9538cH
WCDMA	12.2kbps RMC	23.14	23.15	23.11
HSDPA	Subtest 1	23.02	23.04	23.00
	Subtest 2	22.97	22.98	22.94
	Subtest 3	22.86	22.87	22.83
	Subtest 4	22.75	22.77	22.71
HSUPA	Subtest 1	22.66	22.69	22.62
	Subtest 2	22.54	22.56	22.51
	Subtest 3	22.45	22.48	22.43
	Subtest 4	22.37	22.39	22.32
	Subtest 5	22.28	22.30	22.21
UMTS1700 (Band IV)		Average Power (dBm)		
		1313CH	1413CH	1513CH
WCDMA	12.2kbps RMC	23.21	23.22	23.20
HSDPA	Subtest 1	23.15	23.17	23.13
	Subtest 2	23.06	23.08	23.02
	Subtest 3	22.95	22.97	22.92
	Subtest 4	22.84	22.86	22.81
HSUPA	Subtest 1	22.75	22.77	22.73
	Subtest 2	22.66	22.68	22.61
	Subtest 3	22.57	22.59	22.52
	Subtest 4	22.45	22.47	22.43
	Subtest 5	22.36	22.39	22.33
UMTS850 (Band V)		Average Power (dBm)		
		4132CH	4183CH	4233CH
WCDMA	12.2kbps RMC	23.23	23.10	23.16
HSDPA	Subtest 1	23.16	23.05	23.09
	Subtest 2	23.07	22.94	22.98
	Subtest 3	22.98	22.88	22.89
	Subtest 4	22.87	22.76	22.77
HSUPA	Subtest 1	22.76	22.67	22.68
	Subtest 2	22.68	22.55	22.59
	Subtest 3	22.57	22.46	22.48
	Subtest 4	22.49	22.37	22.39
	Subtest 5	22.38	22.22	22.27

**Note:**

- WCDMA SAR was tested under RMC 12.2kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25dB higher than the RMC level and SAR was less than 1.2W/kg.
- It is expected by the manufacturer that MPR for some HSPA subtests may be up to 2dB more than specified by 3GPP, but also as low as 0dB according to the chipset implementation in this model

## 7.3 LTE Conducted peak output Power

### LTE Test Configurations

The CMW500 Wide Band Radio Communication Tester was used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR test were performed with the same number of RB and RB offsets transmitting on all frames.

#### 1) Spectrum Plots for RB configurations

A properly configured base station simulator was used for LTE output power measurements and SAR testing. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### 2) MPR

When MPR is implemented permanently within the UE, regardless of network requirements, only those RB configurations allowed by 3GPP for the channel bandwidth and modulation combinations may be tested with MPR active. Configurations with RB allocations less than the RB thresholds required by 3GPP must be tested without MPR.

The allowed Maximum Power Reduction(MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101:

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

#### 3)A-MPR LTE procedures for SAR testing

A-MPR(Additional MPR) has been disabled for all SAR tests by using Network Signaling Value of “NS\_01” on the base station simulator.

#### 4)LTE procedures for SAR testing

A) Largest channel bandwidth standalone SAR test

requirements i) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8\text{W/kg}$ , testing of the remaining RB offset configurations and required test channels is not required for 1RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45\text{ W/kg}$ , SAR is required for all three RB offset configurations for that required test channel.



1. LTE Band 2 Conducted Power Test Verdict:

LTE FDD Band 2				Conducted Power(dBm)			Tune up
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			
				18607/1850.7	18900/1880	19193/1909.3	
1.4MHz	QPSK	1	0	22.67	22.5	22.64	22.0±1.0
		1	3	22.52	22.75	22.54	
		1	5	22.65	22.65	22.51	
		3	0	22.34	22.34	22.38	21.5±1.0
		3	2	22.36	22.22	22.21	
		3	3	22.15	22.31	22.32	
	16QAM	6	0	22.09	22	22.09	21.5±1.0
		1	0	21.84	21.93	21.65	21.0±1.0
		1	3	21.69	21.84	21.78	
		1	5	21.79	21.68	21.87	
		3	0	21.34	21.45	21.59	21.0±1.0
		3	2	21.5	21.5	21.45	
3	3	21.46	21.52	21.55			
		6	0	21.16	21.15	21.22	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
3MHz	QPSK	1	0	22.8	22.67	22.77	22.0±1.0
		1	7	22.5	22.78	22.8	
		1	14	22.69	22.61	22.8	
		8	0	22.15	22.27	22.27	21.5±1.0
		8	4	22.15	22.43	22.43	
		8	7	22.45	22.19	22.38	
		15	0	22.06	22.02	22.08	21.5±1.0
	16QAM	1	0	21.94	21.66	21.89	21.0±1.0
		1	7	21.95	21.92	21.94	
		1	14	21.72	21.8	21.66	
		8	0	21.59	21.3	21.51	21.0±1.0
		8	4	21.39	21.31	21.54	
		8	7	21.3	21.34	21.47	
		15	0	21.19	21.25	21.24	20.5±1.0



LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18625/1852.5	18900/1880	19175/1907.5	
5MHz	QPSK	1	0	22.58	22.79	22.68	22.0±1.0
		1	13	22.74	22.59	22.55	
		1	24	22.58	22.54	22.56	
		12	0	22.42	22.33	22.19	21.5±1.0
		12	6	22.39	22.35	22.2	
		12	13	22.3	22.2	22.39	
		25	0	22.1	22.05	22.07	21.5±1.0
	16QAM	1	0	21.74	21.93	21.67	21.0±1.0
		1	13	21.85	21.72	21.88	
		1	24	21.76	21.93	21.91	
		12	0	21.36	21.53	21.3	21.0±1.0
		12	6	21.55	21.4	21.39	
		12	13	21.35	21.42	21.51	
		25	0	21.17	21.25	21.23	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18650/1855	18900/1880	19150/1905	
10MHz	QPSK	1	0	22.6	22.67	22.59	22.0±1.0
		1	25	22.75	22.58	22.54	
		1	49	22.63	22.53	22.55	
		25	0	22.26	22.3	22.31	21.5±1.0
		25	13	22.43	22.27	22.16	
		25	25	22.45	22.33	22.34	
		50	0	22.03	22.03	22	21.5±1.0
	16QAM	1	0	21.78	21.65	21.88	21.0±1.0
		1	25	21.69	21.74	21.67	
		1	49	21.81	21.7	21.72	
		25	0	21.44	21.37	21.48	21.0±1.0
		25	13	21.35	21.44	21.6	
		25	25	21.51	21.35	21.33	
		50	0	21.24	21.21	21.16	20.5±1.0



LTE FDD Band 2				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18675/1857.5	18900/1880	19125/1902.5	
15MHz	QPSK	1	0	22.79	22.57	22.58	22.0±1.0
		1	38	22.76	22.64	22.51	
		1	74	22.7	22.8	22.79	
		36	0	22.25	22.44	22.37	21.5±1.0
		36	18	22.33	22.24	22.2	
		36	39	22.44	22.19	22.45	
		75	0	22.09	22.05	22.08	21.5±1.0
	16QAM	1	0	21.88	21.7	21.88	21.0±1.0
		1	38	21.93	21.74	21.76	
		1	74	21.75	21.92	21.66	
		36	0	21.39	21.32	21.56	21.0±1.0
		36	18	21.46	21.33	21.53	
		36	39	21.54	21.56	21.4	
		75	0	21.2	21.15	21.18	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				18700/1860	18900/1880	19100/1900	
20MHz	QPSK	1	0	22.76	22.82	22.72	22.0±1.0
		1	50	22.55	22.51	22.61	
		1	99	22.6	22.6	22.71	
		50	0	22.27	22.41	22.29	21.5±1.0
		50	25	22.28	22.29	22.17	
		50	50	22.16	22.17	22.4	
		100	0	22.07	22.03	22.05	21.5±1.0
	16QAM	1	0	21.86	21.72	21.82	21.0±1.0
		1	50	21.85	21.82	21.77	
		1	99	21.87	21.71	21.86	
		50	0	21.54	21.3	21.42	21.0±1.0
		50	25	21.49	21.53	21.42	
		50	50	21.45	21.57	21.48	
		100	0	21.25	21.19	21.15	20.5±1.0



## 2. LTE Band 4 Conducted Power Test Verdict:

LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19957/1710.7	20175/1732.5	20393/1754.3	
1.4MHz	QPSK	1	0	22.77	22.82	22.91	22.0±1.0
		1	3	22.74	22.92	22.93	
		1	5	22.73	22.72	22.75	
		3	0	22.57	22.42	22.62	22.0±1.0
		3	2	22.43	22.51	22.42	
		3	3	22.48	22.53	22.51	
	16QAM	6	0	22.27	22.21	22.23	21.5±1.0
		1	0	21.94	21.91	22.11	21.5±1.0
		1	3	21.95	22.08	21.88	
		1	5	21.96	22.04	21.91	
		3	0	21.7	21.8	21.59	21.0±1.0
		3	2	21.8	21.57	21.57	
3	3	21.61	21.52	21.62			
6	0	21.44	21.44	21.43	20.5±1.0		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19965/1711.5	20175/1732.5	20385/1753.5	
3MHz	QPSK	1	0	22.98	22.95	22.95	22.0±1.0
		1	7	22.88	22.98	22.81	
		1	14	22.97	22.94	22.76	
		8	0	22.48	22.59	22.51	22.0±1.0
		8	4	22.42	22.51	22.52	
		8	7	22.59	22.63	22.52	
		15	0	22.23	22.21	22.2	21.5±1.0
	16QAM	1	0	22.11	22.02	22.09	21.5±1.0
		1	7	22.14	21.91	22.07	
		1	14	21.88	21.87	22.15	
		8	0	21.8	21.68	21.62	21.0±1.0
		8	4	21.58	21.69	21.51	
		8	7	21.59	21.61	21.52	
		15	0	21.43	21.43	21.43	20.5±1.0



LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				19975/1712.5	20175/1732.5	20375/1752.5	
5MHz	QPSK	1	0	22.74	22.73	22.7	22.0±1.0
		1	13	22.99	22.73	22.88	
		1	24	22.91	22.94	22.87	
		12	0	22.63	22.57	22.46	22.0±1.0
		12	6	22.65	22.47	22.55	
		12	13	22.41	22.56	22.58	
		25	0	22.21	22.29	22.22	21.5±1.0
	16QAM	1	0	22.1	21.86	21.96	21.5±1.0
		1	13	21.85	21.89	21.88	
		1	24	22.09	21.95	21.87	
		12	0	21.59	21.73	21.6	21.0±1.0
		12	6	21.74	21.53	21.76	
		12	13	21.59	21.65	21.73	
		25	0	21.39	21.42	21.42	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20000/1715	20175/1732.5	20350/1750	
10MHz	QPSK	1	0	22.75	22.9	22.78	22.0±1.0
		1	25	22.77	22.73	22.71	
		1	49	22.75	22.89	22.88	
		25	0	22.64	22.57	22.43	22.0±1.0
		25	13	22.56	22.61	22.45	
		25	25	22.55	22.35	22.44	
		50	0	22.24	22.24	22.2	21.5±1.0
	16QAM	1	0	21.88	21.88	22.15	21.5±1.0
		1	25	21.99	21.92	22.14	
		1	49	22.14	22.04	21.85	
		25	0	21.54	21.65	21.58	21.0±1.0
		25	13	21.79	21.5	21.72	
		25	25	21.53	21.8	21.52	
		50	0	21.38	21.42	21.41	20.5±1.0



LTE FDD Band 4				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20025/1717.5	20175/1732.5	20325/1747.5	
15MHz	QPSK	1	0	22.8	22.7	22.82	22.0±1.0
		1	38	22.71	22.79	22.75	
		1	74	22.95	22.88	22.77	
		36	0	22.4	22.56	22.39	22.0±1.0
		36	18	22.38	22.43	22.54	
		36	39	22.48	22.39	22.39	
		75	0	22.2	22.2	22.29	21.5±1.0
	16QAM	1	0	22.03	22.1	21.99	21.5±1.0
		1	38	22.1	21.85	22.02	
		1	74	21.91	22.04	22.03	
		36	0	21.8	21.61	21.58	21.0±1.0
		36	18	21.68	21.5	21.78	
		36	39	21.57	21.51	21.53	
		75	0	21.39	21.4	21.38	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20050/1720	20175/1732.5	20300/1745	
20MHz	QPSK	1	0	22.93	23.05	22.99	22.5±1.0
		1	50	22.98	22.93	22.88	
		1	99	22.78	22.74	22.91	
		50	0	22.35	22.64	22.46	22.0±1.0
		50	25	22.57	22.38	22.6	
		50	50	22.38	22.37	22.53	
		100	0	22.3	22.23	22.29	21.5±1.0
	16QAM	1	0	21.86	22.01	21.92	21.5±1.0
		1	50	22.1	22.13	21.86	
		1	99	21.98	22.12	22.09	
		50	0	21.7	21.56	21.58	21.0±1.0
		50	25	21.68	21.72	21.56	
		50	50	21.67	21.72	21.51	
		100	0	21.38	21.43	21.4	20.5±1.0

## 3. LTE Band 5 Conducted Power Test Verdict:

LTE FDD Band 5				Conducted Power(dBm)						
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up			
				20407/824.7	20525/836.5	20643/848.3				
1.4MHz	QPSK	1	0	23.08	23.23	23.2	22.5±1.0			
		1	3	23.21	23.05	23.11				
		1	5	23.01	23.21	23				
		3	0	22.83	22.94	22.81	22.0±1.0			
		3	2	22.95	22.74	22.89				
		3	3	22.67	22.72	22.68				
	16QAM	16QAM	6	0	22.53	22.58	22.52	22.0±1.0		
			1	0	22.15	22.26	22.37	21.5±1.0		
			1	3	22.38	22.32	22.36			
			1	5	22.22	22.29	22.35			
			3	0	21.94	21.99	21.87	21.5±1.0		
			3	2	22.02	21.83	21.89			
			3	3	21.8	21.81	21.8			
			6	0	21.7	21.7	21.67	21.0±1.0		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up			
				20415/825.5	20525/836.5	20635/847.5				
3MHz	QPSK	1	0	23.05	23.11	23.2	22.5±1.0			
		1	7	23.15	23.04	23.04				
		1	14	23.16	23.11	23.11				
		16QAM	16QAM	8	0	22.66	22.84	22.65	22.0±1.0	
				8	4	22.94	22.92	22.72		
				8	7	22.74	22.87	22.82		
				15	0	22.54	22.58	22.52	22.0±1.0	
	16QAM			16QAM	1	0	22.25	22.39	22.24	21.5±1.0
					1	7	22.34	22.21	22.16	
		1	14		22.28	22.17	22.16			
		8	0		21.92	22.03	21.82	21.5±1.0		
		8	4		21.82	21.81	21.91			
		8	7		21.89	21.93	21.99			
		15	0		21.7	21.7	21.66	21.0±1.0		



LTE FDD Band 5				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20425/826.5	20525/836.5	20625/846.5	
5MHz	QPSK	1	0	23.23	23	23.08	22.5±1.0
		1	13	23.05	23.12	23.23	
		1	24	23.21	23.03	23.12	
		12	0	22.76	22.88	22.91	22.0±1.0
		12	6	22.82	22.77	22.87	
		12	13	22.66	22.92	22.86	
		25	0	22.53	22.55	22.53	22.0±1.0
	16QAM	1	0	22.37	22.31	22.29	21.5±1.0
		1	13	22.36	22.26	22.28	
		1	24	22.43	22.36	22.36	
		12	0	21.85	21.97	21.85	21.5±1.0
		12	6	22.08	21.89	21.96	
		12	13	22.02	21.97	22.1	
		25	0	21.74	21.65	21.69	21.0±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20450/829	20525/836.5	20600/844	
10MHz	QPSK	1	0	23.26	23.31	23.15	22.5±1.0
		1	25	23.15	23.23	23.09	
		1	49	23.29	23.01	23.25	
		25	0	22.83	22.94	22.88	22.0±1.0
		25	13	22.87	22.69	22.68	
		25	25	22.89	22.84	22.67	
		50	0	22.54	22.53	22.51	22.0±1.0
	16QAM	1	0	22.27	22.34	22.45	21.5±1.0
		1	25	22.22	22.43	22.41	
		1	49	22.23	22.2	22.35	
		25	0	22.06	21.93	21.86	21.5±1.0
		25	13	21.96	21.81	21.95	
		25	25	22.08	21.99	21.98	
		50	0	21.67	21.68	21.68	21.0±1.0

## 4. LTE Band 7 Conducted Power Test Verdict:

LTE FDD Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20775/2502.5	21100/2535	21425/2567.5	
5MHz	QPSK	1	0	21.74	21.77	21.76	21.0±1.0
		1	13	21.96	21.79	21.84	
		1	24	21.94	21.94	21.98	
		12	0	21.6	21.65	21.65	21.0±1.0
		12	6	21.51	21.55	21.59	
		12	13	21.35	21.64	21.51	
	25	0	21.28	21.23	21.24	20.5±1.0	
	16QAM	1	0	20.94	21.05	20.95	20.5±1.0
		1	13	20.85	20.92	21.04	
		1	24	21.09	20.93	20.9	
		12	0	20.8	20.57	20.72	20.0±1.0
		12	6	20.59	20.66	20.71	
		12	13	20.56	20.67	20.8	
	25	0	20.45	20.38	20.41	19.5±1.0	
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20800/2505	21100/2535	21400/2565	
10MHz	QPSK	1	0	21.83	21.91	21.76	21.0±1.0
		1	25	21.76	21.83	21.76	
		1	49	21.97	21.91	21.73	
		25	0	21.41	21.43	21.6	21.0±1.0
		25	13	21.49	21.64	21.57	
		25	25	21.52	21.52	21.59	
	50	0	21.22	21.3	21.23	20.5±1.0	
	16QAM	1	0	20.86	21.13	20.92	20.5±1.0
		1	25	20.86	21.07	21.12	
		1	49	20.88	21.02	21.01	
		25	0	20.54	20.67	20.61	20.0±1.0
		25	13	20.72	20.67	20.73	
		25	25	20.59	20.8	20.8	
	50	0	20.37	20.39	20.42	19.5±1.0	



LTE FDD Band 7				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20825/2507.5	21100/2535	21375/2562.5	
15MHz	QPSK	1	0	21.76	21.76	21.92	21.0±1.0
		1	38	21.88	21.76	21.82	
		1	74	21.88	21.79	21.84	
		36	0	21.54	21.59	21.55	21.0±1.0
		36	18	21.47	21.41	21.44	
		36	39	21.65	21.42	21.55	
		75	0	21.2	21.27	21.26	20.5±1.0
	16QAM	1	0	21.15	21.07	20.98	20.5±1.0
		1	38	21	21.02	20.88	
		1	74	21.05	20.87	21.12	
		36	0	20.62	20.71	20.8	20.0±1.0
		36	18	20.72	20.65	20.57	
		36	39	20.77	20.71	20.65	
		75	0	20.41	20.37	20.42	19.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				20850/2510	21100/2535	21350/2560	
20MHz	QPSK	1	0	21.95	21.83	22.06	21.5±1.0
		1	50	21.74	21.71	21.8	
		1	99	21.71	22	21.78	
		50	0	21.54	21.49	21.64	21.0±1.0
		50	25	21.59	21.55	21.49	
		50	50	21.4	21.44	21.6	
		100	0	21.26	21.25	21.21	20.5±1.0
	16QAM	1	0	20.91	20.91	20.96	20.5±1.0
		1	50	21.05	21.13	20.97	
		1	99	21.09	20.97	21.14	
		50	0	20.68	20.73	20.61	20.0±1.0
		50	25	20.7	20.74	20.61	
		50	50	20.58	20.65	20.59	
		100	0	20.38	20.43	20.44	19.5±1.0



5. LTE Band 66 Conducted Power Test Verdict:

LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131979/1710.7	132322/1745	132665/1779.3	
1.4MHz	QPSK	1	0	22.97	22.9	22.93	22.0±1.0
		1	3	22.79	22.98	22.7	
		1	5	22.85	22.79	22.78	
		3	0	22.57	22.61	22.58	22.0±1.0
		3	2	22.4	22.55	22.39	
		3	3	22.56	22.62	22.62	
		6	0	22.23	22.23	22.27	21.5±1.0
	16QAM	1	0	21.85	22.01	21.85	21.5±1.0
		1	3	21.94	22.1	21.95	
		1	5	22.1	22.1	22.09	
		3	0	21.61	21.58	21.63	21.0±1.0
		3	2	21.64	21.55	21.65	
		3	3	21.66	21.52	21.64	
		6	0	21.41	21.36	21.45	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131987/1711.5	12322/1745	132657/1778.5	
3MHz	QPSK	1	0	22.9	22.84	22.73	22.0±1.0
		1	7	22.84	22.77	22.95	
		1	14	22.92	22.94	22.84	
		8	0	22.39	22.65	22.6	22.0±1.0
		8	4	22.63	22.48	22.61	
		8	7	22.64	22.61	22.61	
		15	0	22.22	22.25	22.25	21.5±1.0
	16QAM	1	0	21.9	22.13	22.1	21.5±1.0
		1	7	22.1	21.86	22.01	
		1	14	21.86	21.96	21.86	
		8	0	21.71	21.65	21.51	21.0±1.0
		8	4	21.56	21.72	21.54	
		8	7	21.59	21.68	21.51	
		15	0	21.35	21.43	21.43	20.5±1.0





LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				131997/1712.5	132322/1745	132647/1777.5	
5MHz	QPSK	1	0	22.71	22.81	22.82	22.0±1.0
		1	13	22.97	22.9	22.8	
		1	24	22.98	22.99	22.72	
		12	0	22.52	22.51	22.39	22.0±1.0
		12	6	22.45	22.58	22.5	
		12	13	22.48	22.41	22.56	
	25	0	22.3	22.3	22.25	21.5±1.0	
	16QAM	1	0	22.06	21.94	22.1	21.5±1.0
		1	13	21.94	21.85	21.85	
		1	24	21.85	21.93	21.98	
		12	0	21.57	21.61	21.69	21.0±1.0
		12	6	21.68	21.69	21.6	
		12	13	21.53	21.73	21.66	
		25	0	21.37	21.4	21.37	20.5±1.0
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132022/1715	132322/1745	132622/1775	
10MHz	QPSK	1	0	22.81	22.97	22.98	22.0±1.0
		1	25	22.84	22.84	22.7	
		1	49	22.79	22.81	22.78	
		25	0	22.35	22.59	22.4	22.0±1.0
		25	13	22.56	22.36	22.41	
		25	25	22.44	22.5	22.44	
	50	0	22.26	22.22	22.27	21.5±1.0	
	16QAM	1	0	22.08	22.05	21.95	21.5±1.0
		1	25	22.02	21.86	22.09	
		1	49	22.11	22.1	21.91	
		25	0	21.51	21.56	21.68	21.0±1.0
		25	13	21.7	21.54	21.55	
		25	25	21.51	21.72	21.79	
		50	0	21.35	21.44	21.35	20.5±1.0



LTE FDD Band 66				Conducted Power(dBm)			
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132047/1717.5	132322/1745	132597/1772.5	
15MHz	QPSK	1	0	22.85	22.95	22.97	22.0±1.0
		1	38	22.73	22.88	22.73	
		1	74	22.87	22.91	22.7	
		36	0	22.58	22.38	22.59	22.0±1.0
		36	18	22.52	22.53	22.59	
		36	39	22.4	22.64	22.6	
		75	0	22.27	22.23	22.24	21.5±1.0
	16QAM	1	0	21.99	21.91	21.9	21.5±1.0
		1	38	21.94	22.14	21.85	
		1	74	22.08	22.08	21.89	
		36	0	21.78	21.7	21.62	21.0±1.0
		36	18	21.59	21.68	21.72	
		36	39	21.76	21.57	21.78	
		75	0	21.44	21.36	21.44	
20.5±1.0							
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency			Tune up
				132072/1720	132322/1745	132572/1770	
20MHz	QPSK	1	0	22.98	23.04	22.86	22.5±1.0
		1	50	22.93	22.74	22.77	
		1	99	22.8	22.81	22.84	
		50	0	22.41	22.65	22.55	22.0±1.0
		50	25	22.38	22.61	22.62	
		50	50	22.64	22.54	22.43	
		100	0	22.24	22.3	22.21	21.5±1.0
	16QAM	1	0	22.1	21.98	22.12	21.5±1.0
		1	50	21.99	22.15	21.94	
		1	99	22.14	21.93	22.04	
		50	0	21.67	21.54	21.79	21.0±1.0
		50	25	21.67	21.77	21.57	
		50	50	21.76	21.65	21.55	
		100	0	21.42	21.37	21.35	
20.5±1.0							

## 7.4 WIFI Conducted Power

### WLAN 2.4GHz Band Conducted Power

Channel/Freq.(MHz)	Maximum Conducted Out Power (dBm)		
	802.11b	802.11g	802.11n(HT20)
1(2412)	17.54	15.45	11.83
6(2437)	18.04	16.11	12.47
11(2462)	17.52	15.46	12.73


## 7.5 Bluetooth Output Power

Channel	Frequency (MHz)	BT3.0 Output Power(dBm)		
		GFSK	$\pi$ /4-DQPSK	8-DPSK
CH 0	2402	7.78	8.05	8.49
CH 39	2441	7.67	8.69	9.13
CH 78	2480	7.19	7.39	7.86
Channel	Frequency (MHz)	BT4.0 Output Power(dBm)		
		GFSK		
CH 0	2402	1.658		
CH 20	2442	3.538		
CH 39	2480	3.289		

### Note:

1. Per KDB248227 D01 v02r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at lowest data rate
3. Per KDB248227 D01 v02r02, 802.11g /11n-HT20/11n-HT40 is not required. . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{W/Kg}$ . Thus the SAR can be excluded.

**Antenna Location:**

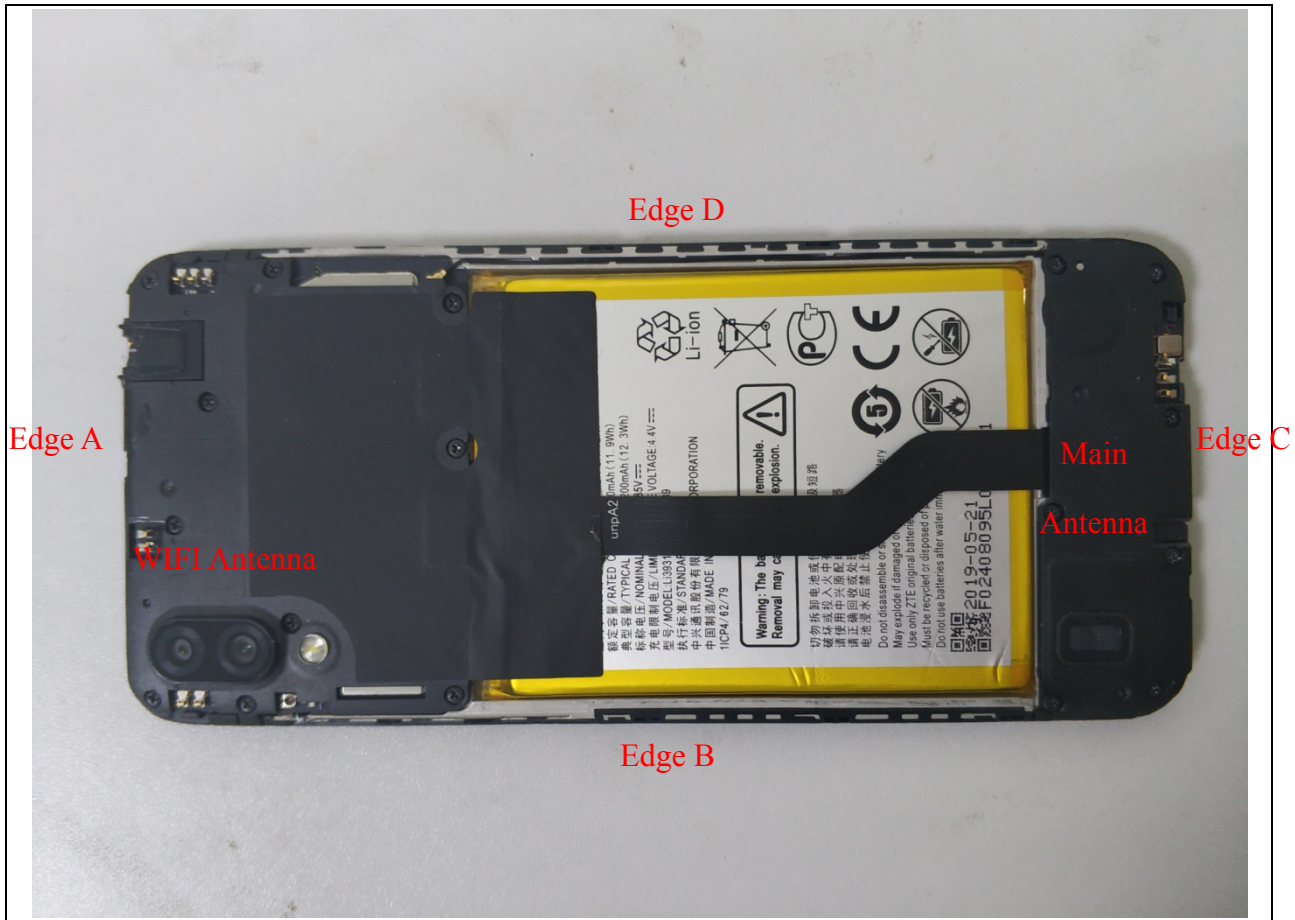

**Antenna-to-User (Edge Side) distance (mm):**

Antenna	Front	Back	Edge A	Edge B	Edge C	Edge D
WWAN Main Antenna	5	2	141	2	0	2
WIFI2.4G/BT	5	2	0	17	142	38

Note: The diagonal distance of the overall section is 15.5cm.

**The Body SAR measurement positions of each band are as below:**

Antenna	Front	Back	Edge A	Edge B	Edge C	Edge D
WWAN Antenna Body-worn	Yes	Yes	No	No	No	No
WWAN Antenna hotspot	Yes	Yes	No	Yes	Yes	Yes
WIFI Antenna Body-worn	Yes	Yes	No	No	No	No
WIFI 2.4G Antenna hotspot	Yes	Yes	Yes	Yes	No	No

Note: According to KDB 941225 D06 v02r01, when antenna-to-edge>2.5cm, SAR is not required.

## 8. Scaling Factor calculation

Operation Mode	Channel /Frequency	Output Power(dBm)	Tune up Power in tolerance (dBm)	Max. Tune up(dBm)	Scaling Factor
GSM850	128/824.2	32.38	31.5 ± 1.0	32.50	1.028
	190/836.6	32.42	31.5 ± 1.0	32.50	1.019
	251/848.8	32.20	31.5 ± 1.0	32.50	1.072
GPRS850 (GPRS 4Tx)	128/824.2	27.55	27.0 ± 1.0	28.00	1.109
	190/836.6	27.62	27.0 ± 1.0	28.00	1.091
	251/848.8	27.49	27.0 ± 1.0	28.00	1.125
GSM1900	512/1850.2	28.96	28.5 ± 1.0	29.50	1.132
	661/1880.0	29.01	28.5 ± 1.0	29.50	1.119
	810/1909.8	28.88	28.5 ± 1.0	29.50	1.153
GPRS1900 (GPRS 4Tx)	512/1850.2	24.23	23.5 ± 1.0	24.50	1.064
	661/1880.0	24.28	23.5 ± 1.0	24.50	1.052
	810/1909.8	24.16	23.5 ± 1.0	24.50	1.081
WCDMA850	4132/826.4	23.23	22.5 ± 1.0	23.50	1.064
	4183/836.6	23.10	22.5 ± 1.0	23.50	1.096
	4233/846.6	23.16	22.5 ± 1.0	23.50	1.081
WCDMA1900	9262/1852.4	23.14	22.5 ± 1.0	23.50	1.086
	9400/1880.0	23.15	22.5 ± 1.0	23.50	1.084
	9538/1907.6	23.11	22.5 ± 1.0	23.50	1.094
WCDMA1700	1312/1712.4	23.21	22.5 ± 1.0	23.50	1.069
	1413/1732.6	23.22	22.5 ± 1.0	23.50	1.067
	1513/1752.6	23.20	22.5 ± 1.0	23.50	1.072
LTE B2 20MHz 1RB#0	18700/1860	22.76	22.0 ± 1.0	23.00	1.057
	18900/1880	22.82	22.0 ± 1.0	23.00	1.042
	19100/1900	22.72	22.0 ± 1.0	23.00	1.067
LTE B2 20MHz 50RB#50	18700/1860	22.27	21.5 ± 1.0	22.50	1.054
	18900/1880	22.41	21.5 ± 1.0	22.50	1.021
	19100/1900	22.29	21.5 ± 1.0	22.50	1.050
LTE B4 20MHz 1RB#0	20050/1720	22.93	22.5 ± 1.0	23.50	1.140
	20175/1732.5	23.05	22.5 ± 1.0	23.50	1.109
	20300/1745	22.99	22.5 ± 1.0	23.50	1.125
LTE B4 20MHz 50RB#0	20050/1720	22.35	22.0 ± 1.0	23.00	1.161
	20175/1732.5	22.64	22.0 ± 1.0	23.00	1.086
	20300/1745	22.46	22.0 ± 1.0	23.00	1.132



LTE B5 10MHz 1RB#0	20450/829	23.26	22.5 ± 1.0	23.50	1.057
	20525/836.5	23.31	22.5 ± 1.0	23.50	1.045
	20600/844	23.15	22.5 ± 1.0	23.50	1.084
LTE B5 10MHz 25RB#0	20450/829	22.83	22.0 ± 1.0	23.00	1.040
	20525/836.5	22.94	22.0 ± 1.0	23.00	1.014
	20600/844	22.88	22.0 ± 1.0	23.00	1.028
LTE B7 20MHz 1RB#0	20850/2510	21.95	21.5 ± 1.0	22.50	1.135
	21100/2535	21.83	21.5 ± 1.0	22.50	1.167
	21350/2560	22.06	21.5 ± 1.0	22.50	1.107
LTE B7 20MHz 50RB#0	20850/2510	21.54	21.0 ± 1.0	22.00	1.112
	21100/2535	21.49	21.0 ± 1.0	22.00	1.125
	21350/2560	21.64	21.0 ± 1.0	22.00	1.086
LTE B66 20MHz 1RB#0	132072/1720	22.98	22.5 ± 1.0	23.50	1.127
	132322/1745	23.04	22.5 ± 1.0	23.50	1.112
	132572/1770	22.86	22.5 ± 1.0	23.50	1.159
LTE B66 20MHz 50RB#0	132072/1720	22.41	22.0 ± 1.0	23.00	1.146
	132322/1745	22.65	22.0 ± 1.0	23.00	1.084
	132572/1770	22.55	22.0 ± 1.0	23.00	1.109
WIFI 2.4G 802.11b	1/2412	17.54	17.5 ± 1.0	18.50	1.247
	6/2437	18.04	17.5 ± 1.0	18.50	1.112
	11/2462	17.52	17.5 ± 1.0	18.50	1.253
BT 3.0 GFSK	0/2402	7.78	7.0 ± 1.0	8.00	1.052
	39/2441	7.67	7.0 ± 1.0	8.00	1.079
	78/2480	7.19	7.0 ± 1.0	8.00	1.205

Note: for LTE power tolerance, only QPSK modulation mode was provide here.

## 9. Test Results

### Results overview of GSM850

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	190/836.6	Voice	0.264	-1.23	1.019	0.269	/
Left Tilt 15°	190/836.6	Voice	0.197	3.77	1.019	0.201	/
Right Cheek	190/836.6	Voice	<b>0.307</b>	-2.25	1.019	<b>0.313</b>	Yes
Right Tilt 15°	190/836.6	Voice	0.183	4.96	1.019	0.186	/
Right Cheek B2#	190/836.6	Voice	0.306	4.43	1.019	0.312	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	190/836.6	GPRS 4Tx	<b>0.319</b>	-1.60	1.091	<b>0.348</b>	Yes
Face Upward	190/836.6	GPRS 4Tx	0.203	-1.40	1.091	0.222	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	190/836.6	GPRS 4Tx	<b>0.319</b>	-1.60	1.091	<b>0.348</b>	Yes
Face Upward	190/836.6	GPRS 4Tx	0.203	-1.40	1.091	0.222	/
Edge B	190/836.6	GPRS 4Tx	0.239	-1.43	1.091	0.261	/
Edge C	190/836.6	GPRS 4Tx	0.112	-3.43	1.091	0.122	/
Edge D	190/836.6	GPRS 4Tx	0.129	-4.31	1.091	0.141	/
Back Upward B2#	190/836.6	GPRS 4Tx	0.316	-2.39	1.091	0.345	/

**Results overview of GSM1900**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	661/1880.0	Voice	<b>0.054</b>	3.03	1.119	<b>0.060</b>	Yes
Left Tilt 15°	661/1880.0	Voice	0.021	0.35	1.119	0.024	/
Right Cheek	661/1880.0	Voice	0.018	-4.68	1.119	0.020	/
Right Tilt 15°	661/1880.0	Voice	0.016	-2.26	1.119	0.018	/
Left Cheek B2#	661/1880.0	Voice	0.050	4.29	1.119	0.056	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	661/1880.0	GPRS 4Tx	<b>0.178</b>	-4.31	1.052	<b>0.187</b>	Yes
Face Upward	661/1880.0	GPRS 4Tx	0.134	-4.60	1.052	0.141	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Edge C	661/1880.0	GPRS 4Tx	<b>0.193</b>	-4.39	1.052	<b>0.203</b>	Yes
Face Upward	661/1880.0	GPRS 4Tx	0.134	-4.60	1.052	0.141	/
Back Upward	661/1880.0	GPRS 4Tx	0.178	-4.31	1.052	0.187	/
Edge B	661/1880.0	GPRS 4Tx	0.075	2.61	1.052	0.079	/
Edge D	661/1880.0	GPRS 4Tx	0.048	3.41	1.052	0.050	/
Edge C B2#	661/1880.0	GPRS 4Tx	0.188	-4.83	1.052	0.198	/



**Results overview of WCDMA850**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	4132/826.4	RMC	0.311	-3.46	1.064	0.331	/
Left Tilt 15°	4132/826.4	RMC	0.209	-3.73	1.064	0.222	/
Right Cheek	4132/826.4	RMC	<b>0.388</b>	-3.43	1.064	<b>0.413</b>	Yes
Right Tilt 15°	4132/826.4	RMC	0.234	-3.70	1.064	0.249	/
Right Cheek B2#	4132/826.4	RMC	0.378	-2.98	1.064	0.402	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	4132/826.4	RMC	<b>0.550</b>	-2.96	1.064	<b>0.585</b>	Yes
Face Upward	4132/826.4	RMC	0.350	-4.14	1.064	0.372	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	4132/826.4	RMC	<b>0.550</b>	-2.96	1.064	<b>0.585</b>	Yes
Face Upward	4132/826.4	RMC	0.350	-4.14	1.064	0.372	/
Edge B	4132/826.4	RMC	0.404	-3.66	1.064	0.430	/
Edge C	4132/826.4	RMC	0.125	-4.44	1.064	0.133	/
Edge D	4132/826.4	RMC	0.227	-1.92	1.064	0.242	/
Back Upward B2#	4132/826.4	RMC	0.500	-2.13	1.064	0.532	/

**Results overview of WCDMA1900**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	9400/1880.0	RMC	<b>0.126</b>	-3.50	1.084	<b>0.137</b>	Yes
Left Tilt 15°	9400/1880.0	RMC	0.074	3.03	1.084	0.080	/
Right Cheek	9400/1880.0	RMC	0.102	-4.27	1.084	0.111	/
Right Tilt 15°	9400/1880.0	RMC	0.046	1.34	1.084	0.050	/
Left Cheek B2#	9400/1880.0	RMC	0.118	2.63	1.084	0.128	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	9400/1880.0	RMC	<b>0.489</b>	-2.39	1.084	<b>0.530</b>	Yes
Face Upward	9400/1880.0	RMC	0.389	-3.18	1.084	0.422	/
Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	9400/1880.0	RMC	<b>0.489</b>	-2.39	1.084	0.530	/
Face Upward	9400/1880.0	RMC	0.389	-3.18	1.084	0.422	/
Edge B	9400/1880.0	RMC	0.209	-3.12	1.084	0.227	/
Edge C	9400/1880.0	RMC	<b>0.589</b>	-1.92	1.084	<b>0.638</b>	Yes
Edge D	9400/1880.0	RMC	0.161	-4.46	1.084	0.175	/
Edge C B2#	9400/1880.0	RMC	0.574	-3.84	1.084	0.622	/

**Results overview of WCDMA1700**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	1413/1732.6	RMC	0.040	0.02	1.067	0.043	/
Left Tilt 15°	1413/1732.6	RMC	0.030	0.07	1.067	0.032	/
Right Cheek	1413/1732.6	RMC	<b>0.073</b>	-2.88	1.067	<b>0.078</b>	Yes
Right Tilt 15°	1413/1732.6	RMC	0.028	-4.40	1.067	0.030	/
Left Cheek B2#	1413/1732.6	RMC	0.065	-1.74	1.067	0.069	/
Body-Worn& Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	1312/1712.4	RMC	1.043	-2.21	1.069	1.115	/
Back Upward	1413/1732.6	RMC	<b>1.074</b>	3.39	1.067	<b>1.146</b>	Yes
Back Upward	1513/1752.6	RMC	1.032	-1.84	1.072	1.106	/
Back Upward repeat	1312/1712.4	RMC	1.008	-2.10	1.069	1.078	
Back Upward repeat	1413/1732.6	RMC	1.021	-1.09	1.067	1.089	
Back Upward repeat	1513/1752.6	RMC	0.991	-2.68	1.072	1.063	
Face Upward	1413/1732.6	RMC	0.549	3.05	1.067	0.586	/
Edge B	1413/1732.6	RMC	0.106	0.01	1.067	0.113	/
Edge C	1413/1732.6	RMC	0.714	-3.08	1.067	0.762	/
Edge D	1413/1732.6	RMC	0.030	-3.21	1.067	0.032	/
Back Upward B2#	1413/1732.6	RMC	0.986	-4.38	1.067	1.052	/



**Results overview of FDD LTE Band 2, QPSK, 20MHz Bandwidth**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Left Cheek	18900/1880	Data	0.101	-2.370	1.042	0.105	/
Left Tilt 15°	18900/1880	Data	0.082	-2.950	1.042	0.085	/
Right Cheek	18900/1880	Data	<b>0.116</b>	-1.950	1.042	<b>0.121</b>	Yes
Right Tilt 15°	18900/1880	Data	0.055	1.200	1.042	0.057	/
Right Cheek B2#	18900/1880	Data	0.108	-0.560	1.042	0.113	/
50%RB#0							
Left Cheek	18900/1880	Data	0.089	-2.150	1.021	0.091	/
Left Tilt 15°	18900/1880	Data	0.066	-1.850	1.021	0.067	/
Right Cheek	18900/1880	Data	0.105	-3.360	1.021	0.107	/
Right Tilt 15°	18900/1880	Data	0.047	3.470	1.021	0.048	/
Body Worn& Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Back Upward	18900/1880	Data	<b>0.477</b>	-2.980	1.042	<b>0.497</b>	Yes
Face Upward	18900/1880	Data	0.334	1.840	1.042	0.348	/
Edge B	18900/1880	Data	0.149	-3.270	1.042	0.155	/
Edge C	18900/1880	Data	0.425	-1.730	1.042	0.443	/
Edge D	18900/1880	Data	0.117	-4.830	1.042	0.122	/
Back Upward B2#	18900/1880	Data	0.464	-2.930	1.042	0.484	/
50%RB#0							
Back Upward	18900/1880	Data	0.450	-2.110	1.021	0.459	/
Face Upward	18900/1880	Data	0.311	-1.070	1.021	0.318	/
Edge B	18900/1880	Data	0.122	0.870	1.021	0.125	/
Edge C	18900/1880	Data	0.395	-0.910	1.021	0.403	/
Edge D	18900/1880	Data	0.097	-1.870	1.021	0.099	/



**Results overview of FDD LTE Band 4, QPSK, 20MHz Bandwidth**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Left Cheek	20175/1732.5	Data	<b>0.164</b>	-2.030	1.109	<b>0.182</b>	Yes
Left Tilt 15°	20175/1732.5	Data	0.114	-4.470	1.109	0.126	/
Right Cheek	20175/1732.5	Data	0.148	-1.460	1.109	0.164	/
Right Tilt 15°	20175/1732.5	Data	0.067	-1.600	1.109	0.074	/
Left Cheek B2#	20175/1732.5	Data	0.147	-1.590	1.109	0.163	/
50%RB#0							
Left Cheek	20175/1732.5	Data	0.152	-2.840	1.086	0.165	/
Left Tilt 15°	20175/1732.5	Data	0.100	-1.930	1.086	0.109	/
Right Cheek	20175/1732.5	Data	0.131	-1.070	1.086	0.142	/
Right Tilt 15°	20175/1732.5	Data	0.058	-1.650	1.086	0.063	/
Body-Worn & Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Back Upward	20175/1732.5	Data	<b>0.606</b>	-4.110	1.109	<b>0.672</b>	Yes
Face Upward	20175/1732.5	Data	0.542	-4.590	1.109	0.601	/
Edge B	20175/1732.5	Data	0.210	-1.690	1.109	0.233	/
Edge C	20175/1732.5	Data	0.474	-1.190	1.109	0.526	/
Edge D	20175/1732.5	Data	0.160	-2.040	1.109	0.177	/
Back Upward B2#	20175/1732.5	Data	0.589	-4.780	1.109	0.653	/
50%RB#0							
Back Upward	20175/1732.5	Data	0.563	0.870	1.086	0.612	/
Face Upward	20175/1732.5	Data	0.489	-1.190	1.086	0.531	/
Edge B	20175/1732.5	Data	0.188	-2.250	1.086	0.204	/
Edge C	20175/1732.5	Data	0.422	-1.940	1.086	0.458	/
Edge D	20175/1732.5	Data	0.115	-1.660	1.086	0.125	/



**Results overview of FDD LTE Band 5, QPSK, 20MHz Bandwidth**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Left Cheek	20525/836.5	Data	0.296	-4.390	1.045	0.309	/
Left Tilt 15°	20525/836.5	Data	0.217	1.880	1.045	0.227	/
Right Cheek	20525/836.5	Data	<b>0.405</b>	-2.180	1.045	<b>0.423</b>	Yes
Right Tilt 15°	20525/836.5	Data	0.259	-1.460	1.045	0.271	/
Left Cheek B2#	20525/836.5	Data	0.339	-2.630	1.045	0.354	/
50%RB#0							
Left Cheek	20525/836.5	Data	0.278	-2.740	1.014	0.282	/
Left Tilt 15°	20525/836.5	Data	0.195	-1.960	1.014	0.198	/
Right Cheek	20525/836.5	Data	0.384	-2.220	1.014	0.389	/
Right Tilt 15°	20525/836.5	Data	0.223	-1.300	1.014	0.226	/
Body-Worn & Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Back Upward	20525/836.5	Data	<b>0.616</b>	-3.110	1.045	<b>0.644</b>	Yes
Face Upward	20525/836.5	Data	0.371	-2.760	1.045	0.388	/
Edge B	20525/836.5	Data	0.527	-4.320	1.045	0.551	/
Edge C	20525/836.5	Data	0.244	-2.570	1.045	0.255	/
Edge D	20525/836.5	Data	0.287	-0.910	1.045	0.300	/
Back Upward B2#	20525/836.5	Data	0.472	-2.570	1.045	0.493	/
50%RB#0							
Back Upward	20525/836.5	Data	0.593	0.850	1.014	0.601	/
Face Upward	20525/836.5	Data	0.345	-1.620	1.014	0.350	/
Edge B	20525/836.5	Data	0.492	-1.110	1.014	0.499	/
Edge C	20525/836.5	Data	0.210	-0.730	1.014	0.213	/
Edge D	20525/836.5	Data	0.251	-0.550	1.014	0.254	/



**Results overview of FDD LTE Band 7, QPSK, 20MHz Bandwidth**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Left Cheek	21350/2560	Data	<b>0.198</b>	0.060	1.107	<b>0.219</b>	Yes
Left Tilt 15°	21350/2560	Data	0.131	-2.440	1.107	0.145	/
Right Cheek	21350/2560	Data	0.166	0.050	1.107	0.184	/
Right Tilt 15°	21350/2560	Data	0.092	-4.180	1.107	0.102	/
Left Cheek B2#	21350/2560	Data	0.173	-0.100	1.107	0.191	/
50%RB#0							
Left Cheek	21350/2560	Data	0.176	-0.840	1.086	0.191	/
Left Tilt 15°	21350/2560	Data	0.108	-1.030	1.086	0.117	/
Right Cheek	21350/2560	Data	0.148	-1.780	1.086	0.161	/
Right Tilt 15°	21350/2560	Data	0.074	-0.250	1.086	0.080	/

Body-Worn & Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Back Upward	20850/2510	Data	0.898	-2.170	1.135	1.019	/
Back Upward	21100/2535	Data	0.879	-1.660	1.167	1.026	/
Back Upward	21350/2560	Data	0.918	-2.350	1.107	1.016	/
Back Upward repeat	21350/2560	Data	0.891	-4.150	1.107	0.986	/
Face Upward	21350/2560	Data	0.451	-4.030	1.107	0.499	/
Edge B	21350/2560	Data	0.275	-2.000	1.107	0.304	/
Edge C	20850/2510	Data	0.981	-3.070	1.135	1.113	/
Edge C	21100/2535	Data	0.956	-1.920	1.167	1.116	/
Edge C	21350/2560	Data	<b>1.009</b>	-2.680	1.107	<b>1.117</b>	Yes
Edge C repeat	21350/2560	Data	0.990	-1.100	1.107	1.096	/
Edge D	21350/2560	Data	0.143	4.350	1.107	0.158	/
Edge C B2#	20850/2510	Data	0.965	-3.840	1.135	1.095	/
50%RB#0							
Back Upward	20850/2510	Data	0.843	-1.570	1.112	0.937	/
Back Upward	21100/2535	Data	0.830	-3.610	1.125	0.934	/
Back Upward	21350/2560	Data	0.865	-2.110	1.086	0.940	/
Back Upward repeat	21350/2560	Data	0.850	-1.060	1.086	0.923	/
Face Upward	21100/2535	Data	0.417	-1.020	1.086	0.453	/
Edge B	21100/2535	Data	0.234	-3.740	1.086	0.254	/
Edge C	20850/2510	Data	0.956	-2.440	1.112	1.063	/
Edge C	21100/2535	Data	0.943	-1.620	1.125	1.061	/
Edge C	21350/2560	Data	0.985	-1.810	1.086	1.070	/
Edge C repeat	21350/2560	Data	0.966	-1.550	1.086	1.049	/
Edge D	21100/2535	Data	0.117	-1.550	1.086	0.127	/



**Results overview of FDD LTE Band 66, QPSK, 20MHz Bandwidth**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Left Cheek	132322/1745	Data	0.058	2.460	1.112	0.064	/
Left Tilt 15°	132322/1745	Data	0.040	-3.840	1.112	0.044	/
Right Cheek	132322/1745	Data	<b>0.077</b>	-2.780	1.112	<b>0.086</b>	Yes
Right Tilt 15°	132322/1745	Data	0.034	-2.850	1.112	0.038	/
Left Cheek B2#	132322/1745	Data	0.069	0.690	1.112	0.077	/
50%RB#0							
Left Cheek	132322/1745	Data	0.051	-2.960	1.084	0.055	/
Left Tilt 15°	132322/1745	Data	0.033	-1.560	1.084	0.036	/
Right Cheek	132322/1745	Data	0.070	-1.300	1.084	0.076	/
Right Tilt 15°	132322/1745	Data	0.029	-2.870	1.084	0.031	/
Body-Worn & Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
1RB#0							
Back Upward	132072/1720	Data	1.101	-0.660	1.127	1.241	/
Back Upward	132322/1745	Data	1.123	-1.250	1.112	1.248	/
Back Upward	132572/1770	Data	1.066	-0.370	1.159	1.235	/
Back Upward repeat	132322/1745	Data	1.112	-3.280	1.112	1.237	/
Face Upward	132322/1745	Data	0.539	-1.370	1.112	0.599	/
Edge B	132322/1745	Data	0.122	0.480	1.112	0.136	/
Edge C	132072/1720	Data	1.122	-3.220	1.127	1.264	/
Edge C	132322/1745	Data	<b>1.158</b>	4.740	1.112	<b>1.287</b>	Yes
Edge C	132572/1770	Data	1.106	-1.530	1.159	1.282	/
Edge C repeat	132322/1745	Data	1.135	-2.700	1.112	1.262	/
Edge D	132322/1745	Data	0.039	-1.010	1.112	0.043	/
Edge C B2#	132322/1745	Data	1.142	-3.050	1.112	1.270	/
Edge C B2# repeat	132322/1745	Data	1.127	-1.870	1.112	1.253	/
50%RB#0							
Back Upward	132072/1720	Data	0.993	-2.660	1.146	1.138	/
Back Upward	132322/1745	Data	1.052	-0.510	1.084	1.140	/
Back Upward	132572/1770	Data	1.023	-1.850	1.109	1.135	/
Back Upward repeat	132322/1745	Data	1.030	-2.030	1.084	1.117	/
Face Upward	132322/1745	Data	0.505	-1.750	1.084	0.547	/
Edge B	132322/1745	Data	0.100	-2.000	1.084	0.108	/
Edge C	132072/1720	Data	1.050	-2.470	1.146	1.203	/
Edge C	132322/1745	Data	1.113	-1.450	1.084	1.206	/
Edge C	132572/1770	Data	1.082	-1.580	1.109	1.200	/
Edge C repeat	132322/1745	Data	1.088	-0.330	1.084	1.179	/
Edge D	132322/1745	Data	0.032	-1.260	1.084	0.035	/



**Results overview of WIFI2.4G 802.11b**

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	6/2437	DSSS	<b>0.309</b>	0.87	1.112	<b>0.344</b>	Yes
Left Tilt 15°	6/2437	DSSS	0.245	0.14	1.112	0.272	/
Right Cheek	6/2437	DSSS	0.289	-4.48	1.112	<b>0.321</b>	/
Right Tilt 15°	6/2437	DSSS	0.203	-1.72	1.112	0.226	/
Left Cheek B2#	6/2437	DSSS	0.296	-2.95	1.112	0.329	/
Body-worn & Hotspot(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	6/2437	DSSS	<b>0.229</b>	-4.31	1.112	<b>0.255</b>	Yes
Face Upward	6/2437	DSSS	0.166	3.03	1.112	0.185	/
Edge A	6/2437	DSSS	0.228	-3.12	1.112	0.253	/
Edge B	6/2437	DSSS	0.051	-4.53	1.112	0.057	/
Edge D	6/2437	DSSS	0.036	4.13	1.112	0.040	/
Back Upward B2#	6/2437	DSSS	0.215	-4.49	1.112	0.239	/

### Results overview of BT

Test Position of Head	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Left Cheek	39/2441	DH5	<b>0.025</b>	-1.77	1.079	<b>0.027</b>	/
Left Tilt 15°	39/2441	DH5	0.020	1.82	1.079	0.022	/
Right Cheek	39/2441	DH5	0.016	-4.33	1.079	0.017	/
Right Tilt 15°	39/2441	DH5	0.012	-3.02	1.079	0.013	/
Left Cheek B2#	39/2441	DH5	0.019	-4.38	1.079	0.020	/
Body-worn(10mm)	Channel /Frequency	Mode	SAR Value (W/kg)1-g	Power drift(%)	Scaled Factor	Scaled SAR (W/Kg)1-g	SAR Plot.
Back Upward	39/2441	DH5	<b>0.038</b>	0.03	1.079	<b>0.041</b>	/
Face Upward	39/2441	DH5	0.022	-2.14	1.079	0.024	/
Back Upward B2#	39/2441	DH5	0.030	-2.00	1.079	0.032	/

**Note:**

Per KDB941225 D06 v02r01, When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested. As the manufacture requirement the separation distance use 5mm for Hotspot mode.

Per KDB Publication 941225 D01v03r01. RMC 12.2kbps was as primary mode SAR, when the primary mode SAR less than 1.2W/kg, secondary SAR (HSPA) was not requires.

When the 1-g SAR for the mid-band channel or the channel with the highest output power satisfy the following conditions, testing of the other channels in the band is not required. (Per KDB 447498 D01 General RF Exposure Guidance v06)

- $\leq 0.8$  W/kg, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg, when the transmission band is  $\geq 200$  MHz

## 10. Simultaneous Transmissions Analysis

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 6 of this report. Maximum localized SAR is **below** exposure limits specified in the relevant standards.

### Simultaneous SAR

No.	Transmitter Combinations	Scenario Supported or not	Supported for Mobile Hotspot or not
1	GSM + BT	Yes	No
2	GSM + WIFI 2.4G	Yes	Yes
3	WCDMA +BT	Yes	No
4	WCDMA +WIFI 2.4G	Yes	Yes
5	LTE+BT	Yes	No
6	LTE+WIFI 2.4G	Yes	Yes
7	WIFI+BT	No	No

### Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Head)

Test Position		Left Cheek	Left Tilt	Right Cheek	Right Tilt
Head MAX 1-g SAR(W/Kg)	GSM850	0.269	0.201	0.313	0.186
	GSM1900	0.060	0.024	0.020	0.018
	WCDMA 850	0.331	0.222	0.413	0.249
	WCDMA 1700	0.043	0.032	0.078	0.030
	WCDMA 1900	0.137	0.080	0.111	0.050
	LTE Band2	0.105	0.085	0.121	0.057
	LTE Band4	0.182	0.126	0.164	0.074
	LTE Band5	0.309	0.227	0.423	0.271
	LTE Band7	0.219	0.145	0.184	0.102
	LTE Band66	0.064	0.044	0.086	0.038
	2.4G WIFI 802.11b	0.344	0.272	0.321	0.226
	BT	0.027	0.022	0.017	0.013
WIFI Simultaneous $\Sigma$ 1-g SAR(W/Kg)		0.675	0.499	0.744	0.497
BT Simultaneous $\Sigma$ 1-g SAR(W/Kg)		0.358	0.249	0.440	0.284



Simultaneous Tx Combination of GSM/WCDMA/LTE and BT/WIFI (Body).

Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Body-worn 10mm separation MAX 1-g SAR(W/Kg)	GSM850	0.222	0.348	/	/	/	/
	GSM1900	0.141	0.187	/	/	/	/
	WCDMA 850	0.372	0.585	/	/	/	/
	WCDMA 1700	0.585	1.146	/	/	/	/
	WCDMA 1900	0.422	0.530	/	/	/	/
	LTE Band2	0.348	0.497	/	/	/	/
	LTE Band4	0.601	0.672	/	/	/	/
	LTE Band5	0.388	0.644	/	/	/	/
	LTE Band7	0.499	1.016	/	/	/	/
	LTE Band66	0.599	1.248	/	/	/	/
	2.4G WIFI 802.11b	0.185	0.255	/	/	/	/
BT	0.024	0.041	/	/	/	/	
WIFI Simultaneous $\Sigma$ 1-g SAR(W/Kg)		0.786	1.503	/	/	/	/
BT Simultaneous $\Sigma$ 1-g SAR(W/Kg)		0.625	1.289	/	/	/	/

Simultaneous Tx Combination of GSM/WCDMA/LTE and WIFI (Body).

Test Position		Face	Back	Edge A	Edge B	Edge C	Edge D
Hotspot 10mm separation MAX 1-g SAR(W/Kg)	GSM850	0.222	0.348	/	0.261	0.122	0.141
	GSM1900	0.141	0.187	/	0.079	0.203	0.050
	WCDMA 850	0.372	0.585	/	0.430	0.133	0.242
	WCDMA 1700	0.585	1.146	/	0.113	0.762	0.032
	WCDMA 1900	0.422	0.530	/	0.227	0.638	0.175
	LTE Band2	0.348	0.497	/	0.155	0.443	0.122
	LTE Band4	0.601	0.672	/	0.233	0.526	0.177
	LTE Band5	0.388	0.644	/	0.551	0.255	0.300
	LTE Band7	0.499	1.016	/	0.304	1.117	0.158
	LTE Band66	0.599	1.248	/	0.136	1.287	0.043
	2.4G WIFI 802.11b	0.185	0.255	0.253	0.057	/	0.040
WIFI Simultaneous $\Sigma$ 1-g SAR(W/Kg)		0.786	1.503	/	0.608	/	0.340

The estimated SAR value with \* Signal

**SAR to Peak Location Separation Ratio (SPLSR)**

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required

## 11.Measurement Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom $\nu_{eff}$ or $\nu_i$
<b>Measurement System</b>								
1	- Probe Calibration	B	5.8	N	1	1	5.8	$\infty$
2	- Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	$\infty$
3	- Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	$\infty$
4	- Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	$\infty$
5	- Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	$\infty$
6	- System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.58	$\infty$
7	Modulation response	B	3	N	1	1	3.00	
8	- Readout Electronics	B	0.5	N	1	1	0.50	$\infty$
9	- Response Time	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
10	- Integration Time	B	3.0	R	$\sqrt{3}$	1	1.73	$\infty$
11	- RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	$\infty$
12	- Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
13	- Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
14	- Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	$\infty$

Uncertainties of the DUT								
15	- Position of the DUT	A	2.6	N	$\sqrt{3}$	1	2.6	5
16	- Holder of the DUT	A	3	N	$\sqrt{3}$	1	3.0	5
17	- Output Power Variation -SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.89	$\infty$
Phantom and Tissue Parameters								
18	- Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	$\infty$
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	- Liquid Conductivity Target -tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	$\infty$
21	- Liquid Conductivity -measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	- Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	$\infty$
23	- Liquid Permittivity -measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	$\infty$
<b>Combined Standard Uncertainty</b>				RSS			10.63	
<b>Expanded uncertainty</b> (Confidence interval of 95 %)				K=2			21.26	

### System Check Uncertainty

No.	Uncertainty Component	Type	Uncertainty Value (%)	Probability Distribution	k	ci	Standard Uncertainty (%) $u_i(\%)$	Degree of freedom $V_{eff}$ or $v_i$
Measurement System								
1	- Probe Calibration	B	5.8	N	1	1	5.8	$\infty$

2	- Axial isotropy	B	3.5	R	$\sqrt{3}$	0.5	1.43	$\infty$
3	- Hemispherical Isotropy	B	5.9	R	$\sqrt{3}$	0.5	2.41	$\infty$
4	- Boundary Effect	B	1	R	$\sqrt{3}$	1	0.58	$\infty$
5	- Linearity	B	4.7	R	$\sqrt{3}$	1	2.71	$\infty$
6	- System Detection Limits	B	1	R	$\sqrt{3}$	1	0.58	$\infty$
7	Modulation response	B	0	N	1	1	0.00	
8	- Readout Electronics	B	0.5	N	1	1	0.50	$\infty$
9	- Response Time	B	0.00	R	$\sqrt{3}$	1	0.00	$\infty$
10	- Integration Time	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
11	- RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	$\infty$
12	- Probe Position Mechanical tolerance	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
13	- Probe Position with respect to Phantom Shell	B	1.4	R	$\sqrt{3}$	1	0.81	$\infty$
14	- Extrapolation, Interpolation and Integration Algorithms for Max. SAR evaluation	B	2.3	R	$\sqrt{3}$	1	1.33	$\infty$
Uncertainties of the DUT								
15	Deviation of experimental source from numerical source	A	4	N	1	1	4.00	5
16	Input Power and SAR drift measurement	A	5	R	$\sqrt{3}$	1	2.89	5
17	Dipole Axis to Liquid Distance	B	2	R	$\sqrt{3}$	1	1.2	$\infty$

Phantom and Tissue Parameters								
18	- Phantom Uncertainty(shape and thickness tolerances)	B	4	R	$\sqrt{3}$	1	2.31	$\infty$
19	Uncertainty in SAR correction for deviation(in permittivity and conductivity)	B	2	N	1	1	2.00	
20	- Liquid Conductivity Target -tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	$\infty$
21	- Liquid Conductivity -measurement Uncertainty)	B	4	N	$\sqrt{3}$	1	0.92	9
22	- Liquid Permittivity Target tolerance	B	2.5	R	$\sqrt{3}$	0.6	1.95	$\infty$
23	- Liquid Permittivity -measurement uncertainty	B	5	N	$\sqrt{3}$	1	1.15	$\infty$
<b>Combined Standard Uncertainty</b>				RSS			10.15	
<b>Expanded uncertainty</b> (Confidence interval of 95 %)				K=2			20.29	



## 12. Equipment List

This table is a complete overview of the SAR measurement equipment. Devices used during the test described are marked .

	EQUIPMENT	Model	Serial number	Calibration Date	Due Date
<input checked="" type="checkbox"/>	SAR Probe	SSE2	SN27/15 EPGO261	2019/03/04	2020/03/03
<input checked="" type="checkbox"/>	Dipole	SID750	SN 23/15 DIP0G750-378	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SID835	SN 09/13 DIP0G835-217	2017/11/27	2019/11/26
<input type="checkbox"/>	Dipole	SID900	SN 09/13 DIP0G900-215	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SID1800	SN 09/13 DIP1G800-216	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SID1900	SN 09/13 DIP2G000-218	2017/11/27	2019/11/26
<input type="checkbox"/>	Dipole	SID2000	SN 09/13 DIP2G000-219	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SID2450	SN_09/13_DIP2G450-220	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SID2600	SN 32/14_DIP2G600-338	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Dipole	SWG5500	SN15/15 WGA39	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Multimeter	Keithley-2000	4014020	2019/04/01	2020/04/01
<input checked="" type="checkbox"/>	System Simulator(Agilent 8960)	E5515C	GB 47200710	2017/11/08	2019/11/07
<input checked="" type="checkbox"/>	System Simulator(R&S)	CMW500	130805	2019/07/30	2020/07/29
<input checked="" type="checkbox"/>	KEYSIGHT	E7515A	MY56040357	2019/04/01	2020/04/01
<input checked="" type="checkbox"/>	Vector Network Analyzer(R&S)	ZVB8	A0802530	2019/04/17	2020/04/17
<input checked="" type="checkbox"/>	PC 3.5 Fixed Match Calibration Kit	ZV-Z32	100571	2017/11/29	2019/11/28
<input checked="" type="checkbox"/>	Dielectric Probe Kit	SCLMP	SN 09/13 OCPG51	2017/11/27	2019/11/26
<input checked="" type="checkbox"/>	Signal Generator	SMU200A	A140801888	2019/04/01	2020/04/01
<input checked="" type="checkbox"/>	Amplifier	Nucltudes	143060	2019/03/26	2020/03/25
<input checked="" type="checkbox"/>	Directional Coupler	DC6180A	305827	2019/03/26	2020/03/25
<input checked="" type="checkbox"/>	Power Meter	NRP2	A140401673	2019/03/26	2020/03/25
<input checked="" type="checkbox"/>	Power Sensor	NPR-Z11	1138.3004.02-114072-nq	2019/03/26	2020/03/25
<input checked="" type="checkbox"/>	Power Meter	NRVS	A0802531	2019/03/26	2020/03/25
<input checked="" type="checkbox"/>	Power Sensor	NRV-Z4	100069	2019/03/26	2020/03/25



## ANNEX A: Appendix A: SAR System performance Check Plots

(Please See Appendix A)

## ANNEX B: Appendix B: SAR Measurement results Plots

(Please See Appendix B)

## ANNEX C: Appendix C: Calibration reports

(Please See Appendix C)

## ANNEX D: Appendix D: SAR Test Setup

(Please See Appendix D)

—End of the Report—