


# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : LTE/WCDMA/GSM(GPRS) Multi-Mode  
Digital Mobile Phone  
BRAND NAME : ZTE  
MODEL NAME : ZTE Blade A7s  
FCC ID : SRQ-ZTEA7S  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DSS) Spread Spectrum Transmitter


The product was received on Aug. 29, 2019 and testing was completed on Oct. 23, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.



---

Reviewed by: Jason Jia / Supervisor



---

Approved by: James Huang / Manager



**Sporton International (Kunshan) Inc.**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



## TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>REVISION HISTORY.....</b>                                    | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                             | <b>4</b>  |
| <b>1 GENERAL DESCRIPTION.....</b>                               | <b>5</b>  |
| 1.1 Applicant.....                                              | 5         |
| 1.2 Manufacturer.....                                           | 5         |
| 1.3 Product Feature of Equipment Under Test.....                | 5         |
| 1.4 Product Specification of Equipment Under Test.....          | 6         |
| 1.5 Modification of EUT .....                                   | 6         |
| 1.6 Testing Location .....                                      | 7         |
| 1.7 Applicable Standards.....                                   | 7         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....</b>        | <b>8</b>  |
| 2.1 Carrier Frequency Channel .....                             | 8         |
| 2.2 Test Mode.....                                              | 9         |
| 2.3 Connection Diagram of Test System.....                      | 10        |
| 2.4 Support Unit used in test configuration and system .....    | 11        |
| 2.5 EUT Operation Test Setup .....                              | 11        |
| 2.6 Measurement Results Explanation Example.....                | 11        |
| <b>3 TEST RESULT .....</b>                                      | <b>12</b> |
| 3.1 Number of Channel Measurement .....                         | 12        |
| 3.2 Hopping Channel Separation Measurement .....                | 14        |
| 3.3 Dwell Time Measurement.....                                 | 21        |
| 3.4 20dB Bandwidth Measurement .....                            | 23        |
| 3.5 Output Power Measurement.....                               | 30        |
| 3.6 Conducted Band Edges Measurement.....                       | 32        |
| 3.7 Conducted Spurious Emission Measurement .....               | 39        |
| 3.8 Radiated Band Edges and Spurious Emission Measurement ..... | 49        |
| 3.9 AC Conducted Emission Measurement.....                      | 53        |
| 3.10 Antenna Requirements.....                                  | 55        |
| <b>4 LIST OF MEASURING EQUIPMENT.....</b>                       | <b>56</b> |
| <b>5 UNCERTAINTY OF EVALUATION.....</b>                         | <b>57</b> |
| <b>APPENDIX A. AC CONDUCTED EMISSION TEST RESULT</b>            |           |
| <b>APPENDIX B. RADIATED SPURIOUS EMISSION</b>                   |           |
| <b>APPENDIX C. DUTY CYCLE PLOTS</b>                             |           |
| <b>APPENDIX D. SETUP PHOTOGRAPHS</b>                            |           |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FR982912A  | Rev. 01 | Initial issue of report | Nov. 01, 2019 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | Description                                        | Limit                                  | Result | Remark                                    |
|----------------|--------------------|----------------------------------------------------|----------------------------------------|--------|-------------------------------------------|
| 3.1            | 15.247(a)(1)       | Number of Channels                                 | $\geq 15\text{Chs}$                    | Pass   | -                                         |
| 3.2            | 15.247(a)(1)       | Hopping Channel Separation                         | $\geq 2/3$ of 20dB BW                  | Pass   | -                                         |
| 3.3            | 15.247(a)(1)       | Dwell Time of Each Channel                         | $\leq 0.4\text{sec}$ in 31.6sec period | Pass   | -                                         |
| 3.4            | 15.247(a)(1)       | 20dB Bandwidth                                     | NA                                     | Pass   | -                                         |
| 3.5            | 15.247(b)(1)       | Peak Output Power                                  | $\leq 125\text{ mW}$                   | Pass   | -                                         |
| 3.6            | 15.247(d)          | Conducted Band Edges                               | $\leq 20\text{dBc}$                    | Pass   | -                                         |
| 3.7            | 15.247(d)          | Conducted Spurious Emission                        | $\leq 20\text{dBc}$                    | Pass   | -                                         |
| 3.8            | 15.247(d)          | Radiated Band Edges and Radiated Spurious Emission | 15.209(a) & 15.247(d)                  | Pass   | Under limit<br>15.88 dB at<br>947.620 MHz |
| 3.9            | 15.207             | AC Conducted Emission                              | 15.207(a)                              | Pass   | Under limit<br>10.58 dB at<br>0.181 MHz   |
| 3.10           | 15.203 & 15.247(b) | Antenna Requirement                                | N/A                                    | Pass   | -                                         |

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,  
P.R.China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057,  
P.R.China

## 1.3 Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                                         |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | LTE/WCDMA/GSM(GPRS) Multi-Mode Digital Mobile Phone                                                                                     |
| Brand Name                      | ZTE                                                                                                                                     |
| Model Name                      | ZTE Blade A7s                                                                                                                           |
| FCC ID                          | SRQ-ZTEA7S                                                                                                                              |
| EUT supports Radios application | GSM/GPRS/EGPRS/LTE<br>WLAN 2.4GHz 802.11b/g/n HT20<br>Bluetooth BR/EDR/LE<br>GNSS/FM Receiver                                           |
| IMEI Code                       | Conducted: 869415040002131/869415040004137<br>Conduction: 869415040002248/869415040004244<br>Radiation: 869415040002701/869415040004707 |
| HW Version                      | ZTE Blade A7s MP                                                                                                                        |
| SW Version                      | ZTE Blade A7sB01-PT_ACC02a                                                                                                              |
| EUT Stage                       | Identical Prototype                                                                                                                     |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                            |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Tx/Rx Frequency Range                   | 2402 MHz ~ 2480 MHz                                                                                                                        |
| Number of Channels                      | 79                                                                                                                                         |
| Carrier Frequency of Each Channel       | 2402+n*1 MHz; n=0~78                                                                                                                       |
| Maximum Output Power to Antenna         | Bluetooth BR(1Mbps) : 11.50 dBm (0.0141 W)<br>Bluetooth EDR (2Mbps) : 10.91 dBm (0.0123 W)<br>Bluetooth EDR (3Mbps) : 10.90 dBm (0.0123 W) |
| Antenna Type / Gain                     | PIFA Antenna with gain 0.50 dBi                                                                                                            |
| Type of Modulation                      | Bluetooth BR (1Mbps) : GFSK<br>Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK<br>Bluetooth EDR (3Mbps) : 8-DPSK                                    |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.



## 1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

|                           |                                                                                                                                                                          |                            |                                       |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Firm</b>          | Sporton International (Kunshan) Inc.                                                                                                                                     |                            |                                       |
| <b>Test Site Location</b> | No. 1098, Pengxi North Road, Kunshan Economic Development Zone<br>Jiangsu Province 215300 People's Republic of China<br>TEL : +86-512-57900158<br>FAX : +86-512-57900958 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                  | <b>FCC Designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | TH01-KS<br>CO01-KS<br>03CH05-KS                                                                                                                                          | CN1257                     | 314309                                |

## 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

| Frequency Band  | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) | Channel | Freq.<br>(MHz) |
|-----------------|---------|----------------|---------|----------------|---------|----------------|
| 2400-2483.5 MHz | 0       | 2402           | 27      | 2429           | 54      | 2456           |
|                 | 1       | 2403           | 28      | 2430           | 55      | 2457           |
|                 | 2       | 2404           | 29      | 2431           | 56      | 2458           |
|                 | 3       | 2405           | 30      | 2432           | 57      | 2459           |
|                 | 4       | 2406           | 31      | 2433           | 58      | 2460           |
|                 | 5       | 2407           | 32      | 2434           | 59      | 2461           |
|                 | 6       | 2408           | 33      | 2435           | 60      | 2462           |
|                 | 7       | 2409           | 34      | 2436           | 61      | 2463           |
|                 | 8       | 2410           | 35      | 2437           | 62      | 2464           |
|                 | 9       | 2411           | 36      | 2438           | 63      | 2465           |
|                 | 10      | 2412           | 37      | 2439           | 64      | 2466           |
|                 | 11      | 2413           | 38      | 2440           | 65      | 2467           |
|                 | 12      | 2414           | 39      | 2441           | 66      | 2468           |
|                 | 13      | 2415           | 40      | 2442           | 67      | 2469           |
|                 | 14      | 2416           | 41      | 2443           | 68      | 2470           |
|                 | 15      | 2417           | 42      | 2444           | 69      | 2471           |
|                 | 16      | 2418           | 43      | 2445           | 70      | 2472           |
|                 | 17      | 2419           | 44      | 2446           | 71      | 2473           |
|                 | 18      | 2420           | 45      | 2447           | 72      | 2474           |
|                 | 19      | 2421           | 46      | 2448           | 73      | 2475           |
|                 | 20      | 2422           | 47      | 2449           | 74      | 2476           |
|                 | 21      | 2423           | 48      | 2450           | 75      | 2477           |
|                 | 22      | 2424           | 49      | 2451           | 76      | 2478           |
|                 | 23      | 2425           | 50      | 2452           | 77      | 2479           |
|                 | 24      | 2426           | 51      | 2453           | 78      | 2480           |
|                 | 25      | 2427           | 52      | 2454           | -       | -              |
|                 | 26      | 2428           | 53      | 2455           | -       | -              |



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


| Summary table of Test Cases                                                                                                                                                                                                             |                                                                                                                      |                                                                         |                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Test Item                                                                                                                                                                                                                               | Data Rate / Modulation                                                                                               |                                                                         |                                                                         |
|                                                                                                                                                                                                                                         | Bluetooth BR 1Mbps<br>GFSK                                                                                           | Bluetooth EDR 2Mbps<br>$\pi/4$ -DQPSK                                   | Bluetooth EDR 3Mbps<br>8-DPSK                                           |
| Conducted<br>Test Cases                                                                                                                                                                                                                 | Mode 1: CH00_2402 MHz<br>Mode 2: CH39_2441 MHz<br>Mode 3: CH78_2480 MHz                                              | Mode 4: CH00_2402 MHz<br>Mode 5: CH39_2441 MHz<br>Mode 6: CH78_2480 MHz | Mode 7: CH00_2402 MHz<br>Mode 8: CH39_2441 MHz<br>Mode 9: CH78_2480 MHz |
| Radiated<br>Test Cases                                                                                                                                                                                                                  | Bluetooth BR 1Mbps GFSK                                                                                              |                                                                         |                                                                         |
|                                                                                                                                                                                                                                         | Mode 1: CH00_2402 MHz<br>Mode 2: CH39_2441 MHz<br>Mode 3: CH78_2480 MHz                                              |                                                                         |                                                                         |
| AC<br>Conducted<br>Emission                                                                                                                                                                                                             | Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (2.4G) + USB Cable (Charging from Adapter 2) + Earphone + Battery |                                                                         |                                                                         |
| Remark:                                                                                                                                                                                                                                 |                                                                                                                      |                                                                         |                                                                         |
| 1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission. |                                                                                                                      |                                                                         |                                                                         |
| 2. For Radiated Test Cases, The tests were performed with Adapter 1, Battery , Earphone and USB Cable.                                                                                                                                  |                                                                                                                      |                                                                         |                                                                         |

## 2.3 Connection Diagram of Test System

For Radiation

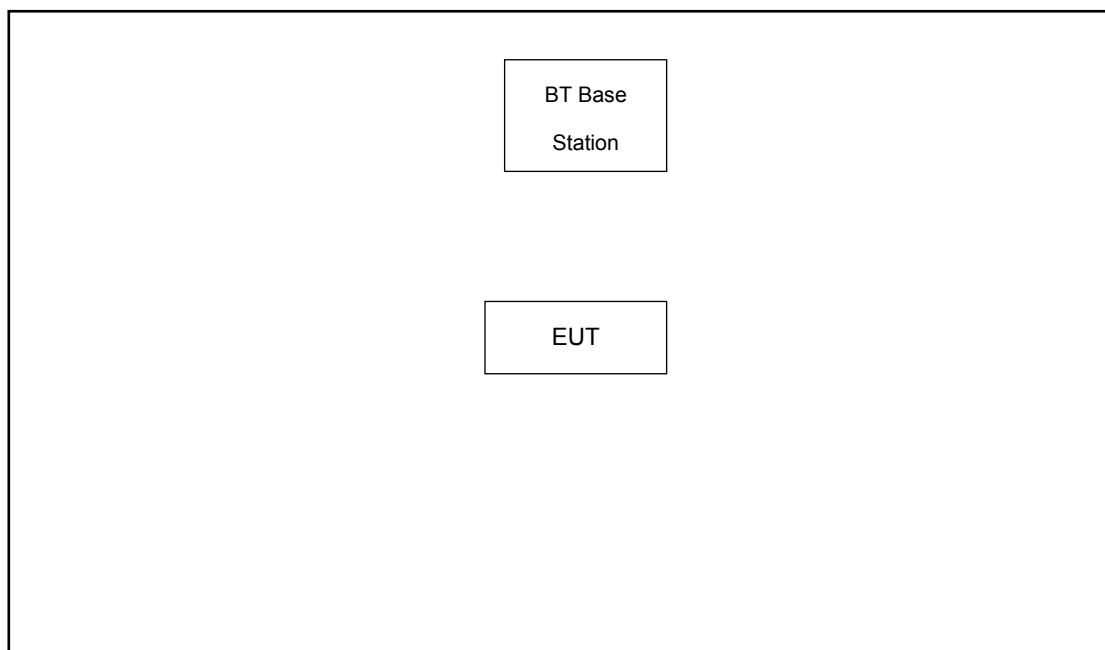

For Conducted Emission

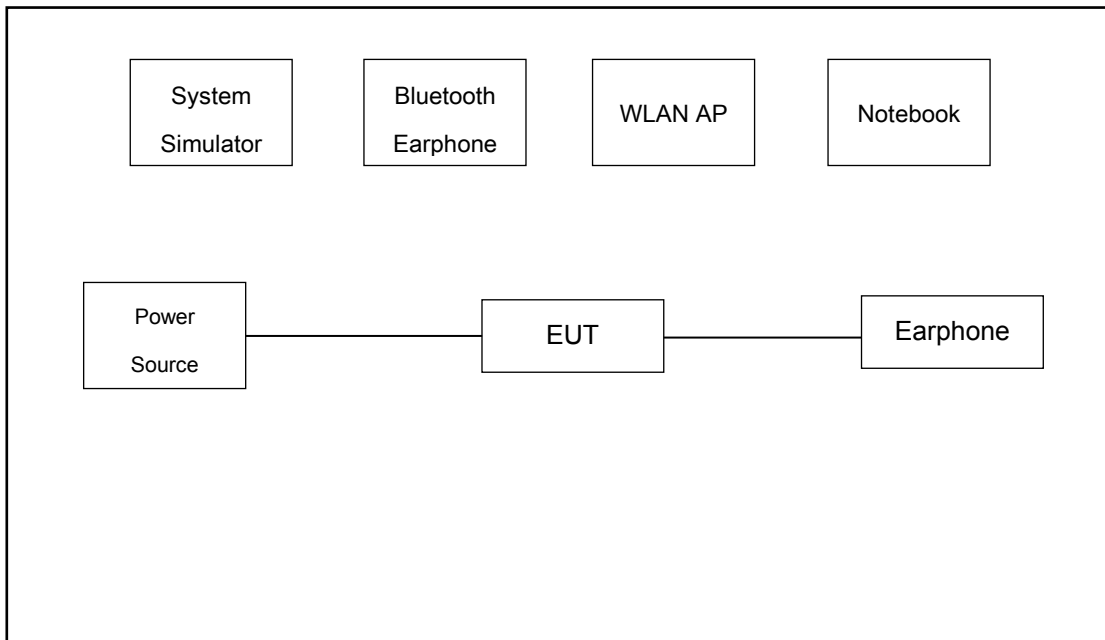

## 2.4 Support Unit used in test configuration and system

| Item | Equipment              | Trade Name | Model Name | FCC ID        | Data Cable | Power Cord                                                 |
|------|------------------------|------------|------------|---------------|------------|------------------------------------------------------------|
| 1.   | System Simulator       | Anritsu    | MT8820C    | N/A           | N/A        | Unshielded, 1.8m                                           |
| 2.   | Bluetooth Base station | R&S        | CBT        | N/A           | N/A        | Unshielded, 1.8m                                           |
| 3.   | WLAN AP                | D-Link     | DIR-655    | KA21R655B1    | N/A        | Unshielded, 1.8m                                           |
| 4.   | Notebook               | Lenovo     | G480       | QDS-BRCM1050I | N/A        | AC I/P:<br>Unshielded, 1.8 m<br>DC O/P:<br>Shielded, 1.8 m |
| 5.   | Bluetooth Earphone     | Lenovo     | LBH308     | N/A           | N/A        | N/A                                                        |

## 2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} . \\
 &= 5.8 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Number of Channel Measurement

##### 3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

##### 3.1.4 Test Setup

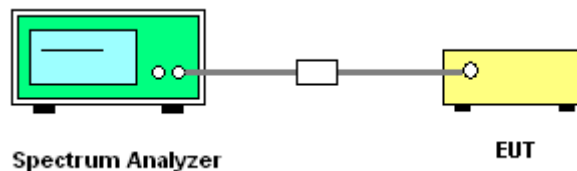


##### 3.1.5 Test Result of Number of Hopping Frequency


| <b>Test Mode :</b>             | 1Mbps                                   | <b>Temperature :</b>       | 21~25°C   |
|--------------------------------|-----------------------------------------|----------------------------|-----------|
| <b>Test Engineer :</b>         | Aly Cao                                 | <b>Relative Humidity :</b> | 51~54%    |
| Number of Hopping<br>(Channel) | Adaptive Frequency<br>Hopping (Channel) | Limits<br>(Channel)        | Pass/Fail |
| 79                             | 20                                      | > 15                       | Pass      |



Number of Hopping Channel Plot on Channel 00 - 78

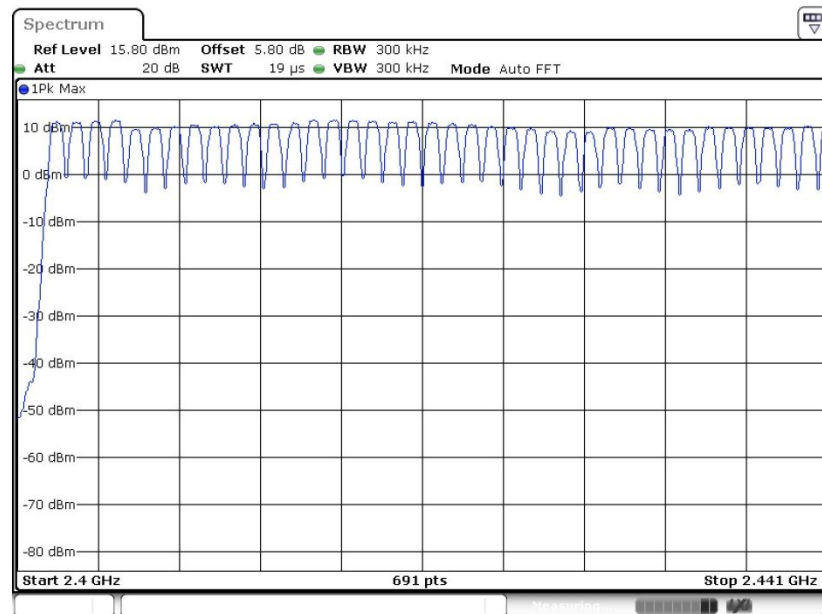

Date: 23.OCT.2019 21:20:13

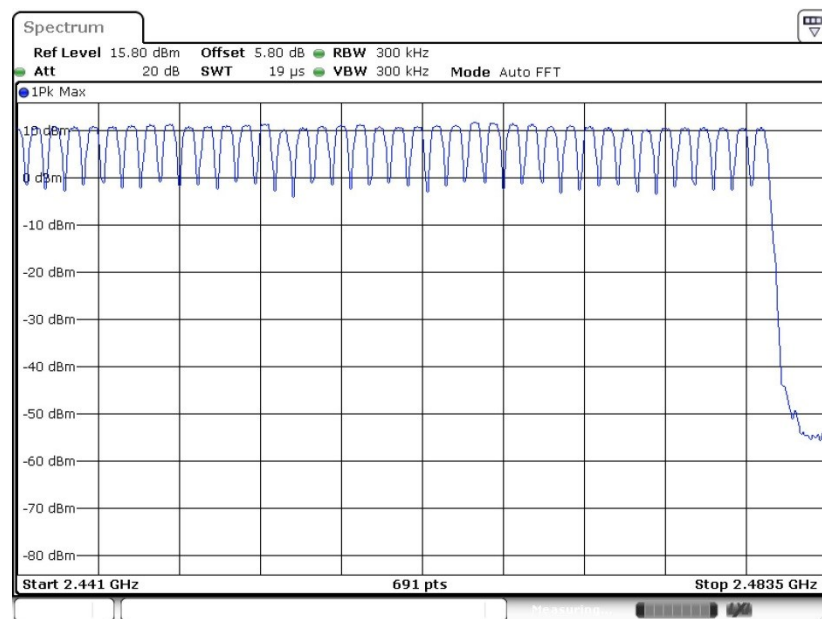

Date: 23.OCT.2019 21:20:47

## 3.2 Hopping Channel Separation Measurement

### 3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:  
Span = wide enough to capture the peaks of two adjacent channels;  
RBW = 300kHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


### 3.2.4 Test Setup

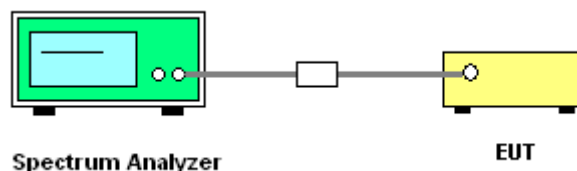

**3.2.5 Test Result of Hopping Channel Separation**

|                 |         |                     |        |
|-----------------|---------|---------------------|--------|
| Test Mode :     | 1Mbps   | Temperature :       | 21~25℃ |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54% |


| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.0116                     | 0.5403                        | Pass      |
| 39      | 2441            | 1.0029                     | 0.5422                        | Pass      |
| 78      | 2480            | 0.9942                     | 0.5422                        | Pass      |

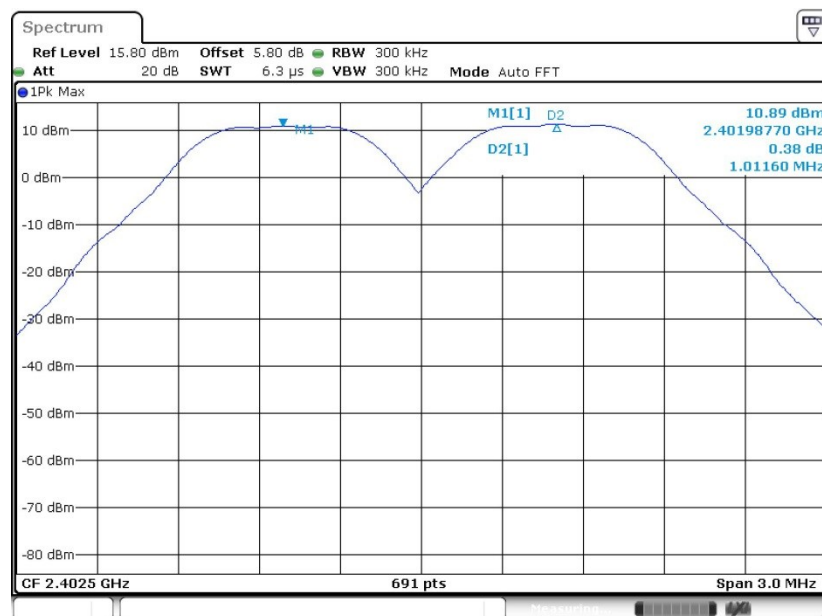**Channel Separation Plot on Channel 00 - 01**

Date: 23.OCT.2019 21:09:52




### Channel Separation Plot on Channel 39 - 40

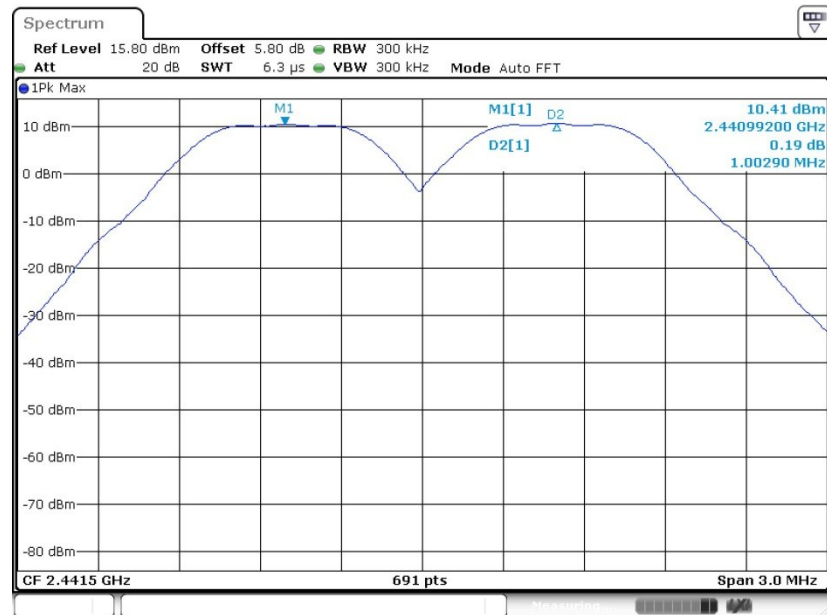

Date: 23.OCT.2019 21:13:27

### Channel Separation Plot on Channel 77 - 78

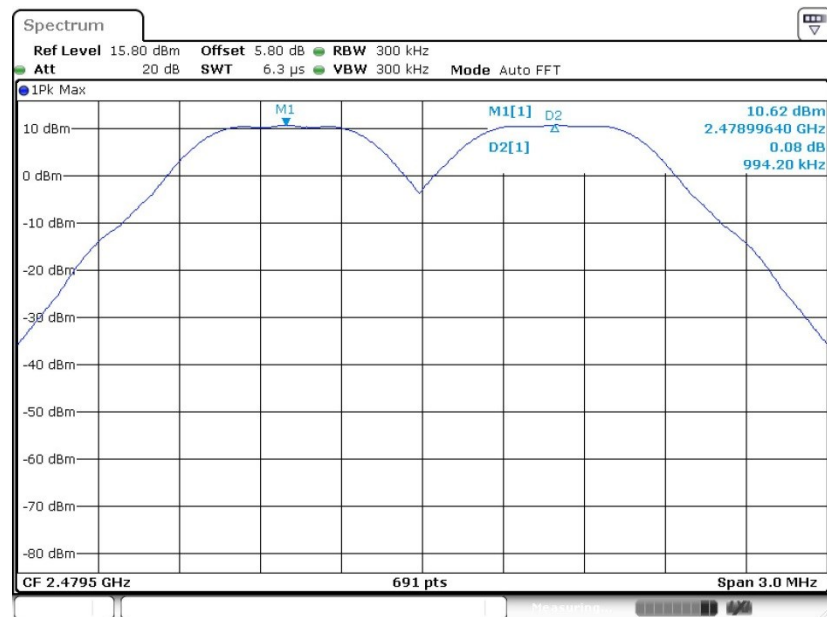


Date: 23.OCT.2019 21:17:52





|                 |         |                     |         |
|-----------------|---------|---------------------|---------|
| Test Mode :     | 2Mbps   | Temperature :       | 21~25°C |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54%  |


| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 1.0029                     | 0.8278                        | Pass      |
| 39      | 2441            | 1.2590                     | 0.8249                        | Pass      |
| 78      | 2480            | 1.3198                     | 0.8249                        | Pass      |

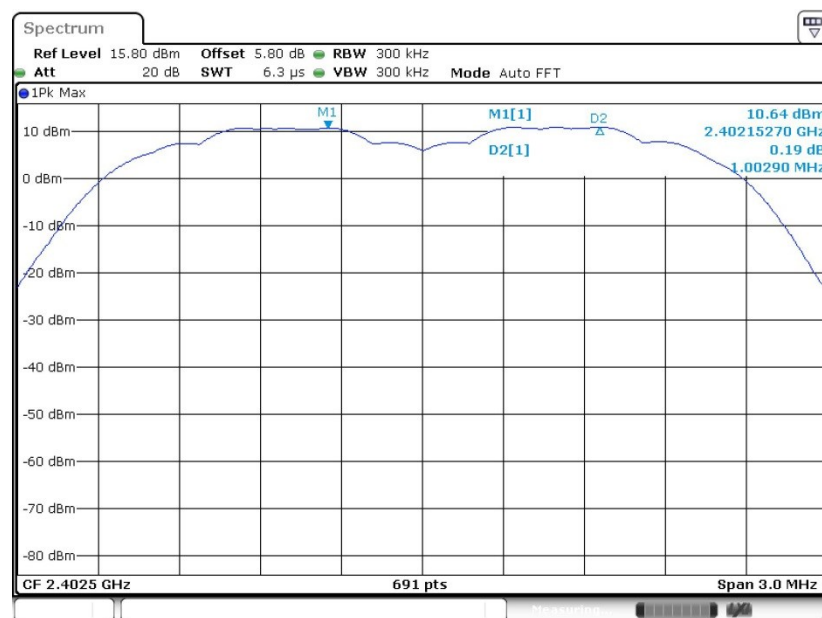**Channel Separation Plot on Channel 00 - 01**

Date: 23.OCT.2019 21:24:05




### Channel Separation Plot on Channel 39 - 40

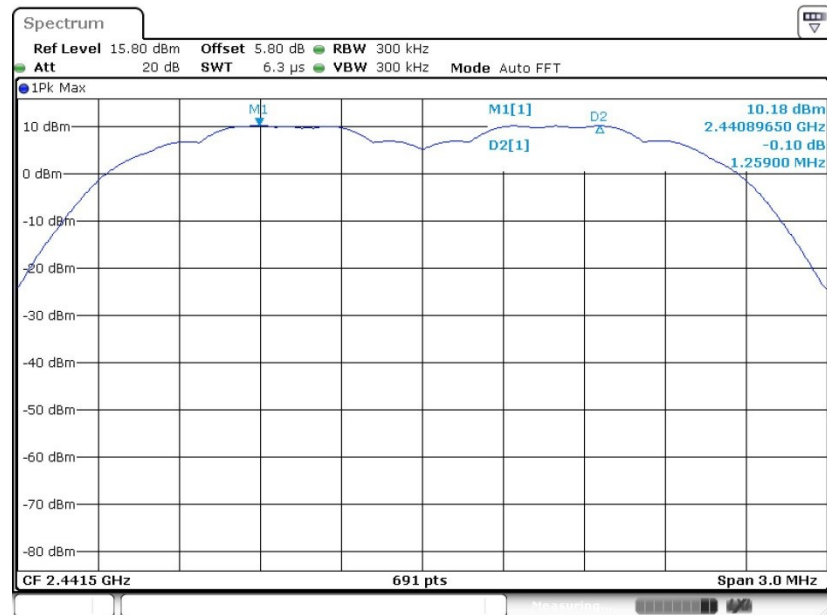

Date: 23.OCT.2019 21:28:19

### Channel Separation Plot on Channel 77 - 78

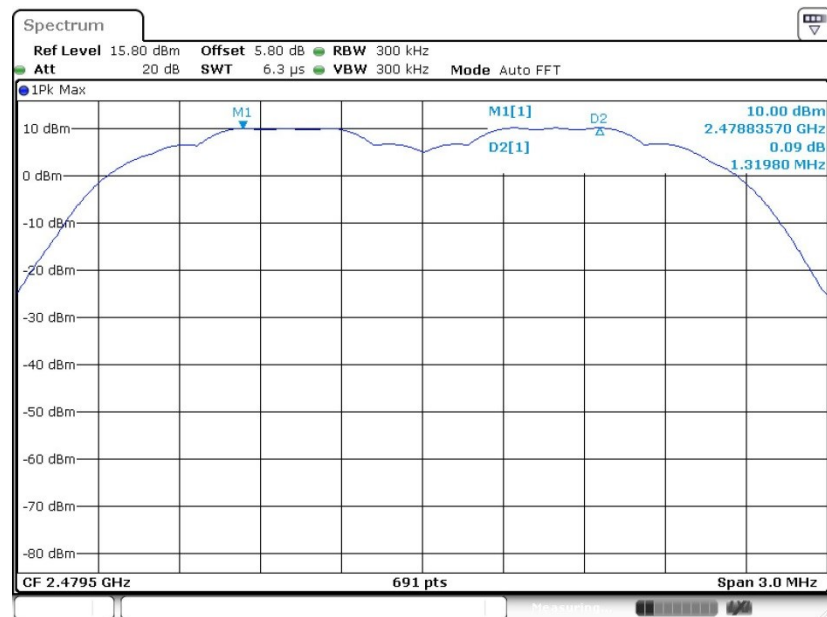


Date: 23.OCT.2019 21:32:37



|                 |         |                     |         |
|-----------------|---------|---------------------|---------|
| Test Mode :     | 3Mbps   | Temperature :       | 21~25°C |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54%  |

| Channel | Frequency (MHz) | Frequency Separation (MHz) | (2/3 of 20dB BW) Limits (MHz) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------------------|-----------|
| 00      | 2402            | 0.9986                     | 0.8075                        | Pass      |
| 39      | 2441            | 0.9986                     | 0.8075                        | Pass      |
| 78      | 2480            | 0.9986                     | 0.8046                        | Pass      |

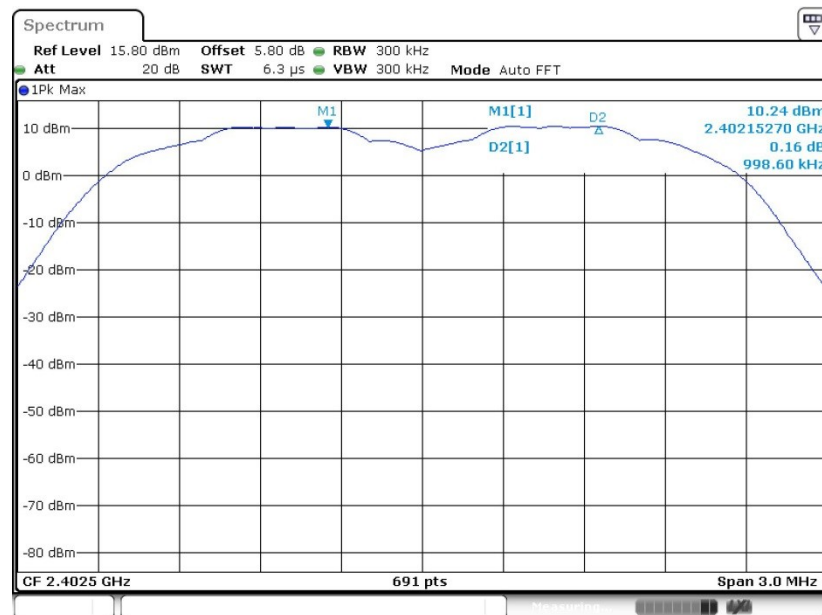**Channel Separation Plot on Channel 00 - 01**

Date: 23.OCT.2019 23:44:13




### Channel Separation Plot on Channel 39 - 40



Date: 23.OCT.2019 23:48:04

### Channel Separation Plot on Channel 77 - 78

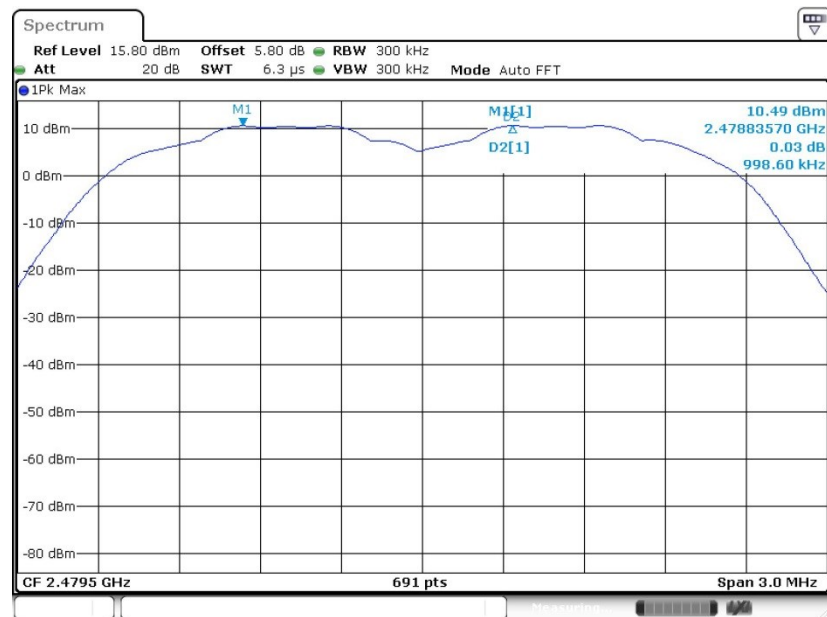

Date: 23.OCT.2019 23:52:06

### 3.3 Dwell Time Measurement

#### 3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW  $\geq$  RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

#### 3.3.4 Test Setup

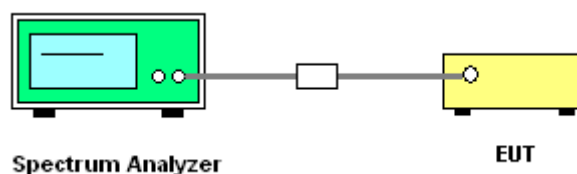


### 3.3.5 Test Result of Dwell Time

|                        |         |                            |        |
|------------------------|---------|----------------------------|--------|
| <b>Test Mode :</b>     | DH5     | <b>Temperature :</b>       | 21~25℃ |
| <b>Test Engineer :</b> | Aly Cao | <b>Relative Humidity :</b> | 51~54% |

| Mode   | Hopping Channel Number | Hops Over Occupancy Time(hops) | Package Transfer Time (msec) | Dwell Time (sec) | Limits (sec) | Pass/Fail |
|--------|------------------------|--------------------------------|------------------------------|------------------|--------------|-----------|
| Normal | 79                     | 106.67                         | 2.887                        | 0.31             | 0.4          | Pass      |
| AFH    | 20                     | 53.34                          | 2.887                        | 0.15             | 0.4          | Pass      |

**Package Transfer Time Plot**

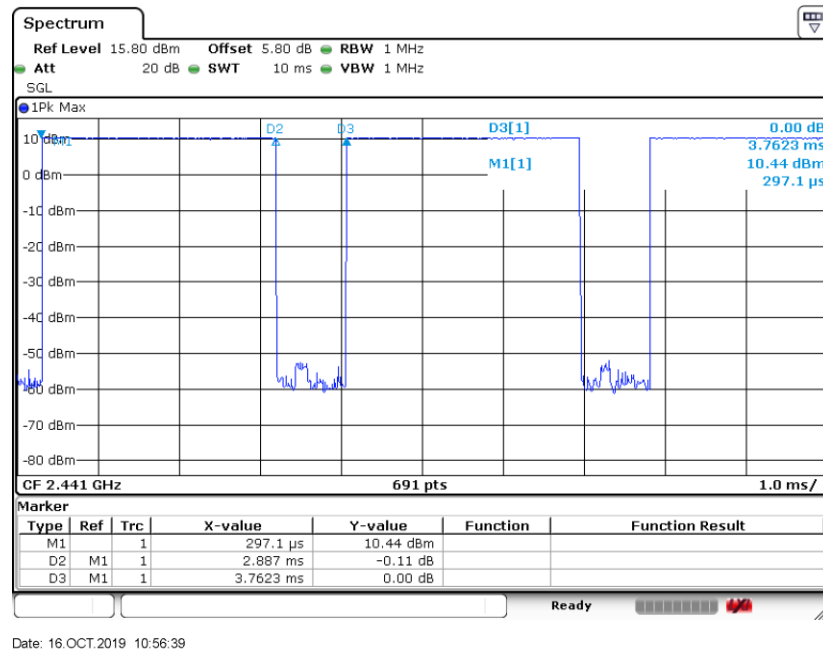

Date: 16.OCT.2019 10:56:39

**Remark:**

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.  
With channel hopping rate (1600 / 6 / 79) in Occupancy Time Limit (0.4 x 79) (s),  
Hops Over Occupancy Time comes to (1600 / 6 / 79) x (0.4 x 79) = 106.67 hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.  
With channel hopping rate (800 / 6 / 20) in Occupancy Time Limit (0.4 x 20) (s),  
Hops Over Occupancy Time comes to (800 / 6 / 20) x (0.4 x 20) = 53.33 hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

### 3.4 20dB Bandwidth Measurement

#### 3.4.1 Limit of 20dB Bandwidth

Reporting only


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Use the following spectrum analyzer settings for 20dB Bandwidth measurement.  
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;  
RBW  $\geq$  1% of the 20 dB bandwidth; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak;  
Trace = max hold.
5. Measure and record the results in the test report.

#### 3.4.4 Test Setup

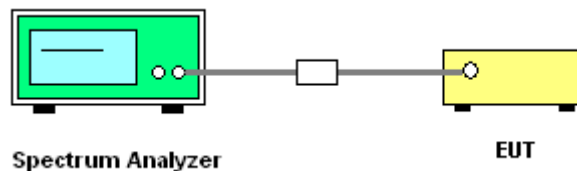


### 3.4.5 Test Result of 20dB Bandwidth

|                 |         |                     |        |
|-----------------|---------|---------------------|--------|
| Test Mode :     | 1Mbps   | Temperature :       | 21~25℃ |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54% |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 0.810                |
| 39      | 2441            | 0.813                |
| 78      | 2480            | 0.813                |

**20 dB Bandwidth Plot on Channel 00**

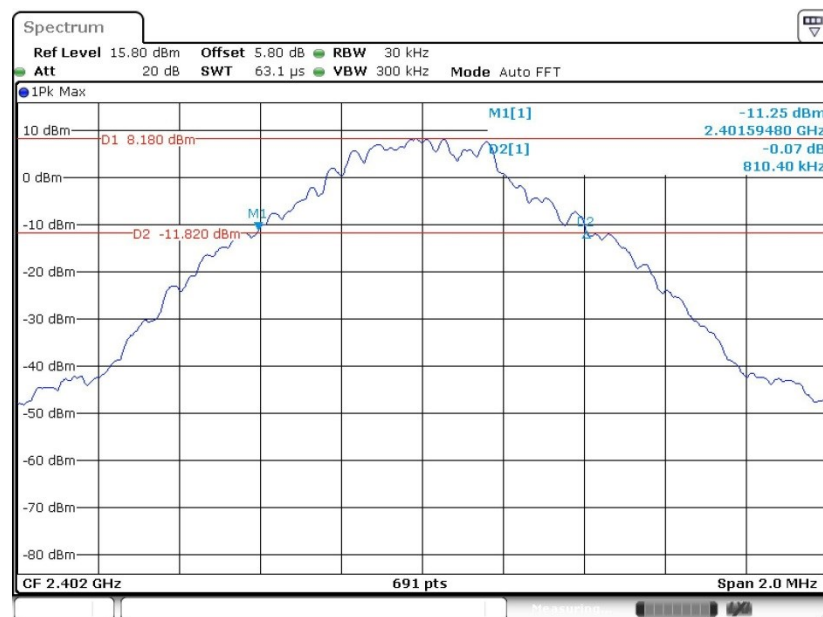


Date: 23.OCT.2019 21:08:25






### 20 dB Bandwidth Plot on Channel 39

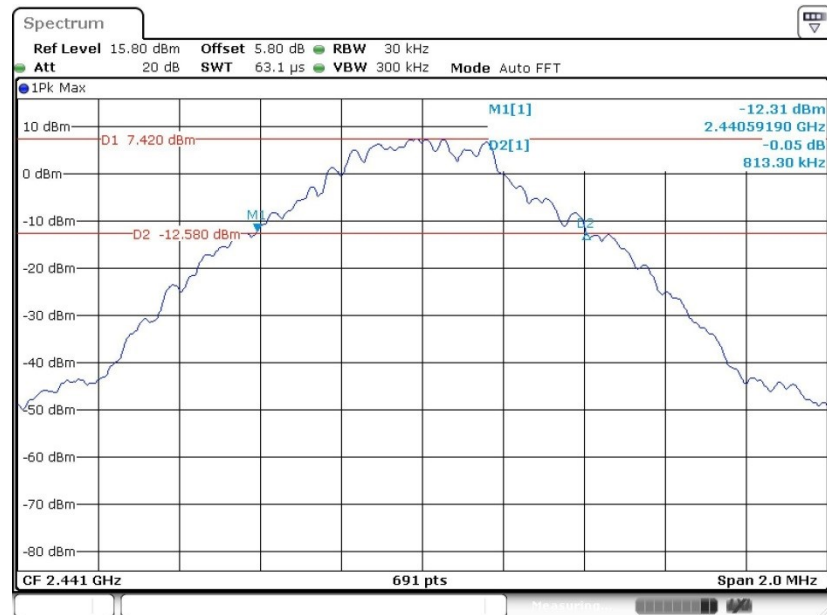

Date: 23.OCT.2019 21:12:38

### 20 dB Bandwidth Plot on Channel 78

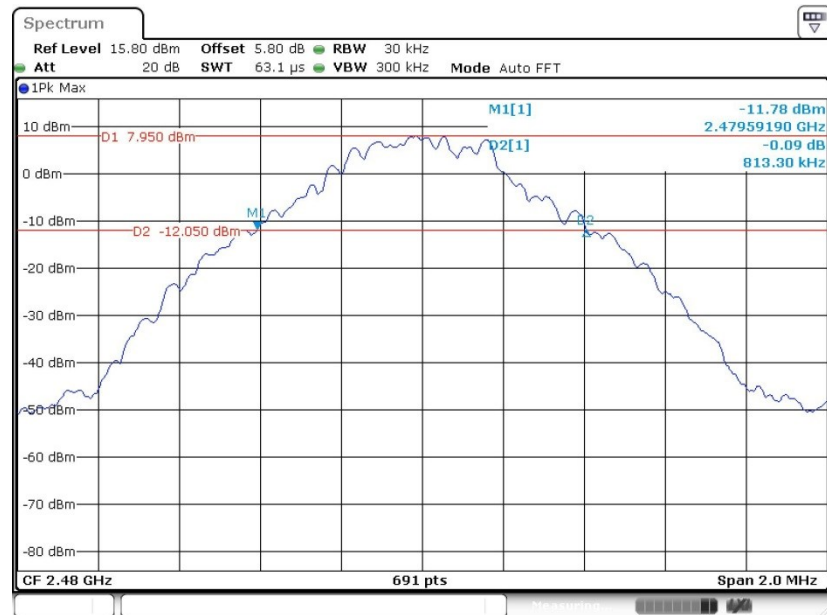


Date: 23.OCT.2019 21:16:23

|                        |         |                            |         |
|------------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>     | 2Mbps   | <b>Temperature :</b>       | 21~25°C |
| <b>Test Engineer :</b> | Aly Cao | <b>Relative Humidity :</b> | 51~54%  |


| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.242                |
| 39      | 2441            | 1.237                |
| 78      | 2480            | 1.237                |

**20 dB Bandwidth Plot on Channel 00**

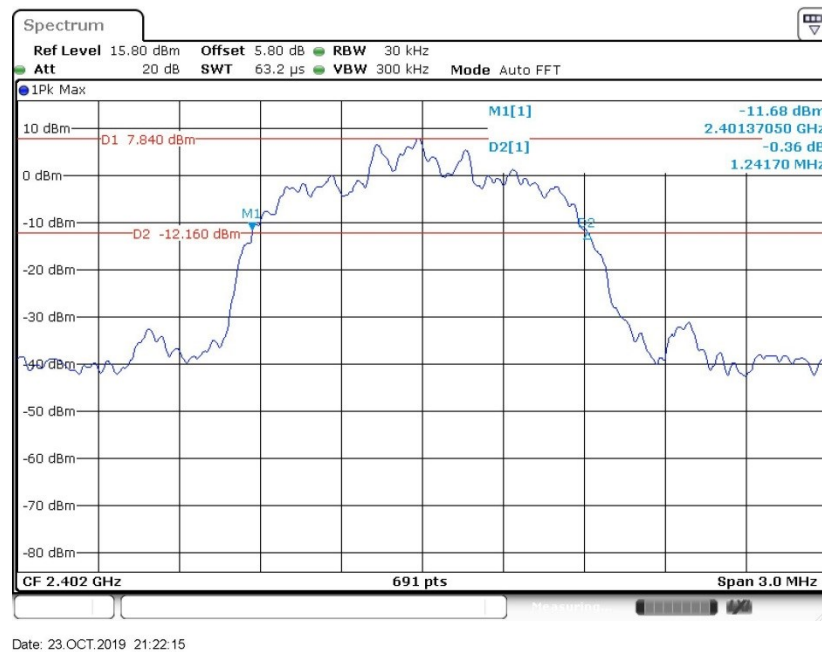




### 20 dB Bandwidth Plot on Channel 39

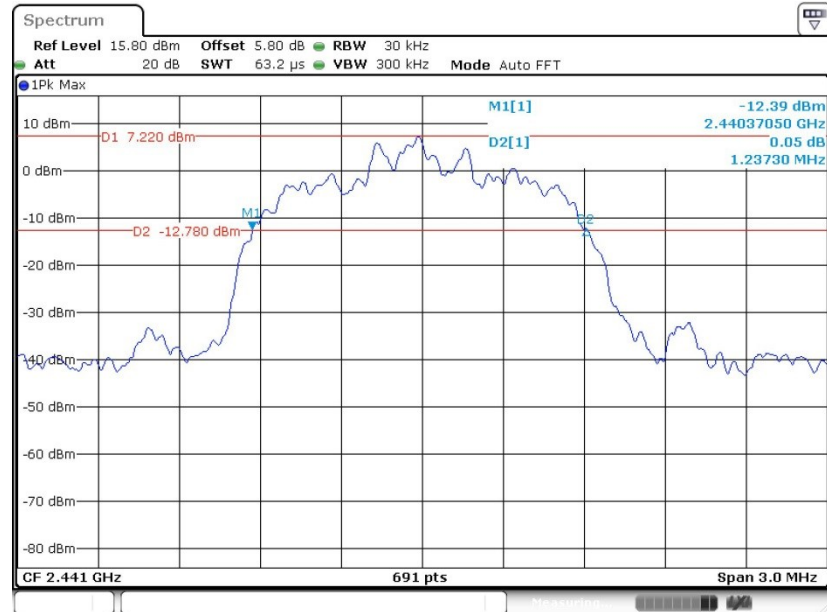

Date: 23.OCT.2019 21:27:33

### 20 dB Bandwidth Plot on Channel 78

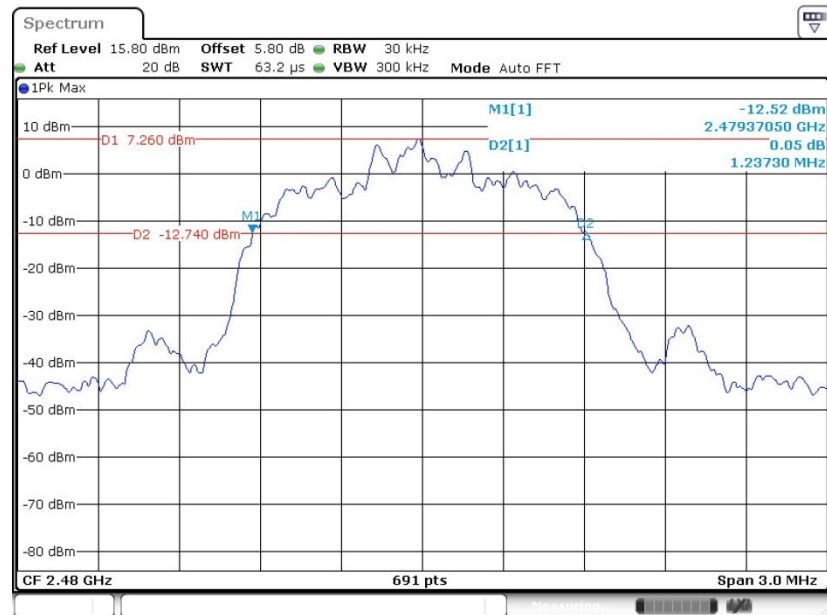


Date: 23.OCT.2019 21:31:13




|                 |         |                     |         |
|-----------------|---------|---------------------|---------|
| Test Mode :     | 3Mbps   | Temperature :       | 21~25°C |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54%  |

| Channel | Frequency (MHz) | 20dB Bandwidth (MHz) |
|---------|-----------------|----------------------|
| 00      | 2402            | 1.211                |
| 39      | 2441            | 1.211                |
| 78      | 2480            | 1.207                |

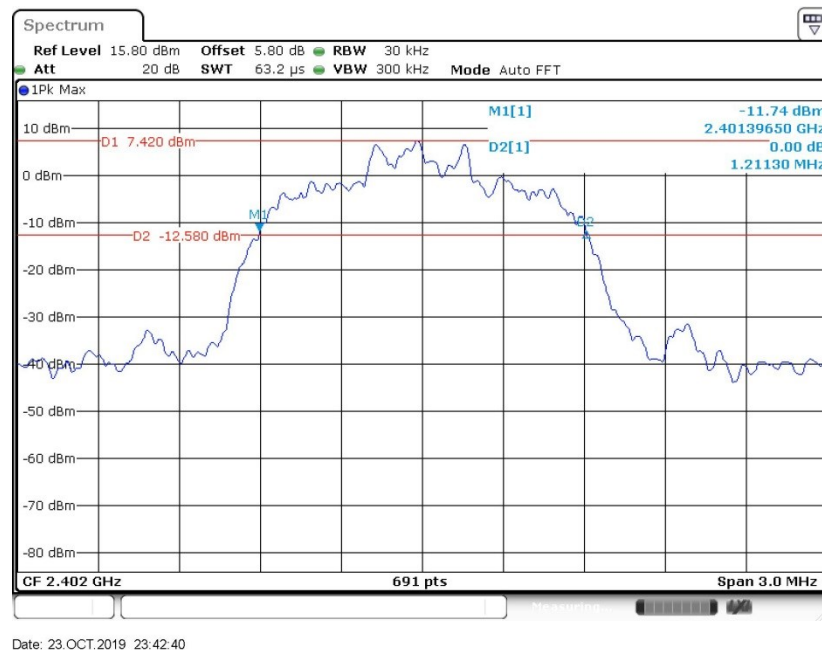**20 dB Bandwidth Plot on Channel 00**




### 20 dB Bandwidth Plot on Channel 39

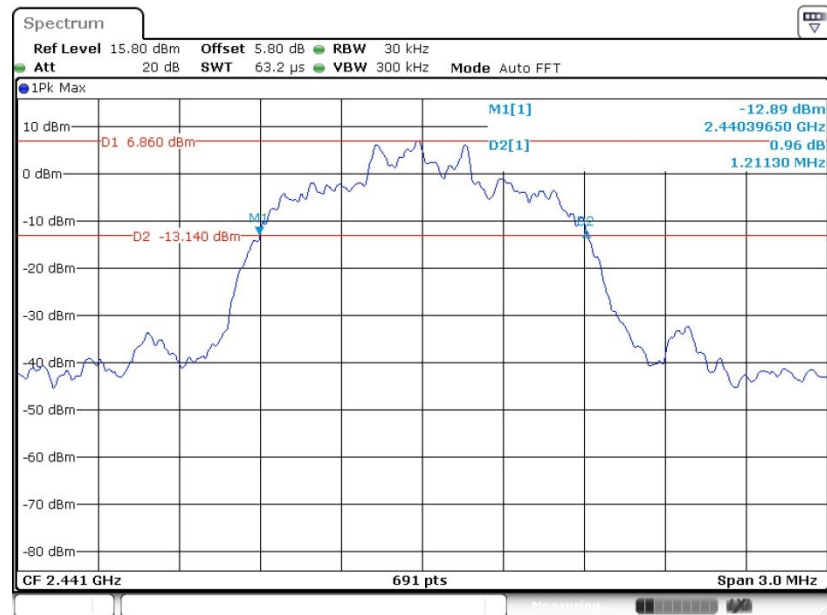

Date: 23.OCT.2019 23:47:04

### 20 dB Bandwidth Plot on Channel 78

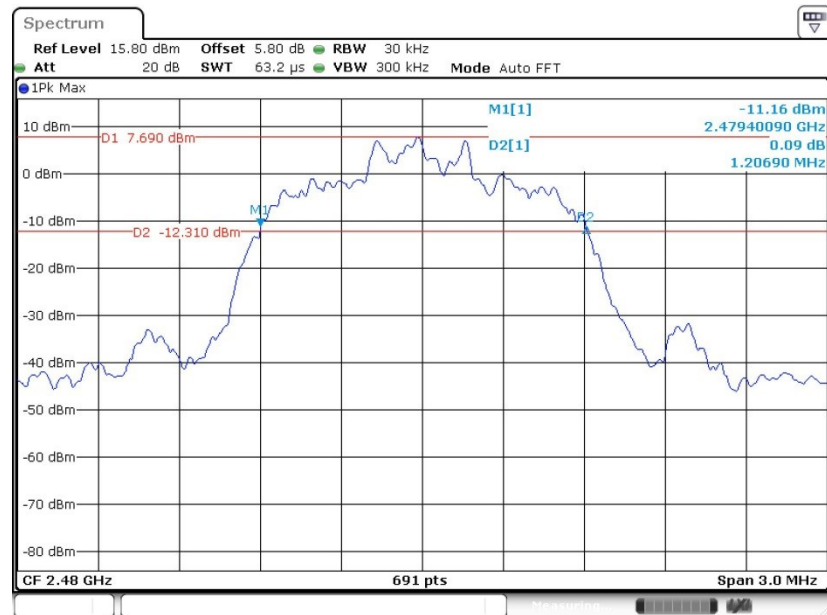

Date: 23.OCT.2019 23:50:28

## 3.5 Output Power Measurement

### 3.5.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

- (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

### 3.5.4 Test Setup

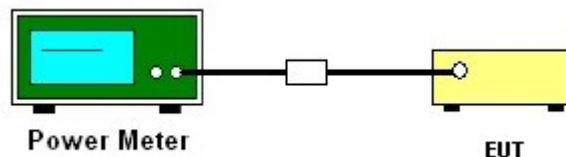

### 3.5.5 Test Result of Peak Output Power

|                        |         |                            |         |
|------------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>     | 1Mbps   | <b>Temperature :</b>       | 21~25°C |
| <b>Test Engineer :</b> | Aly Cao | <b>Relative Humidity :</b> | 51~54%  |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | GFSK           | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 1 Mbps         |                      |           |
| 00      | 2402               | 11.50          | 20.97                | Pass      |
| 39      | 2441               | 10.67          | 20.97                | Pass      |
| 78      | 2480               | 11.06          | 20.97                | Pass      |

|                        |         |                            |         |
|------------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>     | 2Mbps   | <b>Temperature :</b>       | 21~25°C |
| <b>Test Engineer :</b> | Aly Cao | <b>Relative Humidity :</b> | 51~54%  |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | $\pi/4$ -DQPSK | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 2 Mbps         |                      |           |
| 00      | 2402               | 10.91          | 20.97                | Pass      |
| 39      | 2441               | 10.38          | 20.97                | Pass      |
| 78      | 2480               | 10.35          | 20.97                | Pass      |

|                        |         |                            |         |
|------------------------|---------|----------------------------|---------|
| <b>Test Mode :</b>     | 3Mbps   | <b>Temperature :</b>       | 21~25°C |
| <b>Test Engineer :</b> | Aly Cao | <b>Relative Humidity :</b> | 51~54%  |

| Channel | Frequency<br>(MHz) | RF Power (dBm) |                      |           |
|---------|--------------------|----------------|----------------------|-----------|
|         |                    | 8-DPSK         | Max. Limits<br>(dBm) | Pass/Fail |
|         |                    | 3 Mbps         |                      |           |
| 00      | 2402               | 10.90          | 20.97                | Pass      |
| 39      | 2441               | 10.00          | 20.97                | Pass      |
| 78      | 2480               | 10.37          | 20.97                | Pass      |

## 3.6 Conducted Band Edges Measurement

### 3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100kHz, VBW = 300kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2. and 3.
5. Measure and record the results in the test report.

### 3.6.4 Test Setup

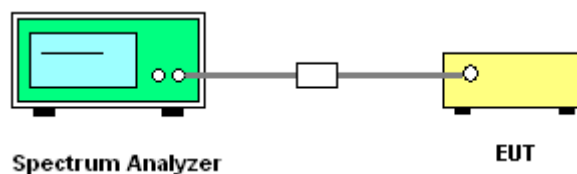





### 3.6.5 Test Result of Conducted Band Edges

|                |           |                     |         |
|----------------|-----------|---------------------|---------|
| Test Mode :    | 1Mbps     | Temperature :       | 21~25°C |
| Test Channel : | 00 and 78 | Relative Humidity : | 51~54%  |
|                |           | Test Engineer :     | Aly Cao |

**Low Band Edge Plot on Channel 00**

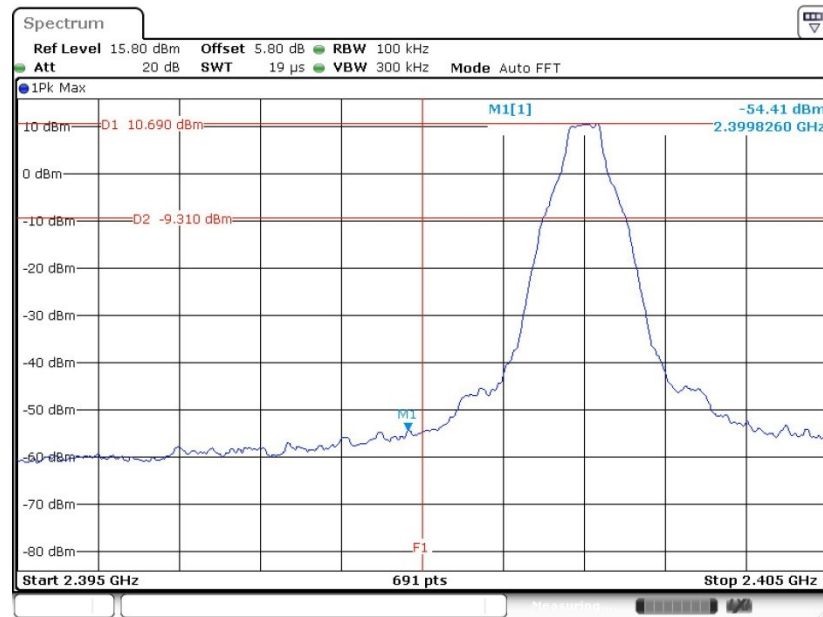


**High Band Edge Plot on Channel 78**

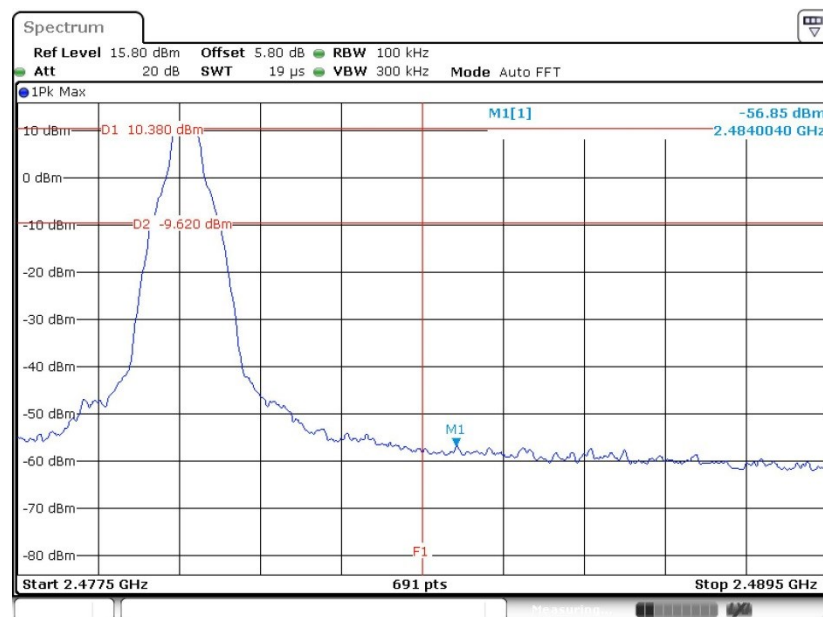




|                |           |                     |         |
|----------------|-----------|---------------------|---------|
| Test Mode :    | 2Mbps     | Temperature :       | 21~25°C |
| Test Channel : | 00 and 78 | Relative Humidity : | 51~54%  |
|                |           | Test Engineer :     | Aly Cao |

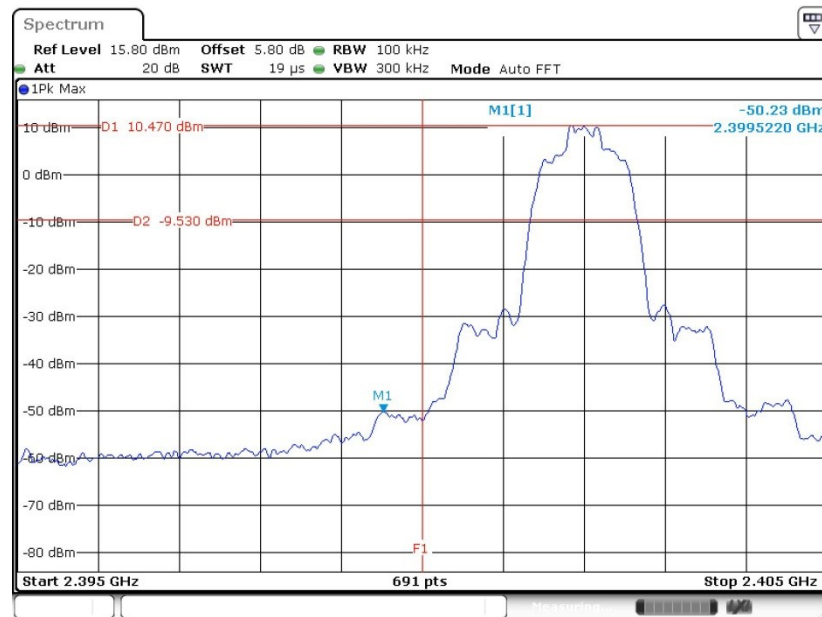**Low Band Edge Plot on Channel 00**


Date: 23.OCT.2019 21:22:35

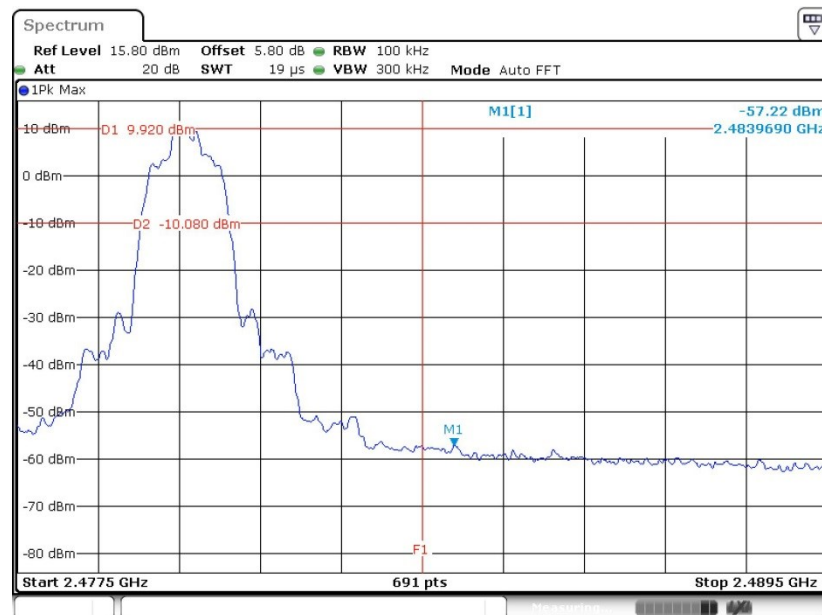**High Band Edge Plot on Channel 78**


Date: 23.OCT.2019 21:31:32



|                |           |                     |         |
|----------------|-----------|---------------------|---------|
| Test Mode :    | 3Mbps     | Temperature :       | 21~25°C |
| Test Channel : | 00 and 78 | Relative Humidity : | 51~54%  |
|                |           | Test Engineer :     | Aly Cao |

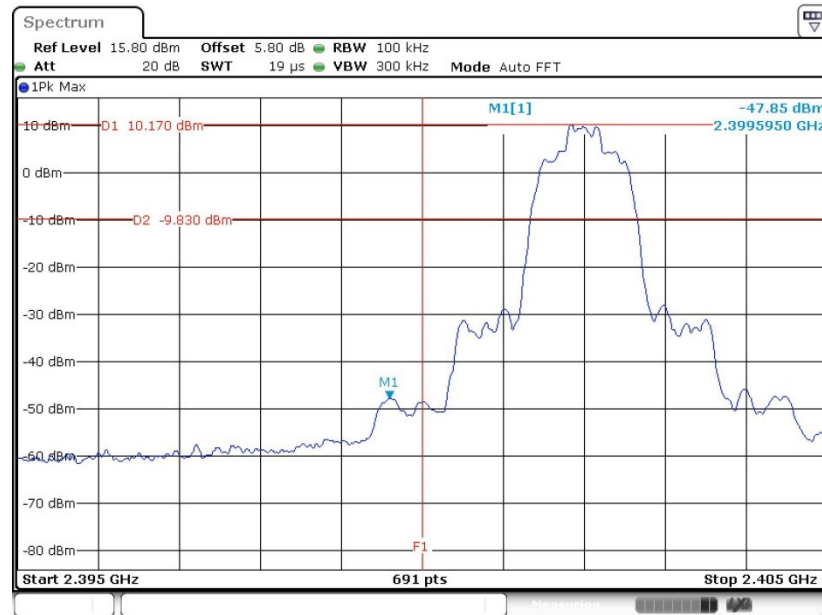**Low Band Edge Plot on Channel 00**

Date: 23.OCT.2019 23:42:59

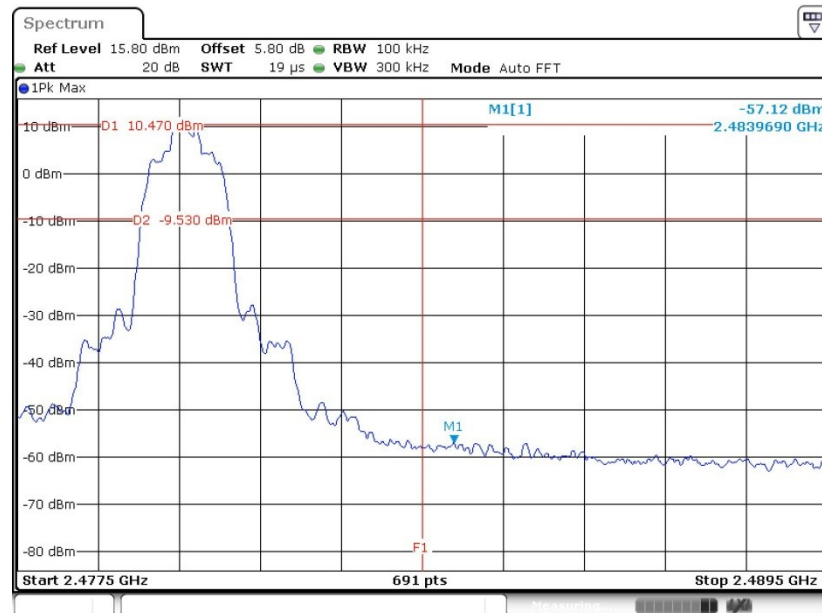**High Band Edge Plot on Channel 78**


Date: 23.OCT.2019 23:50:48



## 3.6.6 Test Result of Conducted Hopping Mode Band Edges


|                 |         |                     |        |
|-----------------|---------|---------------------|--------|
| Test Mode :     | 1Mbps   | Temperature :       | 21~25℃ |
| Test Engineer : | Aly Cao | Relative Humidity : | 51~54% |

Hopping Mode Low Band Edge Plot

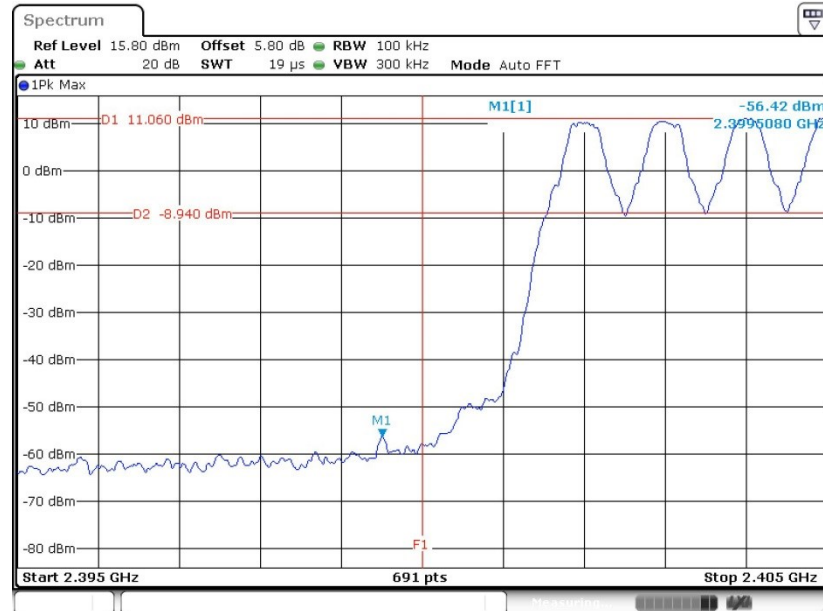

Date: 23.OCT.2019 21:08:58

Hopping Mode High Band Edge Plot

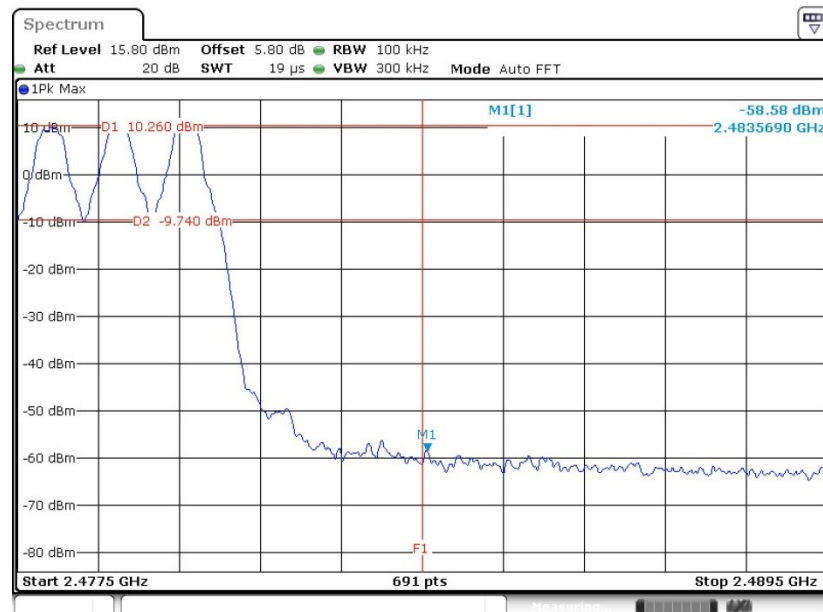

Date: 23.OCT.2019 21:16:54