

CFR 47 FCC PART 15 SUBPART E

TEST REPORT

For

DJI O4 Air Unit Pro

MODEL NUMBER: DF3P2904

REPORT NUMBER: 4791502181-5-RF-1

ISSUE DATE: December 6, 2024

FCC ID: SS3-DF3P290424

Prepared for

SZ DJI TECHNOLOGY CO., LTD

**Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street,
Nanshan District, Shenzhen, China.**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	December 6, 2024	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e)	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)/KDB 789033 D02 v02r01 Section E.3.a (Method PM) Section E.2.d (Method SA-2)	FCC 15.407 (a)	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207	N/A
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
FREQUENCY STABILITY	ANSI C63.10-2013, Clause 6.8	FCC 15.407 (g)	Pass
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2),	Pass

Note:

1. N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 PART 15 SUBPART E> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	10
5.2.1. 5.1G 10 MHz Bandwidth (5157 MHz ~ 5245 MHz).....	10
5.2.2. 5.1G 20 MHz Bandwidth (5161 MHz ~ 5240 MHz).....	11
5.2.3. 5.1G 40 MHz Bandwidth (5170 MHz ~ 5230 MHz).....	12
5.2.4. 5.1G 60 MHz Bandwidth (5180 MHz ~ 5220 MHz).....	13
5.2.5. 5.1G 80 MHz Bandwidth (5190 MHz ~ 5210 MHz).....	13
5.2.6. 5.8G 10 MHz Bandwidth (5730.5 MHz ~ 5844.5 MHz).....	14
5.2.7. 5.8G 20 MHz Bandwidth (5735.5 MHz ~ 5839.5 MHz).....	15
5.2.8. 5.8G 40 MHz Bandwidth (5745.5 MHz ~ 5829.5 MHz).....	16
5.2.9. 5.8G 60 MHz Bandwidth (5755.5 MHz ~ 5819.5 MHz).....	17
5.2.10. 5.8G 80 MHz Bandwidth (5765.5 MHz ~ 5809.5 MHz).....	18
5.3. MAXIMUM OUTPUT POWER.....	19
5.4. TEST CHANNEL CONFIGURATION.....	20
5.5. THE WORSE CASE POWER SETTING PARAMETER	21
5.6. WORSE CASE CONFIGURATIONS.....	22
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	23
5.8. SUPPORT UNITS FOR SYSTEM TEST	24
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	25
7. ANTENNA PORT TEST RESULTS	27
7.1. ON TIME AND DUTY CYCLE	27
7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH ...	28
7.3. CONDUCTED OUTPUT POWER	30
7.4. POWER SPECTRAL DENSITY	32
7.5. FREQUENCY STABILITY.....	34
8. RADIATED TEST RESULTS.....	36
8.1. RESTRICTED BANDEDGE	44
8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)	102

8.3.	SPURIOUS EMISSIONS(7 GHZ~18 GHZ)	114
8.4.	SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	174
8.5.	SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	177
8.6.	SPURIOUS EMISSIONS(26 GHZ~40 GHZ)	179
8.7.	SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	181
9.	ANTENNA REQUIREMENT	183
10.	TEST DATA.....	184
10.1.	APPENDIX A: EMISSION BANDWIDTH.....	184
10.1.1.	Test Result.....	184
10.1.2.	Test Graphs	186
10.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	219
10.2.1.	Test Result.....	219
10.2.2.	Test Graphs	221
10.3.	APPENDIX C: MIN EMISSION BANDWIDTH	252
10.3.1.	Test Result.....	252
10.3.2.	Test Graphs	253
10.4.	APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER.....	265
10.4.1.	Test Result.....	265
10.5.	APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY	268
10.5.1.	Test Result.....	268
10.5.2.	Test Graphs	271
10.6.	APPENDIX F: FREQUENCY STABILITY.....	302
10.6.1.	Test Result.....	302
10.7.	APPENDIX G: DUTY CYCLE.....	303
10.7.1.	Test Result.....	303
10.7.2.	Test Graphs	304

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: SZ DJI TECHNOLOGY CO., LTD
Address: Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.

Manufacturer Information


Company Name: SZ DJI TECHNOLOGY CO., LTD
Address: Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.

EUT Information

EUT Name: DJI O4 Air Unit Pro
Model: DF3P2904
Sample Received Date: October 10, 2024
Sample Status: Normal
Sample ID: 769128-1
Date of Tested: October 10, 2024 to December 6, 2024


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	Pass

Prepared By:



James Qin
Project Engineer

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E, ANSI C63.10-2013, CFR 47 FCC Part 2, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	DJI O4 Air Unit Pro
Series EUT Name	DF3P2904
Radio Technology	SRD 5.1G, SRD 5.8G
Operation Frequency	5.1G 10 MHz Bandwidth (5157 MHz ~ 5245 MHz) 5.1G 20 MHz Bandwidth (5161 MHz ~ 5240 MHz) 5.1G 40 MHz Bandwidth (5170 MHz ~ 5230 MHz) 5.1G 60 MHz Bandwidth (5180 MHz ~ 5220 MHz) 5.1G 80 MHz Bandwidth (5190 MHz ~ 5210 MHz) 5.8G 10 MHz Bandwidth (5730.5 MHz ~ 5844.5 MHz) 5.8G 20 MHz Bandwidth (5735.5 MHz ~ 5839.5 MHz) 5.8G 40 MHz Bandwidth (5745.5 MHz ~ 5829.5 MHz) 5.8G 60 MHz Bandwidth (5755.5 MHz ~ 5819.5 MHz) 5.8G 80 MHz Bandwidth (5765.5 MHz ~ 5809.5 MHz)
Modulation	OFDM (QPSK, 16QAM, 64QAM)
Rated Voltage	DC 7.4-26.4 V
Test Voltage	DC 17.0V

Note:

Voltage range of DC 7.4 V to DC 26.4 V has been pretest, only the worst data reported.

5.2. CHANNEL LIST

5.2.1. 5.1G 10 MHz Bandwidth (5157 MHz ~ 5245 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5157	24	5180	47	5203	71	5227
2	5158	25	5181	48	5204	72	5228
3	5159	26	5182	49	5205	73	5229
4	5160	27	5183	50	5206	74	5230
5	5161	28	5184	51	5207	75	5231
6	5162	29	5185	52	5208	76	5232
7	5163	30	5186	53	5209	77	5233
8	5164	31	5187	54	5210	78	5234
9	5165	32	5188	55	5211	79	5235
10	5166	33	5189	56	5212	80	5236
11	5167	34	5190	57	5213	81	5237
12	5168	35	5191	58	5214	82	5238
13	5169	36	5192	59	5215	83	5239
14	5170	37	5193	60	5216	84	5240
15	5171	38	5194	61	5217	85	5241
16	5172	39	5195	62	5218	86	5242
17	5173	40	5196	63	5219	87	5243
18	5174	41	5197	64	5220	88	5244
19	5175	42	5198	65	5221	89	5245
20	5176	43	5199	66	5222	\	\
21	5177	44	5200	67	5223	\	\
22	5178	45	5201	68	5224	\	\
23	5179	46	5202	69	5225	\	\

5.2.2. 5.1G 20 MHz Bandwidth (5161 MHz ~ 5240 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5161	21	5181	41	5201	61	5221
2	5162	22	5182	42	5202	62	5222
3	5163	23	5183	43	5203	63	5223
4	5164	24	5184	44	5204	64	5224
5	5165	25	5185	45	5205	65	5225
6	5166	26	5186	46	5206	66	5226
7	5167	27	5187	47	5207	67	5227
8	5168	28	5188	48	5208	68	5228
9	5169	29	5189	49	5209	69	5229
10	5170	30	5190	50	5210	70	5230
11	5171	31	5191	51	5211	71	5231
12	5172	32	5192	52	5212	72	5232
13	5173	33	5193	53	5213	73	5233
14	5174	34	5194	54	5214	74	5234
15	5175	35	5195	55	5215	75	5235
16	5176	36	5196	56	5216	76	5236
17	5177	37	5197	57	5217	77	5237
18	5178	38	5198	58	5218	78	5238
19	5179	39	5199	59	5219	79	5239
20	5180	40	5200	60	5220	80	5240

5.2.3. 5.1G 40 MHz Bandwidth (5170 MHz ~ 5230 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5170	17	5186	33	5202	50	5219
2	5171	18	5187	34	5203	51	5220
3	5172	19	5188	35	5204	52	5221
4	5173	20	5189	36	5205	53	5222
5	5174	21	5190	37	5206	54	5223
6	5175	22	5191	38	5207	55	5224
7	5176	23	5192	39	5208	56	5225
8	5177	24	5193	40	5209	57	5226
9	5178	25	5194	41	5210	58	5227
10	5179	26	5195	42	5211	59	5228
11	5180	27	5196	43	5212	60	5229
12	5181	28	5197	44	5213	61	5230
13	5182	29	5198	45	5214	\	\
14	5183	30	5199	46	5215	\	\
15	5184	31	5200	47	5216	\	\
16	5185	32	5201	48	5217	\	\

5.2.4. 5.1G 60 MHz Bandwidth (5180 MHz ~ 5220 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5180	12	5191	23	5202	34	5213
2	5181	13	5192	24	5203	35	5214
3	5182	14	5193	25	5204	36	5215
4	5183	15	5194	26	5205	37	5216
5	5184	16	5195	27	5206	38	5217
6	5185	17	5196	28	5207	39	5218
7	5186	18	5197	29	5208	40	5219
8	5187	19	5198	30	5209	41	5220
9	5188	20	5199	31	5210	\	\
10	5189	21	5200	32	5211	\	\
11	5190	22	5201	33	5212	\	\

5.2.5. 5.1G 80 MHz Bandwidth (5190 MHz ~ 5210 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5190	7	5196	13	5202	20	5209
2	5191	8	5197	14	5203	21	5210
3	5192	9	5198	15	5204	\	\
4	5193	10	5199	16	5205	\	\
5	5194	11	5200	17	5206	\	\
6	5195	12	5201	18	5207	\	\

5.2.6. 5.8G 10 MHz Bandwidth (5730.5 MHz ~ 5844.5 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5730.5	31	5760.5	61	5790.5	91	5820.5
2	5731.5	32	5761.5	62	5791.5	92	5821.5
3	5732.5	33	5762.5	63	5792.5	93	5822.5
4	5733.5	34	5763.5	64	5793.5	94	5823.5
5	5734.5	35	5764.5	65	5794.5	95	5824.5
6	5735.5	36	5765.5	66	5795.5	96	5825.5
7	5736.5	37	5766.5	67	5796.5	97	5826.5
8	5737.5	38	5767.5	68	5797.5	98	5827.5
9	5738.5	39	5768.5	69	5798.5	99	5828.5
10	5739.5	40	5769.5	70	5799.5	100	5829.5
11	5740.5	41	5770.5	71	5800.5	101	5830.5
12	5741.5	42	5771.5	72	5801.5	102	5831.5
13	5742.5	43	5772.5	73	5802.5	103	5832.5
14	5743.5	44	5773.5	74	5803.5	104	5833.5
15	5744.5	45	5774.5	75	5804.5	105	5834.5
16	5745.5	46	5775.5	76	5805.5	106	5835.5
17	5746.5	47	5776.5	77	5806.5	107	5836.5
18	5747.5	48	5777.5	78	5807.5	108	5837.5
19	5748.5	49	5778.5	79	5808.5	109	5838.5
20	5749.5	50	5779.5	80	5809.5	110	5839.5
21	5750.5	51	5780.5	81	5810.5	111	5840.5
22	5751.5	52	5781.5	82	5811.5	112	5841.5
23	5752.5	53	5782.5	83	5812.5	113	5842.5
24	5753.5	54	5783.5	84	5813.5	114	5843.5
25	5754.5	55	5784.5	85	5814.5	115	5844.5
26	5755.5	56	5785.5	86	5815.5	\	\
27	5756.5	57	5786.5	87	5816.5	\	\
28	5757.5	58	5787.5	88	5817.5	\	\
29	5758.5	59	5788.5	89	5818.5	\	\
30	5759.5	60	5789.5	90	5819.5	\	\

5.2.7. 5.8G 20 MHz Bandwidth (5735.5 MHz ~ 5839.5 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5735.5	28	5762.5	55	5789.5	82	5816.5
2	5736.5	29	5763.5	56	5790.5	83	5817.5
3	5737.5	30	5764.5	57	5791.5	84	5818.5
4	5738.5	31	5765.5	58	5792.5	85	5819.5
5	5739.5	32	5766.5	59	5793.5	86	5820.5
6	5740.5	33	5767.5	60	5794.5	87	5821.5
7	5741.5	34	5768.5	61	5795.5	88	5822.5
8	5742.5	35	5769.5	62	5796.5	89	5823.5
9	5743.5	36	5770.5	63	5797.5	90	5824.5
10	5744.5	37	5771.5	64	5798.5	91	5825.5
11	5745.5	38	5772.5	65	5799.5	92	5826.5
12	5746.5	39	5773.5	66	5800.5	93	5827.5
13	5747.5	40	5774.5	67	5801.5	94	5828.5
14	5748.5	41	5775.5	68	5802.5	95	5829.5
15	5749.5	42	5776.5	69	5803.5	96	5830.5
16	5750.5	43	5777.5	70	5804.5	97	5831.5
17	5751.5	44	5778.5	71	5805.5	98	5832.5
18	5752.5	45	5779.5	72	5806.5	99	5833.5
19	5753.5	46	5780.5	73	5807.5	100	5834.5
20	5754.5	47	5781.5	74	5808.5	101	5835.5
21	5755.5	48	5782.5	75	5809.5	102	5836.5
22	5756.5	49	5783.5	76	5810.5	103	5837.5
23	5757.5	50	5784.5	77	5811.5	104	5838.5
24	5758.5	51	5785.5	78	5812.5	105	5839.5
25	5759.5	52	5786.5	79	5813.5	\	\
26	5760.5	53	5787.5	80	5814.5	\	\
27	5761.5	54	5788.5	81	5815.5	\	\

5.2.8. 5.8G 40 MHz Bandwidth (5745.5 MHz ~ 5829.5 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5745.5	24	5768.5	47	5791.5	70	5814.5
2	5746.5	25	5769.5	48	5792.5	71	5815.5
3	5747.5	26	5770.5	49	5793.5	72	5816.5
4	5748.5	27	5771.5	50	5794.5	73	5817.5
5	5749.5	28	5772.5	51	5795.5	74	5818.5
6	5750.5	29	5773.5	52	5796.5	75	5819.5
7	5751.5	30	5774.5	53	5797.5	76	5820.5
8	5752.5	31	5775.5	54	5798.5	77	5821.5
9	5753.5	32	5776.5	55	5799.5	78	5822.5
10	5754.5	33	5777.5	56	5800.5	79	5823.5
11	5755.5	34	5778.5	57	5801.5	80	5824.5
12	5756.5	35	5779.5	58	5802.5	81	5825.5
13	5757.5	36	5780.5	59	5803.5	82	5826.5
14	5758.5	37	5781.5	60	5804.5	83	5827.5
15	5759.5	38	5782.5	61	5805.5	84	5828.5
16	5760.5	39	5783.5	62	5806.5	85	5829.5
17	5761.5	40	5784.5	63	5807.5	\	\
18	5762.5	41	5785.5	64	5808.5	\	\
19	5763.5	42	5786.5	65	5809.5	\	\
20	5764.5	43	5787.5	66	5810.5	\	\
21	5765.5	44	5788.5	67	5811.5	\	\
22	5766.5	45	5789.5	68	5812.5	\	\
23	5767.5	46	5790.5	69	5813.5	\	\

5.2.9. 5.8G 60 MHz Bandwidth (5755.5 MHz ~ 5819.5 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5755.5	19	5773.5	37	5791.5	55	5809.5
2	5756.5	20	5774.5	38	5792.5	56	5810.5
3	5757.5	21	5775.5	39	5793.5	57	5811.5
4	5758.5	22	5776.5	40	5794.5	58	5812.5
5	5759.5	23	5777.5	41	5795.5	59	5813.5
6	5760.5	24	5778.5	42	5796.5	60	5814.5
7	5761.5	25	5779.5	43	5797.5	61	5815.5
8	5762.5	26	5780.5	44	5798.5	62	5816.5
9	5763.5	27	5781.5	45	5799.5	63	5817.5
10	5764.5	28	5782.5	46	5800.5	64	5818.5
11	5765.5	29	5783.5	47	5801.5	65	5819.5
12	5766.5	30	5784.5	48	5802.5	\	\
13	5767.5	31	5785.5	49	5803.5	\	\
14	5768.5	32	5786.5	50	5804.5	\	\
15	5769.5	33	5787.5	51	5805.5	\	\
16	5770.5	34	5788.5	52	5806.5	\	\
17	5771.5	35	5789.5	53	5807.5	\	\
18	5772.5	36	5790.5	54	5808.5	\	\

5.2.10. 5.8G 80 MHz Bandwidth (5765.5 MHz ~ 5809.5 MHz)

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5765.5	13	5777.5	25	5789.5	37	5801.5
2	5766.5	14	5778.5	26	5790.5	38	5802.5
3	5767.5	15	5779.5	27	5791.5	39	5803.5
4	5768.5	16	5780.5	28	5792.5	40	5804.5
5	5769.5	17	5781.5	29	5793.5	41	5805.5
6	5770.5	18	5782.5	30	5794.5	42	5806.5
7	5771.5	19	5783.5	31	5795.5	43	5807.5
8	5772.5	20	5784.5	32	5796.5	44	5808.5
9	5773.5	21	5785.5	33	5797.5	45	5809.5
10	5774.5	22	5786.5	34	5798.5	\	\
11	5775.5	23	5787.5	35	5799.5	\	\
12	5776.5	24	5788.5	36	5800.5	\	\

5.3. MAXIMUM OUTPUT POWER

SRD 5.1G	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)
10 MHz Mode	5157 MHz ~ 5245 MHz	19.29
20 MHz Mode	5161 MHz ~ 5240 MHz	20.22
40 MHz Mode	5170 MHz ~ 5230 MHz	20.16
60 MHz Mode	5180 MHz ~ 5220 MHz	19.32
80 MHz Mode	5190 MHz ~ 5210 MHz	19.69

SRD 5.8G	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)
10 MHz Mode	5730.5 MHz ~ 5844.5 MHz	29.64
20 MHz Mode	5735.5 MHz ~ 5839.5 MHz	29.98
40 MHz Mode	5745.5 MHz ~ 5829.5 MHz	29.53
60 MHz Mode	5755.5 MHz ~ 5819.5 MHz	26.93
80 MHz Mode	5765.5 MHz ~ 5809.5 MHz	26.90

5.4. TEST CHANNEL CONFIGURATION

SRD 5.1G	Test Channel Number	Frequency
10 MHz Mode	CH 1(Low Channel)	5157 MHz
	CH 4	5160 MHz
	CH 7	5163 MHz
	CH 11	5167 MHz
	CH 14	5170 MHz
	CH 45(MID Channel)	5201 MHz
	CH 89(High Channel)	5245 MHz
20 MHz Mode	CH 1(Low Channel)	5161 MHz
	CH 4	5164 MHz
	CH 7	5167 MHz
	CH 10	5170 MHz
	CH 40(MID Channel)	5200 MHz
	CH 80(High Channel)	5240 MHz
40 MHz Mode	CH 1(Low Channel)	5170 MHz
	CH 9	5178 MHz
	CH 19	5188 MHz
	CH 31(MID Channel)	5200 MHz
	CH 61(High Channel)	5230 MHz
60 MHz Mode	CH 1(Low Channel)	5180 MHz
	CH 9	5188 MHz
	CH 16	5195 MHz
	CH 21(MID Channel)	5200 MHz
	CH 41(High Channel)	5220 MHz
80 MHz Mode	CH 1(Low Channel)	5190 MHz
	CH 6	5195 MHz
	CH 9	5198 MHz
	CH 11(MID Channel)	5200 MHz
	CH 14	5203 MHz
	CH 21(High Channel)	5210 MHz

SRD 5.8G	Test Channel Number	Frequency
10 MHz Mode	CH 1(Low Channel)	5730.5 MHz
	CH 58(MID Channel)	5787.5 MHz
	CH 115(High Channel)	5844.5 MHz
20 MHz Mode	CH 1(Low Channel)	5735.5 MHz
	CH 52(MID Channel)	5787.5 MHz
	CH 105(High Channel)	5839.5 MHz
40 MHz Mode	CH 1(Low Channel)	5745.5 MHz
	CH 27	5771.5 MHz
	CH 43(MID Channel)	5787.5 MHz
	CH 64	5808.5 MHz
	CH 68	5812.5 MHz
	CH 85(High Channel)	5829.5 MHz
60 MHz Mode	CH 1(Low Channel)	5755.5 MHz
	CH 33(MID Channel)	5787.5 MHz
	CH 65(High Channel)	5819.5 MHz
80 MHz Mode	CH 1(Low Channel)	5765.5 MHz
	CH 23(MID Channel)	5787.5 MHz
	CH 45(High Channel)	5809.5 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 5157 ~ 5245 MHz Band				
Test Software		DjiSdrConsole		
Modulation Mode	Transmit Antenna Number	Test Software setting value		
		NCB: 10 MHz/20 MHz/40 MHz/60 MHz/80 MHz		
		Low Channel	MID Channel	High Channel
SRD 10M	2	-2	-3	-4
SRD 20M		-3	-4	0
SRD 40M		-2	-5	-5
SRD 60M		0	-2	-2
SRD 80M		-2	-3	-6

The Worse Case Power Setting Parameter under 5730.5 ~ 5844.5 MHz Band				
Test Software		DjiSdrConsole		
Modulation Mode	Transmit Antenna Number	Test Software setting value		
		NCB: 10 MHz/20 MHz/40 MHz/60 MHz/80 MHz		
		Low Channel	MID Channel	High Channel
SRD 10M	2	-9	-8	-8
SRD 20M		-2	-1	0
SRD 40M		-1	-5	2
SRD 60M		-1	0	0
SRD 80M		-2	-2	-2

5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.2.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

SRD 5.1G/SRD 5.8G-10 MHz Mode/QPSK
SRD 5.1G/SRD 5.8G-20 MHz Mode/QPSK
SRD 5.1G/SRD 5.8G-40 MHz Mode/QPSK
SRD 5.1G/SRD 5.8G-60 MHz Mode/QPSK
SRD 5.1G/SRD 5.8G-80 MHz Mode/QPSK

The EUT support SISO and MIMO mode. SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 1 and antenna 2 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Space Time Coding(STBC) mode.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Frequency (MHz)	Antenna Type	Max Antenna Gain (dBi)
1	5157 ~ 5245	Dipole	-0.5
2	5157 ~ 5245	Dipole	-0.5

Antenna No.	Frequency (MHz)	Antenna Type	Max Antenna Gain (dBi)
1	5730.5 ~ 5844.5	Dipole	0.5
2	5730.5 ~ 5844.5	Dipole	0.5

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the STBC mode results the Directional Gain was calculated in accordance with the following method:

For output power measurements:

Directional gain= GANT + Array Gain = GANT

GANT: equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$

For power spectral density (PSD) measurements:

Directional gain= GANT + Array Gain = GANT

GANT: equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $NANT \leq 4$

Test Mode	Transmit and Receive Mode	Description
10 MHz Mode	☒ 2TX, 2RX	ANT 1 & ANT 2 can be used as transmitting and receiving antenna.
20 MHz Mode	☒ 2TX, 2RX	ANT 1 & ANT 2 can be used as transmitting and receiving antenna.
40 MHz Mode	☒ 2TX, 2RX	ANT 1 & ANT 2 can be used as transmitting and receiving antenna.
60 MHz Mode	☒ 2TX, 2RX	ANT 1 & ANT 2 can be used as transmitting and receiving antenna.
80 MHz Mode	☒ 2TX, 2RX	ANT 1 & ANT 2 can be used as transmitting and receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E14	/
2	Adapter	/	PD-30CN	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type C	Unshielded	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

SETUP DIAGRAM FOR TESTS

For other tests:



6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer		Name		Version
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	May.08, 2023	May.07 2026
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025

EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Sep.28, 2024	Sep.27, 2025

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

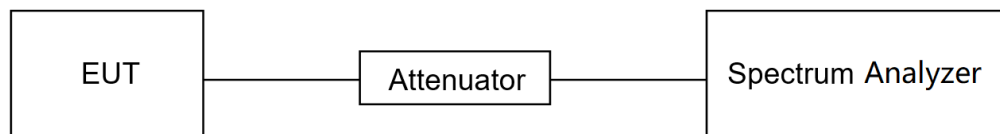

TEST ENVIRONMENT

Temperature	21.8°C	Relative Humidity	52.7%
Atmosphere Pressure	101kPa	Test Voltage	DC 17.0 V

TEST DATE / ENGINEER

Test Date	November 13, 2024	Test By	Bairong Liu
-----------	-------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC)
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

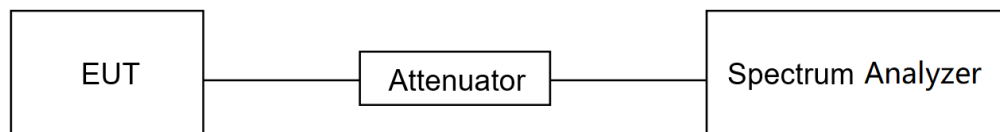

TEST ENVIRONMENT

Temperature	22.8°C	Relative Humidity	56.4%
Atmosphere Pressure	101kPa	Test Voltage	DC 17.0 V

TEST DATE / ENGINEER

Test Date	October 30, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B&C

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	☐ Outdoor Access Point: 1 W (30 dBm) ☐ Indoor Access Point: 1 W (30 dBm) ☐ Fixed Point-To-Point Access Points: 1 W (30 dBm) ☒ Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:


The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding 10 log (1/x) where x is the duty cycle (e.g., 10 log (1/0.25) if the duty cycle is 25 %).

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.8°C	Relative Humidity	56.4%
Atmosphere Pressure	101kPa	Test Voltage	DC 17.0 V

TEST DATE / ENGINEER

Test Date	October 30, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	☐ Outdoor Access Point: 17 dBm/MHz ☐ Indoor Access Point: 17 dBm/MHz ☐ Fixed Point-To-Point Access Points: 17 dBm/MHz ☒ Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:


Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP**TEST ENVIRONMENT**

Temperature	22.8°C	Relative Humidity	56.4%
Atmosphere Pressure	101kPa	Test Voltage	DC 17.0 V

TEST DATE / ENGINEER

Test Date	October 30, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -10 °C ~ 40 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 90 % to 110 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 23.6 °C	T _L (Low Temperature): -10 °C
		T _H (High Temperature): 40 °C
Supply Voltage	V _N (Normal Voltage): DC 17.0V	V _L (Low Voltage): DC 14.45 V
		V _H (High Voltage): DC 19.55 V

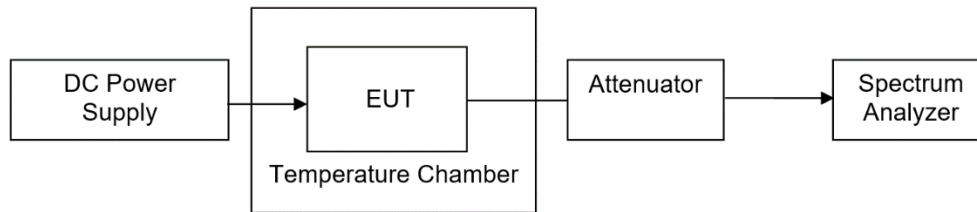TEST SETUP**TEST ENVIRONMENT**

Temperature	22.8°C	Relative Humidity	56.4%
Atmosphere Pressure	101kPa	Test Voltage	DC 17.0 V

TEST DATE / ENGINEER

Test Date	October 30, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b).

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

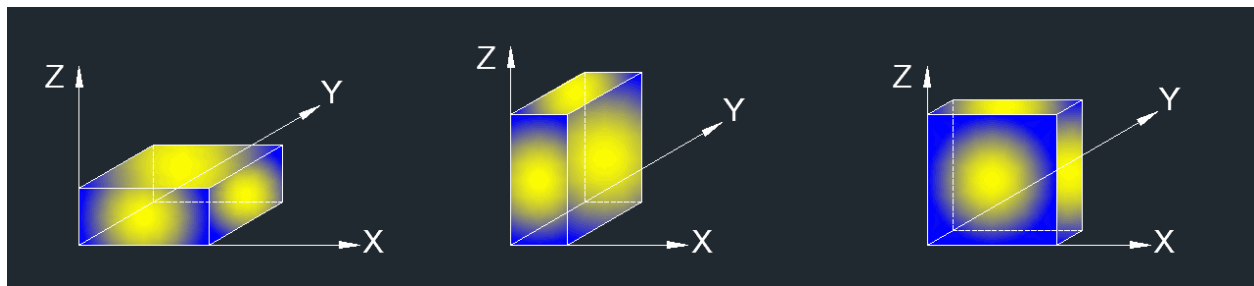

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

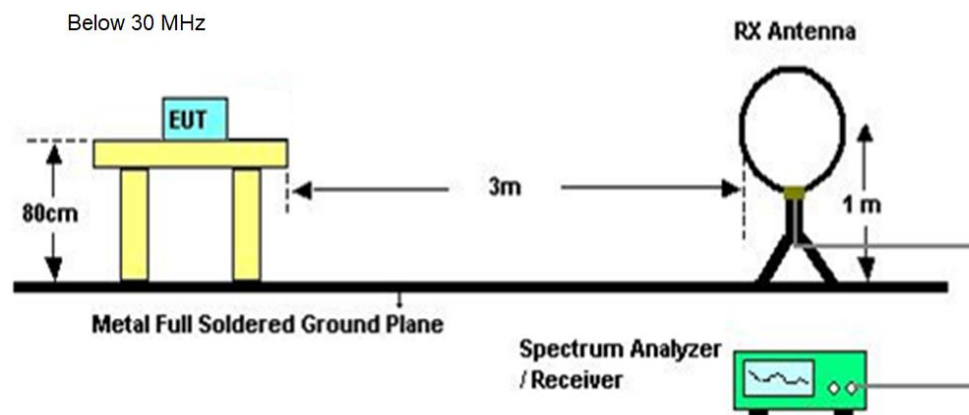

Below 1 GHz and above 30 MHz

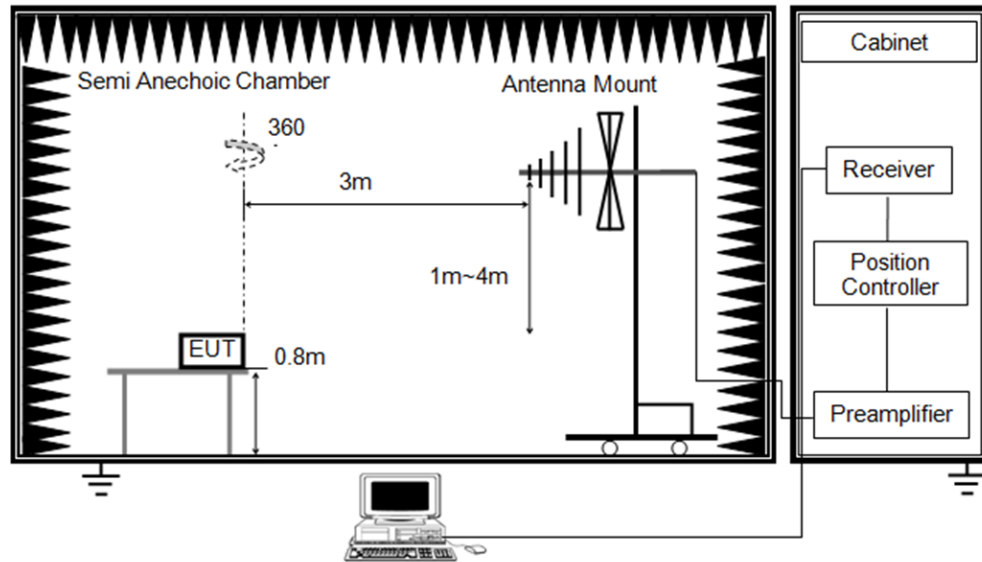

Above 1 GHz

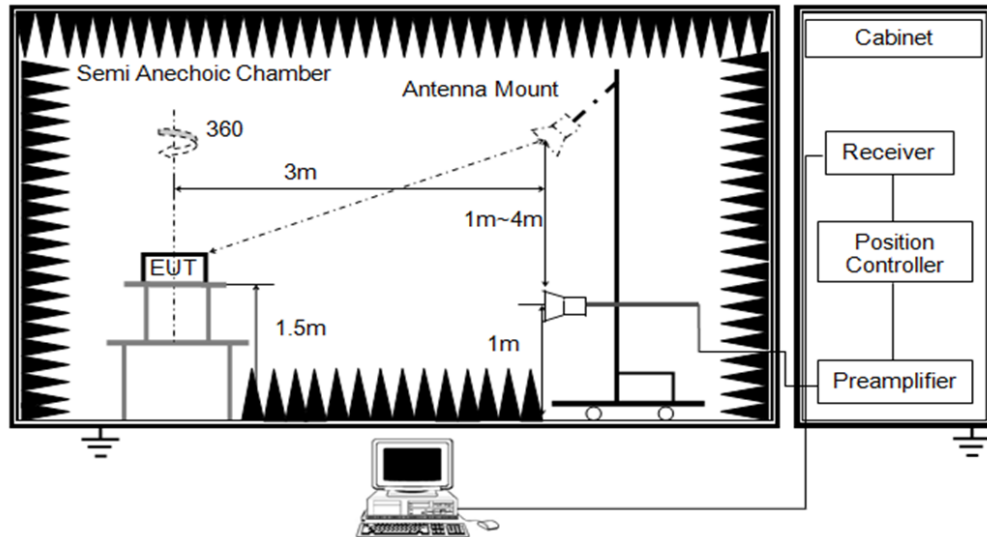

TEST ENVIRONMENT

Temperature	23.2°C	Relative Humidity	61.4%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	November 11, 2024	Test By	Mason Wang
-----------	-------------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

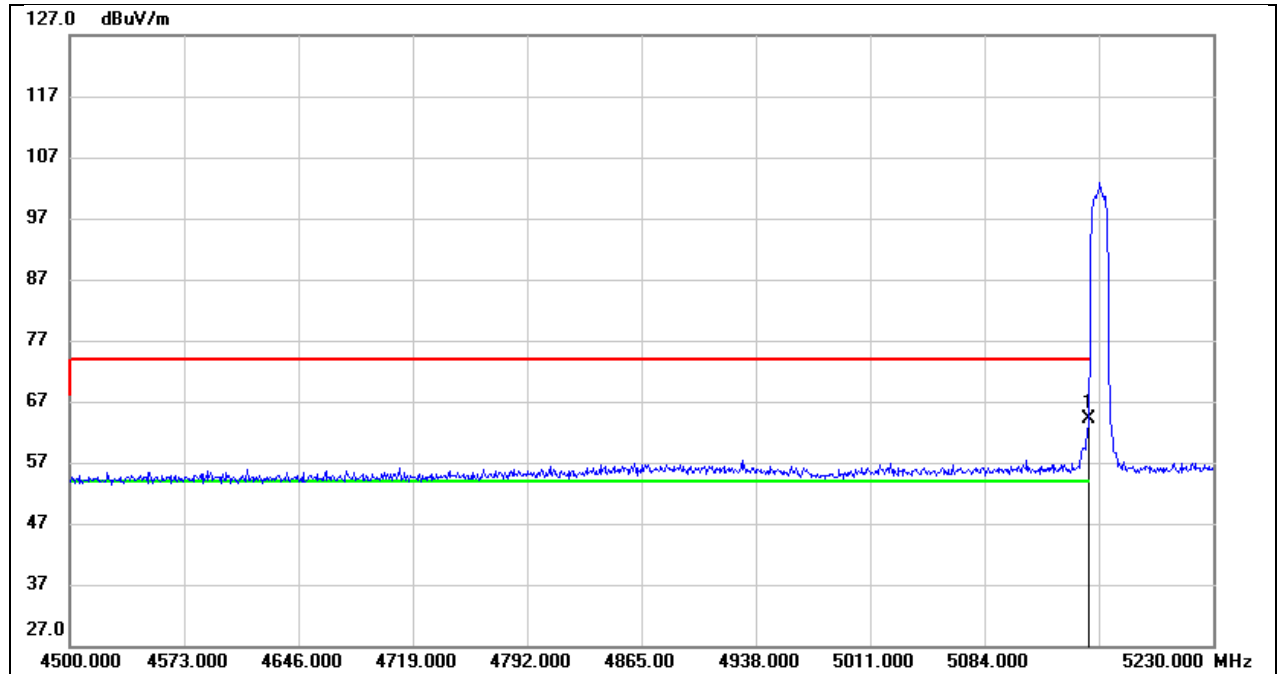


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	25.24	38.84	64.08	74.00	-9.92	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

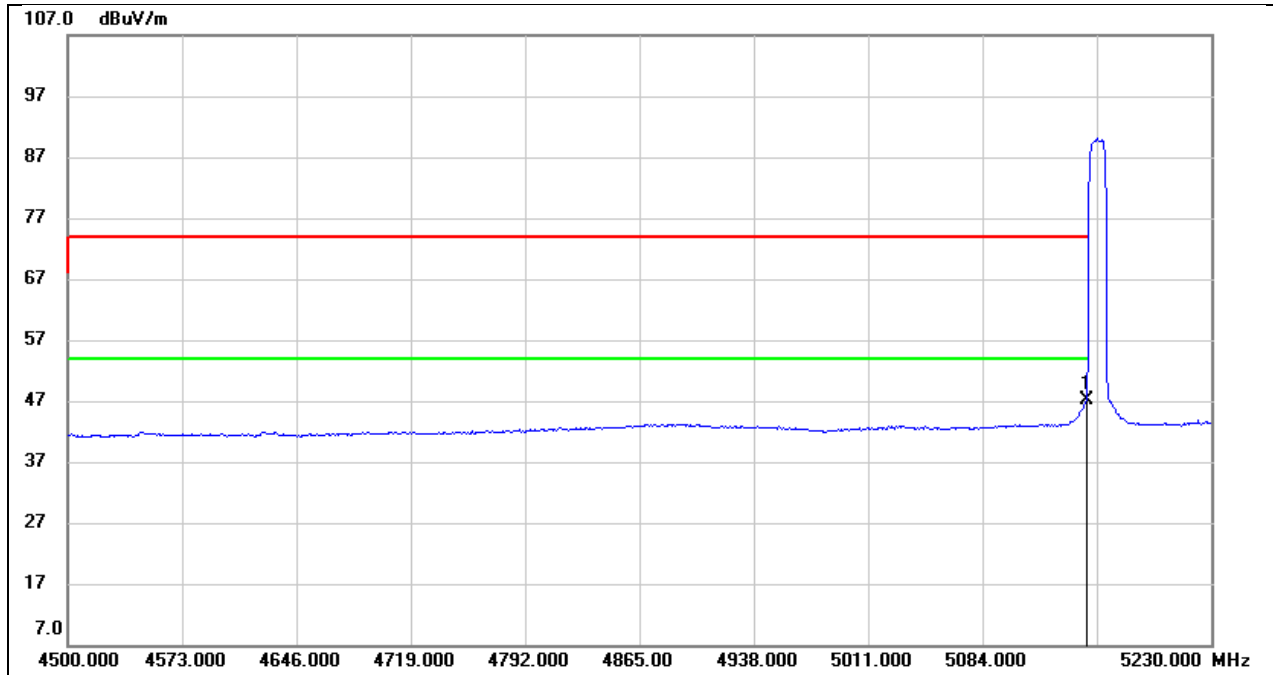


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	8.31	38.84	47.15	54.00	-6.85	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0 V

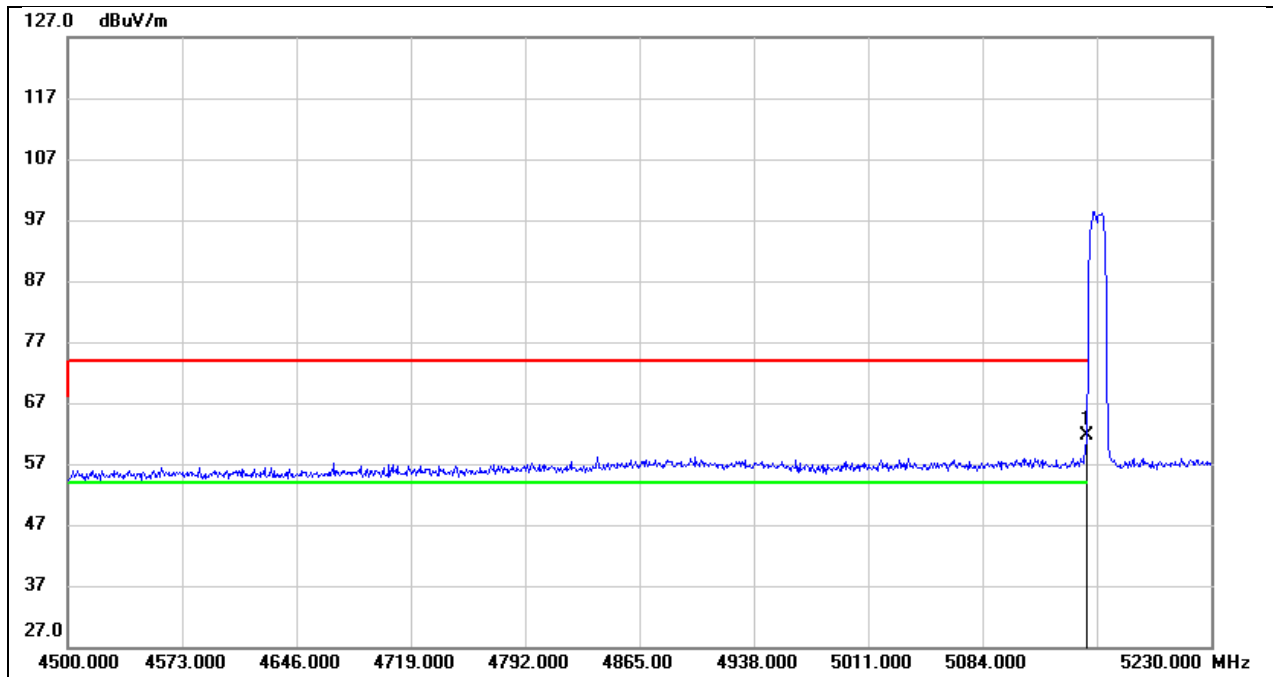


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	21.63	40.04	61.67	74.00	-12.33	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0 V

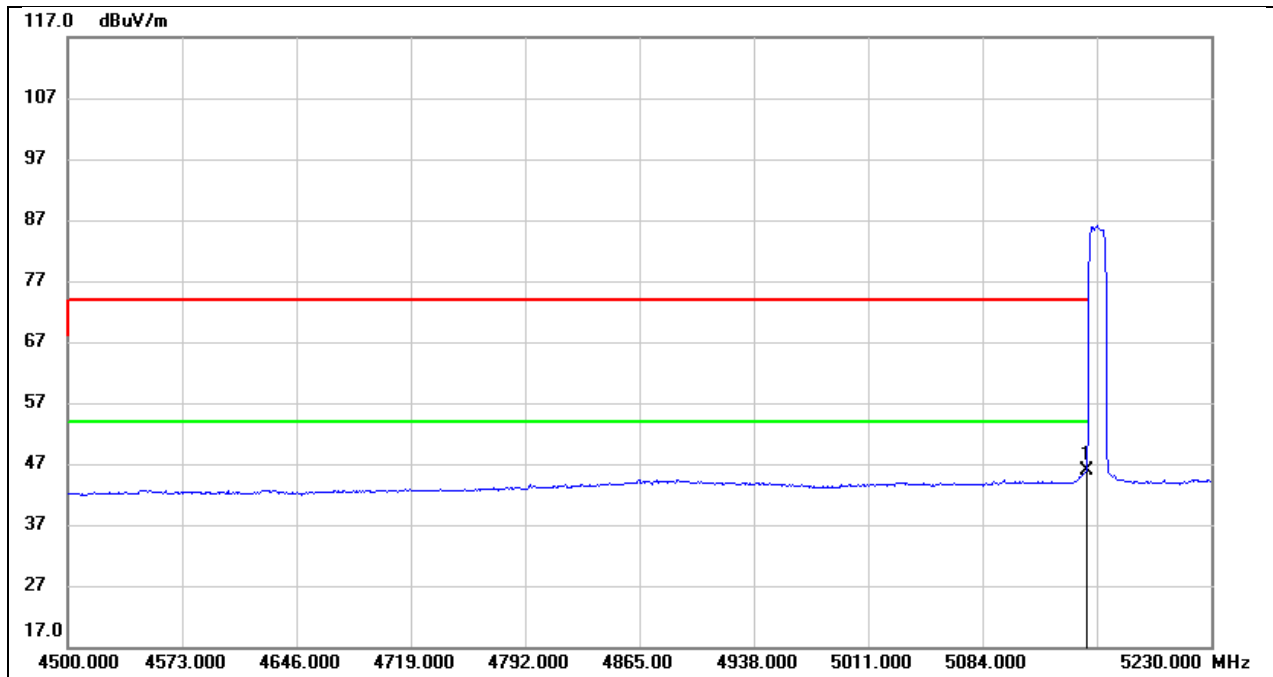


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.96	40.04	46.00	54.00	-8.00	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5160
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

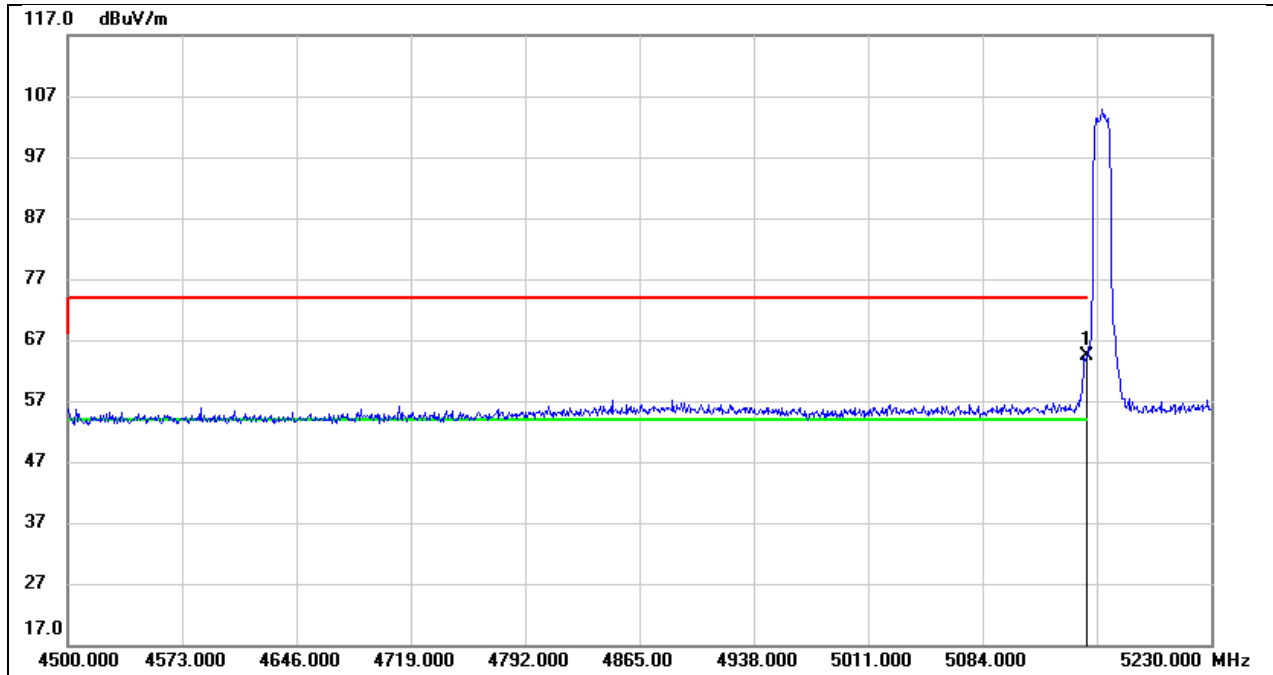


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	25.59	38.84	64.43	74.00	-9.57	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5160
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

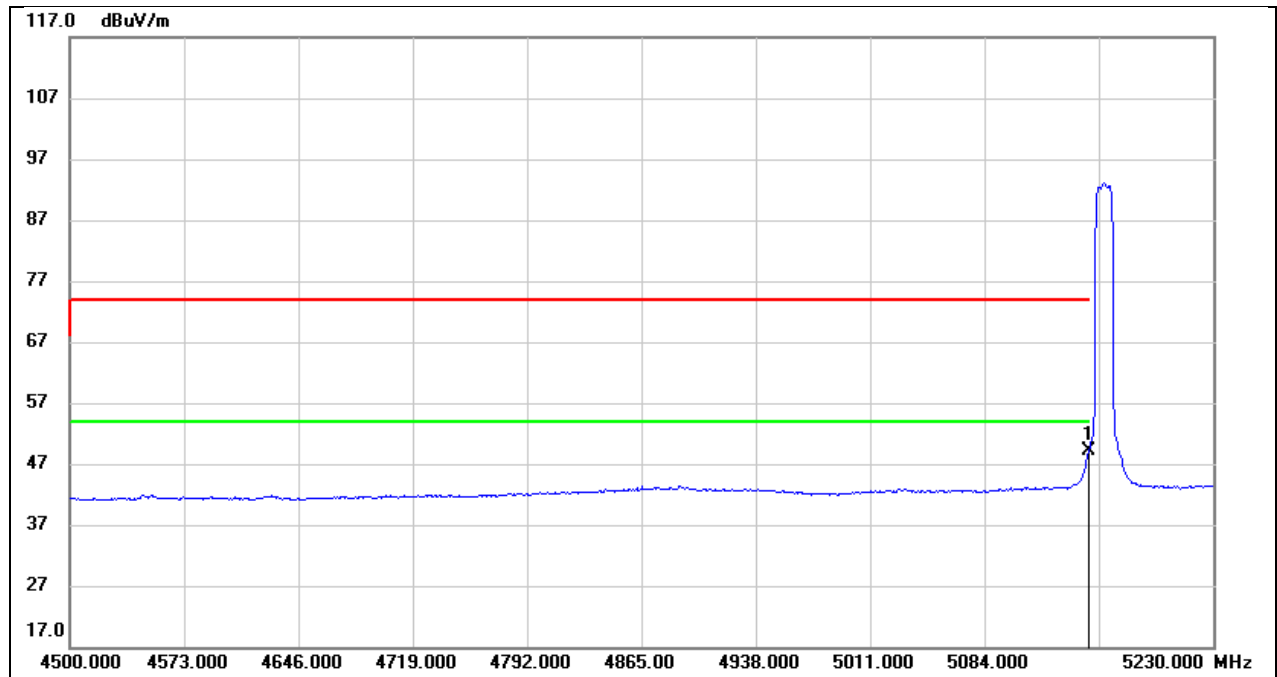


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	10.27	38.84	49.11	54.00	-4.89	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5163
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

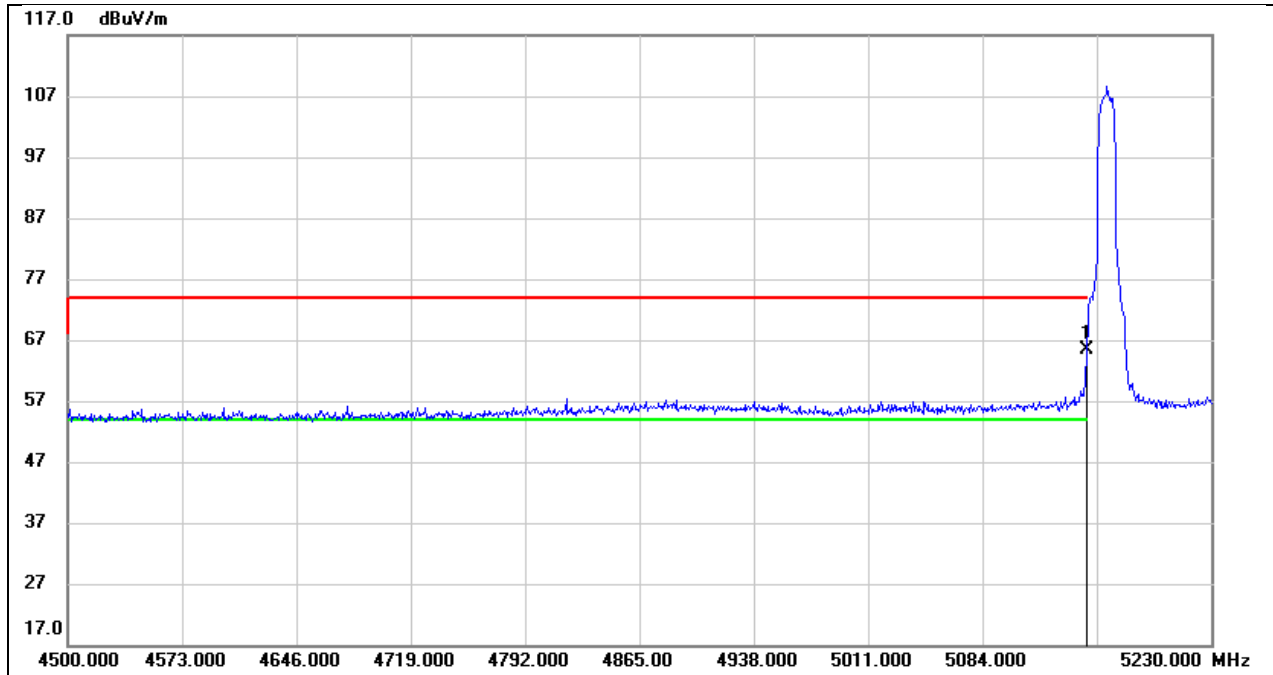


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.46	38.84	65.30	74.00	-8.70	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5163
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

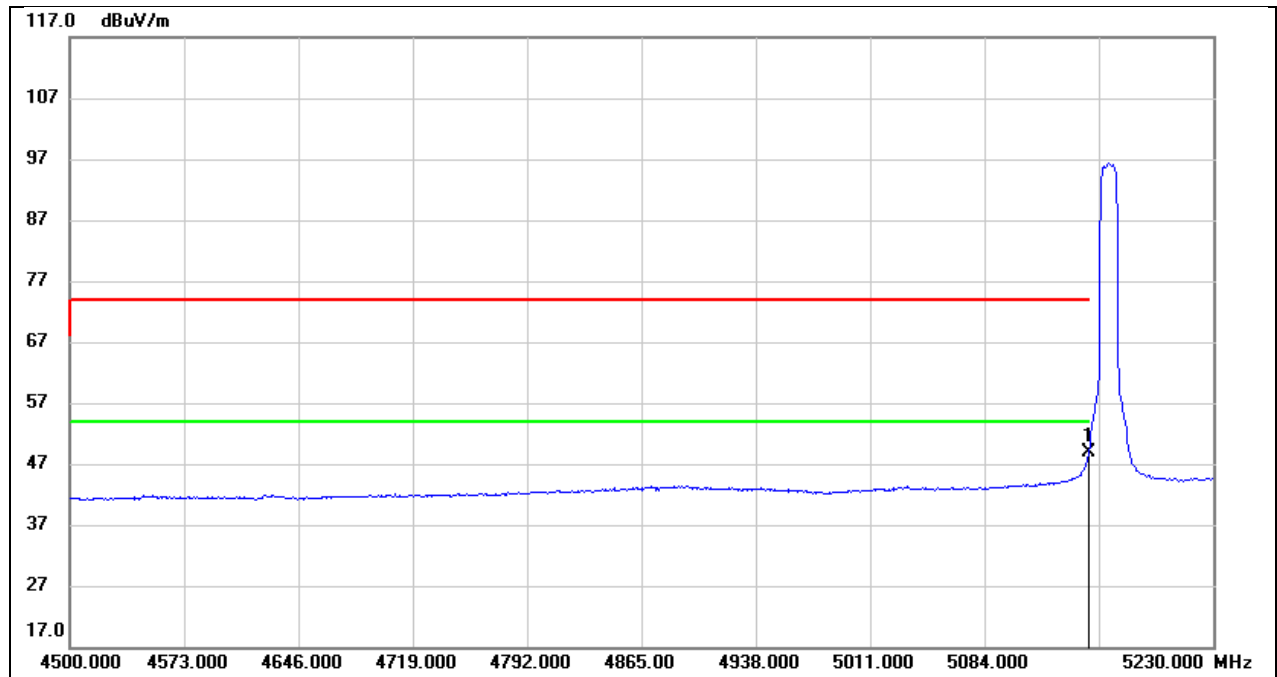


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	9.96	38.84	48.80	54.00	-5.20	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5167
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

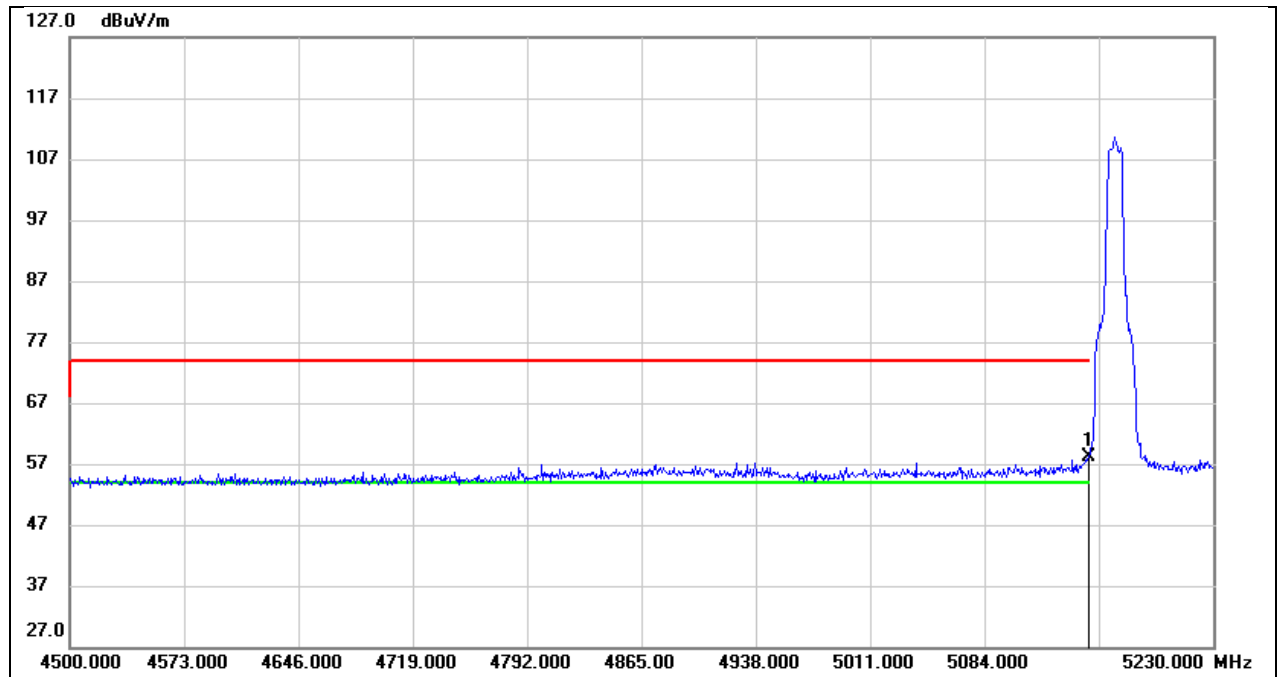


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.20	38.84	58.04	74.00	-15.96	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5167
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

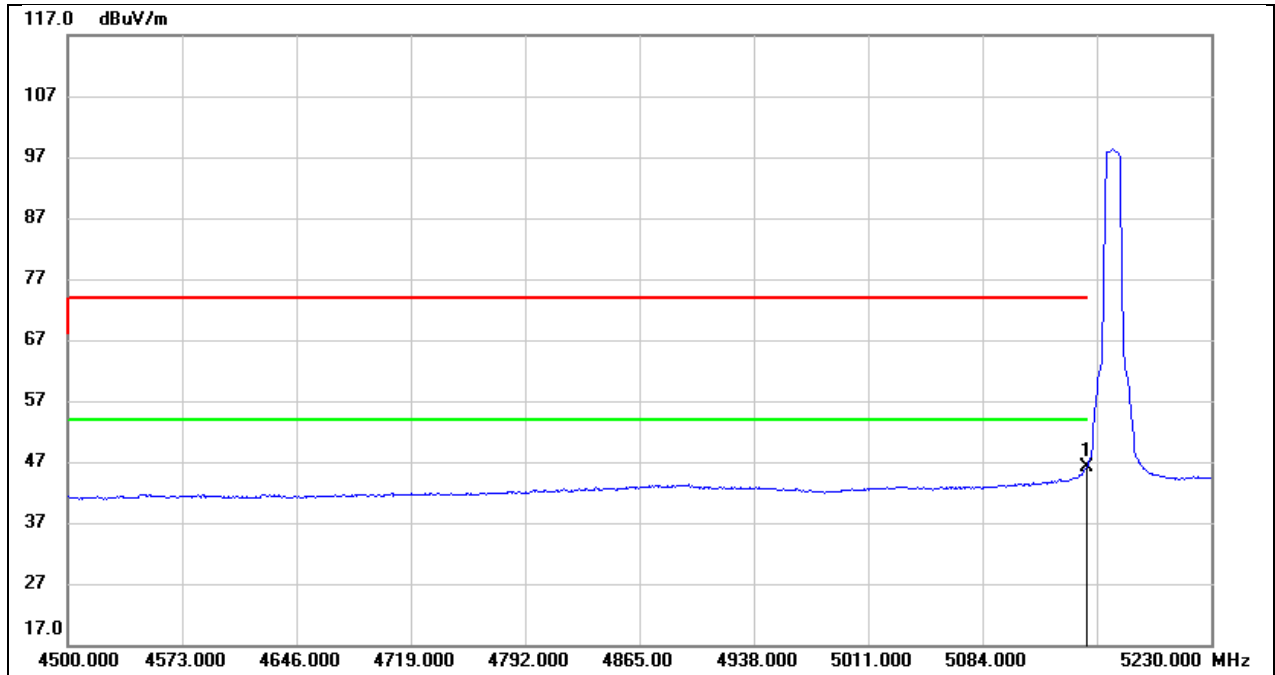


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.22	38.84	46.06	54.00	-7.94	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

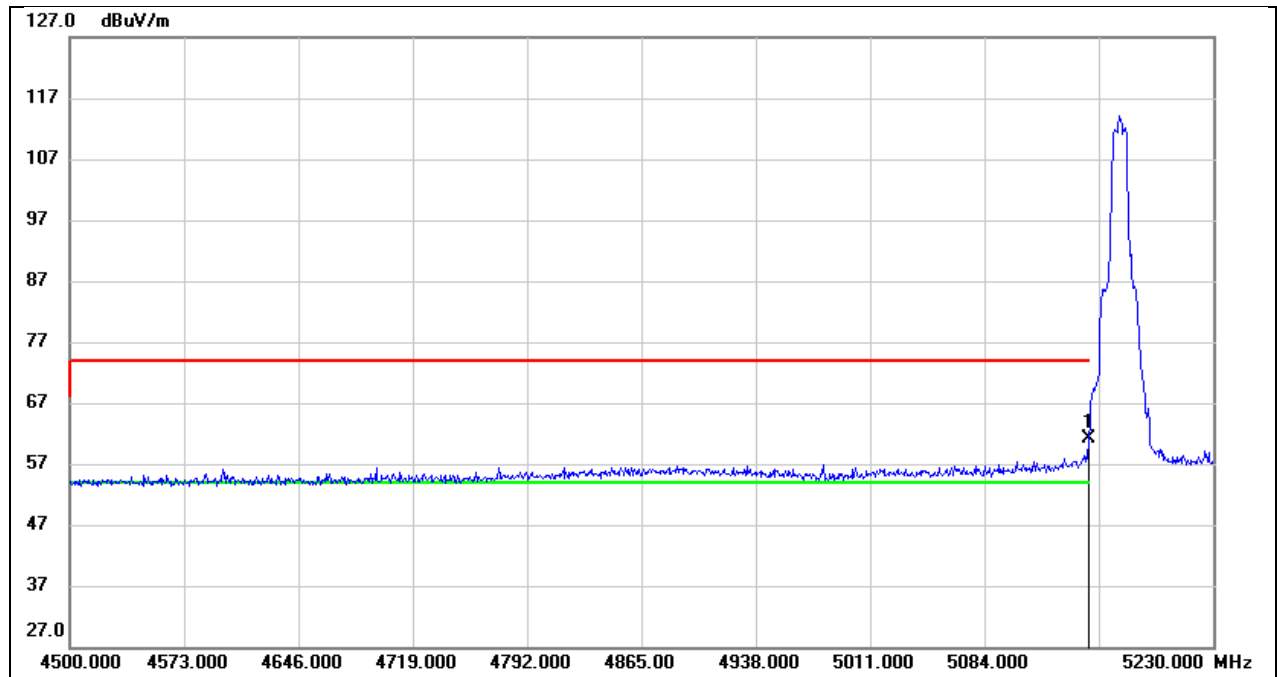


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	22.30	38.84	61.14	74.00	-12.86	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

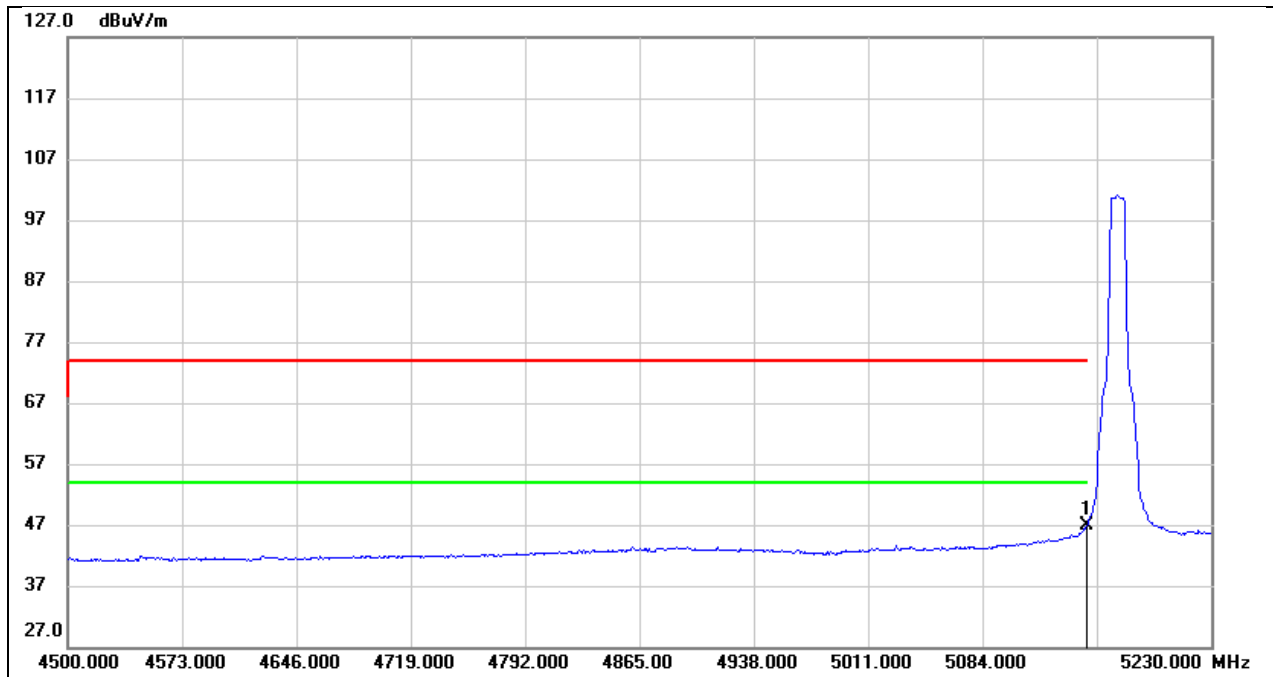


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.97	38.84	46.81	54.00	-7.19	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

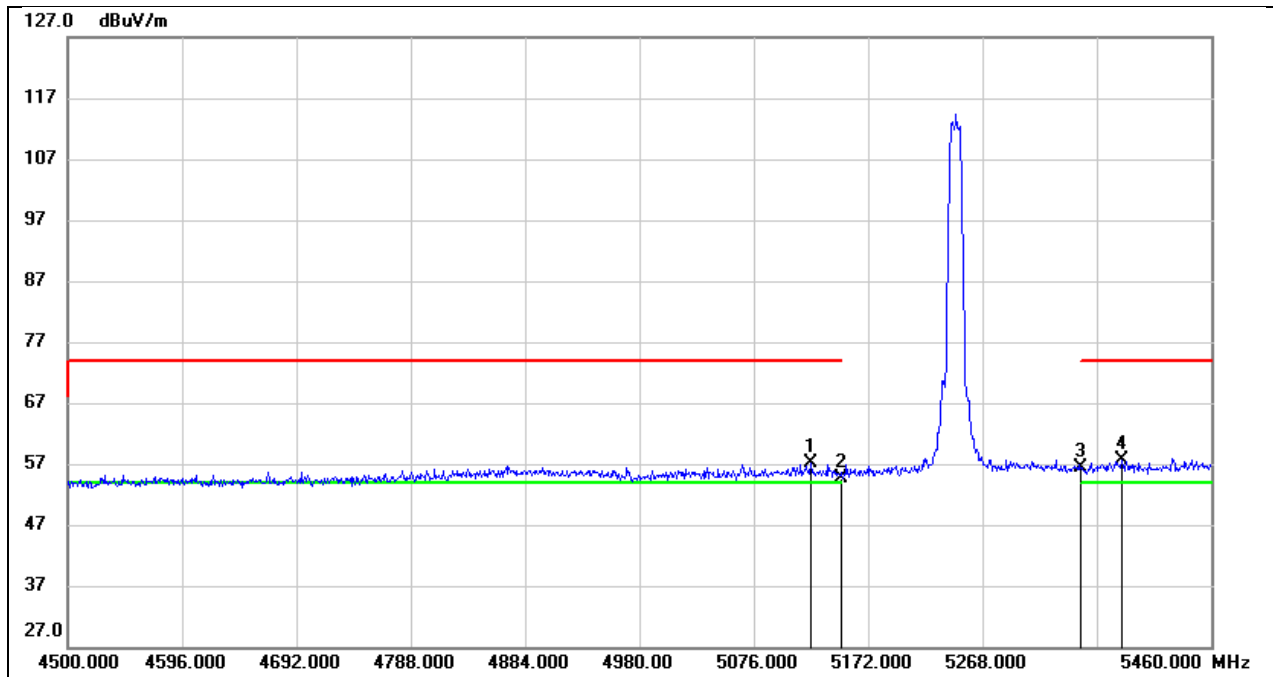


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.000	18.39	38.80	57.19	74.00	-16.81	peak
2	5150.000	15.82	38.84	54.66	74.00	-19.34	peak
3	5350.000	16.99	39.29	56.28	74.00	-17.72	peak
4	5385.120	18.16	39.38	57.54	74.00	-16.46	peak

Test Mode:	SDR5G 10M AV	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

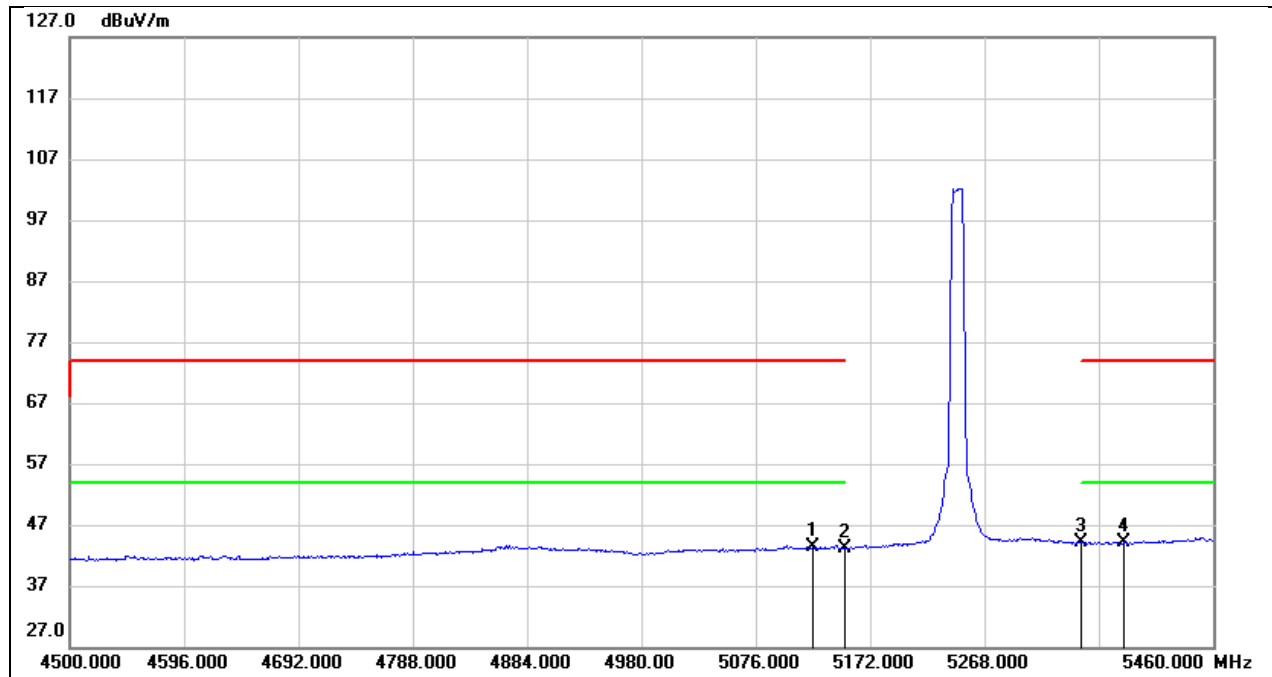


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5124.000	4.54	38.80	43.34	54.00	-10.66	AVG
2	5150.000	4.31	38.84	43.15	54.00	-10.85	AVG
3	5350.000	4.92	39.29	44.21	54.00	-9.79	AVG
4	5385.120	4.67	39.38	44.05	54.00	-9.95	AVG

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

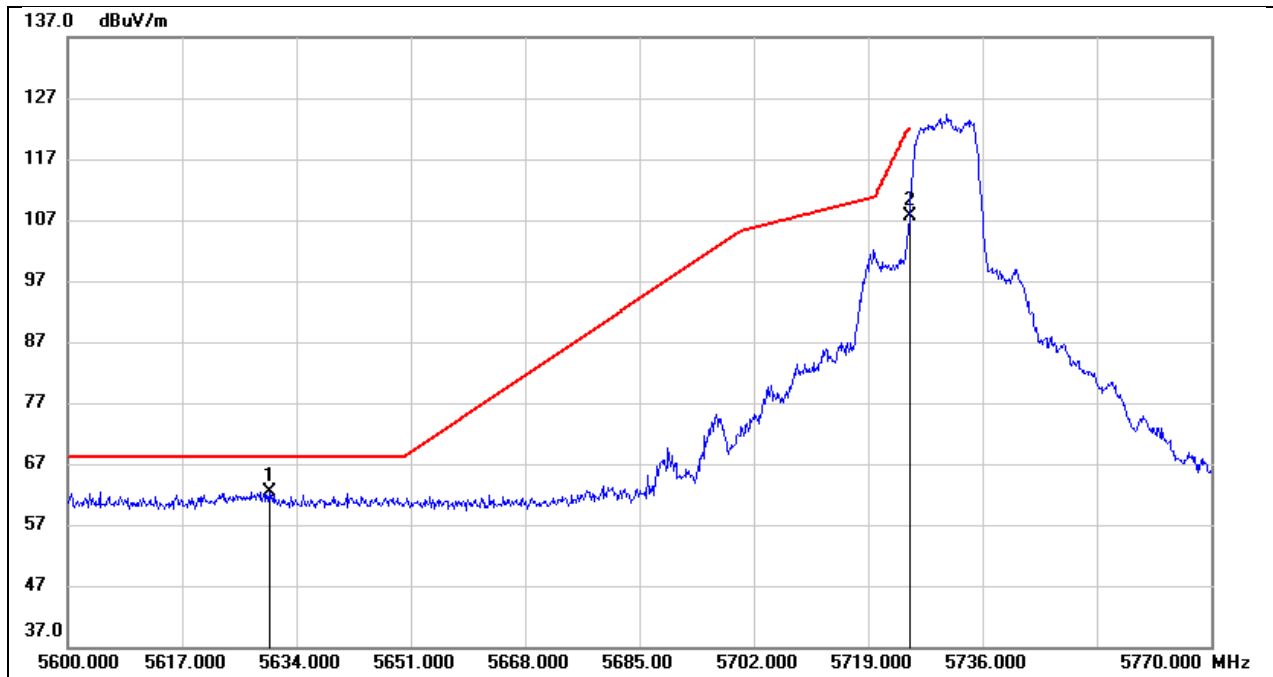


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5629.920	22.41	39.97	62.38	68.20	-5.82	peak
2	5725.000	67.52	40.09	107.61	122.20	-14.59	peak

Test Mode:	SDR5G 10M PK	Frequency(MHz):	5844.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

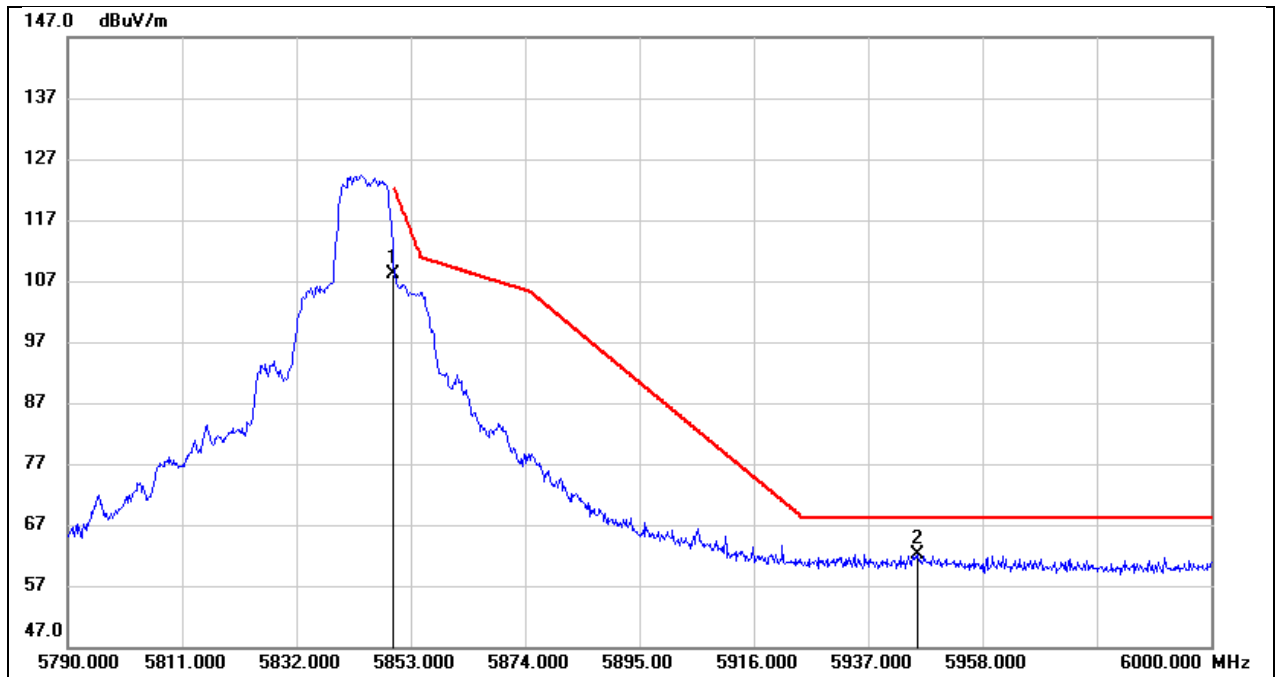


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	67.92	40.30	108.22	122.20	-13.98	peak
2	5946.030	21.71	40.52	62.23	68.20	-5.97	peak

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5161
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

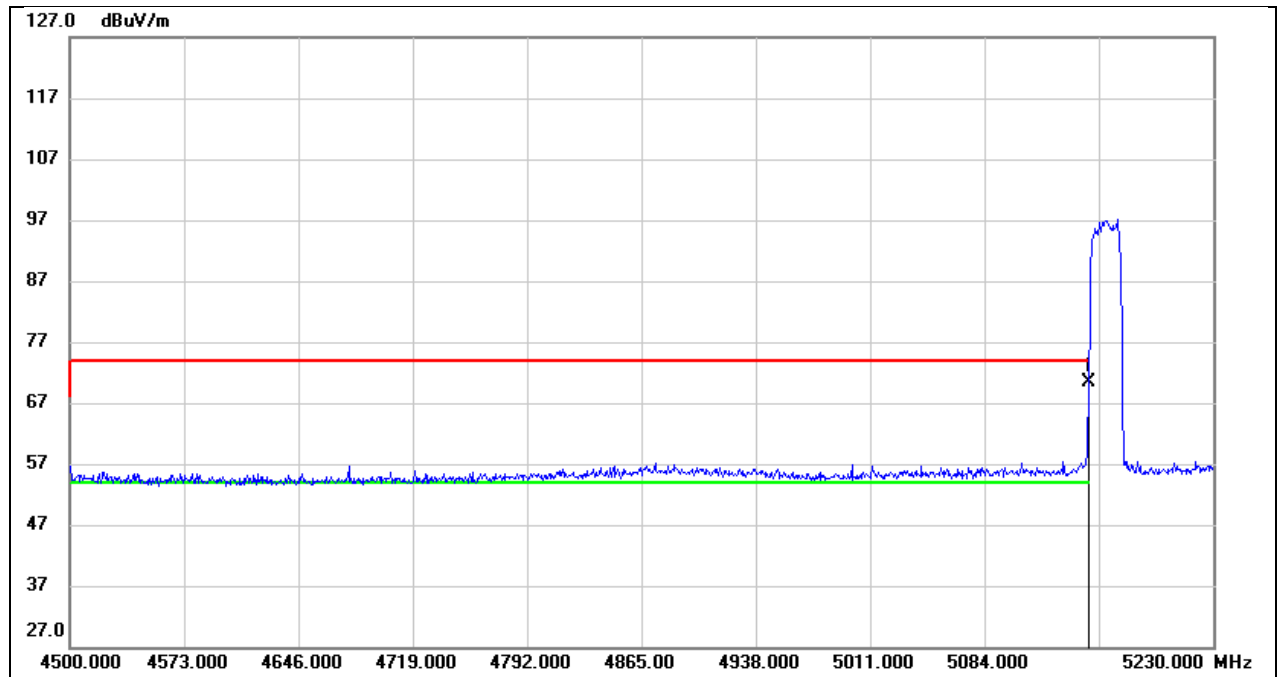


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.43	38.84	70.27	74.00	-3.73	peak

Test Mode:	SDR5G 20M AV	Frequency(MHz):	5161
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

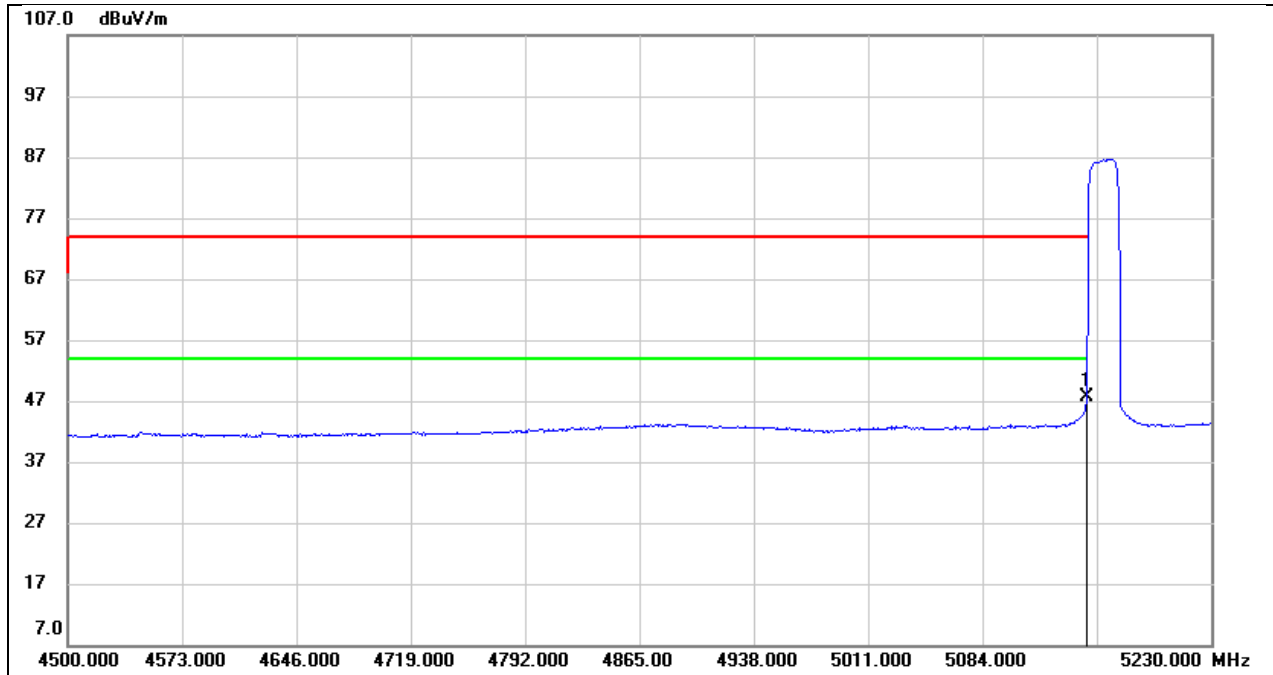


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	8.82	38.84	47.66	54.00	-6.34	AVG

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5164
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

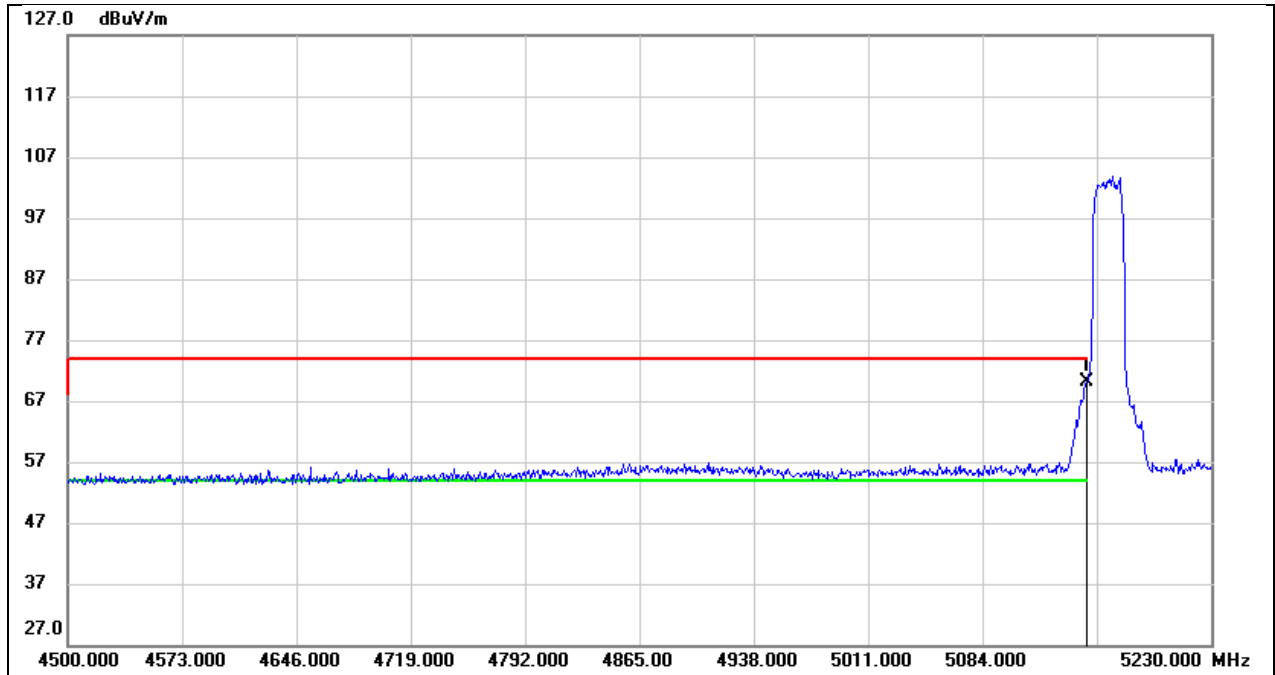


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.26	38.84	70.10	74.00	-3.90	peak

Test Mode:	SDR5G 20M AV	Frequency(MHz):	5164
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

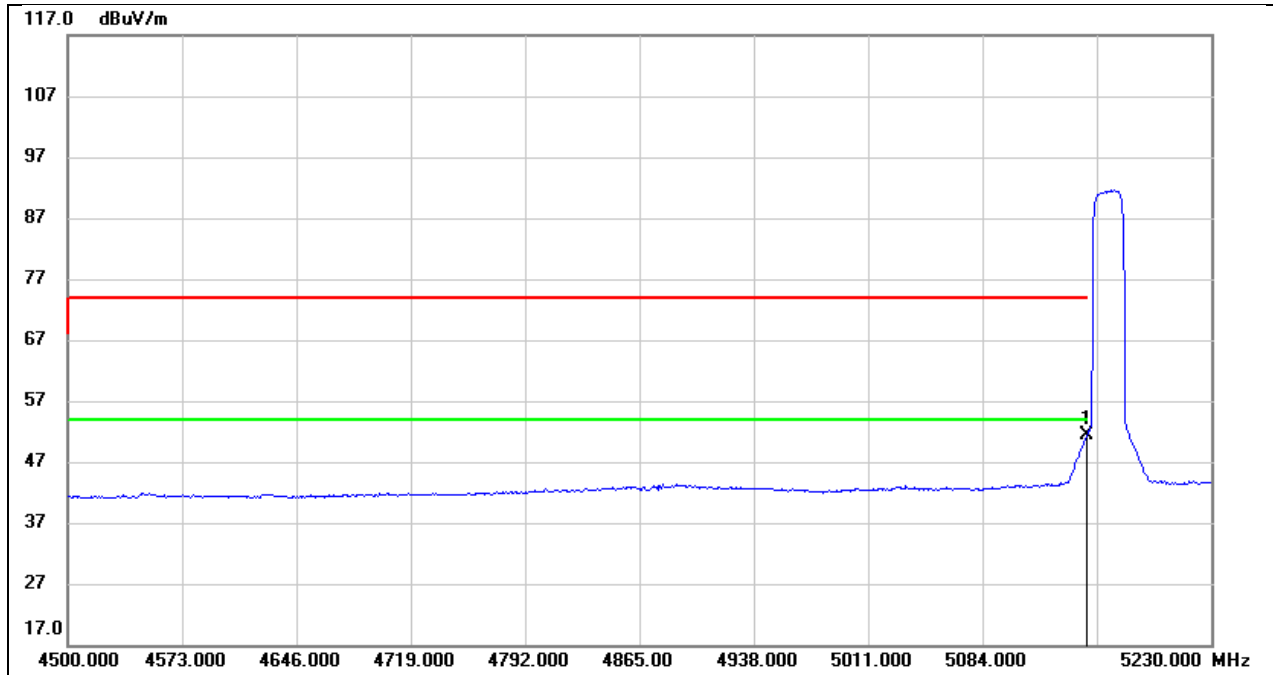


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.44	38.84	51.28	54.00	-2.72	AVG

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5167
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

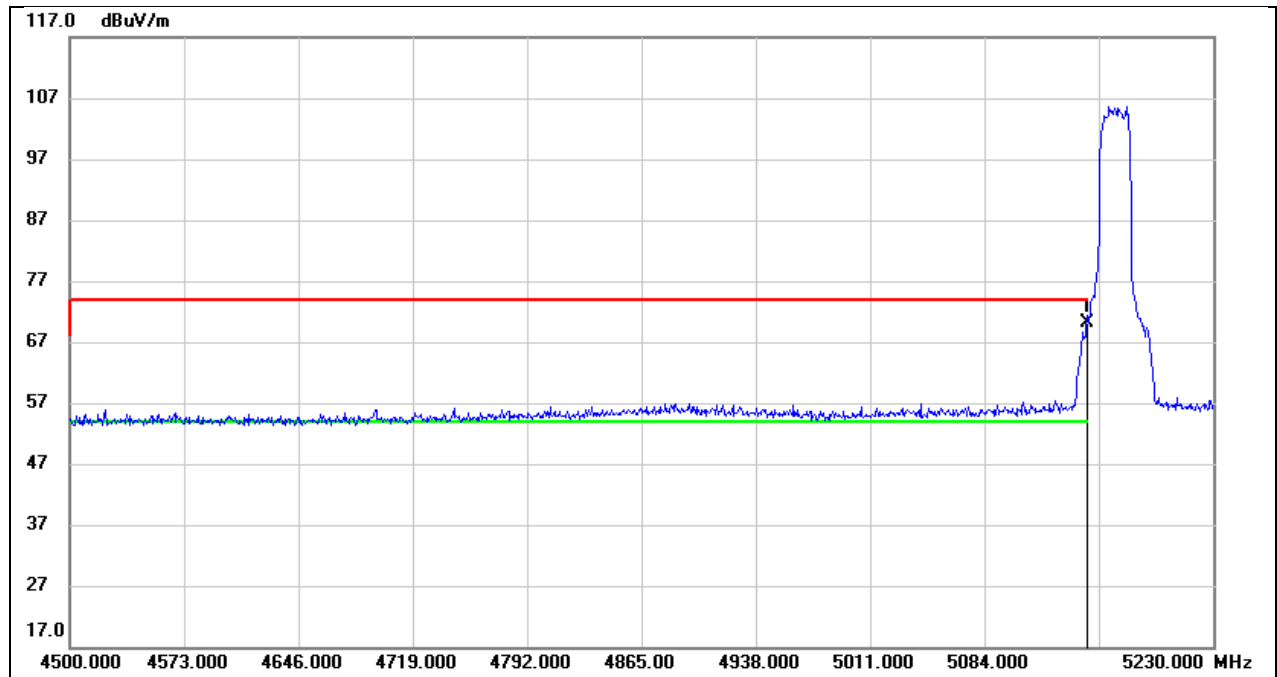


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	31.17	38.84	70.01	74.00	-3.99	peak

Test Mode:	SDR5G 20M AV	Frequency(MHz):	5167
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

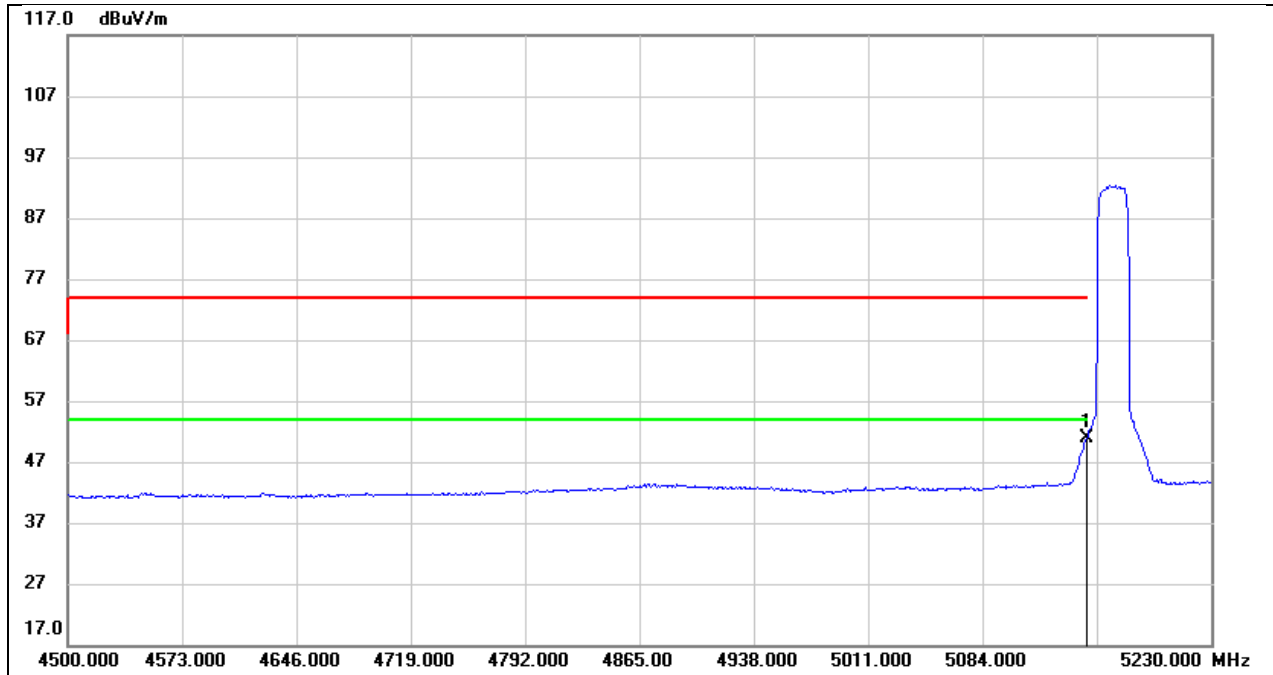


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.14	38.84	50.98	54.00	-3.02	AVG

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

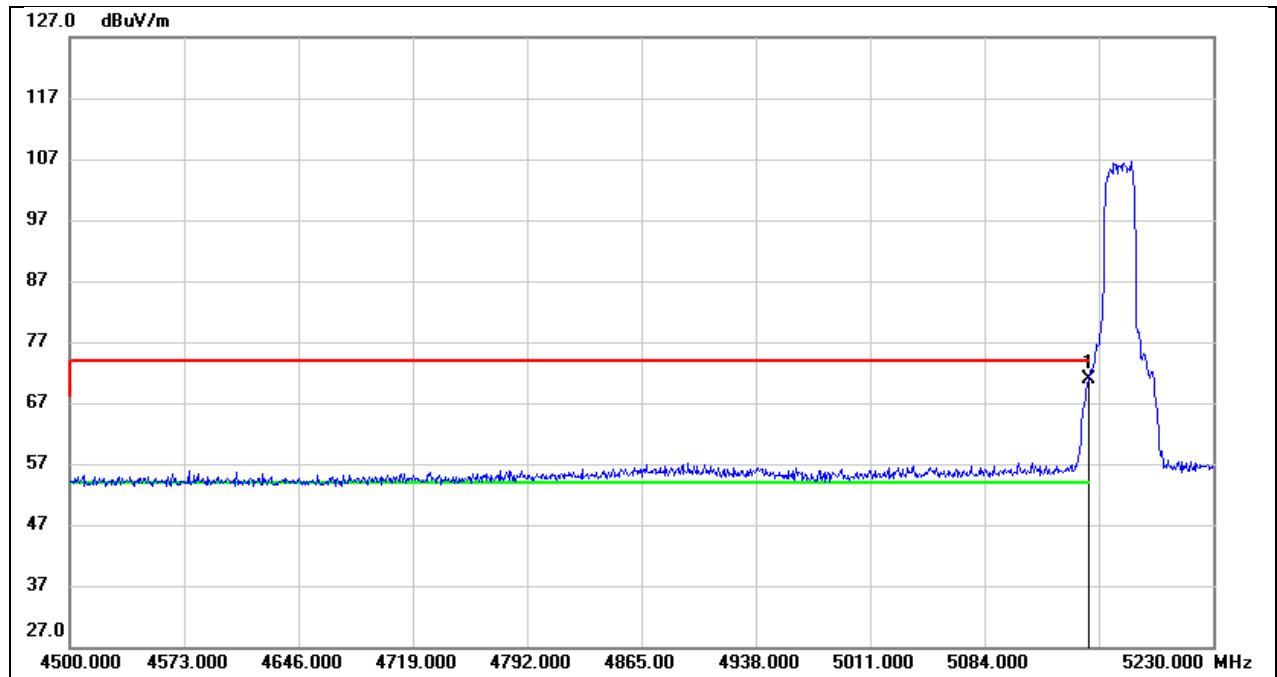


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	32.13	38.84	70.97	74.00	-3.03	peak

Test Mode:	SDR5G 20M AV	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

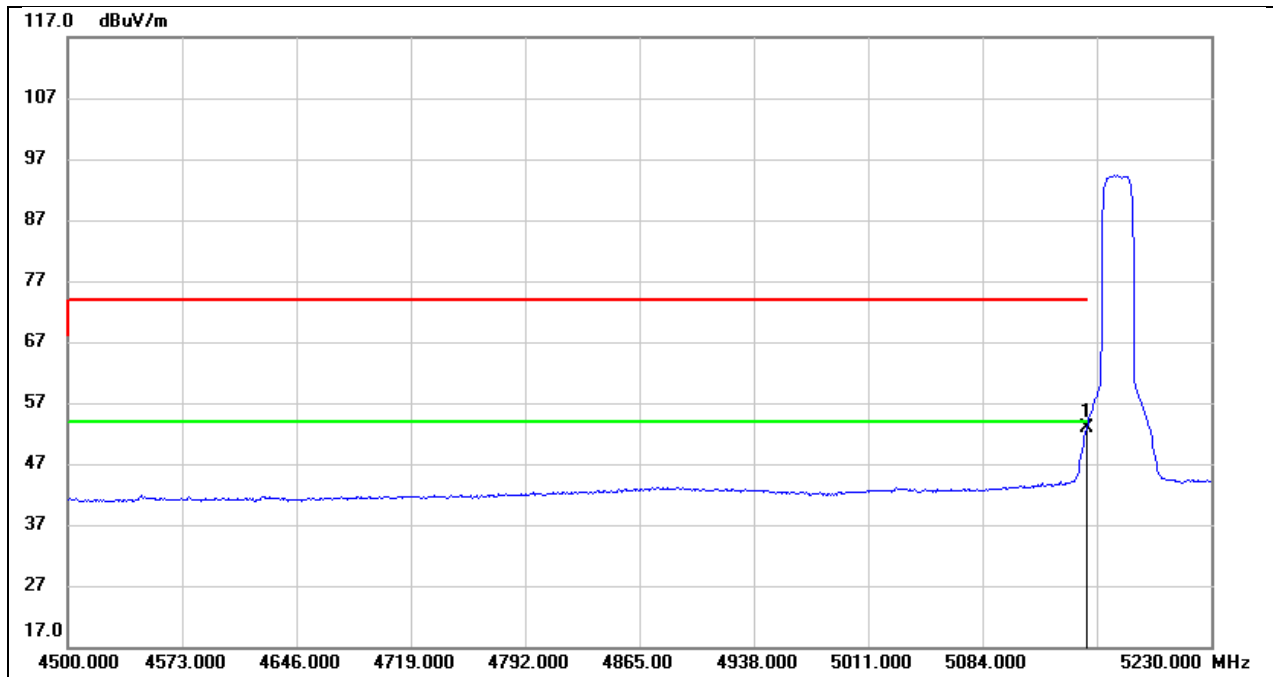


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	13.99	38.84	52.83	54.00	-1.17	AVG

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

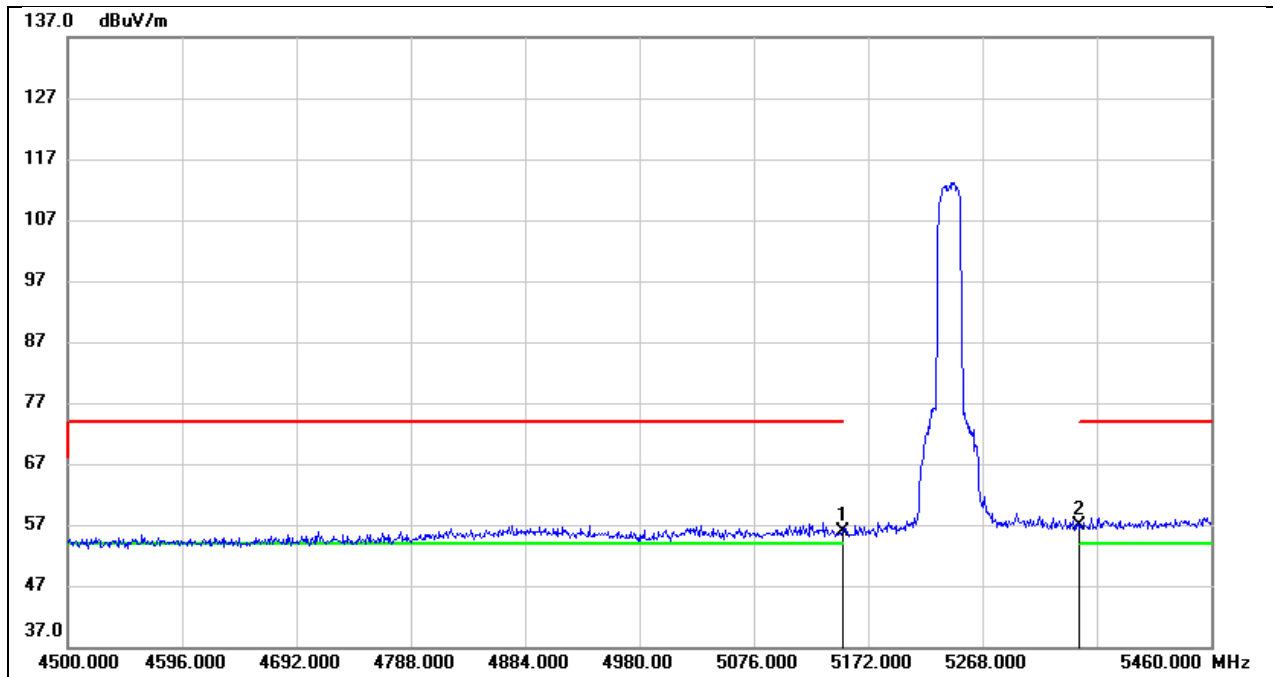


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	16.96	38.84	55.80	74.00	-18.20	peak
2	5350.000	17.61	39.29	56.90	74.00	-17.10	peak

Test Mode:	SDR5G 20M AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

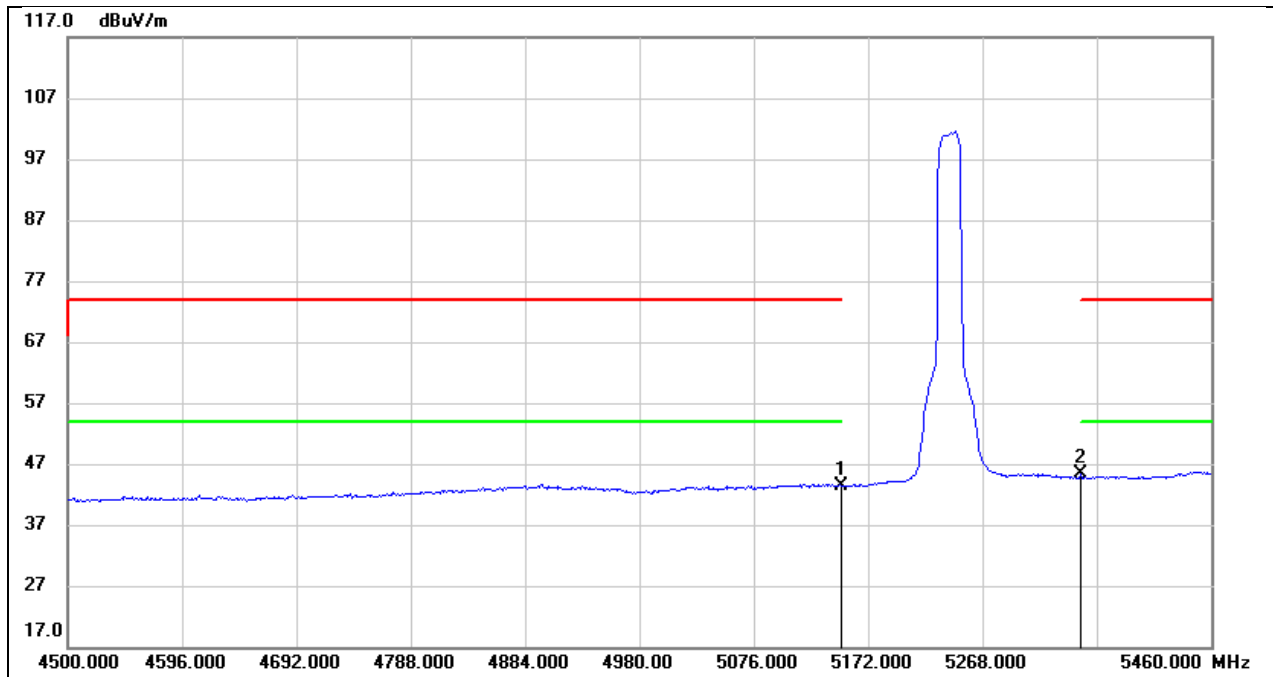


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	4.47	38.84	43.31	54.00	-10.69	AVG
2	5350.000	5.99	39.29	45.28	54.00	-8.72	AVG

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5735.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

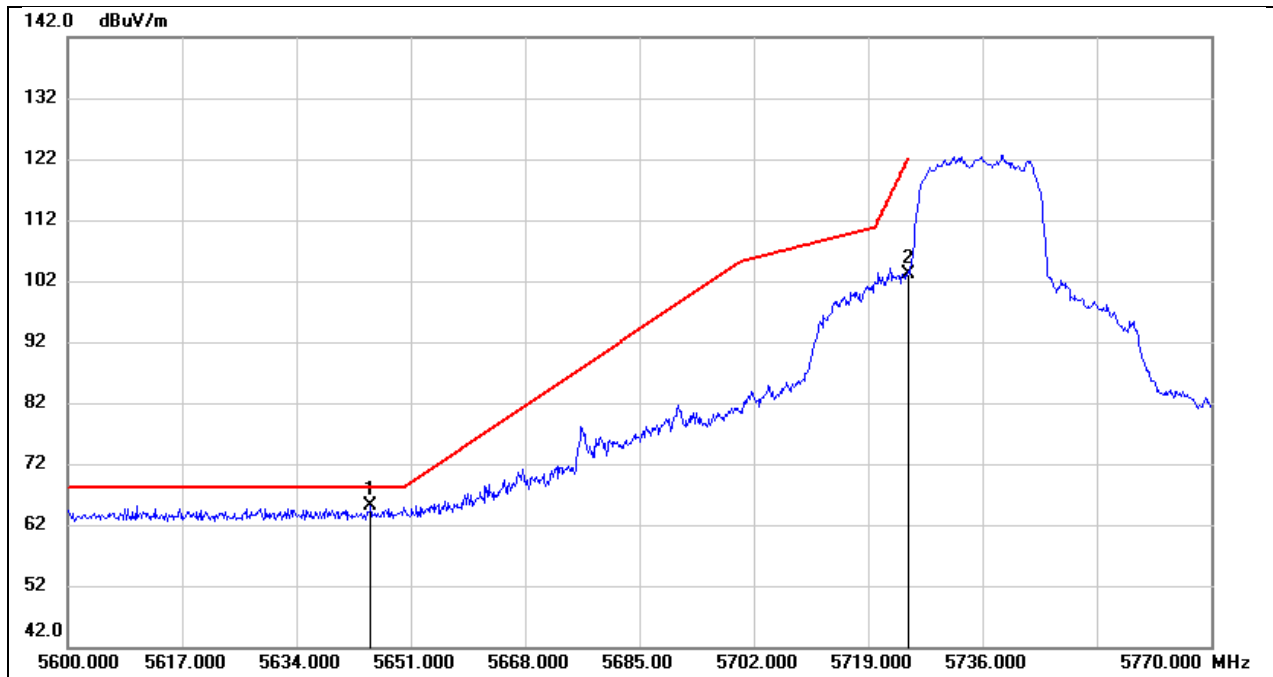


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5645.050	25.09	39.98	65.07	68.20	-3.13	peak
2	5725.000	63.10	40.09	103.19	122.20	-19.01	peak

Test Mode:	SDR5G 20M PK	Frequency(MHz):	5839.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

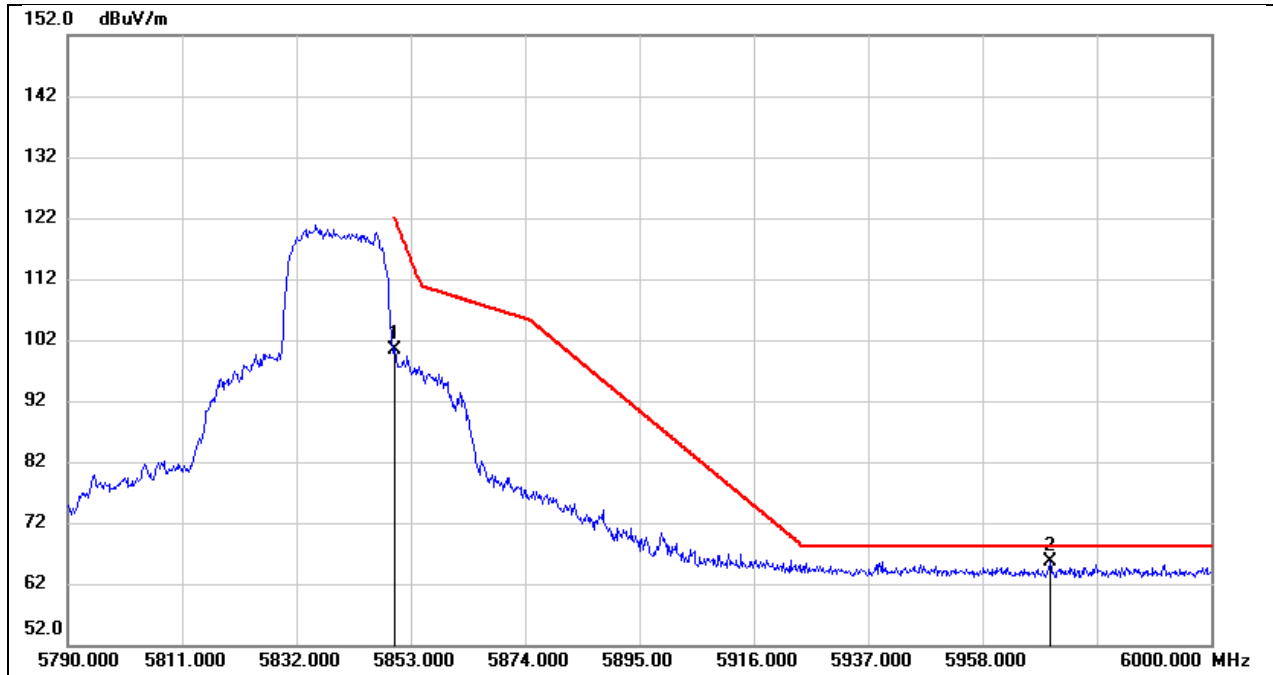


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	60.06	40.30	100.36	122.20	-21.84	peak
2	5970.390	25.08	40.58	65.66	68.20	-2.54	peak

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

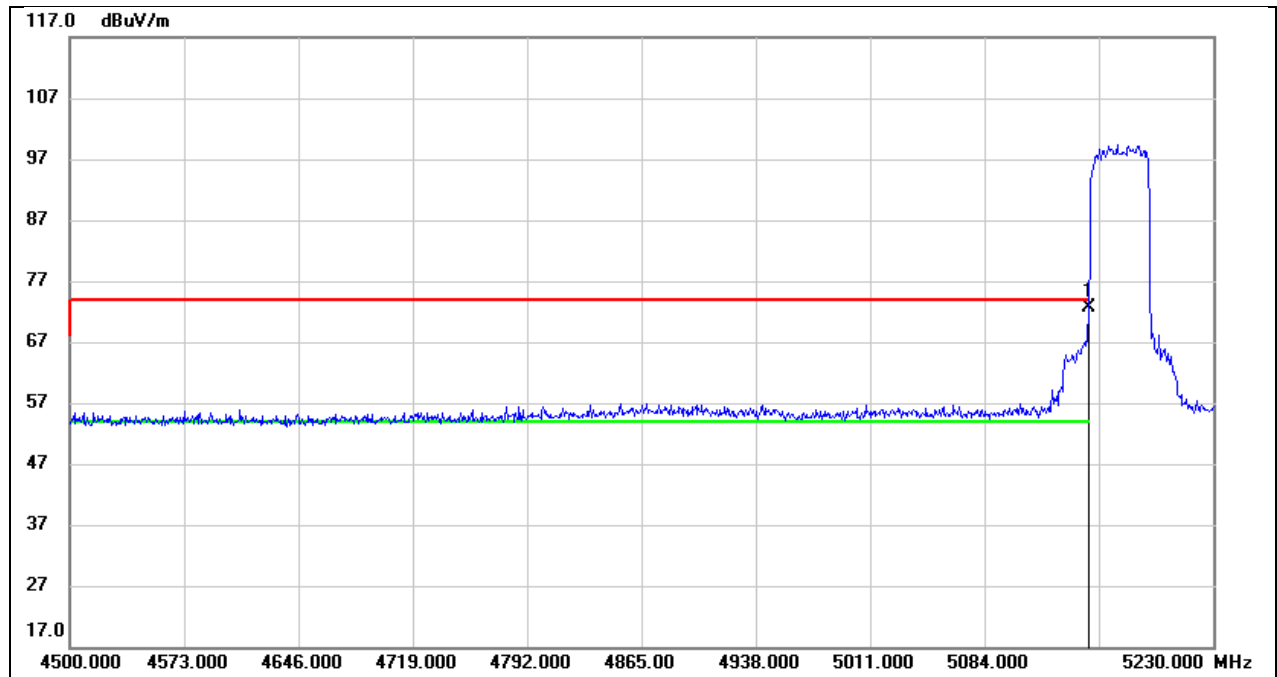


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	33.69	38.84	72.53	74.00	-1.47	peak

Test Mode:	SDR5G 40M AV	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

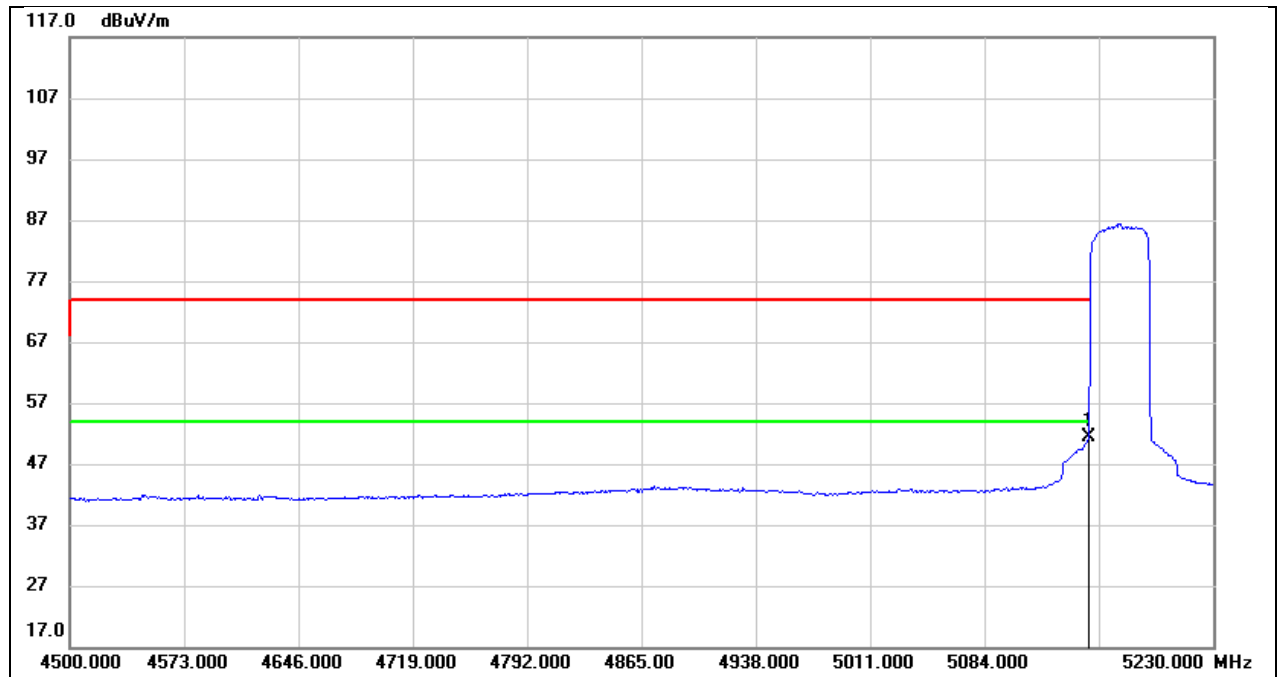


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.52	38.84	51.36	54.00	-2.64	AVG

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5178
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

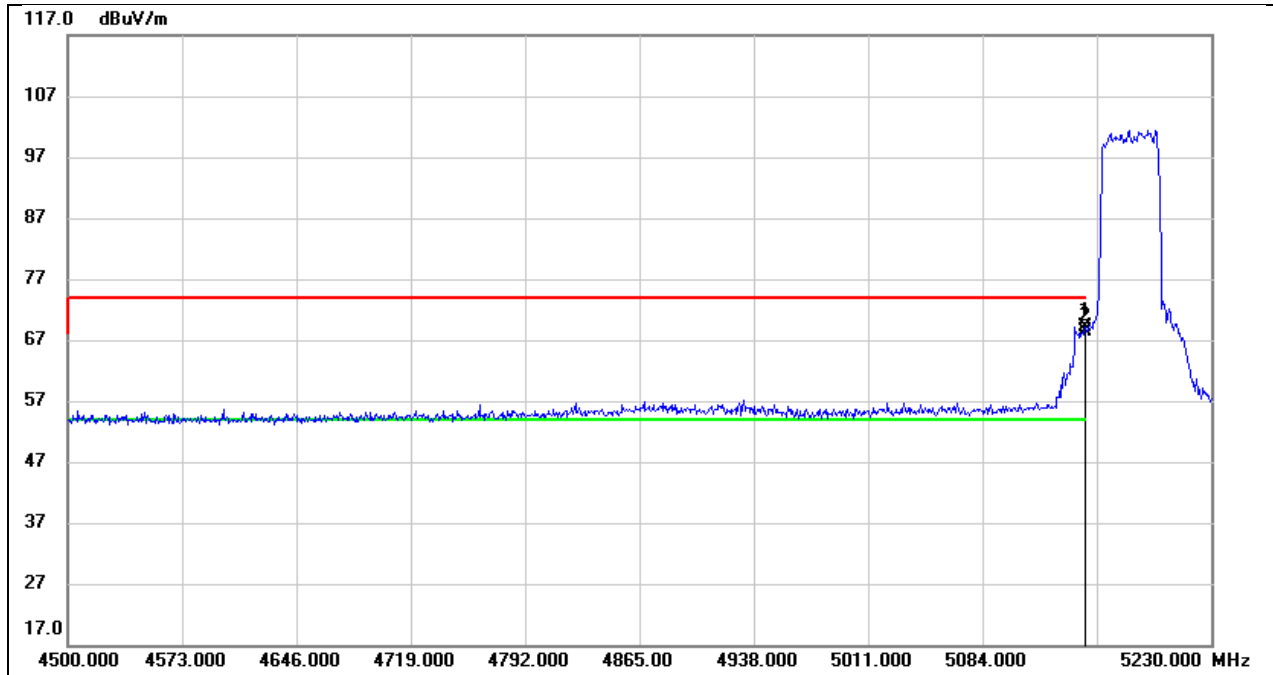


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.700	30.35	38.84	69.19	74.00	-4.81	peak
2	5150.000	29.62	38.84	68.46	74.00	-5.54	peak

Test Mode:	SDR5G 40M AV	Frequency(MHz):	5178
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

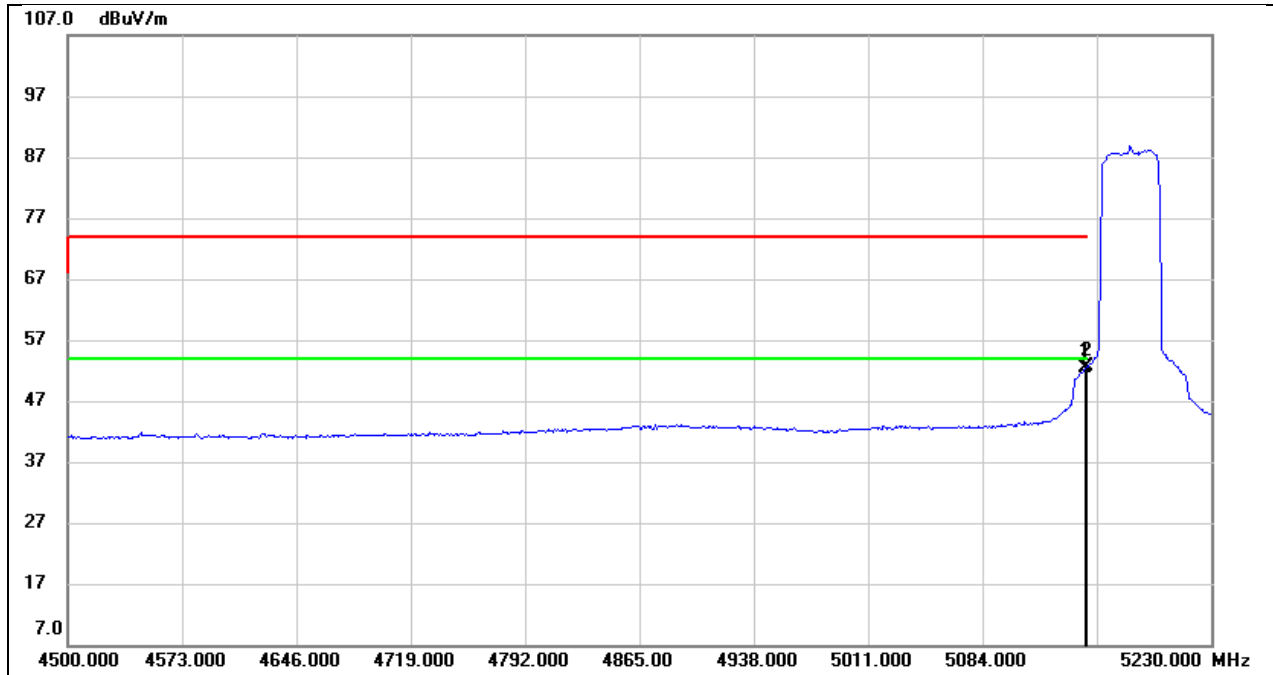


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.700	13.42	38.84	52.26	54.00	-1.74	AVG
2	5150.000	13.68	38.84	52.52	54.00	-1.48	AVG

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5188
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

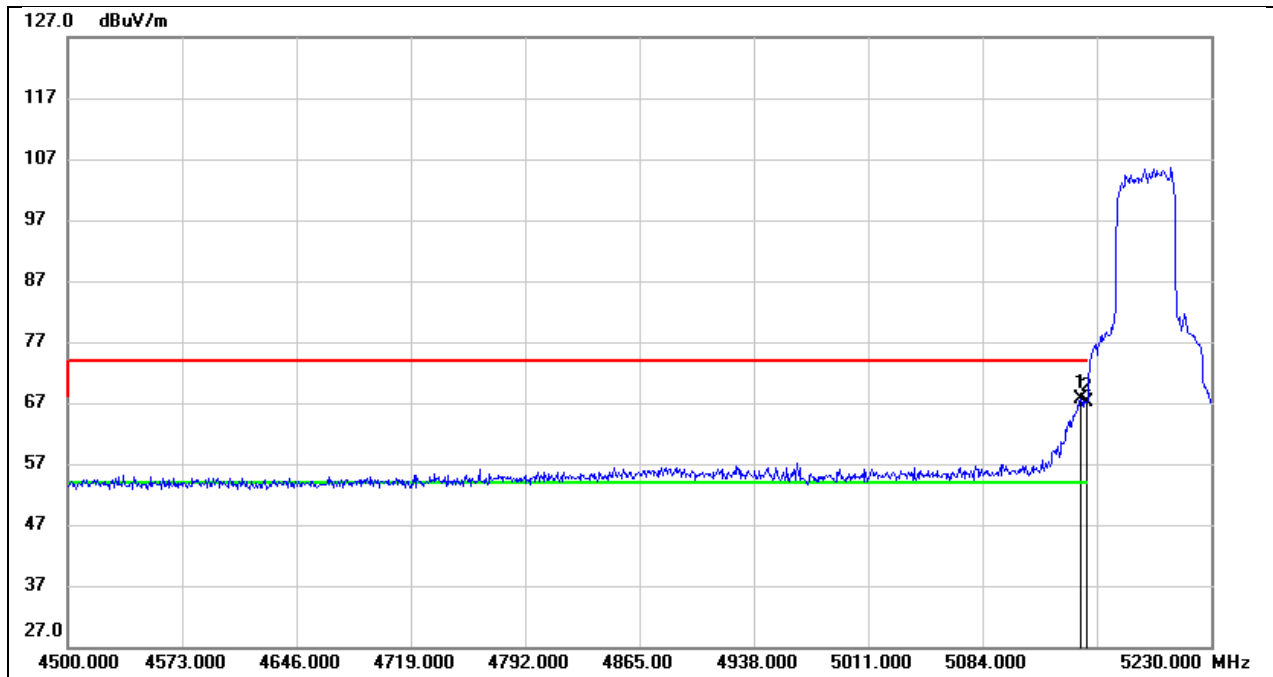


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.780	28.85	38.84	67.69	74.00	-6.31	peak
2	5150.000	28.29	38.84	67.13	74.00	-6.87	peak

Test Mode:	SDR5G 40M AV	Frequency(MHz):	5188
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

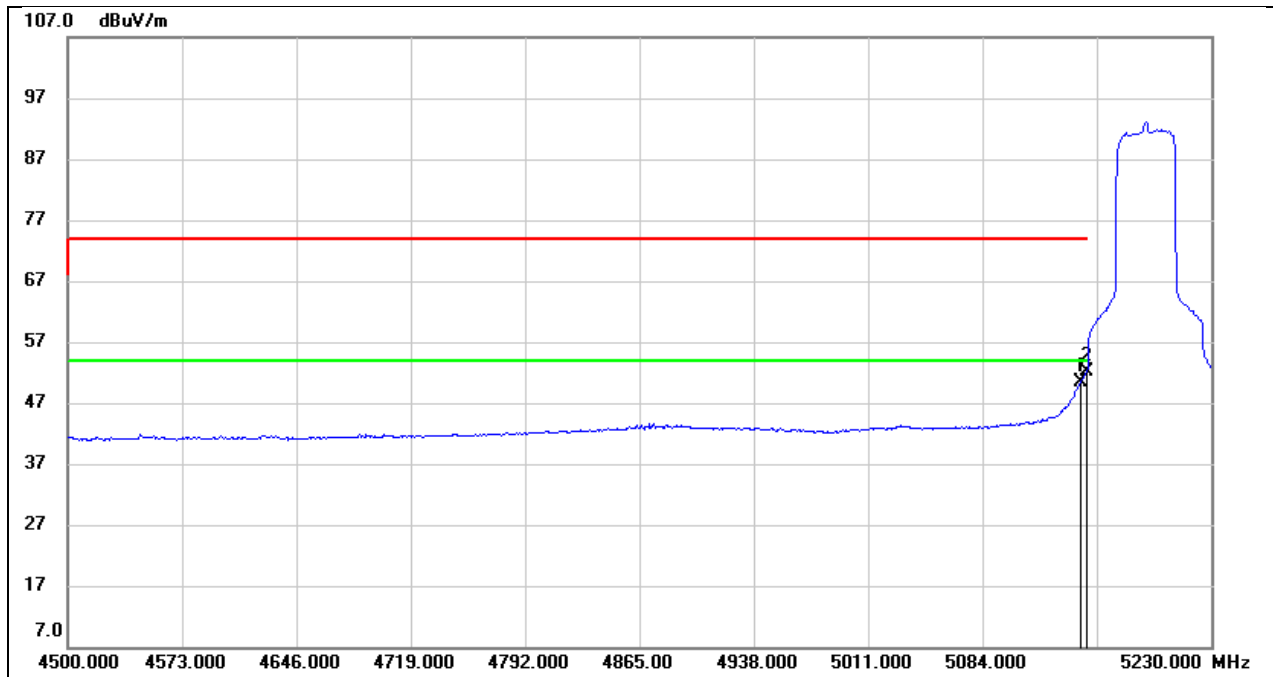


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.780	11.56	38.84	50.40	54.00	-3.60	AVG
2	5150.000	13.28	38.84	52.12	54.00	-1.88	AVG

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

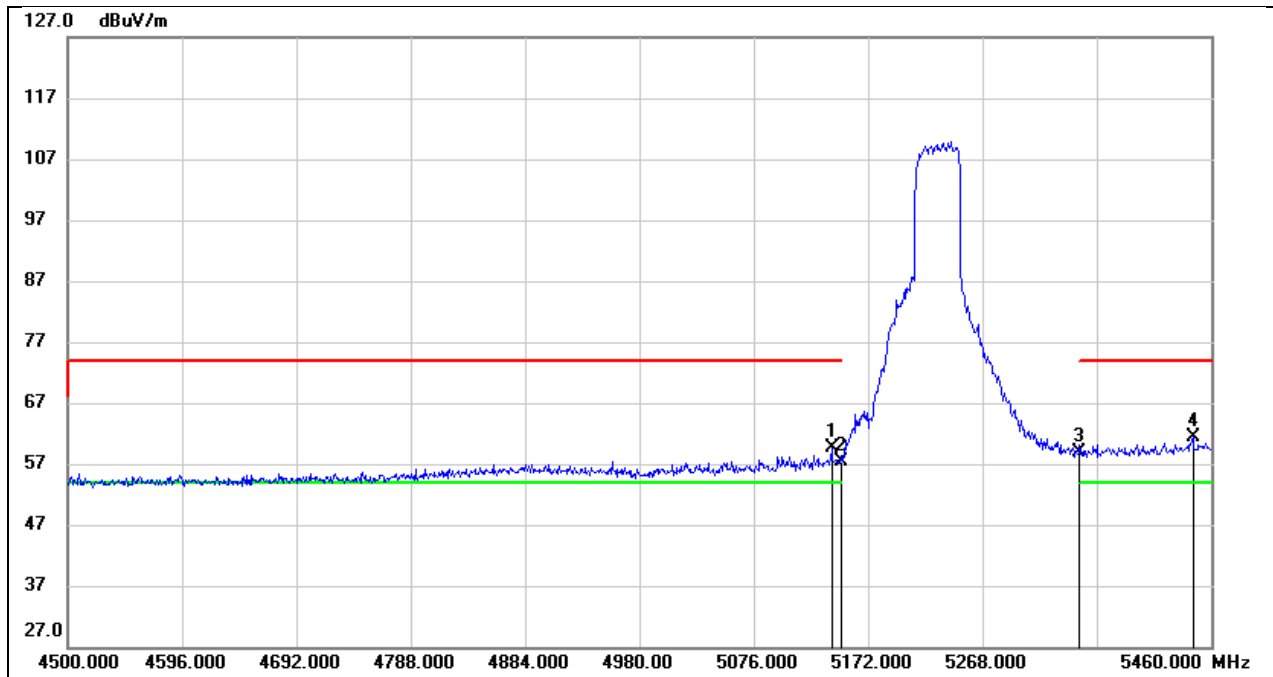


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	20.71	38.83	59.54	74.00	-14.46	peak
2	5150.000	18.63	38.84	57.47	74.00	-16.53	peak
3	5350.000	19.69	39.29	58.98	74.00	-15.02	peak
4	5444.640	21.92	39.52	61.44	74.00	-12.56	peak

Test Mode:	SDR5G 40M AV	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

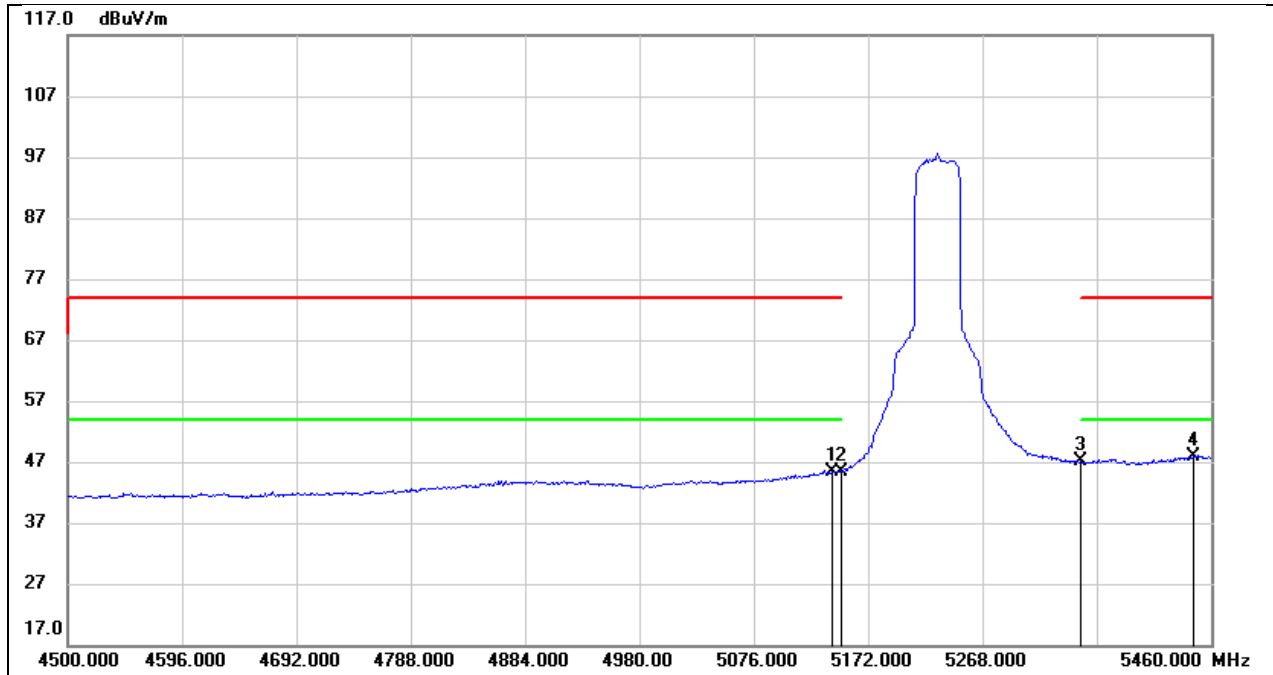


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	6.53	38.83	45.36	54.00	-8.64	AVG
2	5150.000	6.59	38.84	45.43	54.00	-8.57	AVG
3	5350.000	7.75	39.29	47.04	54.00	-6.96	AVG
4	5444.640	8.46	39.52	47.98	54.00	-6.02	AVG

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5745.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

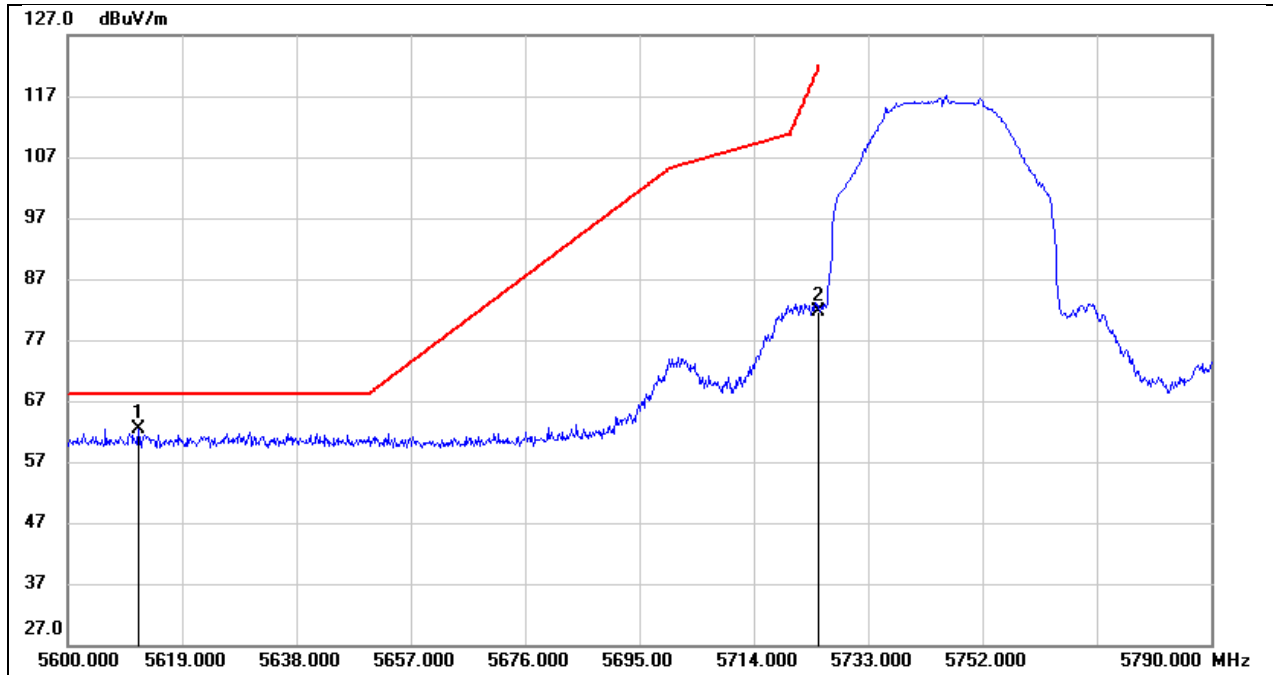


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5611.780	22.43	39.95	62.38	68.20	-5.82	peak
2	5725.000	41.43	40.09	81.52	122.20	-40.68	peak

Test Mode:	SDR5G 40M PK	Frequency(MHz):	5829.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

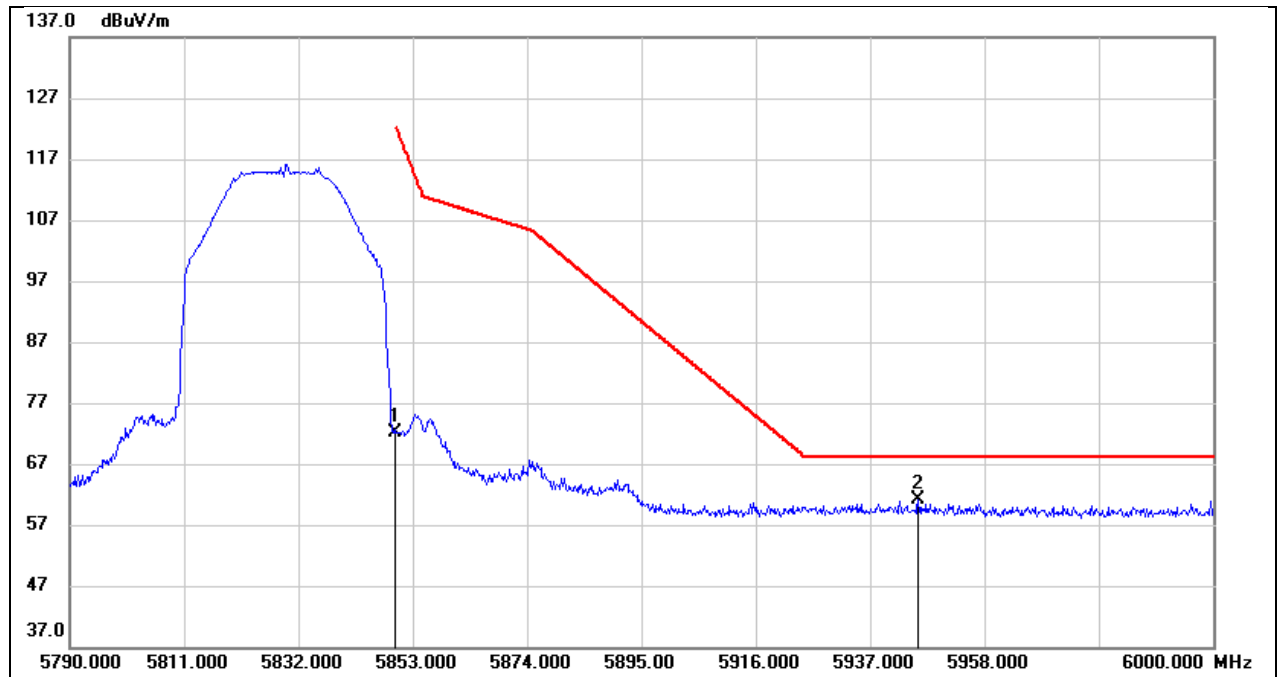


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	31.81	40.30	72.11	122.20	-50.09	peak
2	5945.820	20.58	40.52	61.10	68.20	-7.10	peak

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

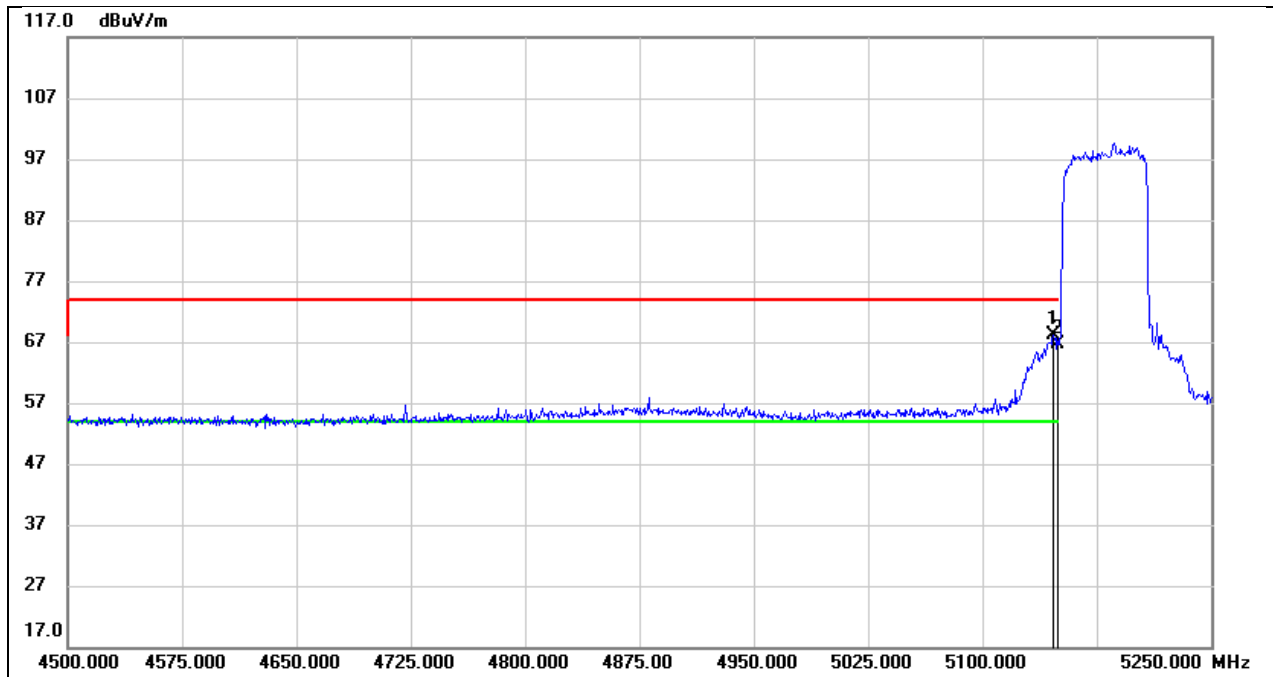


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.500	29.37	38.84	68.21	74.00	-5.79	peak
2	5150.000	27.83	38.84	66.67	74.00	-7.33	peak

Test Mode:	SDR5G 60M AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

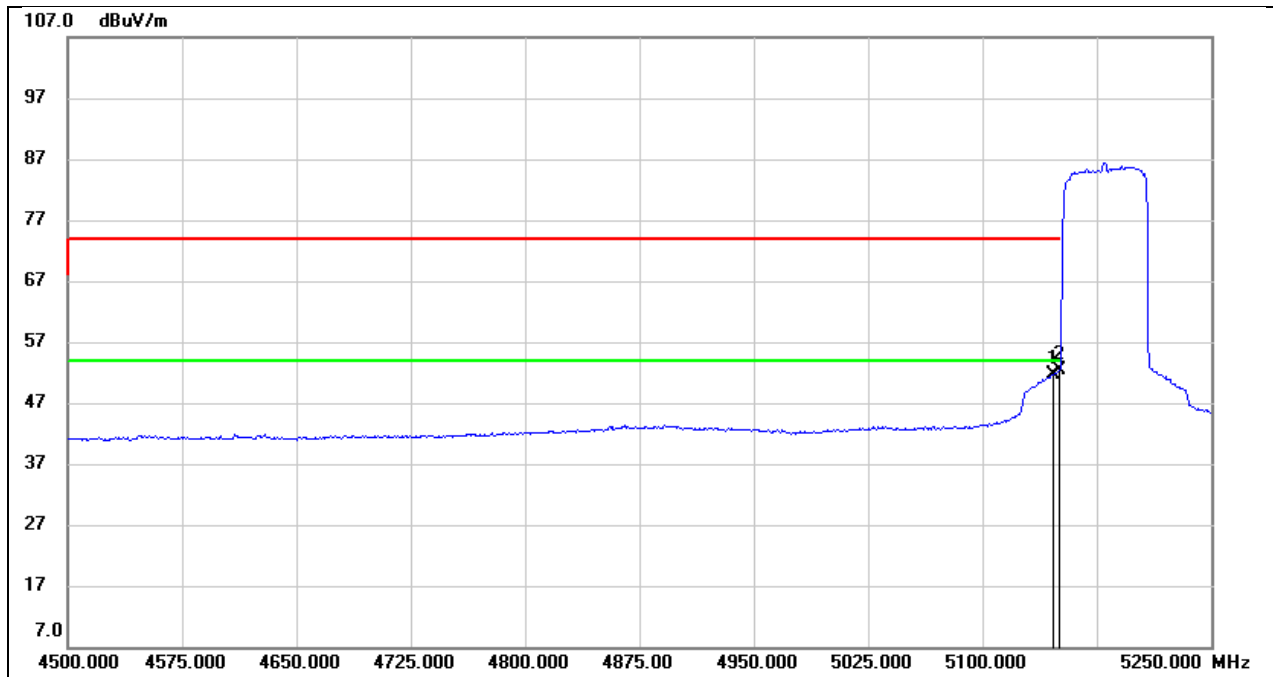


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.500	12.74	38.84	51.58	54.00	-2.42	AVG
2	5150.000	13.46	38.84	52.30	54.00	-1.70	AVG

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5188
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

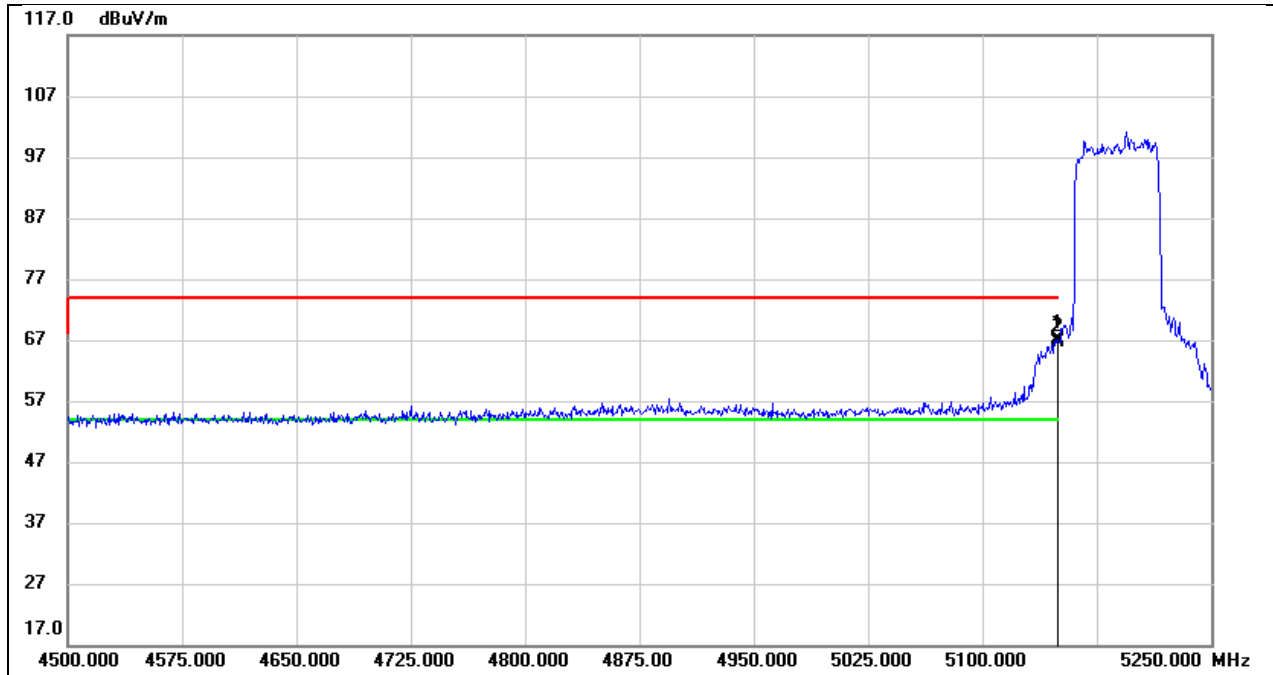


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.500	28.17	38.84	67.01	74.00	-6.99	peak
2	5150.000	27.76	38.84	66.60	74.00	-7.40	peak

Test Mode:	SDR5G 60M AV	Frequency(MHz):	5188
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

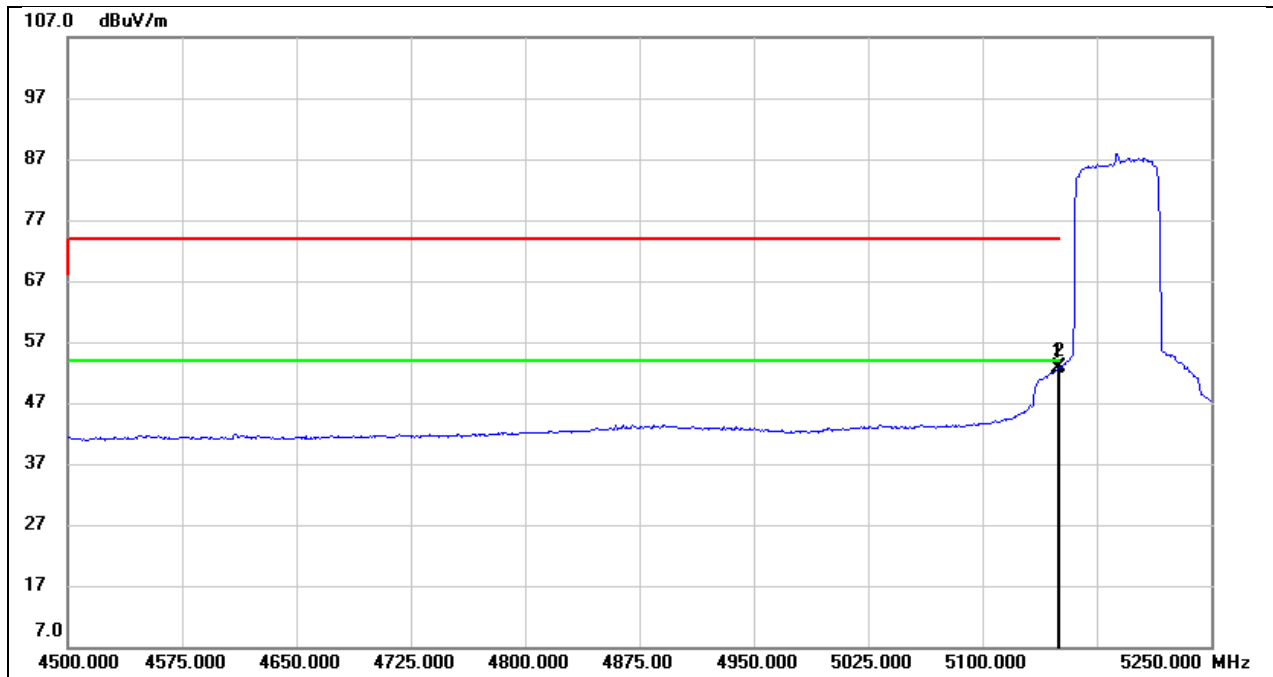


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5149.500	13.72	38.84	52.56	54.00	-1.44	AVG
2	5150.000	13.94	38.84	52.78	54.00	-1.22	AVG

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5195
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

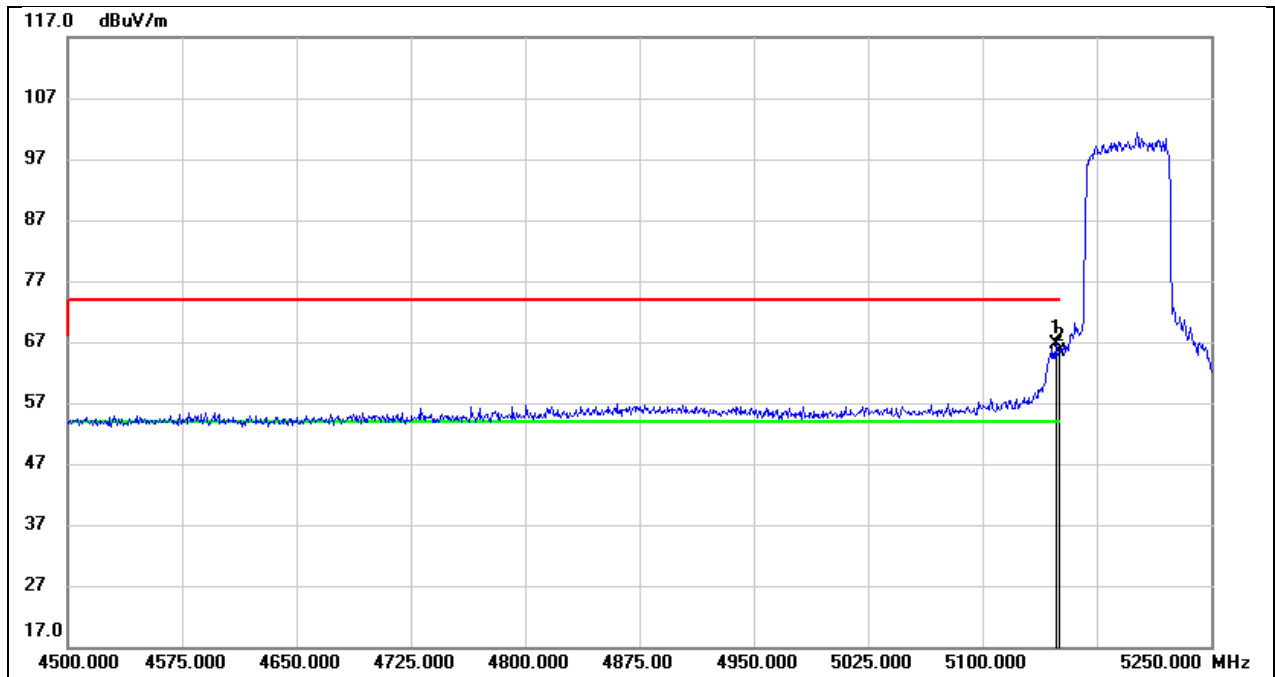


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.000	27.67	38.84	66.51	74.00	-7.49	peak
2	5150.000	26.48	38.84	65.32	74.00	-8.68	peak

Test Mode:	SDR5G 60M AV	Frequency(MHz):	5195
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

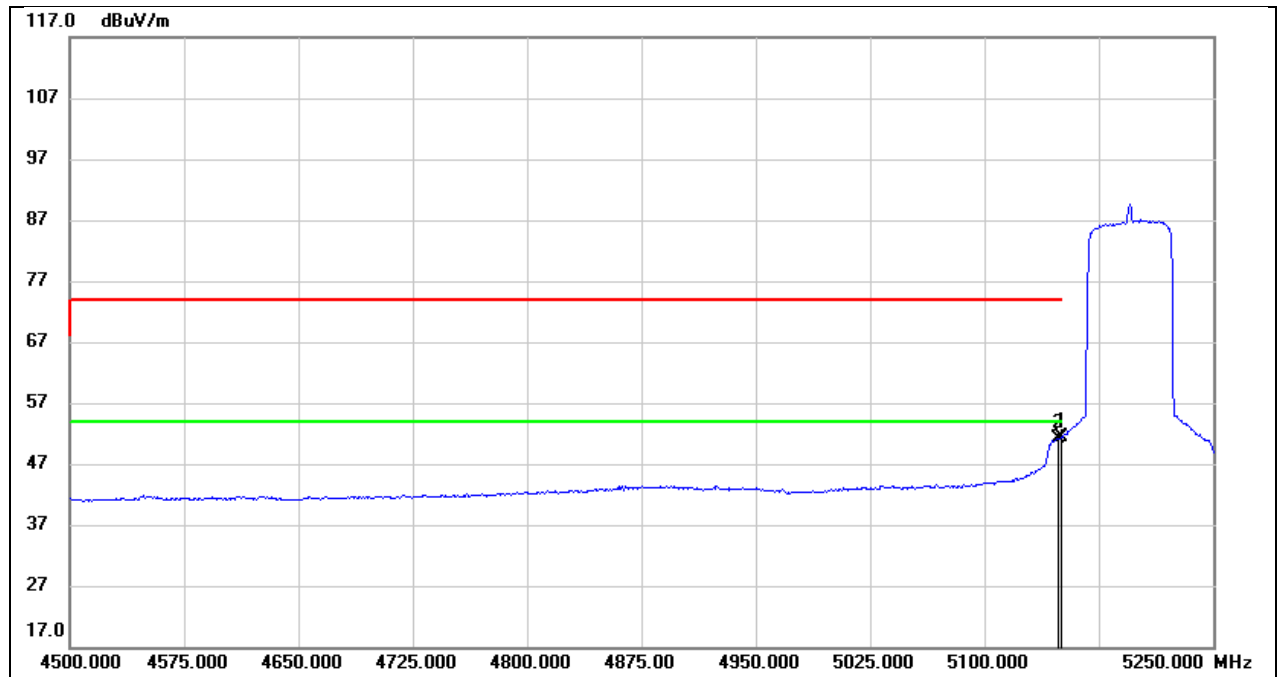


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.58	38.84	51.42	54.00	-2.58	AVG
2	5148.000	12.27	38.84	51.11	54.00	-2.89	AVG

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5220
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

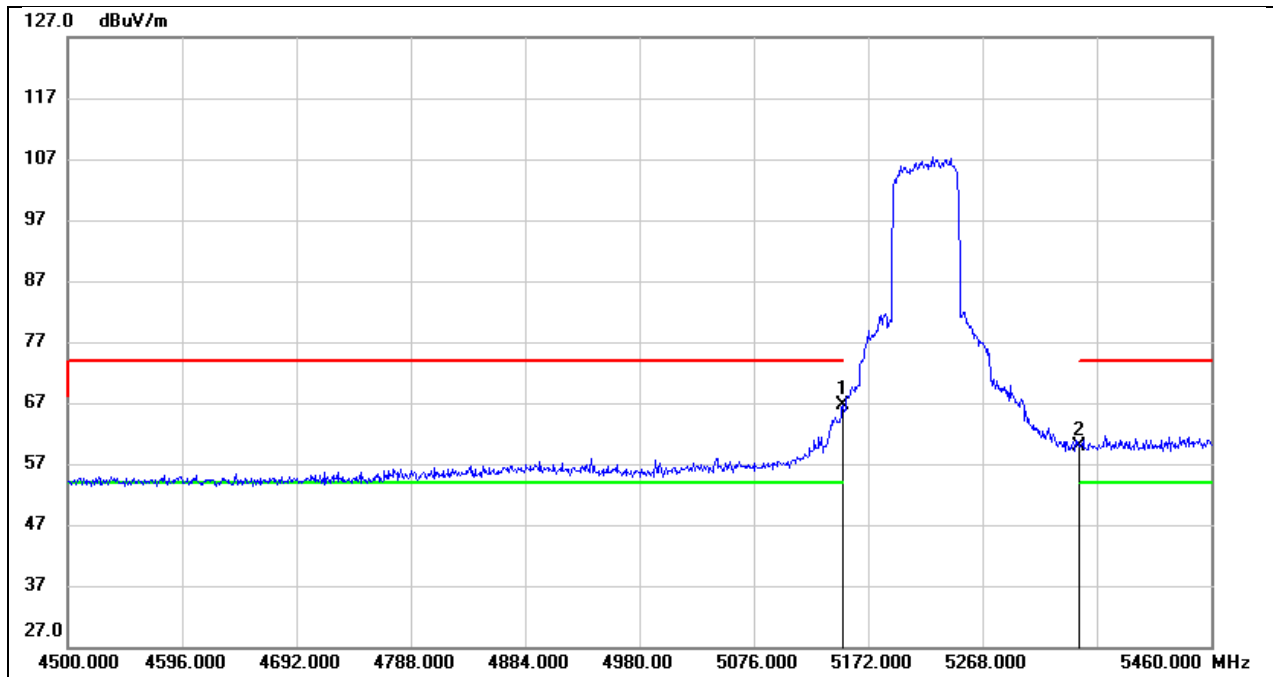


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	27.70	38.84	66.54	74.00	-7.46	peak
2	5350.000	20.57	39.29	59.86	74.00	-14.14	peak

Test Mode:	SDR5G 60M AV	Frequency(MHz):	5220
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

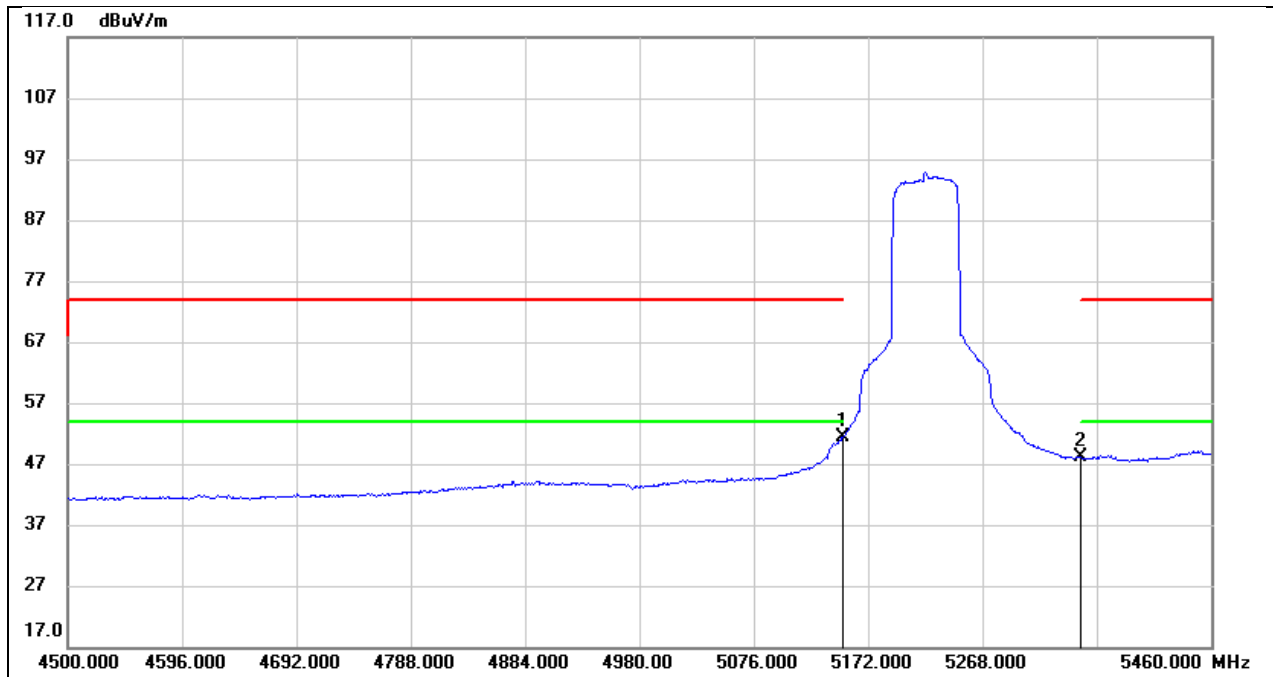


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	12.59	38.84	51.43	54.00	-2.57	AVG
2	5350.000	8.78	39.29	48.07	54.00	-5.93	AVG

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5755.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

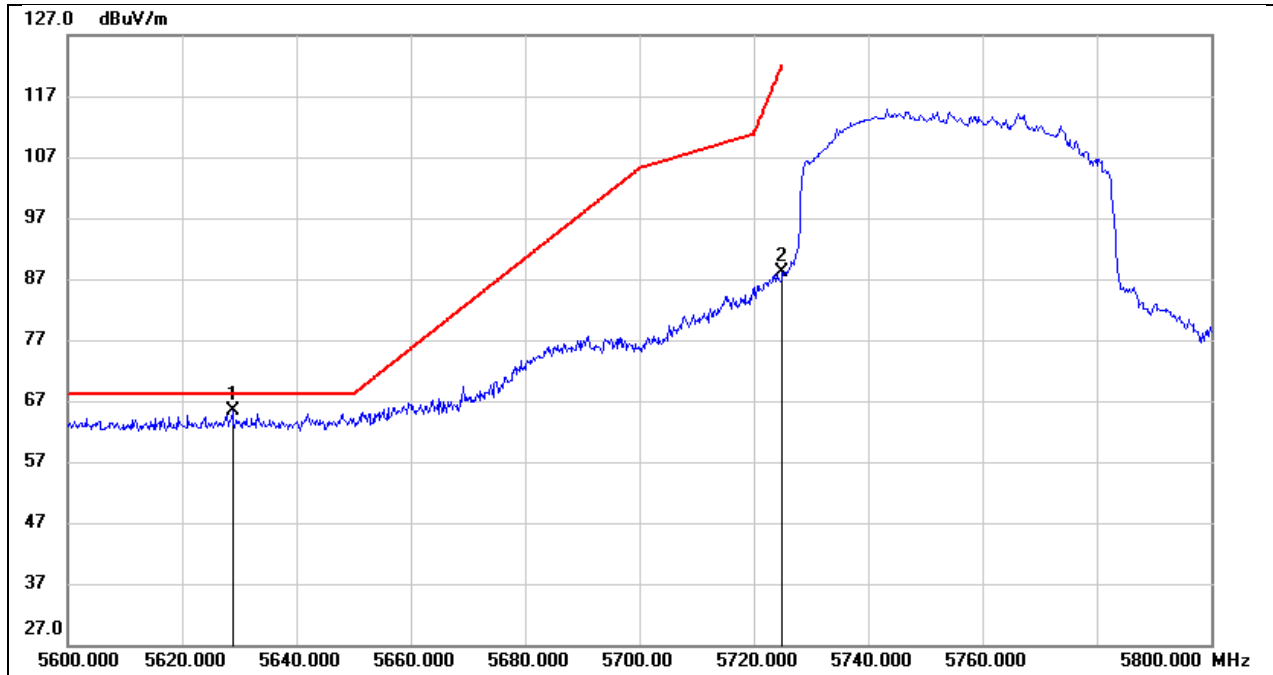


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5628.800	25.37	39.97	65.34	68.20	-2.86	peak
2	5725.000	48.10	40.09	88.19	122.20	-34.01	peak

Test Mode:	SDR5G 60M PK	Frequency(MHz):	5819.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

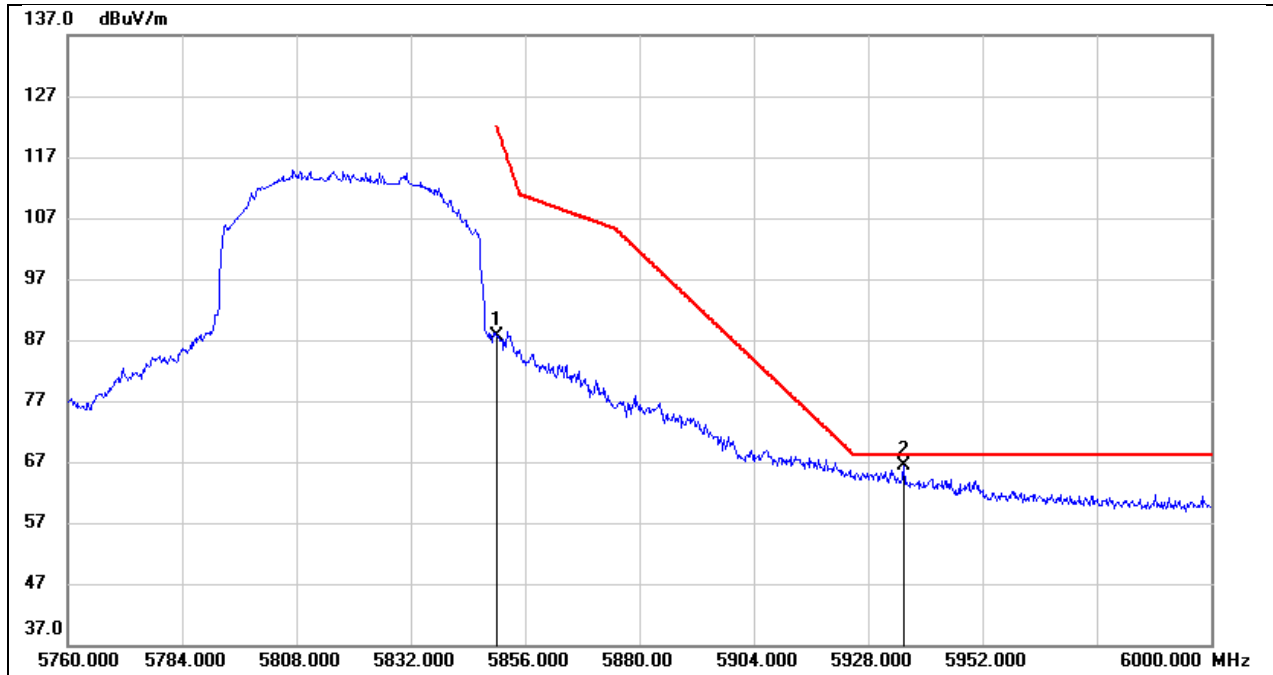


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.42	40.30	87.72	122.20	-34.48	peak
2	5935.440	25.79	40.50	66.29	68.20	-1.91	peak

Test Mode:	SDR5G 80M PK	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

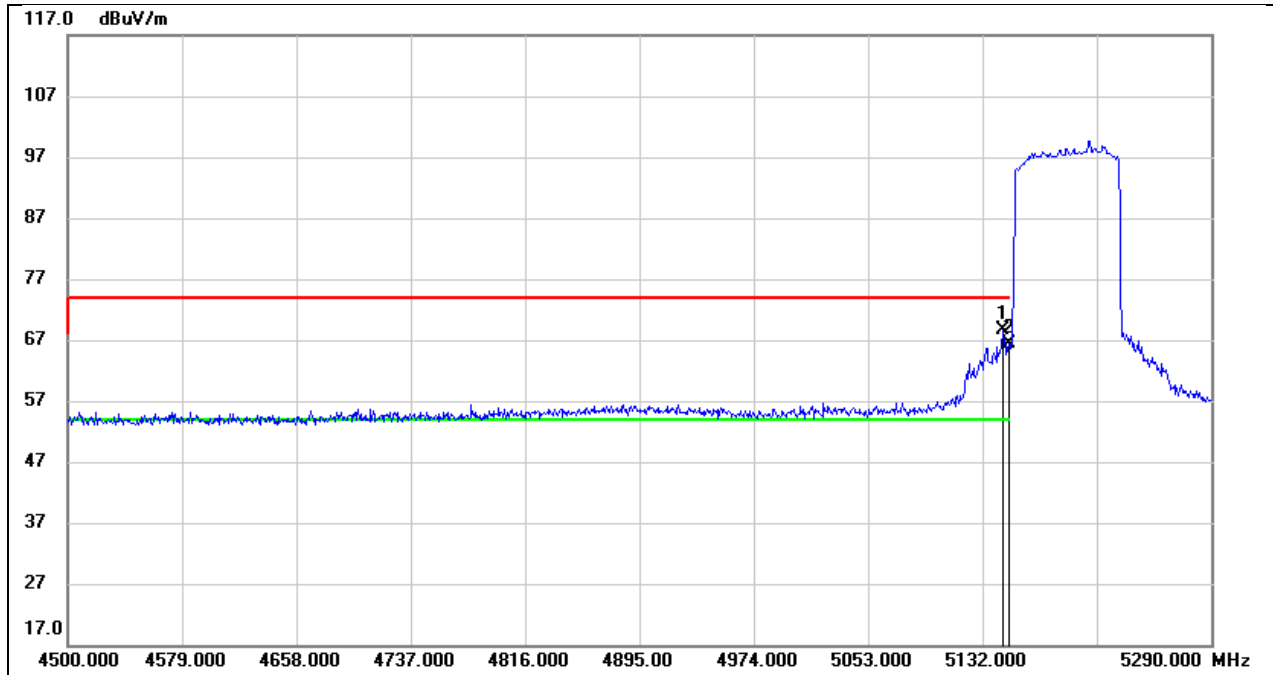


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.220	29.69	38.84	68.53	74.00	-5.47	peak
2	5150.000	27.56	38.84	66.40	74.00	-7.60	peak

Test Mode:	SDR5G 80M AV	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

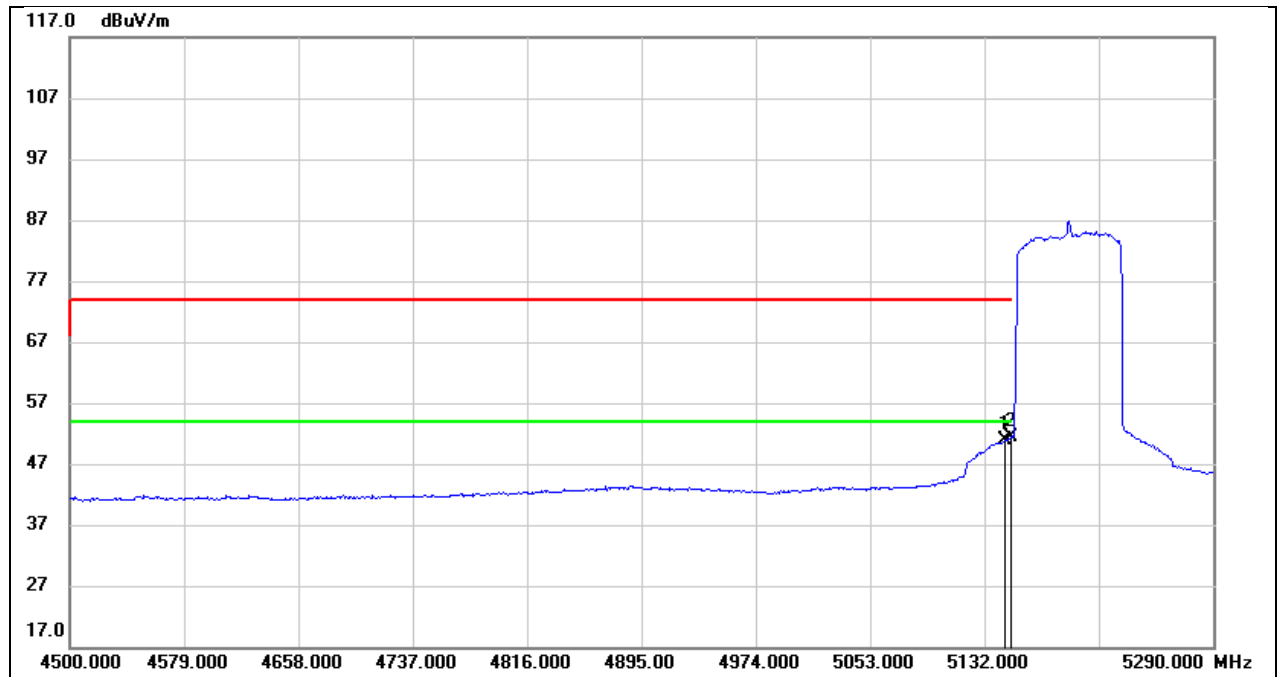


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.220	12.06	38.84	50.90	54.00	-3.10	AVG
2	5150.000	12.48	38.84	51.32	54.00	-2.68	AVG

Test Mode:	SDR5G 80M PK	Frequency(MHz):	5195
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

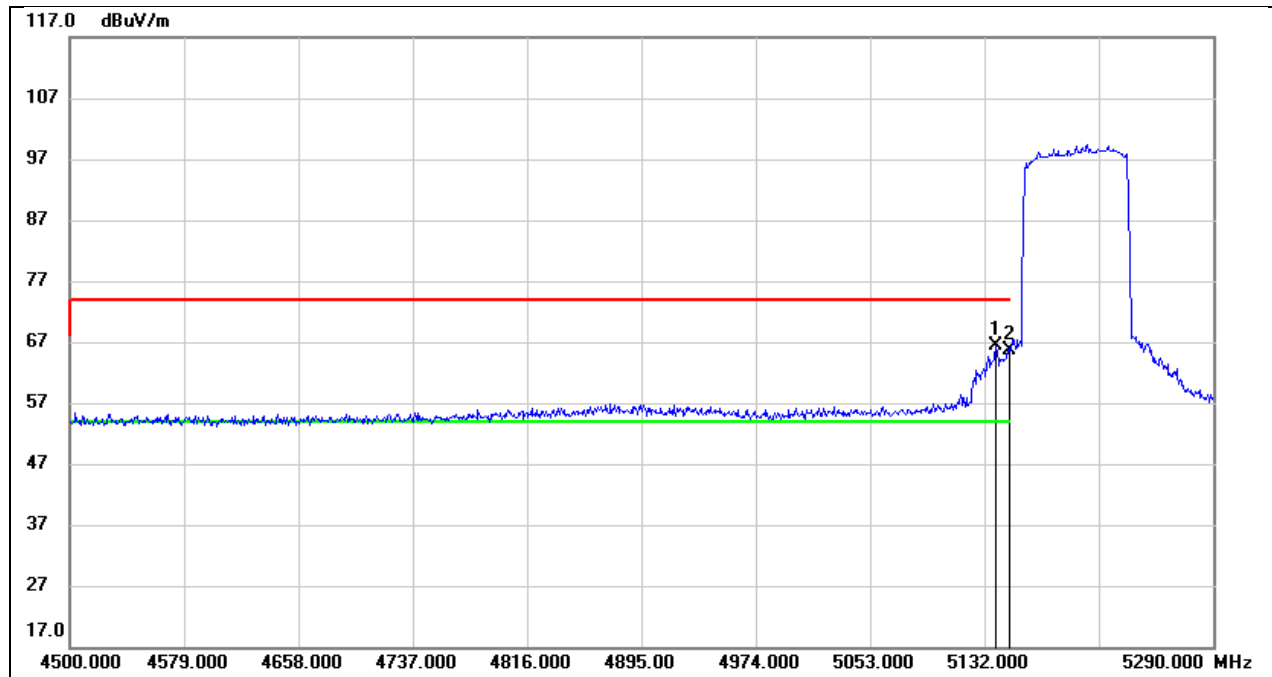


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.900	27.53	38.83	66.36	74.00	-7.64	peak
2	5150.000	26.86	38.84	65.70	74.00	-8.30	peak

Test Mode:	SDR5G 80M AV	Frequency(MHz):	5195
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

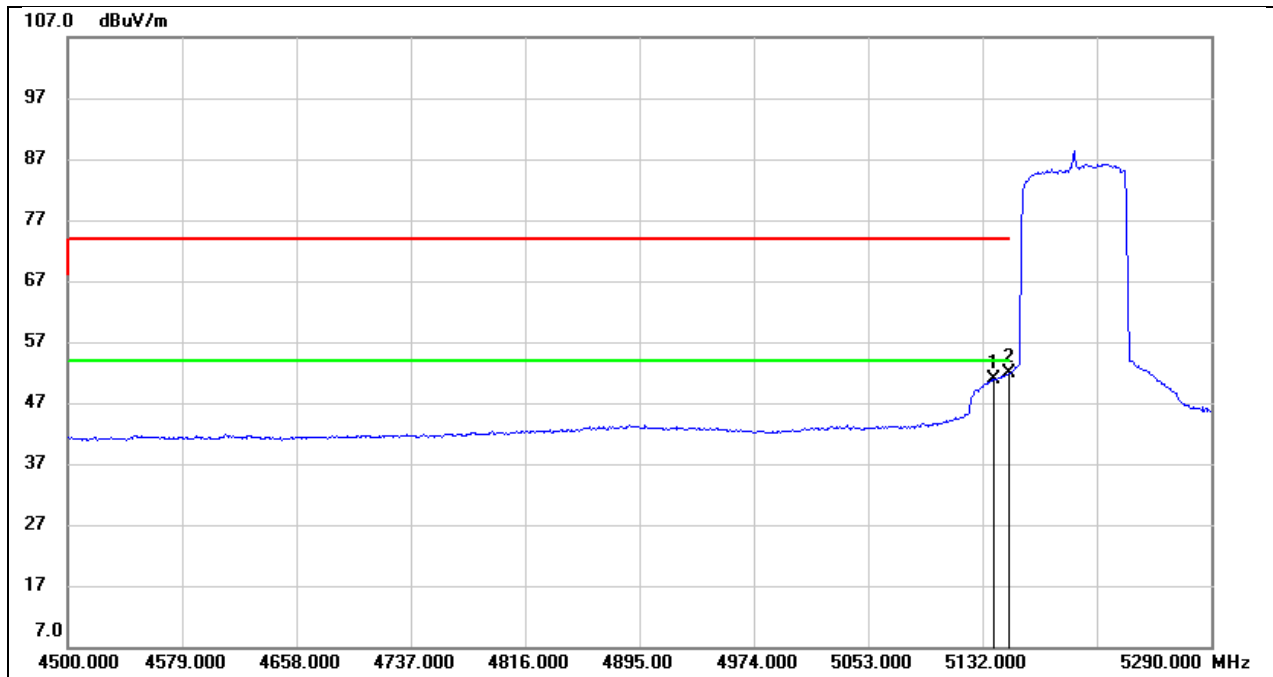


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5139.900	11.95	38.83	50.78	54.00	-3.22	AVG
2	5150.000	12.98	38.84	51.82	54.00	-2.18	AVG

Test Mode:	SDR5G 80M PK	Frequency(MHz):	5198
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

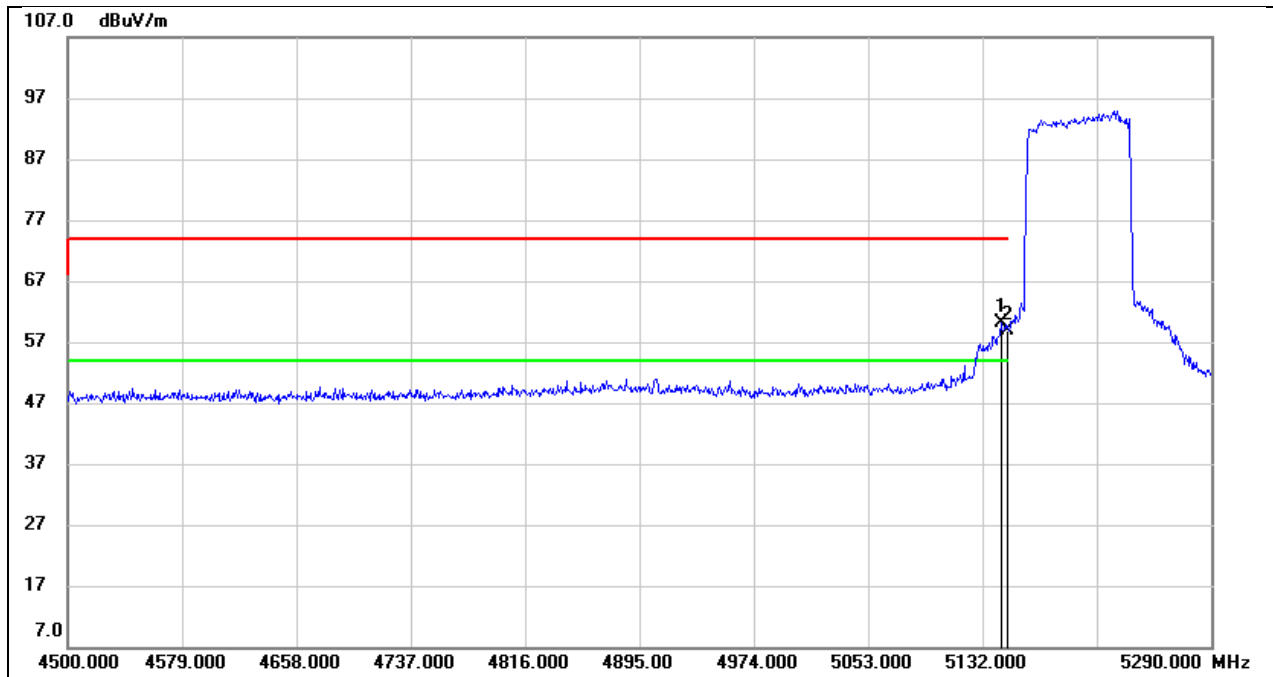


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.640	27.55	32.57	60.12	74.00	-13.88	peak
2	5150.000	26.24	32.58	58.82	74.00	-15.18	peak

Test Mode:	SDR5G 80M AV	Frequency(MHz):	5198
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

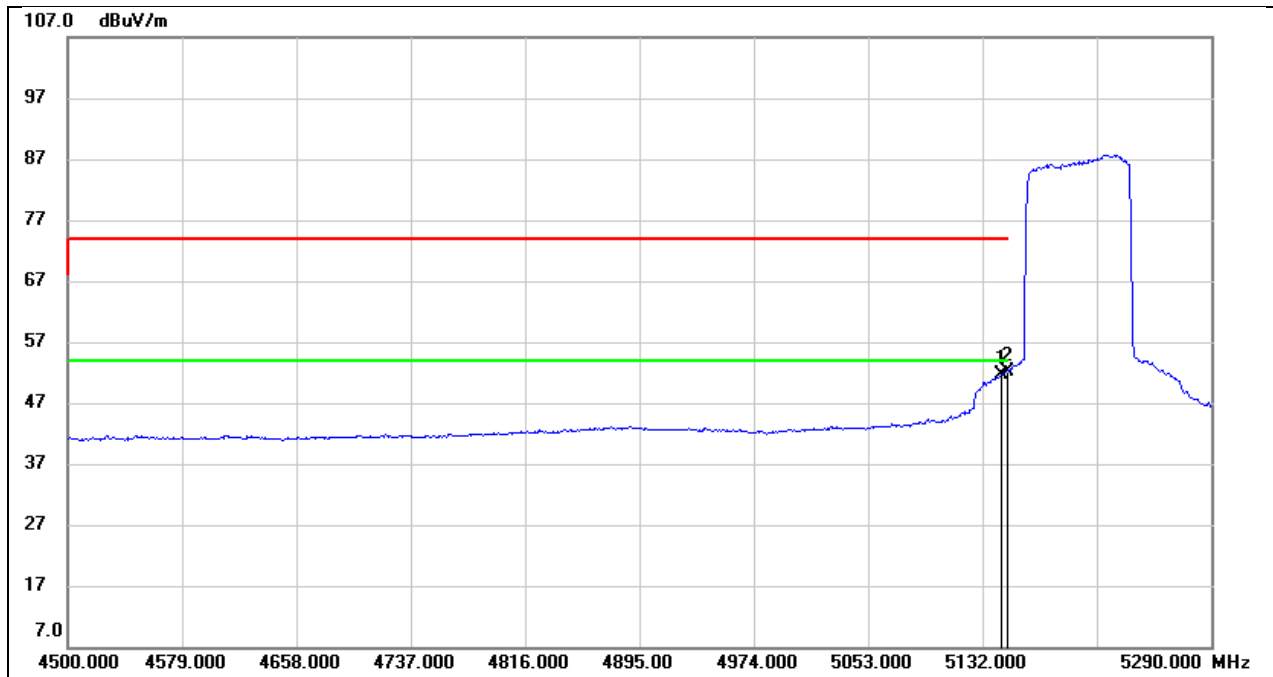


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.640	12.71	38.83	51.54	54.00	-2.46	AVG
2	5150.000	13.39	38.84	52.23	54.00	-1.77	AVG

Test Mode:	SDR5G 80M AV	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

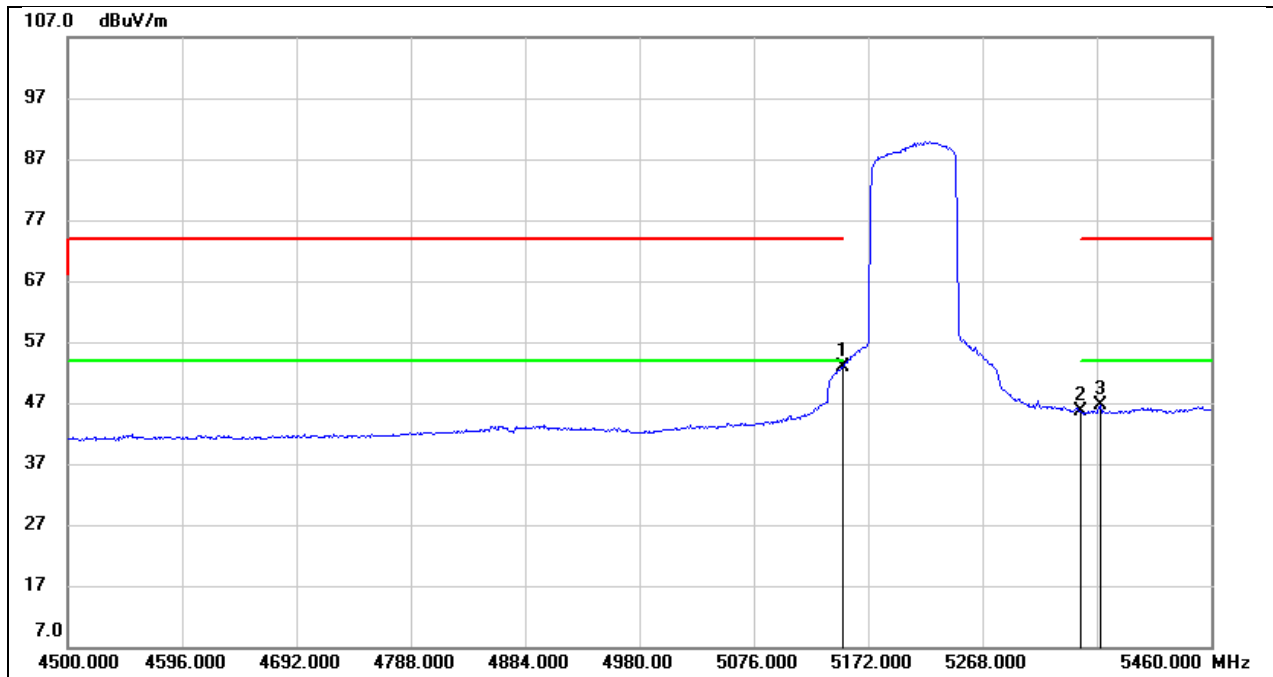


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	14.06	38.84	52.90	54.00	-1.10	AVG
2	5350.000	6.33	39.29	45.62	54.00	-8.38	AVG
3	5366.880	7.19	39.34	46.53	54.00	-7.47	AVG

Test Mode:	SDR5G 80M PK	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

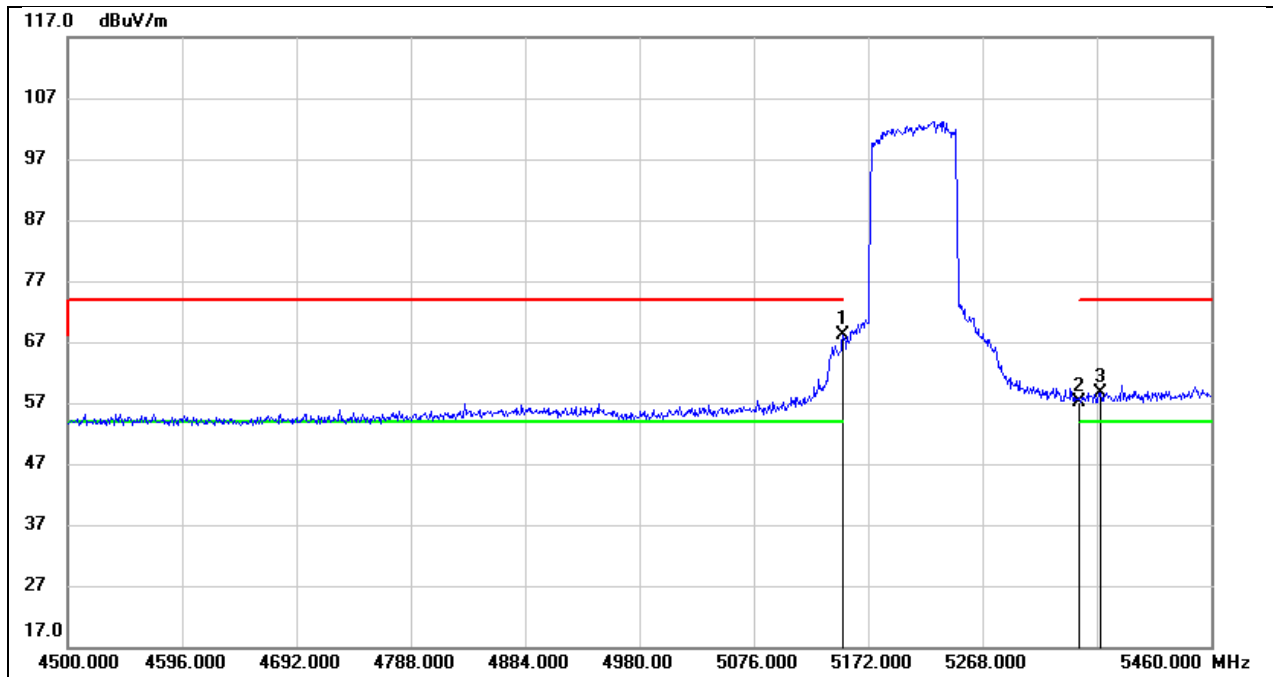


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	29.18	38.84	68.02	74.00	-5.98	peak
2	5350.000	17.86	39.29	57.15	74.00	-16.85	peak
3	5366.880	19.32	39.34	58.66	74.00	-15.34	peak

Test Mode:	SDR5G 80M PK	Frequency(MHz):	5765.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

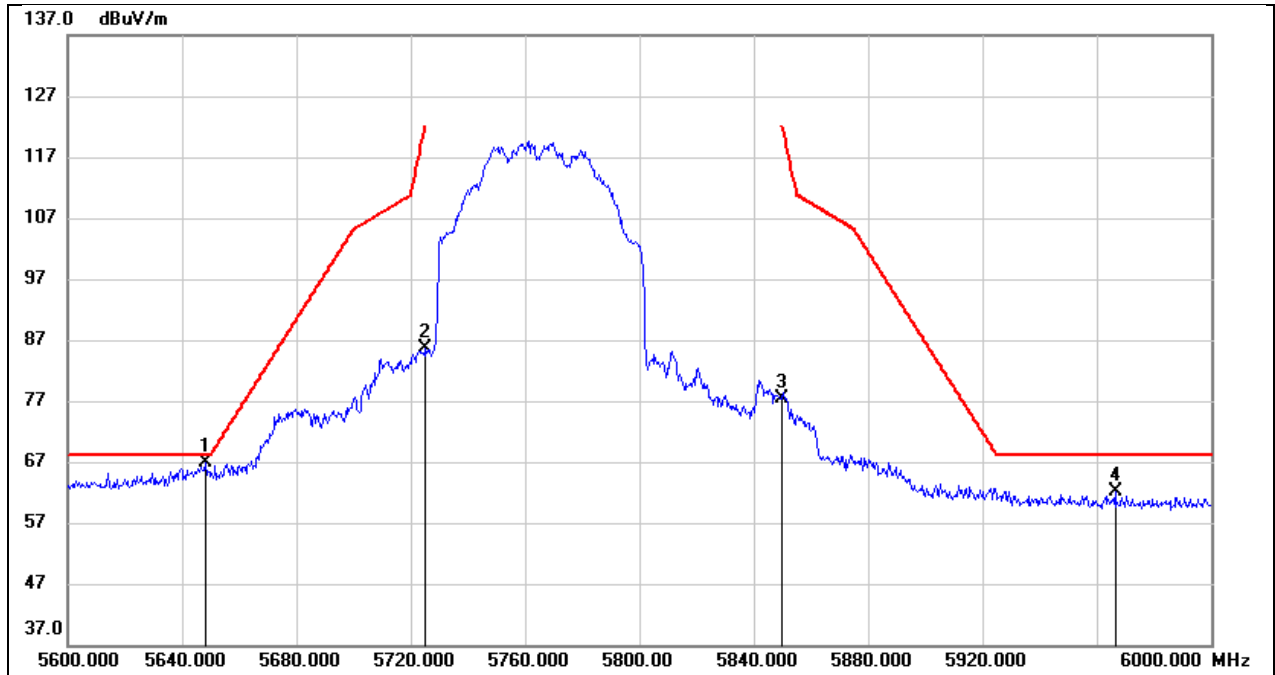

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5648.400	26.95	39.99	66.94	68.20	-1.26	peak
2	5725.000	45.65	40.09	85.74	122.20	-36.46	peak
3	5850.000	37.18	40.30	77.48	122.20	-44.72	peak
4	5966.400	21.64	40.57	62.21	68.20	-5.99	peak


Test Mode:	SDR5G 80M PK	Frequency(MHz):	5809.5
Polarity:	Horizontal	Test Voltage:	DC 17.0 V

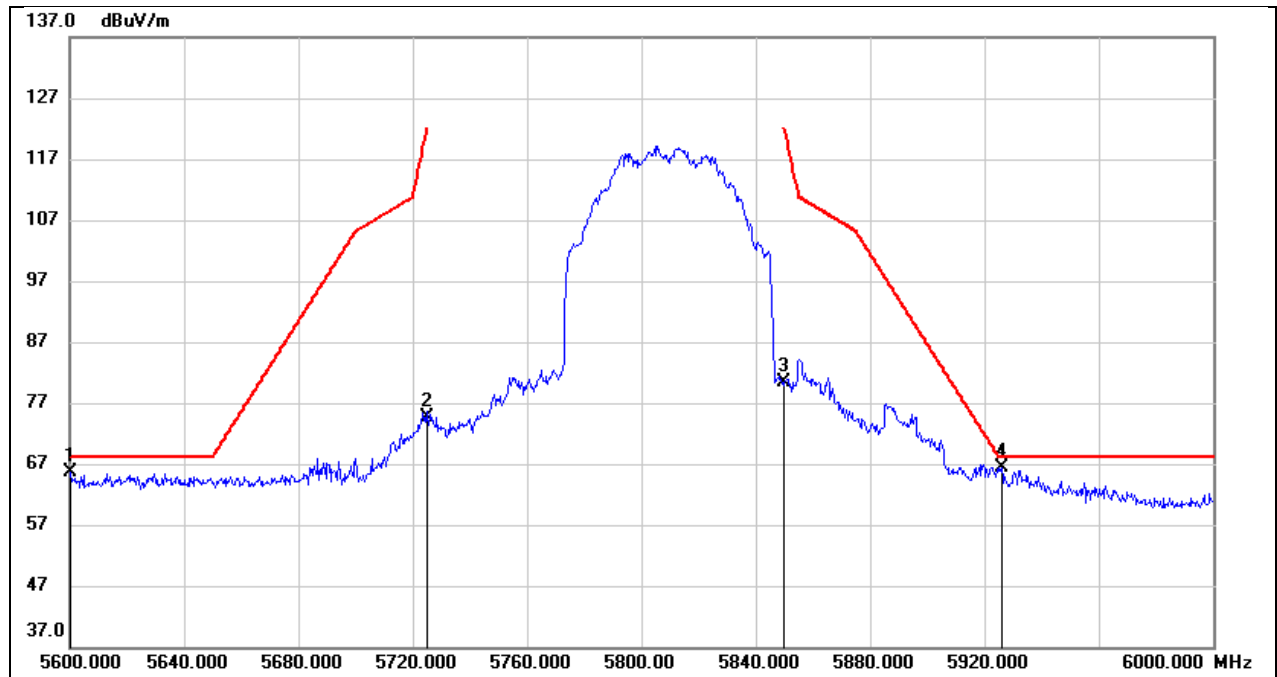

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.400	25.70	39.93	65.63	68.20	-2.57	peak
2	5725.000	34.63	40.09	74.72	122.20	-47.48	peak
3	5850.000	40.18	40.30	80.48	122.20	-41.72	peak
4	5926.000	25.82	40.47	66.29	68.20	-1.91	peak


8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

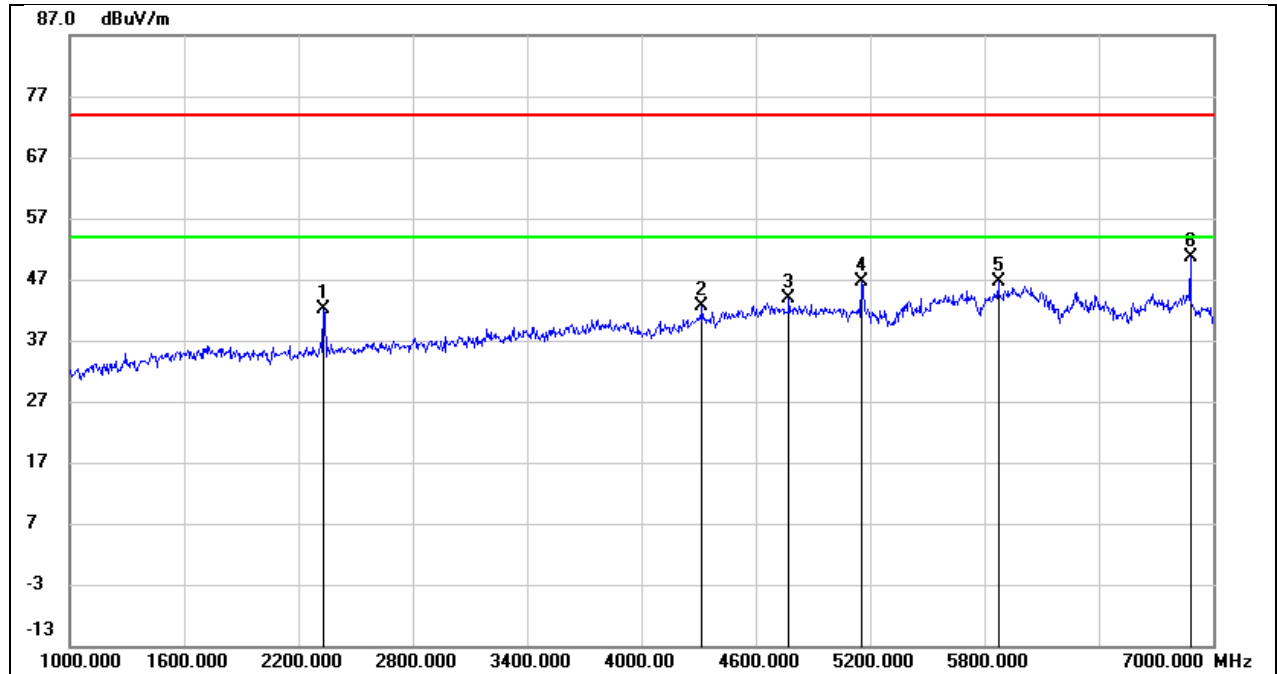


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	50.96	-8.82	42.14	74.00	-31.86	peak
2	4318.000	44.01	-1.35	42.66	74.00	-31.34	peak
3	4774.000	42.96	0.88	43.84	74.00	-30.16	peak
4	5157.000	44.45	2.18	46.63	\	\	fundamental
5	5872.000	41.50	5.03	46.53	74.00	-27.47	peak
6	6880.000	43.90	6.65	50.55	74.00	-23.45	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0V

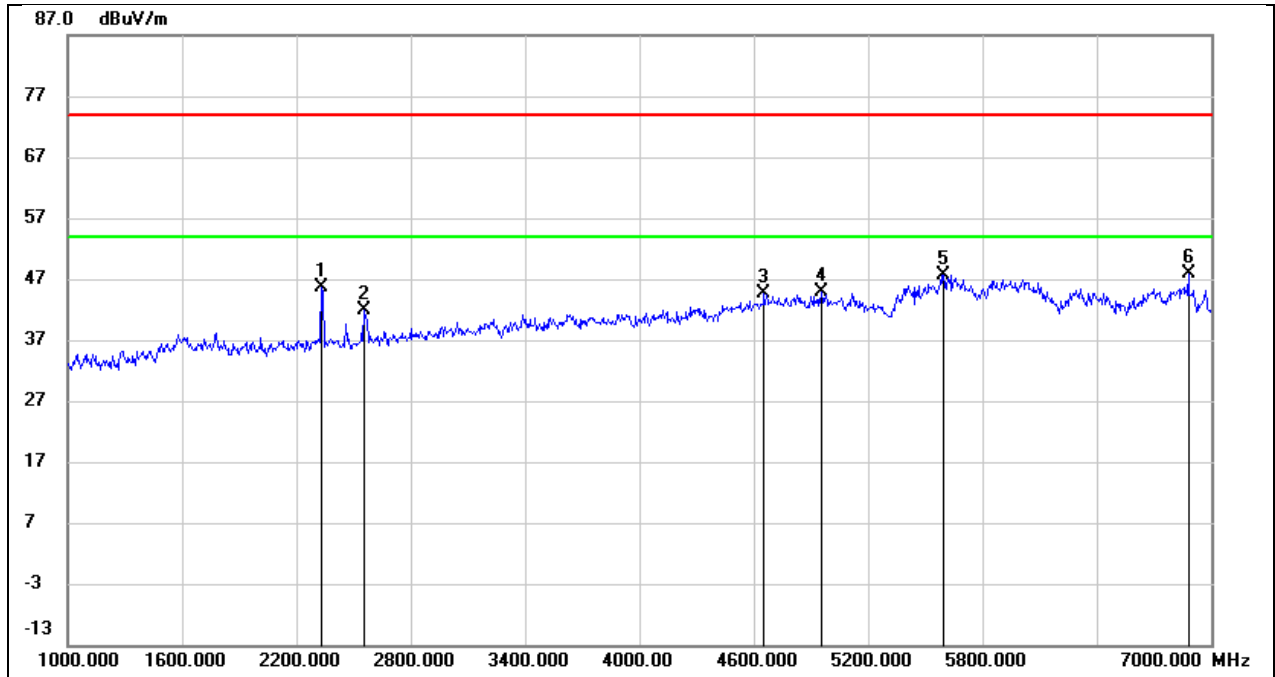


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	53.52	-7.98	45.54	74.00	-28.46	peak
2	2554.000	48.84	-7.06	41.78	74.00	-32.22	peak
3	4654.000	43.23	1.35	44.58	74.00	-29.42	peak
4	4954.000	41.86	2.94	44.80	74.00	-29.20	peak
5	5596.000	42.83	4.90	47.73	74.00	-26.27	peak
6	6880.000	40.44	7.52	47.96	74.00	-26.04	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5201
Polarity:	Horizontal	Test Voltage:	DC 17.0V

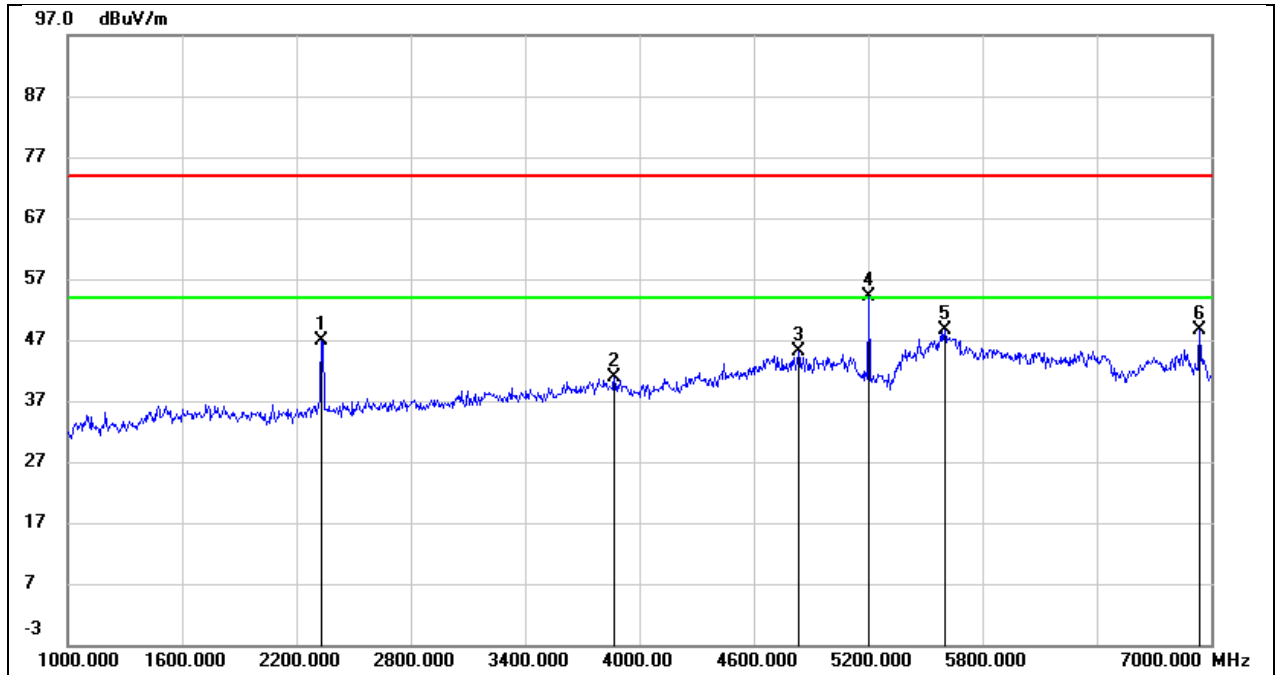


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	55.58	-8.82	46.76	74.00	-27.24	peak
2	3868.000	43.60	-2.84	40.76	74.00	-33.24	peak
3	4834.000	44.06	1.15	45.21	74.00	-28.79	peak
4	5201.000	51.97	2.25	54.22	\	\	fundamental
5	5602.000	44.91	3.76	48.67	74.00	-25.33	peak
6	6940.000	42.16	6.59	48.75	74.00	-25.25	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5201
Polarity:	Vertical	Test Voltage:	DC 17.0V

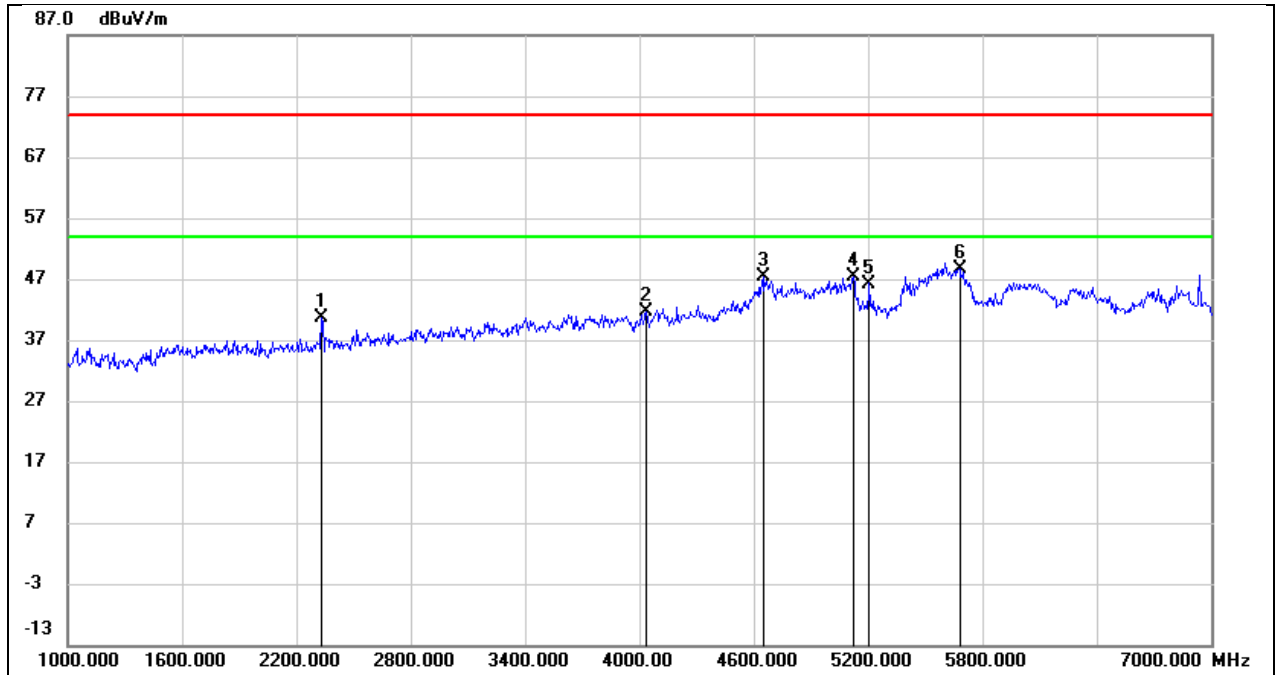


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	48.66	-7.98	40.68	74.00	-33.32	peak
2	4036.000	42.89	-1.38	41.51	74.00	-32.49	peak
3	4648.000	46.02	1.32	47.34	74.00	-26.66	peak
4	5122.000	43.94	3.34	47.28	74.00	-26.72	peak
5	5201.000	42.80	3.45	46.25	\	\	fundamental
6	5680.000	43.49	5.24	48.73	74.00	-25.27	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 17.0V

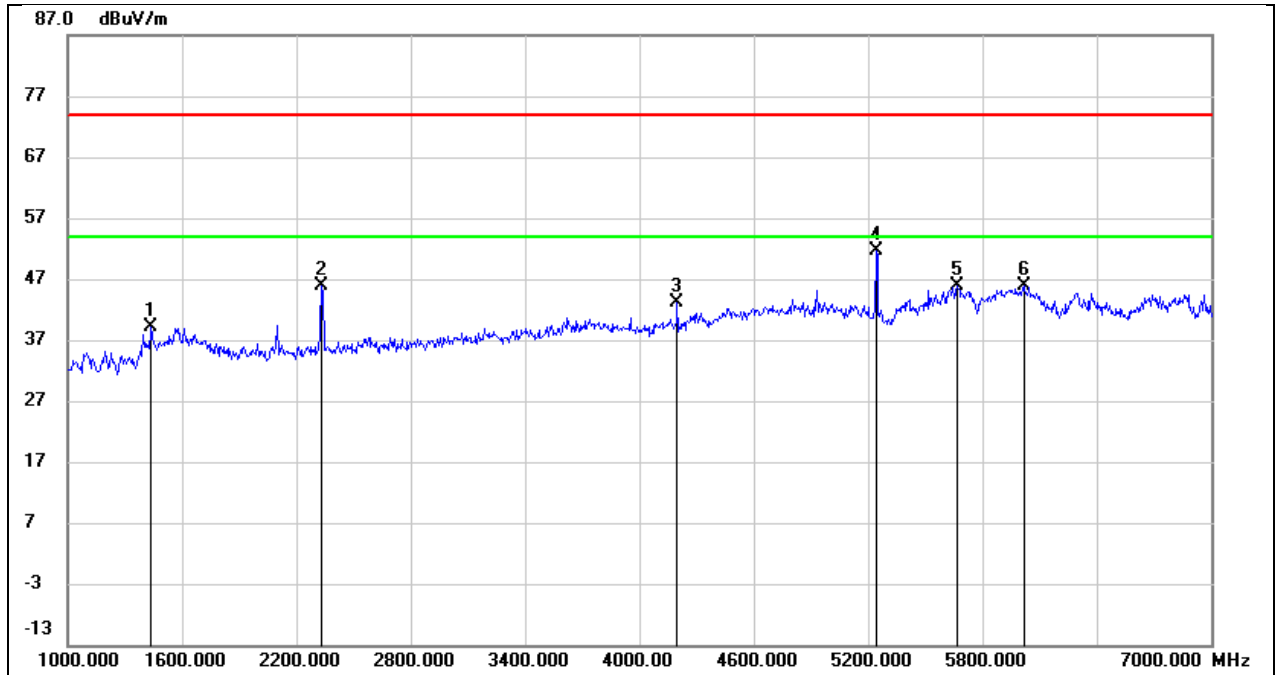


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	51.24	-12.13	39.11	74.00	-34.89	peak
2	2332.000	54.81	-8.82	45.99	74.00	-28.01	peak
3	4198.000	44.88	-1.80	43.08	74.00	-30.92	peak
4	5245.000	49.17	2.40	51.57	\	\	fundamental
5	5668.000	41.76	4.05	45.81	74.00	-28.19	peak
6	6016.000	39.98	5.79	45.77	74.00	-28.23	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 17.0V

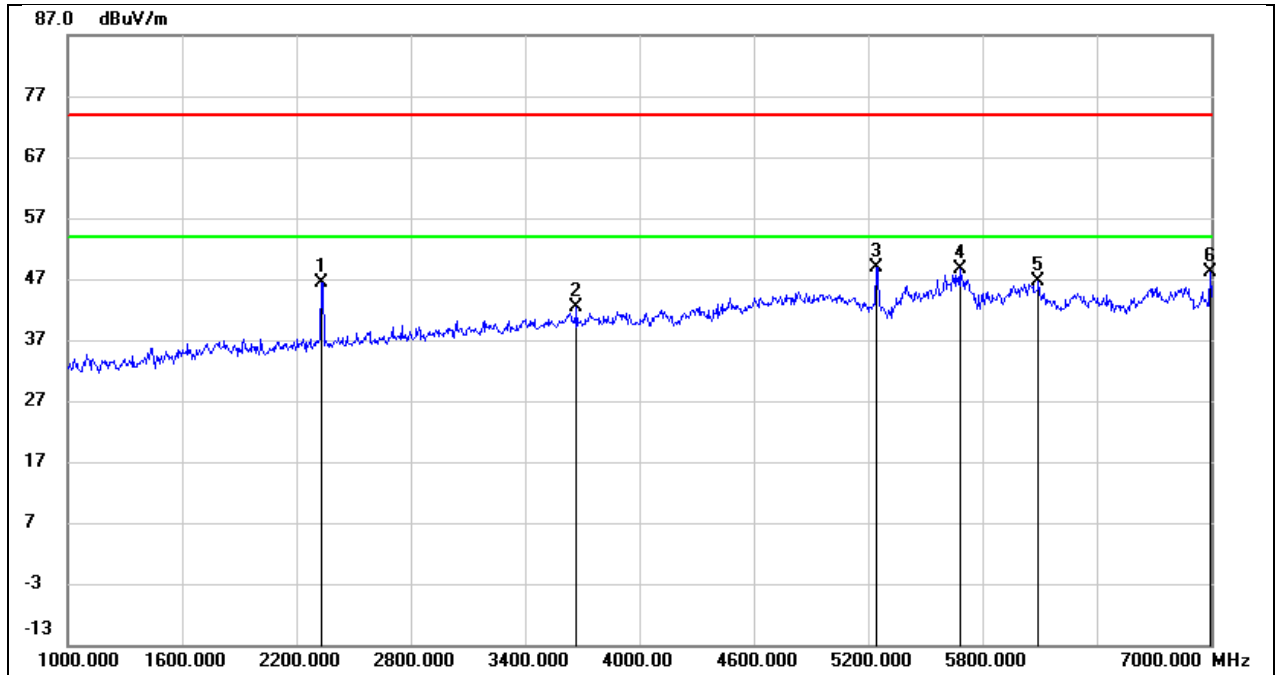


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	54.39	-7.98	46.41	74.00	-27.59	peak
2	3670.000	44.56	-2.19	42.37	74.00	-31.63	peak
3	5245.000	45.30	3.60	48.90	\	\	fundamental
4	5680.000	43.46	5.24	48.70	74.00	-25.30	peak
5	6094.000	39.68	7.05	46.73	74.00	-27.27	peak
6	6994.000	40.55	7.46	48.01	74.00	-25.99	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

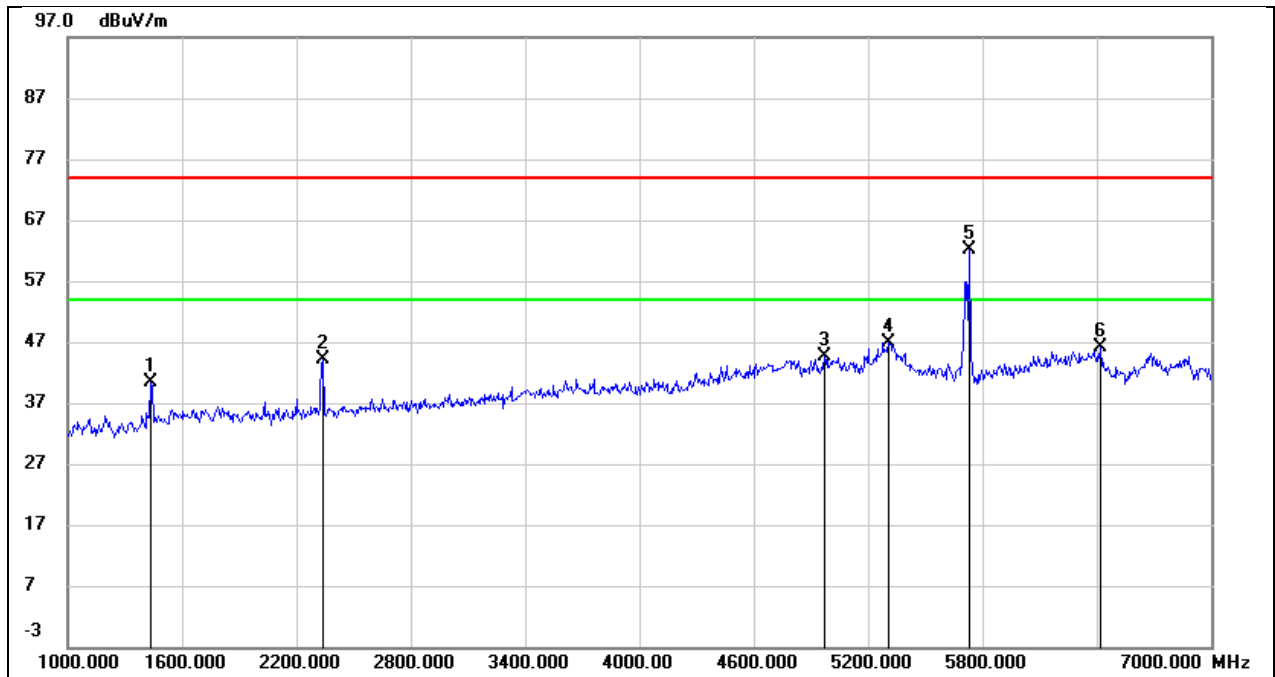


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	52.63	-12.13	40.50	74.00	-33.50	peak
2	2338.000	52.98	-8.78	44.20	74.00	-29.80	peak
3	4972.000	42.82	1.86	44.68	74.00	-29.32	peak
4	5308.000	44.18	2.68	46.86	74.00	-27.14	peak
5	5730.5000	57.90	4.31	62.21	\	\	fundamental
6	6418.000	40.24	5.92	46.16	74.00	-27.84	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

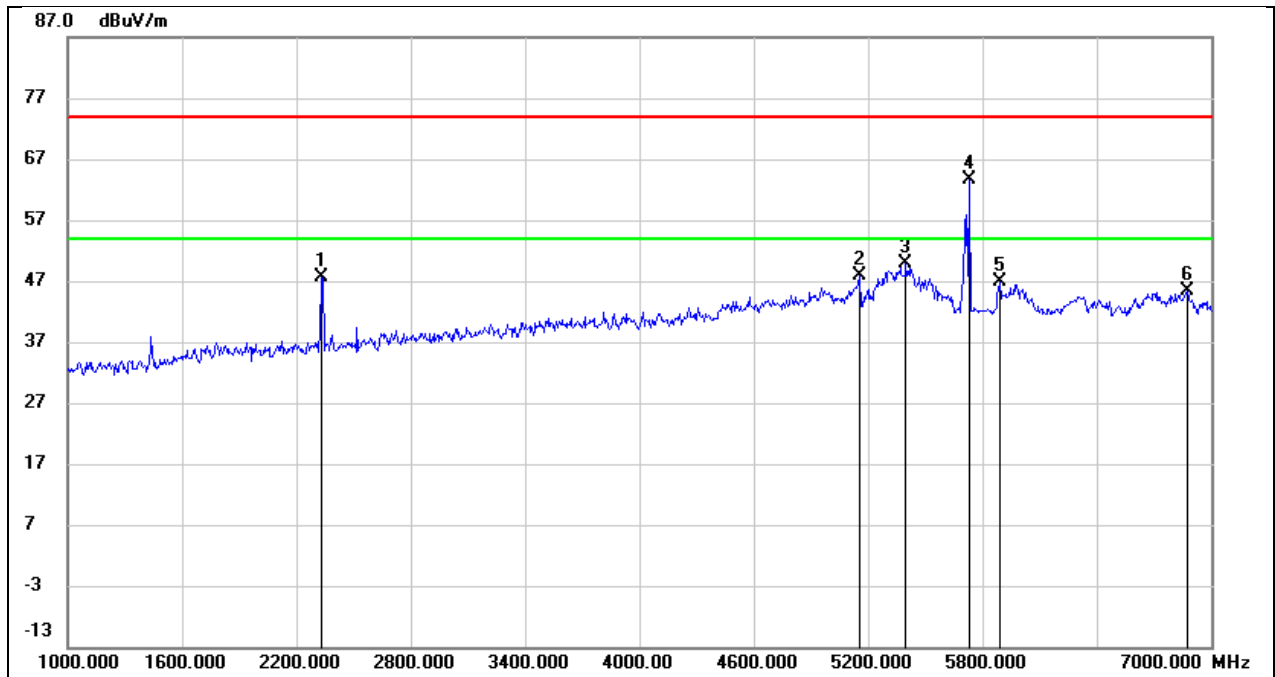


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	55.61	-7.98	47.63	74.00	-26.37	peak
2	5152.000	44.45	3.37	47.82	74.00	-26.18	peak
3	5398.000	45.49	4.27	49.76	74.00	-24.24	peak
4	5730.5000	58.15	5.42	63.57	\	\	fundamental
5	5890.000	40.82	6.17	46.99	74.00	-27.01	peak
6	6874.000	37.96	7.52	45.48	74.00	-28.52	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

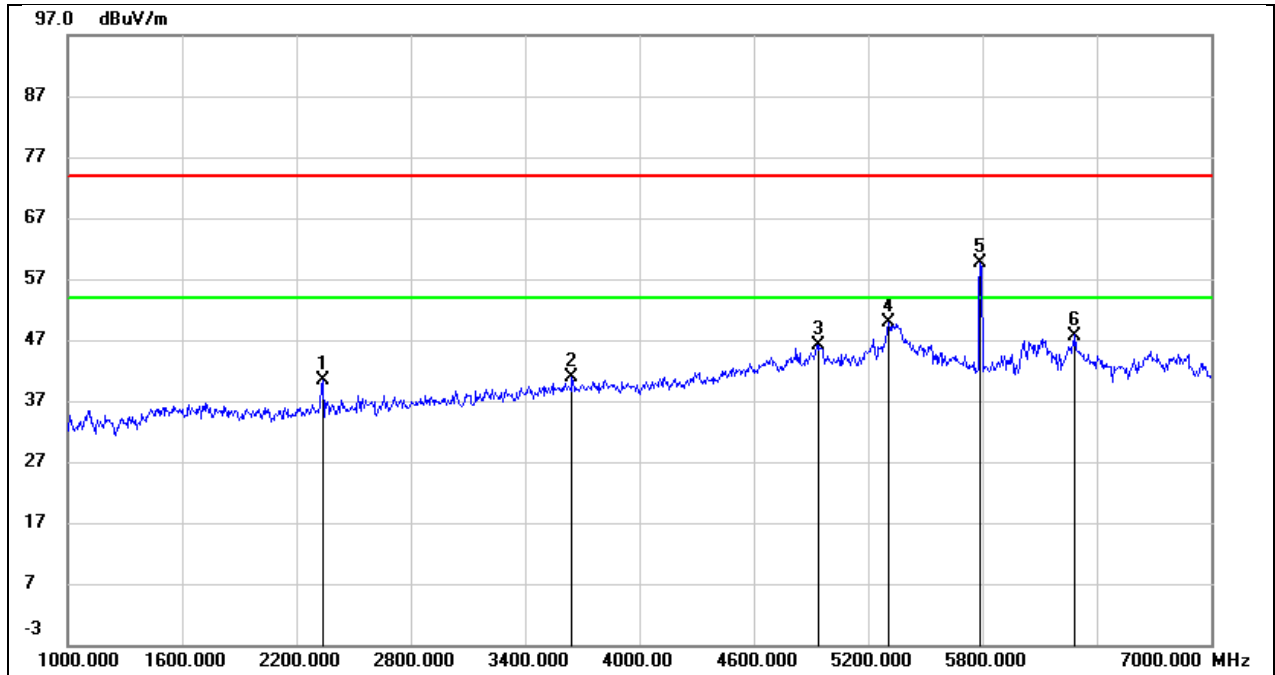


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.000	49.12	-8.78	40.34	74.00	-33.66	peak
2	3646.000	44.22	-3.28	40.94	74.00	-33.06	peak
3	4936.000	44.51	1.67	46.18	74.00	-27.82	peak
4	5308.000	47.30	2.68	49.98	74.00	-24.02	peak
5	5787.5000	55.10	4.58	59.68	\	\	fundamental
6	6286.000	41.53	6.22	47.75	74.00	-26.25	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

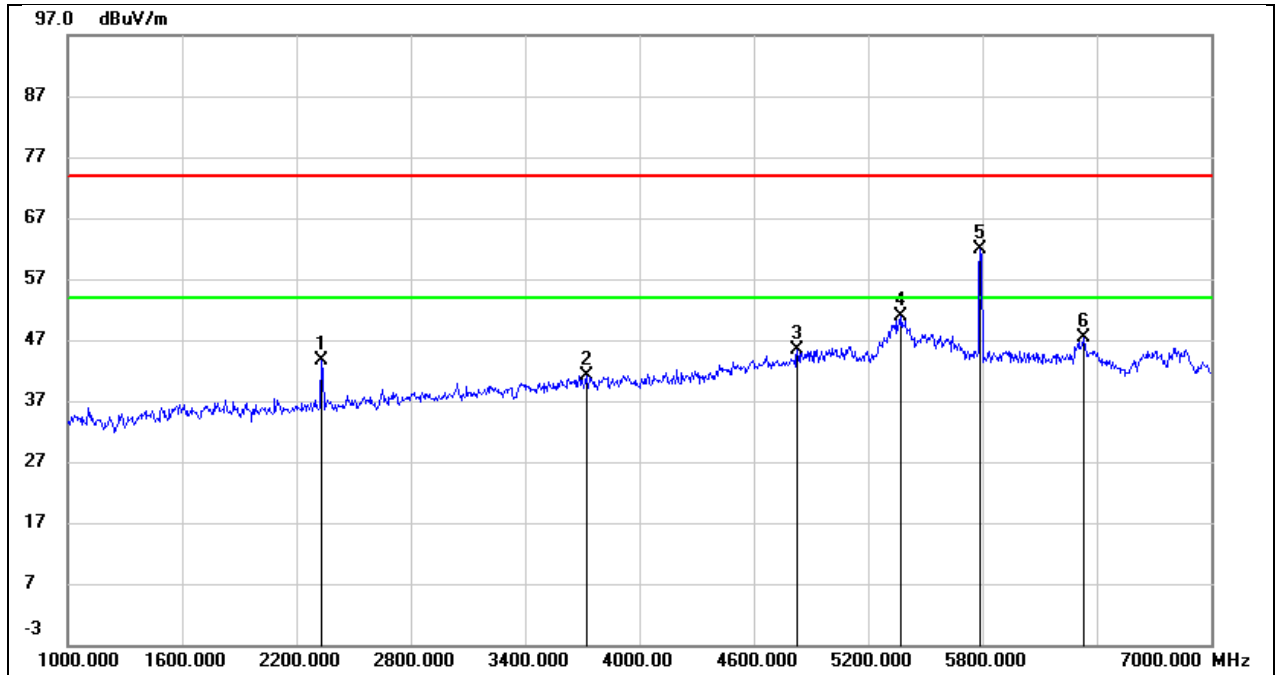


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	51.59	-7.98	43.61	74.00	-30.39	peak
2	3724.000	43.28	-2.07	41.21	74.00	-32.79	peak
3	4828.000	43.19	2.23	45.42	74.00	-28.58	peak
4	5374.000	46.72	4.17	50.89	74.00	-23.11	peak
5	5787.500	56.18	5.67	61.85	\	\	fundamental
6	6328.000	40.37	6.97	47.34	74.00	-26.66	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5844.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

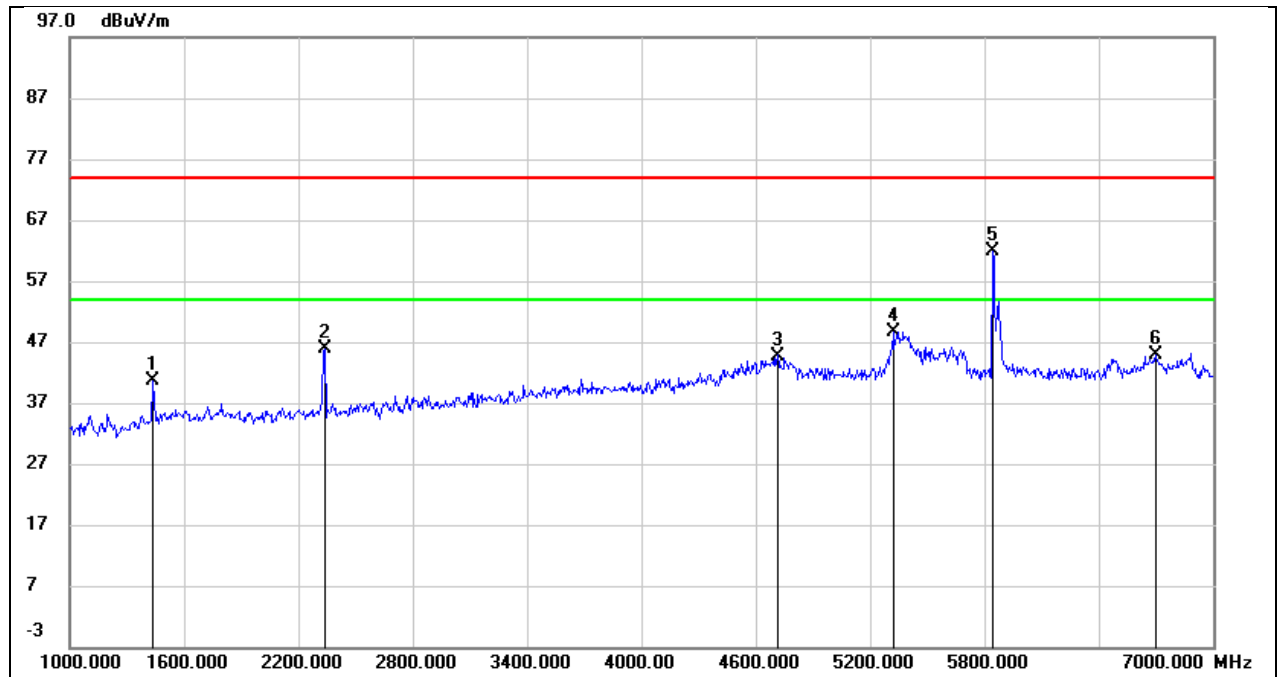

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	52.64	-12.13	40.51	74.00	-33.49	peak
2	2338.000	54.56	-8.78	45.78	74.00	-28.22	peak
3	4714.000	44.13	0.62	44.75	74.00	-29.25	peak
4	5320.000	45.94	2.73	48.67	74.00	-25.33	peak
5	5844.500	57.05	4.86	61.91	\	\	fundamental
6	6700.000	38.35	6.45	44.80	74.00	-29.20	peak


Test Mode:	SRD 5G 10M	Frequency(MHz):	5844.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

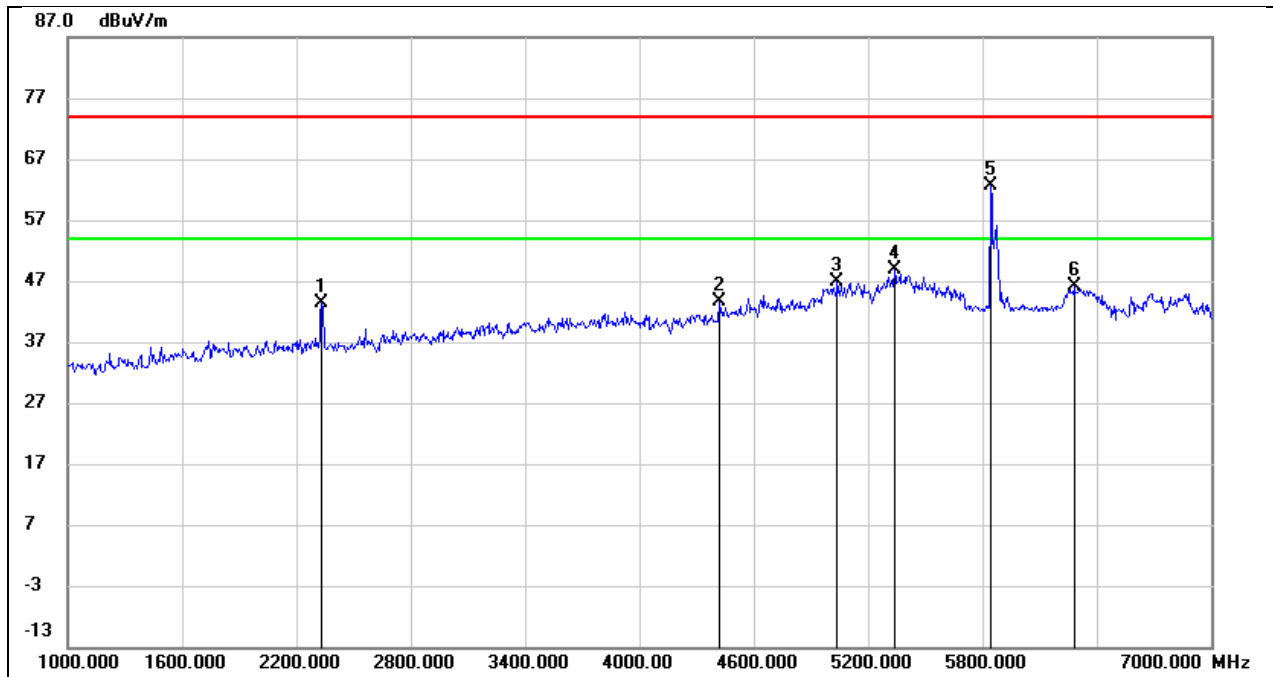

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2332.000	51.29	-7.98	43.31	74.00	-30.69	peak
2	4420.000	43.64	0.01	43.65	74.00	-30.35	peak
3	5038.000	43.63	3.24	46.87	74.00	-27.13	peak
4	5338.000	44.88	4.01	48.89	74.00	-25.11	peak
5	5844.500	56.79	5.92	62.71	\	\	fundamental
6	6280.000	39.01	7.14	46.15	74.00	-27.85	peak


8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

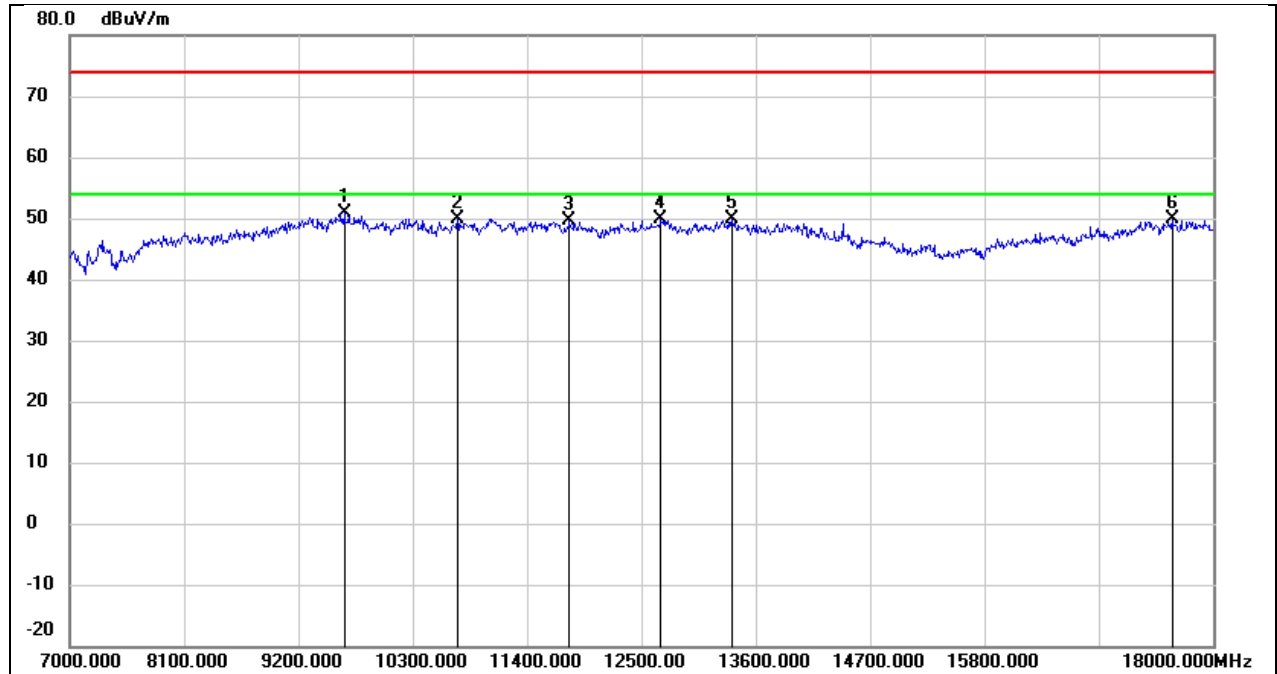


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	37.47	13.50	50.97	74.00	-23.03	peak
2	10729.000	35.86	14.13	49.99	74.00	-24.01	peak
3	11807.000	31.38	18.14	49.52	74.00	-24.48	peak
4	12687.000	30.46	19.51	49.97	74.00	-24.03	peak
5	13369.000	28.55	21.39	49.94	74.00	-24.06	peak
6	17604.000	24.37	25.39	49.76	74.00	-24.24	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0V

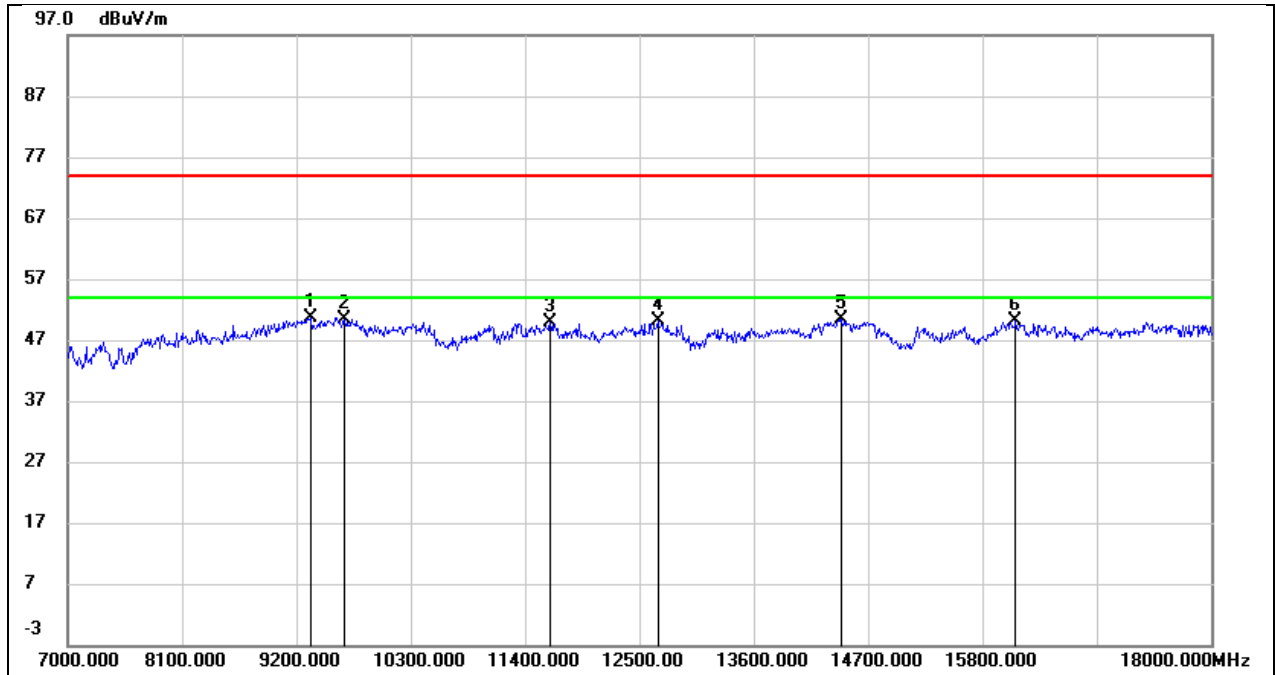


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.54	12.06	50.60	74.00	-23.40	peak
2	9662.000	37.15	13.31	50.46	74.00	-23.54	peak
3	11642.000	33.11	16.77	49.88	74.00	-24.12	peak
4	12676.000	31.61	18.46	50.07	74.00	-23.93	peak
5	14447.000	29.70	20.77	50.47	74.00	-23.53	peak
6	16119.000	26.49	23.61	50.10	74.00	-23.90	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5201
Polarity:	Horizontal	Test Voltage:	DC 17.0V

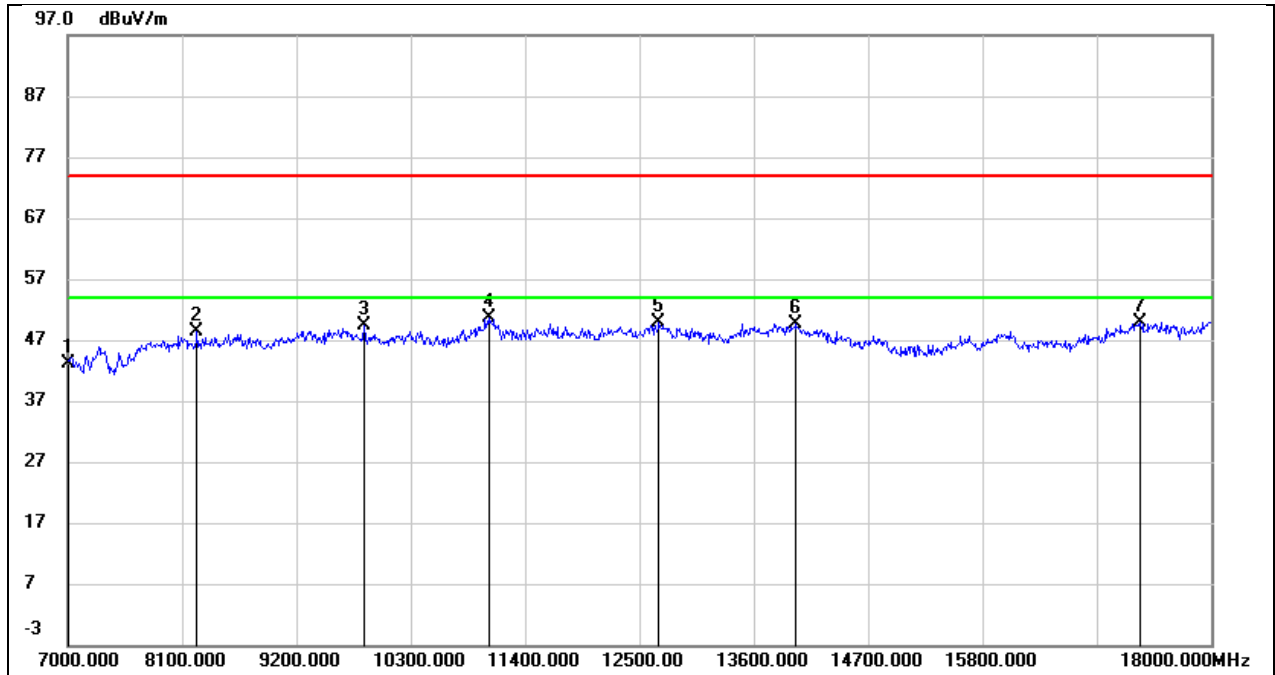


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7000.000	36.01	7.22	43.23	74.00	-30.77	peak
2	8243.000	39.92	8.36	48.28	74.00	-25.72	peak
3	9849.000	35.82	13.67	49.49	74.00	-24.51	peak
4	11048.000	35.49	15.24	50.73	74.00	-23.27	peak
5	12687.000	30.46	19.51	49.97	74.00	-24.03	peak
6	14007.000	26.14	23.39	49.53	74.00	-24.47	peak
7	17318.000	25.64	24.18	49.82	74.00	-24.18	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5201
Polarity:	Vertical	Test Voltage:	DC 17.0V

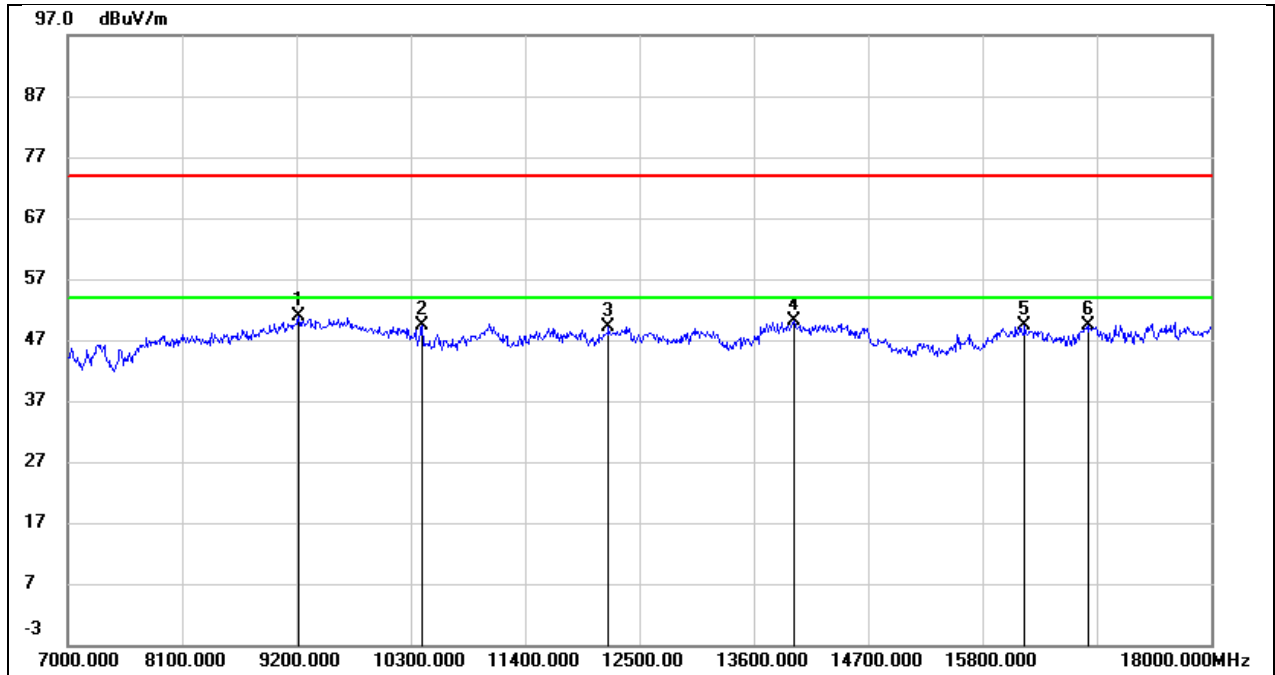


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.98	11.78	50.76	74.00	-23.24	peak
2	10410.000	36.34	13.04	49.38	74.00	-24.62	peak
3	12203.000	31.30	17.83	49.13	74.00	-24.87	peak
4	13985.000	28.50	21.75	50.25	74.00	-23.75	peak
5	16207.000	25.21	24.10	49.31	74.00	-24.69	peak
6	16812.000	25.42	23.91	49.33	74.00	-24.67	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 17.0V

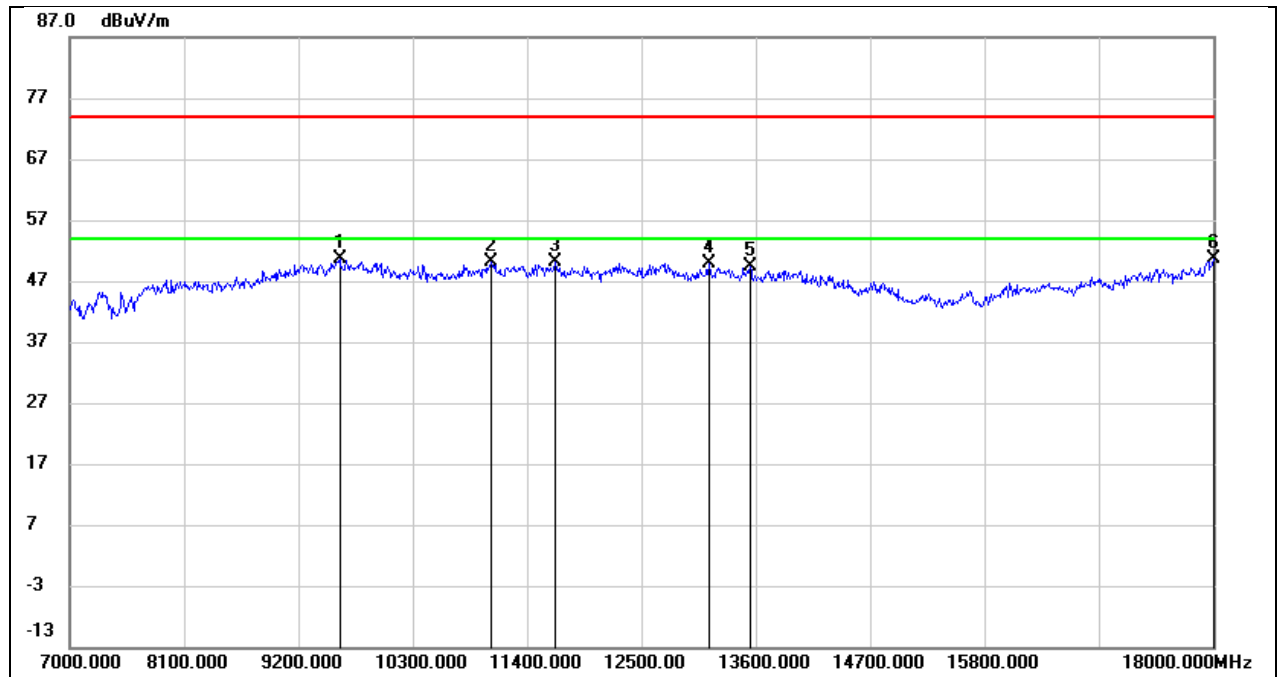


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	37.15	13.40	50.55	74.00	-23.45	peak
2	11059.000	34.92	15.31	50.23	74.00	-23.77	peak
3	11675.000	31.87	18.16	50.03	74.00	-23.97	peak
4	13149.000	29.41	20.58	49.99	74.00	-24.01	peak
5	13545.000	27.45	21.97	49.42	74.00	-24.58	peak
6	18000.000	21.34	29.41	50.75	74.00	-23.25	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 17.0V

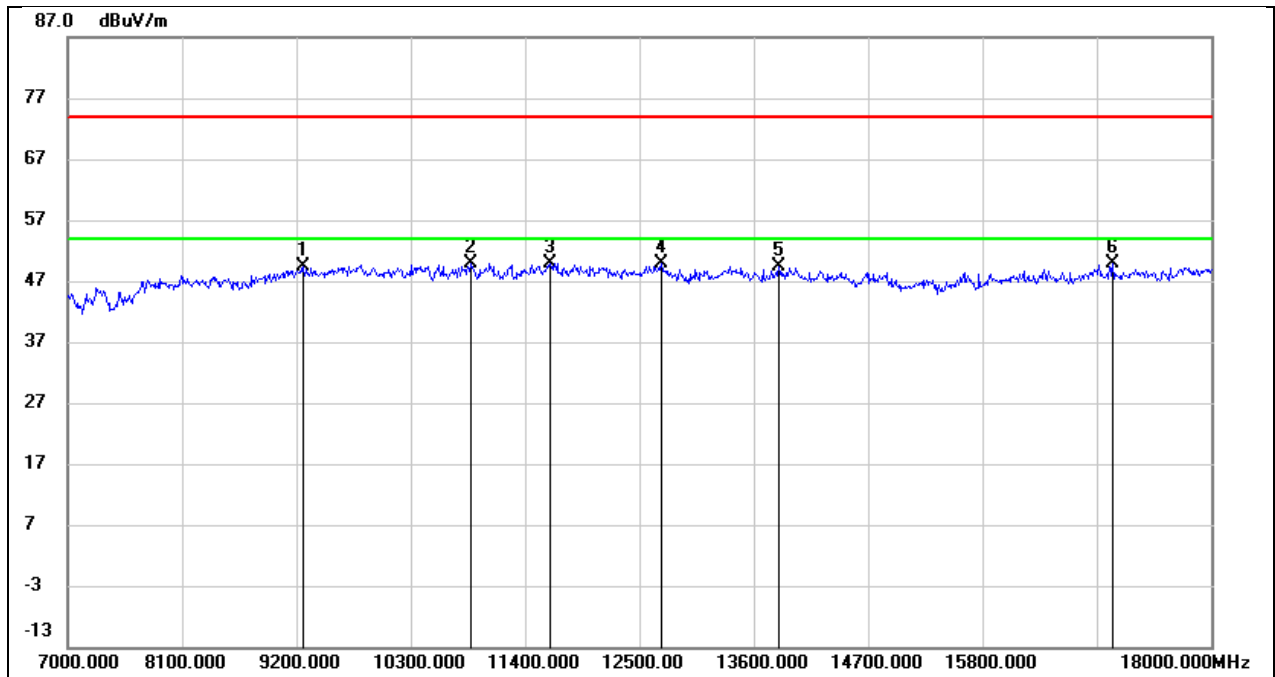


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.61	11.88	49.49	74.00	-24.51	peak
2	10872.000	36.04	13.91	49.95	74.00	-24.05	peak
3	11642.000	33.11	16.77	49.88	74.00	-24.12	peak
4	12709.000	31.31	18.57	49.88	74.00	-24.12	peak
5	13842.000	28.16	21.15	49.31	74.00	-24.69	peak
6	17054.000	25.56	24.35	49.91	74.00	-24.09	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

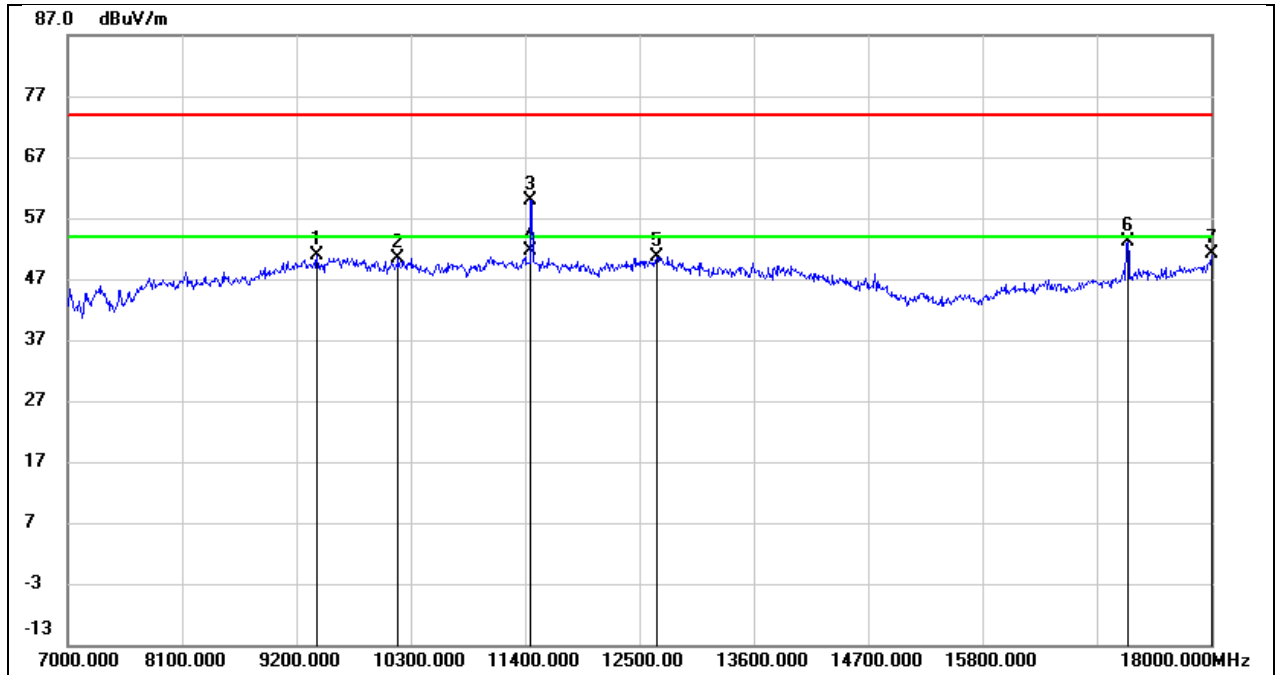

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9398.000	38.70	12.15	50.85	74.00	-23.15	peak
2	10179.000	37.25	13.18	50.43	74.00	-23.57	peak
3	11455.000	42.30	17.65	59.95	74.00	-14.05	peak
4	11455.000	34.01	17.65	51.66	54.00	-2.34	AVG
5	12665.000	31.31	19.42	50.73	74.00	-23.27	peak
6	17197.000	29.48	23.67	53.15	74.00	-20.85	peak
7	18000.000	21.60	29.41	51.01	74.00	-22.99	peak


Test Mode:	SRD 5G 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

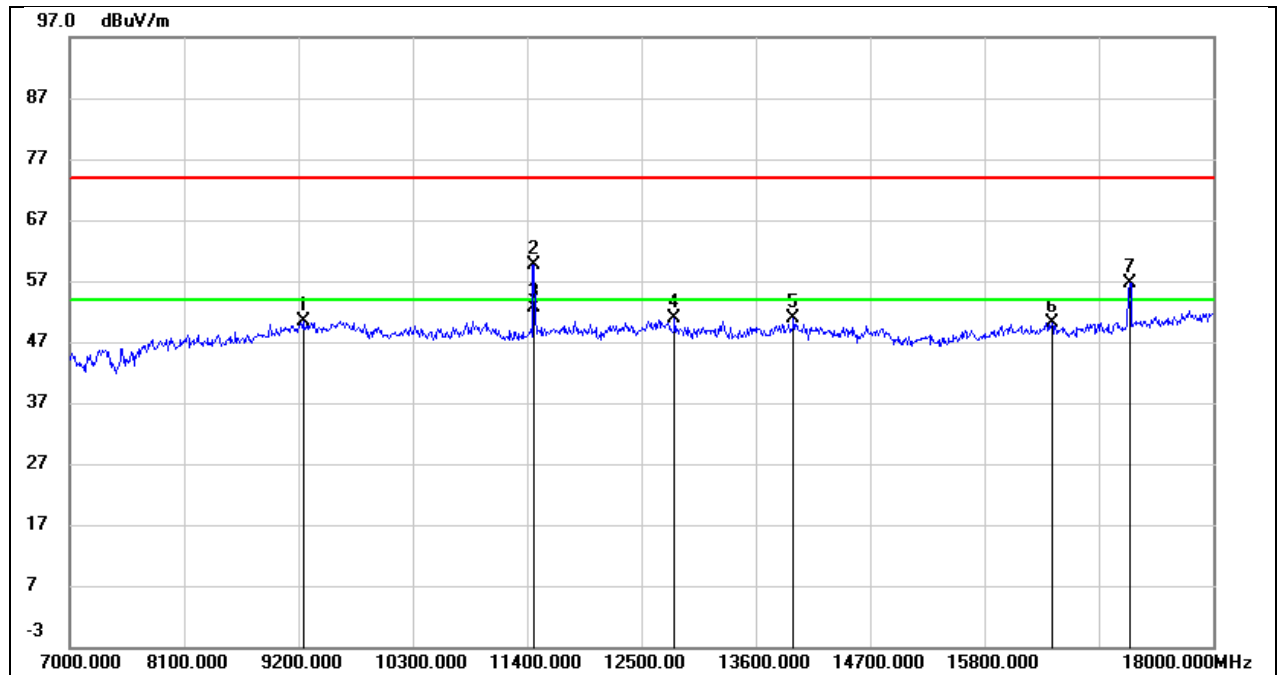

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.55	11.84	50.39	74.00	-23.61	peak
2	11466.000	43.35	16.26	59.61	74.00	-14.39	peak
3	11466.000	36.48	16.26	52.74	54.00	-1.26	AVG
4	12819.000	31.91	18.86	50.77	74.00	-23.23	peak
5	13963.000	29.12	21.65	50.77	74.00	-23.23	peak
6	16449.000	26.58	23.51	50.09	74.00	-23.91	peak
7	17197.000	31.82	24.70	56.52	74.00	-17.48	peak

Note: the marked point 7 is not fall in restricted bands set forth in FCC §15.205 (a)


Test Mode:	SRD 5G 10M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

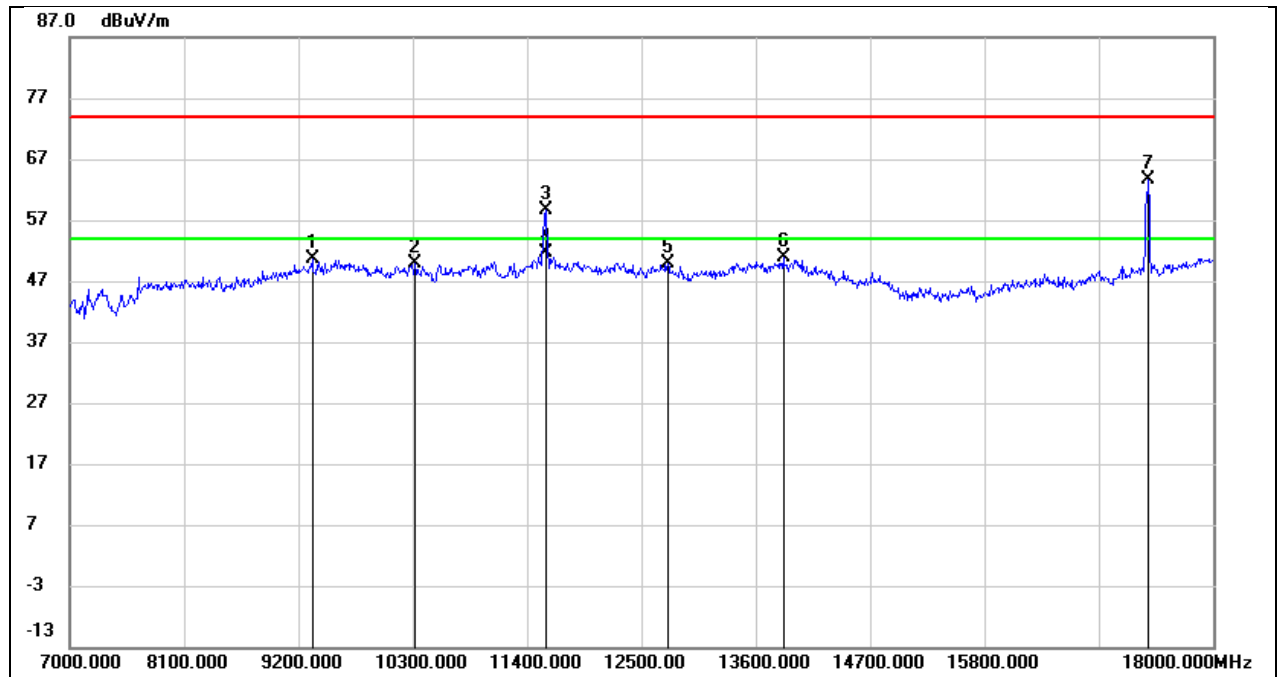

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.68	11.92	50.60	74.00	-23.40	peak
2	10322.000	36.51	13.25	49.76	74.00	-24.24	peak
3	11576.000	40.46	18.11	58.57	74.00	-15.43	peak
4	11576.000	33.58	18.11	51.69	54.00	-2.31	AVG
5	12753.000	30.01	19.75	49.76	74.00	-24.24	peak
6	13864.000	27.89	22.87	50.76	74.00	-23.24	peak
7	17373.000	39.22	24.41	63.63	74.00	-10.37	peak

Note: the marked point 7 is not fall in restricted bands set forth in FCC §15.205 (a)


Test Mode:	SRD 5G 10M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

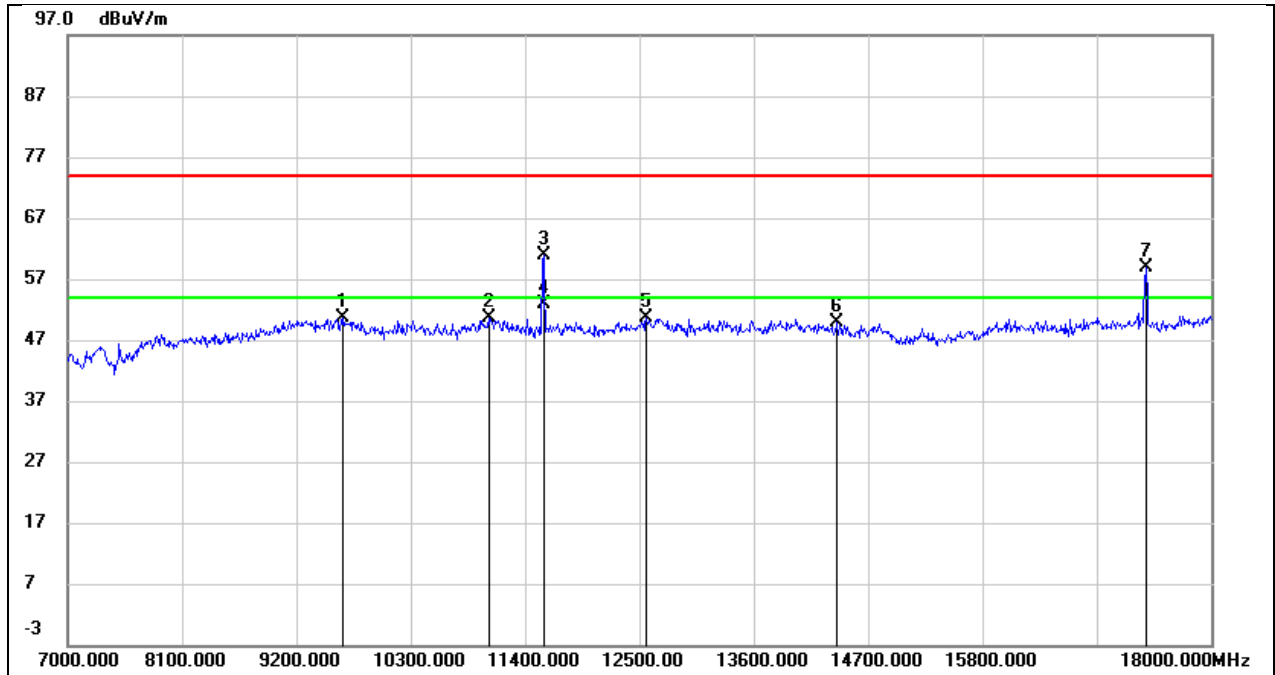

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9651.000	37.22	13.30	50.52	74.00	-23.48	peak
2	11048.000	36.27	14.37	50.64	74.00	-23.36	peak
3	11576.000	44.13	16.67	60.80	74.00	-13.20	peak
4	11576.000	36.24	16.67	52.91	54.00	-1.09	AVG
5	12566.000	32.34	18.19	50.53	74.00	-23.47	peak
6	14403.000	29.10	20.80	49.90	74.00	-24.10	peak
7	17373.000	33.92	24.84	58.76	74.00	-15.24	peak

Note: the marked point 7 is not fall in restricted bands set forth in FCC §15.205 (a)


Test Mode:	SRD 5G 10M	Frequency(MHz):	5844.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

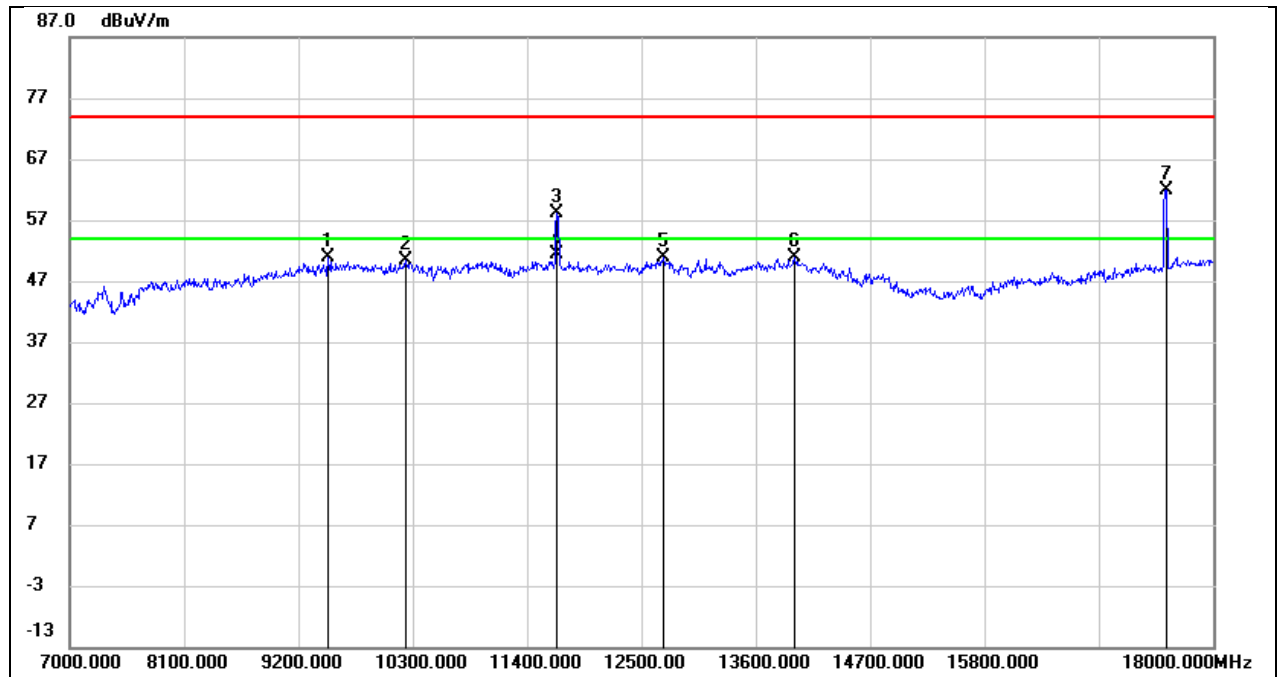

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9486.000	38.05	12.72	50.77	74.00	-23.23	peak
2	10234.000	37.16	13.18	50.34	74.00	-23.66	peak
3	11686.000	40.04	18.16	58.20	74.00	-15.80	peak
4	11686.000	33.29	18.16	51.45	54.00	-2.55	AVG
5	12709.000	31.27	19.59	50.86	74.00	-23.14	peak
6	13974.000	27.63	23.31	50.94	74.00	-23.06	peak
7	17549.000	36.91	25.05	61.96	74.00	-12.04	peak


Note: the marked point 7 is not fall in restricted bands set forth in FCC §15.205 (a)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5844.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

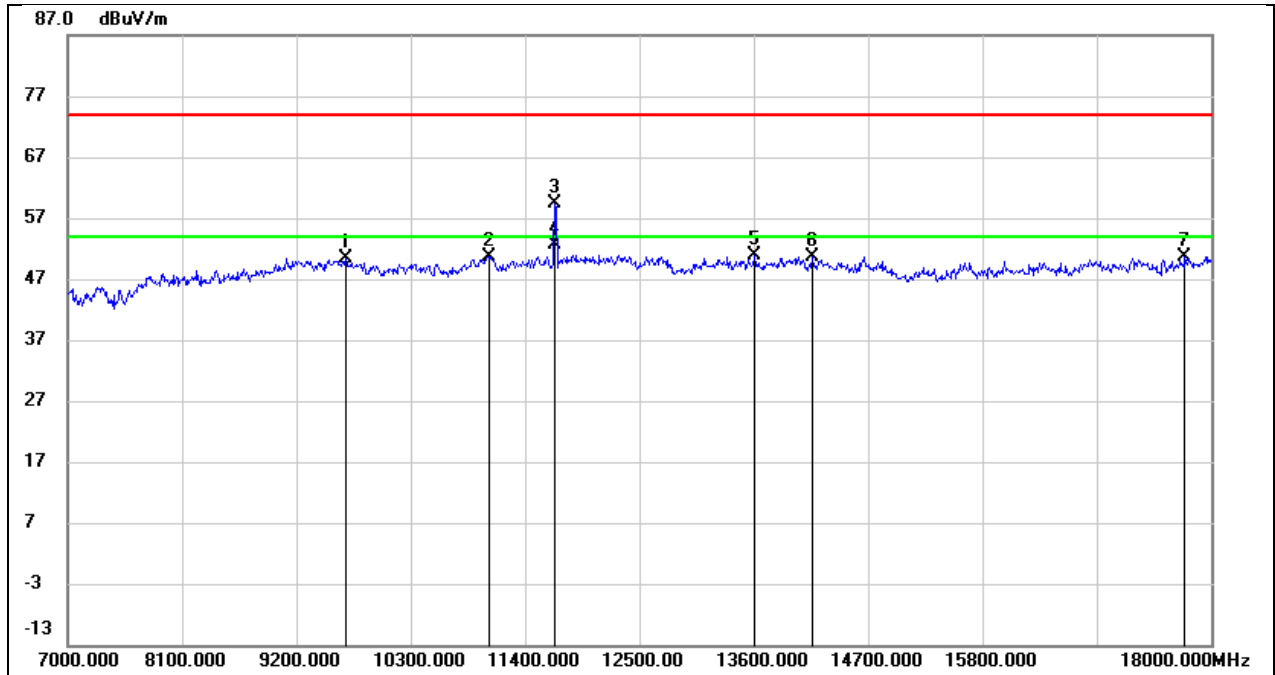


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9673.000	37.06	13.31	50.37	74.00	-23.63	peak
2	11059.000	36.22	14.43	50.65	74.00	-23.35	peak
3	11686.000	42.66	16.81	59.47	74.00	-14.53	peak
4	11686.000	35.93	16.81	52.74	54.00	-1.26	AVG
5	13611.000	30.38	20.41	50.79	74.00	-23.21	peak
6	14161.000	29.03	21.56	50.59	74.00	-23.41	peak
7	17747.000	25.00	25.69	50.69	74.00	-23.31	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5161
Polarity:	Horizontal	Test Voltage:	DC 17.0V

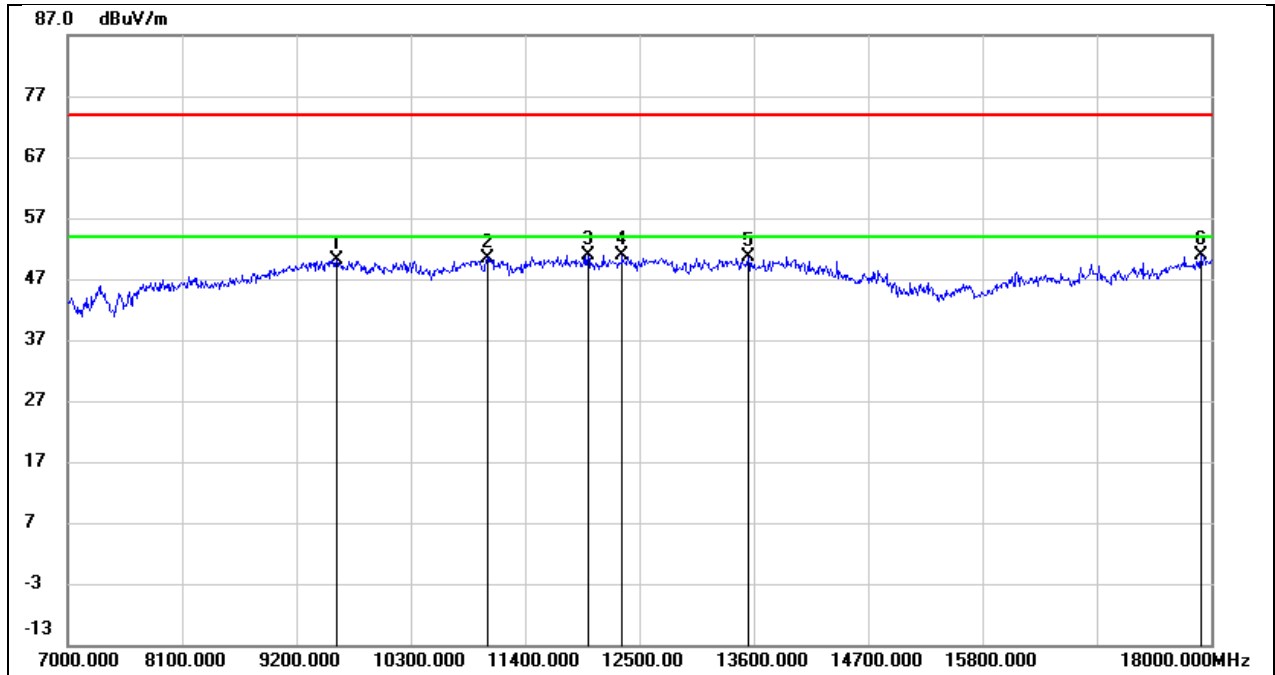


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	36.70	13.34	50.04	74.00	-23.96	peak
2	11037.000	35.32	15.18	50.50	74.00	-23.50	peak
3	12005.000	32.14	18.71	50.85	74.00	-23.15	peak
4	12335.000	32.01	18.99	51.00	74.00	-23.00	peak
5	13545.000	28.70	21.97	50.67	74.00	-23.33	peak
6	17901.000	22.50	28.36	50.86	74.00	-23.14	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5161
Polarity:	Vertical	Test Voltage:	DC 17.0V

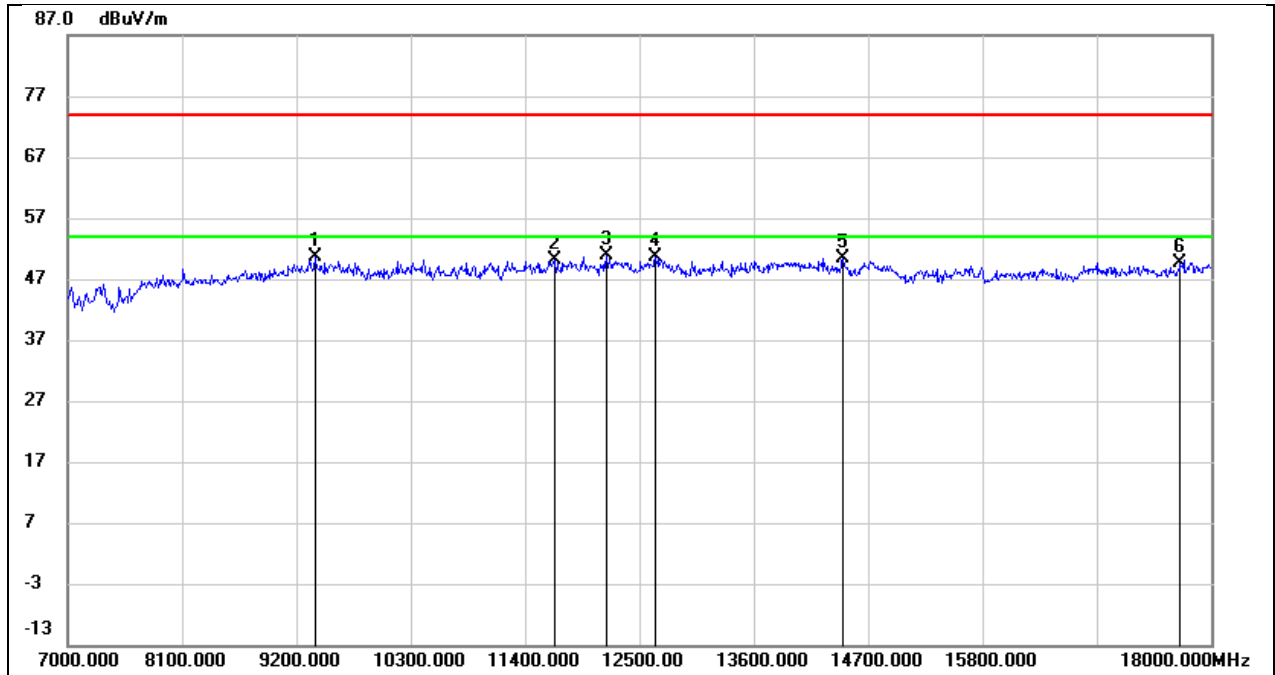


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	38.48	12.17	50.65	74.00	-23.35	peak
2	11686.000	33.22	16.81	50.03	74.00	-23.97	peak
3	12181.000	32.96	17.81	50.77	74.00	-23.23	peak
4	12654.000	32.22	18.39	50.61	74.00	-23.39	peak
5	14458.000	29.62	20.78	50.40	74.00	-23.60	peak
6	17703.000	24.26	25.45	49.71	74.00	-24.29	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 17.0V

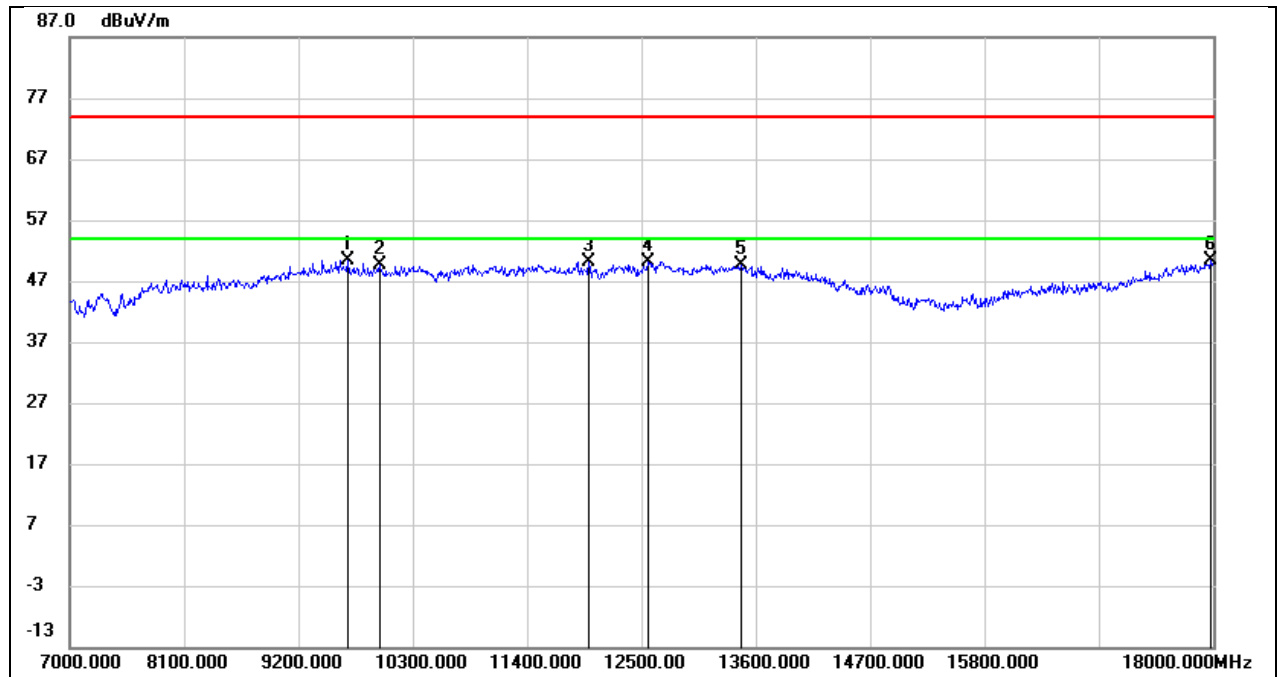


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9673.000	36.88	13.55	50.43	74.00	-23.57	peak
2	9981.000	36.34	13.38	49.72	74.00	-24.28	peak
3	11994.000	31.52	18.68	50.20	74.00	-23.80	peak
4	12566.000	31.07	19.13	50.20	74.00	-23.80	peak
5	13457.000	27.91	21.73	49.64	74.00	-24.36	peak
6	17978.000	21.10	29.18	50.28	74.00	-23.72	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 17.0V

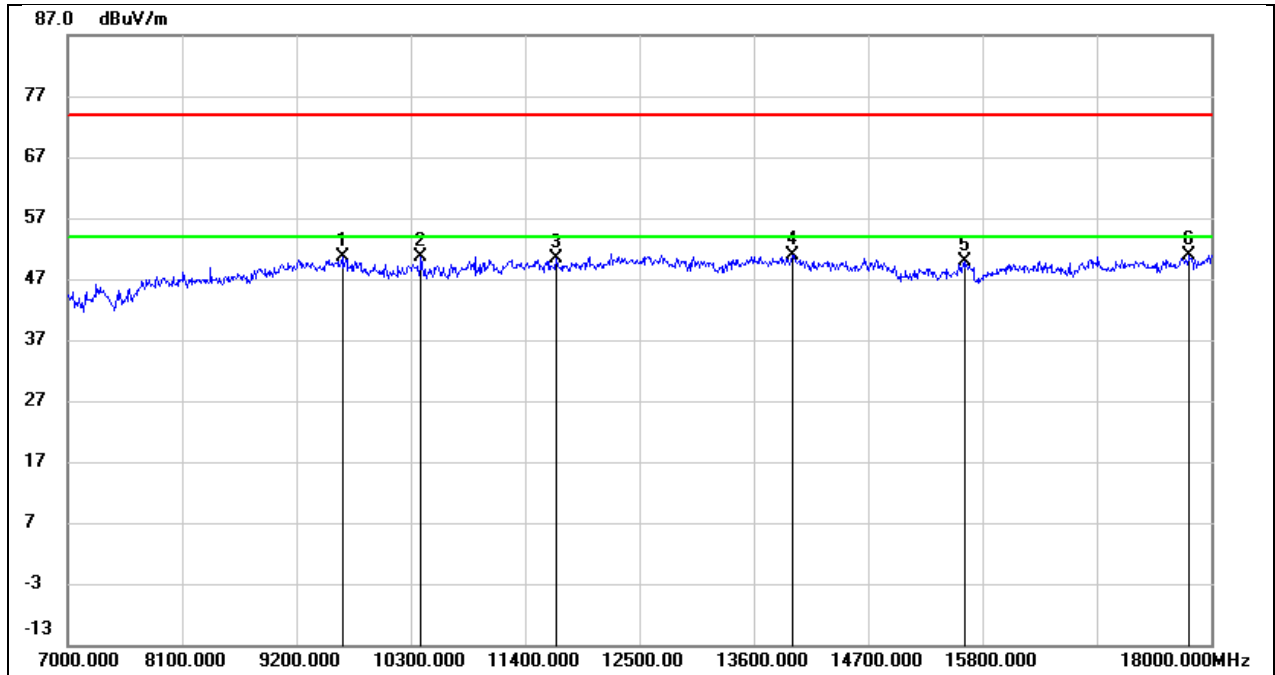


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	37.45	13.30	50.75	74.00	-23.25	peak
2	10399.000	37.64	13.01	50.65	74.00	-23.35	peak
3	11697.000	33.59	16.82	50.41	74.00	-23.59	peak
4	13974.000	29.25	21.70	50.95	74.00	-23.05	peak
5	15635.000	29.01	20.93	49.94	74.00	-24.06	peak
6	17791.000	25.01	25.91	50.92	74.00	-23.08	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 17.0V

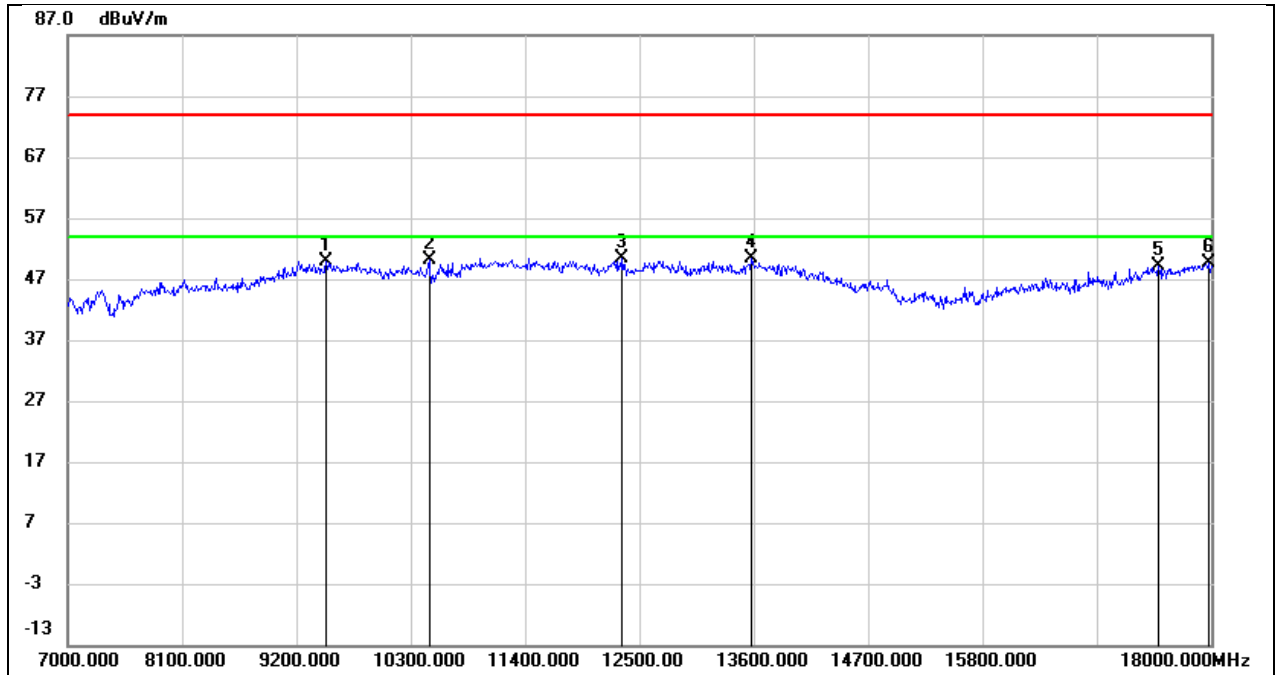


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9486.000	37.18	12.72	49.90	74.00	-24.10	peak
2	10476.000	36.62	13.44	50.06	74.00	-23.94	peak
3	12335.000	31.34	18.99	50.33	74.00	-23.67	peak
4	13578.000	28.32	22.03	50.35	74.00	-23.65	peak
5	17494.000	24.34	24.74	49.08	74.00	-24.92	peak
6	17978.000	20.52	29.18	49.70	74.00	-24.30	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 17.0V

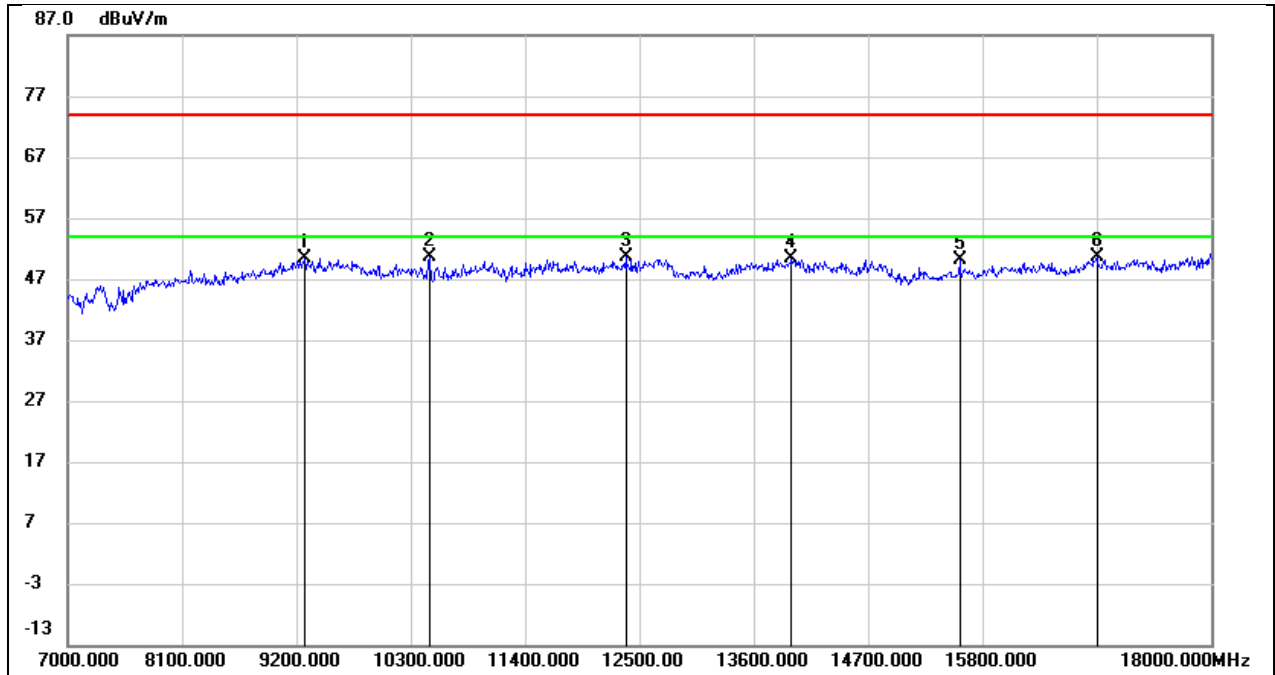


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	38.41	11.92	50.33	74.00	-23.67	peak
2	10476.000	37.39	13.21	50.60	74.00	-23.40	peak
3	12368.000	32.51	18.07	50.58	74.00	-23.42	peak
4	13963.000	28.81	21.65	50.46	74.00	-23.54	peak
5	15580.000	29.32	20.74	50.06	74.00	-23.94	peak
6	16900.000	26.54	24.06	50.60	74.00	-23.40	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5735.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

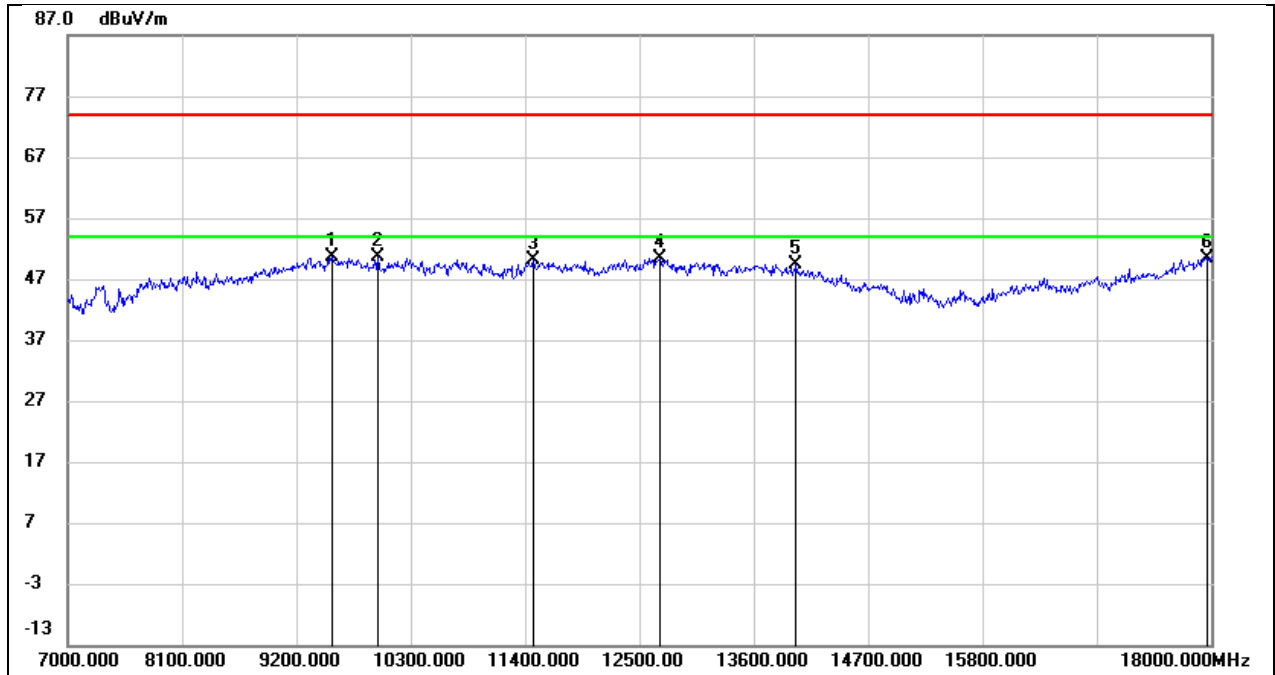


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9541.000	37.52	13.06	50.58	74.00	-23.42	peak
2	9981.000	37.16	13.38	50.54	74.00	-23.46	peak
3	11477.000	32.46	17.77	50.23	74.00	-23.77	peak
4	12698.000	30.91	19.55	50.46	74.00	-23.54	peak
5	14007.000	26.04	23.39	49.43	74.00	-24.57	peak
6	17956.000	21.41	28.94	50.35	74.00	-23.65	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5735.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

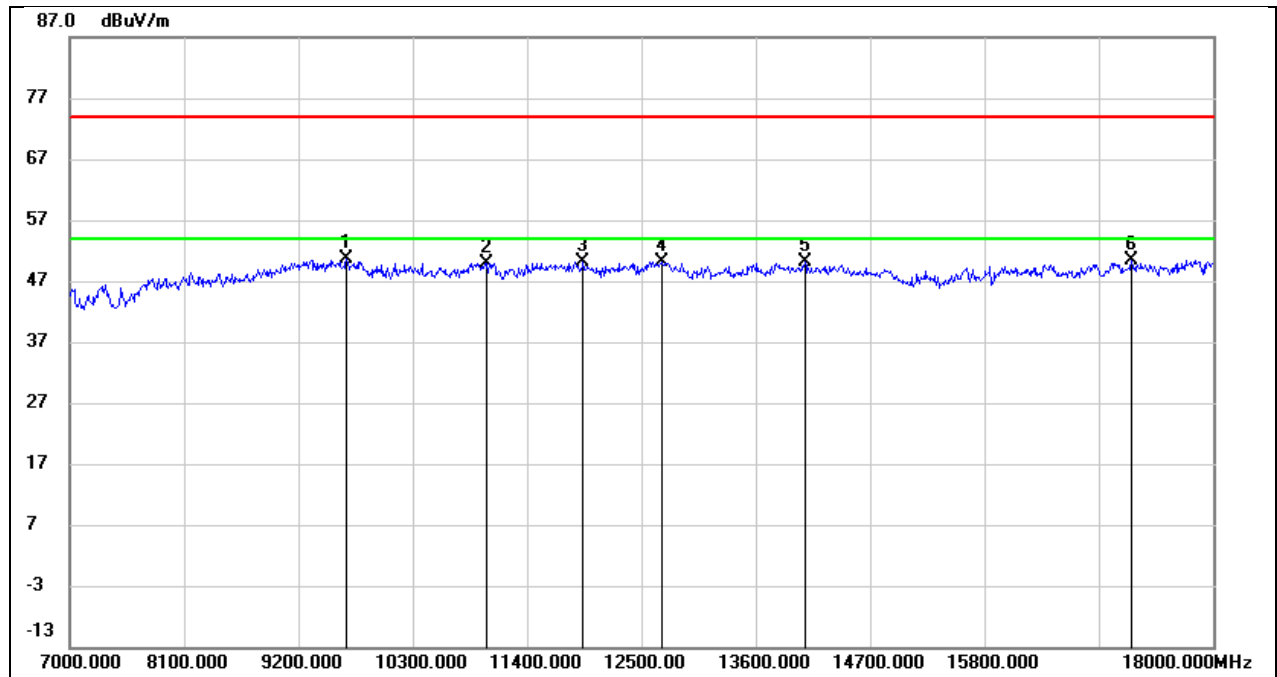


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	37.31	13.31	50.62	74.00	-23.38	peak
2	11004.000	35.75	14.18	49.93	74.00	-24.07	peak
3	11939.000	32.68	17.37	50.05	74.00	-23.95	peak
4	12698.000	31.55	18.53	50.08	74.00	-23.92	peak
5	14073.000	28.42	21.70	50.12	74.00	-23.88	peak
6	17208.000	25.69	24.72	50.41	74.00	-23.59	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

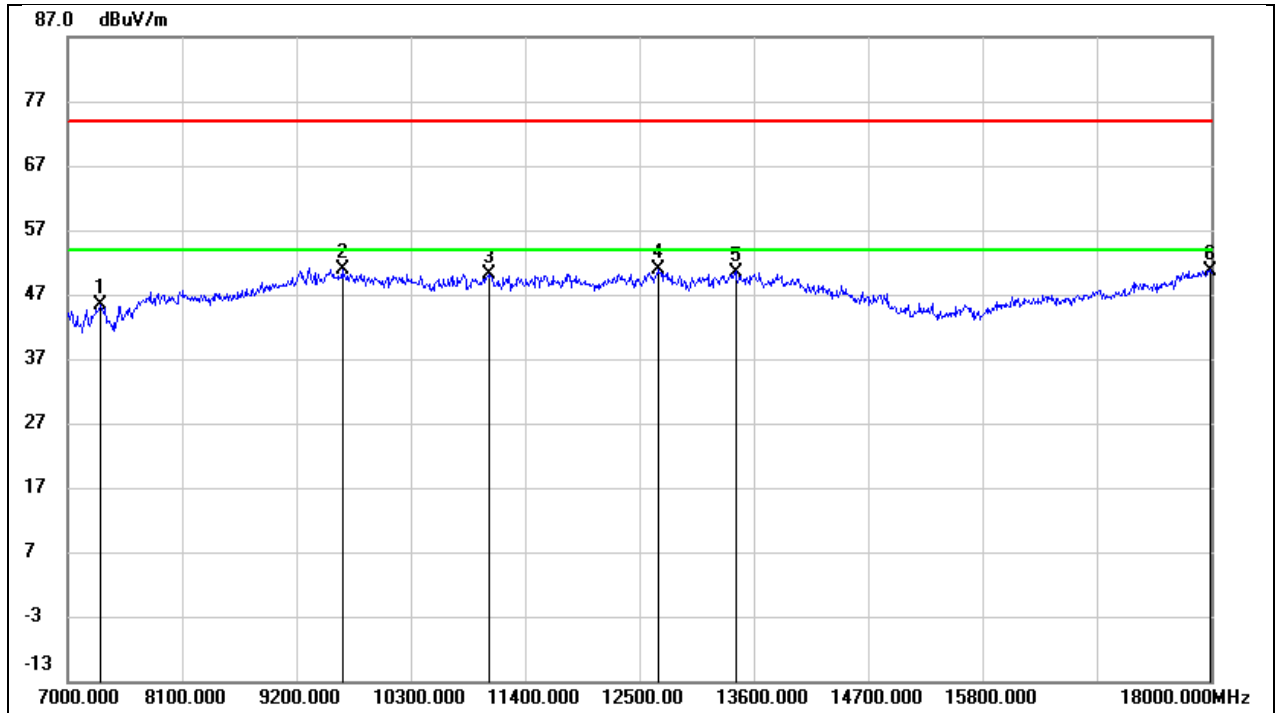


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.65	7.71	45.36	74.00	-28.64	peak
2	9640.000	37.39	13.50	50.89	74.00	-23.11	peak
3	11059.000	34.93	15.31	50.24	74.00	-23.76	peak
4	12687.000	31.25	19.51	50.76	74.00	-23.24	peak
5	13424.000	28.91	21.59	50.50	74.00	-23.50	peak
6	17989.000	21.46	29.29	50.75	74.00	-23.25	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

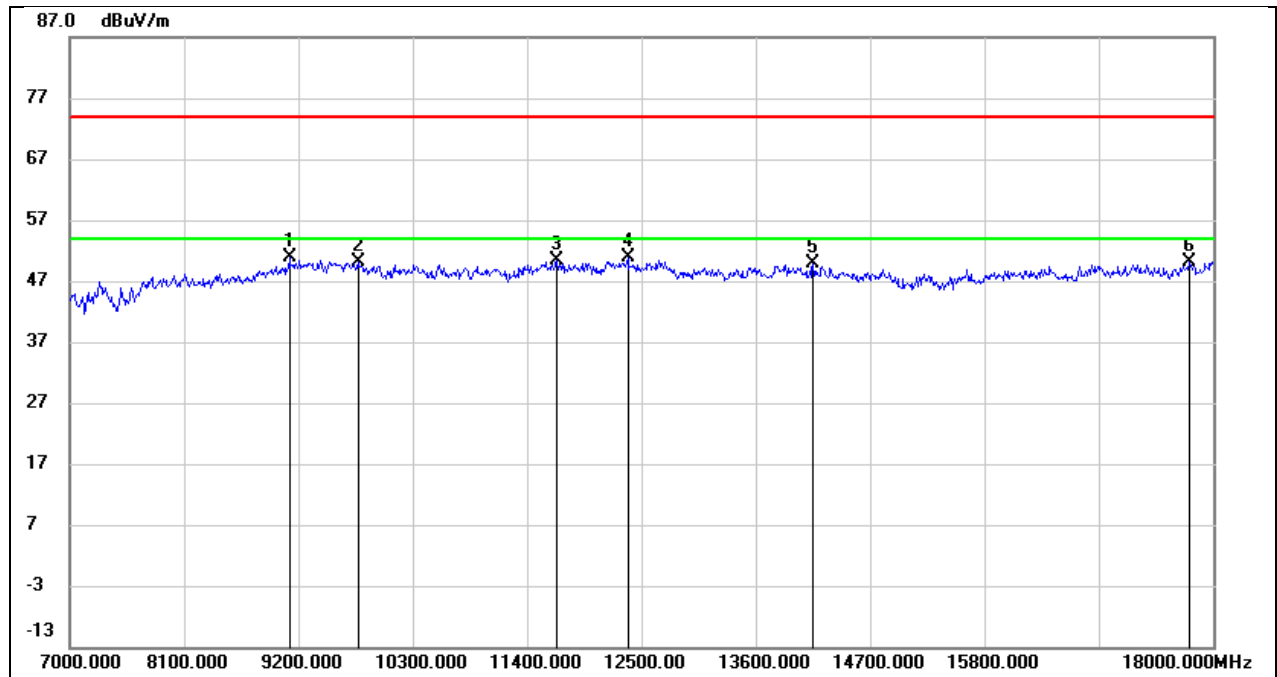


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	39.45	11.39	50.84	74.00	-23.16	peak
2	9772.000	36.82	13.35	50.17	74.00	-23.83	peak
3	11686.000	33.55	16.81	50.36	74.00	-23.64	peak
4	12368.000	32.76	18.07	50.83	74.00	-23.17	peak
5	14150.000	28.24	21.59	49.83	74.00	-24.17	peak
6	17769.000	24.27	25.80	50.07	74.00	-23.93	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5839.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

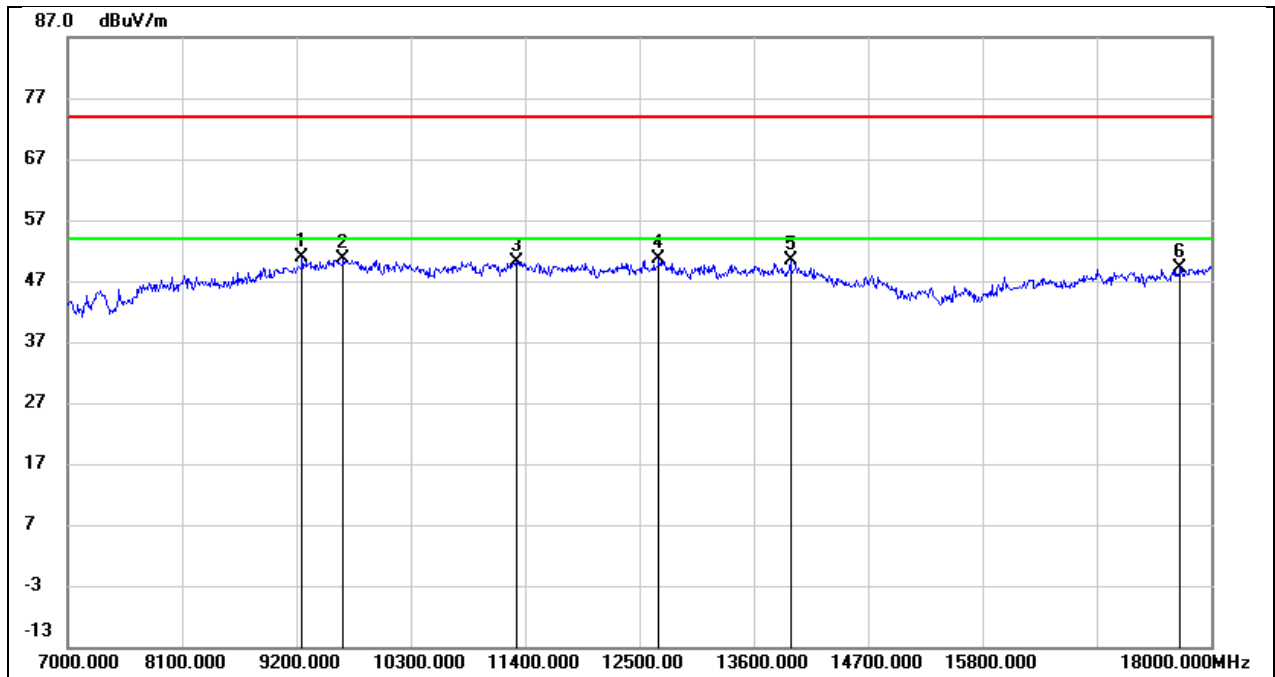


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	39.09	11.67	50.76	74.00	-23.24	peak
2	9651.000	37.01	13.51	50.52	74.00	-23.48	peak
3	11312.000	33.39	16.83	50.22	74.00	-23.78	peak
4	12687.000	31.13	19.51	50.64	74.00	-23.36	peak
5	13952.000	27.05	23.22	50.27	74.00	-23.73	peak
6	17703.000	22.91	26.34	49.25	74.00	-24.75	peak

Test Mode:	SRD 5G 20M	Frequency(MHz):	5839.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

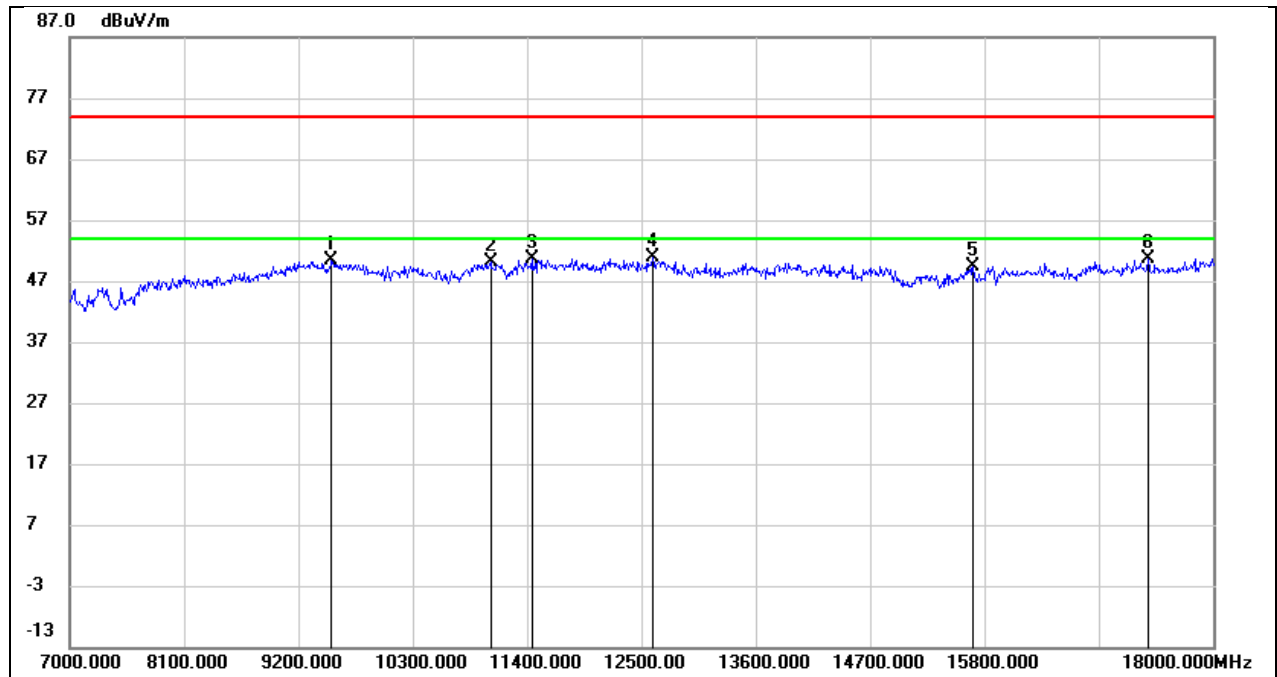


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.39	12.90	50.29	74.00	-23.71	peak
2	11048.000	35.78	14.37	50.15	74.00	-23.85	peak
3	11444.000	34.53	16.19	50.72	74.00	-23.28	peak
4	12610.000	32.63	18.26	50.89	74.00	-23.11	peak
5	15690.000	28.28	21.16	49.44	74.00	-24.56	peak
6	17373.000	25.82	24.84	50.66	74.00	-23.34	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 17.0V

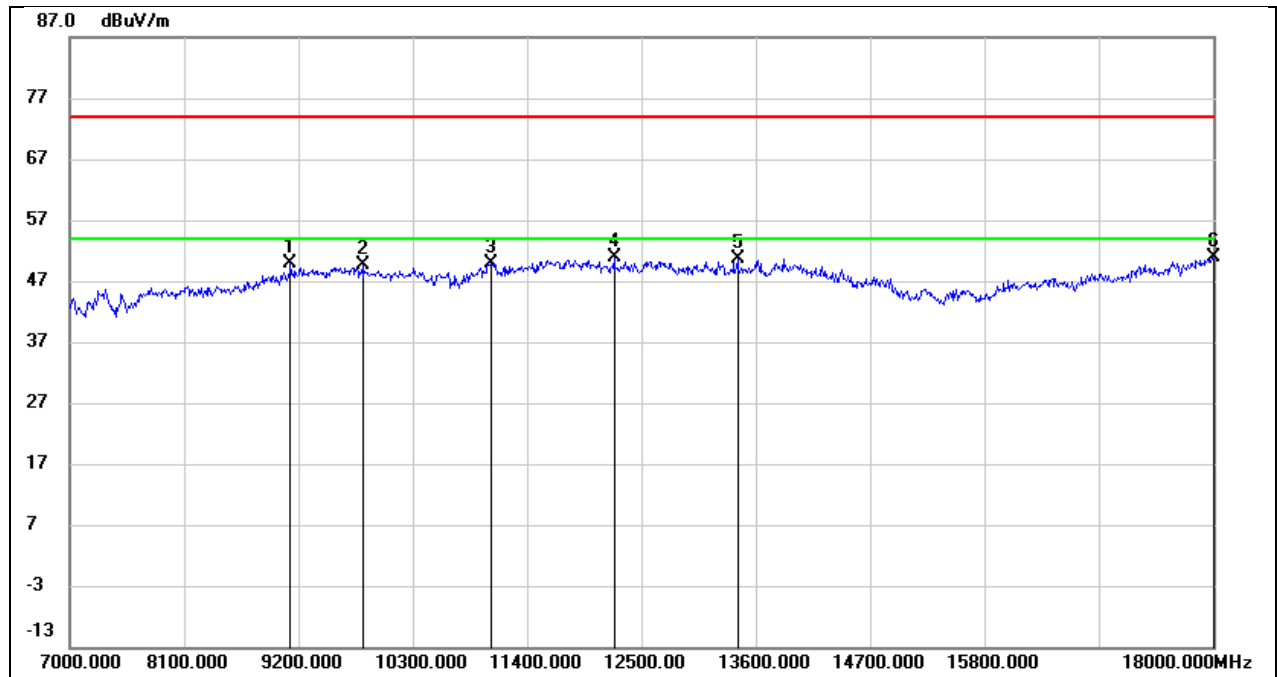


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.73	11.13	49.86	74.00	-24.14	peak
2	9816.000	35.78	13.75	49.53	74.00	-24.47	peak
3	11048.000	34.74	15.24	49.98	74.00	-24.02	peak
4	12236.000	31.91	18.89	50.80	74.00	-23.20	peak
5	13424.000	29.12	21.59	50.71	74.00	-23.29	peak
6	18000.000	21.58	29.41	50.99	74.00	-23.01	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5170
Polarity:	Vertical	Test Voltage:	DC 17.0V

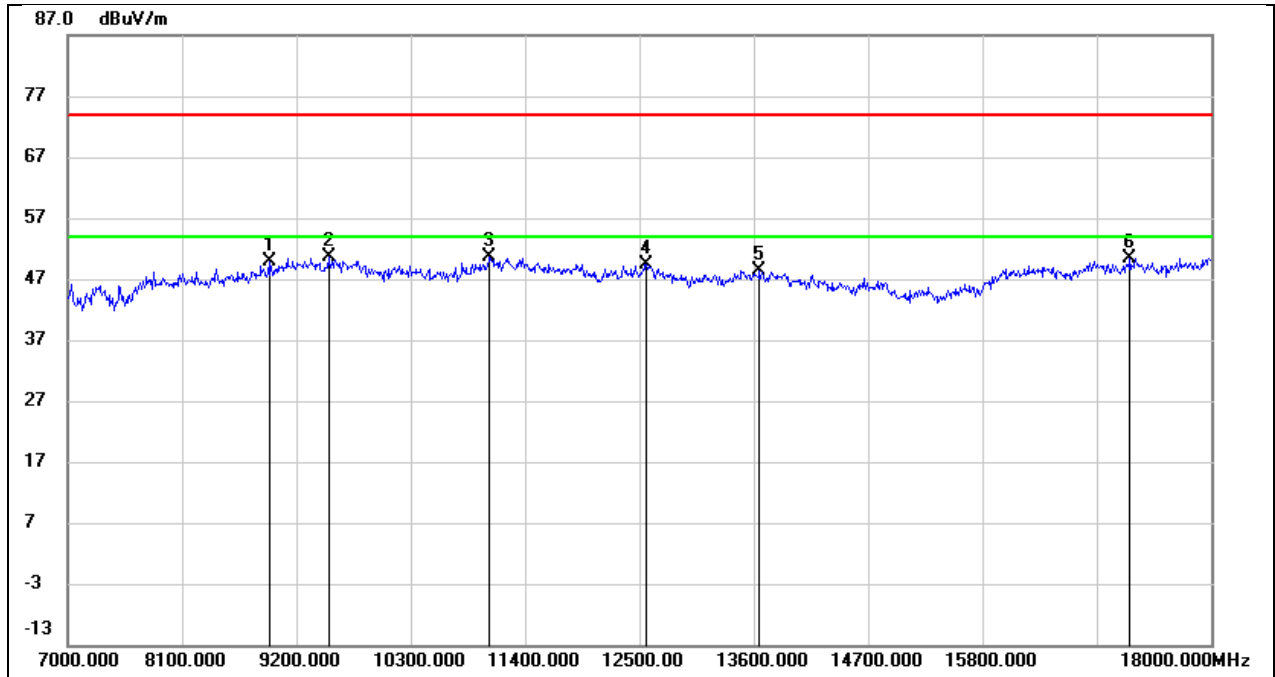


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8936.000	39.15	10.68	49.83	74.00	-24.17	peak
2	9508.000	37.71	12.85	50.56	74.00	-23.44	peak
3	11059.000	36.09	14.43	50.52	74.00	-23.48	peak
4	12566.000	31.29	18.19	49.48	74.00	-24.52	peak
5	13655.000	27.77	20.54	48.31	74.00	-25.69	peak
6	17219.000	25.65	24.72	50.37	74.00	-23.63	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 17.0V

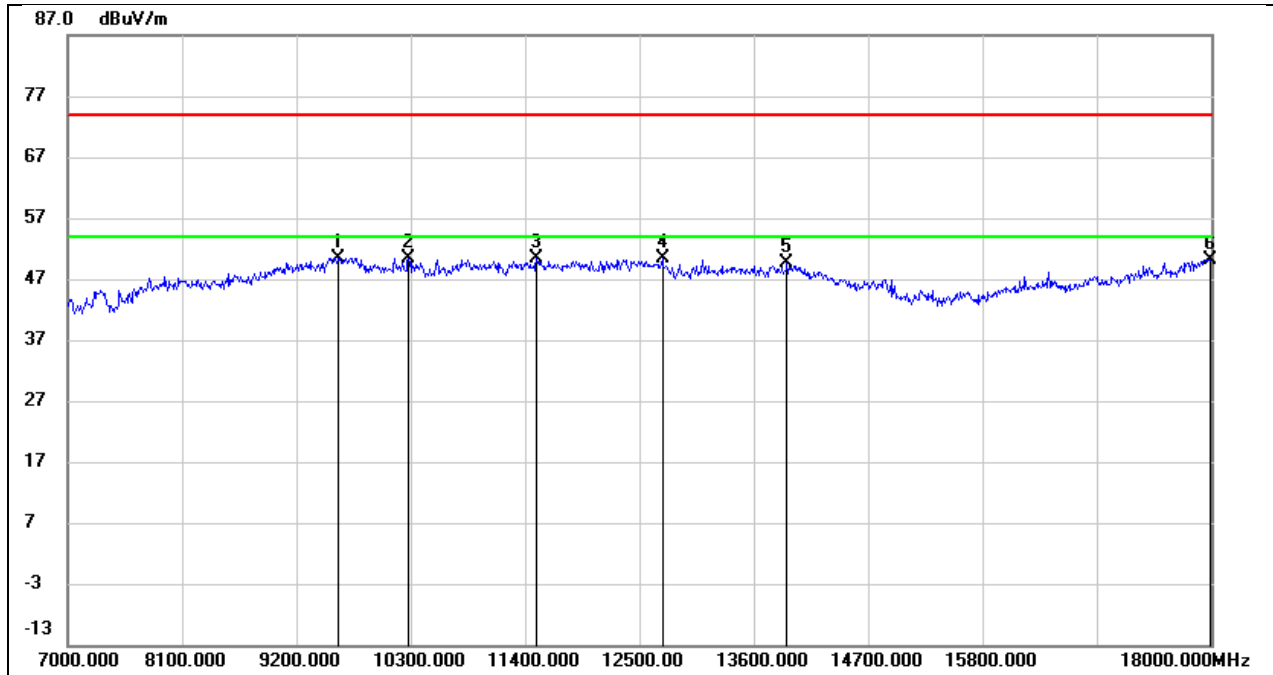


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	37.06	13.44	50.50	74.00	-23.50	peak
2	10278.000	37.25	13.22	50.47	74.00	-23.53	peak
3	11510.000	32.48	17.91	50.39	74.00	-23.61	peak
4	12720.000	30.70	19.64	50.34	74.00	-23.66	peak
5	13919.000	26.48	23.09	49.57	74.00	-24.43	peak
6	17989.000	20.96	29.29	50.25	74.00	-23.75	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 17.0V

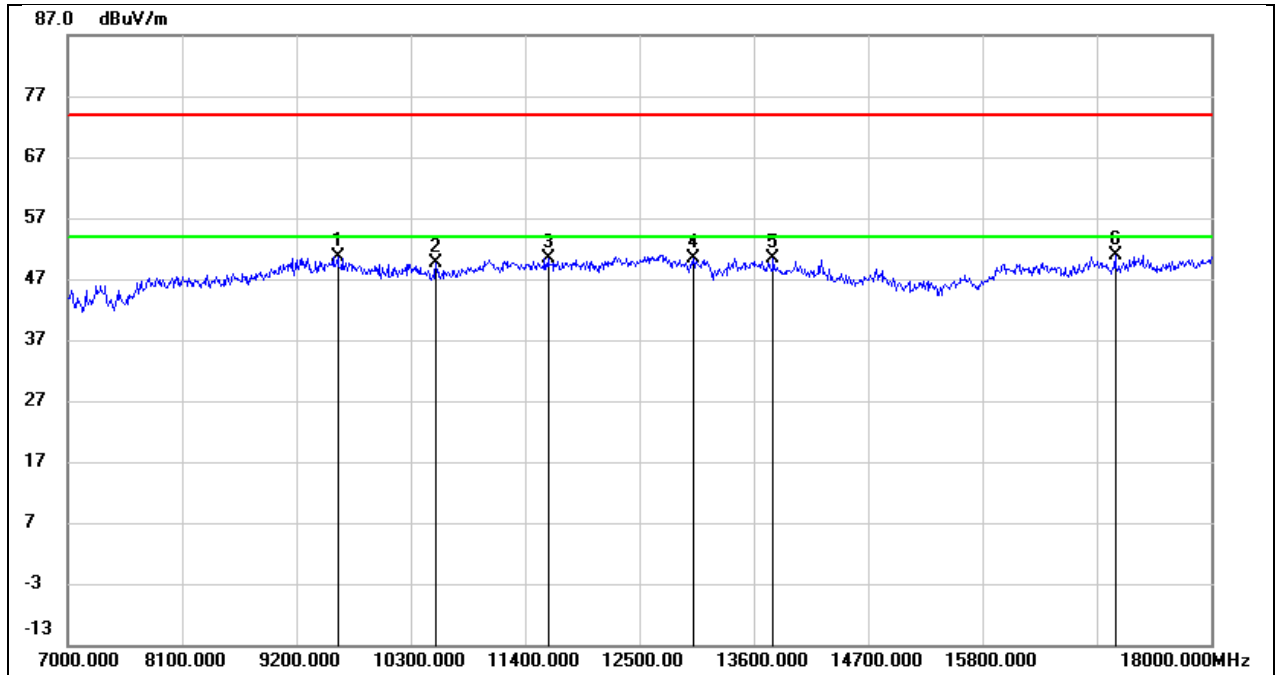


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	37.36	13.26	50.62	74.00	-23.38	peak
2	10542.000	36.27	13.36	49.63	74.00	-24.37	peak
3	11620.000	33.62	16.77	50.39	74.00	-23.61	peak
4	13017.000	31.65	18.81	50.46	74.00	-23.54	peak
5	13787.000	29.33	20.94	50.27	74.00	-23.73	peak
6	17076.000	26.50	24.41	50.91	74.00	-23.09	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 17.0V

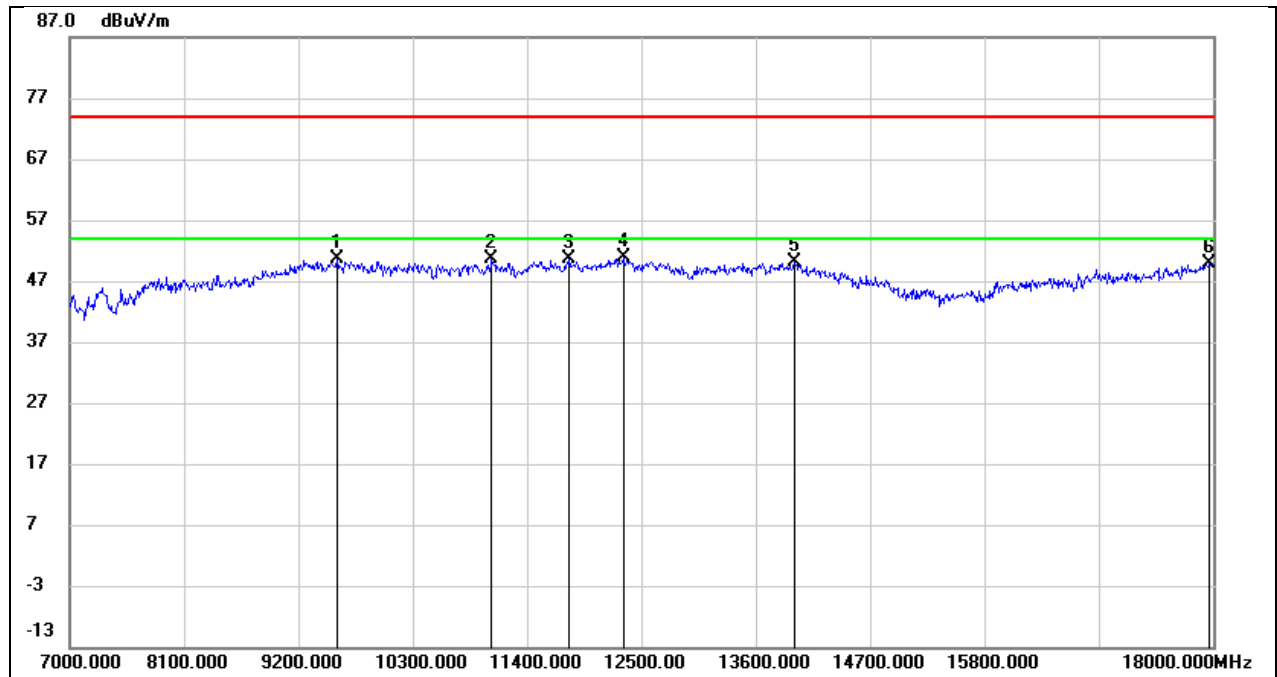


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	37.36	13.26	50.62	74.00	-23.38	peak
2	11059.000	35.22	15.31	50.53	74.00	-23.47	peak
3	11807.000	32.47	18.14	50.61	74.00	-23.39	peak
4	12324.000	31.84	18.99	50.83	74.00	-23.17	peak
5	13974.000	26.83	23.31	50.14	74.00	-23.86	peak
6	17967.000	20.82	29.06	49.88	74.00	-24.12	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 17.0V

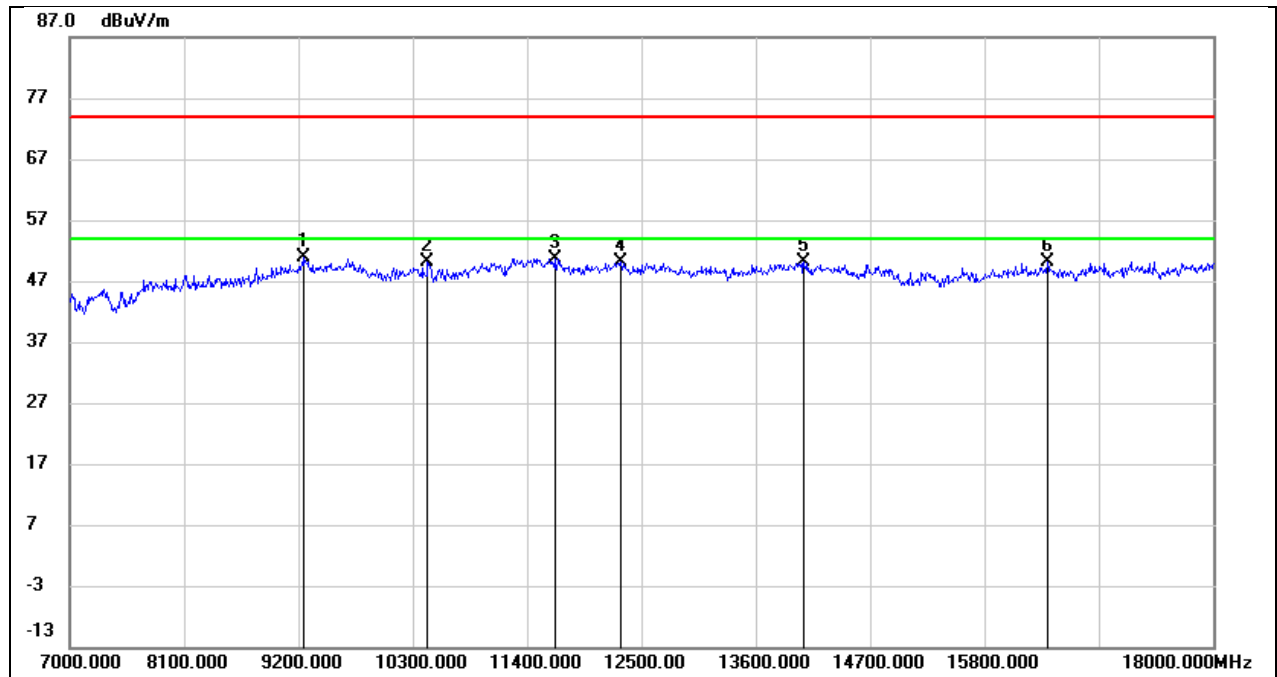


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	39.01	11.86	50.87	74.00	-23.13	peak
2	10443.000	36.92	13.13	50.05	74.00	-23.95	peak
3	11664.000	33.90	16.78	50.68	74.00	-23.32	peak
4	12302.000	32.21	17.98	50.19	74.00	-23.81	peak
5	14062.000	28.53	21.71	50.24	74.00	-23.76	peak
6	16405.000	26.65	23.52	50.17	74.00	-23.83	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5745.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

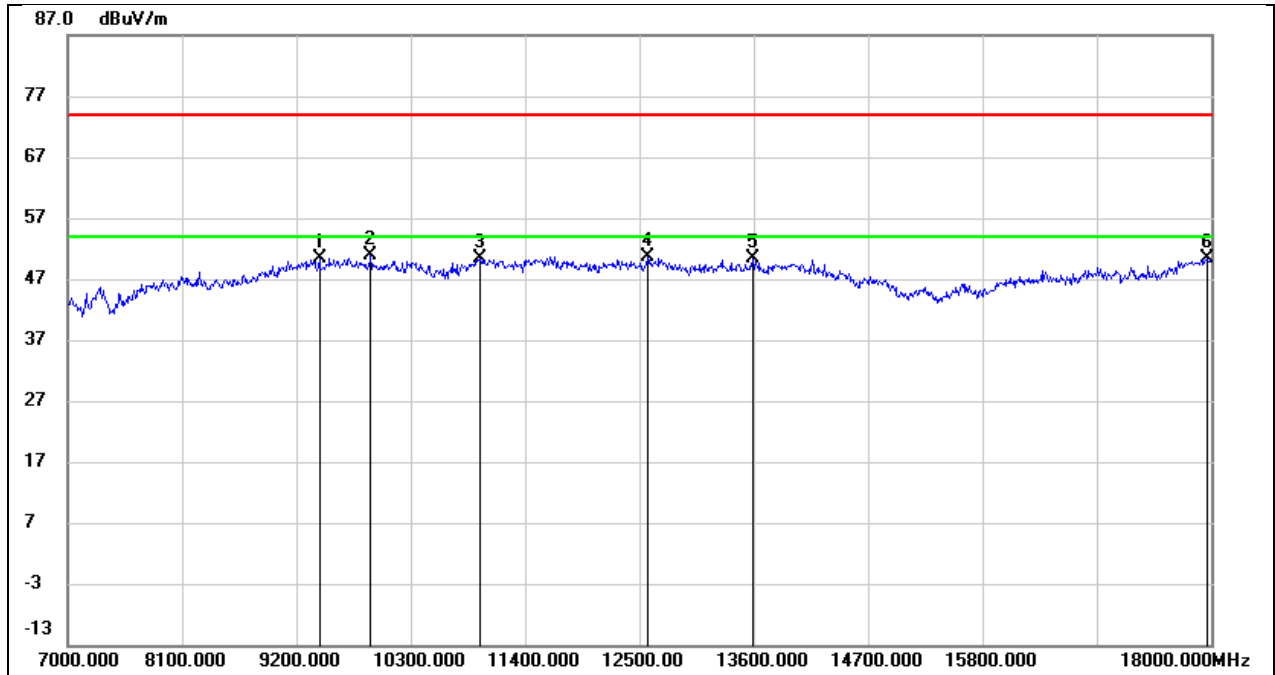


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9420.000	38.07	12.28	50.35	74.00	-23.65	peak
2	9915.000	37.29	13.53	50.82	74.00	-23.18	peak
3	10971.000	35.49	14.87	50.36	74.00	-23.64	peak
4	12577.000	31.46	19.15	50.61	74.00	-23.39	peak
5	13589.000	28.41	22.04	50.45	74.00	-23.55	peak
6	17967.000	21.33	29.06	50.39	74.00	-23.61	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5745.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

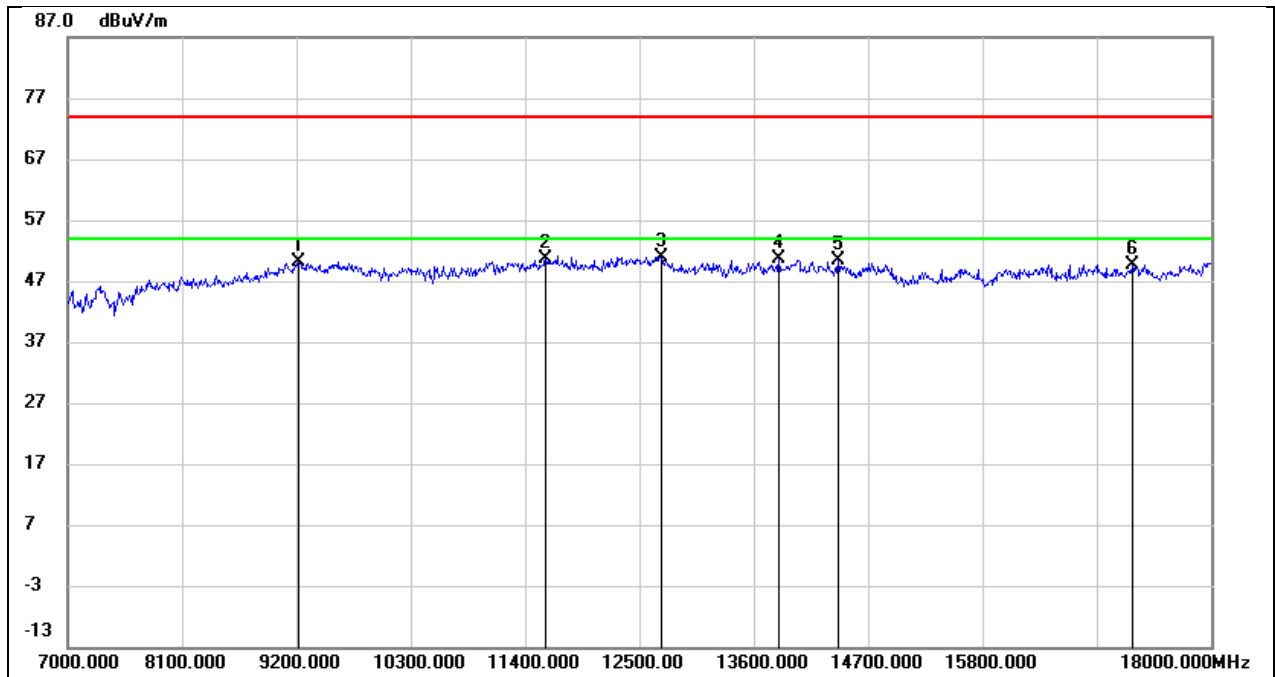


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.41	11.78	50.19	74.00	-23.81	peak
2	11598.000	33.82	16.76	50.58	74.00	-23.42	peak
3	12709.000	32.42	18.57	50.99	74.00	-23.01	peak
4	13842.000	29.55	21.15	50.70	74.00	-23.30	peak
5	14414.000	29.55	20.79	50.34	74.00	-23.66	peak
6	17241.000	24.93	24.74	49.67	74.00	-24.33	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

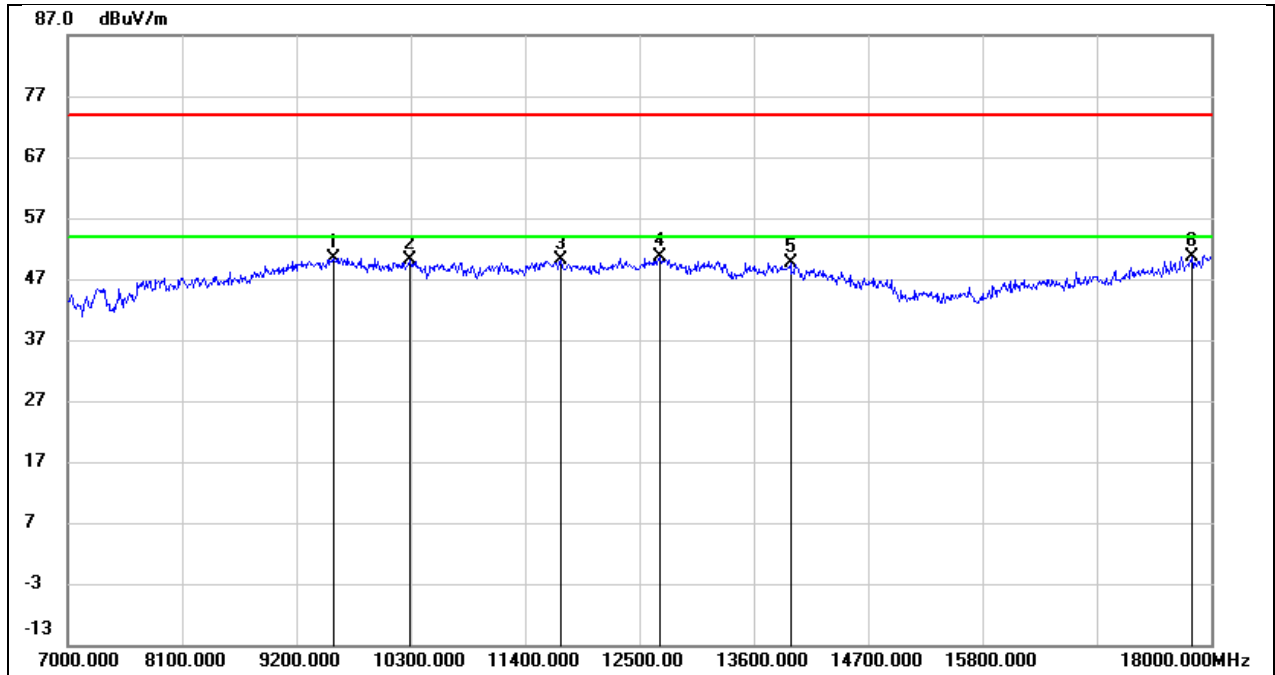


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	37.34	13.12	50.46	74.00	-23.54	peak
2	10289.000	36.78	13.23	50.01	74.00	-23.99	peak
3	11741.000	31.92	18.14	50.06	74.00	-23.94	peak
4	12698.000	31.07	19.55	50.62	74.00	-23.38	peak
5	13952.000	26.53	23.22	49.75	74.00	-24.25	peak
6	17813.000	23.25	27.42	50.67	74.00	-23.33	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

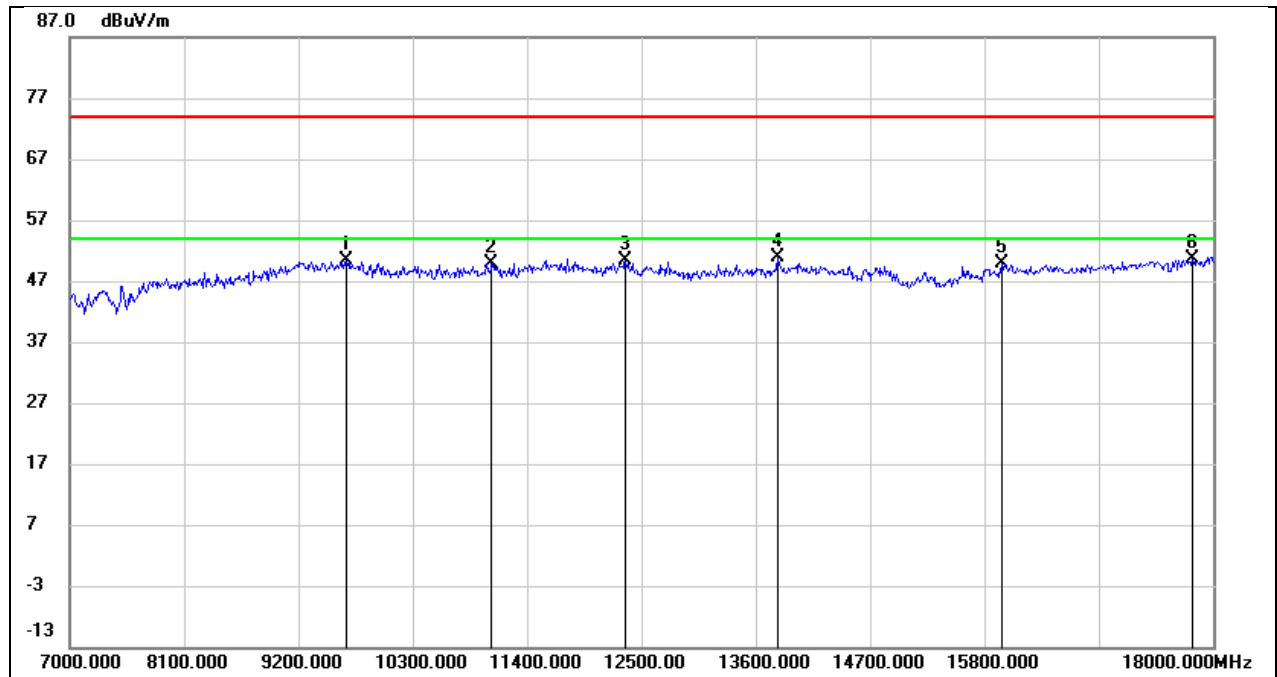


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9662.000	37.06	13.31	50.37	74.00	-23.63	peak
2	11059.000	35.56	14.43	49.99	74.00	-24.01	peak
3	12346.000	32.44	18.05	50.49	74.00	-23.51	peak
4	13809.000	29.88	21.01	50.89	74.00	-23.11	peak
5	15965.000	27.20	22.65	49.85	74.00	-24.15	peak
6	17802.000	24.55	25.98	50.53	74.00	-23.47	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5829.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

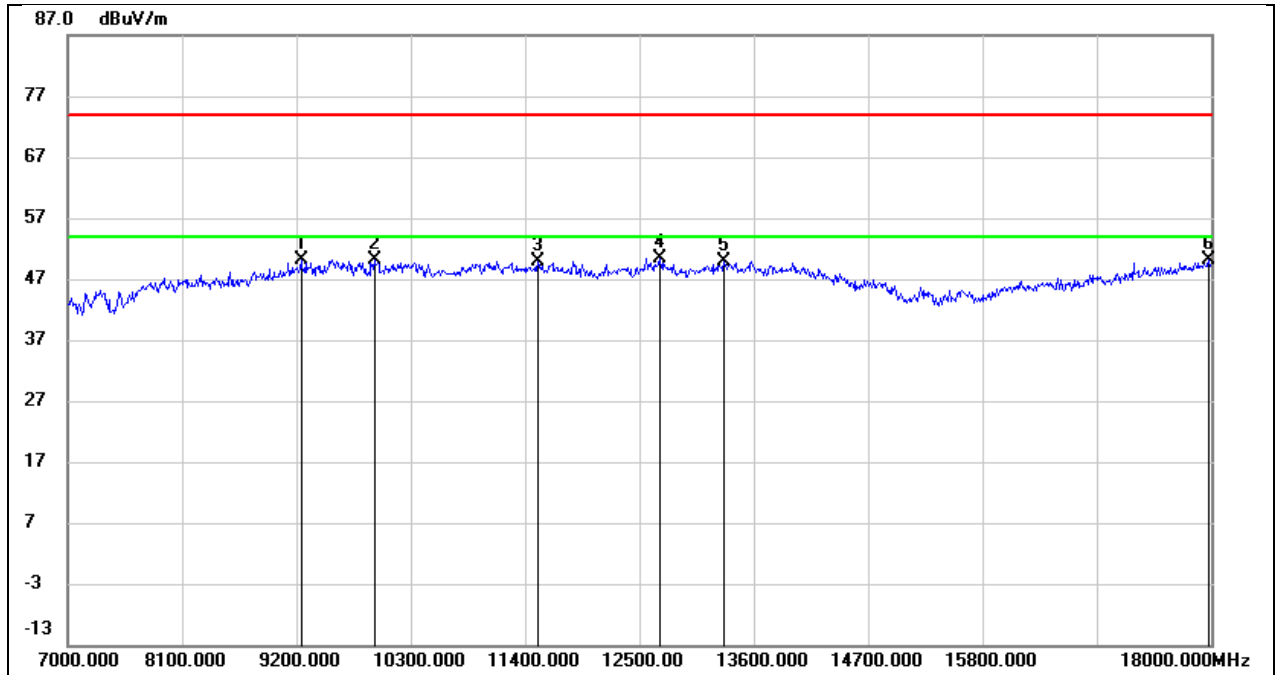


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.45	11.63	50.08	74.00	-23.92	peak
2	9948.000	36.57	13.46	50.03	74.00	-23.97	peak
3	11521.000	31.99	17.94	49.93	74.00	-24.07	peak
4	12698.000	30.93	19.55	50.48	74.00	-23.52	peak
5	13314.000	28.76	21.19	49.95	74.00	-24.05	peak
6	17978.000	21.02	29.18	50.20	74.00	-23.80	peak

Test Mode:	SRD 5G 40M	Frequency(MHz):	5829.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

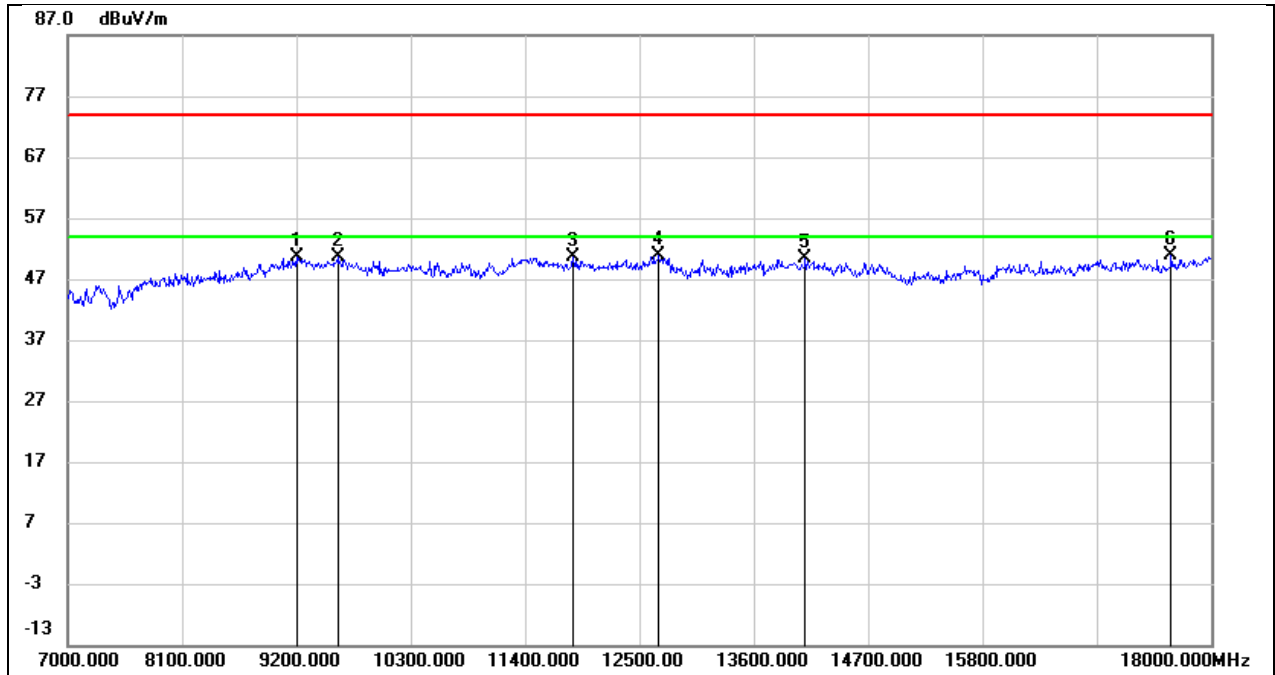


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.83	11.72	50.55	74.00	-23.45	peak
2	9596.000	37.29	13.26	50.55	74.00	-23.45	peak
3	11862.000	33.42	17.09	50.51	74.00	-23.49	peak
4	12687.000	32.28	18.50	50.78	74.00	-23.22	peak
5	14095.000	28.72	21.66	50.38	74.00	-23.62	peak
6	17615.000	25.83	25.00	50.83	74.00	-23.17	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 17.0V

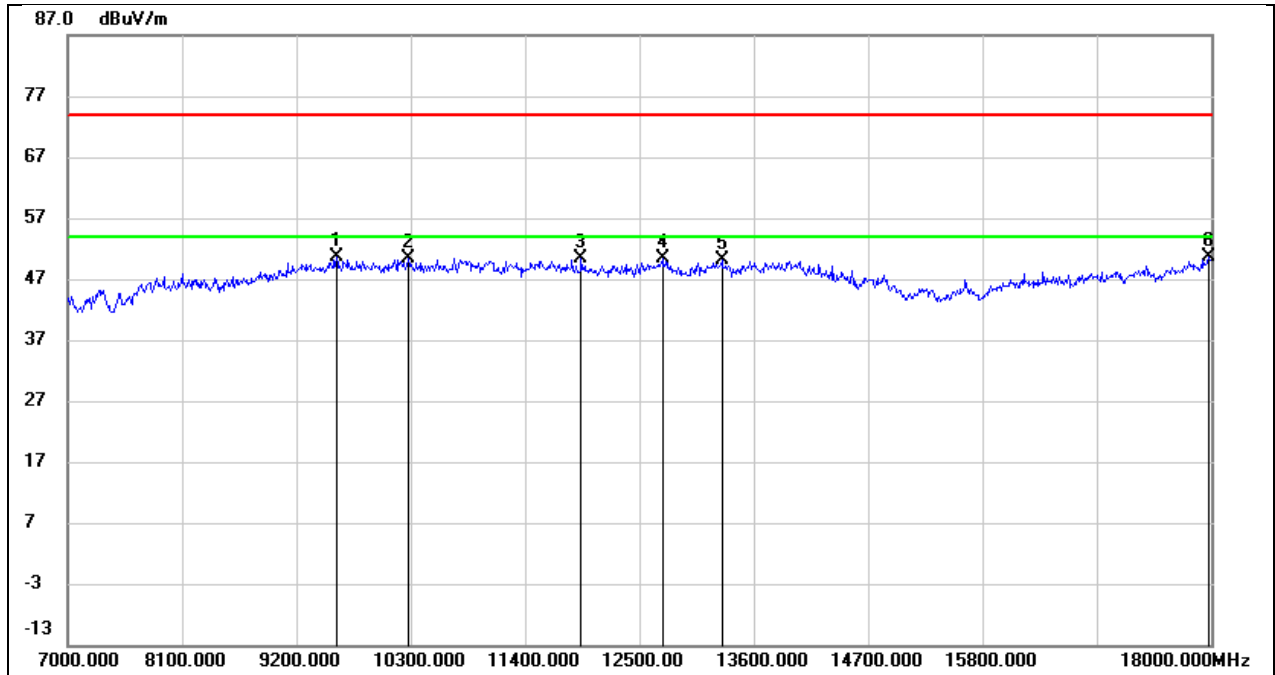


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.20	13.34	50.54	74.00	-23.46	peak
2	10278.000	37.12	13.22	50.34	74.00	-23.66	peak
3	11939.000	31.86	18.52	50.38	74.00	-23.62	peak
4	12720.000	30.70	19.64	50.34	74.00	-23.66	peak
5	13292.000	28.90	21.11	50.01	74.00	-23.99	peak
6	17978.000	21.49	29.18	50.67	74.00	-23.33	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 17.0V

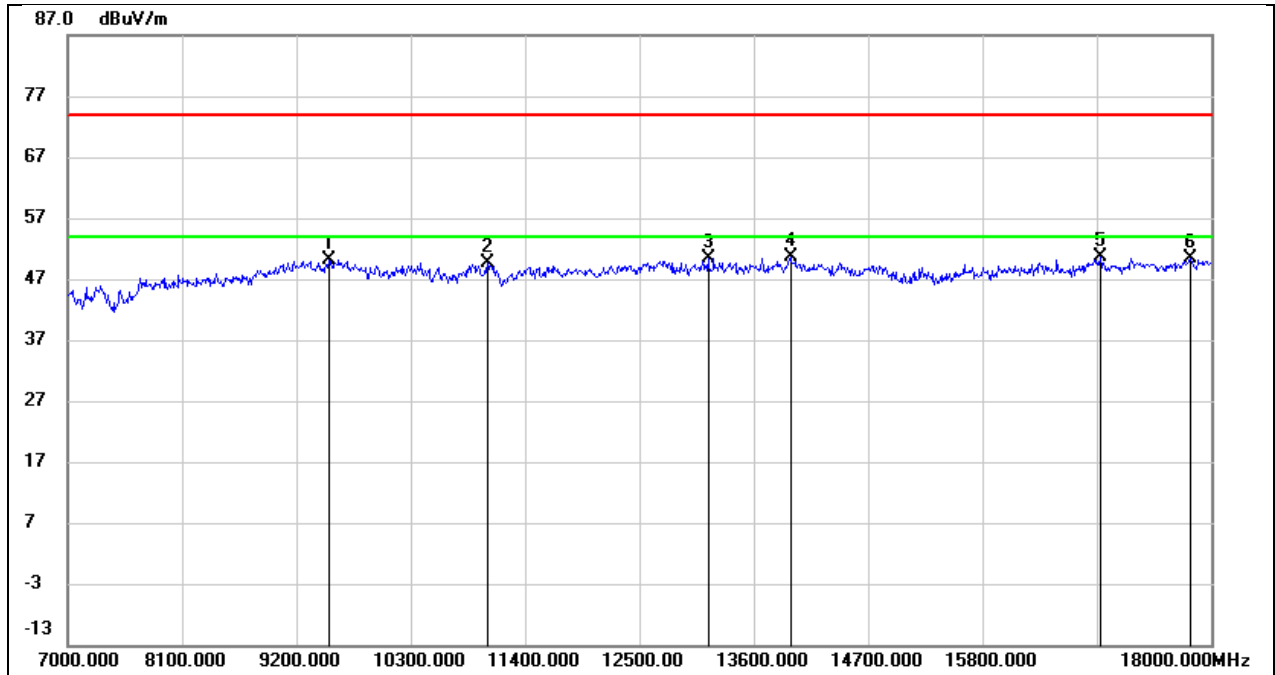


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.27	12.85	50.12	74.00	-23.88	peak
2	11037.000	35.30	14.33	49.63	74.00	-24.37	peak
3	13160.000	31.07	19.26	50.33	74.00	-23.67	peak
4	13952.000	28.98	21.61	50.59	74.00	-23.41	peak
5	16933.000	26.40	24.11	50.51	74.00	-23.49	peak
6	17802.000	24.35	25.98	50.33	74.00	-23.67	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 17.0V

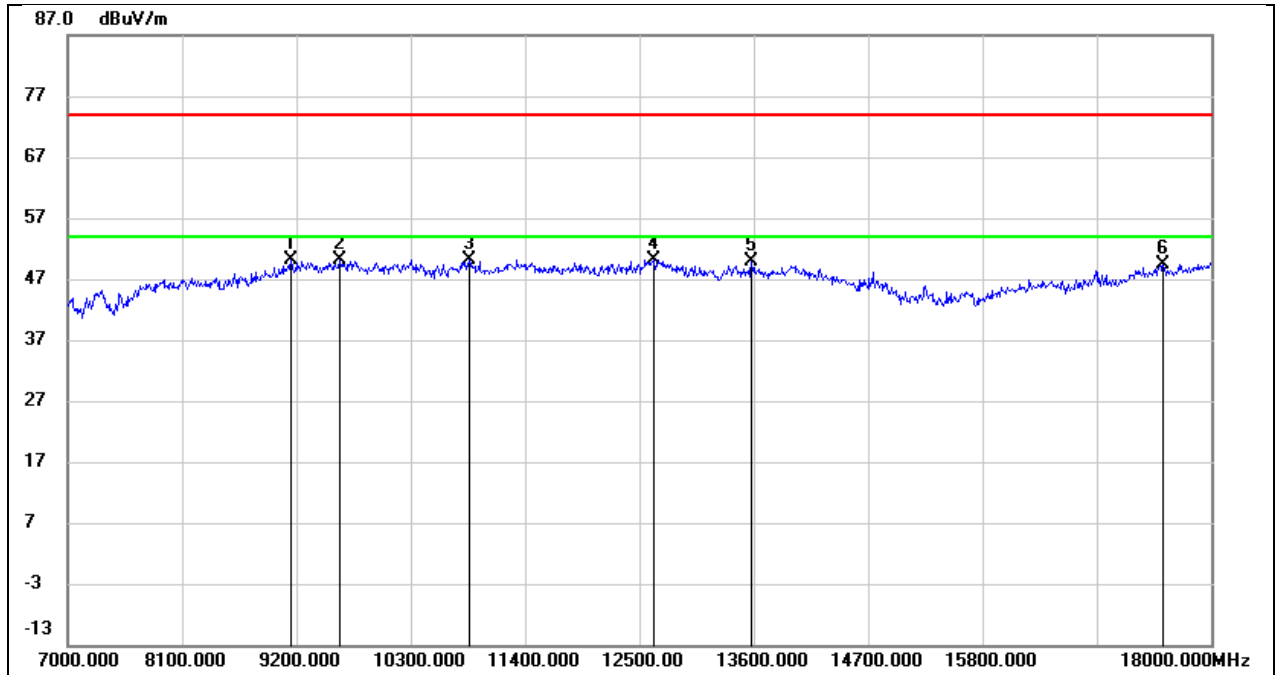


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.90	11.22	50.12	74.00	-23.88	peak
2	9618.000	36.62	13.46	50.08	74.00	-23.92	peak
3	10861.000	35.66	14.52	50.18	74.00	-23.82	peak
4	12632.000	30.82	19.30	50.12	74.00	-23.88	peak
5	13578.000	27.95	22.03	49.98	74.00	-24.02	peak
6	17538.000	24.42	24.99	49.41	74.00	-24.59	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 17.0V

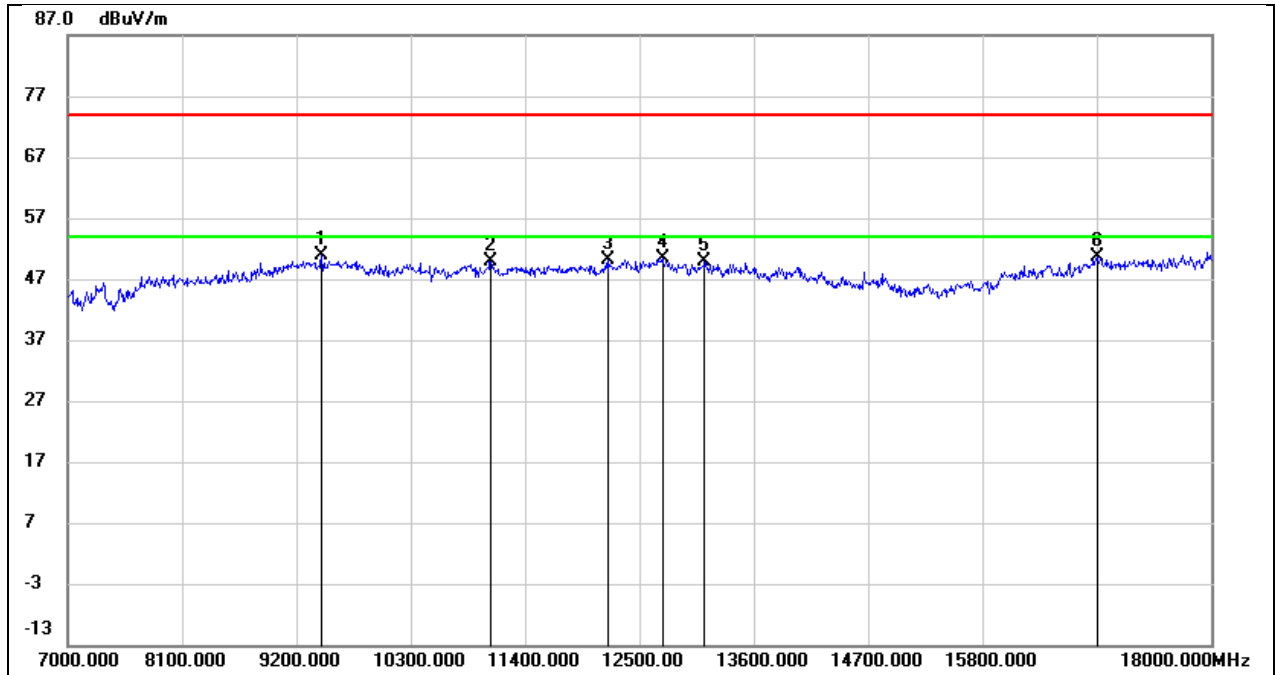


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9442.000	38.38	12.47	50.85	74.00	-23.15	peak
2	11070.000	35.49	14.47	49.96	74.00	-24.04	peak
3	12203.000	32.34	17.83	50.17	74.00	-23.83	peak
4	12720.000	31.66	18.61	50.27	74.00	-23.73	peak
5	13127.000	30.77	19.15	49.92	74.00	-24.08	peak
6	16911.000	26.43	24.08	50.51	74.00	-23.49	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5220
Polarity:	Horizontal	Test Voltage:	DC 17.0V

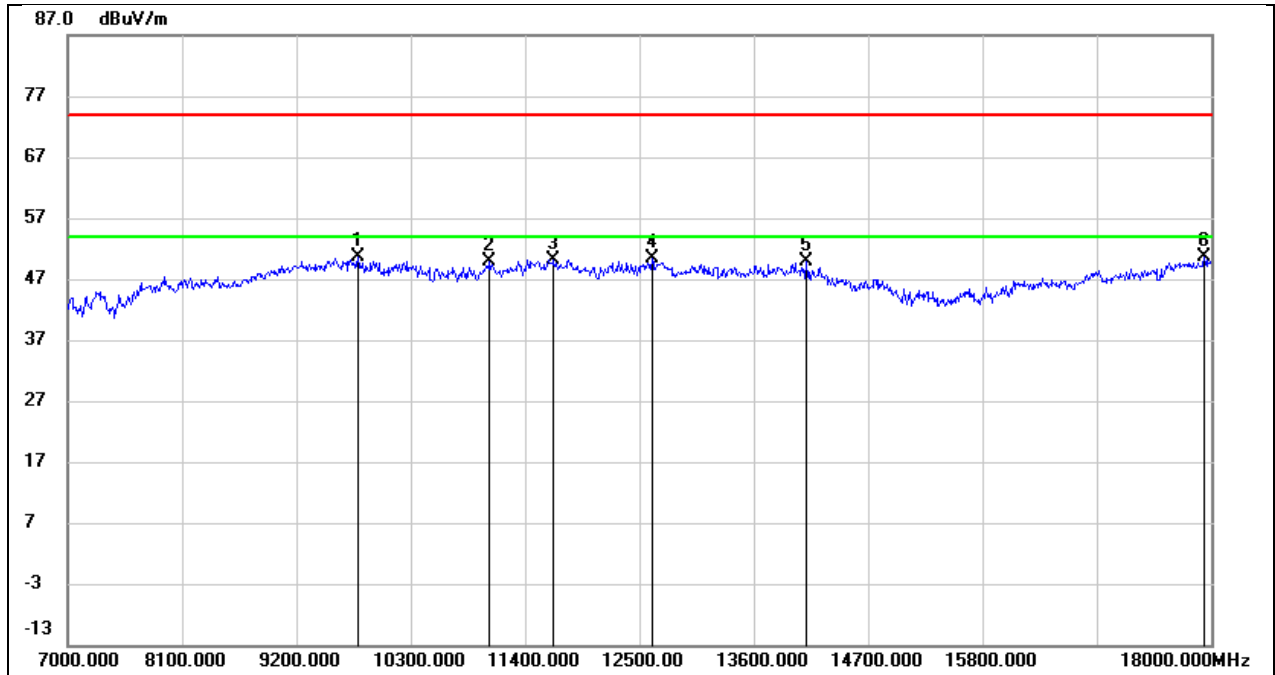


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9794.000	36.84	13.76	50.60	74.00	-23.40	peak
2	11059.000	34.47	15.31	49.78	74.00	-24.22	peak
3	11675.000	32.03	18.16	50.19	74.00	-23.81	peak
4	12621.000	31.01	19.26	50.27	74.00	-23.73	peak
5	14106.000	26.82	22.98	49.80	74.00	-24.20	peak
6	17934.000	21.91	28.71	50.62	74.00	-23.38	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5220
Polarity:	Vertical	Test Voltage:	DC 17.0V

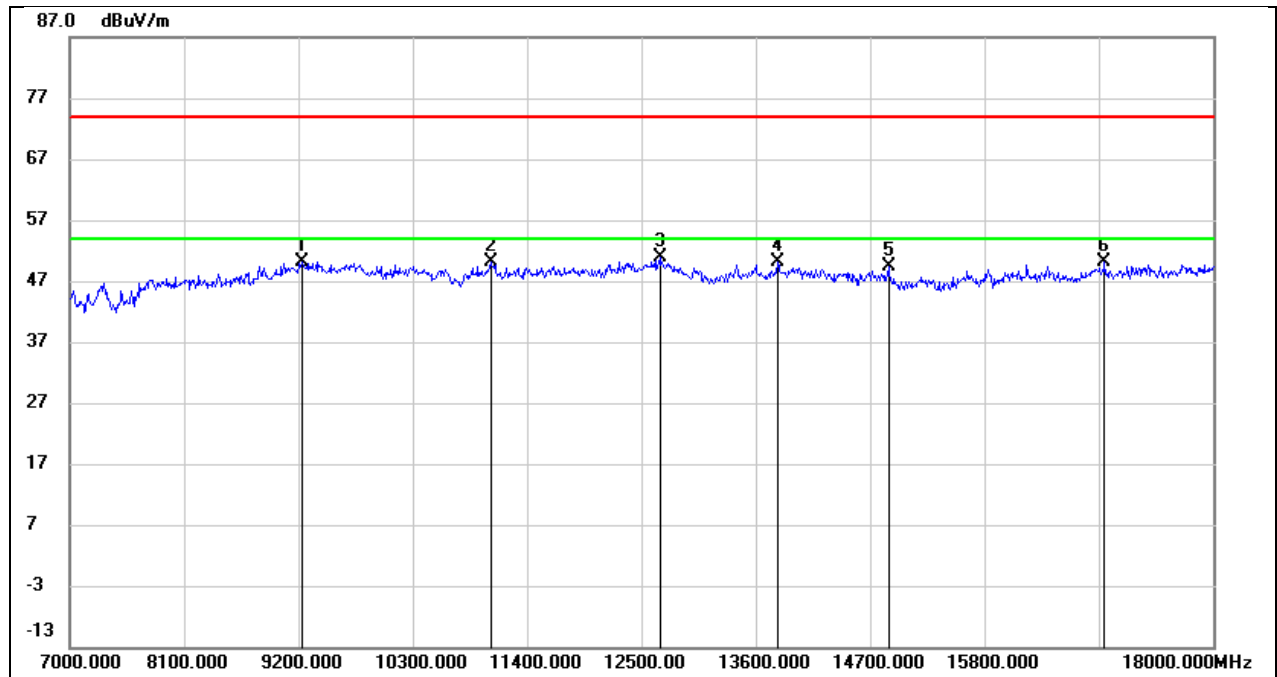


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.39	11.81	50.20	74.00	-23.80	peak
2	11048.000	35.76	14.37	50.13	74.00	-23.87	peak
3	12687.000	32.30	18.50	50.80	74.00	-23.20	peak
4	13809.000	29.08	21.01	50.09	74.00	-23.91	peak
5	14876.000	29.14	20.16	49.30	74.00	-24.70	peak
6	16955.000	25.91	24.14	50.05	74.00	-23.95	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5755.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

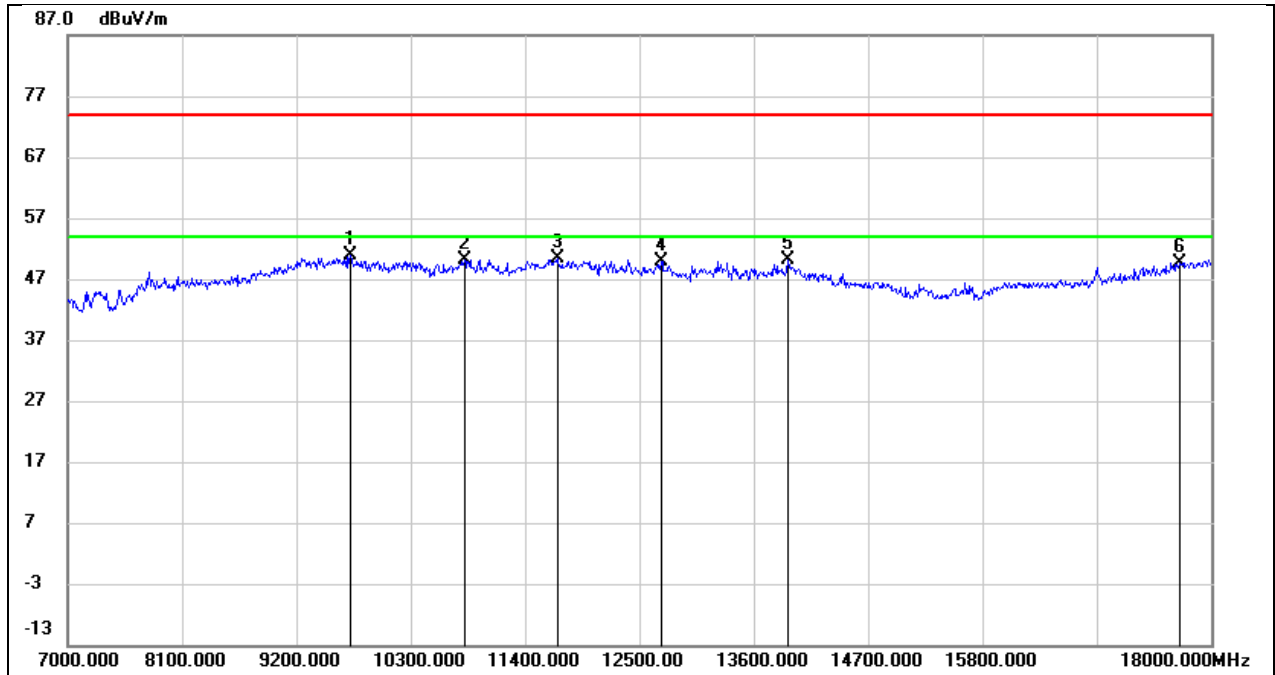


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9717.000	37.31	13.63	50.94	74.00	-23.06	peak
2	10817.000	35.85	14.40	50.25	74.00	-23.75	peak
3	11708.000	32.16	18.15	50.31	74.00	-23.69	peak
4	12709.000	30.35	19.59	49.94	74.00	-24.06	peak
5	13930.000	27.08	23.13	50.21	74.00	-23.79	peak
6	17703.000	23.37	26.34	49.71	74.00	-24.29	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5755.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

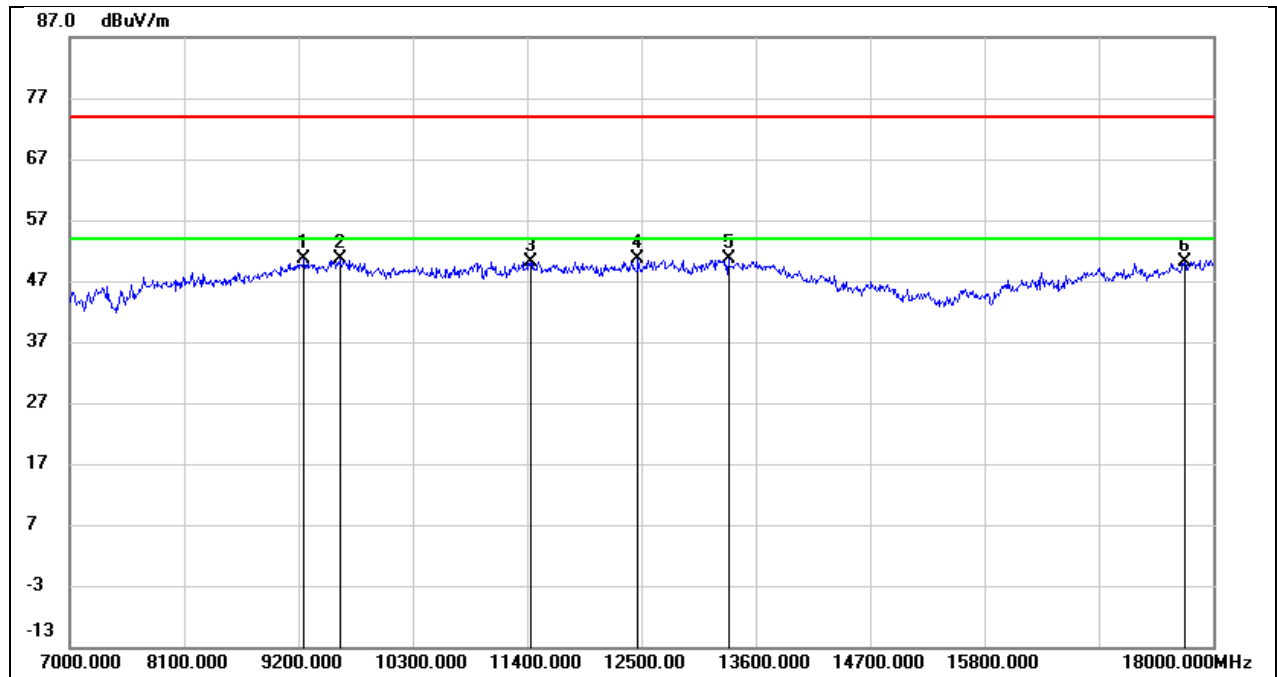


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.80	11.86	50.66	74.00	-23.34	peak
2	9596.000	37.35	13.26	50.61	74.00	-23.39	peak
3	11433.000	34.09	16.14	50.23	74.00	-23.77	peak
4	12467.000	32.38	18.13	50.51	74.00	-23.49	peak
5	13336.000	30.95	19.74	50.69	74.00	-23.31	peak
6	17725.000	24.56	25.56	50.12	74.00	-23.88	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

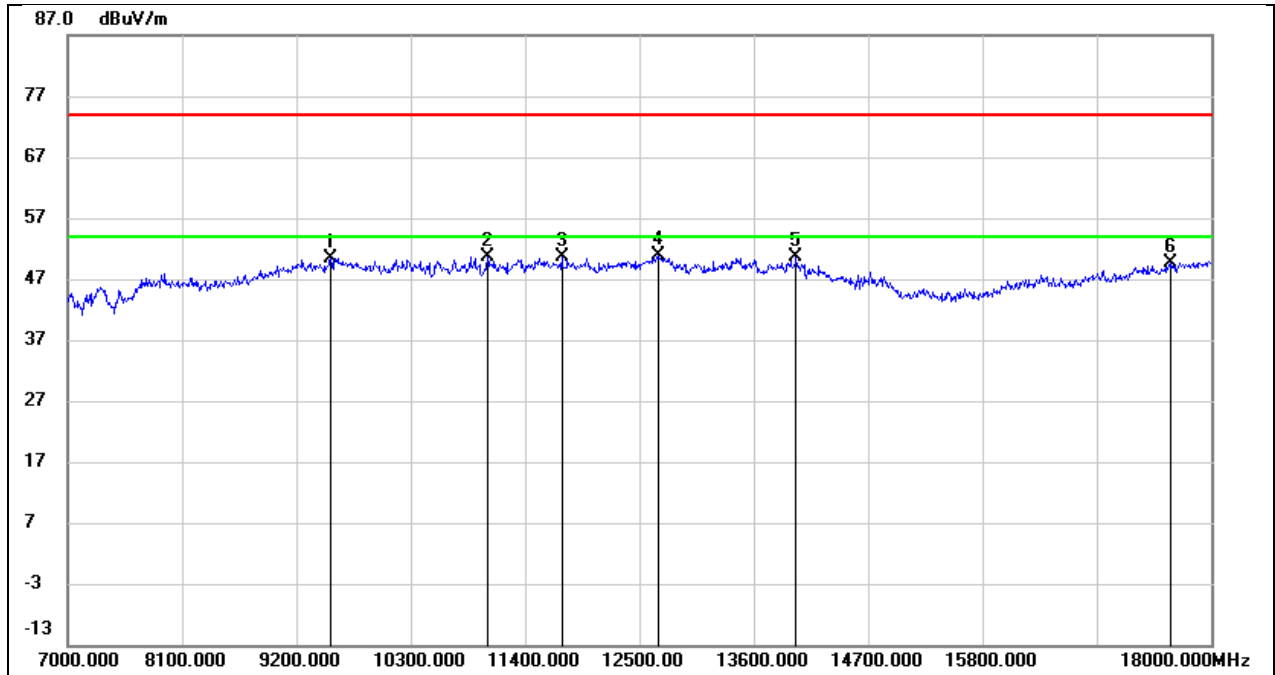


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9530.000	37.45	12.99	50.44	74.00	-23.56	peak
2	11037.000	35.41	15.18	50.59	74.00	-23.41	peak
3	11752.000	32.58	18.14	50.72	74.00	-23.28	peak
4	12687.000	31.45	19.51	50.96	74.00	-23.04	peak
5	14007.000	27.34	23.39	50.73	74.00	-23.27	peak
6	17615.000	24.21	25.50	49.71	74.00	-24.29	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

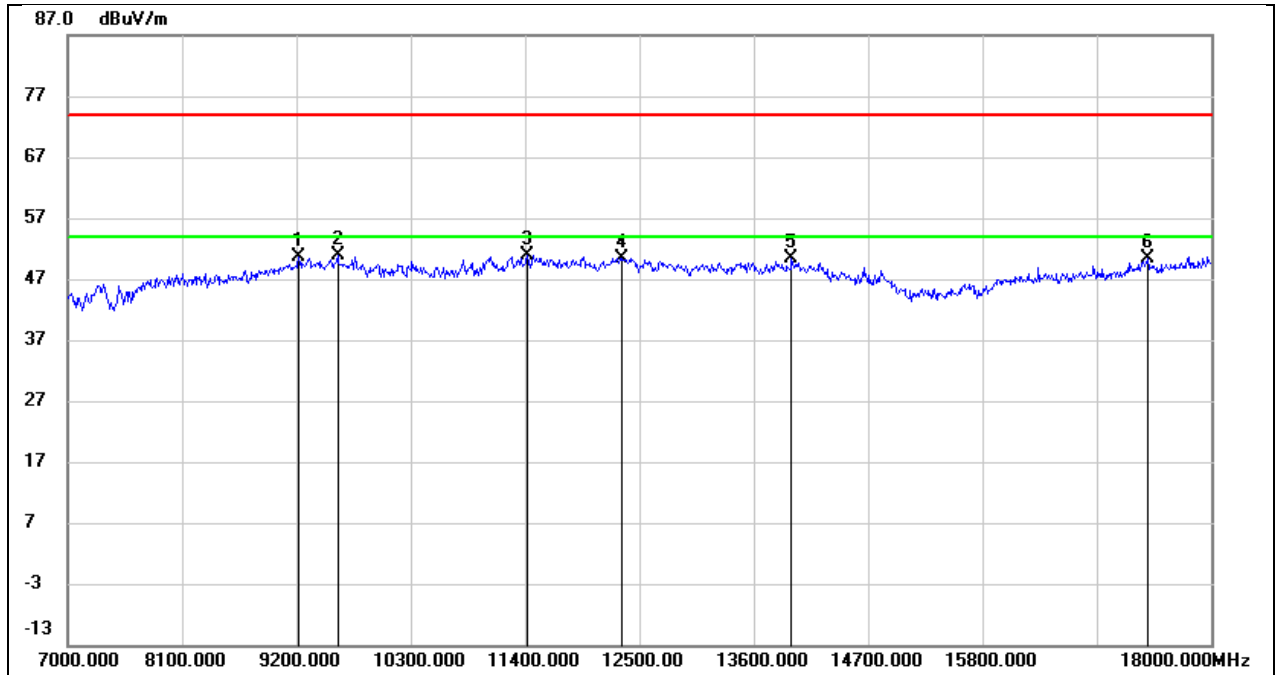


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.87	11.78	50.65	74.00	-23.35	peak
2	9596.000	37.55	13.26	50.81	74.00	-23.19	peak
3	11422.000	34.85	16.10	50.95	74.00	-23.05	peak
4	12324.000	32.35	18.01	50.36	74.00	-23.64	peak
5	13963.000	28.67	21.65	50.32	74.00	-23.68	peak
6	17384.000	25.46	24.85	50.31	74.00	-23.69	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5819.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

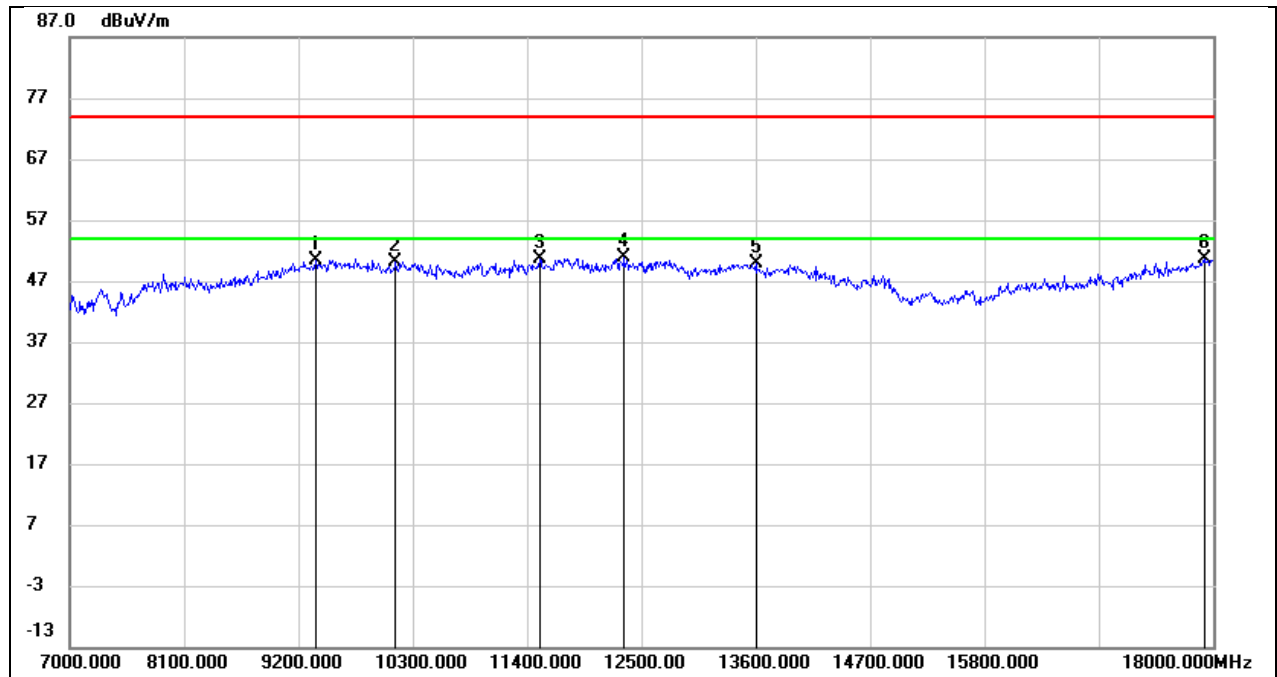


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9365.000	38.39	12.03	50.42	74.00	-23.58	peak
2	10135.000	36.88	13.21	50.09	74.00	-23.91	peak
3	11521.000	32.79	17.94	50.73	74.00	-23.27	peak
4	12335.000	31.77	18.99	50.76	74.00	-23.24	peak
5	13600.000	27.85	22.06	49.91	74.00	-24.09	peak
6	17912.000	22.25	28.48	50.73	74.00	-23.27	peak

Test Mode:	SRD 5G 60M	Frequency(MHz):	5819.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

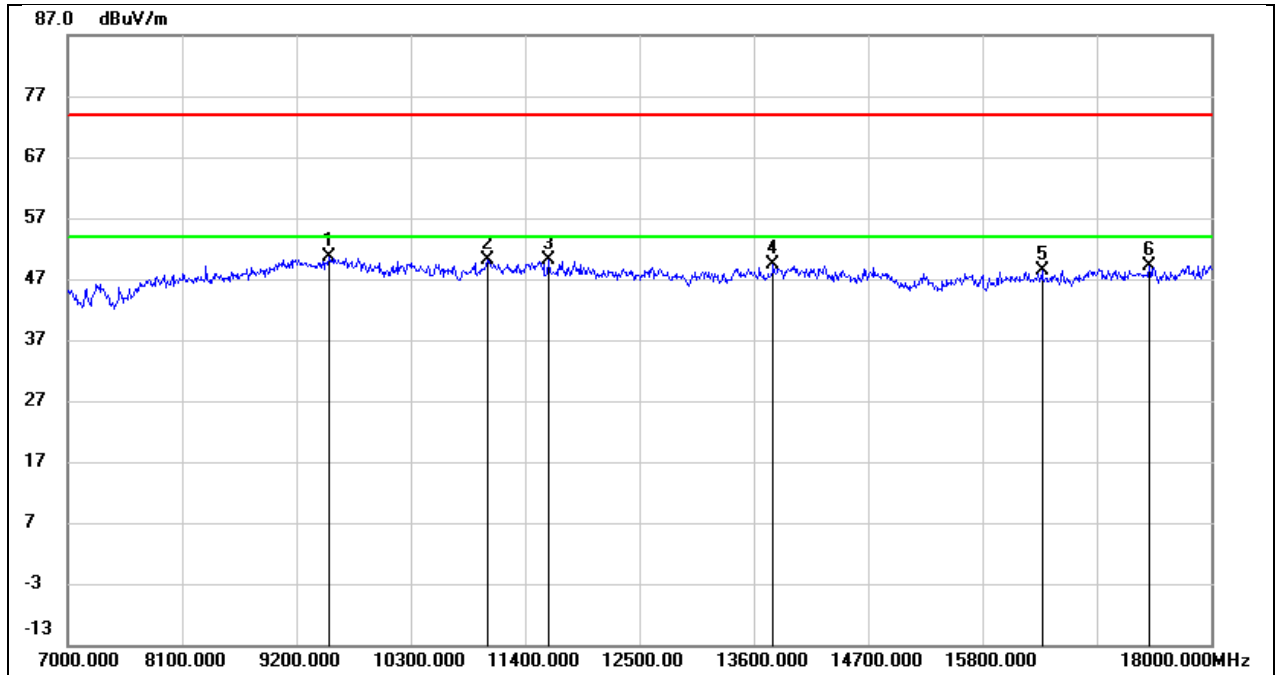


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.66	12.90	50.56	74.00	-23.44	peak
2	11037.000	35.85	14.33	50.18	74.00	-23.82	peak
3	11620.000	33.47	16.77	50.24	74.00	-23.76	peak
4	13787.000	28.42	20.94	49.36	74.00	-24.64	peak
5	16372.000	24.77	23.61	48.38	74.00	-25.62	peak
6	17406.000	24.38	24.85	49.23	74.00	-24.77	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 17.0V

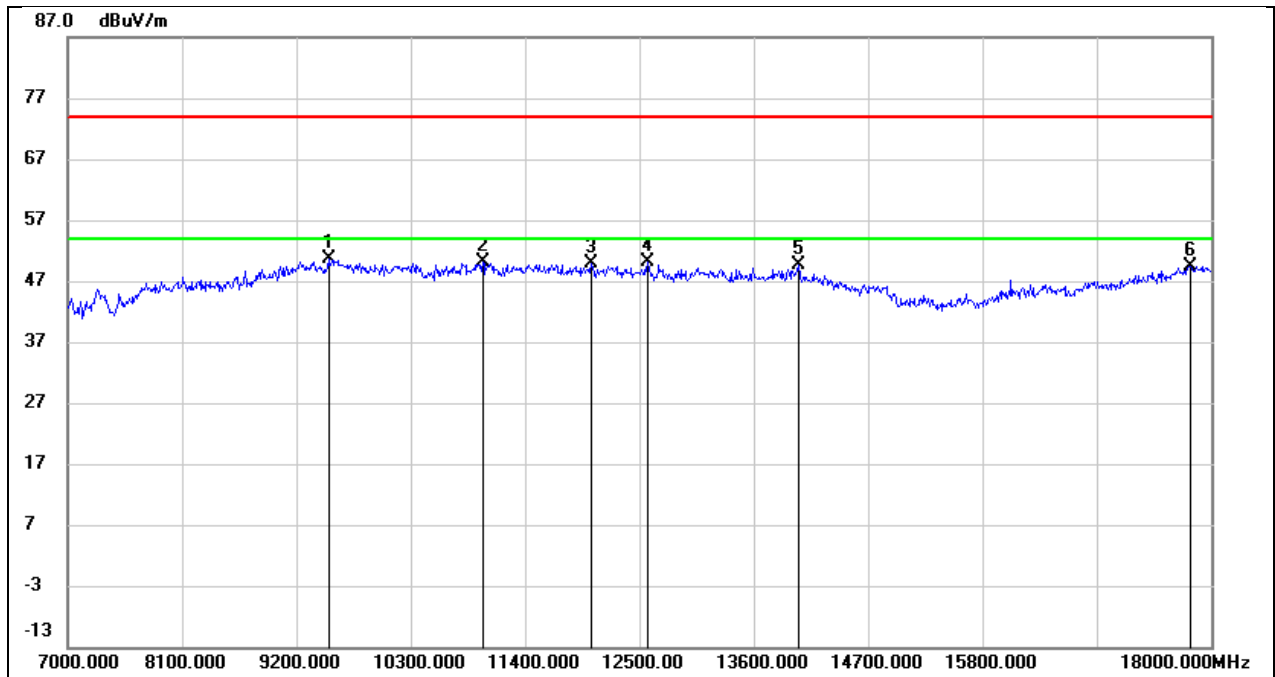


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.82	12.86	50.68	74.00	-23.32	peak
2	10993.000	35.13	14.94	50.07	74.00	-23.93	peak
3	12038.000	31.10	18.73	49.83	74.00	-24.17	peak
4	12577.000	30.90	19.15	50.05	74.00	-23.95	peak
5	14029.000	26.28	23.29	49.57	74.00	-24.43	peak
6	17802.000	22.18	27.31	49.49	74.00	-24.51	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 17.0V

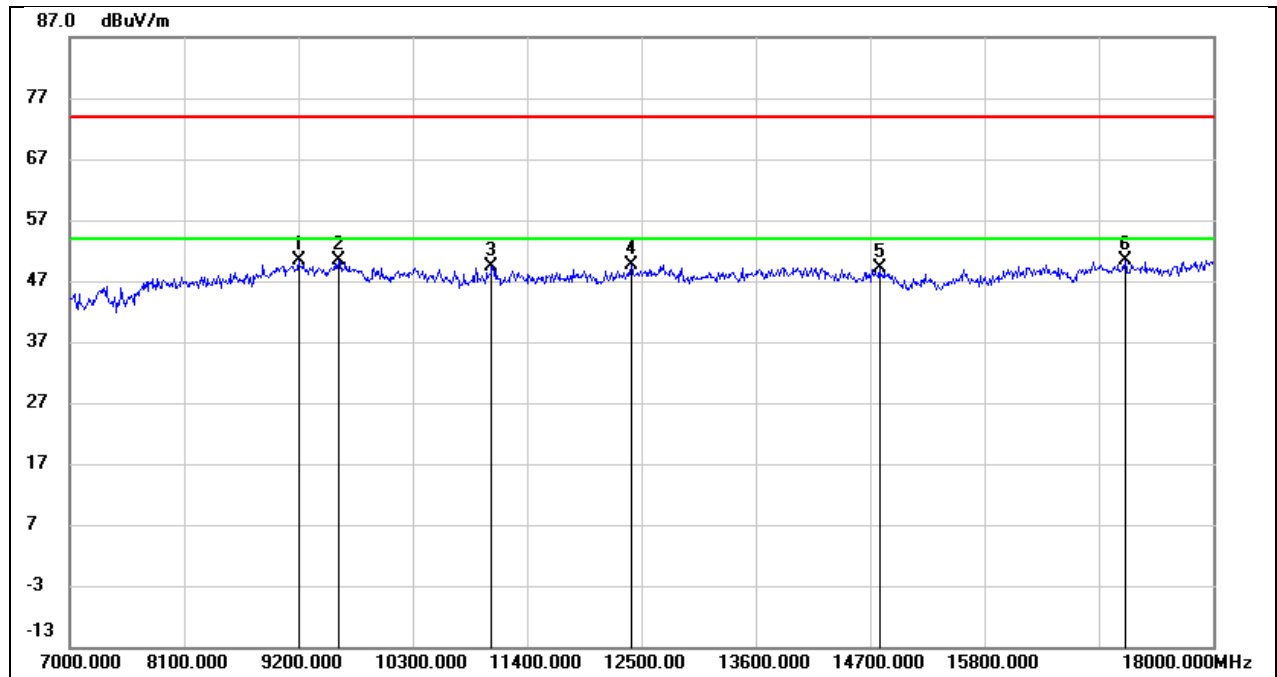


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.54	11.72	50.26	74.00	-23.74	peak
2	9585.000	37.15	13.22	50.37	74.00	-23.63	peak
3	11059.000	35.06	14.43	49.49	74.00	-24.51	peak
4	12401.000	31.53	18.12	49.65	74.00	-24.35	peak
5	14788.000	28.84	20.41	49.25	74.00	-24.75	peak
6	17153.000	25.67	24.59	50.26	74.00	-23.74	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 17.0V

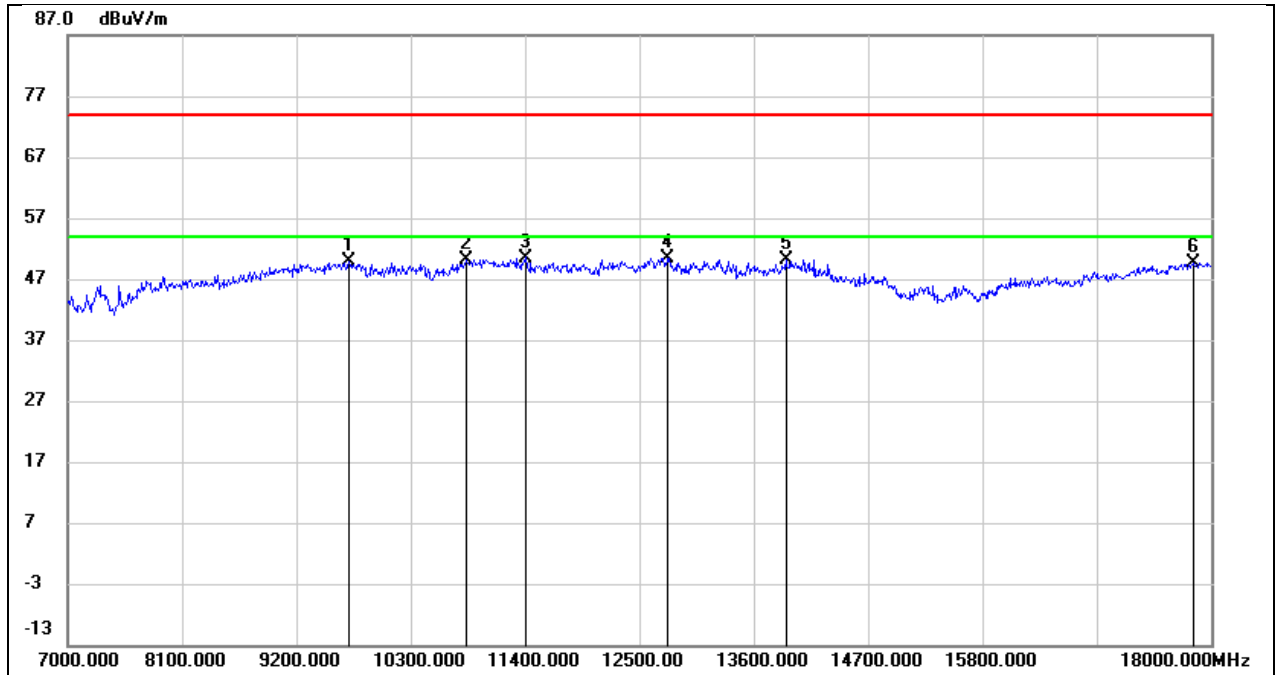


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9706.000	36.30	13.62	49.92	74.00	-24.08	peak
2	10828.000	35.73	14.43	50.16	74.00	-23.84	peak
3	11411.000	33.07	17.43	50.50	74.00	-23.50	peak
4	12775.000	30.65	19.85	50.50	74.00	-23.50	peak
5	13908.000	27.02	23.05	50.07	74.00	-23.93	peak
6	17835.000	22.01	27.66	49.67	74.00	-24.33	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 17.0V

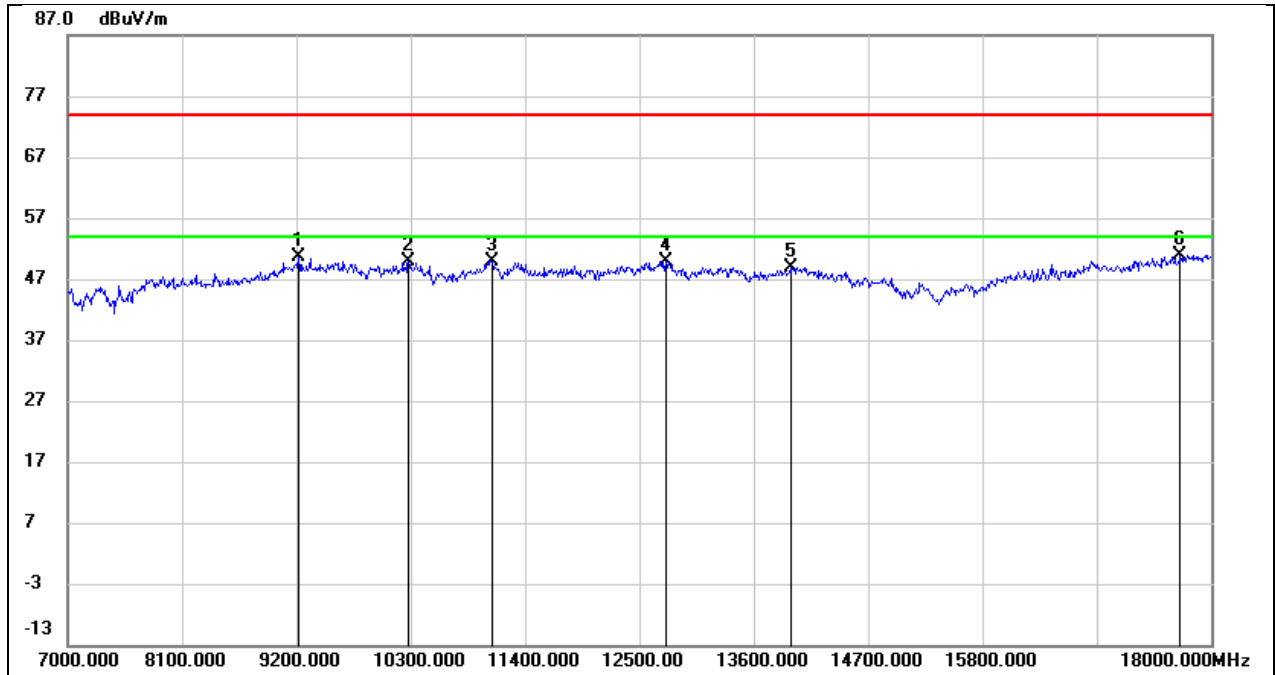


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.84	11.78	50.62	74.00	-23.38	peak
2	10278.000	37.04	12.79	49.83	74.00	-24.17	peak
3	11081.000	35.48	14.52	50.00	74.00	-24.00	peak
4	12753.000	31.15	18.70	49.85	74.00	-24.15	peak
5	13952.000	27.31	21.61	48.92	74.00	-25.08	peak
6	17703.000	25.36	25.45	50.81	74.00	-23.19	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 17.0V

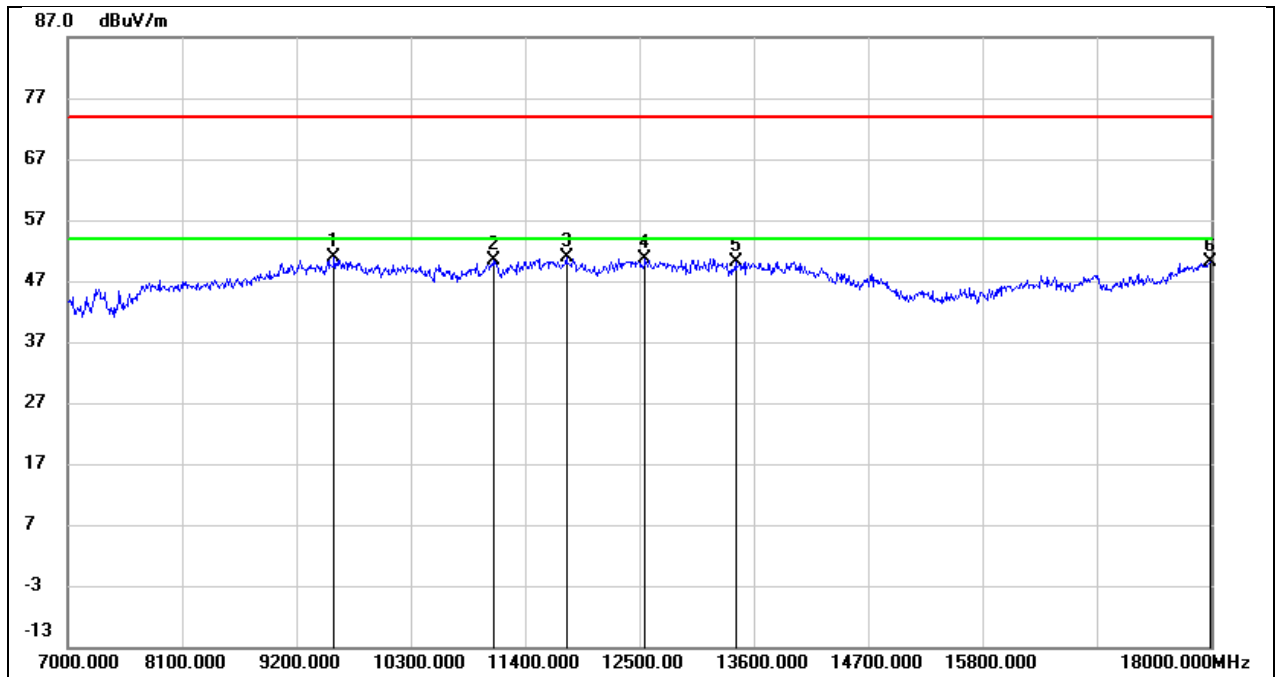


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.60	13.19	50.79	74.00	-23.21	peak
2	11092.000	34.97	15.49	50.46	74.00	-23.54	peak
3	11796.000	32.70	18.12	50.82	74.00	-23.18	peak
4	12555.000	31.44	19.12	50.56	74.00	-23.44	peak
5	13424.000	28.64	21.59	50.23	74.00	-23.77	peak
6	17989.000	20.87	29.29	50.16	74.00	-23.84	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 17.0V

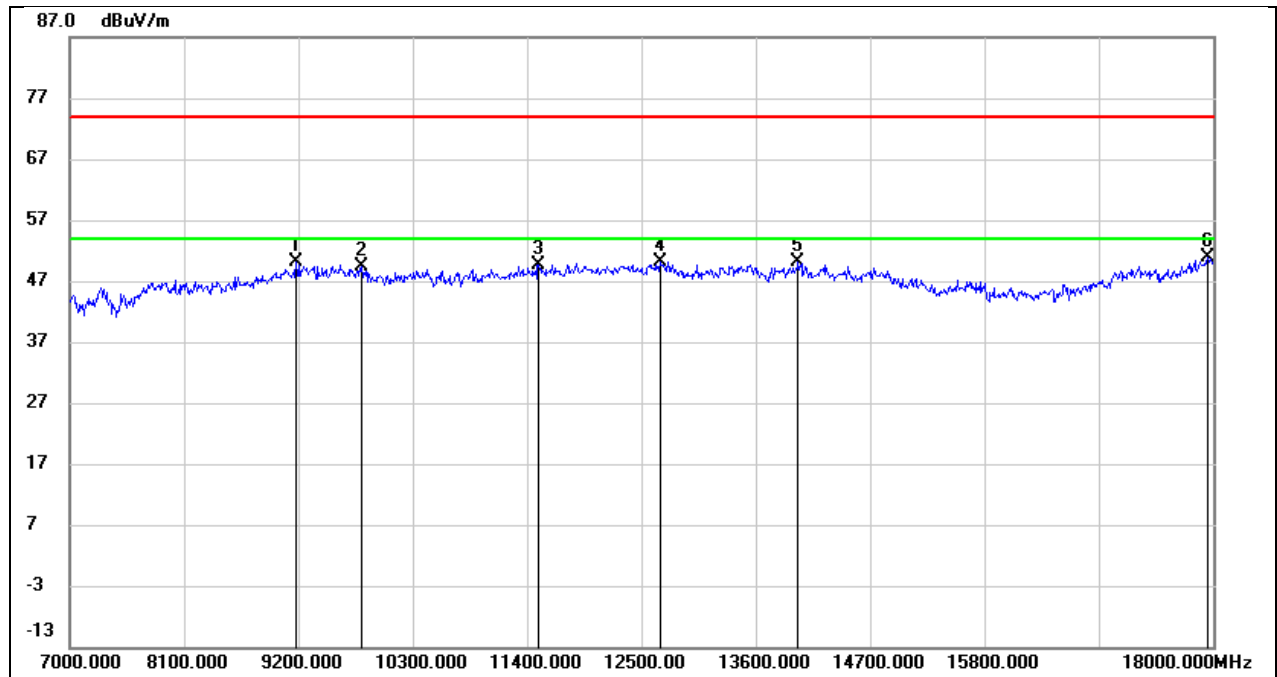


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	38.56	11.63	50.19	74.00	-23.81	peak
2	9805.000	35.95	13.35	49.30	74.00	-24.70	peak
3	11510.000	33.30	16.42	49.72	74.00	-24.28	peak
4	12687.000	31.74	18.50	50.24	74.00	-23.76	peak
5	14007.000	28.31	21.81	50.12	74.00	-23.88	peak
6	17945.000	24.10	26.87	50.97	74.00	-23.03	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5765.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

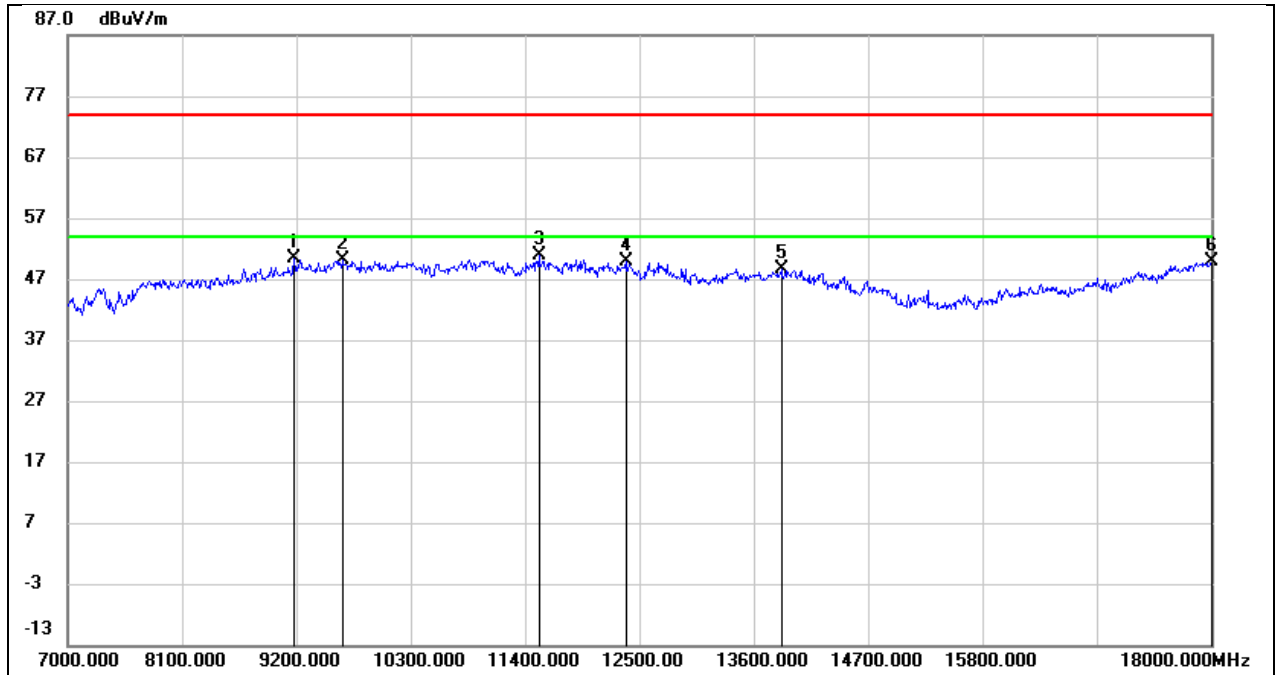


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	38.93	11.37	50.30	74.00	-23.70	peak
2	9640.000	36.60	13.50	50.10	74.00	-23.90	peak
3	11532.000	32.96	17.98	50.94	74.00	-23.06	peak
4	12368.000	30.83	19.03	49.86	74.00	-24.14	peak
5	13864.000	25.71	22.87	48.58	74.00	-25.42	peak
6	18000.000	20.55	29.41	49.96	74.00	-24.04	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5765.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

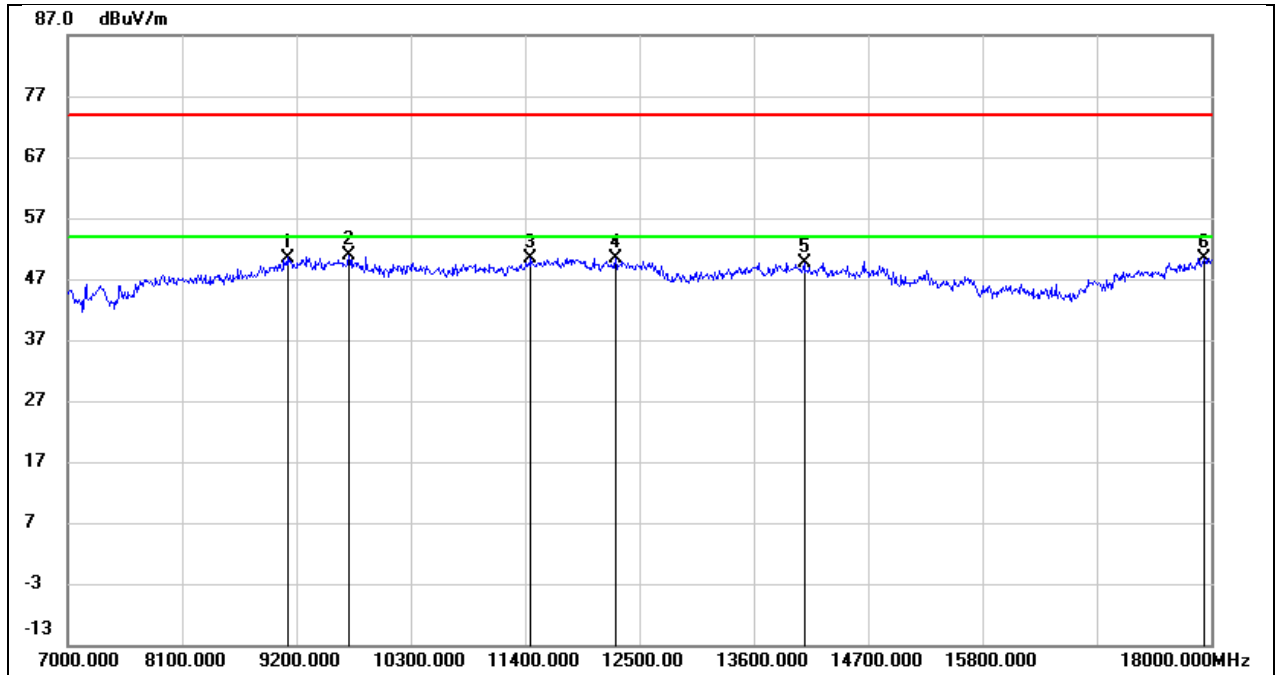


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9112.000	39.11	11.39	50.50	74.00	-23.50	peak
2	9706.000	37.59	13.33	50.92	74.00	-23.08	peak
3	11455.000	34.07	16.21	50.28	74.00	-23.72	peak
4	12269.000	32.57	17.92	50.49	74.00	-23.51	peak
5	14084.000	28.02	21.68	49.70	74.00	-24.30	peak
6	17934.000	23.61	26.80	50.41	74.00	-23.59	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

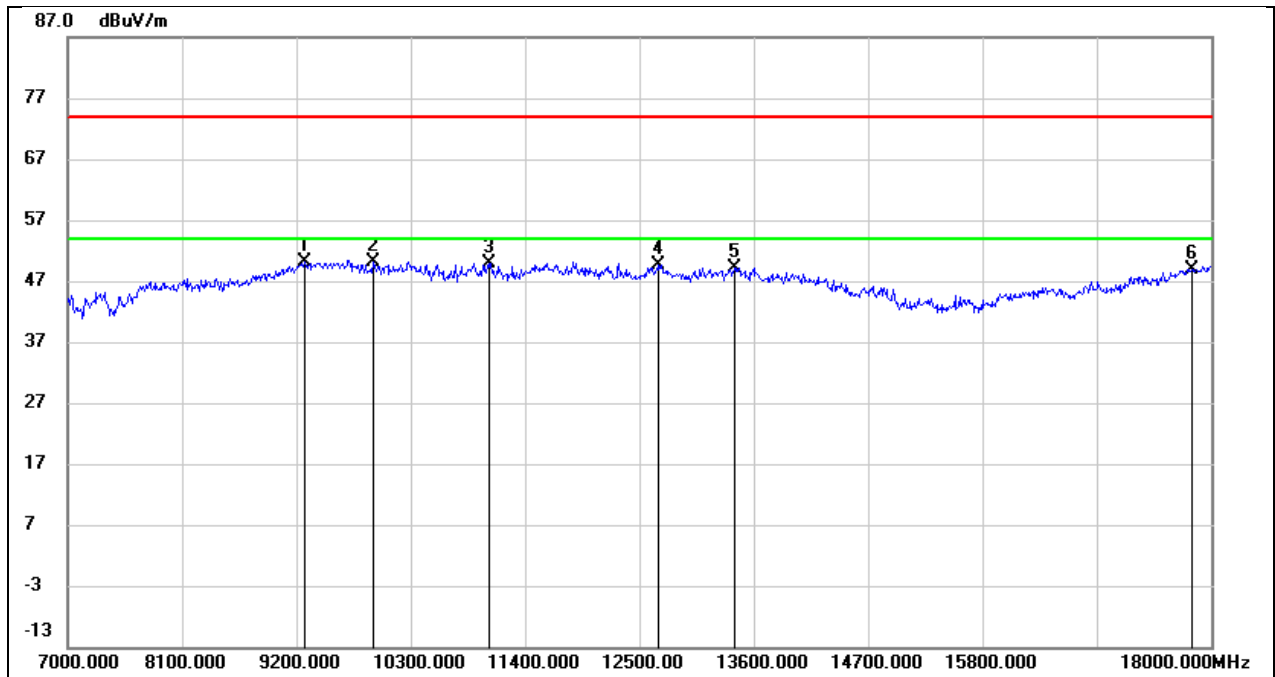


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	38.30	11.74	50.04	74.00	-23.96	peak
2	9937.000	36.68	13.48	50.16	74.00	-23.84	peak
3	11048.000	34.70	15.24	49.94	74.00	-24.06	peak
4	12687.000	30.19	19.51	49.70	74.00	-24.30	peak
5	13413.000	27.61	21.55	49.16	74.00	-24.84	peak
6	17813.000	21.51	27.42	48.93	74.00	-25.07	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

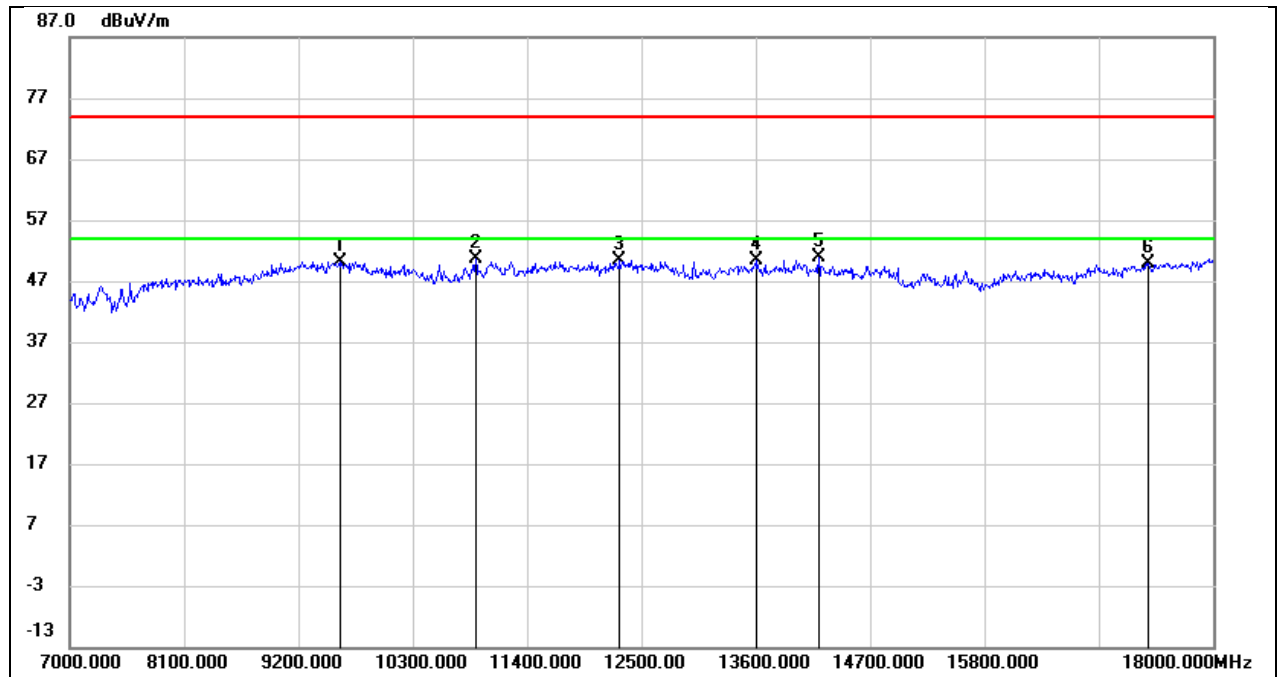


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.96	13.26	50.22	74.00	-23.78	peak
2	10905.000	36.59	13.97	50.56	74.00	-23.44	peak
3	12291.000	32.42	17.96	50.38	74.00	-23.62	peak
4	13611.000	29.92	20.41	50.33	74.00	-23.67	peak
5	14205.000	29.28	21.49	50.77	74.00	-23.23	peak
6	17373.000	25.12	24.84	49.96	74.00	-24.04	peak

Test Mode:	SRD 5G 80M	Frequency(MHz):	5809.5
Polarity:	Horizontal	Test Voltage:	DC 17.0V

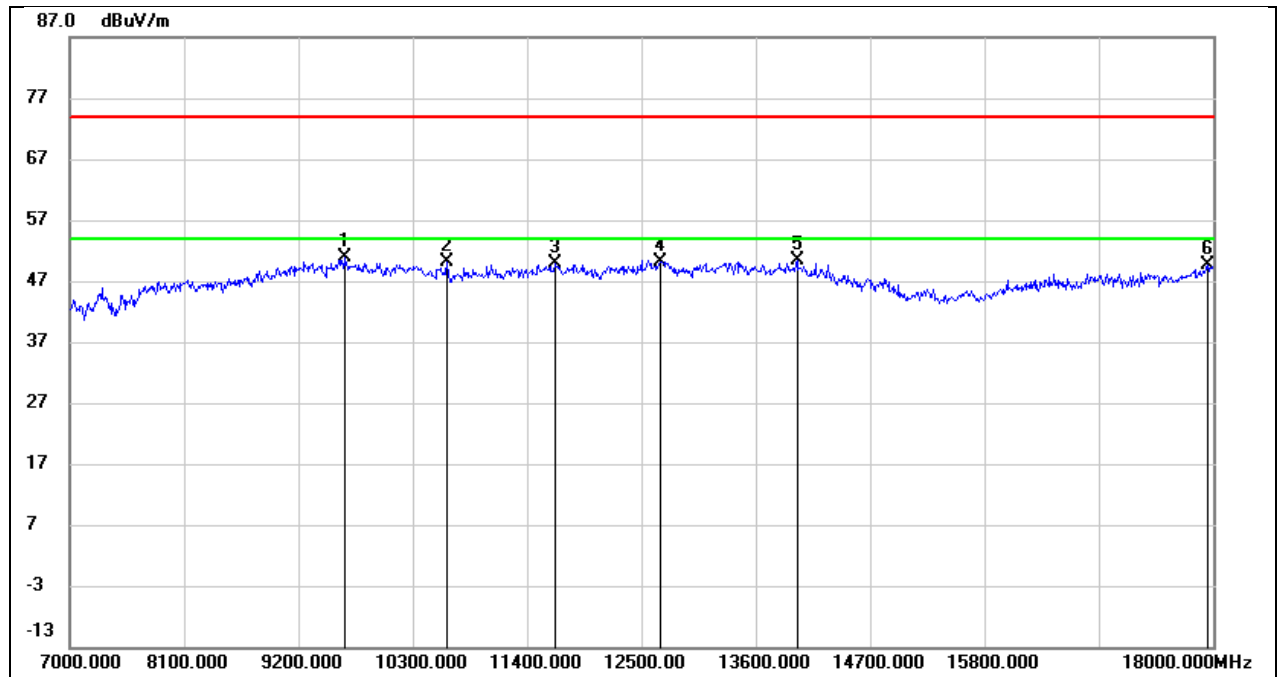

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	37.42	13.50	50.92	74.00	-23.08	peak
2	10630.000	36.17	13.85	50.02	74.00	-23.98	peak
3	11675.000	31.73	18.16	49.89	74.00	-24.11	peak
4	12676.000	30.69	19.47	50.16	74.00	-23.84	peak
5	13996.000	26.87	23.39	50.26	74.00	-23.74	peak
6	17945.000	20.71	28.83	49.54	74.00	-24.46	peak


Test Mode:	SRD 5G 80M	Frequency(MHz):	5809.5
Polarity:	Vertical	Test Voltage:	DC 17.0V

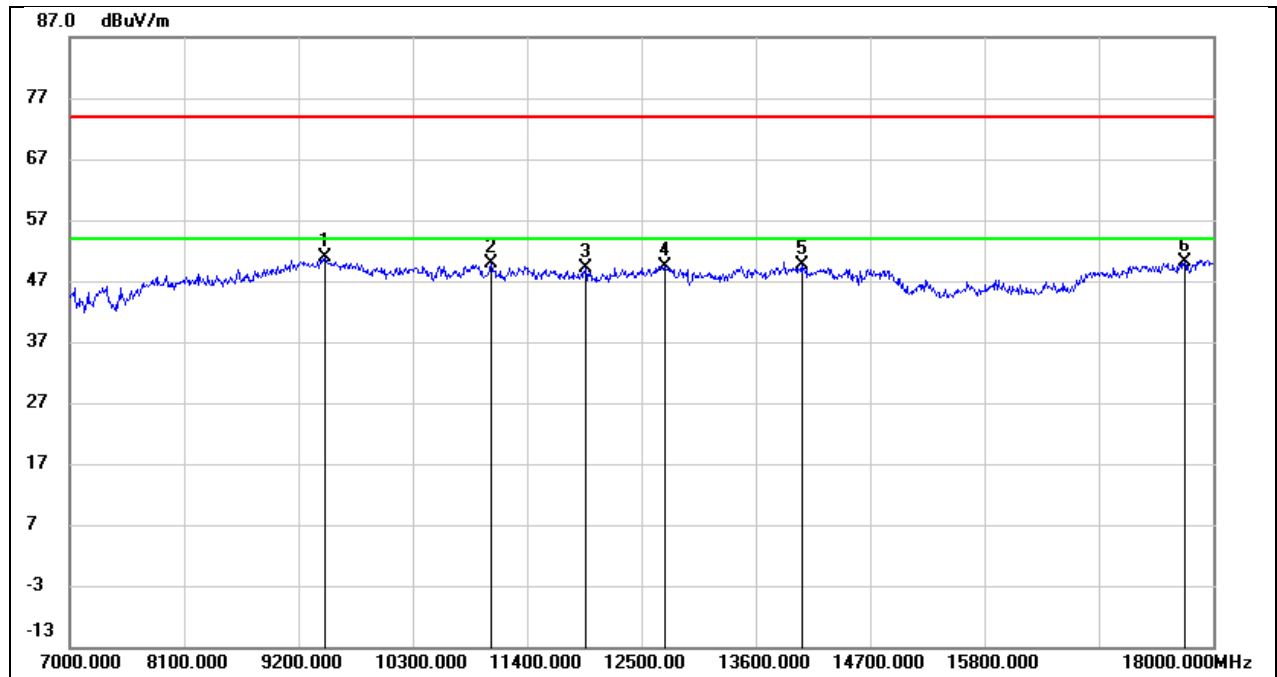

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9453.000	38.29	12.53	50.82	74.00	-23.18	peak
2	11059.000	35.37	14.43	49.80	74.00	-24.20	peak
3	11961.000	31.78	17.46	49.24	74.00	-24.76	peak
4	12720.000	30.82	18.61	49.43	74.00	-24.57	peak
5	14040.000	27.80	21.75	49.55	74.00	-24.45	peak
6	17725.000	24.69	25.56	50.25	74.00	-23.75	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

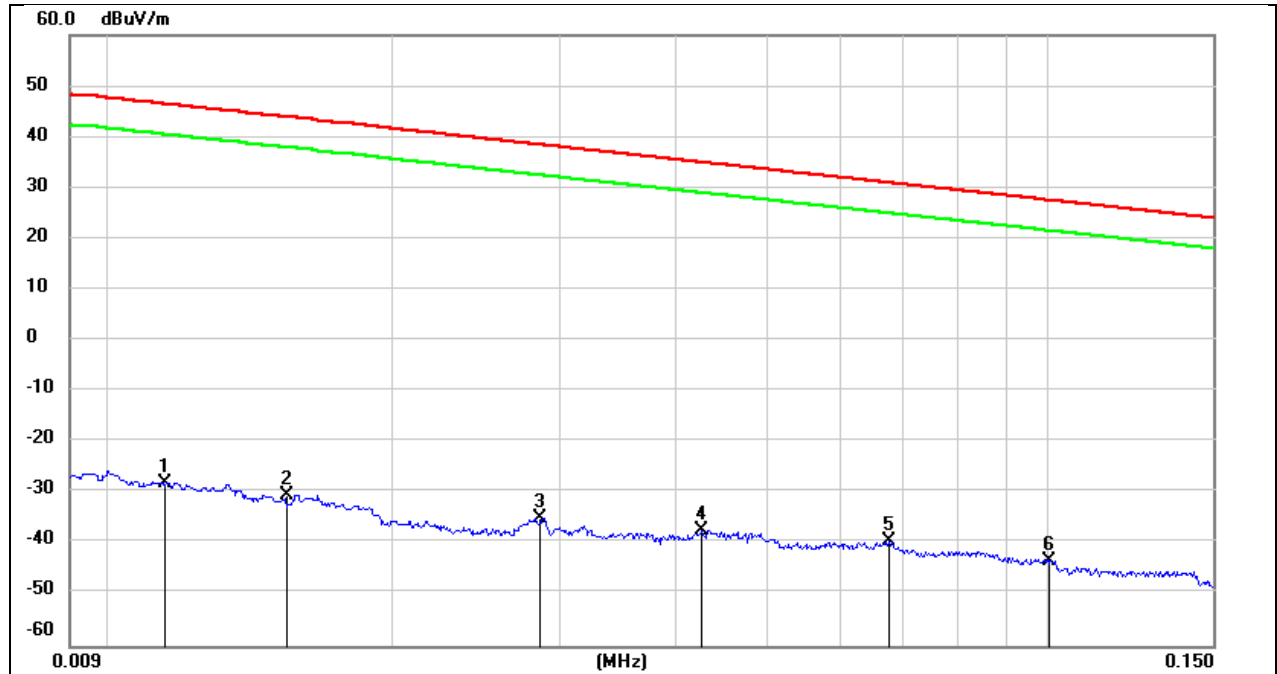


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0114	73.45	-101.40	-27.95	46.46	-74.41	peak
2	0.0154	70.94	-101.37	-30.43	43.85	-74.28	peak
3	0.0286	66.46	-101.38	-34.92	38.47	-73.39	peak
4	0.0427	64.14	-101.45	-37.31	34.99	-72.30	peak
5	0.0675	62.14	-101.56	-39.42	31.02	-70.44	peak
6	0.1005	58.56	-101.80	-43.24	27.56	-70.80	peak

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

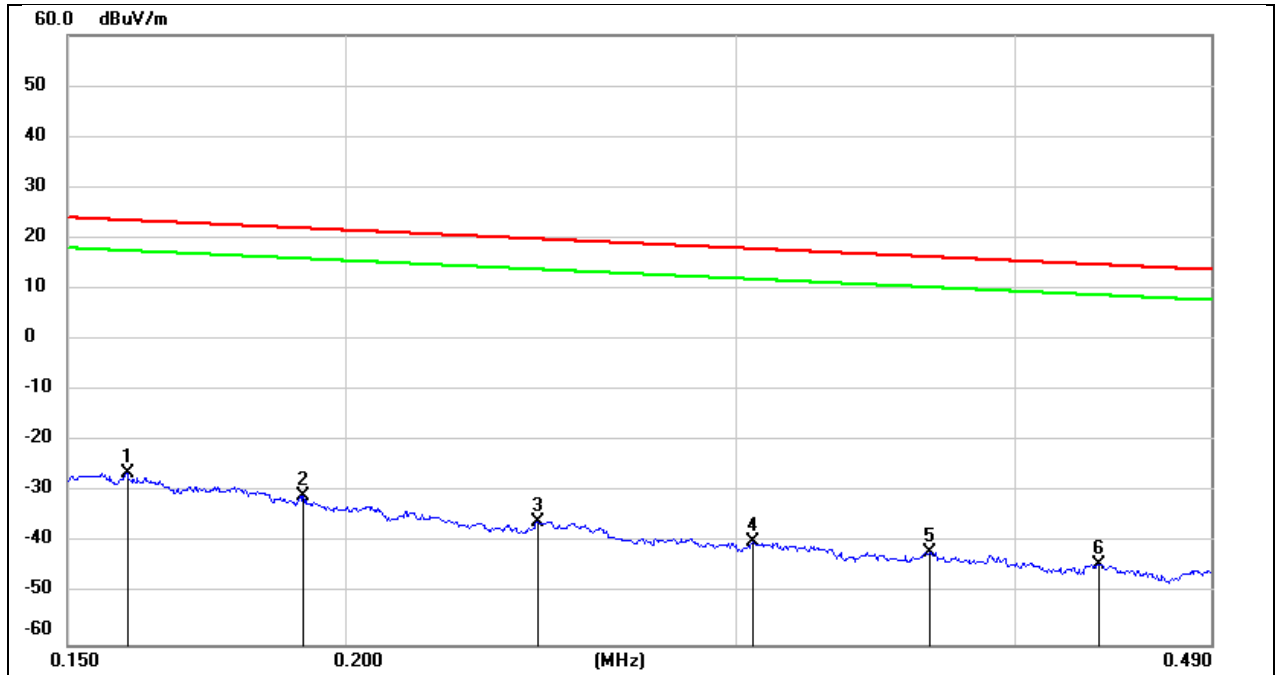

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1595	75.36	-101.65	-26.29	23.55	-49.84	peak
2	0.1915	71.02	-101.70	-30.68	21.96	-52.64	peak
3	0.2442	66.03	-101.79	-35.76	19.85	-55.61	peak
4	0.3048	62.04	-101.86	-39.82	17.92	-57.74	peak
5	0.3662	60.08	-101.93	-41.85	16.33	-58.18	peak
6	0.4364	57.86	-101.99	-44.13	14.80	-58.93	peak


Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

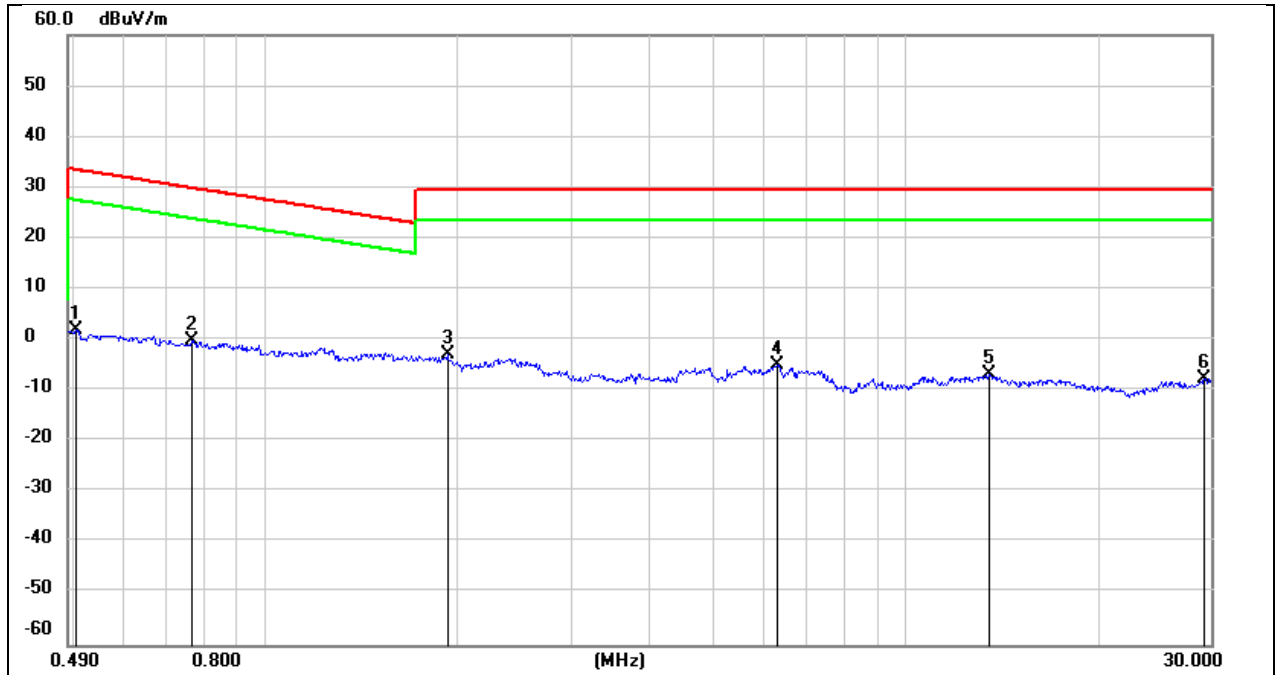

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	63.93	-62.07	1.86	33.56	-31.70	peak
2	0.7641	61.92	-62.12	-0.20	29.94	-30.14	peak
3	1.9207	59.08	-61.85	-2.77	29.54	-32.31	peak
4	6.3033	56.45	-61.31	-4.86	29.54	-34.40	peak
5	13.5334	54.06	-60.95	-6.89	29.54	-36.43	peak
6	29.3213	52.30	-60.02	-7.72	29.54	-37.26	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

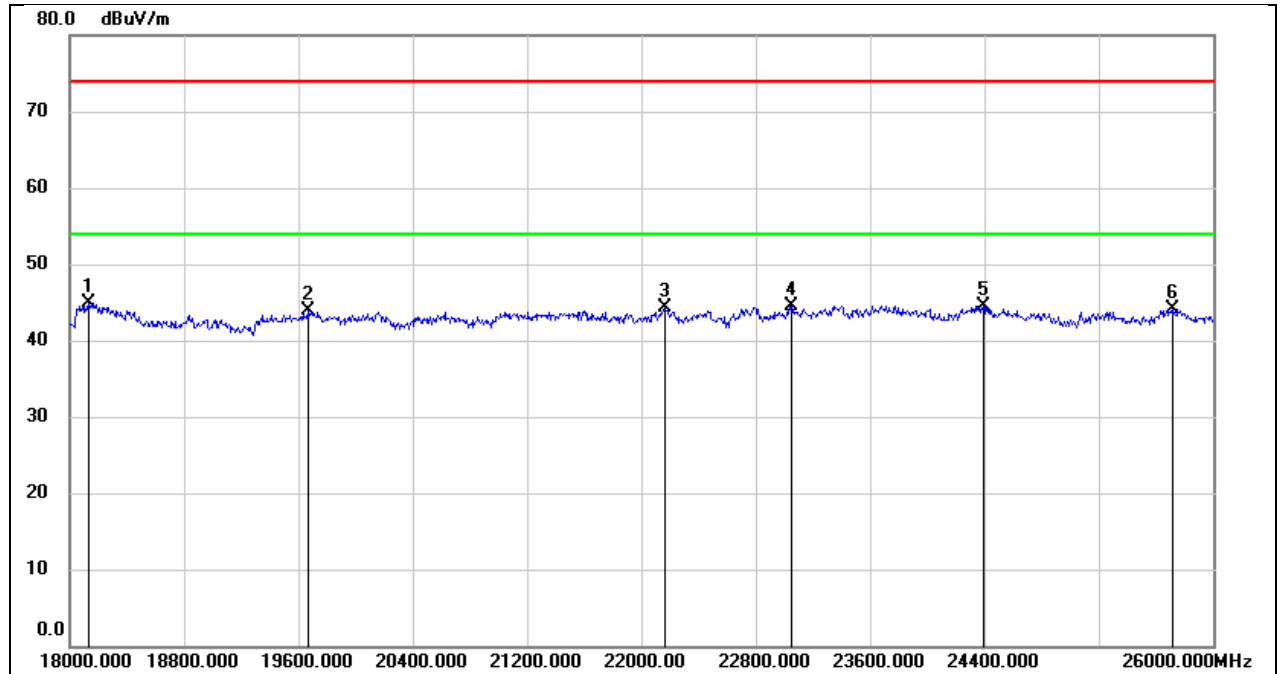

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18128.000	50.32	-5.47	44.85	74.00	-29.15	peak
2	19664.000	49.16	-5.35	43.81	74.00	-30.19	peak
3	22160.000	48.58	-4.31	44.27	74.00	-29.73	peak
4	23048.000	47.93	-3.43	44.50	74.00	-29.50	peak
5	24392.000	47.04	-2.54	44.50	74.00	-29.50	peak
6	25712.000	44.85	-0.79	44.06	74.00	-29.94	peak


Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0V

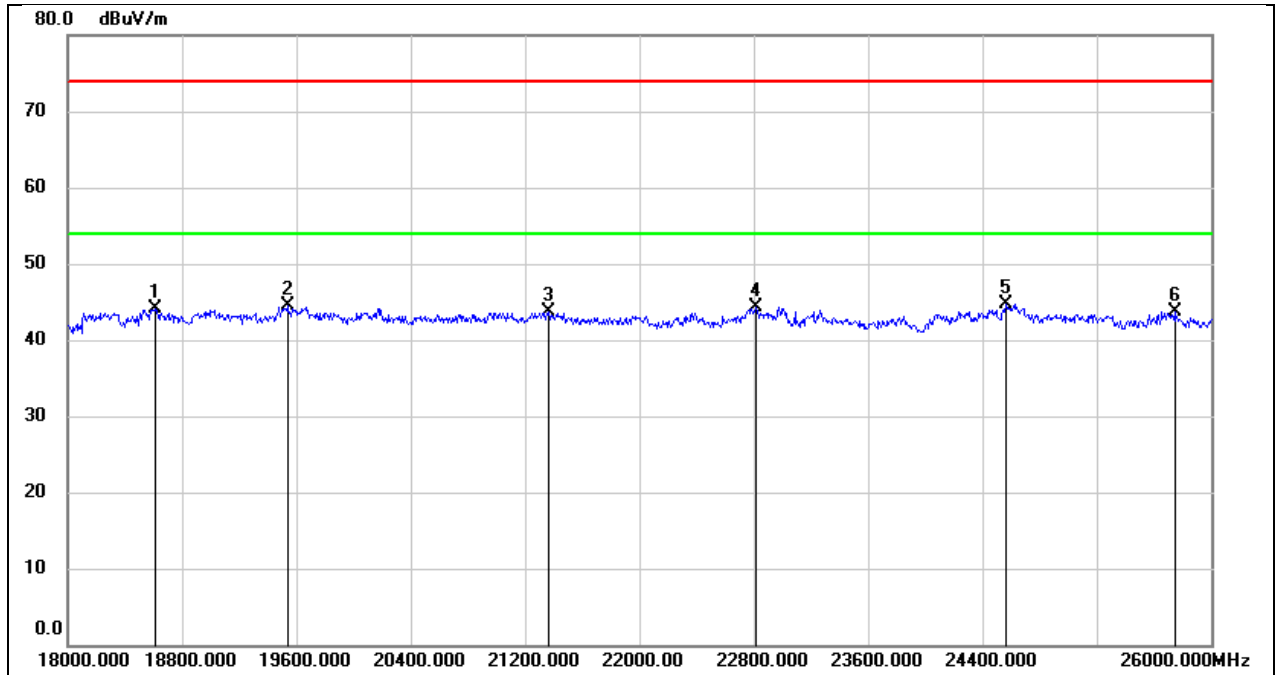

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18616.000	49.39	-5.34	44.05	74.00	-29.95	peak
2	19536.000	49.92	-5.51	44.41	74.00	-29.59	peak
3	21368.000	48.40	-4.73	43.67	74.00	-30.33	peak
4	22816.000	47.93	-3.63	44.30	74.00	-29.70	peak
5	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak
6	25744.000	44.30	-0.64	43.66	74.00	-30.34	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

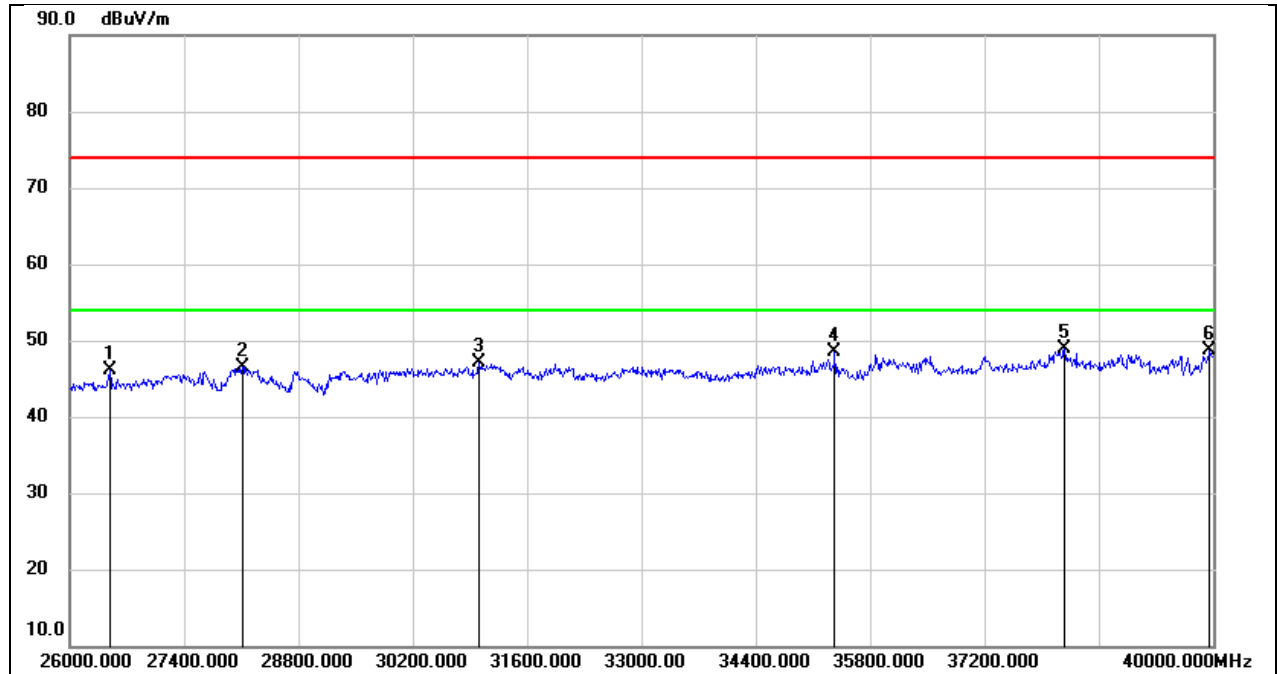

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	50.79	-4.74	46.05	74.00	-27.95	peak
2	28114.000	49.78	-3.30	46.48	74.00	-27.52	peak
3	31012.000	47.83	-0.71	47.12	74.00	-26.88	peak
4	35366.000	45.90	2.59	48.49	74.00	-25.51	peak
5	38180.000	45.14	3.69	48.83	74.00	-25.17	peak
6	39958.000	43.58	5.12	48.70	74.00	-25.30	peak


Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0V

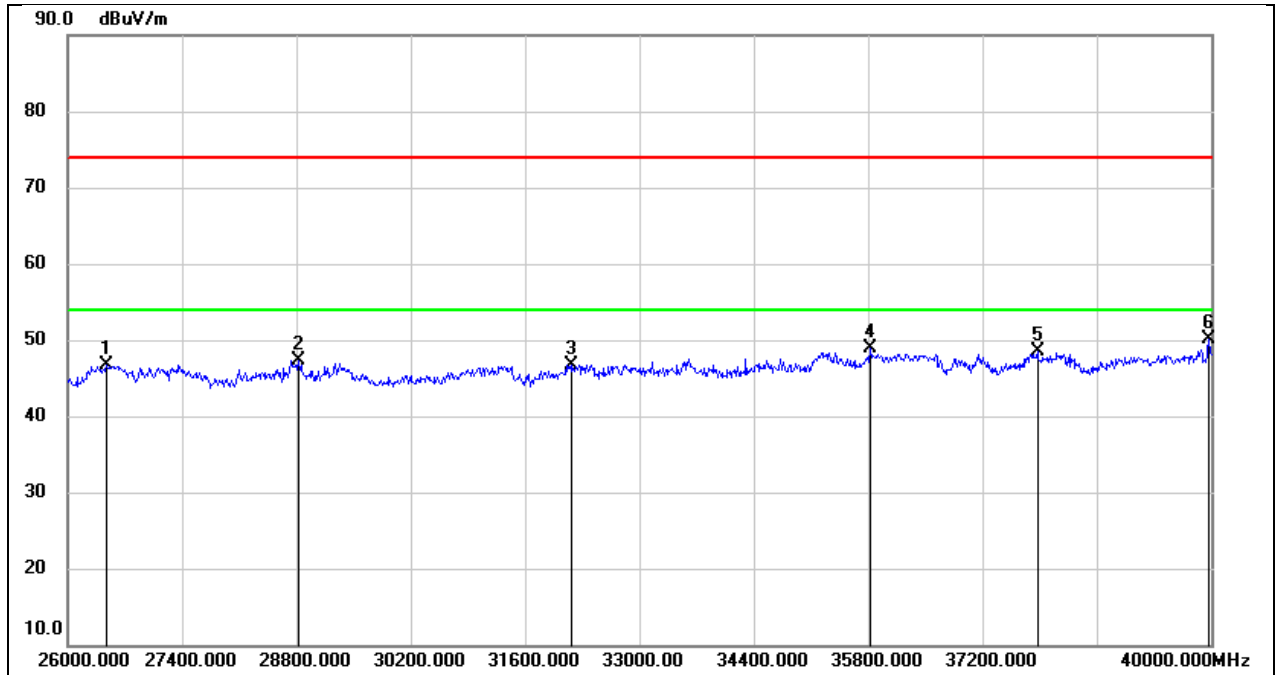

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26476.000	51.53	-4.78	46.75	74.00	-27.25	peak
2	28828.000	48.13	-0.79	47.34	74.00	-26.66	peak
3	32160.000	48.31	-1.53	46.78	74.00	-27.22	peak
4	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
5	37872.000	44.97	3.48	48.45	74.00	-25.55	peak
6	39972.000	44.95	5.13	50.08	74.00	-23.92	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 17.0V

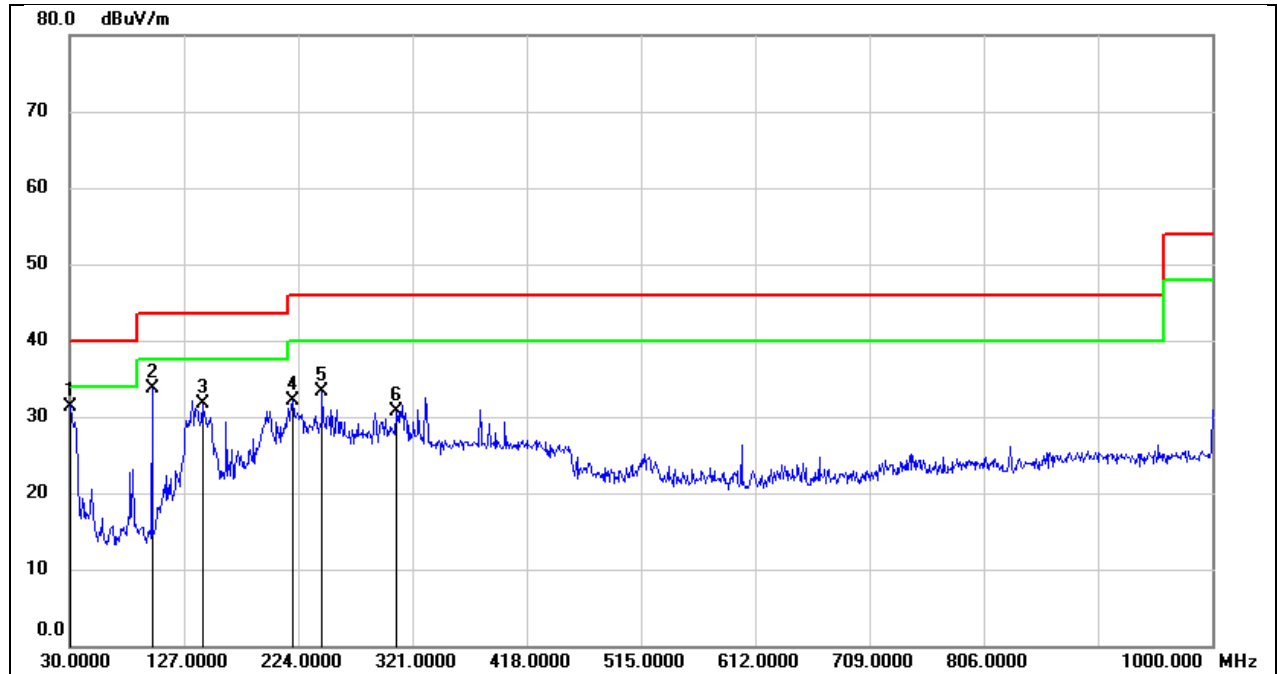

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.9700	45.59	-14.19	31.40	40.00	-8.60	QP
2	99.8399	49.77	-16.11	33.66	43.50	-9.84	QP
3	142.5200	44.83	-13.12	31.71	43.50	-11.79	QP
4	219.1500	44.19	-12.05	32.14	46.00	-13.86	QP
5	244.3700	46.82	-13.48	33.34	46.00	-12.66	QP
6	307.4200	40.97	-10.27	30.70	46.00	-15.30	QP

Test Mode:	SRD 5G 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 17.0V

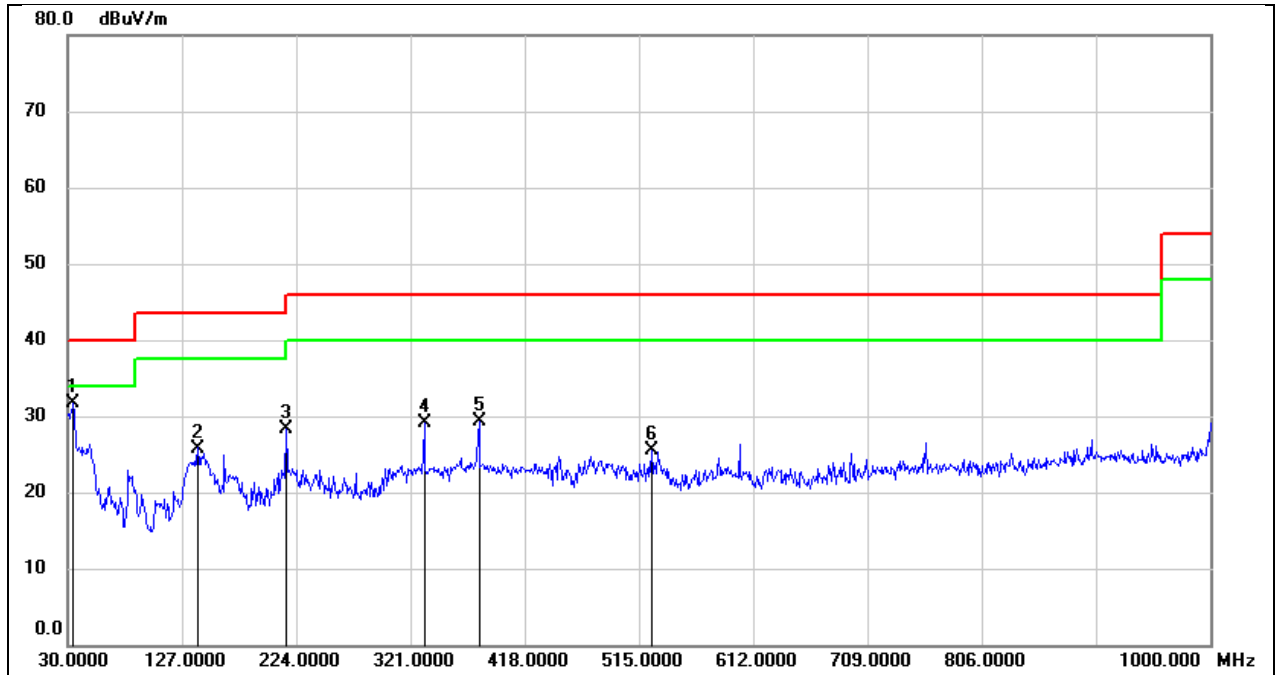

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	45.94	-14.31	31.63	40.00	-8.37	QP
2	140.5800	39.13	-13.33	25.80	43.50	-17.70	QP
3	215.2700	40.23	-11.87	28.36	43.50	-15.14	QP
4	332.6400	38.35	-9.21	29.14	46.00	-16.86	QP
5	379.2000	37.82	-8.54	29.28	46.00	-16.72	QP
6	525.6700	31.61	-6.20	25.41	46.00	-20.59	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. TEST DATA


10.1. APPENDIX A: EMISSION BANDWIDTH


10.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
SRD 10M	Ant1	5157	10.60	5151.84	5162.44
	Ant2	5157	10.84	5151.52	5162.36
	Ant1	5158	10.76	5152.64	5163.40
	Ant2	5158	10.88	5152.68	5163.56
	Ant1	5160	10.60	5154.80	5165.40
	Ant2	5160	10.56	5154.56	5165.12
	Ant1	5162	10.60	5156.76	5167.36
	Ant2	5162	10.80	5156.60	5167.40
	Ant1	5163	10.76	5157.68	5168.44
	Ant2	5163	10.68	5157.72	5168.40
	Ant1	5166	10.72	5160.72	5171.44
	Ant2	5166	11.00	5160.56	5171.56
	Ant1	5167	10.72	5161.68	5172.40
	Ant2	5167	10.92	5161.60	5172.52
	Ant1	5170	10.60	5164.76	5175.36
	Ant2	5170	11.08	5164.56	5175.64
	Ant1	5201	10.72	5195.68	5206.40
	Ant2	5201	10.84	5195.60	5206.44
	Ant1	5245	10.64	5239.68	5250.32
	Ant2	5245	10.80	5239.64	5250.44
	Ant1	5730.5	10.64	5725.34	5735.98
	Ant2	5730.5	10.76	5725.14	5735.90
	Ant1	5787.5	10.72	5782.02	5792.74
	Ant2	5787.5	10.76	5782.22	5792.98
	Ant1	5844.5	10.92	5839.10	5850.02
	Ant2	5844.5	10.96	5839.10	5850.06
SRD 20M	Ant1	5161	19.48	5151.12	5170.60
	Ant2	5161	19.80	5151.16	5170.96
	Ant1	5164	19.44	5154.28	5173.72
	Ant2	5164	19.68	5154.28	5173.96
	Ant1	5167	19.52	5157.20	5176.72
	Ant2	5167	19.76	5157.20	5176.96
	Ant1	5170	19.80	5160.20	5180.00
	Ant2	5170	19.60	5160.32	5179.92
	Ant1	5200	19.60	5190.20	5209.80
	Ant2	5200	19.40	5190.36	5209.76
	Ant1	5240	19.36	5230.32	5249.68
	Ant2	5240	19.32	5230.36	5249.68
	Ant1	5735.5	19.92	5725.66	5745.58
	Ant2	5735.5	19.08	5726.10	5745.18
	Ant1	5787.5	19.56	5777.86	5797.42
	Ant2	5787.5	19.20	5777.82	5797.02
SRD 40M	Ant1	5839.5	19.40	5829.86	5849.26
	Ant2	5839.5	19.44	5829.78	5849.22
	Ant1	5170	38.48	5150.80	5189.28
	Ant2	5170	38.32	5150.96	5189.28
	Ant1	5178	38.32	5158.88	5197.20
	Ant2	5178	38.16	5159.04	5197.20
	Ant1	5188	38.32	5168.80	5207.12
	Ant2	5188	38.32	5168.96	5207.28
	Ant1	5200	38.32	5180.96	5219.28
	Ant2	5200	38.16	5180.96	5219.12
	Ant1	5230	38.40	5210.80	5249.20


	Ant2	5230	38.40	5210.96	5249.36
	Ant1	5745.5	36.88	5727.10	5763.98
	Ant2	5745.5	36.88	5727.18	5764.06
	Ant1	5771.5	36.80	5753.10	5789.90
	Ant2	5771.5	36.88	5753.18	5790.06
	Ant1	5787.5	36.96	5769.02	5805.98
	Ant2	5787.5	36.80	5769.18	5805.98
	Ant1	5808.5	36.72	5790.18	5826.90
	Ant2	5808.5	36.72	5790.18	5826.90
	Ant1	5812.5	36.80	5794.18	5830.98
	Ant2	5812.5	36.72	5794.18	5830.90
	Ant1	5829.5	36.80	5811.18	5847.98
SRD 60M	Ant2	5829.5	36.88	5811.18	5848.06
	Ant1	5180	57.24	5151.56	5208.80
	Ant2	5180	57.12	5151.56	5208.68
	Ant1	5188	56.76	5159.92	5216.68
	Ant2	5188	57.00	5159.56	5216.56
	Ant1	5195	56.16	5167.04	5223.20
	Ant2	5195	56.52	5166.80	5223.32
	Ant1	5200	56.28	5172.16	5228.44
	Ant2	5200	56.64	5171.68	5228.32
	Ant1	5220	57.12	5191.56	5248.68
	Ant2	5220	57.00	5191.56	5248.56
	Ant1	5755.5	57.12	5726.86	5783.98
	Ant2	5755.5	56.64	5727.18	5783.82
	Ant1	5787.5	59.36	5759.02	5818.38
	Ant2	5787.5	56.48	5759.34	5815.82
	Ant1	5819.5	57.76	5790.22	5847.98
	Ant2	5819.5	57.92	5790.06	5847.98
SRD 80M	Ant1	5190	74.56	5152.72	5227.28
	Ant2	5190	74.40	5153.04	5227.44
	Ant1	5195	74.08	5158.04	5232.12
	Ant2	5195	74.24	5158.20	5232.44
	Ant1	5198	74.56	5160.72	5235.28
	Ant2	5198	74.40	5160.88	5235.28
	Ant1	5203	74.56	5165.88	5240.44
	Ant2	5203	74.40	5166.04	5240.44
	Ant1	5210	74.72	5172.72	5247.44
	Ant2	5210	74.56	5172.88	5247.44
	Ant1	5765.5	72.64	5729.18	5801.82
	Ant2	5765.5	72.80	5729.18	5801.98
	Ant1	5787.5	72.80	5751.18	5823.98
	Ant2	5787.5	72.64	5751.34	5823.98
	Ant1	5809.5	72.64	5773.18	5845.82
	Ant2	5809.5	72.64	5773.18	5845.82

10.1.2. Test Graphs

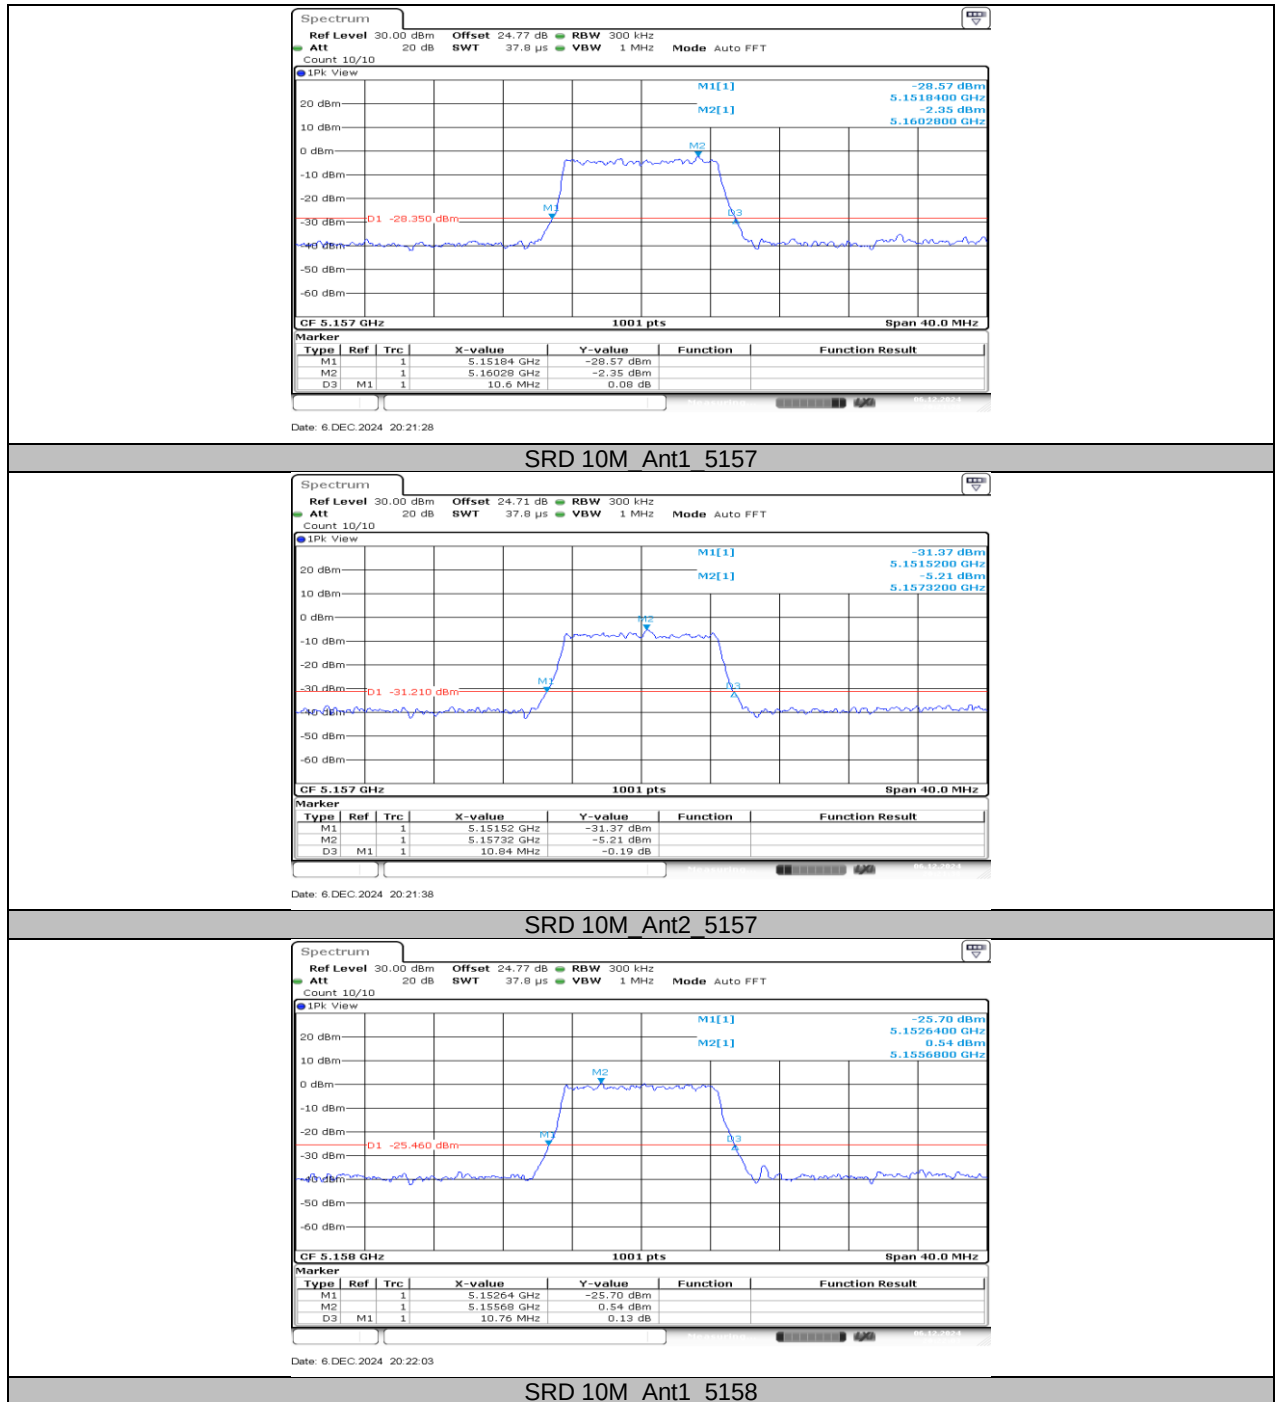


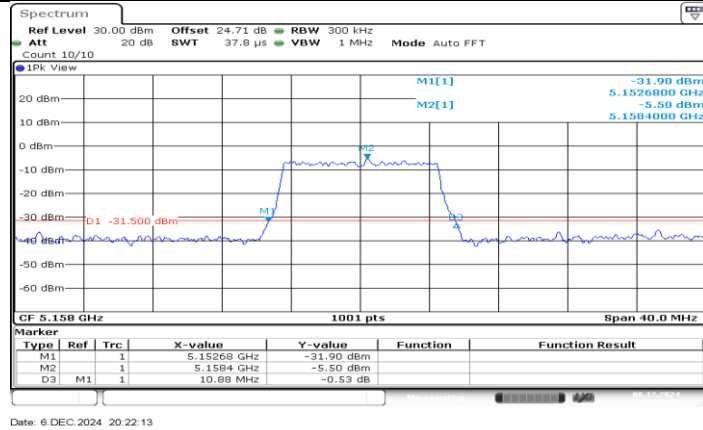


SRD 10M_Ant2_5158

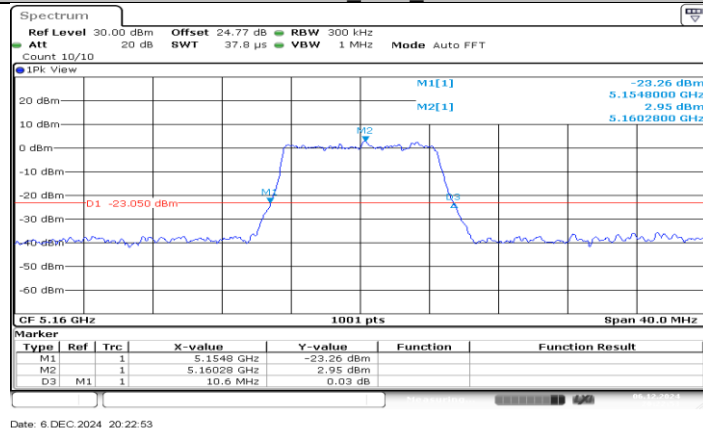


SRD 10M_Ant1_5160

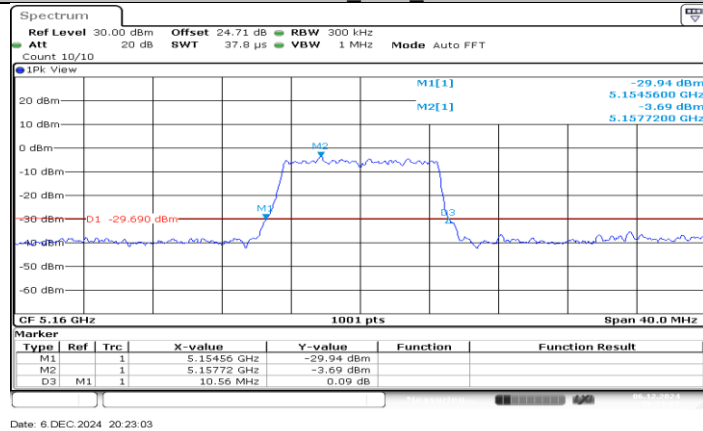


SRD 10M_Ant2_5160

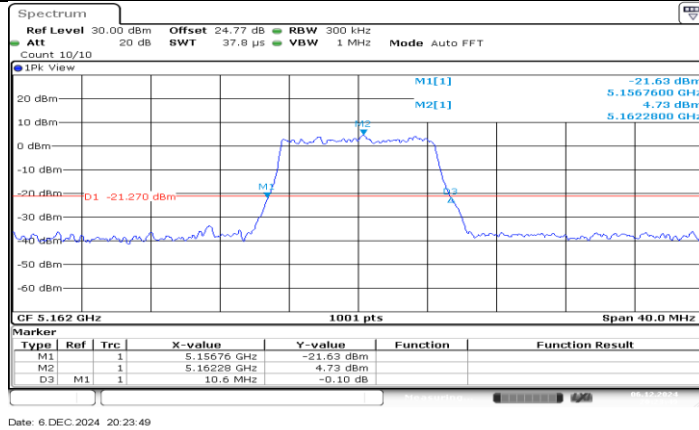


SRD 10M_Ant1_5162

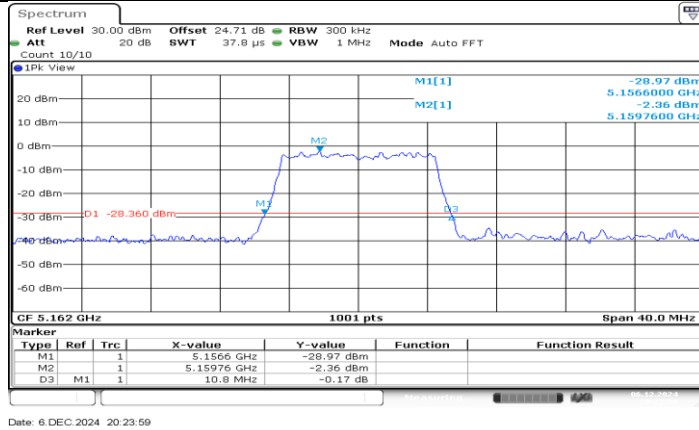


SRD 10M_Ant2_5162

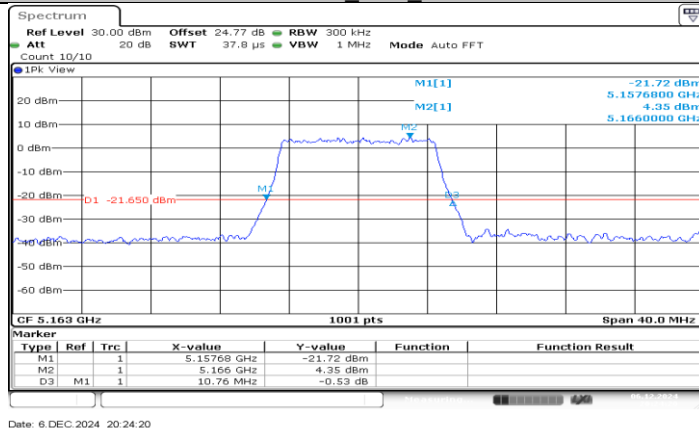


SRD 10M_Ant1_5163

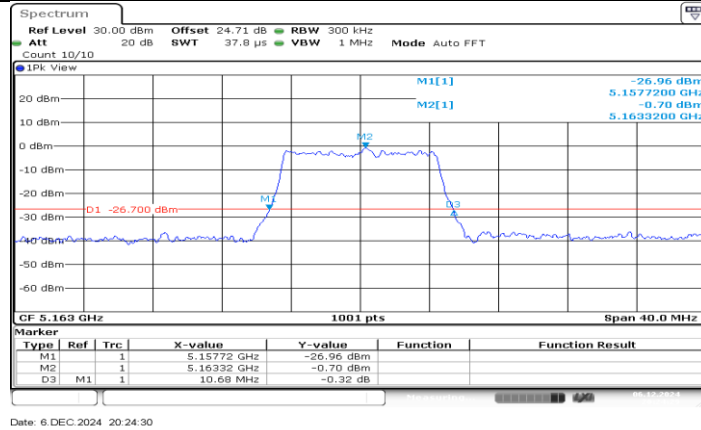


SRD 10M_Ant2_5163

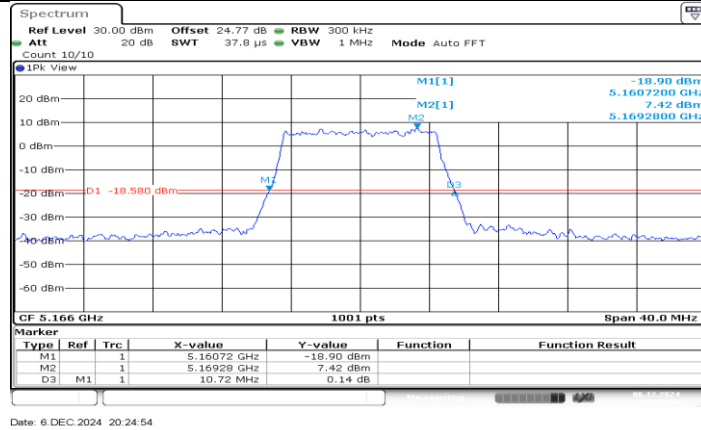


SRD 10M_Ant1_5166

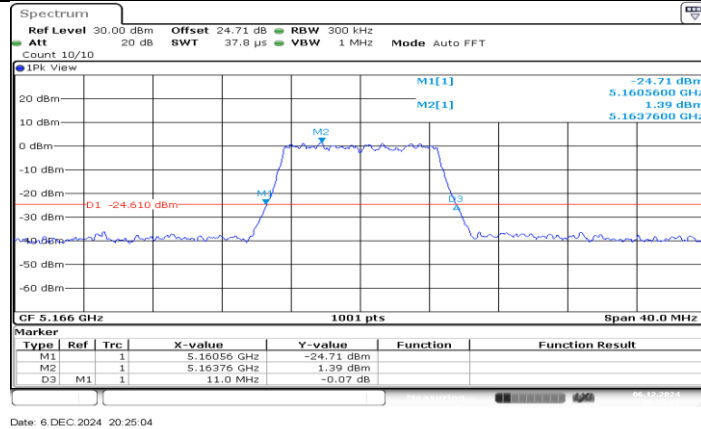


SRD 10M_Ant2_5166

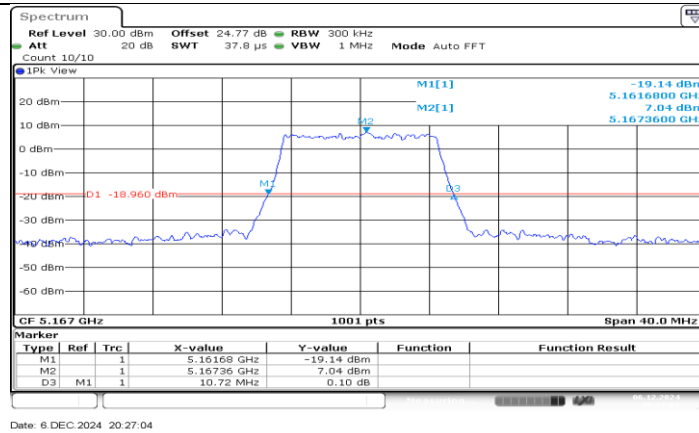


SRD 10M_Ant1_5167

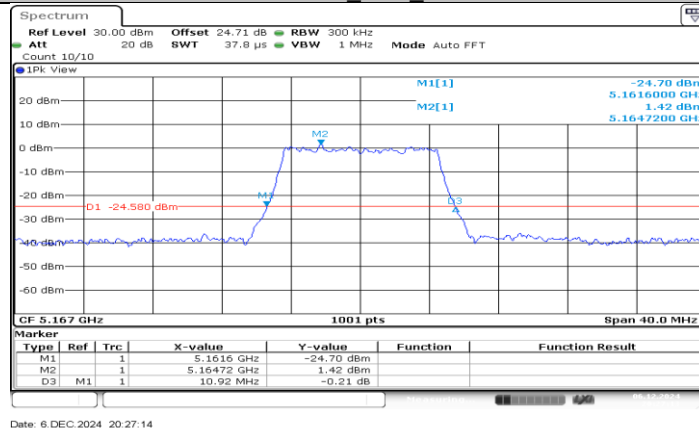


SRD 10M_Ant2_5167

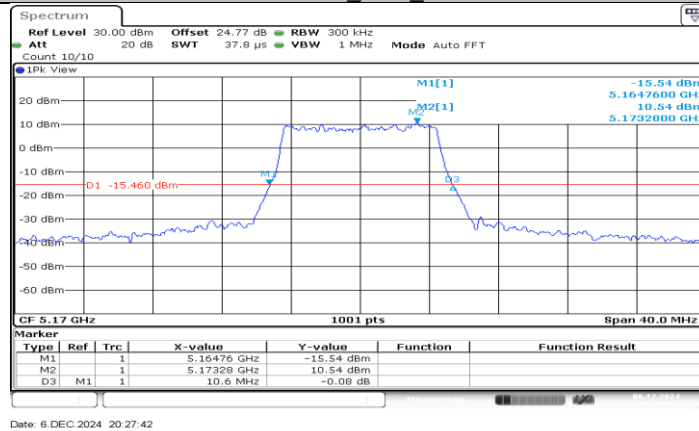


SRD 10M_Ant1_5170

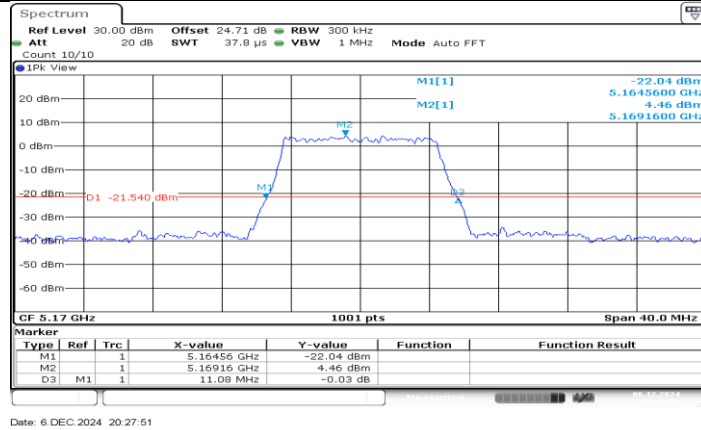


SRD 10M_Ant2_5170

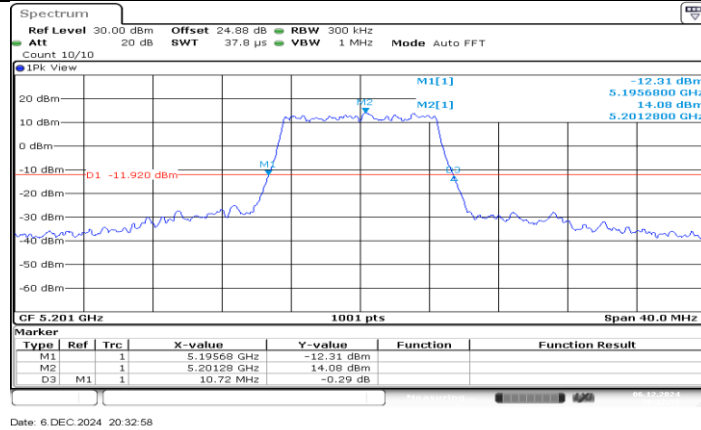


SRD 10M_Ant1_5201

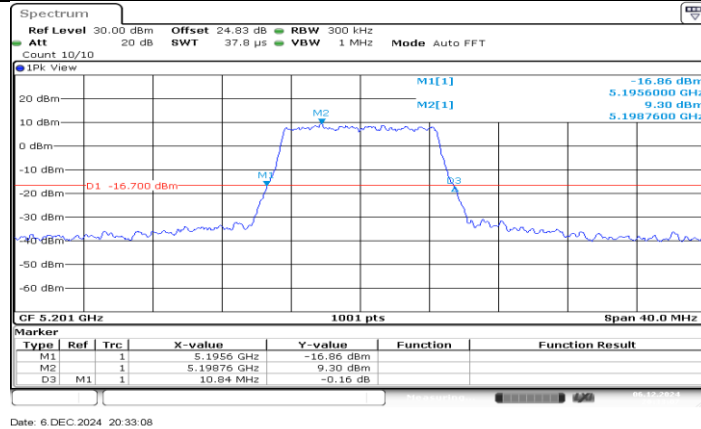


SRD 10M_Ant2_5201

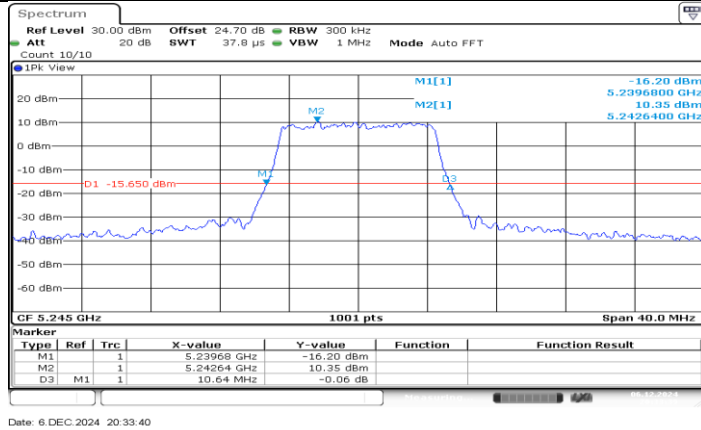


SRD 10M_Ant1_5245

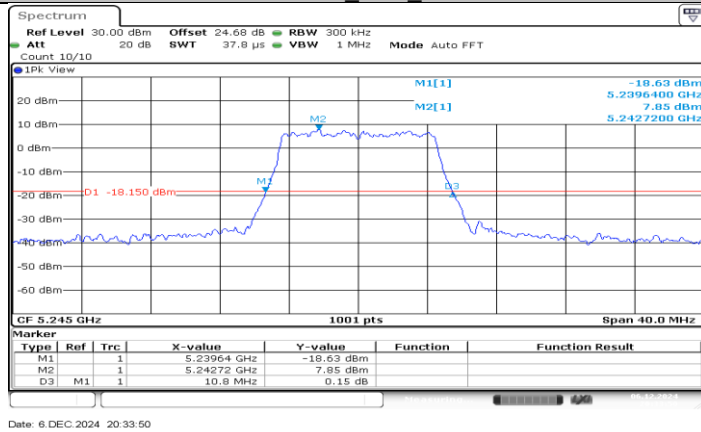


SRD 10M_Ant2_5245

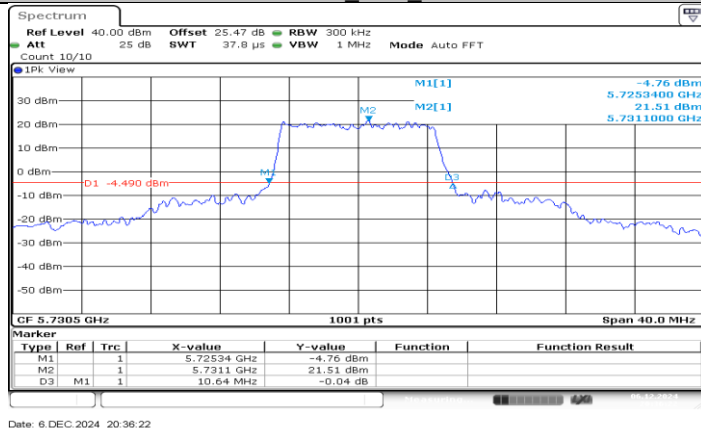


SRD 10M_Ant1_5730.5

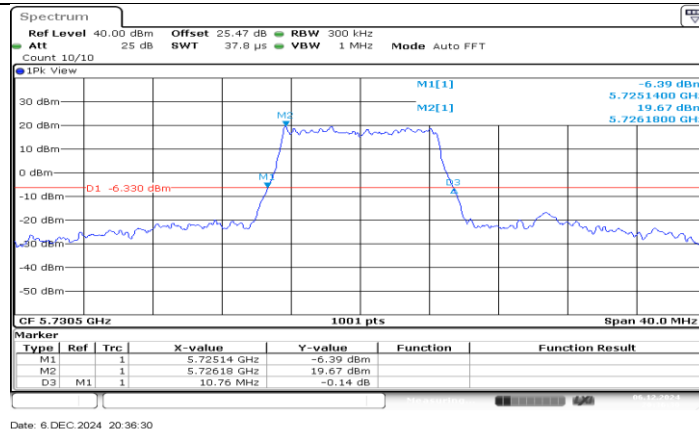


SRD 10M_Ant2_5730.5

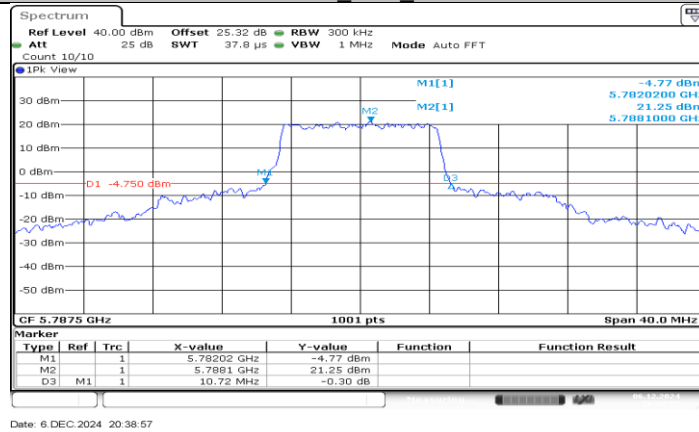


SRD 10M_Ant1_5787.5

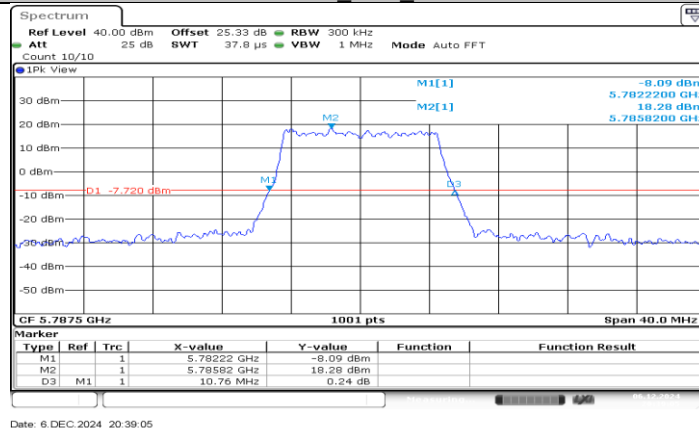


SRD 10M_Ant2_5787.5

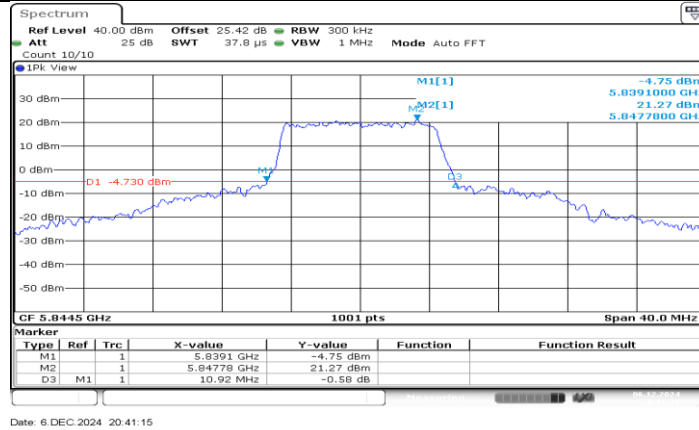


SRD 10M_Ant1_5844.5

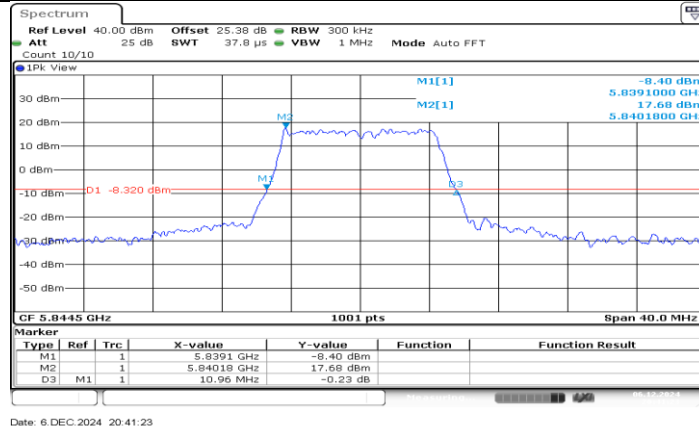


SRD 10M_Ant2_5844.5

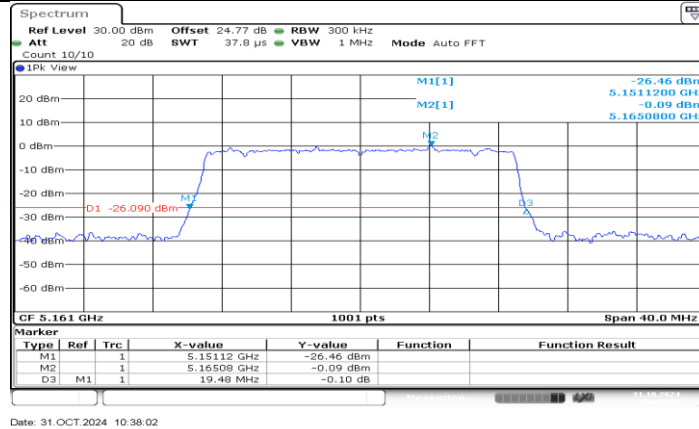


SRD 20M_Ant1_5161

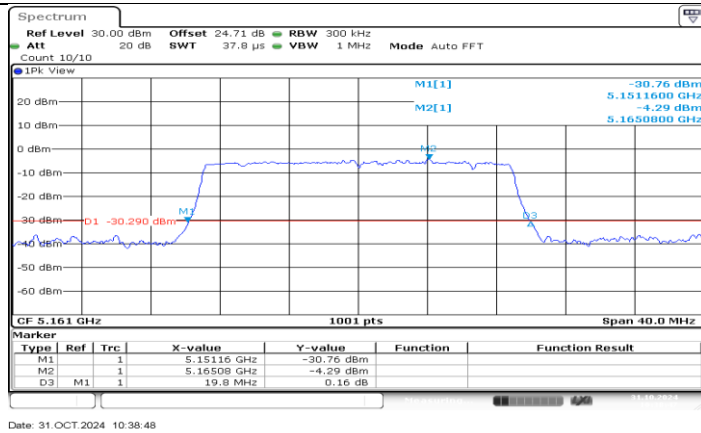


SRD 20M_Ant2_5161

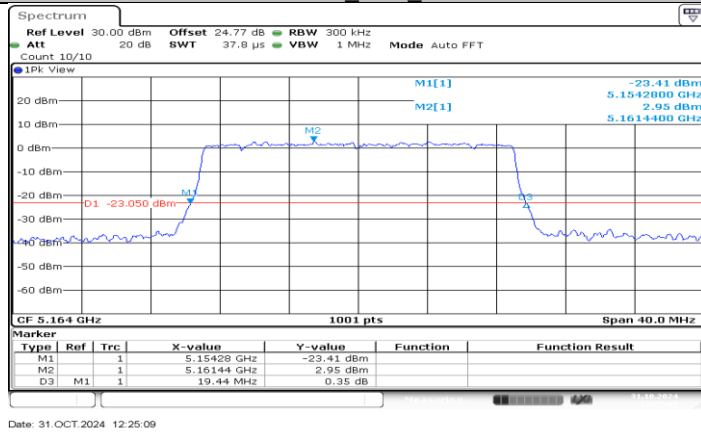


SRD 20M_Ant1_5164

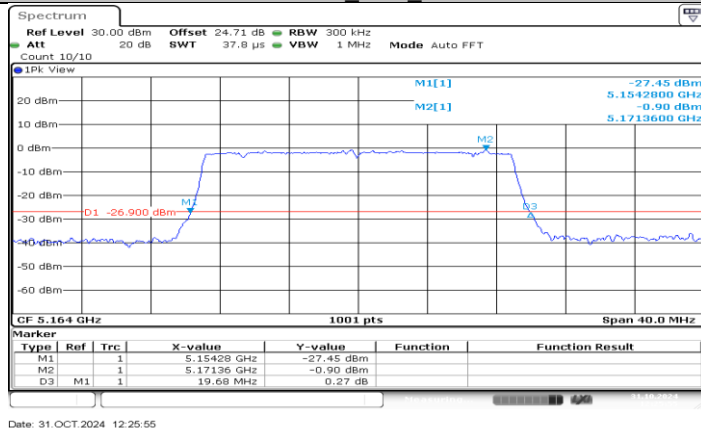


SRD 20M_Ant2_5164

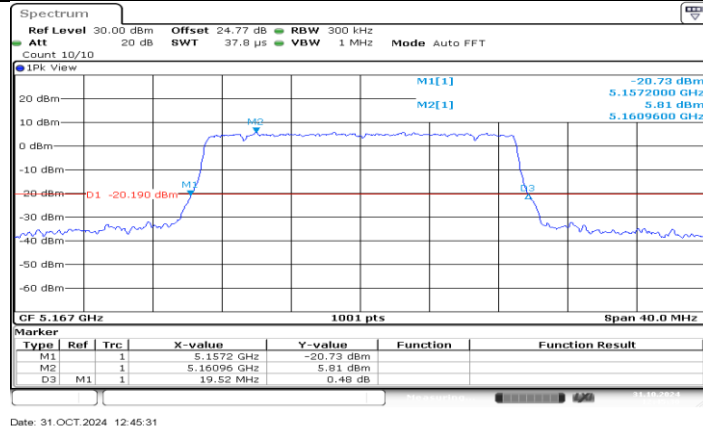


SRD 20M_Ant1_5167

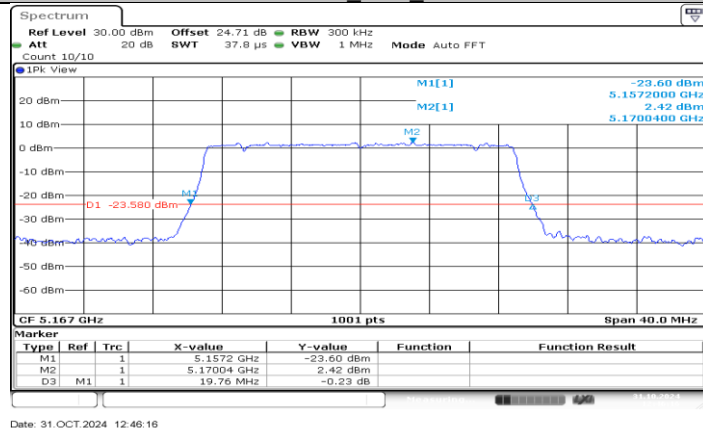


SRD 20M_Ant2_5167

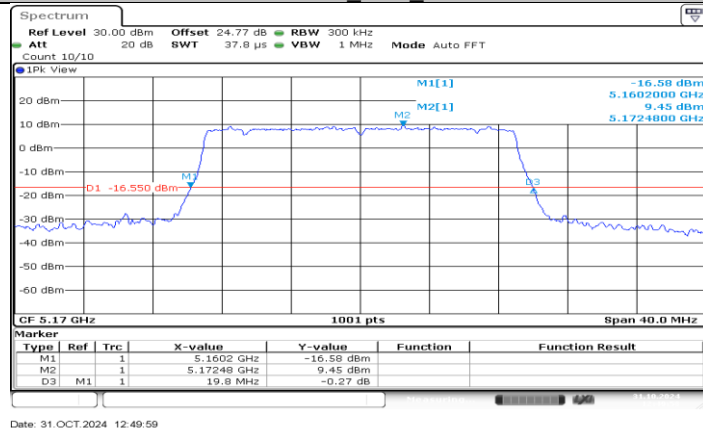


SRD 20M_Ant1_5170

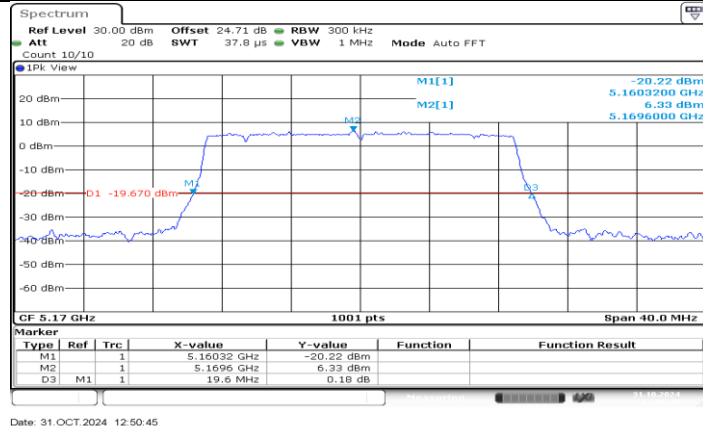

SRD 20M_Ant2_5170

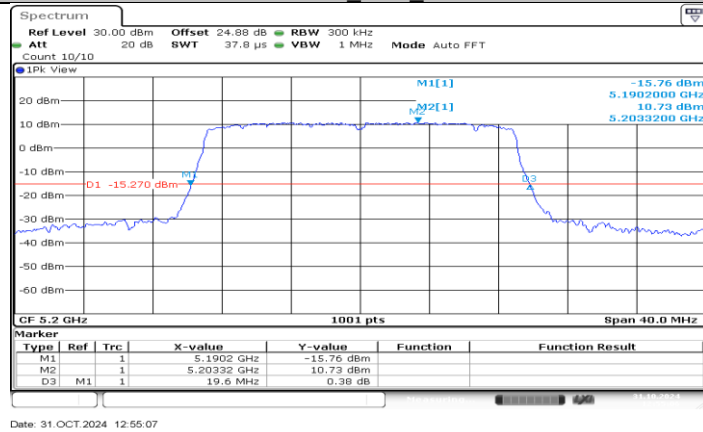

SRD 20M_Ant1_5200

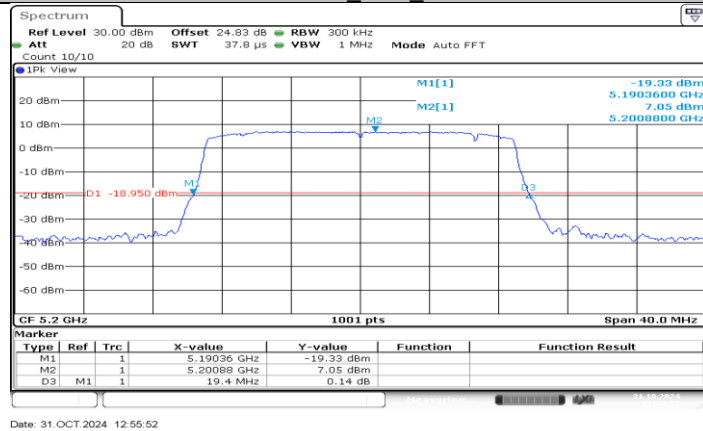

SRD 20M_Ant2_5200