

**Test Plot 1#: SDR 2.4G\_1.4MHz\_Handheld Back\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.232 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.568 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.365 W/kg  
**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.130 W/kg**  
 Maximum value of SAR (measured) = 0.229 W/kg

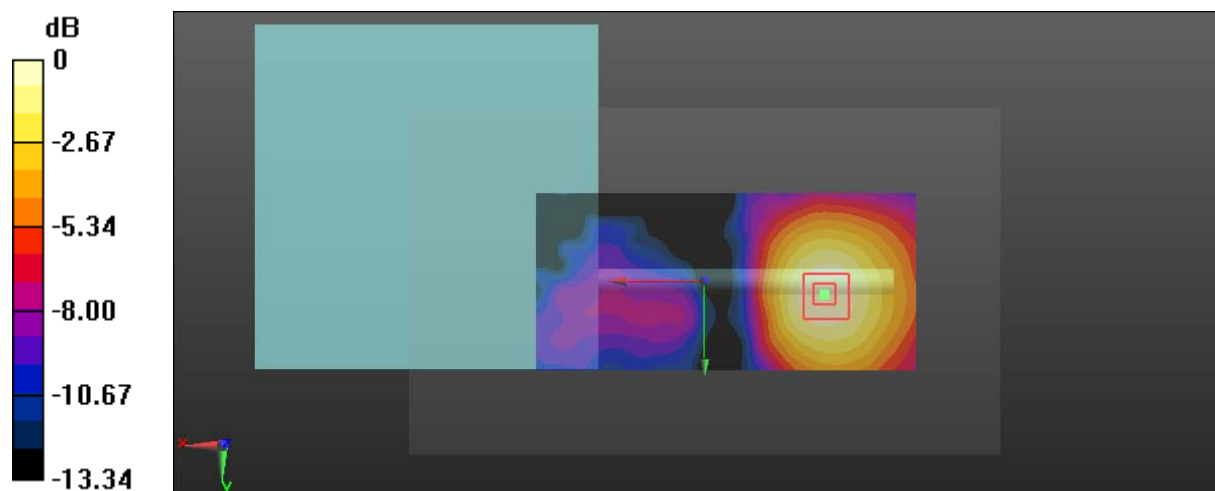

0 dB = 0.229 W/kg = -6.40 dBW/kg

**Test Plot 2#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.909$  S/m;  $\epsilon_r = 54.382$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 8.67 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 56.24 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 14.3 W/kg  
**SAR(1 g) = 6.7 W/kg; SAR(10 g) = 2.98 W/kg**  
 Maximum value of SAR (measured) = 7.57 W/kg

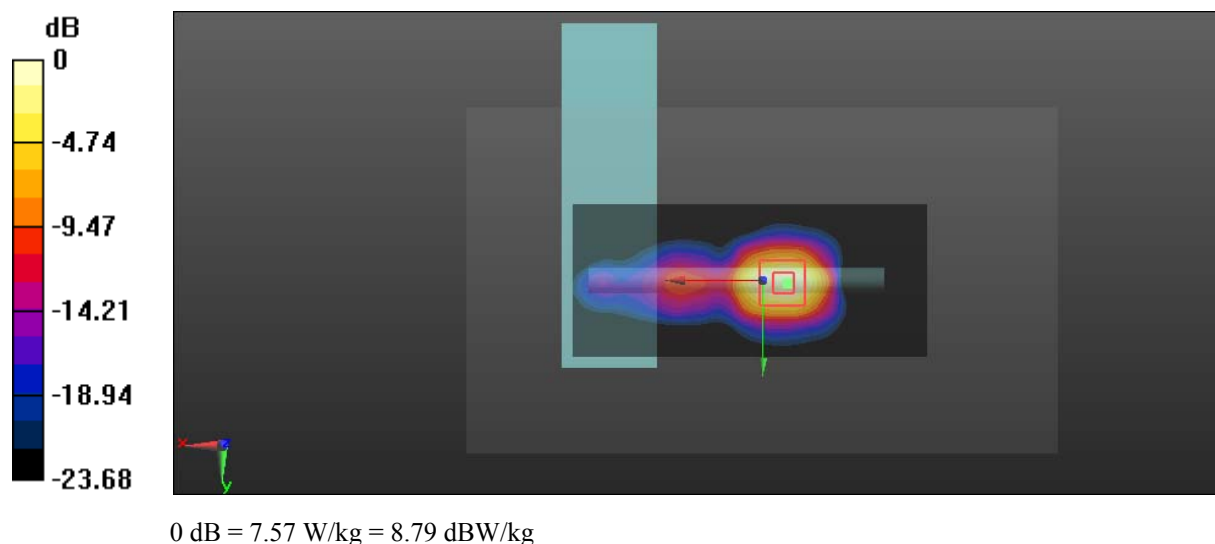

**Test Plot 3#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 9.57 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 48.43 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 15.3 W/kg  
**SAR(1 g) = 6.82 W/kg; SAR(10 g) = 2.97 W/kg**  
 Maximum value of SAR (measured) = 7.62 W/kg

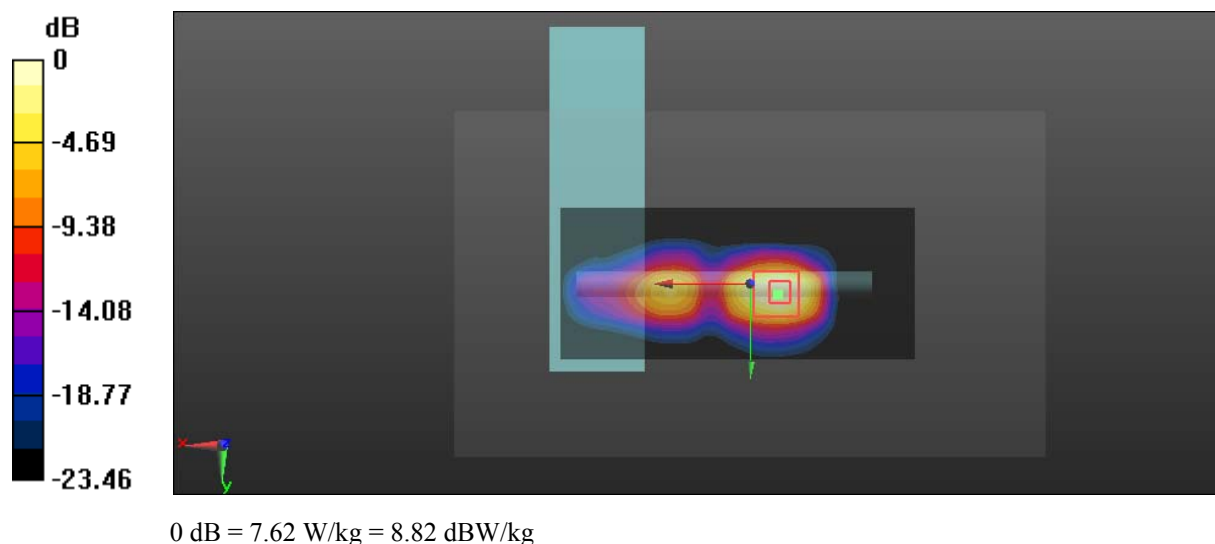

**Test Plot 4#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2477.5$  MHz;  $\sigma = 1.983$  S/m;  $\epsilon_r = 51.825$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 5.22 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 33.28 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 9.05 W/kg  
**SAR(1 g) = 4.34 W/kg; SAR(10 g) = 2.03 W/kg**  
 Maximum value of SAR (measured) = 4.77 W/kg

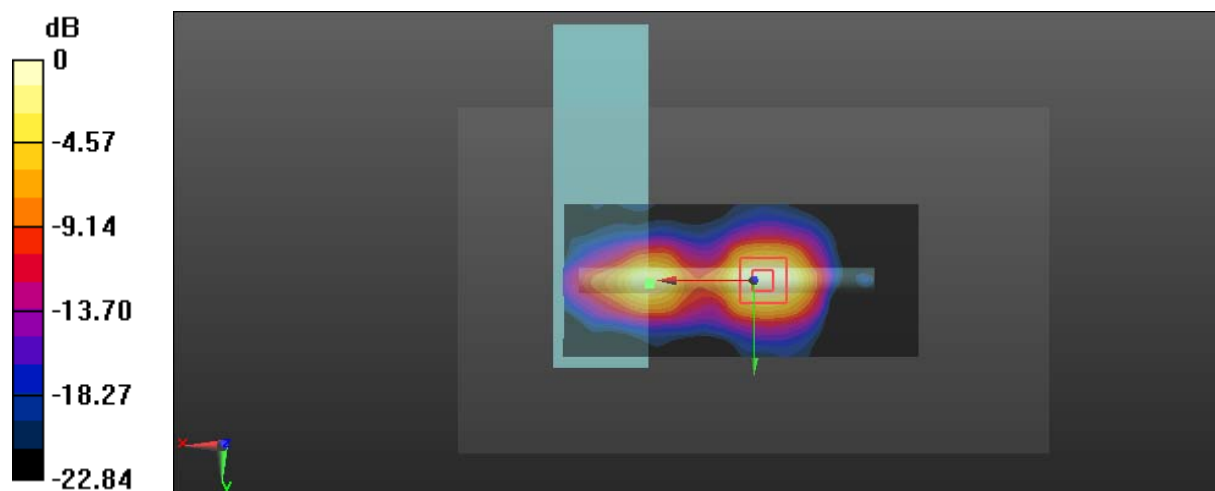

0 dB = 4.77 W/kg = 6.79 dBW/kg

**Test Plot 5#: SDR 2.4G\_10MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 7.85 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 36.49 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 9.18 W/kg  
**SAR(1 g) = 4.13 W/kg; SAR(10 g) = 1.8 W/kg**  
 Maximum value of SAR (measured) = 6.94 W/kg

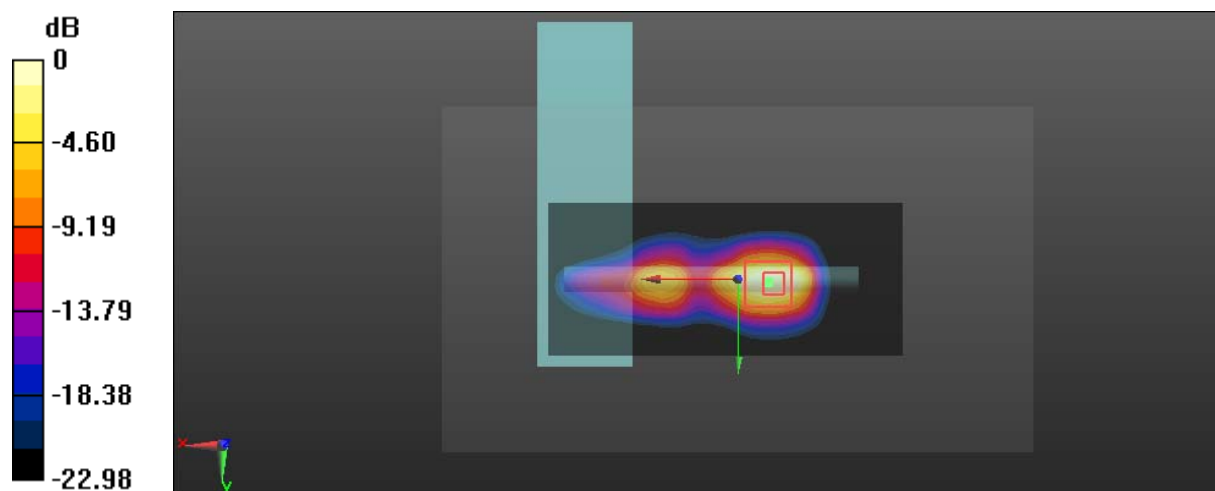

0 dB = 6.94 W/kg = 8.41 dBW/kg

**Test Plot 6#: SDR 2.4G\_20MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 4.88 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 33.60 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 5.04 W/kg  
**SAR(1 g) = 2.68 W/kg; SAR(10 g) = 1.19 W/kg**  
 Maximum value of SAR (measured) = 4.20 W/kg

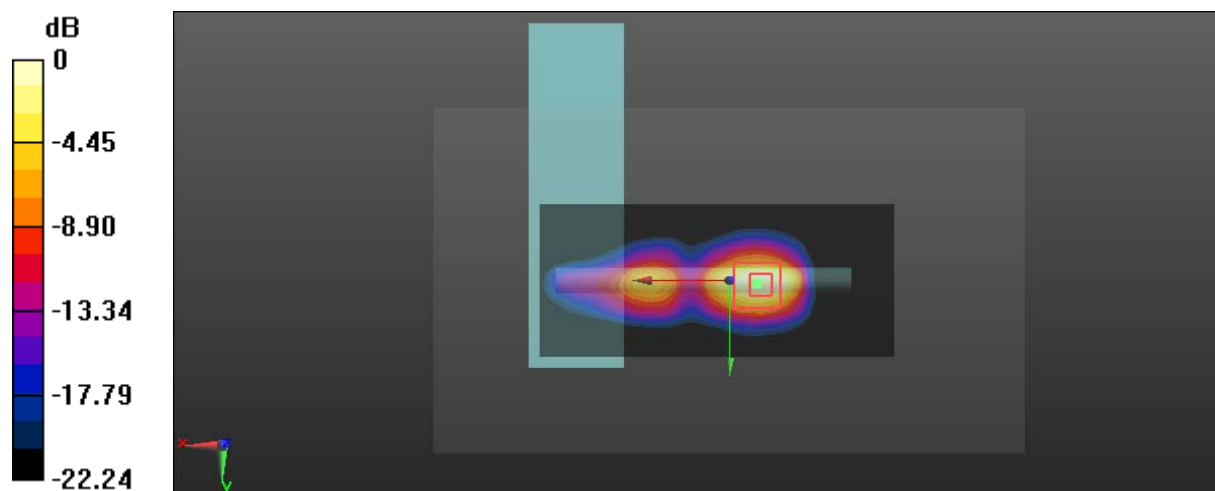

0 dB = 4.20 W/kg = 6.23 dBW/kg

**Test Plot 7#: SDR 2.4G\_1.4MHz\_Handheld Front\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.241 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.215 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.362 W/kg  
**SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.133 W/kg**  
 Maximum value of SAR (measured) = 0.225 W/kg

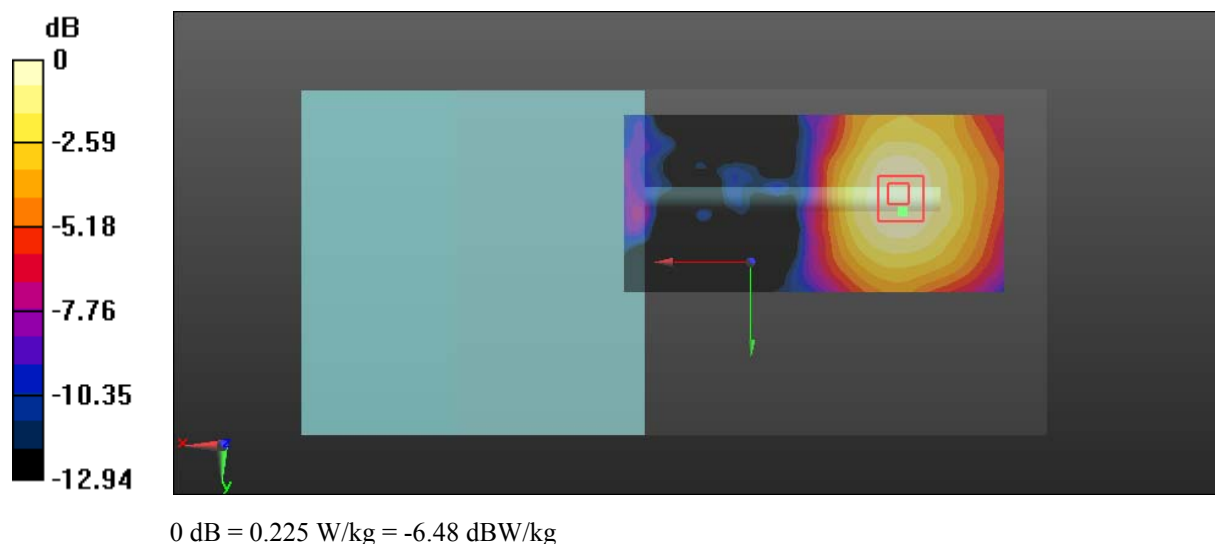

**Test Plot 8#: SDR 2.4G\_1.4MHz\_Close To Body Back\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.164 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.221 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.262 W/kg  
**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.097 W/kg**  
 Maximum value of SAR (measured) = 0.162 W/kg

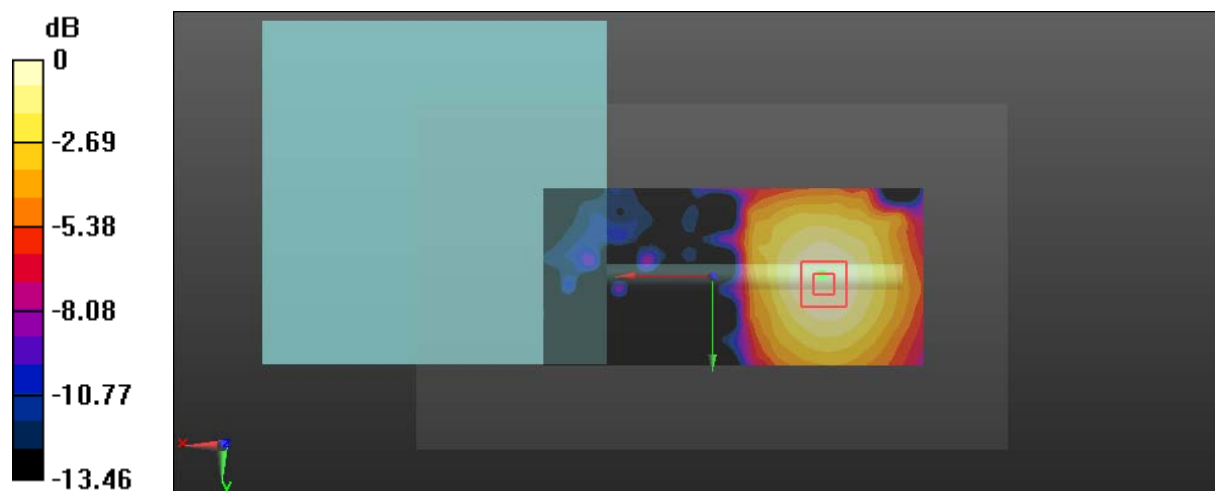

0 dB = 0.162 W/kg = -7.90 dBW/kg



**Test Plot 9#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2403.5$  MHz;  $\sigma = 1.909$  S/m;  $\epsilon_r = 54.382$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.16 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 21.12 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 1.83 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.541 W/kg**  
 Maximum value of SAR (measured) = 1.12 W/kg

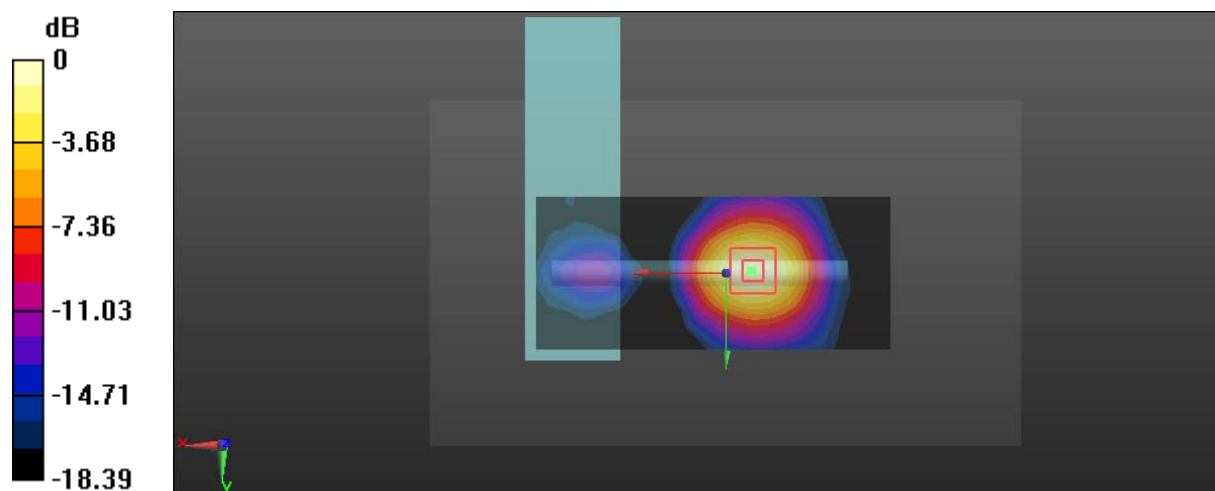

0 dB = 1.12 W/kg = 0.49 dBW/kg

**Test Plot 10#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.939$  S/m;  $\epsilon_r = 53.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.25 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 22.61 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 2.03 W/kg  
**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.544 W/kg**  
 Maximum value of SAR (measured) = 1.19 W/kg

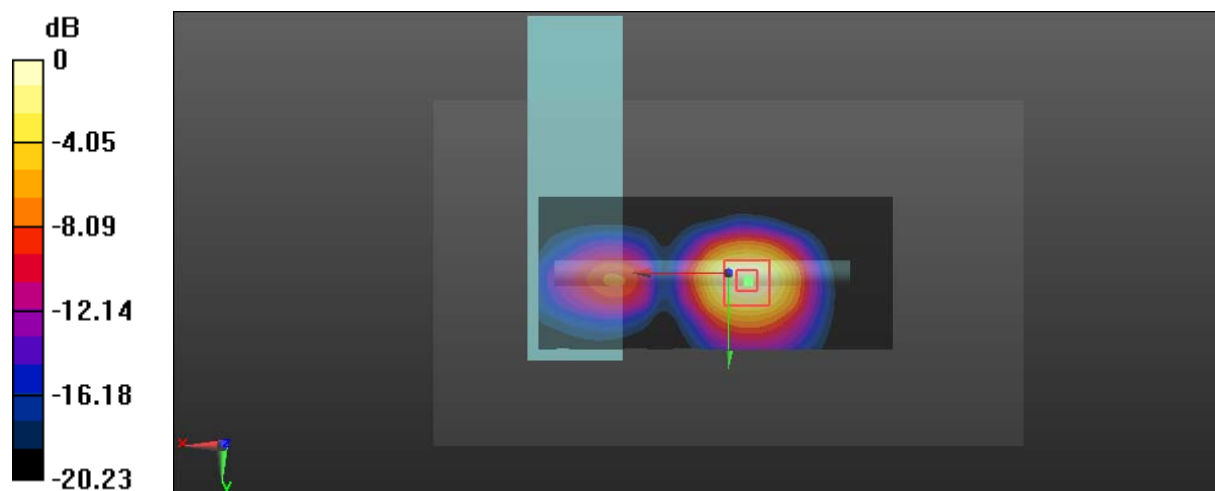

0 dB = 1.19 W/kg = 0.76 dBW/kg

**Test Plot 11#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2477.5$  MHz;  $\sigma = 1.983$  S/m;  $\epsilon_r = 51.825$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.01 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 20.82 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 0.913 W/kg; SAR(10 g) = 0.474 W/kg**  
 Maximum value of SAR (measured) = 1.01 W/kg

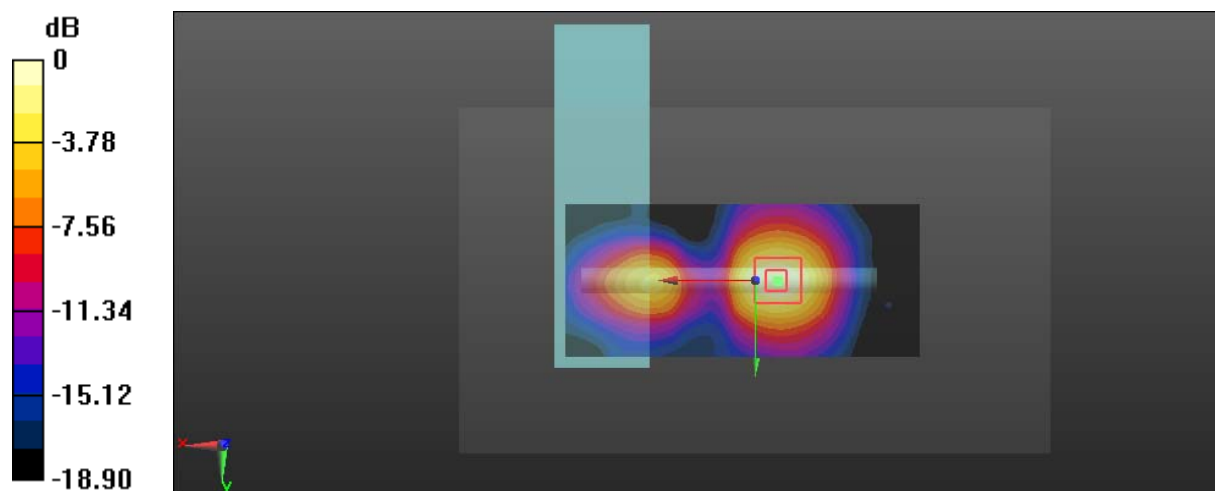

0 dB = 1.01 W/kg = 0.04 dBW/kg

**Test Plot 12#: SDR 2.4G\_10MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.939$  S/m;  $\epsilon_r = 53.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.10 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.26 W/kg

**SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.361 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

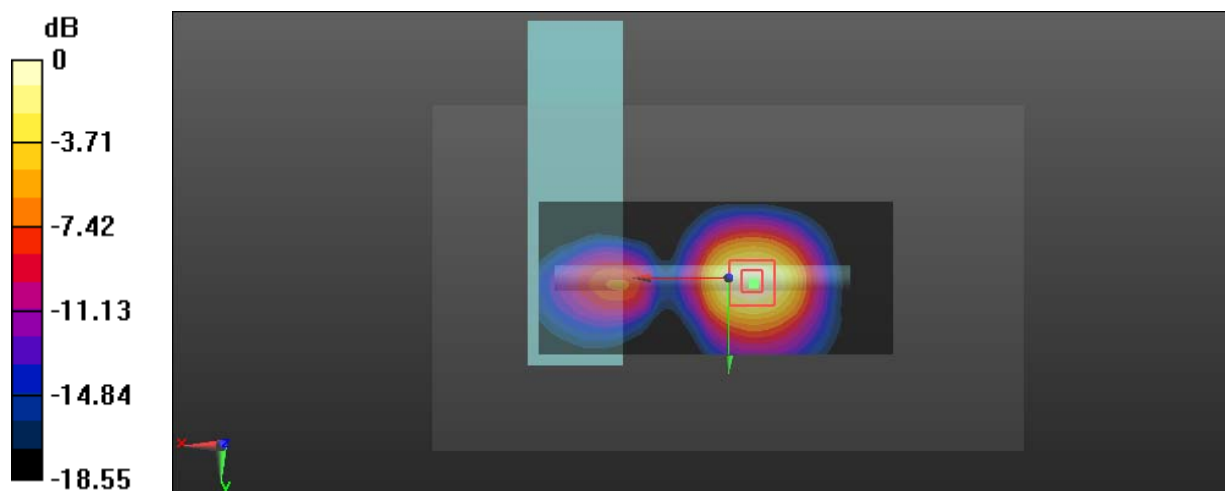

0 dB = 1.04 W/kg = 0.17 dBW/kg

**Test Plot 13#: SDR 2.4G\_20MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.939 \text{ S/m}$ ;  $\epsilon_r = 53.35$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.03 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 20.56 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.31 W/kg  
**SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.332 W/kg**  
 Maximum value of SAR (measured) = 1.05 W/kg

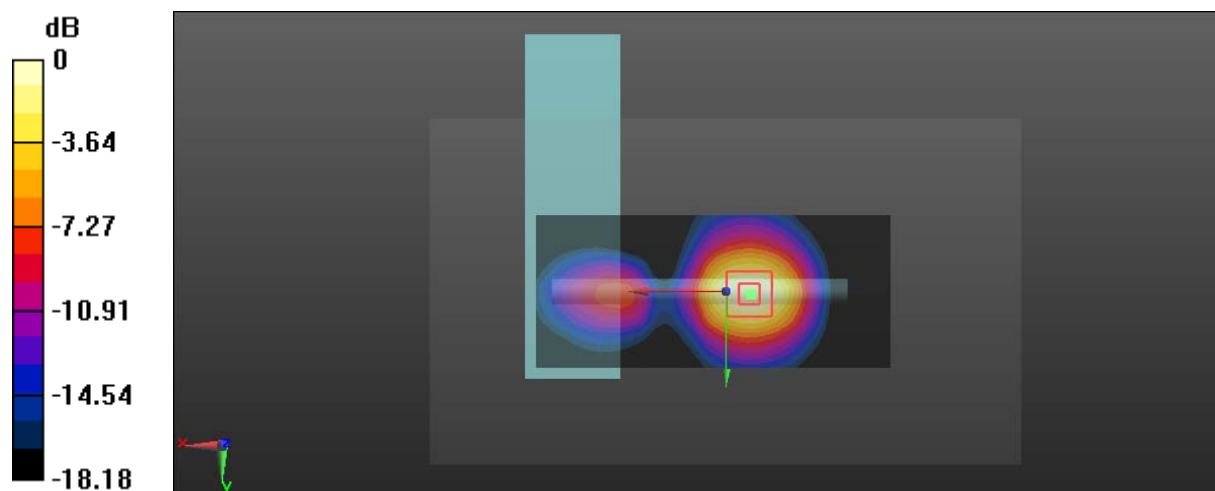

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Test Plot 14#: SDR 2.4G\_1.4MHz\_Close To Body Front\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.939$  S/m;  $\epsilon_r = 53.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.162 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 2.132 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.260 W/kg  
**SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.097 W/kg**  
 Maximum value of SAR (measured) = 0.164 W/kg

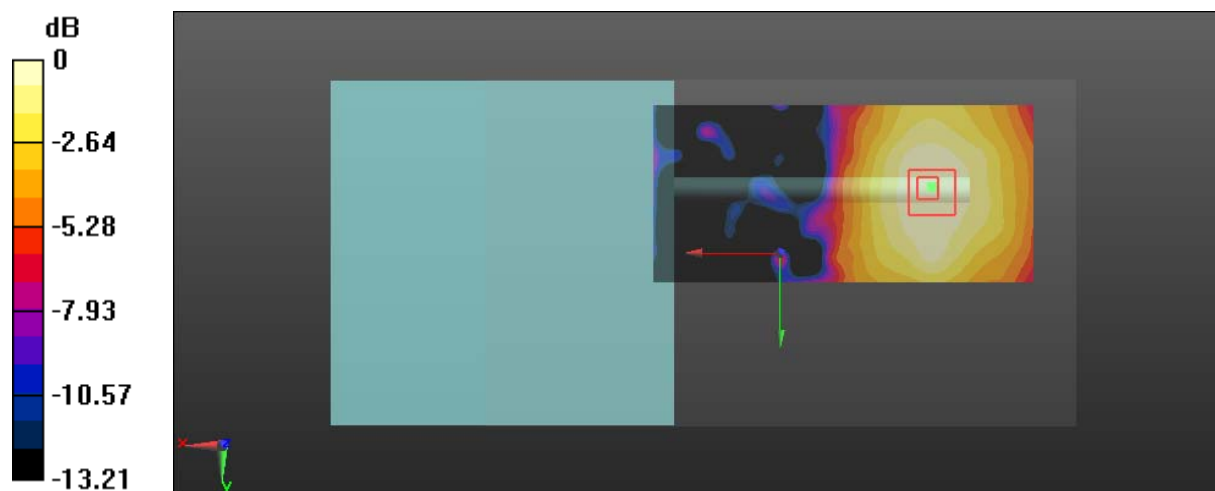

0 dB = 0.164 W/kg = -7.85 dBW/kg

**Test Plot 15#: Wi-Fi 2.4G\_Handheld Back\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0452 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 1.936 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.0830 W/kg  
**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.012 W/kg**  
 Maximum value of SAR (measured) = 0.0229 W/kg

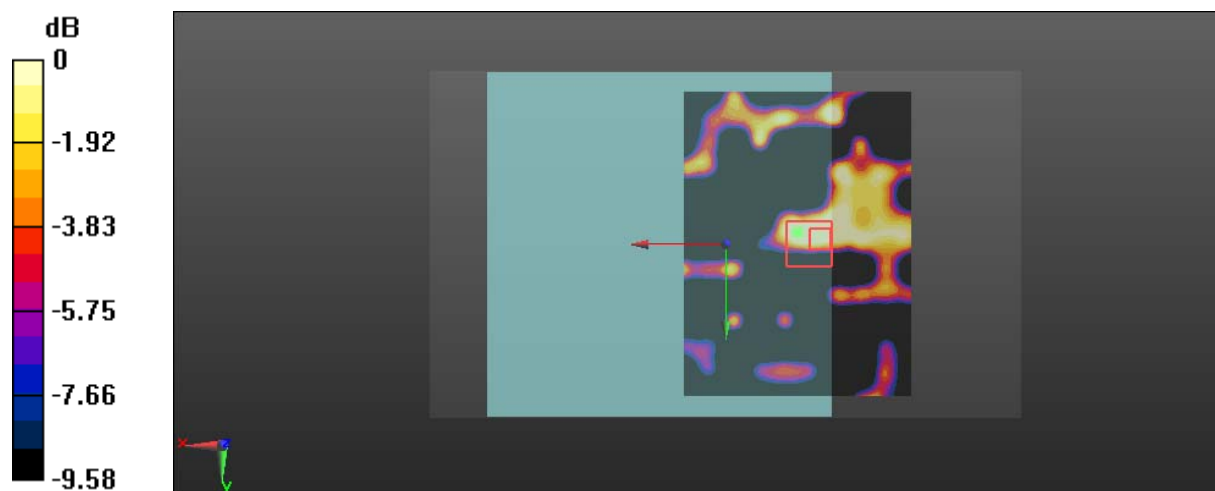

0 dB = 0.0229 W/kg = -16.40 dBW/kg

**Test Plot 16#: Wi-Fi 2.4G\_Handheld Top\_0mm\_Low Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.915$  S/m;  $\epsilon_r = 54.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0705 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.808 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0780 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0658 W/kg

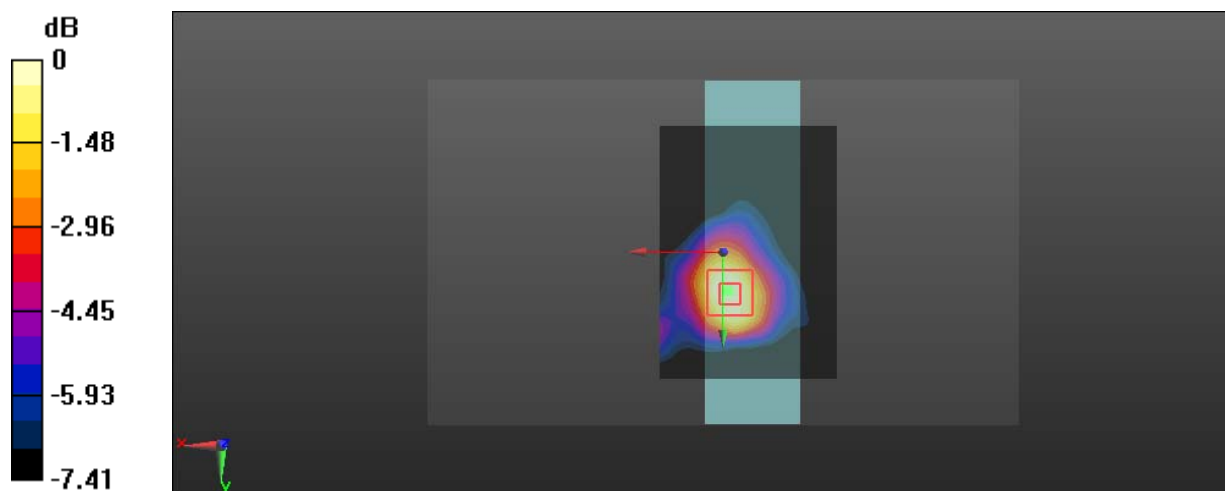

0 dB = 0.0658 W/kg = -11.82 dBW/kg



**Test Plot 17#: Wi-Fi 2.4G\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.104 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.469 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 0.118 W/kg  
**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.045 W/kg**  
 Maximum value of SAR (measured) = 0.0998 W/kg

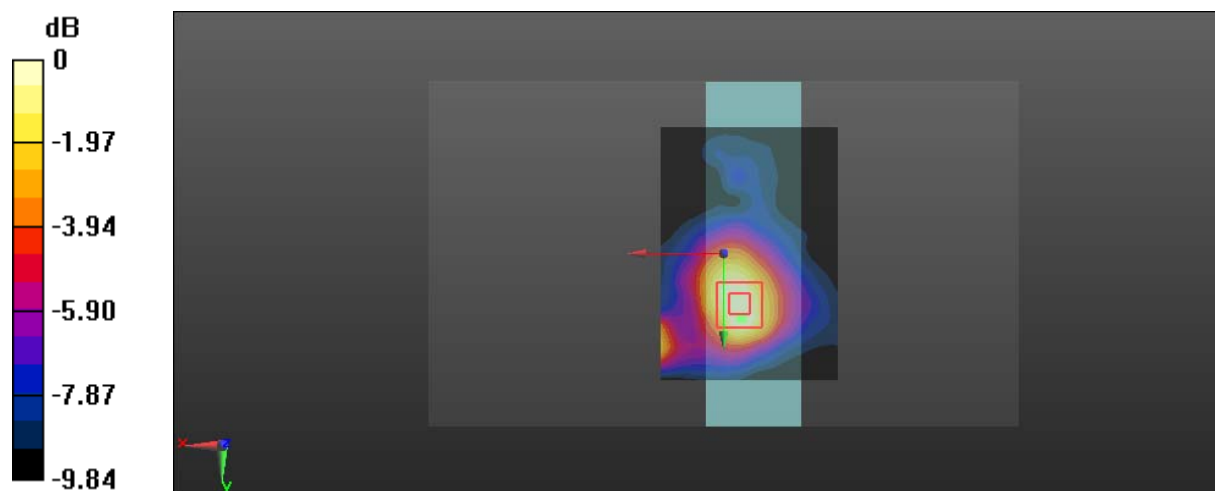

0 dB = 0.0998 W/kg = -10.01 dBW/kg

**Test Plot 18#: Wi-Fi 2.4G\_Handheld Top\_0mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.977 \text{ S/m}$ ;  $\epsilon_r = 52.022$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.101 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.009 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 0.118 W/kg  
**SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.039 W/kg**  
 Maximum value of SAR (measured) = 0.0882 W/kg

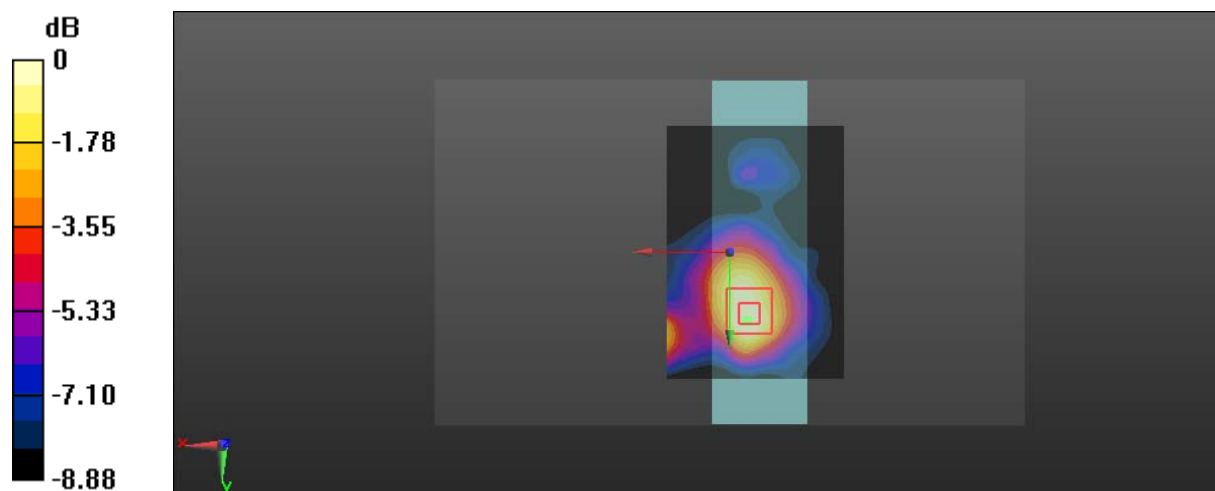

0 dB = 0.0882 W/kg = -10.55 dBW/kg

**Test Plot 19#: Wi-Fi 2.4G\_Handheld Front\_0mm\_Middle Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0336 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.305 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg**

Maximum value of SAR (measured) = 0.0294 W/kg

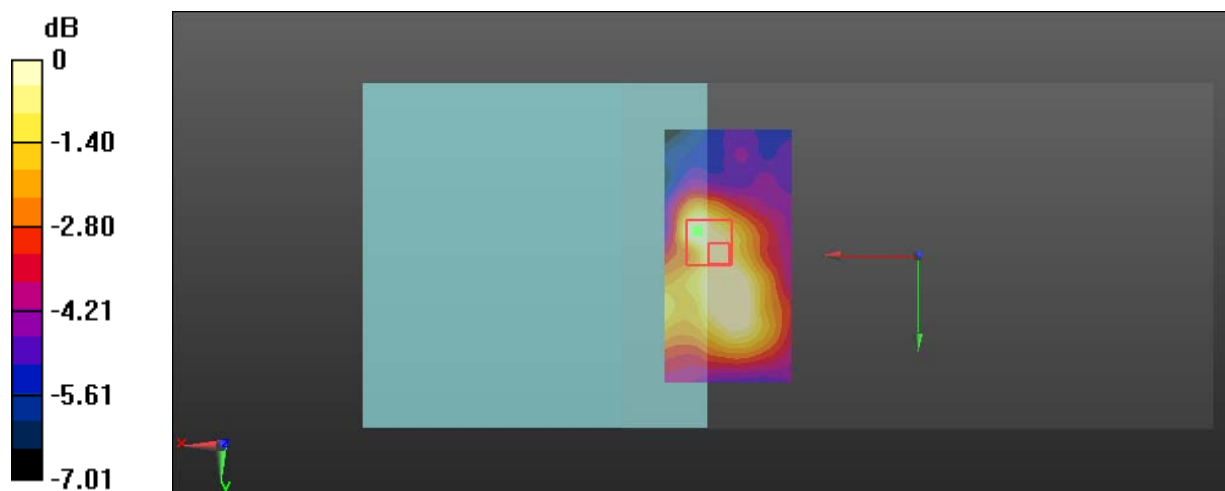

0 dB = 0.0294 W/kg = -15.32 dBW/kg

**Test Plot 20#: Wi-Fi 2.4G\_Close To Body Back\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0122 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.573 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.0150 W/kg  
**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00884 W/kg**  
 Maximum value of SAR (measured) = 0.0128 W/kg

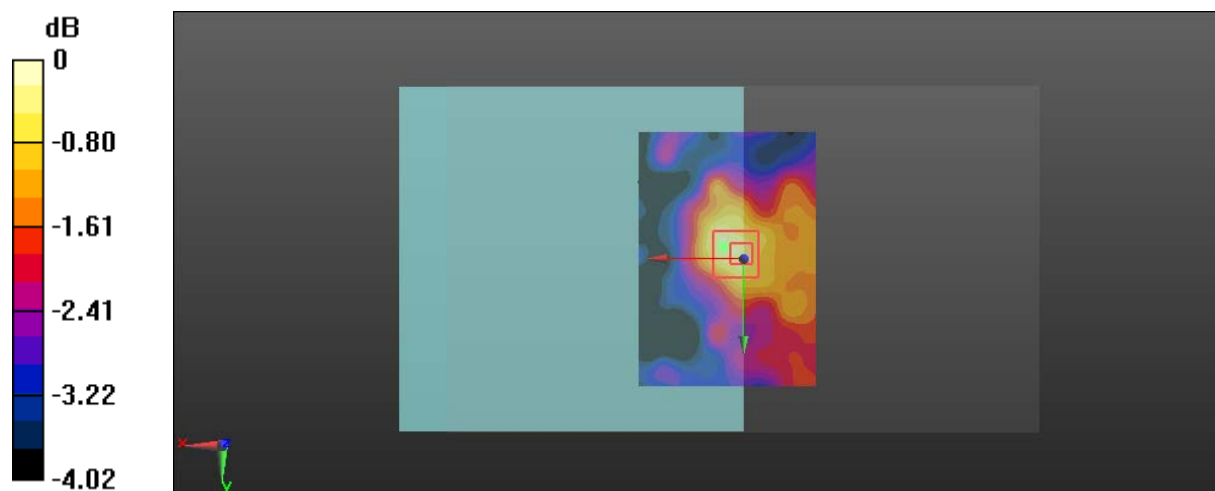

0 dB = 0.0128 W/kg = -18.93 dBW/kg

**Test Plot 21#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.915 \text{ S/m}$ ;  $\epsilon_r = 54.251$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0330 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.964 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.0350 W/kg  
**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.015 W/kg**  
 Maximum value of SAR (measured) = 0.0302 W/kg

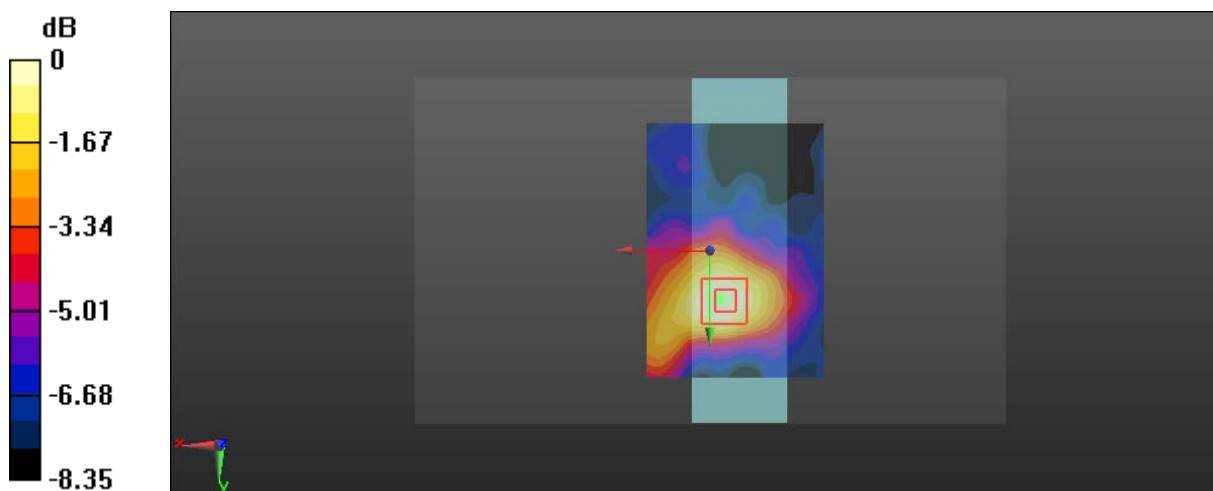

0 dB = 0.0302 W/kg = -15.20 dBW/kg

**Test Plot 22#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0484 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.279 V/m; Power Drift = 0.10 dB  
 Peak SAR (extrapolated) = 0.0560 W/kg  
**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.024 W/kg**  
 Maximum value of SAR (measured) = 0.0484 W/kg

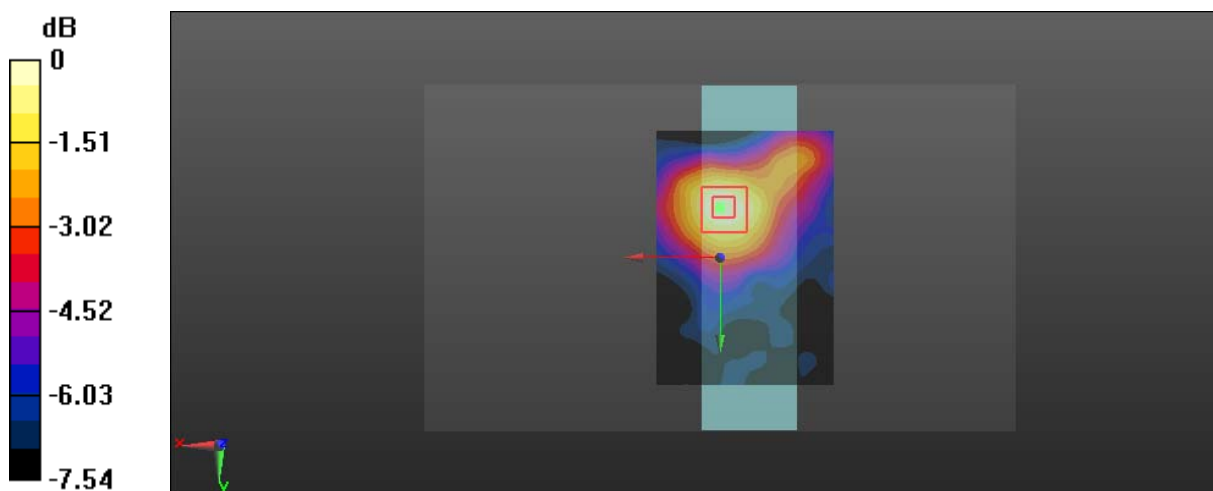

0 dB = 0.0484 W/kg = -13.15 dBW/kg

**Test Plot 23#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.977 \text{ S/m}$ ;  $\epsilon_r = 52.022$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0318 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.707 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0350 \text{ W/kg}$   
**SAR(1 g) =  $0.023 \text{ W/kg}$ ; SAR(10 g) =  $0.016 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0299 \text{ W/kg}$

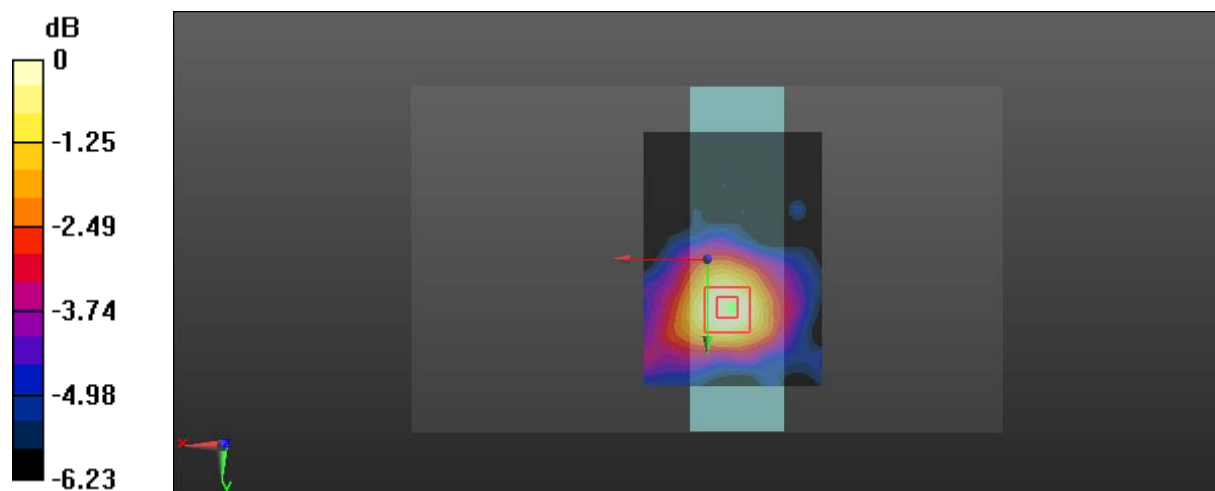

0 dB =  $0.0299 \text{ W/kg} = -15.24 \text{ dBW/kg}$

**Test Plot 24#: Wi-Fi 2.4G\_Close To Body Front\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0131 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.158 V/m; Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 0.0150 W/kg  
**SAR(1 g) = 0.012 W/kg; SAR(10 g) = 0.00895 W/kg**  
 Maximum value of SAR (measured) = 0.0137 W/kg

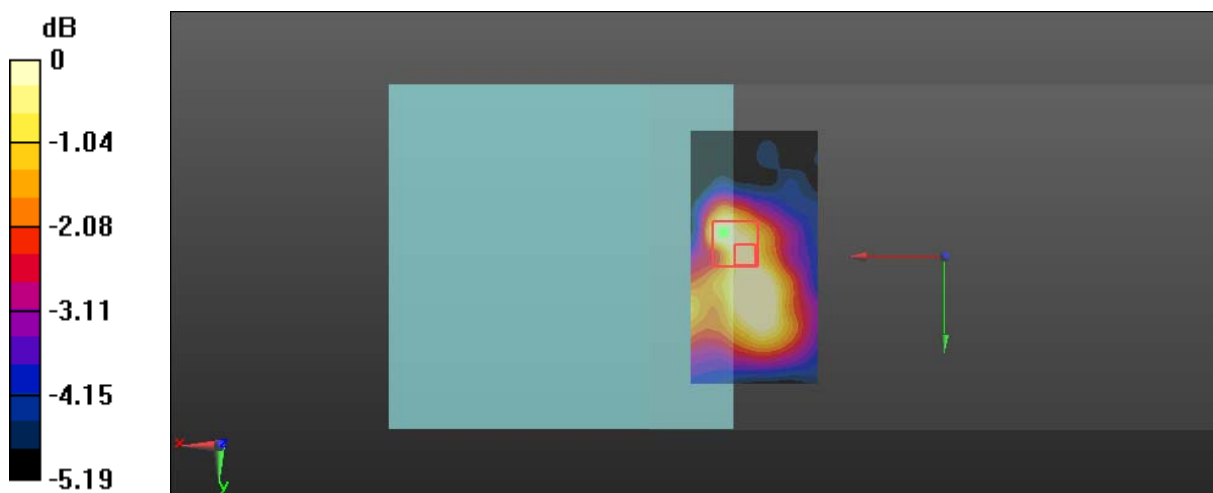

0 dB = 0.0137 W/kg = -18.63 dBW/kg



**Test Plot 25#: SDR 5.8G\_1.4MHz\_Handheld Back\_0mm\_Middle Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.159$  S/m;  $\epsilon_r = 48.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.243 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.994 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.247 W/kg

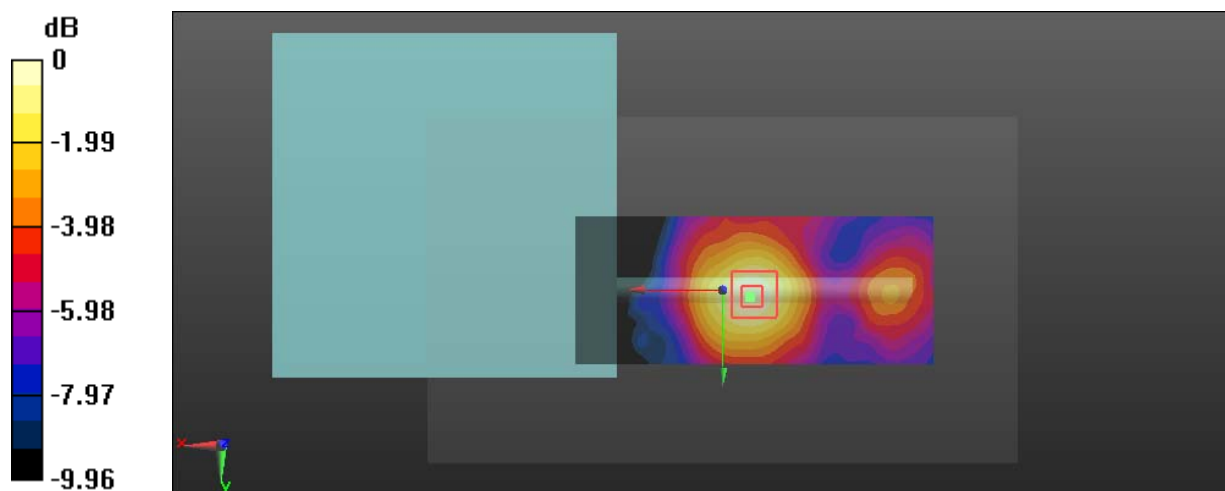

0 dB = 0.247 W/kg = -6.07 dBW/kg

**Test Plot 26#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5728.5$  MHz;  $\sigma = 5.955$  S/m;  $\epsilon_r = 49.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 7.63 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 15.39 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 10.1 W/kg  
**SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.693 W/kg**  
 Maximum value of SAR (measured) = 5.39 W/kg

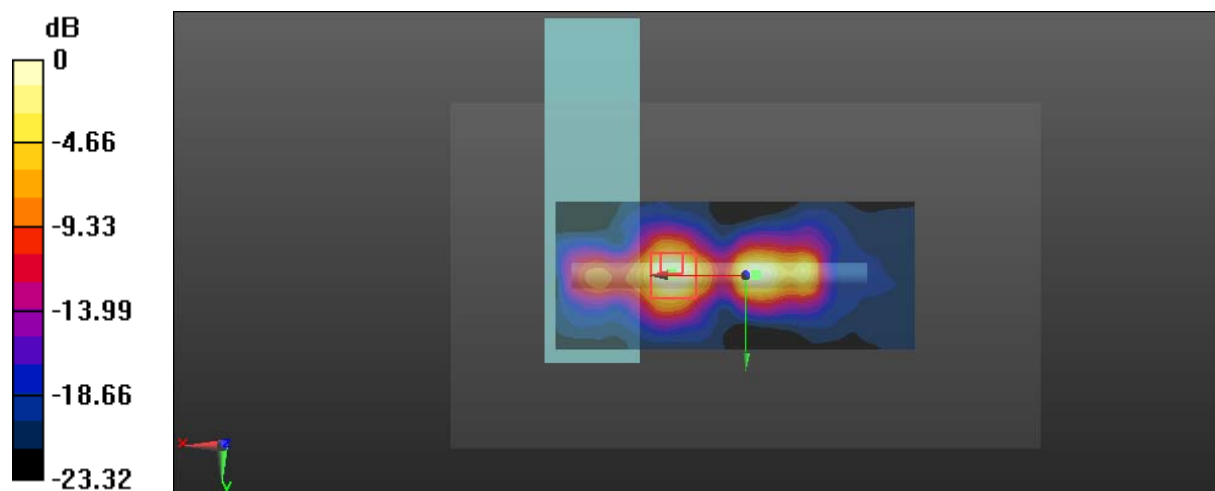

0 dB = 5.39 W/kg = 7.32 dBW/kg

**Test Plot 27#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.159$  S/m;  $\epsilon_r = 48.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 6.14 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 20.56 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 9.16 W/kg  
**SAR(1 g) = 2.17 W/kg; SAR(10 g) = 0.727 W/kg**  
 Maximum value of SAR (measured) = 4.71 W/kg

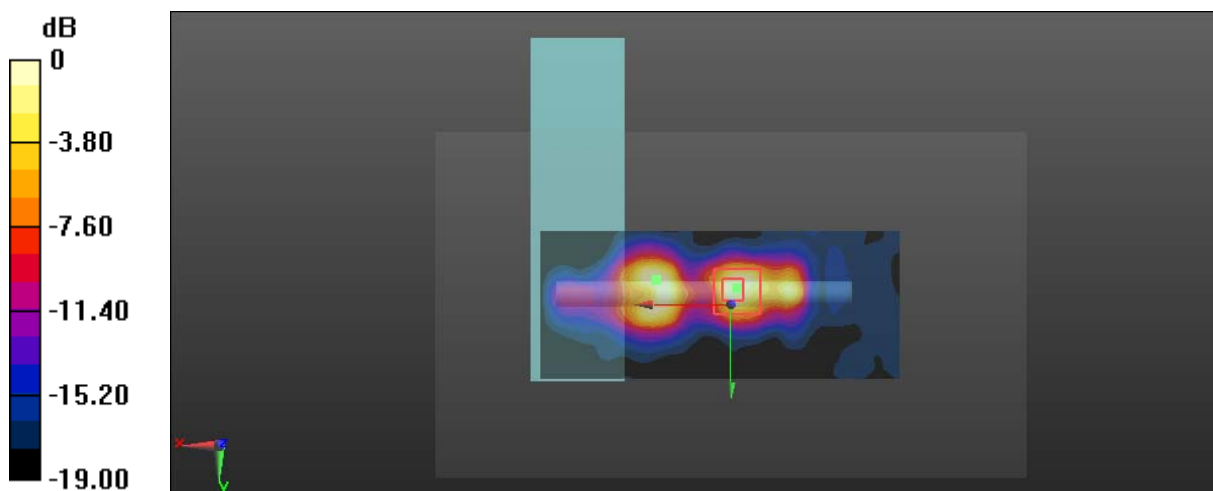

0 dB = 4.71 W/kg = 6.73 dBW/kg

**Test Plot 28#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_High Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 5846.5$  MHz;  $\sigma = 6.301$  S/m;  $\epsilon_r = 48.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.85 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 18.65 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 8.15 W/kg

**SAR(1 g) = 2.05 W/kg; SAR(10 g) = 0.639 W/kg**

Maximum value of SAR (measured) = 4.52 W/kg

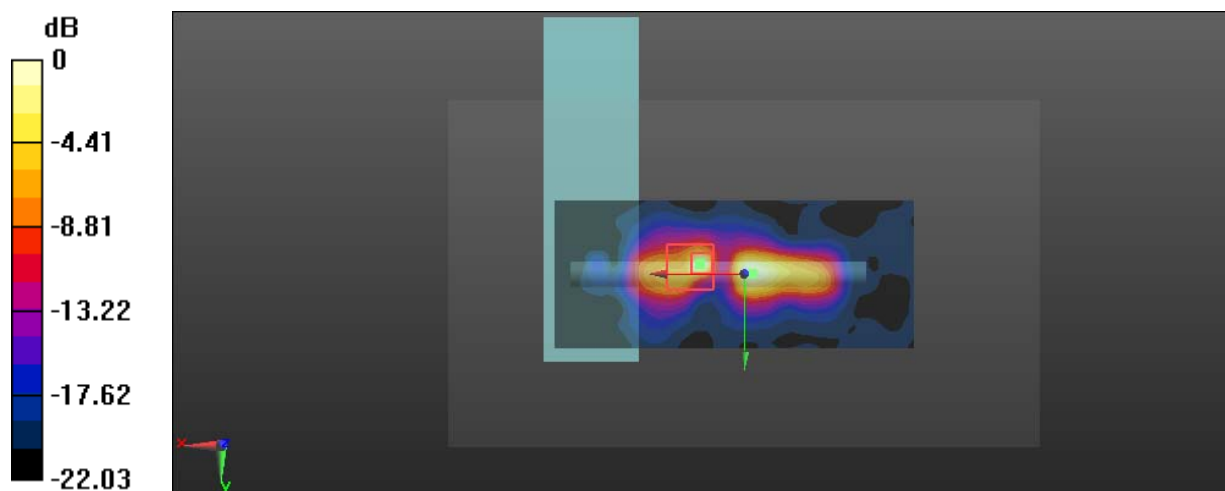

0 dB = 4.52 W/kg = 6.55 dBW/kg

**Test Plot 29#: SDR 5.8G\_10MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5$  MHz;  $\sigma = 6.163$  S/m;  $\epsilon_r = 48.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 4.11 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 13.58 V/m; Power Drift = -0.20 dB  
 Peak SAR (extrapolated) = 6.06 W/kg  
**SAR(1 g) = 1.24 W/kg; SAR(10 g) = 0.537 W/kg**  
 Maximum value of SAR (measured) = 3.21 W/kg

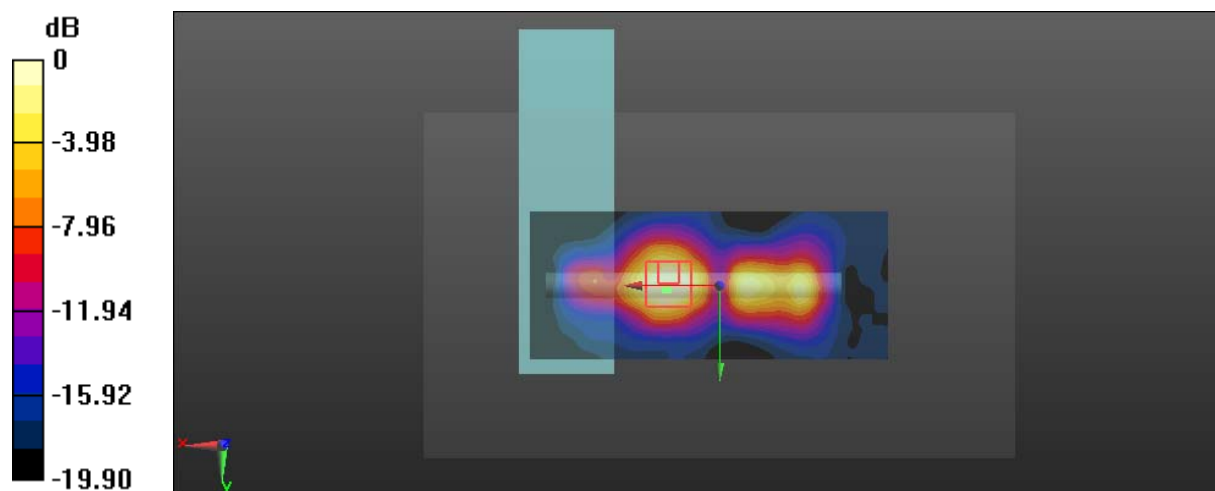

0 dB = 3.21 W/kg = 5.07 dBW/kg

**Test Plot 30#: SDR 5.8G\_20MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5$  MHz;  $\sigma = 6.163$  S/m;  $\epsilon_r = 48.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 3.65 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 11.81 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 3.88 W/kg  
**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.513 W/kg**  
 Maximum value of SAR (measured) = 2.73 W/kg

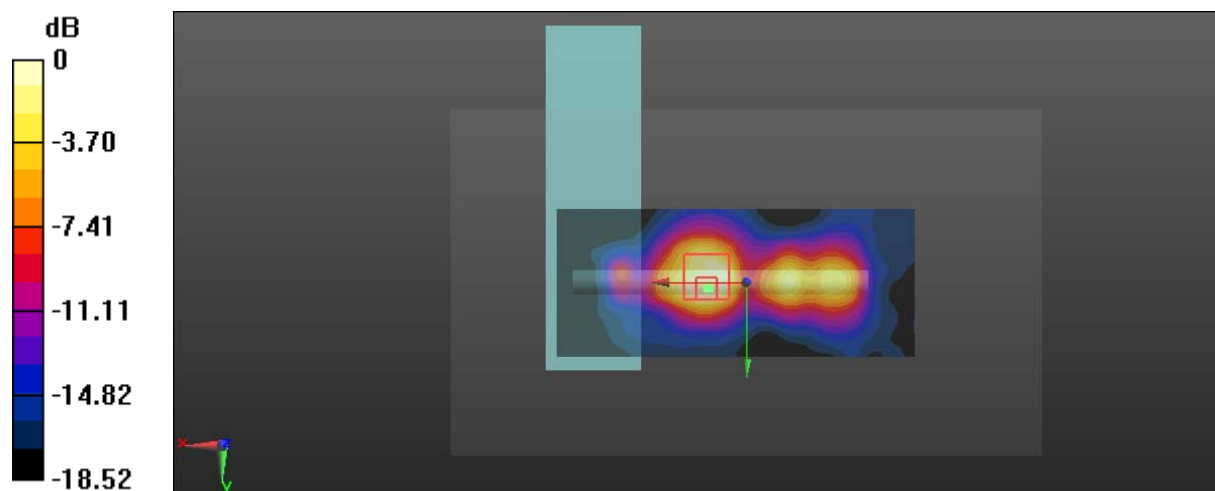

0 dB = 2.73 W/kg = 4.36 dBW/kg

**Test Plot 31#: SDR 5.8G\_1.4MHz\_Handheld Front\_0mm\_Middle Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.159$  S/m;  $\epsilon_r = 48.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.406 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.498 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

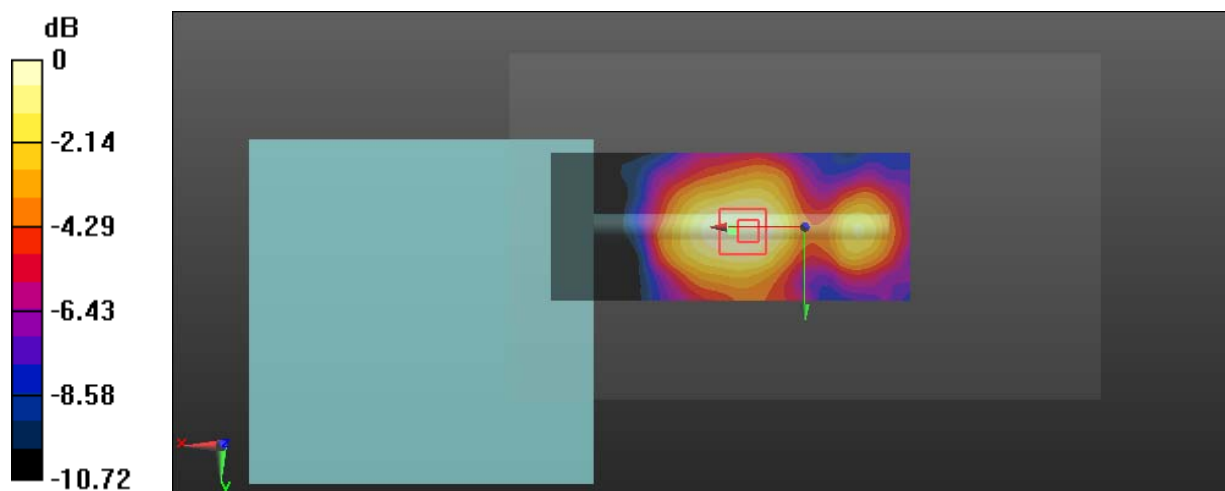

0 dB = 0.274 W/kg = -5.62 dBW/kg

**Test Plot 32#: SDR 5.8G\_1.4MHz\_Close To Body Back\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.159$  S/m;  $\epsilon_r = 48.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.160 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 3.620 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.281 W/kg  
**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.055 W/kg**  
 Maximum value of SAR (measured) = 0.153 W/kg

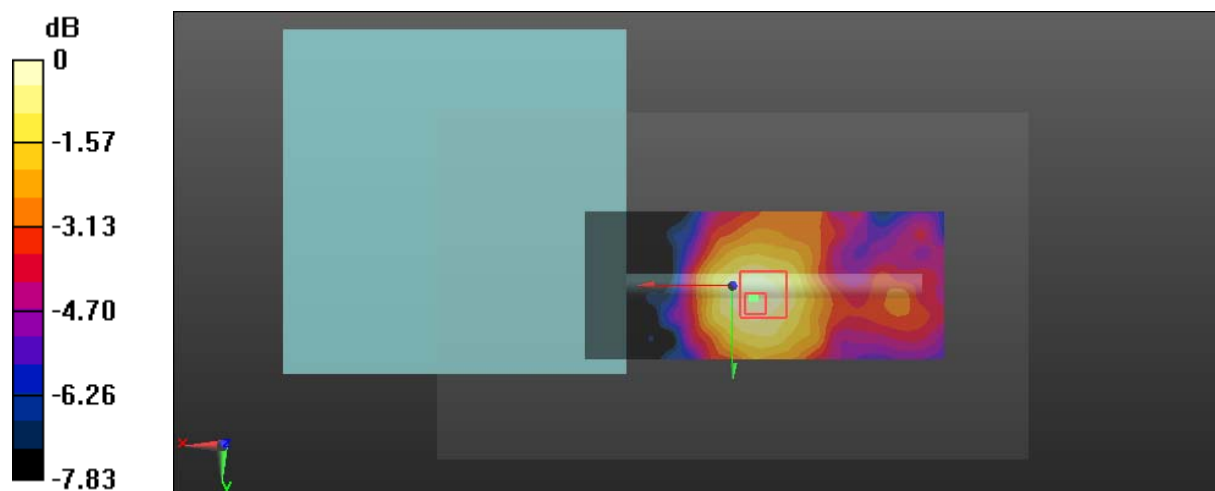

0 dB = 0.153 W/kg = -8.15 dBW/kg



**Test Plot 33#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5728.5$  MHz;  $\sigma = 5.955$  S/m;  $\epsilon_r = 49.394$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.420 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 4.019 V/m; Power Drift = -0.20 dB  
 Peak SAR (extrapolated) = 0.706 W/kg  
**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.094 W/kg**  
 Maximum value of SAR (measured) = 0.397 W/kg

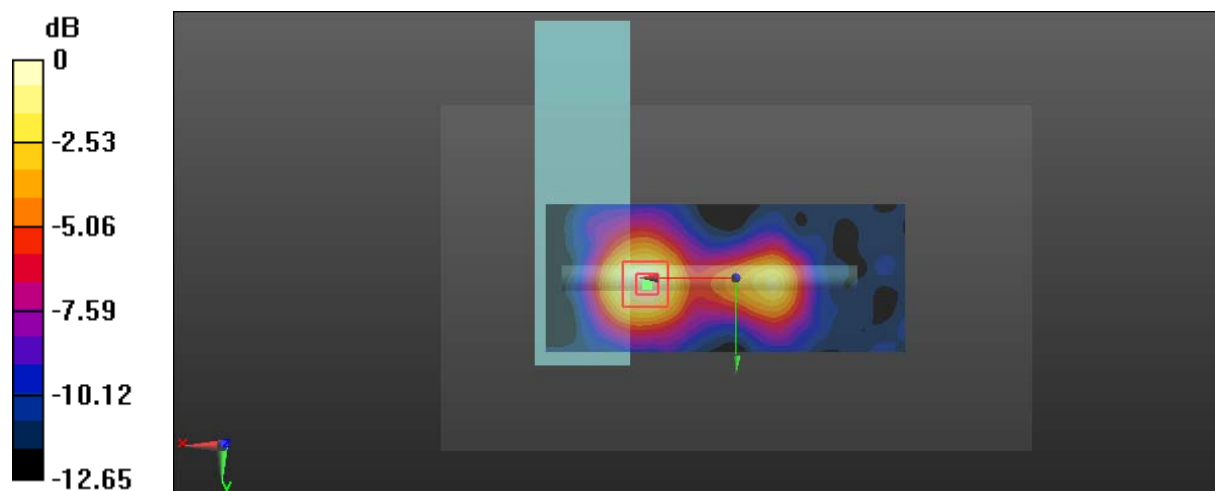

0 dB = 0.397 W/kg = -4.01 dBW/kg

**Test Plot 34#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.159$  S/m;  $\epsilon_r = 48.786$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.926 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 4.495 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.46 W/kg  
**SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.176 W/kg**  
 Maximum value of SAR (measured) = 0.865 W/kg

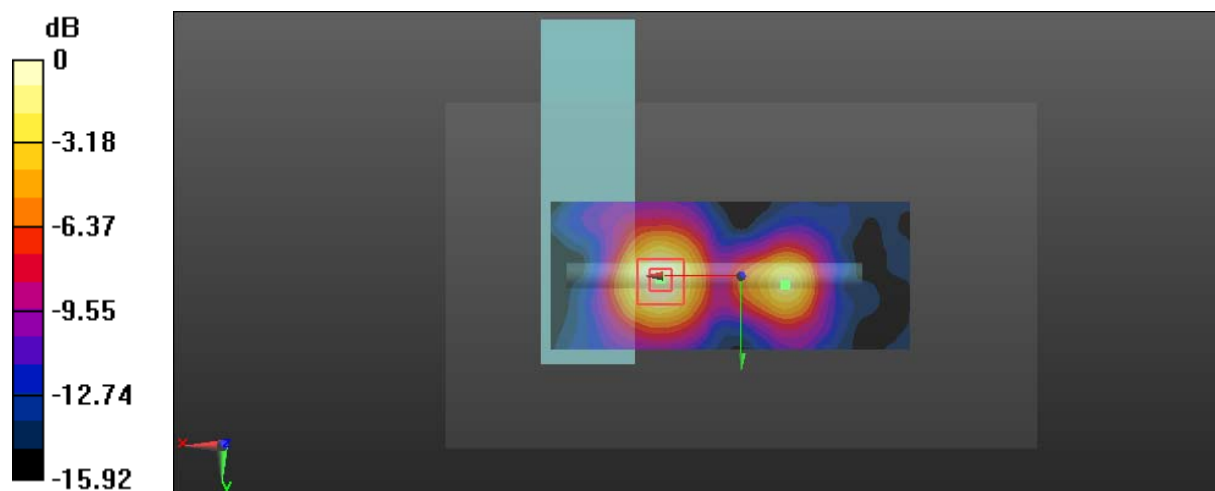

0 dB = 0.865 W/kg = -0.63 dBW/kg

**Test Plot 35#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5846.5$  MHz;  $\sigma = 6.301$  S/m;  $\epsilon_r = 48.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.539 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 5.542 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.731 W/kg  
**SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.088 W/kg**  
 Maximum value of SAR (measured) = 0.405 W/kg

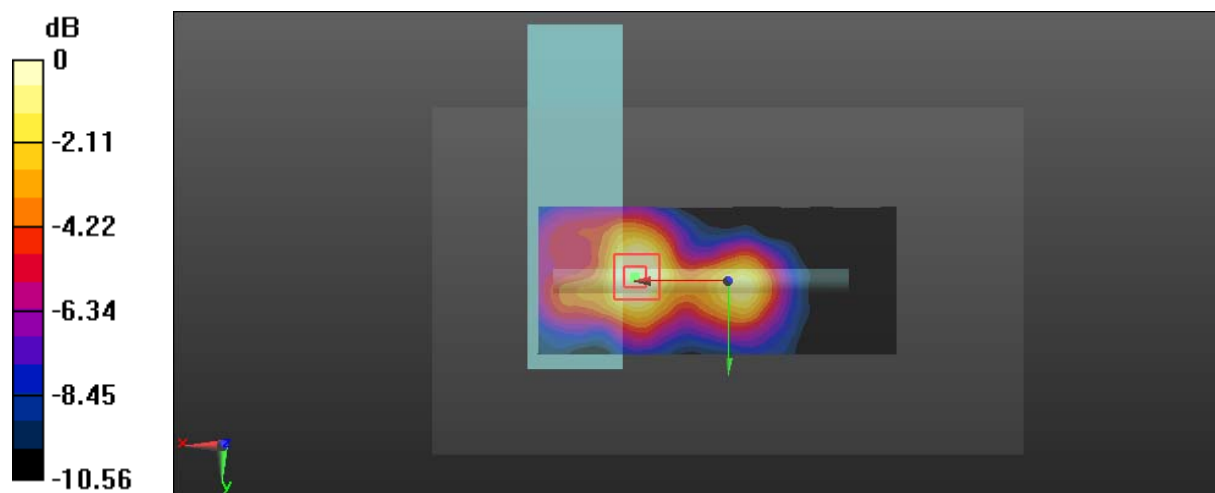

0 dB = 0.405 W/kg = -3.93 dBW/kg

**Test Plot 36#: SDR 5.8G\_10MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5$  MHz;  $\sigma = 6.163$  S/m;  $\epsilon_r = 48.776$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.645 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 4.844 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 1.06 W/kg  
**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.132 W/kg**  
 Maximum value of SAR (measured) = 0.612 W/kg

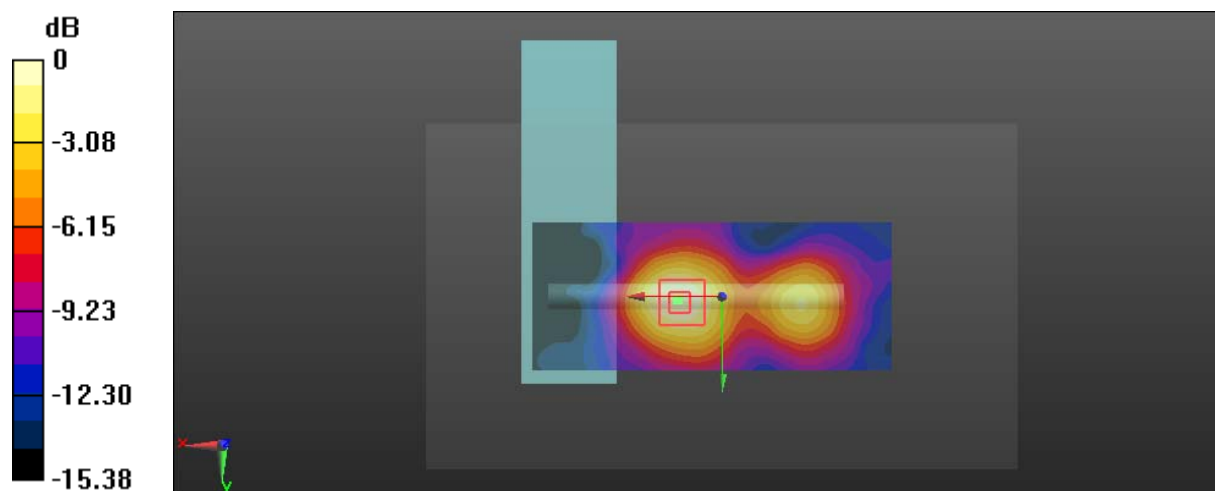

0 dB = 0.612 W/kg = -2.13 dBW/kg

**Test Plot 37#: SDR 5.8G\_20MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5 \text{ MHz}$ ;  $\sigma = 6.163 \text{ S/m}$ ;  $\epsilon_r = 48.776$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.768 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.171 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.141 W/kg**  
 Maximum value of SAR (measured) = 0.658 W/kg

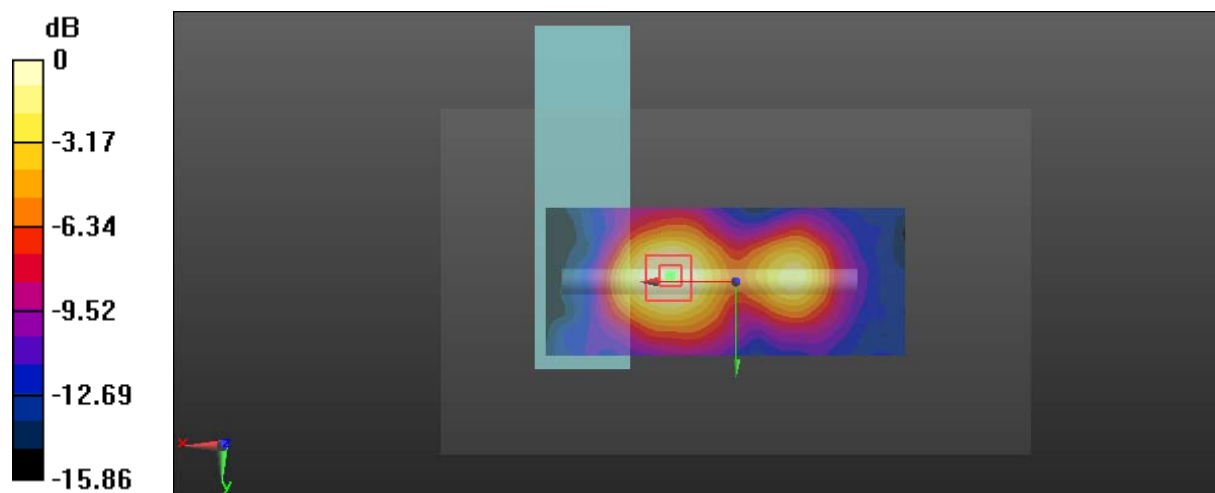

0 dB = 0.658 W/kg = -1.82 dBW/kg

**Test Plot 38#: SDR 5.8G\_1.4MHz\_Close To Body Front\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5 \text{ MHz}$ ;  $\sigma = 6.159 \text{ S/m}$ ;  $\epsilon_r = 48.786$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.140 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.258 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.269 W/kg  
**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.052 W/kg**  
 Maximum value of SAR (measured) = 0.145 W/kg

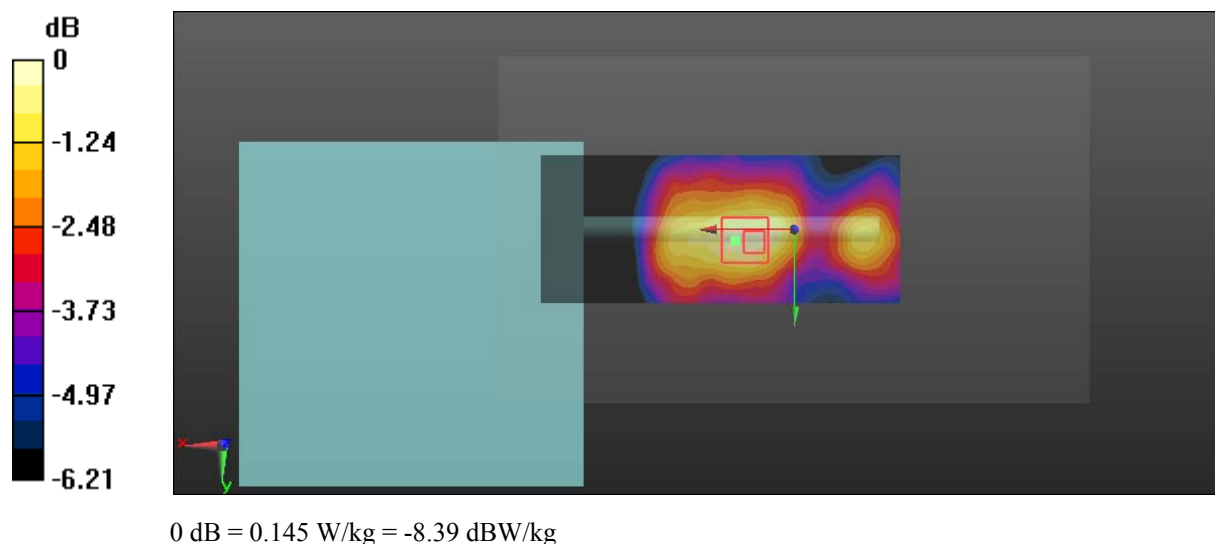

**Test Plot 39#: Wi-Fi 5.2G\_Handheld Back\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.113 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 1.797 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 0.254 W/kg  
**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.060 W/kg**  
 Maximum value of SAR (measured) = 0.151 W/kg

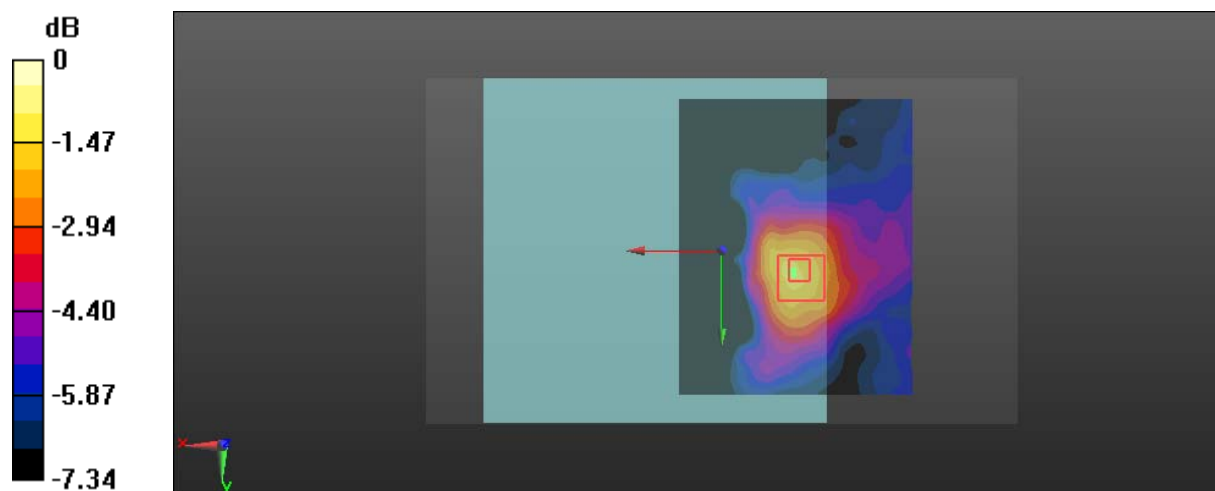

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 40#: Wi-Fi 5.2G\_Handheld Top\_0mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 5.334 \text{ S/m}$ ;  $\epsilon_r = 48.523$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.266 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.716 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.416 W/kg  
**SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.080 W/kg**  
 Maximum value of SAR (measured) = 0.260 W/kg

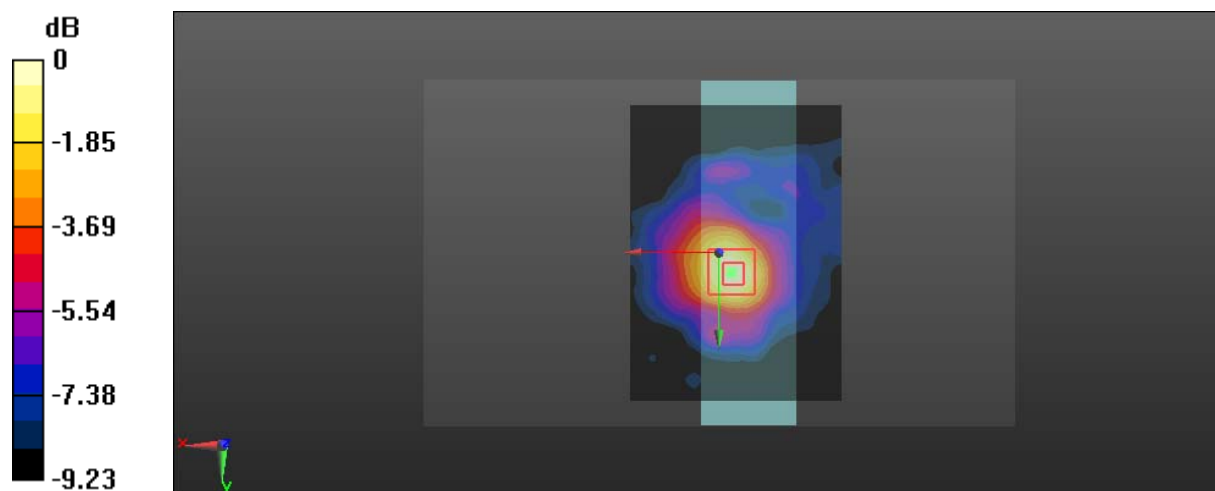

0 dB = 0.260 W/kg = -5.85 dBW/kg



**Test Plot 41#: Wi-Fi 5.2G\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.265 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.591 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.417 W/kg  
**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.081 W/kg**  
 Maximum value of SAR (measured) = 0.266 W/kg

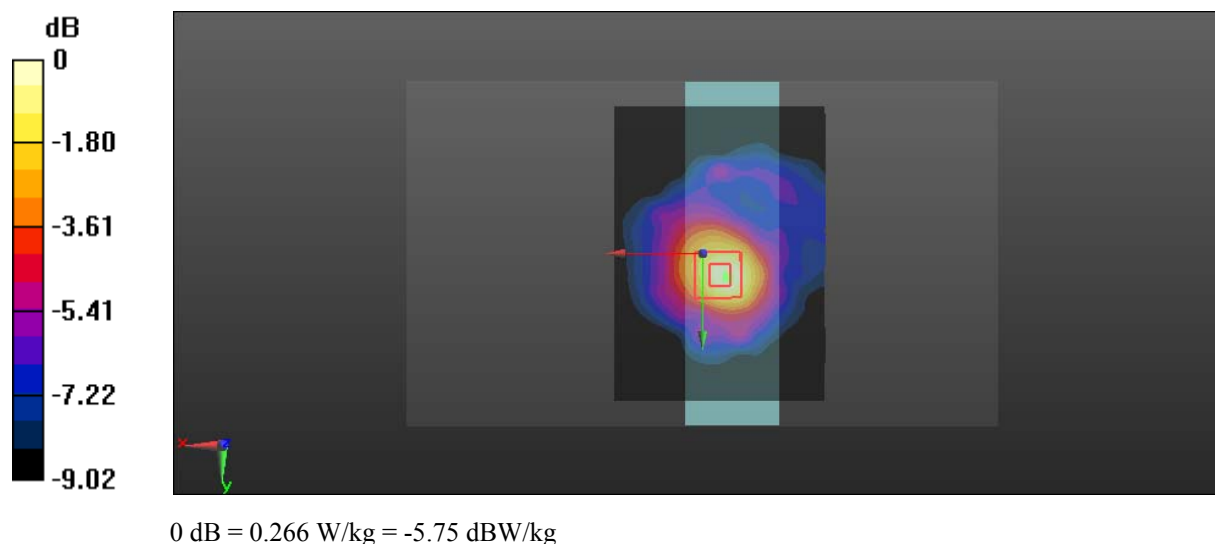

**Test Plot 42#: Wi-Fi 5.2G\_Handheld Top\_0mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 5.381 \text{ S/m}$ ;  $\epsilon_r = 48.375$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.285 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.782 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.457 W/kg  
**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.086 W/kg**  
 Maximum value of SAR (measured) = 0.283 W/kg

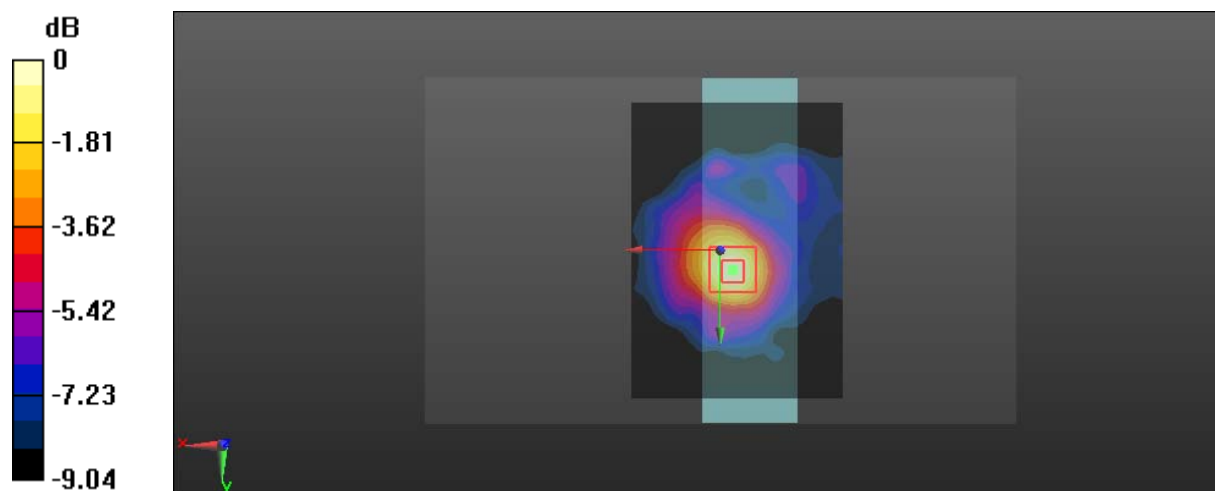

0 dB = 0.283 W/kg = -5.48 dBW/kg

**Test Plot 43#: Wi-Fi 5.2G\_Handheld Front\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.278 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.516 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.422 W/kg  
**SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.073 W/kg**  
 Maximum value of SAR (measured) = 0.273 W/kg

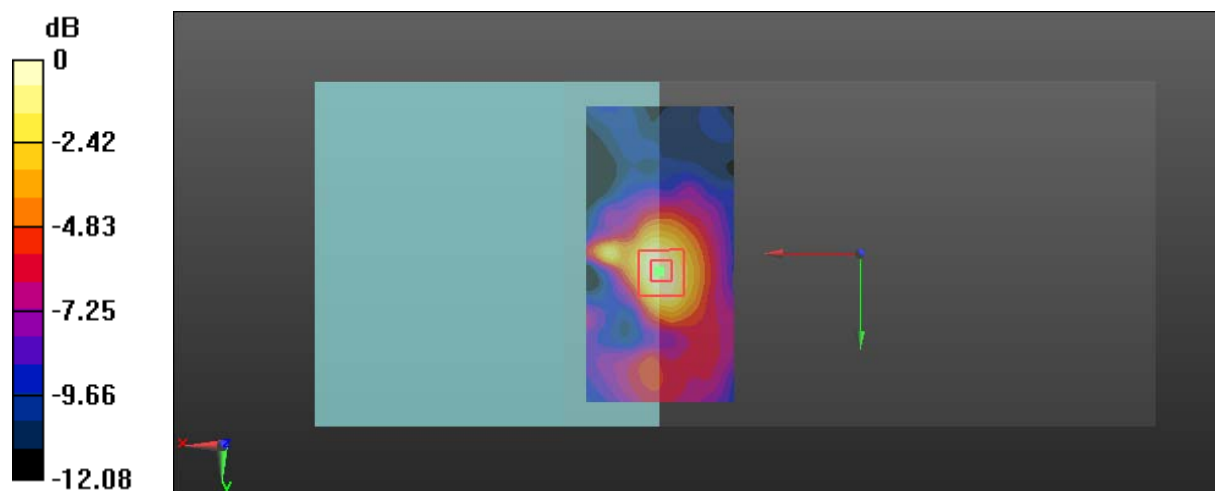

0 dB = 0.273 W/kg = -5.64 dBW/kg

**Test Plot 44#: Wi-Fi 5.2G\_Close To Body Back\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.103 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.731 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.158 W/kg  
**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.054 W/kg**  
 Maximum value of SAR (measured) = 0.105 W/kg

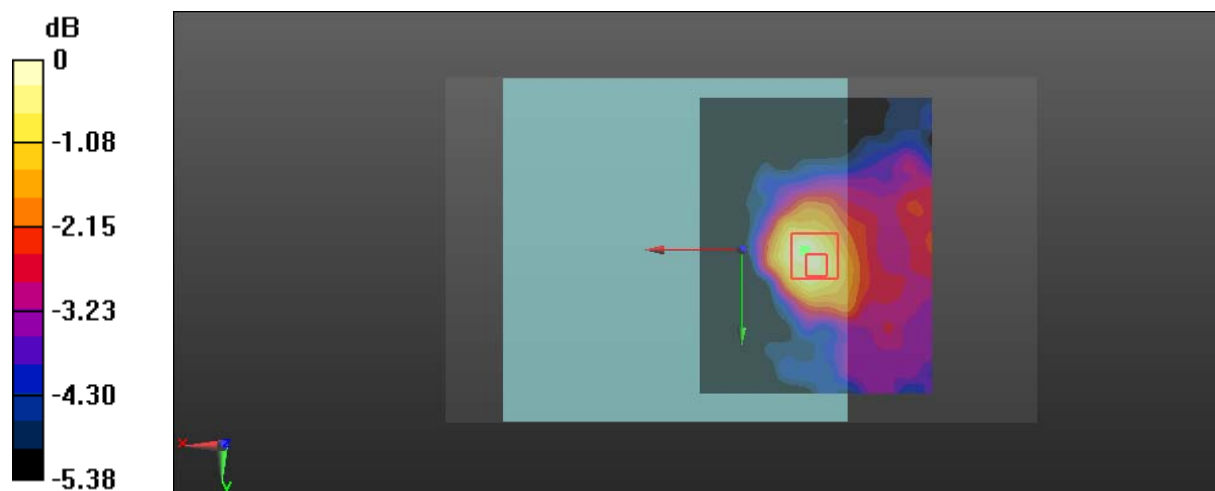

0 dB = 0.105 W/kg = -9.79 dBW/kg

**Test Plot 45#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 5.334 \text{ S/m}$ ;  $\epsilon_r = 48.523$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.147 \text{ W/kg}$

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value =  $3.879 \text{ V/m}$ ; Power Drift =  $0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.240 \text{ W/kg}$   
**SAR(1 g) =  $0.086 \text{ W/kg}$ ; SAR(10 g) =  $0.059 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.146 \text{ W/kg}$

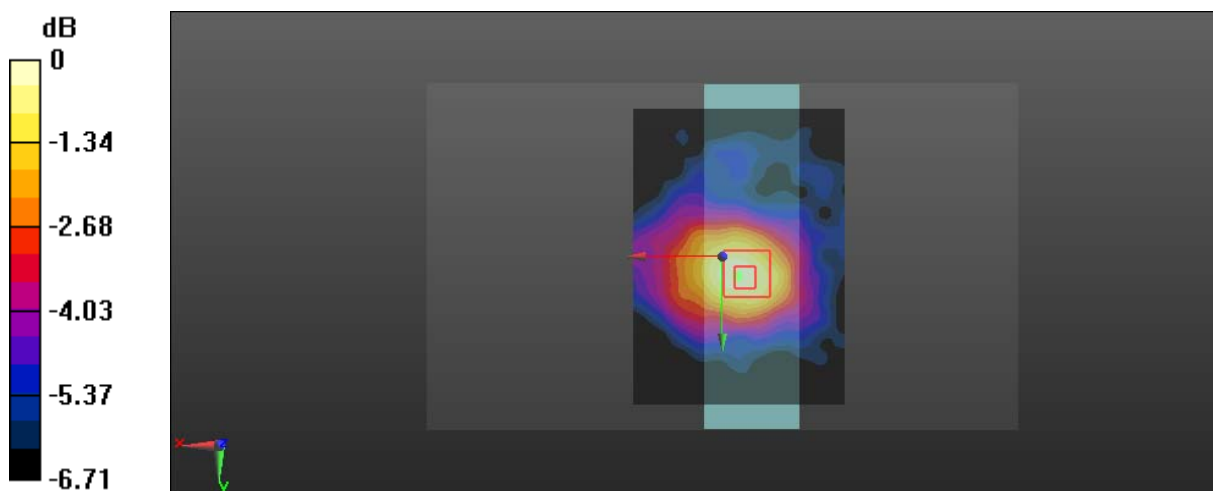

0 dB =  $0.146 \text{ W/kg} = -8.36 \text{ dBW/kg}$

**Test Plot 46#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.157 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.923 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.251 W/kg  
**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.062 W/kg**  
 Maximum value of SAR (measured) = 0.152 W/kg

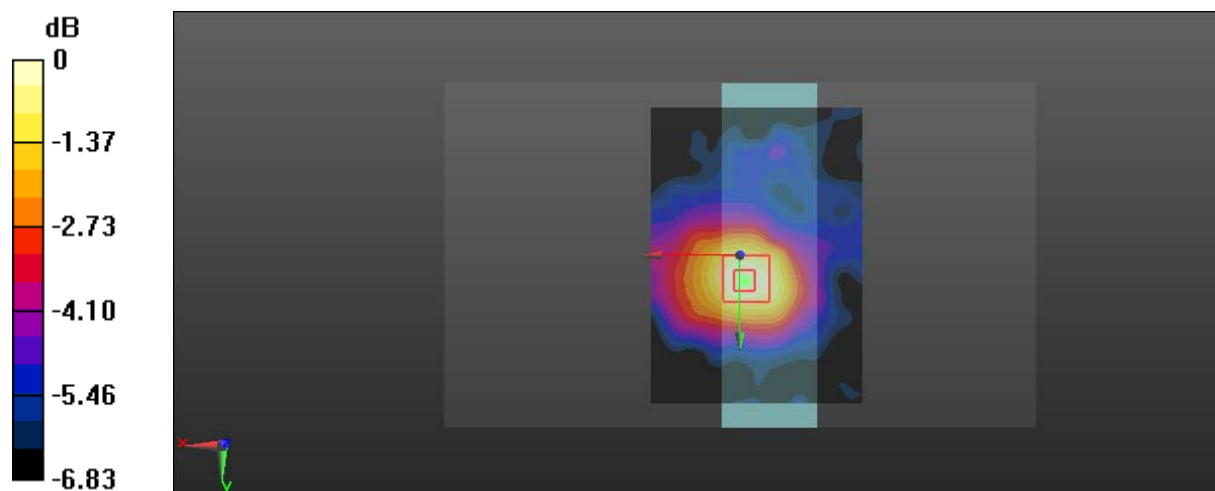

0 dB = 0.152 W/kg = -8.18 dBW/kg

**Test Plot 47#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_High Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.381$  S/m;  $\epsilon_r = 48.375$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.151 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.454 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

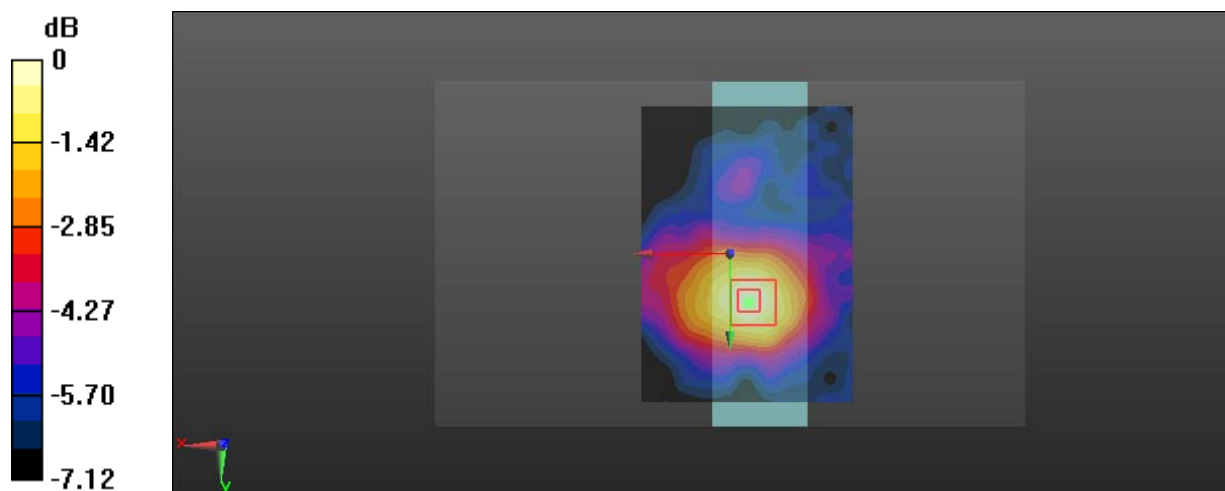

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 48#: Wi-Fi 5.2G\_Close To Body Front\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0490 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.311 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.125 W/kg  
**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.032 W/kg**  
 Maximum value of SAR (measured) = 0.0518 W/kg

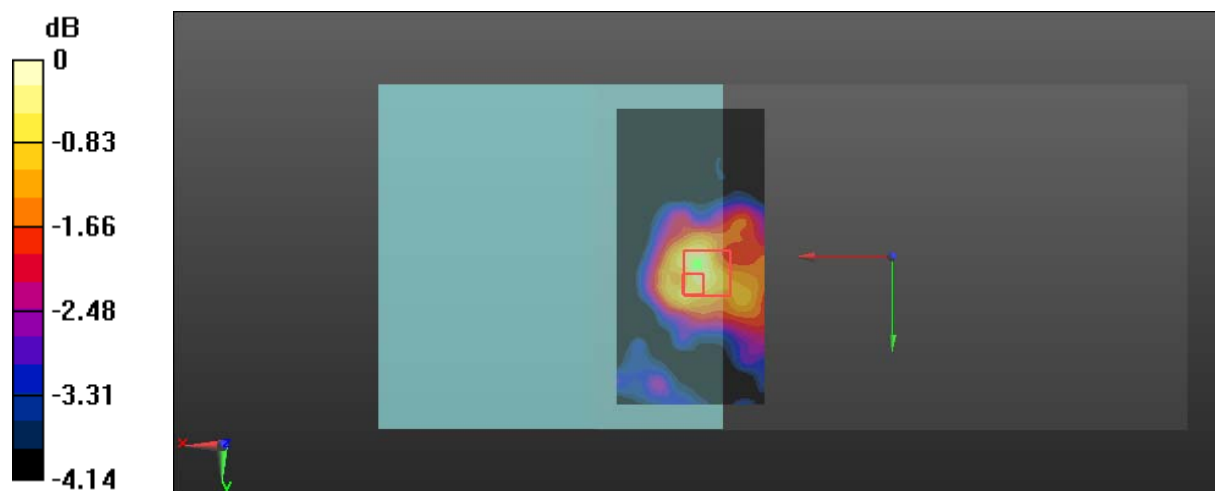

0 dB = 0.0518 W/kg = -12.86 dBW/kg



**Test Plot 49#: Wi-Fi 5.8G\_Handheld Back\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.154 \text{ S/m}$ ;  $\epsilon_r = 48.802$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.129 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.244 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.222 W/kg  
**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.082 W/kg**  
 Maximum value of SAR (measured) = 0.125 W/kg

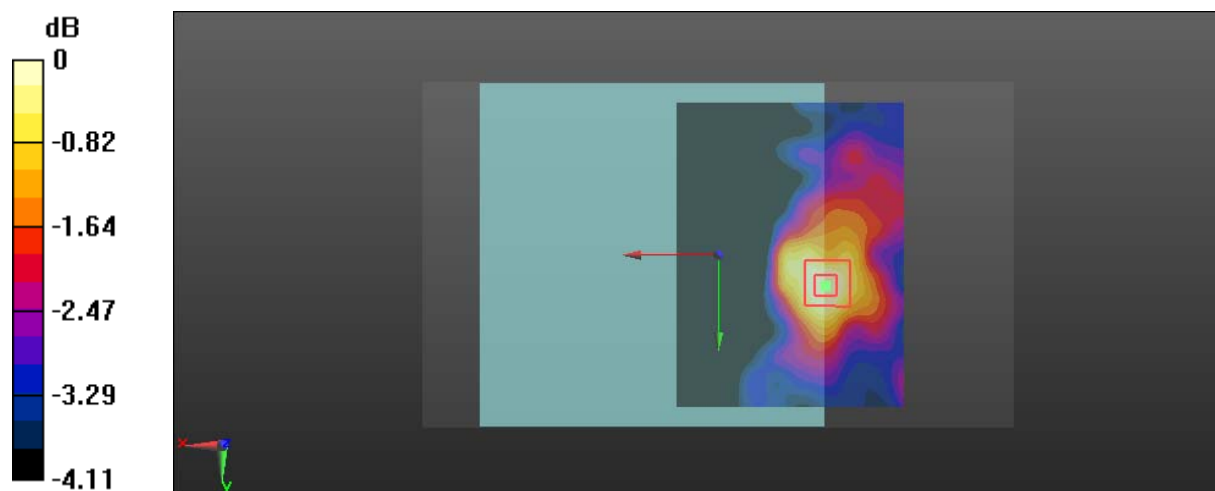

0 dB = 0.125 W/kg = -9.03 dBW/kg

**Test Plot 50#: Wi-Fi 5.8G\_Handheld Top\_0mm\_Low Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.013 \text{ S/m}$ ;  $\epsilon_r = 49.221$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.210 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.567 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.447 W/kg  
**SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.100 W/kg**  
 Maximum value of SAR (measured) = 0.205 W/kg

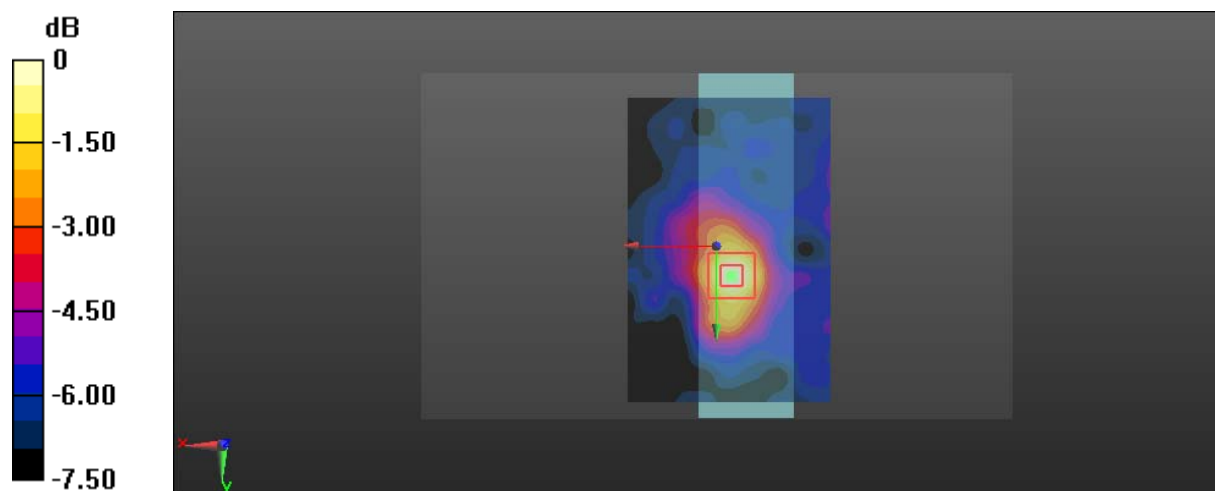

0 dB = 0.205 W/kg = -6.88 dBW/kg

**Test Plot 51#: Wi-Fi 5.8G\_Handheld Top\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.154 \text{ S/m}$ ;  $\epsilon_r = 48.802$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.203 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.736 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.456 W/kg  
**SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.098 W/kg**  
 Maximum value of SAR (measured) = 0.207 W/kg

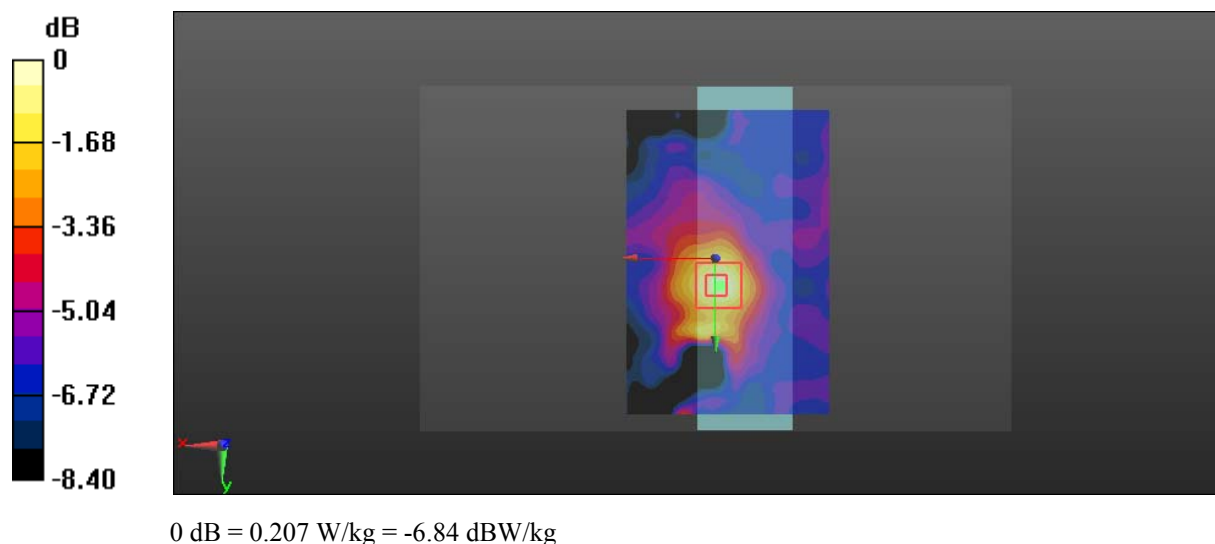

**Test Plot 52#: Wi-Fi 5.8G\_Handheld Top\_0mm\_High Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5825$  MHz;  $\sigma = 6.295$  S/m;  $\epsilon_r = 48.383$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.035 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.474 W/kg

**SAR(1 g) = 0.195 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.222 W/kg

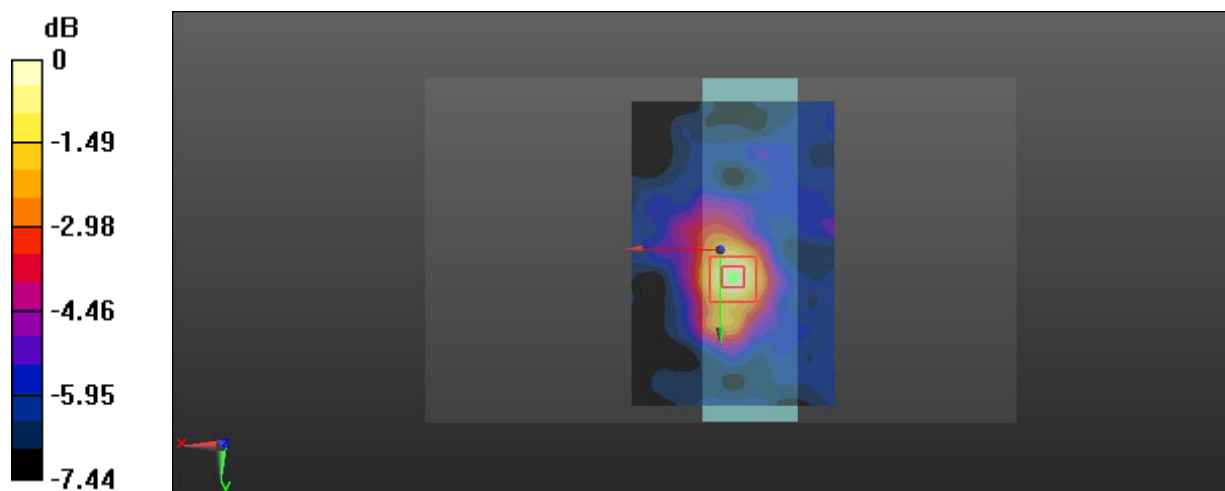

0 dB = 0.222 W/kg = -6.54 dBW/kg

**Test Plot 53#: Wi-Fi 5.8G\_Handheld Front\_0mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.154 \text{ S/m}$ ;  $\epsilon_r = 48.802$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0619 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.684 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 0.106 W/kg  
**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.041 W/kg**  
 Maximum value of SAR (measured) = 0.0676 W/kg

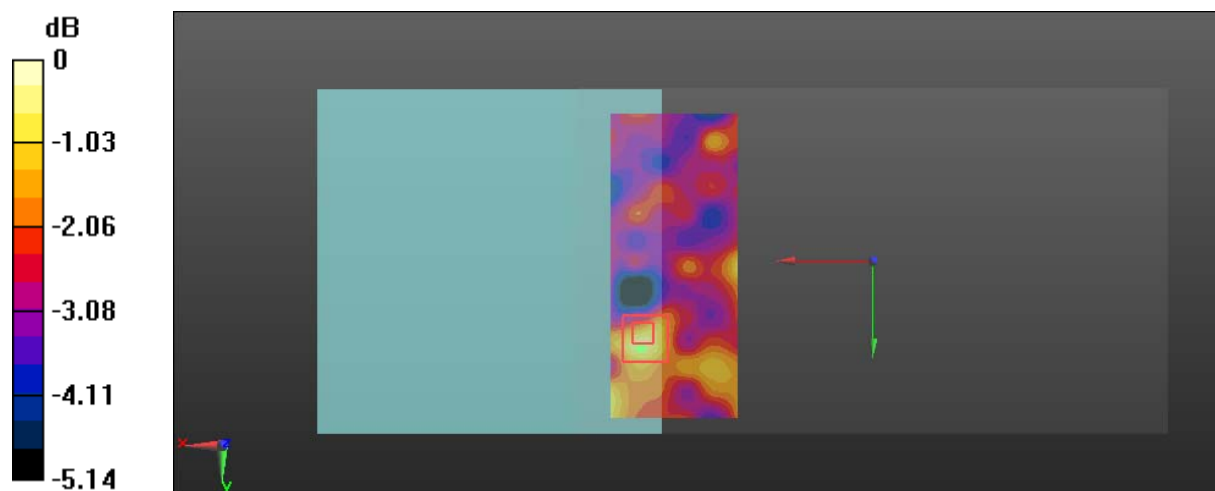

0 dB = 0.0676 W/kg = -11.70 dBW/kg

**Test Plot 54#: Wi-Fi 5.8G\_Close To Body Back\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.154 \text{ S/m}$ ;  $\epsilon_r = 48.802$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.208 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.872 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.374 W/kg  
**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.078 W/kg**  
 Maximum value of SAR (measured) = 0.202 W/kg

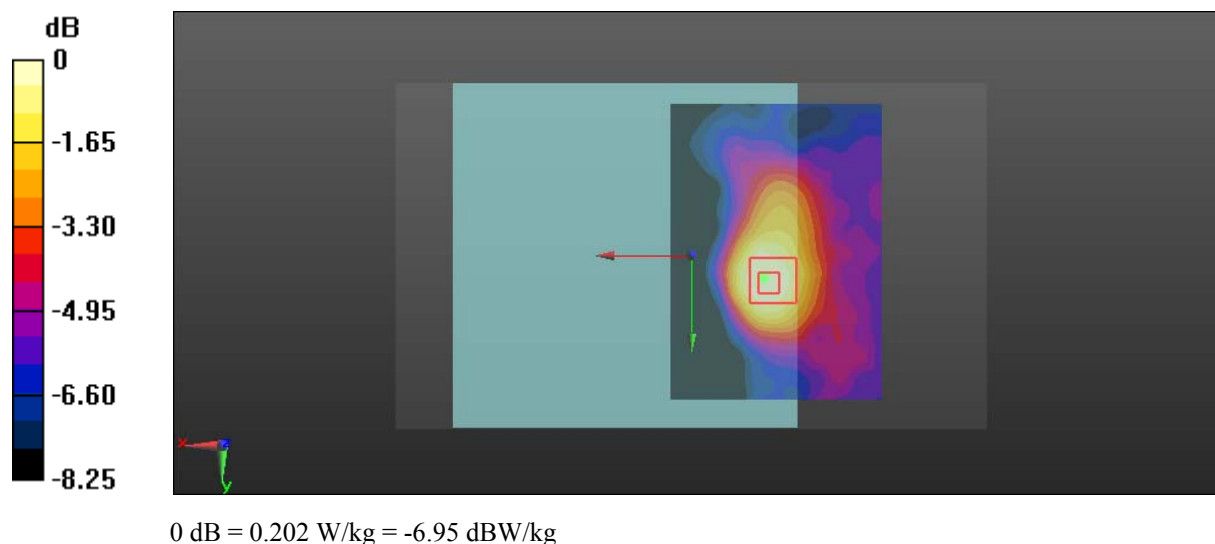

**Test Plot 55#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_Low Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5745$  MHz;  $\sigma = 6.013$  S/m;  $\epsilon_r = 49.221$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.185 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.671 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.380 W/kg

**SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.204 W/kg

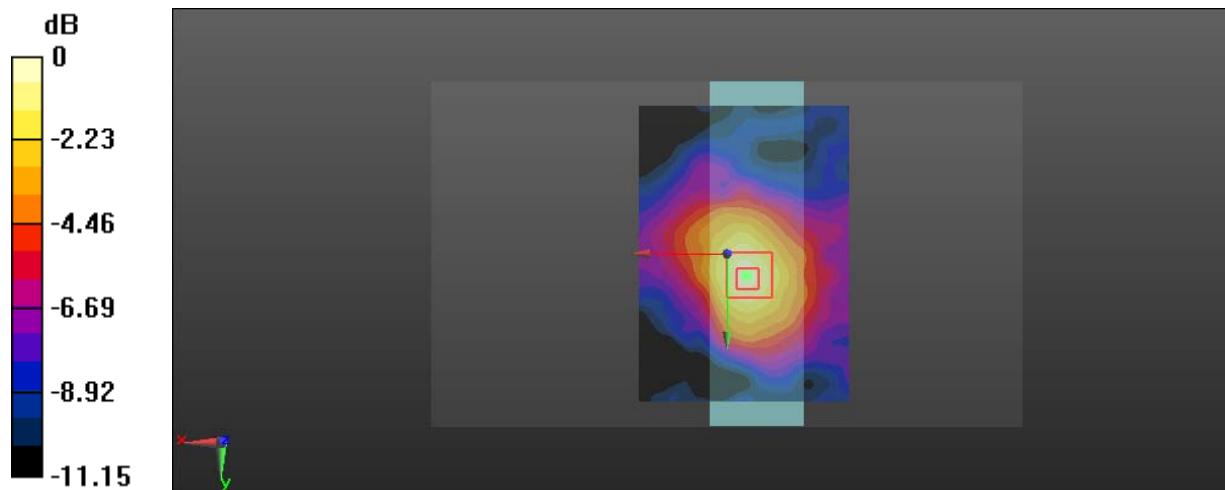

0 dB = 0.204 W/kg = -6.90 dBW/kg

**Test Plot 56#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_Middle Channel\_Chain 0****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.154$  S/m;  $\epsilon_r = 48.802$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.923 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.399 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.198 W/kg

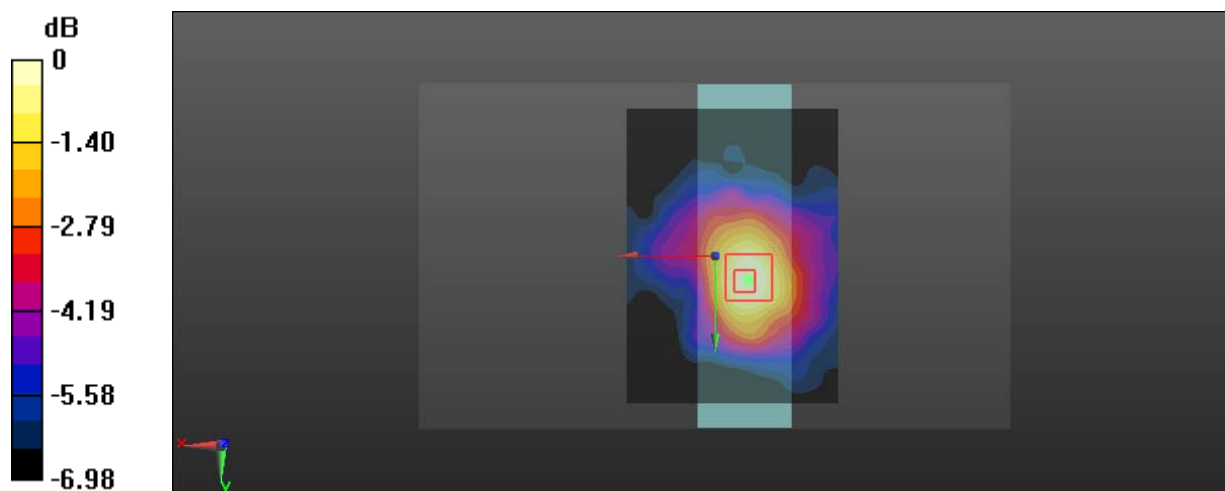

0 dB = 0.198 W/kg = -7.03 dBW/kg



**Test Plot 57#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_High Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.295 \text{ S/m}$ ;  $\epsilon_r = 48.383$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.245 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.749 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 0.496 W/kg  
**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.091 W/kg**  
 Maximum value of SAR (measured) = 0.254 W/kg

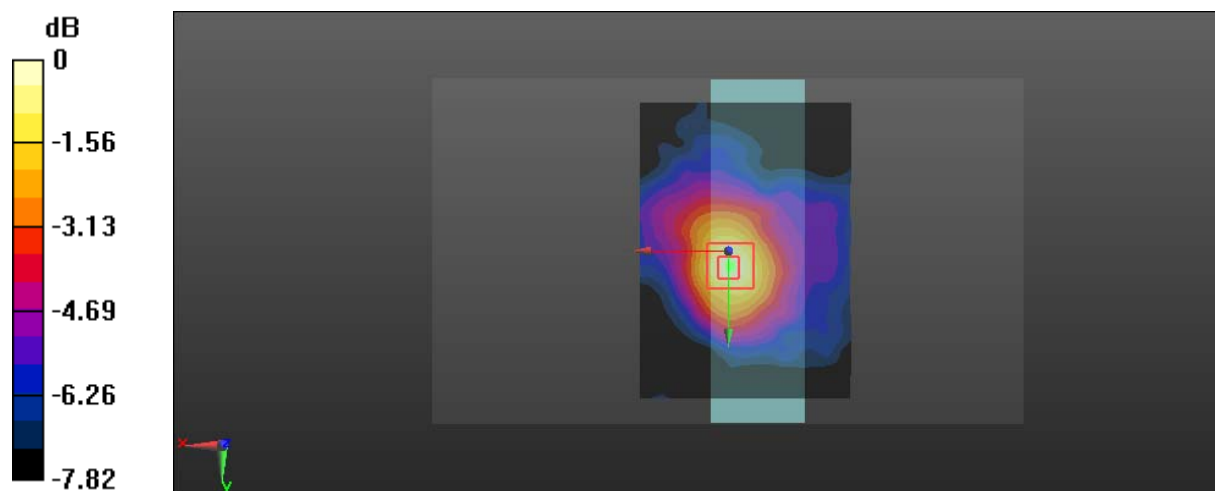

0 dB = 0.254 W/kg = -5.95 dBW/kg

**Test Plot 58#: Wi-Fi 5.8G\_Close To Body Front\_10mm\_Middle Channel\_Chain 0**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.154 \text{ S/m}$ ;  $\epsilon_r = 48.802$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0673 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.694 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 0.164 W/kg  
**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.046 W/kg**  
 Maximum value of SAR (measured) = 0.0745 W/kg

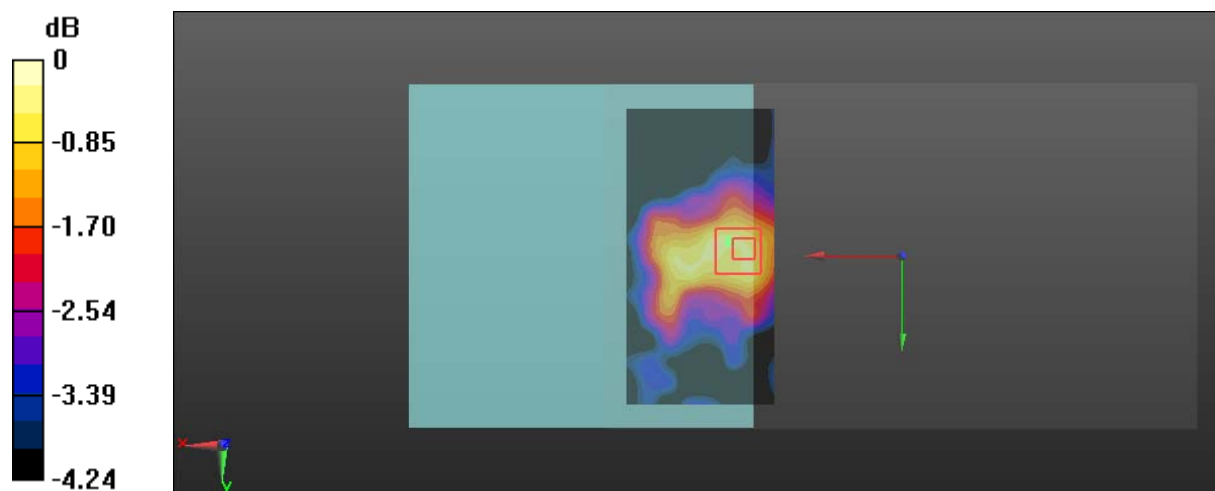

0 dB = 0.0745 W/kg = -11.28 dBW/kg

**Test Plot 59#: SDR 2.4G\_1.4MHz\_Handheld Back\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.319 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.714 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 0.518 W/kg  
**SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.174 W/kg**  
 Maximum value of SAR (measured) = 0.318 W/kg

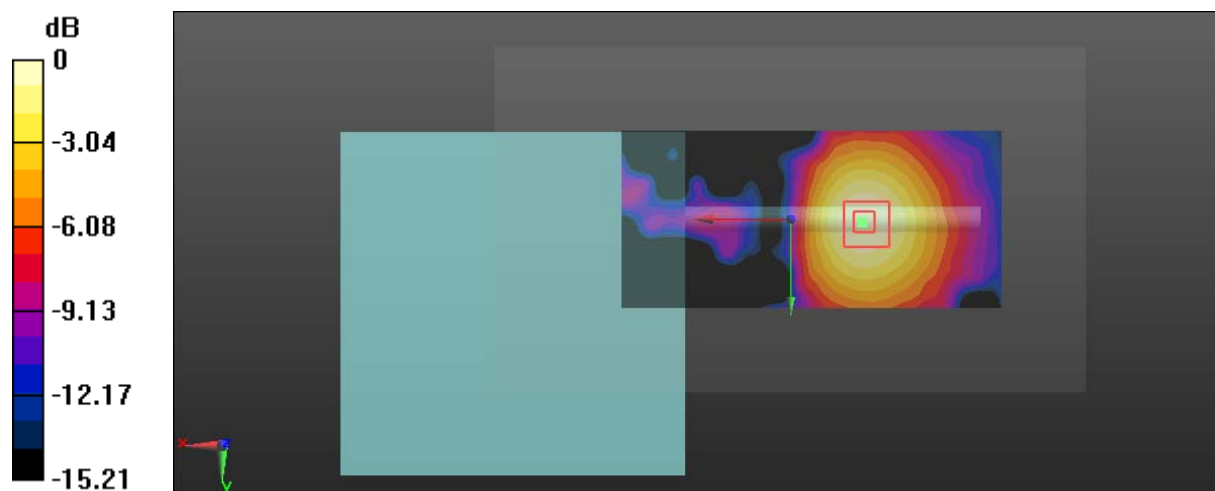

0 dB = 0.318 W/kg = -4.98 dBW/kg

**Test Plot 60#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2403.5 \text{ MHz}$ ;  $\sigma = 1.911 \text{ S/m}$ ;  $\epsilon_r = 54.434$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 8.47 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 44.49 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 14.6 W/kg  
**SAR(1 g) = 6.59 W/kg; SAR(10 g) = 2.92 W/kg**  
 Maximum value of SAR (measured) = 7.27 W/kg

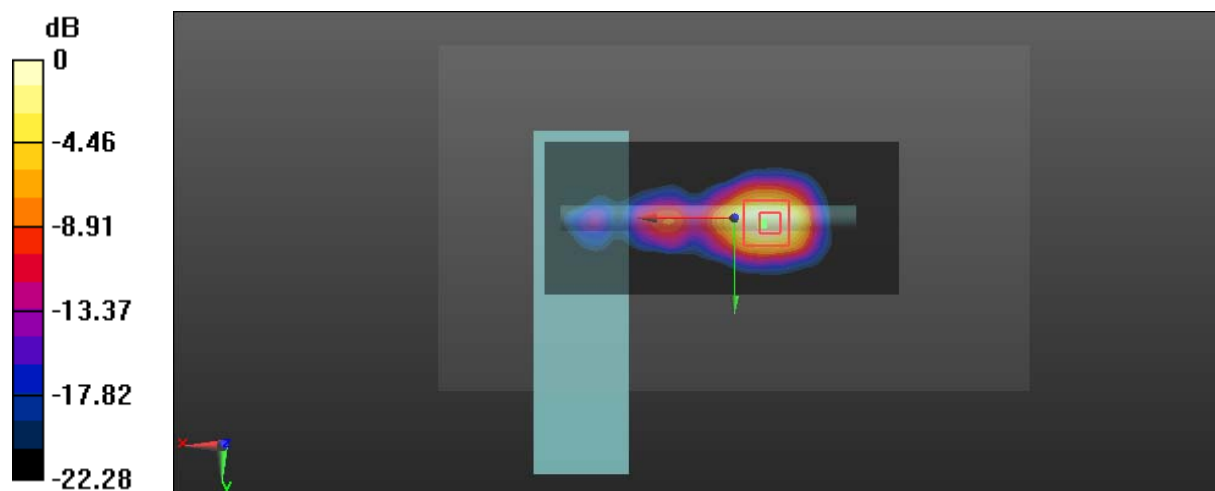

0 dB = 7.27 W/kg = 8.62 dBW/kg

**Test Plot 61#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 8.26 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 54.43 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 15.0 W/kg  
**SAR(1 g) = 6.58 W/kg; SAR(10 g) = 2.86 W/kg**  
 Maximum value of SAR (measured) = 7.48 W/kg

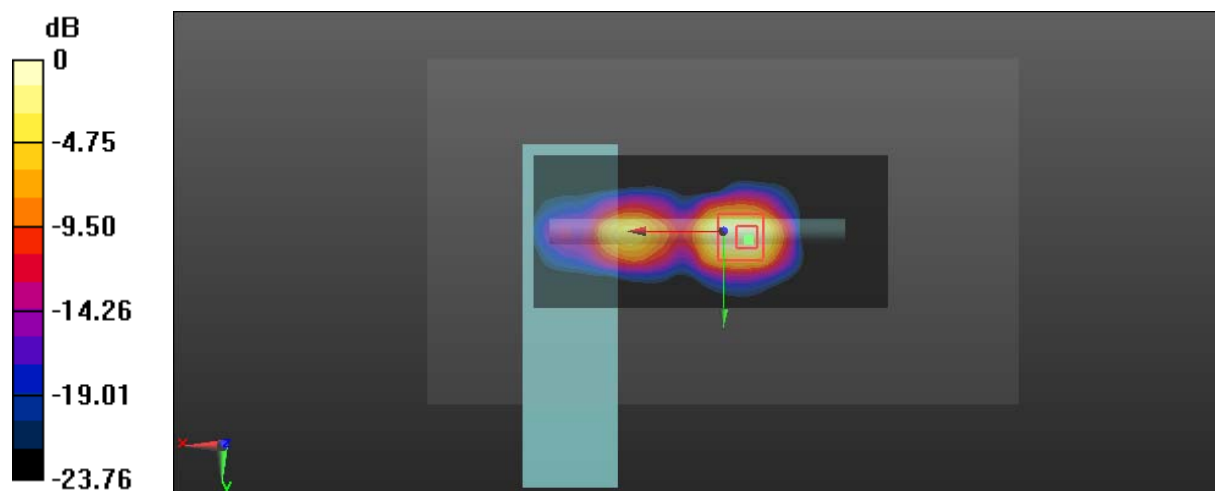

0 dB = 7.48 W/kg = 8.74 dBW/kg

**Test Plot 62#: SDR 2.4G\_1.4MHz\_Handheld Top\_0mm\_High Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2477.5$  MHz;  $\sigma = 1.998$  S/m;  $\epsilon_r = 51.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 6.36 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 40.75 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 11.1 W/kg

**SAR(1 g) = 5.04 W/kg; SAR(10 g) = 2.15 W/kg**

Maximum value of SAR (measured) = 5.66 W/kg

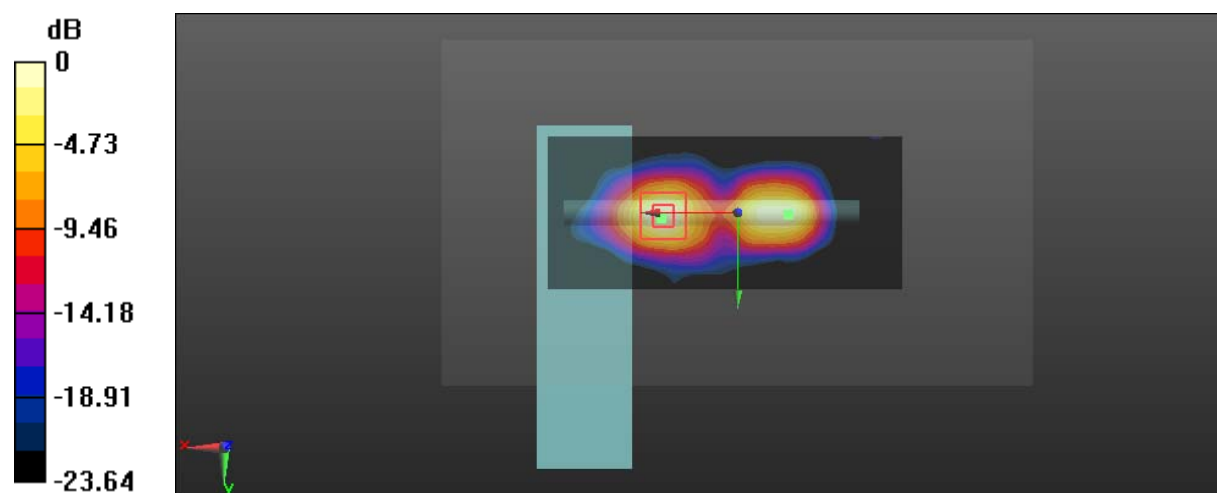

0 dB = 5.66 W/kg = 7.53 dBW/kg

**Test Plot 63#: SDR 2.4G\_10MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.955$  S/m;  $\epsilon_r = 53.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 4.62 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.34 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 7.82 W/kg

**SAR(1 g) = 3.65 W/kg; SAR(10 g) = 1.65 W/kg**

Maximum value of SAR (measured) = 4.07 W/kg

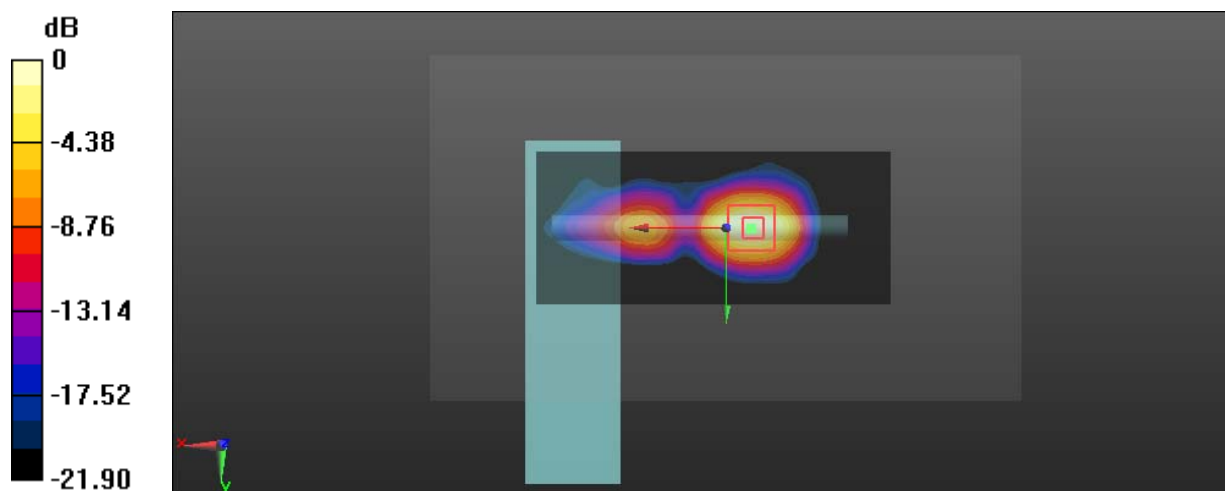

0 dB = 4.07 W/kg = 6.10 dBW/kg

**Test Plot 64#: SDR 2.4G\_20MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.955$  S/m;  $\epsilon_r = 53.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.05 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.27 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 8.00 W/kg

**SAR(1 g) = 3.62 W/kg; SAR(10 g) = 1.58 W/kg**

Maximum value of SAR (measured) = 6.21 W/kg

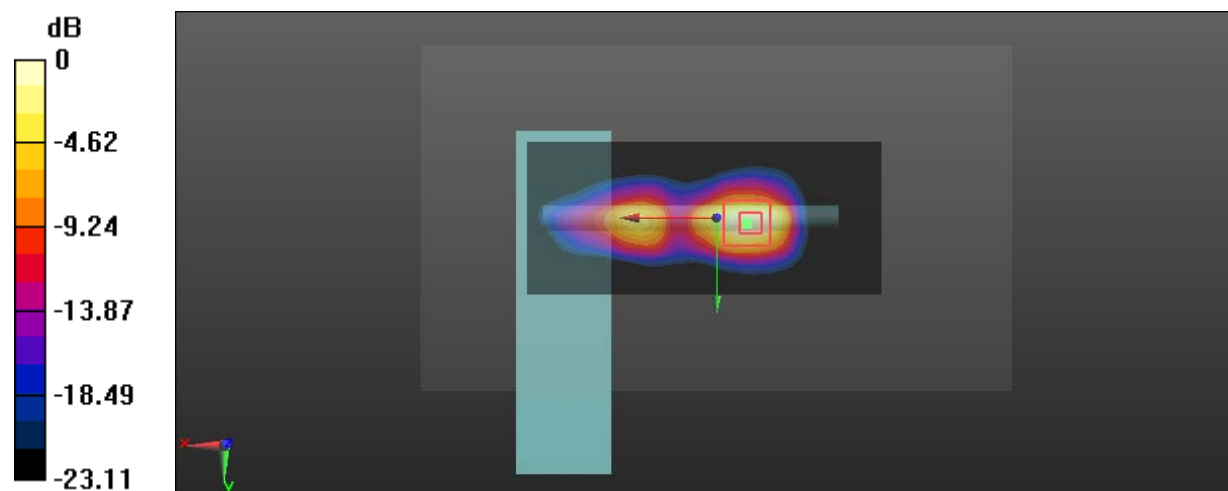

0 dB = 6.21 W/kg = 7.93 dBW/kg



**Test Plot 65#: SDR 2.4G\_1.4MHz\_Handheld Front\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.452 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 14.04 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.735 W/kg  
**SAR(1 g) = 0.411 W/kg; SAR(10 g) = 0.240 W/kg**  
 Maximum value of SAR (measured) = 0.444 W/kg

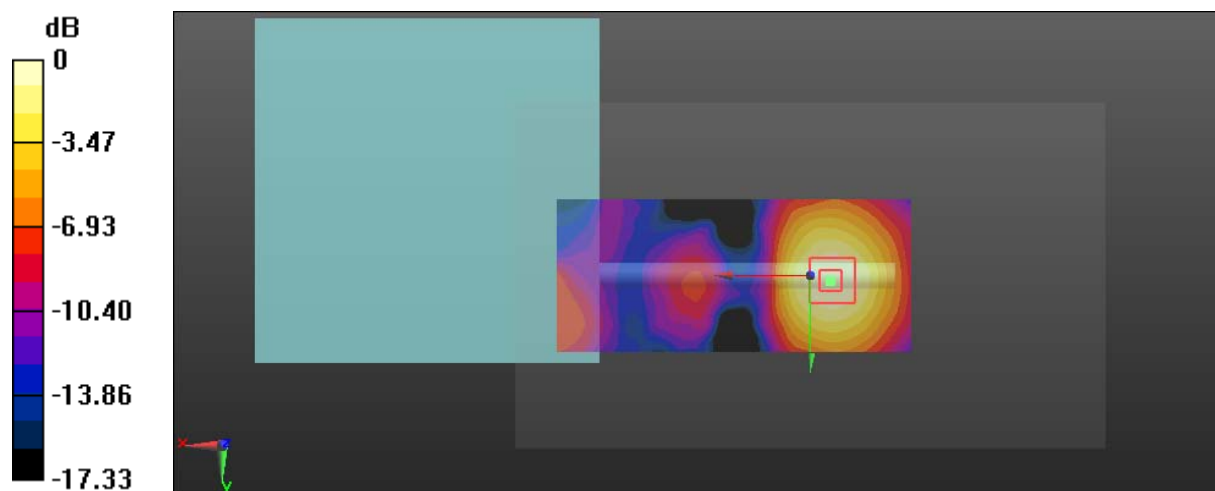

0 dB = 0.444 W/kg = -3.53 dBW/kg

**Test Plot 66#: SDR 2.4G\_1.4MHz\_Close To Body Back\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.210 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.079 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.347 W/kg  
**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.118 W/kg**  
 Maximum value of SAR (measured) = 0.204 W/kg

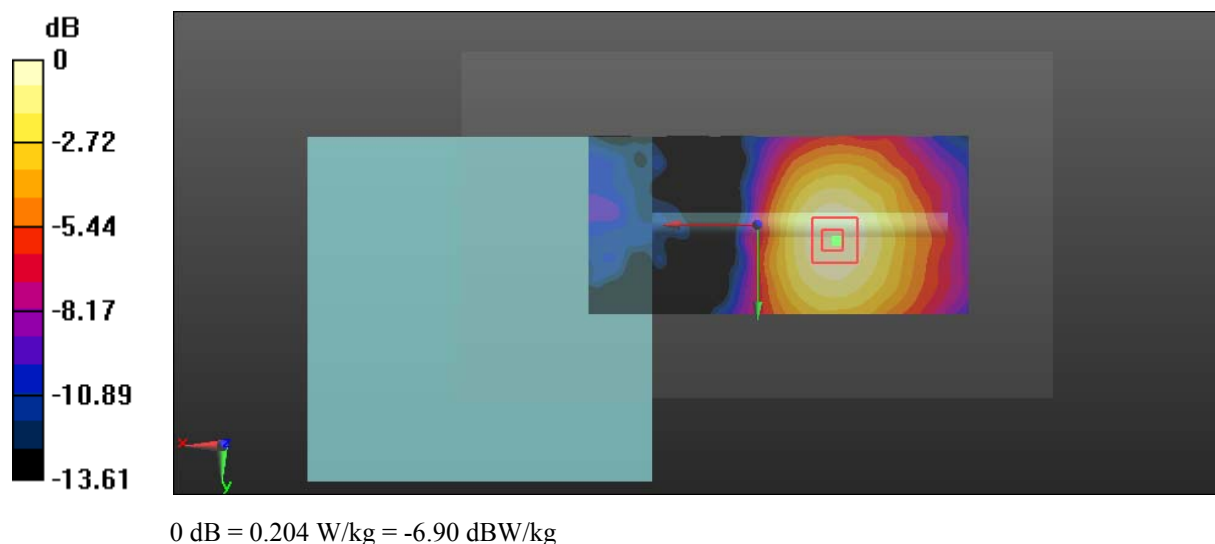

**Test Plot 67#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2403.5 \text{ MHz}$ ;  $\sigma = 1.911 \text{ S/m}$ ;  $\epsilon_r = 53.434$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.27 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 25.43 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 2.01 W/kg  
**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.571 W/kg**  
 Maximum value of SAR (measured) = 1.21 W/kg

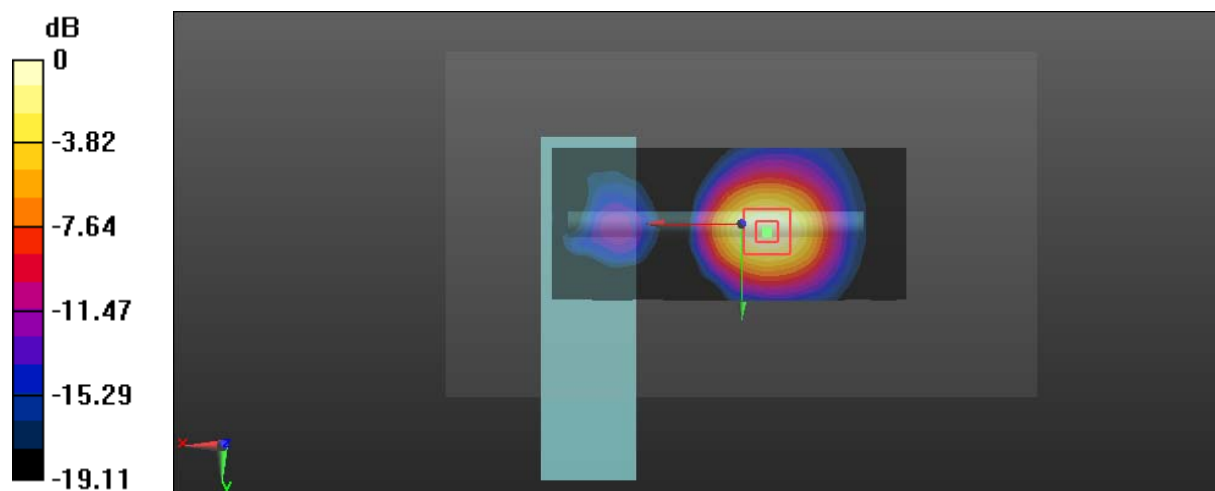

0 dB = 1.21 W/kg = 0.83 dBW/kg

**Test Plot 68#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.955$  S/m;  $\epsilon_r = 53.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.42 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.12 W/kg

**SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.589 W/kg**

Maximum value of SAR (measured) = 1.26 W/kg

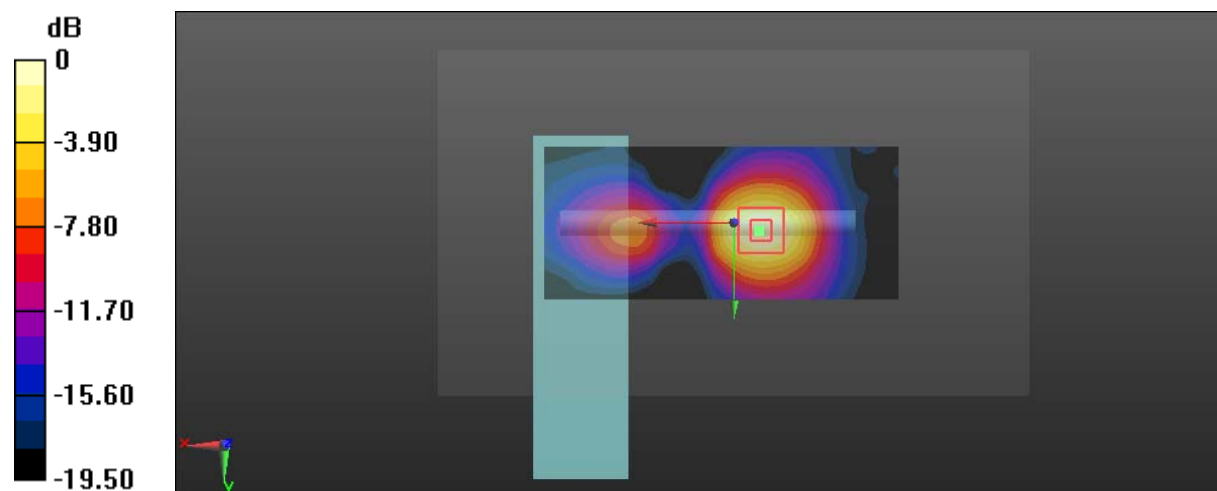

0 dB = 1.26 W/kg = 1.00 dBW/kg

**Test Plot 69#: SDR 2.4G\_1.4MHz\_Close To Body Top\_10mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2477.5$  MHz;  $\sigma = 1.998$  S/m;  $\epsilon_r = 51.86$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 19.91 V/m; Power Drift = 0.00 dB  
 Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.449 W/kg**  
 Maximum value of SAR (measured) = 0.995 W/kg

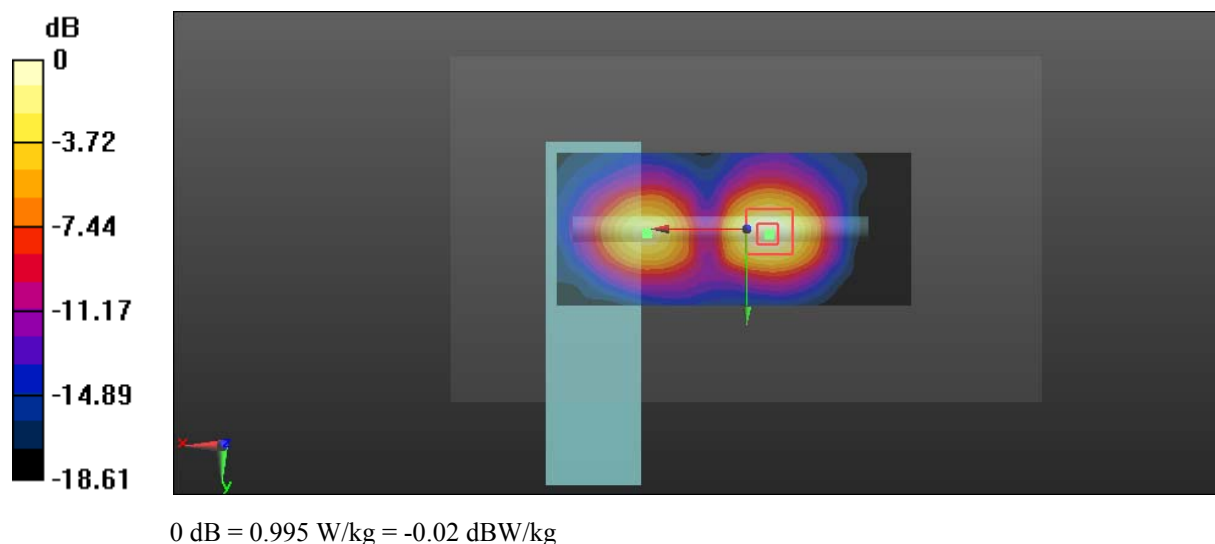

**Test Plot 70#: SDR 2.4G\_10MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.784 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.48 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.31 W/kg  
**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.371 W/kg**  
 Maximum value of SAR (measured) = 0.772 W/kg

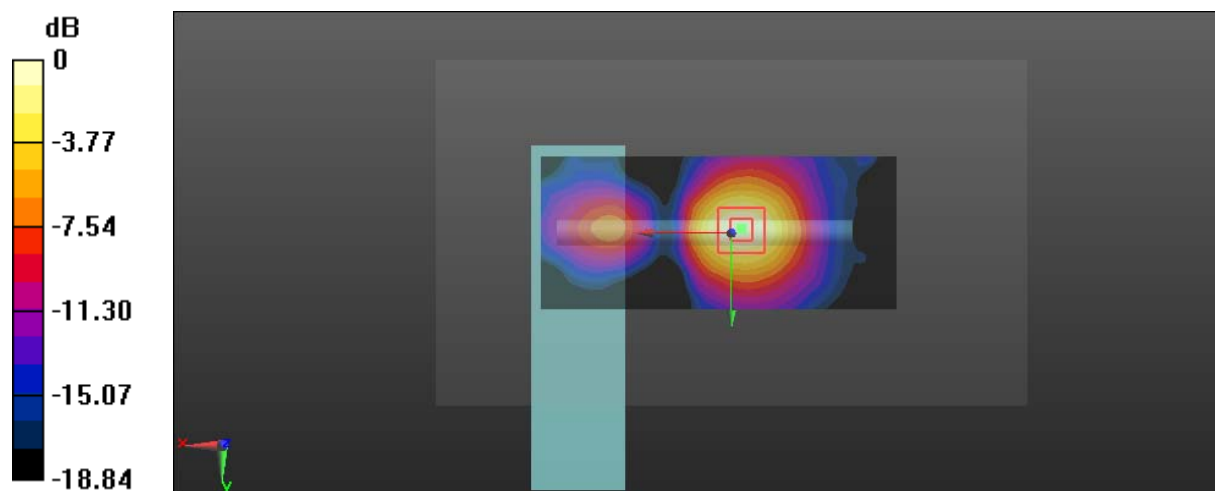

0 dB = 0.772 W/kg = -1.12 dBW/kg

**Test Plot 71#: SDR 2.4G\_20MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 2.4G\_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2441.5 \text{ MHz}$ ;  $\sigma = 1.955 \text{ S/m}$ ;  $\epsilon_r = 53.407$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.14 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.54 V/m; Power Drift = 0.16 dB  
 Peak SAR (extrapolated) = 1.39 W/kg  
**SAR(1 g) = 0.736 W/kg; SAR(10 g) = 0.383 W/kg**  
 Maximum value of SAR (measured) = 1.15 W/kg

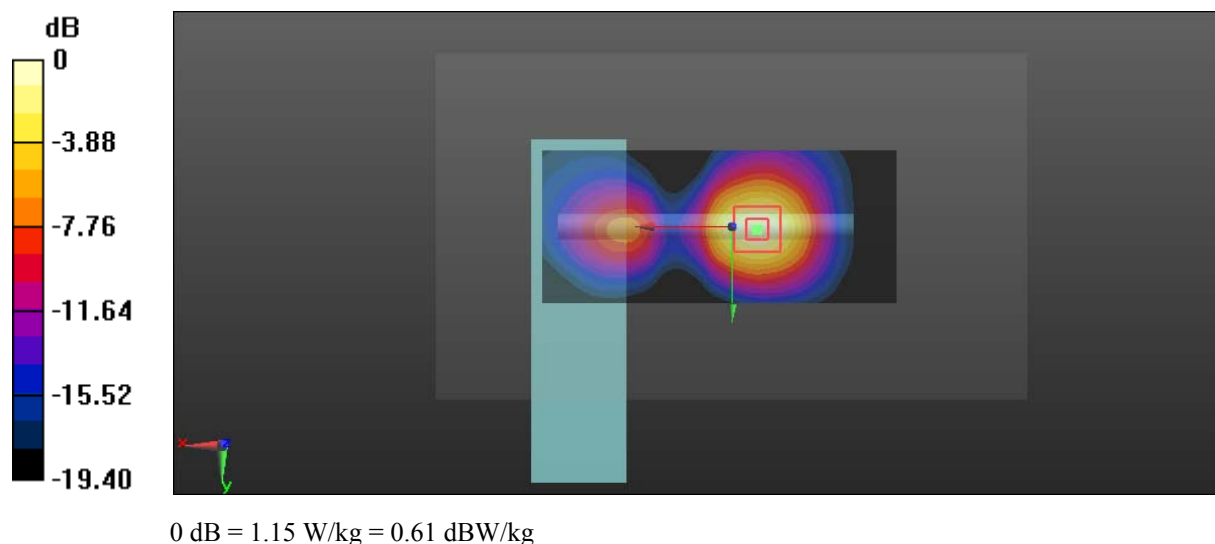

**Test Plot 72#: SDR 2.4G\_1.4MHz\_Close To Body Front\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 2.4G\_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2441.5$  MHz;  $\sigma = 1.955$  S/m;  $\epsilon_r = 53.407$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.345 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.332 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.559 W/kg

**SAR(1 g) = 0.318 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 0.341 W/kg

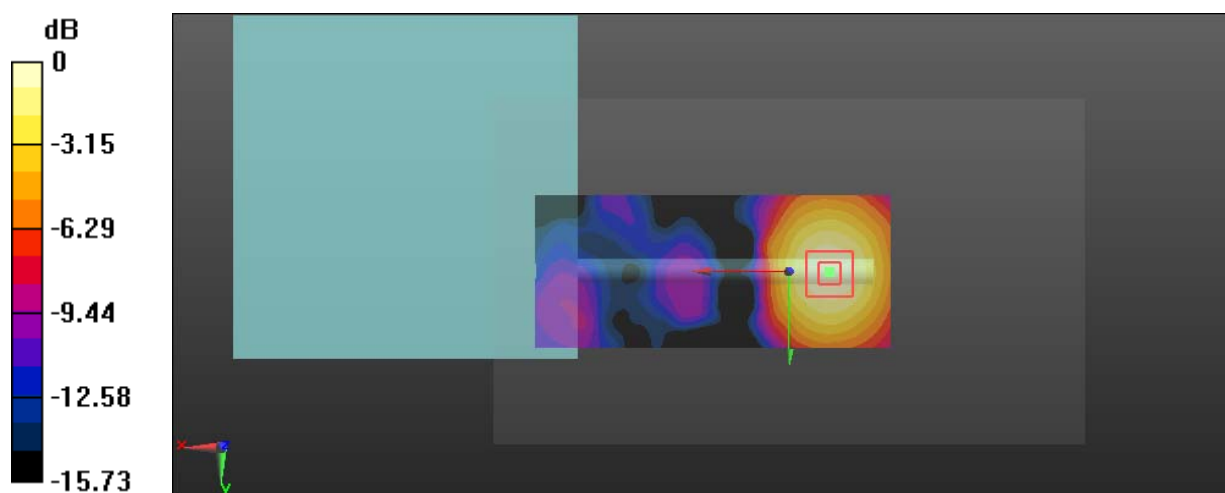

0 dB = 0.341 W/kg = -4.67 dBW/kg



**Test Plot 73#: Wi-Fi 2.4G\_Handheld Back\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.948 \text{ S/m}$ ;  $\epsilon_r = 54.191$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0541 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.717 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 0.0390 W/kg  
**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.011 W/kg**  
 Maximum value of SAR (measured) = 0.0210 W/kg

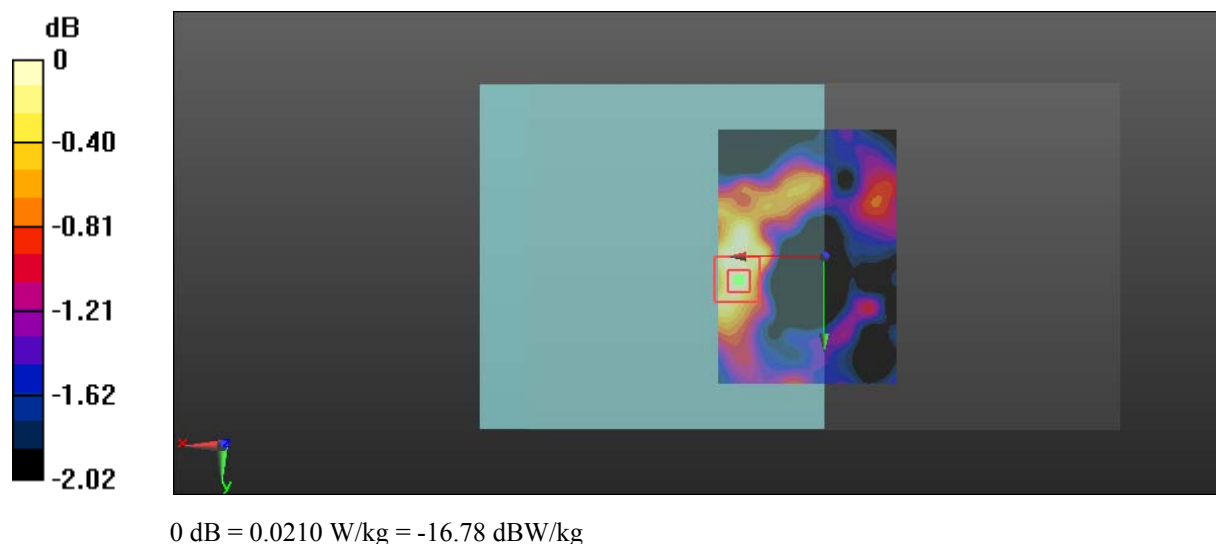

**Test Plot 74#: Wi-Fi 2.4G\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.948 \text{ S/m}$ ;  $\epsilon_r = 54.191$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0646 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.492 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.0840 W/kg  
**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.035 W/kg**  
 Maximum value of SAR (measured) = 0.0657 W/kg

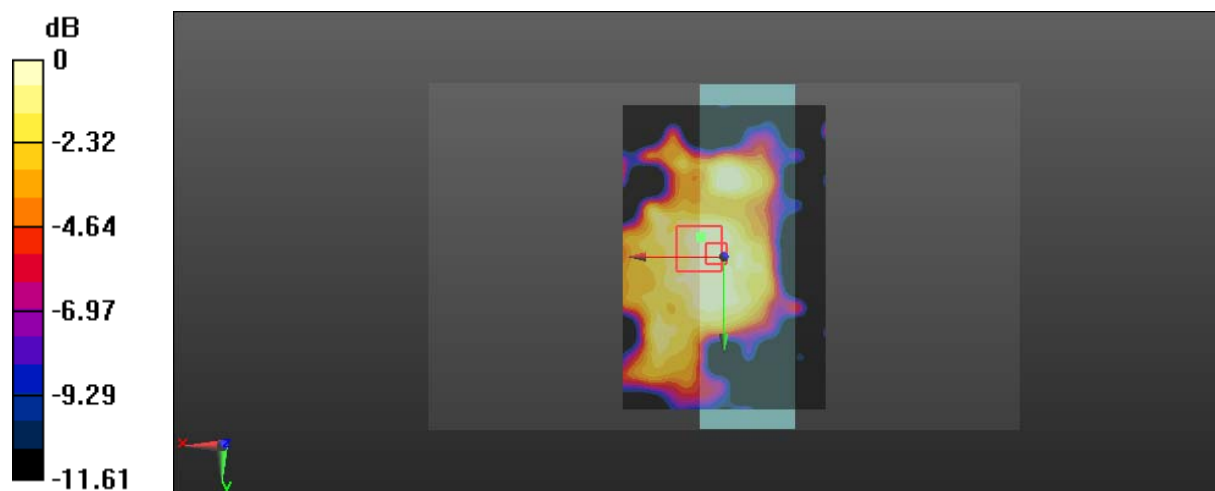

0 dB = 0.0657 W/kg = -11.82 dBW/kg

**Test Plot 75#: Wi-Fi 2.4G\_Handheld Front\_0mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.923 \text{ S/m}$ ;  $\epsilon_r = 54.368$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.130 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.136 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.142 W/kg  
**SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.041 W/kg**  
 Maximum value of SAR (measured) = 0.116 W/kg

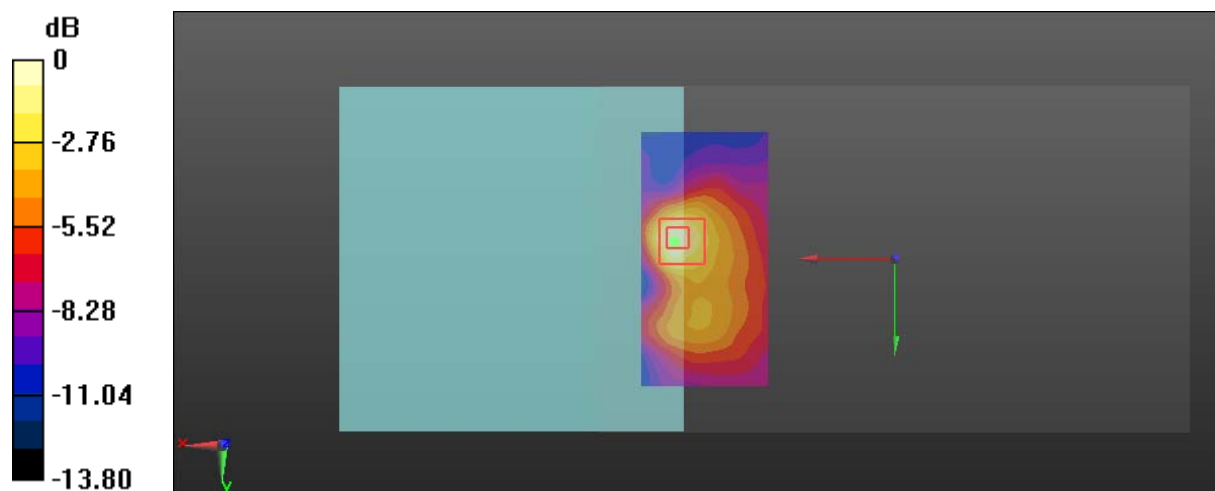

0 dB = 0.116 W/kg = -9.36 dBW/kg

**Test Plot 76#: Wi-Fi 2.4G\_Handheld Front\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.948 \text{ S/m}$ ;  $\epsilon_r = 54.191$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.140 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.389 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.155 W/kg  
**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.043 W/kg**  
 Maximum value of SAR (measured) = 0.127 W/kg

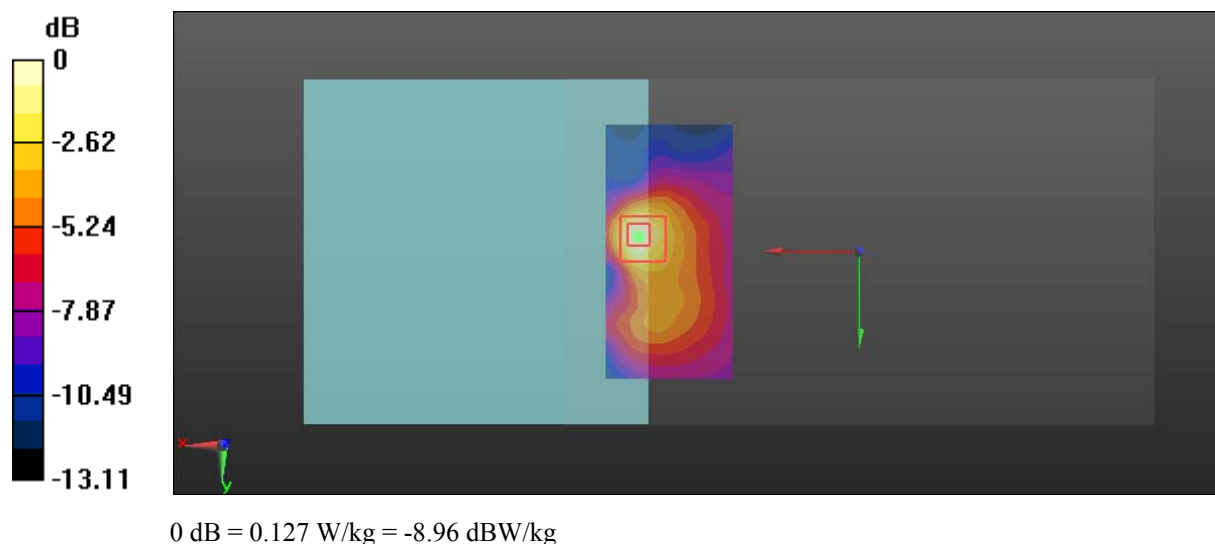

**Test Plot 77#: Wi-Fi 2.4G\_Handheld Front\_0mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2462 \text{ MHz}$ ;  $\sigma = 1.985 \text{ S/m}$ ;  $\epsilon_r = 51.999$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.135 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.292 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.147 W/kg  
**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.042 W/kg**  
 Maximum value of SAR (measured) = 0.121 W/kg

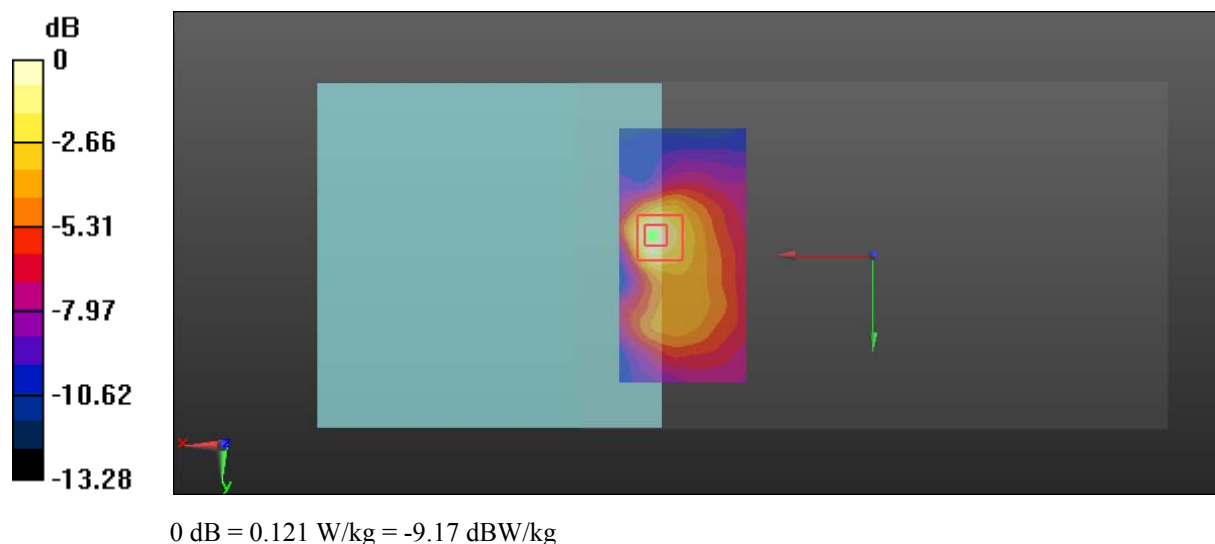

**Test Plot 78#: Wi-Fi 2.4G\_Close To Body Back\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.948$  S/m;  $\epsilon_r = 54.191$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0156 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.113 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.0180 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.010 W/kg**

Maximum value of SAR (measured) = 0.0152 W/kg

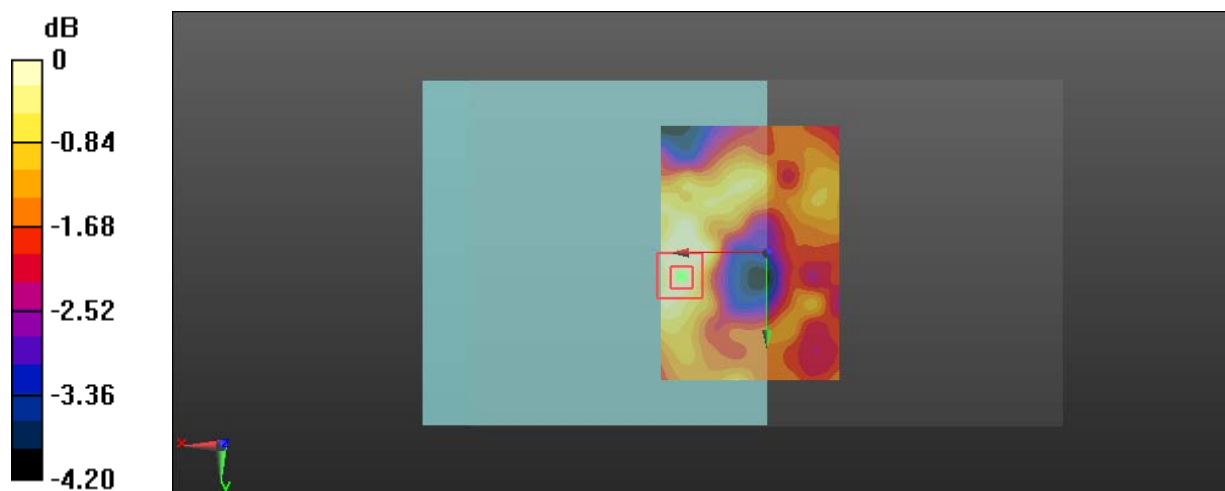

0 dB = 0.0152 W/kg = -18.18 dBW/kg

**Test Plot 79#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.923$  S/m;  $\epsilon_r = 54.368$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0611 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.491 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0700 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0597 W/kg

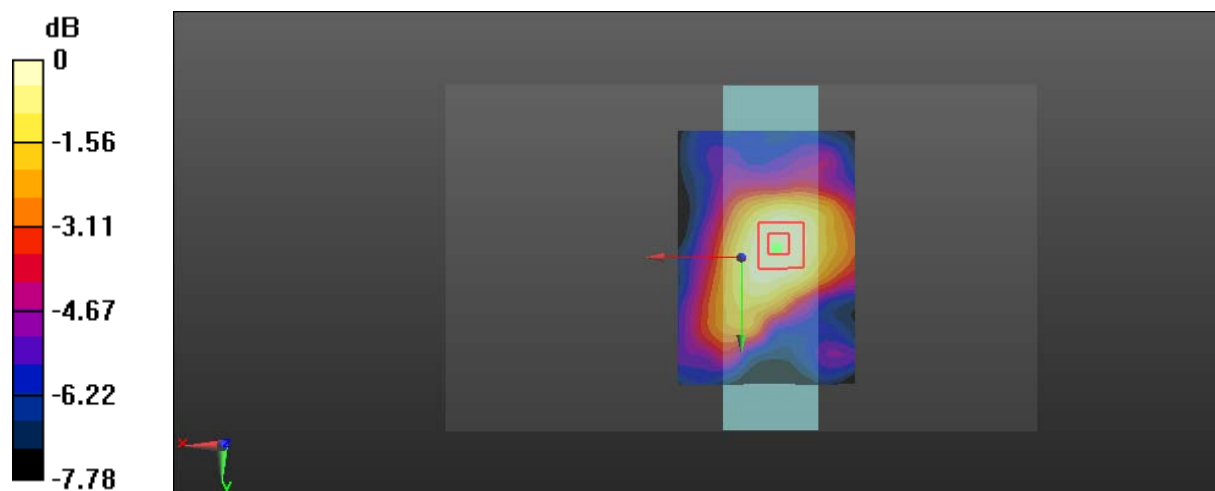

0 dB = 0.0597 W/kg = -12.24 dBW/kg

**Test Plot 80#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.948 \text{ S/m}$ ;  $\epsilon_r = 54.191$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0541 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.345 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 0.0630 W/kg  
**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.027 W/kg**  
 Maximum value of SAR (measured) = 0.0531 W/kg

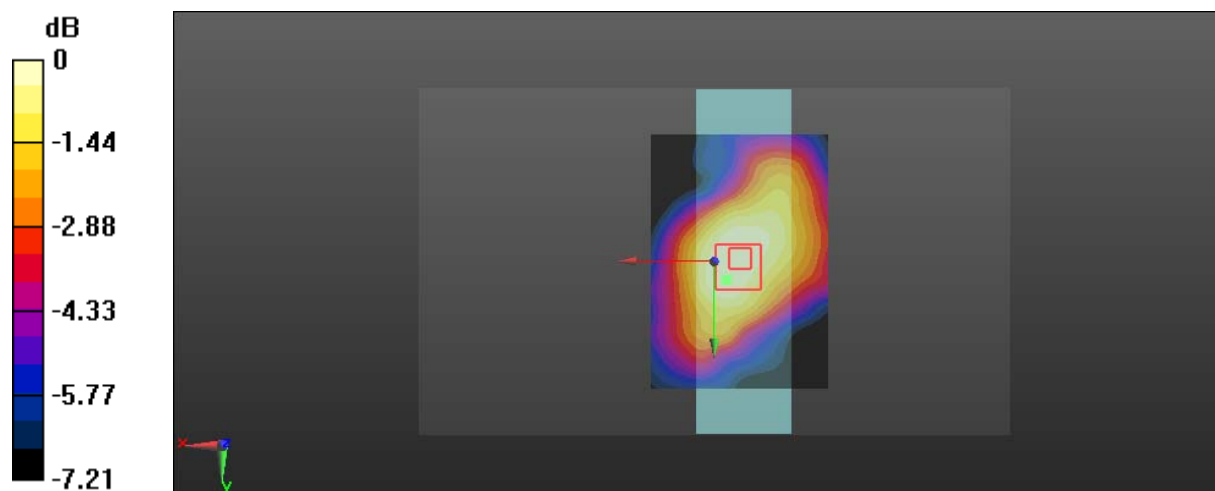

0 dB = 0.0531 W/kg = -12.75 dBW/kg



**Test Plot 81#: Wi-Fi 2.4G\_Close To Body Top\_10mm\_High Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.985$  S/m;  $\epsilon_r = 51.999$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0655 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.636 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0637 W/kg

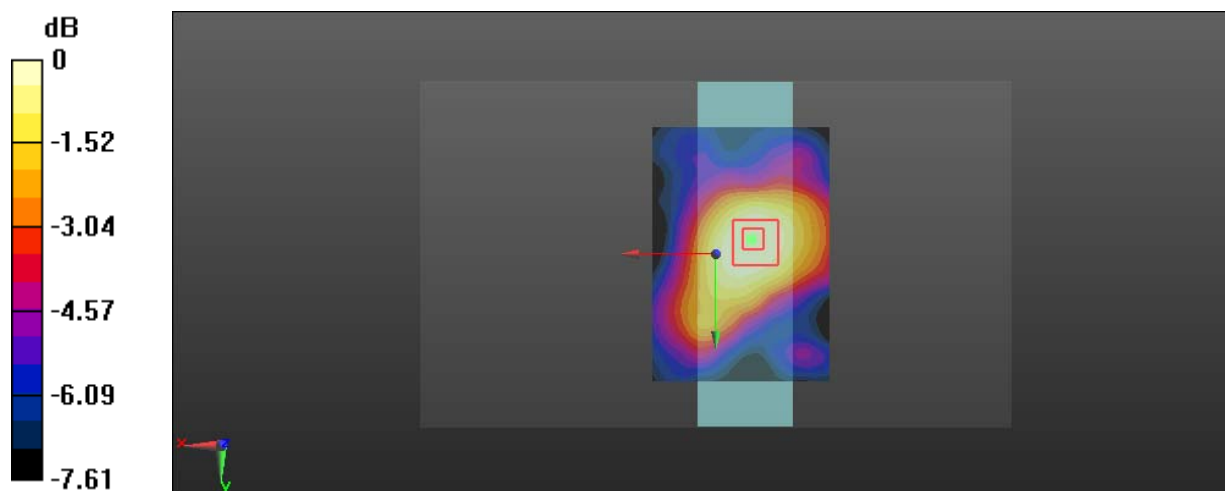

0 dB = 0.0637 W/kg = -11.96 dBW/kg

**Test Plot 82#: Wi-Fi 2.4G\_Close To Body Front\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.948$  S/m;  $\epsilon_r = 54.191$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0558 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.423 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0630 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0520 W/kg

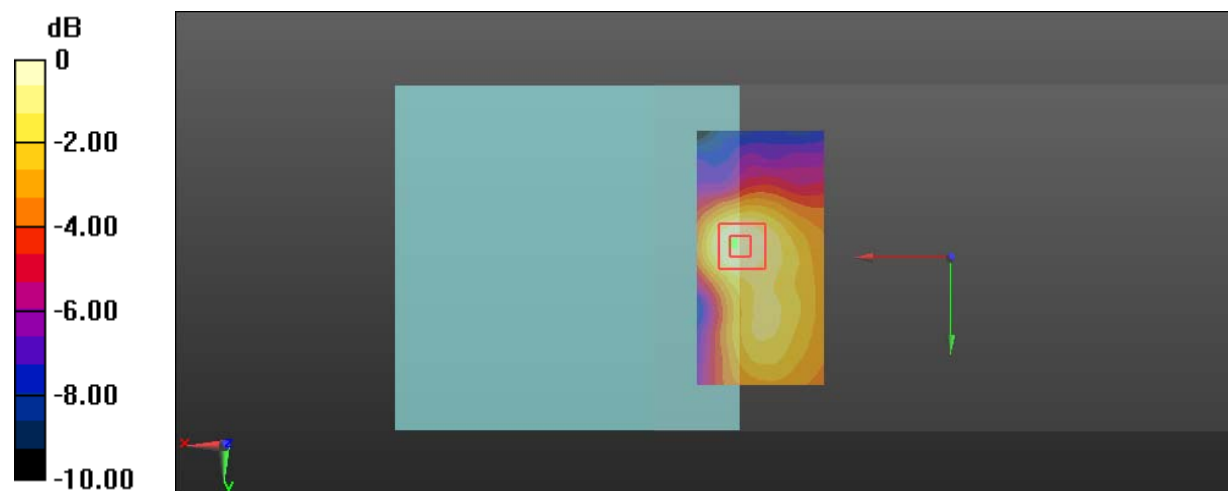

0 dB = 0.0520 W/kg = -12.84 dBW/kg

**Test Plot 83#: SDR 5.8G\_1.4MHz\_Handheld Back\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5 \text{ MHz}$ ;  $\sigma = 6.104 \text{ S/m}$ ;  $\epsilon_r = 48.936$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.472 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.002 V/m; Power Drift = 0.08 dB  
 Peak SAR (extrapolated) = 0.773 W/kg  
**SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.113 W/kg**  
 Maximum value of SAR (measured) = 0.448 W/kg

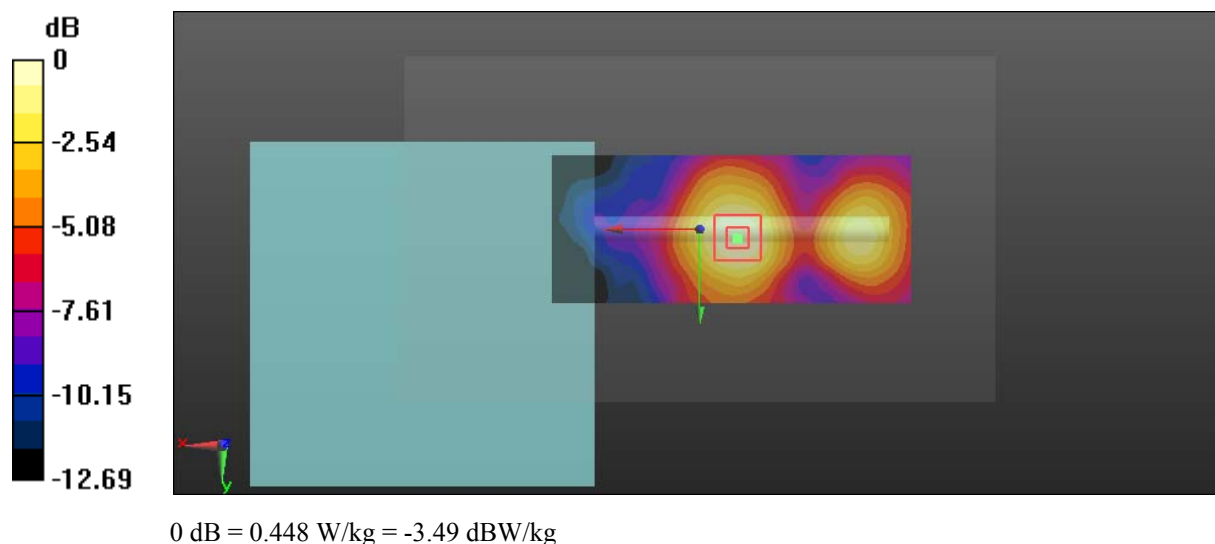

**Test Plot 84#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5728.5$  MHz;  $\sigma = 5.935$  S/m;  $\epsilon_r = 49.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 4.98 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 18.89 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 5.53 W/kg  
**SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.437 W/kg**  
 Maximum value of SAR (measured) = 2.96 W/kg

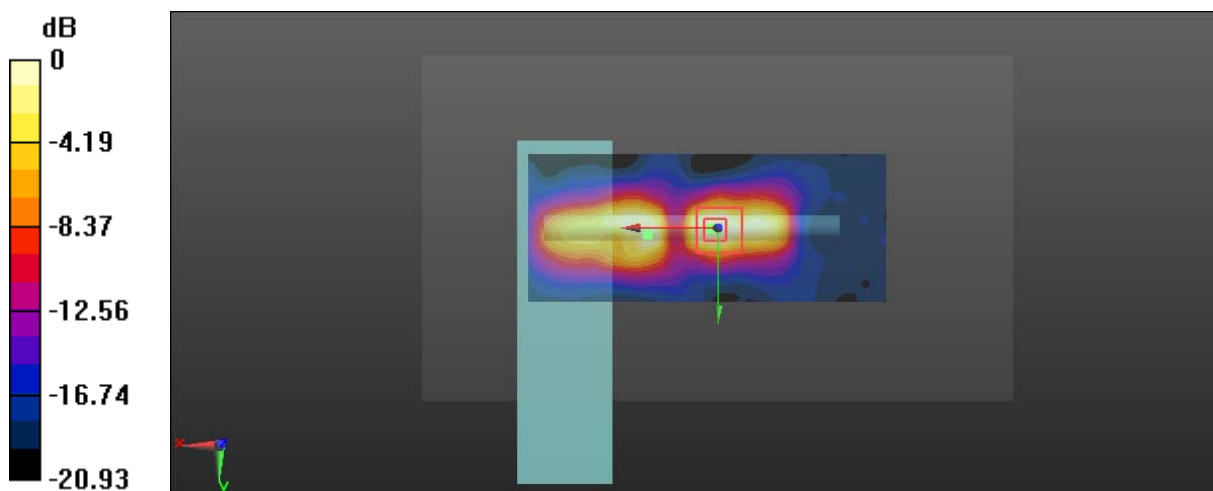

0 dB = 2.96 W/kg = 4.71 dBW/kg

**Test Plot 85#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.104$  S/m;  $\epsilon_r = 48.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 10.2 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 19.66 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 12.9 W/kg  
**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 0.696 W/kg**  
 Maximum value of SAR (measured) = 4.88 W/kg

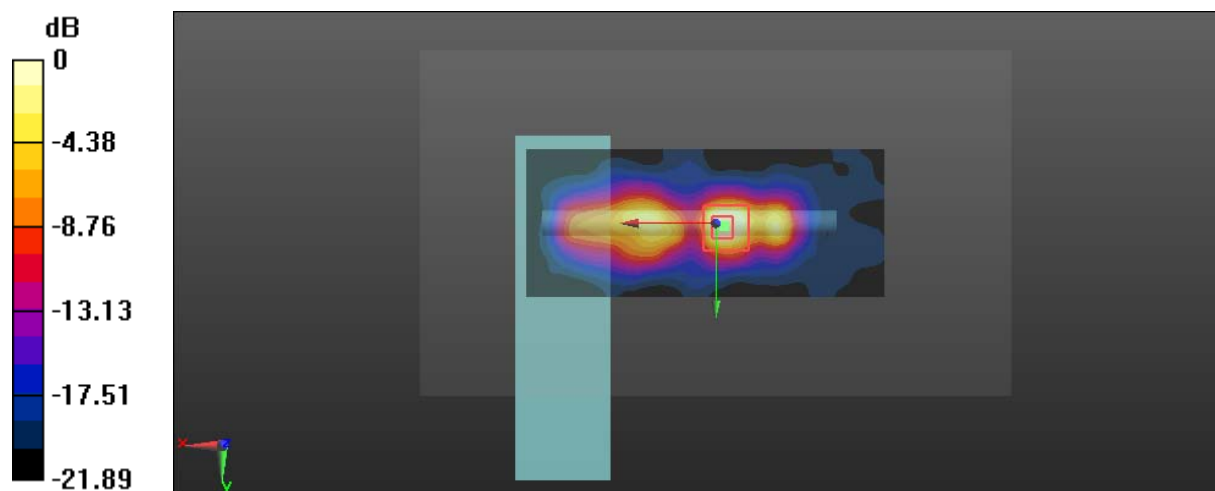

0 dB = 4.88 W/kg = 6.88 dBW/kg

**Test Plot 86#: SDR 5.8G\_1.4MHz\_Handheld Top\_0mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5846.5 \text{ MHz}$ ;  $\sigma = 6.325 \text{ S/m}$ ;  $\epsilon_r = 48.34$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 13.0 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 22.37 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 15.3 W/kg  
**SAR(1 g) = 2.54 W/kg; SAR(10 g) = 0.763 W/kg**  
 Maximum value of SAR (measured) = 5.79 W/kg

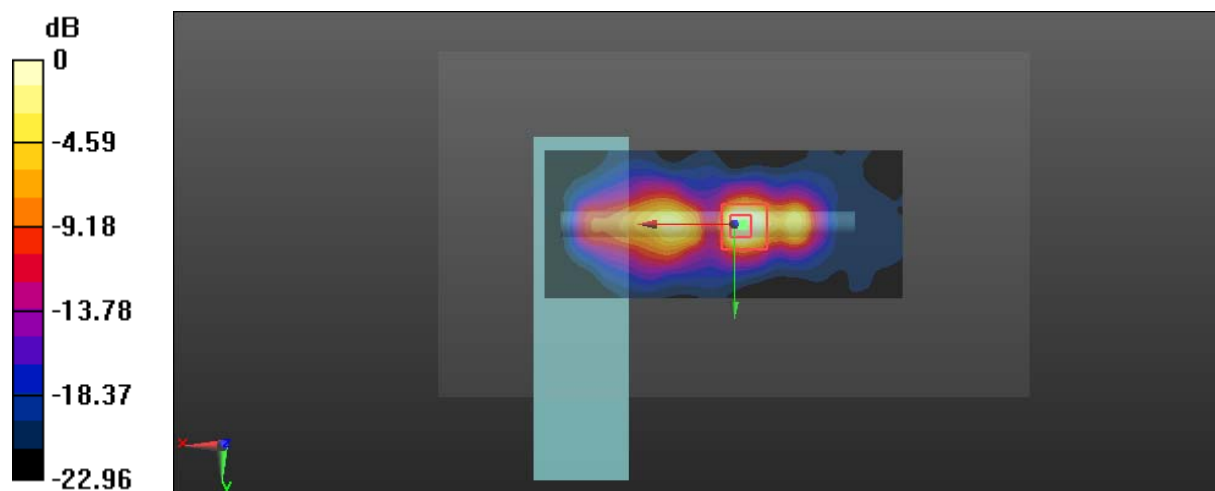

0 dB = 5.79 W/kg = 7.63 dBW/kg

**Test Plot 87#: SDR 5.8G\_10MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5787.5$  MHz;  $\sigma = 6.109$  S/m;  $\epsilon_r = 48.926$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.44 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 16.06 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 8.69 W/kg

**SAR(1 g) = 1.75 W/kg; SAR(10 g) = 0.527 W/kg**

Maximum value of SAR (measured) = 4.03 W/kg

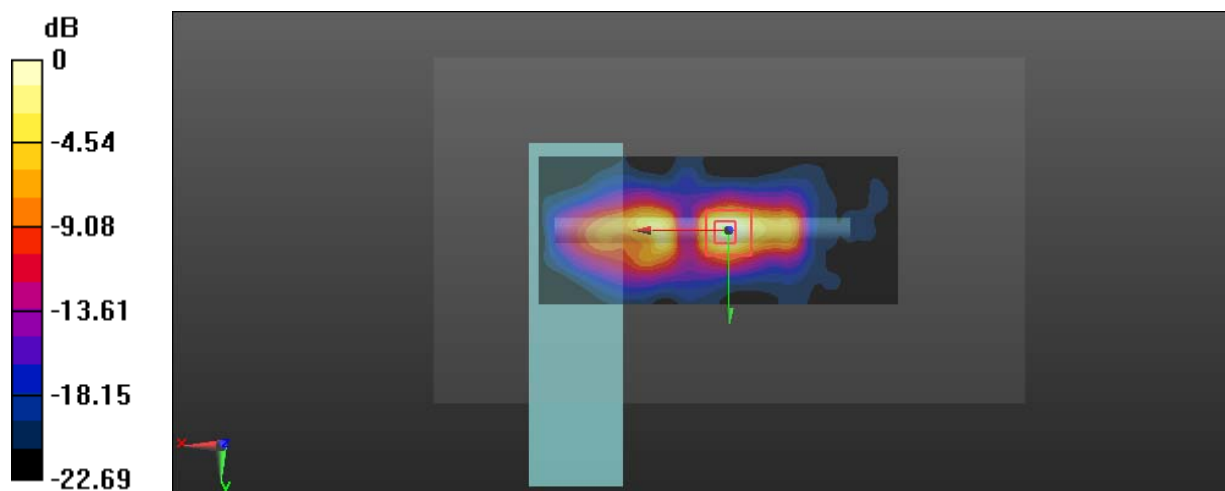

0 dB = 4.03 W/kg = 6.05 dBW/kg

**Test Plot 88#: SDR 5.8G\_20MHz\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5 \text{ MHz}$ ;  $\sigma = 6.109 \text{ S/m}$ ;  $\epsilon_r = 48.926$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 11.6 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 18.24 V/m; Power Drift = -0.18 dB  
 Peak SAR (extrapolated) = 9.68 W/kg  
**SAR(1 g) = 2.04 W/kg; SAR(10 g) = 0.602 W/kg**  
 Maximum value of SAR (measured) = 4.93 W/kg

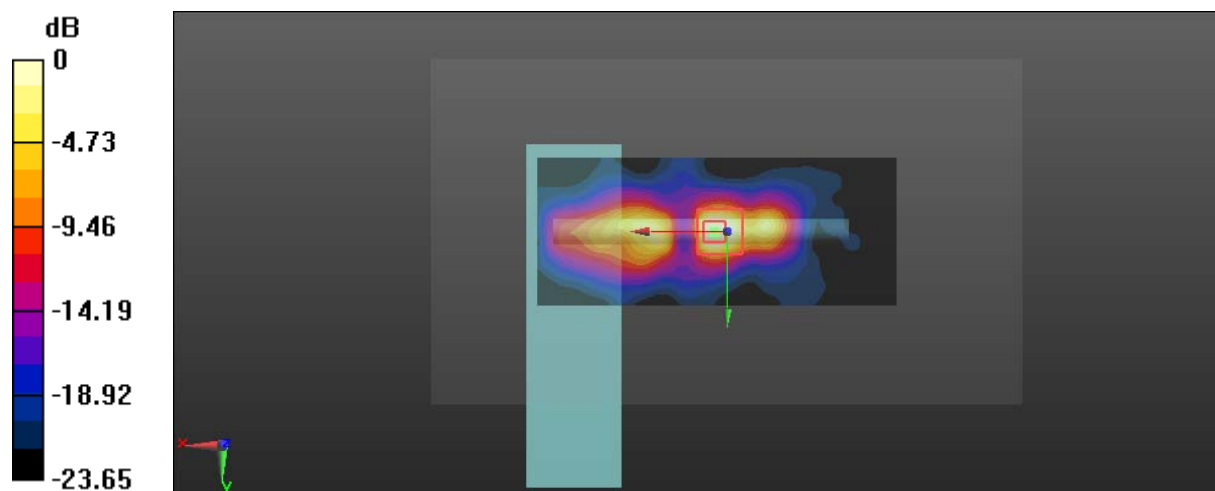

0 dB = 4.93 W/kg = 6.93 dBW/kg



**Test Plot 89#: SDR 5.8G\_1.4MHz\_Handheld Front\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.104$  S/m;  $\epsilon_r = 48.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.369 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 3.844 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.628 W/kg  
**SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.097 W/kg**  
 Maximum value of SAR (measured) = 0.363 W/kg

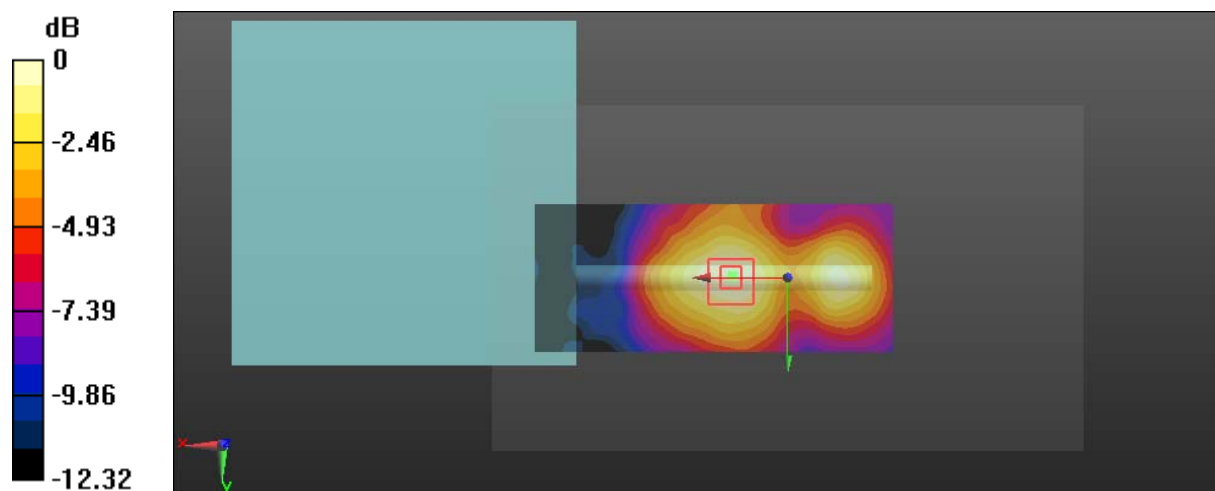

0 dB = 0.363 W/kg = -4.40 dBW/kg

**Test Plot 90#: SDR 5.8G\_1.4MHz\_Close To Body Back\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.104$  S/m;  $\epsilon_r = 48.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.258 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 3.948 V/m; Power Drift = -0.01 dB  
 Peak SAR (extrapolated) = 0.437 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.072 W/kg**  
 Maximum value of SAR (measured) = 0.253 W/kg

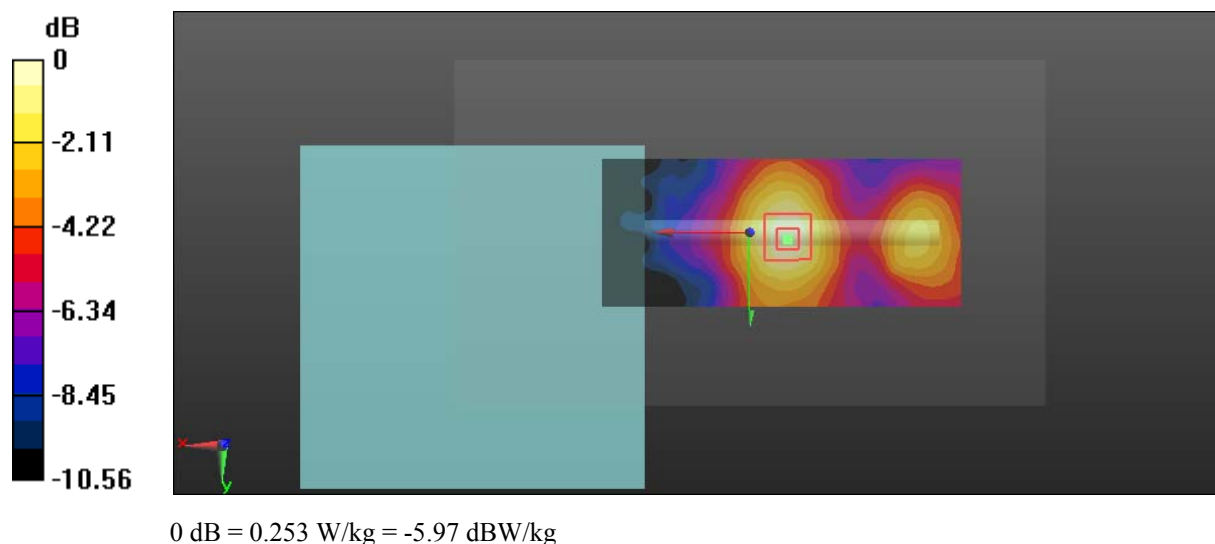

**Test Plot 91#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_Low Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5728.5$  MHz;  $\sigma = 5.935$  S/m;  $\epsilon_r = 49.512$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.660 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.374 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 0.631 W/kg

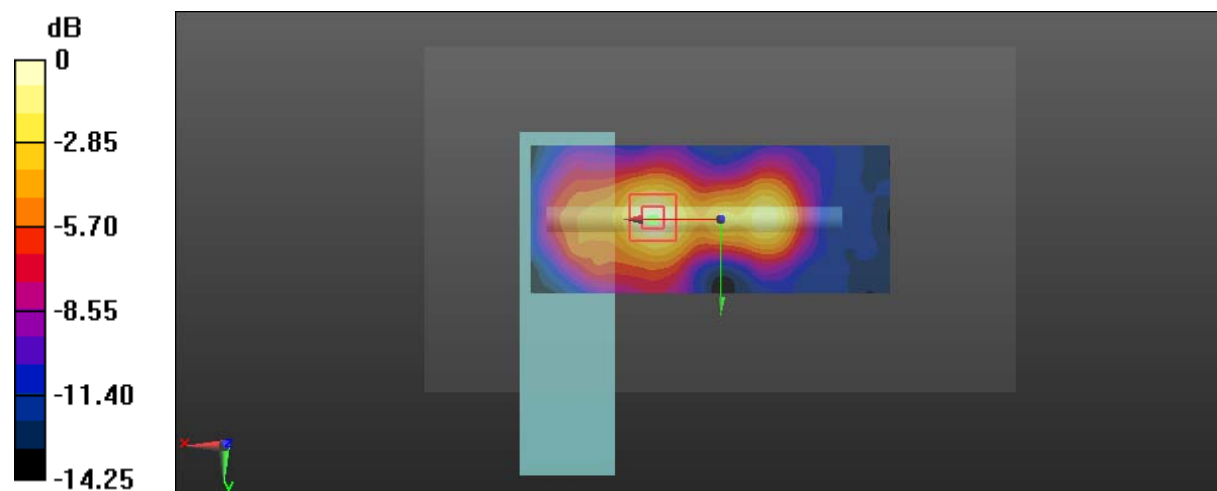

0 dB = 0.631 W/kg = -2.00 dBW/kg

**Test Plot 92#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.104$  S/m;  $\epsilon_r = 48.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.741 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.325 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 1.312 W/kg

**SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.718 W/kg

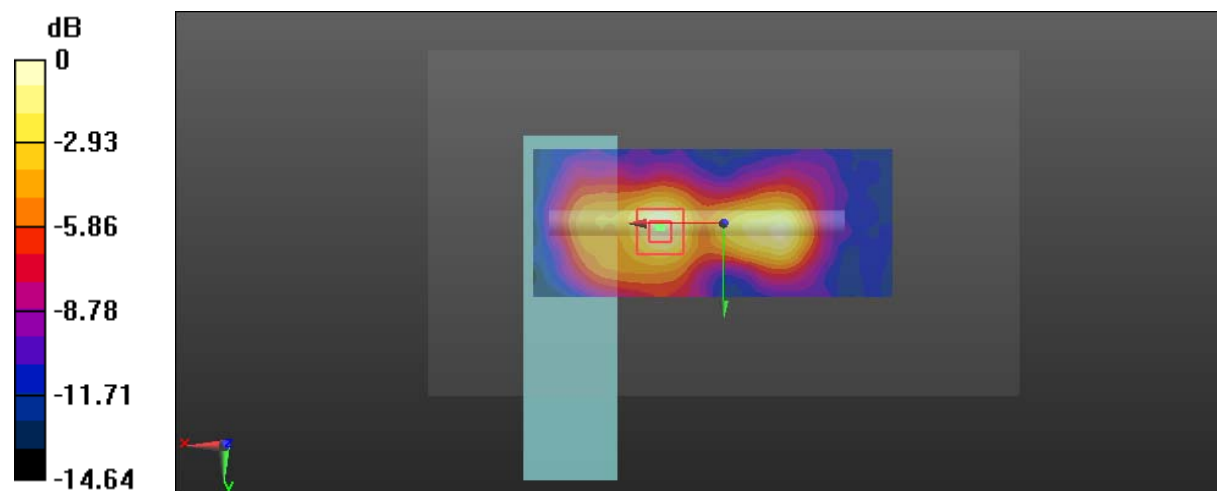

0 dB = 0.718 W/kg = -1.44 dBW/kg

**Test Plot 93#: SDR 5.8G\_1.4MHz\_Close To Body Top\_10mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5846.5$  MHz;  $\sigma = 6.325$  S/m;  $\epsilon_r = 48.34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.786 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 4.953 V/m; Power Drift = 0.15 dB  
 Peak SAR (extrapolated) = 1.36 W/kg  
**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.149 W/kg**  
 Maximum value of SAR (measured) = 0.785 W/kg

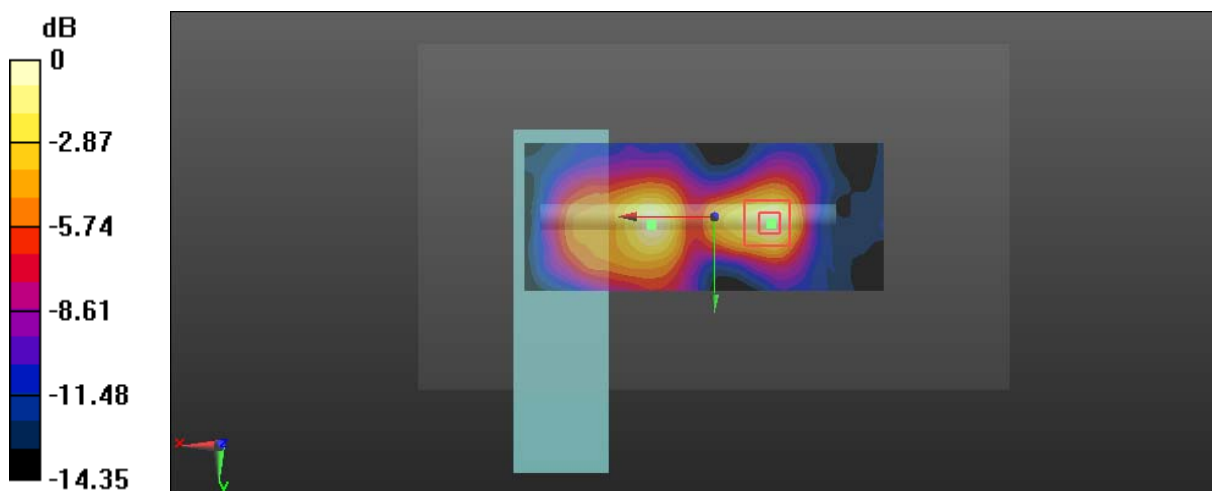

0 dB = 0.785 W/kg = -1.05 dBW/kg

**Test Plot 94#: SDR 5.8G\_10MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5 \text{ MHz}$ ;  $\sigma = 6.109 \text{ S/m}$ ;  $\epsilon_r = 48.926$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.776 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.221 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 1.33 W/kg  
**SAR(1 g) = 0.337 W/kg; SAR(10 g) = 0.153 W/kg**  
 Maximum value of SAR (measured) = 0.735 W/kg

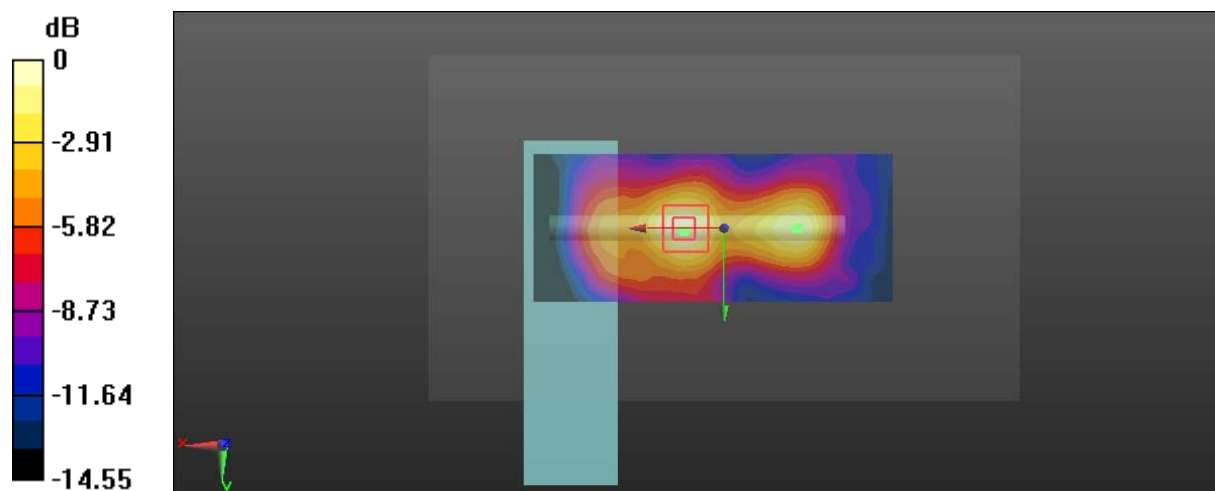

0 dB = 0.735 W/kg = -1.34 dBW/kg

**Test Plot 95#: SDR 5.8G\_20MHz\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5787.5 \text{ MHz}$ ;  $\sigma = 6.109 \text{ S/m}$ ;  $\epsilon_r = 48.926$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.666 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 5.440 V/m; Power Drift = -0.20 dB  
 Peak SAR (extrapolated) = 1.14 W/kg  
**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.137 W/kg**  
 Maximum value of SAR (measured) = 0.632 W/kg

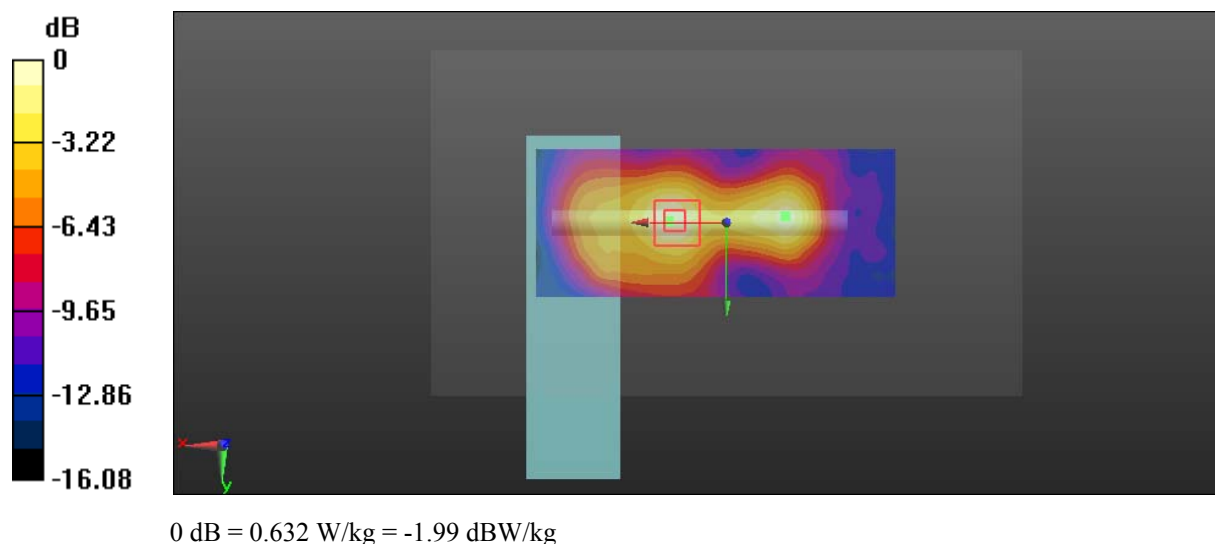

**Test Plot 96#: SDR 5.8G\_1.4MHz\_Close To Body Front\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: SDR 5.8G\_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5786.5$  MHz;  $\sigma = 6.104$  S/m;  $\epsilon_r = 48.936$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (171x71x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.190 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm  
 Reference Value = 3.243 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.346 W/kg  
**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.064 W/kg**  
 Maximum value of SAR (measured) = 0.184 W/kg

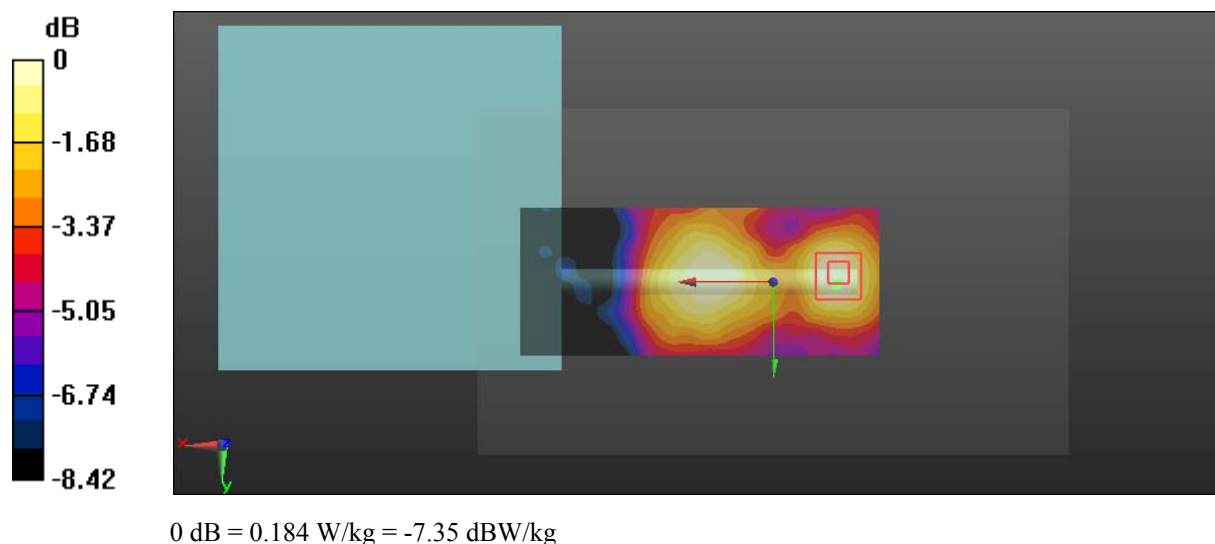



**Test Plot 97#: Wi-Fi 5.2G\_Handheld Back\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0629 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.147 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 0.0880 W/kg  
**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.041 W/kg**  
 Maximum value of SAR (measured) = 0.0614 W/kg

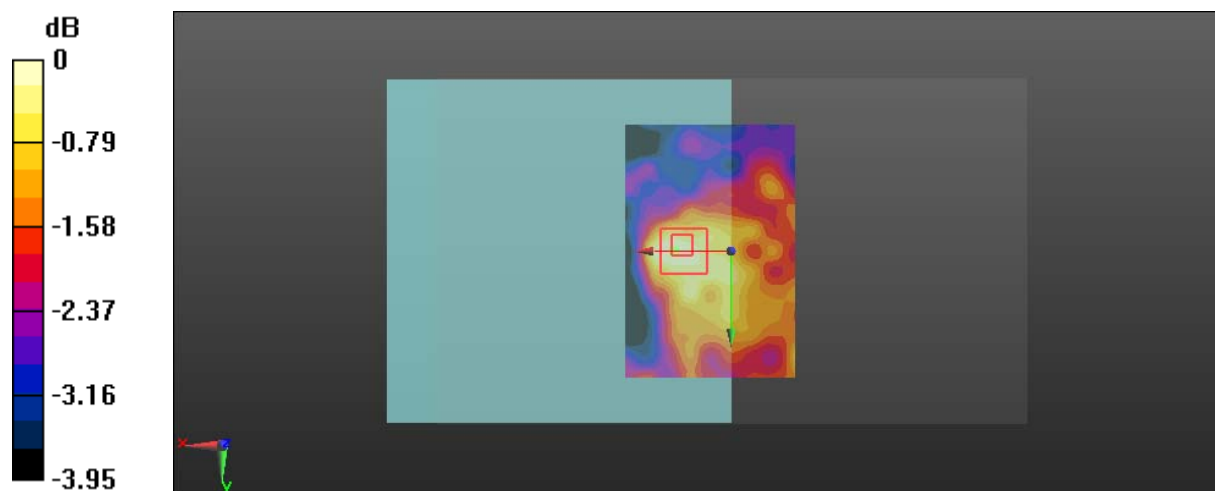

0 dB = 0.0614 W/kg = -12.12 dBW/kg

**Test Plot 98#: Wi-Fi 5.2G\_Handheld Top\_0mm\_Low Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5180$  MHz;  $\sigma = 5.334$  S/m;  $\epsilon_r = 48.523$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.294 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.484 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.084 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

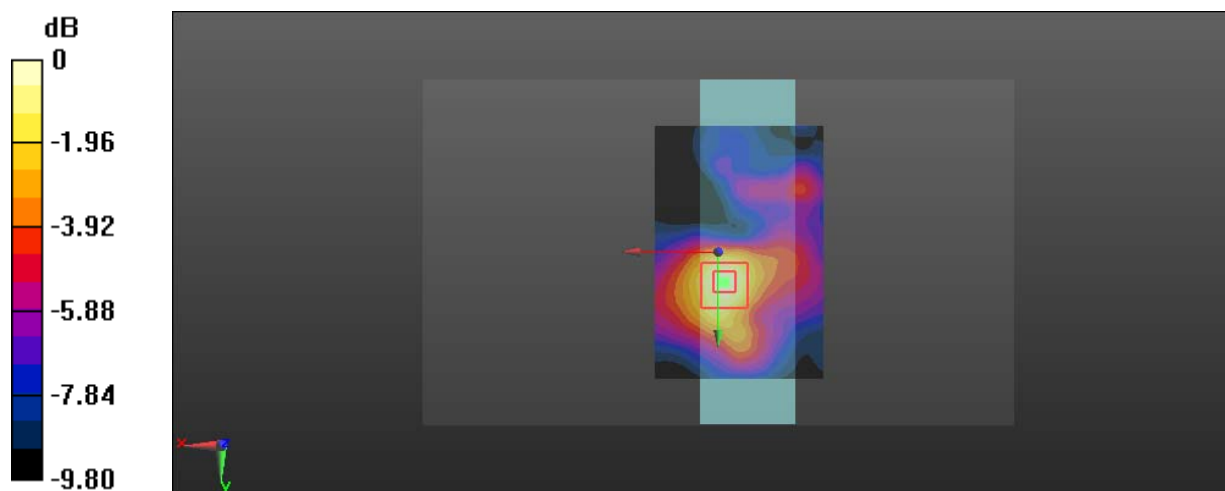

0 dB = 0.297 W/kg = -5.27 dBW/kg

**Test Plot 99#: Wi-Fi 5.2G\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.196 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.739 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 0.394 W/kg  
**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.077 W/kg**  
 Maximum value of SAR (measured) = 0.239 W/kg

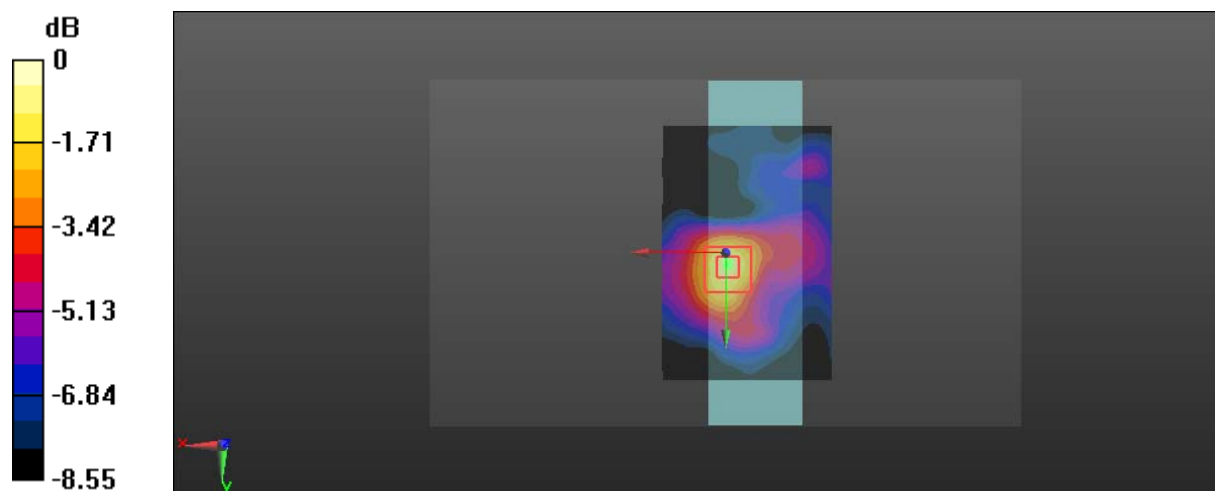

0 dB = 0.239 W/kg = -6.22 dBW/kg

**Test Plot 100#: Wi-Fi 5.2G\_Handheld Top\_0mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 5.381 \text{ S/m}$ ;  $\epsilon_r = 48.375$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.157 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.385 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 0.277 W/kg  
**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.059 W/kg**  
 Maximum value of SAR (measured) = 0.147 W/kg

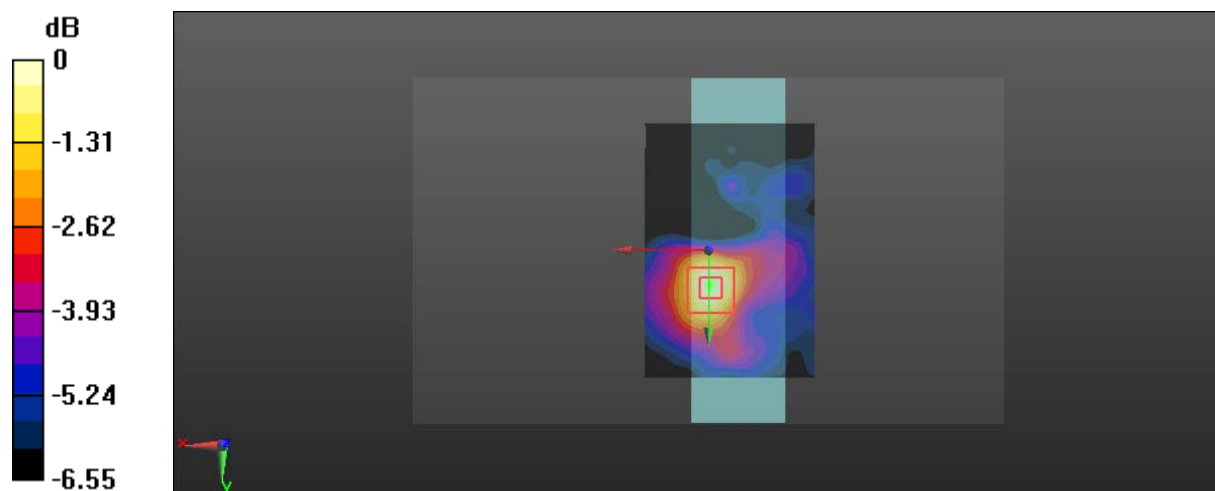

0 dB = 0.147 W/kg = -8.33 dBW/kg

**Test Plot 101#: Wi-Fi 5.2G\_Handheld Front\_0mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.376$  S/m;  $\epsilon_r = 48.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.245 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.713 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.407 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.068 W/kg**

Maximum value of SAR (measured) = 0.248 W/kg

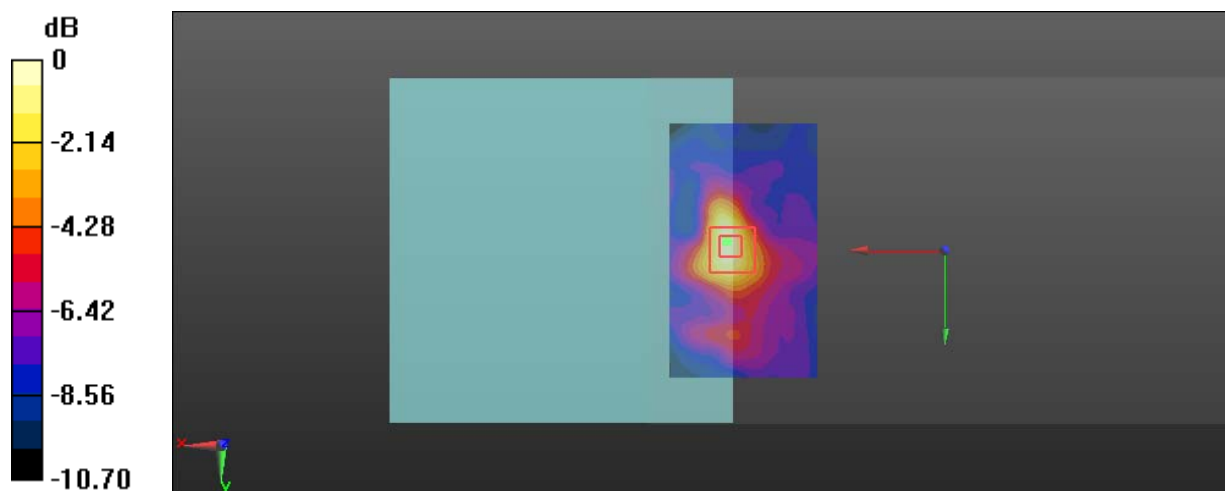

**Test Plot 102#: Wi-Fi 5.2G\_Close To Body Back\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0618 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.059 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.104 W/kg  
**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.047 W/kg**  
 Maximum value of SAR (measured) = 0.0678 W/kg

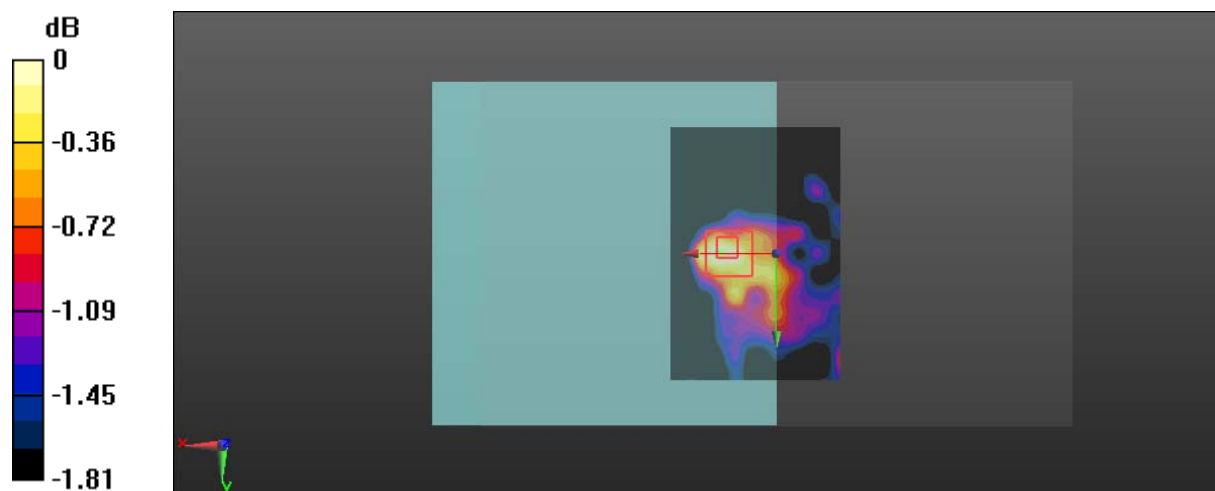

0 dB = 0.0678 W/kg = -11.69 dBW/kg

**Test Plot 103#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5180 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 5.334 \text{ S/m}$ ;  $\epsilon_r = 48.523$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.173 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.789 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.268 W/kg  
**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.060 W/kg**  
 Maximum value of SAR (measured) = 0.159 W/kg

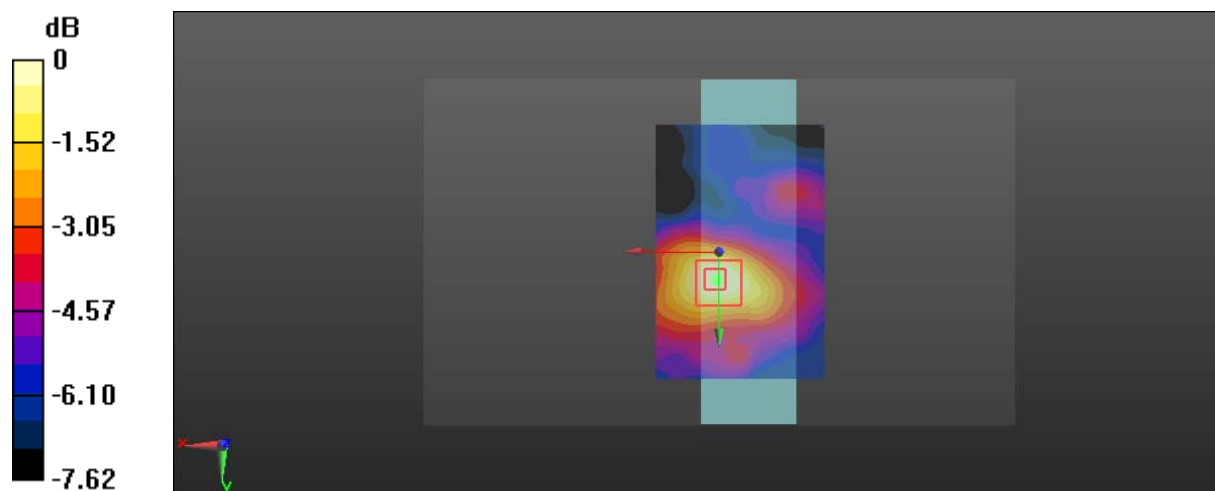

0 dB = 0.159 W/kg = -7.99 dBW/kg

**Test Plot 104#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 5.376 \text{ S/m}$ ;  $\epsilon_r = 48.449$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.142 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.434 V/m; Power Drift = 0.12 dB  
 Peak SAR (extrapolated) = 0.283 W/kg  
**SAR(1 g) = 0.101 W/kg; SAR(10 g) = 0.065 W/kg**  
 Maximum value of SAR (measured) = 0.175 W/kg

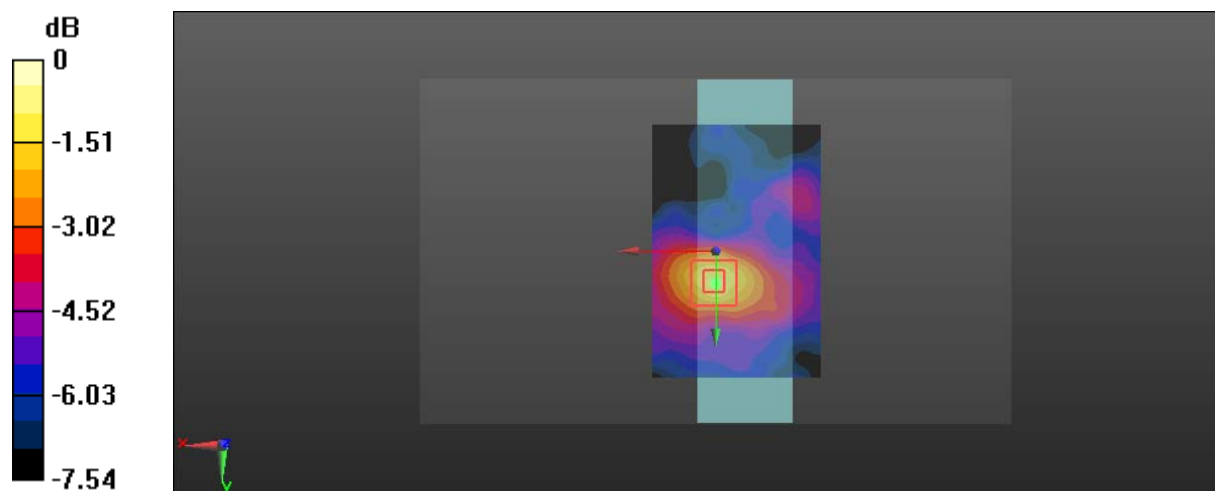

0 dB = 0.175 W/kg = -7.57 dBW/kg



**Test Plot 105#: Wi-Fi 5.2G\_Close To Body Top\_10mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5240 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5240 \text{ MHz}$ ;  $\sigma = 5.381 \text{ S/m}$ ;  $\epsilon_r = 48.375$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.109 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.492 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.190 W/kg  
**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.051 W/kg**  
 Maximum value of SAR (measured) = 0.103 W/kg

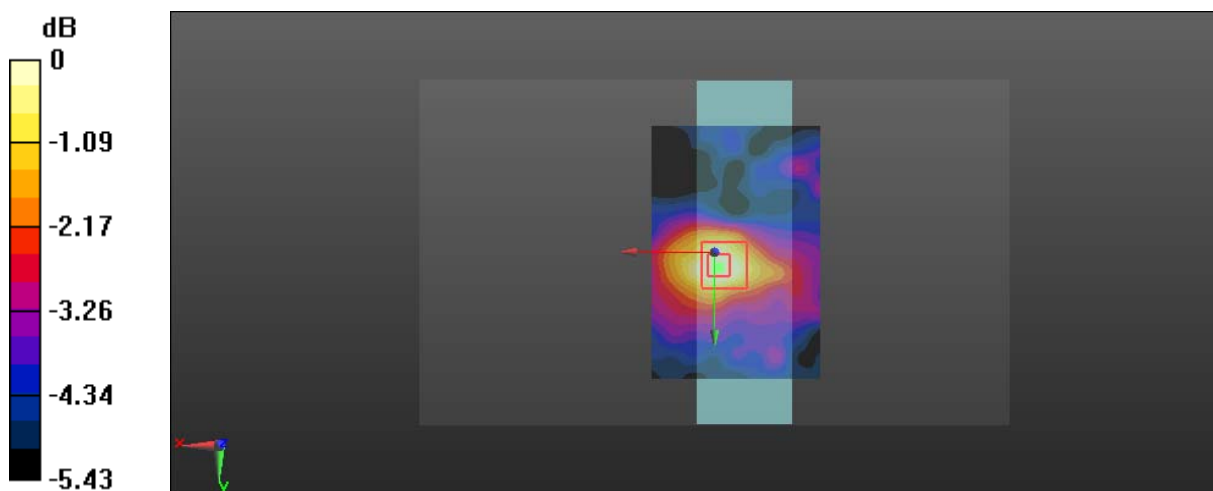

0 dB = 0.103 W/kg = -9.87 dBW/kg

**Test Plot 106#: Wi-Fi 5.2G\_Close To Body Front\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.2 GHz; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.376$  S/m;  $\epsilon_r = 48.449$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(5.22, 5.22, 5.22); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.820 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.109 W/kg

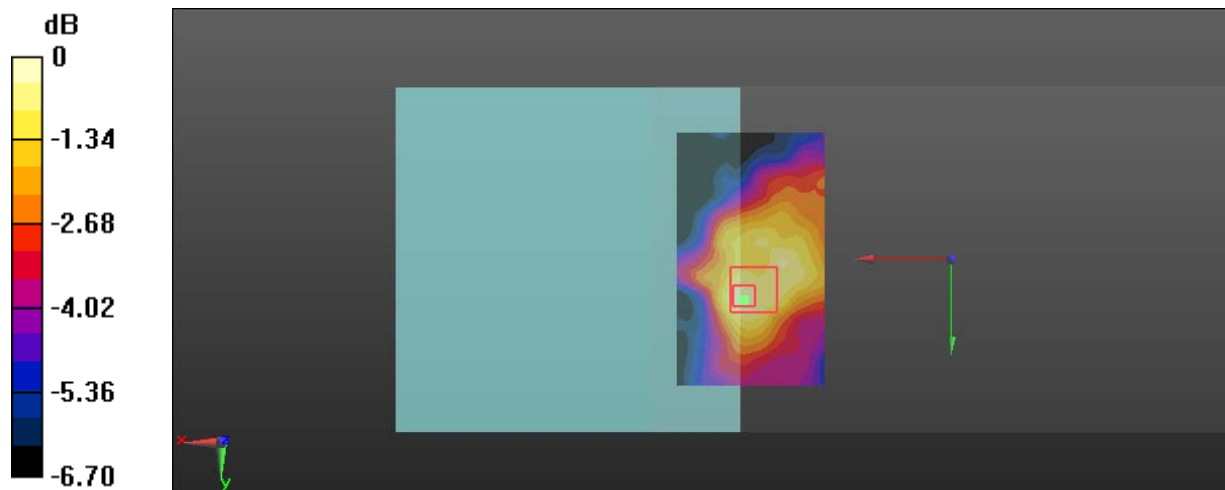

**Test Plot 107#: Wi-Fi 5.8G\_Handheld Back\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.095 \text{ S/m}$ ;  $\epsilon_r = 48.951$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0897 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.899 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 0.136 W/kg  
**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.053 W/kg**  
 Maximum value of SAR (measured) = 0.0812 W/kg

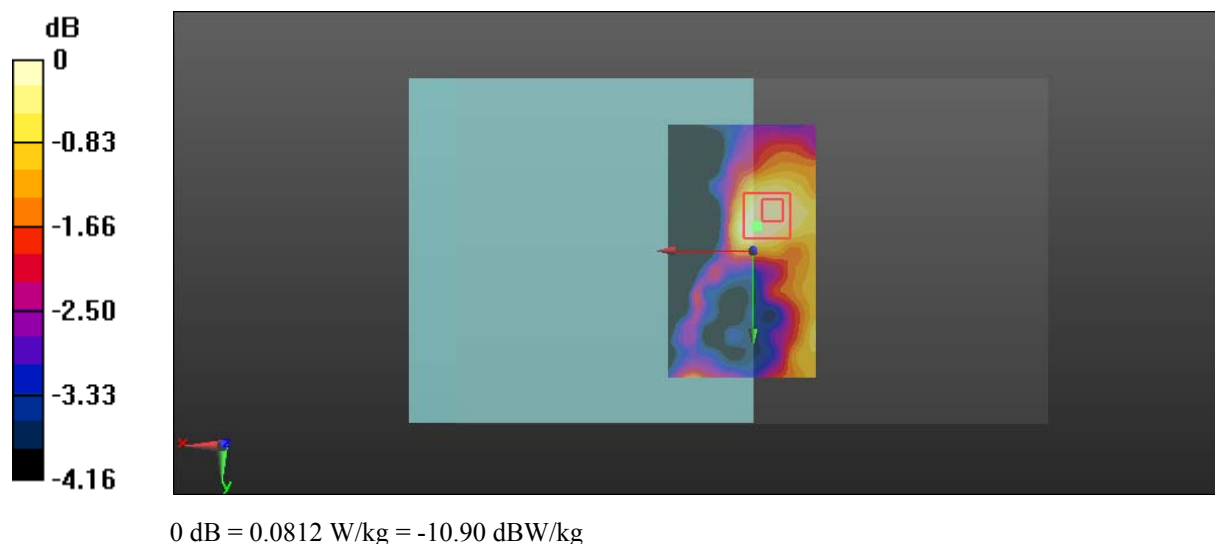

**Test Plot 108#: Wi-Fi 5.8G\_Handheld Top\_0mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.022 \text{ S/m}$ ;  $\epsilon_r = 49.348$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.259 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.568 V/m; Power Drift = -0.20 dB  
 Peak SAR (extrapolated) = 0.448 W/kg  
**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.078 W/kg**  
 Maximum value of SAR (measured) = 0.250 W/kg

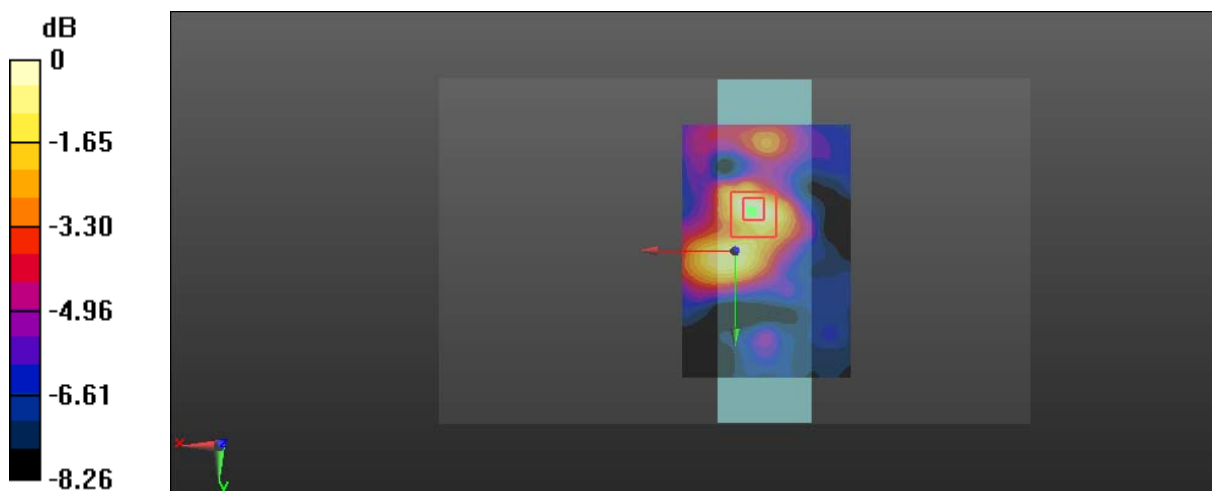

0 dB = 0.250 W/kg = -6.02 dBW/kg

**Test Plot 109#: Wi-Fi 5.8G\_Handheld Top\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.095 \text{ S/m}$ ;  $\epsilon_r = 48.951$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.266 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.242 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.489 W/kg  
**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.079 W/kg**  
 Maximum value of SAR (measured) = 0.245 W/kg

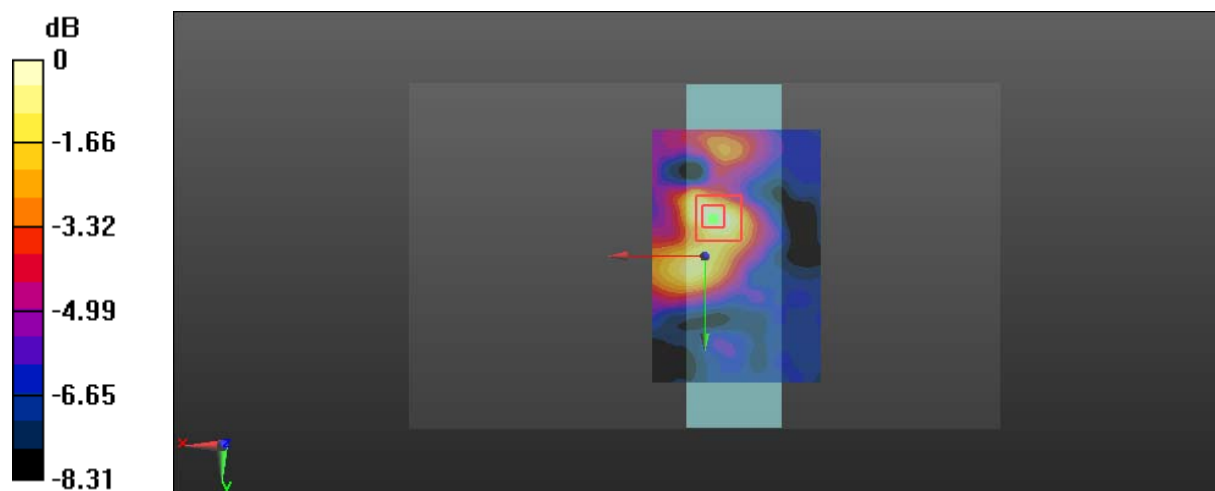

0 dB = 0.245 W/kg = -6.11 dBW/kg

**Test Plot 110#: Wi-Fi 5.8G\_Handheld Top\_0mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.315 \text{ S/m}$ ;  $\epsilon_r = 48.554$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.254 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.570 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.494 W/kg  
**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.081 W/kg**  
 Maximum value of SAR (measured) = 0.262 W/kg

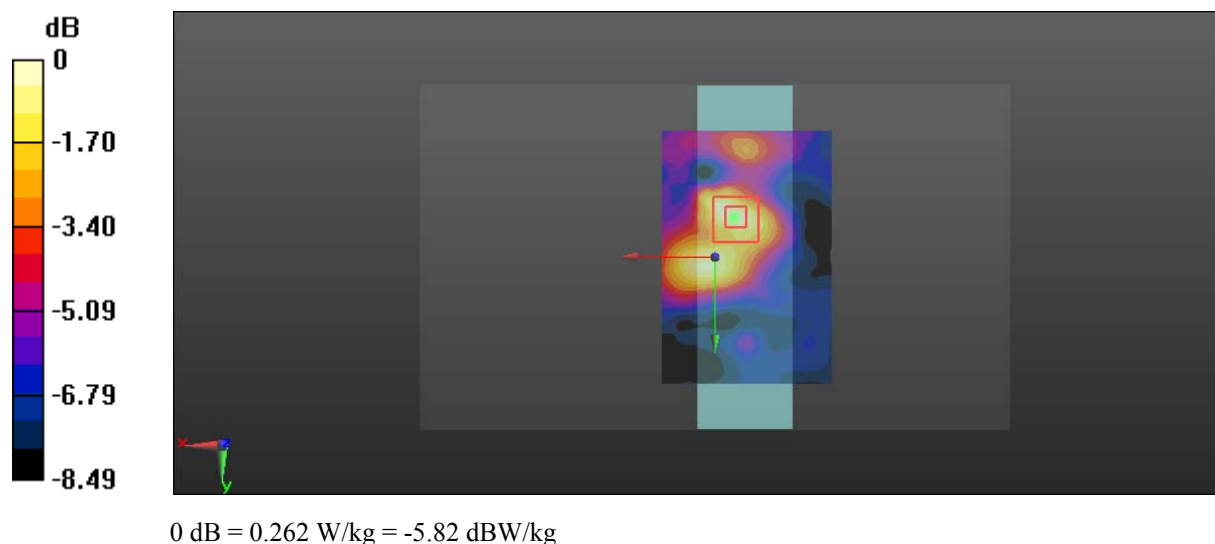

**Test Plot 111#: Wi-Fi 5.8G\_Handheld Front\_0mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.095 \text{ S/m}$ ;  $\epsilon_r = 48.951$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.152 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.819 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 0.295 W/kg  
**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.057 W/kg**  
 Maximum value of SAR (measured) = 0.155 W/kg

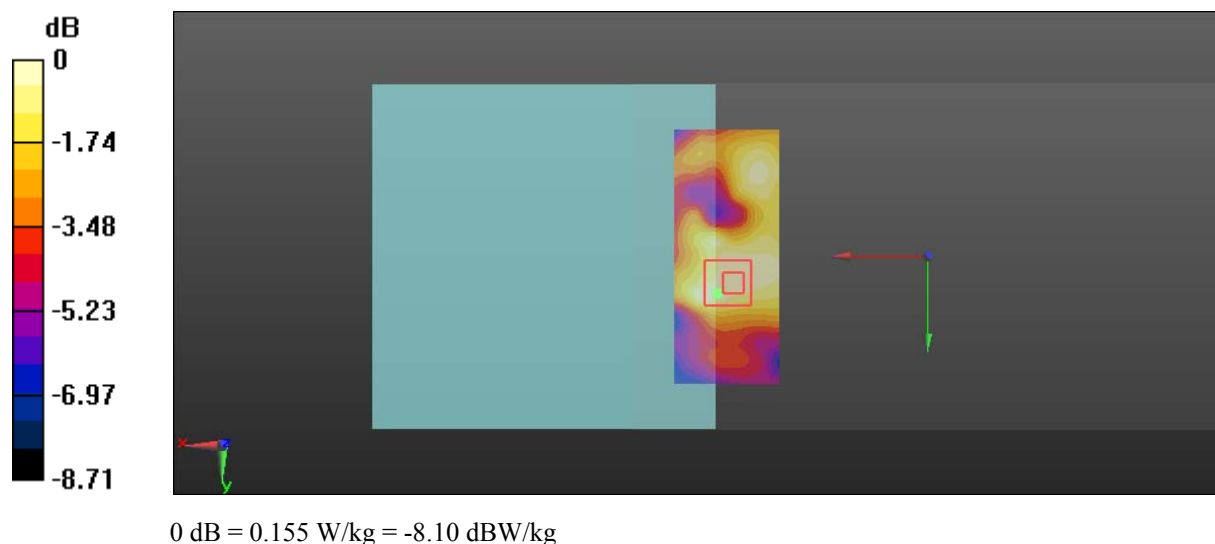

**Test Plot 112#: Wi-Fi 5.8G\_Close To Body Back\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.095 \text{ S/m}$ ;  $\epsilon_r = 48.951$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0675 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.803 V/m; Power Drift = 0.20 dB  
 Peak SAR (extrapolated) = 0.140 W/kg  
**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.049 W/kg**  
 Maximum value of SAR (measured) = 0.0731 W/kg

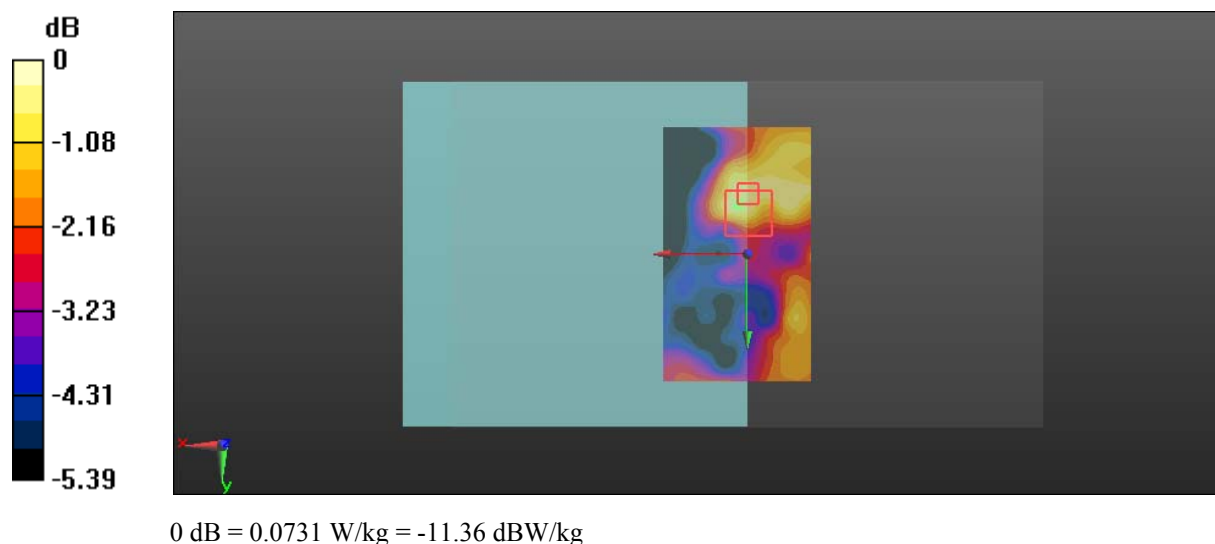



**Test Plot 113#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_Low Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 6.022 \text{ S/m}$ ;  $\epsilon_r = 49.348$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.226 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.356 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.399 W/kg  
**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.085 W/kg**  
 Maximum value of SAR (measured) = 0.232 W/kg

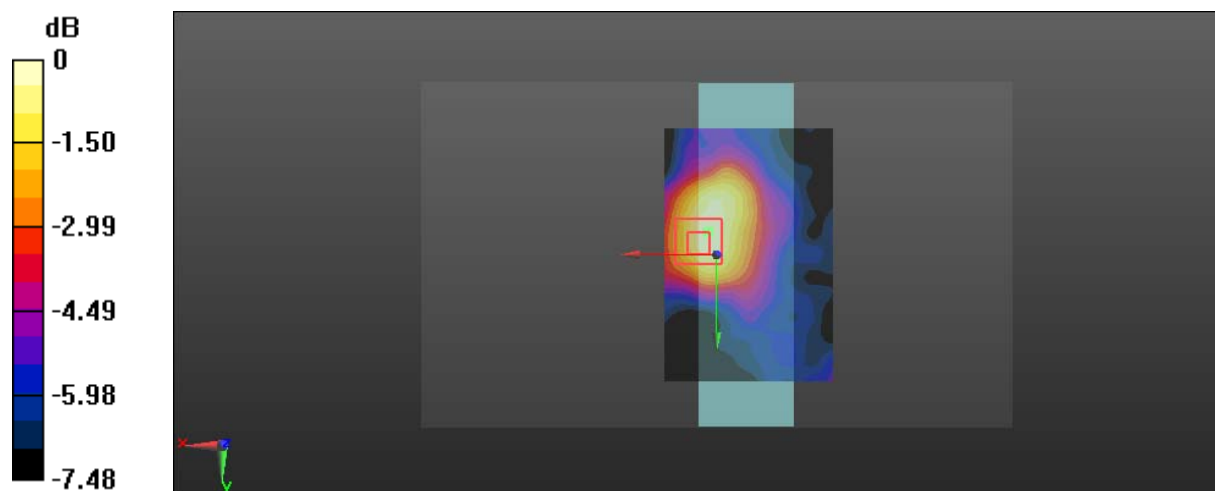

0 dB = 0.232 W/kg = -6.35 dBW/kg

**Test Plot 114#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_Middle Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.095 \text{ S/m}$ ;  $\epsilon_r = 48.951$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.242 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.386 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.470 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.078 W/kg**  
 Maximum value of SAR (measured) = 0.247 W/kg

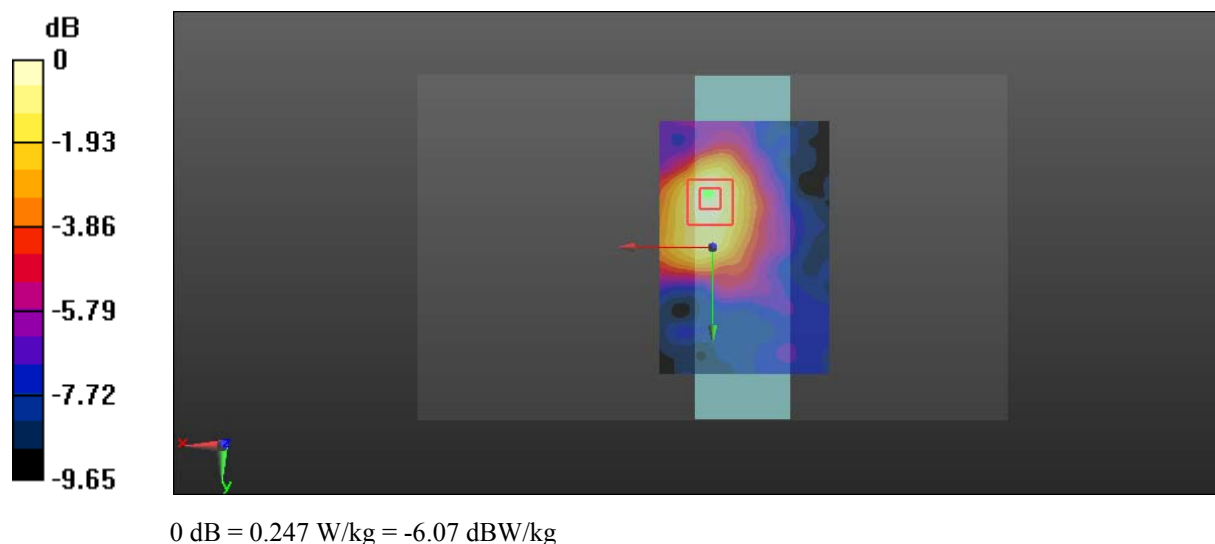

**Test Plot 115#: Wi-Fi 5.8G\_Close To Body Top\_10mm\_High Channel\_Chain 1**

**DUT: C1; Type: GL300K; Serial: 18020600220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5825 \text{ MHz}$ ;  $\sigma = 6.315 \text{ S/m}$ ;  $\epsilon_r = 48.554$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.220 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.573 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 0.444 W/kg  
**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.082 W/kg**  
 Maximum value of SAR (measured) = 0.221 W/kg

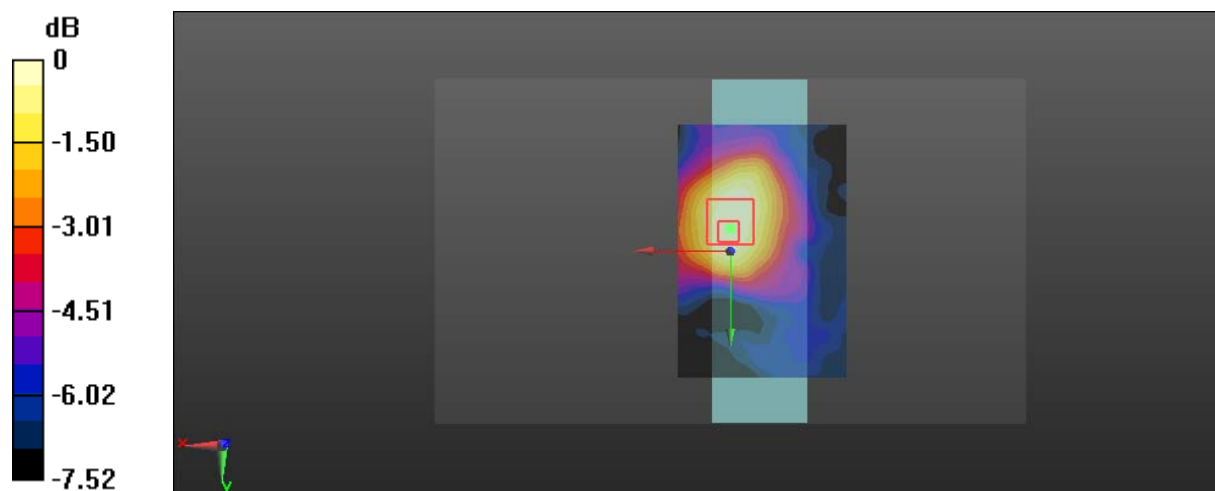

0 dB = 0.221 W/kg = -6.56 dBW/kg

**Test Plot 116#: Wi-Fi 5.8G\_Close To Body Front\_10mm\_Middle Channel\_Chain 1****DUT: C1; Type: GL300K; Serial: 18020600220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.095$  S/m;  $\epsilon_r = 48.951$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0585 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.948 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0704 W/kg

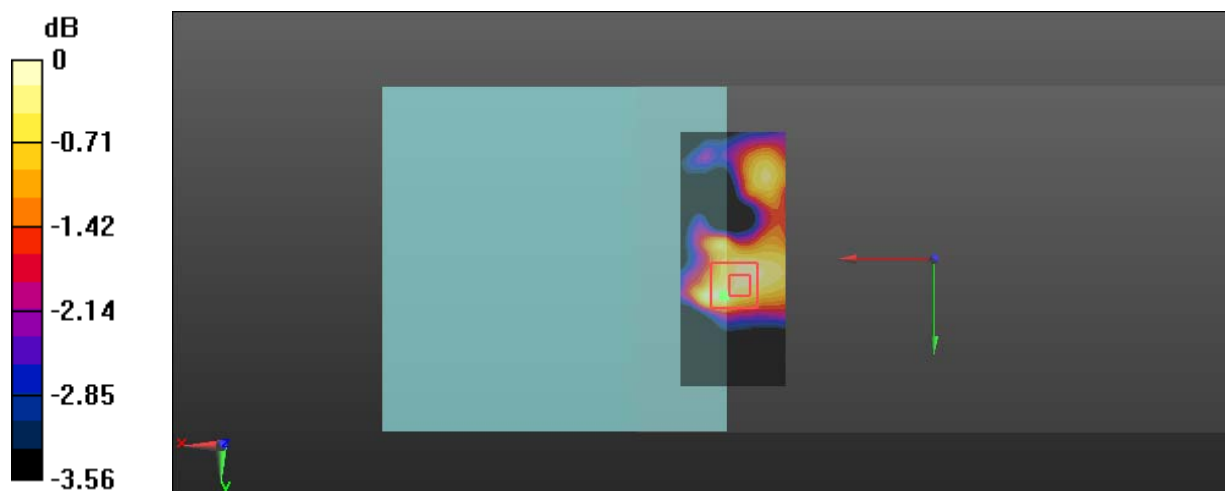

0 dB = 0.0704 W/kg = -11.52 dBW/kg