

Test Plot 1#: SDR 2.4G_1.4MHz_Handheld Left_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.941 \text{ S/m}$; $\epsilon_r = 51.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.147 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.458 V/m; Power Drift = 0.16 dB
 Peak SAR (extrapolated) = 0.236 W/kg
SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.085 W/kg
 Maximum value of SAR (measured) = 0.143 W/kg

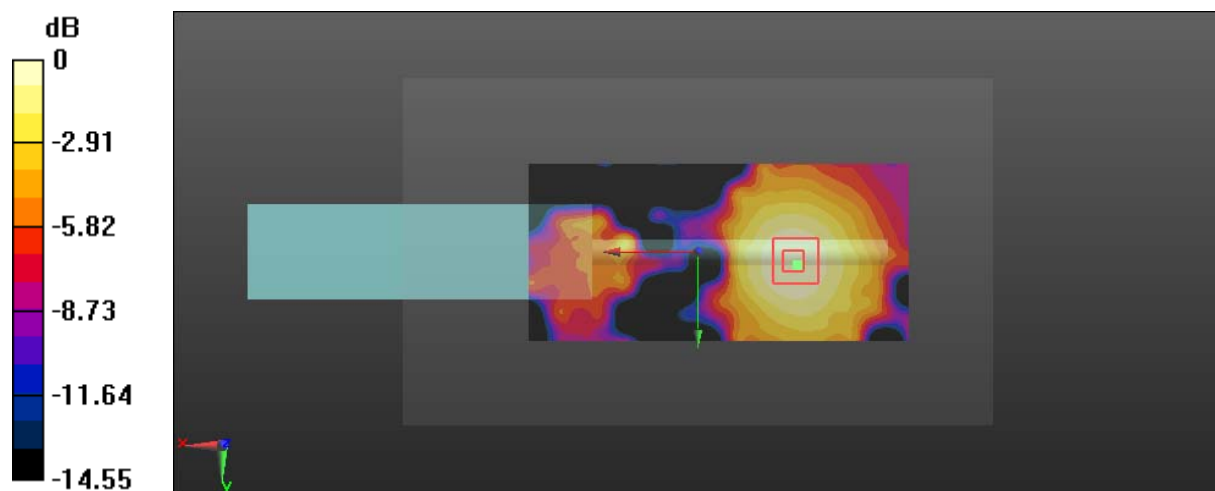

0 dB = 0.143 W/kg = -8.45 dBW/kg

Test Plot 2#: SDR 2.4G_1.4MHz_Handheld Back_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.941 \text{ S/m}$; $\epsilon_r = 51.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.267 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.725 V/m; Power Drift = 0.05 dB
 Peak SAR (extrapolated) = 0.471 W/kg
SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.156 W/kg
 Maximum value of SAR (measured) = 0.285 W/kg

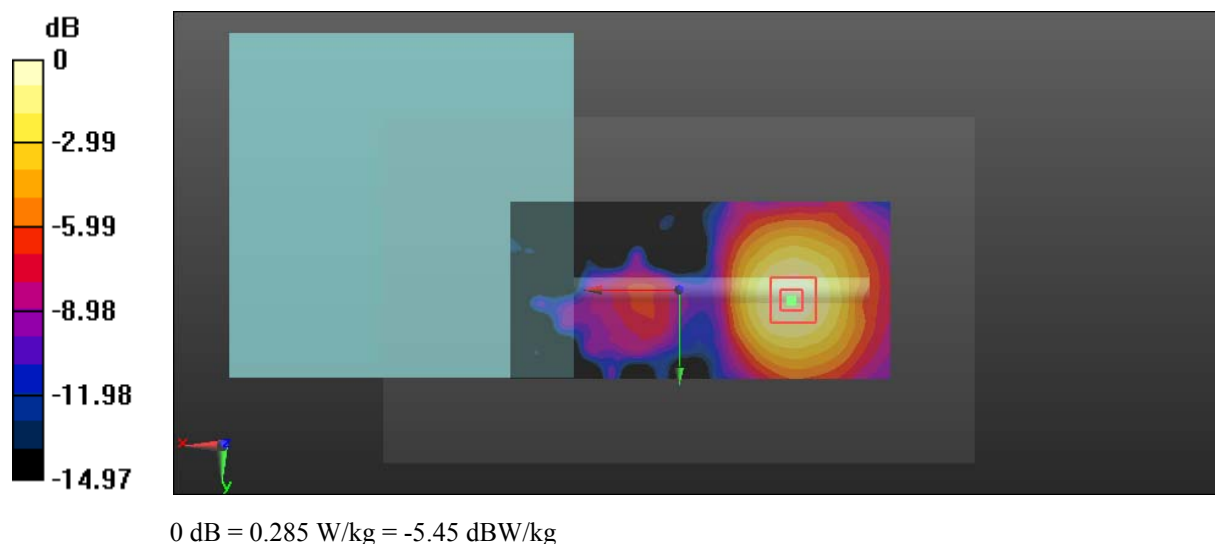

Test Plot 3#: SDR 2.4G_1.4MHz_Handheld Top_0mm_Low Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 53.419$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 7.62 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.23 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 12.9 W/kg

SAR(1 g) = 6.24 W/kg; SAR(10 g) = 2.85 W/kg

Maximum value of SAR (measured) = 7.04 W/kg

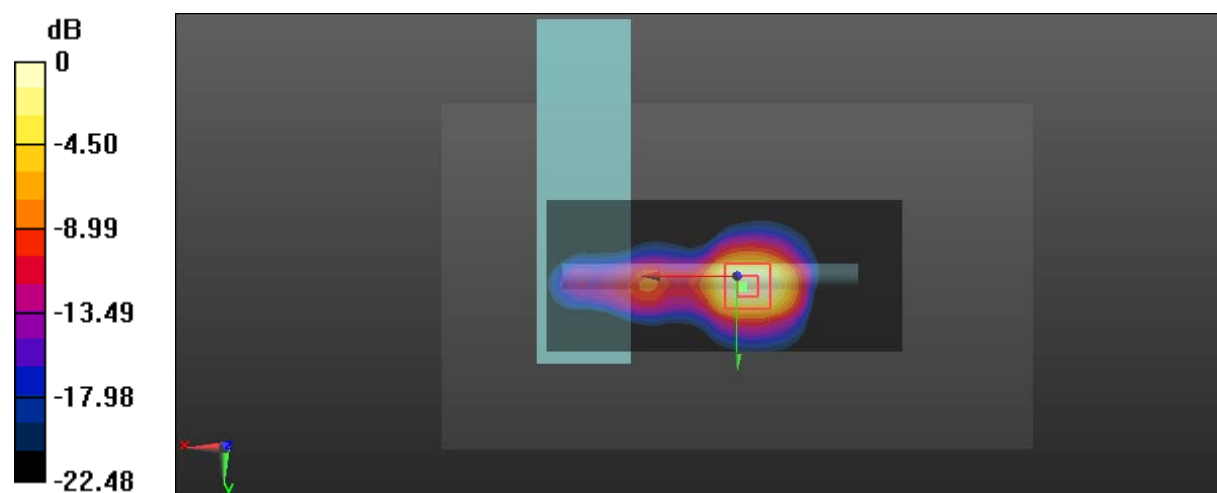

0 dB = 7.04 W/kg = 8.48 dBW/kg

Test Plot 4#: SDR 2.4G_1.4MHz_Handheld Top_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 6.81 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 46.90 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 11.3 W/kg
SAR(1 g) = 5.01 W/kg; SAR(10 g) = 2.23 W/kg
 Maximum value of SAR (measured) = 5.60 W/kg

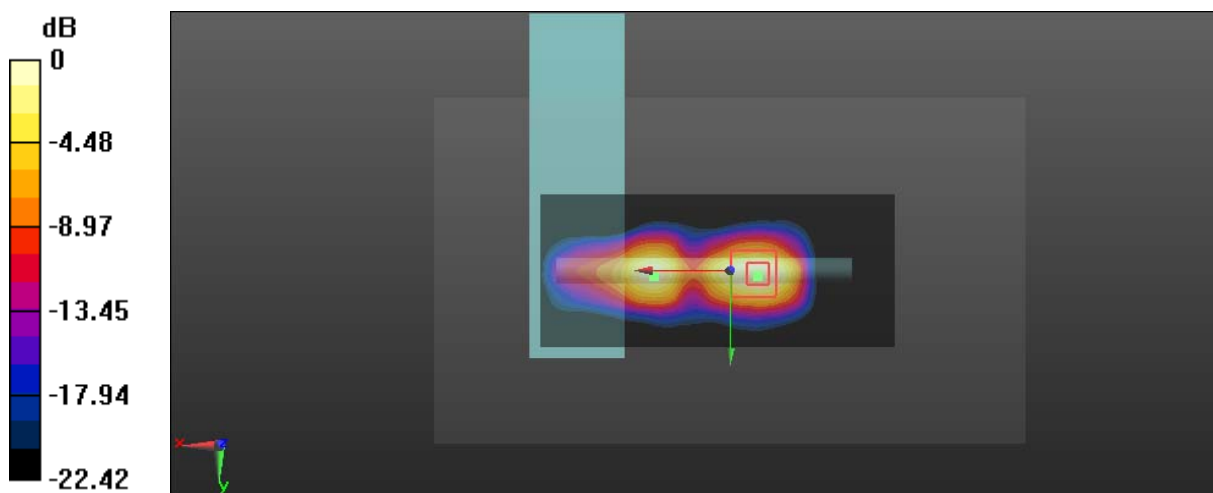

0 dB = 5.60 W/kg = 7.48 dBW/kg

Test Plot 5#: SDR 2.4G_1.4MHz_Handheld Top_0mm_High Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2477.5$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 50.903$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 6.15 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 43.68 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 10.7 W/kg
SAR(1 g) = 4.66 W/kg; SAR(10 g) = 1.93 W/kg
 Maximum value of SAR (measured) = 5.37 W/kg

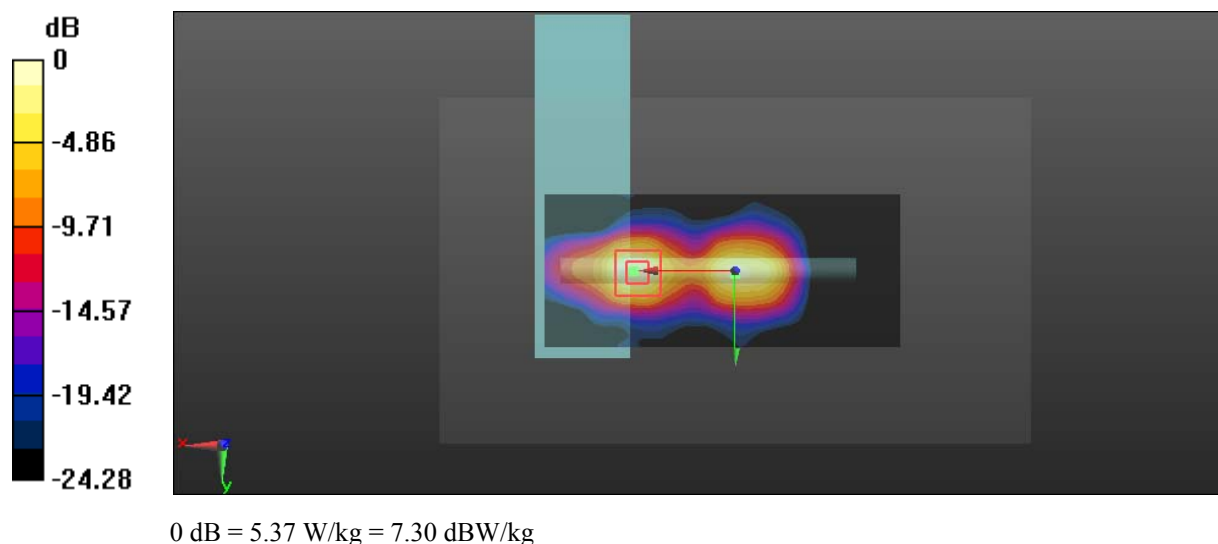

Test Plot 6#: SDR 2.4G_10MHz_Handheld Top_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.941 \text{ S/m}$; $\epsilon_r = 51.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 5.20 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 35.26 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 5.76 W/kg
SAR(1 g) = 2.62 W/kg; SAR(10 g) = 1.15 W/kg
 Maximum value of SAR (measured) = 4.57 W/kg

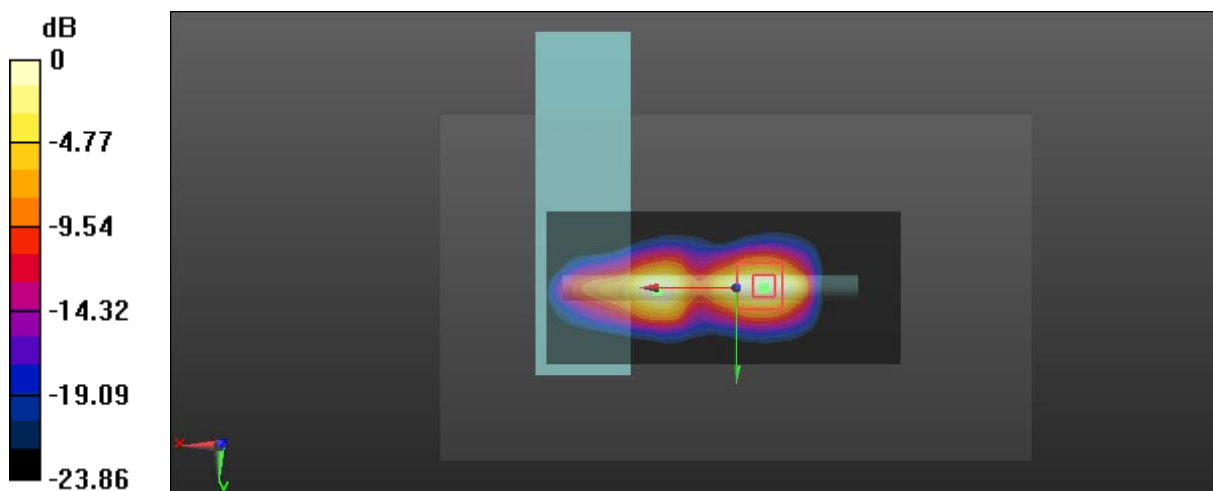

0 dB = 4.57 W/kg = 6.60 dBW/kg

Test Plot 7#: SDR 2.4G_20MHz_Handheld Top_0mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 5.08 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.56 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 5.88 W/kg

SAR(1 g) = 2.64 W/kg; SAR(10 g) = 1.17 W/kg

Maximum value of SAR (measured) = 4.39 W/kg

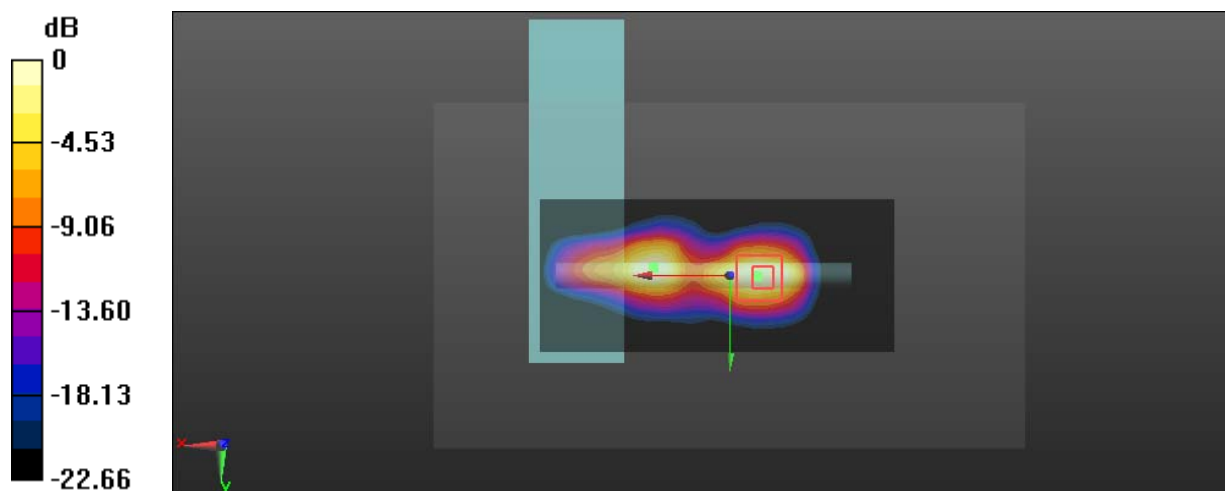

0 dB = 4.39 W/kg = 6.42 dBW/kg

Test Plot 8#: SDR 2.4G_1.4MHz_Handheld Front_0mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.325 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.14 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.494 W/kg

SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.314 W/kg

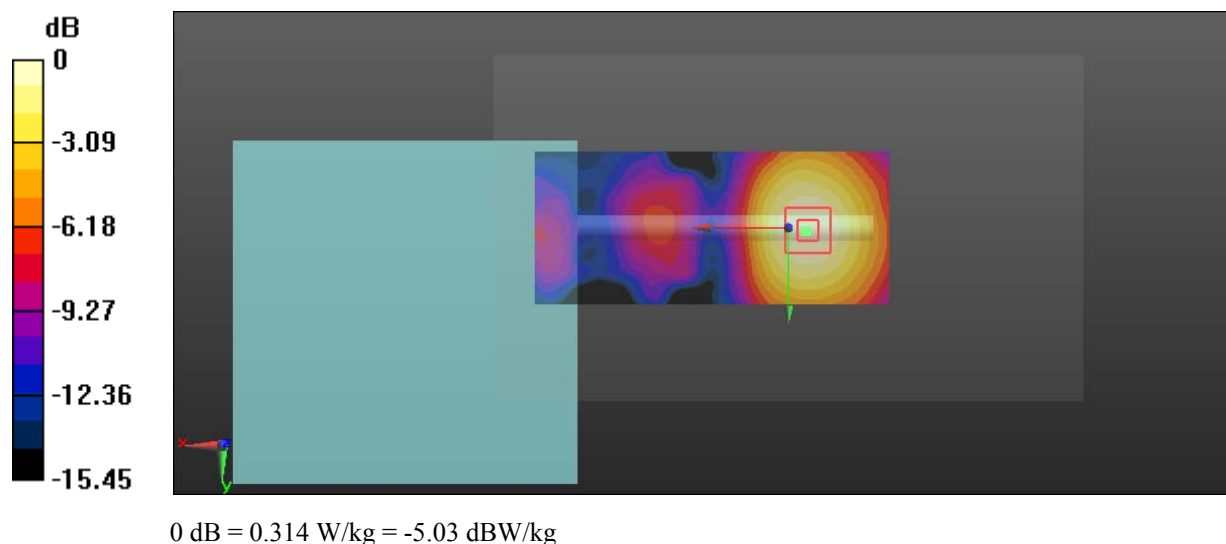

Test Plot 9#: SDR 2.4G_1.4MHz_Close To Body Left_10mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.126 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.308 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.203 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.074 W/kg

Maximum value of SAR (measured) = 0.121 W/kg

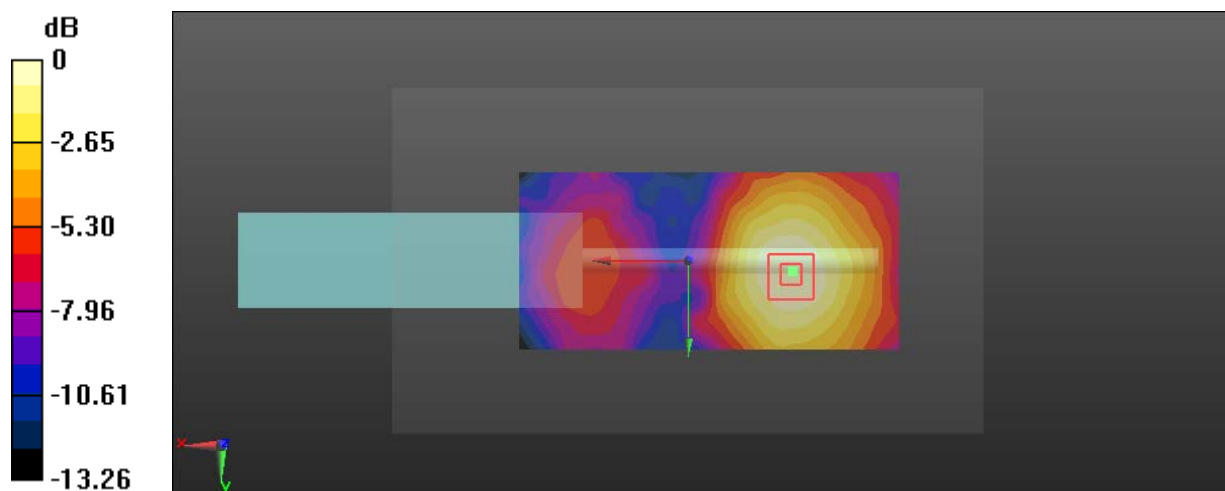

0 dB = 0.121 W/kg = -9.17 dBW/kg

Test Plot 10#: SDR 2.4G_1.4MHz_Close To Body Back_10mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.157 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.108 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.090 W/kg

Maximum value of SAR (measured) = 0.154 W/kg

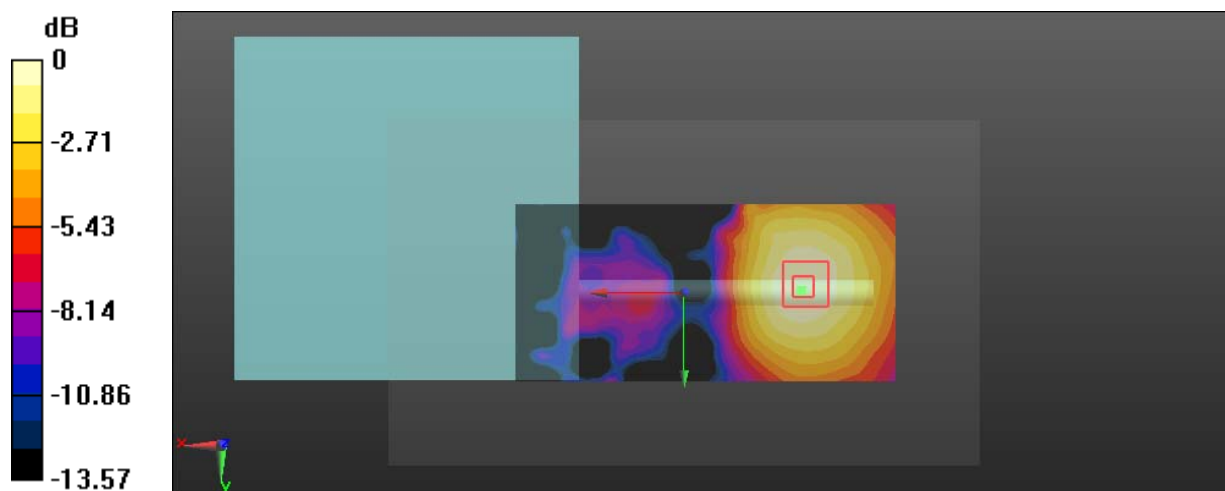

0 dB = 0.154 W/kg = -8.12 dBW/kg

Test Plot 11#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_Low Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.905$ S/m; $\epsilon_r = 53.419$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.932 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.27 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.825 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 0.904 W/kg

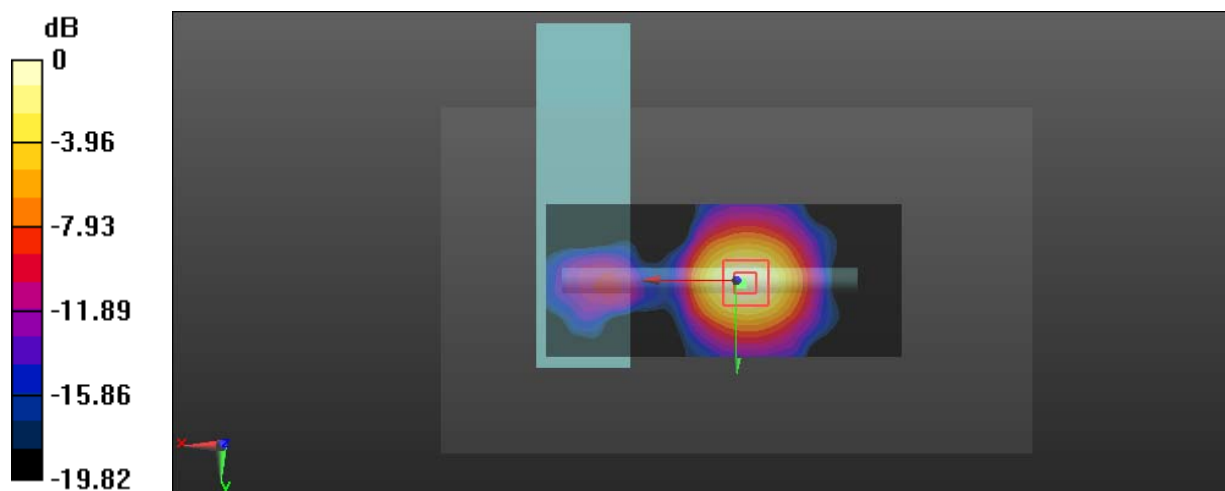

0 dB = 0.904 W/kg = -0.44 dBW/kg

Test Plot 12#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.941 \text{ S/m}$; $\epsilon_r = 51.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.842 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 20.05 V/m; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 1.36 W/kg
SAR(1 g) = 0.751 W/kg; SAR(10 g) = 0.401 W/kg
 Maximum value of SAR (measured) = 0.821 W/kg

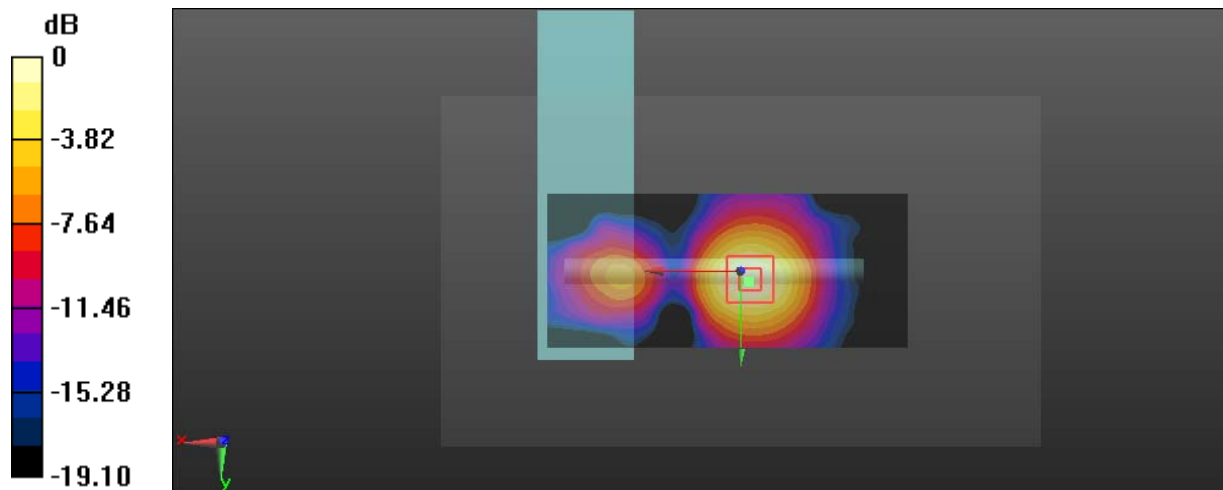

0 dB = 0.821 W/kg = -0.86 dBW/kg

Test Plot 13#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_High Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2477.5$ MHz; $\sigma = 1.995$ S/m; $\epsilon_r = 50.903$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.822 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.77 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.713 W/kg; SAR(10 g) = 0.379 W/kg
 Maximum value of SAR (measured) = 0.777 W/kg

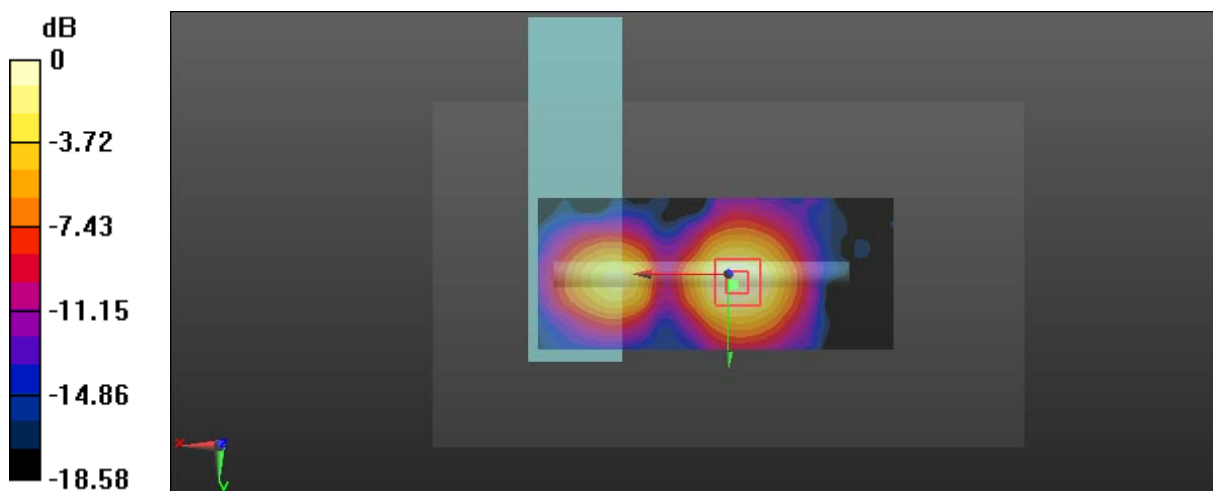

0 dB = 0.777 W/kg = -1.10 dBW/kg

Test Plot 14#: SDR 2.4G_10MHz_Close To Body Top_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.971 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 11.86 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 1.18 W/kg
SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.314 W/kg
 Maximum value of SAR (measured) = 0.966 W/kg

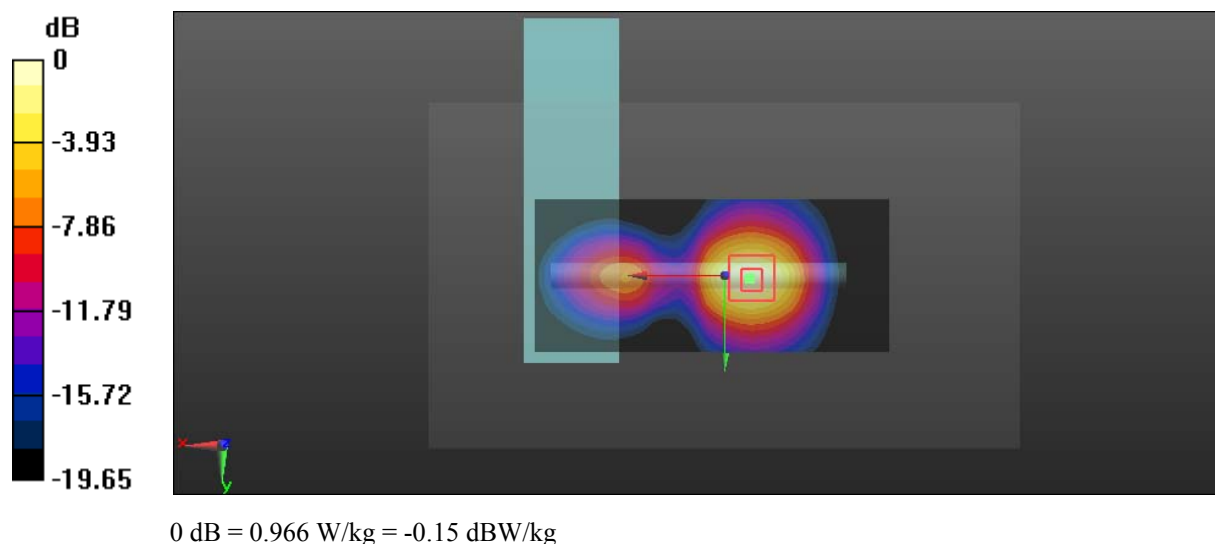

Test Plot 15#: SDR 2.4G_20MHz_Close To Body Top_10mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.941$ S/m; $\epsilon_r = 51.363$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.952 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.25 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.309 W/kg

Maximum value of SAR (measured) = 0.921 W/kg

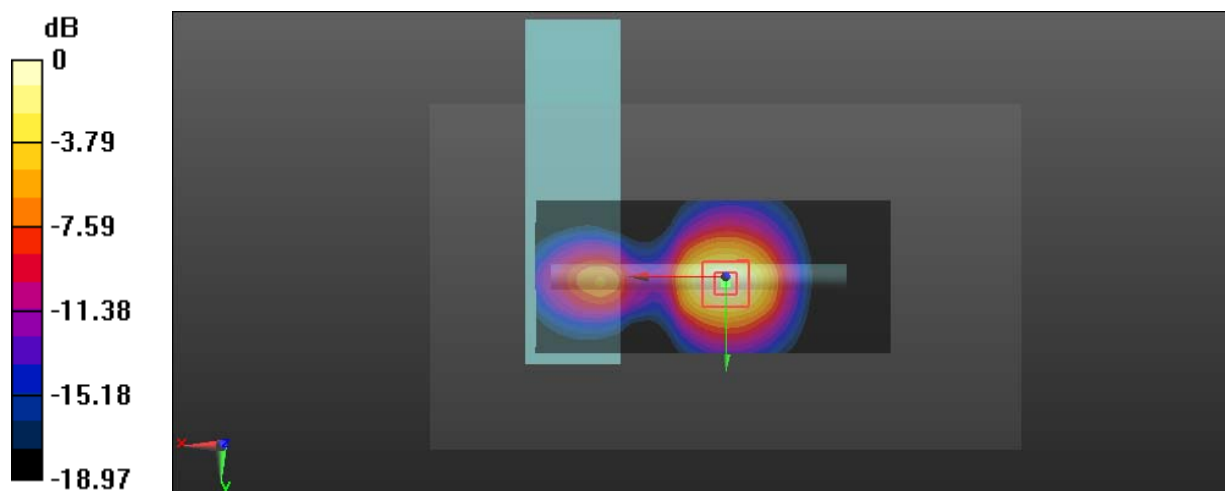

0 dB = 0.921 W/kg = -0.36 dBW/kg

Test Plot 16#: SDR 2.4G_1.4MHz_Close To Body Front_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.941 \text{ S/m}$; $\epsilon_r = 51.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.223 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 10.12 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.372 W/kg
SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.129 W/kg
 Maximum value of SAR (measured) = 0.228 W/kg

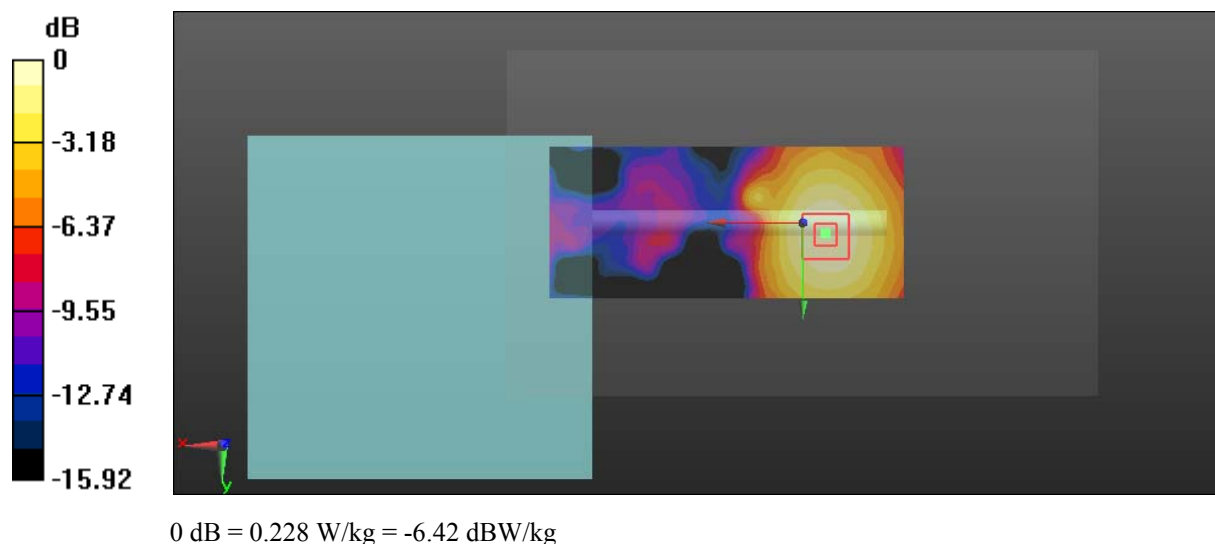

Test Plot 17#: SDR 5.8G_1.4MHz_Handheld Left_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0948 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 2.515 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.217 W/kg
SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.037 W/kg
 Maximum value of SAR (measured) = 0.0978 W/kg

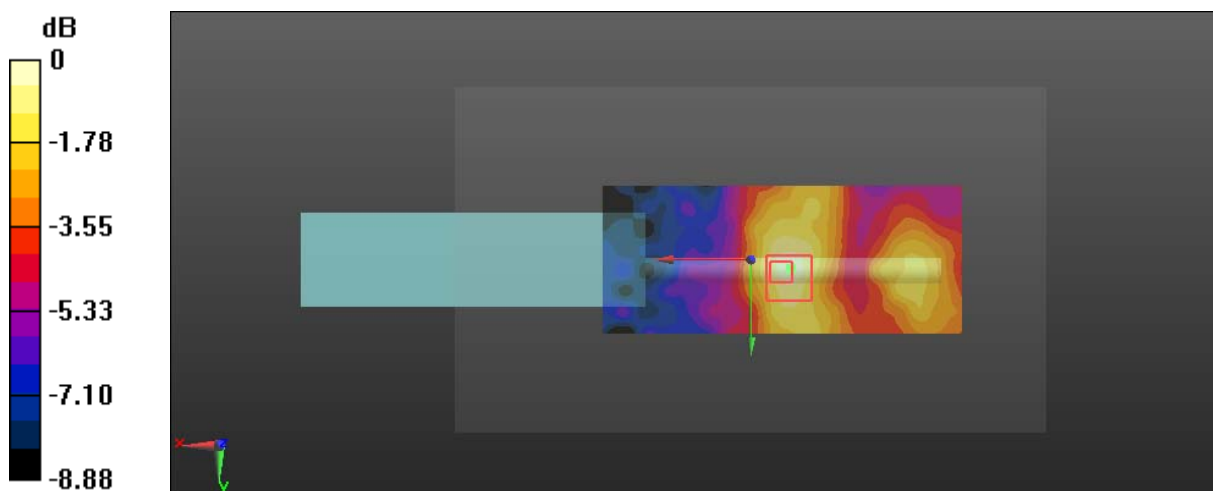

0 dB = 0.0978 W/kg = -10.10 dBW/kg

Test Plot 18#: SDR 5.8G_1.4MHz_Handheld Back_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.193 \text{ S/m}$; $\epsilon_r = 49.16$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.274 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 4.121 V/m; Power Drift = -0.13 dB
 Peak SAR (extrapolated) = 0.465 W/kg
SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.061 W/kg
 Maximum value of SAR (measured) = 0.247 W/kg

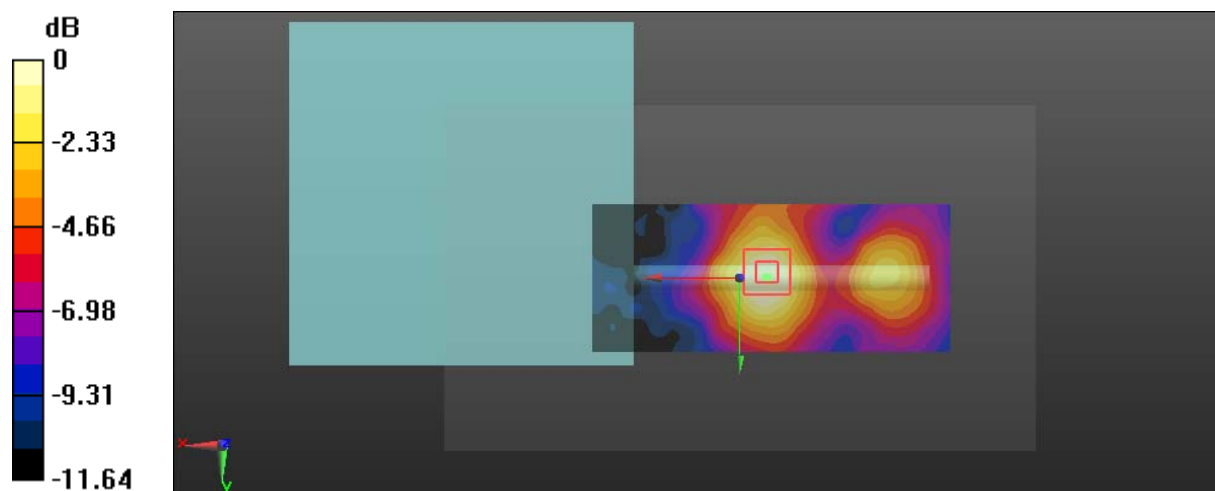

0 dB = 0.247 W/kg = -6.07 dBW/kg

Test Plot 19#: SDR 5.8G_1.4MHz_Handheld Top_0mm_Low Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5728.5$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 49.222$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.96 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 12.72 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 10.9 W/kg

SAR(1 g) = 2.47 W/kg; SAR(10 g) = 0.775 W/kg

Maximum value of SAR (measured) = 5.81 W/kg

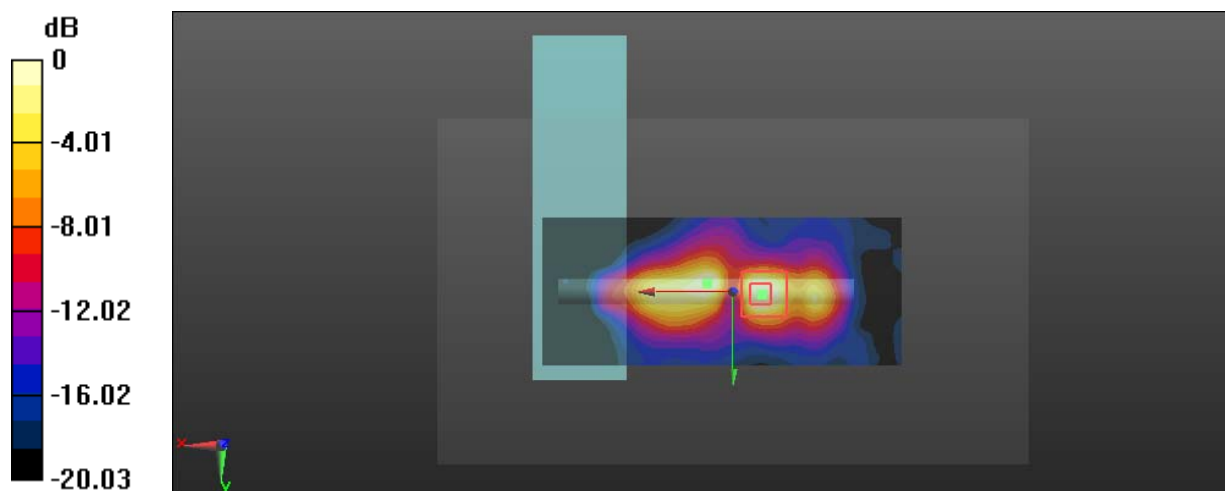

0 dB = 5.81 W/kg = 7.64 dBW/kg

Test Plot 20#: SDR 5.8G_1.4MHz_Handheld Top_0mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.75 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 10.23 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 13.5 W/kg

SAR(1 g) = 2.21 W/kg; SAR(10 g) = 0.597 W/kg

Maximum value of SAR (measured) = 6.89 W/kg

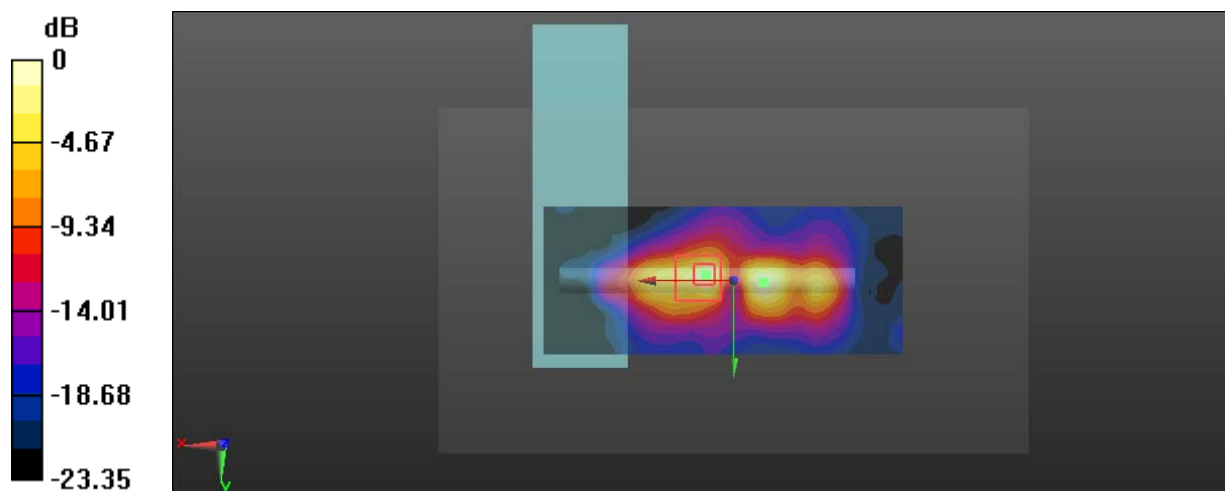

0 dB = 6.89 W/kg = 8.38 dBW/kg

Test Plot 21#: SDR 5.8G_1.4MHz_Handheld Top_0mm_High Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5846.5$ MHz; $\sigma = 6.269$ S/m; $\epsilon_r = 49.097$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 6.31 W/kg

Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 8.547 V/m; Power Drift = 0.16 dB
 Peak SAR (extrapolated) = 9.01 W/kg
SAR(1 g) = 1.92 W/kg; SAR(10 g) = 0.581 W/kg
 Maximum value of SAR (measured) = 4.28 W/kg

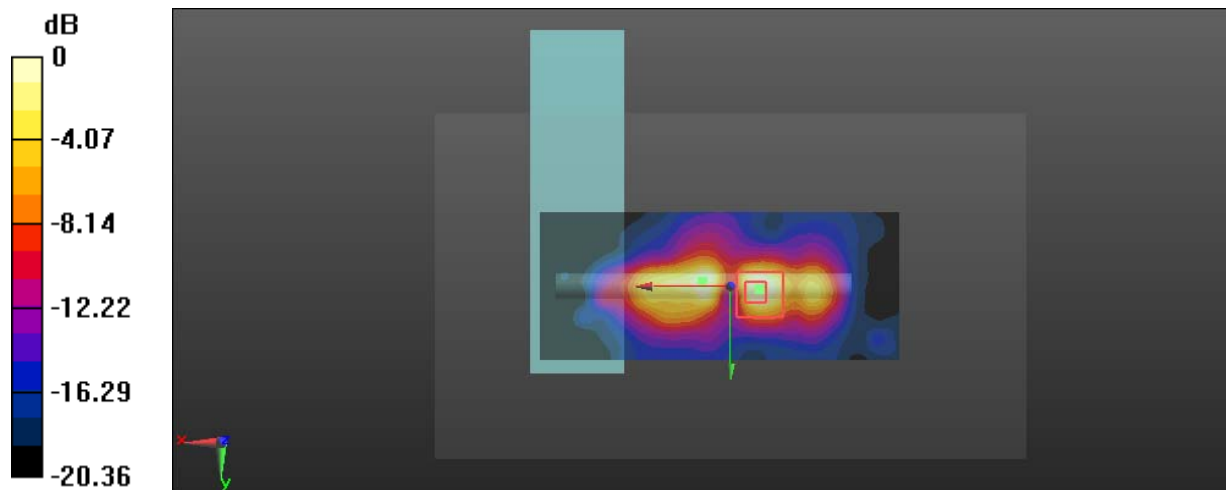

0 dB = 4.28 W/kg = 6.31 dBW/kg

Test Plot 22#: SDR 5.8G_10MHz_Handheld Top_0mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.194$ S/m; $\epsilon_r = 49.159$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 6.16 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 10.43 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 8.18 W/kg
SAR(1 g) = 1.65 W/kg; SAR(10 g) = 0.499 W/kg
 Maximum value of SAR (measured) = 3.94 W/kg

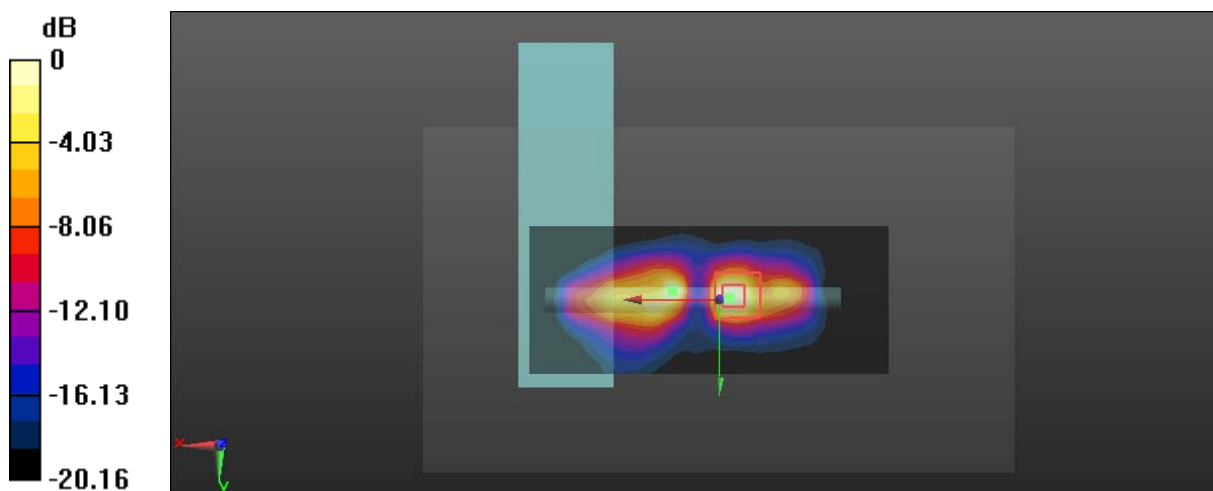

0 dB = 3.94 W/kg = 5.95 dBW/kg

Test Plot 23#: SDR 5.8G_20MHz_Handheld Top_0mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.194$ S/m; $\epsilon_r = 49.159$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.43 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 12.91 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.1 W/kg

SAR(1 g) = 2.27 W/kg; SAR(10 g) = 0.615 W/kg

Maximum value of SAR (measured) = 5.67 W/kg

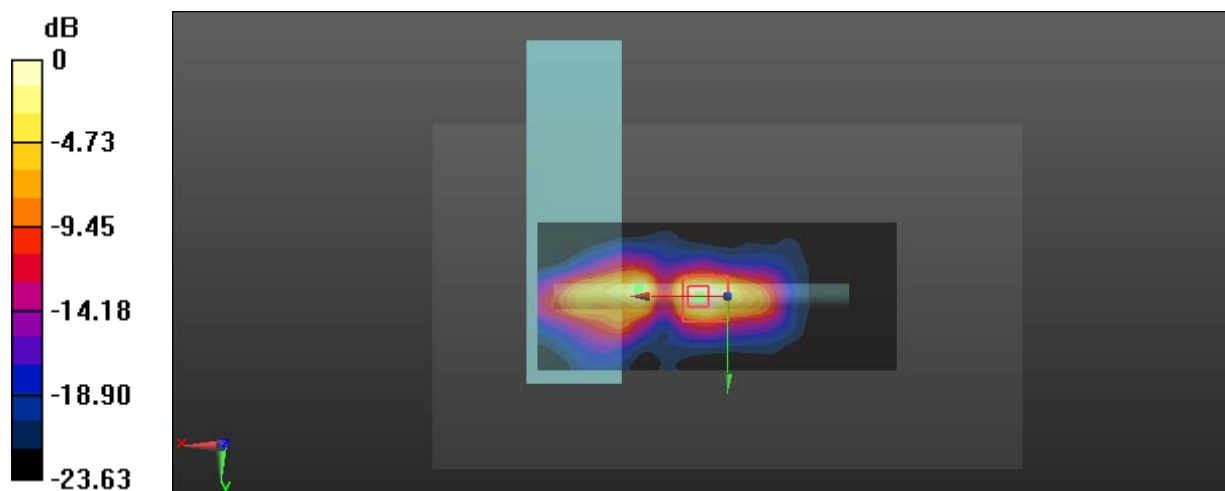

0 dB = 5.67 W/kg = 7.54 dBW/kg

Test Plot 24#: SDR 5.8G_1.4MHz_Handheld Front_0mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.271 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.451 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.060 W/kg

Maximum value of SAR (measured) = 0.235 W/kg

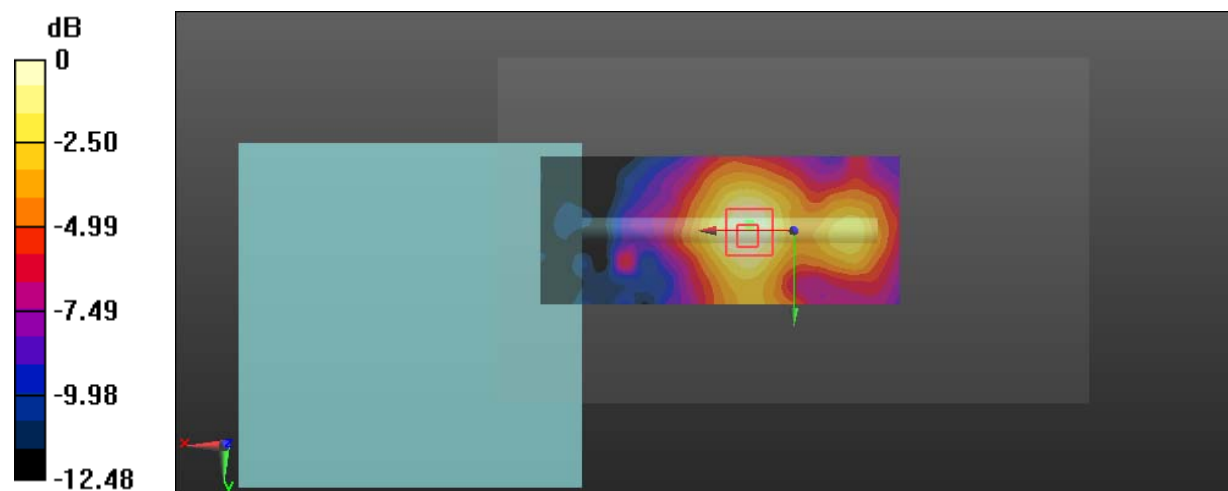

Test Plot 25#: SDR 5.8G_1.4MHz_Close To Body Left_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.0884 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 2.405 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.036 W/kg
 Maximum value of SAR (measured) = 0.0916 W/kg

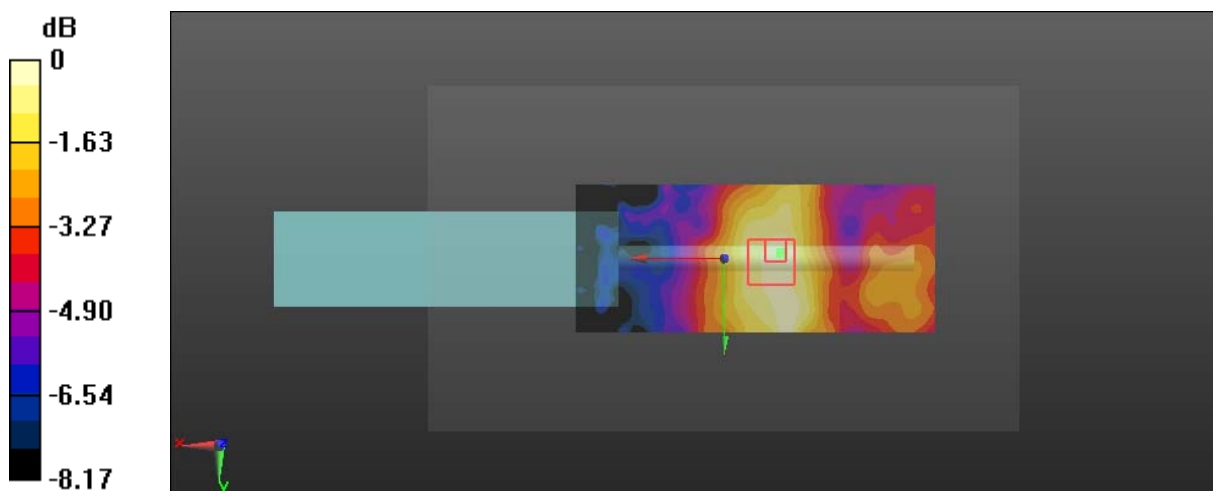

0 dB = 0.0916 W/kg = -10.38 dBW/kg

Test Plot 26#: SDR 5.8G_1.4MHz_Close To Body Back_10mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.332 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.321 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.177 W/kg

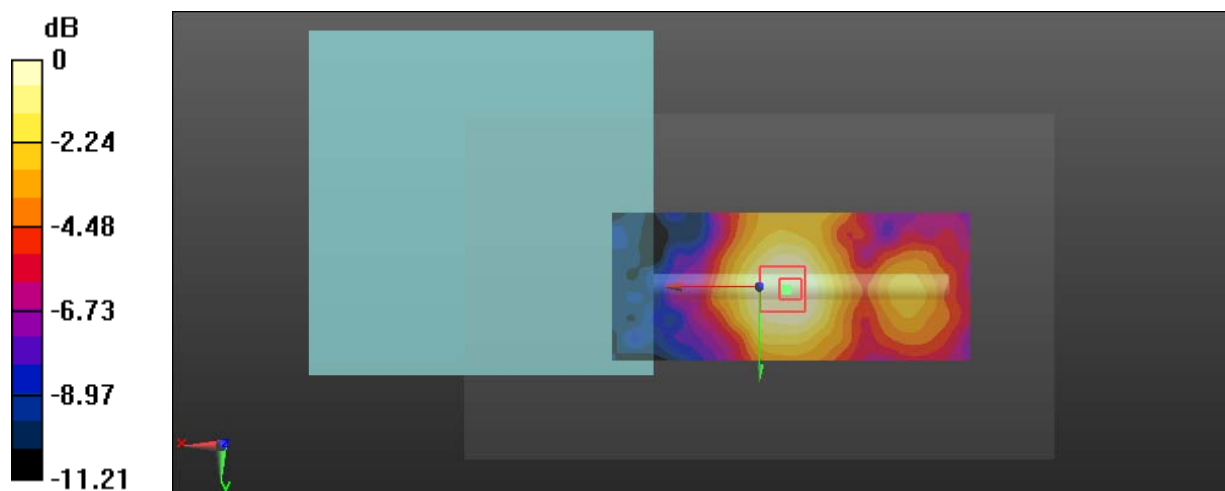

0 dB = 0.177 W/kg = -7.52 dBW/kg

Test Plot 27#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_Low Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**


Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5728.5$ MHz; $\sigma = 6.12$ S/m; $\epsilon_r = 49.222$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.48 W/kg

Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
Reference Value = 12.21 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.239 W/kg
Maximum value of SAR (measured) = 1.42 W/kg

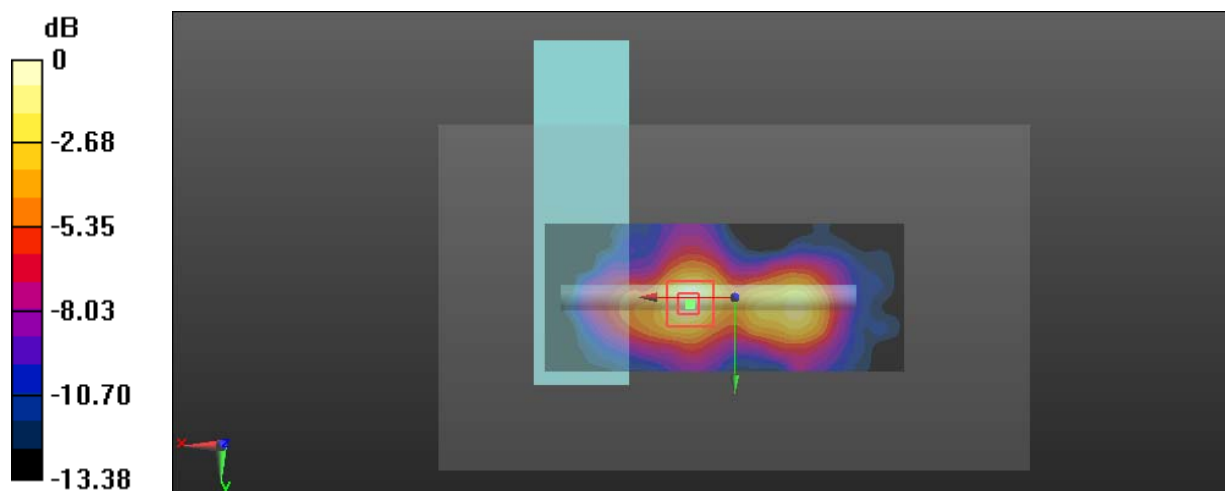

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Plot 28#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.971 W/kg

Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 7.709 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 1.68 W/kg
SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.189 W/kg
 Maximum value of SAR (measured) = 0.966 W/kg

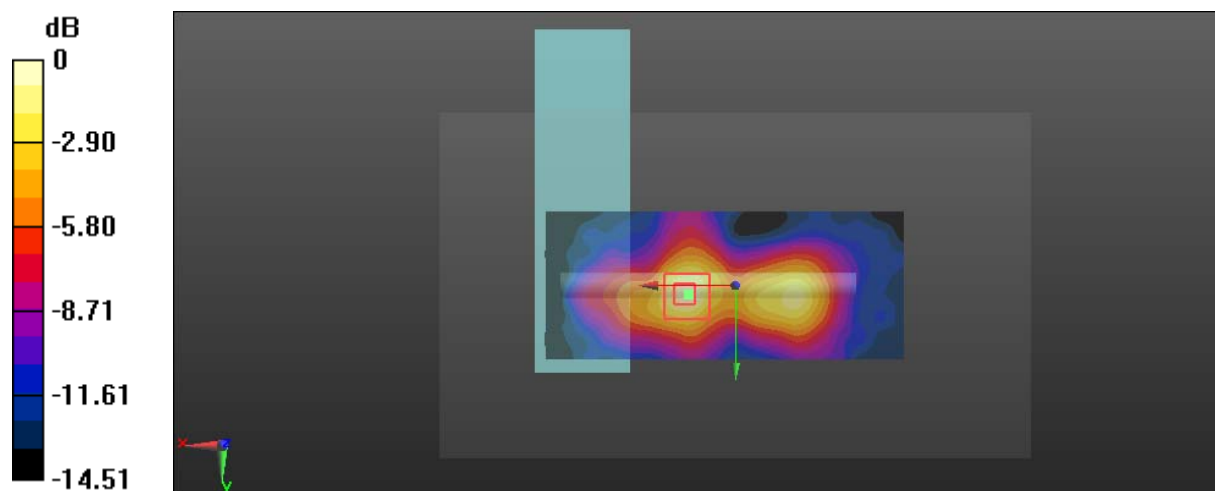

0 dB = 0.966 W/kg = -0.15 dBW/kg

Test Plot 29#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_High Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5846.5$ MHz; $\sigma = 6.269$ S/m; $\epsilon_r = 49.097$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.951 W/kg

Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 7.689 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.183 W/kg
 Maximum value of SAR (measured) = 0.915 W/kg

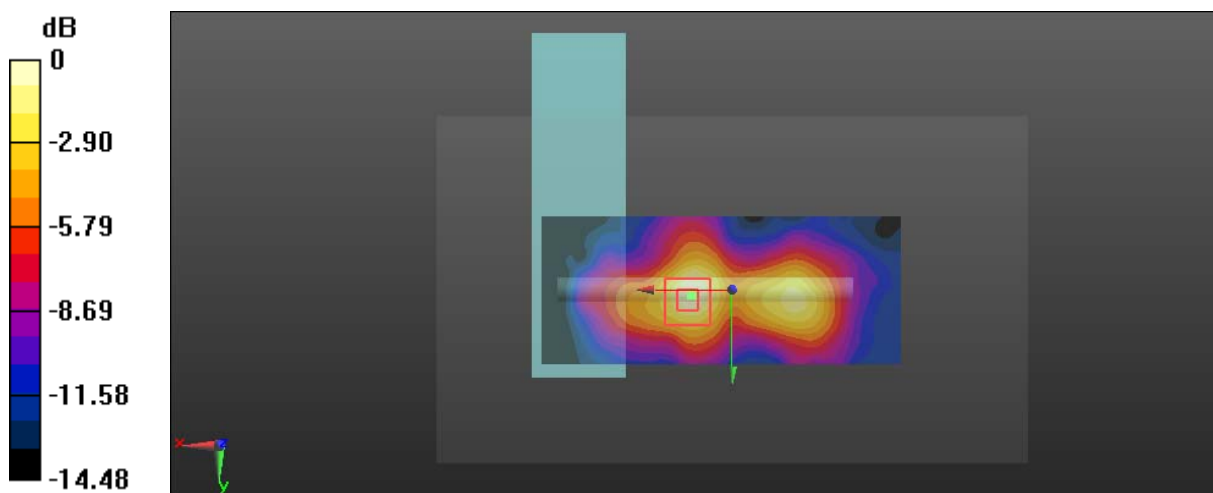

0 dB = 0.915 W/kg = -0.39 dBW/kg

Test Plot 30#: SDR 5.8G_10MHz_Close To Body Top_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.194$ S/m; $\epsilon_r = 49.159$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.806 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 7.567 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 1.43 W/kg
SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.173 W/kg
 Maximum value of SAR (measured) = 0.752 W/kg

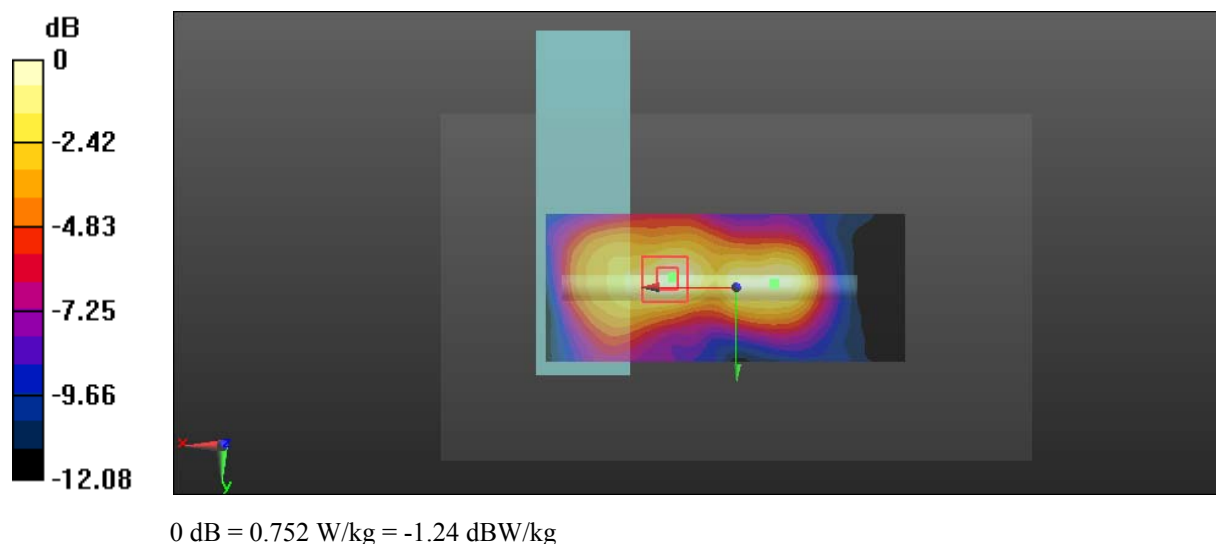

Test Plot 31#: SDR 5.8G_20MHz_Close To Body Top_10mm_Middle Channel_Chain 0

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5 \text{ MHz}$; $\sigma = 6.194 \text{ S/m}$; $\epsilon_r = 49.159$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 7.232 V/m; Power Drift = 0.13 dB
 Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.215 W/kg
 Maximum value of SAR (measured) = 1.10 W/kg

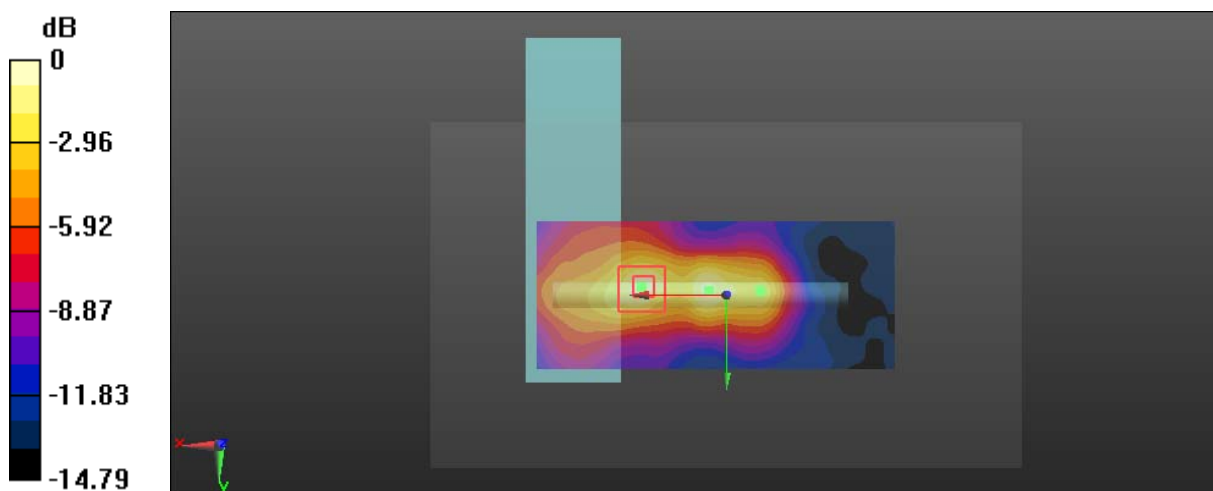

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Plot 32#: SDR 5.8G_1.4MHz_Close To Body Front_10mm_Middle Channel_Chain 0**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.193$ S/m; $\epsilon_r = 49.16$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.127 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.701 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.128 W/kg

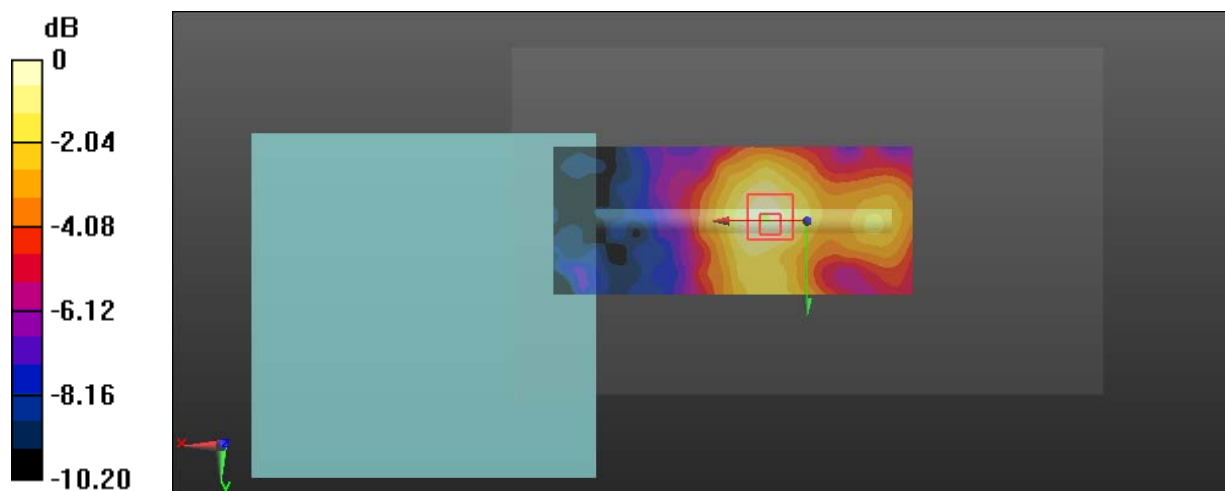

0 dB = 0.128 W/kg = -8.93 dBW/kg

Test Plot 33#: SDR 2.4G_1.4MHz_Handheld Right_0mm_Middle Channel_Chain 1**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 52.363$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.228 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.742 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.370 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.129 W/kg

Maximum value of SAR (measured) = 0.228 W/kg

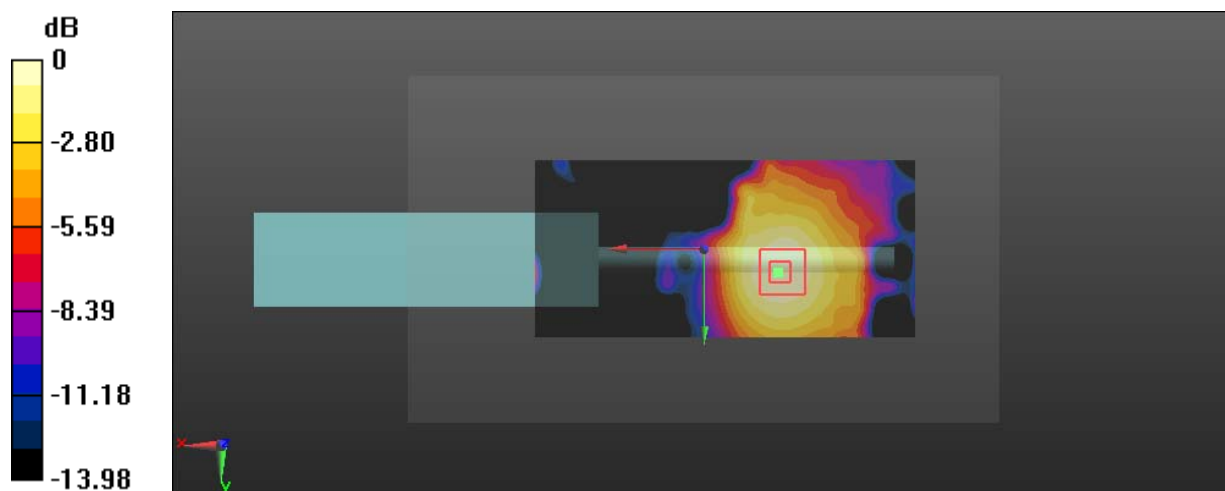

0 dB = 0.228 W/kg = -6.42 dBW/kg

Test Plot 34#: SDR 2.4G_1.4MHz_Handheld Back_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.288 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.568 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 0.470 W/kg
SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.160 W/kg
 Maximum value of SAR (measured) = 0.285 W/kg

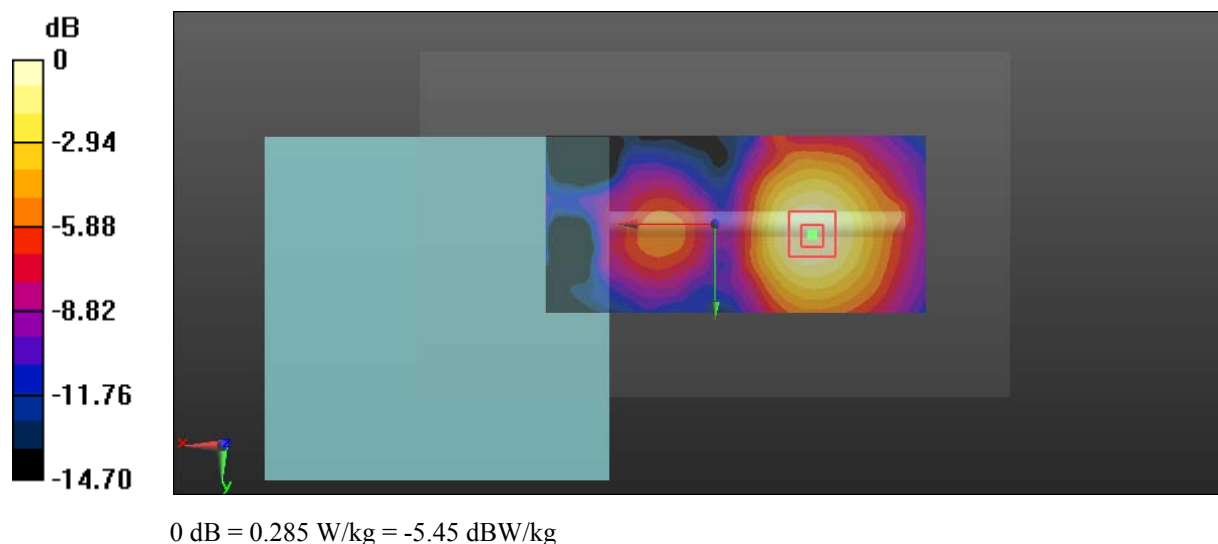

Test Plot 35#: SDR 2.4G_1.4MHz_Handheld Top_0mm_Low Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 54.377$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 13.5 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 53.81 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 14.4 W/kg
SAR(1 g) = 6.69 W/kg; SAR(10 g) = 2.91 W/kg
 Maximum value of SAR (measured) = 11.5 W/kg

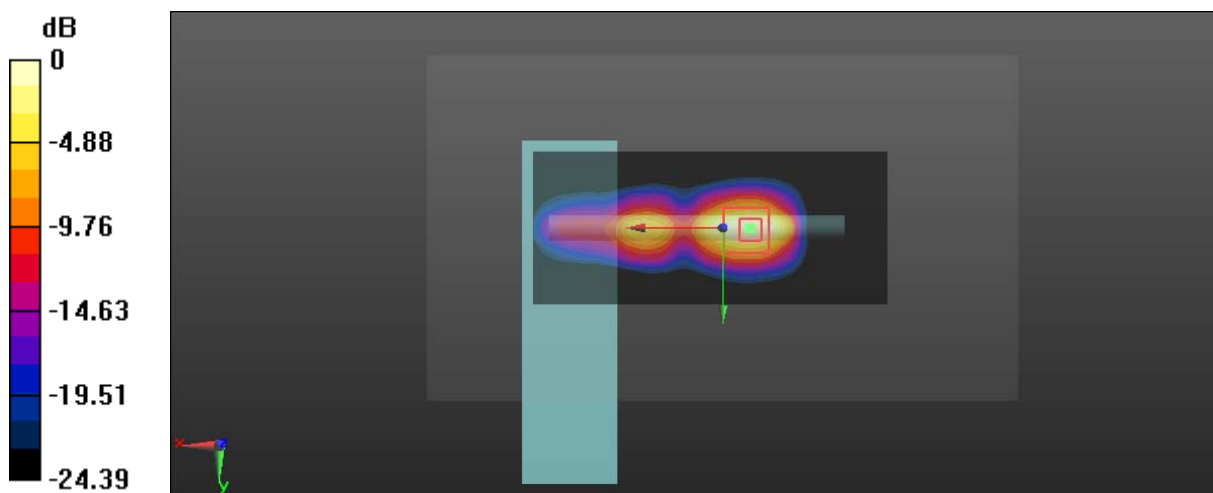

0 dB = 11.5 W/kg = 10.61 dBW/kg

Test Plot 36#: SDR 2.4G_1.4MHz_Handheld Top_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 10.1 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 50.76 V/m; Power Drift = -0.09 dB
 Peak SAR (extrapolated) = 11.3 W/kg
SAR(1 g) = 5.12 W/kg; SAR(10 g) = 2.23 W/kg
 Maximum value of SAR (measured) = 9.12 W/kg

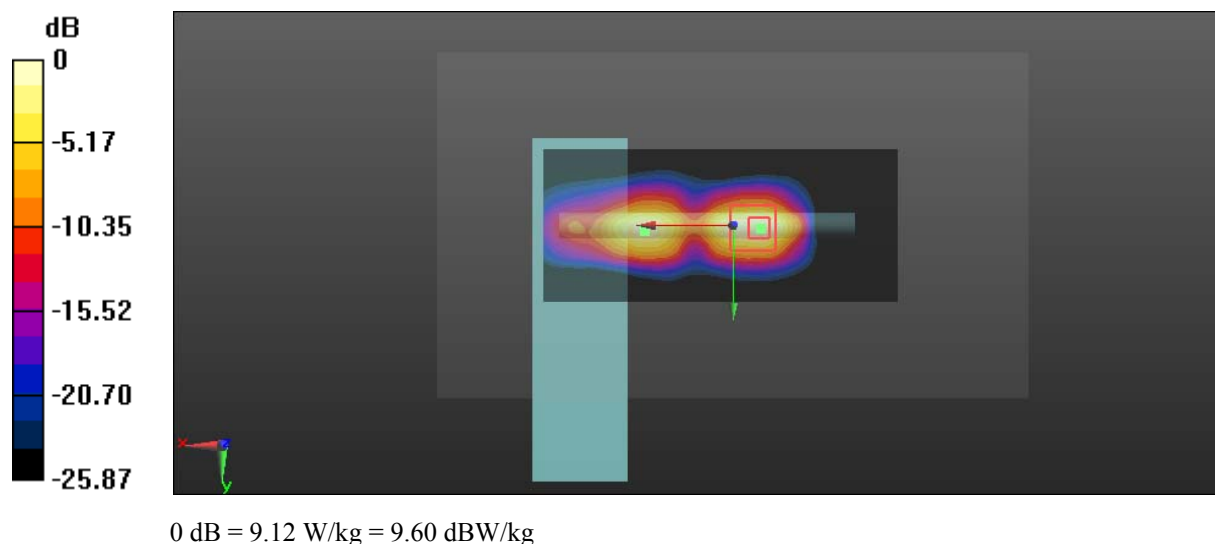

Test Plot 37#: SDR 2.4G_1.4MHz_Handheld Top_0mm_High Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2477.5 \text{ MHz}$; $\sigma = 1.989 \text{ S/m}$; $\epsilon_r = 51.89$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 8.76 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 31.18 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 9.71 W/kg
SAR(1 g) = 4.45 W/kg; SAR(10 g) = 1.87 W/kg
 Maximum value of SAR (measured) = 7.76 W/kg

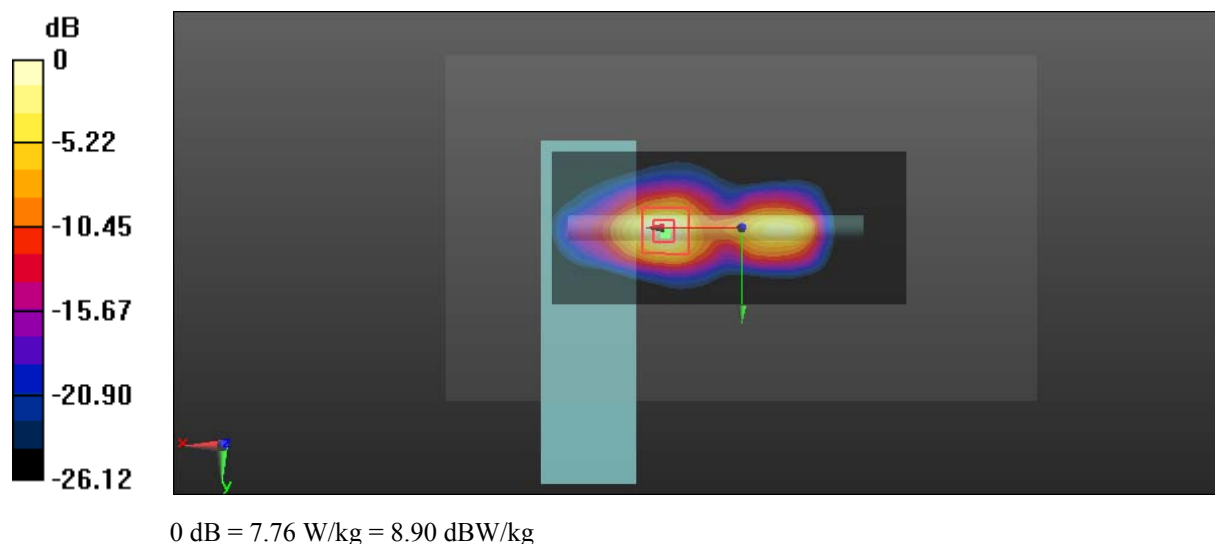

Test Plot 38#: SDR 2.4G_10MHz_Handheld Top_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 52.363$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 5.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 37.40 V/m; Power Drift = -0.10 dB
 Peak SAR (extrapolated) = 6.39 W/kg
SAR(1 g) = 2.85 W/kg; SAR(10 g) = 1.22 W/kg
 Maximum value of SAR (measured) = 5.13 W/kg

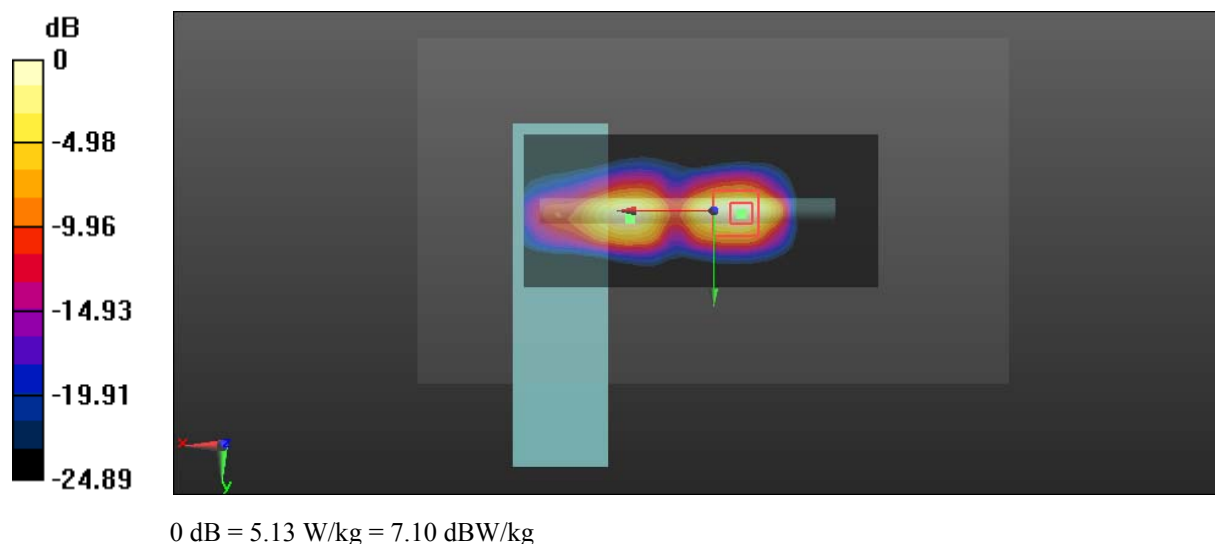

Test Plot 39#: SDR 2.4G_20MHz_Handheld Top_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 52.363$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 6.12 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 37.30 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 6.63 W/kg
SAR(1 g) = 2.95 W/kg; SAR(10 g) = 1.27 W/kg
 Maximum value of SAR (measured) = 5.33 W/kg

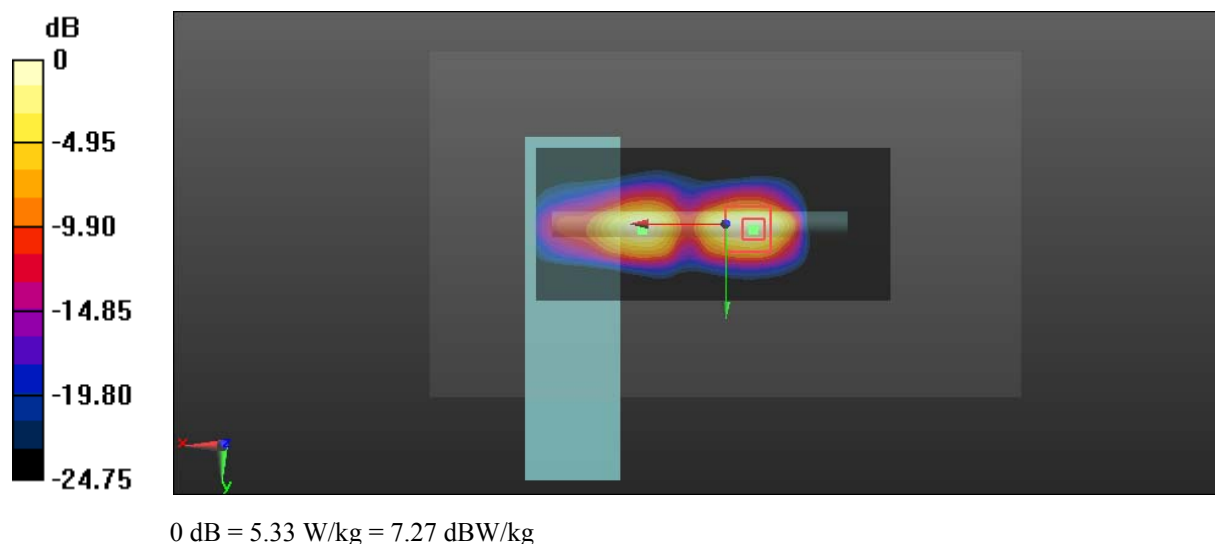

Test Plot 40#: SDR 2.4G_1.4MHz_Handheld Front_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 52.363$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.393 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 13.16 V/m; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.658 W/kg
SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.220 W/kg
 Maximum value of SAR (measured) = 0.407 W/kg

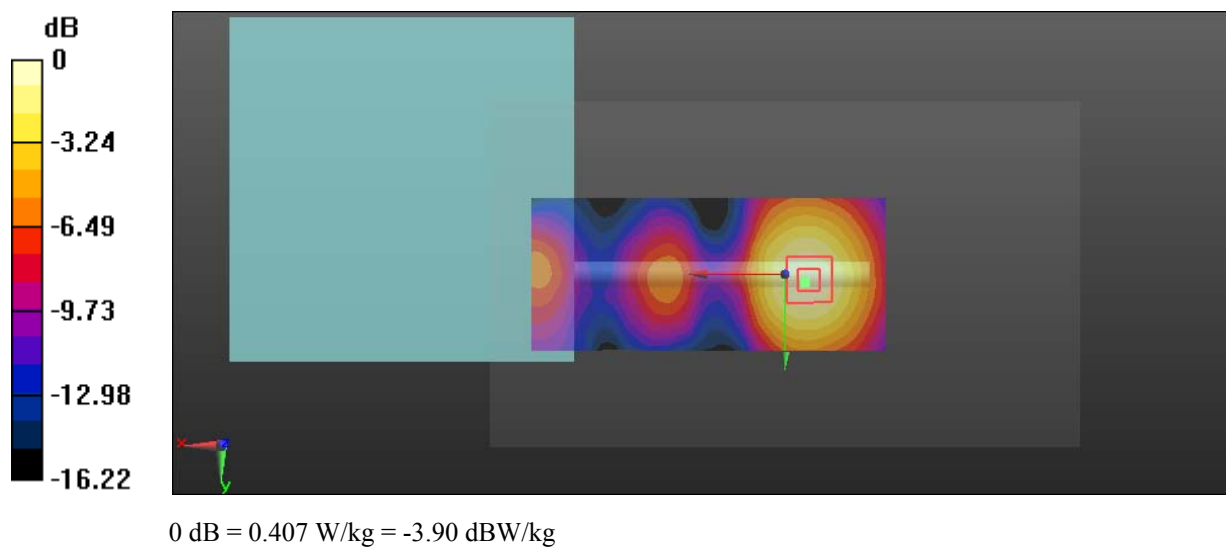

Test Plot 41#: SDR 2.4G_1.4MHz_Close To Body Right_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.163 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.182 V/m; Power Drift = 0.19 dB
 Peak SAR (extrapolated) = 0.271 W/kg
SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.093 W/kg
 Maximum value of SAR (measured) = 0.156 W/kg

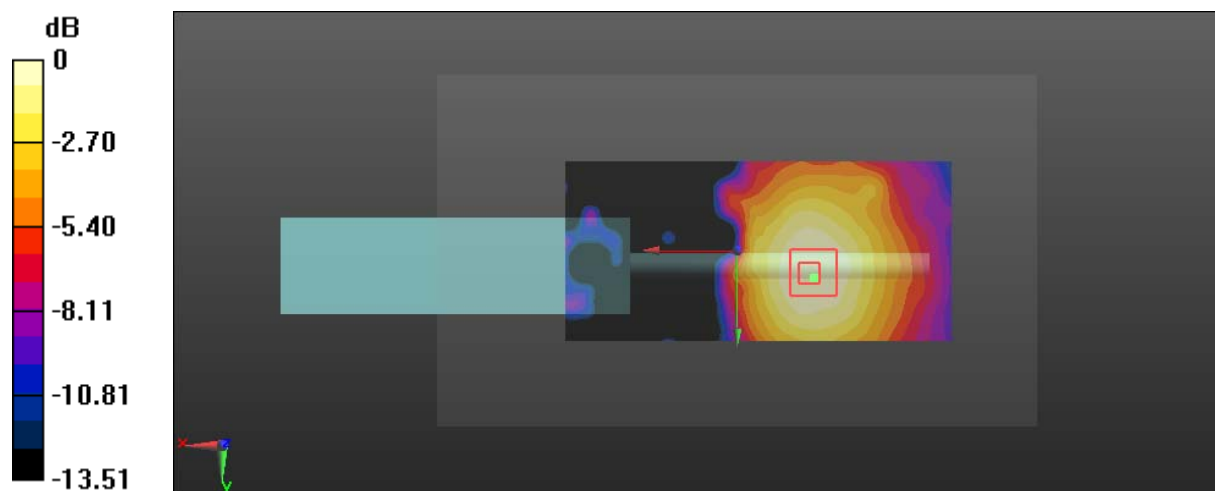

0 dB = 0.156 W/kg = -8.07 dBW/kg

Test Plot 42#: SDR 2.4G_1.4MHz_Close To Body Back_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x71x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.206 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 3.440 V/m; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 0.317 W/kg
SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.110 W/kg
 Maximum value of SAR (measured) = 0.188 W/kg

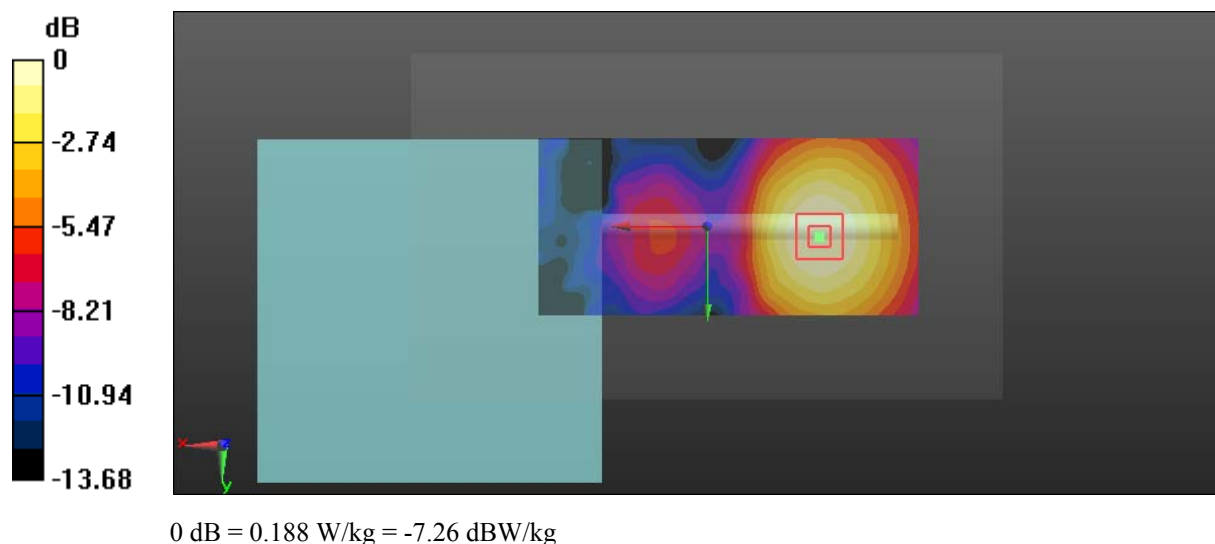

Test Plot 43#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_Low Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2403.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2403.5$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 54.377$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.71 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 24.23 V/m; Power Drift = -0.16 dB
 Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.551 W/kg
 Maximum value of SAR (measured) = 1.55 W/kg

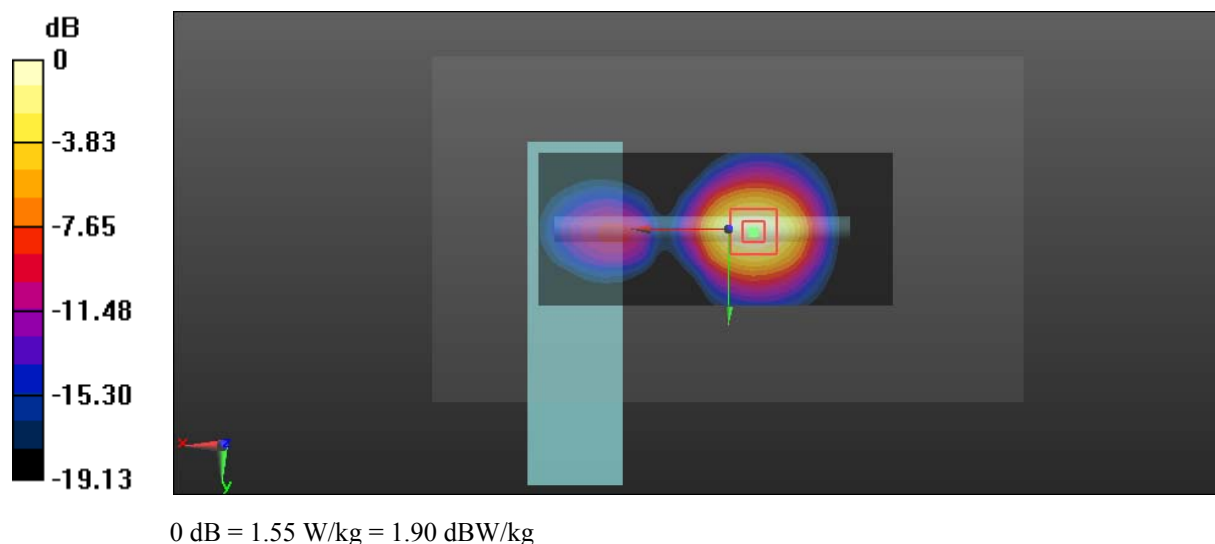

Test Plot 44#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.63 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 22.83 V/m; Power Drift = 0.03 dB
 Peak SAR (extrapolated) = 1.88 W/kg
SAR(1 g) = 0.986 W/kg; SAR(10 g) = 0.513 W/kg
 Maximum value of SAR (measured) = 1.51 W/kg

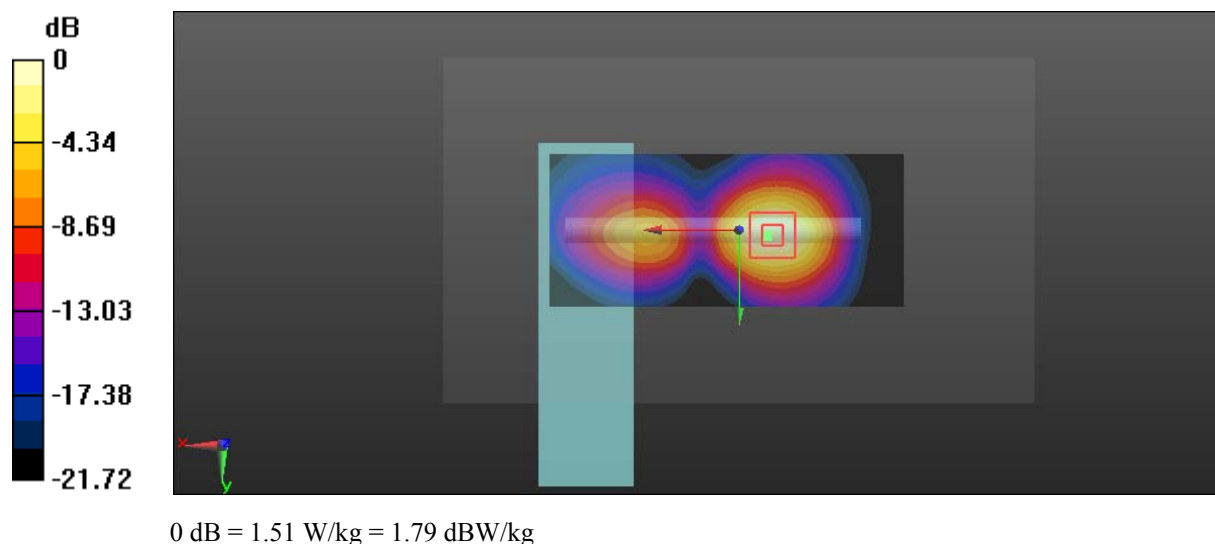

Test Plot 45#: SDR 2.4G_1.4MHz_Close To Body Top_10mm_High Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2477.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2477.5$ MHz; $\sigma = 1.989$ S/m; $\epsilon_r = 51.89$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.57 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 19.56 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.477 W/kg
 Maximum value of SAR (measured) = 1.47 W/kg

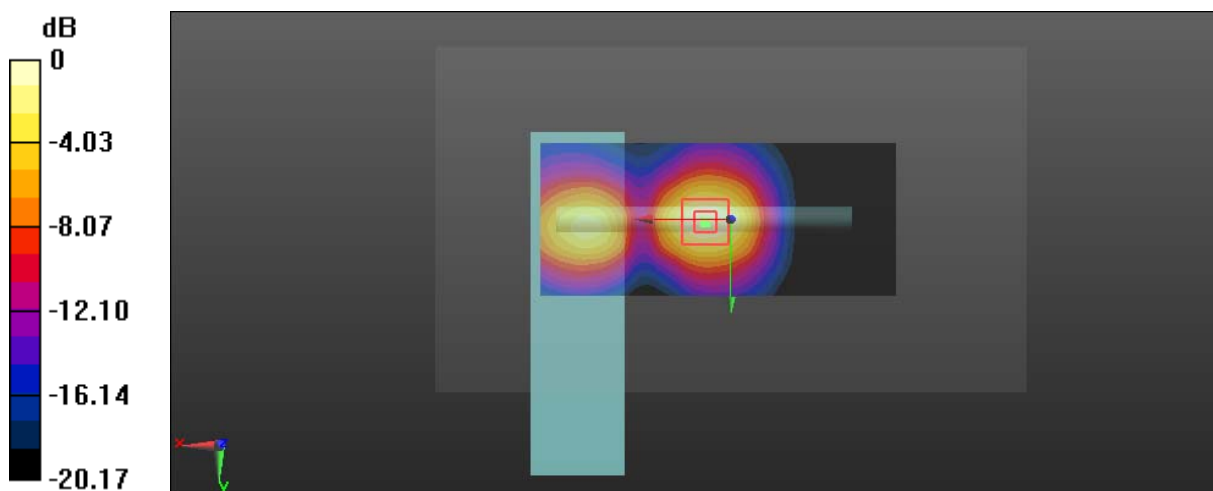

0 dB = 1.47 W/kg = 1.67 dBW/kg

Test Plot 46#: SDR 2.4G_10MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_10M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.99 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.369 W/kg
 Maximum value of SAR (measured) = 1.14 W/kg

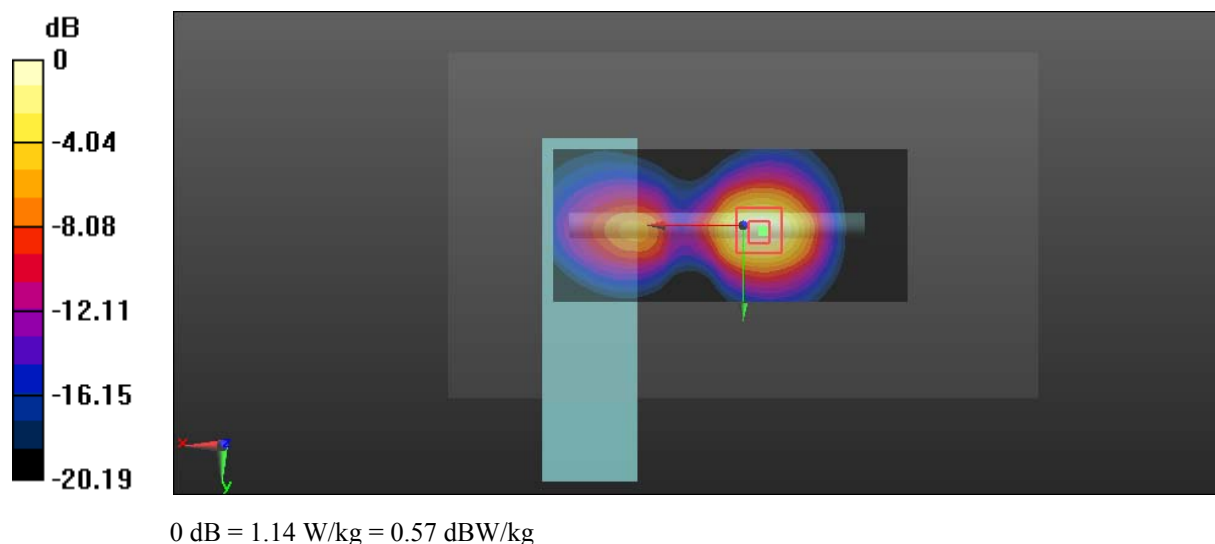

Test Plot 47#: SDR 2.4G_20MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_20M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 11.78 V/m; Power Drift = -0.17 dB
 Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.368 W/kg
 Maximum value of SAR (measured) = 1.02 W/kg

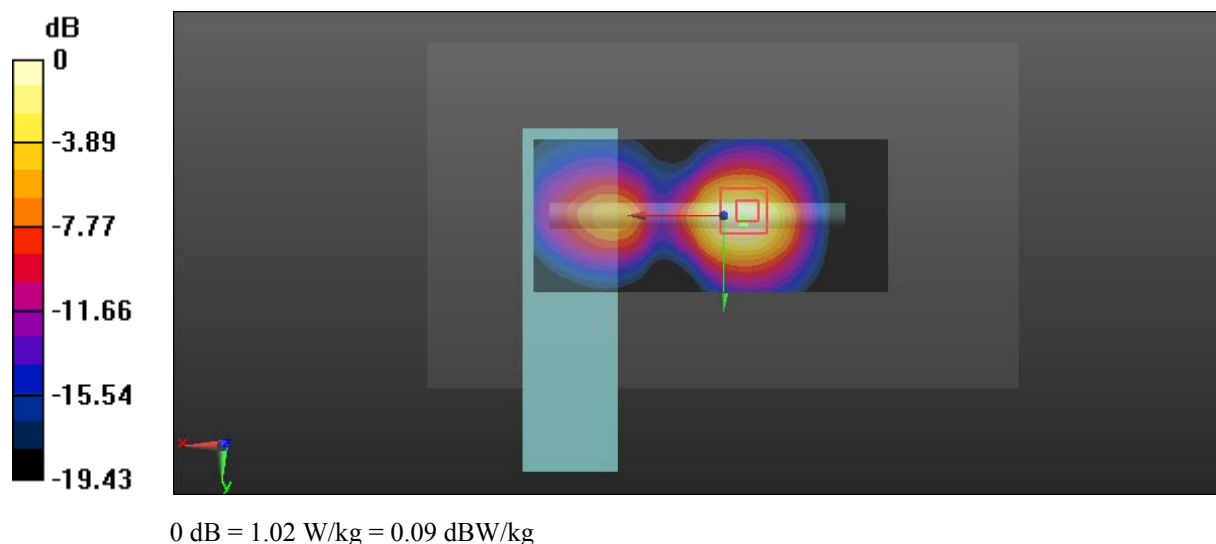

Test Plot 48#: SDR 2.4G_1.4MHz_Close To Body Front_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 2.4G_1.4M; Frequency: 2441.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 2441.5 \text{ MHz}$; $\sigma = 1.945 \text{ S/m}$; $\epsilon_r = 52.363$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (141x61x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.214 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 9.565 V/m; Power Drift = 0.07 dB
 Peak SAR (extrapolated) = 0.352 W/kg
SAR(1 g) = 0.202 W/kg; SAR(10 g) = 0.124 W/kg
 Maximum value of SAR (measured) = 0.213 W/kg

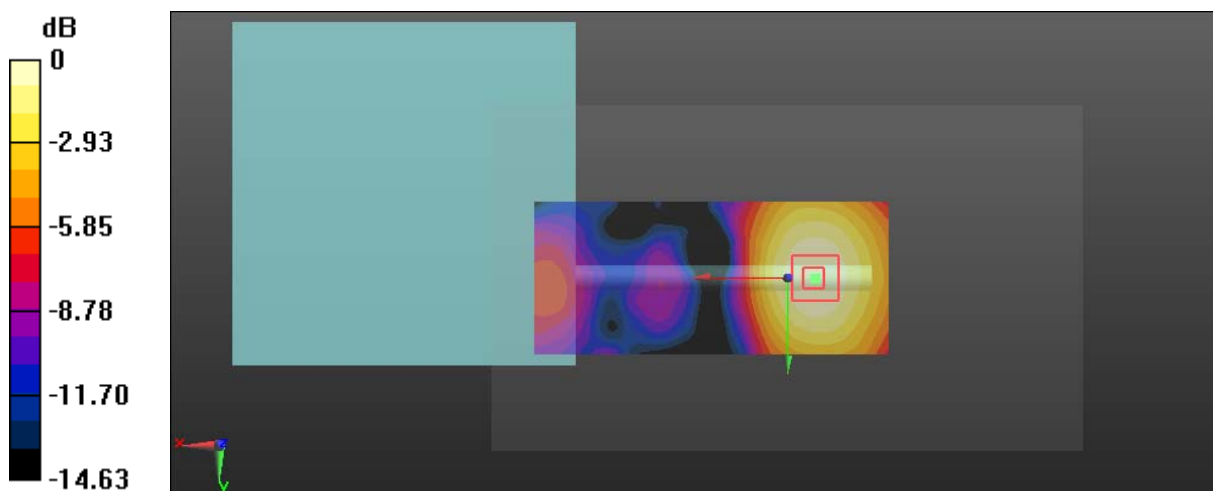

0 dB = 0.213 W/kg = -6.72 dBW/kg

Test Plot 49#: SDR 5.8G_1.4MHz_Handheld Right_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.211 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.277 V/m; Power Drift = -0.20 dB
 Peak SAR (extrapolated) = 0.383 W/kg
SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.061 W/kg
 Maximum value of SAR (measured) = 0.216 W/kg

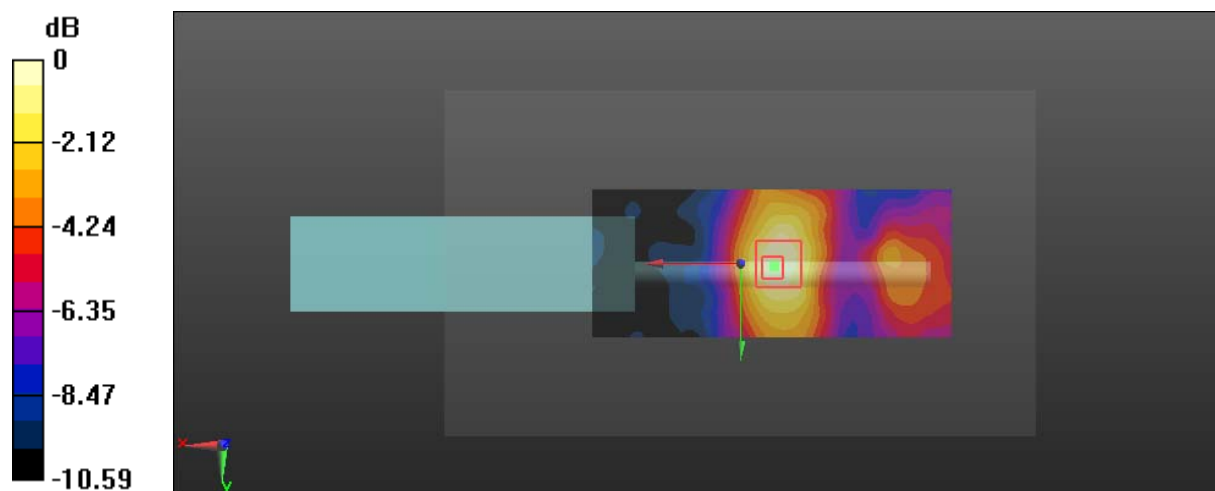

0 dB = 0.216 W/kg = -6.66 dBW/kg

Test Plot 50#: SDR 5.8G_1.4MHz_Handheld Back_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.273 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 2.898 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.453 W/kg
SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.070 W/kg
 Maximum value of SAR (measured) = 0.254 W/kg

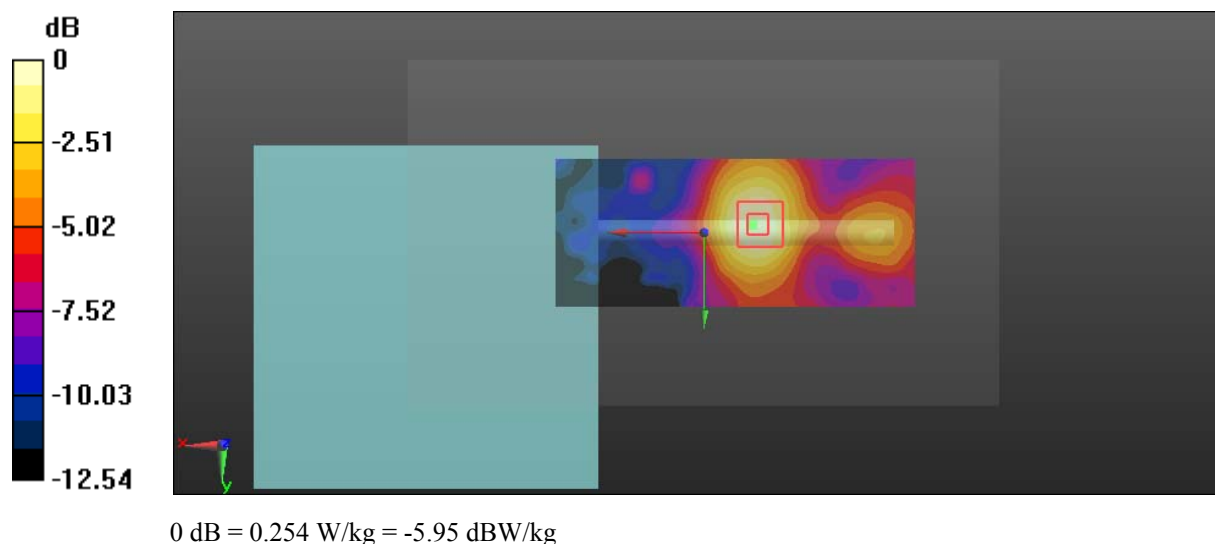

Test Plot 51#: SDR 5.8G_1.4MHz_Handheld Top_0mm_Low Channel_Chain 1**DUT: C1; Type: GL300L; Serial: 18010501420**


Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5728.5$ MHz; $\sigma = 6.045$ S/m; $\epsilon_r = 49.092$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 8.20 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
Reference Value = 12.21 V/m; Power Drift = 0.13 dB
Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 2.53 W/kg; SAR(10 g) = 0.677 W/kg
Maximum value of SAR (measured) = 6.86 W/kg

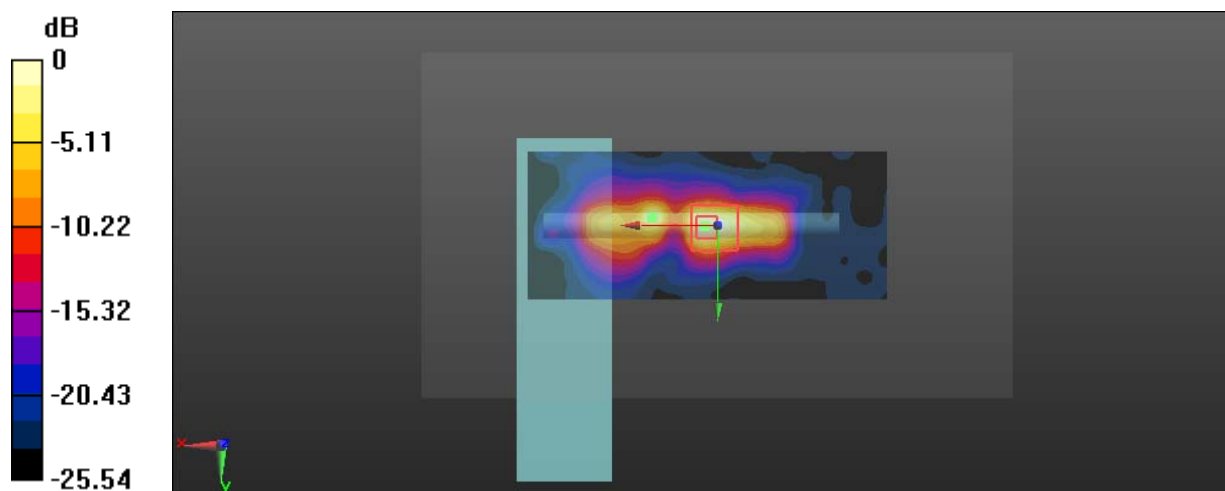

0 dB = 6.86 W/kg = 8.36 dBW/kg

Test Plot 52#: SDR 5.8G_1.4MHz_Handheld Top_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5$ MHz; $\sigma = 6.113$ S/m; $\epsilon_r = 49.03$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 7.68 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 10.82 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 9.48 W/kg
SAR(1 g) = 1.96 W/kg; SAR(10 g) = 0.544 W/kg
 Maximum value of SAR (measured) = 4.71 W/kg

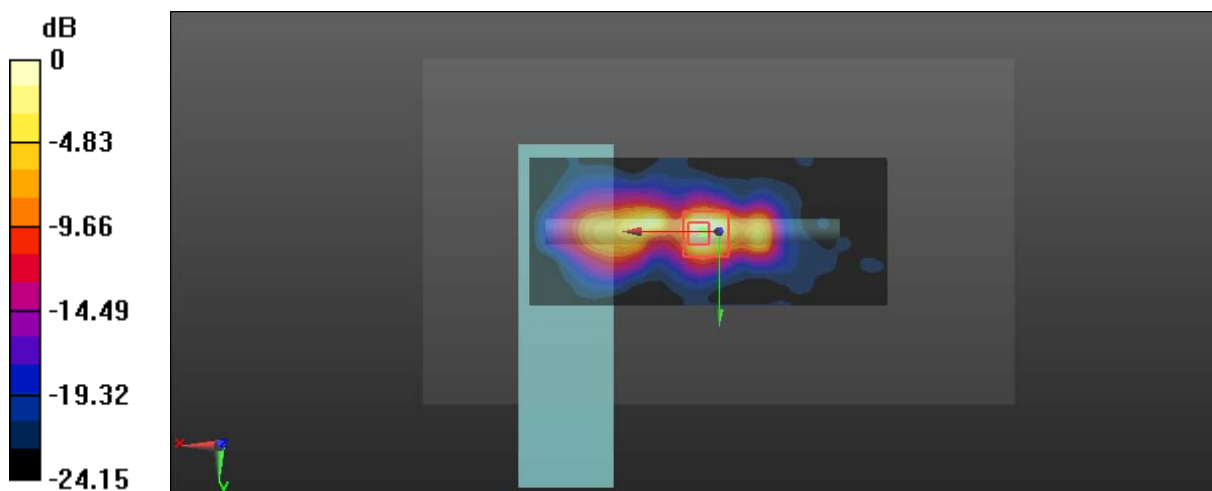

0 dB = 4.71 W/kg = 6.73 dBW/kg

Test Plot 53#: SDR 5.8G_1.4MHz_Handheld Top_0mm_High Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5846.5$ MHz; $\sigma = 6.183$ S/m; $\epsilon_r = 48.966$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 4.42 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 11.23 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 8.86 W/kg
SAR(1 g) = 1.53 W/kg; SAR(10 g) = 0.406 W/kg
 Maximum value of SAR (measured) = 4.03 W/kg

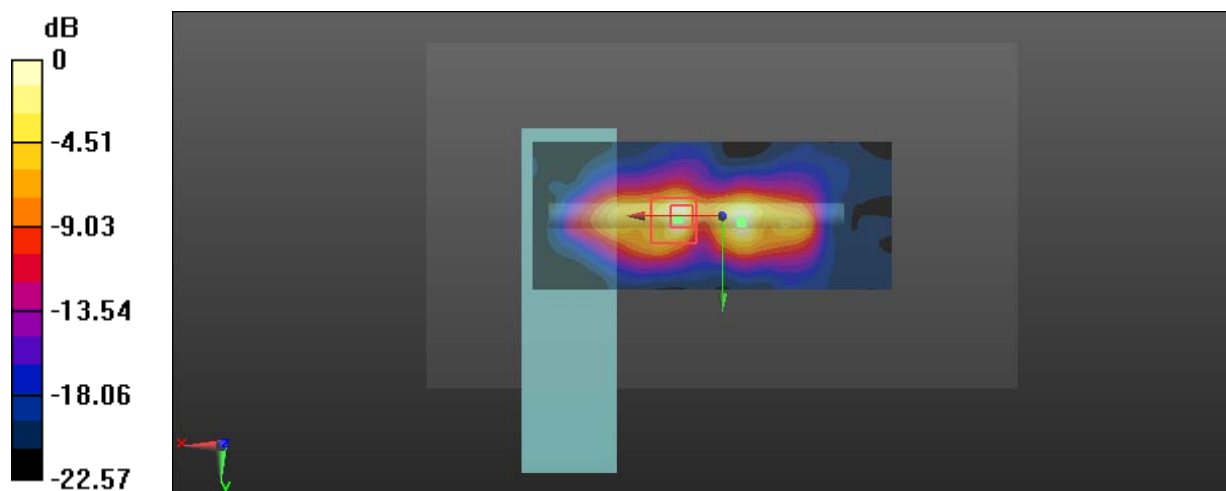

0 dB = 4.03 W/kg = 6.05 dBW/kg

Test Plot 54#: SDR 5.8G_10MHz_Handheld Top_0mm_Middle Channel_Chain 1**DUT: C1; Type: GL300L; Serial: 18010501420**

Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 49.029$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 7.99 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 10.91 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 8.31 W/kg

SAR(1 g) = 1.76 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 4.24 W/kg

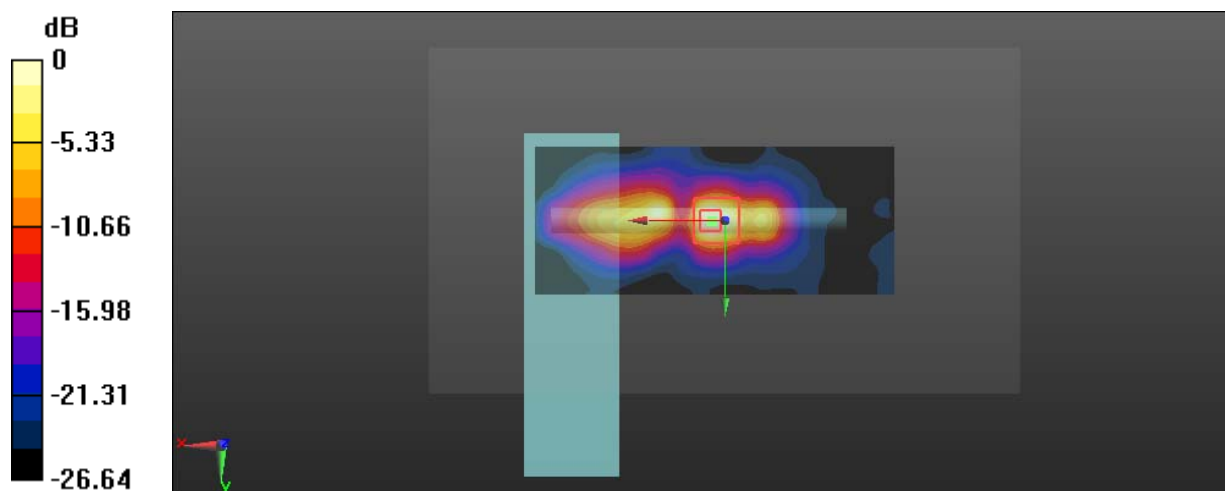

0 dB = 4.24 W/kg = 6.27 dBW/kg

Test Plot 55#: SDR 5.8G_20MHz_Handheld Top_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 49.029$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 9.65 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 12.22 V/m; Power Drift = 0.10 dB
 Peak SAR (extrapolated) = 11.1 W/kg
SAR(1 g) = 2.25 W/kg; SAR(10 g) = 0.639 W/kg
 Maximum value of SAR (measured) = 5.19 W/kg

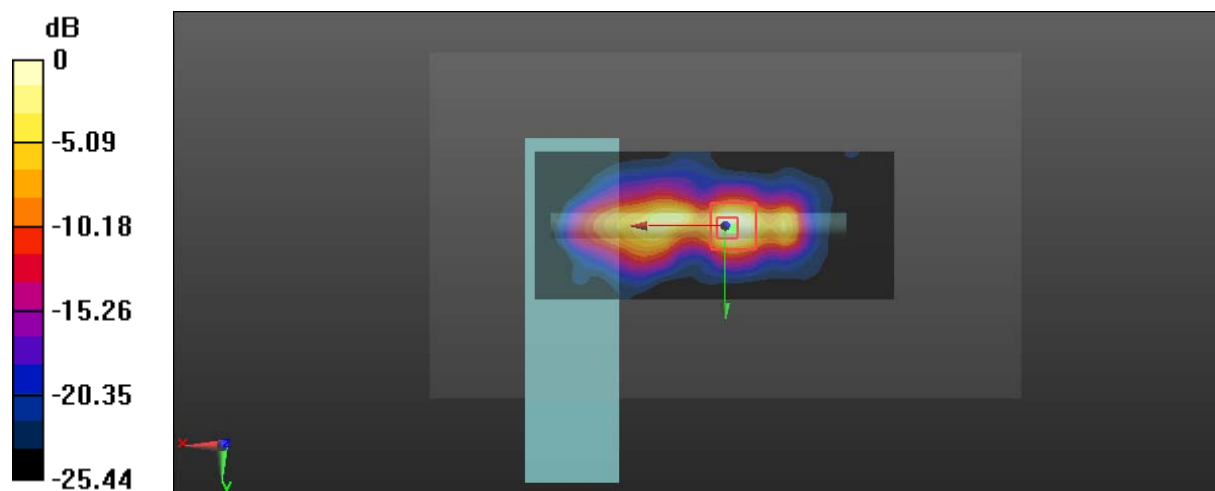

0 dB = 5.19 W/kg = 7.15 dBW/kg

Test Plot 56#: SDR 5.8G_1.4MHz_Handheld Front_0mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.360 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.710 V/m; Power Drift = -0.18 dB
 Peak SAR (extrapolated) = 0.630 W/kg
SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.087 W/kg
 Maximum value of SAR (measured) = 0.368 W/kg

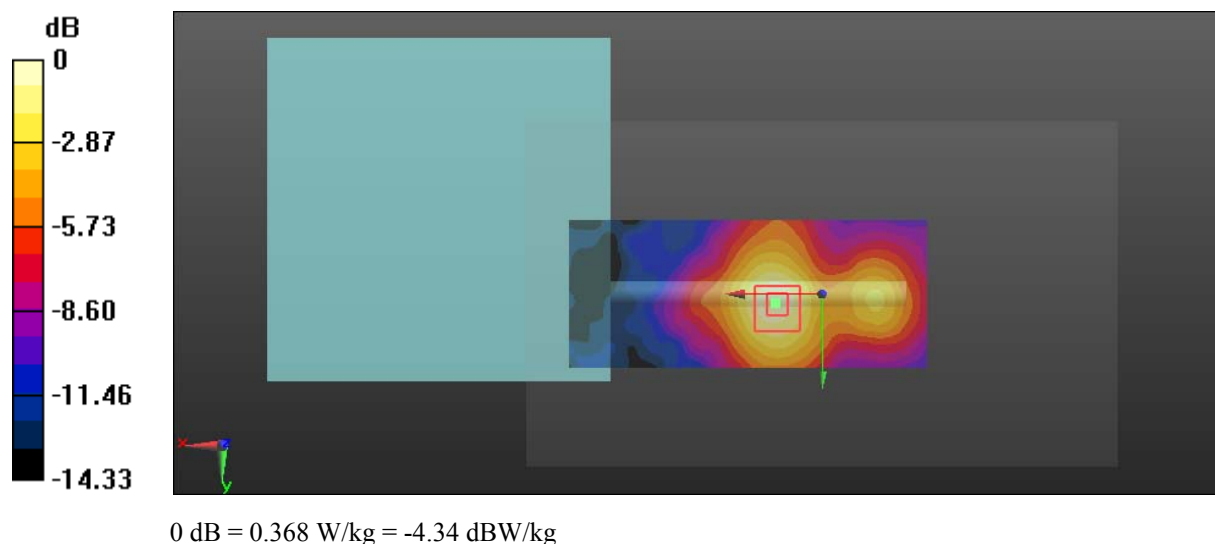

Test Plot 57#: SDR 5.8G_1.4MHz_Close To Body Right_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.171 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 2.257 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.304 W/kg
SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.055 W/kg
 Maximum value of SAR (measured) = 0.165 W/kg

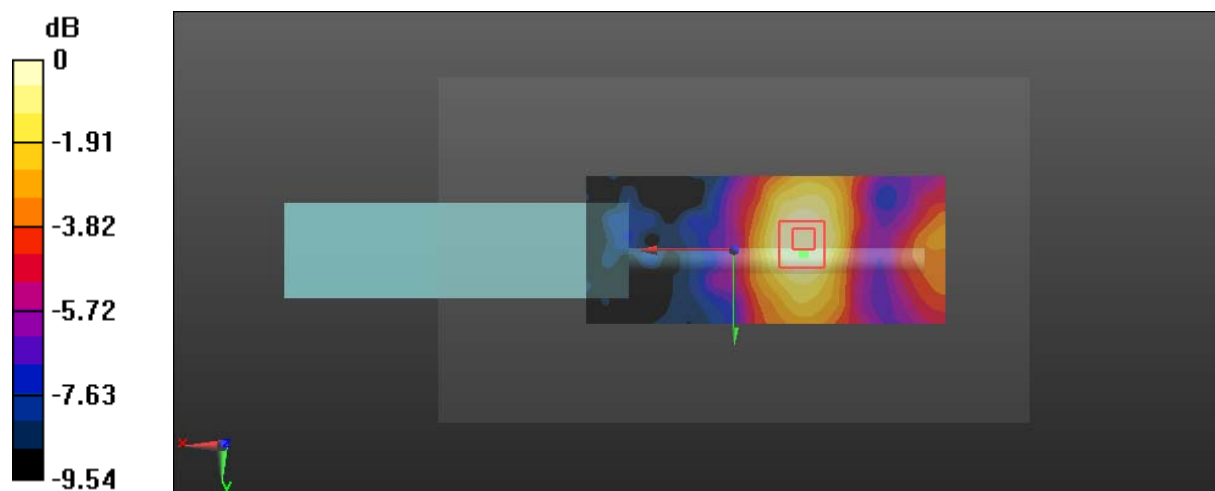

0 dB = 0.165 W/kg = -7.83 dBW/kg

Test Plot 58#: SDR 5.8G_1.4MHz_Close To Body Back_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.201 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.097 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 0.374 W/kg
SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.061 W/kg
 Maximum value of SAR (measured) = 0.204 W/kg

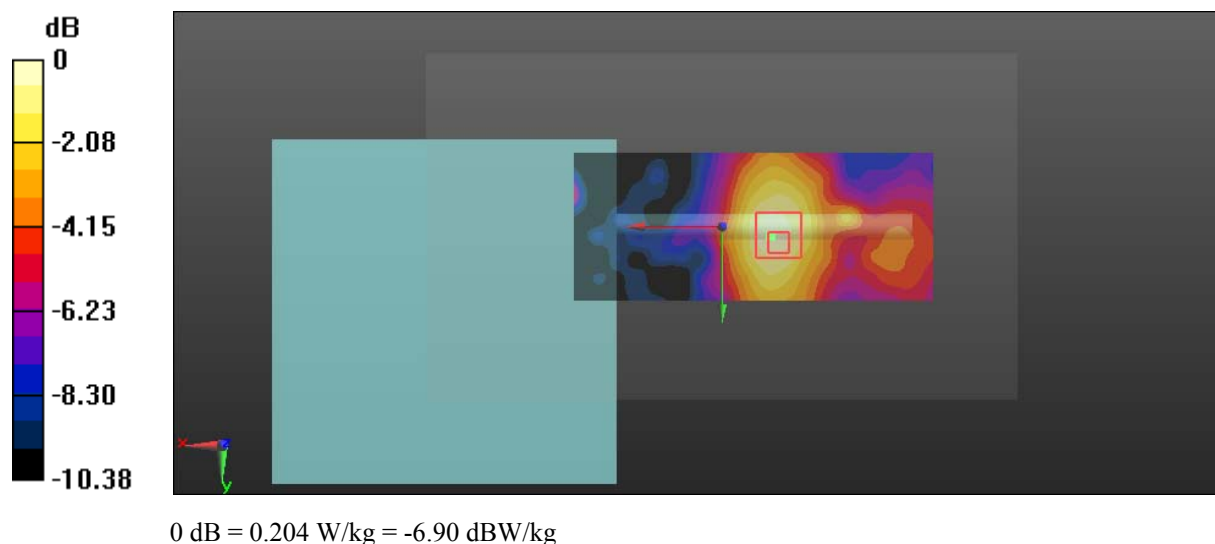

Test Plot 59#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_Low Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5728.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5728.5$ MHz; $\sigma = 6.045$ S/m; $\epsilon_r = 49.092$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 15.48 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 3.12 W/kg
SAR(1 g) = 0.668 W/kg; SAR(10 g) = 0.361 W/kg
 Maximum value of SAR (measured) = 1.21 W/kg

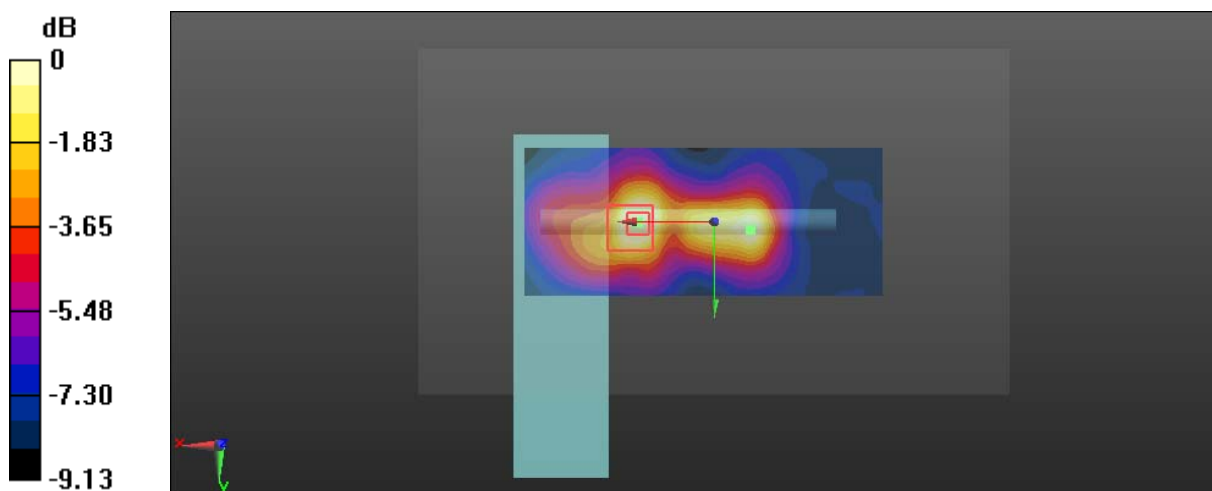

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Plot 60#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 12.94 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 2.39 W/kg
SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.232 W/kg
 Maximum value of SAR (measured) = 1.25 W/kg

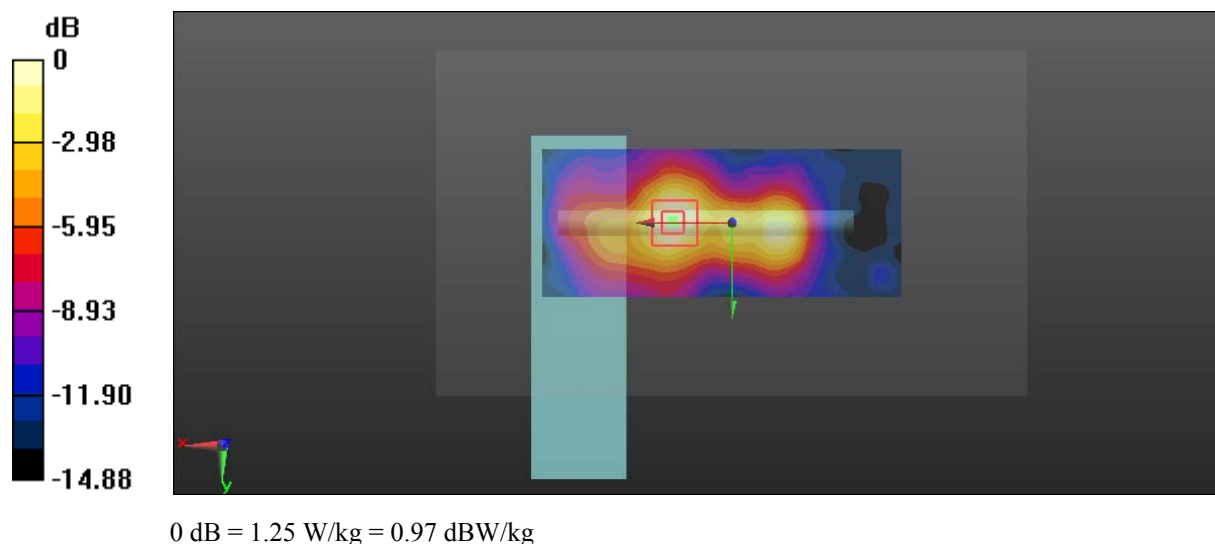

Test Plot 61#: SDR 5.8G_1.4MHz_Close To Body Top_10mm_High Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5846.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5846.5 \text{ MHz}$; $\sigma = 6.183 \text{ S/m}$; $\epsilon_r = 48.966$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 10.66 V/m; Power Drift = -0.14 dB
 Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.201 W/kg
 Maximum value of SAR (measured) = 1.13 W/kg

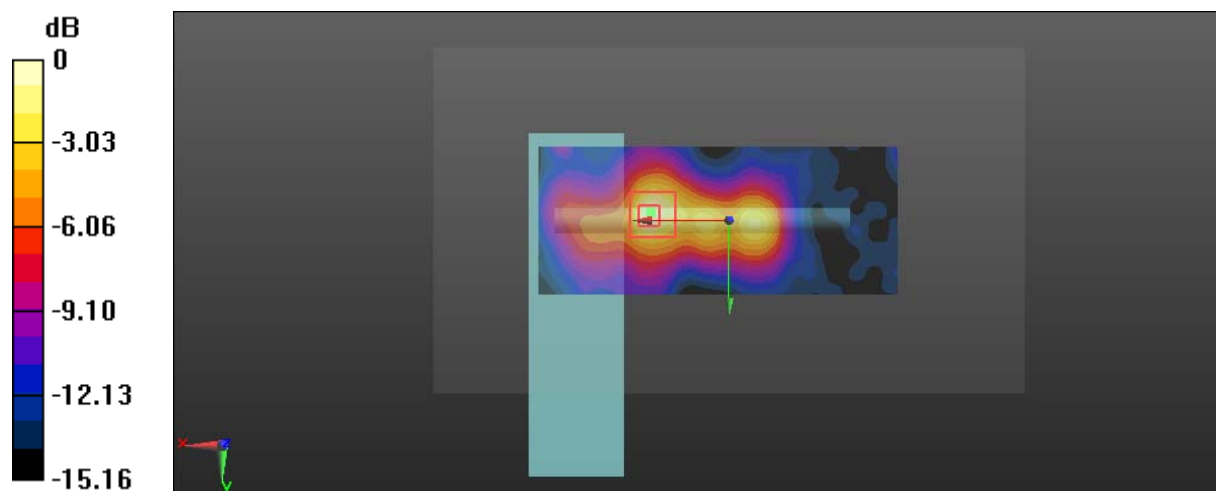

0 dB = 1.13 W/kg = 0.53 dBW/kg

Test Plot 62#: SDR 5.8G_10MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_10M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 49.029$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 6.824 V/m; Power Drift = 0.20 dB
 Peak SAR (extrapolated) = 2.43 W/kg
SAR(1 g) = 0.553 W/kg; SAR(10 g) = 0.207 W/kg
 Maximum value of SAR (measured) = 1.30 W/kg

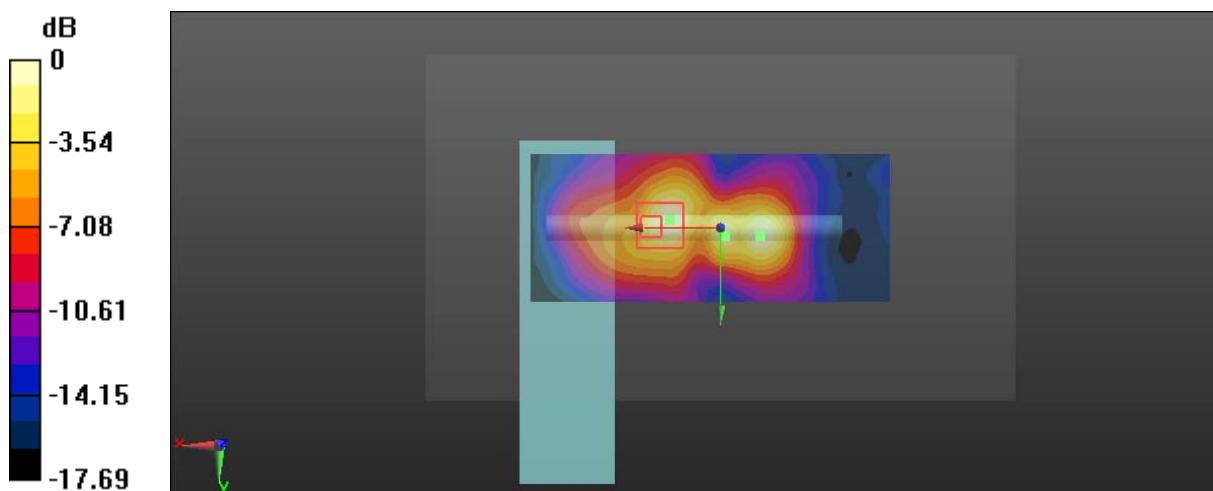

0 dB = 1.30 W/kg = 1.14 dBW/kg

Test Plot 63#: SDR 5.8G_20MHz_Close To Body Top_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_20M; Frequency: 5787.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5787.5$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 49.029$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
 Reference Value = 7.245 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 2.40 W/kg
SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.234 W/kg
 Maximum value of SAR (measured) = 1.35 W/kg

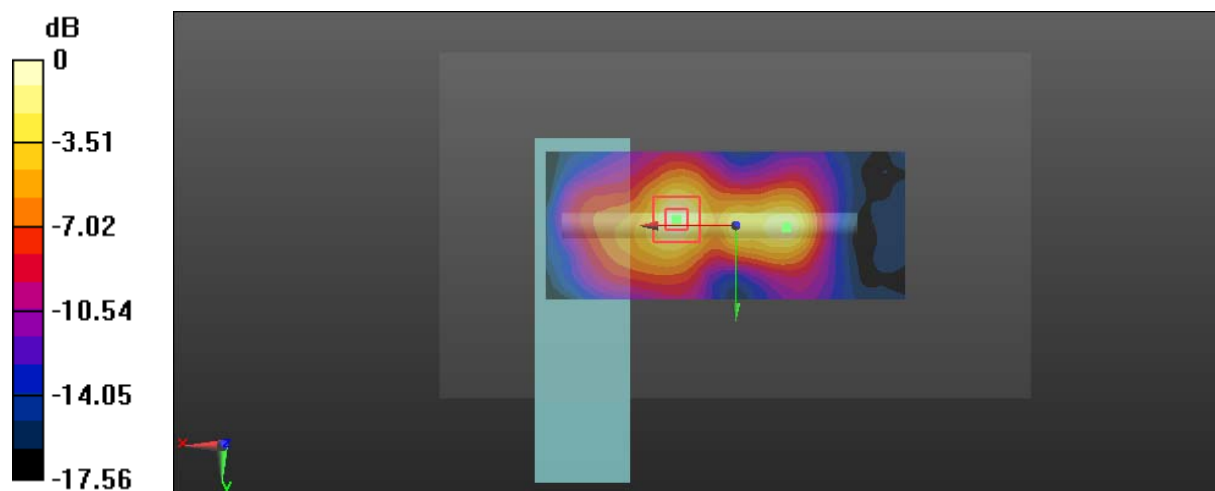

0 dB = 1.35 W/kg = 1.30 dBW/kg

Test Plot 64#: SDR 5.8G_1.4MHz_Close To Body Front_10mm_Middle Channel_Chain 1

DUT: C1; Type: GL300L; Serial: 18010501420


Communication System: SDR 5.8G_1.4M; Frequency: 5786.5 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 5786.5 \text{ MHz}$; $\sigma = 6.113 \text{ S/m}$; $\epsilon_r = 49.03$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.35, 4.35, 4.35); Calibrated: 2017/11/2;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (171x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.173 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.457 V/m; Power Drift = -0.15 dB
 Peak SAR (extrapolated) = 0.353 W/kg
SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.056 W/kg
 Maximum value of SAR (measured) = 0.190 W/kg

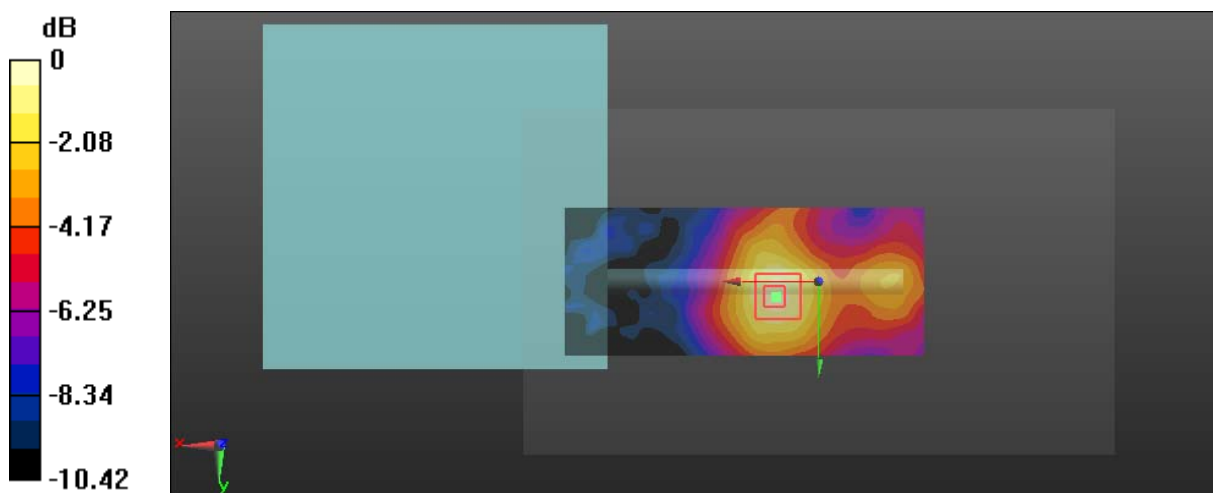

0 dB = 0.190 W/kg = -7.21 dBW/kg