

Appendix A: Test Results of 5.2G SDR



APPENDIX A: TEST RESULTS OF 5.2G SDR	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
APPENDIX A.2: TEST RESULTS OF FREQUENCY STABILITY	9
APPENDIX A.3: TEST RESULTS OF 26DB BANDWIDTH	10
APPENDIX A.4: TEST RESULTS OF 99% BANDWIDTH.....	14
APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS.....	18
30MHz - 1GHz (Worst case).....	18
1GHz - 18GHz.....	20



Note: All testing were carried out on SISO mode and MIMO mode, but only the worst case was presented in this report.

Appendix A.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
10MMIMO	Ant1	5157	0.21	≤11.00	PASS
	Ant2	5157	0.07	≤11.00	PASS
	total	5157	3.15	≤11.00	PASS
	Ant1	5201	6.54	≤11.00	PASS
	Ant2	5201	6.37	≤11.00	PASS
	total	5201	9.47	≤11.00	PASS
	Ant1	5245	6.86	≤11.00	PASS
	Ant2	5245	6.79	≤11.00	PASS
	total	5245	9.84	≤11.00	PASS
20MMIMO	Ant1	5161	-5.04	≤11.00	PASS
	Ant2	5161	-5.52	≤11.00	PASS
	total	5161	-2.26	≤11.00	PASS
	Ant1	5200	3.90	≤11.00	PASS
	Ant2	5200	3.93	≤11.00	PASS
	total	5200	6.93	≤11.00	PASS
	Ant1	5240	4.18	≤11.00	PASS
	Ant2	5240	3.89	≤11.00	PASS
	total	5240	7.05	≤11.00	PASS
40MMIMO	Ant1	5170	-6.24	≤11.00	PASS
	Ant2	5170	-7.04	≤11.00	PASS
	total	5170	-3.61	≤11.00	PASS
	Ant1	5200	1.17	≤11.00	PASS
	Ant2	5200	0.69	≤11.00	PASS
	total	5200	3.95	≤11.00	PASS
	Ant1	5230	1.29	≤11.00	PASS
	Ant2	5230	1.05	≤11.00	PASS
	total	5230	4.18	≤11.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

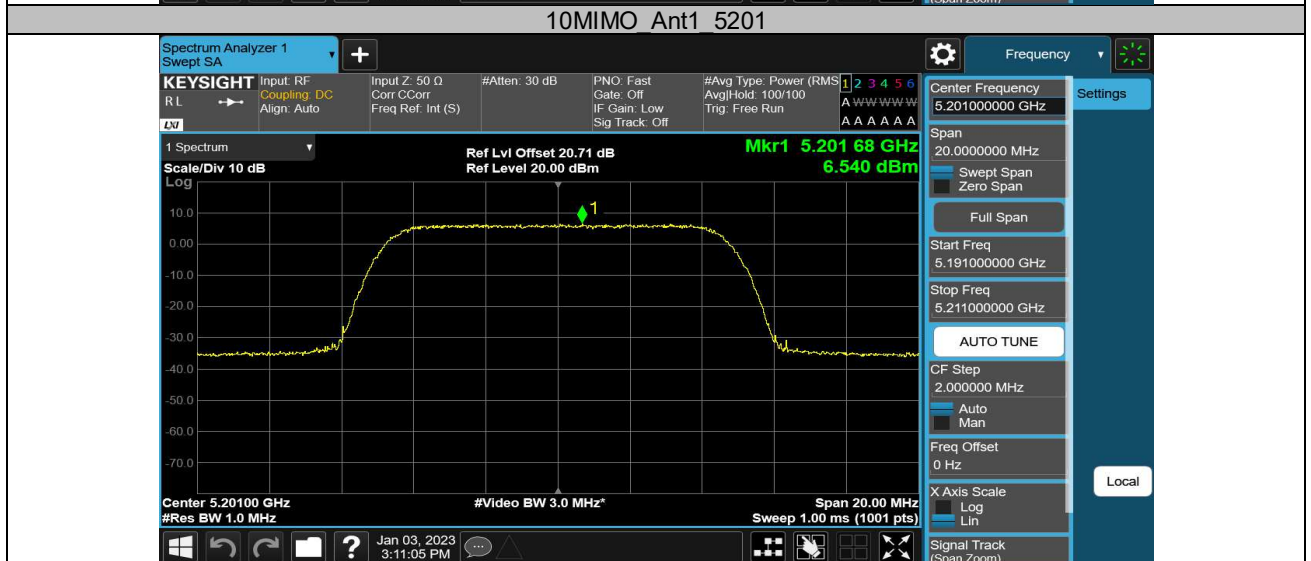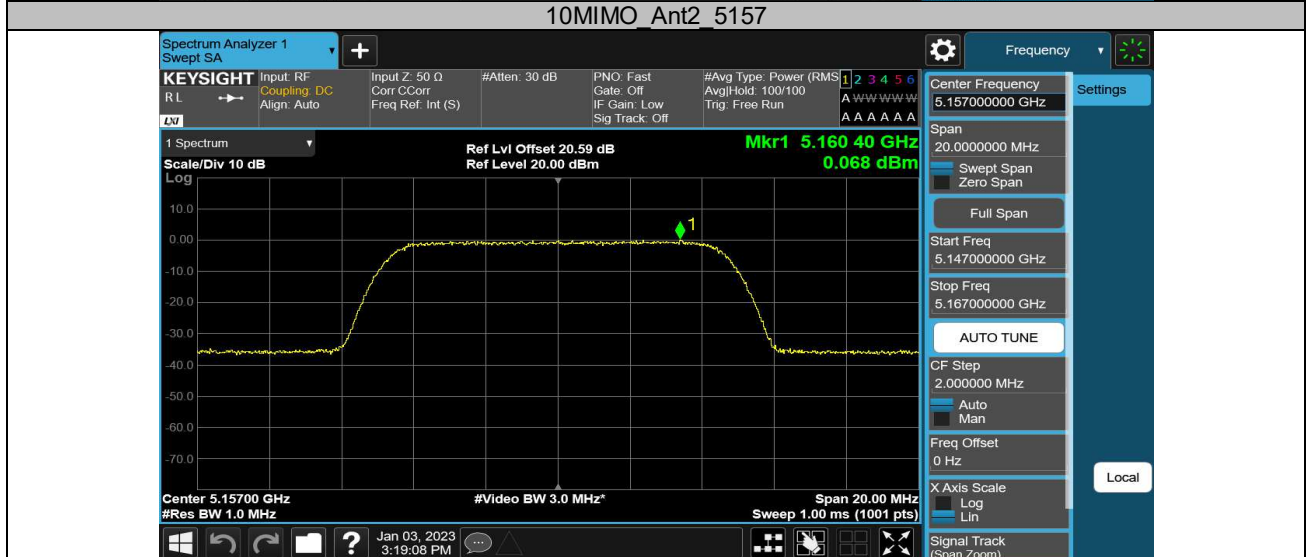

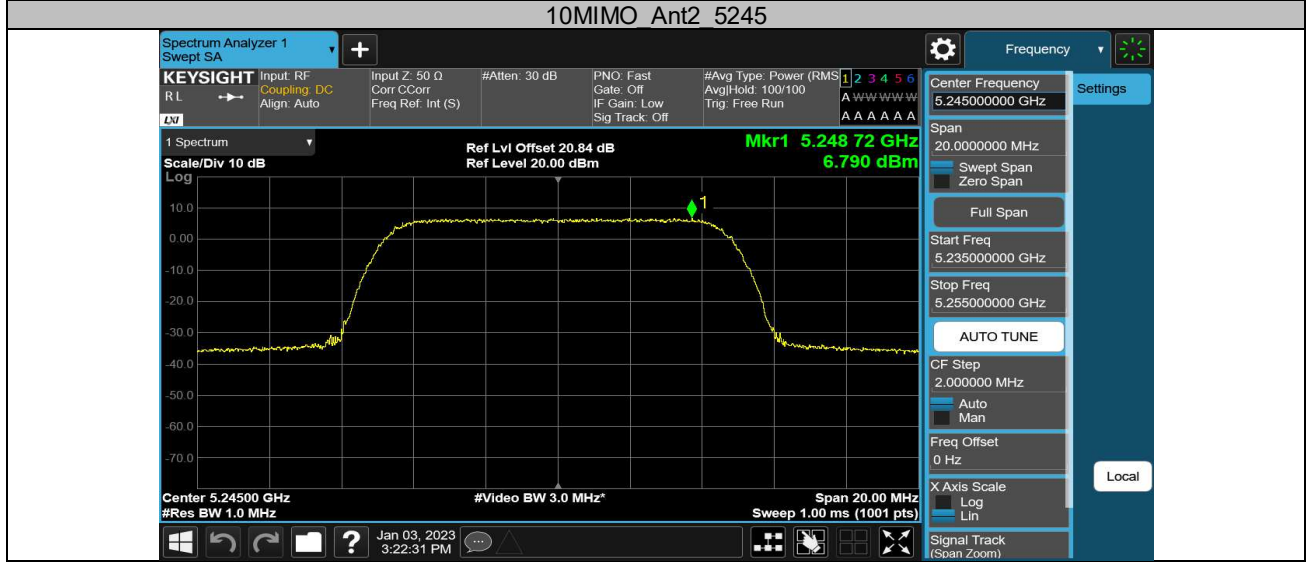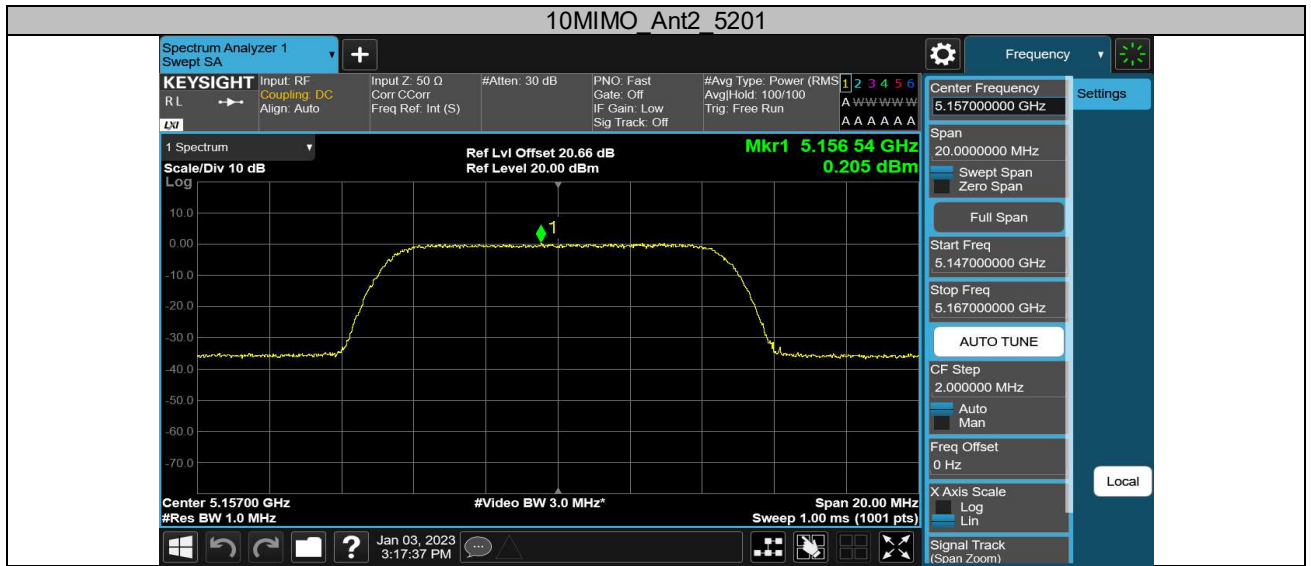





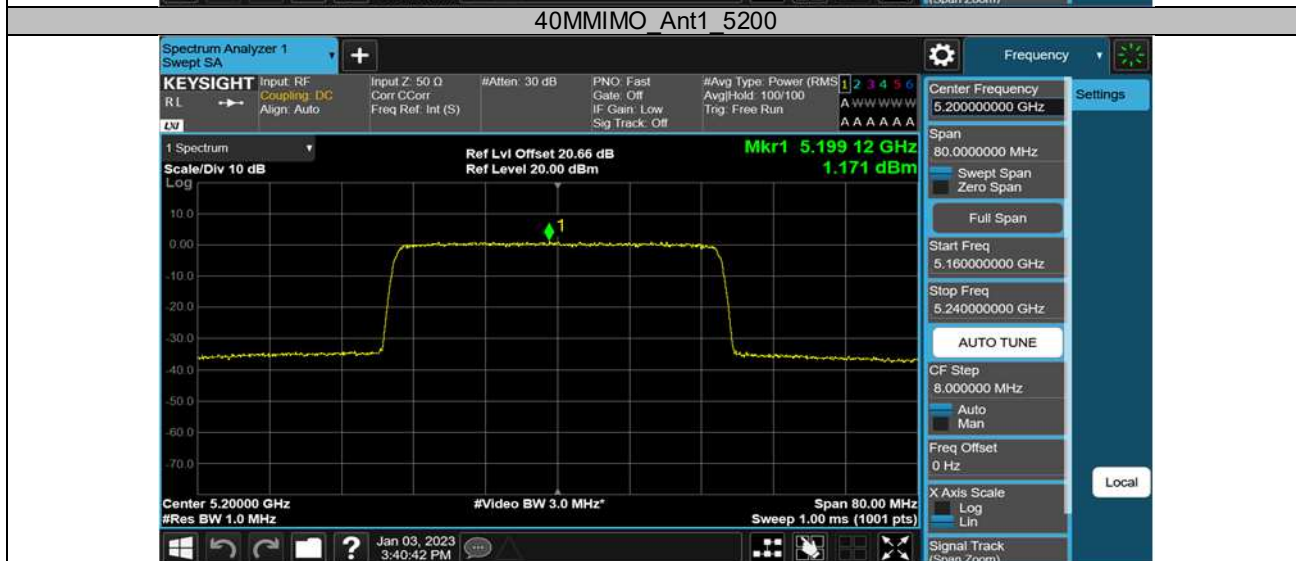





Appendix A.2: Test Results of Frequency Stability


Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10MMIMO	Ant1	5157	NV	NT	0.00	0.000000	20	PASS
		5201	NV	NT	-1000.00	-1.939112	20	PASS
		5245	NV	NT	-1000.00	-1.922707	20	PASS
20MMIMO	Ant1	5161	NV	NT	0.00	0.000000	20	PASS
		5200	NV	NT	-2000.00	-0.384615	20	PASS
		5240	NV	NT	-2000.00	-0.381679	20	PASS
40MMIMO	Ant1	5170	NV	NT	-2000.00	-0.386847	20	PASS
		5200	NV	NT	-2000.00	-0.384615	20	PASS
		5230	NV	NT	-2000.00	-0.382409	20	PASS

Appendix A.3: Test Results of 26dB Bandwidth

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10MMIMO	Ant1	5157	10.400	5151.620	5162.020	---	PASS
		5201	10.040	5196.120	5206.160	---	PASS
		5245	10.060	5239.940	5250.000	---	PASS
20MMIMO	Ant1	5161	19.200	5151.480	5170.680	---	PASS
		5200	19.080	5190.480	5209.560	---	PASS
		5240	19.120	5230.400	5249.520	---	PASS
40MMIMO	Ant1	5170	37.120	5151.360	5188.480	---	PASS
		5200	37.280	5181.440	5218.720	---	PASS
		5230	37.040	5211.440	5248.480	---	PASS

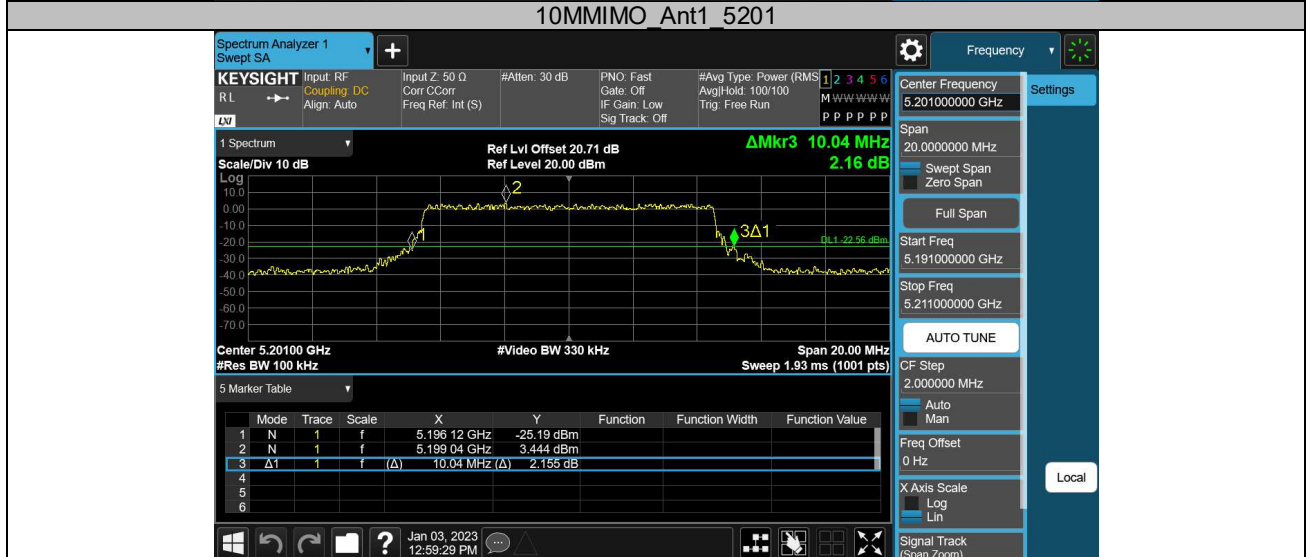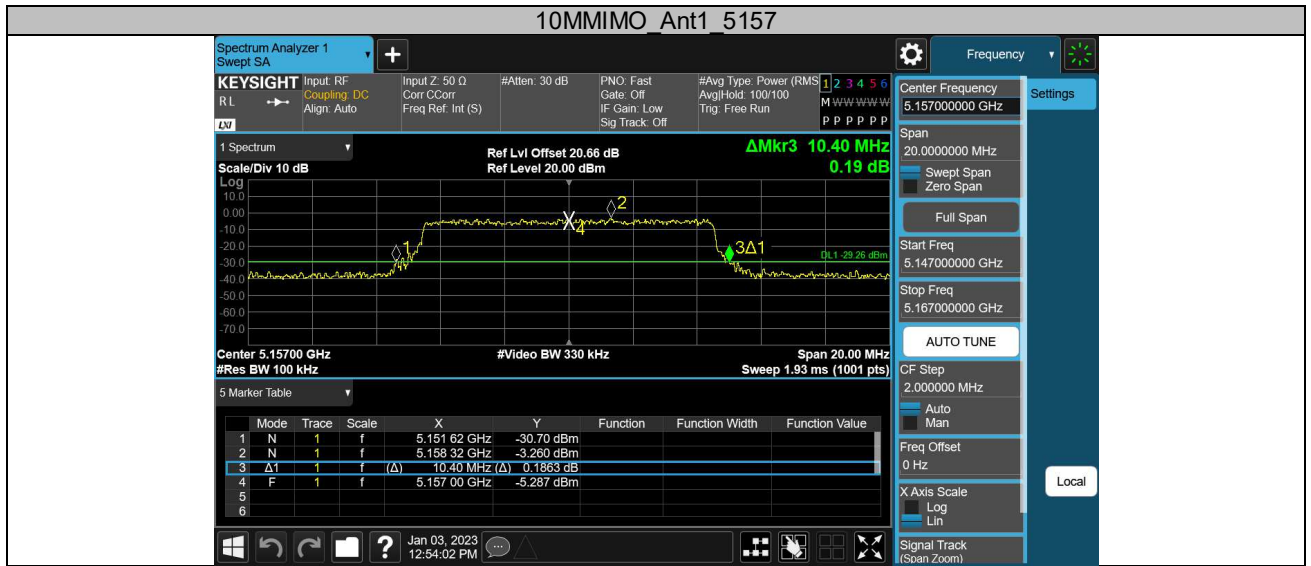





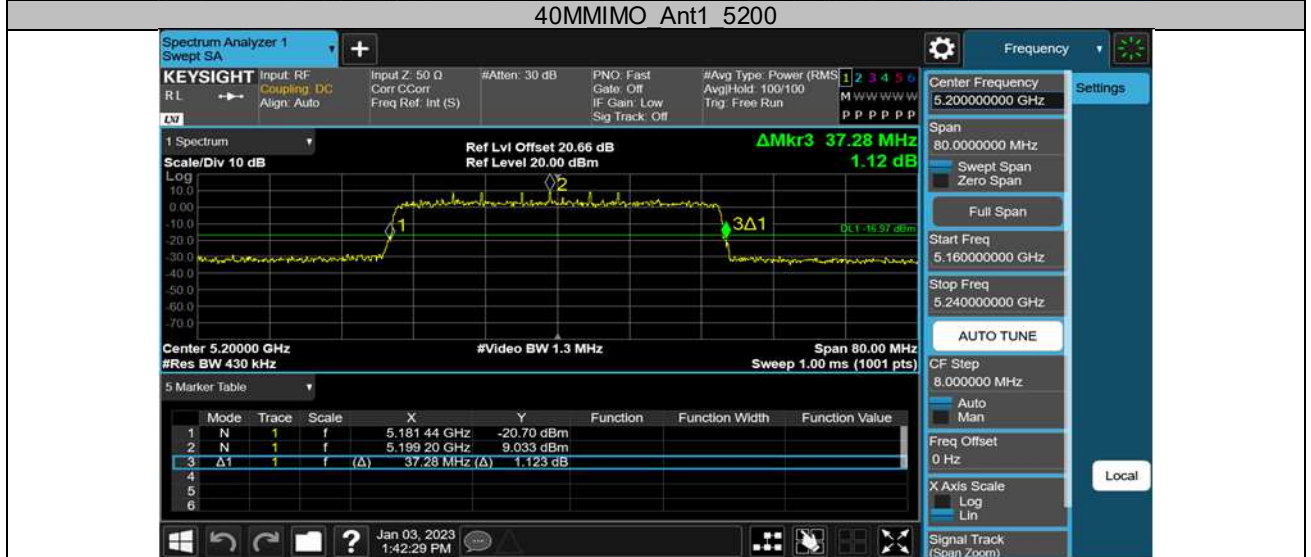


Appendix A.4: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10MMIMO	Ant1	5157	9.0015	5152.5046	5161.5061	---	PASS
		5201	9.0000	5196.4916	5205.4916	---	PASS
		5245	9.0020	5240.4946	5249.4966	---	PASS
20MMIMO	Ant1	5161	17.933	5152.0560	5169.9890	---	PASS
		5200	17.855	5191.0782	5208.9332	---	PASS
		5240	17.917	5231.0649	5248.9819	---	PASS
40MMIMO	Ant1	5170	35.794	5152.1354	5187.9294	---	PASS
		5200	35.703	5182.1844	5217.8874	---	PASS
		5230	35.705	5212.2004	5247.9054	---	PASS






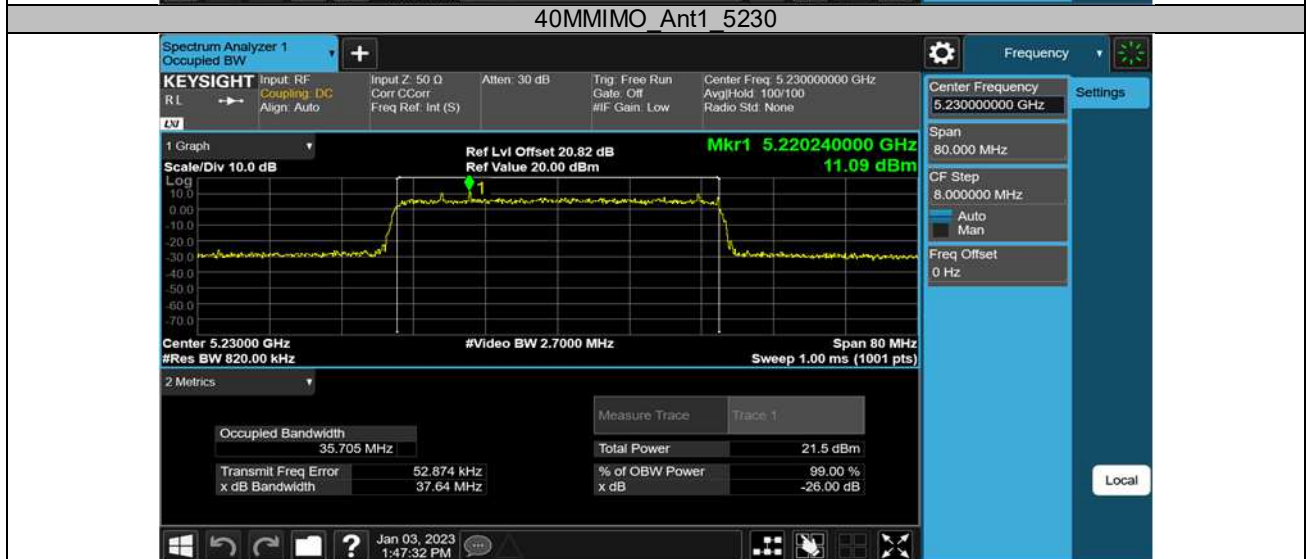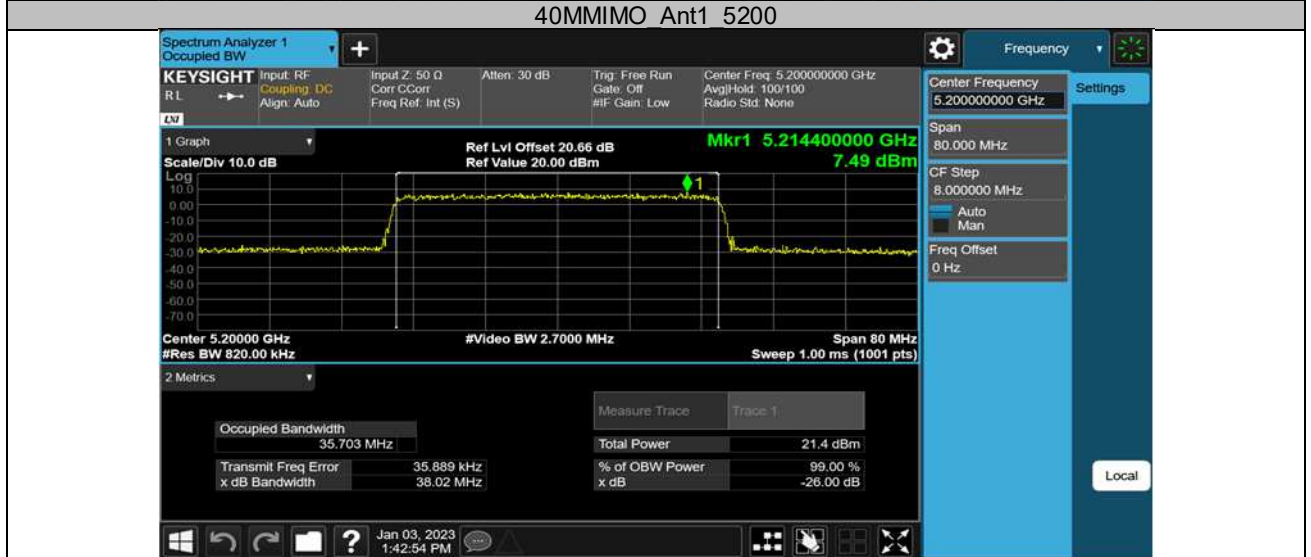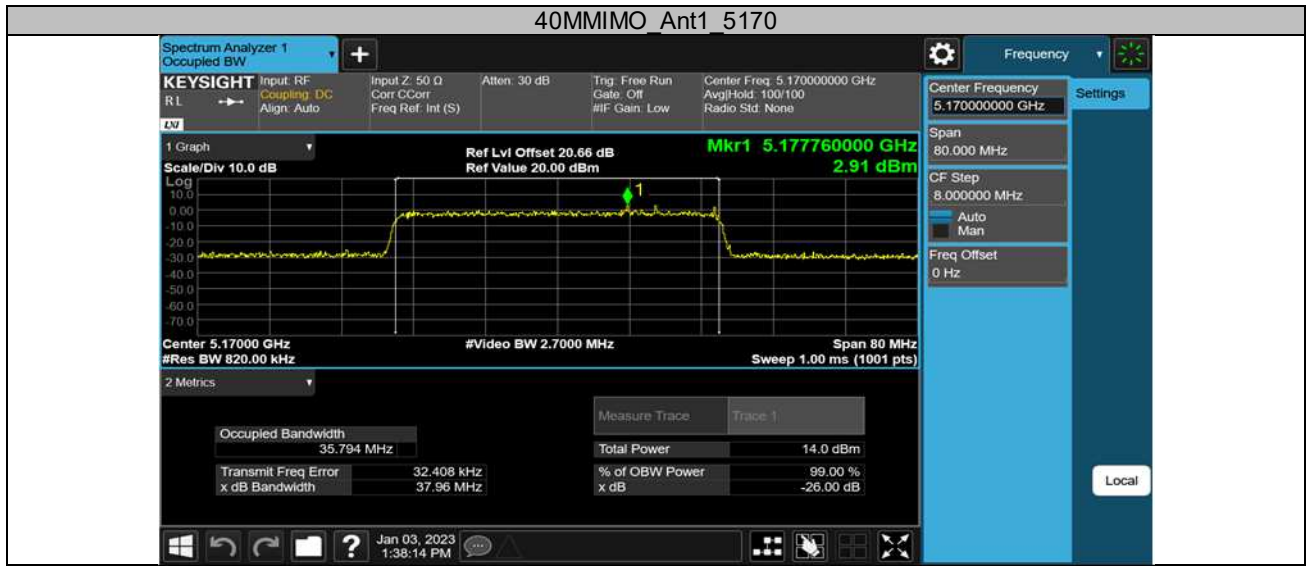

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5201MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

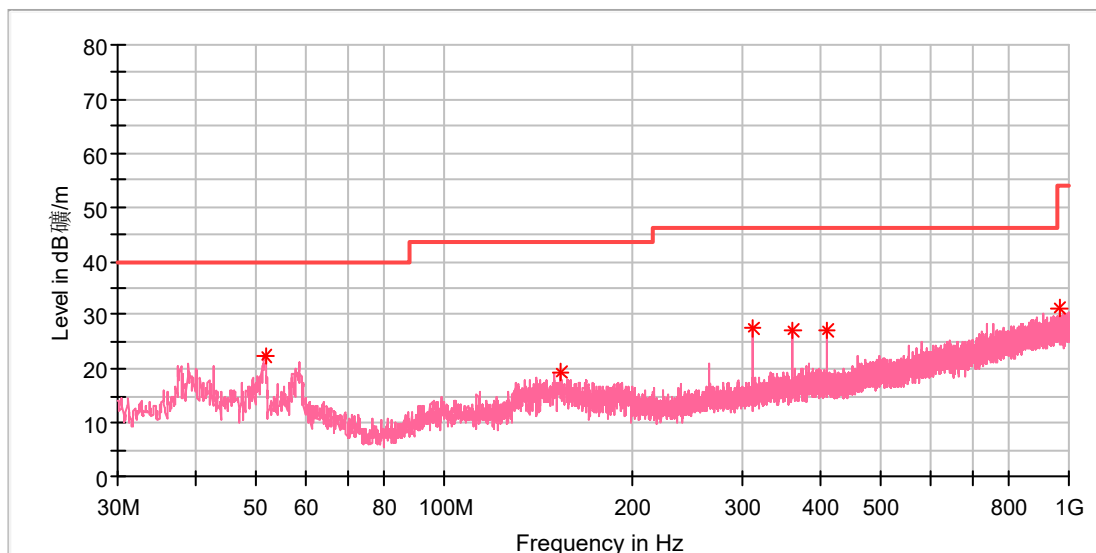

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.631000	22.46	40.00	17.54	100.0	V	15.0	-18.4
153.723500	19.46	43.50	24.04	100.0	V	184.0	-22.0
312.027500	27.61	46.00	18.39	100.0	V	9.0	-15.9
359.994000	27.06	46.00	18.94	100.0	V	354.0	-14.6
408.009000	27.27	46.00	18.73	100.0	V	0.0	-13.5
966.874500	31.17	54.00	22.83	100.0	V	319.0	-4.2

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---


1GHz - 18GHz

Note: The highest waveform in the figure is 5.2GHz SDR Fundamental.

5.2GHz SDR, 10MHz BW

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.2G_10M_5157MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

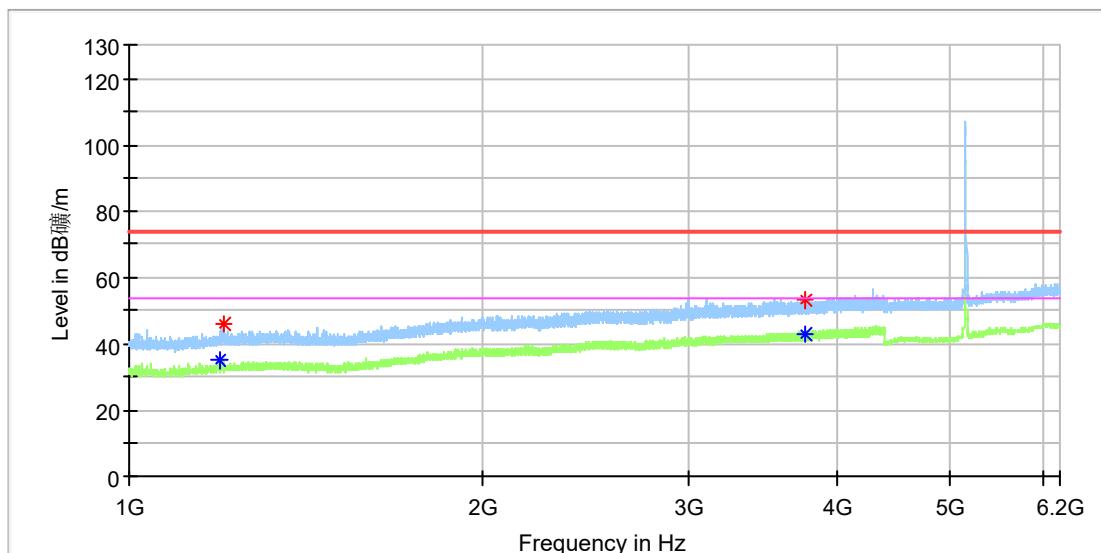

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.990000	---	35.18	54.00	18.82	100.0	H	164.0	1.1
1202.810000	46.16	---	74.00	27.84	100.0	H	198.0	1.2
3766.070000	53.44	---	74.00	20.56	100.0	H	0.0	9.7
3768.790000	---	43.17	54.00	10.83	100.0	H	359.0	9.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5157MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

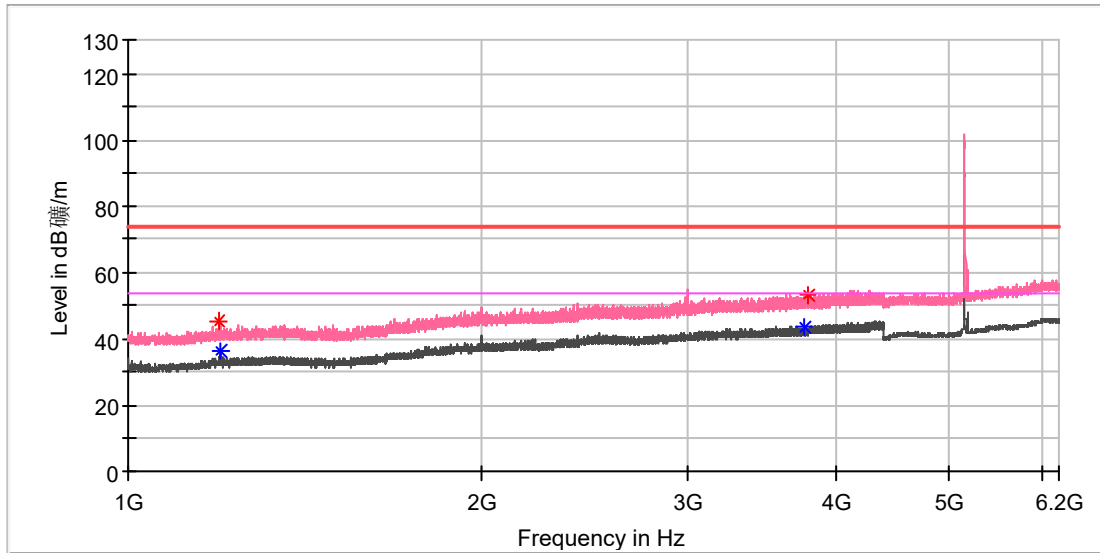

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.160000	45.64	---	74.00	28.36	100.0	V	79.0	1.1
1196.520000	---	36.51	54.00	17.49	100.0	V	308.0	1.1
3757.230000	---	43.40	54.00	10.60	100.0	V	251.0	9.7
3787.320000	53.08	---	74.00	20.92	100.0	V	165.0	9.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5157MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

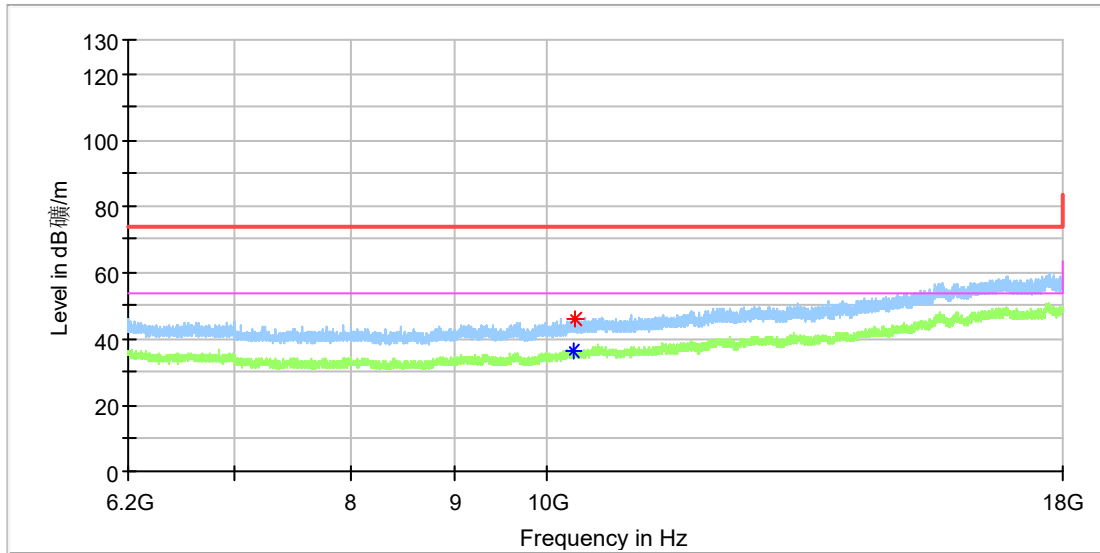

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10309.350000	---	36.57	54.00	17.43	100.0	H	0.0	11.6
10317.708333	45.65	---	74.00	28.35	100.0	H	329.0	11.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5157MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

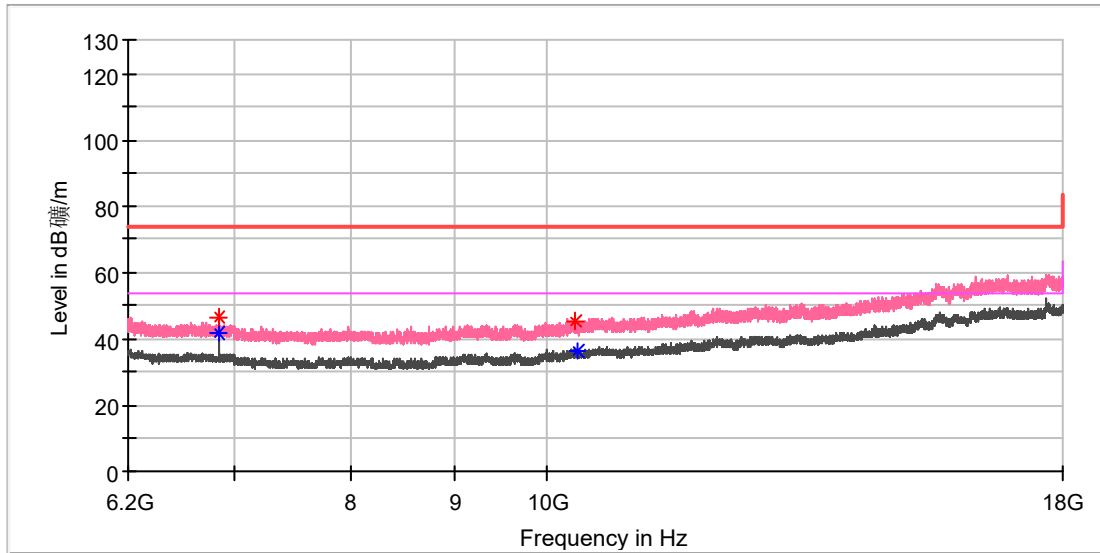

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6876.041667	46.34	---	74.00	27.66	100.0	V	216.0	8.6
6876.041667	---	42.00	54.00	12.00	100.0	V	216.0	8.6
10323.608333	45.06	---	74.00	28.94	100.0	V	60.0	11.7
10348.683333	---	36.47	54.00	17.53	100.0	V	131.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5157MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

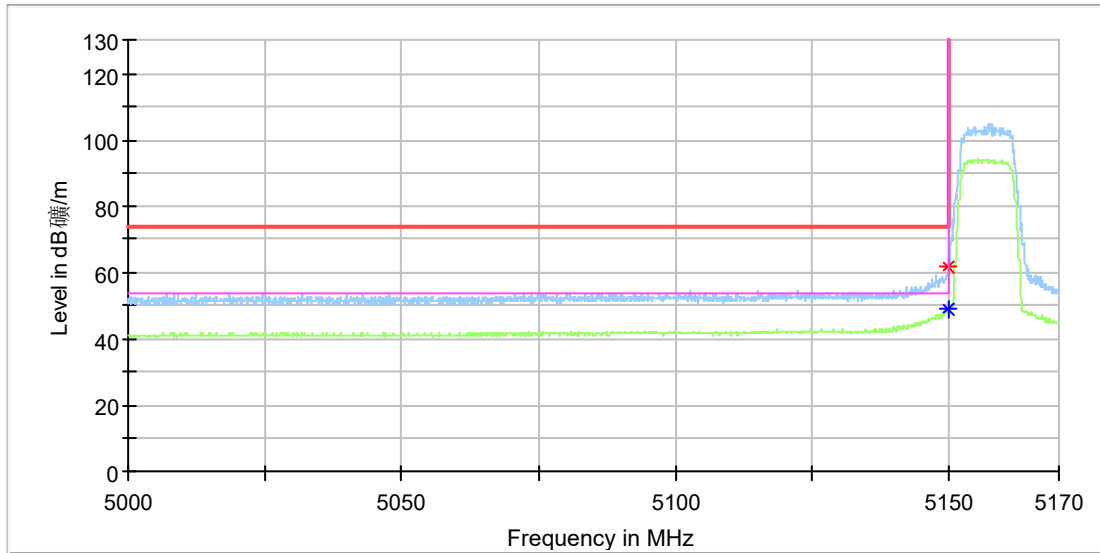

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.877778	---	48.68	54.00	5.32	100.0	H	333.0	12.4
5149.955556	61.58	---	74.00	12.42	100.0	H	333.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5157MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

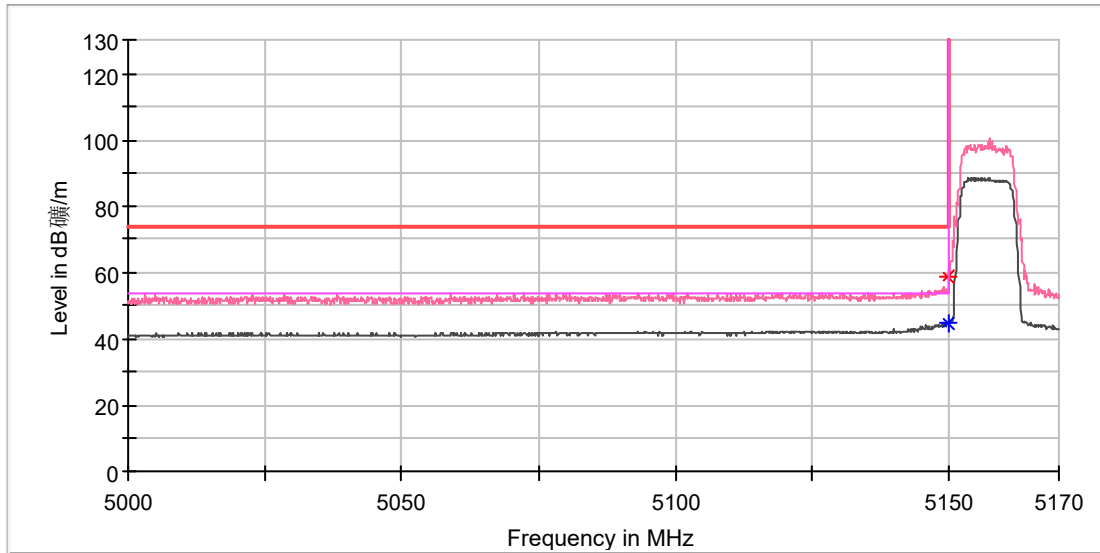

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.666667	---	44.87	54.00	9.13	100.0	V	238.0	12.4
5150.000000	58.94	---	74.00	15.06	100.0	V	231.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5160MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

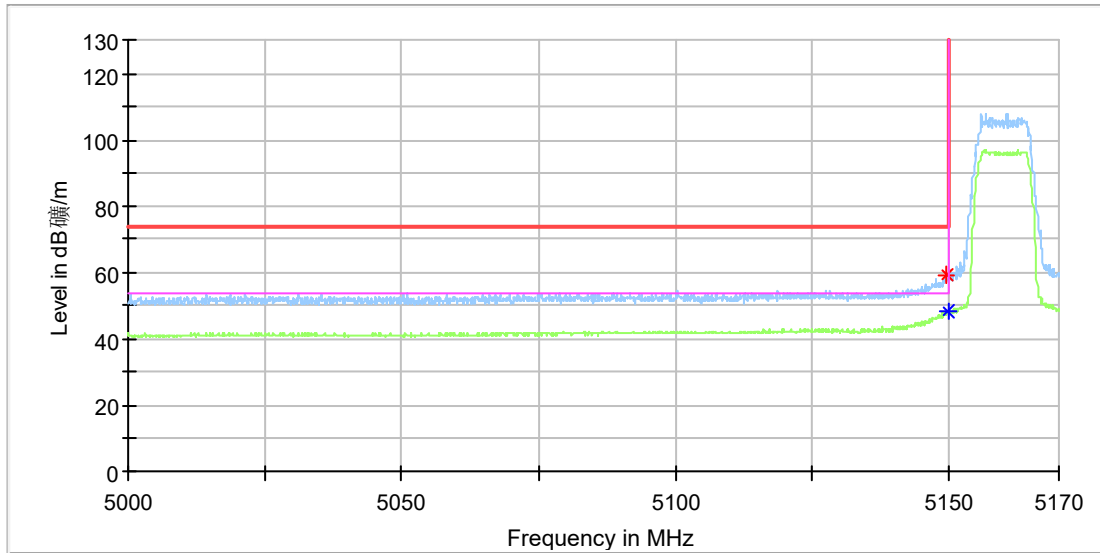

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.566667	59.39	---	74.00	14.61	100.0	H	327.0	12.4
5149.877778	---	48.36	54.00	5.64	100.0	H	319.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5165MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

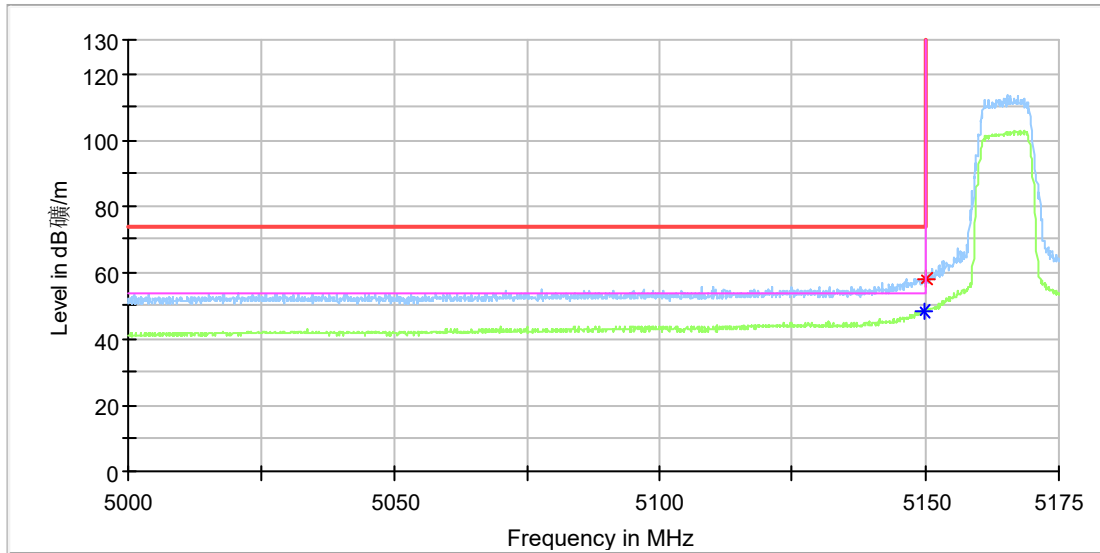

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.800000	---	48.51	54.00	5.49	100.0	H	334.0	12.4
5149.955556	58.27	---	74.00	15.73	100.0	H	334.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5201MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

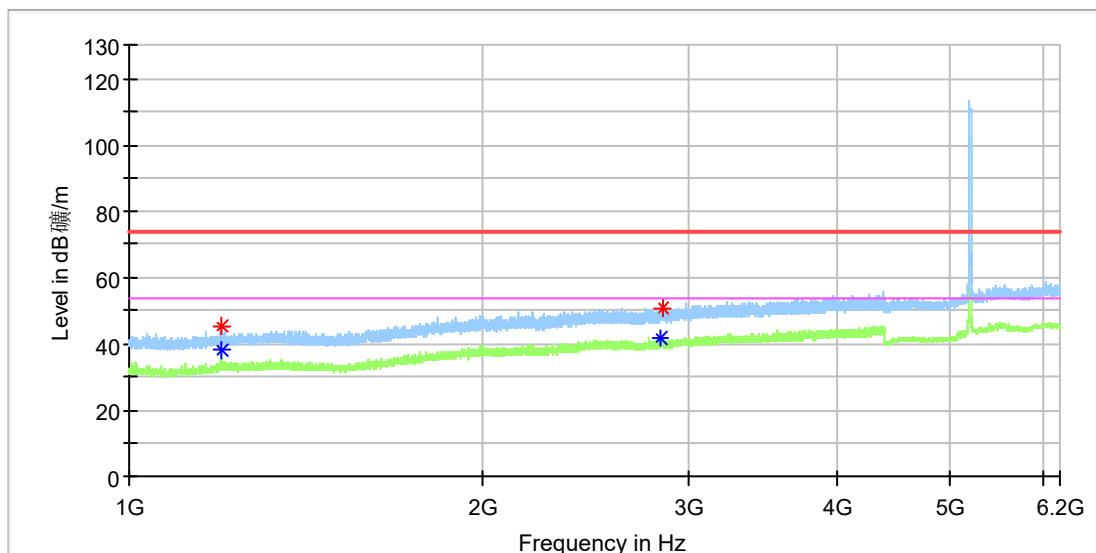

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1199.750000	45.57	---	74.00	28.43	100.0	H	184.0	1.1
1199.750000	---	38.26	54.00	15.74	100.0	H	184.0	1.1
2834.470000	---	41.85	54.00	12.15	100.0	H	0.0	8.1
2844.500000	50.83	---	74.00	23.17	100.0	H	239.0	8.1

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5201MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

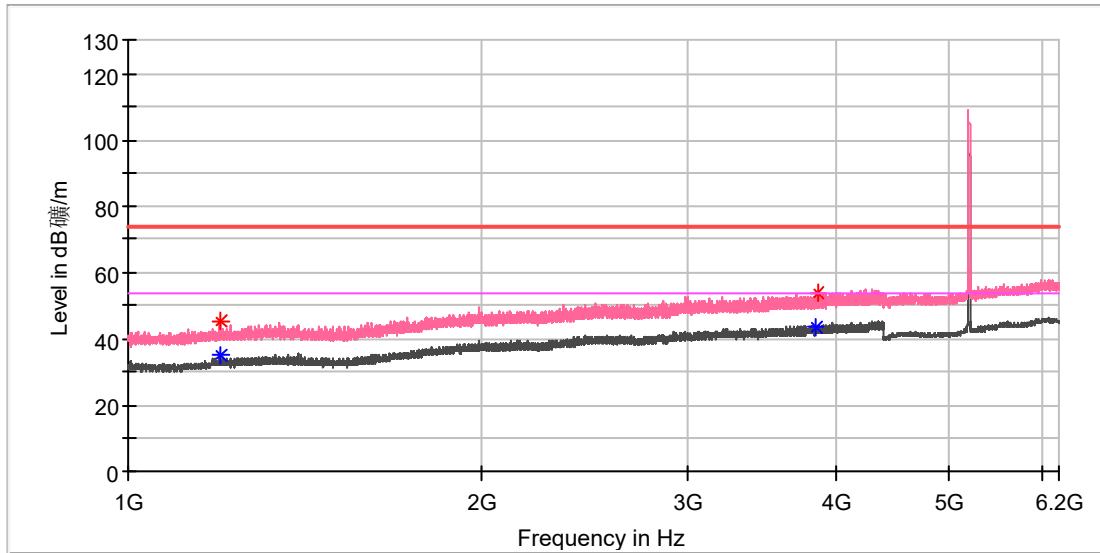

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.370000	---	35.31	54.00	18.69	100.0	V	333.0	1.1
1197.540000	45.56	---	74.00	28.44	100.0	V	333.0	1.1
3851.410000	---	43.69	54.00	10.31	100.0	V	28.0	9.9
3874.870000	53.87	---	74.00	20.13	100.0	V	270.0	10.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5201MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin



Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10396.866667	45.47	---	74.00	28.53	100.0	H	167.0	11.9
10427.350000	---	36.94	54.00	17.06	100.0	H	239.0	11.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5201MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

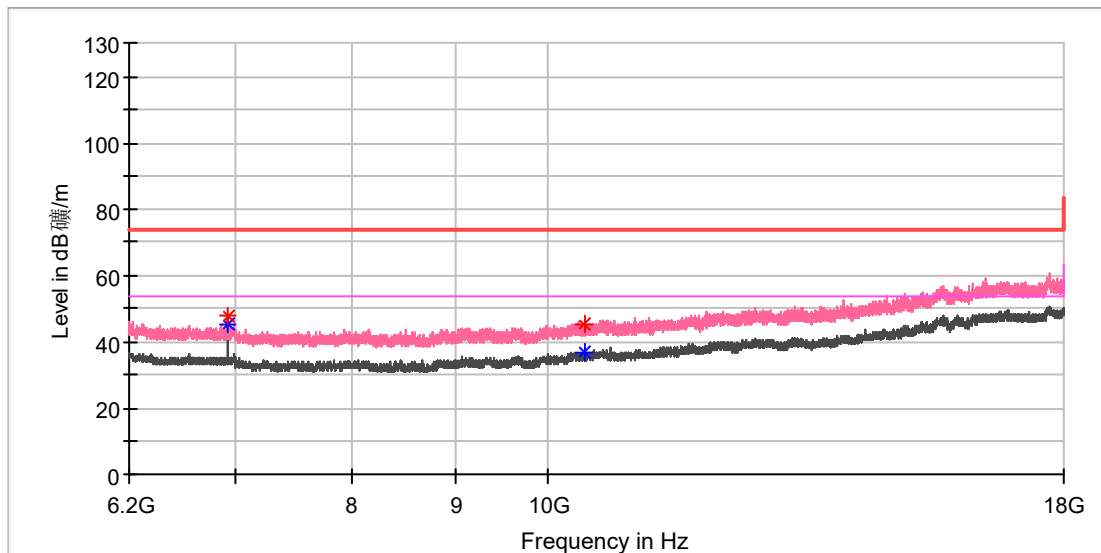

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6934.550000	47.51	---	74.00	26.49	100.0	V	347.0	8.6
6934.550000	---	45.19	54.00	8.81	100.0	V	347.0	8.6
10426.366667	45.28	---	74.00	28.72	100.0	V	311.0	11.9
10426.366667	---	36.97	54.00	17.03	100.0	V	311.0	11.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5245MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

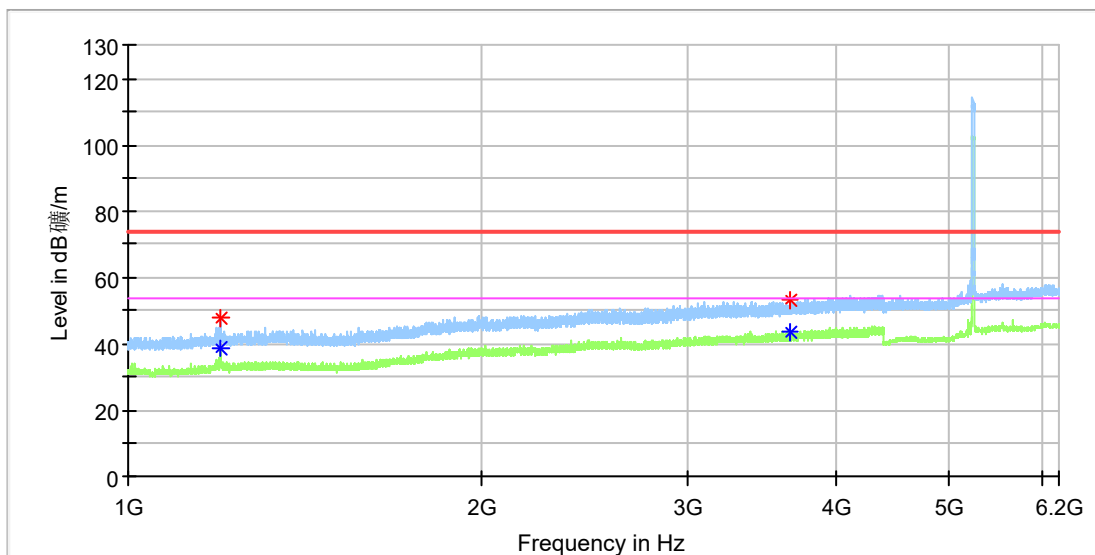

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1198.730000	---	38.67	54.00	15.33	100.0	H	229.0	1.1
1199.580000	47.63	---	74.00	26.37	100.0	H	186.0	1.1
3656.250000	---	43.78	54.00	10.22	100.0	H	332.0	9.4
3663.730000	53.35	---	74.00	20.65	100.0	H	307.0	9.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5245MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

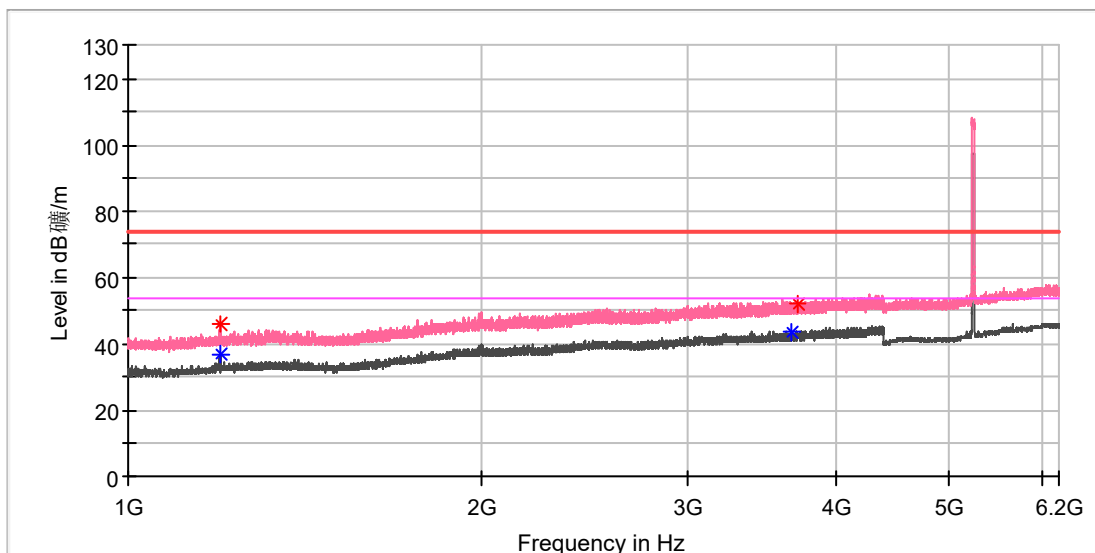

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.350000	---	36.73	54.00	17.27	100.0	V	75.0	1.1
1197.030000	45.77	---	74.00	28.23	100.0	V	75.0	1.1
3670.870000	---	43.38	54.00	10.62	100.0	V	353.0	9.5
3719.660000	52.18	---	74.00	21.82	100.0	V	299.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5245MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

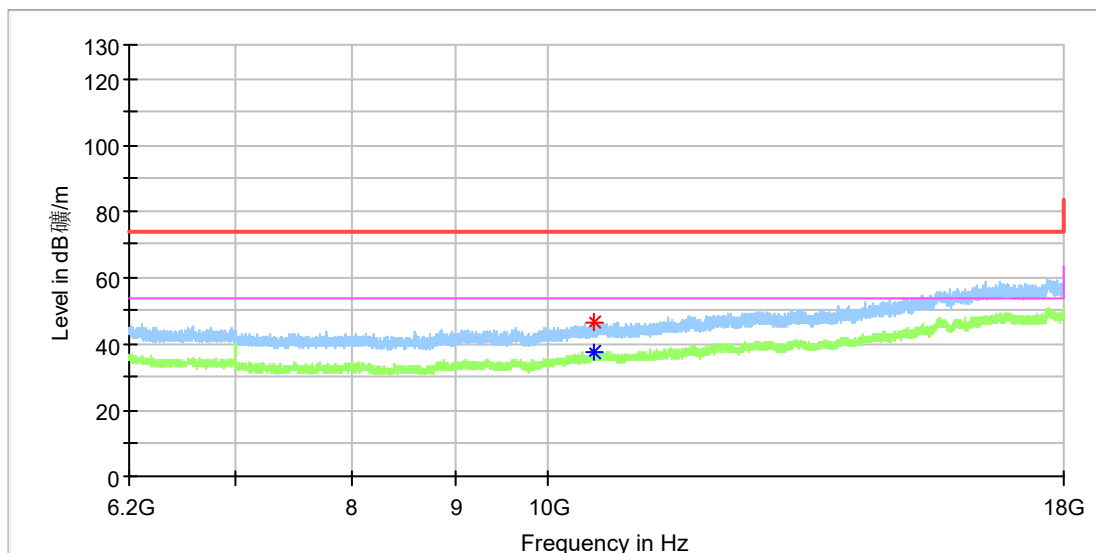

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10540.925000	46.75	---	74.00	27.25	100.0	H	333.0	12.0
10551.741667	---	37.48	54.00	16.52	100.0	H	250.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5245MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

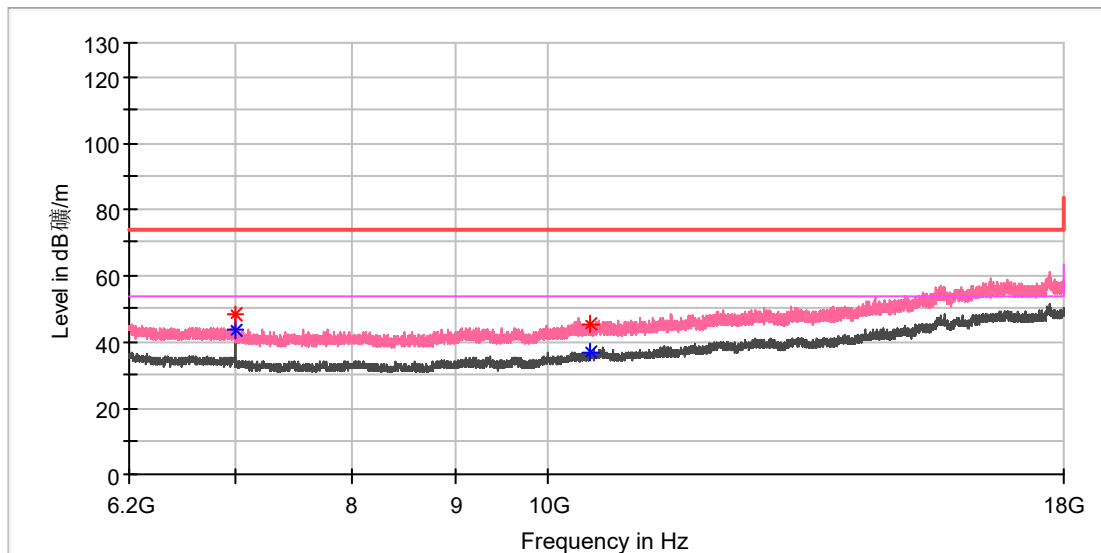

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6993.550000	48.15	---	74.00	25.85	100.0	V	192.0	8.6
6993.550000	---	43.65	54.00	10.35	100.0	V	192.0	8.6
10488.808333	45.54	---	74.00	28.46	100.0	V	203.0	12.0
10499.133333	---	36.97	54.00	17.03	100.0	V	192.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.2G_10M_5245MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

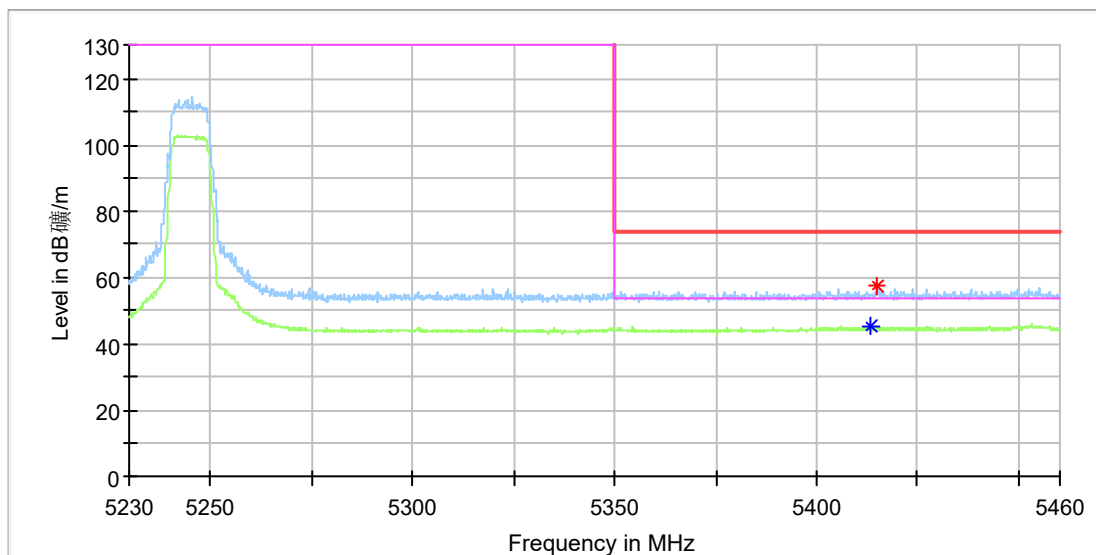

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5413.488889	---	45.20	54.00	8.80	100.0	H	326.0	13.5
5414.894445	57.33	---	74.00	16.67	100.0	H	32.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_10M_5245MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

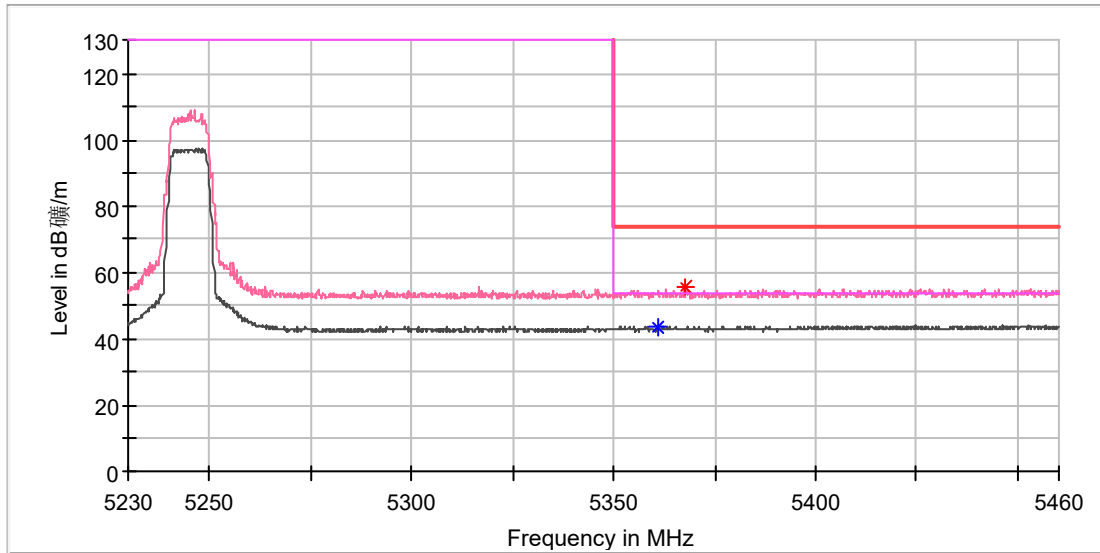

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5360.716667	---	43.39	54.00	10.61	100.0	V	80.0	13.3
5368.000000	55.42	---	74.00	18.58	100.0	V	120.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5161MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

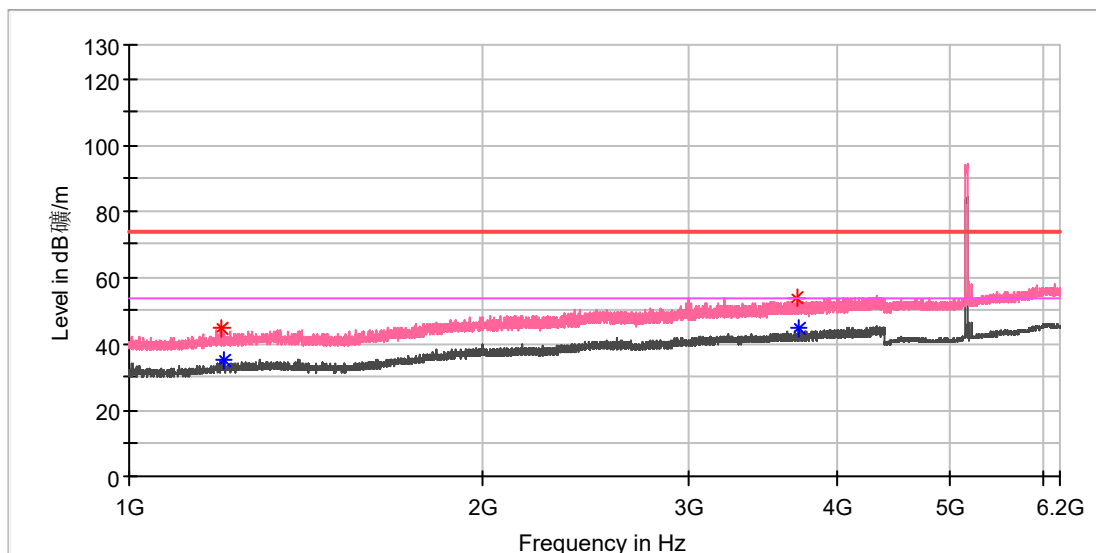

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.520000	44.63	---	74.00	29.37	100.0	V	0.0	1.1
1202.130000	---	35.26	54.00	18.74	100.0	V	313.0	1.2
3711.330000	53.55	---	74.00	20.45	100.0	V	344.0	9.6
3718.640000	---	44.71	54.00	9.29	100.0	V	266.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5161MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

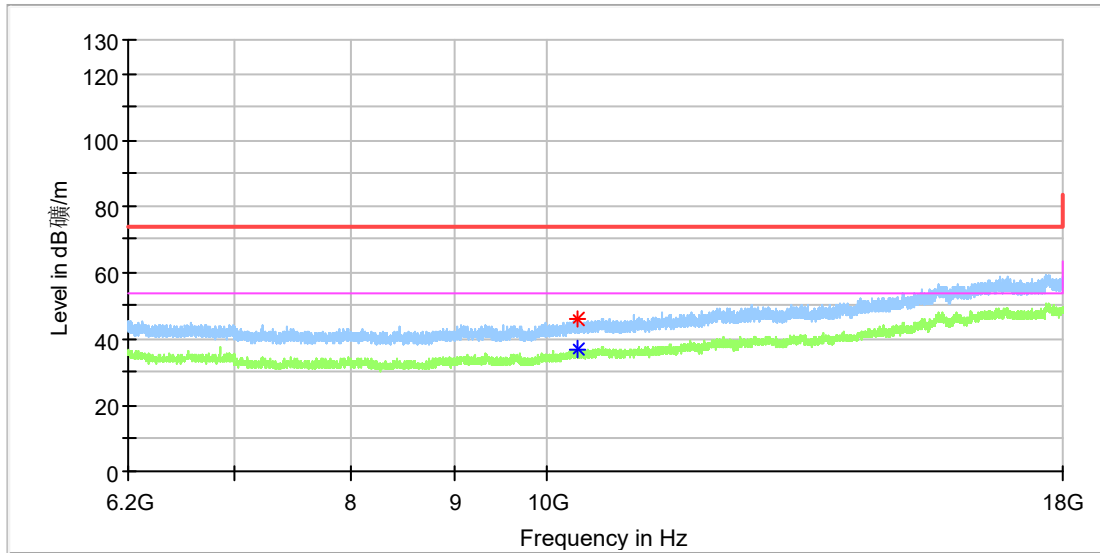

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10338.850000	---	36.91	54.00	17.09	100.0	H	65.0	11.7
10342.291667	46.01	---	74.00	27.99	100.0	H	18.0	11.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5161MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

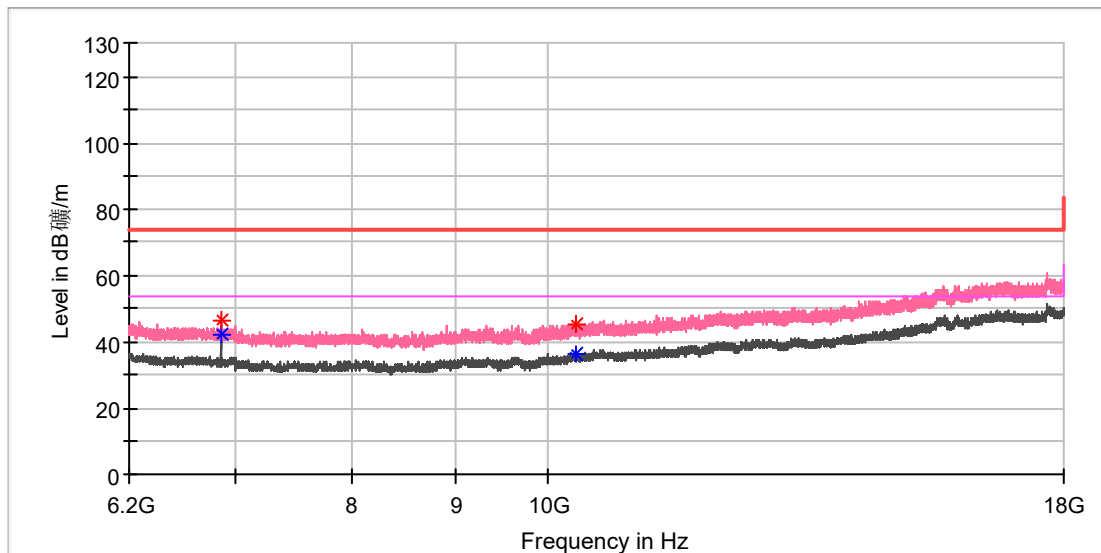

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6880.958333	46.80	---	74.00	27.20	100.0	V	223.0	8.6
6880.958333	---	42.15	54.00	11.85	100.0	V	223.0	8.6
10322.625000	---	36.49	54.00	17.51	100.0	V	247.0	11.7
10328.525000	45.29	---	74.00	28.71	100.0	V	247.0	11.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5161MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

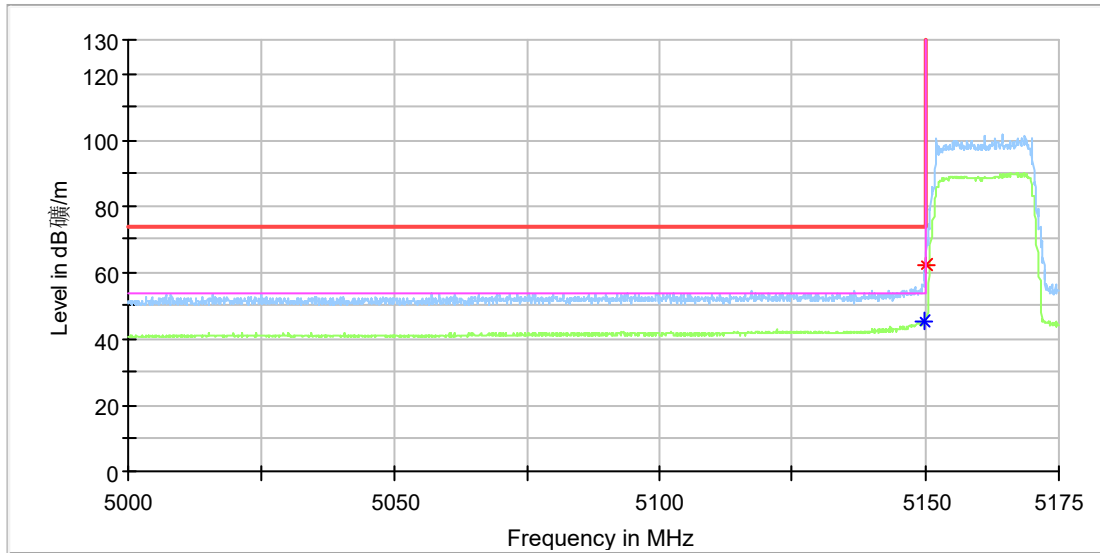

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.877778	---	45.41	54.00	8.59	100.0	H	320.0	12.4
5149.955556	61.98	---	74.00	12.02	100.0	H	355.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5161MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

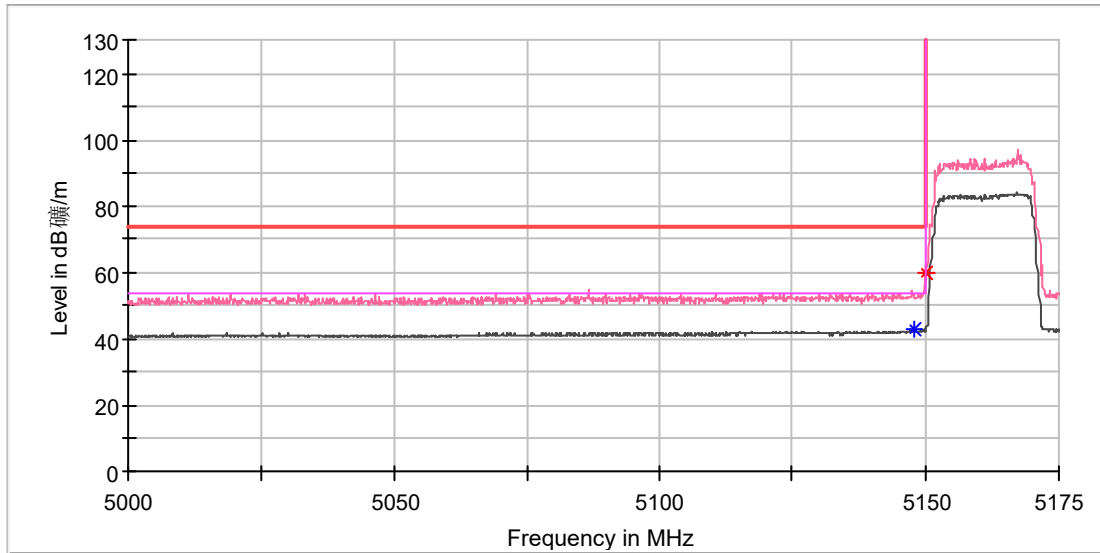

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5147.777778	---	42.77	54.00	11.23	100.0	V	114.0	12.4
5150.000000	59.58	---	74.00	14.42	100.0	V	120.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5165MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

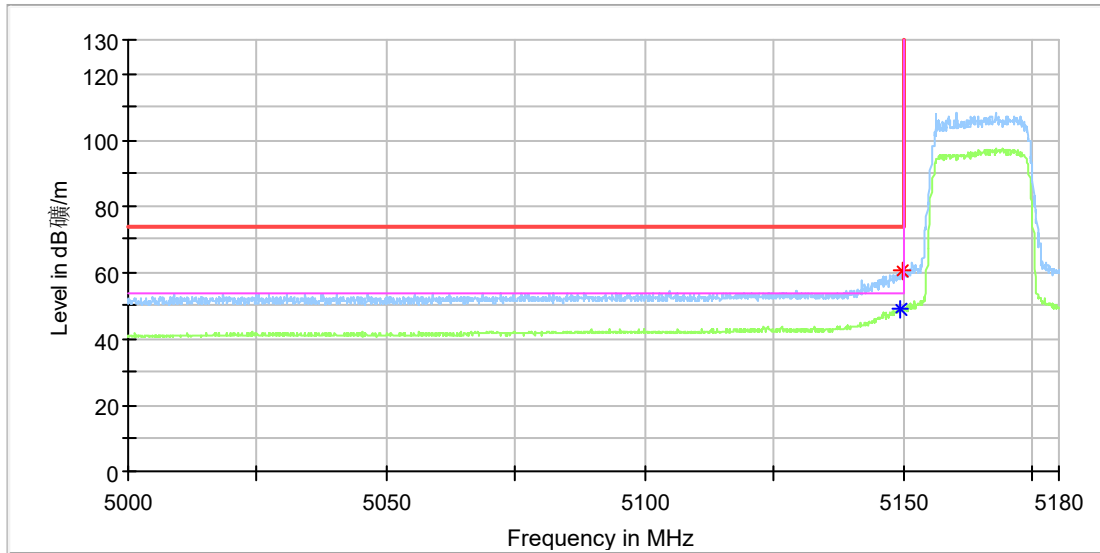

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.488889	---	49.13	54.00	4.87	100.0	H	325.0	12.4
5149.800000	60.58	---	74.00	13.42	100.0	H	325.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

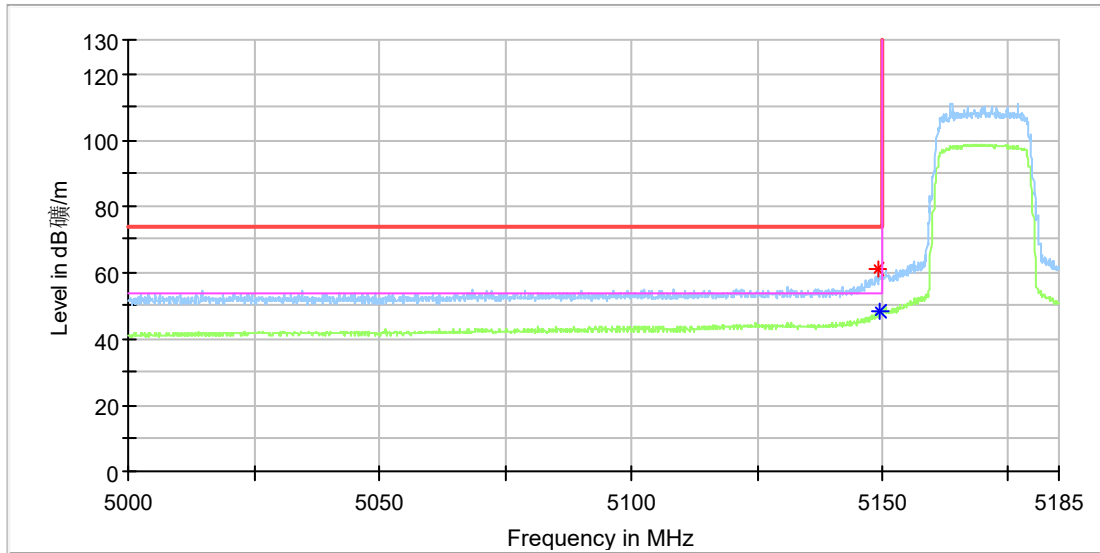

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5149.177778	60.97	---	74.00	13.03	100.0	H	332.0	12.4
5149.488889	---	48.19	54.00	5.81	100.0	H	316.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

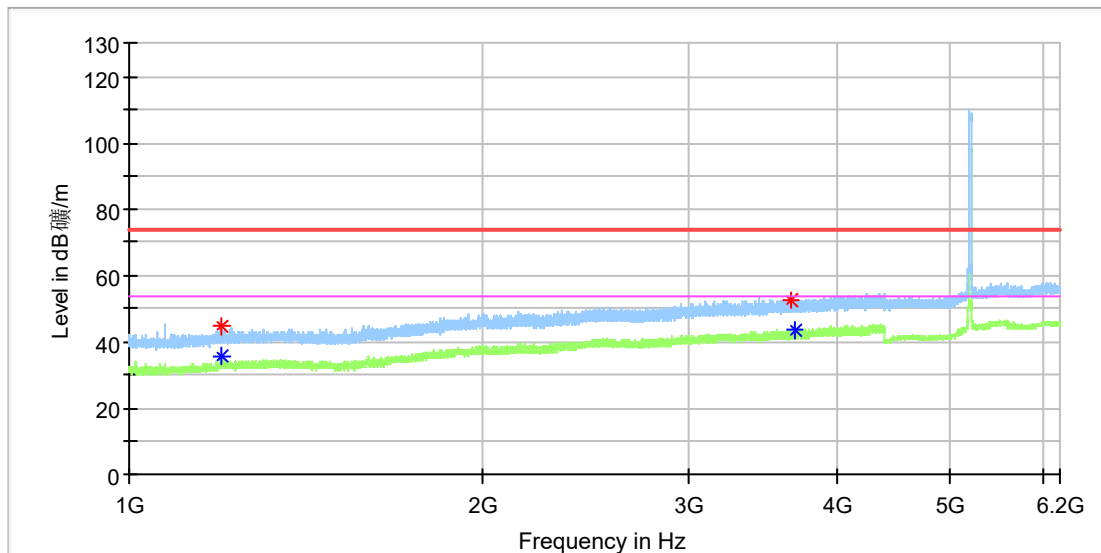

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.200000	45.05	---	74.00	28.95	100.0	H	230.0	1.1
1197.540000	---	35.58	54.00	18.42	100.0	H	230.0	1.1
3657.270000	52.85	---	74.00	21.15	100.0	H	298.0	9.4
3691.100000	---	43.40	54.00	10.60	100.0	H	93.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

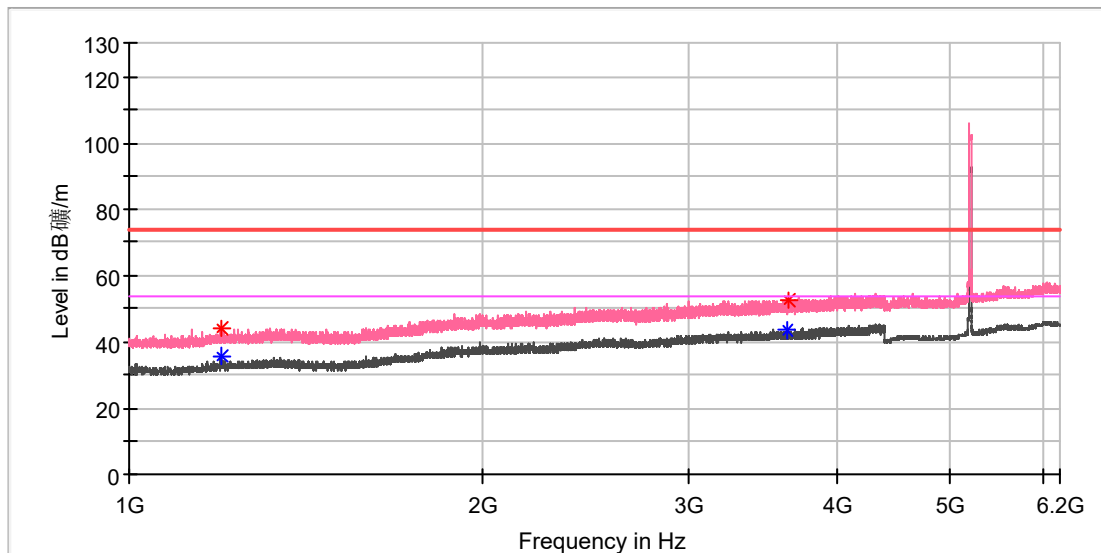

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1199.070000	---	35.79	54.00	18.21	100.0	V	0.0	1.1
1199.580000	44.38	---	74.00	29.62	100.0	V	0.0	1.1
3627.350000	---	43.25	54.00	10.75	100.0	V	165.0	9.4
3650.980000	52.64	---	74.00	21.36	100.0	V	88.0	9.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

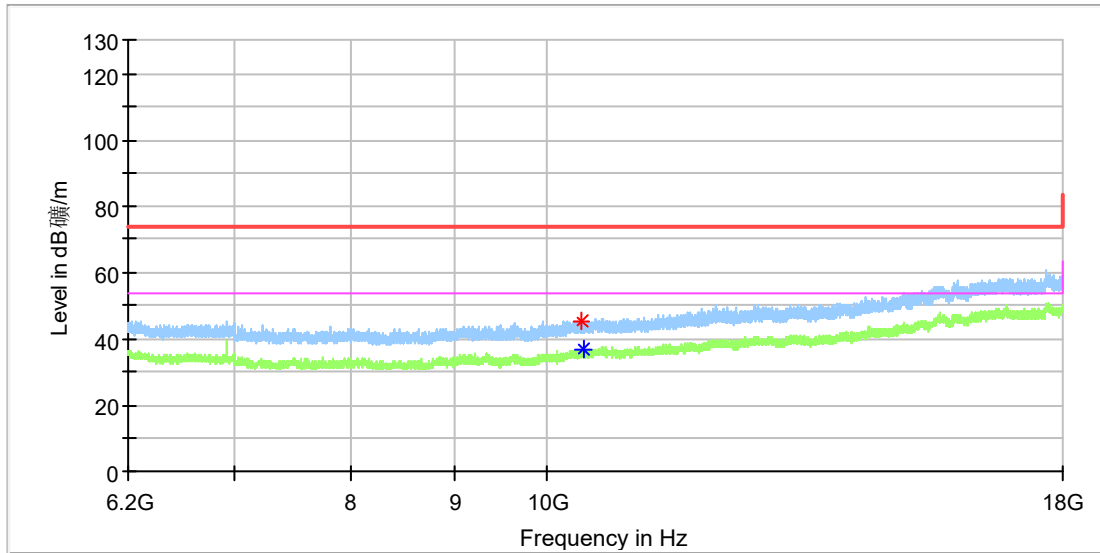

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10398.833333	45.14	---	74.00	28.86	100.0	H	168.0	11.9
10428.825000	---	36.64	54.00	17.36	100.0	H	255.0	11.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

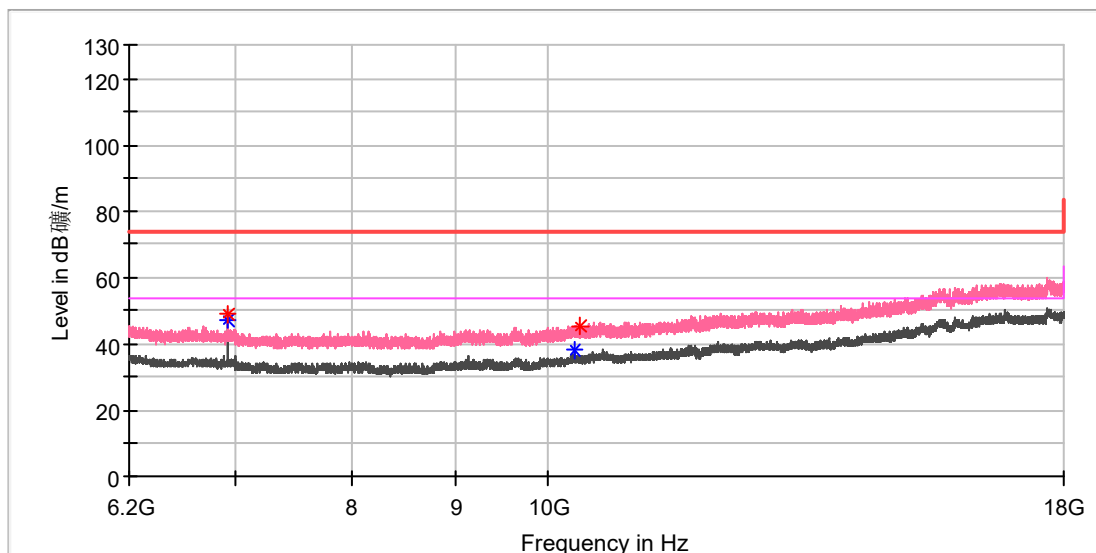

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6933.075000	49.00	---	74.00	25.00	100.0	V	192.0	8.6
6933.075000	---	46.97	54.00	7.03	100.0	V	192.0	8.6
10295.091667	---	37.88	54.00	16.12	100.0	V	84.0	11.6
10373.758333	45.46	---	74.00	28.54	100.0	V	0.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

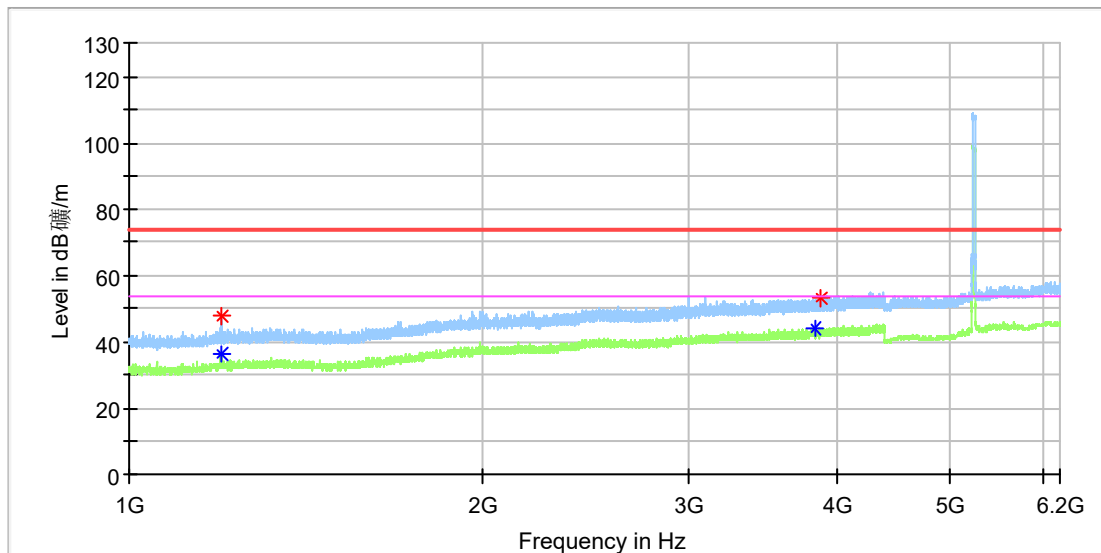

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1199.070000	48.04	---	74.00	25.96	100.0	H	191.0	1.1
1199.070000	---	36.48	54.00	17.52	100.0	H	191.0	1.1
3839.000000	---	43.95	54.00	10.05	100.0	H	356.0	9.9
3879.120000	53.37	---	74.00	20.63	100.0	H	295.0	10.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

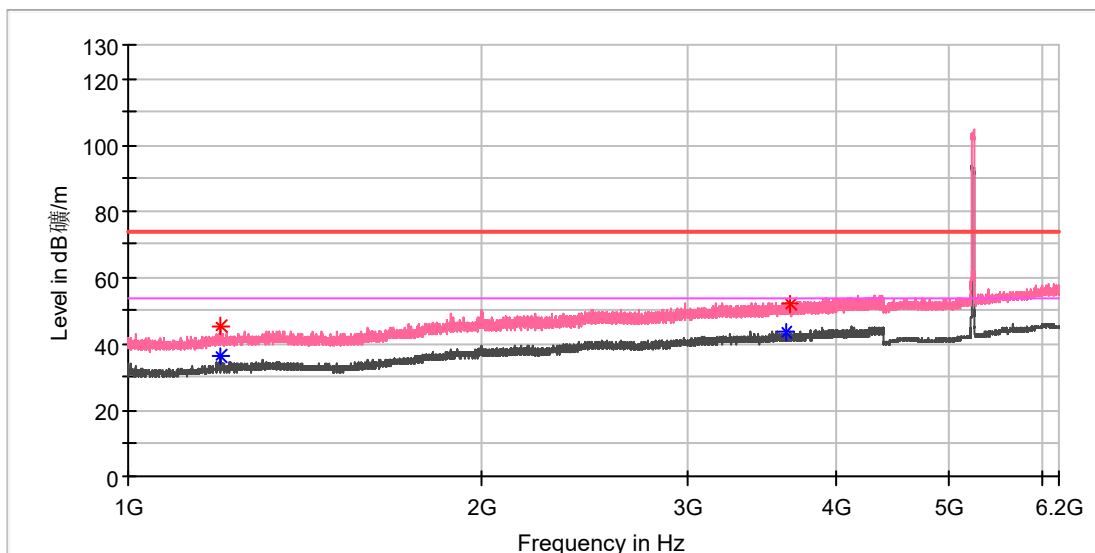

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1197.030000	---	36.09	54.00	17.91	100.0	V	351.0	1.1
1199.240000	45.34	---	74.00	28.66	100.0	V	75.0	1.1
3632.450000	---	43.73	54.00	10.27	100.0	V	208.0	9.4
3665.600000	52.27	---	74.00	21.73	100.0	V	16.0	9.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

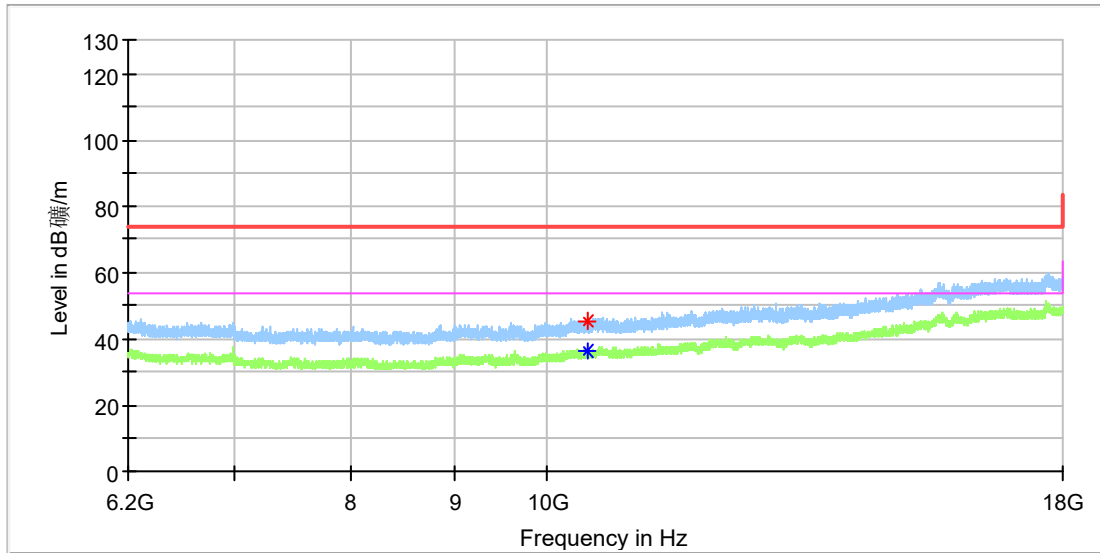

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10458.816667	---	36.56	54.00	17.44	100.0	H	323.0	12.0
10459.800000	45.55	---	74.00	28.45	100.0	H	223.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

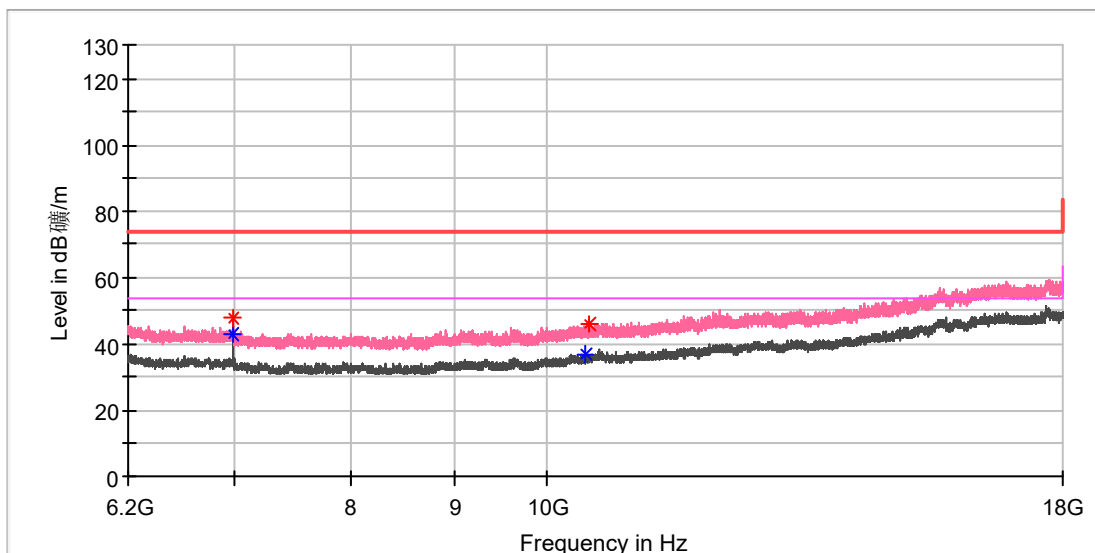

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6986.666667	47.69	---	74.00	26.31	100.0	V	225.0	8.6
6986.666667	---	42.84	54.00	11.16	100.0	V	225.0	8.6
10438.166667	---	36.81	54.00	17.19	100.0	V	4.0	11.9
10493.725000	46.19	---	74.00	27.81	100.0	V	65.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

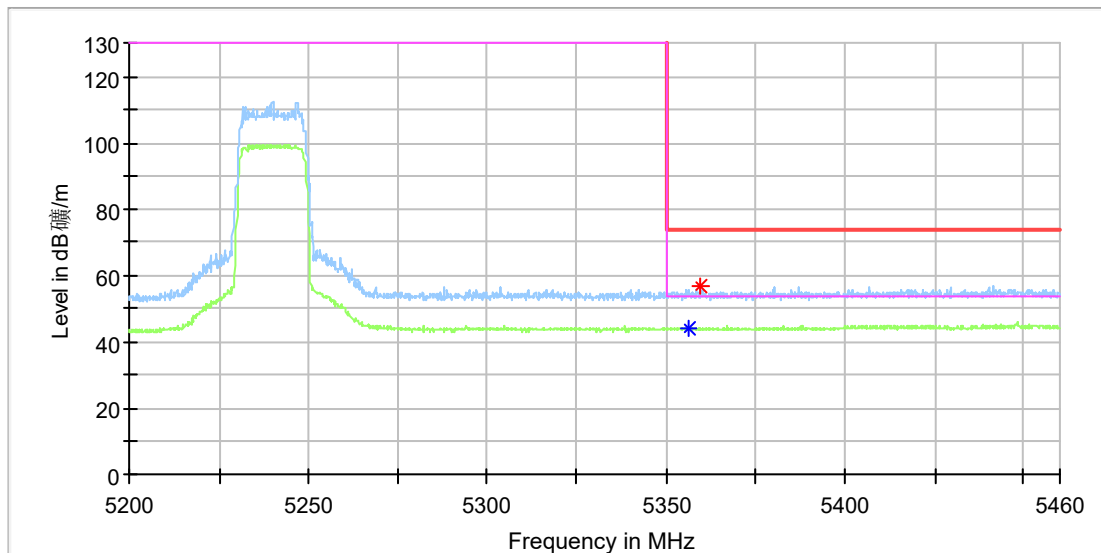

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5356.500000	---	44.13	54.00	9.87	100.0	H	326.0	13.3
5359.694445	56.75	---	74.00	17.25	100.0	H	359.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_20M_5240MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

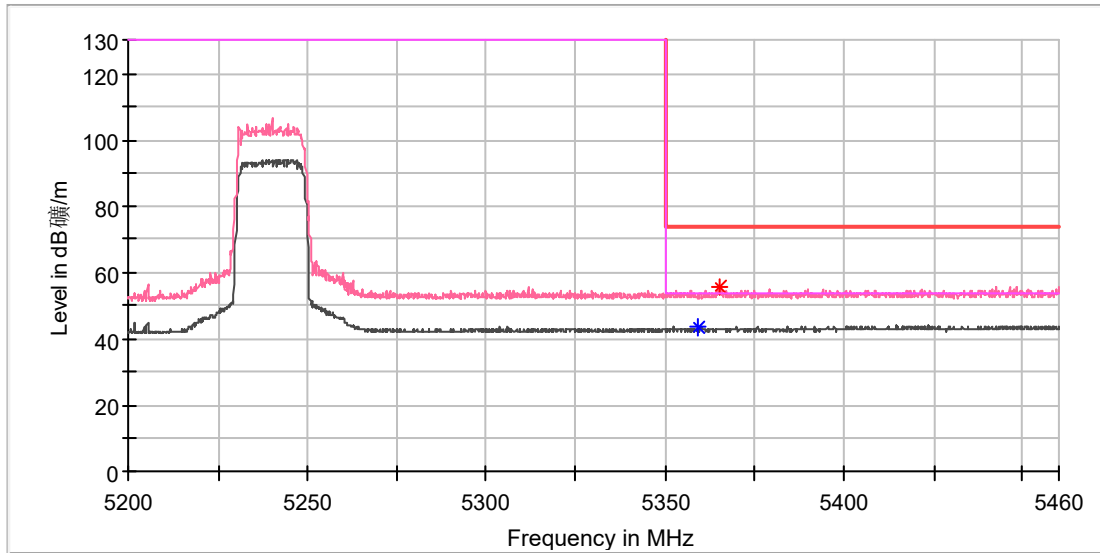

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5359.055556	---	43.47	54.00	10.53	100.0	V	193.0	13.3
5365.316667	55.35	---	74.00	18.65	100.0	V	73.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

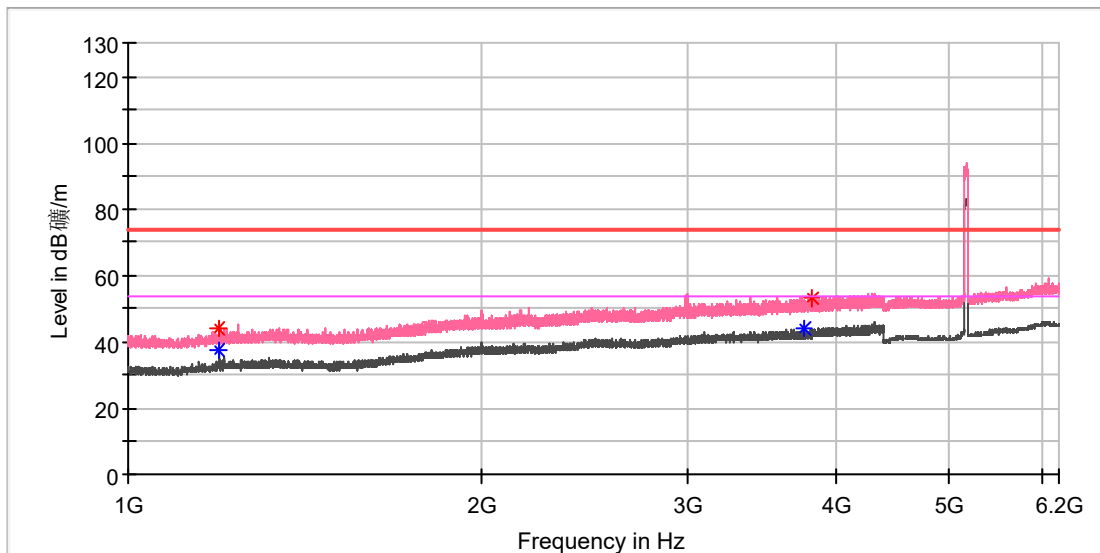

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.330000	44.23	---	74.00	29.77	100.0	V	111.0	1.1
1195.330000	---	37.27	54.00	16.73	100.0	V	111.0	1.1
3767.940000	---	43.86	54.00	10.14	100.0	V	299.0	9.7
3820.130000	53.28	---	74.00	20.72	100.0	V	245.0	9.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

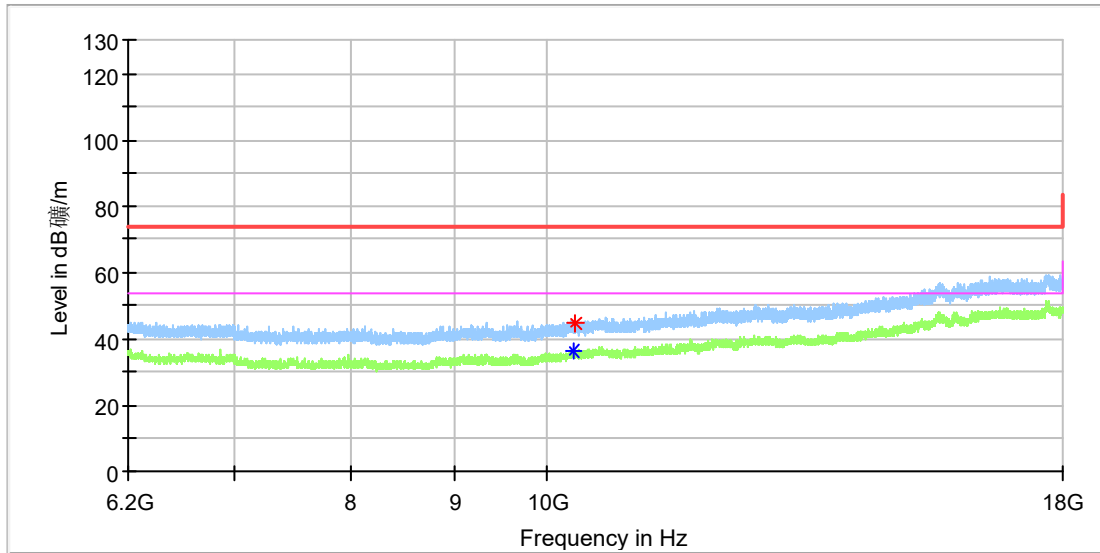

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10307.875000	---	36.55	54.00	17.45	100.0	H	276.0	11.6
10333.933333	44.94	---	74.00	29.06	100.0	H	0.0	11.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

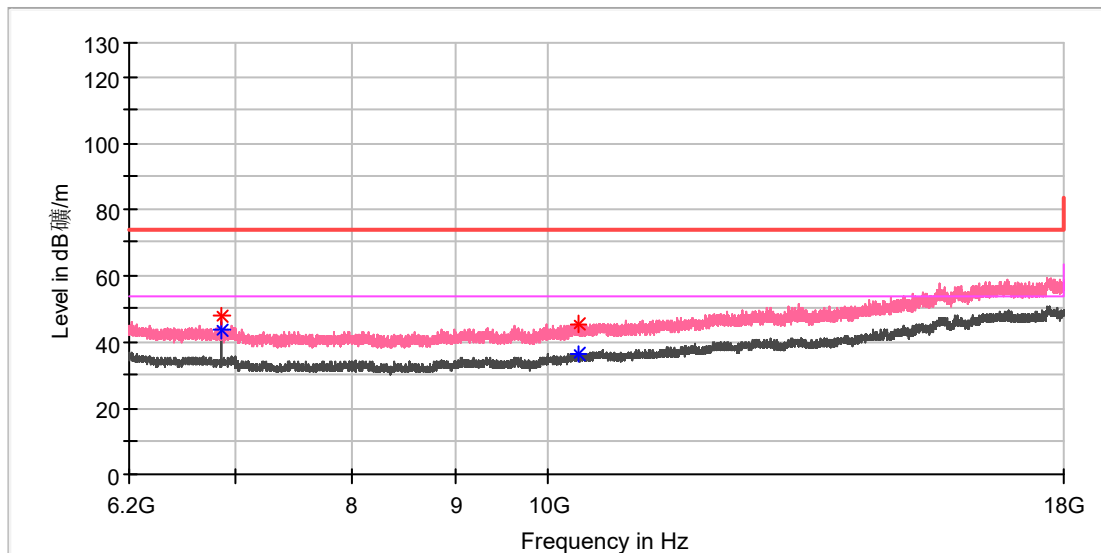

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6892.758333	47.73	---	74.00	26.27	100.0	V	204.0	8.6
6893.250000	---	43.59	54.00	10.41	100.0	V	204.0	8.6
10339.341667	45.29	---	74.00	28.71	100.0	V	0.0	11.7
10359.991667	---	36.32	54.00	17.68	100.0	V	356.0	11.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

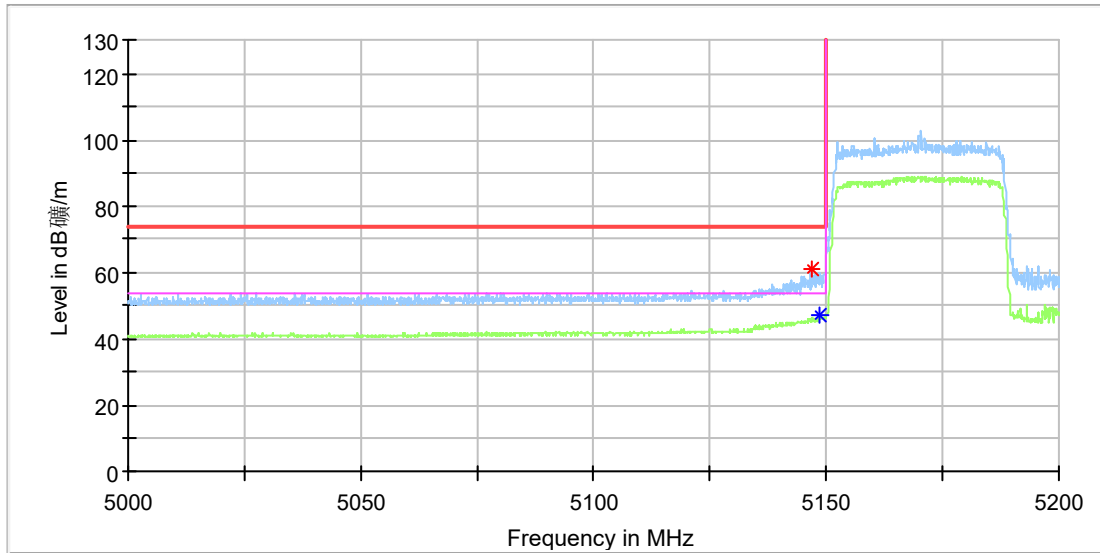

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5147.077778	61.19	---	74.00	12.81	100.0	H	322.0	12.4
5148.633333	---	46.93	54.00	7.07	100.0	H	322.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5170MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

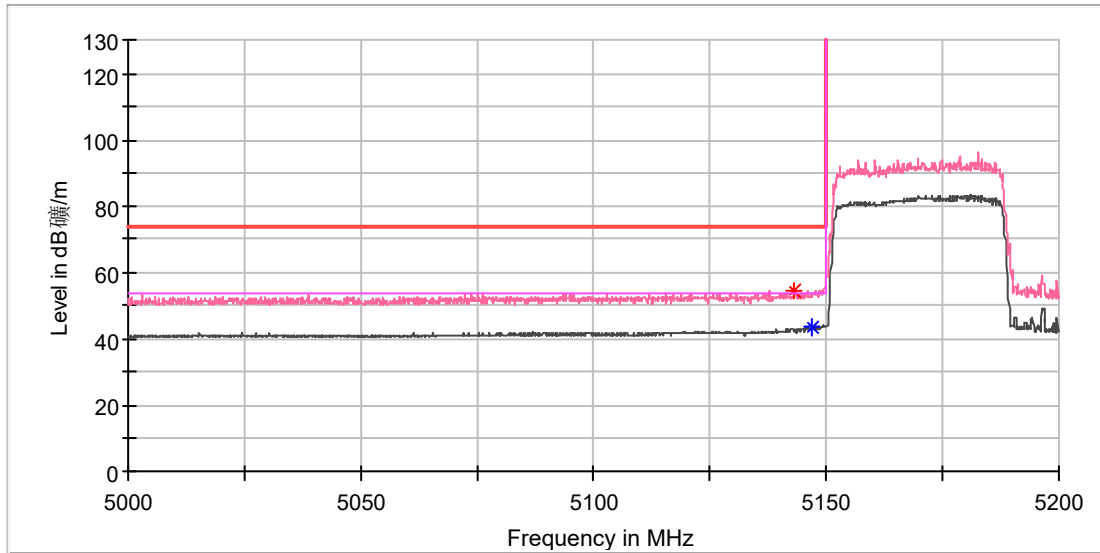

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5143.000000	54.64	---	74.00	19.36	100.0	V	64.0	12.4
5147.111111	---	43.55	54.00	10.45	100.0	V	217.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5175MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

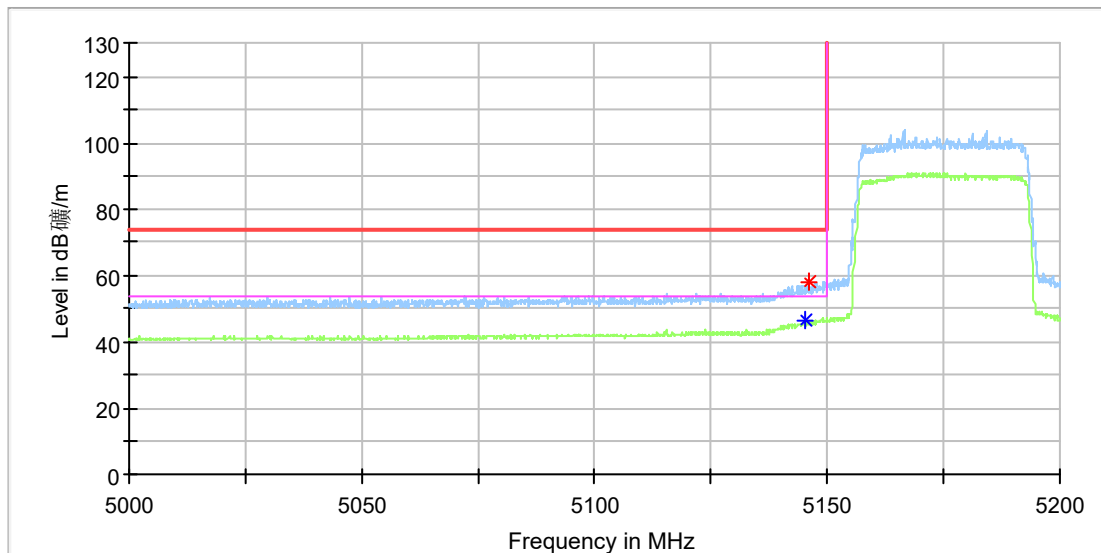

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5145.288889	---	46.42	54.00	7.58	100.0	H	342.0	12.4
5146.066667	58.01	---	74.00	15.99	100.0	H	320.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5180MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

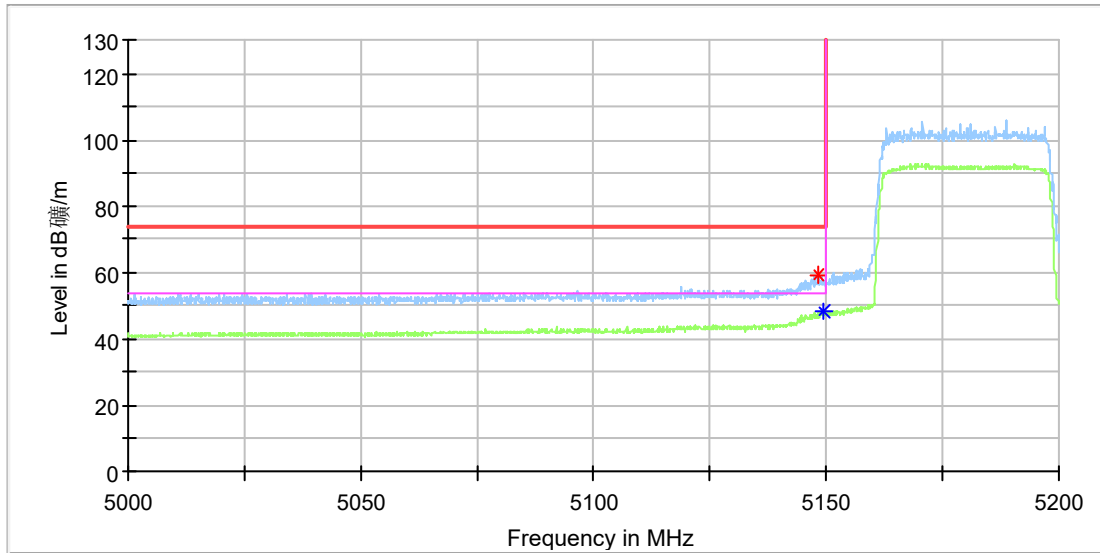

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5148.477778	59.17	---	74.00	14.83	100.0	H	331.0	12.4
5149.488889	---	48.14	54.00	5.86	100.0	H	331.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.2G_40M_5185MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

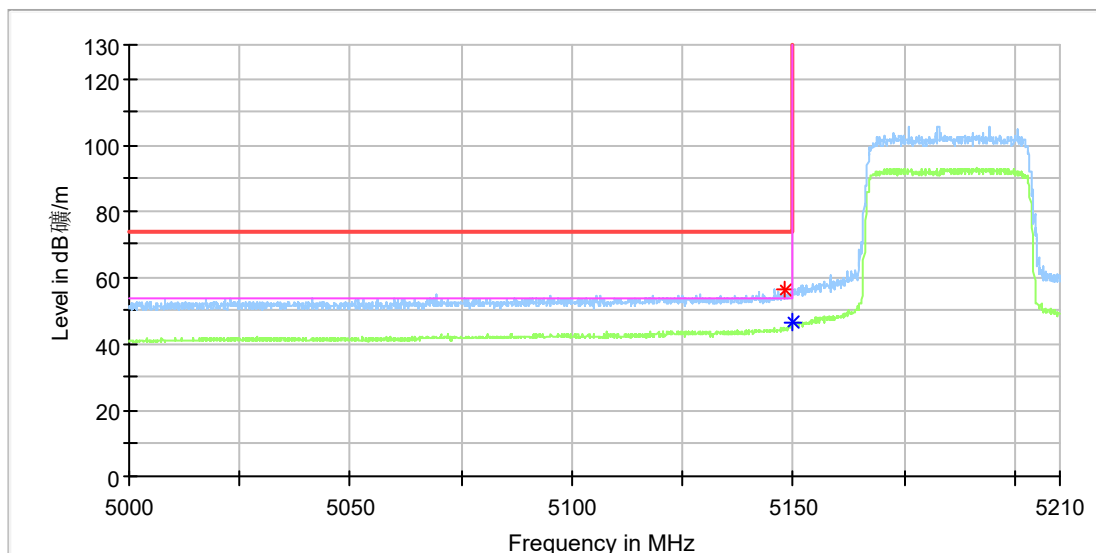

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5148.088889	56.43	---	74.00	17.57	100.0	H	329.0	12.4
5149.800000	---	46.40	54.00	7.60	100.0	H	321.0	12.4

Final Result

Frequency (MHz)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

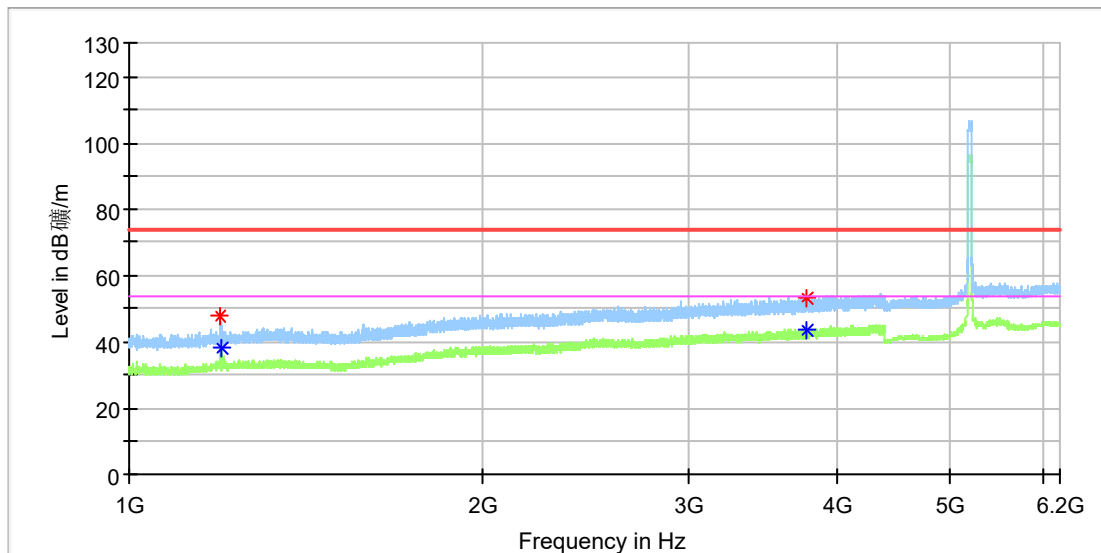

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.670000	47.63	---	74.00	26.37	100.0	H	186.0	1.1
1196.350000	---	38.03	54.00	15.97	100.0	H	186.0	1.1
3776.610000	---	43.57	54.00	10.43	100.0	H	198.0	9.7
3778.480000	53.35	---	74.00	20.65	100.0	H	331.0	9.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

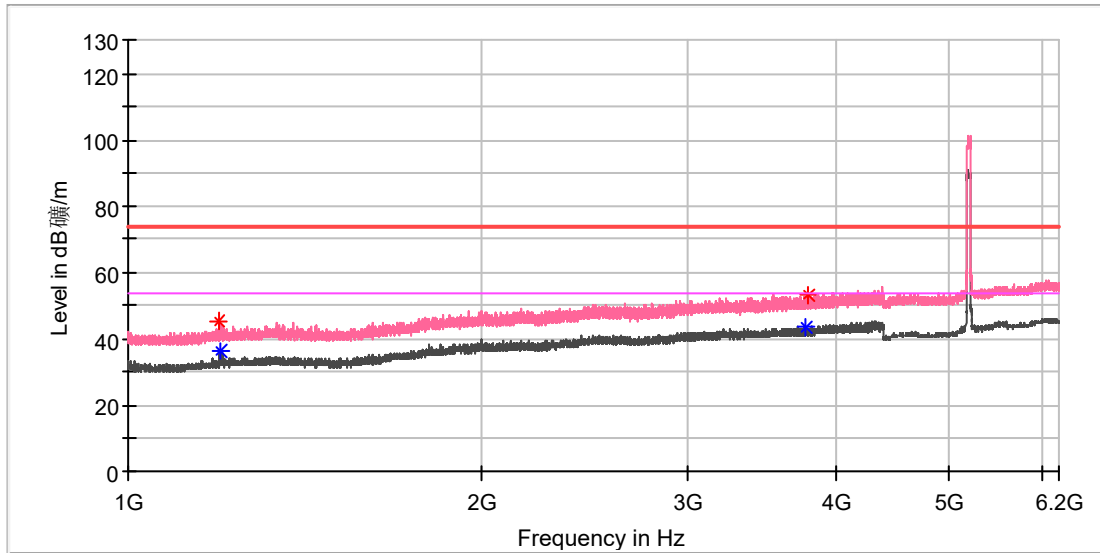

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.650000	45.42	---	74.00	28.58	100.0	V	106.0	1.1
1196.520000	---	36.37	54.00	17.63	100.0	V	355.0	1.1
3777.290000	---	43.40	54.00	10.60	100.0	V	189.0	9.7
3787.830000	53.19	---	74.00	20.81	100.0	V	256.0	9.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

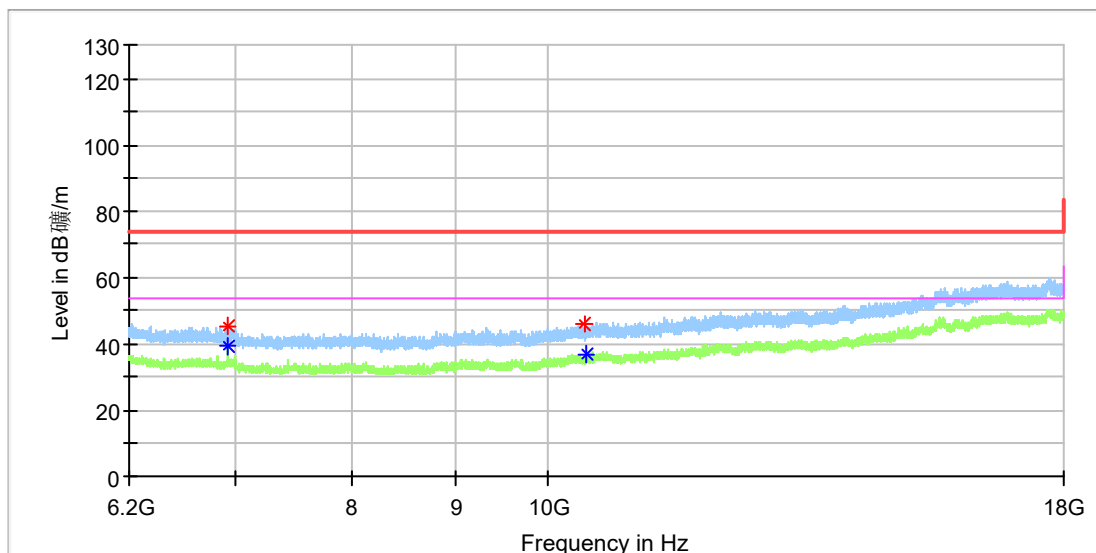

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6933.075000	---	39.48	54.00	14.52	100.0	H	222.0	8.6
6933.566667	45.14	---	74.00	28.86	100.0	H	354.0	8.6
10429.316667	45.84	---	74.00	28.16	100.0	H	147.0	11.9
10439.641667	---	36.70	54.00	17.30	100.0	H	324.0	11.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5200MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

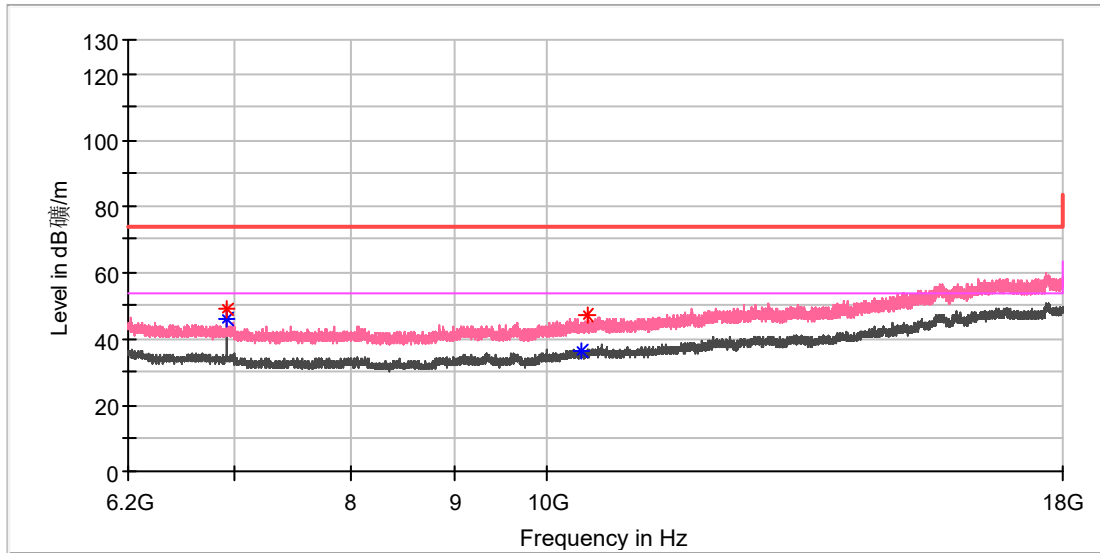

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6933.075000	49.08	---	74.00	24.92	100.0	V	193.0	8.6
6933.075000	---	46.16	54.00	7.84	100.0	V	193.0	8.6
10390.475000	---	36.32	54.00	17.68	100.0	V	178.0	11.9
10467.666667	46.88	---	74.00	27.12	100.0	V	315.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

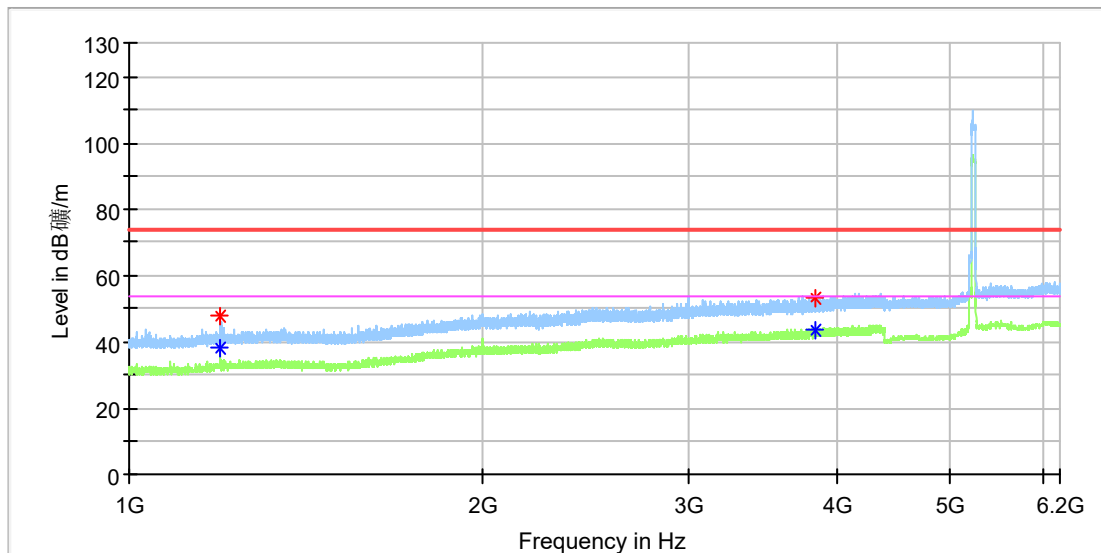

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.990000	---	38.03	54.00	15.97	100.0	H	256.0	1.1
1194.990000	47.48	---	74.00	26.52	100.0	H	256.0	1.1
3832.710000	53.18	---	74.00	20.82	100.0	H	224.0	9.9
3833.220000	---	43.79	54.00	10.21	100.0	H	202.0	9.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

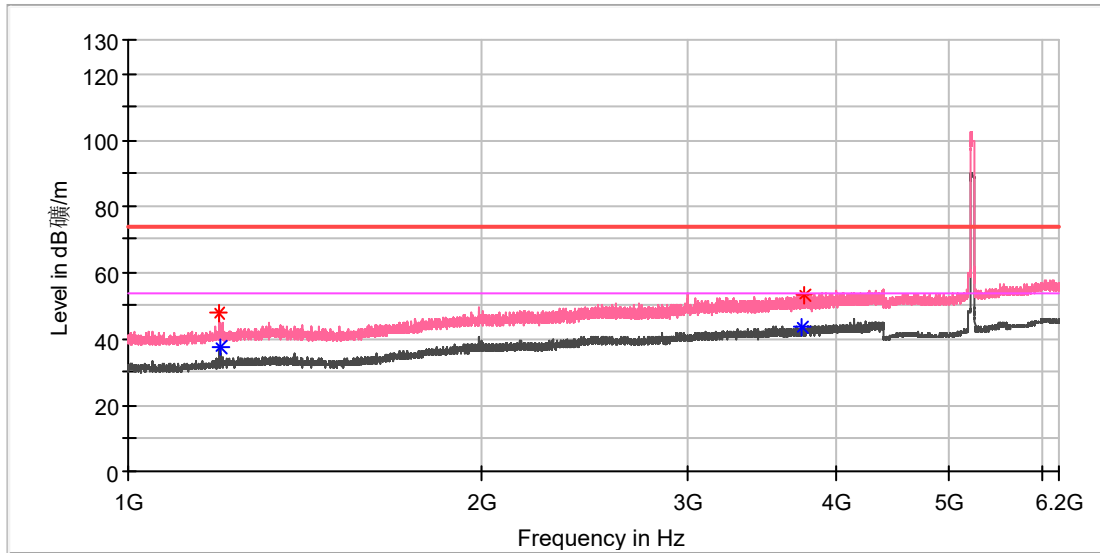

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.670000	47.49	---	74.00	26.51	100.0	V	347.0	1.1
1199.240000	---	37.40	54.00	16.60	100.0	V	304.0	1.1
3745.840000	---	43.63	54.00	10.37	100.0	V	304.0	9.6
3766.410000	53.16	---	74.00	20.84	100.0	V	316.0	9.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

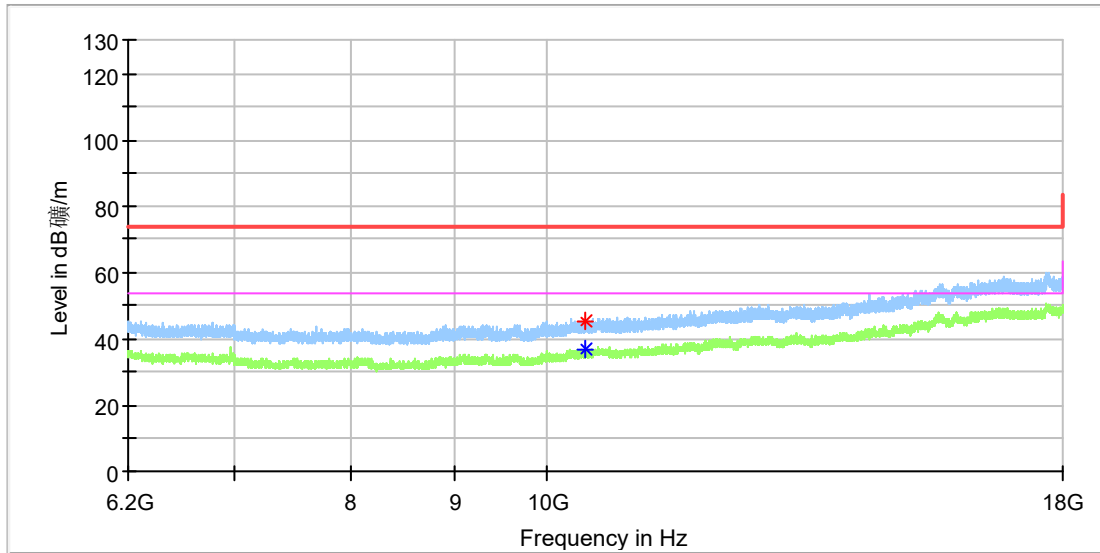

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
10435.708333	45.37	---	74.00	28.63	100.0	H	285.0	11.9
10452.425000	---	36.83	54.00	17.17	100.0	H	72.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

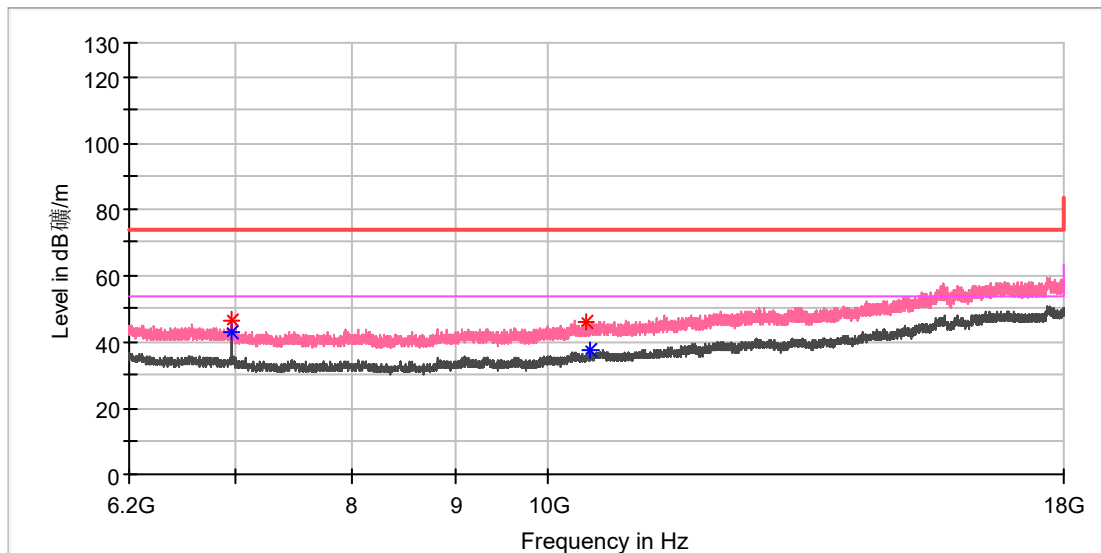

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
6972.900000	46.77	---	74.00	27.23	100.0	V	166.0	8.6
6973.391667	---	43.00	54.00	11.00	100.0	V	166.0	8.6
10432.266667	45.79	---	74.00	28.21	100.0	V	353.0	11.9
10482.908333	---	37.44	54.00	16.56	100.0	V	91.0	12.0

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

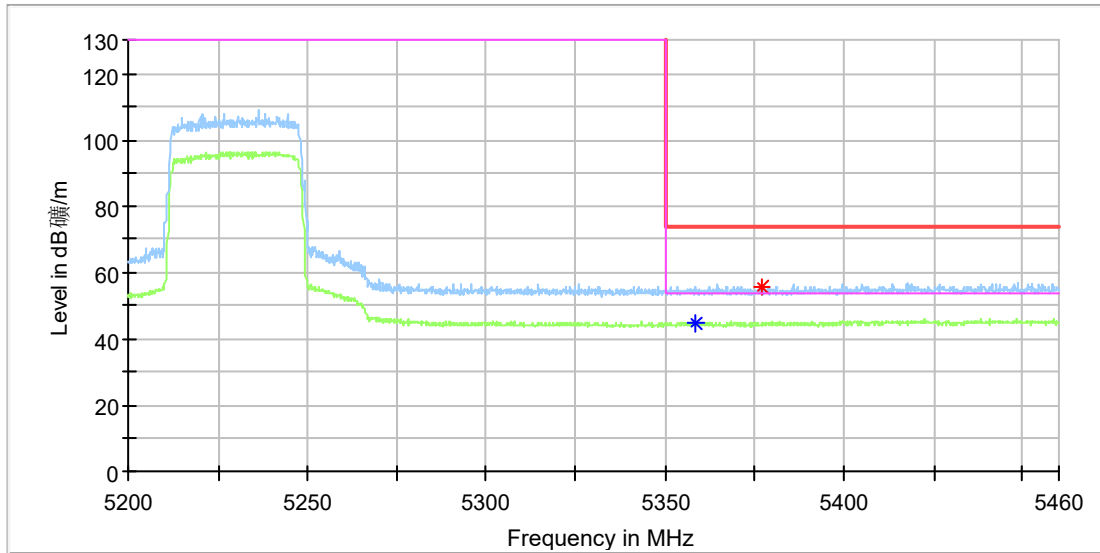

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5358.544445	---	44.79	54.00	9.21	100.0	H	30.0	13.3
5377.072222	55.86	---	74.00	18.14	100.0	H	320.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.2G_40M_5230MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

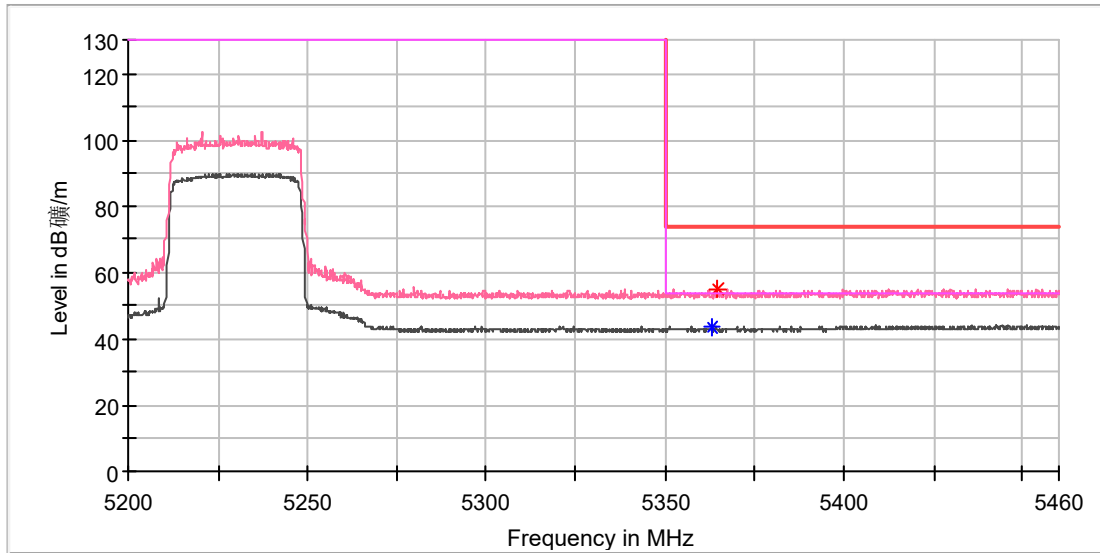

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5363.272222	---	43.33	54.00	10.67	100.0	V	95.0	13.3
5364.805556	54.86	---	74.00	19.14	100.0	V	244.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---