

Appendix A: Test Results of 5.8G SDR

APPENDIX A: TEST RESULTS OF 5.8G SDR	1
APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
5.8G SDR, 1.4MHz BW	2
5.8G SDR, 1.4MHz BW CA mode	5
5.8G SDR, 3MHz BW	8
5.8G SDR, 3MHz BW CA mode	11
5.8G SDR, 10MHz BW	14
5.8G SDR, 20MHz BW	17
5.8G SDR, 40MHz BW	20
APPENDIX A.2: TEST RESULTS OF FREQUENCY STABILITY	23
5.8G SDR, 1.4MHz BW	23
5.8G SDR, 1.4MHz BW CA mode	23
5.8G SDR, 3MHz BW	23
5.8G SDR, 3MHz BW CA mode	23
5.8G SDR, 10MHz BW	23
5.8G SDR, 20MHz BW	24
5.8G SDR, 40MHz BW	24
APPENDIX A.3: TEST RESULTS OF 6dB BANDWIDTH	25
5.8G SDR, 1.4MHz BW	25
5.8G SDR, 1.4MHz BW CA mode	27
5.8G SDR, 3MHz BW	29
5.8G SDR, 3MHz BW CA mode	31
5.8G SDR, 10MHz BW	33
5.8G SDR, 20MHz BW	35
5.8G SDR, 40MHz BW	37
APPENDIX A.4: TEST RESULTS OF 99% BANDWIDTH	39
5.8G SDR, 1.4MHz BW	39
5.8G SDR, 1.4MHz BW CA mode	41
5.8G SDR, 3MHz BW	43
5.8G SDR, 3MHz BW CA mode	45
5.8G SDR, 10MHz BW	47
5.8G SDR, 20MHz BW	49
5.8G SDR, 40MHz BW	51
APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	53
30MHz - 1GHz (Worst case)	53
1GHz - 18GHz	55

Note: All testing were carried out on SISO mode and MIMO mode, but only the worst case was presented in this report.

Appendix A.1: Test Results of Conducted Power Spectral Density

5.8G SDR, 1.4MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
1.4M-MIMO	Ant1	5728.5	9.20	≤30.00	PASS
	Ant2		8.04	≤30.00	PASS
	Total		11.67	≤30.00	PASS
	Ant1	5786.5	9.55	≤30.00	PASS
	Ant2		8.80	≤30.00	PASS
	Total		12.20	≤30.00	PASS
	Ant1	5846.5	8.07	≤30.00	PASS
	Ant2		8.35	≤30.00	PASS
	Total		11.22	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor and RBW Factor is compensated in the graph.


1.4M-MIMO_Ant1_5728.5



1.4M-MIMO_Ant2_5728.5



1.4M-MIMO_Ant1_5786.5

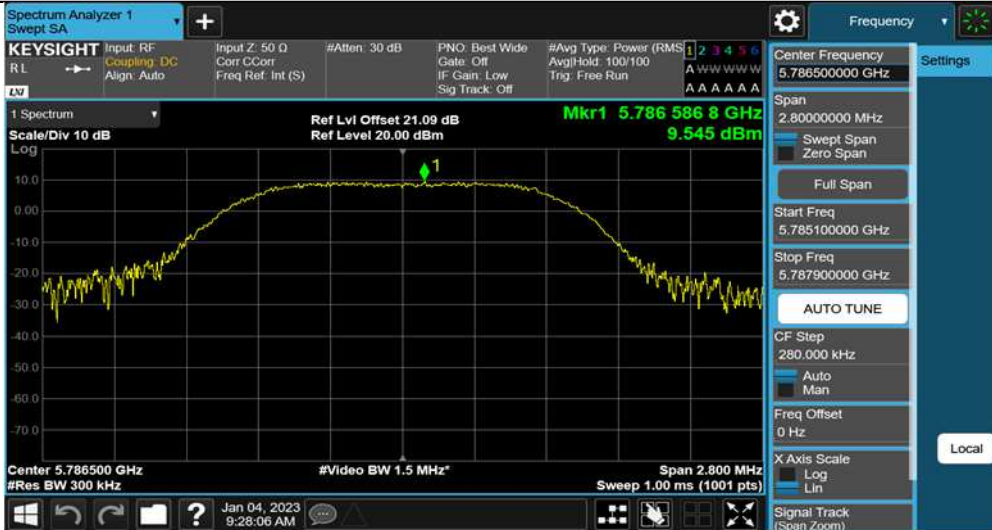


1.4M-MIMO_Ant2_5786.5



1.4M-MIMO_Ant1_5846.5



1.4M-MIMO_Ant2_5846.5

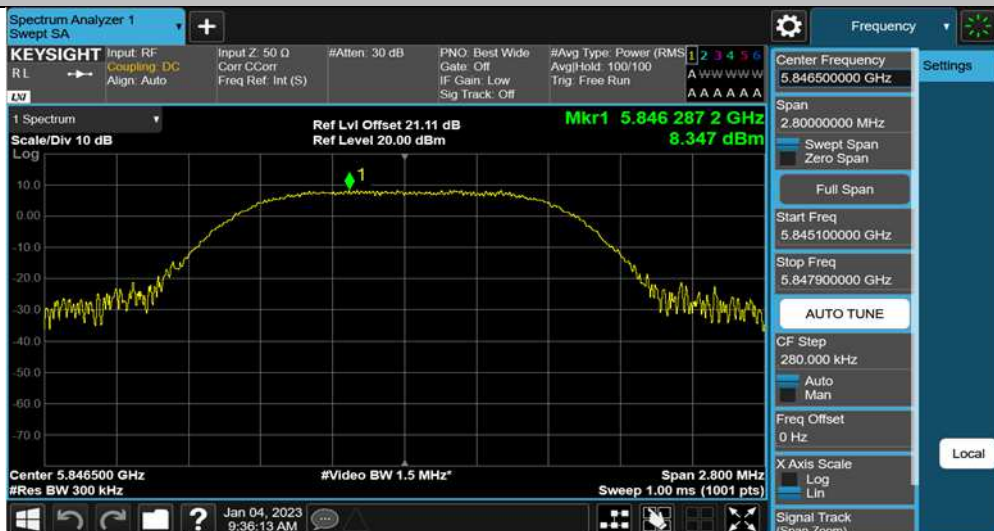

5.8G SDR, 1.4MHz BW CA mode

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
1.4MCA-MIMO	Ant1	5730.12	8.92	≤30.00	PASS
	Ant2		7.77	≤30.00	PASS
	Total		11.39	≤30.00	PASS
	Ant1	5788.12	9.18	≤30.00	PASS
	Ant2		8.66	≤30.00	PASS
	Total		11.94	≤30.00	PASS
	Ant1	5848.12	7.14	≤30.00	PASS
	Ant2		7.63	≤30.00	PASS
	Total		10.40	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

1.4MCA-MIMO_Ant1_5730.12



1.4MCA-MIMO_Ant2_5730.12



1.4MCA-MIMO_Ant1_5788.12




1.4MCA-MIMO_Ant2_5788.12



1.4MCA-MIMO_Ant1_5848.12



1.4MCA-MIMO_Ant2_5848.12

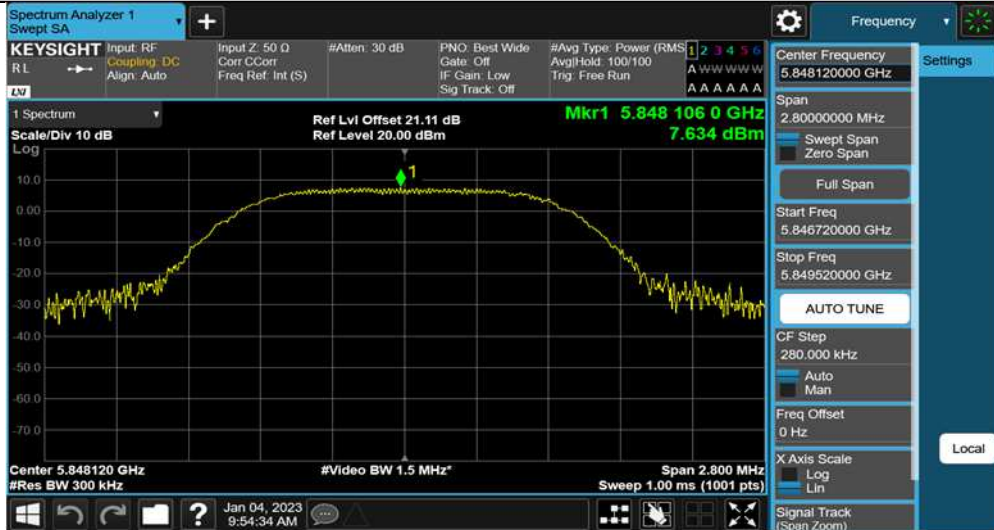

5.8G SDR, 3MHz BW


TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
3M-MIMO	Ant1	5727.5	5.33	≤30.00	PASS
	Ant2		4.01	≤30.00	PASS
	Total		7.73	≤30.00	PASS
	Ant1	5784.5	6.35	≤30.00	PASS
	Ant2		5.69	≤30.00	PASS
	Total		9.04	≤30.00	PASS
	Ant1	5844.5	3.97	≤30.00	PASS
	Ant2		3.80	≤30.00	PASS
	Total		6.90	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.


3M-MIMO_Ant1_5727.5




3M-MIMO_Ant2_5727.5

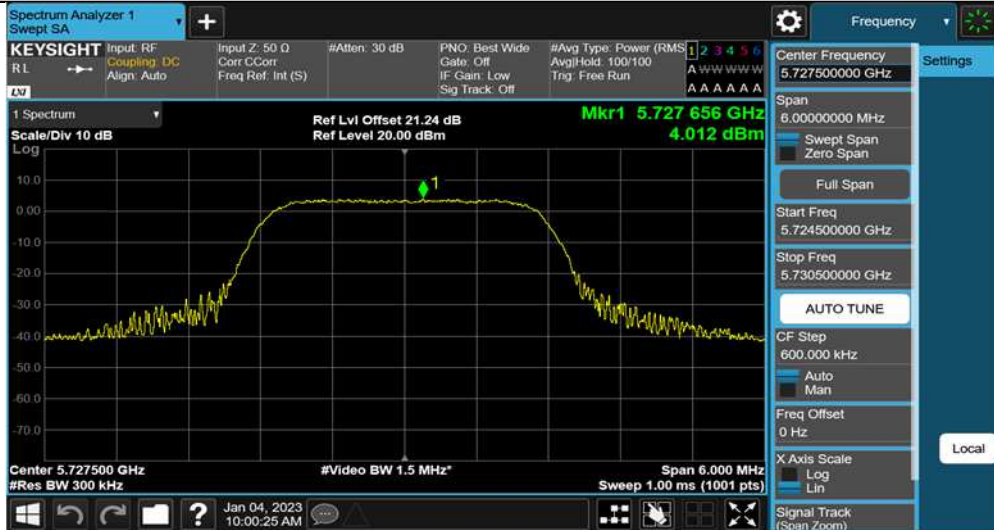

3M-MIMO_Ant1_5784.5

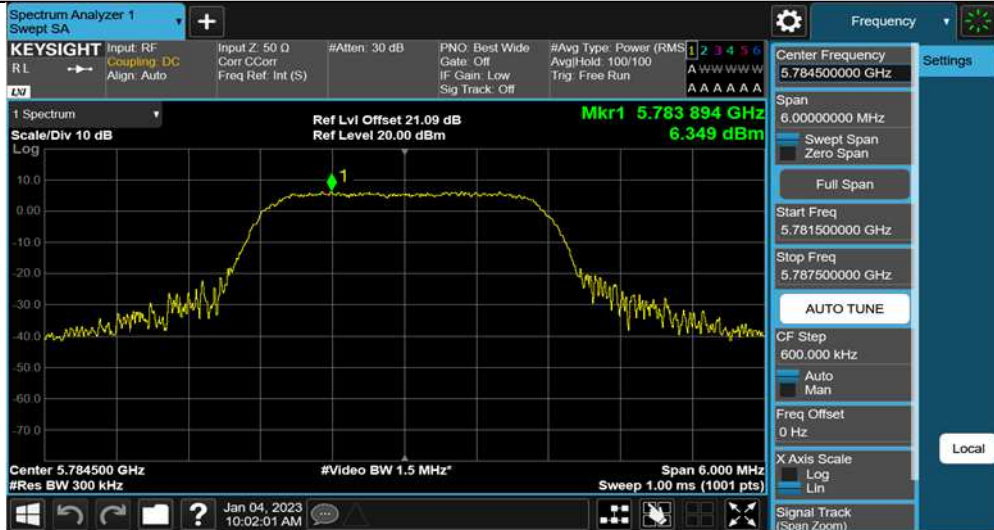

3M-MIMO_Ant2_5784.5

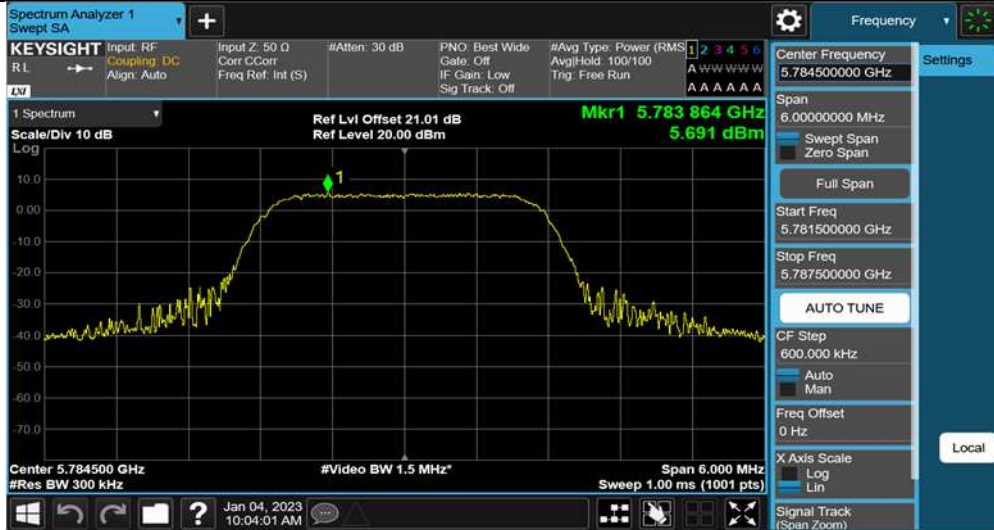

3M-MIMO_Ant1_5844.5



3M-MIMO_Ant2_5844.5




5.8G SDR, 3MHz BW CA mode

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
3MCA-MIMO	Ant1	5730.2	5.82	≤30.00	PASS
	Ant2		4.67	≤30.00	PASS
	Total		8.29	≤30.00	PASS
	Ant1	5787.2	6.32	≤30.00	PASS
	Ant2		5.62	≤30.00	PASS
	Total		8.99	≤30.00	PASS
	Ant1	5847.2	4.09	≤30.00	PASS
	Ant2		4.05	≤30.00	PASS
	Total		7.08	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.


3MCA-MIMO_Ant1_5730.2

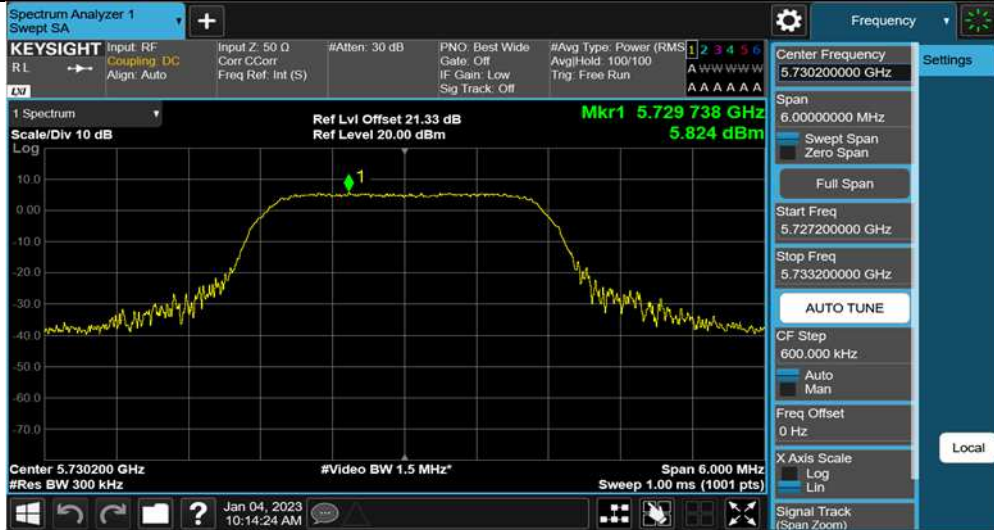


3MCA-MIMO_Ant2_5730.2



3MCA-MIMO_Ant1_5787.2

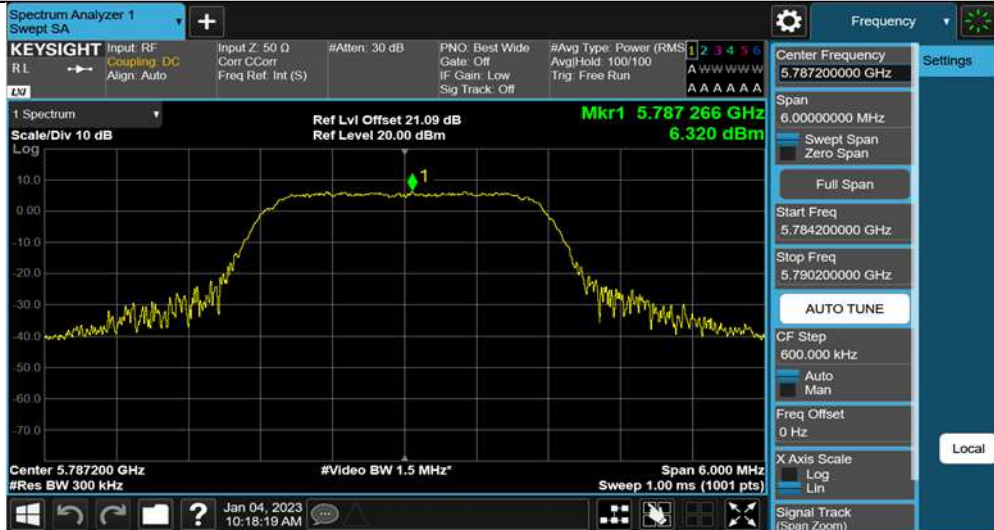

3MCA-MIMO_Ant2_5787.2

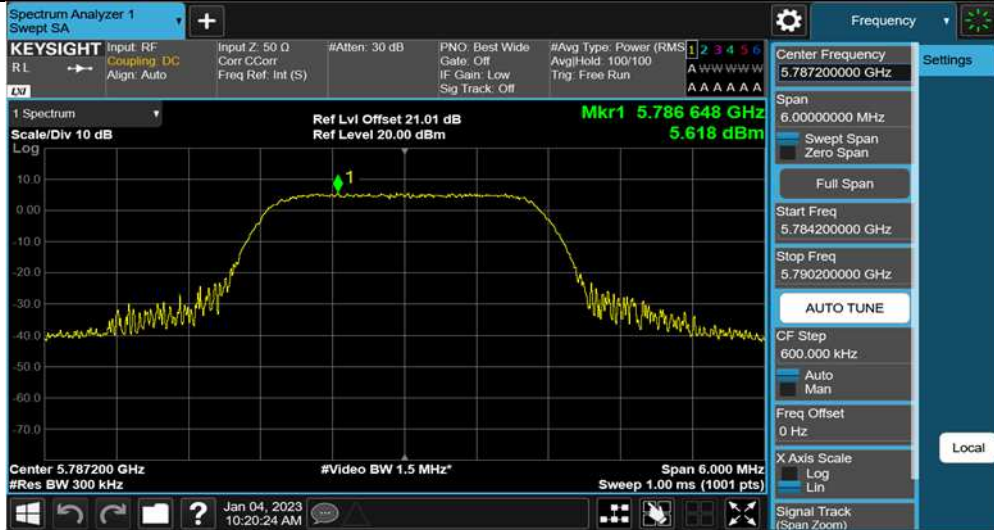

3MCA-MIMO_Ant1_5847.2



3MCA-MIMO_Ant2_5847.2



5.8G SDR, 10MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
10M-MIMO	Ant1	5730.5	11.56	≤30.00	PASS
	Ant2		10.62	≤30.00	PASS
	Total		14.13	≤30.00	PASS
	Ant1	5787.5	11.49	≤30.00	PASS
	Ant2		11.27	≤30.00	PASS
	Total		14.39	≤30.00	PASS
	Ant1	5844.5	10.65	≤30.00	PASS
	Ant2		10.58	≤30.00	PASS
	Total		13.63	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

10M-MIMO_Ant1_5730.5



10M-MIMO_Ant2_5730.5



10M-MIMO_Ant1_5787.5



10M-MIMO_Ant2_5787.5



10M-MIMO_Ant1_5844.5



10M-MIMO_Ant2_5844.5



5.8G SDR, 20MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
20M-MIMO	Ant1	5735.5	7.87	≤30.00	PASS
	Ant2		7.31	≤30.00	PASS
	Total		10.61	≤30.00	PASS
	Ant1	5787.5	8.58	≤30.00	PASS
	Ant2		8.17	≤30.00	PASS
	Total		11.39	≤30.00	PASS
	Ant1	5839.5	2.42	≤30.00	PASS
	Ant2		2.87	≤30.00	PASS
	Total		5.66	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

20M-MIMO_Ant1_5735.5



20M-MIMO_Ant2_5735.5



20M-MIMO_Ant1_5787.5



20M-MIMO_Ant2_5787.5



20M-MIMO_Ant1_5839.5



20M-MIMO_Ant2_5839.5




5.8G SDR, 40MHz BW

TestMode	Antenna	Channel	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
40M-MIMO	Ant1	5745.5	0.70	≤30.00	PASS
	Ant2		0.31	≤30.00	PASS
	Total		3.52	≤30.00	PASS
	Ant1	5787.5	5.08	≤30.00	PASS
	Ant2		5.11	≤30.00	PASS
	Total		8.11	≤30.00	PASS
	Ant1	5829.5	0.86	≤30.00	PASS
	Ant2		0.76	≤30.00	PASS
	Total		3.82	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

40M-MIMO_Ant1_5745.5

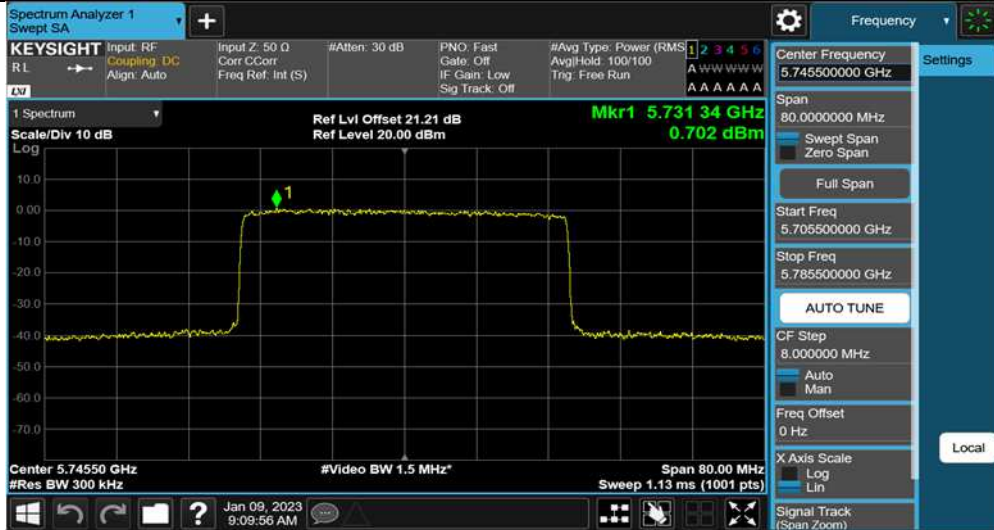

40M-MIMO_Ant2_5745.5



40M-MIMO_Ant1_5787.5



40M-MIMO_Ant2_5787.5



40M-MIMO_Ant1_5829.5



40M-MIMO_Ant2_5829.5



Appendix A.2: Test Results of Frequency Stability

5.8G SDR, 1.4MHz BW

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
1.4M-MIMO	Ant1	5728.5	NV	NT	-2000.00	-0.349132	20	PASS
		5786.5	NV	NT	-2000.00	-0.345632	20	PASS
		5846.5	NV	NT	-2000.00	-0.342085	20	PASS

5.8G SDR, 1.4MHz BW CA mode

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
1.4MCA-MIMO	Ant1	5730.12	NV	NT	-2000.00	-0.349033	20	PASS
		5788.12	NV	NT	-3000.00	-0.518303	20	PASS
		5848.12	NV	NT	-2000.00	-0.341990	20	PASS

5.8G SDR, 3MHz BW

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
3M-MIMO	Ant1	5727.5	NV	NT	-2000.00	-0.349192	20	PASS
		5784.5	NV	NT	-2000.00	-0.345752	20	PASS
		5844.5	NV	NT	-2000.00	-0.342202	20	PASS

5.8G SDR, 3MHz BW CA mode

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
3MCA-MIMO	Ant1	5730.2	NV	NT	-3000.00	-0.523542	20	PASS
		5787.2	NV	NT	-2000.00	-0.345590	20	PASS
		5847.2	NV	NT	-3000.00	-0.513066	20	PASS

5.8G SDR, 10MHz BW

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
10M-MIMO	Ant1	5730.5	NV	NT	-2000.00	-0.349010	20	PASS
		5787.5	NV	NT	-1000.00	-0.172786	20	PASS
		5844.5	NV	NT	-1000.00	-0.171101	20	PASS

5.8G SDR, 20MHz BW

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20M-MIMO	Ant1	5735.5	NV	NT	-1000.00	-0.174353	20	PASS
		5787.5	NV	NT	-2000.00	-0.345572	20	PASS
		5839.5	NV	NT	-2000.00	-0.342495	20	PASS

5.8G SDR, 40MHz BW

Voltage								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
40M-MIMO	Ant1	5745.5	NV	NT	-1000.00	-0.174049	20	PASS
		5787.5	NV	NT	-1000.00	-0.172786	20	PASS
		5829.5	NV	NT	-2000.00	-0.343083	20	PASS

Appendix A.3: Test Results of 6dB Bandwidth

5.8G SDR, 1.4MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1.4M-MIMO	Ant1	5728.5	1.092	5727.957	5729.049	0.5	PASS
		5786.5	1.089	5785.957	5787.046	0.5	PASS
		5846.5	1.086	5845.960	5847.046	0.5	PASS

1.4M-MIMO_Ant1_5728.5



1.4M-MIMO_Ant1_5786.5



1.4M-MIMO_Ant1_5846.5




Dec 21, 2022
 8:57:17 AM


5.8G SDR, 1.4MHz BW CA mode

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1.4MCA-MIMO	Ant1	5730.12	1.081	5729.585	5730.666	0.5	PASS
		5788.12	1.086	5787.580	5788.666	0.5	PASS
		5848.12	1.064	5847.591	5848.655	0.5	PASS

1.4MCA-MIMO_Ant1_5730.12

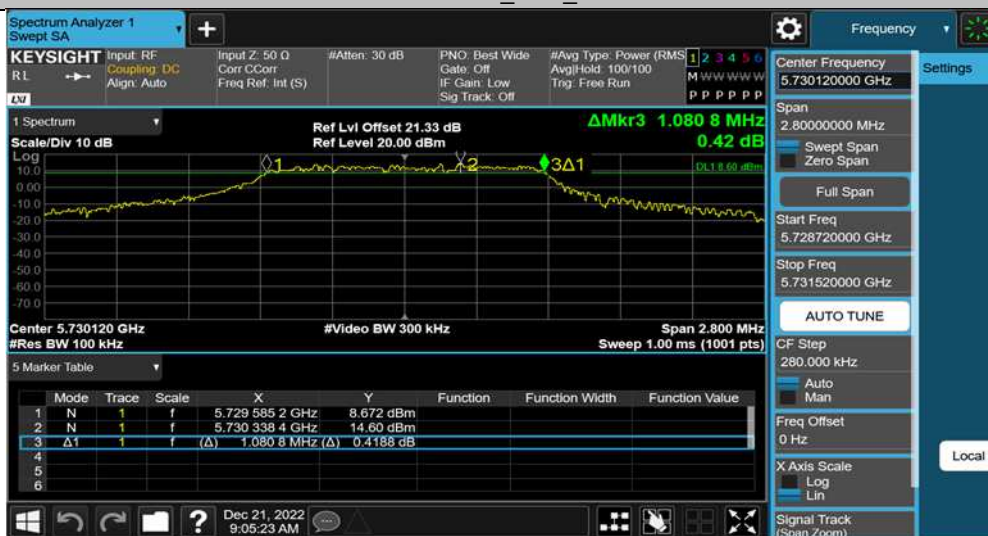

1.4MCA-MIMO_Ant1_5788.12

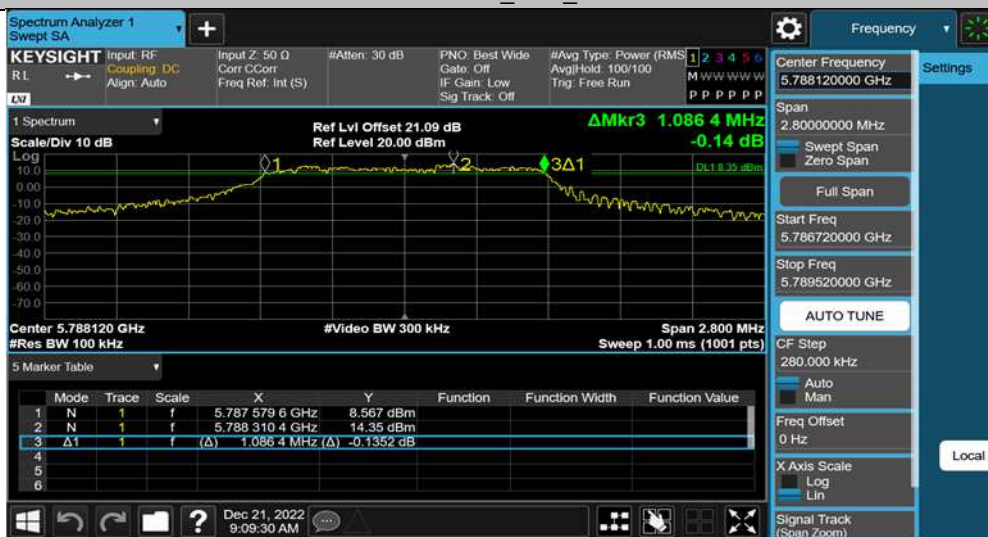

1.4MCA-MIMO_Ant1_5848.12



5.8G SDR, 3MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
3M-MIMO	Ant1	5727.5	2.196	5726.402	5728.598	0.5	PASS
		5784.5	2.196	5783.402	5785.598	0.5	PASS
		5844.5	2.196	5843.408	5845.604	0.5	PASS

3M-MIMO_Ant1_5727.5



3M-MIMO_Ant1_5784.5



3M-MIMO_Ant1_5844.5



5.8G SDR, 3MHz BW CA mode

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
3MCA-MIMO	Ant1	5730.2	2.190	5729.108	5731.298	0.5	PASS
		5787.2	2.196	5786.108	5788.304	0.5	PASS
		5847.2	2.202	5846.102	5848.304	0.5	PASS

3MCA-MIMO_Ant1_5730.2



3MCA-MIMO_Ant1_5787.2



3MCA-MIMO_Ant1_5847.2



5.8G SDR, 10MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M-MIMO	Ant1	5730.5	9.000	5726.000	5735.000	0.5	PASS
		5787.5	8.960	5783.020	5791.980	0.5	PASS
		5844.5	9.020	5840.000	5849.020	0.5	PASS

10M-MIMO_Ant1_5730.5



10M-MIMO_Ant1_5787.5



10M-MIMO_Ant1_5844.5



5.8G SDR, 20MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M-MIMO	Ant1	5735.5	17.960	5726.500	5744.460	0.5	PASS
		5787.5	17.920	5778.540	5796.460	0.5	PASS
		5839.5	17.920	5830.540	5848.460	0.5	PASS

20M-MIMO_Ant1_5735.5



20M-MIMO_Ant1_5787.5



20M-MIMO_Ant1_5839.5



5.8G SDR, 40MHz BW

TestMode	Antenna	Channel	DTS BW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
40M-MIMO	Ant1	5745.5	36.000	5727.500	5763.500	0.5	PASS
		5787.5	36.000	5769.500	5805.500	0.5	PASS
		5829.5	35.920	5811.500	5847.420	0.5	PASS

40M-MIMO_Ant1_5745.5



40M-MIMO_Ant1_5787.5



40M-MIMO_Ant1_5829.5



Appendix A.4: Test Results of 99% Bandwidth

5.8G SDR, 1.4MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1.4M-MIMO	Ant1	5728.5	1.1797	5727.8956	5729.0753	---	PASS
		5786.5	1.1812	5785.8982	5787.0794	---	PASS
		5846.5	1.1812	5845.8979	5847.0791	---	PASS

1.4M-MIMO_Ant1_5728.5



1.4M-MIMO_Ant1_5786.5



1.4M-MIMO_Ant1_5846.5



5.8G SDR, 1.4MHz BW CA mode

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
1.4MCA-MIMO	Ant1	5730.12	1.1748	5729.5186	5730.6934	---	PASS
		5788.12	1.1856	5787.5158	5788.7014	---	PASS
		5848.12	1.1814	5847.5171	5848.6985	---	PASS

1.4MCA-MIMO_Ant1_5730.12



1.4MCA-MIMO_Ant1_5788.12



1.4MCA-MIMO_Ant1_5848.12



Dec 21, 2022
9:16:00 AM

5.8G SDR, 3MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
3M-MIMO	Ant1	5727.5	2.2441	5726.3878	5728.6319	---	PASS
		5784.5	2.2602	5783.3849	5785.6451	---	PASS
		5844.5	2.2526	5843.3857	5845.6383	---	PASS

3M-MIMO_Ant1_5727.5



3M-MIMO_Ant1_5784.5



3M-MIMO_Ant1_5844.5



5.8G SDR, 3MHz BW CA mode

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
3MCA-MIMO	Ant1	5730.2	2.2420	5729.0875	5731.3295	---	PASS
		5787.2	2.2743	5786.0872	5788.3615	---	PASS
		5847.2	2.2579	5846.0889	5848.3468	---	PASS

3MCA-MIMO_Ant1_5730.2



3MCA-MIMO_Ant1_5787.2



3MCA-MIMO_Ant1_5847.2




5.8G SDR, 10MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
10M-MIMO	Ant1	5730.5	9.0149	5726.0119	5735.0268	---	PASS
		5787.5	9.0419	5783.0028	5792.0447	---	PASS
		5844.5	9.0619	5839.9617	5849.0236	---	PASS

10M-MIMO_Ant1_5730.5



10M-MIMO_Ant1_5787.5

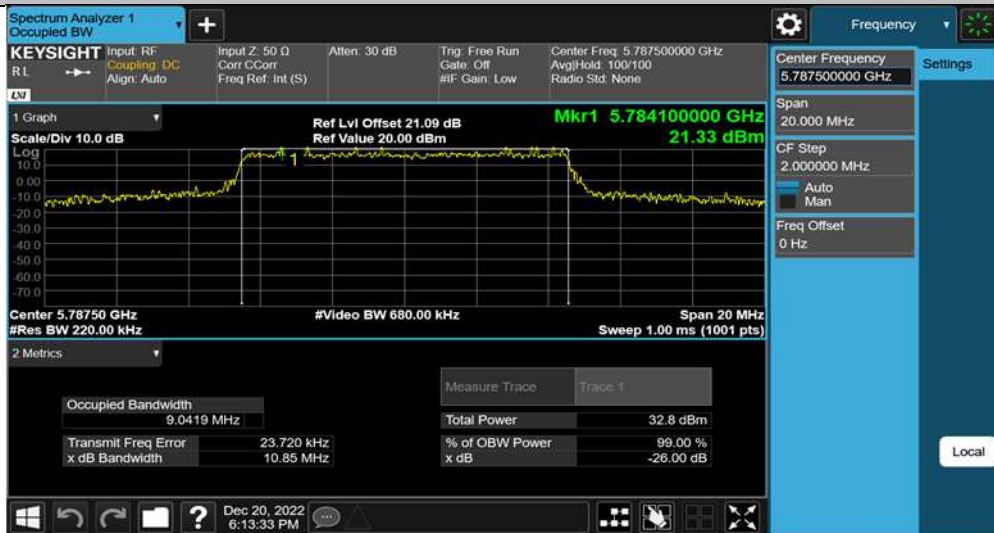

10M-MIMO_Ant1_5844.5



Dec 20, 2022
6:20:37 PM

5.8G SDR, 20MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
20M-MIMO	Ant1	5735.5	17.916	5726.5440	5744.4600	---	PASS
		5787.5	17.990	5778.5018	5796.4918	---	PASS
		5839.5	17.963	5830.5647	5848.5277	---	PASS

20M-MIMO_Ant1_5735.5



20M-MIMO_Ant1_5787.5




20M-MIMO_Ant1_5839.5



5.8G SDR, 40MHz BW

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
40M-MIMO	Ant1	5745.5	35.737	5727.6092	5763.3462	---	PASS
		5787.5	36.438	5769.2776	5805.7156	---	PASS
		5829.5	35.749	5811.6365	5847.3855	---	PASS


40M-MIMO_Ant1_5745.5

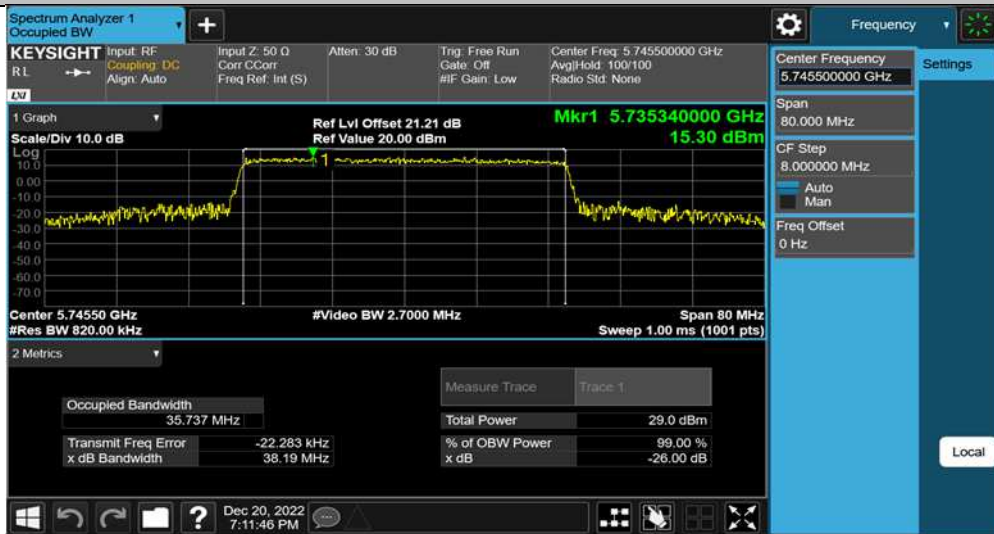

40M-MIMO_Ant1_5787.5



40M-MIMO_Ant1_5829.5

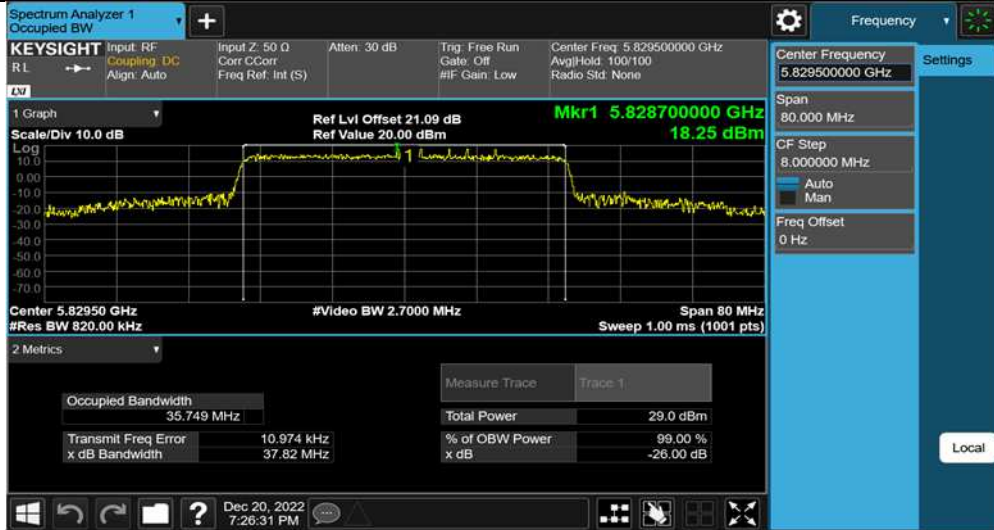


Appendix A.5: Test Results of Radiated Spurious Emissions

Note:1, Testing is carried out with frequency rang 9kHz to the tenth harmonics.
2, The margin is greater than 20 dB are not shown in this Appendix.

30MHz - 1GHz (Worst case)

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

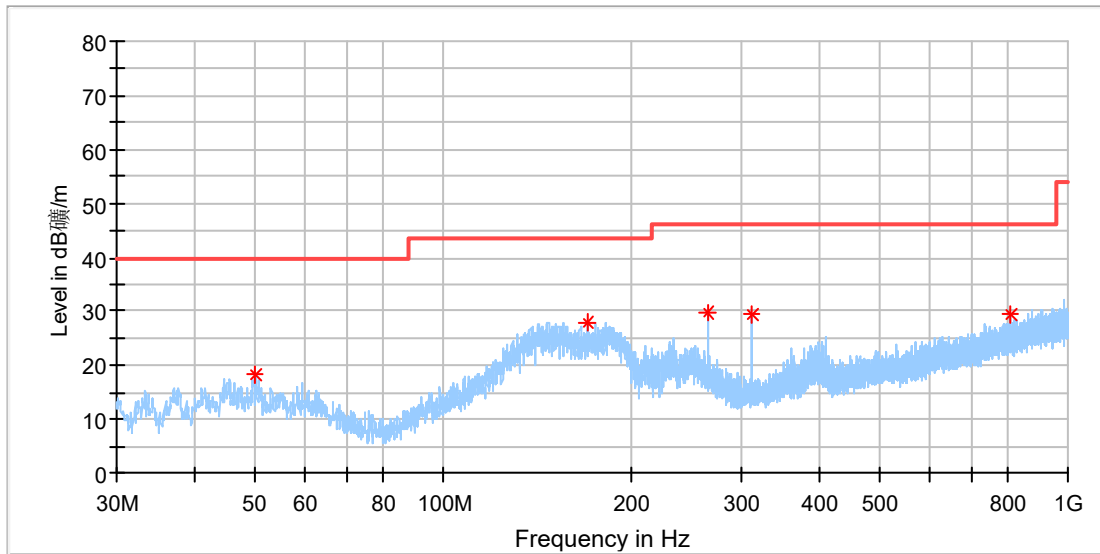

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.079000	18.38	40.00	21.62	100.0	H	247.0	-18.3
169.631500	28.08	43.50	15.42	100.0	H	270.0	-21.2
264.012500	29.74	46.00	16.26	100.0	H	86.0	-17.0
312.027500	29.46	46.00	16.54	100.0	H	63.0	-15.9
804.642000	29.28	46.00	16.72	100.0	H	192.0	-6.3

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

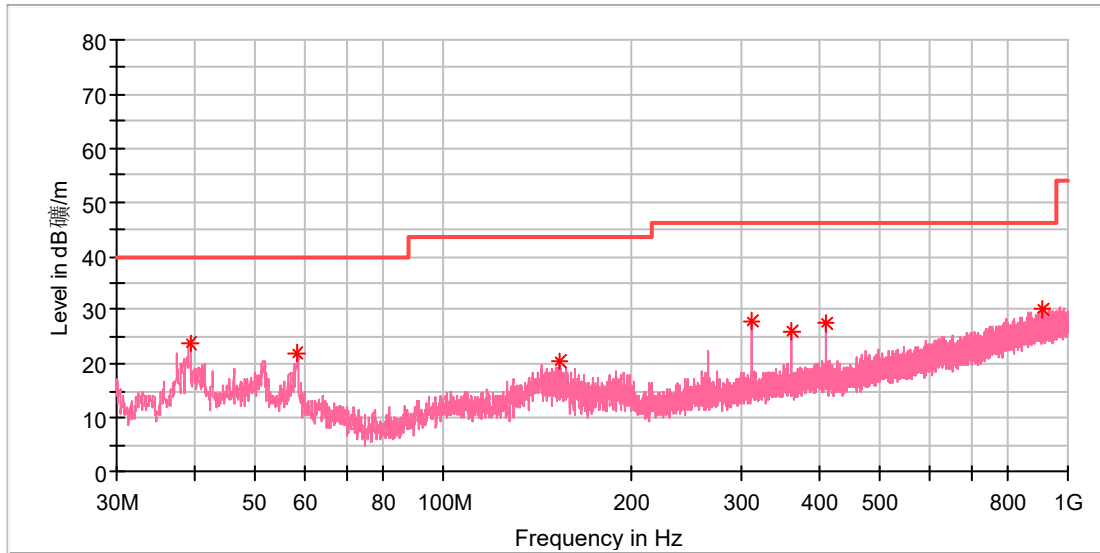

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.360500	23.83	40.00	16.17	100.0	V	144.0	-20.3
58.178500	21.84	40.00	18.16	100.0	V	86.0	-18.8
153.335500	20.35	43.50	23.16	100.0	V	190.0	-22.0
311.979000	27.94	46.00	18.06	100.0	V	0.0	-15.9
360.042500	26.16	46.00	19.84	100.0	V	197.0	-14.6
408.009000	27.42	46.00	18.58	100.0	V	359.0	-13.5
907.801500	30.19	46.00	15.82	100.0	V	156.0	-4.9

Final Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 5.8G SDR Fundamental.

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.8G_1.4M_5728.5MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

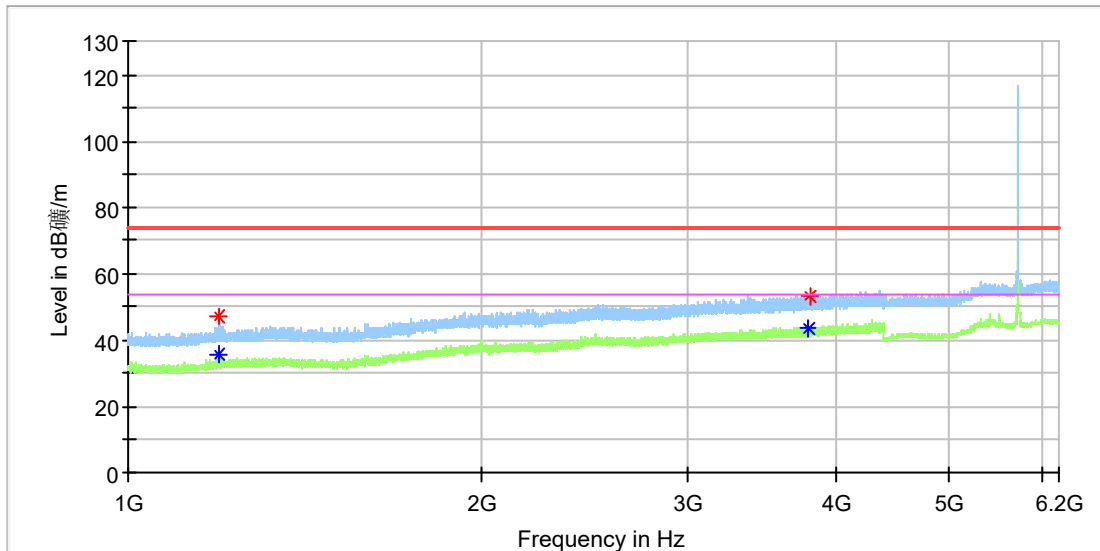

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.160000	---	35.48	54.00	18.52	100.0	H	181.0	1.1
1195.670000	47.12	---	74.00	26.88	100.0	H	259.0	1.1
3796.330000	---	43.39	54.00	10.61	100.0	H	355.0	9.8
3808.910000	53.00	---	74.00	21.00	100.0	H	355.0	9.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

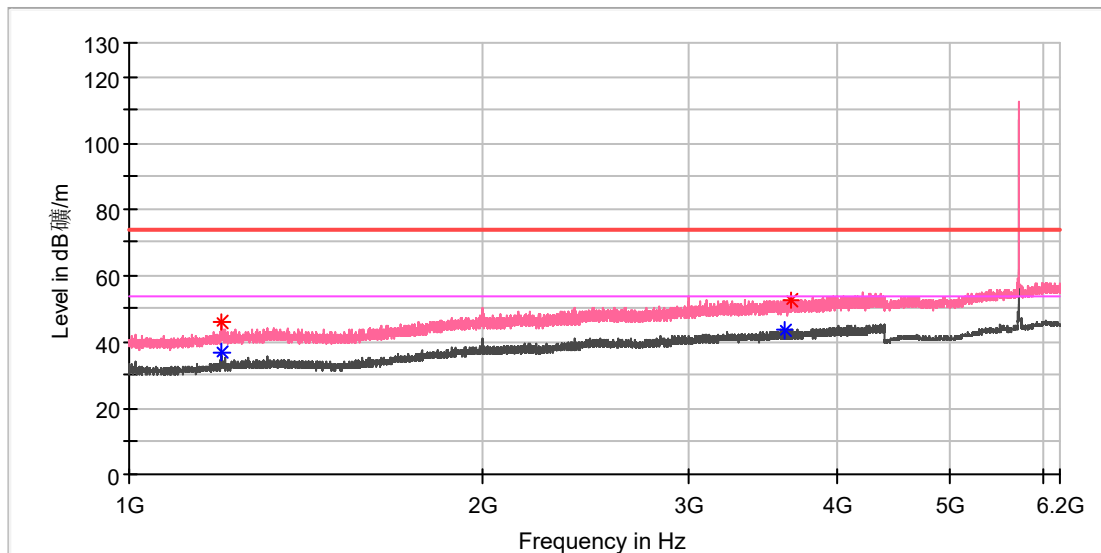

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1198.390000	46.07	---	74.00	27.93	100.0	V	316.0	1.1
1198.390000	---	37.12	54.00	16.88	100.0	V	316.0	1.1
3612.220000	---	43.24	54.00	10.76	100.0	V	328.0	9.4
3659.990000	52.34	---	74.00	21.66	100.0	V	316.0	9.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

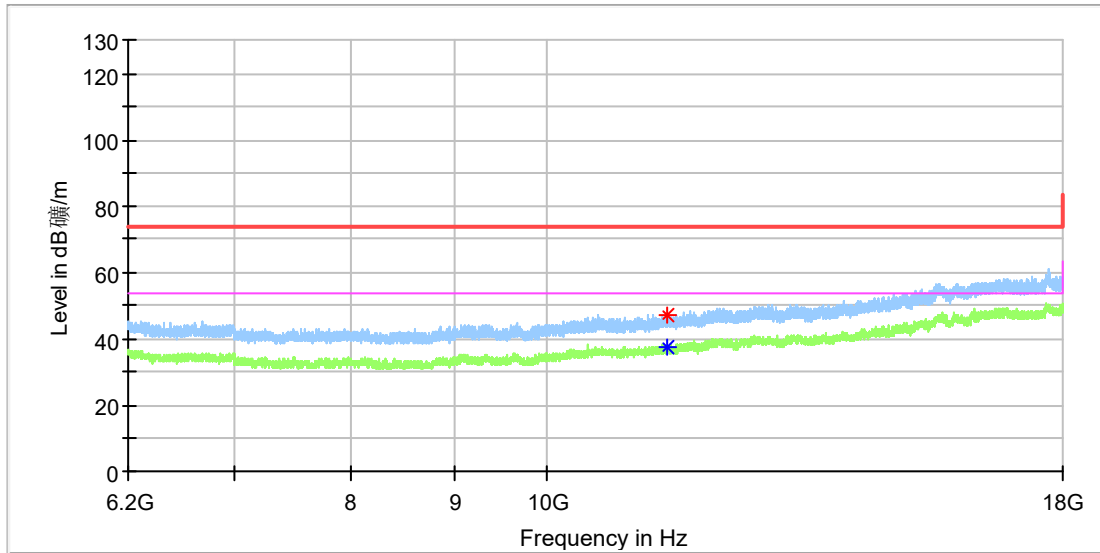

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11474.108333	47.43	---	74.00	26.57	100.0	H	271.0	13.6
11475.583333	---	37.75	54.00	16.25	100.0	H	271.0	13.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

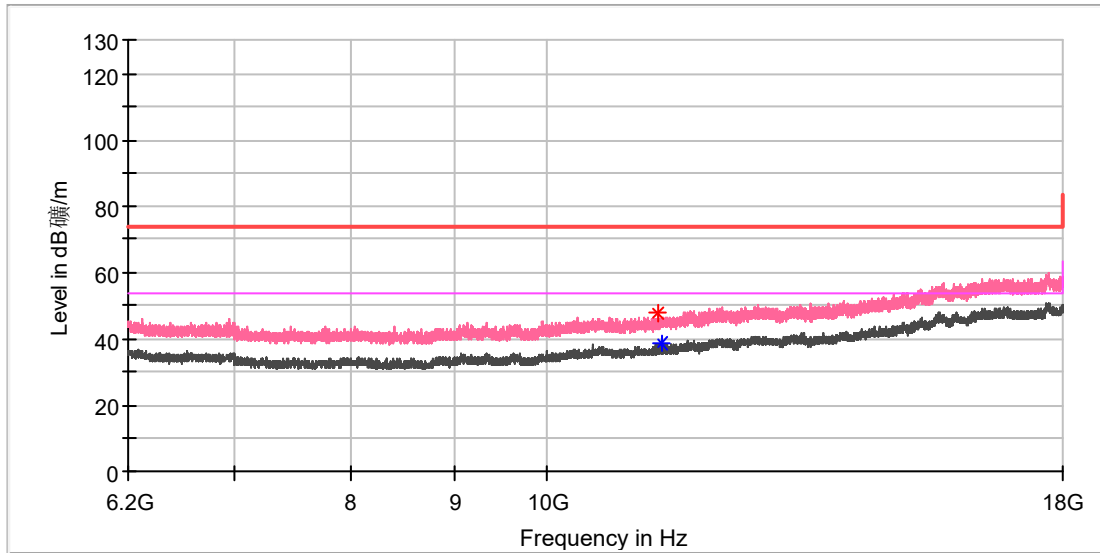

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11343.325000	47.55	---	74.00	26.45	100.0	V	85.0	12.5
11403.800000	---	38.57	54.00	15.43	100.0	V	170.0	12.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.8G_1.4M_5728.5MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

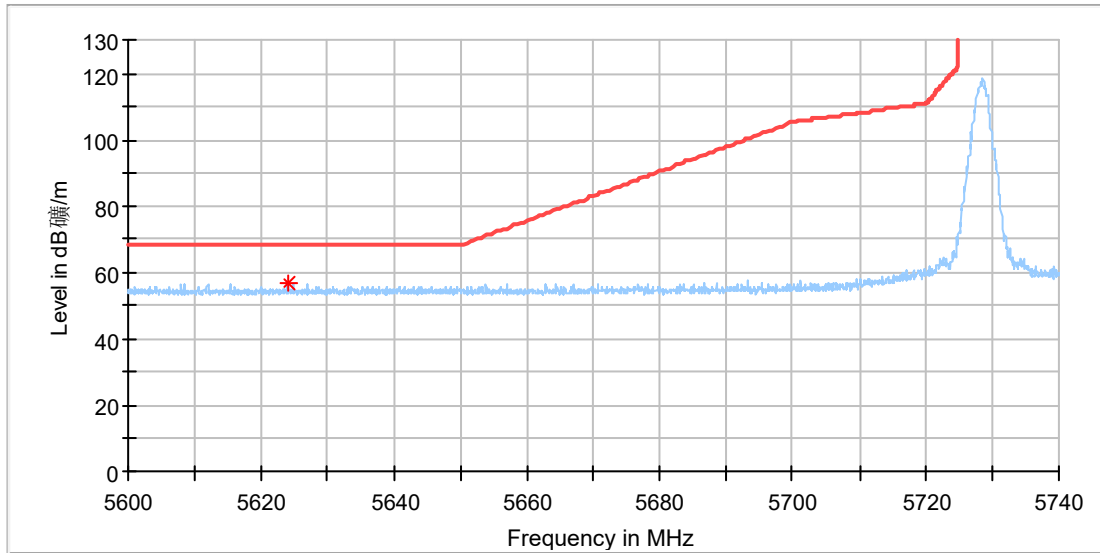

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5624.138889	57.07	68.20	11.13	100.0	H	317.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

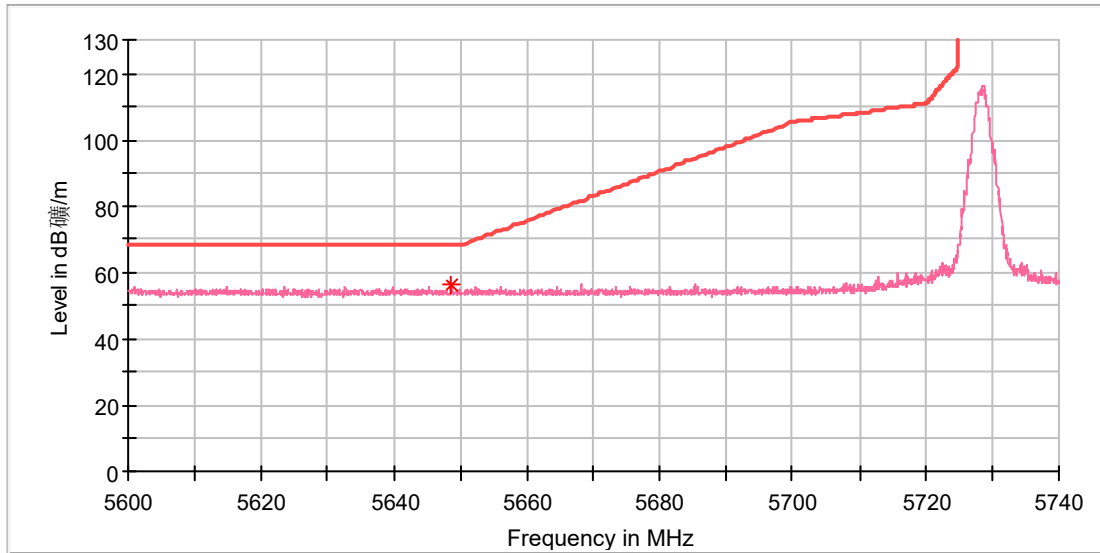

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5648.705556	56.09	68.20	12.11	100.0	V	141.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

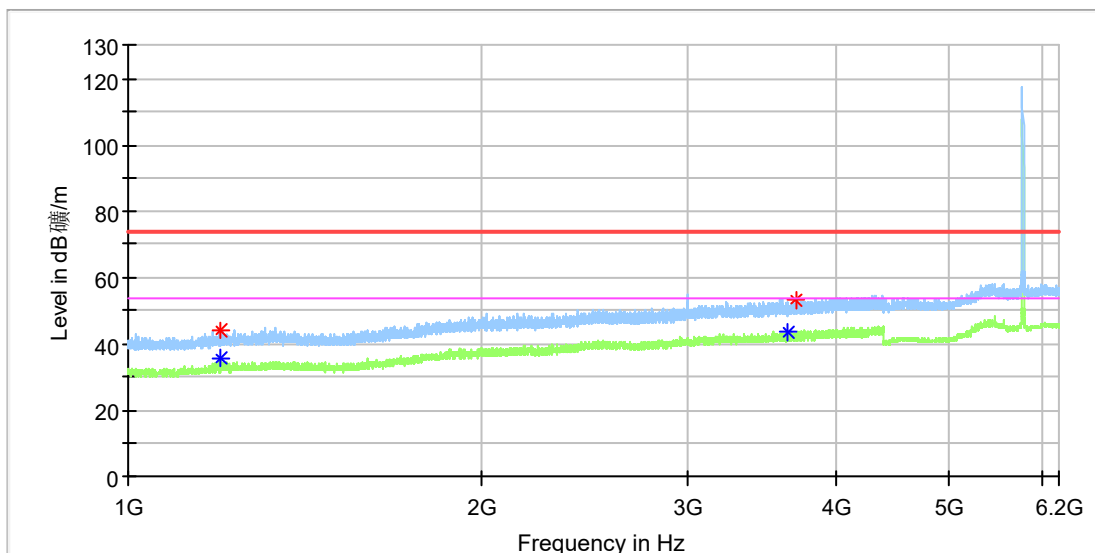

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1200.090000	44.39	---	74.00	29.61	100.0	H	198.0	1.1
1200.090000	---	35.79	54.00	18.21	100.0	H	198.0	1.1
3652.850000	---	43.75	54.00	10.25	100.0	H	5.0	9.4
3708.270000	52.95	---	74.00	21.05	100.0	H	276.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

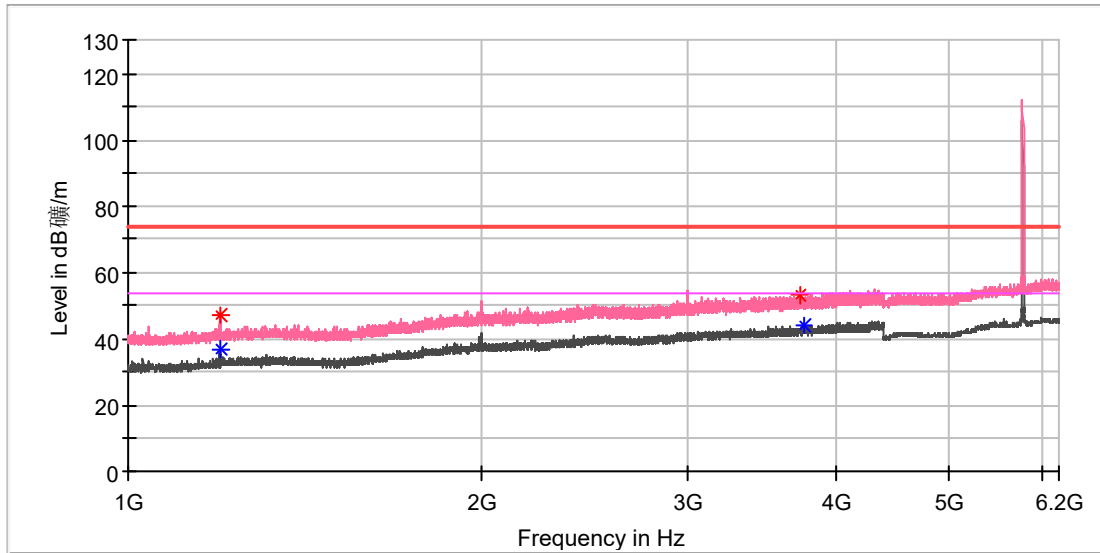

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.010000	46.94	---	74.00	27.06	100.0	V	0.0	1.1
1198.050000	---	36.63	54.00	17.37	100.0	V	313.0	1.1
3730.540000	52.99	---	74.00	21.01	100.0	V	313.0	9.6
3763.180000	---	43.91	54.00	10.09	100.0	V	195.0	9.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

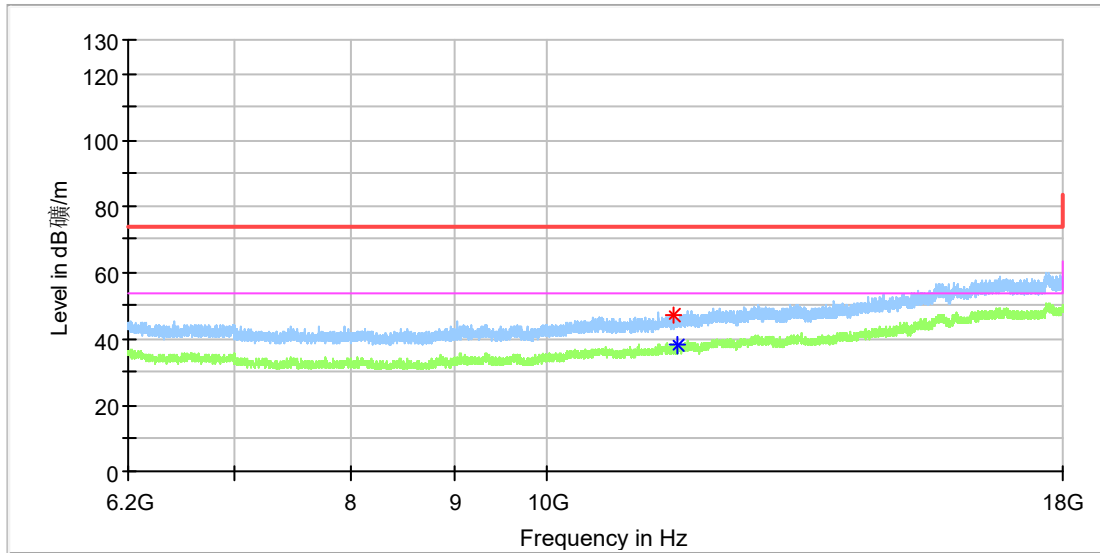

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11555.233333	47.14	---	74.00	26.86	100.0	H	271.0	13.5
11606.858333	---	38.38	54.00	15.62	100.0	H	0.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

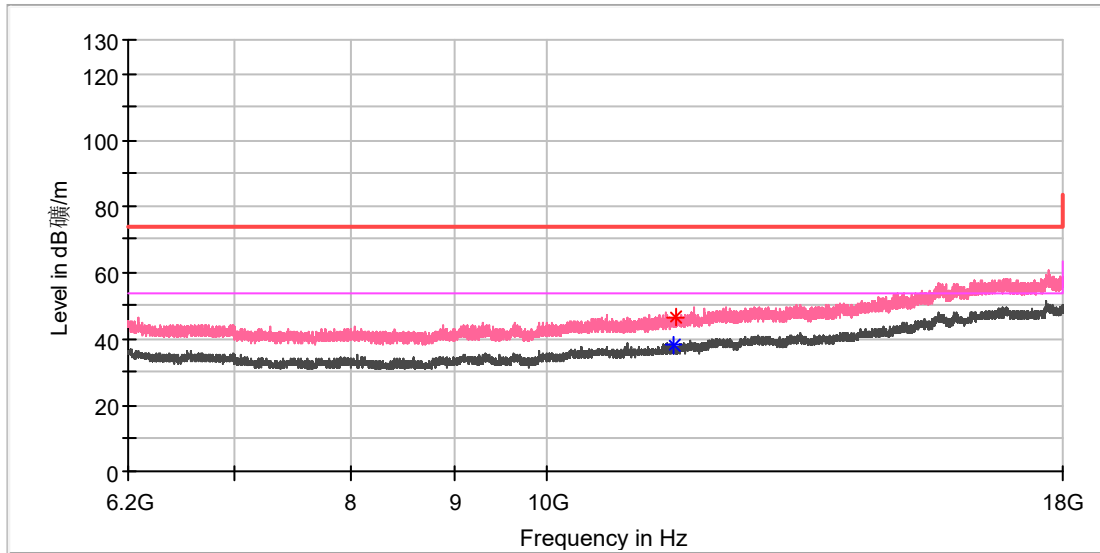

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11536.550000	---	38.06	54.00	15.94	100.0	V	289.0	13.5
11576.375000	46.44	---	74.00	27.56	100.0	V	229.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

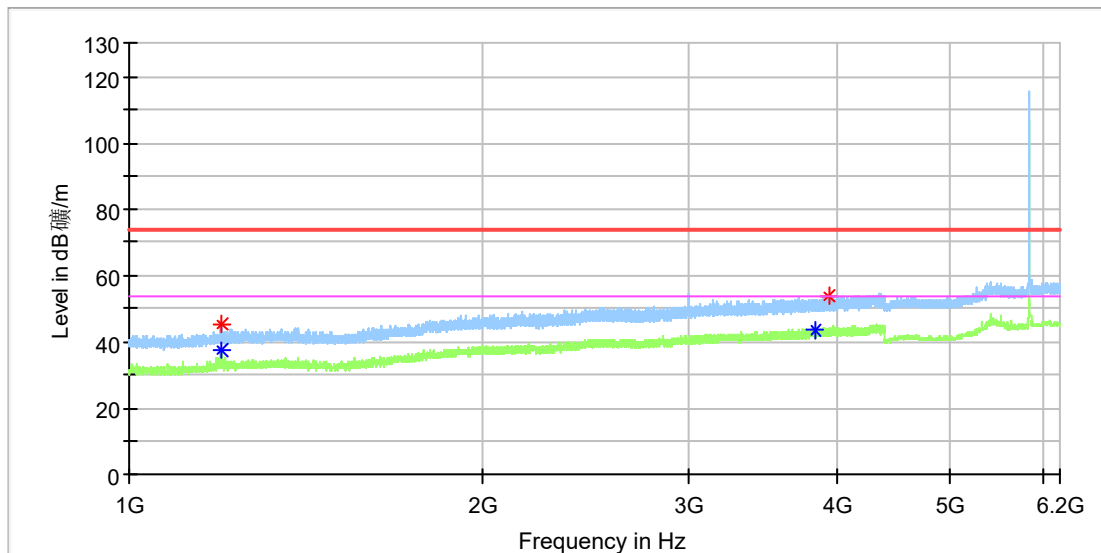

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.350000	45.57	---	74.00	28.43	100.0	H	186.0	1.1
1196.350000	---	37.71	54.00	16.29	100.0	H	186.0	1.1
3832.540000	---	43.69	54.00	10.31	100.0	H	197.0	9.9
3943.040000	53.67	---	74.00	20.33	100.0	H	153.0	10.1

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

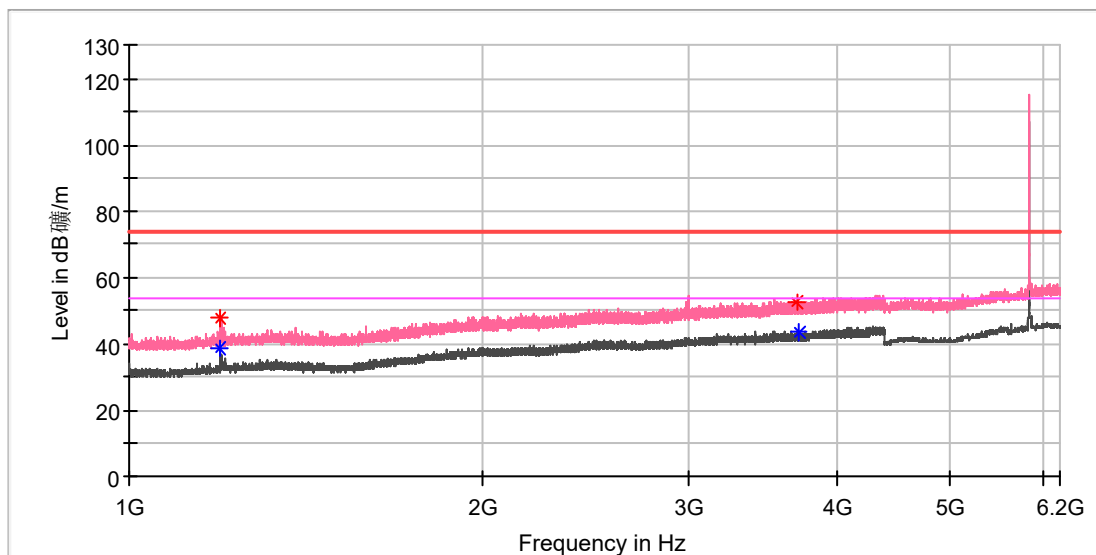

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1195.500000	47.99	---	74.00	26.01	100.0	V	315.0	1.1
1195.500000	---	38.63	54.00	15.37	100.0	V	315.0	1.1
3697.900000	52.68	---	74.00	21.32	100.0	V	281.0	9.6
3717.620000	---	43.71	54.00	10.29	100.0	V	191.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

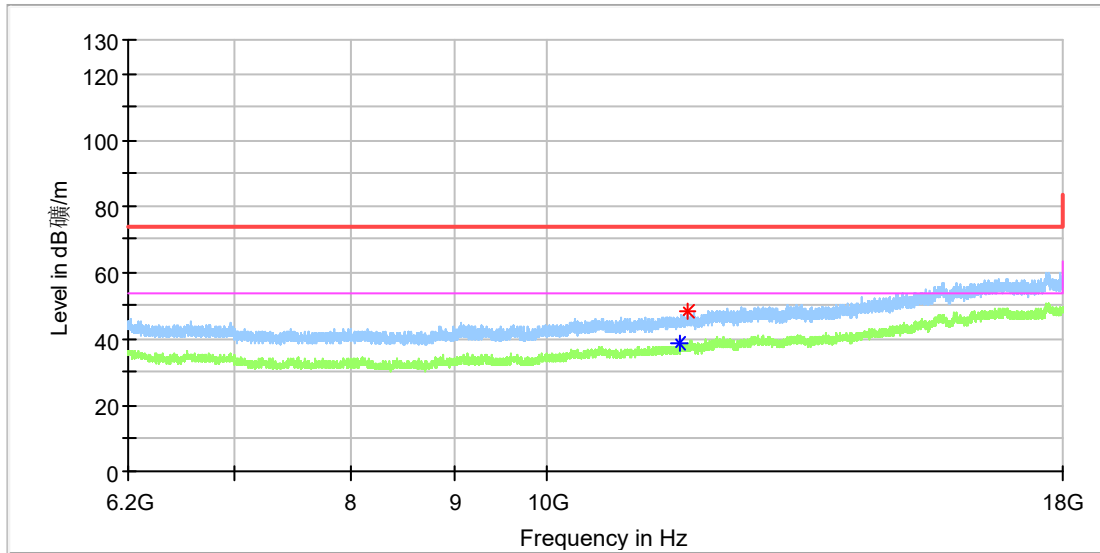

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11640.783333	---	38.51	54.00	15.49	100.0	H	50.0	13.3
11723.383333	48.16	---	74.00	25.84	100.0	H	98.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

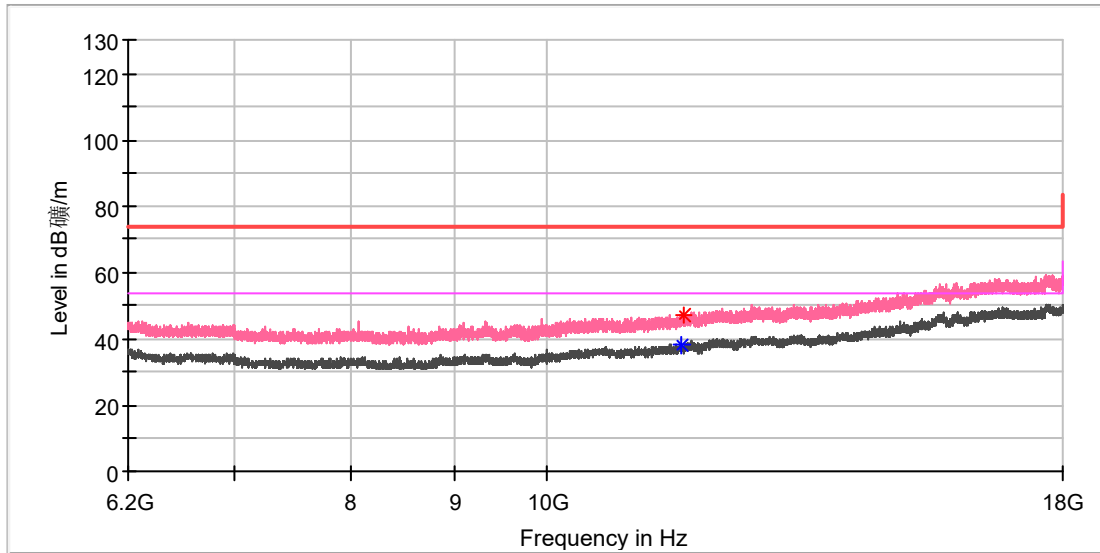

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11661.925000	---	38.00	54.00	16.00	100.0	V	146.0	13.3
11688.475000	47.29	---	74.00	26.71	100.0	V	241.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

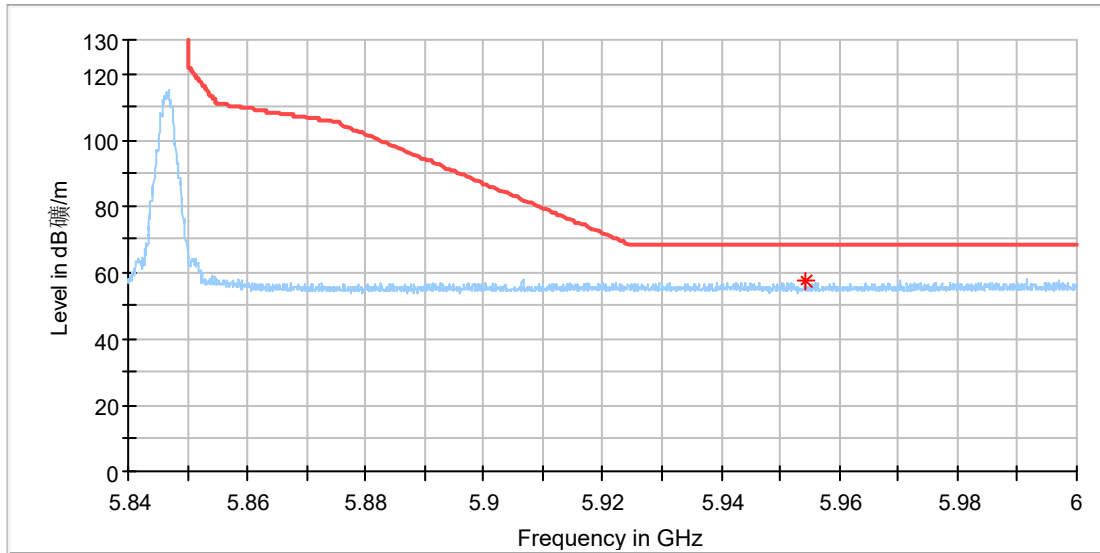

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5954.191667	57.31	68.20	10.89	100.0	H	87.0	14.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

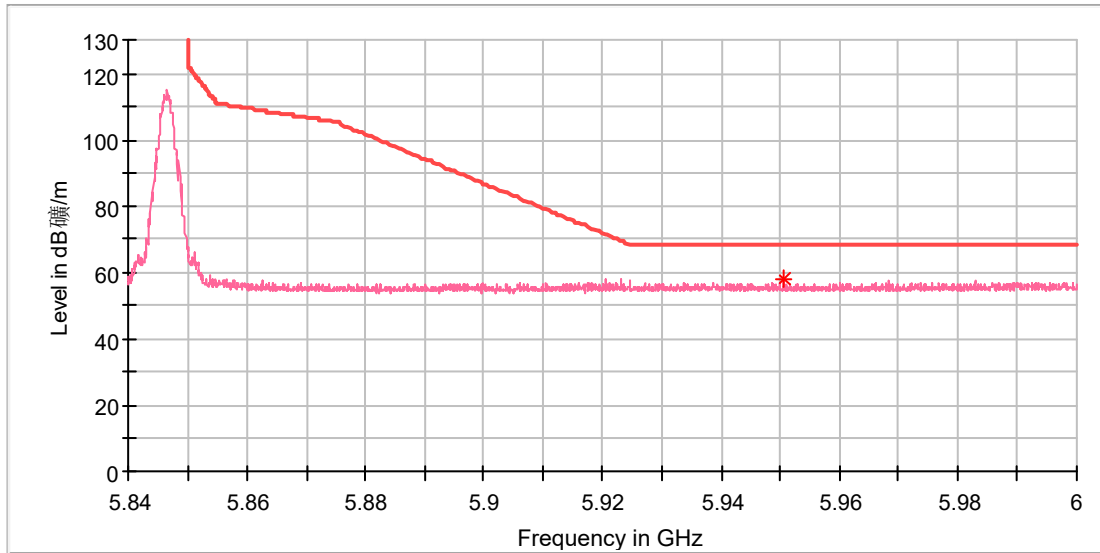

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5950.550000	57.76	68.20	10.44	100.0	V	27.0	14.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

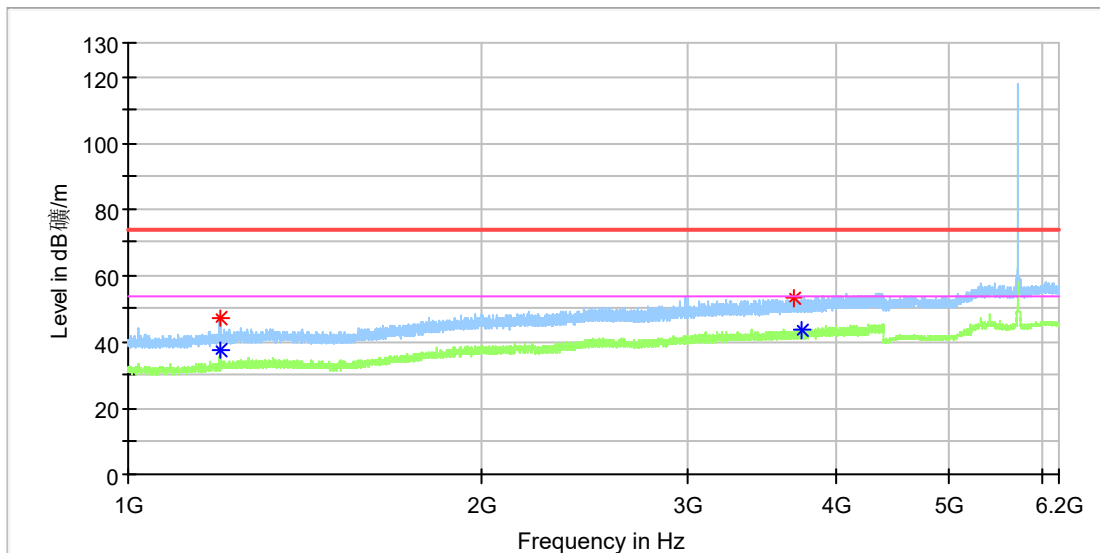

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.860000	47.14	---	74.00	26.86	100.0	H	119.0	1.1
1196.860000	---	37.27	54.00	16.73	100.0	H	119.0	1.1
3688.890000	53.14	---	74.00	20.86	100.0	H	97.0	9.5
3752.300000	---	43.57	54.00	10.43	100.0	H	358.0	9.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

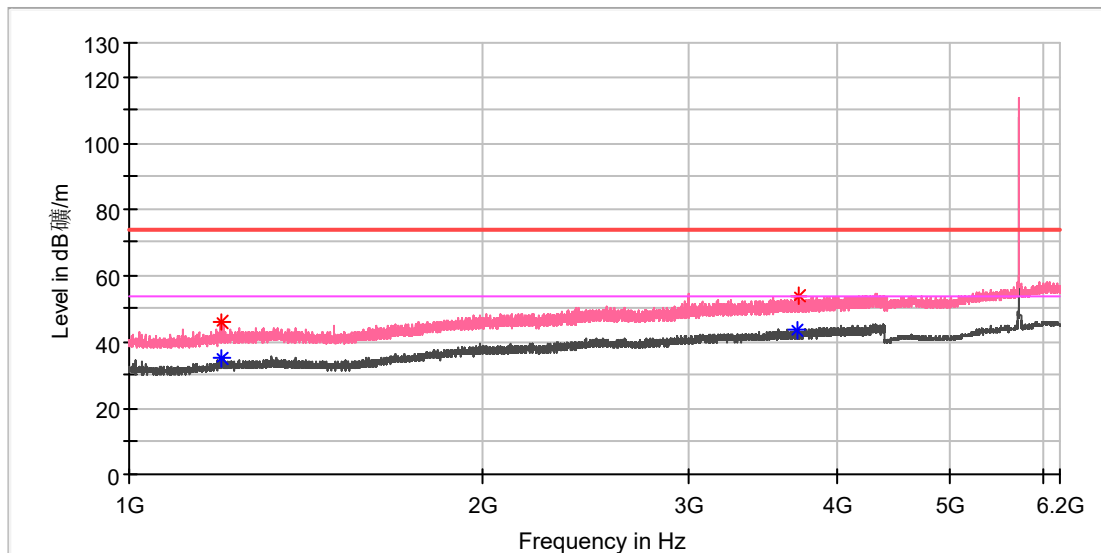

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.520000	---	35.32	54.00	18.68	100.0	V	90.0	1.1
1198.560000	46.22	---	74.00	27.78	100.0	V	256.0	1.1
3707.250000	---	43.38	54.00	10.62	100.0	V	189.0	9.6
3720.000000	53.86	---	74.00	20.14	100.0	V	0.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

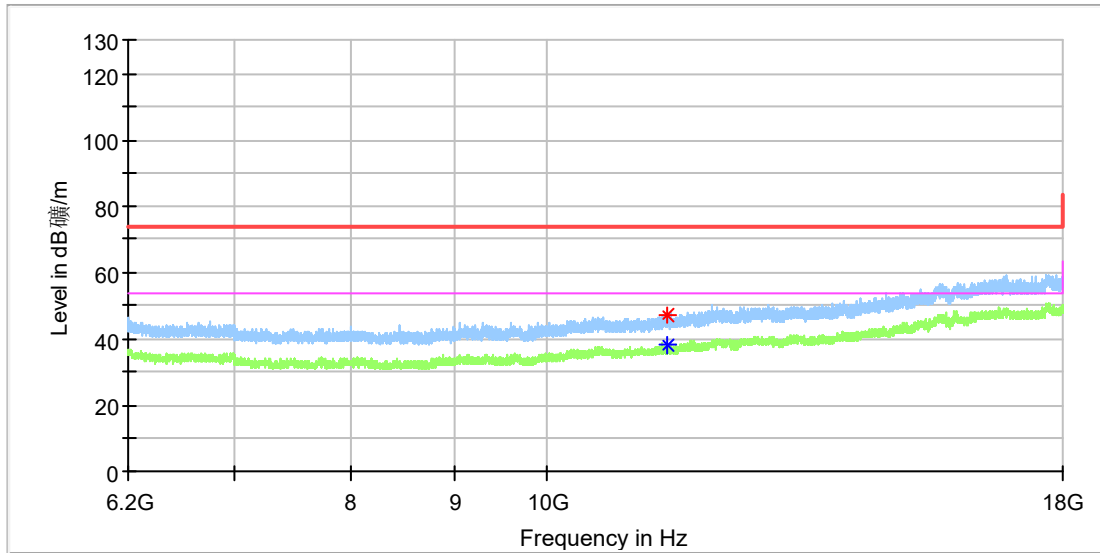

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11465.258333	---	37.79	54.00	16.21	100.0	H	74.0	13.5
11467.716667	47.03	---	74.00	26.97	100.0	H	343.0	13.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

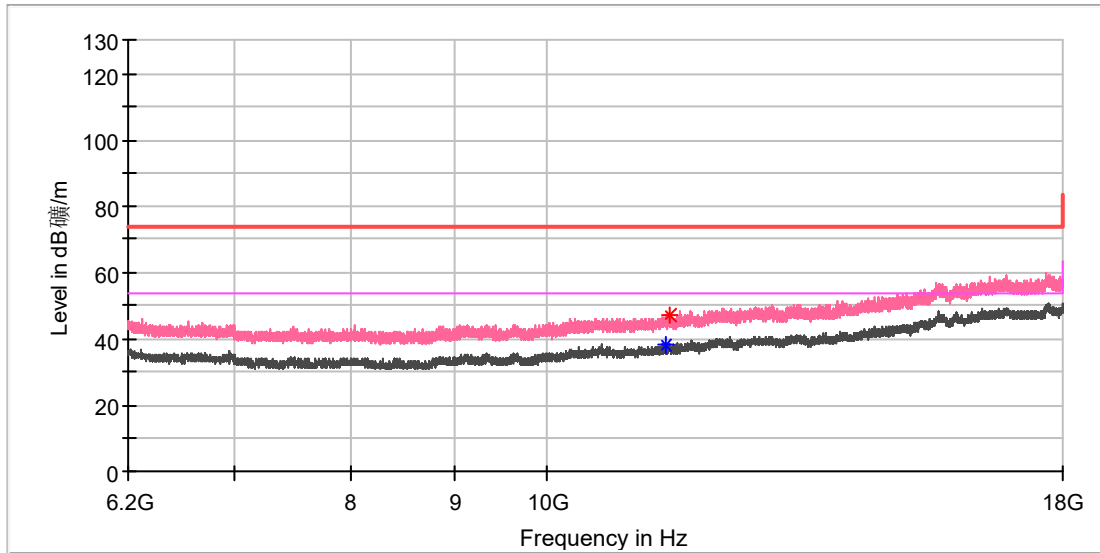

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11448.050000	---	38.20	54.00	15.80	100.0	V	224.0	13.3
11489.350000	46.99	---	74.00	27.01	100.0	V	288.0	13.7

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.8G_1.4M CA_5730.12MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

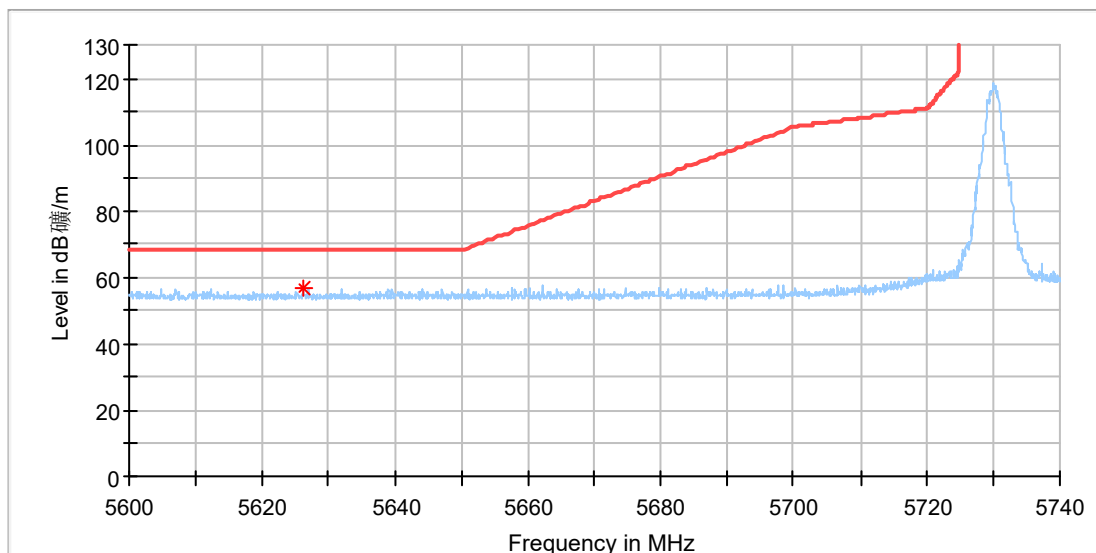

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5626.277778	56.97	68.20	11.23	100.0	H	51.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

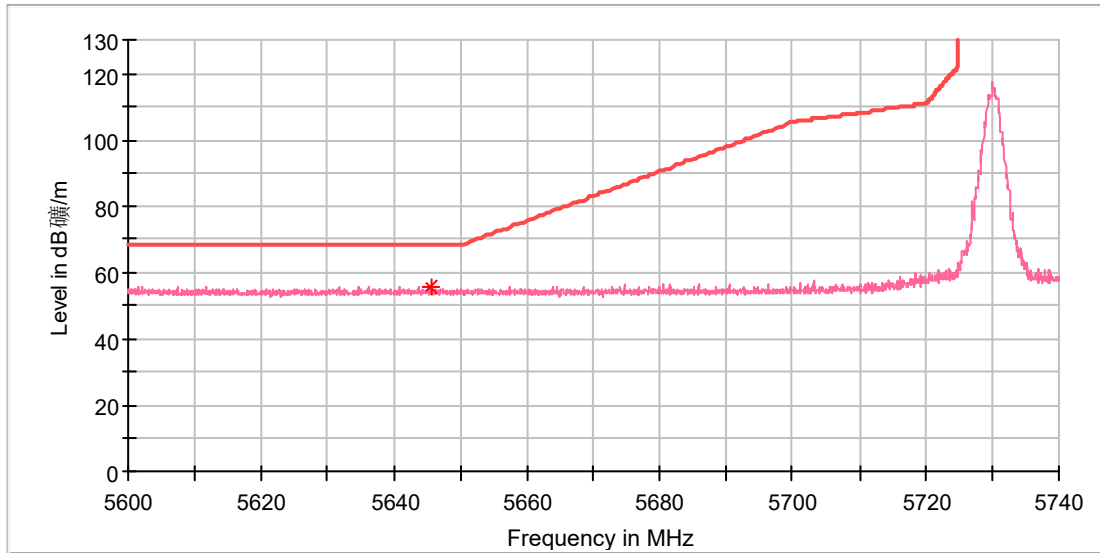

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5645.650000	55.82	68.20	12.38	100.0	V	355.0	13.8

Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

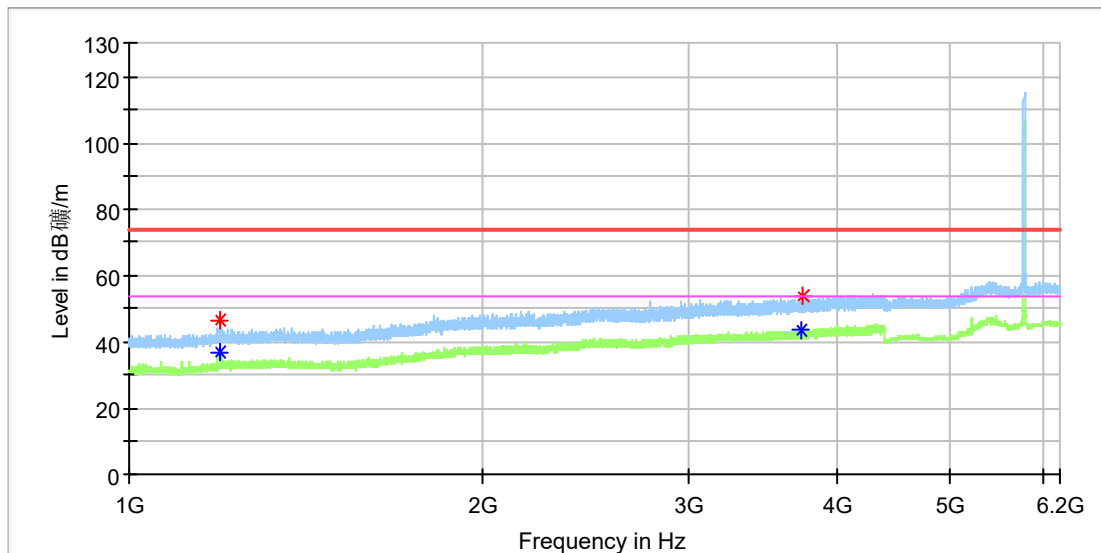

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.650000	46.86	---	74.00	27.14	100.0	H	246.0	1.1
1194.650000	---	36.78	54.00	17.22	100.0	H	246.0	1.1
3729.860000	---	43.47	54.00	10.53	100.0	H	279.0	9.6
3741.080000	53.52	---	74.00	20.48	100.0	H	177.0	9.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

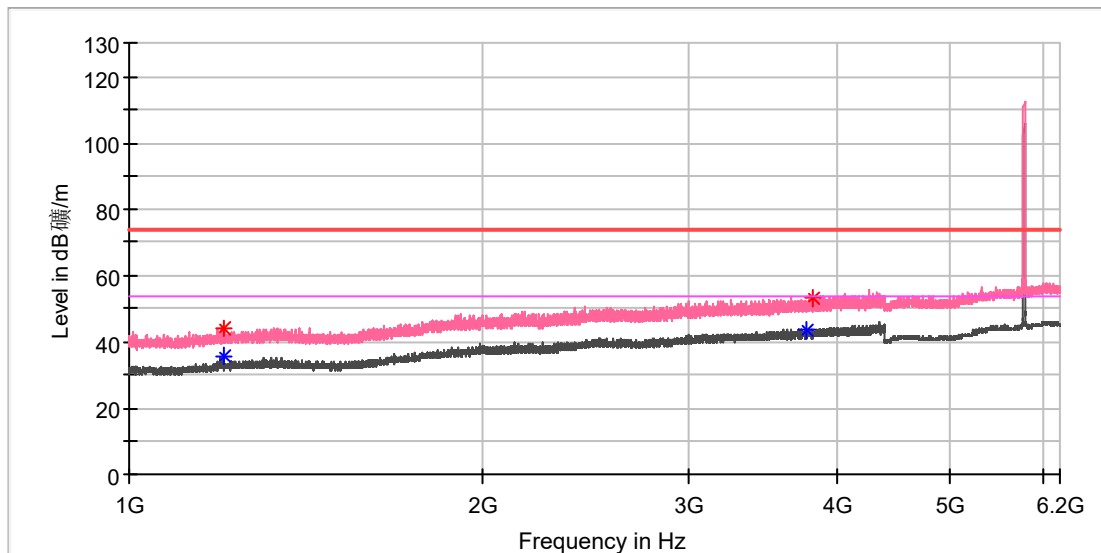

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1200.770000	---	35.73	54.00	18.27	100.0	V	318.0	1.1
1201.790000	44.36	---	74.00	29.64	100.0	V	318.0	1.2
3770.830000	---	43.81	54.00	10.19	100.0	V	32.0	9.7
3828.120000	53.45	---	74.00	20.55	100.0	V	318.0	9.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

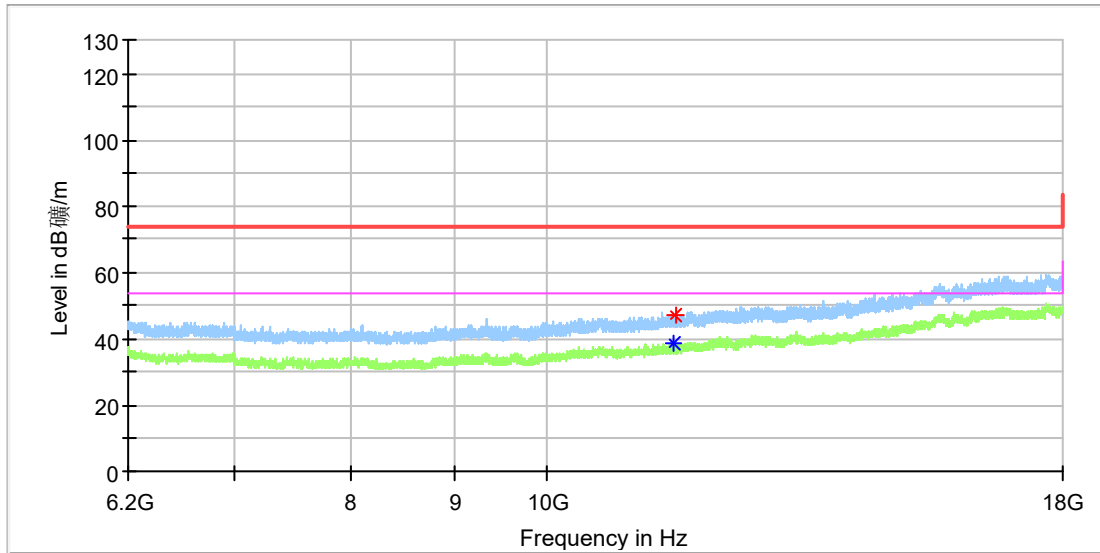

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11561.133333	---	38.40	54.00	15.60	100.0	H	210.0	13.4
11577.850000	46.89	---	74.00	27.11	100.0	H	0.0	13.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

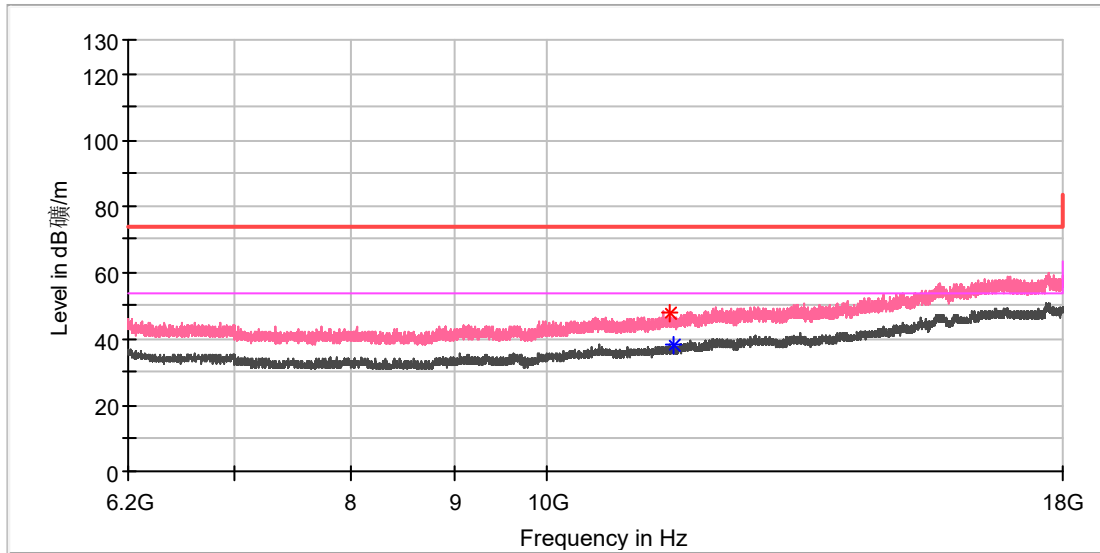

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11505.575000	47.86	---	74.00	26.14	100.0	V	0.0	13.7
11548.841667	---	38.07	54.00	15.93	100.0	V	143.0	13.5

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

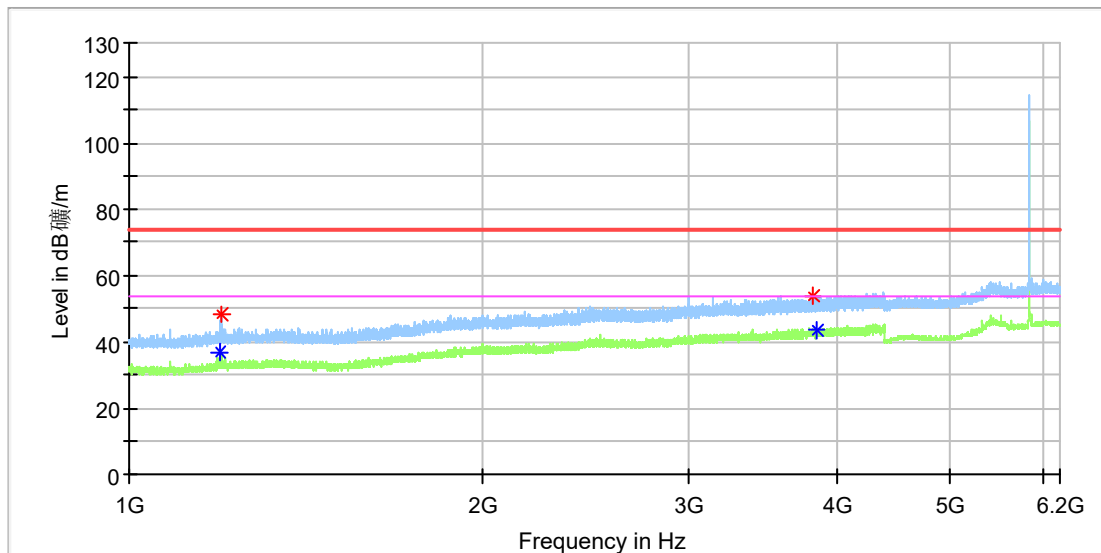

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.650000	---	36.73	54.00	17.27	100.0	H	203.0	1.1
1199.240000	48.22	---	74.00	25.79	100.0	H	180.0	1.1
3824.550000	53.71	---	74.00	20.29	100.0	H	79.0	9.9
3846.140000	---	43.82	54.00	10.18	100.0	H	235.0	9.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

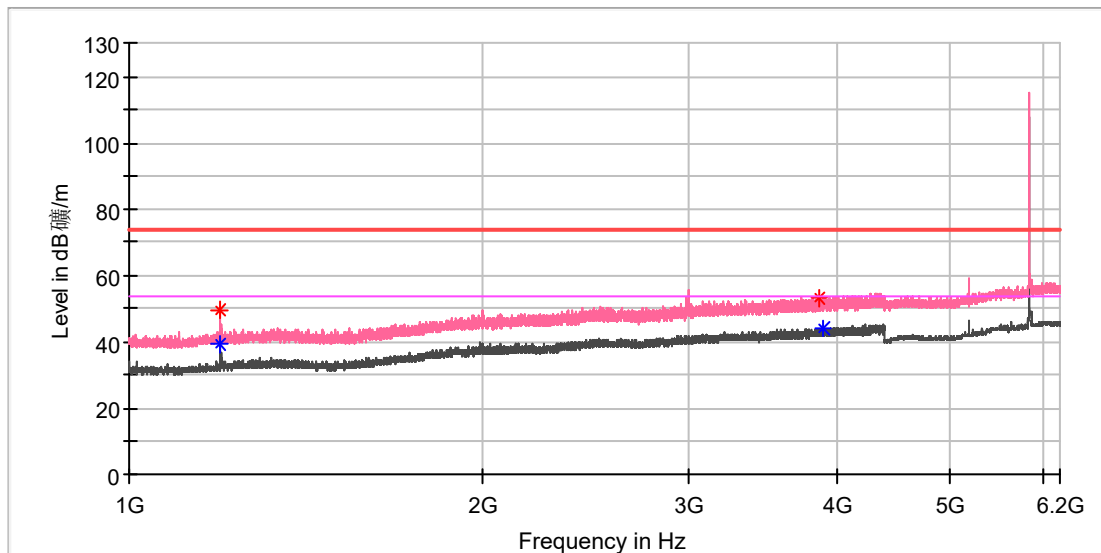

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.990000	---	39.57	54.00	14.43	100.0	V	316.0	1.1
1194.990000	49.77	---	74.00	24.23	100.0	V	316.0	1.1
3873.340000	53.25	---	74.00	20.75	100.0	V	132.0	10.0
3895.440000	---	44.05	54.00	9.95	100.0	V	285.0	10.1

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

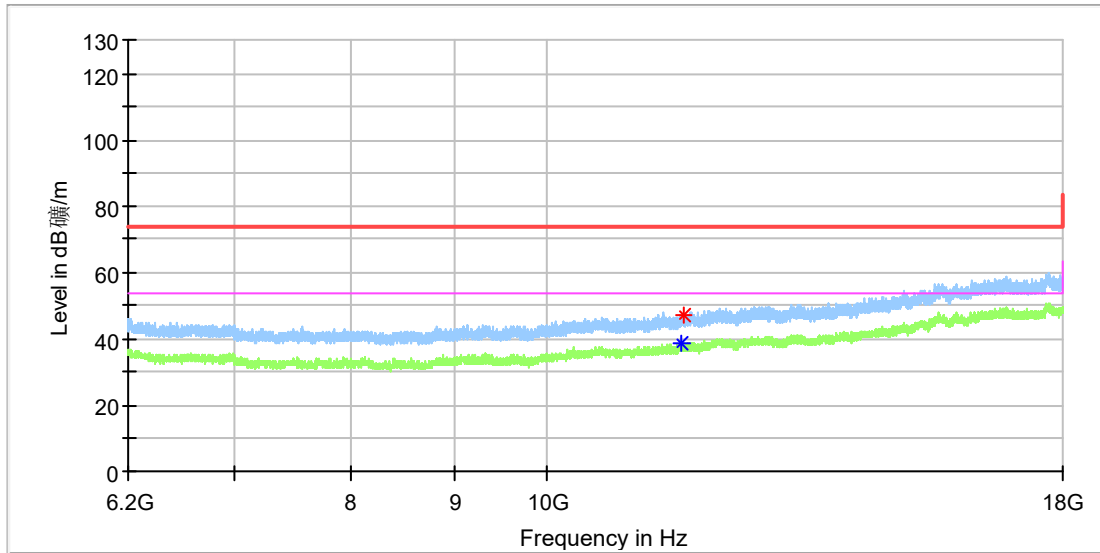

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11667.333333	---	38.73	54.00	15.27	100.0	H	310.0	13.3
11677.166667	47.16	---	74.00	26.84	100.0	H	101.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

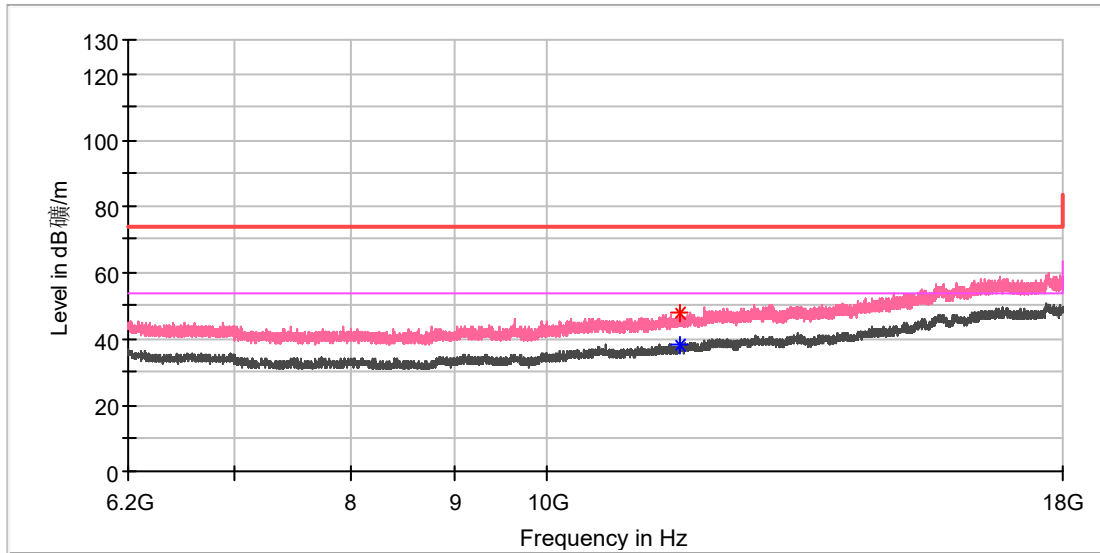

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11639.308333	47.52	---	74.00	26.48	100.0	V	231.0	13.3
11641.766667	---	38.02	54.00	15.98	100.0	V	35.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.8G_1.4M CA_5848.12MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

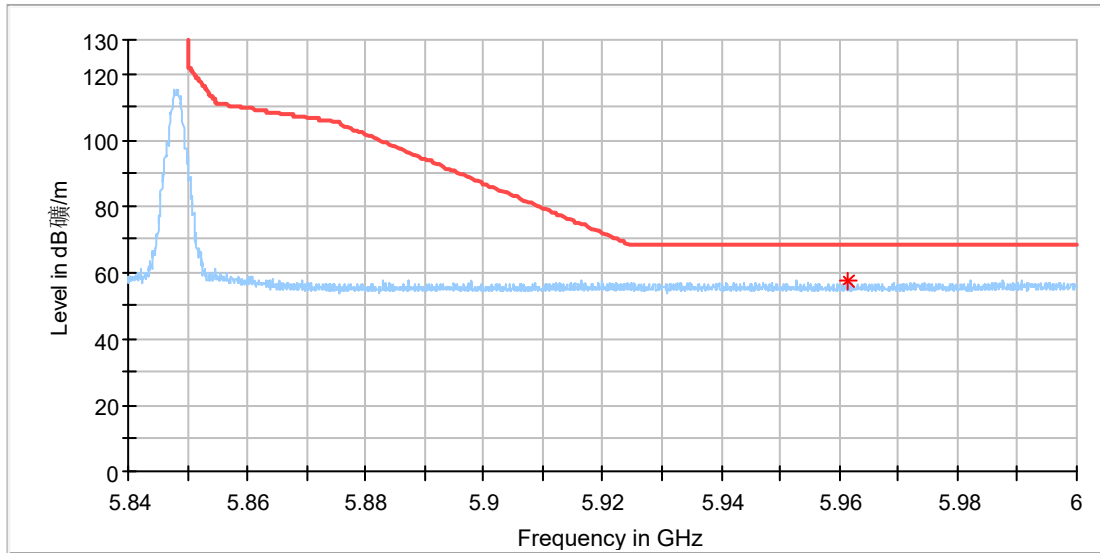

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5961.411111	57.58	68.20	10.62	100.0	H	239.0	14.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	DJI Mavic 3 Pro Cine
Model:	L2E
Test Mode:	SDR 5.8G_1.4M CA_5848.12MHz
Order No/Sample No:	168400062/A003384103-004
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

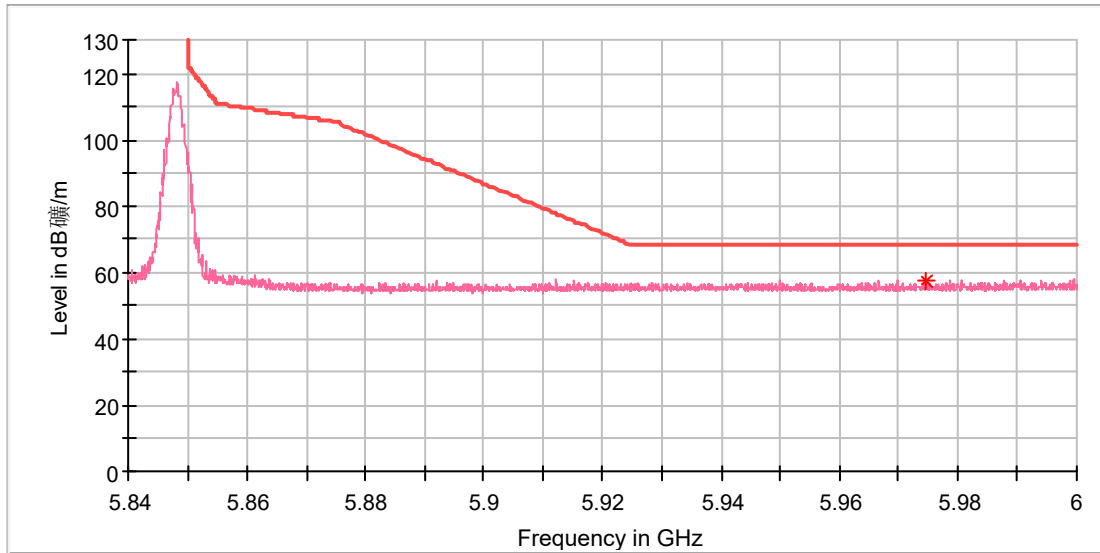

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5974.636111	57.28	68.20	10.92	100.0	V	46.0	14.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

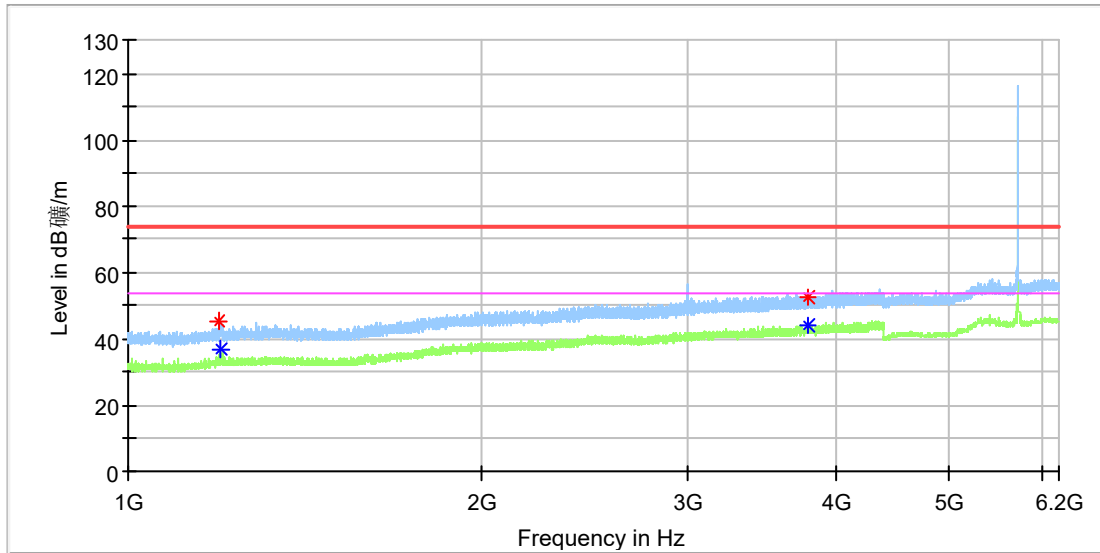

Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.310000	45.53	---	74.00	28.47	100.0	H	170.0	1.1
1197.370000	---	36.65	54.00	17.35	100.0	H	159.0	1.1
3794.120000	52.61	---	74.00	21.39	100.0	H	348.0	9.8
3797.860000	---	44.23	54.00	9.77	100.0	H	281.0	9.8

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: DJI Mavic 3 Pro Cine
 Model: L2E
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168400062/A003384103-004
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

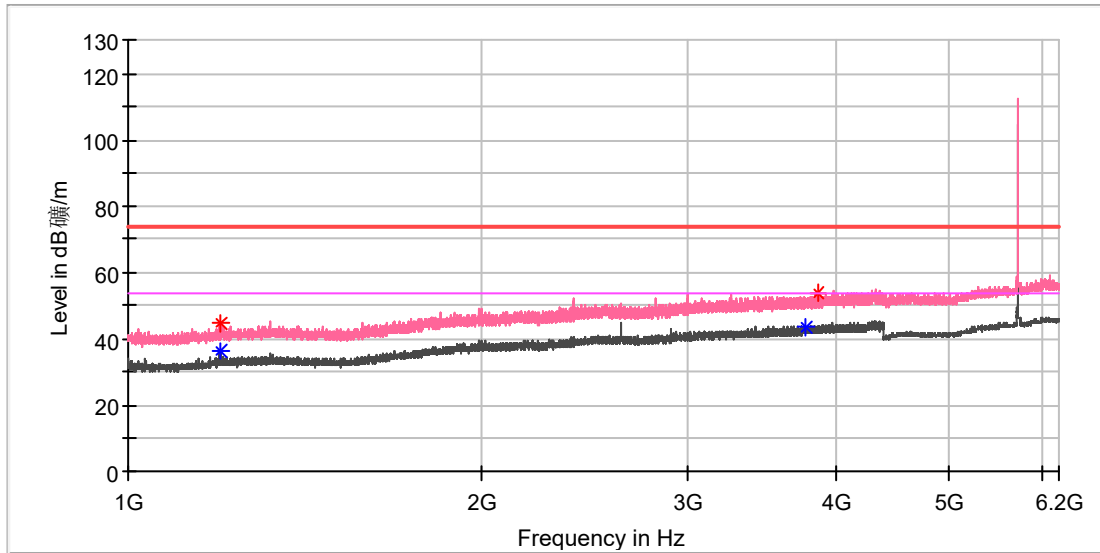

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1196.350000	---	36.15	54.00	17.85	100.0	V	285.0	1.1
1197.200000	44.66	---	74.00	29.34	100.0	V	99.0	1.1
3772.870000	---	43.83	54.00	10.17	100.0	V	122.0	9.7
3864.330000	53.61	---	74.00	20.39	100.0	V	187.0	9.9

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---