

Prüfbericht-Nr.: Test report no.:	CN24L5BD 003	Auftrags-Nr.: Order no.:	168484696	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2024-05-20	
Auftraggeber: Client:	SZ DJI TECHNOLOGY CO., LTD Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.			
Prüfgegenstand: Test item:	Drone			
Bezeichnung / Typ-Nr.: Identification / Type no.:	L3A, L3B (Trademark: DJI)			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart E Section 15.407			
Wareneingangsdatum: Date of sample receipt:	2024-06-17	Please refer to Photo Document		
Prüfmuster-Nr.: Test sample no.:	A003723392-006 A003743305-001~012			
Prüfzeitraum: Testing period:	2024-06-20 - 2024-07-15			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:			genehmigt von: authorized by:	
Datum: Date:	2024-11-19	Signed by: Bell Hu	Ausstellungsdatum: Issue date:	2024-11-19
		Signed by: Jonathan Li		
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	FCC ID: SS3-L3AB2410 This report is for 5.2GHz SDR, 5.8GHz SDR and 5.8GHz Wi-Fi.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN24L5BD 003
Test report no.:

Seite 2 von 27
Page 2 of 27

Anmerkungen
Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:

Seite 3 von 27
Page 3 of 27

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 FREQUENCY STABILITY

RESULT: Pass

5.1.5 6dB BANDWIDTH

RESULT: Pass

5.1.6 26dB BANDWIDTH

RESULT: Pass

5.1.7 99% BANDWIDTH

RESULT: Pass

5.1.8 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.9 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2	TEST SITES.....	6
2.1	TEST FACILITIES	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	7
2.4	CALIBRATION.....	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	8
2.7	STATUS OF FACILITY USED FOR TESTING	8
3	GENERAL PRODUCT INFORMATION	9
3.1	PRODUCT FUNCTION AND INTENDED USE	9
3.2	RATINGS AND SYSTEM DETAILS.....	9
3.3	INDEPENDENT OPERATION MODES.....	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	11
3.5	SUBMITTED DOCUMENTS.....	11
4	TEST SET-UP AND OPERATION MODES.....	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	15
5.1.1	<i>Antenna Requirement.....</i>	<i>15</i>
5.1.2	<i>Maximum Output Power.....</i>	<i>16</i>
5.1.3	<i>Conducted Power Spectral Density.....</i>	<i>20</i>
5.1.4	<i>Frequency Stability.....</i>	<i>21</i>
5.1.5	<i>6dB Bandwidth</i>	<i>22</i>
5.1.6	<i>26dB Bandwidth</i>	<i>23</i>
5.1.7	<i>99% Bandwidth.....</i>	<i>24</i>
5.1.8	<i>Radiated Spurious Emission</i>	<i>25</i>
5.1.9	<i>Conducted Emission on AC Mains.....</i>	<i>26</i>
6	PHOTOGRAPHS OF THE TEST SET-UP	27
7	LIST OF TABLES.....	27

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5.2GHz SDR

Appendix B: Test Results of 5.8GHz SDR

Appendix C: Test Results of 5.8GHz Wi-Fi

Appendix D: Photographs of the Test Set-up.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Accreditation Designation No.: 694916

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (SRD-Tonscend)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2023-09-22	2024-09-21
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2023-09-22	2024-09-21
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2023-09-22	2024-09-21
DC power supply	Keysight	E3642A	MY61276100	2023-09-22	2024-09-21
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2023-09-22	2024-09-21
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2023-09-22	2024-09-21
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2024-06-21	2025-06-20
Unwanted Emission Testing (TS9975)					
Equipment	Manufacturer	Model	Serial No.	Cal. Date	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2023-07-26	2024-07-25
Signal Analyzer	R&S	FSV 40	101439	2023-07-26	2024-07-25
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2023-07-26	2024-07-25
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2023-07-26	2024-07-25
Amplifier	R&S	SCU-18F	180070	2023-07-26	2024-07-25
Amplifier	R&S	SCU40A	100475	2023-07-26	2024-07-25
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-07	2024-08-06
Double-Ridged Antenna (1 -18	ETS-LINDGREN	3117	00218717	2022-08-07	2024-08-06

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:

Seite 7 von 27
Page 7 of 27

GHz)					
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-28	2024-08-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-08-07	2024-08-06
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-06-21	2025-06-20

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2025-02-22
Artificial Mains Network	R&S	ENV216	101445	2025-02-22
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

Prüfbericht - Nr.: CN24L5BD 003
*Test Report No.:*Seite 8 von 27
Page 8 of 27

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B & C & D of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The Product is Drone which supports Bluetooth, 2.4GHz SDR, 2.4GHz Wi-Fi, 5.2GHz SDR, 5.8GHz Wi-Fi and 5.8GHz SDR functions.

*Remark: SDR means specific defined radio and cannot changes radio specification via software/firmware by end-users.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Drone
Type Designation	L3A, L3B (They are electrically identical, only named differently for marketing Purpose)
Trademark	DJI
FCC ID	SS3-L3AB2410
Operating Voltage	7.6V DC by built-in battery or AC 100-240V via AC/DC adapter
Testing Voltage	Fully charged battery
Extreme Temperature Range	-10°C to +40°C
Radiofrequency operating mode	1) Bluetooth: operating within 2400-2483.5MHz, Bluetooth BLE (1Mbps&2Mbps) 2) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 10MHz/20MHz/40MHz/60MHz Bandwidth 3) 2.4GHz Wi-Fi: operating within 2400-2483.5MHz, supports 20MHz/40MHz Bandwidth and IEEE 802.11 b/g/n20/n40/ax20/ax40 4) 5.2GHz SDR: operating within 5150-5250MHz, supports 10MHz/20MHz/40MHz/60MHz/80MHz Bandwidth 5) 5.8GHz SDR: operating within 5725-5850MHz, supports 10MHz/20MHz/40MHz/60MHz/80MHz Bandwidth 6) 5.8GHz Wi-Fi: operating within 5725-5850MHz, supports 20MHz/40MHz/80MHz Bandwidth and IEEE 802.11 a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Technical Specification of 5.2GHz SDR	
Operating Frequency	5157-5245MHz for 10MHz Bandwidth 5161-5240MHz for 20MHz Bandwidth 5170-5230MHz for 40MHz Bandwidth 5180-5220MHz for 60MHz Bandwidth 5190-5210MHz for 80MHz Bandwidth
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Channel Number	89 channels for 10MHz Bandwidth 80 channels for 20MHz Bandwidth 61 channels for 40MHz Bandwidth 41 channels for 60MHz Bandwidth 21 channels for 80MHz Bandwidth

Channel Separation	1MHz for 10MHz/20MHz/40MHz/60MHz/80MHz
Antenna Type	Integral Antennas
Antenna Number	1Tx for SISO mode (ANT0 or ANT1 or ANT2 or ANT3 or ANT4 or ANT5) 2Tx for MIMO mode (ANT0+1 or ANT0+3 or ANT0+5 or ANT2+1 or ANT2+3 or ANT2+5 or ANT4+1 or ANT4+3 or ANT4+5)
Antenna Gain	2.0 dBi Max (Provided by the Client)
The type of wideband data transmission equipment	DTS
Technical Specification of 5.8GHz SDR	
Operating Frequency	5730.5-5844.5MHz for 10MHz Bandwidth 5735.5-5839.5MHz for 20MHz Bandwidth 5745.5-5829.5MHz for 40MHz Bandwidth 5755.5-5819.5MHz for 60MHz Bandwidth 5765.5-5809.5MHz for 80MHz Bandwidth
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Channel Number	115 channels for 10MHz Bandwidth 105 channels for 20MHz Bandwidth 85 channels for 40MHz Bandwidth 65 channels for 60MHz Bandwidth 45 channels for 80MHz Bandwidth
Antenna Type	Integral Antenna
Antenna Number	1Tx for SISO mode (ANT0 or ANT1 or ANT2 or ANT3 or ANT4 or ANT5) 2Tx for MIMO mode (ANT0+1 or ANT0+3 or ANT0+5 or ANT2+1 or ANT2+3 or ANT2+5 or ANT4+1 or ANT4+3 or ANT4+5)
Antenna Gain	3 dBi Max (Provided by the Client)
The type of wideband data transmission equipment	DTS
Technical Specification of 5.8GHz Wi-Fi	
Operating Frequency	5745–5825MHz for 802.11 a/n20/n40/ac20/ac40/ac80/ax20/ax40/ax80
Type of Modulation	OFDM(BPSK/QPSK/16QAM/64QAM) OFDMA(BPSK/QPSK/16QAM/64QAM/256QAM/1024QAM)
Data Rate	6/9/12/18/24/36/48/54 Mbps for 802.11a MCS0 ~ MCS7 for 802.11n MCS0 ~ MCS9 for 802.11ac MCS0 ~ MCS11 for 802.11ax* *Only Full RU mode supported for 802.11ax.
Channel Number	5 channels for 802.11a/n20/ac20/ax20 2 channels for 802.11n40/ac40/ax40 1 channel for 802.11ac80/ax80
Channel Separation	20MHz, 40MHz, 80MHz
Antenna Type	Integral Antenna
Antenna Number	1Tx1Rx for SISO mode (ANT0 or ANT1) 2Tx2Rx for MIMO mode (ANT0+ANT1)
Antenna Gain	2.89 dBi Max (Provided by the Client)

Table 4: RF Channel and Frequency of 5.8GHz Wi-Fi

U-NII-3					
20MHz Bandwidth		40MHz Bandwidth		80MHz Bandwidth	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775

153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 5.2GHz SDR wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, 5.8GHz SDR wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- C. On, 5.8GHz Wi-Fi wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- User Manual
- ID Label and Location Info
- Operation Description

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model L3A in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	Remark
Laptop	Lenovo	T480	SN: PF-16A6N8
DJI RC Pro 2	DJI	RC520	SN: 7ZWDM4R0000015
AC/DC Adapter	DJI	PD-65US	Input: 100-240V, 50/60Hz, 2.0A Output (USB-C): 5V/5A or 9V/5A or 12V/5A or 15V/4.5A or 20V/3.25A or 5-20V/3.25A Output (USB-A): 5V/2A Output (USB-A+USB-C): 65W Max

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

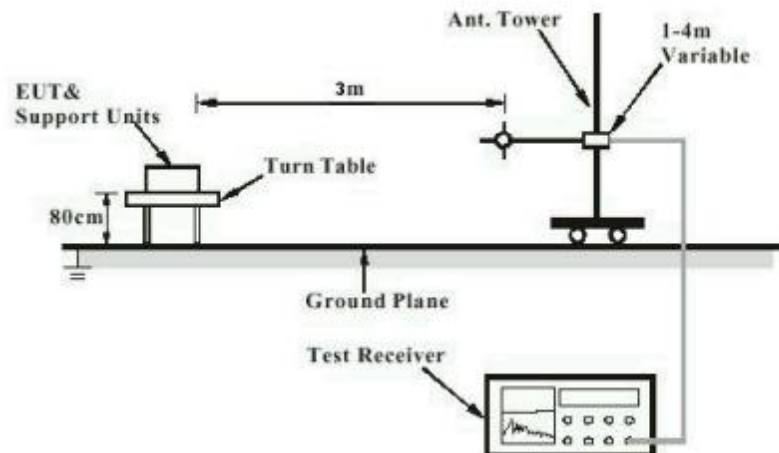


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

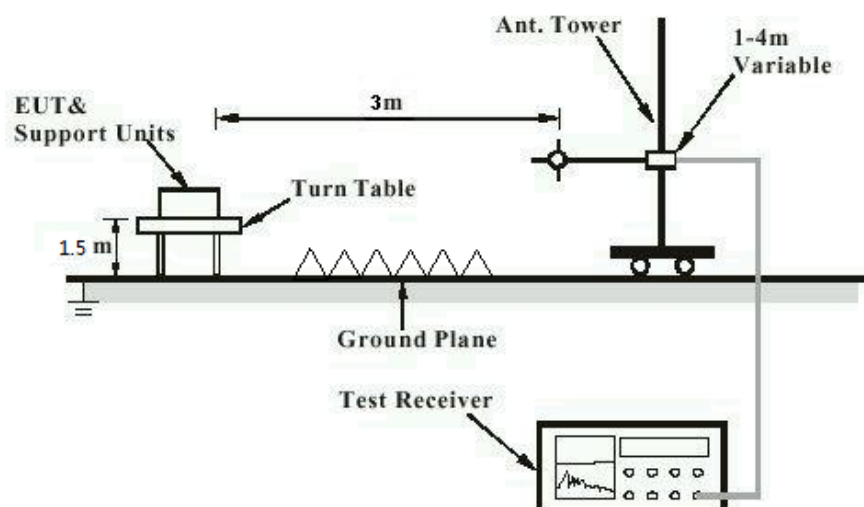


Diagram of Measurement Configuration for Mains Conduction Measurement


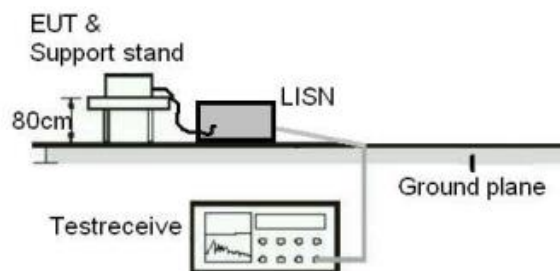


Diagram of Measurement Configuration for Conducted Transmitter Measurement

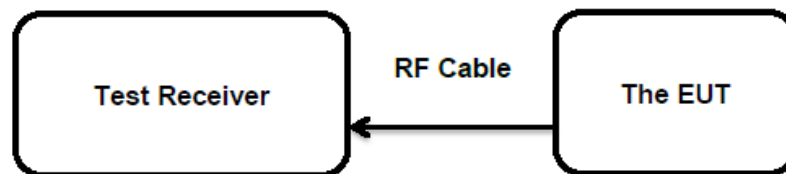

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.203
Limit : the use of antennas with directional gains that do not exceed 6 dBi

The EUT have Integral Antennas, the max. uncorrelated antenna gain antenna is 2.89dBi for 5.8GHz Wi-Fi, 3dBi for 5.8GHz SDR and 2dBi for 5.2GHz SDR, permanent attachment and no consideration of replacement..

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:Seite 16 von 27
Page 16 of 27

5.1.2 Maximum Output Power

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.407 (a)
Basic standard	: ANSI C63.10: 2013
Limits	: <250mW (23.98dBm) (5150-5250MHz) : <1W (30dBm) (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-20 to 2024-07-08
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

For details refer to following test result.

Table 6: Test Result of Maximum Conducted Output Power, 5.8GHz Wi-Fi

Worst case: SISO mode (ANT 0)

Test Mode	Data Rate	Test Channel (MHz)	Measured Average Power		Limit (W)
			(dBm)	(W)	
802.11a	1 Mbps	5745	15.90	0.0389	< 1.0
		5785	15.99	0.0397	
		5825	16.04	0.0402	
802.11n (HT20)	MCS0	5745	15.66	0.0368	
		5785	15.94	0.0393	
		5825	15.89	0.0388	
802.11n (HT40)	MCS0	5755	15.67	0.0369	
		5795	16.17	0.0414	
802.11ac (VHT20)	MCS0	5745	15.63	0.0366	
		5785	16.04	0.0402	
		5825	15.99	0.0397	
802.11ac (VHT40)	MCS0	5755	15.63	0.0366	
		5795	16.14	0.0411	
802.11ac (VHT80)	MCS0	5775	16.27	0.0424	
802.11ax (HE20)	MCS0	5745	15.83	0.0383	
		5785	16.25	0.0422	
		5825	16.15	0.0412	
802.11ax (HE40)	MCS0	5755	15.86	0.0385	
		5795	16.38	0.0435	
802.11ax (HE80)	MCS0	5775	16.06	0.0404	
Maximum Measured Value			16.38	0.0435	

MIMO mode

Test Mode	Data Rate	Test Channel (MHz)	Measured Average Power		Limit (W)
			(dBm)	(W)	
802.11n (HT20)	MCS0	5745	15.73	0.0374	< 1.0
		5785	16.05	0.0403	
		5825	16.09	0.0406	
802.11n (HT40)	MCS0	5755	15.71	0.0372	
		5795	16.32	0.0429	
802.11ac (VHT20)	MCS0	5745	15.80	0.0380	
		5785	16.14	0.0411	
		5825	16.17	0.0414	
802.11ac (VHT40)	MCS0	5755	15.76	0.0377	
		5795	16.37	0.0434	
802.11ac (VHT80)	MCS0	5775	16.39	0.0436	
802.11ax (HE20)	MCS0	5745	15.85	0.0385	
		5785	16.23	0.0420	
		5825	16.32	0.0429	
802.11ax (HE40)	MCS0	5755	15.99	0.0397	
		5795	15.61	0.0364	
802.11ax (HE80)	MCS0	5775	15.82	0.0382	
Maximum Measured Value			16.39	0.0436	

Table 7: Test Result of Maximum Conducted Output Power, 5.2GHz SDR

Worst case: MIMO mode (ANT 0+3)

TestMode	Antenna	Channel	Result[dBm]	Result[W]	Limit[W]	Verdict
10MHz	Ant0	5157	3.38	0.0022	< 0.25	PASS
	Ant3	5157	6.06	0.0040	< 0.25	PASS
	total	5157	7.93	0.0062	< 0.25	PASS
	Ant0	5200	13.95	0.0248	< 0.25	PASS
	Ant3	5200	16.57	0.0454	< 0.25	PASS
	total	5200	18.46	0.0701	< 0.25	PASS
	Ant0	5245	14.03	0.0253	< 0.25	PASS
	Ant3	5245	15.91	0.0390	< 0.25	PASS
20MHz	total	5245	18.08	0.0643	< 0.25	PASS
	Ant0	5161	4.96	0.0031	< 0.25	PASS
	Ant3	5161	6.60	0.0046	< 0.25	PASS
	total	5161	8.87	0.0077	< 0.25	PASS
	Ant0	5200	14.70	0.0295	< 0.25	PASS
	Ant3	5200	16.14	0.0411	< 0.25	PASS
	total	5200	18.49	0.0706	< 0.25	PASS
	Ant0	5240	14.63	0.0290	< 0.25	PASS
40MHz	Ant3	5240	16.01	0.0399	< 0.25	PASS
	total	5240	18.38	0.0689	< 0.25	PASS
	Ant0	5170	6.38	0.0043	< 0.25	PASS
	Ant3	5170	8.08	0.0064	< 0.25	PASS
	total	5170	10.32	0.0108	< 0.25	PASS
	Ant0	5200	13.67	0.0233	< 0.25	PASS
	Ant3	5200	16.17	0.0414	< 0.25	PASS
	total	5200	18.11	0.0647	< 0.25	PASS
60MHz	Ant0	5230	13.37	0.0217	< 0.25	PASS
	Ant3	5230	16.33	0.0430	< 0.25	PASS
	total	5230	18.11	0.0647	< 0.25	PASS
	Ant0	5180	8.20	0.0066	< 0.25	PASS
	Ant3	5180	9.21	0.0083	< 0.25	PASS
	total	5180	11.74	0.0149	< 0.25	PASS
	Ant0	5200	13.93	0.0247	< 0.25	PASS
	Ant3	5200	16.42	0.0439	< 0.25	PASS
80MHz	total	5200	18.36	0.0685	< 0.25	PASS
	Ant0	5220	13.65	0.0232	< 0.25	PASS
	Ant3	5220	16.23	0.0420	< 0.25	PASS
	total	5220	18.14	0.0652	< 0.25	PASS
	Ant0	5190	9.71	0.0094	< 0.25	PASS
	Ant3	5190	11.05	0.0127	< 0.25	PASS
	total	5190	13.44	0.0221	< 0.25	PASS
	Ant0	5200	12.18	0.0165	< 0.25	PASS
	Ant3	5200	14.53	0.0284	< 0.25	PASS
	total	5200	16.52	0.0449	< 0.25	PASS
	Ant0	5210	13.47	0.0222	< 0.25	PASS
	Ant3	5210	16.29	0.0426	< 0.25	PASS
	total	5210	18.12	0.0649	< 0.25	PASS

Table 8: Test Result of Maximum Conducted Output Power, 5.8GHz SDR

Worst case: MIMO mode (ANT 0+3)

TestMode	Antenna	Channel	Result[dBm]	Result[W]	Limit[W]	Verdict
10MHz	Ant0	5730.5	24.75	0.2985	< 1.0	PASS
	Ant3	5730.5	24.81	0.3027	< 1.0	PASS
	total	5730.5	27.79	0.6012	< 1.0	PASS
	Ant0	5787.5	26.56	0.4529	< 1.0	PASS
	Ant3	5787.5	25.81	0.3811	< 1.0	PASS
	total	5787.5	29.21	0.8337	< 1.0	PASS
	Ant0	5844.5	24.85	0.3055	< 1.0	PASS
	Ant3	5844.5	24.76	0.2992	< 1.0	PASS
	total	5844.5	27.82	0.6053	< 1.0	PASS
20MHz	Ant0	5735.5	24.87	0.3069	< 1.0	PASS
	Ant3	5735.5	24.71	0.2958	< 1.0	PASS
	total	5735.5	27.80	0.6026	< 1.0	PASS
	Ant0	5787.5	26.68	0.4656	< 1.0	PASS
	Ant3	5787.5	26.12	0.4093	< 1.0	PASS
	total	5787.5	29.41	0.8730	< 1.0	PASS
	Ant0	5839.5	23.67	0.2328	< 1.0	PASS
	Ant3	5839.5	23.79	0.2393	< 1.0	PASS
	total	5839.5	26.74	0.4721	< 1.0	PASS
40MHz	Ant0	5745.5	21.53	0.1422	< 1.0	PASS
	Ant3	5745.5	21.47	0.1403	< 1.0	PASS
	total	5745.5	24.51	0.2825	< 1.0	PASS
	Ant0	5787.5	26.05	0.4027	< 1.0	PASS
	Ant3	5787.5	25.39	0.3459	< 1.0	PASS
	total	5787.5	28.74	0.7482	< 1.0	PASS
	Ant0	5829.5	21.06	0.1276	< 1.0	PASS
	Ant3	5829.5	21.37	0.1371	< 1.0	PASS
	total	5829.5	24.23	0.2649	< 1.0	PASS
60MHz	Ant0	5755.5	21.66	0.1466	< 1.0	PASS
	Ant3	5755.5	21.51	0.1416	< 1.0	PASS
	total	5755.5	24.60	0.2884	< 1.0	PASS
	Ant0	5787.5	21.34	0.1361	< 1.0	PASS
	Ant3	5787.5	21.75	0.1496	< 1.0	PASS
	total	5787.5	24.56	0.2858	< 1.0	PASS
	Ant0	5819.5	21.82	0.1521	< 1.0	PASS
	Ant3	5819.5	21.87	0.1538	< 1.0	PASS
	total	5819.5	24.86	0.3062	< 1.0	PASS
80MHz	Ant0	5765.5	21.15	0.1303	< 1.0	PASS
	Ant3	5765.5	21.22	0.1324	< 1.0	PASS
	total	5765.5	24.20	0.2630	< 1.0	PASS
	Ant0	5787.5	20.98	0.1253	< 1.0	PASS
	Ant3	5787.5	21.62	0.1452	< 1.0	PASS
	total	5787.5	24.32	0.2704	< 1.0	PASS
	Ant0	5809.5	21.38	0.1374	< 1.0	PASS
	Ant3	5809.5	21.44	0.1393	< 1.0	PASS
	total	5809.5	24.42	0.2767	< 1.0	PASS

Note:

- The cable loss is taken into account in results, $e.i.r.p. = P_{(Conducted\ power)} + G$
- Antenna gain(G) of 5.8GHz Wi-Fi : 2.89dBi
Antenna gain(G) of 5.2GHz SDR: 2dBi
Antenna gain(G) of 5.8GHz SDR: 3dBi

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:Seite 20 von 27
Page 20 of 27

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.407 (a)
Basic standard	: ANSI C63.10: 2013
Limits	: <11dBm/MHz (5150-5250MHz)
	: <30dBm/500KHz (5725-5850MHz)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-20 to 2024-07-03
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:Seite 21 von 27
Page 21 of 27

5.1.4 Frequency Stability

RESULT:

Pass

Test Specification

Test standard	: FCC Part 15.407 (g)
Basic standard	: ANSI C63.10: 2013
Limits	: Within assigned bands
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-06-20 to 2024-07-03
Input voltage	: Fully charged battery
Operation mode	: A, B, C
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:

Seite 22 von 27
Page 22 of 27

5.1.5 6dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407 (e)
Basic standard : ANSI C63.10: 2013
Limits : At least 500KHz (5725-5850MHz)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-06-20 to 2024-07-03
Input voltage : Fully charged battery
Operation mode : B, C
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B, C.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:Seite 23 von 27
Page 23 of 27

5.1.6 26dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.407
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-06-20 to 2024-07-03
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:

Seite 24 von 27
Page 24 of 27

5.1.7 99% Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.407
Basic standard : ANSI C63.10: 2013
Limits : N/A
Kind of test site : Shielded Room

Test Setup

Date of testing : 2024-06-20 to 2024-07-03
Input voltage : Fully charged battery
Operation mode : A, B, C
Test channel : Low / Middle / High
Ambient temperature : 25 °C
Relative humidity : 45 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A, B, C.

5.1.8 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
Basic standard : ANSI C63.10: 2013

Limits :

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2024-07-01 to 2024-07-15
Input voltage : Fully charged battery
Operation mode : A, B, C
Test channel : Low / Middle / High
Ambient temperature : Refer to test result
Relative humidity : Refer to test result
Atmospheric pressure : 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A, B, C.

Prüfbericht - Nr.: CN24L5BD 003
Test Report No.:Seite 26 von 27
Page 26 of 27

5.1.9 Conducted Emission on AC Mains

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Classification	: Class B
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2024-07-02
Input voltage	: AC 120V, 60Hz
Operation mode	: A, B, C
Earthing	: Not connected
Ambient temperature	: 23.4 °C
Relative humidity	: 51.2 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A, B, C.

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix D.

7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT.....	9
Table 4: RF Channel and Frequency of 5.8GHz Wi-Fi.....	11
Table 5: List of Accessories and Auxiliary Equipment.....	12
Table 6: Test Result of Maximum Conducted Output Power, 5.8GHz Wi-Fi.....	17
Table 7: Test Result of Maximum Conducted Output Power, 5.2GHz SDR.....	18
Table 8: Test Result of Maximum Conducted Output Power, 5.8GHz SDR.....	19