


### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M\_2465.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

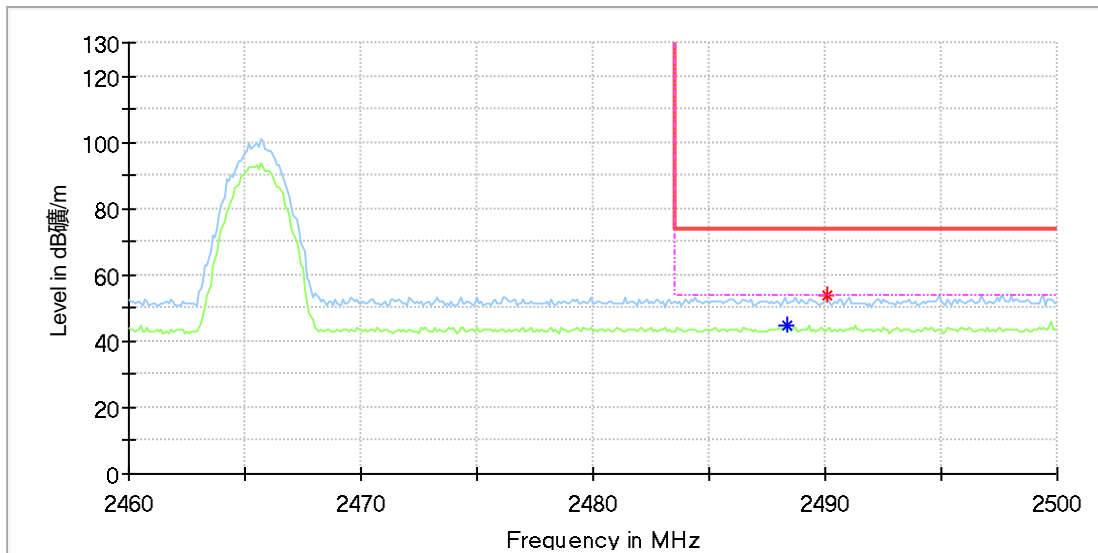

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2488.400000     | ---              | 44.83            | 54.00          | 9.17        | 100.0       | H   | 296.0         | 7.4          |
| 2490.100000     | 53.89            | ---              | 74.00          | 20.11       | 100.0       | H   | 106.0         | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M\_2465.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

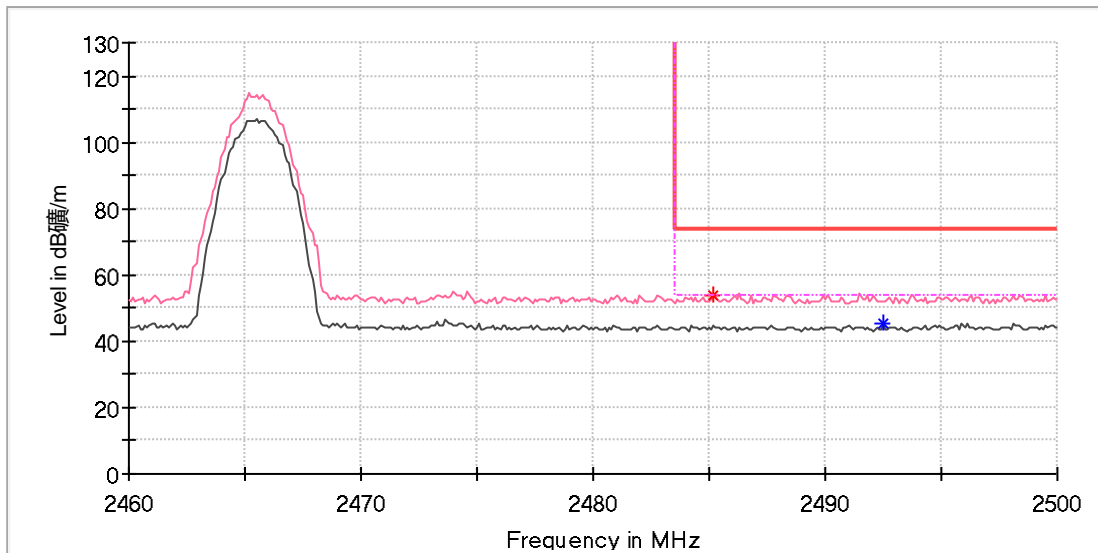

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2485.200000     | 53.79            | ---              | 74.00          | 20.21       | 100.0       | V   | 47.0          | 7.4          |
| 2492.500000     | ---              | 45.18            | 54.00          | 8.82        | 100.0       | V   | 62.0          | 7.4          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

**2.4GHz SDR, 1.4MHz CA BW**

**EUT Information**

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2409.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

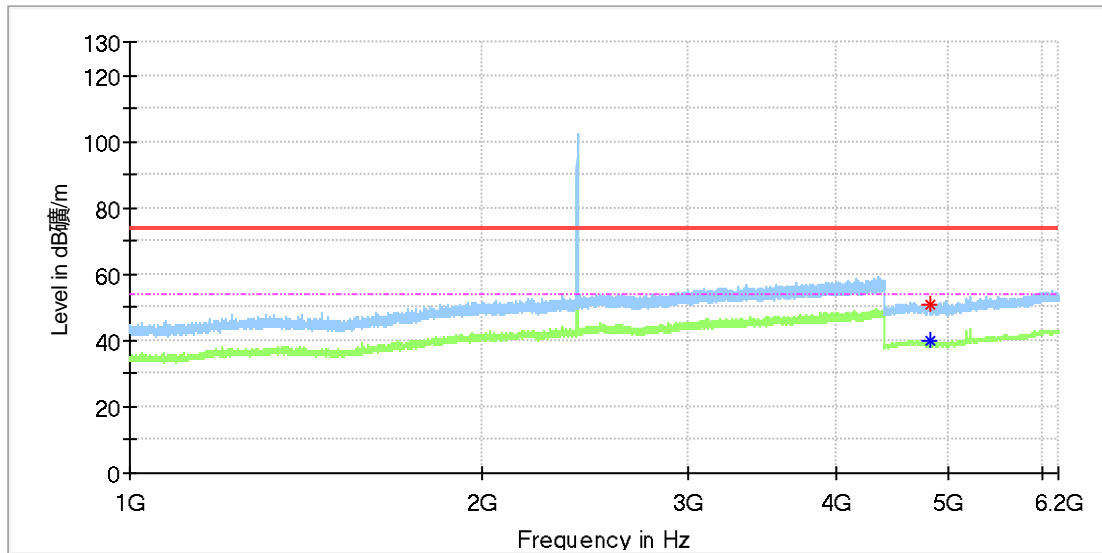

**Critical\_Freqs**


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4815.000000     | ---              | 39.65            | 54.00          | 14.35       | 100.0       | H   | 107.0         | 11.8         |
| 4823.000000     | 50.80            | ---              | 74.00          | 23.20       | 100.0       | H   | 250.0         | 11.8         |

**Final\_Result**

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2409.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

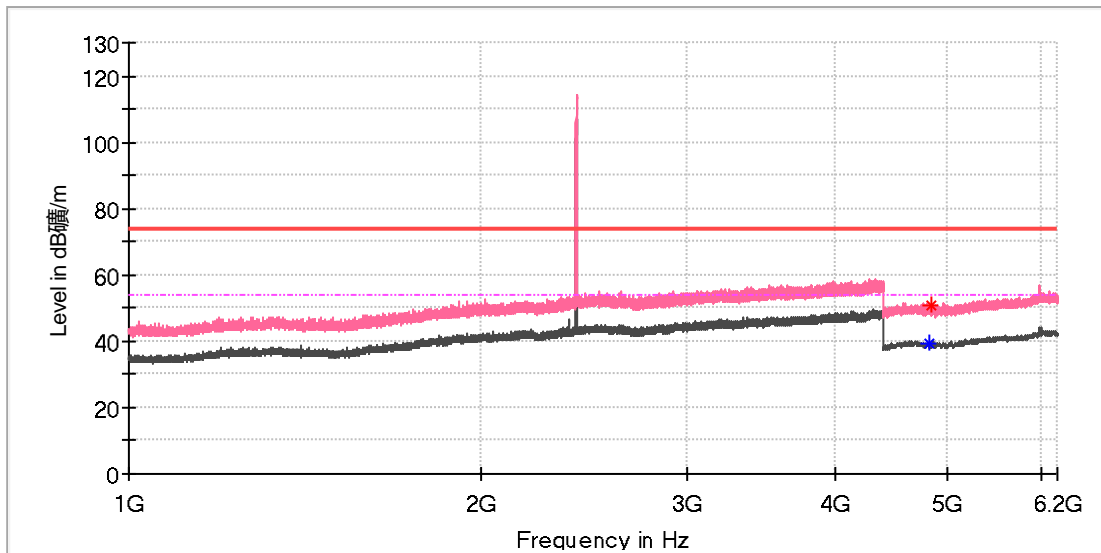

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4818.500000     | ---              | 39.38            | 54.00          | 14.62       | 100.0       | V   | 305.0         | 11.8         |
| 4830.500000     | 50.96            | ---              | 74.00          | 23.04       | 100.0       | V   | 170.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2409.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

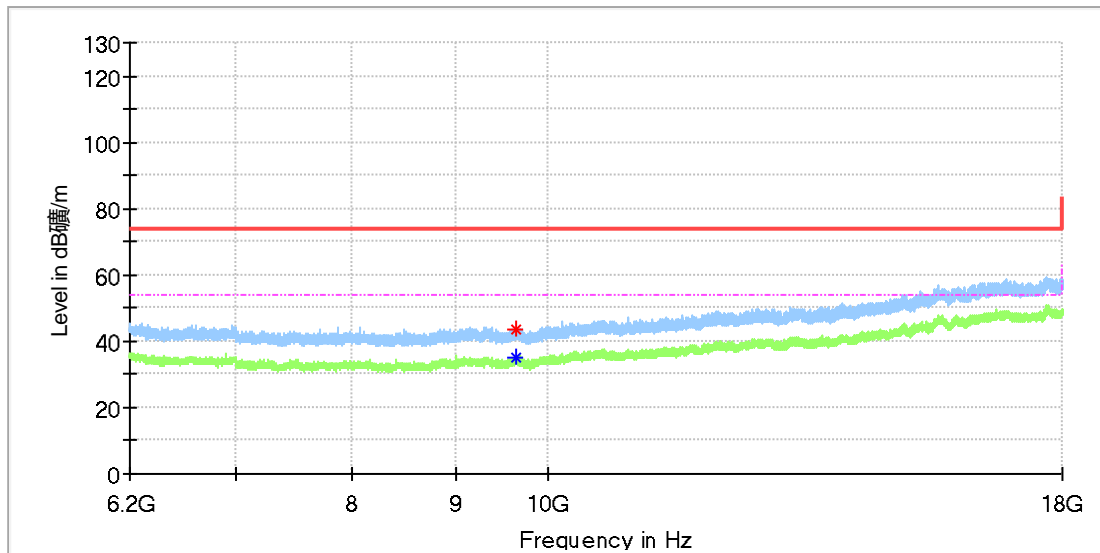

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9635.766667     | 43.46            | ---              | 74.00          | 30.54       | 100.0       | H   | 261.0         | 10.4         |
| 9636.750000     | ---              | 35.12            | 54.00          | 18.88       | 100.0       | H   | 213.0         | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2409.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

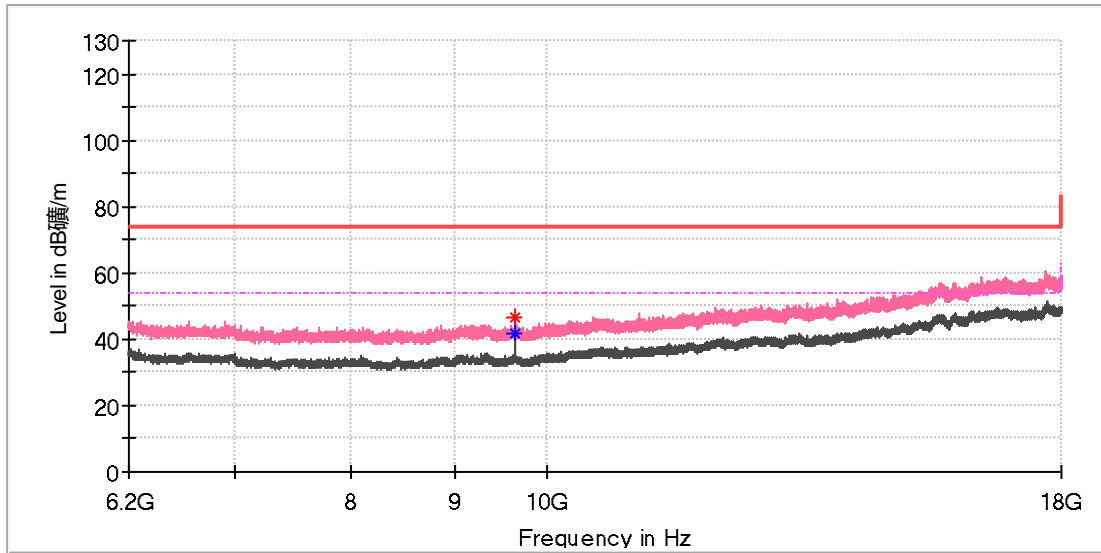

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9636.258333     | 46.28            | ---              | 74.00          | 27.72       | 100.0       | V   | 0.0           | 10.4         |
| 9636.750000     | ---              | 41.52            | 54.00          | 12.48       | 100.0       | V   | 0.0           | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                             |
|---------------------|-----------------------------|
| EUT Name:           | DJI Mini 2 SE               |
| Model:              | MT2SD                       |
| Test Mode:          | SDR 2.4G_1.4M CA_2409.12MHz |
| Order No/Sample No: | 168389903/A003336027-006    |
| Test Voltage::      | Battery                     |
| Remark:             | Temp 23 Humi:56%            |
| Test Standard:      | FCC 15.247                  |
| Tested By:          | Kei Zhang                   |
| Reviewed By:        | Terry Yin                   |

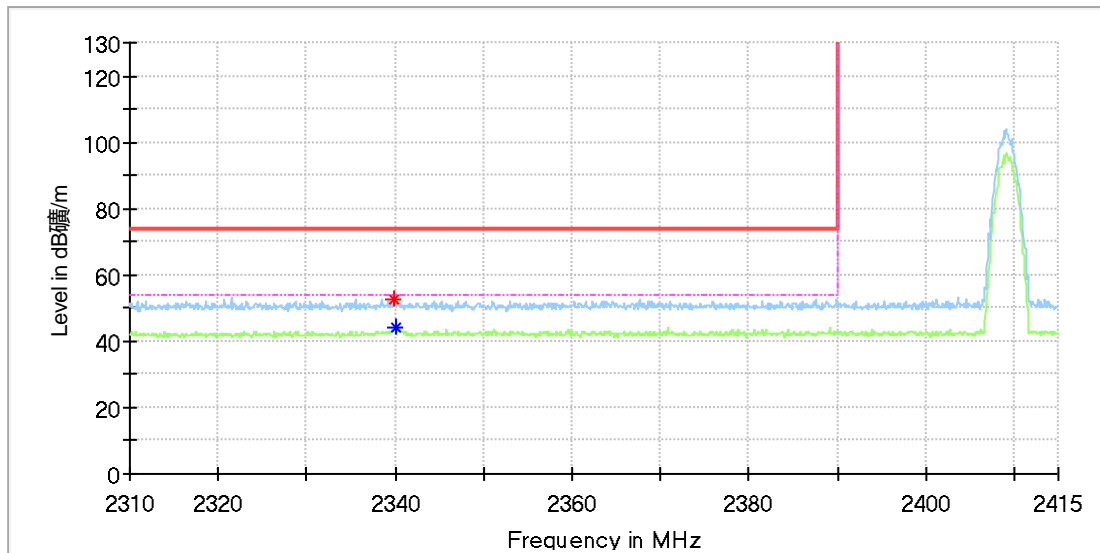

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2339.900000     | 52.79            | ---              | 74.00          | 21.21       | 100.0       | H   | 161.0         | 6.8          |
| 2340.000000     | ---              | 44.14            | 54.00          | 9.86        | 100.0       | H   | 198.0         | 6.8          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                             |
|---------------------|-----------------------------|
| EUT Name:           | DJI Mini 2 SE               |
| Model:              | MT2SD                       |
| Test Mode:          | SDR 2.4G_1.4M CA_2409.12MHz |
| Order No/Sample No: | 168389903/A003336027-006    |
| Test Voltage::      | Battery                     |
| Remark:             | Temp 23 Humi:56%            |
| Test Standard:      | FCC 15.247                  |
| Tested By:          | Kei Zhang                   |
| Reviewed By:        | Terry Yin                   |

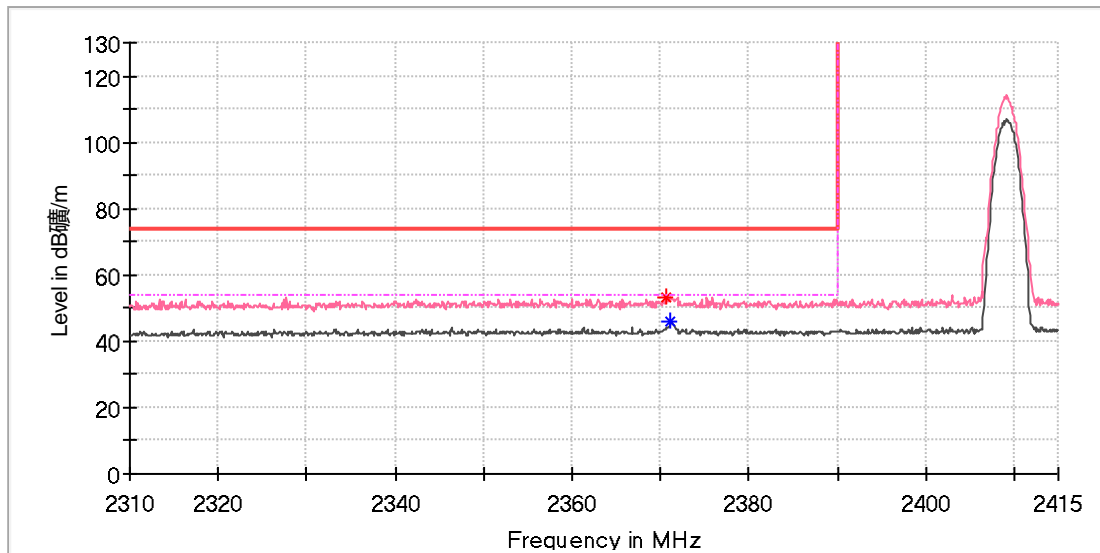

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2370.700000     | 53.37            | ---              | 74.00          | 20.63       | 100.0       | V   | 315.0         | 6.9          |
| 2371.100000     | ---              | 46.10            | 54.00          | 7.90        | 100.0       | V   | 328.0         | 6.9          |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2437.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

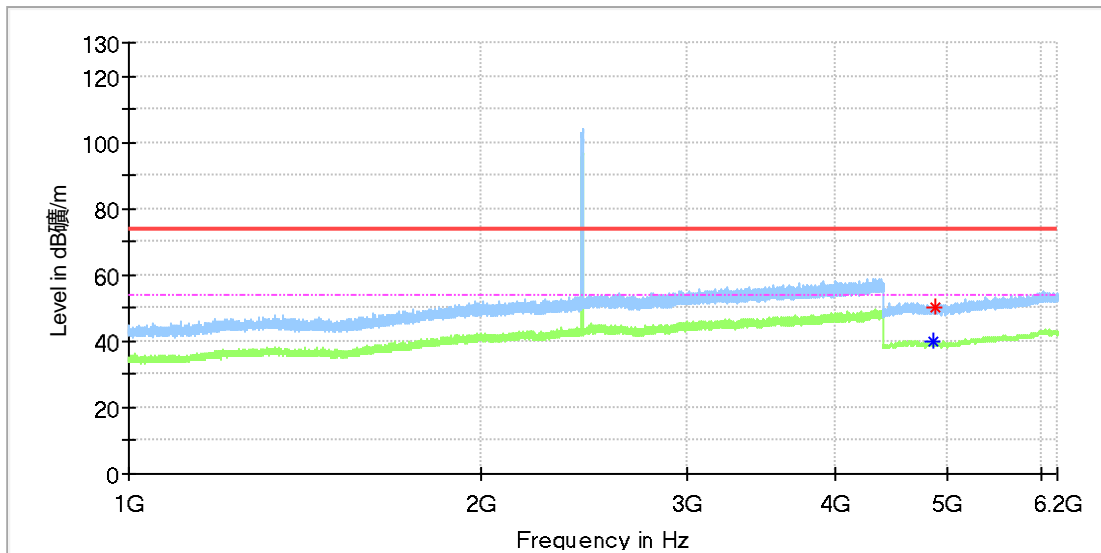

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4865.000000     | ---              | 39.66            | 54.00          | 14.34       | 100.0       | H   | 137.0         | 11.8         |
| 4877.000000     | 50.32            | ---              | 74.00          | 23.68       | 100.0       | H   | 229.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2437.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

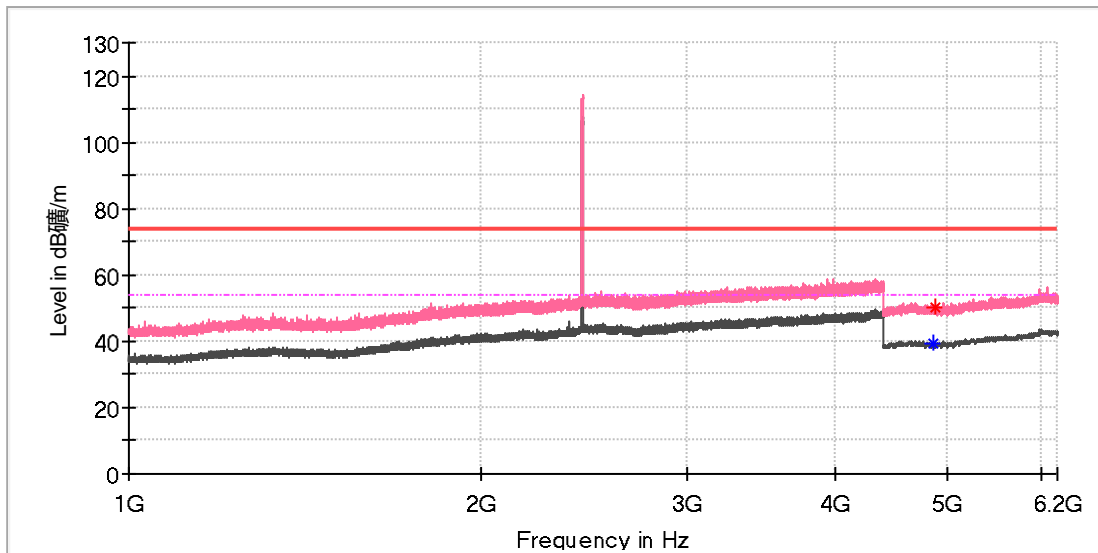

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4862.000000     | ---              | 39.15            | 54.00          | 14.85       | 100.0       | V   | 323.0         | 11.8         |
| 4875.000000     | 49.94            | ---              | 74.00          | 24.06       | 100.0       | V   | 163.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                             |
|---------------------|-----------------------------|
| EUT Name:           | DJI Mini 2 SE               |
| Model:              | MT2SD                       |
| Test Mode:          | SDR 2.4G_1.4M CA_2437.12MHz |
| Order No/Sample No: | 168389903/A003336027-006    |
| Test Voltage::      | Battery                     |
| Remark:             | Temp 23 Humi:56%            |
| Test Standard:      | FCC 15.247                  |
| Tested By:          | Kei Zhang                   |
| Reviewed By:        | Terry Yin                   |

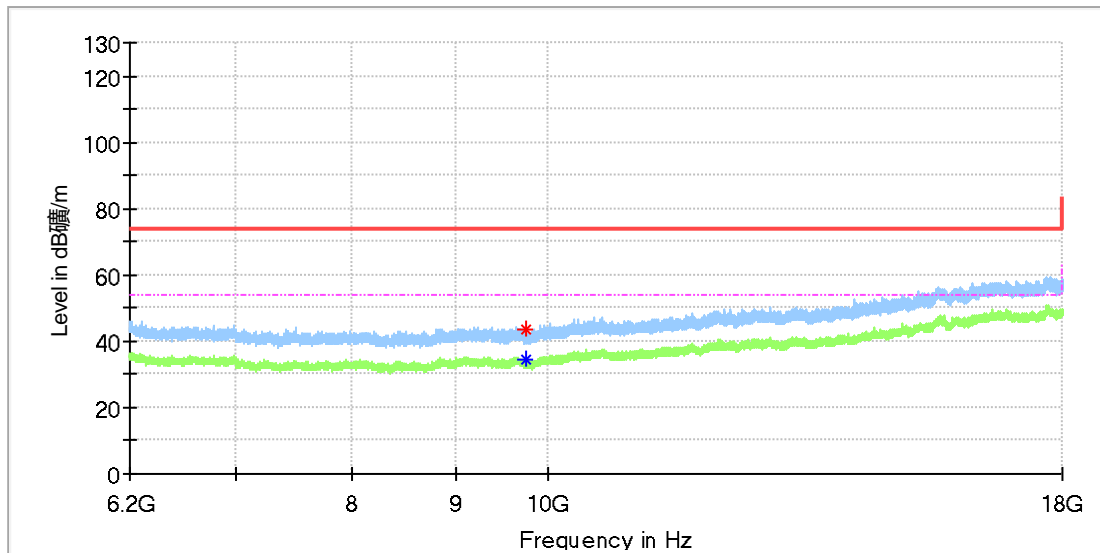

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9748.358333     | ---              | 34.56            | 54.00          | 19.44       | 100.0       | H   | 338.0         | 10.4         |
| 9750.325000     | 43.48            | ---              | 74.00          | 30.52       | 100.0       | H   | 36.0          | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2437.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

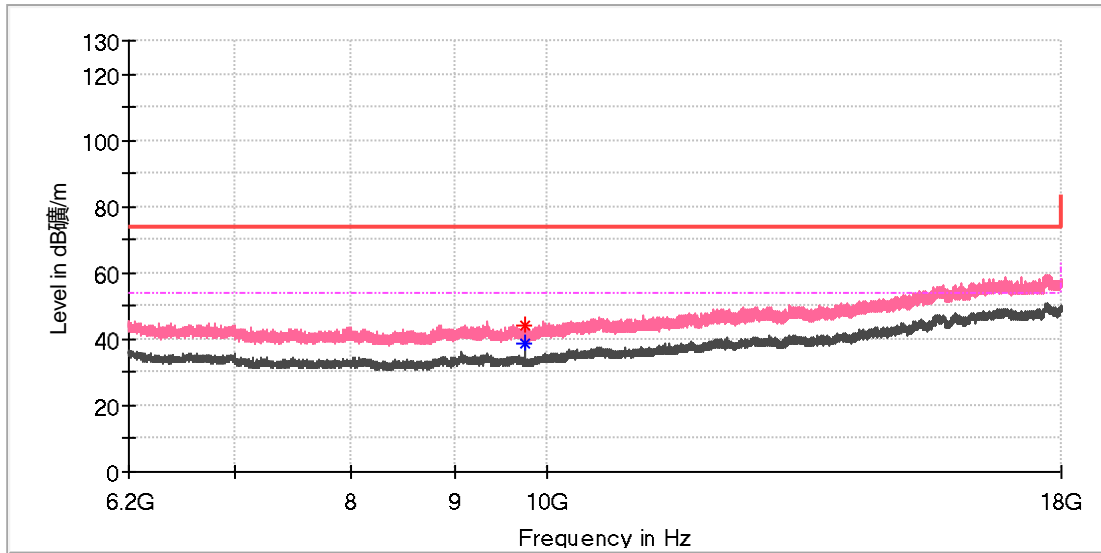

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9748.358333     | ---              | 38.97            | 54.00          | 15.03       | 100.0       | V   | 4.0           | 10.4         |
| 9748.850000     | 43.89            | ---              | 74.00          | 30.11       | 100.0       | V   | 0.0           | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                             |
|---------------------|-----------------------------|
| EUT Name:           | DJI Mini 2 SE               |
| Model:              | MT2SD                       |
| Test Mode:          | SDR 2.4G_1.4M CA_2467.12MHz |
| Order No/Sample No: | 168389903/A003336027-006    |
| Test Voltage::      | Battery                     |
| Remark:             | Temp 23 Humi:56%            |
| Test Standard:      | FCC 15.247                  |
| Tested By:          | Kei Zhang                   |
| Reviewed By:        | Terry Yin                   |

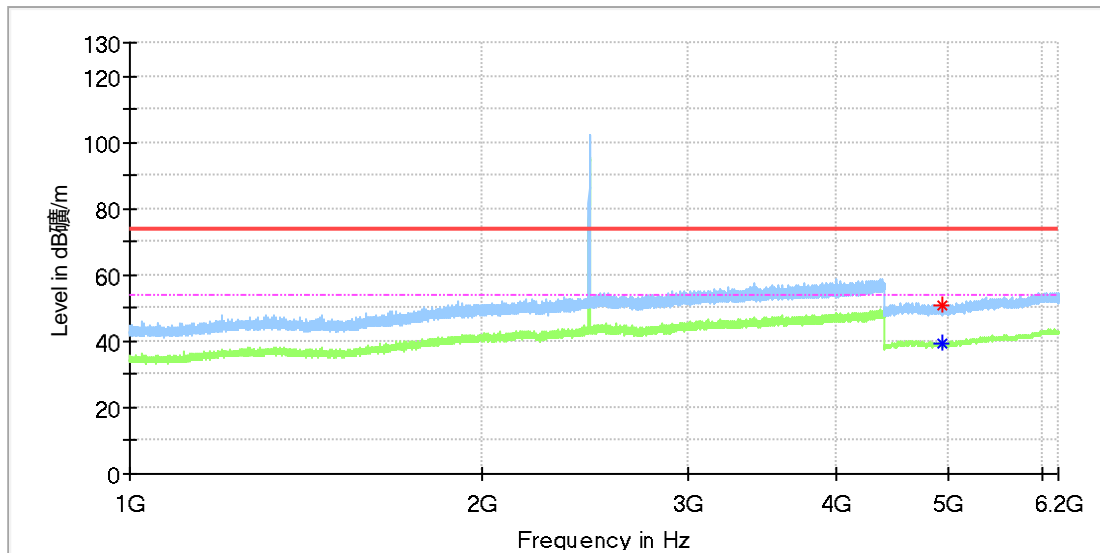

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4939.500000     | ---              | 39.47            | 54.00          | 14.53       | 100.0       | H   | 120.0         | 11.8         |
| 4944.500000     | 50.96            | ---              | 74.00          | 23.04       | 100.0       | H   | 112.0         | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2467.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

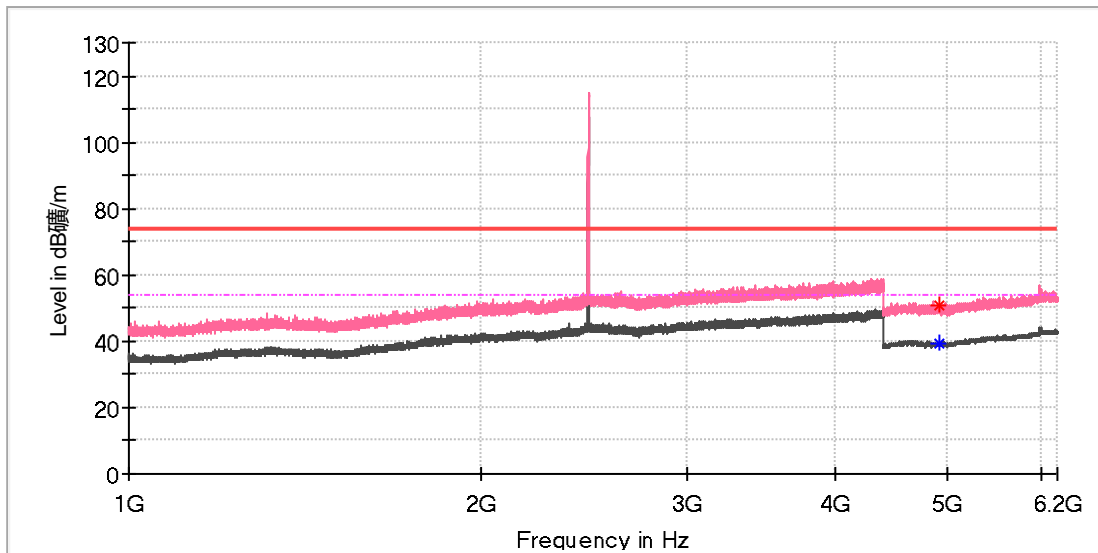

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4921.500000     | 50.87            | ---              | 74.00          | 23.13       | 100.0       | V   | 0.0           | 11.8         |
| 4922.500000     | ---              | 39.35            | 54.00          | 14.65       | 100.0       | V   | 177.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2467.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

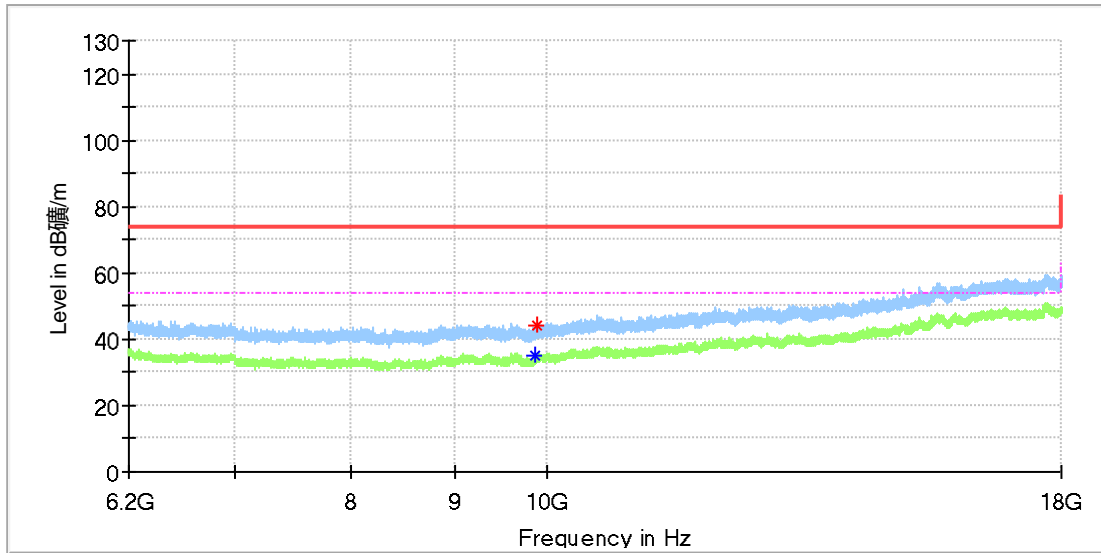

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9869.308333     | ---              | 34.88            | 54.00          | 19.12       | 100.0       | H   | 342.0         | 10.6         |
| 9877.175000     | 43.90            | ---              | 74.00          | 30.10       | 100.0       | H   | 171.0         | 10.7         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                             |
|---------------------|-----------------------------|
| EUT Name:           | DJI Mini 2 SE               |
| Model:              | MT2SD                       |
| Test Mode:          | SDR 2.4G_1.4M CA_2467.12MHz |
| Order No/Sample No: | 168389903/A003336027-006    |
| Test Voltage::      | Battery                     |
| Remark:             | Temp 23 Humi:56%            |
| Test Standard:      | FCC 15.247                  |
| Tested By:          | Kei Zhang                   |
| Reviewed By:        | Terry Yin                   |

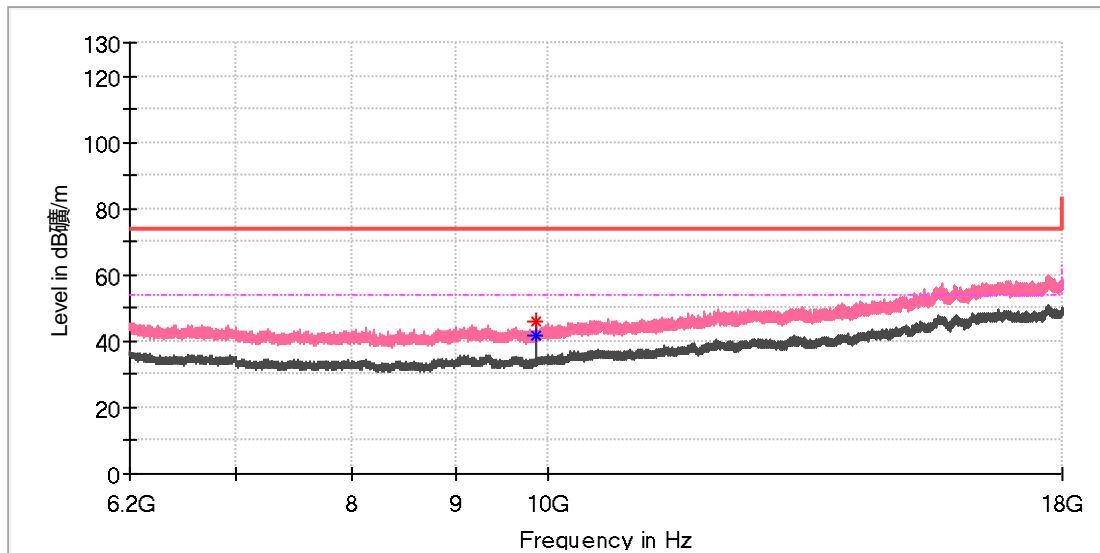

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9868.325000     | 45.77            | ---              | 74.00          | 28.23       | 100.0       | V   | 189.0         | 10.6         |
| 9868.325000     | ---              | 41.46            | 54.00          | 12.54       | 100.0       | V   | 189.0         | 10.6         |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2467.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

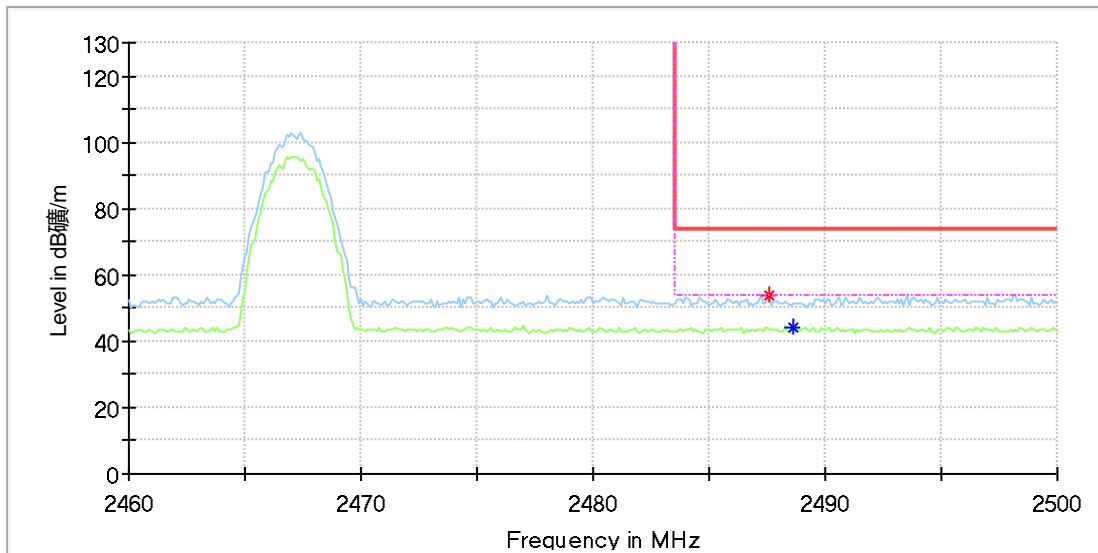

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2487.600000     | 53.57            | ---              | 74.00          | 20.43       | 100.0       | H   | 213.0         | 7.4          |
| 2488.600000     | ---              | 44.40            | 54.00          | 9.60        | 100.0       | H   | 103.0         | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_1.4M CA\_2467.12MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

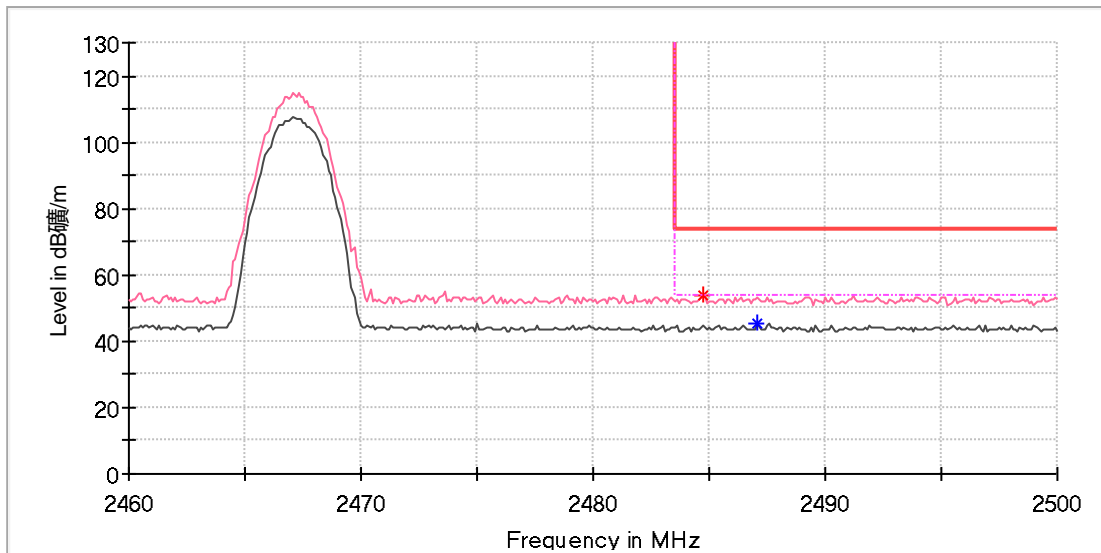

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2484.700000     | 53.83            | ---              | 74.00          | 20.17       | 100.0       | V   | 256.0         | 7.4          |
| 2487.100000     | ---              | 45.08            | 54.00          | 8.92        | 100.0       | V   | 337.0         | 7.4          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

2.4GHz SDR, 3MHz BW

EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2417.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

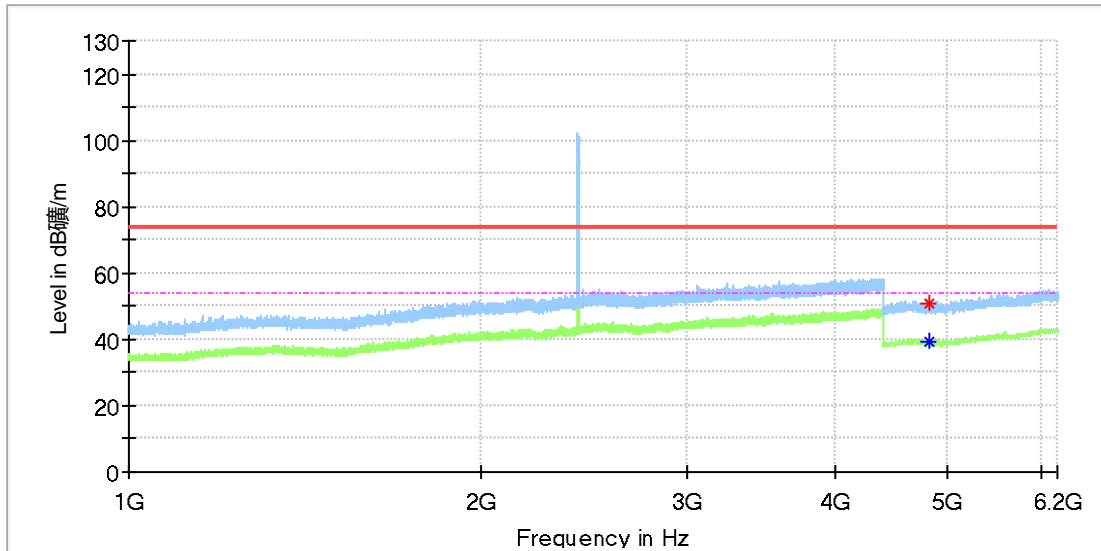

Critical Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4816.500000     | ---              | 39.49            | 54.00          | 14.51       | 100.0       | H   | 175.0         | 11.8         |
| 4817.000000     | 50.75            | ---              | 74.00          | 23.25       | 100.0       | H   | 107.0         | 11.8         |

Final Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2417.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

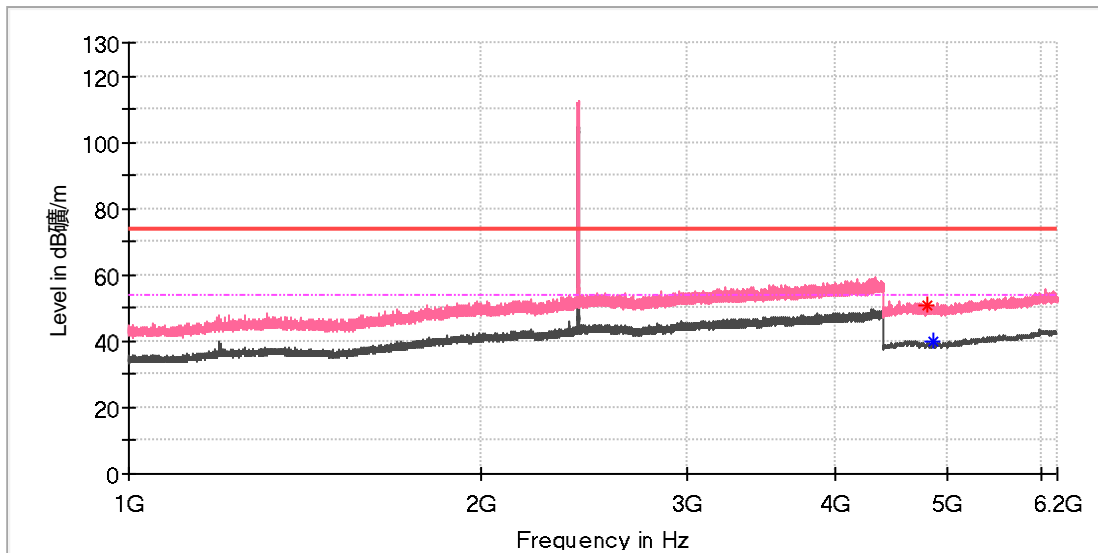

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4810.500000     | 50.81            | ---              | 74.00          | 23.19       | 100.0       | V   | 341.0         | 11.8         |
| 4858.000000     | ---              | 39.66            | 54.00          | 14.34       | 100.0       | V   | 319.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2417.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

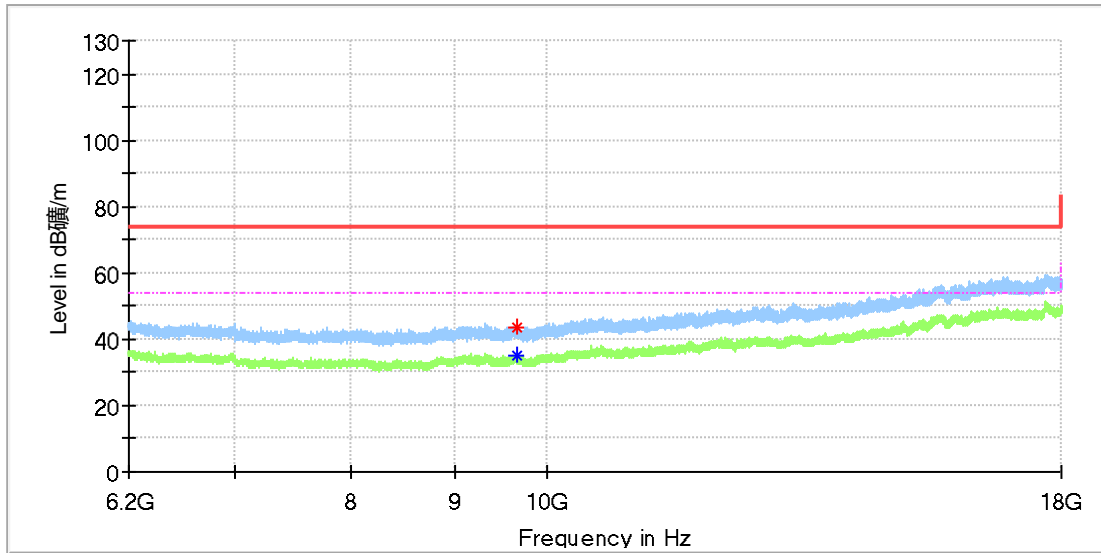

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9652.975000     | 43.65            | ---              | 74.00          | 30.35       | 100.0       | H   | 290.0         | 10.4         |
| 9670.183333     | ---              | 35.10            | 54.00          | 18.90       | 100.0       | H   | 195.0         | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Mini 2 SE            |
| Model:              | MT2SD                    |
| Test Mode:          | SDR 2.4G_3M_2417.5MHz    |
| Order No/Sample No: | 168389903/A003336027-006 |
| Test Voltage::      | Battery                  |
| Remark:             | Temp 23 Humi:56%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

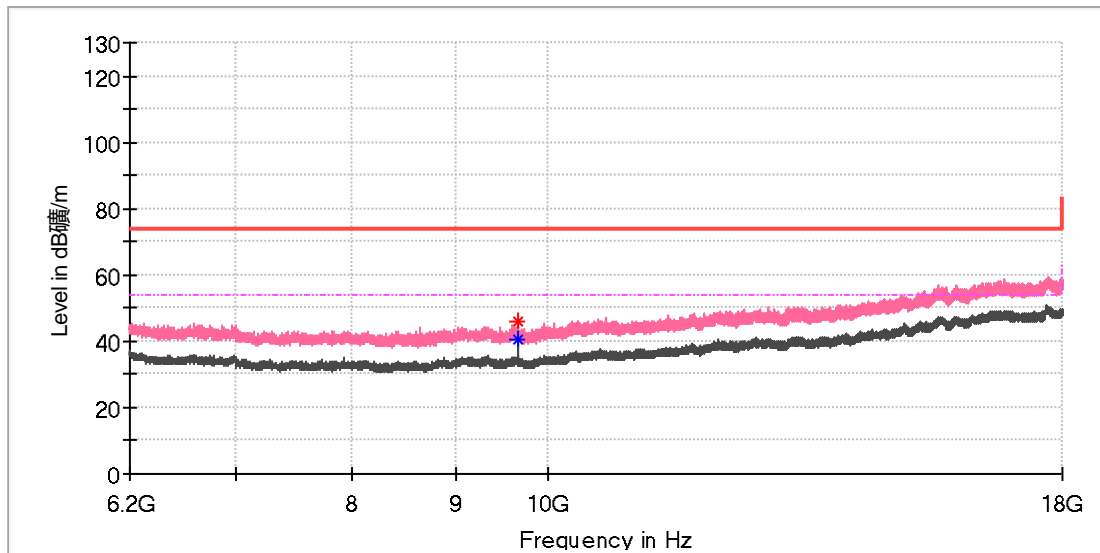

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9669.691667     | 45.67            | ---              | 74.00          | 28.33       | 100.0       | V   | 1.0           | 10.4         |
| 9669.691667     | ---              | 40.75            | 54.00          | 13.25       | 100.0       | V   | 1.0           | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2417.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

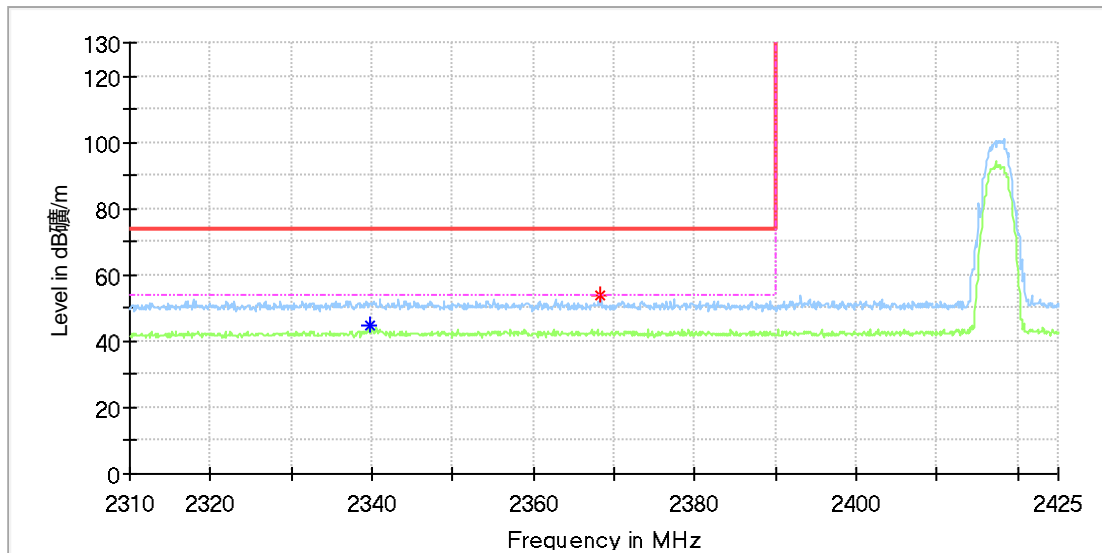

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2339.700000     | ---              | 44.58            | 54.00          | 9.42        | 100.0       | H   | 184.0         | 6.8          |
| 2368.300000     | 53.65            | ---              | 74.00          | 20.35       | 100.0       | H   | 327.0         | 6.9          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2417.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

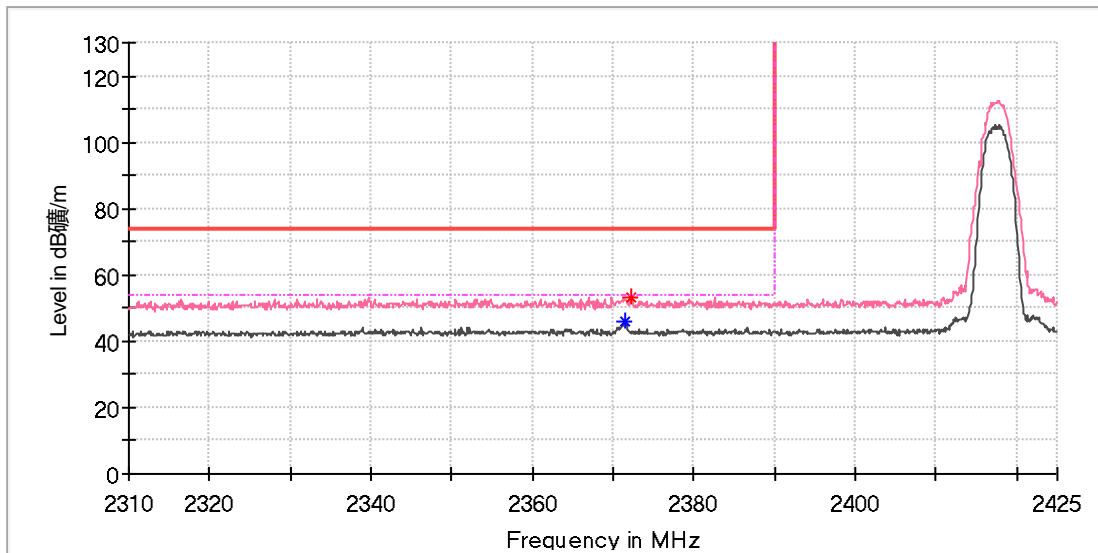

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.500000     | ---              | 45.69            | 54.00          | 8.31        | 100.0       | V   | 206.0         | 6.9          |
| 2372.200000     | 53.06            | ---              | 74.00          | 20.94       | 100.0       | V   | 123.0         | 6.9          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

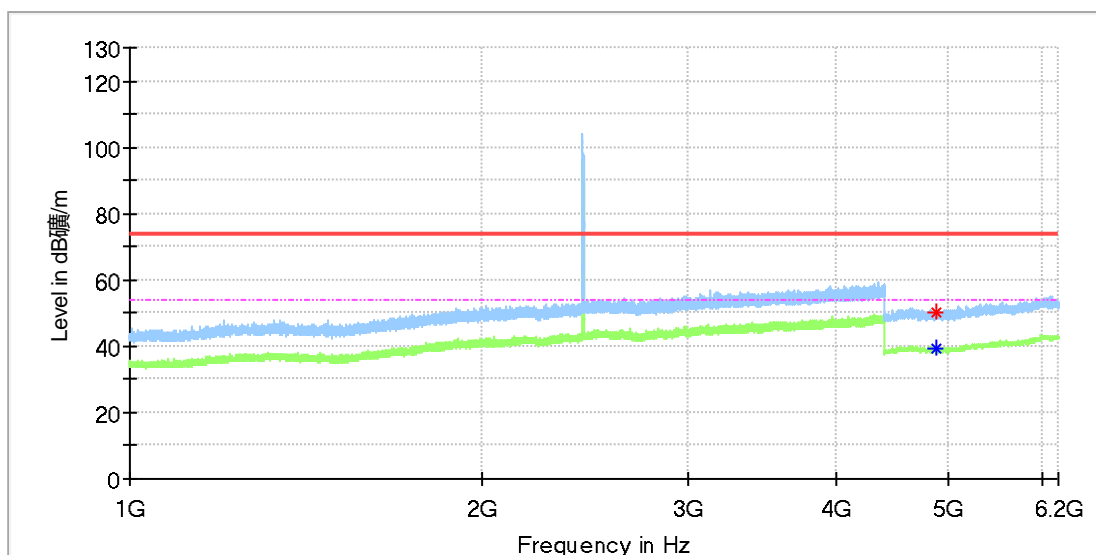

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4872.500000     | ---              | 39.00            | 54.00          | 15.00       | 100.0       | H   | 236.0         | 11.8         |
| 4877.500000     | 50.28            | ---              | 74.00          | 23.72       | 100.0       | H   | 277.0         | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

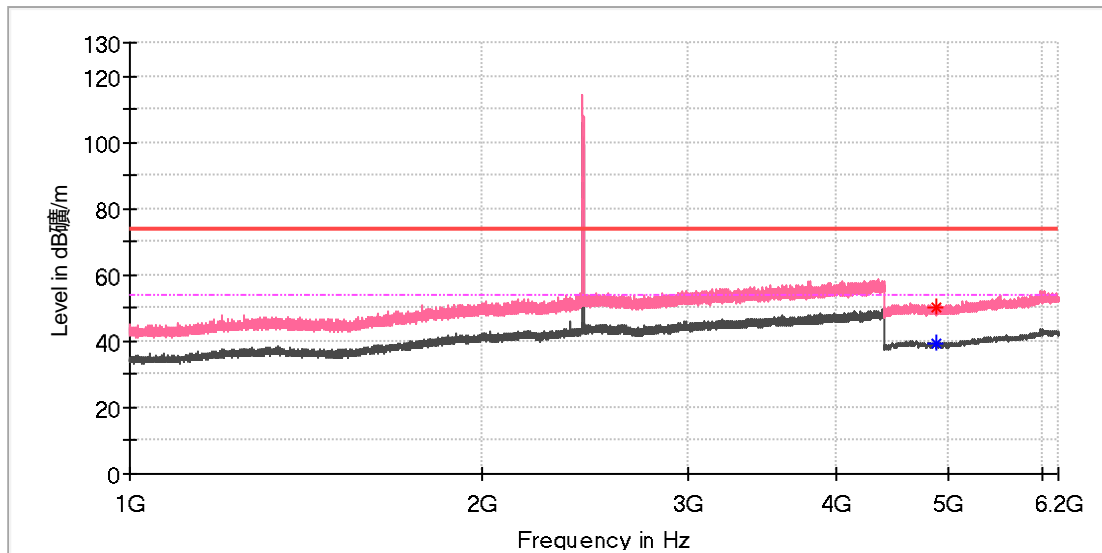

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4871.000000     | ---              | 39.35            | 54.00          | 14.65       | 100.0       | V   | 163.0         | 11.8         |
| 4874.500000     | 50.30            | ---              | 74.00          | 23.70       | 100.0       | V   | 282.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

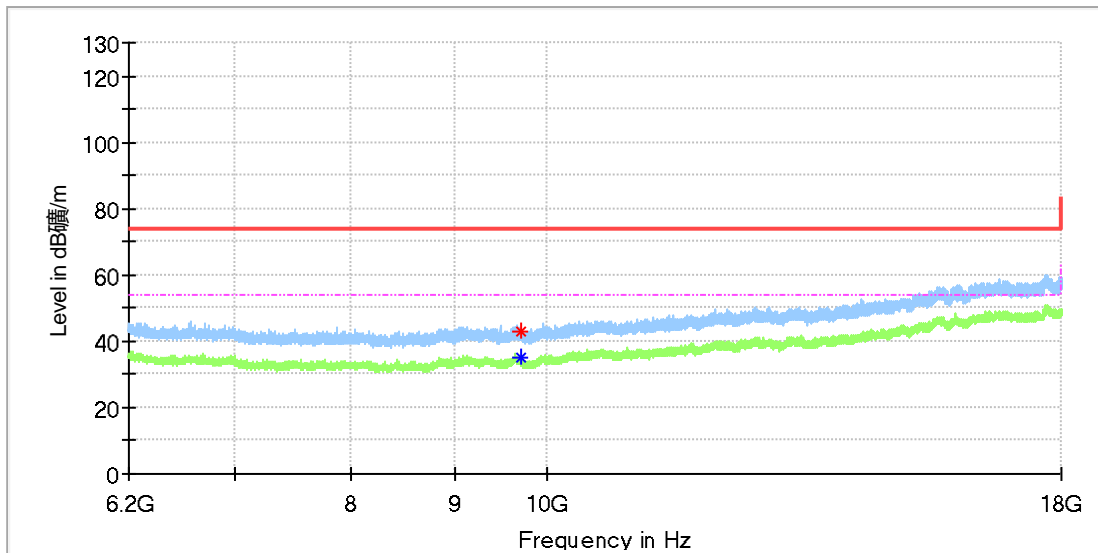

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9711.483333     | 43.21            | ---              | 74.00          | 30.79       | 100.0       | H   | 224.0         | 10.4         |
| 9711.975000     | ---              | 35.22            | 54.00          | 18.78       | 100.0       | H   | 30.0          | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

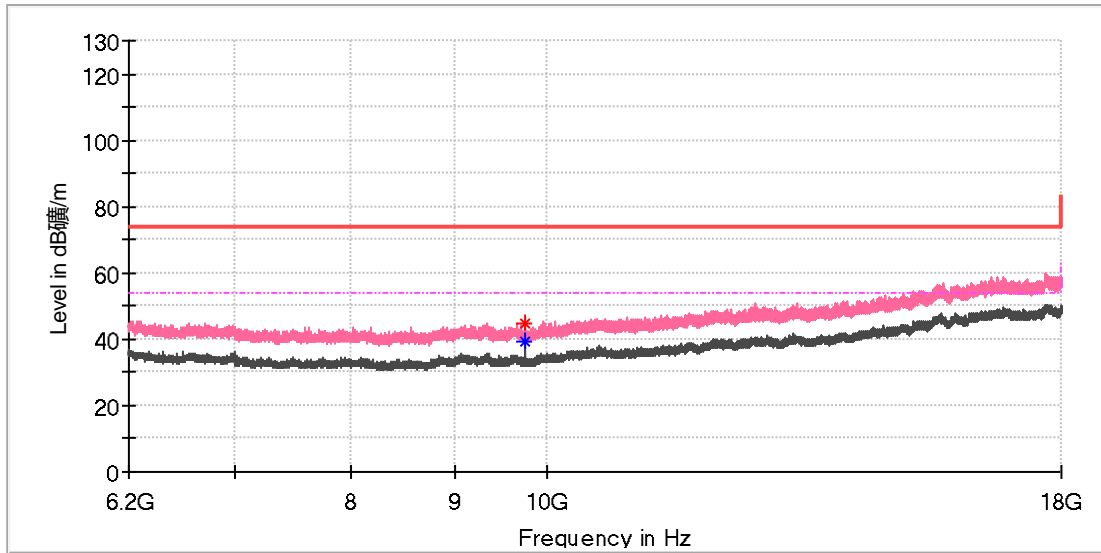

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9741.966667     | 45.04            | ---              | 74.00          | 28.96       | 100.0       | V   | 0.0           | 10.4         |
| 9741.966667     | ---              | 39.39            | 54.00          | 14.61       | 100.0       | V   | 0.0           | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2456.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

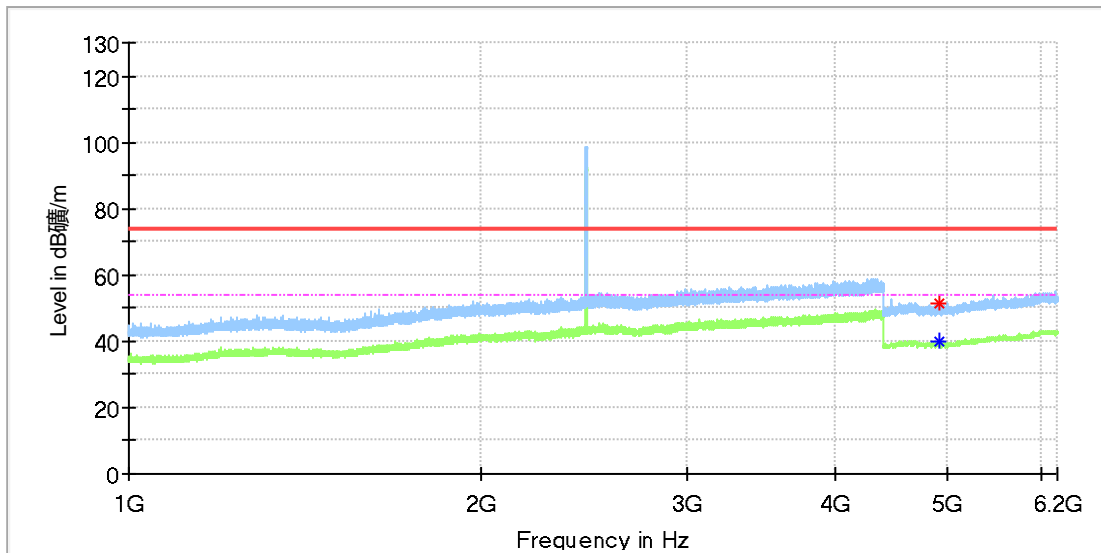

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4907.000000     | ---              | 39.63            | 54.00          | 14.37       | 100.0       | H   | 166.0         | 11.8         |
| 4925.000000     | 51.39            | ---              | 74.00          | 22.61       | 100.0       | H   | 266.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2456.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

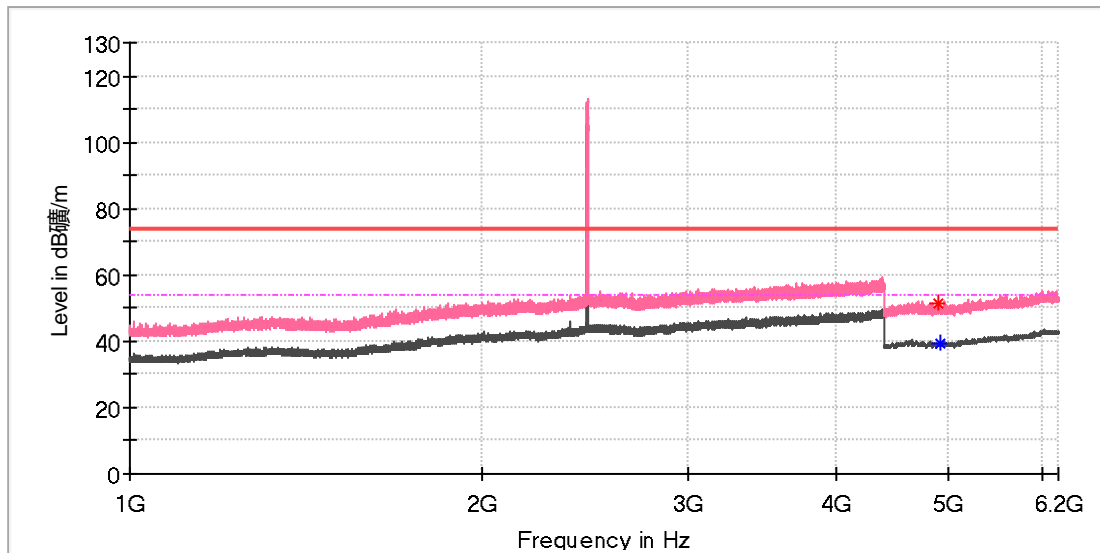

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4903.500000     | 51.26            | ---              | 74.00          | 22.74       | 100.0       | V   | 220.0         | 11.8         |
| 4916.500000     | ---              | 39.29            | 54.00          | 14.71       | 100.0       | V   | 220.0         | 11.8         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Mini 2 SE            |
| Model:              | MT2SD                    |
| Test Mode:          | SDR 2.4G_3M_2456.5MHz    |
| Order No/Sample No: | 168389903/A003336027-006 |
| Test Voltage::      | Battery                  |
| Remark:             | Temp 23 Humi:56%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

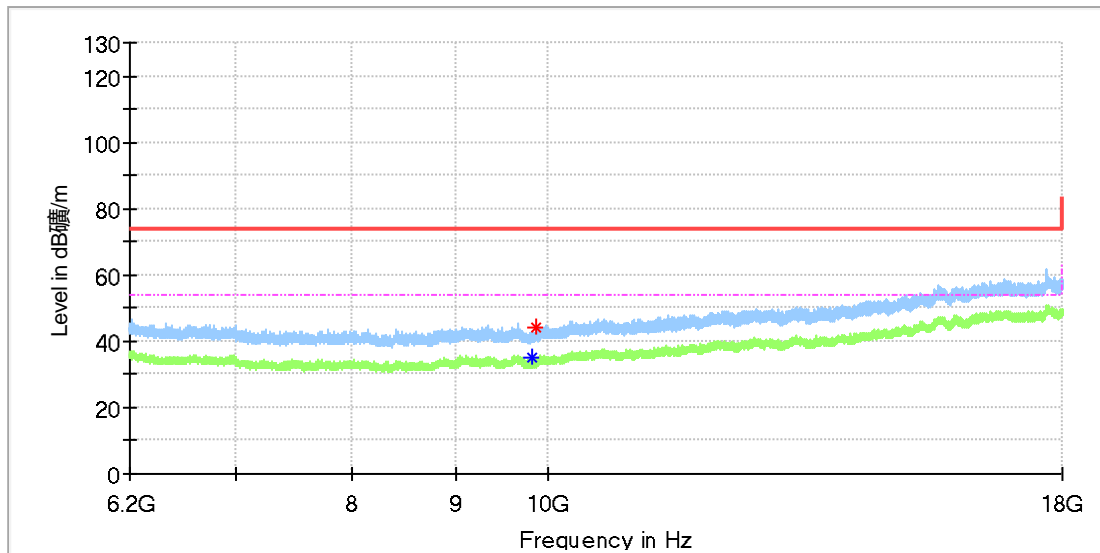

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9826.041667     | ---              | 35.10            | 54.00          | 18.90       | 100.0       | H   | 153.0         | 10.5         |
| 9853.083333     | 44.21            | ---              | 74.00          | 29.79       | 100.0       | H   | 92.0          | 10.6         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2456.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

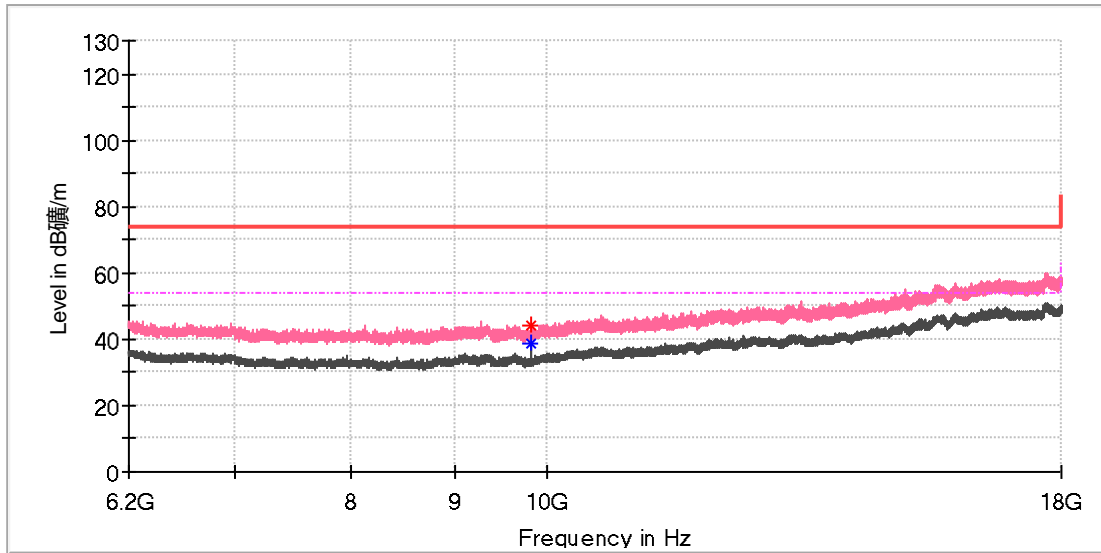

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9826.041667     | 44.15            | ---              | 74.00          | 29.85       | 100.0       | V   | 194.0         | 10.5         |
| 9826.041667     | ---              | 38.69            | 54.00          | 15.31       | 100.0       | V   | 194.0         | 10.5         |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2456.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

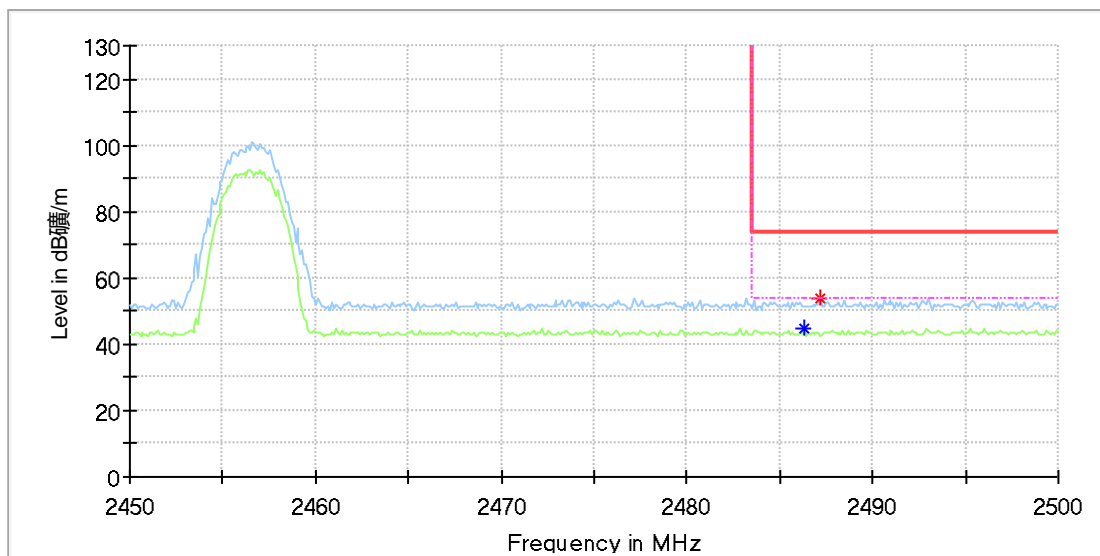

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2486.300000     | ---              | 44.66            | 54.00          | 9.34        | 100.0       | H   | 242.0         | 7.4          |
| 2487.200000     | 53.57            | ---              | 74.00          | 20.43       | 100.0       | H   | 4.0           | 7.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_3M\_2456.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

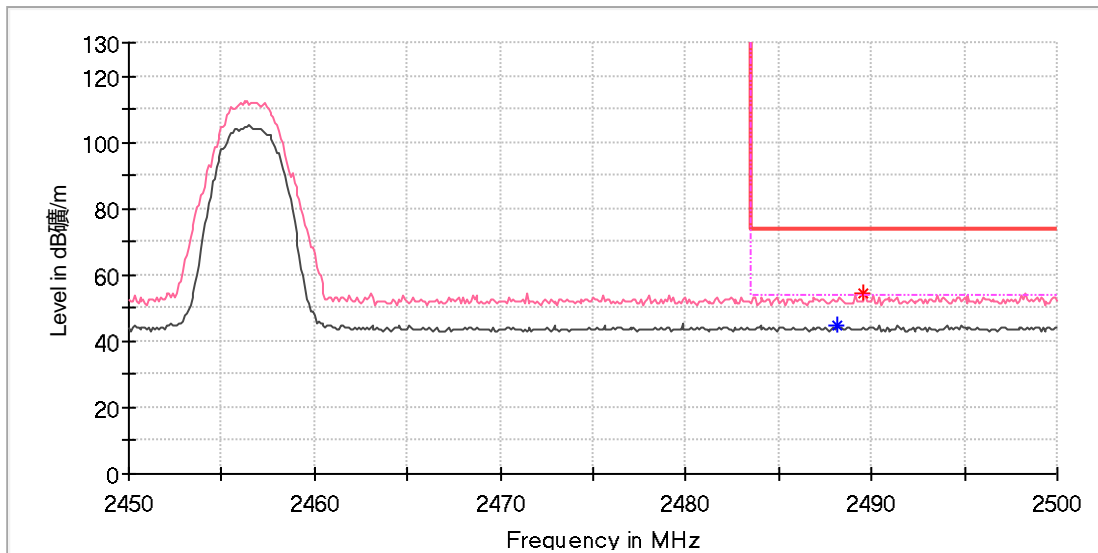

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2488.200000     | ---              | 44.46            | 54.00          | 9.54        | 100.0       | V   | 173.0         | 7.4          |
| 2489.600000     | 54.71            | ---              | 74.00          | 19.29       | 100.0       | V   | 235.0         | 7.4          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

2.4GHz SDR, 10MHz BW

EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Mini 2 SE            |
| Model:              | MT2SD                    |
| Test Mode:          | SDR 2.4G_10M_2405.5MHz   |
| Order No/Sample No: | 168389903/A003336027-006 |
| Test Voltage::      | Battery                  |
| Remark:             | Temp 23 Humi:56%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

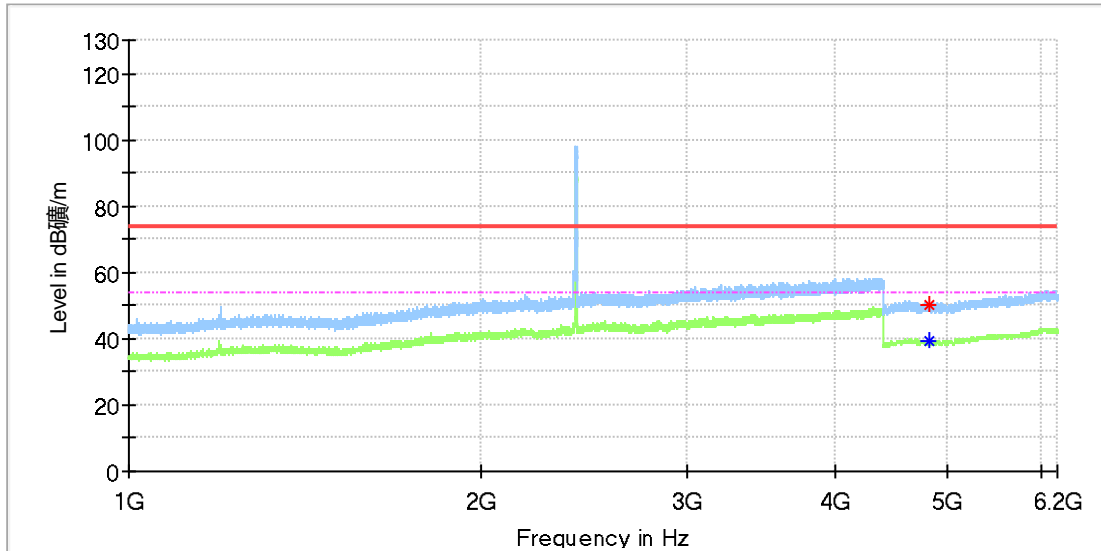

Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4813.000000     | ---              | 39.22            | 54.00          | 14.78       | 100.0       | H   | 179.0         | 11.8         |
| 4823.000000     | 50.44            | ---              | 74.00          | 23.56       | 100.0       | H   | 134.0         | 11.8         |

Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2405.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

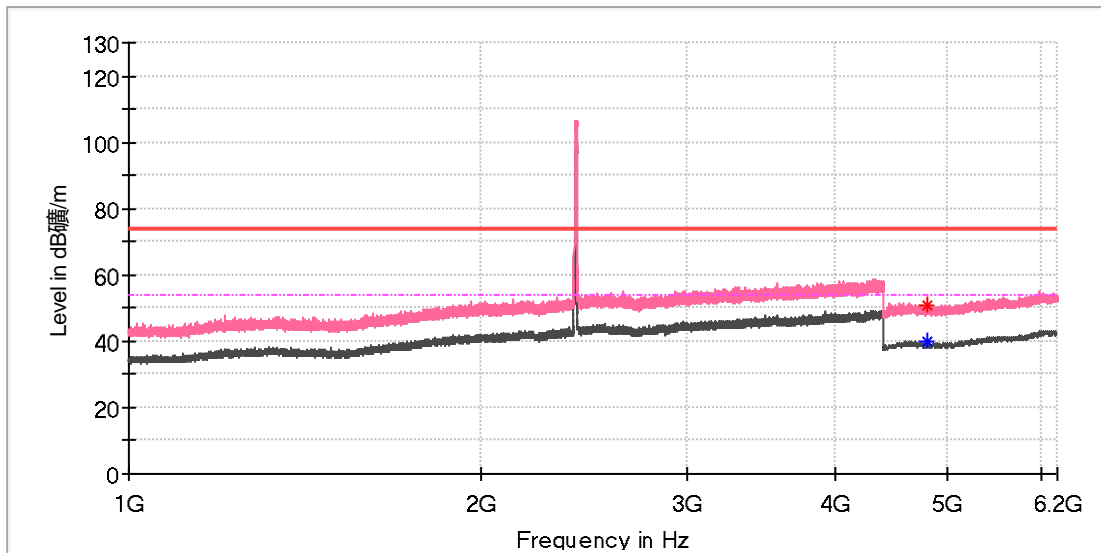

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4807.000000     | 50.59            | ---              | 74.00          | 23.41       | 100.0       | V   | 75.0          | 11.8         |
| 4809.000000     | ---              | 39.61            | 54.00          | 14.39       | 100.0       | V   | 205.0         | 11.8         |

### Final\_Result


| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |





## EUT Information

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Mini 2 SE            |
| Model:              | MT2SD                    |
| Test Mode:          | SDR 2.4G_10M_2405.5MHz   |
| Order No/Sample No: | 168389903/A003336027-006 |
| Test Voltage::      | Battery                  |
| Remark:             | Temp 23 Humi:56%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

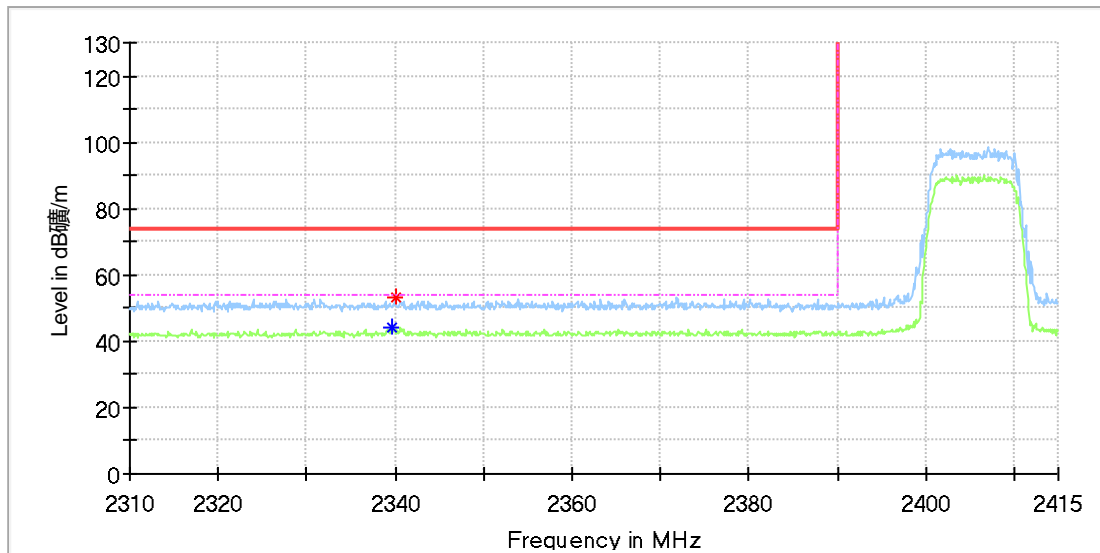

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2339.600000     | ---              | 44.35            | 54.00          | 9.65        | 100.0       | H   | 208.0         | 6.8          |
| 2340.000000     | 53.33            | ---              | 74.00          | 20.67       | 100.0       | H   | 199.0         | 6.8          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2405.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

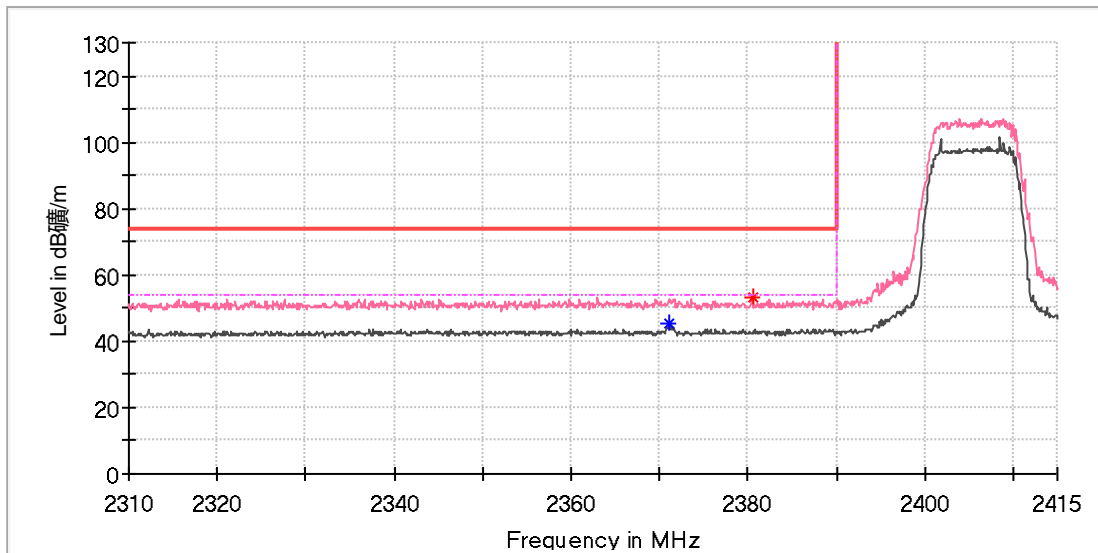

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.100000     | ---              | 45.20            | 54.00          | 8.80        | 100.0       | V   | 120.0         | 6.9          |
| 2380.500000     | 53.20            | ---              | 74.00          | 20.80       | 100.0       | V   | 68.0          | 7.0          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2410.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

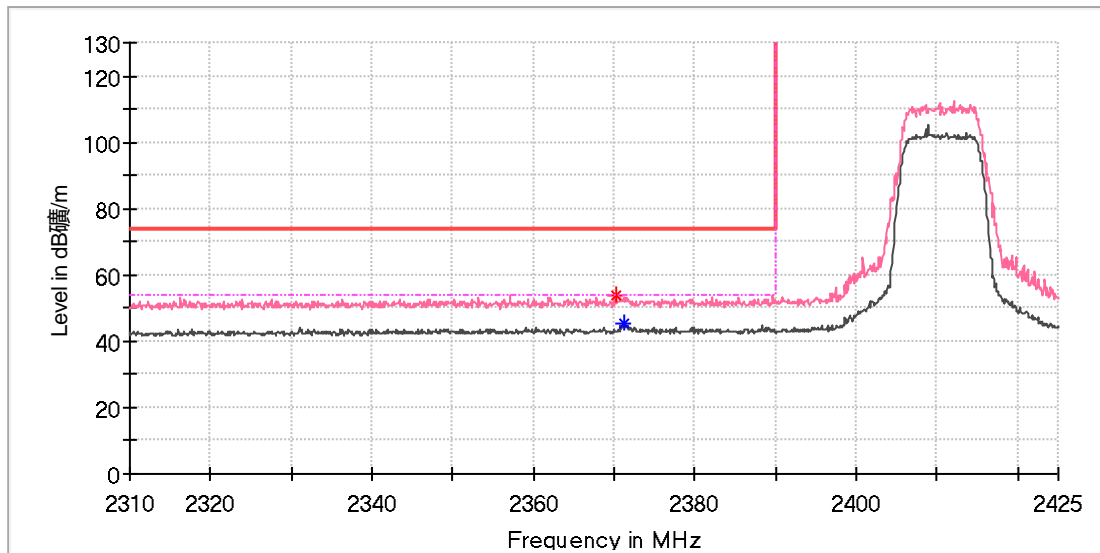

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2370.200000     | 53.71            | ---              | 74.00          | 20.29       | 100.0       | V   | 164.0         | 6.9          |
| 2371.200000     | ---              | 45.08            | 54.00          | 8.92        | 100.0       | V   | 9.0           | 6.9          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2415.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

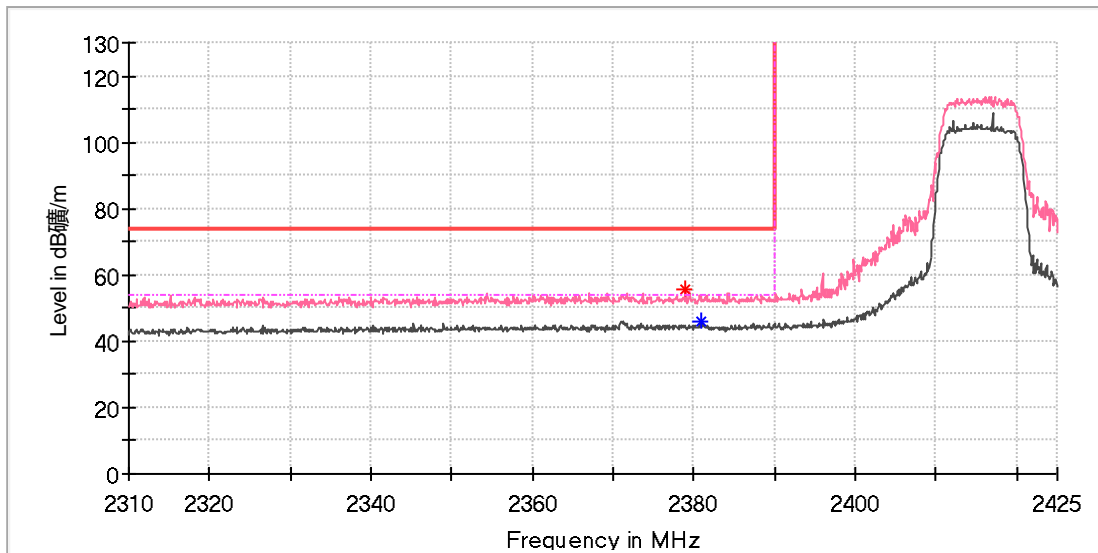

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2379.000000     | 55.35            | ---              | 74.00          | 18.65       | 100.0       | V   | 297.0         | 7.0          |
| 2380.800000     | ---              | 46.24            | 54.00          | 7.76        | 100.0       | V   | 232.0         | 7.0          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2420.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

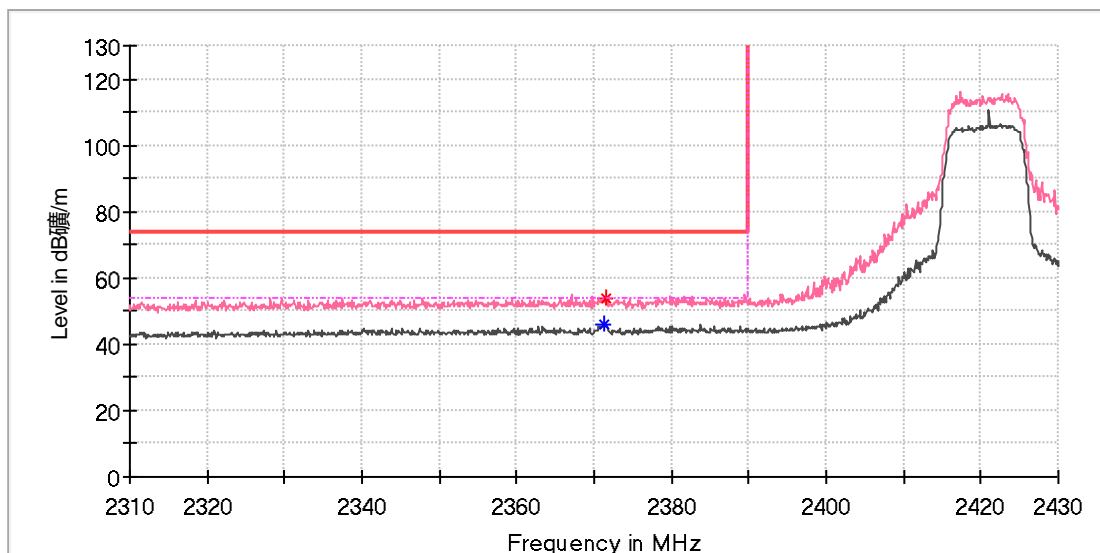

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.200000     | ---              | 45.75            | 54.00          | 8.25        | 100.0       | V   | 13.0          | 6.9          |
| 2371.500000     | 53.82            | ---              | 74.00          | 20.18       | 100.0       | V   | 270.0         | 6.9          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2440.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

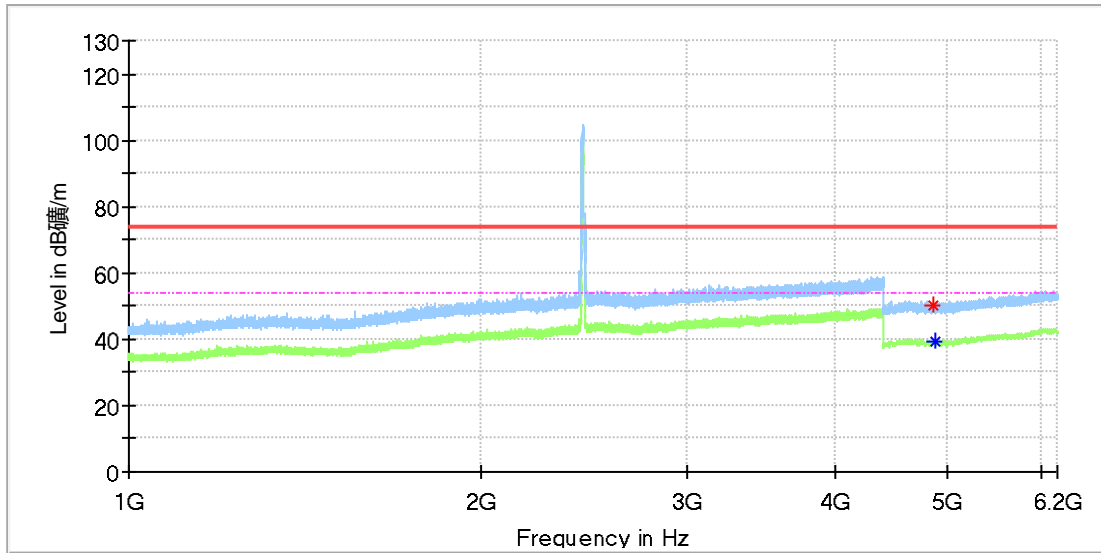

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4867.000000     | 50.31            | ---              | 74.00          | 23.69       | 100.0       | H   | 244.0         | 11.8         |
| 4870.500000     | ---              | 39.42            | 54.00          | 14.58       | 100.0       | H   | 186.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2440.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

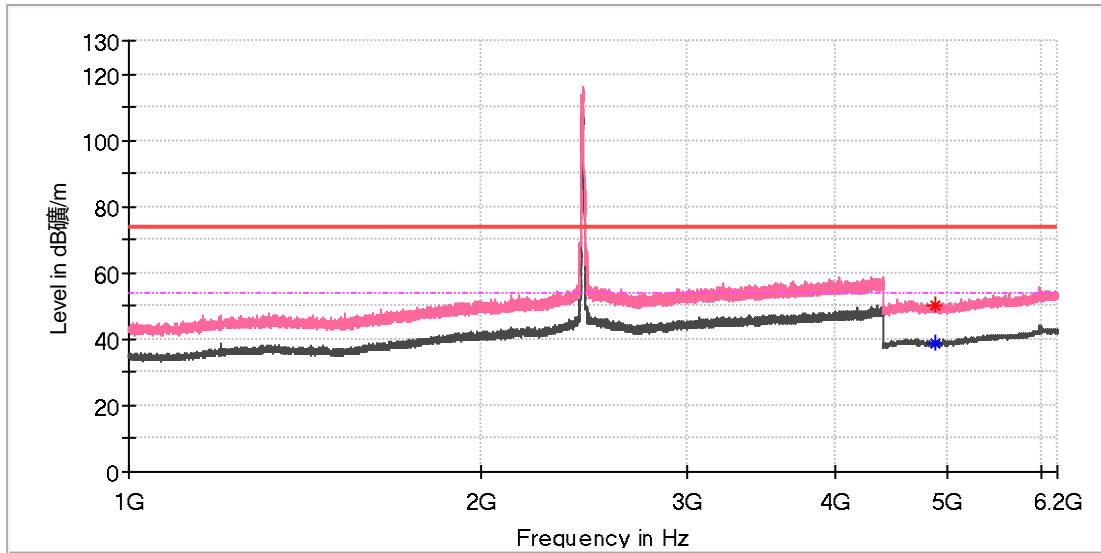

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4875.500000     | ---              | 39.00            | 54.00          | 15.00       | 100.0       | V   | 219.0         | 11.8         |
| 4877.000000     | 49.92            | ---              | 74.00          | 24.08       | 100.0       | V   | 302.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2440.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

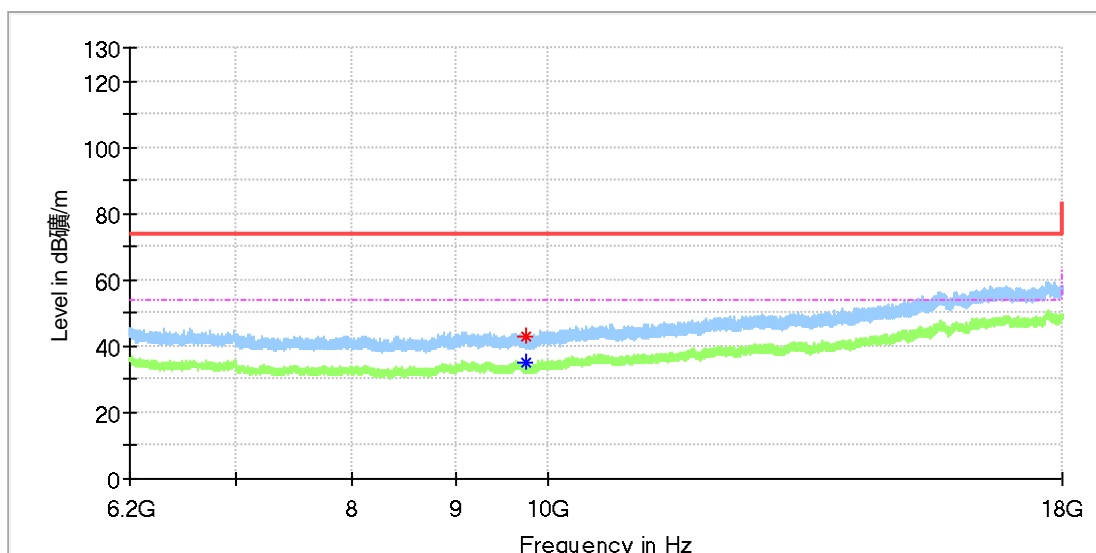

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9756.716667     | 42.73            | ---              | 74.00          | 31.27       | 100.0       | H   | 0.0           | 10.4         |
| 9762.125000     | ---              | 35.23            | 54.00          | 18.77       | 100.0       | H   | 234.0         | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2440.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

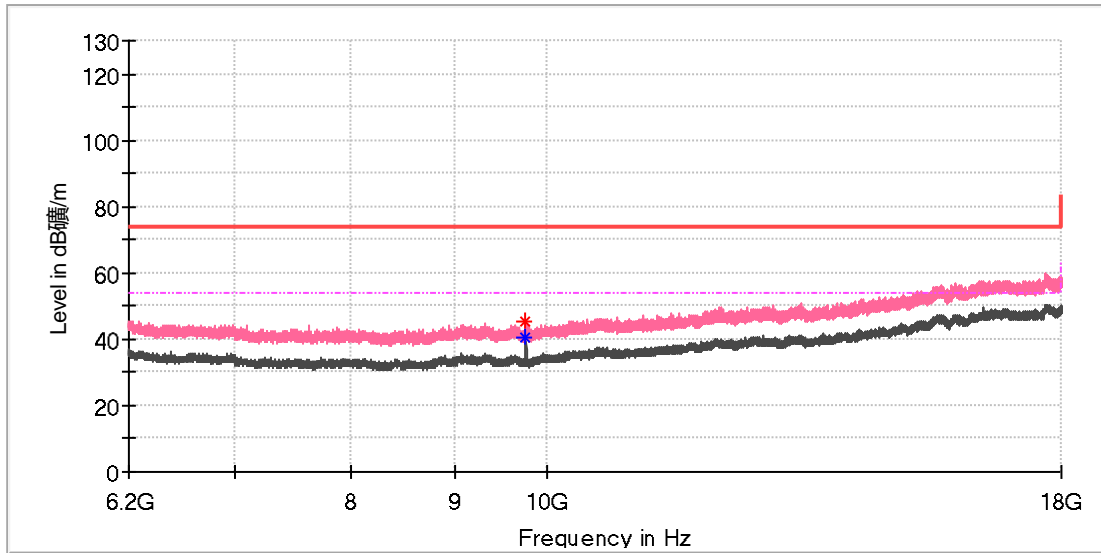

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9761.633333     | ---              | 40.71            | 54.00          | 13.29       | 100.0       | V   | 9.0           | 10.4         |
| 9762.125000     | 45.60            | ---              | 74.00          | 28.40       | 100.0       | V   | 9.0           | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2455.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

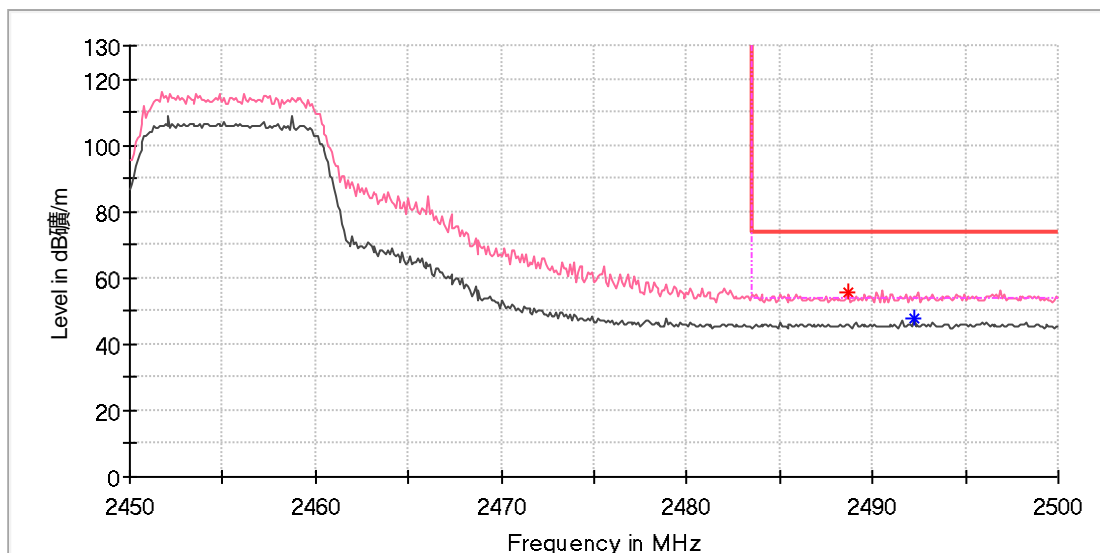

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2488.700000     | 55.78            | ---              | 74.00          | 18.22       | 100.0       | V   | 315.0         | 7.4          |
| 2492.200000     | ---              | 47.51            | 54.00          | 6.49        | 100.0       | V   | 302.0         | 7.4          |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2460.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

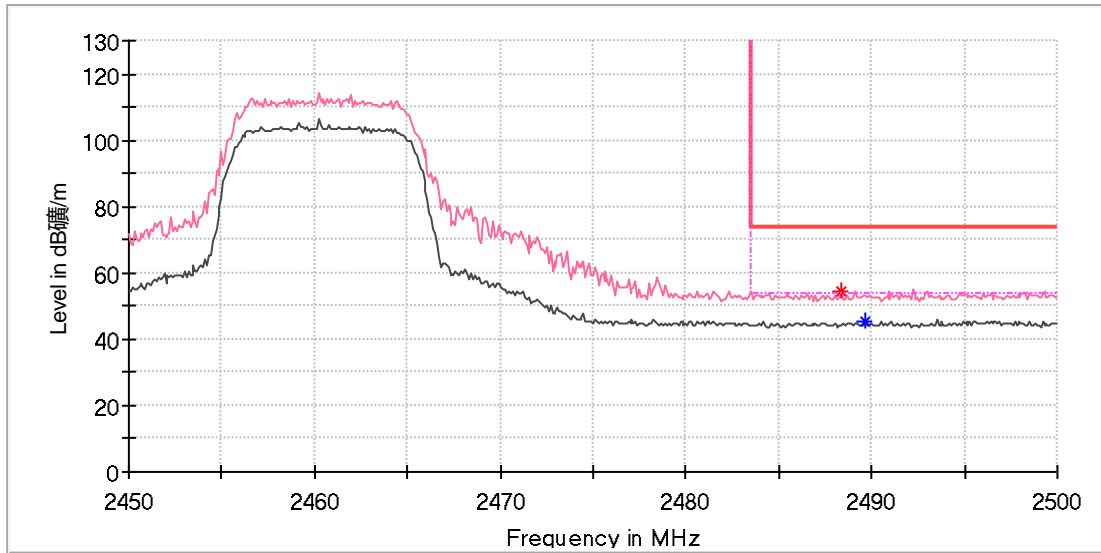

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2488.400000     | 54.49            | ---              | 74.00          | 19.51       | 100.0       | V   | 81.0          | 7.4          |
| 2489.700000     | ---              | 45.54            | 54.00          | 8.46        | 100.0       | V   | 215.0         | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2466.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

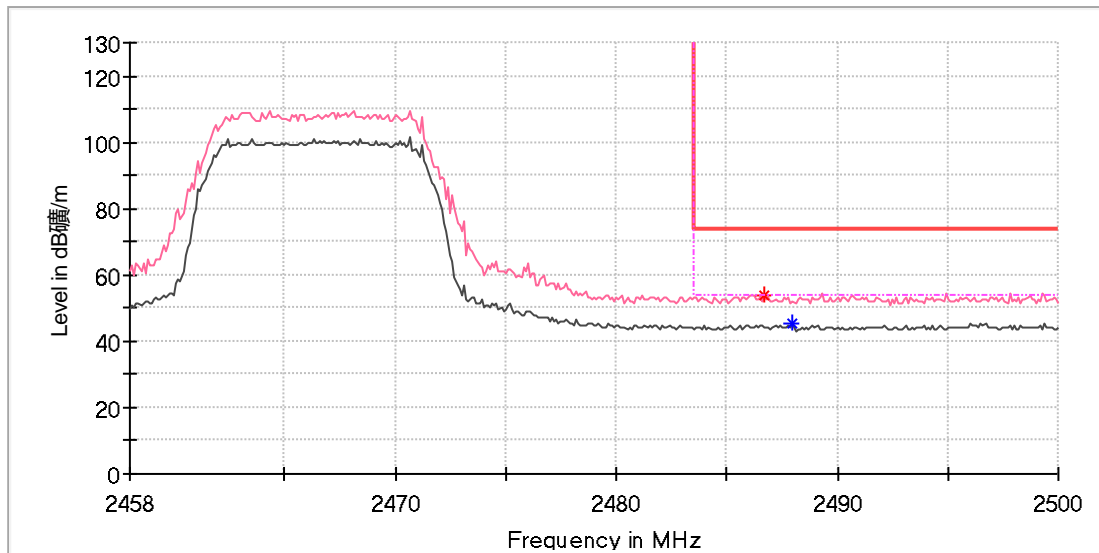

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2486.700000     | 53.63            | ---              | 74.00          | 20.37       | 100.0       | V   | 249.0         | 7.4          |
| 2488.000000     | ---              | 45.27            | 54.00          | 8.73        | 100.0       | V   | 205.0         | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2476.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

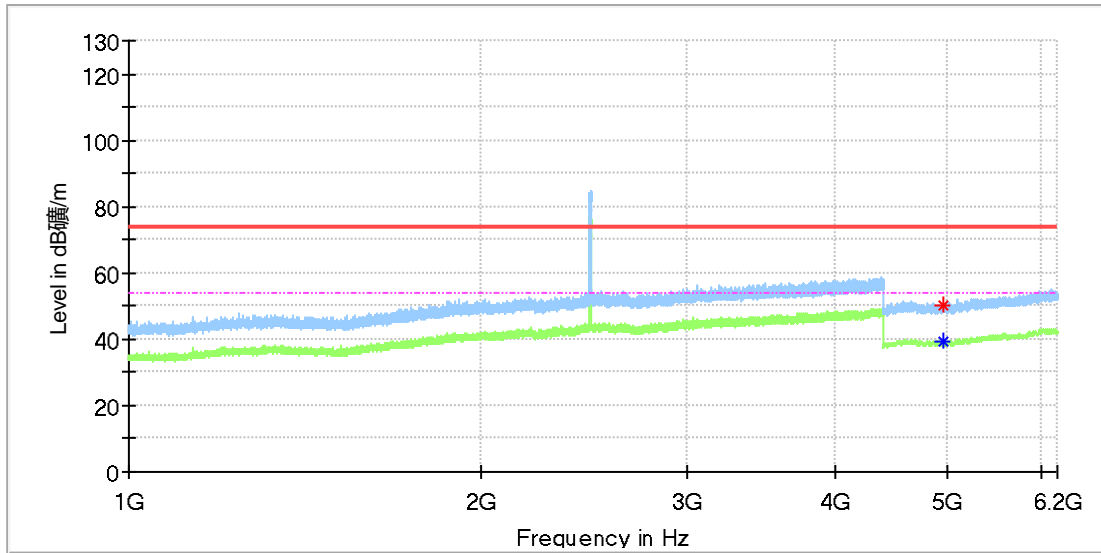

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4950.000000     | ---              | 39.50            | 54.00          | 14.50       | 100.0       | H   | 138.0         | 11.8         |
| 4955.500000     | 50.38            | ---              | 74.00          | 23.62       | 100.0       | H   | 89.0          | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2476.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

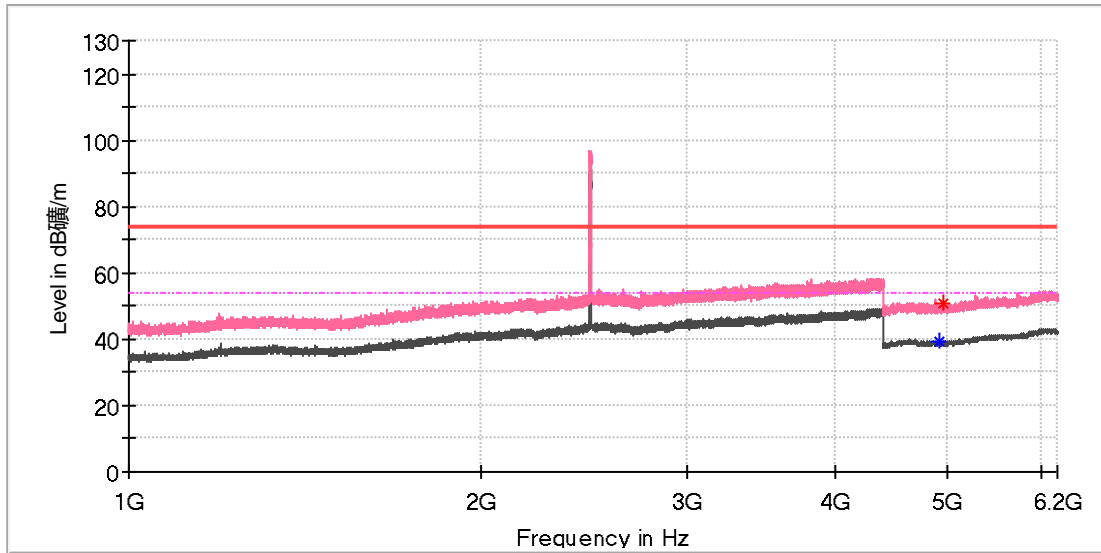

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4923.500000     | ---              | 39.32            | 54.00          | 14.68       | 100.0       | V   | 88.0          | 11.8         |
| 4955.000000     | 50.59            | ---              | 74.00          | 23.41       | 100.0       | V   | 178.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2476.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

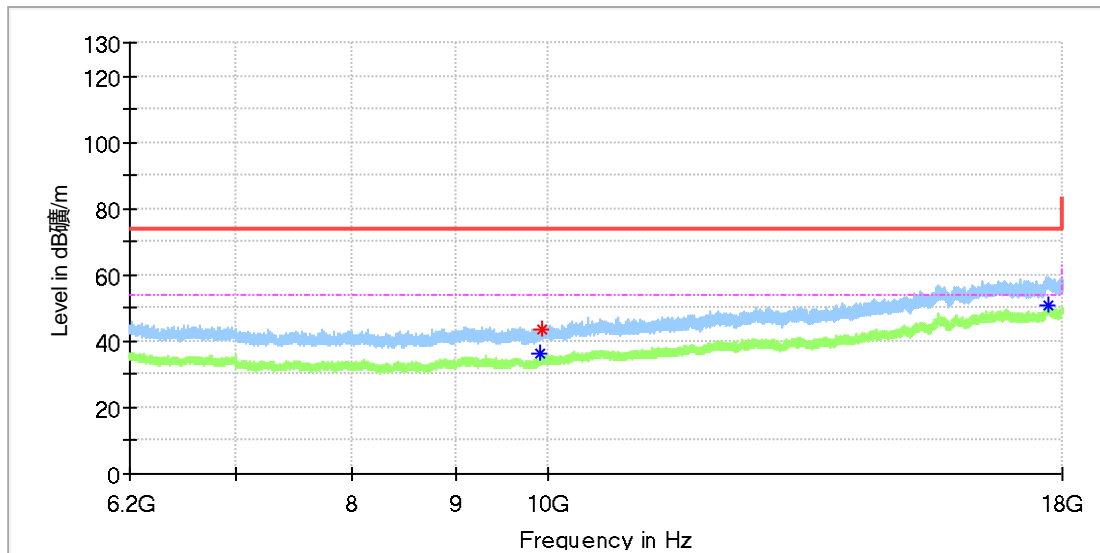

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9906.183333     | ---              | 36.37            | 54.00          | 17.63       | 100.0       | H   | 159.0         | 10.8         |
| 9922.408333     | 43.47            | ---              | 74.00          | 30.53       | 100.0       | H   | 145.0         | 10.8         |
| 17696.641667    | ---              | 51.00            | 54.00          | 3.00        | 100.0       | H   | 188.0         | 22.9         |

## Final\_Result


| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |





### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_10M\_2476.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

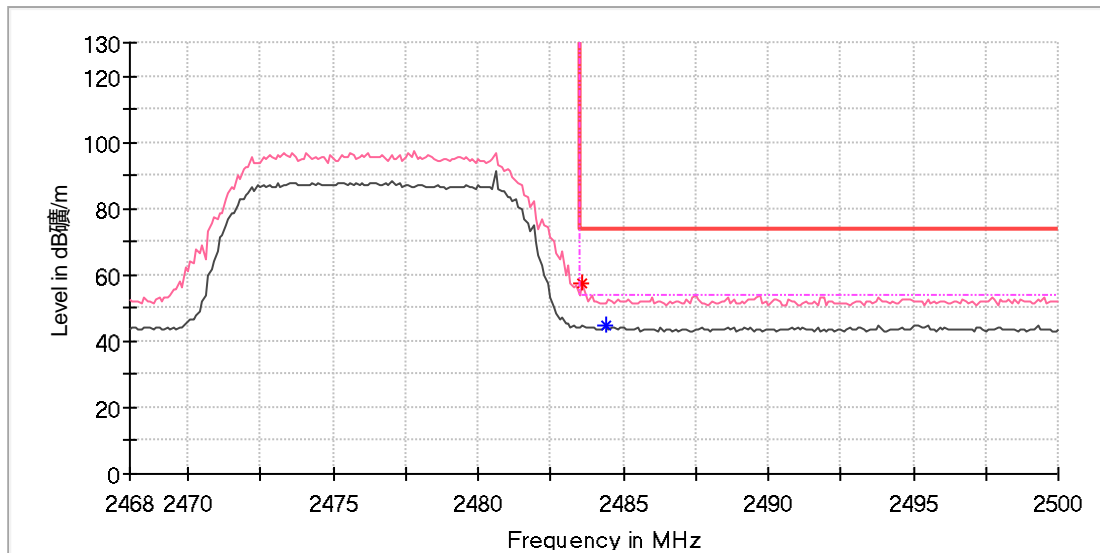

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.600000     | 57.51            | ---              | 74.00          | 16.49       | 100.0       | V   | 218.0         | 7.4          |
| 2484.400000     | ---              | 44.59            | 54.00          | 9.41        | 100.0       | V   | 39.0          | 7.4          |

### Final\_Result


| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



**2.4GHz SDR, 20MHz BW**

**EUT Information**

|                     |                          |
|---------------------|--------------------------|
| EUT Name:           | DJI Mini 2 SE            |
| Model:              | MT2SD                    |
| Test Mode:          | SDR 2.4G_20M_2410.5MHz   |
| Order No/Sample No: | 168389903/A003336027-006 |
| Test Voltage::      | Battery                  |
| Remark:             | Temp 23 Humi:56%         |
| Test Standard:      | FCC 15.247               |
| Tested By:          | Kei Zhang                |
| Reviewed By:        | Terry Yin                |

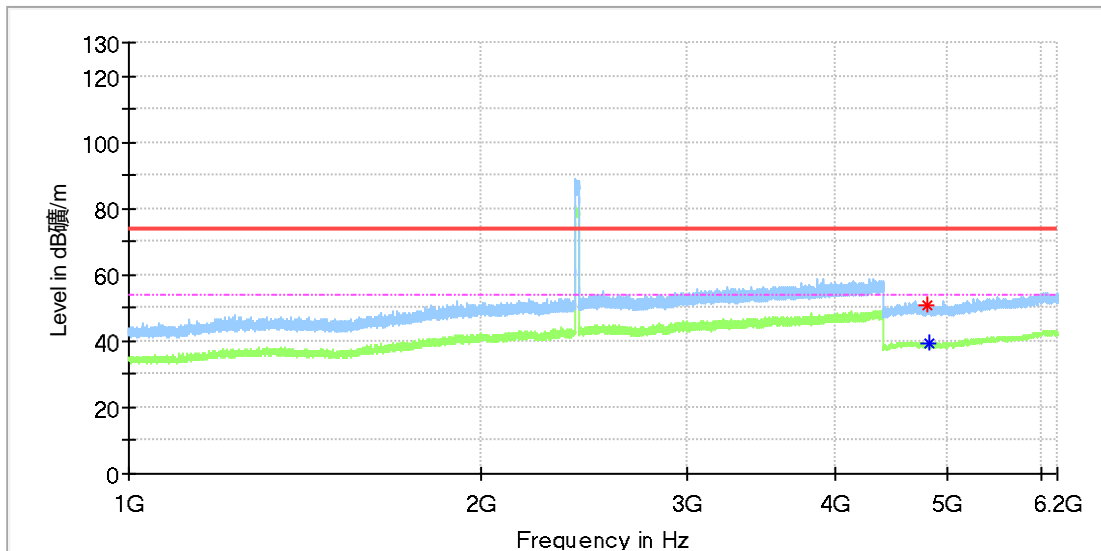

**Critical\_Freqs**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4805.500000     | 51.00            | ---              | 74.00          | 23.00       | 100.0       | H   | 146.0         | 11.8         |
| 4816.500000     | ---              | 39.19            | 54.00          | 14.81       | 100.0       | H   | 216.0         | 11.8         |

**Final\_Result**

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |








## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2410.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

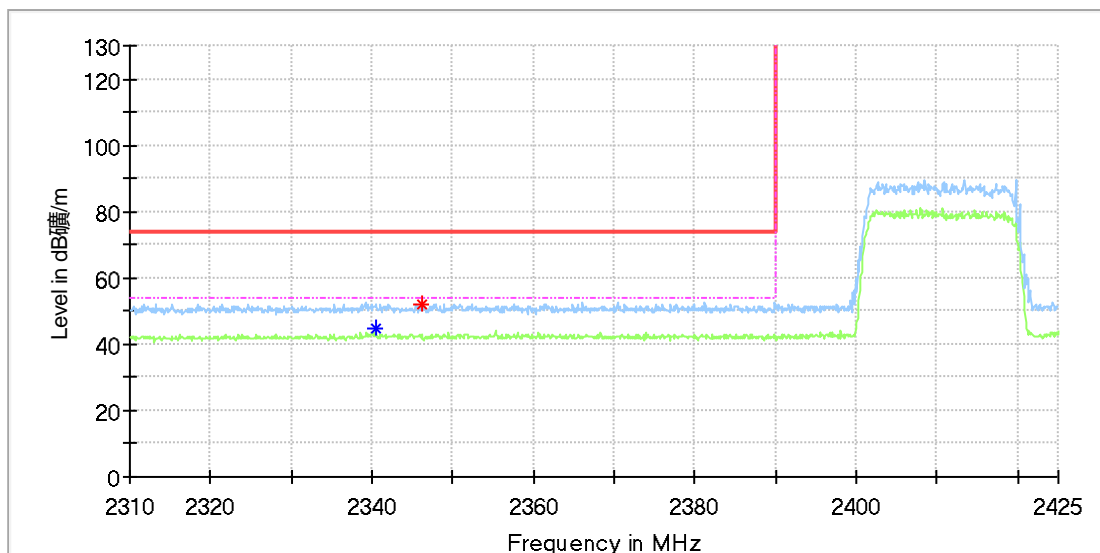

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2340.500000     | ---              | 44.52            | 54.00          | 9.48        | 100.0       | H   | 212.0         | 6.8          |
| 2346.200000     | 52.24            | ---              | 74.00          | 21.76       | 100.0       | H   | 69.0          | 6.9          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2410.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

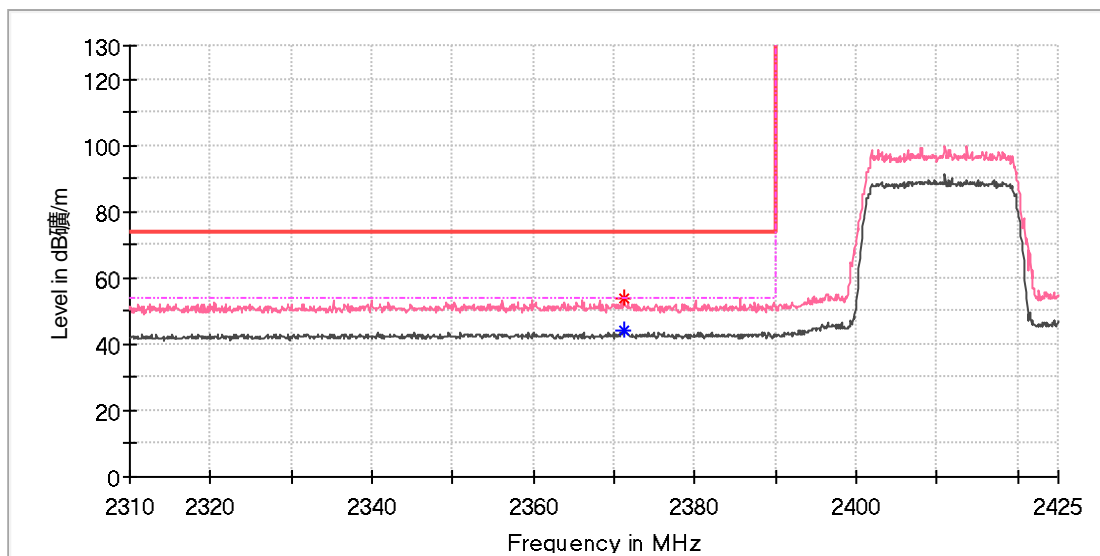

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.200000     | 53.54            | ---              | 74.00          | 20.46       | 100.0       | V   | 318.0         | 6.9          |
| 2371.200000     | ---              | 43.99            | 54.00          | 10.01       | 100.0       | V   | 318.0         | 6.9          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2420.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

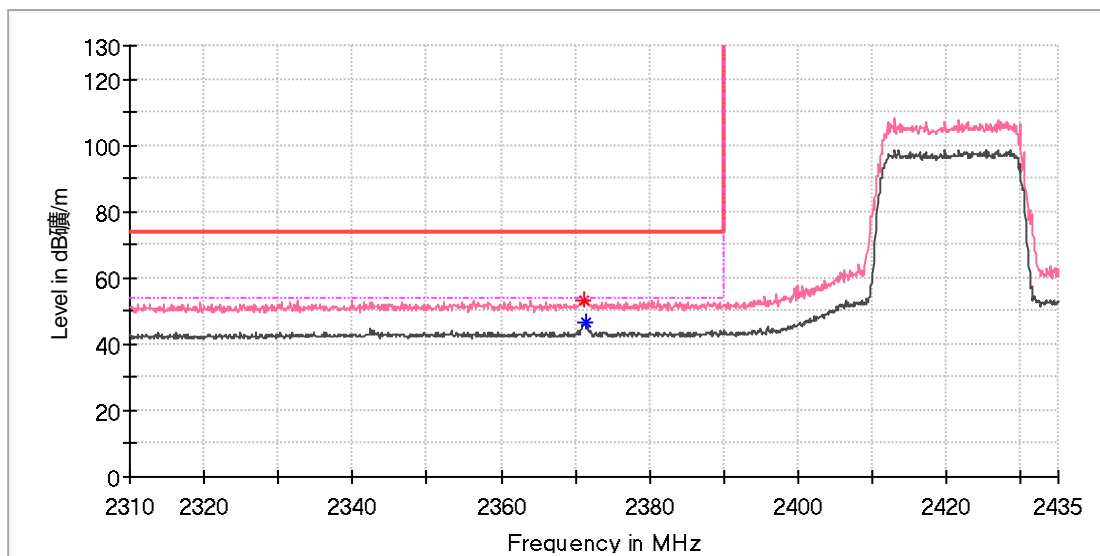

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.200000     | 53.48            | ---              | 74.00          | 20.52       | 100.0       | V   | 279.0         | 6.9          |
| 2371.300000     | ---              | 46.26            | 54.00          | 7.74        | 100.0       | V   | 228.0         | 6.9          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2430.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

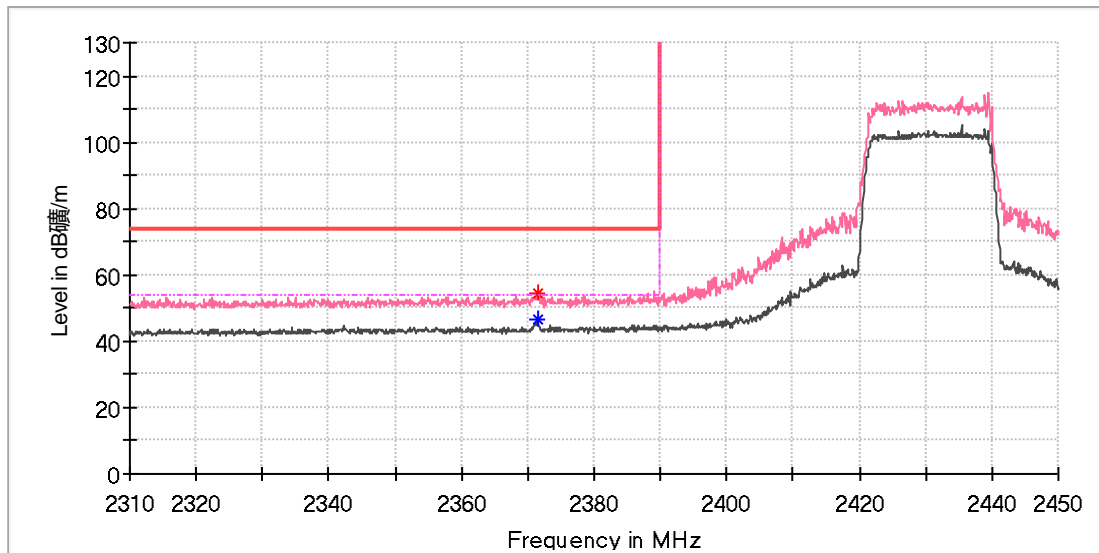

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2371.500000     | ---              | 46.50            | 54.00          | 7.50        | 100.0       | V   | 291.0         | 6.9          |
| 2371.600000     | 54.54            | ---              | 74.00          | 19.46       | 100.0       | V   | 0.0           | 6.9          |


### Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2441.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

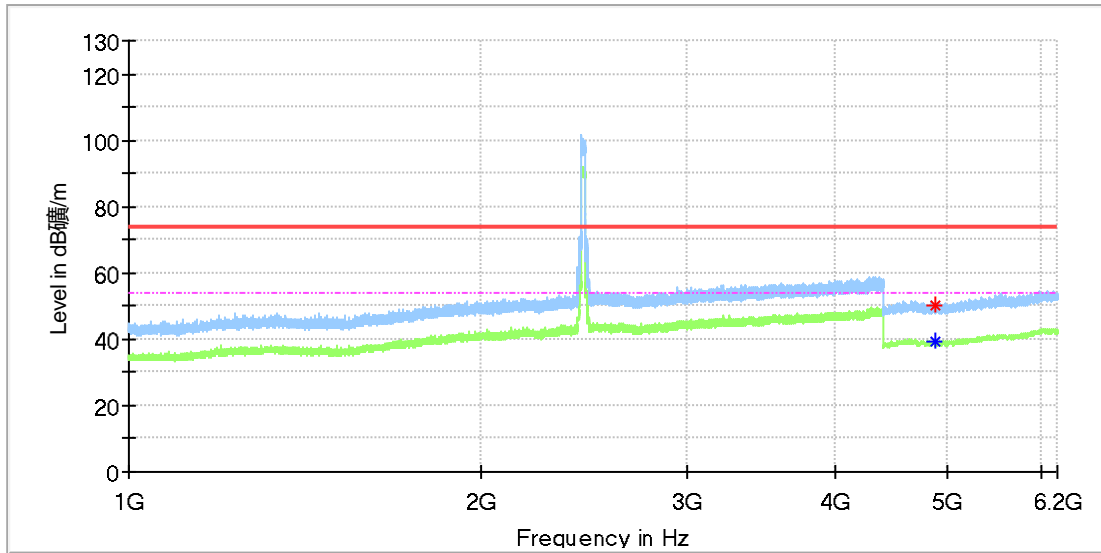

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4874.500000     | ---              | 39.17            | 54.00          | 14.83       | 100.0       | H   | 40.0          | 11.8         |
| 4875.000000     | 50.47            | ---              | 74.00          | 23.53       | 100.0       | H   | 225.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2441.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

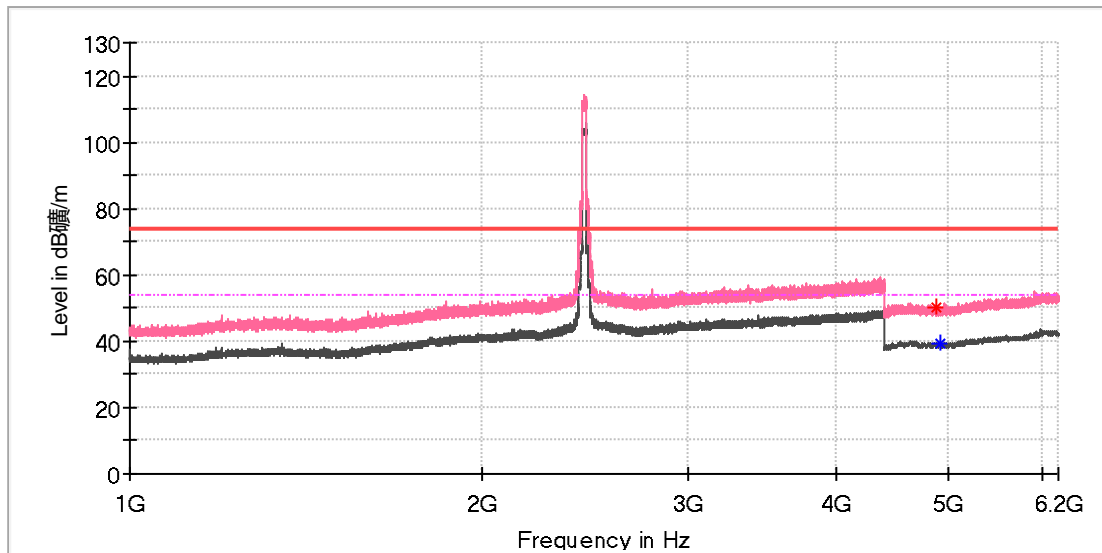

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4881.500000     | 49.90            | ---              | 74.00          | 24.10       | 100.0       | V   | 118.0         | 11.8         |
| 4909.000000     | ---              | 39.46            | 54.00          | 14.54       | 100.0       | V   | 68.0          | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2441.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

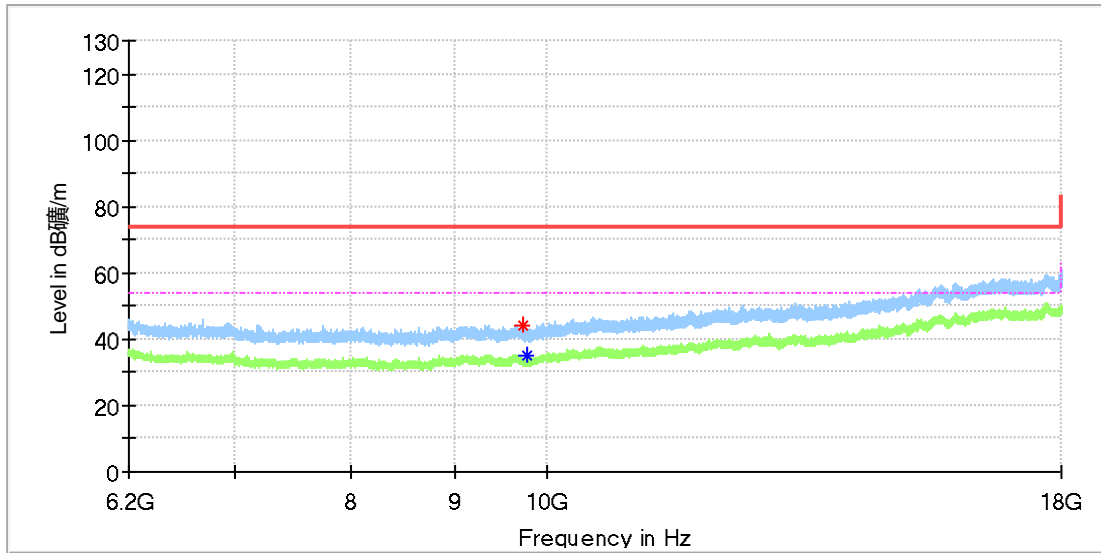

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9730.166667     | 44.27            | ---              | 74.00          | 29.73       | 100.0       | H   | 22.0          | 10.4         |
| 9766.058333     | ---              | 34.84            | 54.00          | 19.16       | 100.0       | H   | 208.0         | 10.4         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2441.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

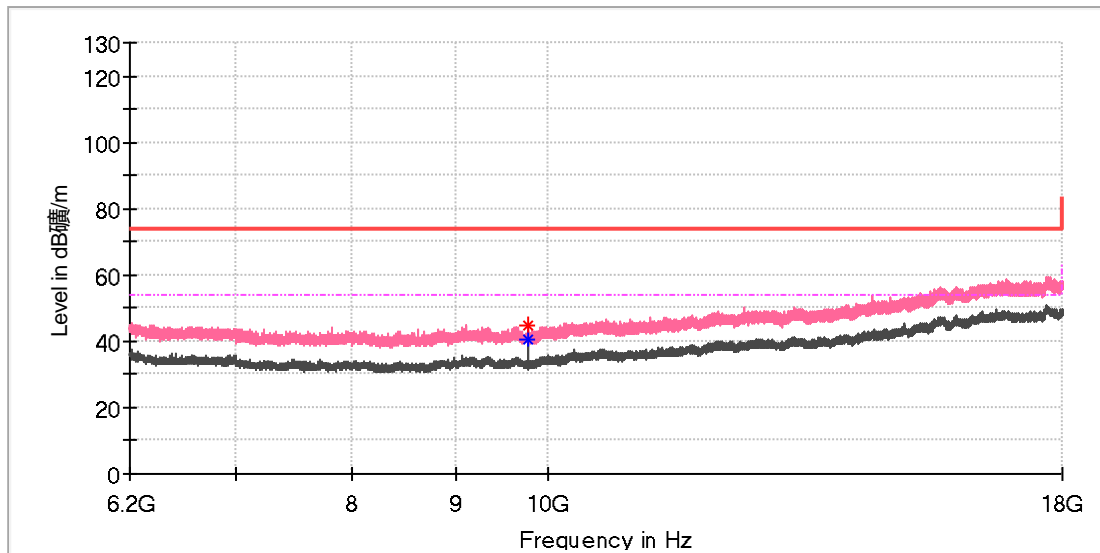

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9766.058333     | 44.81            | ---              | 74.00          | 29.19       | 100.0       | V   | 188.0         | 10.4         |
| 9766.058333     | ---              | 40.72            | 54.00          | 13.28       | 100.0       | V   | 188.0         | 10.4         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2444.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

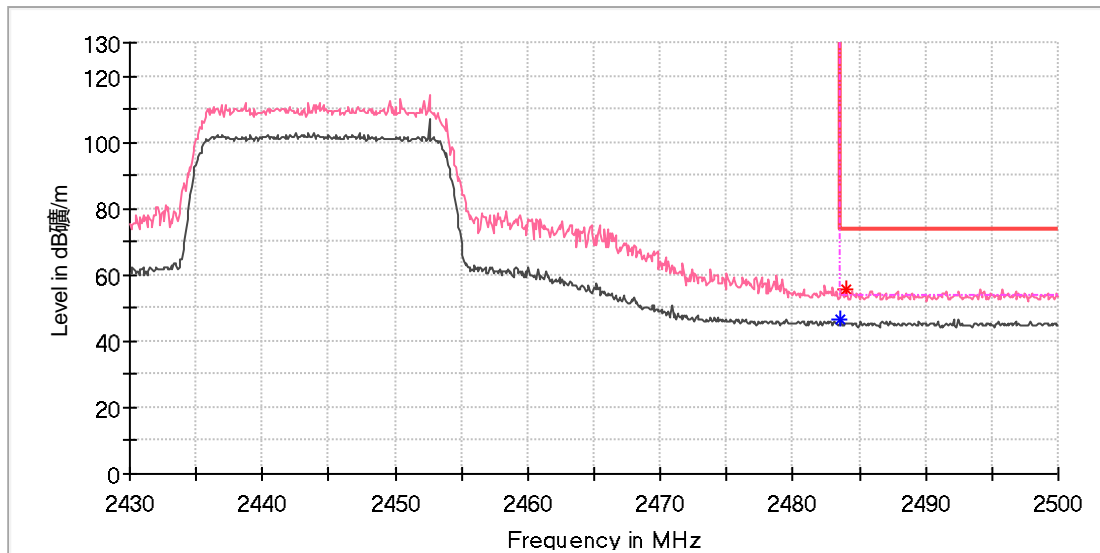

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.600000     | ---              | 46.31            | 54.00          | 7.69        | 100.0       | V   | 188.0         | 7.4          |
| 2484.000000     | 55.69            | ---              | 74.00          | 18.31       | 100.0       | V   | 188.0         | 7.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2448.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

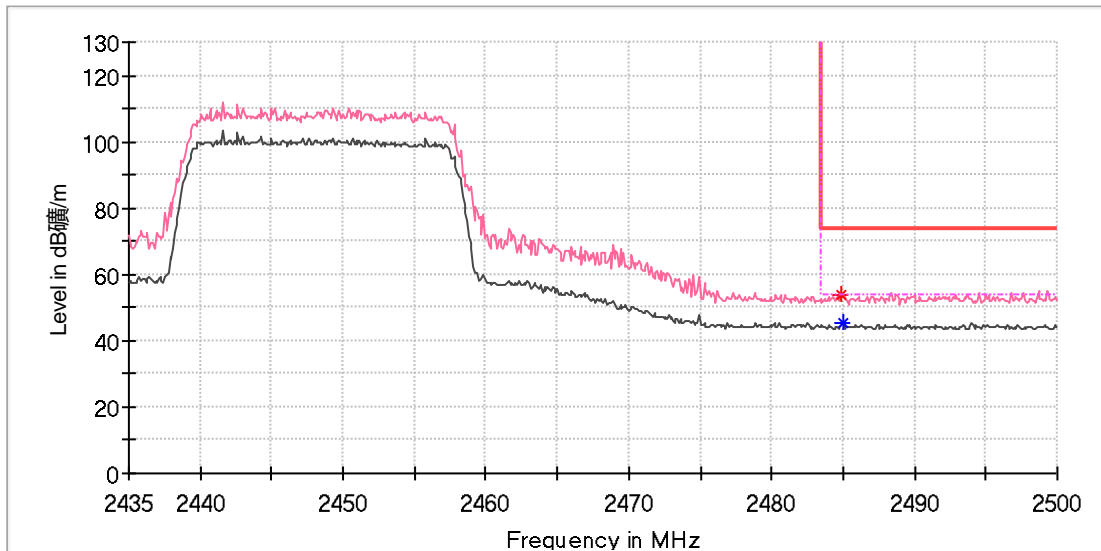

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2484.900000     | 54.11            | ---              | 74.00          | 19.89       | 100.0       | V   | 148.0         | 7.4          |
| 2485.000000     | ---              | 45.31            | 54.00          | 8.69        | 100.0       | V   | 0.0           | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2452.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

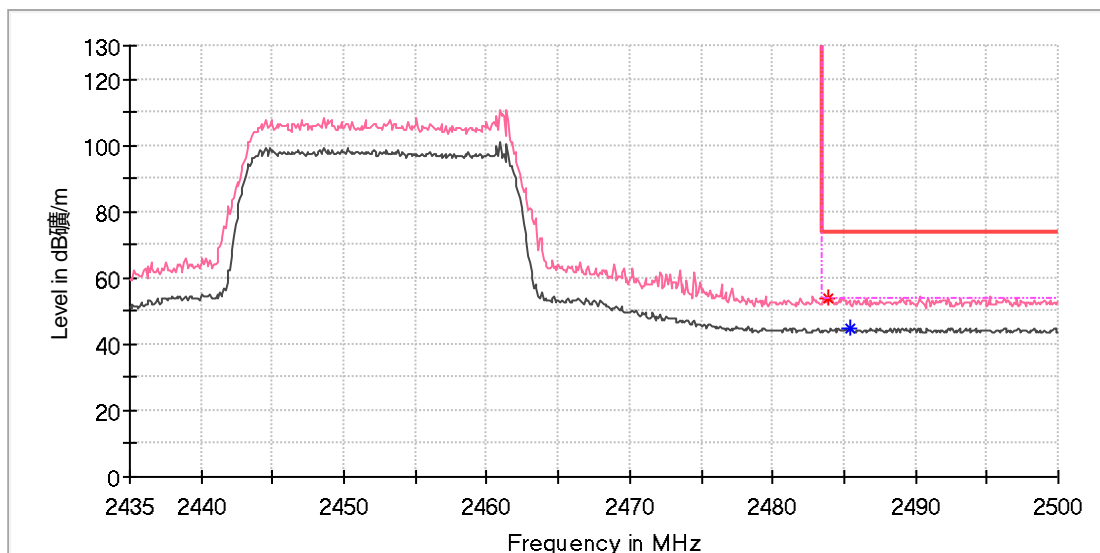

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBμV/m) | Average (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.900000     | 53.75            | ---              | 74.00          | 20.25       | 100.0       | V   | 141.0         | 7.4          |
| 2485.400000     | ---              | 44.58            | 54.00          | 9.42        | 100.0       | V   | 0.0           | 7.4          |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2462.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

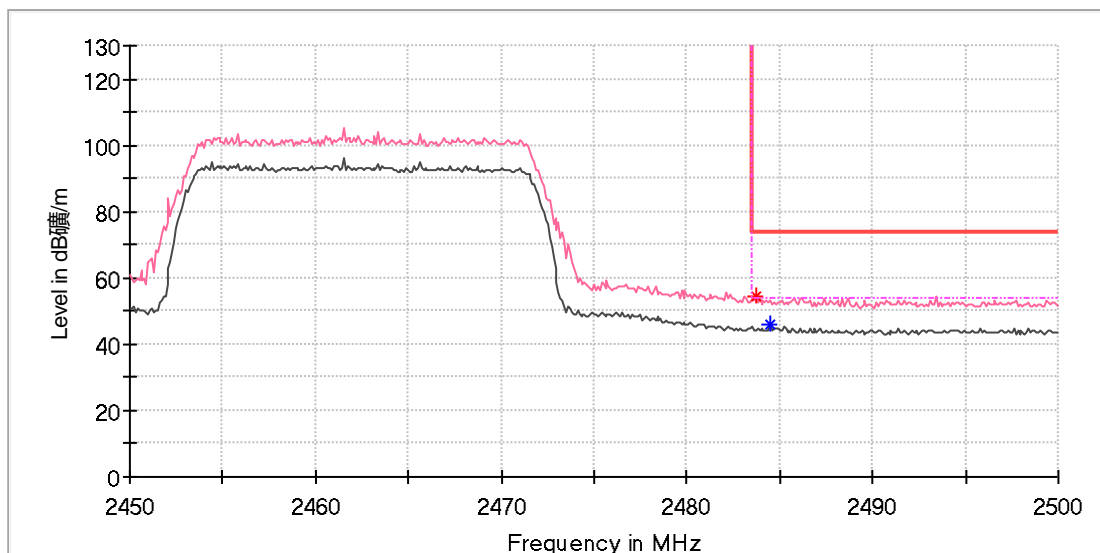

## Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.700000     | 54.24            | ---              | 74.00          | 19.76       | 100.0       | V   | 155.0         | 7.4          |
| 2484.500000     | ---              | 45.82            | 54.00          | 8.18        | 100.0       | V   | 39.0          | 7.4          |


## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |



### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

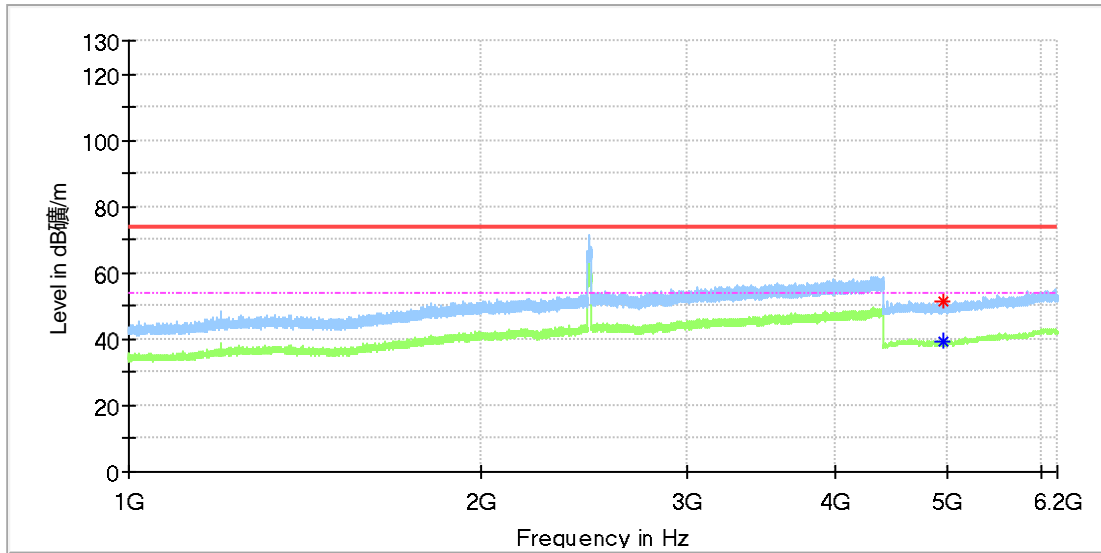

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4956.000000     | ---              | 39.48            | 54.00          | 14.52       | 100.0       | H   | 118.0         | 11.8         |
| 4959.000000     | 51.31            | ---              | 74.00          | 22.69       | 100.0       | H   | 10.0          | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

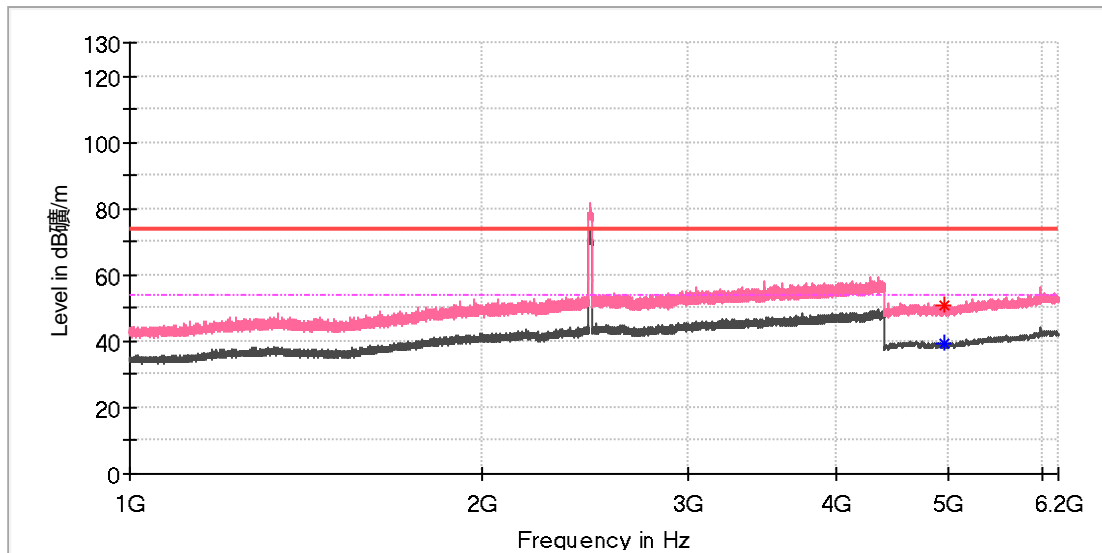

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4950.500000     | ---              | 39.21            | 54.00          | 14.79       | 100.0       | V   | 65.0          | 11.8         |
| 4960.000000     | 50.98            | ---              | 74.00          | 23.02       | 100.0       | V   | 178.0         | 11.8         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

## EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

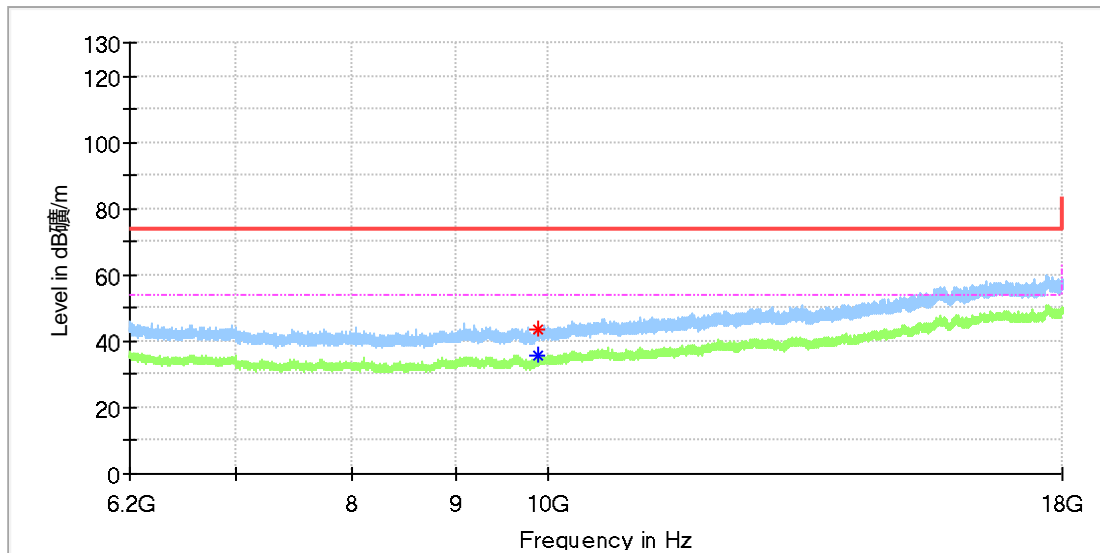

## Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9889.958333     | 43.29            | ---              | 74.00          | 30.71       | 100.0       | H   | 165.0         | 10.7         |
| 9889.958333     | ---              | 35.50            | 54.00          | 18.50       | 100.0       | H   | 165.0         | 10.7         |

## Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

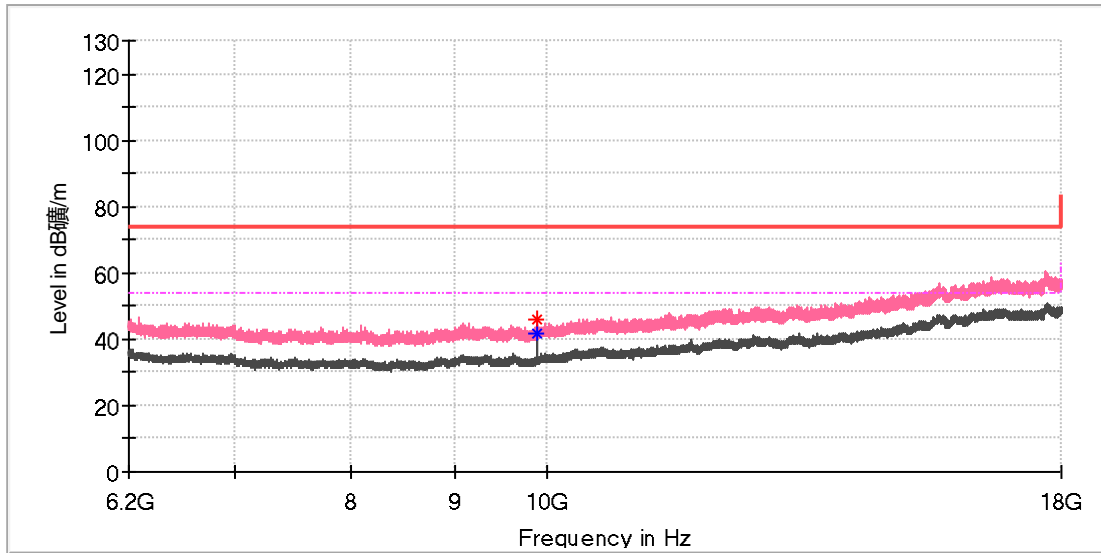

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 9889.466667     | 46.19            | ---              | 74.00          | 27.81       | 100.0       | V   | 186.0         | 10.7         |
| 9889.958333     | ---              | 41.77            | 54.00          | 12.23       | 100.0       | V   | 186.0         | 10.7         |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

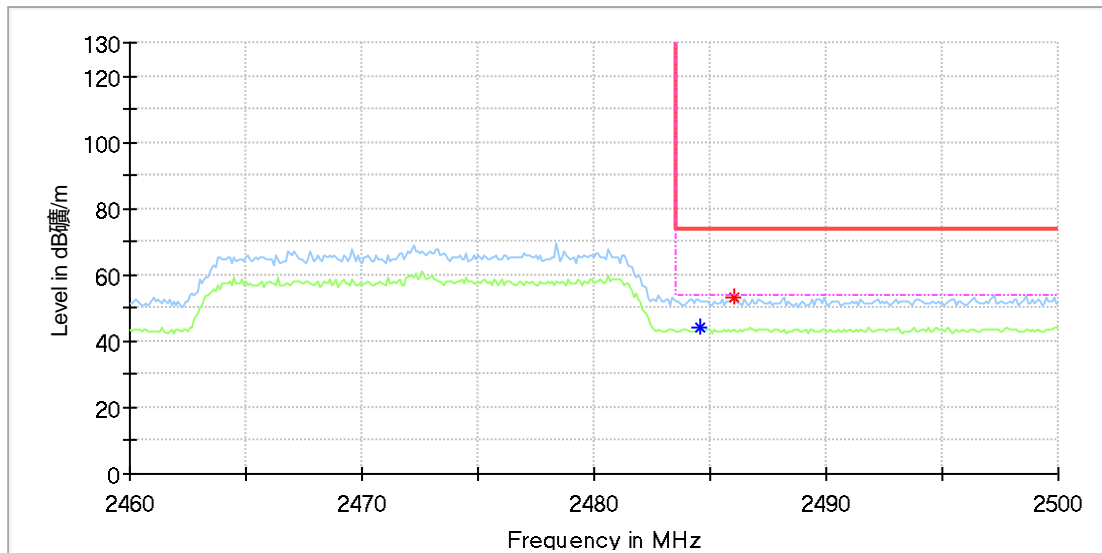

### Critical\_Freqs


| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2484.600000     | ---              | 44.25            | 54.00          | 9.75        | 100.0       | H   | 98.0          | 7.4          |
| 2486.000000     | 53.38            | ---              | 74.00          | 20.62       | 100.0       | H   | 295.0         | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |

### EUT Information

EUT Name: DJI Mini 2 SE  
 Model: MT2SD  
 Test Mode: SDR 2.4G\_20M\_2472.5MHz  
 Order No/Sample No: 168389903/A003336027-006  
 Test Voltage:: Battery  
 Remark: Temp 23 Humi:56%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

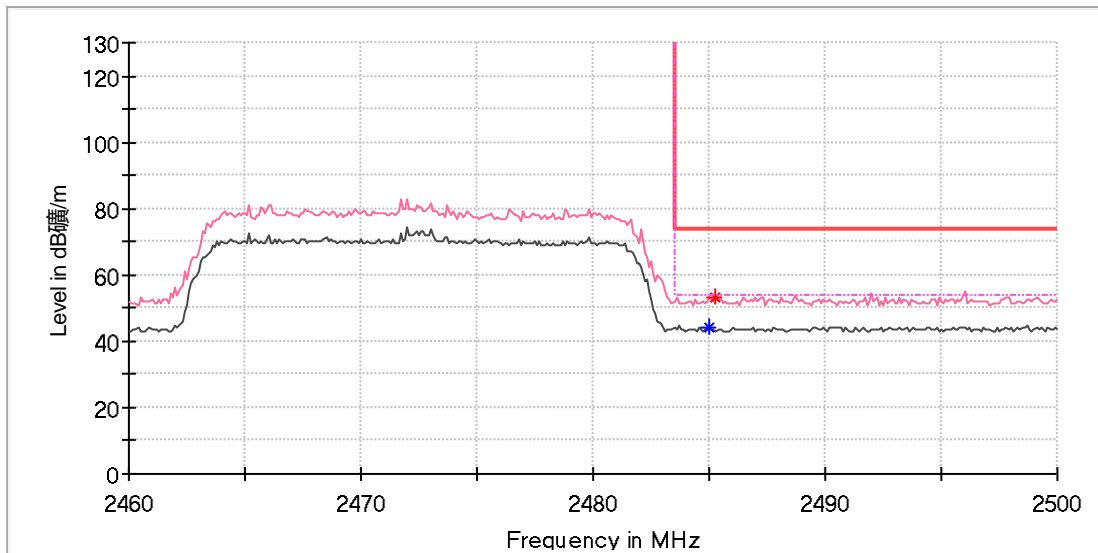

### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2485.000000     | ---              | 43.92            | 54.00          | 10.08       | 100.0       | V   | 201.0         | 7.4          |
| 2485.300000     | 53.25            | ---              | 74.00          | 20.75       | 100.0       | V   | 20.0          | 7.4          |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| ---             | ---              | ---            | ---         | ---         |     | ---           | ---          |