




## Appendix A: Test Results of Bluetooth BLE

<b>APPENDIX A: TEST RESULTS OF BLUETOOTH BLE</b> .....	<b>1</b>
<b>APPENDIX A.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY</b> .....	<b>2</b>
<b>APPENDIX A.2: TEST RESULTS OF 6DB BANDWIDTH</b> .....	<b>5</b>
<b>APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH</b> .....	<b>8</b>
<b>APPENDIX A.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH</b> .....	<b>11</b>
<i>Band Edge</i> .....	<b>11</b>
<i>Conducted Spurious Emission</i> .....	<b>13</b>
<b>APPENDIX A.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS</b> .....	<b>20</b>
30 MHz - 1GHz .....	<b>20</b>
1GHz - 18GHz.....	<b>22</b>
<i>Evaluations for simultaneous use mode</i> .....	<b>34</b>
<b>APPENDIX A.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS</b> .....	<b>35</b>

### Appendix A.1: Test Results of Conducted Power Spectral Density

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-9.42	≤8.00	PASS
		2440	-8.48	≤8.00	PASS
		2480	-9.92	≤8.00	PASS
BLE_2M	Ant1	2402	-11.82	≤8.00	PASS
		2440	-11.06	≤8.00	PASS
		2480	-12.51	≤8.00	PASS

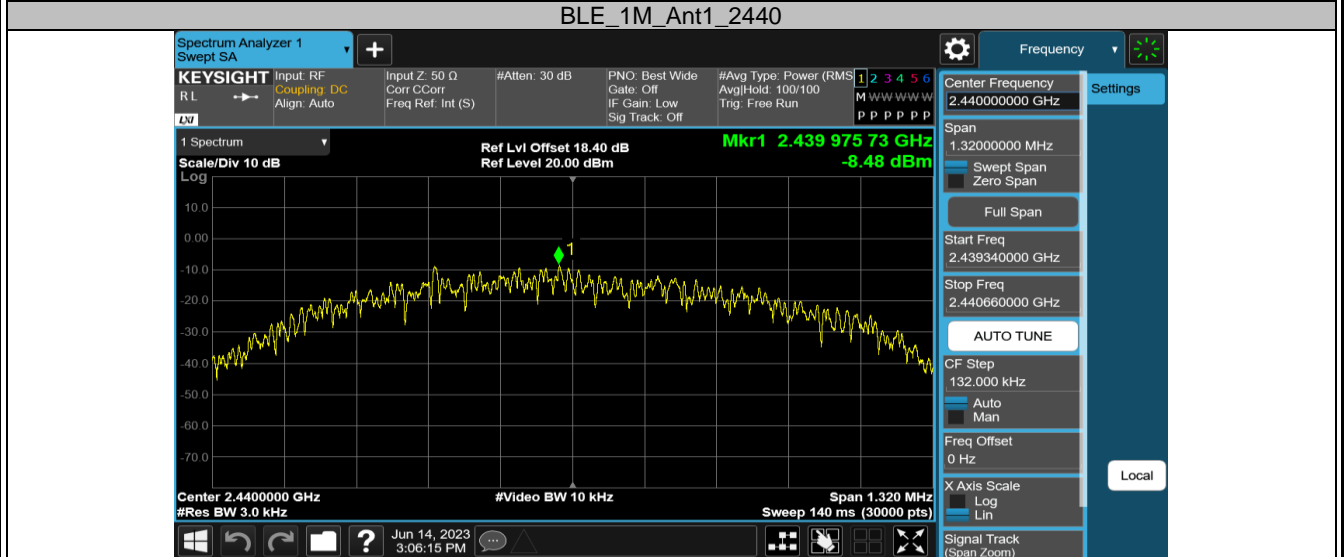


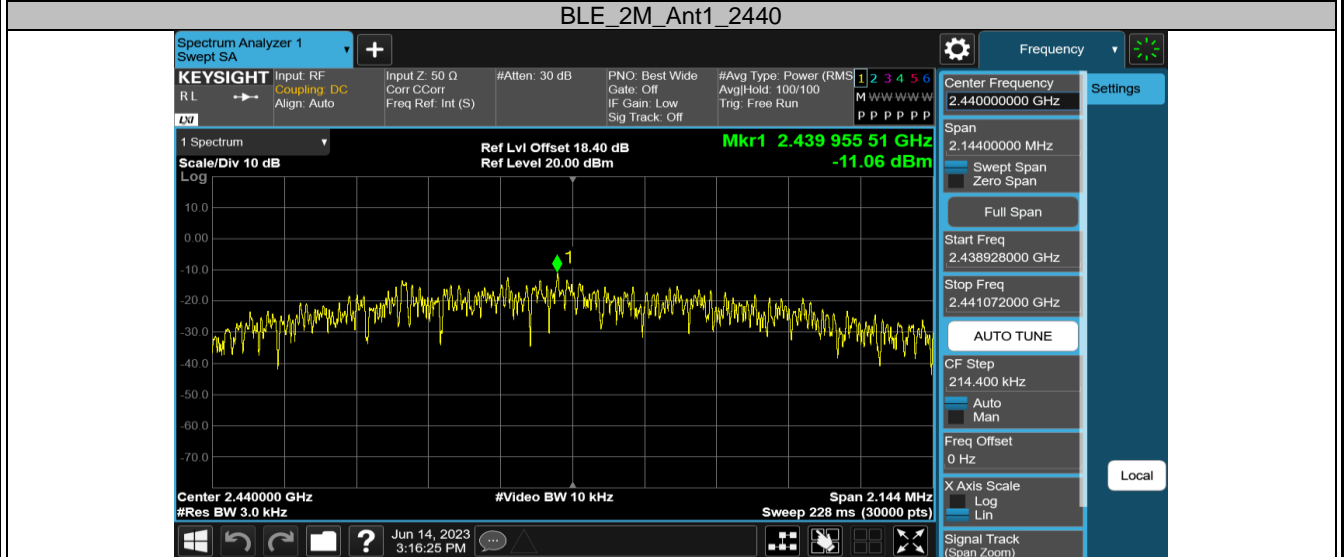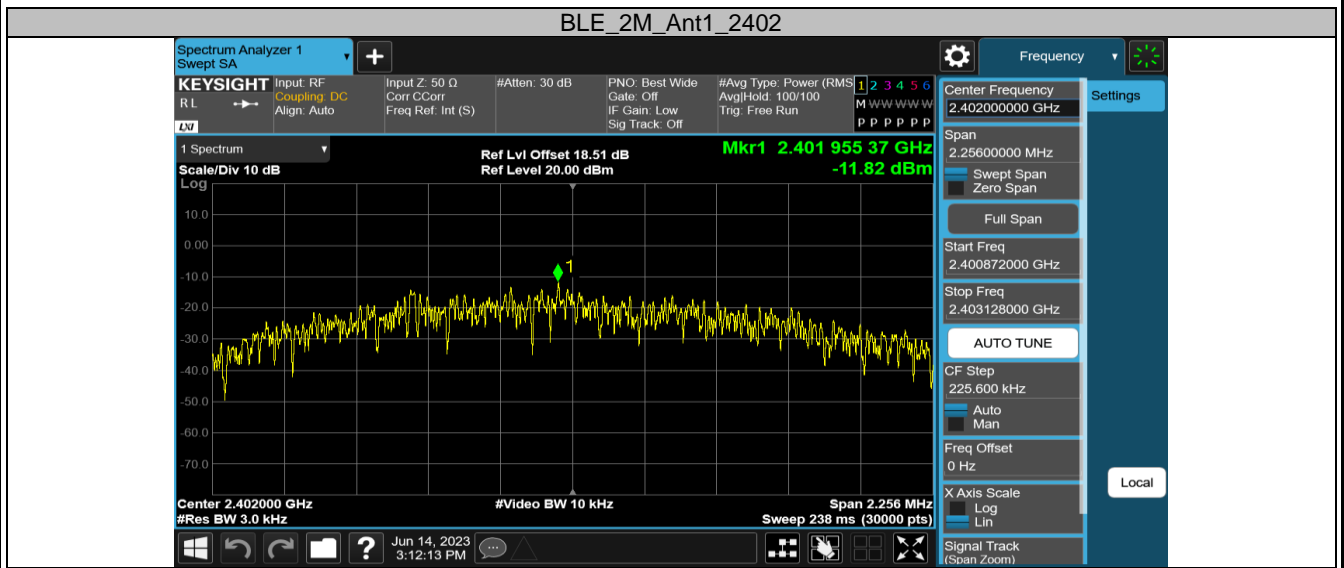

### Appendix A.2: Test Results of 6dB Bandwidth

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.644	2401.680	2402.324	0.5	PASS
		2440	0.660	2439.668	2440.328	0.5	PASS
		2480	0.656	2479.664	2480.320	0.5	PASS
BLE_2M	Ant1	2402	1.128	2401.420	2402.548	0.5	PASS
		2440	1.072	2439.476	2440.548	0.5	PASS
		2480	1.104	2479.424	2480.528	0.5	PASS

BLE\_1M\_Ant1\_2402

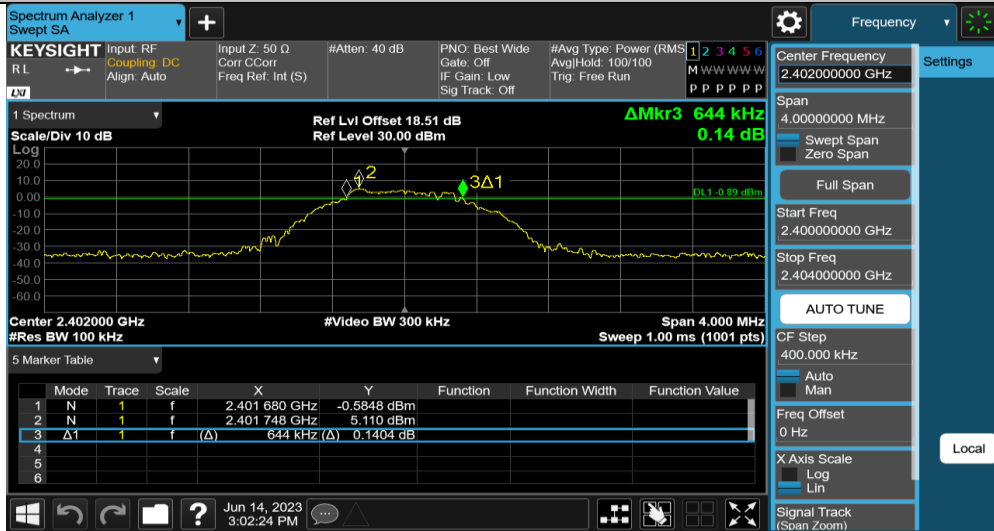

BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480









### Appendix A.3: Test Results of 99% Bandwidth

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0190	2401.4962	2402.5152	---	PASS
		2440	1.0105	2439.5000	2440.5105	---	PASS
		2480	1.0254	2479.4914	2480.5168	---	PASS
BLE_2M	Ant1	2402	2.0479	2401.0005	2403.0484	---	PASS
		2440	2.0374	2439.0052	2441.0426	---	PASS
		2480	2.0314	2479.0026	2481.0340	---	PASS



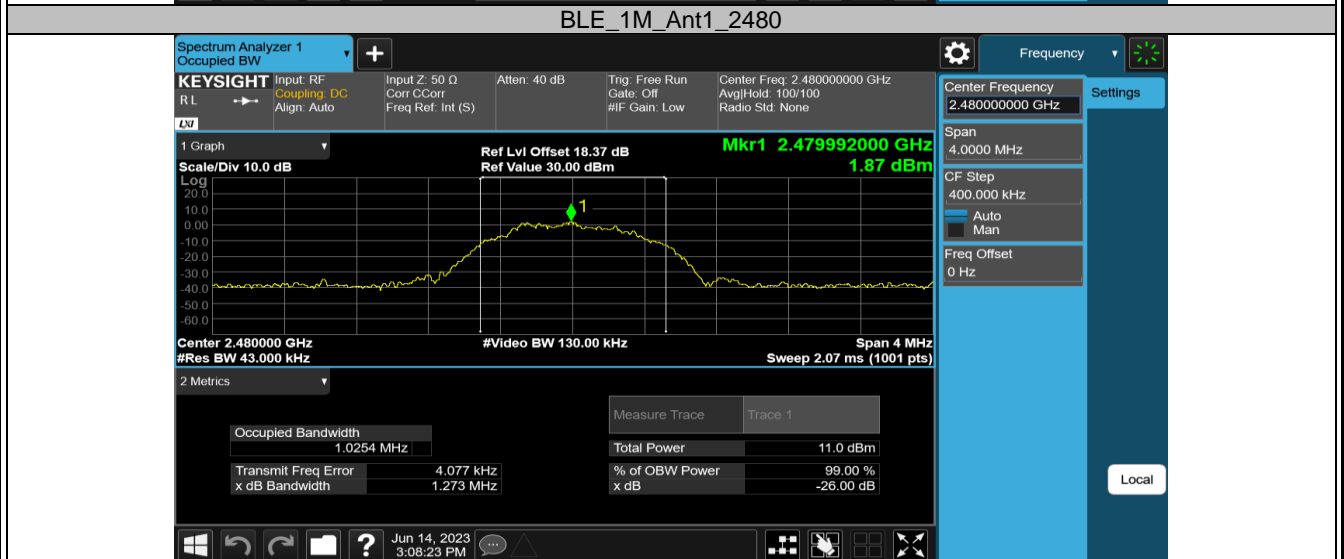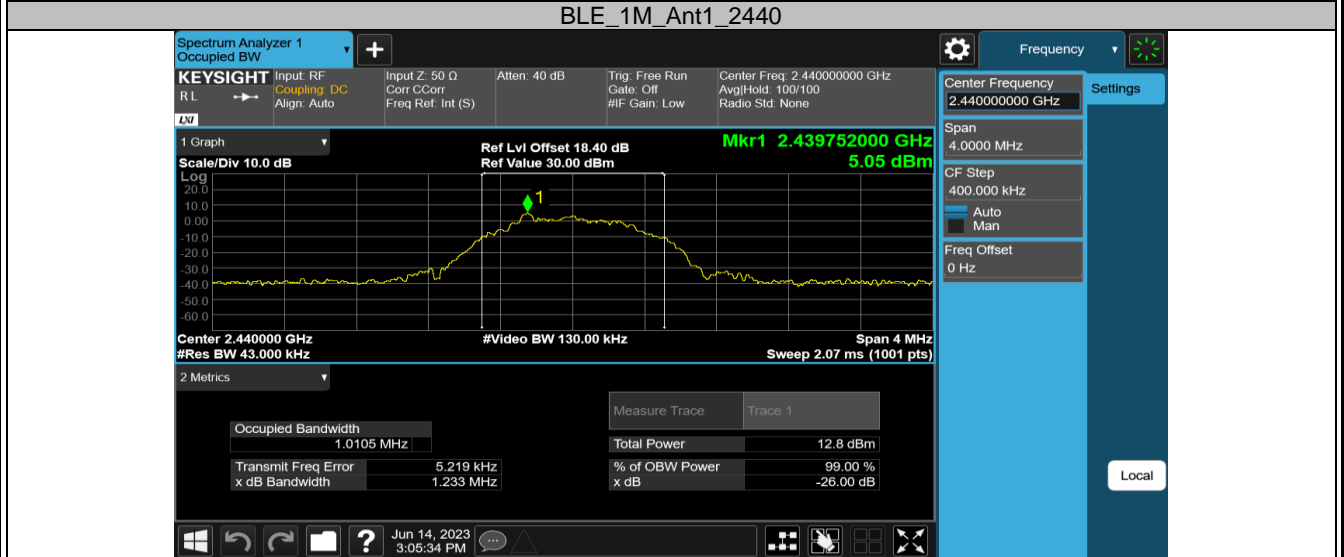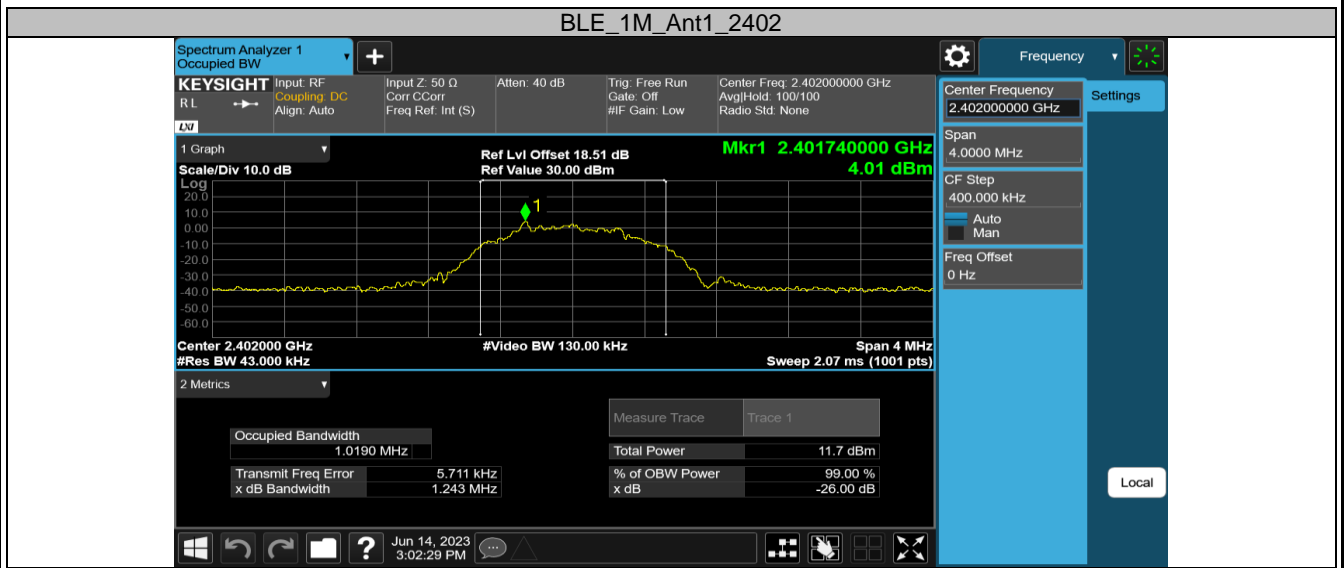

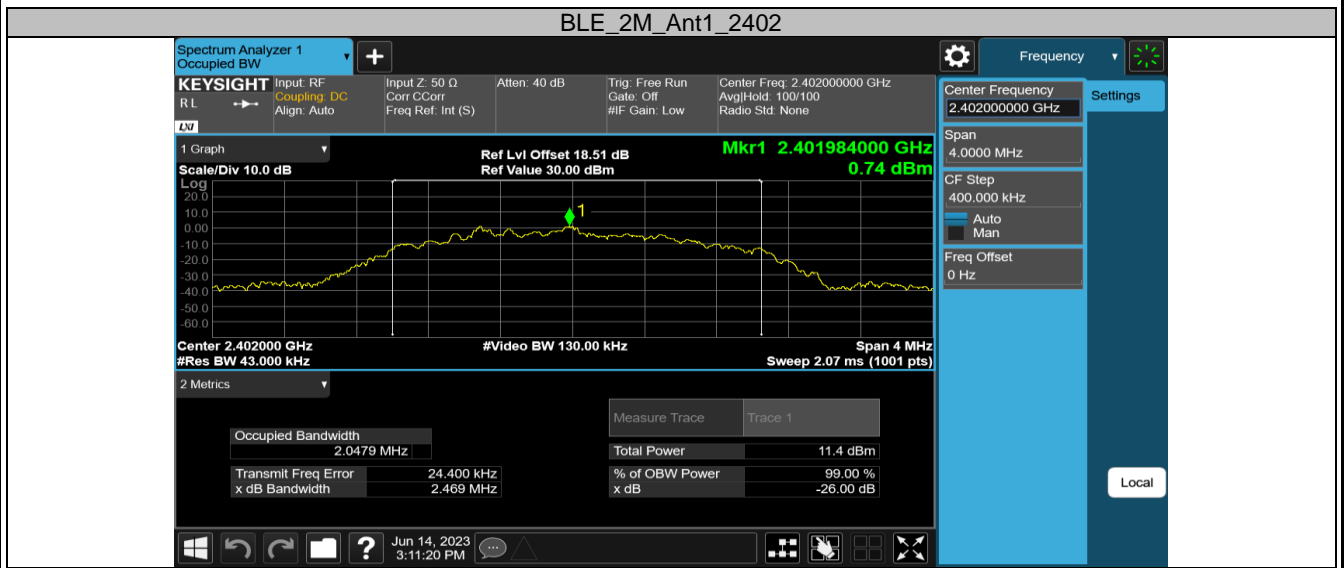


### Appendix A.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Band Edge

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	4.708	-44.61	≤-15.29	PASS
		High	2480	4.357	-45.11	≤-15.64	PASS
BLE_2M	Ant1	Low	2402	4.843	-43.97	≤-15.16	PASS
		High	2480	3.280	-45.3	≤-16.72	PASS


BLE\_1M\_Ant1\_Low\_2402

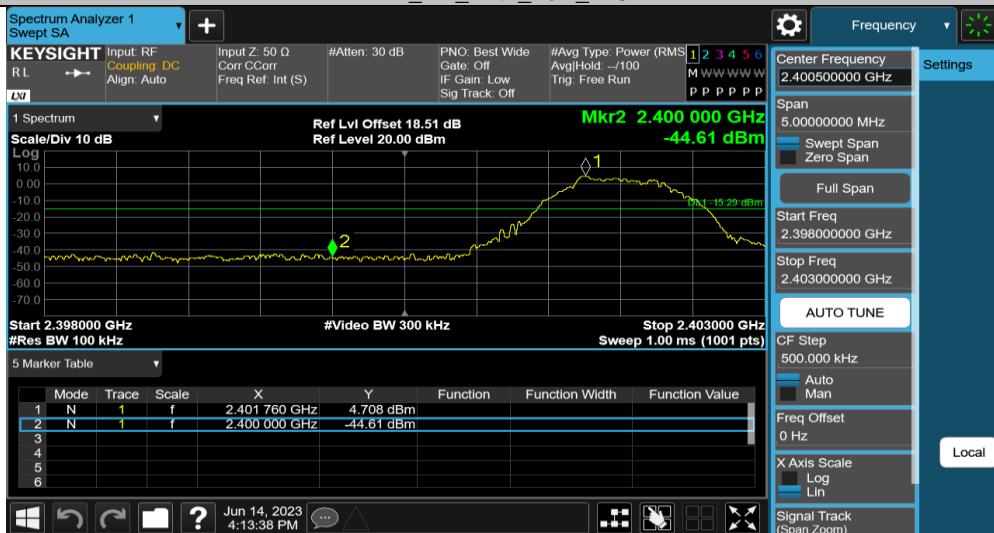

BLE\_1M\_Ant1\_High\_2480

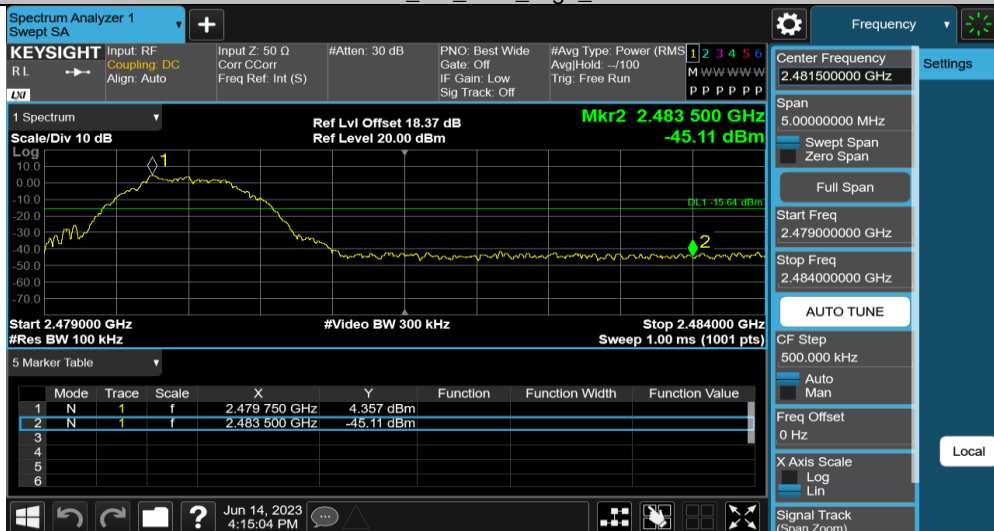

BLE\_2M\_Ant1\_Low\_2402

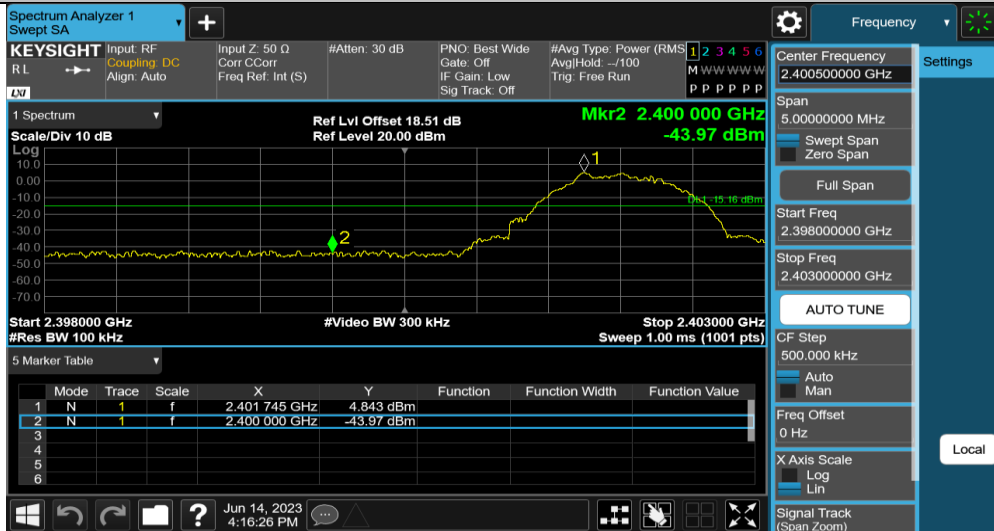

BLE\_2M\_Ant1\_High\_2480




Conducted Spurious Emission

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	4.85	4.85	---	PASS
			30~1000	4.85	-52.3	≤-15.15	PASS
			1000~26500	4.85	-43.04	≤-15.15	PASS
		2440	Reference	4.02	4.02	---	PASS
			30~1000	4.02	-51.85	≤-15.98	PASS
			1000~26500	4.02	-42.84	≤-15.98	PASS
		2480	Reference	3.35	3.35	---	PASS
			30~1000	3.35	-51.85	≤-16.65	PASS
			1000~26500	3.35	-42.6	≤-16.65	PASS
BLE_2M	Ant1	2402	Reference	2.45	2.45	---	PASS
			30~1000	2.45	-52.14	≤-17.55	PASS
			1000~26500	2.45	-41.86	≤-17.55	PASS
		2440	Reference	3.78	3.78	---	PASS
			30~1000	3.78	-52.2	≤-16.22	PASS
			1000~26500	3.78	-42.61	≤-16.22	PASS
		2480	Reference	4.31	4.31	---	PASS
			30~1000	4.31	-51.69	≤-15.69	PASS
			1000~26500	4.31	-42.54	≤-15.69	PASS


BLE\_1M\_Ant1\_2402\_0~Reference






BLE\_1M\_Ant1\_2402\_30~1000

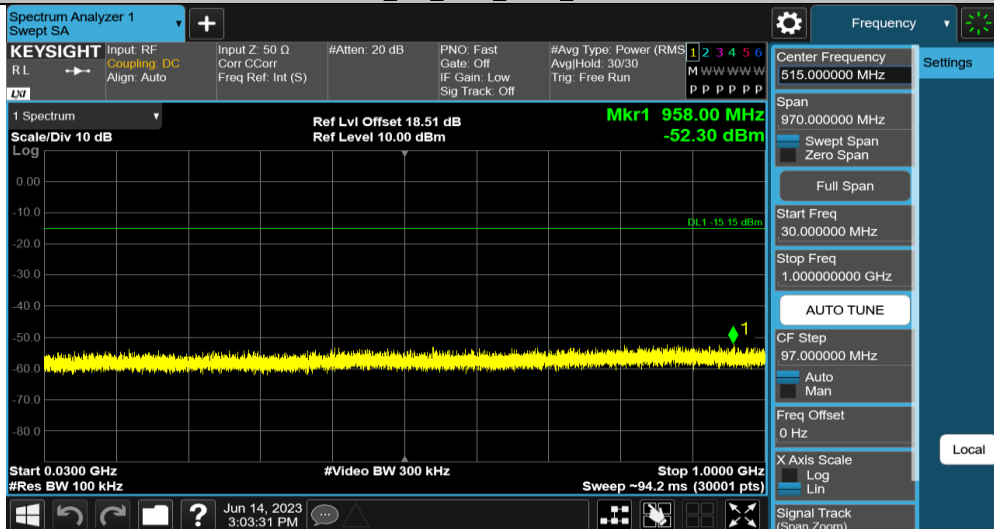

BLE\_1M\_Ant1\_2402\_1000~26500

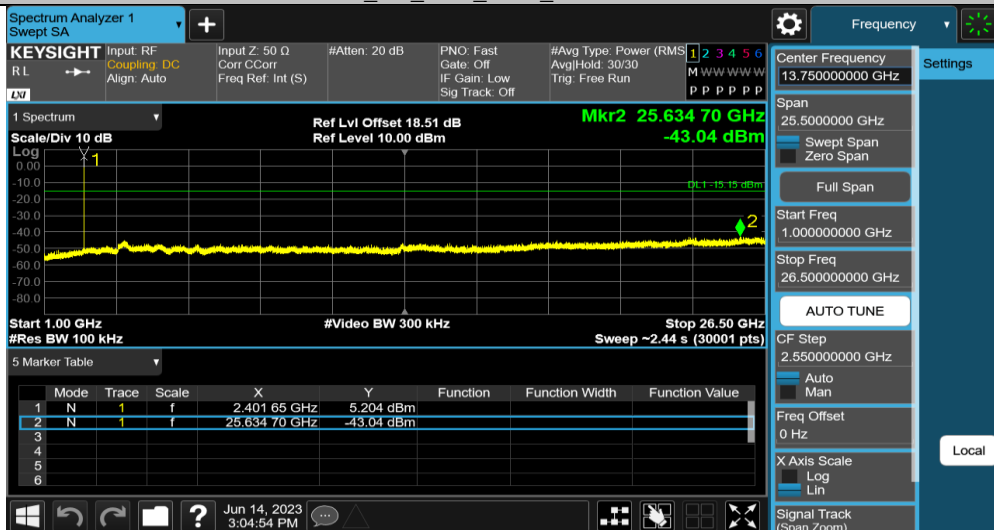


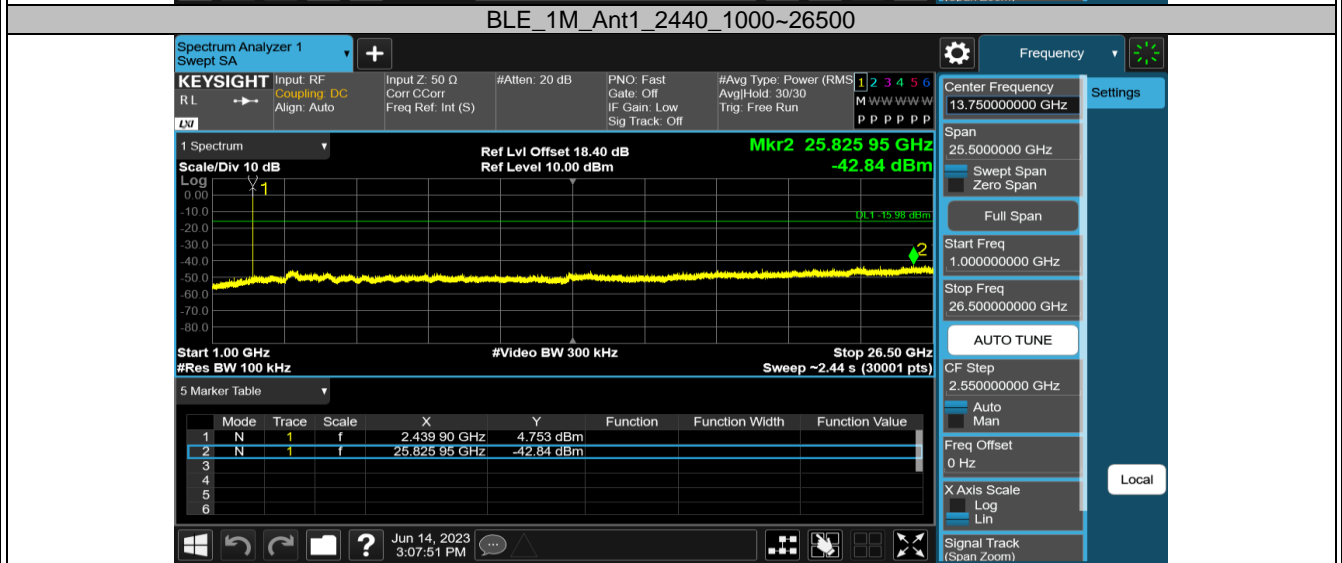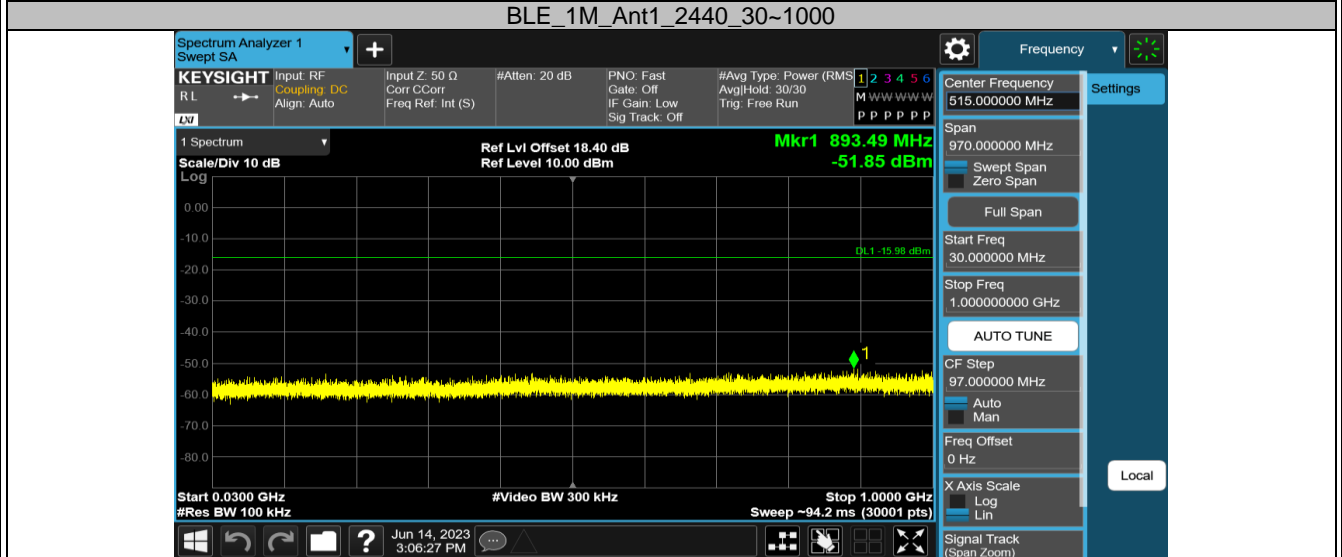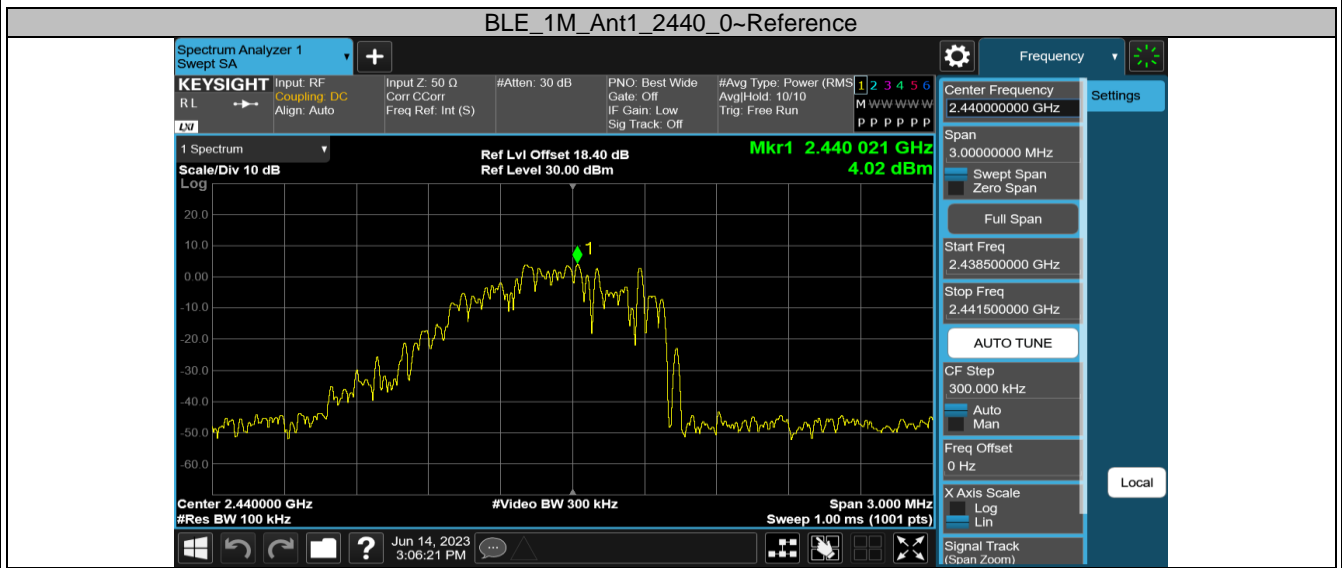


BLE\_1M\_Ant1\_2480\_0~Reference



BLE\_1M\_Ant1\_2480\_30~1000

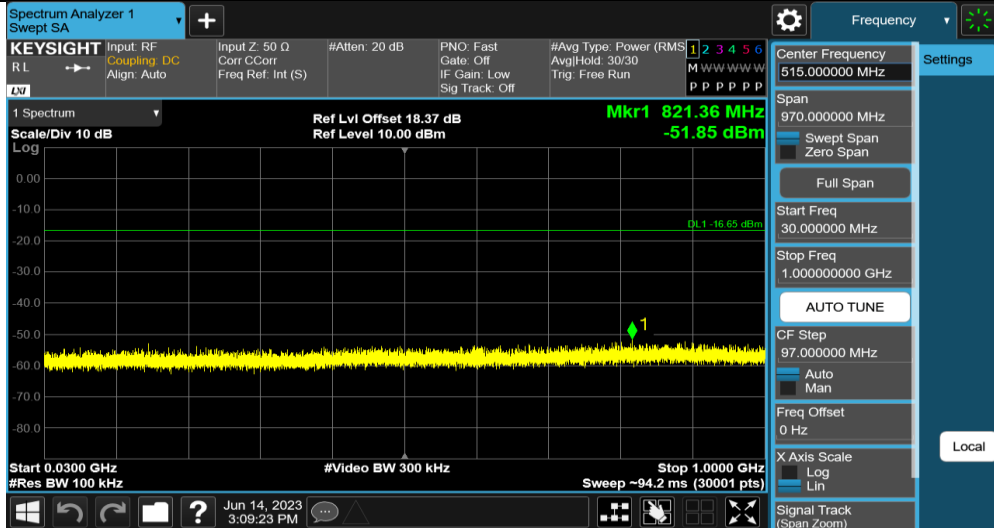

BLE\_1M\_Ant1\_2480\_1000~26500

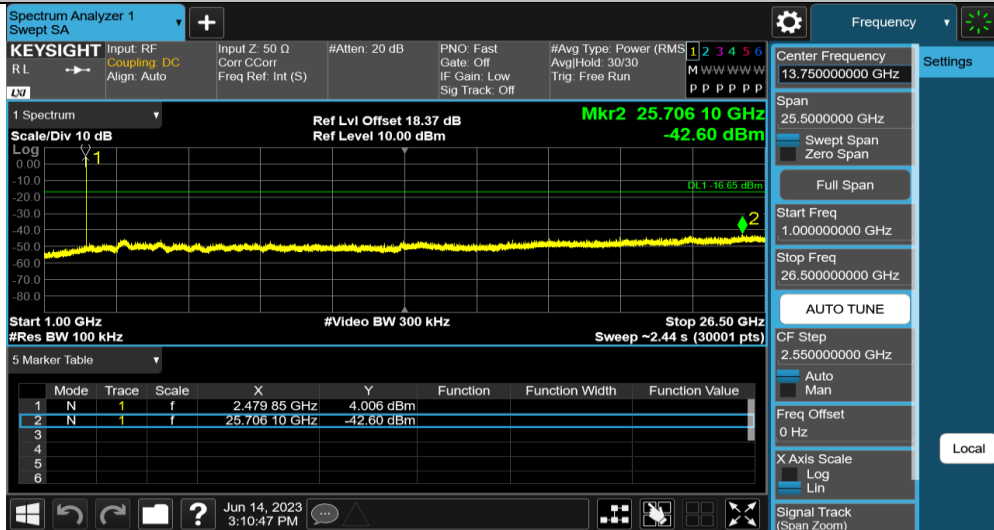





BLE\_2M\_Ant1\_2402\_0~Reference



BLE\_2M\_Ant1\_2402\_30~1000

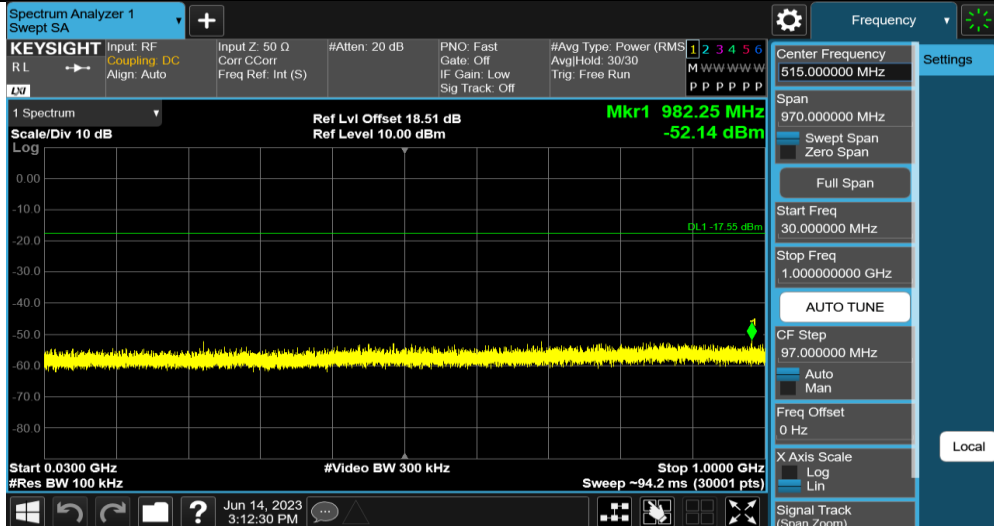


BLE\_2M\_Ant1\_2402\_1000~26500

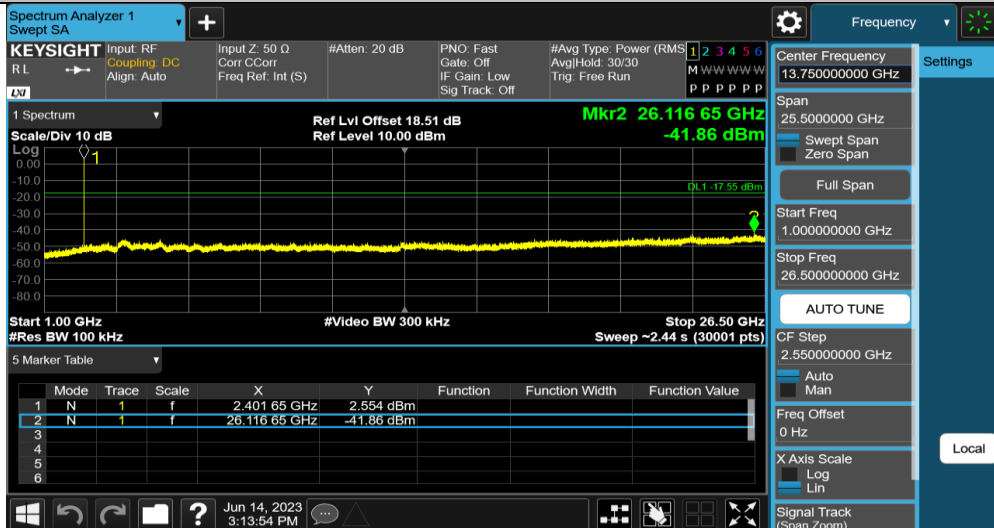


BLE\_2M\_Ant1\_2440\_0~Reference






BLE\_2M\_Ant1\_2440\_30~1000

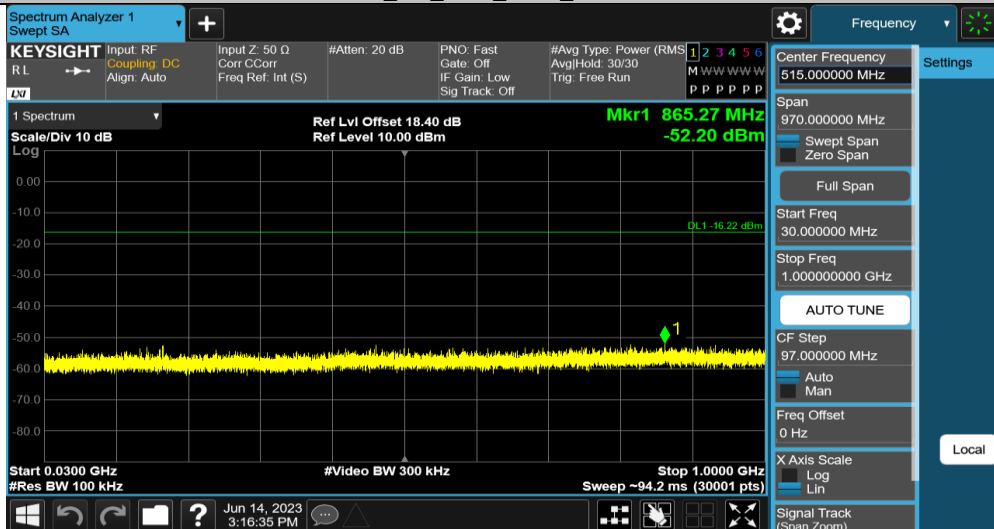

BLE\_2M\_Ant1\_2440\_1000~26500

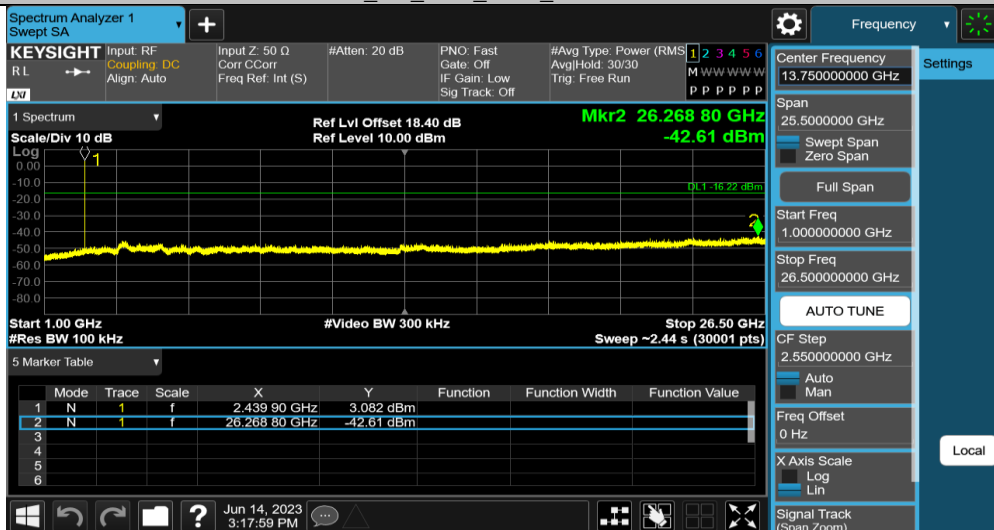

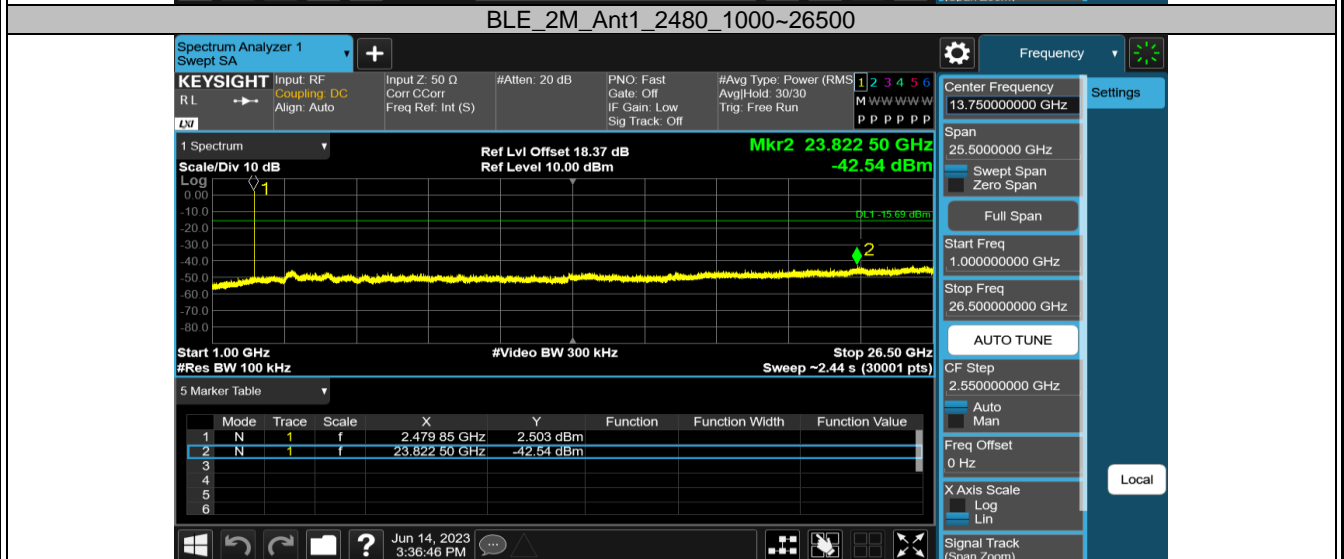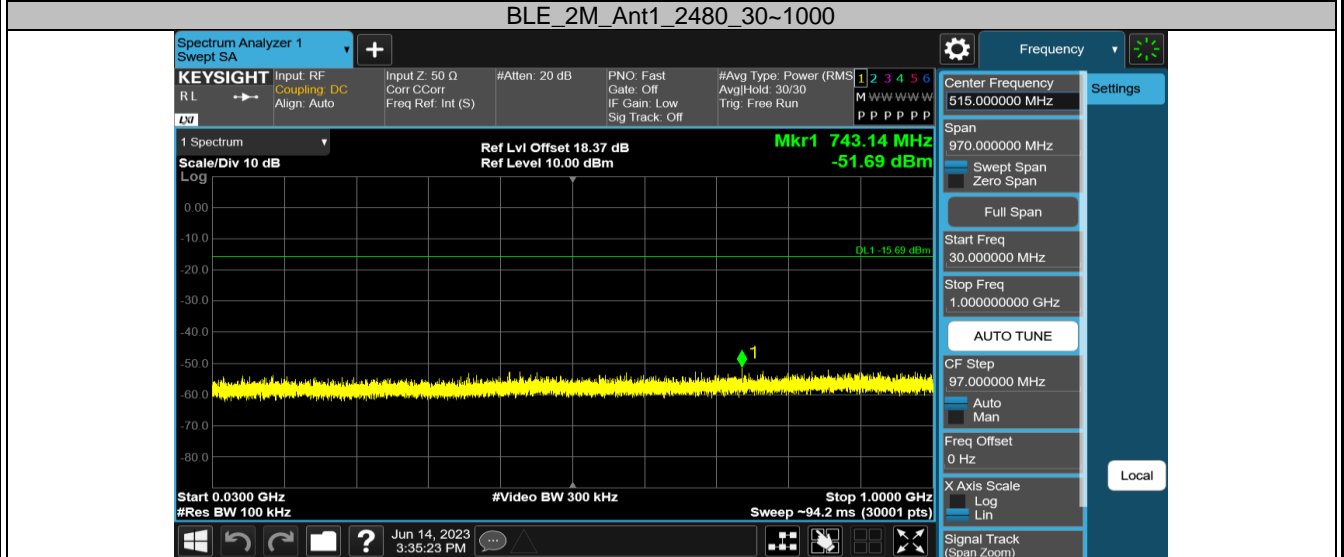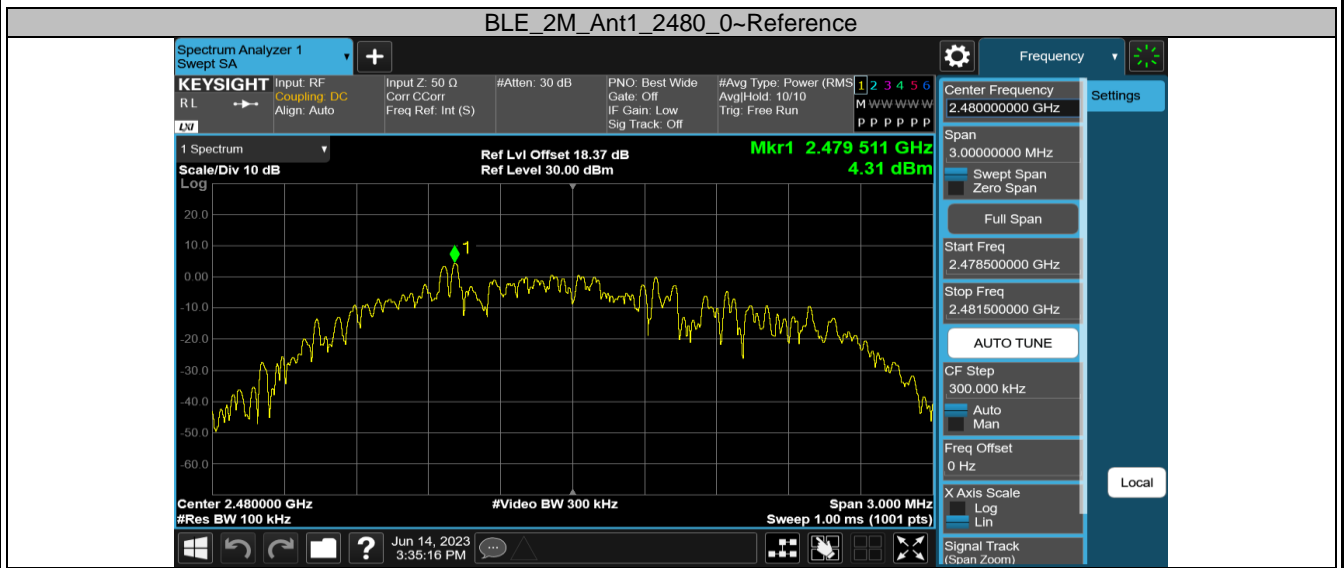

### Appendix A.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30 MHz - 1GHz

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

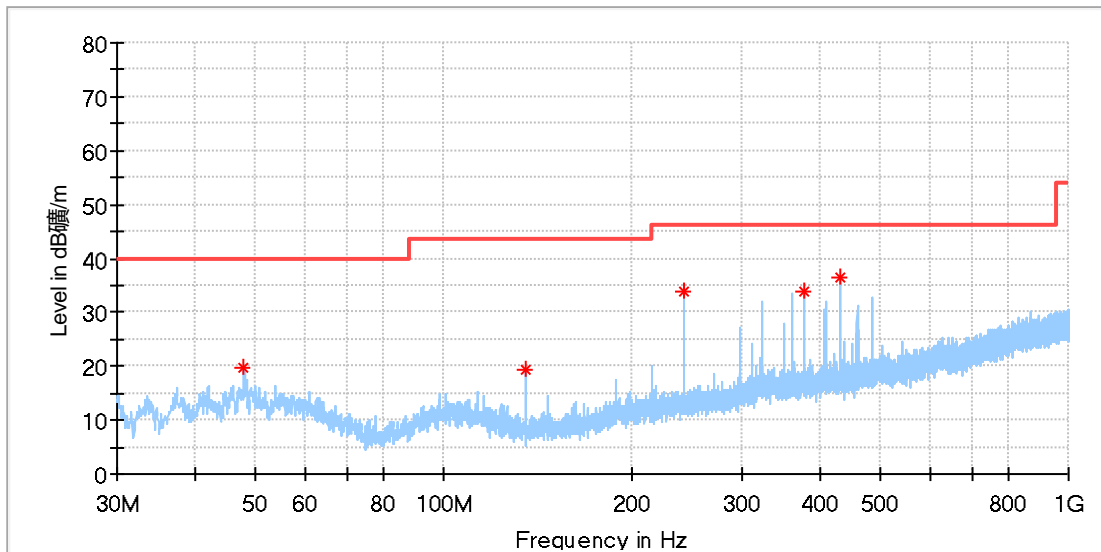

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.896500	19.60	40.00	20.40	100.0	H	306.0	-18.4
135.002500	19.25	43.50	24.25	100.0	H	269.0	-22.1
243.012000	34.01	46.00	11.99	100.0	H	195.0	-17.7
377.987500	33.81	46.00	12.19	100.0	H	321.0	-14.3
432.016500	36.56	46.00	9.44	100.0	H	321.0	-13.3

### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_Mid channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

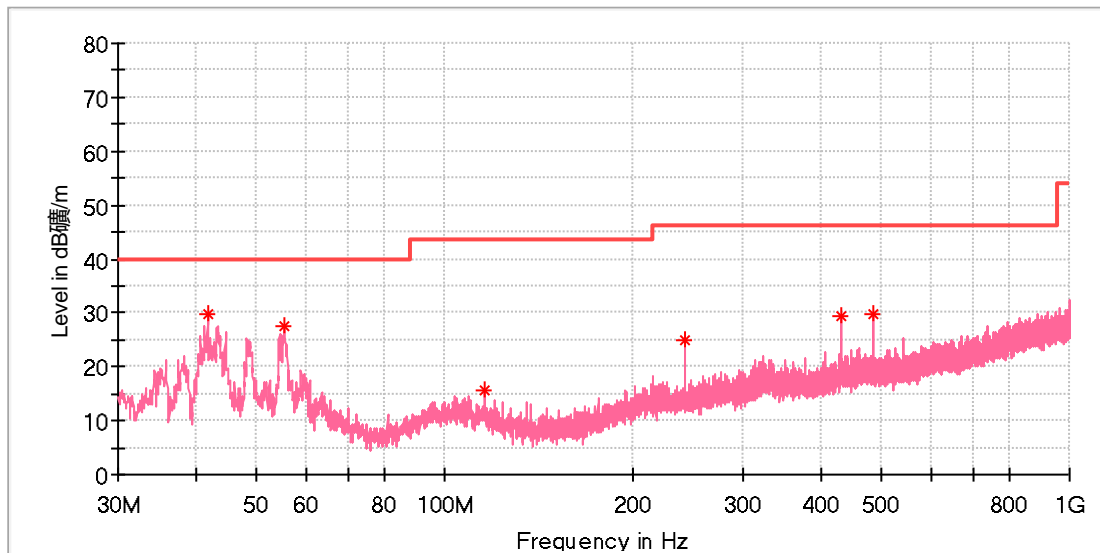

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.785500	29.78	40.00	10.22	100.0	V	248.0	-19.6
55.268500	27.71	40.00	12.29	100.0	V	18.0	-18.5
115.602500	15.67	43.50	27.83	100.0	V	143.0	-19.9
243.012000	25.01	46.00	20.99	100.0	V	264.0	-17.7
432.016500	29.55	46.00	16.45	100.0	V	235.0	-13.3
485.997000	29.82	46.00	16.18	100.0	V	355.0	-12.0

## Final\_Result


Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

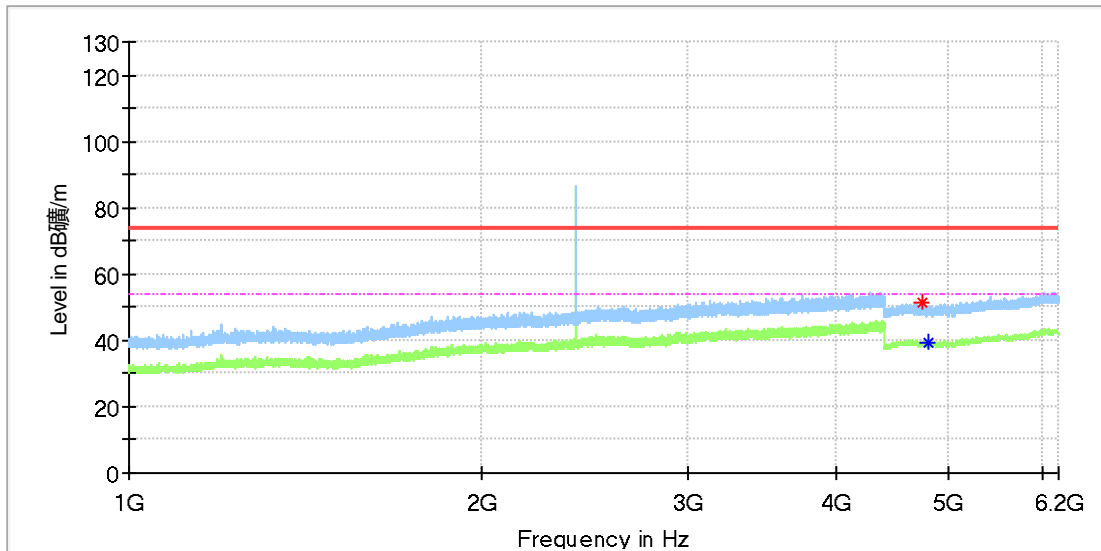

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4748.500000	51.66	---	74.00	22.34	150.0	H	184.0	11.9
4801.000000	---	39.29	54.00	14.71	150.0	H	207.0	11.8

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Low channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

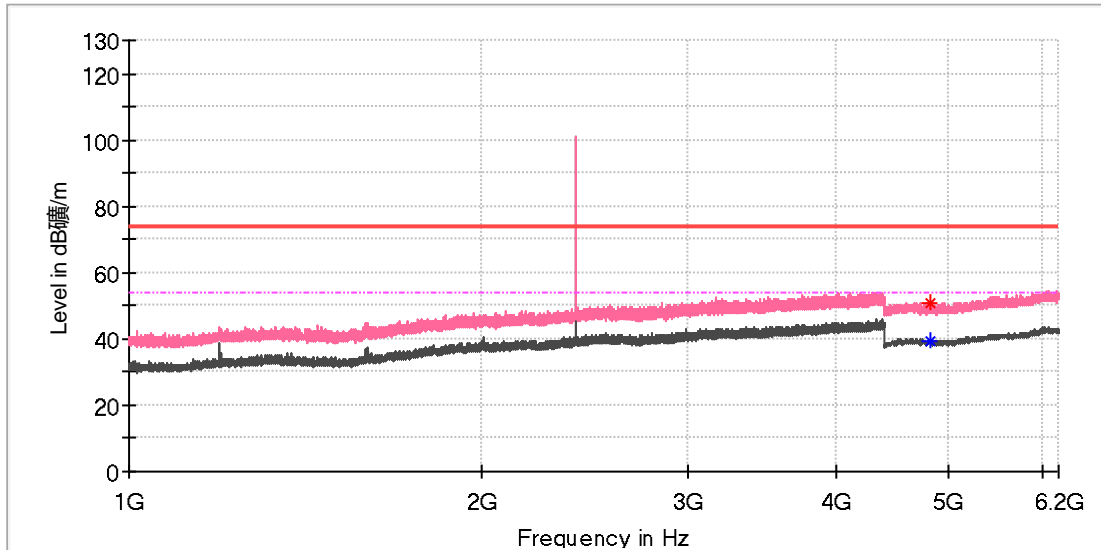

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4813.500000	50.58	---	74.00	23.42	150.0	V	226.0	11.8
4823.500000	---	39.08	54.00	14.92	150.0	V	205.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

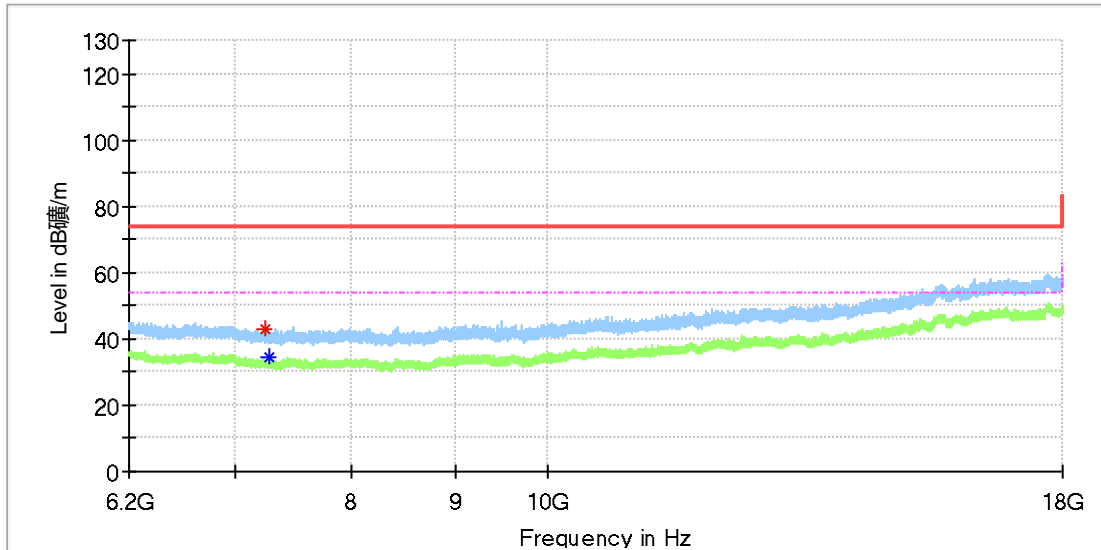

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7235.941667	42.66	---	74.00	31.34	150.0	H	189.0	8.6
7270.850000	---	34.41	54.00	19.59	150.0	H	129.0	8.5


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Low channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

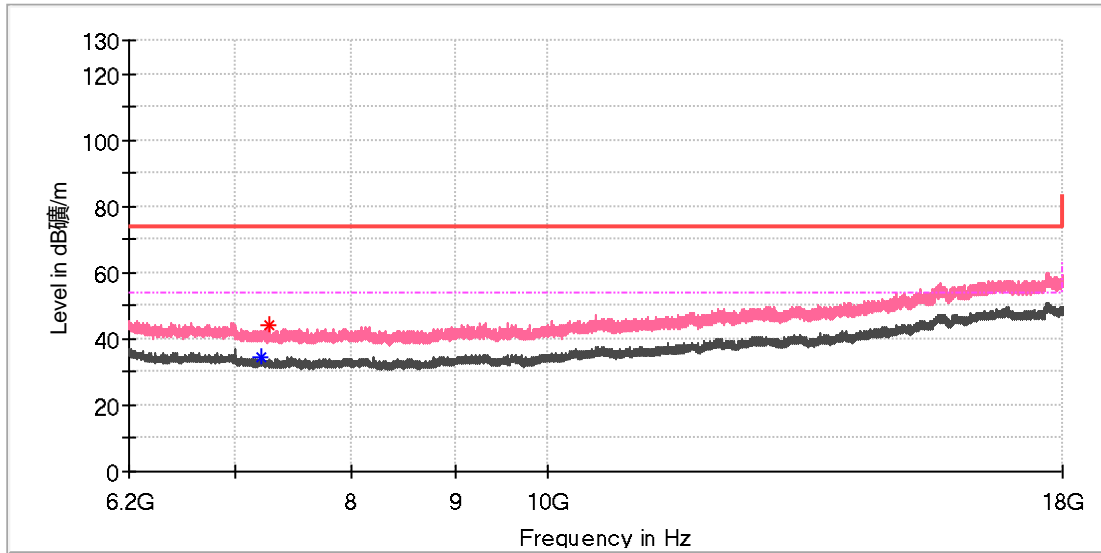

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7216.766667	---	34.61	54.00	19.39	150.0	V	20.0	8.7
7281.175000	43.85	---	74.00	30.15	150.0	V	8.0	8.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Mid channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

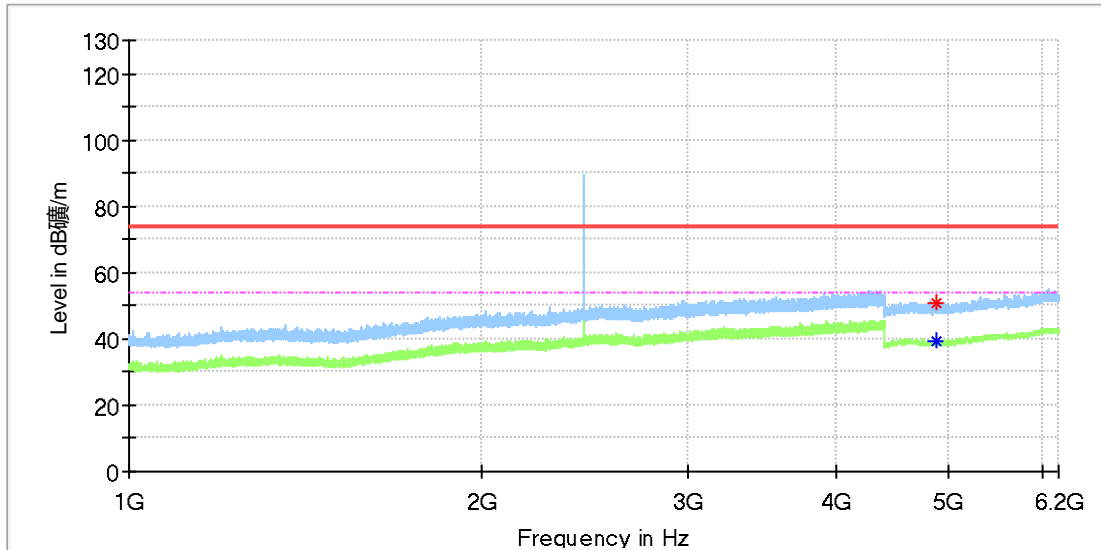

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4870.000000	50.64	---	74.00	23.36	150.0	H	247.0	11.8
4871.500000	---	39.33	54.00	14.67	150.0	H	303.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Mid channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

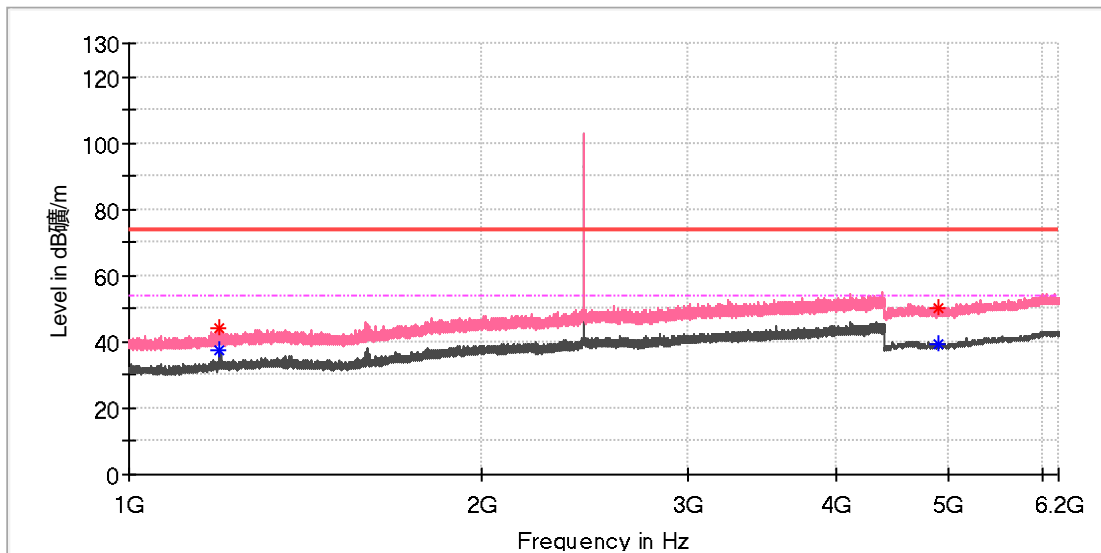

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1194.140000	44.21	---	74.00	29.79	150.0	V	192.0	1.1
1195.160000	---	37.50	54.00	16.50	150.0	V	143.0	1.1
4897.500000	50.31	---	74.00	23.69	150.0	V	117.0	11.8
4901.500000	---	39.30	54.00	14.70	150.0	V	166.0	11.8

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Mid channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

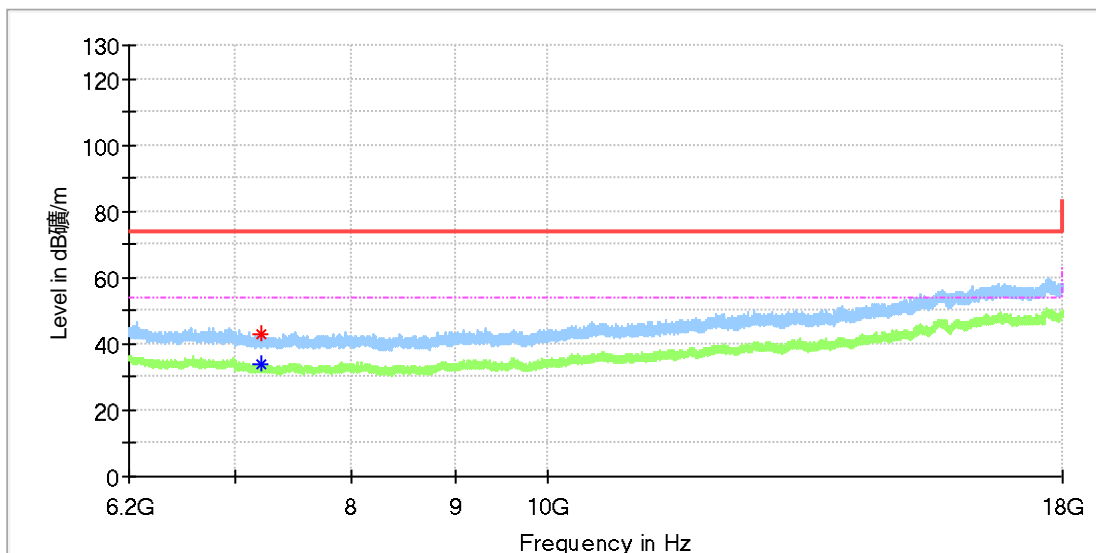

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7204.966667	42.75	---	74.00	31.25	150.0	H	271.0	8.8
7210.375000	---	33.58	54.00	20.42	150.0	H	3.0	8.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Mid channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

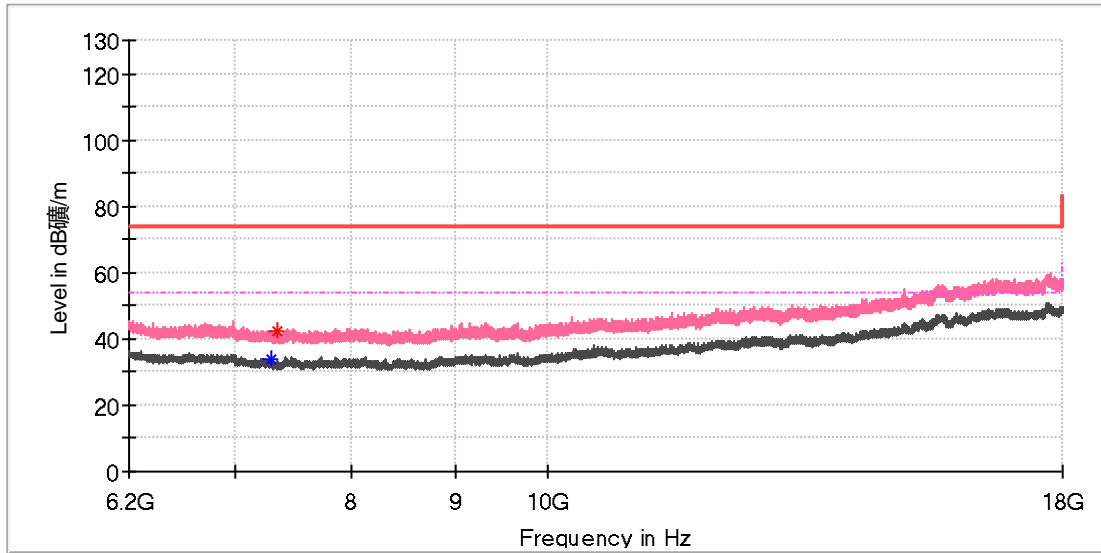

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7289.533333	---	34.15	54.00	19.85	150.0	V	312.0	8.4
7348.533333	42.51	---	74.00	31.49	150.0	V	238.0	8.1

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_High channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

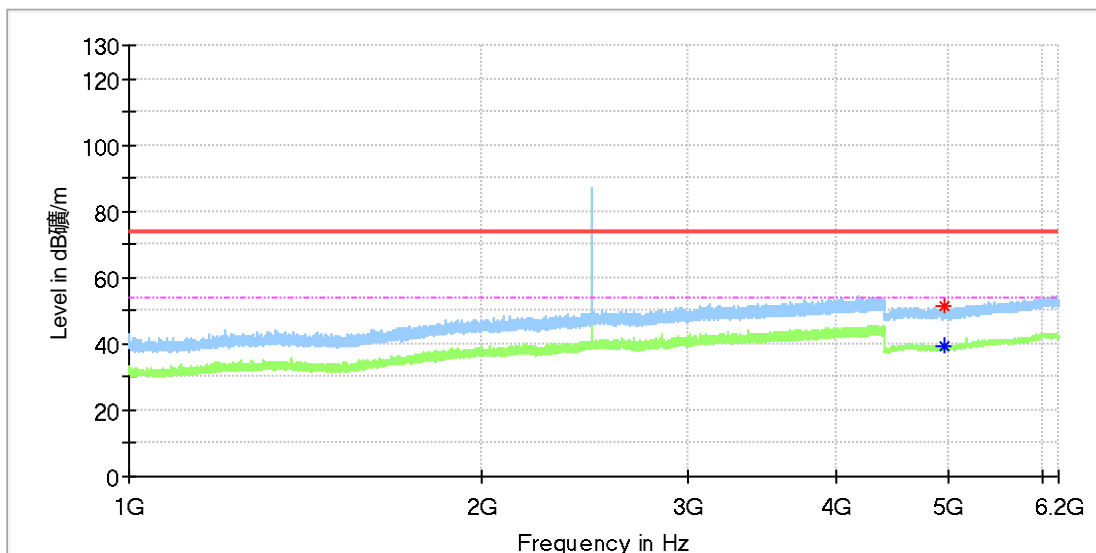

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.000000	---	39.23	54.00	14.77	150.0	H	352.0	11.8
4959.000000	51.31	---	74.00	22.69	150.0	H	340.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_High channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

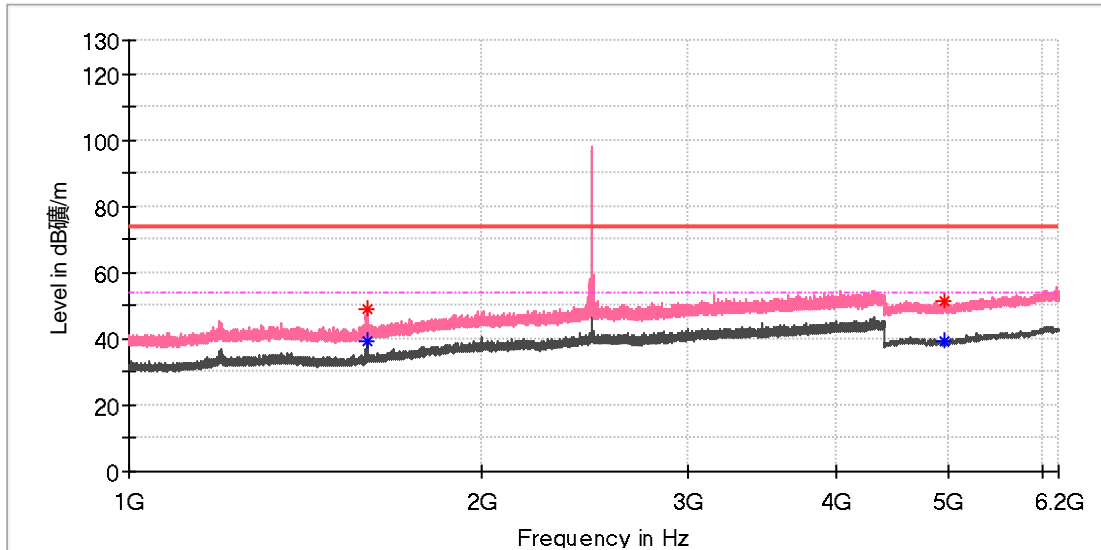

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1594.320000	48.99	---	74.00	25.01	150.0	V	171.0	2.0
1598.740000	---	39.11	54.00	14.89	150.0	V	171.0	2.1
4957.500000	51.24	---	74.00	22.76	150.0	V	59.0	11.8
4963.500000	---	39.53	54.00	14.47	150.0	V	109.0	11.8

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_High channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

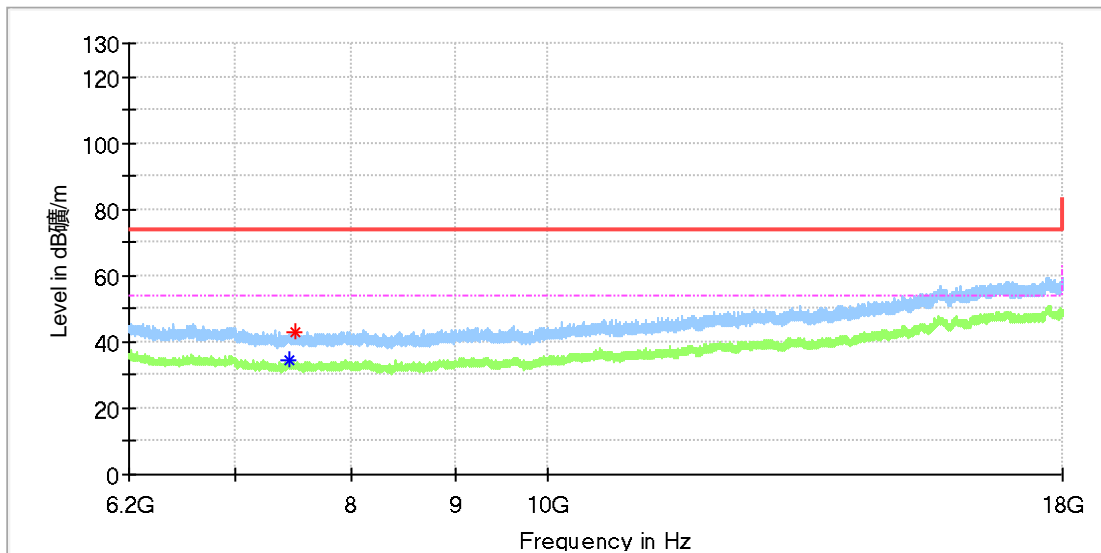

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7449.325000	---	34.23	54.00	19.77	150.0	H	95.0	8.5
7491.608333	42.95	---	74.00	31.05	150.0	H	0.0	8.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

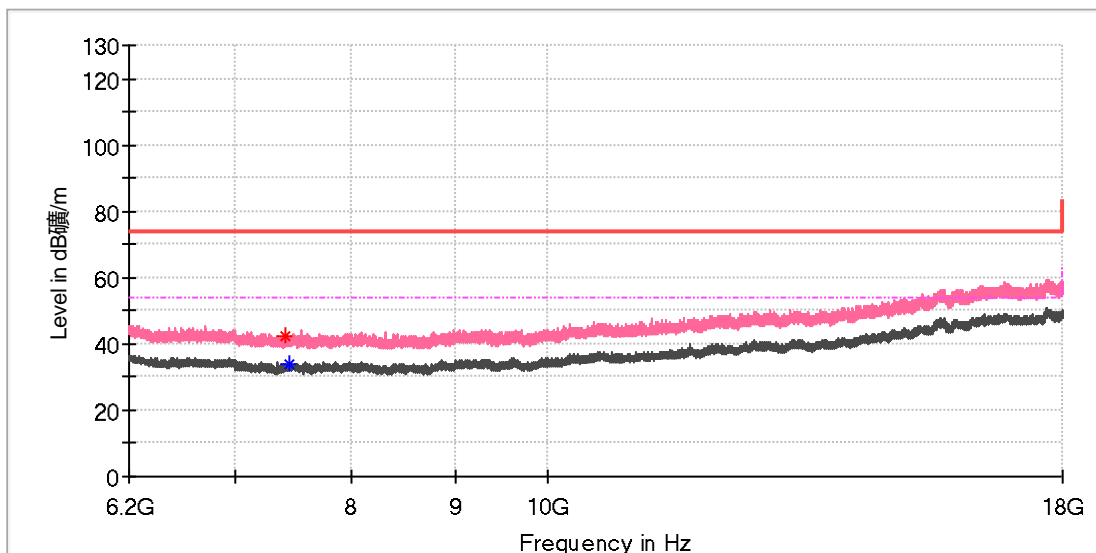

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7415.891667	42.51	---	74.00	31.49	150.0	V	310.0	8.3
7439.000000	---	33.78	54.00	20.23	150.0	V	356.0	8.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Evaluations for simultaneous use mode

As for simultaneous mode, only 2Tx2Rx,2Tx4Rx supported. Details as below:


<b>Simultaneous mode</b>	<b>Antenna in active</b>
2.4GHz SDR MIMO	ANT0+ANT1, or ANT0+ANT3, or ANT2+ANT1, or ANT2+ANT3
5GHz SDR MIMO	ANT0+ANT1, or ANT0+ANT3, or ANT2+ANT1, or ANT2+ANT3
2.4GHz Wi-Fi + 5GHz SDR	ANT0+ANT1, or ANT2+ANT1
5.8GHz Wi-Fi + 2.4GHz SDR	ANT0+ANT1, or ANT2+ANT1
Bluetooth + 5.2GHz SDR	ANT0+ANT1, or ANT2+ANT1

All above modes evaluated, only the worst-case modes (2.4GHz SDR MIMO, 5GHz SDR MIMO) reported, refer to CN23WKV3 002\_Appendix B, CN23WKV3 003\_Appendix A and CN23WKV3 004\_Appendix A .

### Appendix A.6: Test Results of Radiated Emissions in Restricted Bands

#### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_Low channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

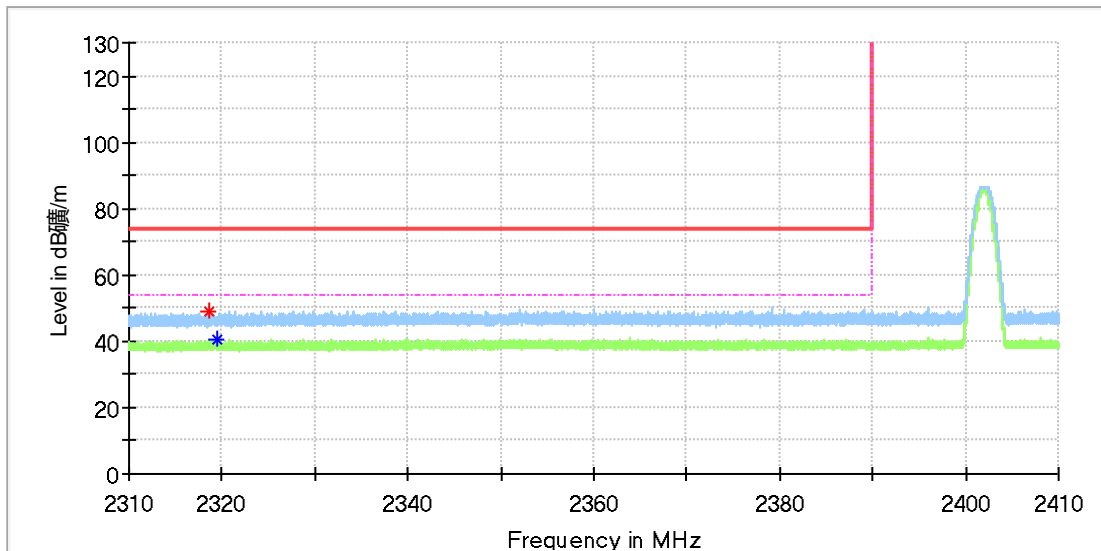

#### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2318.725000	48.90	---	74.00	25.10	150.0	H	107.0	6.6
2319.555000	---	40.61	54.00	13.39	150.0	H	31.0	6.6

#### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: BLE 1M\_Low channel  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

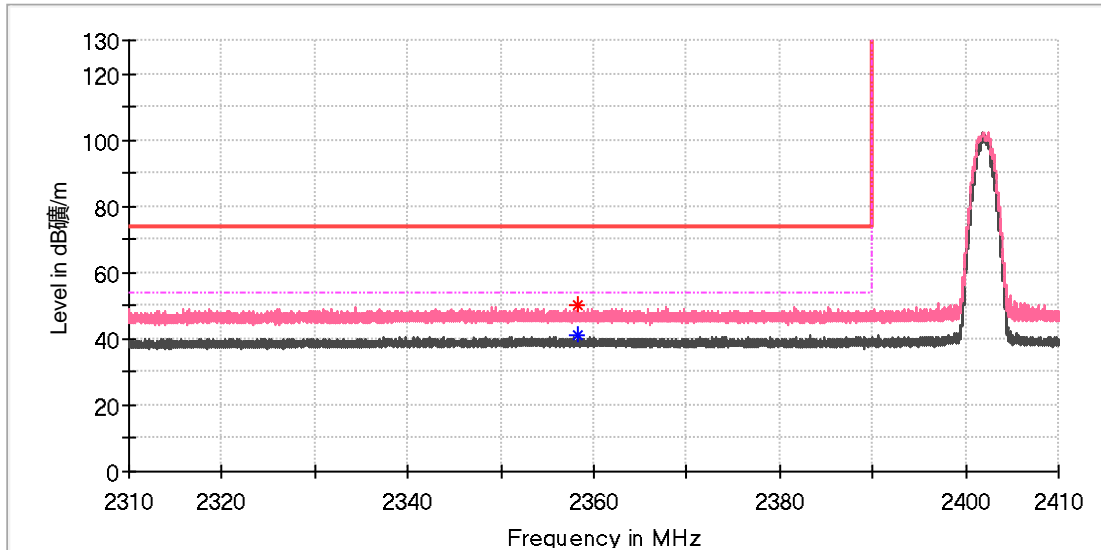

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.180000	50.16	---	74.00	23.84	150.0	V	34.0	6.9
2358.280000	---	41.29	54.00	12.71	150.0	V	358.0	6.9

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

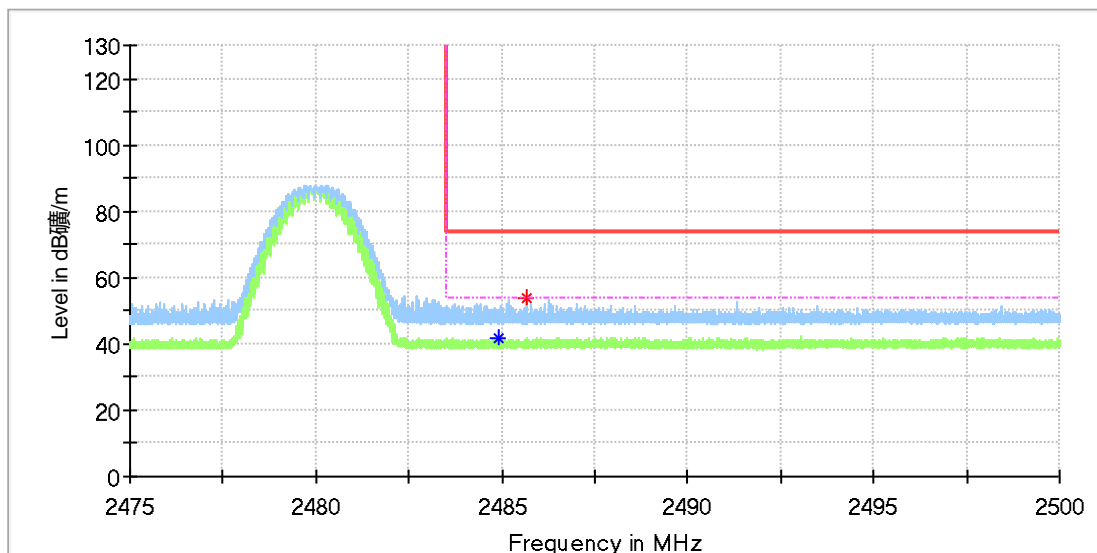

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.915000	---	41.48	54.00	12.52	150.0	H	78.0	7.4
2485.650000	53.85	---	74.00	20.15	150.0	H	96.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	BLE 1M_High channel
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

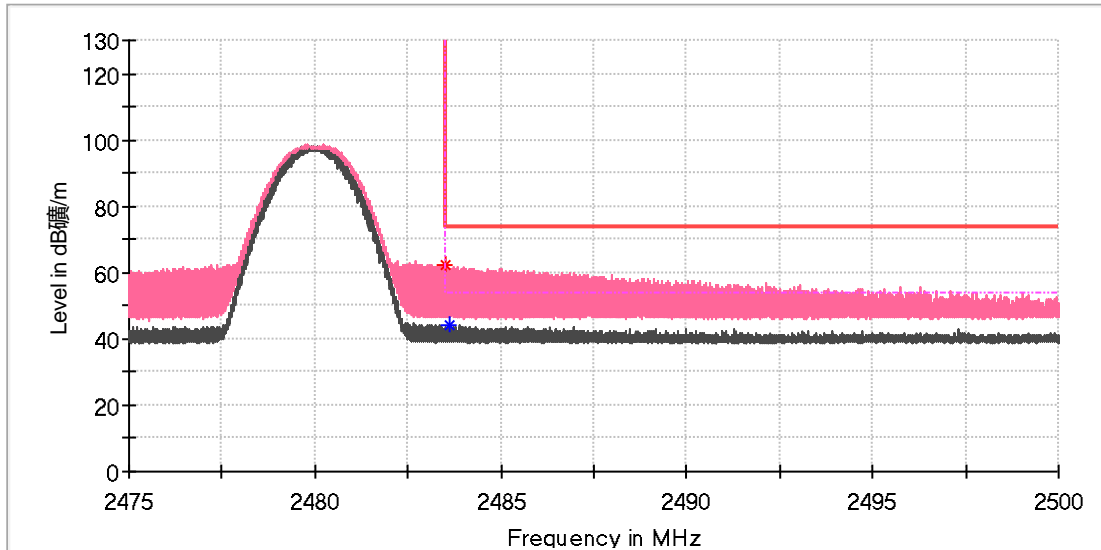

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.526250	62.16	---	74.00	11.84	150.0	V	353.0	7.4
2483.621250	---	44.01	54.00	9.99	150.0	V	345.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---