
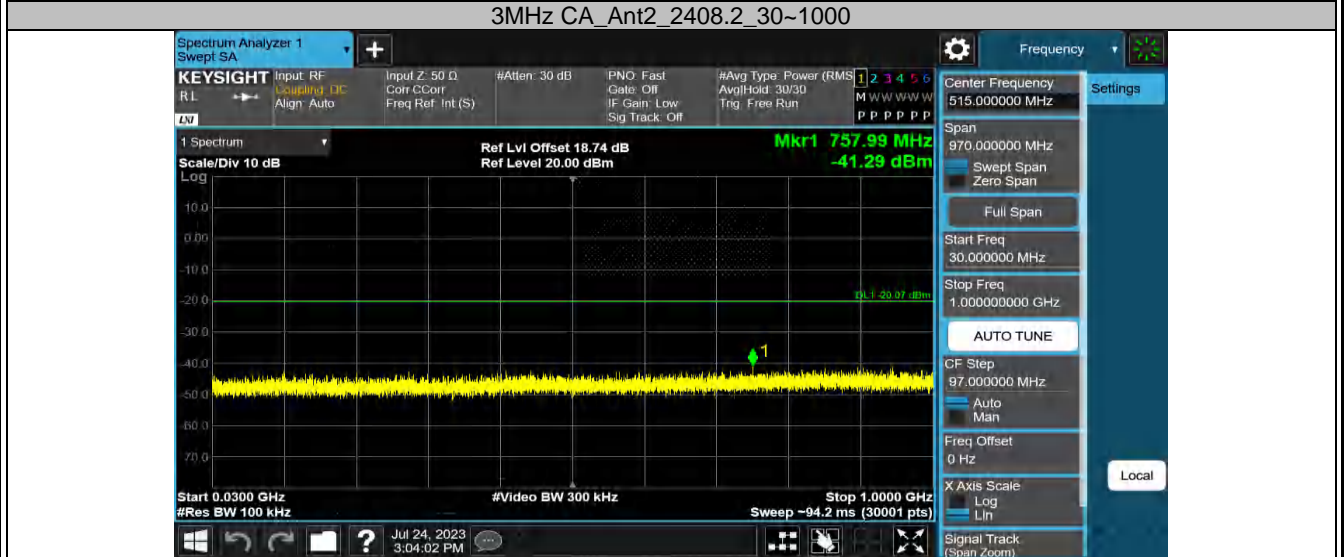



**3MHz\_Ant2\_2465.5\_30~1000**

**3MHz\_Ant2\_2465.5\_1000~26500**


2.4GHz SDR, 3MHz BW CA mode

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
3MHz CA	Ant2	2408.2	Reference	9.93	9.93	---	PASS
			30~1000	9.93	-41.3	≤-20.07	PASS
			1000~26500	9.93	-32.27	≤-20.07	PASS
		2438.2	Reference	10.64	10.64	---	PASS
			30~1000	10.64	-41.49	≤-19.36	PASS
			1000~26500	10.64	-32.63	≤-19.36	PASS
		2468.2	Reference	13.86	13.86	---	PASS
			30~1000	13.86	-41.31	≤-16.14	PASS
			1000~26500	13.86	-32.64	≤-16.14	PASS

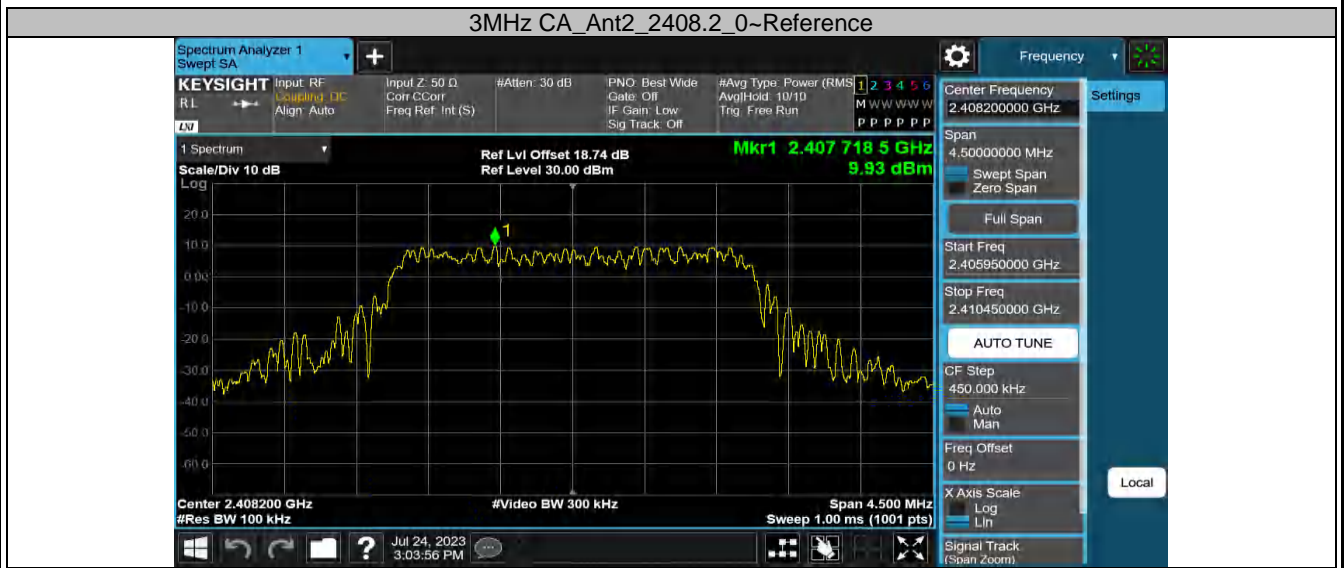


3MHz CA\_Ant0\_2438.2\_0~Reference



3MHz CA\_Ant2\_2438.2\_30~1000




3MHz CA\_Ant2\_2438.2\_1000~26500

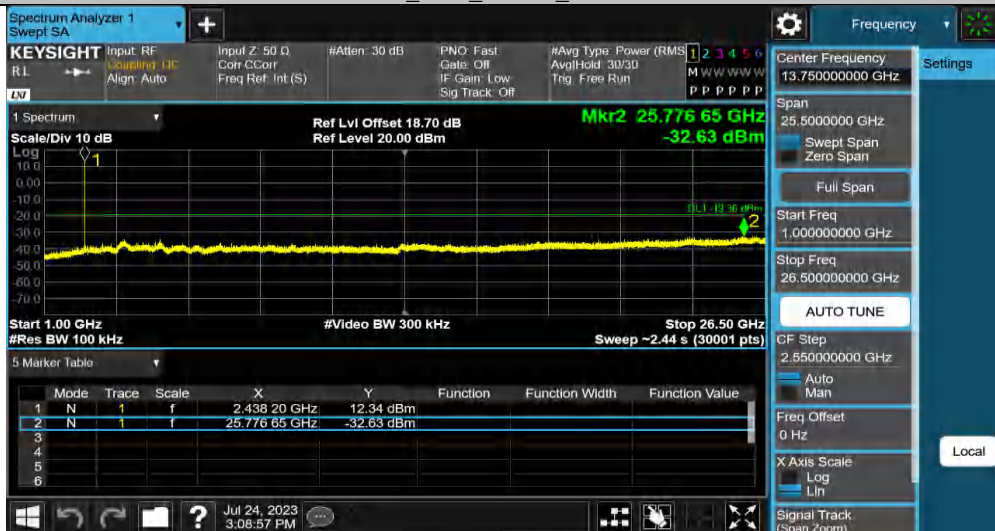


3MHz CA\_Ant2\_2468.2\_0~Reference



3MHz CA\_Ant2\_2468.2\_30~1000

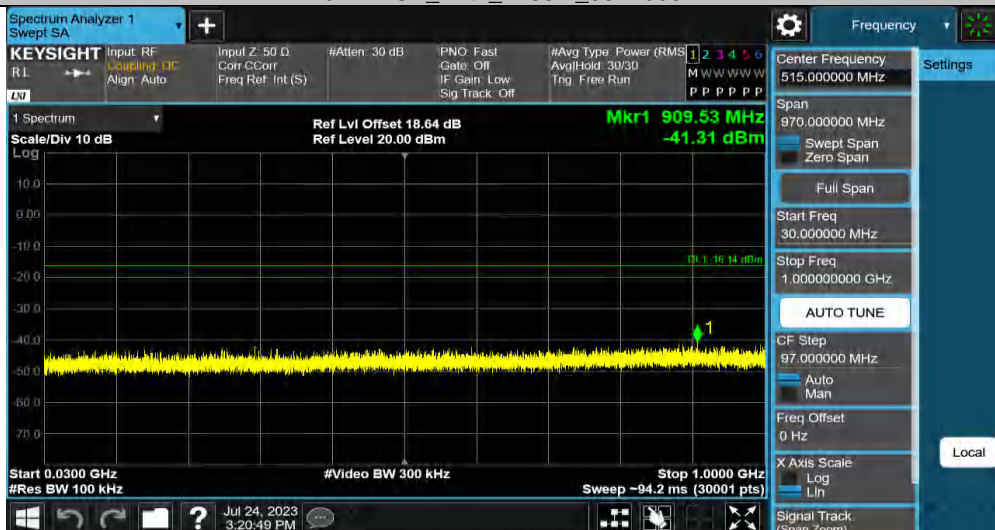

3MHz CA\_Ant2\_2468.2\_1000~26500

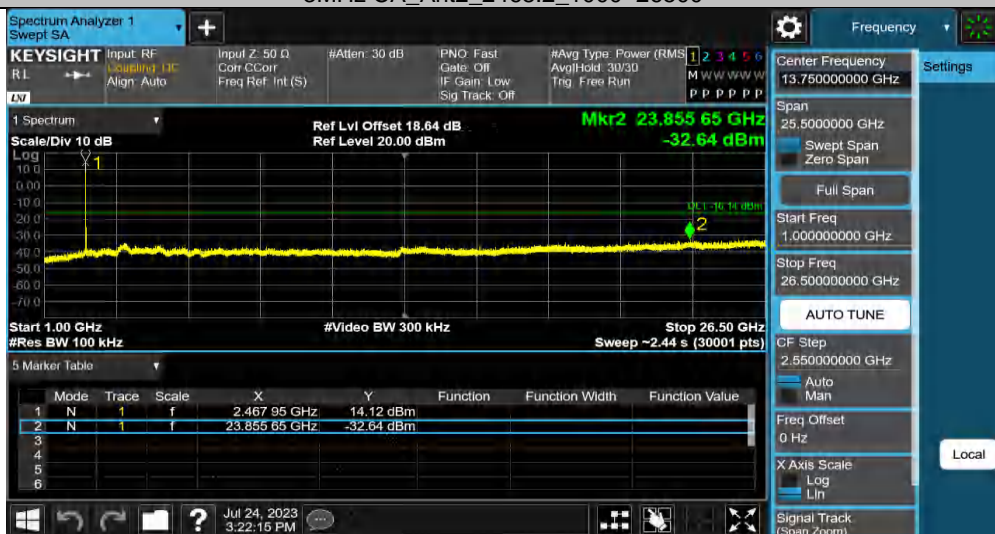


2.4GHz SDR, 5MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
5MHz	Ant2	2404.5	Reference	11.26	11.26	---	PASS
			30~1000	11.26	-41.24	≤-18.74	PASS
			1000~26500	11.26	-32.5	≤-18.74	PASS
		2434.5	Reference	11.25	11.25	---	PASS
			30~1000	11.25	-40.87	≤-18.75	PASS
			1000~26500	11.25	-31.96	≤-18.75	PASS
		2469.5	Reference	9.15	9.15	---	PASS
			30~1000	9.15	-41.43	≤-20.85	PASS
			1000~26500	9.15	-32.36	≤-20.85	PASS


5MHz\_Ant2\_2404.5\_0-Reference



5MHz\_Ant2\_2404.5\_30~1000

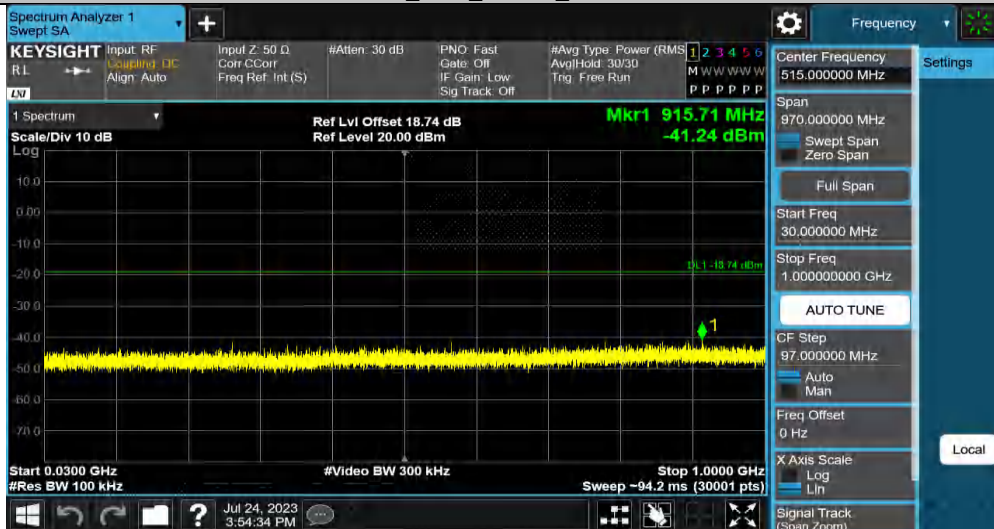


5MHz\_Ant2\_2404.5\_1000~26500

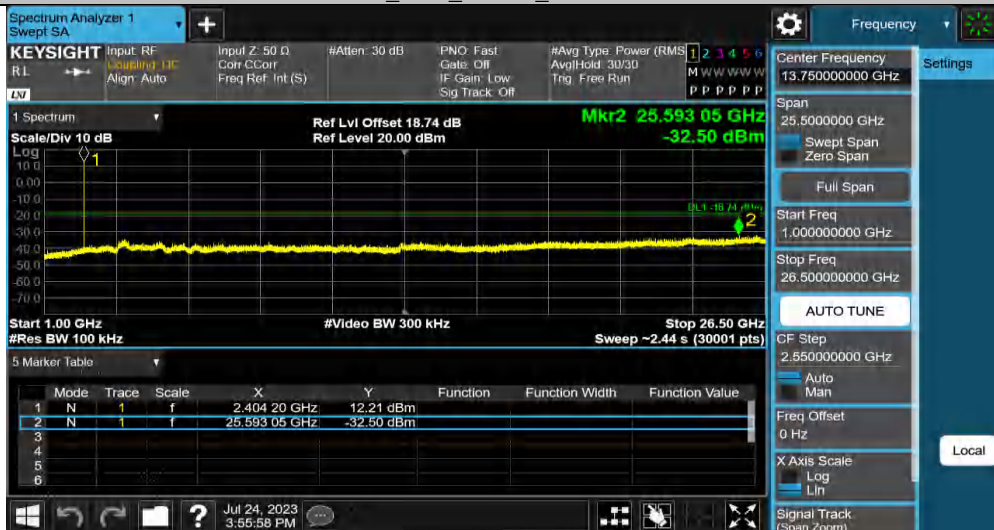


5MHz\_Ant2\_2434.5\_0-Reference



5MHz\_Ant2\_2434.5\_30~1000

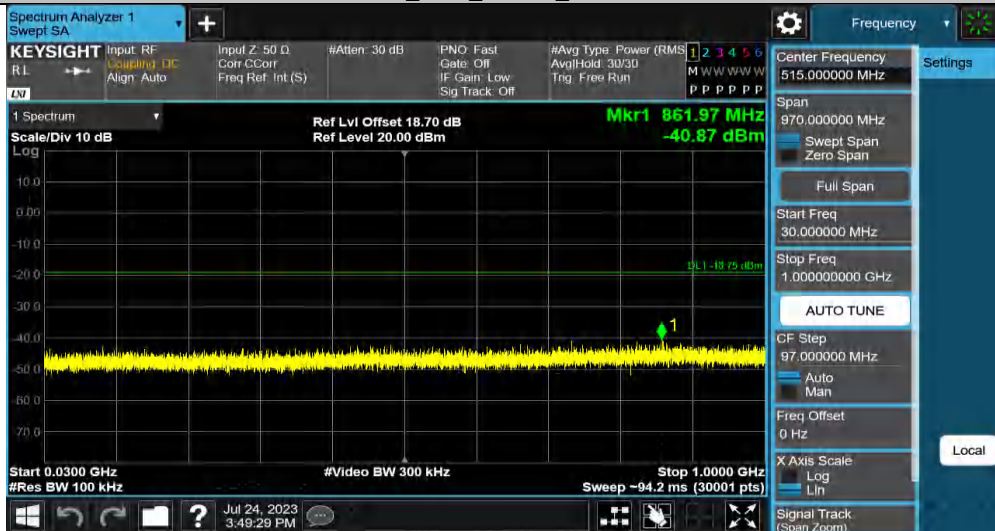

5MHz\_Ant2\_2434.5\_1000~26500

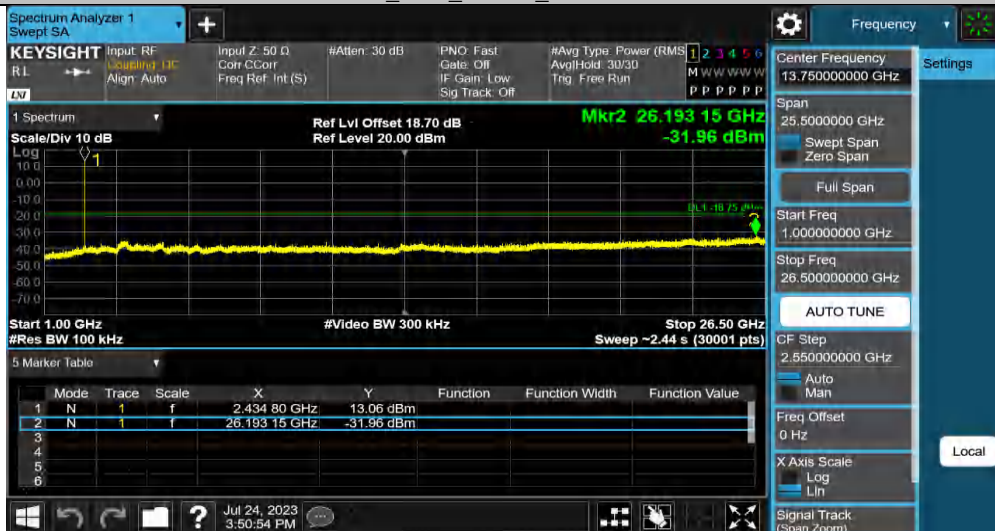

5MHz\_Ant2\_2469.5\_0~Reference






5MHz\_Ant2\_2469.5\_30~1000



5MHz\_Ant2\_2469.5\_1000~26500

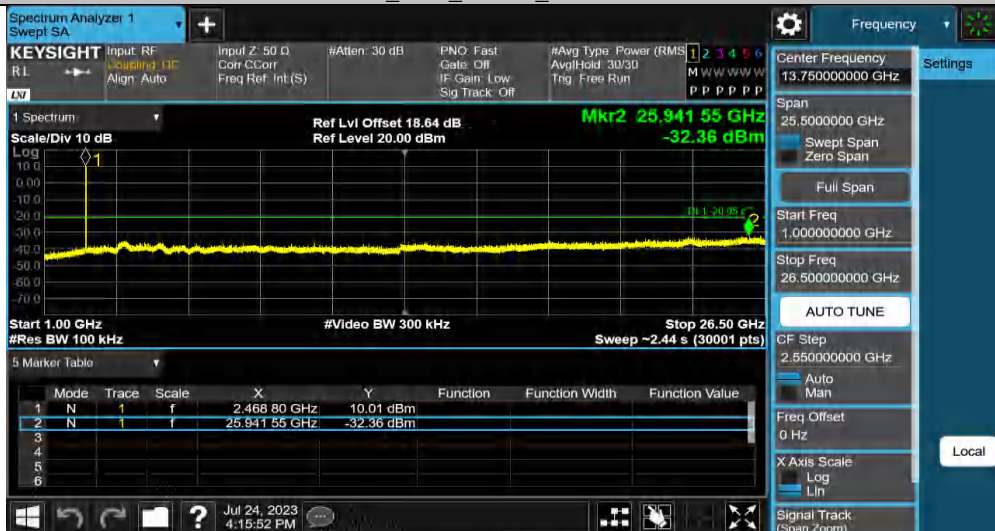

2.4GHz SDR, 10MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
10MHz Bandwidth	Ant2	2407.5	Reference	12.30	12.30	---	PASS
			30~1000	12.30	-40.57	≤-17.7	PASS
			1000~26500	12.30	-31.5	≤-17.7	PASS
		2437.5	Reference	16.05	16.05	---	PASS
			30~1000	16.05	-40.01	≤-13.95	PASS
			1000~26500	16.05	-32.72	≤-13.95	PASS
		2467.5	Reference	15.01	15.01	---	PASS
			30~1000	15.01	-41.59	≤-14.99	PASS
			1000~26500	15.01	-32.03	≤-14.99	PASS

10MHz Bandwidth\_Ant2\_2407.5\_0-Reference




10MHz Bandwidth\_Ant2\_2407.5\_30-1000



10MHz Bandwidth\_Ant2\_2407.5\_1000-26500




10MHz Bandwidth\_Ant2\_2437.5\_0-Reference

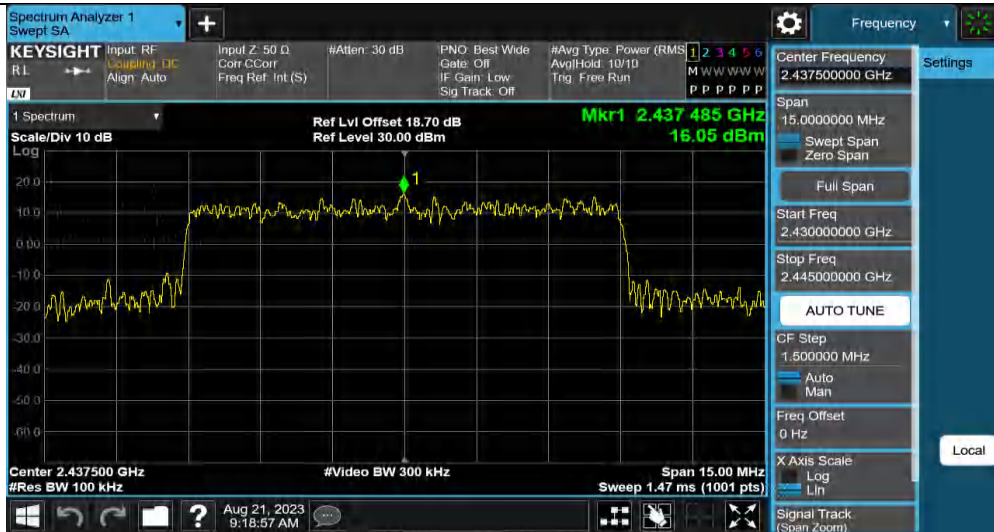

10MHz Bandwidth\_Ant2\_2437.5\_30~1000




10MHz Bandwidth\_Ant2\_2437.5\_1000~26500

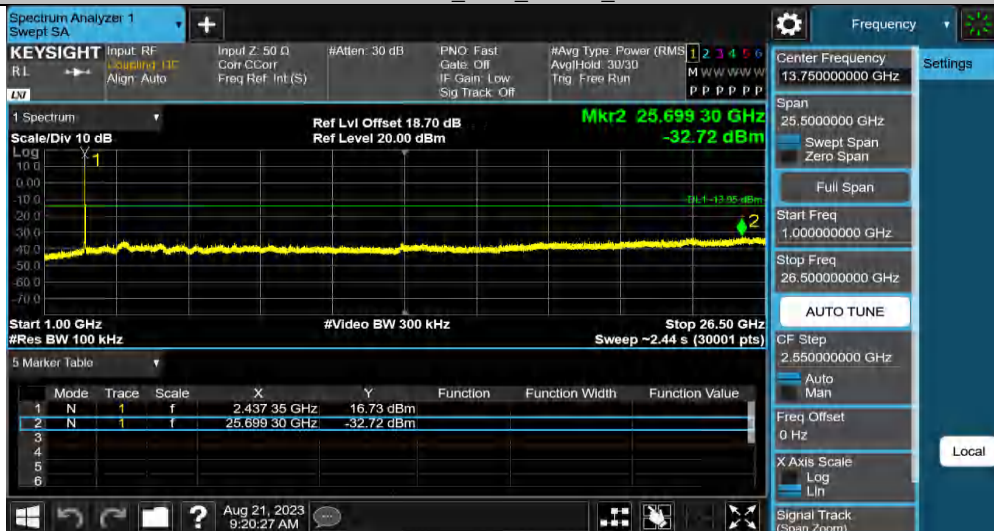


10MHz Bandwidth\_Ant2\_2467.5\_0~Reference



10MHz Bandwidth\_Ant2\_2467.5\_30~1000

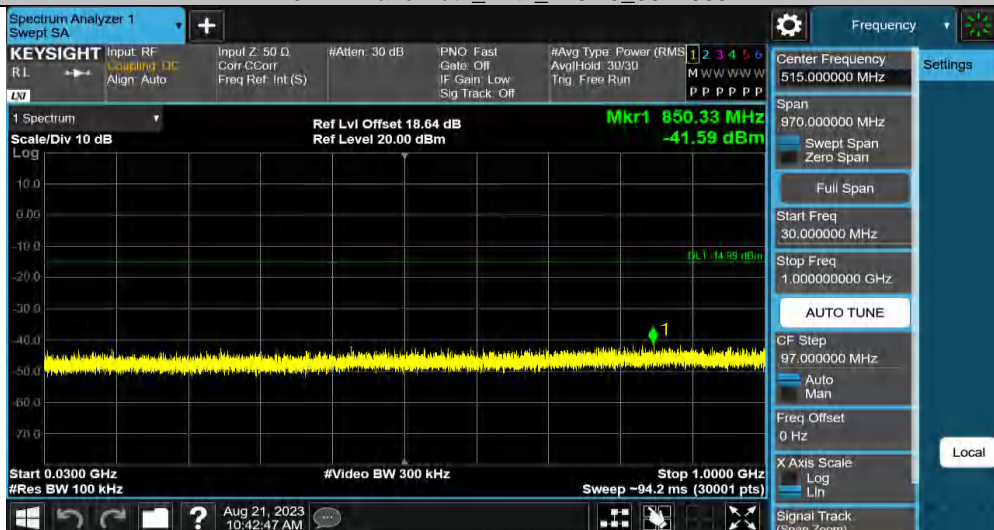


10MHz Bandwidth\_Ant2\_2467.5\_1000~26500

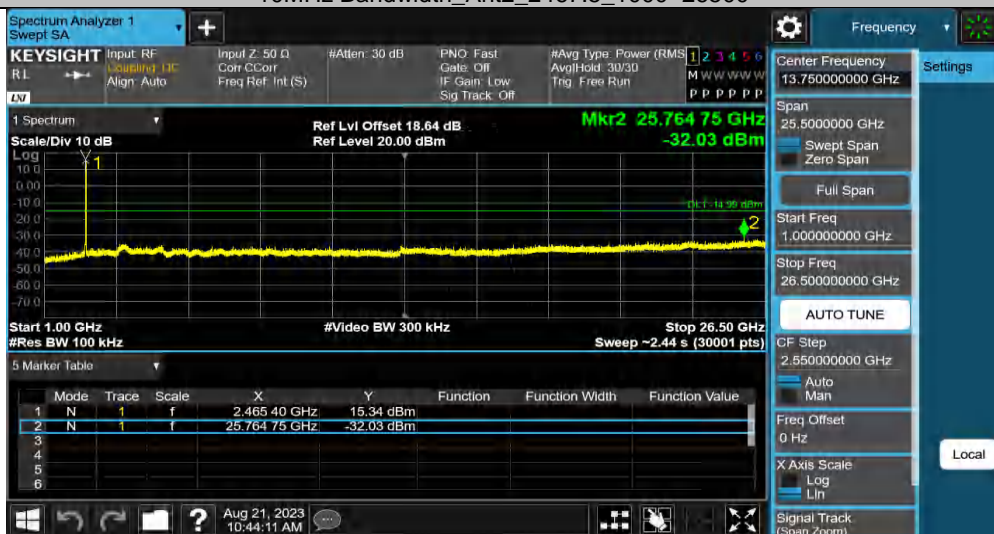


2.4GHz SDR, 20MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
20MHz Bandwidth	Ant2	2412.5	Reference	9.67	9.67	---	PASS
			30~1000	9.67	-41.16	≤-20.33	PASS
			1000~26500	9.67	-32.35	≤-20.33	PASS
		2437.5	Reference	12.46	12.46	---	PASS
			30~1000	12.46	-41.2	≤-17.54	PASS
			1000~26500	12.46	-32.27	≤-17.54	PASS
		2462.5	Reference	11.99	11.99	---	PASS
			30~1000	11.99	-41.88	≤-18.01	PASS
			1000~26500	11.99	-31.47	≤-18.01	PASS

20MHz Bandwidth\_Ant2\_2412.5\_0-Reference

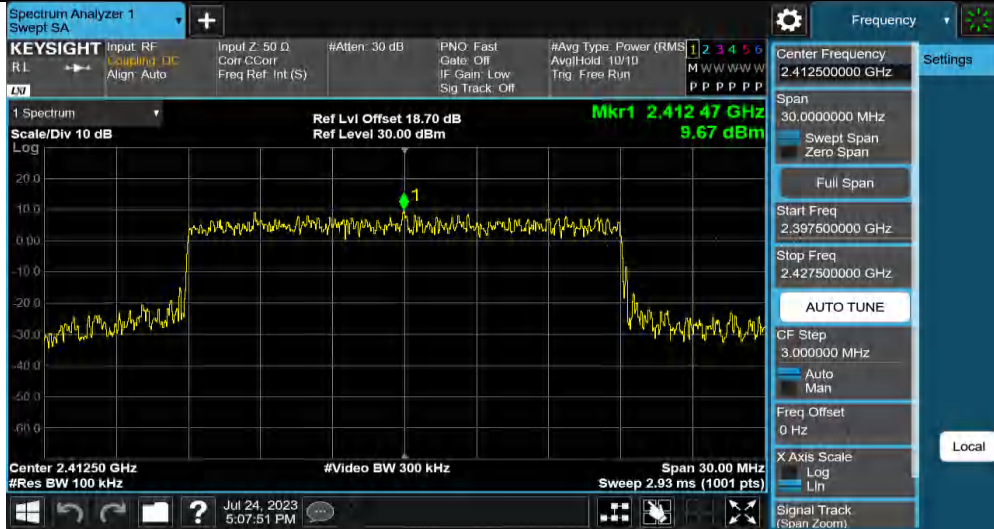

20MHz Bandwidth\_Ant2\_2412.5\_30-1000

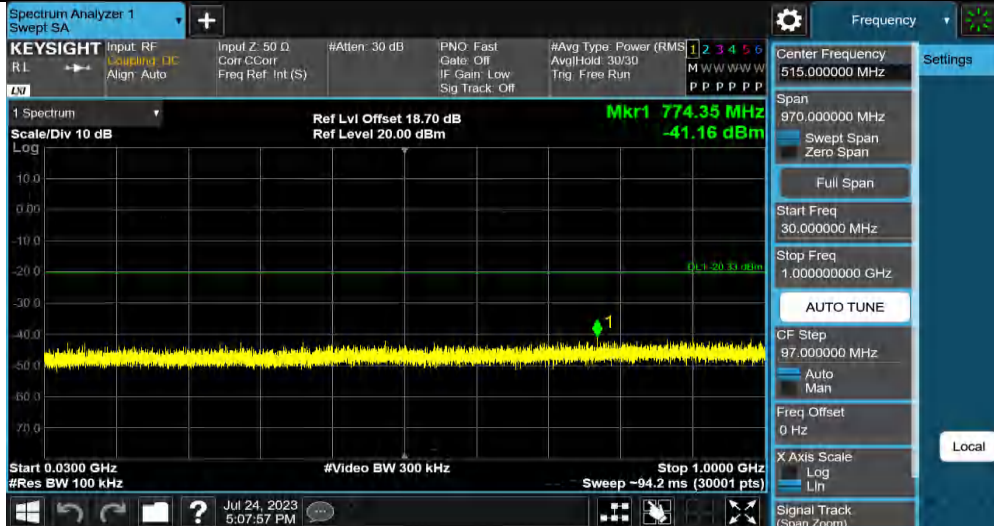

20MHz Bandwidth\_Ant2\_2412.5\_1000-26500



20MHz Bandwidth\_Ant2\_2437.5\_0-Reference



20MHz Bandwidth\_Ant2\_2437.5\_30~1000




20MHz Bandwidth\_Ant2\_2437.5\_1000~26500




20MHz Bandwidth\_Ant2\_2462.5\_0~Reference



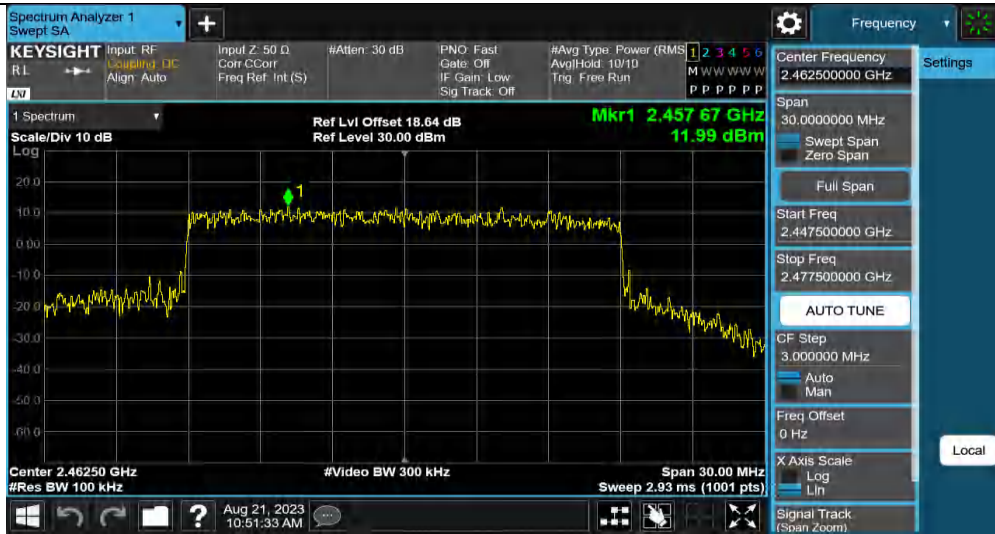

20MHz Bandwidth\_Ant2\_2462.5\_30~1000

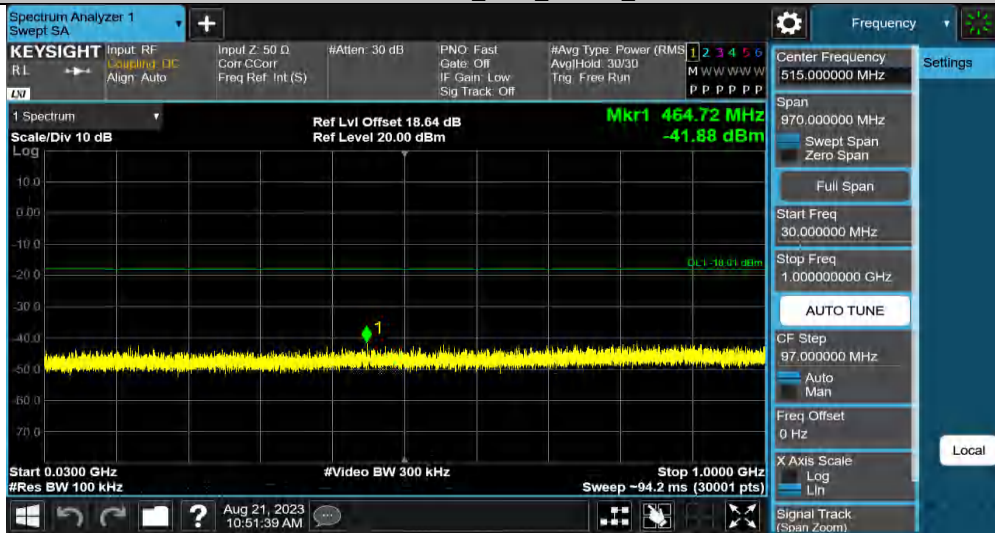


20MHz Bandwidth\_Ant2\_2462.5\_1000~26500




2.4GHz SDR, 40MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
40MHz Bandwidth	Ant2	2422.5	Reference	4.68	4.68	---	PASS
			30~1000	4.68	-41.71	≤-25.32	PASS
			1000~26500	4.68	-32.03	≤-25.32	PASS
		2437.5	Reference	10.60	10.60	---	PASS
			30~1000	10.60	-41.69	≤-19.4	PASS
			1000~26500	10.60	-32.64	≤-19.4	PASS
		2452.5	Reference	10.34	10.34	---	PASS
			30~1000	10.34	-41.42	≤-19.66	PASS
			1000~26500	10.34	-32.75	≤-19.66	PASS

40MHz Bandwidth\_Ant2\_2422.5\_0-Reference

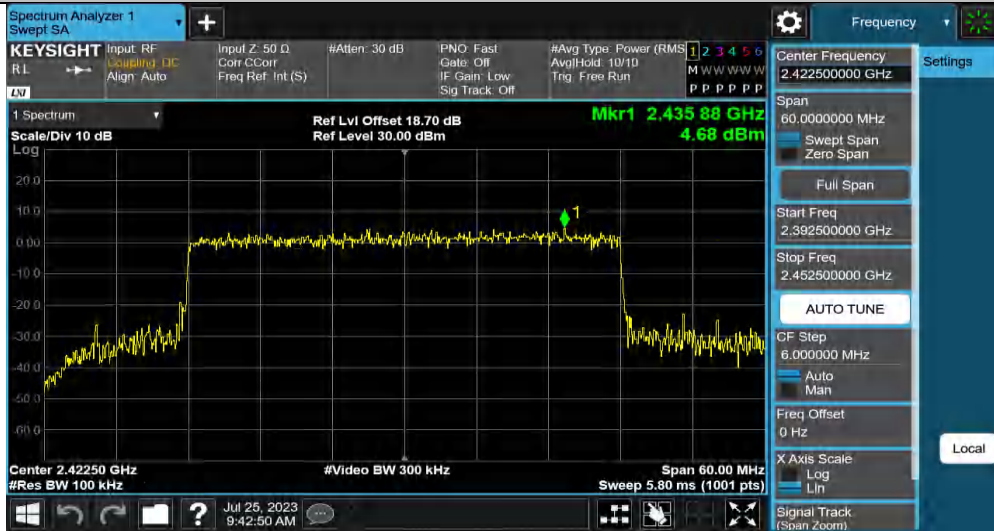

40MHz Bandwidth\_Ant2\_2422.5\_30-1000

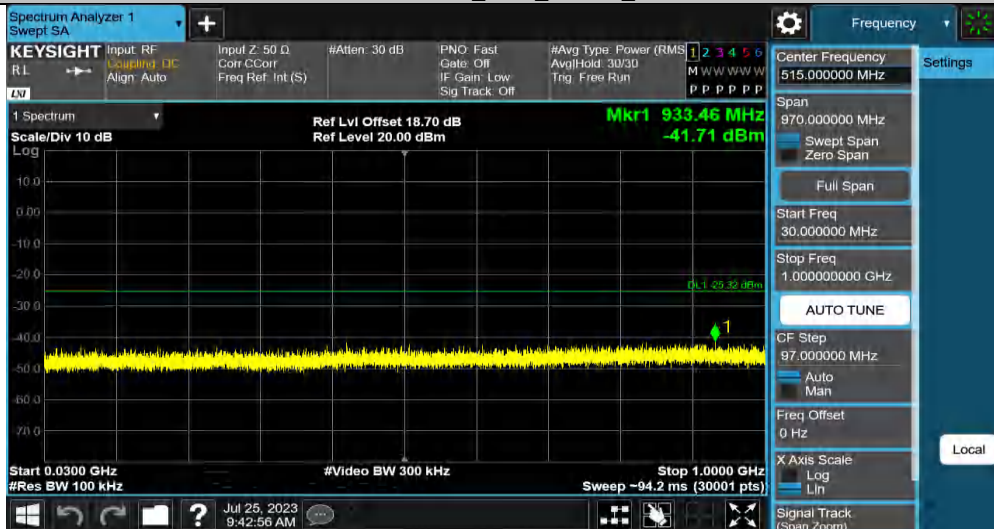

40MHz Bandwidth\_Ant2\_2422.5\_1000-26500




40MHz Bandwidth\_Ant2\_2437.5\_0-Reference



40MHz Bandwidth\_Ant2\_2437.5\_30~1000



40MHz Bandwidth\_Ant2\_2437.5\_1000~26500

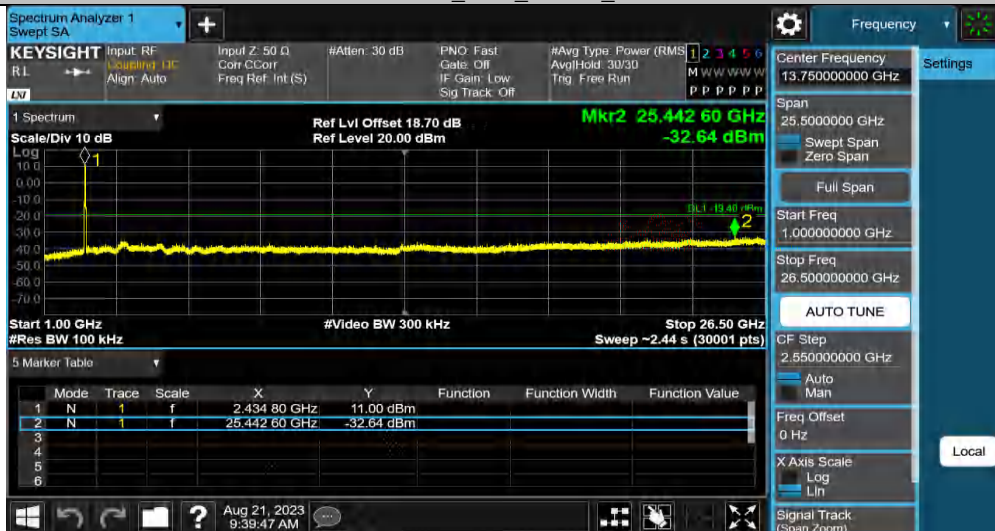

40MHz Bandwidth\_Ant2\_2452.5\_0~Reference



40MHz Bandwidth\_Ant2\_2452.5\_30~1000



40MHz Bandwidth\_Ant2\_2452.5\_1000~26500



2.4GHz SDR, 60MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
60MHz Bandwidth	Ant2	2432.5	Reference	4.00	4.00	---	PASS
			30~1000	4.00	-41.4	≤-26	PASS
			1000~26500	4.00	-31.92	≤-26	PASS
		2437.5	Reference	12.09	12.09	---	PASS
			30~1000	12.09	-41.11	≤-17.91	PASS
			1000~26500	12.09	-31.9	≤-17.91	PASS
		2442.5	Reference	11.54	11.54	---	PASS
			30~1000	11.54	-41.73	≤-18.46	PASS
			1000~26500	11.54	-32.98	≤-18.46	PASS

60MHz Bandwidth\_Ant2\_2432.5\_0-Reference



60MHz Bandwidth\_Ant2\_2432.5\_30-1000



60MHz Bandwidth\_Ant2\_2432.5\_1000-26500




60MHz Bandwidth\_Ant2\_2437.5\_0-Reference



60MHz Bandwidth\_Ant2\_2437.5\_30~1000



60MHz Bandwidth\_Ant2\_2437.5\_1000~26500

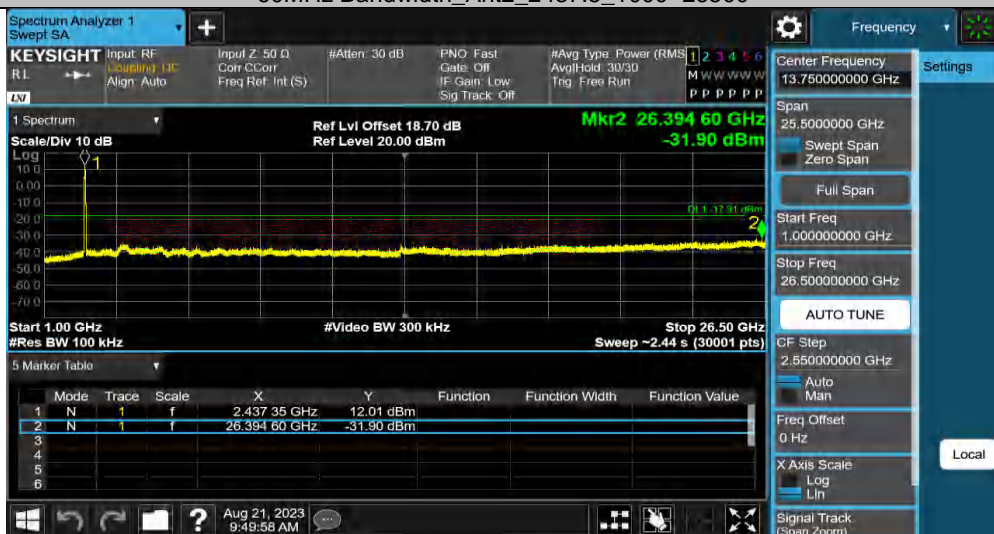

60MHz Bandwidth\_Ant2\_2442.5\_0~Reference






60MHz Bandwidth\_Ant2\_2442.5\_30~1000



60MHz Bandwidth\_Ant2\_2442.5\_1000~26500

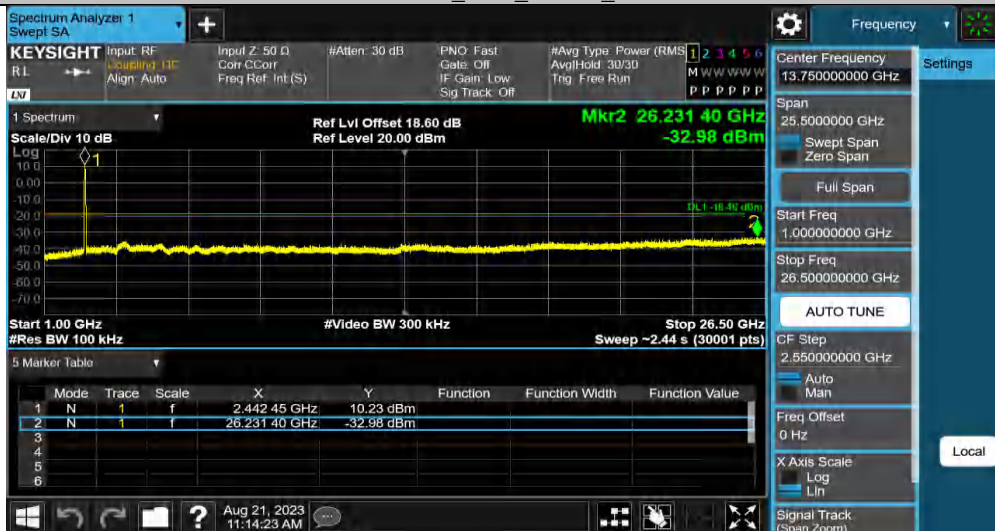

## Appendix B.5: Test Results of Radiated Spurious Emissions


Note:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

### 30MHz - 1GHz (Worst case)

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

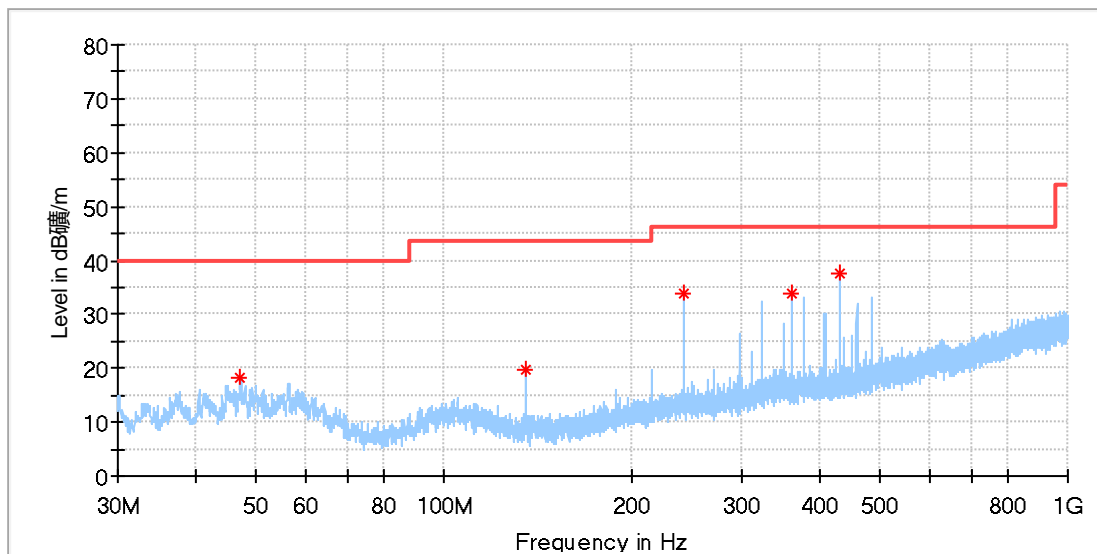

### Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.217500	18.24	40.00	21.76	100.0	H	329.0	-18.5
135.002500	19.68	43.50	23.82	100.0	H	286.0	-22.1
243.012000	33.78	46.00	12.22	100.0	H	195.0	-17.7
360.042500	33.69	46.00	12.31	100.0	H	24.0	-14.6
432.016500	37.75	46.00	8.25	100.0	H	315.0	-13.3

### Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

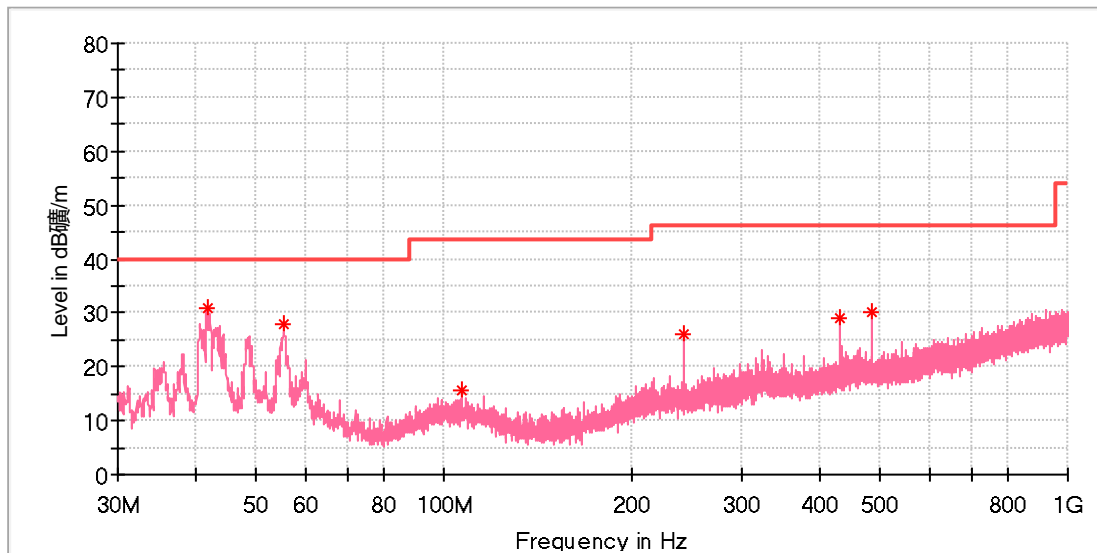

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.737000	30.99	40.00	9.01	100.0	V	96.0	-19.6
55.365500	28.07	40.00	11.93	100.0	V	211.0	-18.5
106.872500	15.78	43.50	27.72	100.0	V	0.0	-18.9
243.012000	25.95	46.00	20.05	100.0	V	272.0	-17.7
432.016500	28.84	46.00	17.16	100.0	V	204.0	-13.3
485.997000	30.14	46.00	15.86	100.0	V	3.0	-12.0

## Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---


**1GHz - 18GHz**

Note: The highest waveform in the figure is 2.4GHz SDR Fundamental.

MIMO mode (Worst case\_ANT0+ANT3)

**EUT Information**

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

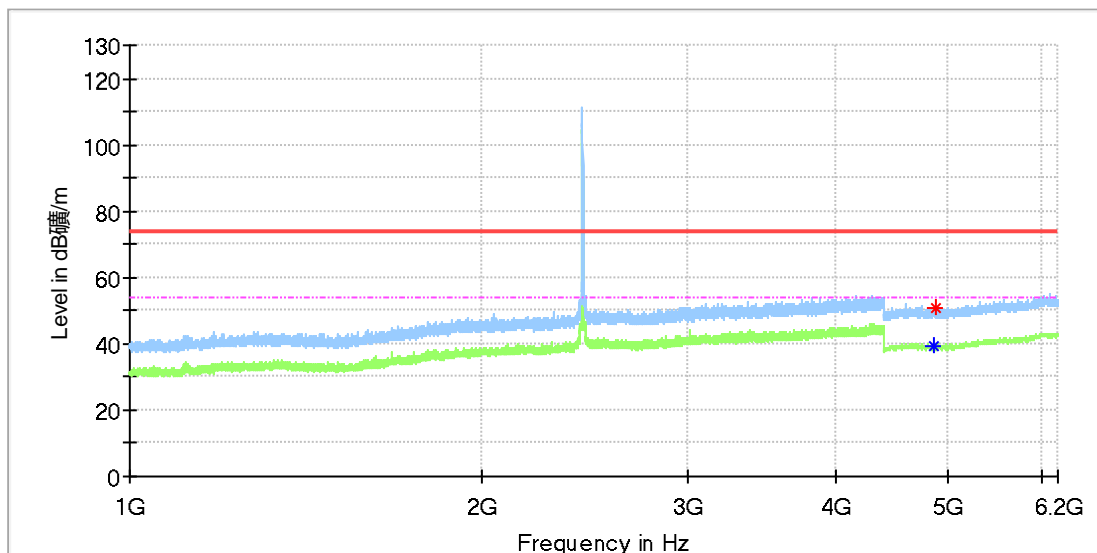
**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4850.000000	---	39.47	54.00	14.53	150.0	H	75.0	11.8
4882.500000	50.71	---	74.00	23.29	150.0	H	0.0	11.8

**Final\_Result**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

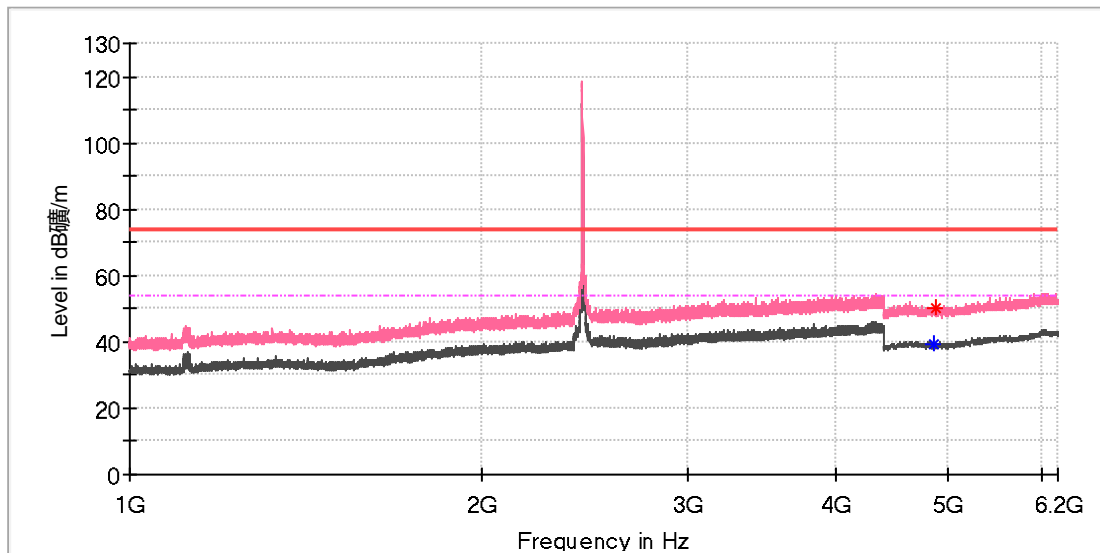

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4863.000000	---	39.58	54.00	14.42	150.0	V	228.0	11.8
4879.500000	49.94	---	74.00	24.06	150.0	V	5.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_1.4M\_2435.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

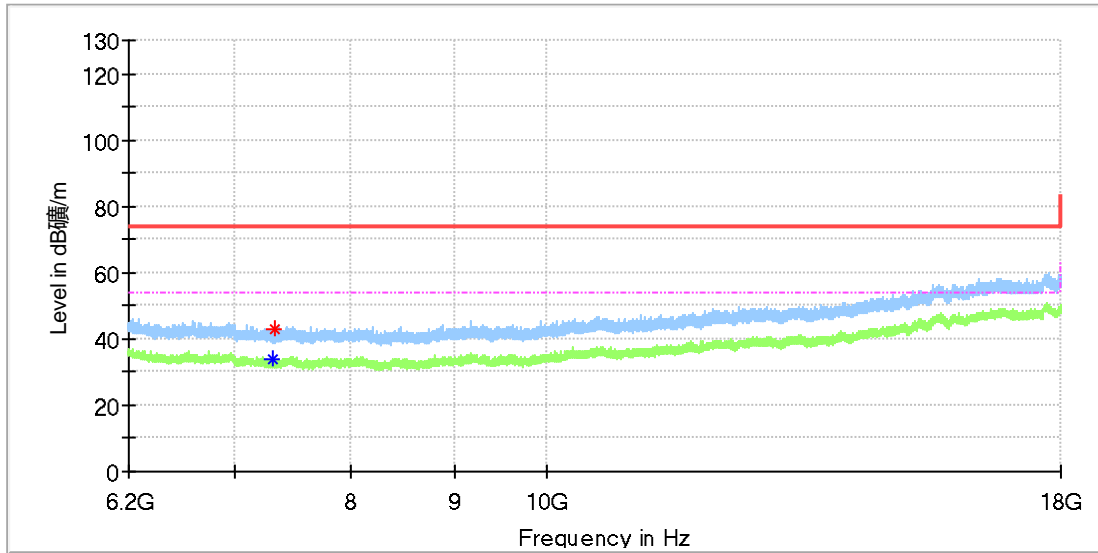

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7305.758333	---	33.58	54.00	20.42	150.0	H	316.0	8.3
7321.491667	43.20	---	74.00	30.80	150.0	H	168.0	8.2

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

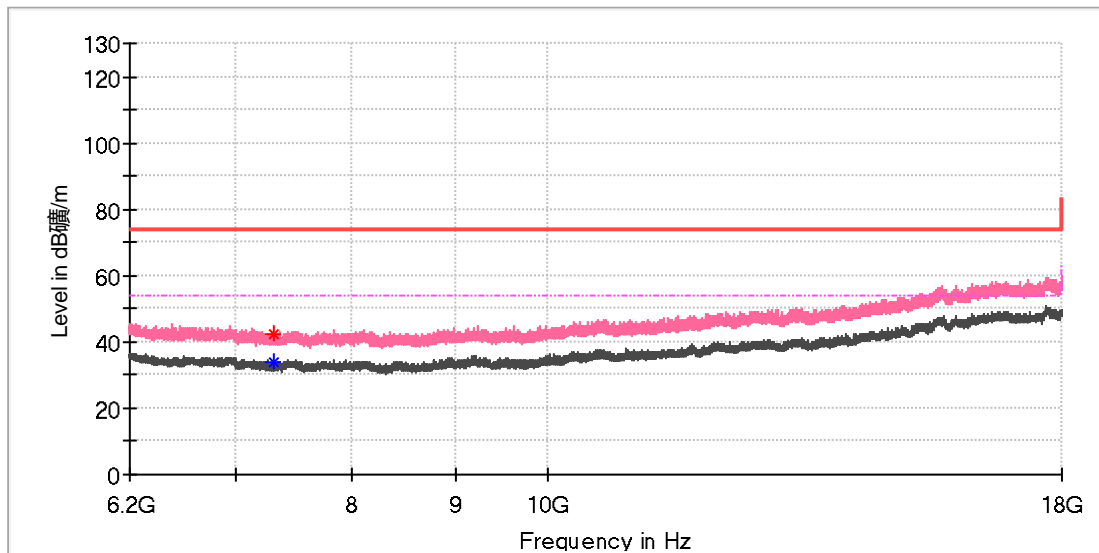

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7307.725000	42.33	---	74.00	31.67	150.0	V	314.0	8.3
7307.725000	---	33.67	54.00	20.33	150.0	V	314.0	8.3

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

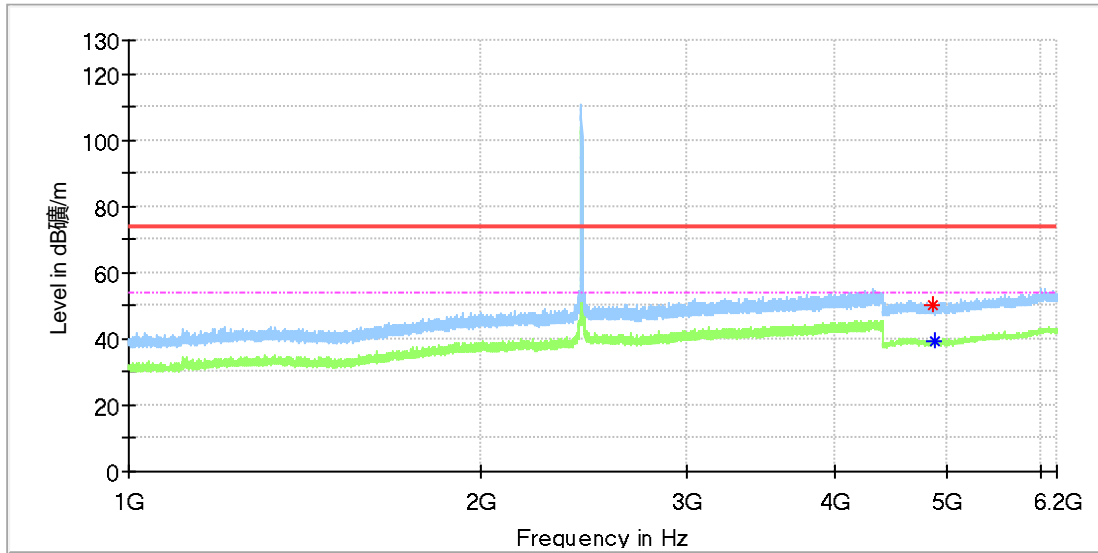

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4851.500000	50.39	---	74.00	23.61	150.0	H	193.0	11.8
4871.000000	---	39.18	54.00	14.82	150.0	H	0.0	11.8


### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_3M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

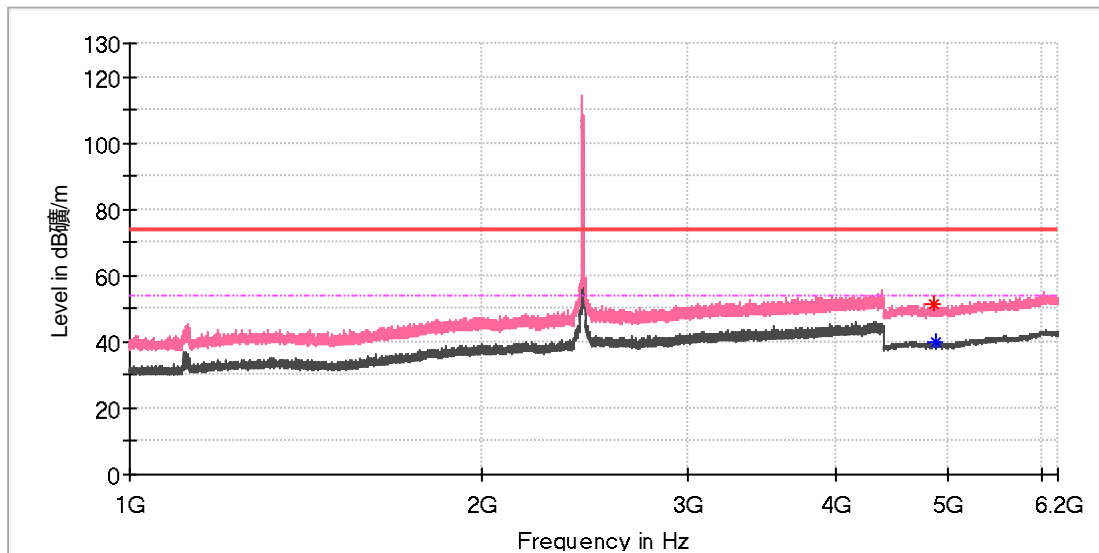

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4851.000000	51.22	---	74.00	22.78	150.0	V	107.0	11.8
4870.000000	---	39.88	54.00	14.12	150.0	V	213.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

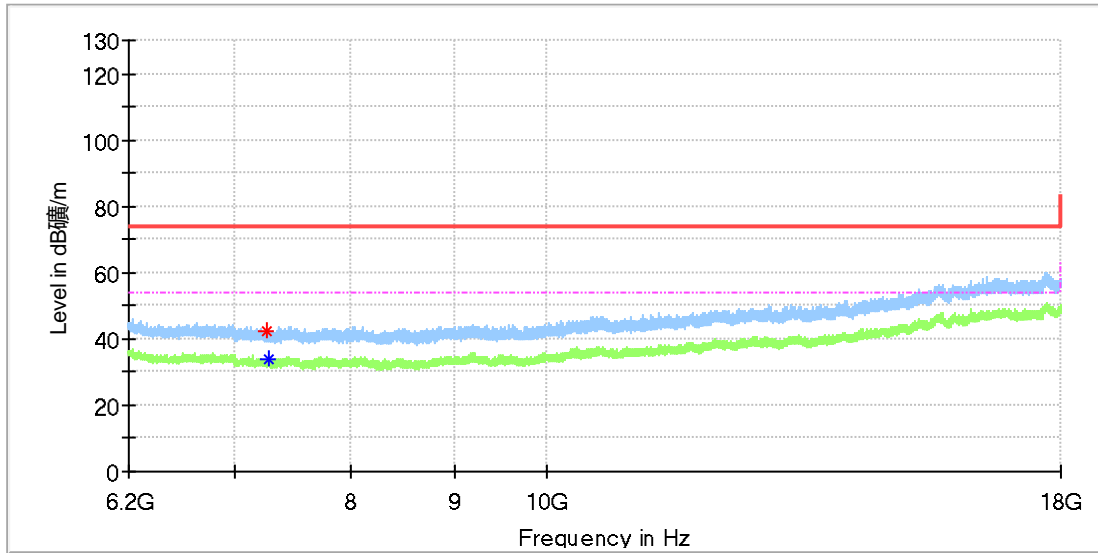

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7260.033333	42.52	---	74.00	31.48	150.0	H	5.0	8.5
7275.766667	---	33.99	54.00	20.01	150.0	H	306.0	8.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_3M\_2435.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

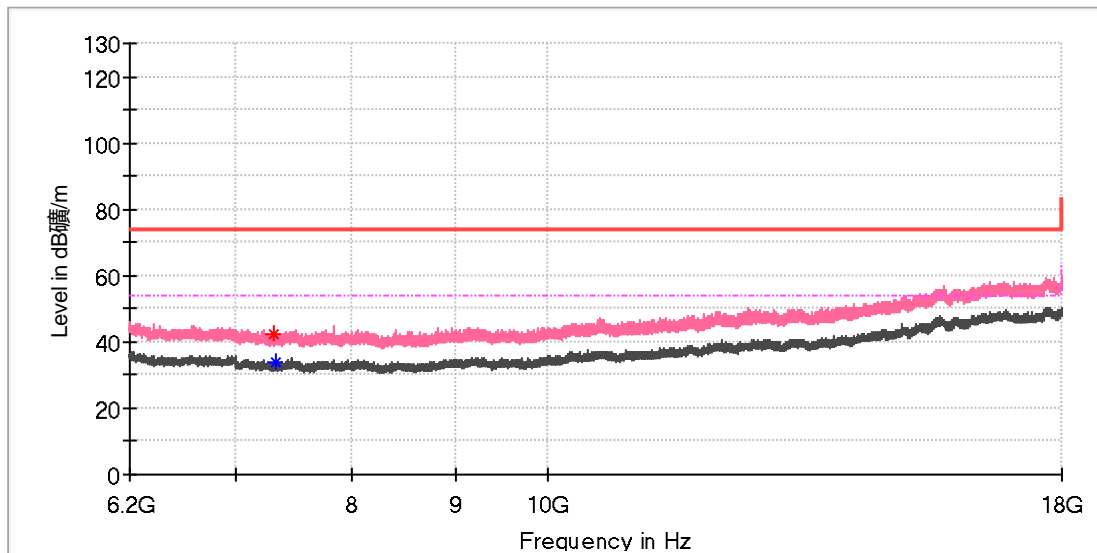

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7313.133333	42.37	---	74.00	31.63	150.0	V	44.0	8.2
7324.441667	---	33.57	54.00	20.43	150.0	V	192.0	8.2

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_5M_2434.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

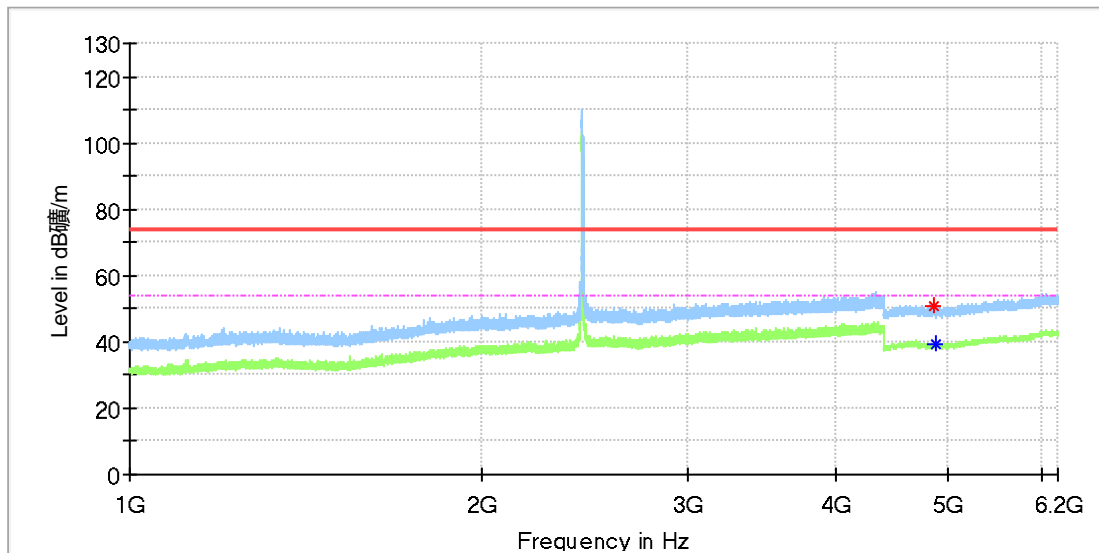

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4850.500000	50.84	---	74.00	23.16	150.0	H	276.0	11.8
4878.000000	---	39.24	54.00	14.76	150.0	H	145.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_5M_2434.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

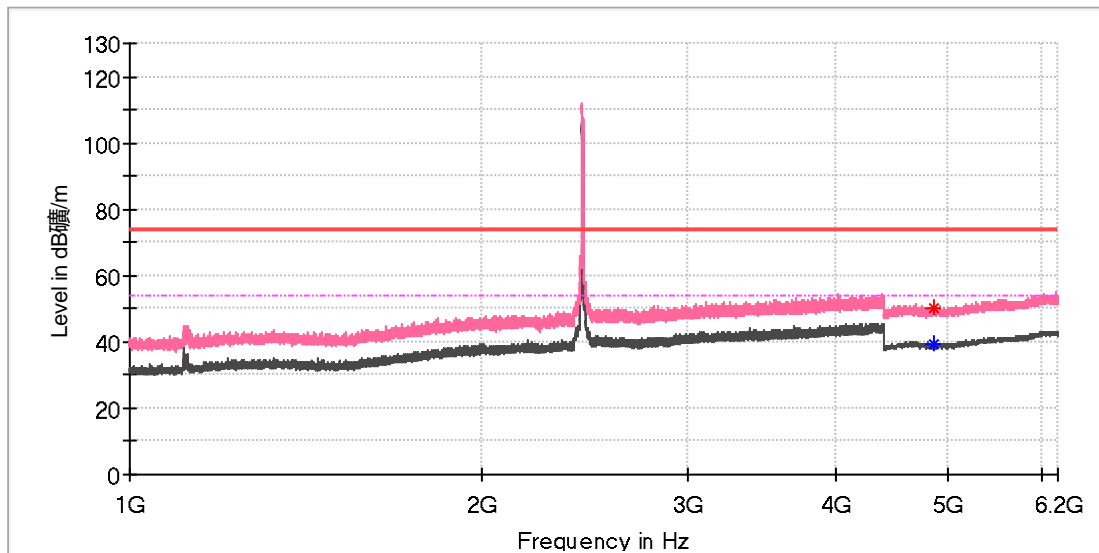

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4852.000000	---	39.46	54.00	14.54	150.0	V	57.0	11.8
4858.500000	50.14	---	74.00	23.86	150.0	V	253.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_5M\_2434.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

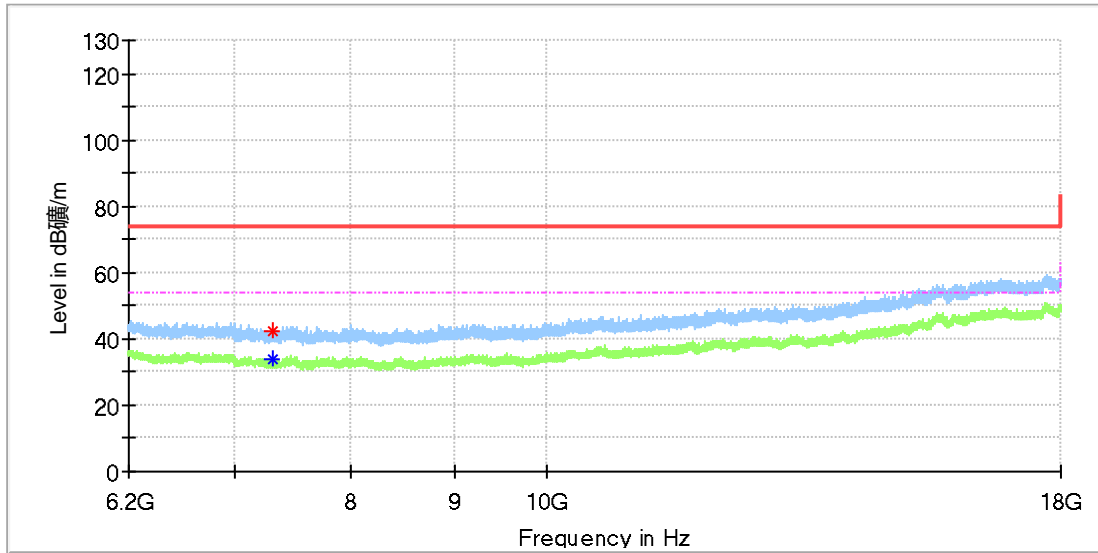

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7305.266667	---	34.10	54.00	19.90	150.0	H	73.0	8.3
7306.250000	42.21	---	74.00	31.79	150.0	H	275.0	8.3

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_5M_2434.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

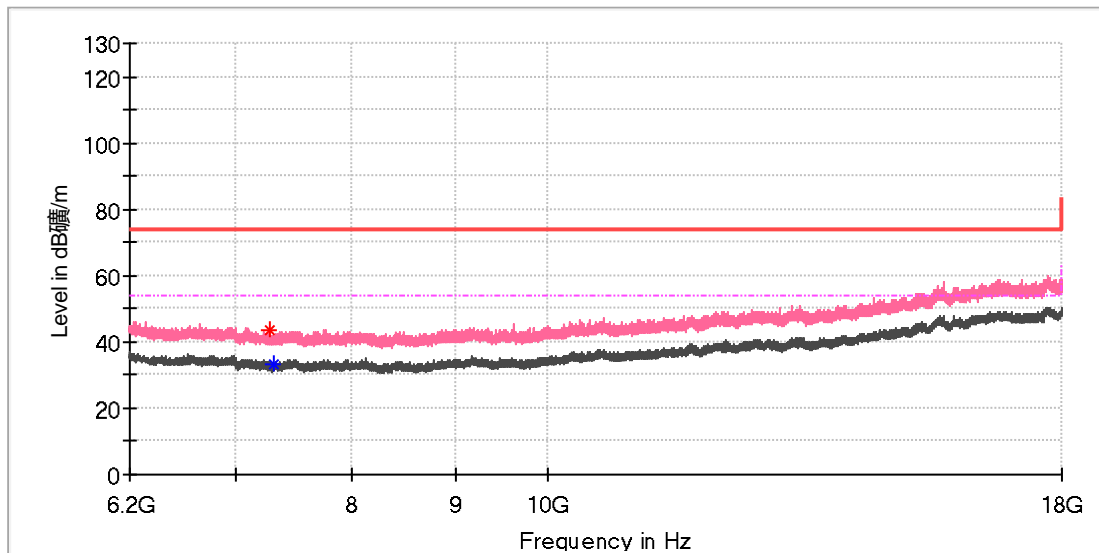

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7283.141667	43.27	---	74.00	30.73	150.0	V	350.0	8.4
7308.216667	---	33.55	54.00	20.45	150.0	V	278.0	8.2

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

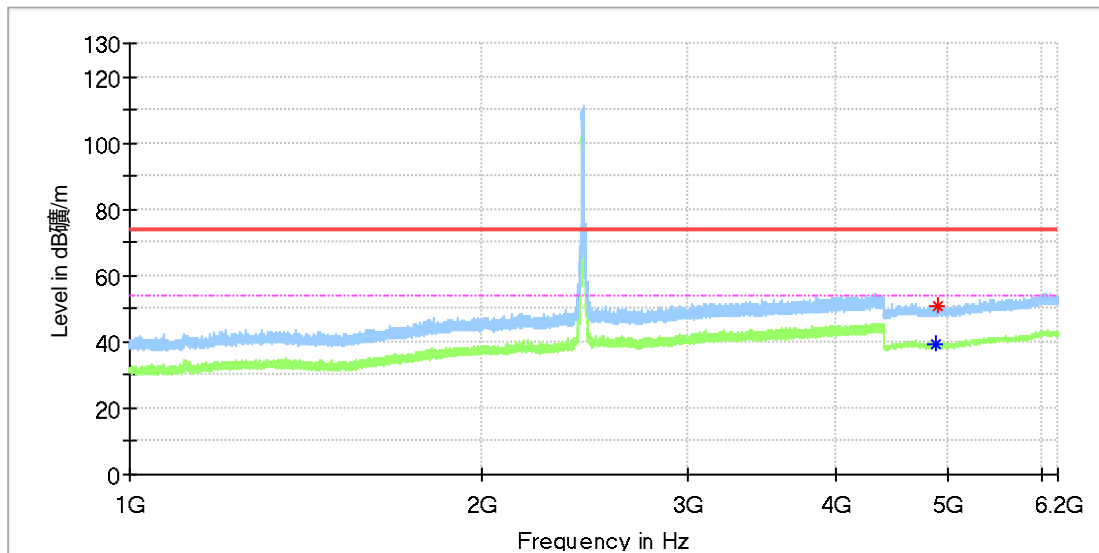

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4869.500000	---	39.15	54.00	14.85	150.0	H	144.0	11.8
4896.000000	51.07	---	74.00	22.93	150.0	H	126.0	11.8


## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

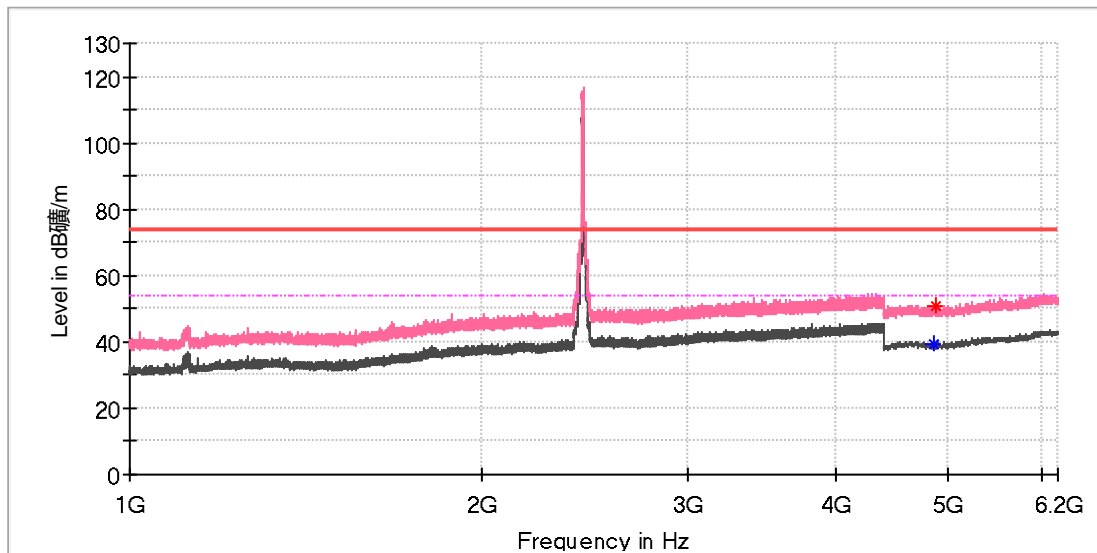

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4853.500000	---	39.51	54.00	14.49	150.0	V	280.0	11.8
4874.000000	50.50	---	74.00	23.50	150.0	V	127.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

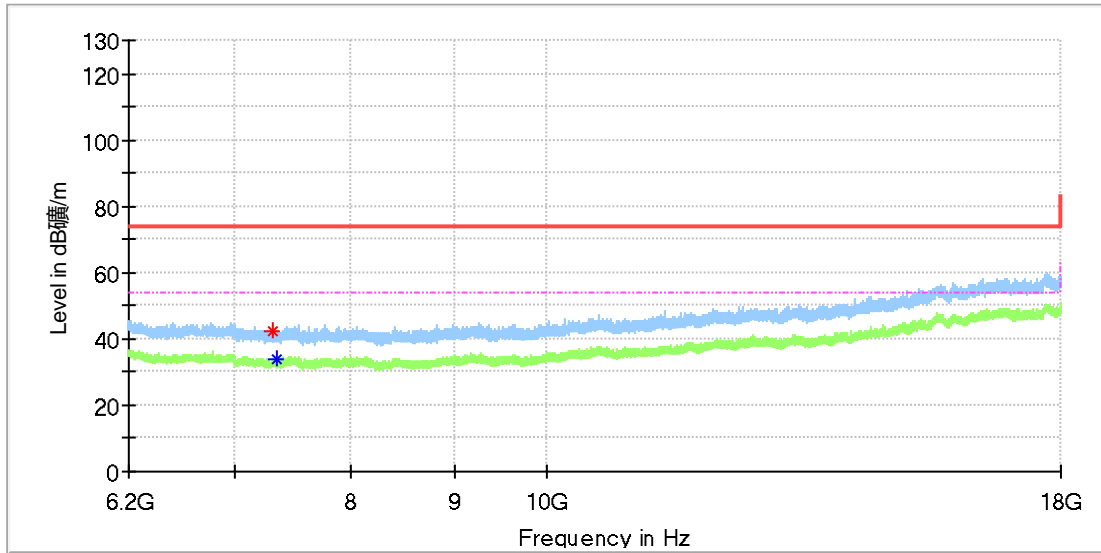

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7317.066667	42.29	---	74.00	31.71	150.0	H	333.0	8.2
7348.041667	---	33.86	54.00	20.14	150.0	H	309.0	8.1

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

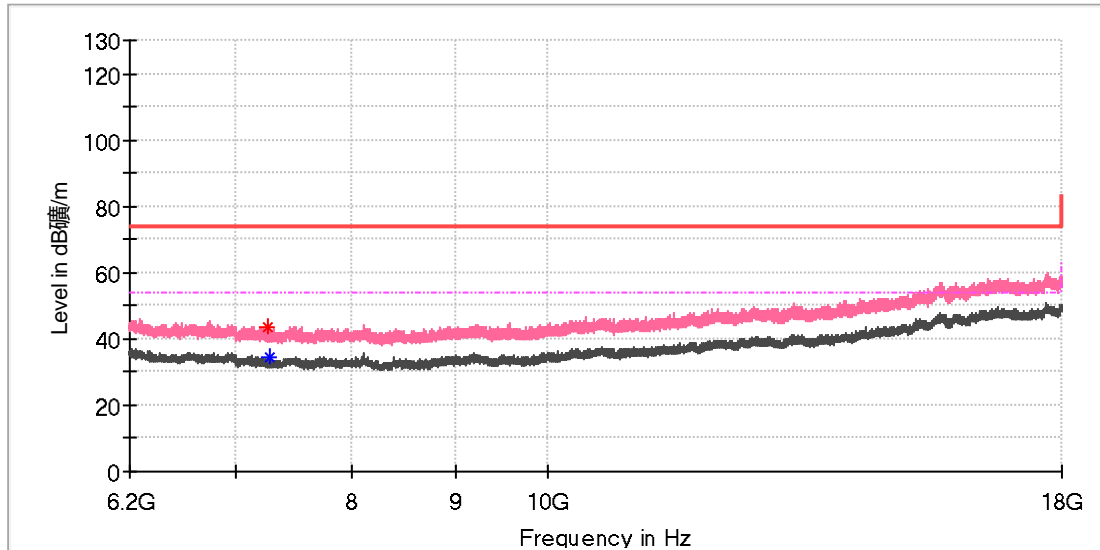

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7265.933333	43.33	---	74.00	30.67	150.0	V	171.0	8.5
7283.633333	---	34.52	54.00	19.48	150.0	V	85.0	8.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_20M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

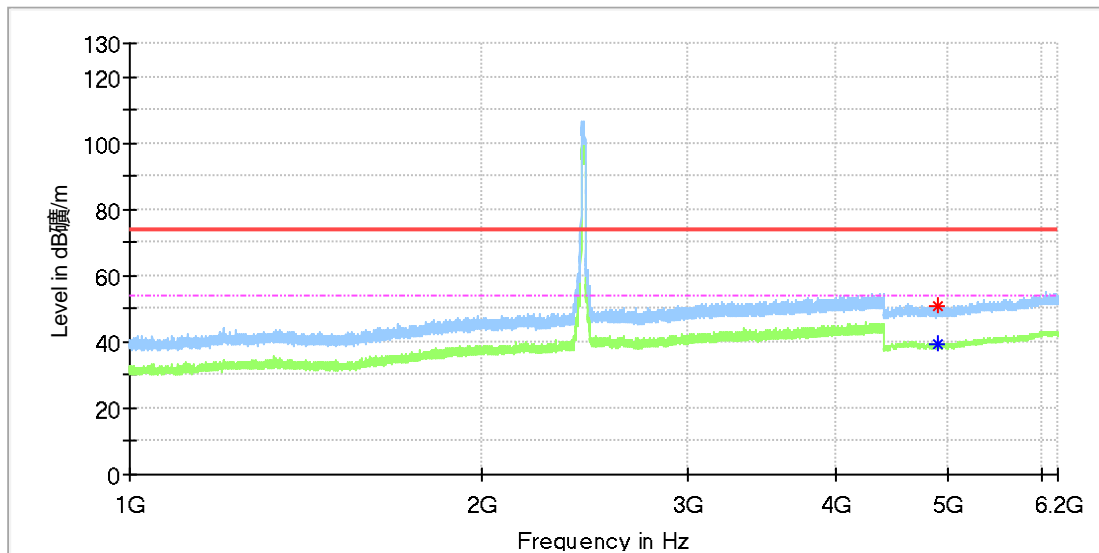

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4895.000000	50.73	---	74.00	23.27	150.0	H	20.0	11.8
4898.000000	---	39.58	54.00	14.42	150.0	H	326.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_20M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

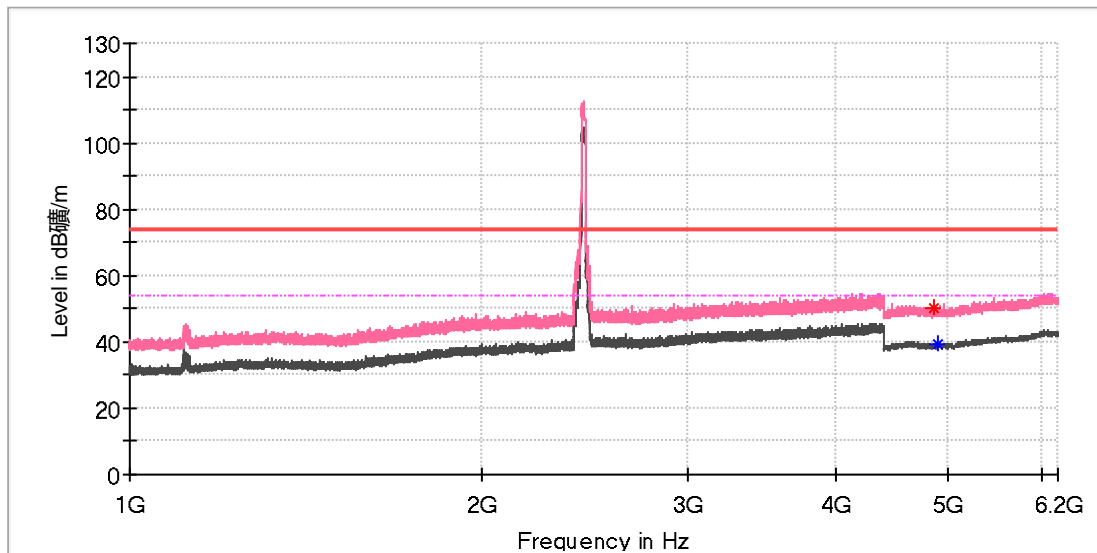

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4868.000000	50.46	---	74.00	23.54	150.0	V	72.0	11.8
4899.500000	---	39.30	54.00	14.70	150.0	V	65.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_20M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

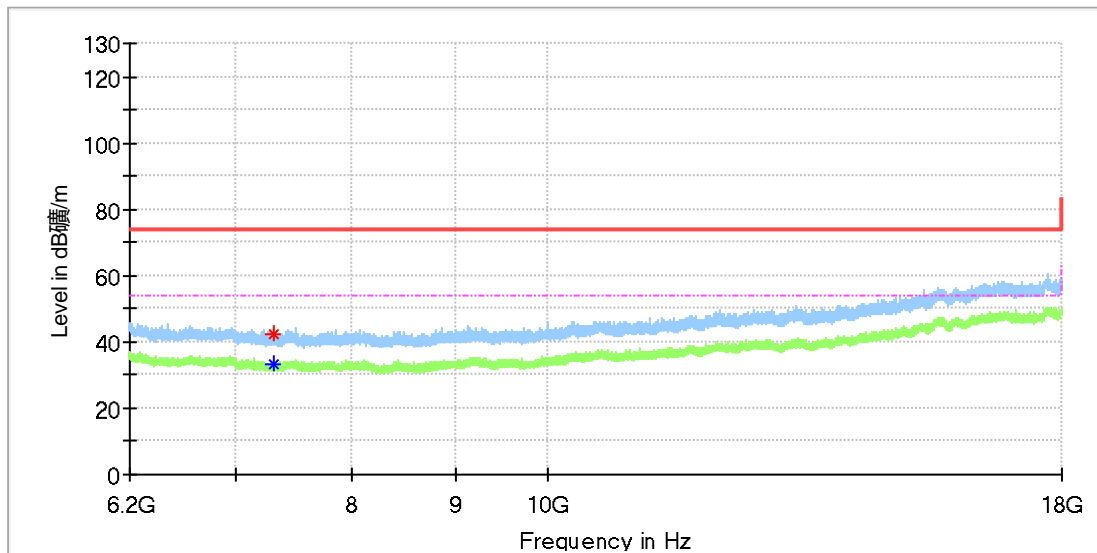

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7305.758333	---	33.32	54.00	20.68	150.0	H	115.0	8.3
7306.741667	42.22	---	74.00	31.78	150.0	H	0.0	8.3

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_20M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

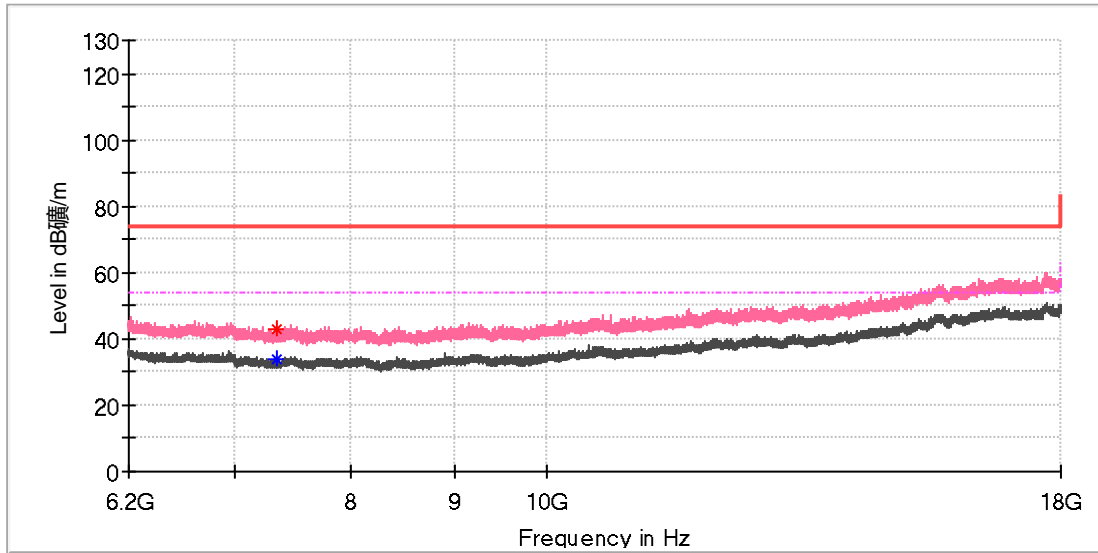

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7345.583333	42.82	---	74.00	31.18	150.0	V	260.0	8.1
7345.583333	---	33.92	54.00	20.08	150.0	V	260.0	8.1

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_40M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

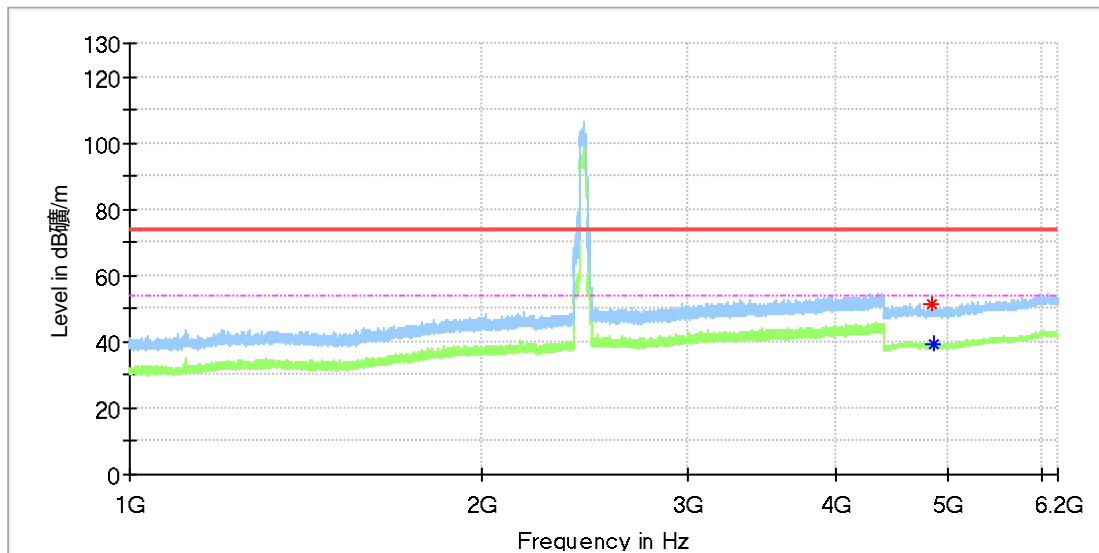

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4840.000000	51.46	---	74.00	22.54	150.0	H	299.0	11.8
4868.000000	---	39.42	54.00	14.58	150.0	H	60.0	11.8


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

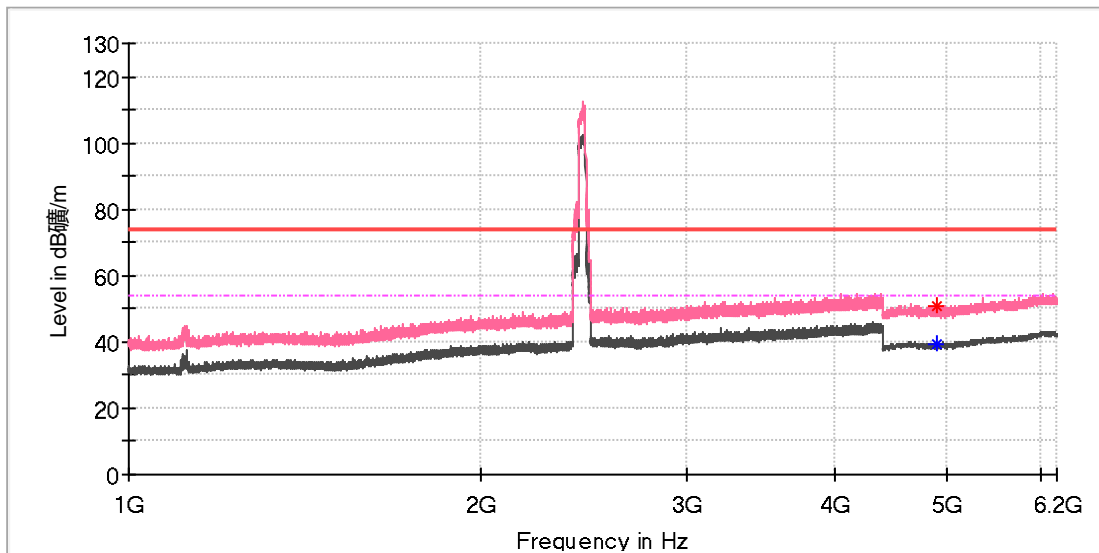

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4896.500000	---	39.30	54.00	14.70	150.0	V	102.0	11.8
4899.000000	50.93	---	74.00	23.07	150.0	V	9.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

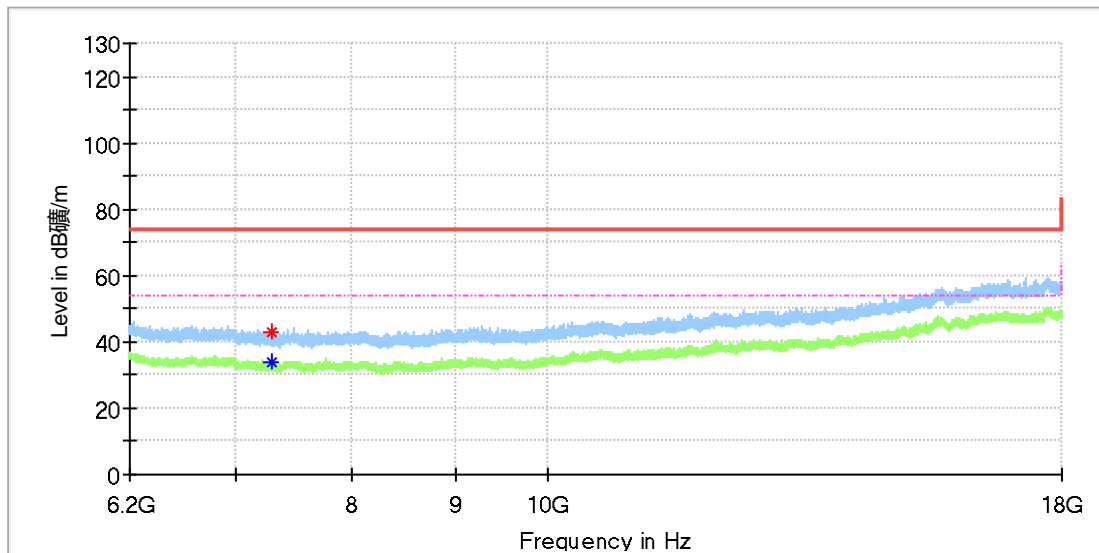

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7297.400000	---	33.70	54.00	20.30	150.0	H	262.0	8.3
7297.891667	43.03	---	74.00	30.97	150.0	H	139.0	8.3

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

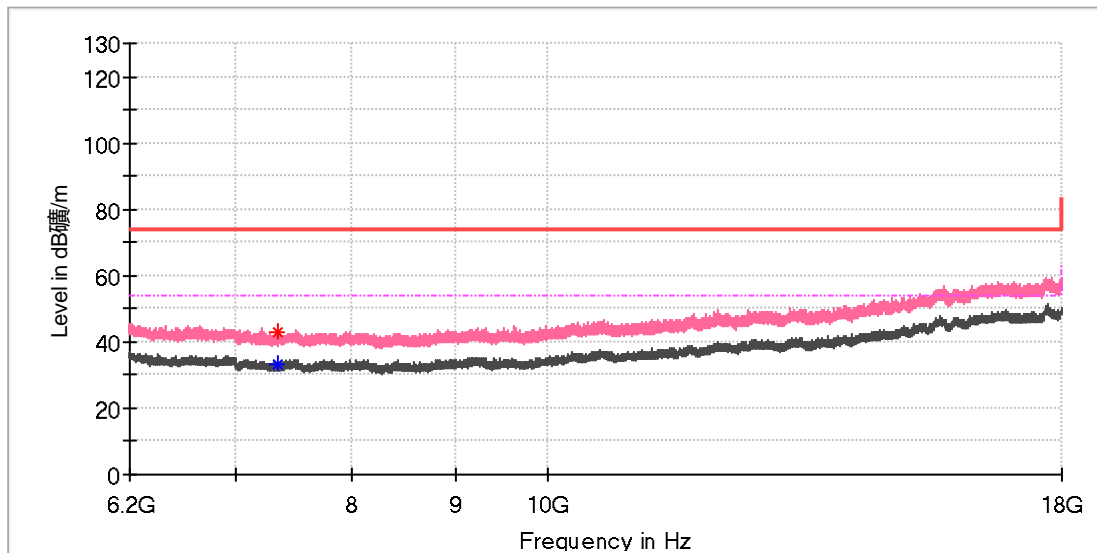

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7336.733333	---	33.53	54.00	20.47	150.0	V	4.0	8.1
7346.566667	42.70	---	74.00	31.30	150.0	V	161.0	8.1

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_60M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

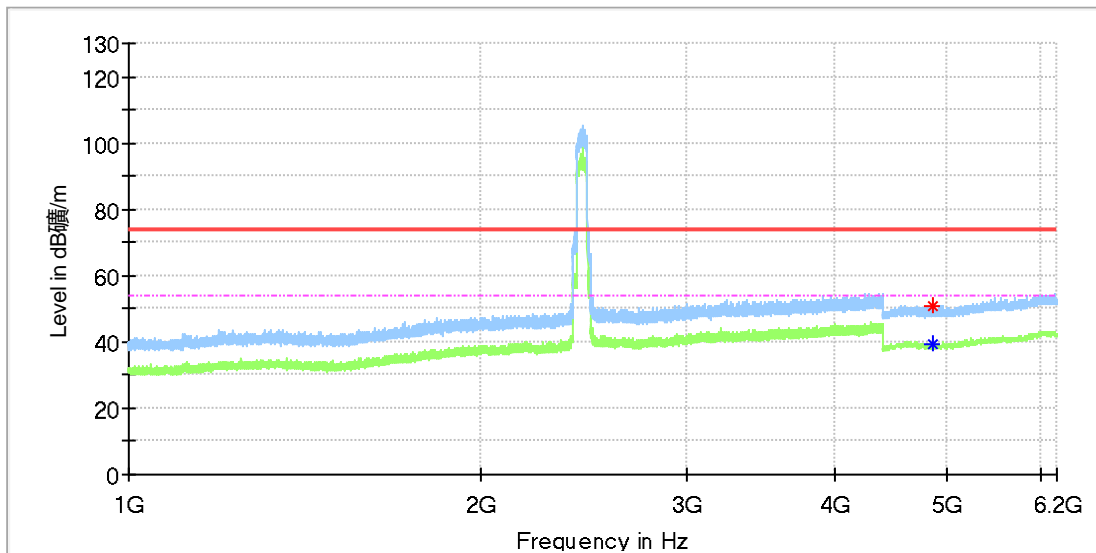

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4849.500000	50.95	---	74.00	23.05	150.0	H	167.0	11.8
4851.500000	---	39.46	54.00	14.54	150.0	H	79.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_60M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

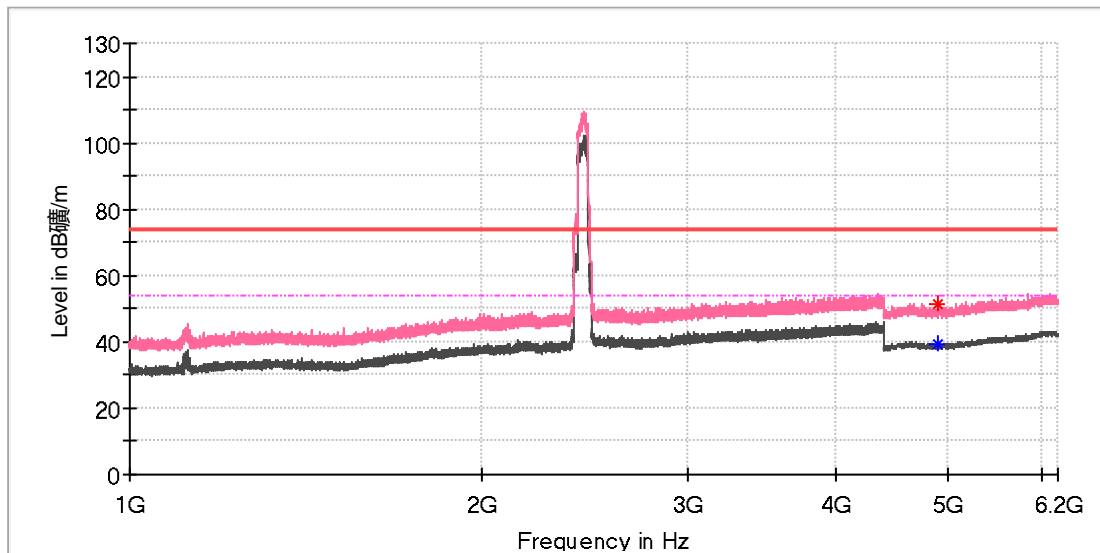

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4896.500000	---	39.34	54.00	14.66	150.0	V	2.0	11.8
4904.000000	51.10	---	74.00	22.90	150.0	V	207.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_60M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

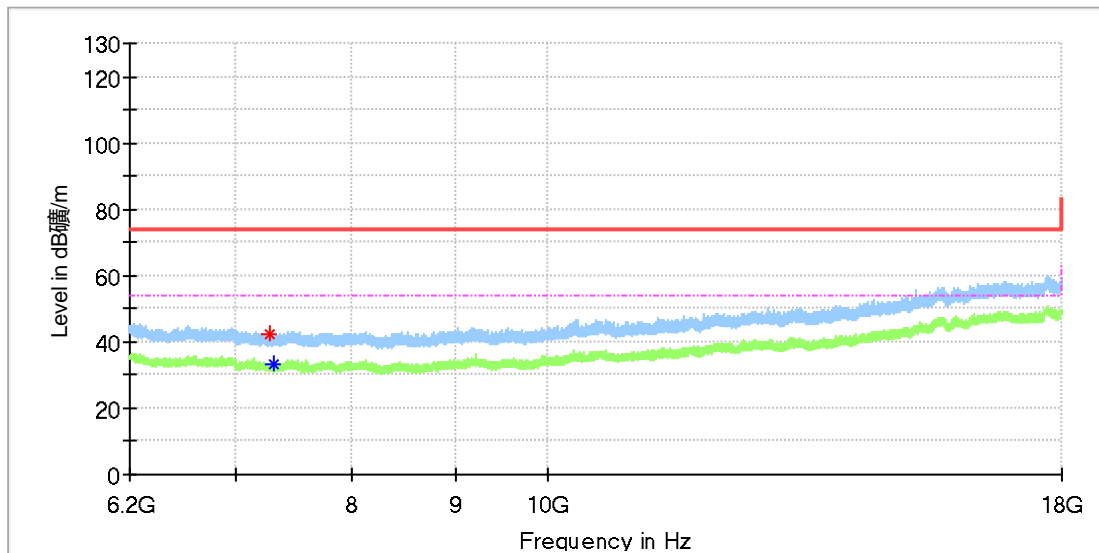

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7275.766667	42.54	---	74.00	31.46	150.0	H	251.0	8.4
7301.825000	---	33.21	54.00	20.79	150.0	H	73.0	8.3

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_60M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

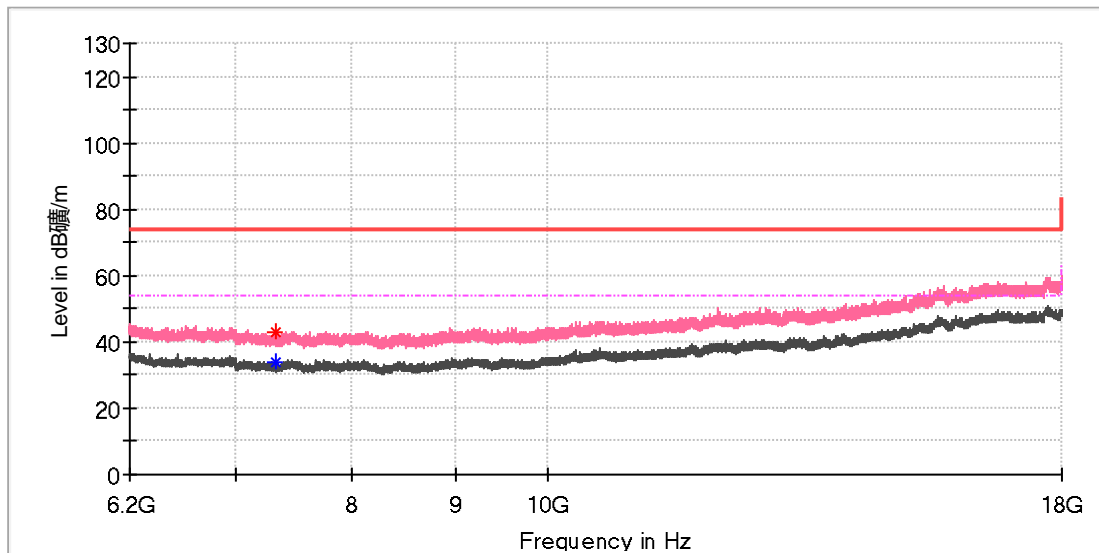

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7328.866667	---	33.68	54.00	20.32	150.0	V	334.0	8.1
7330.833333	42.83	---	74.00	31.17	150.0	V	334.0	8.1


## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

SISO mode (Worst case\_ANT2)

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

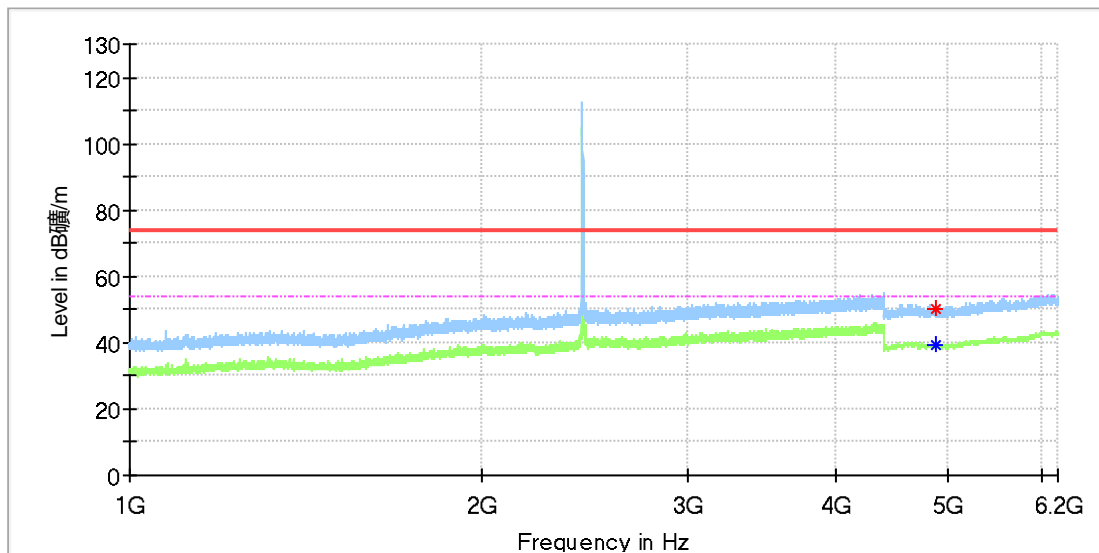

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4876.500000	---	39.28	54.00	14.72	150.0	H	89.0	11.8
4885.500000	50.46	---	74.00	23.54	150.0	H	89.0	11.8


### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

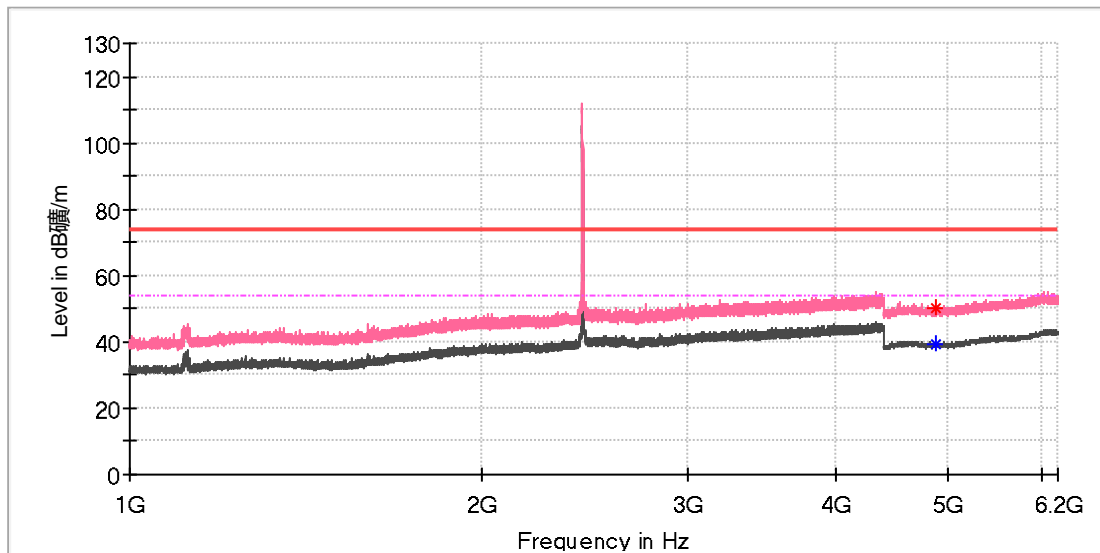

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4871.500000	---	39.55	54.00	14.45	150.0	V	58.0	11.8
4873.000000	50.12	---	74.00	23.88	150.0	V	189.0	11.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2435.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

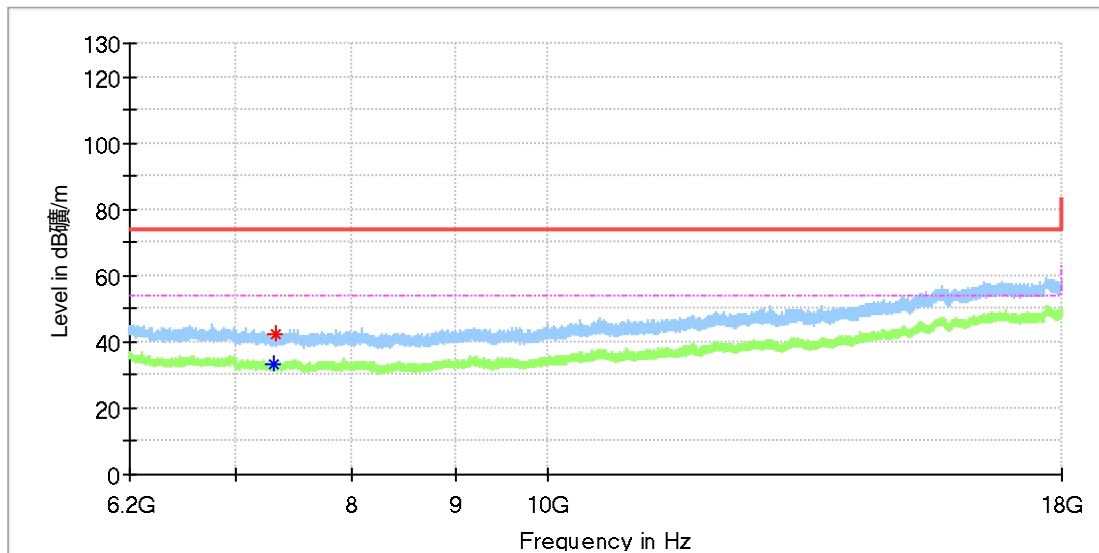

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7312.641667	---	33.48	54.00	20.52	150.0	H	160.0	8.2
7334.275000	42.24	---	74.00	31.76	150.0	H	0.0	8.1

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_1.4M\_2435.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

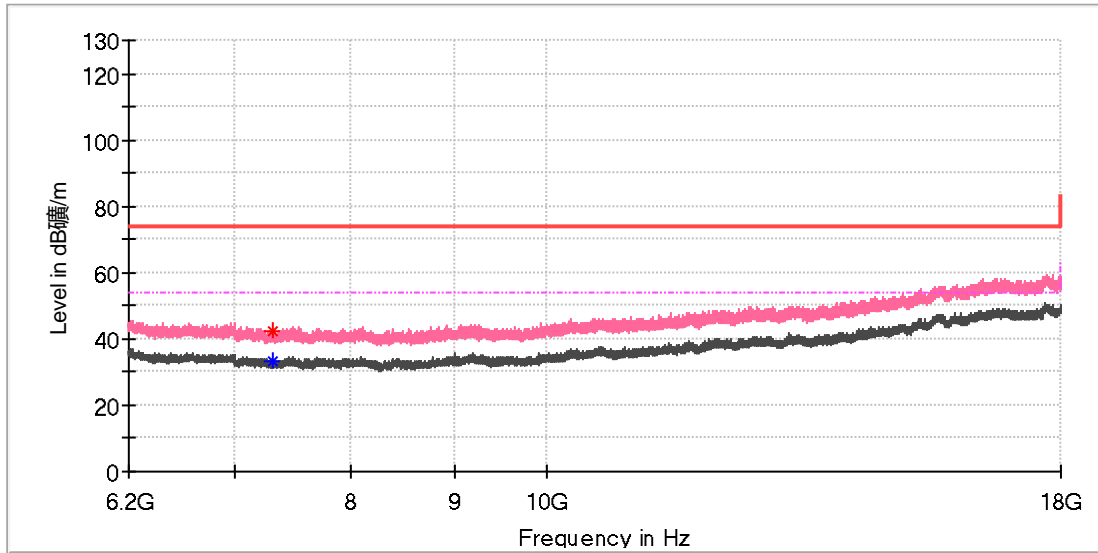

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7309.200000	42.35	---	74.00	31.65	150.0	V	0.0	8.2
7314.116667	---	33.45	54.00	20.55	150.0	V	0.0	8.2

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

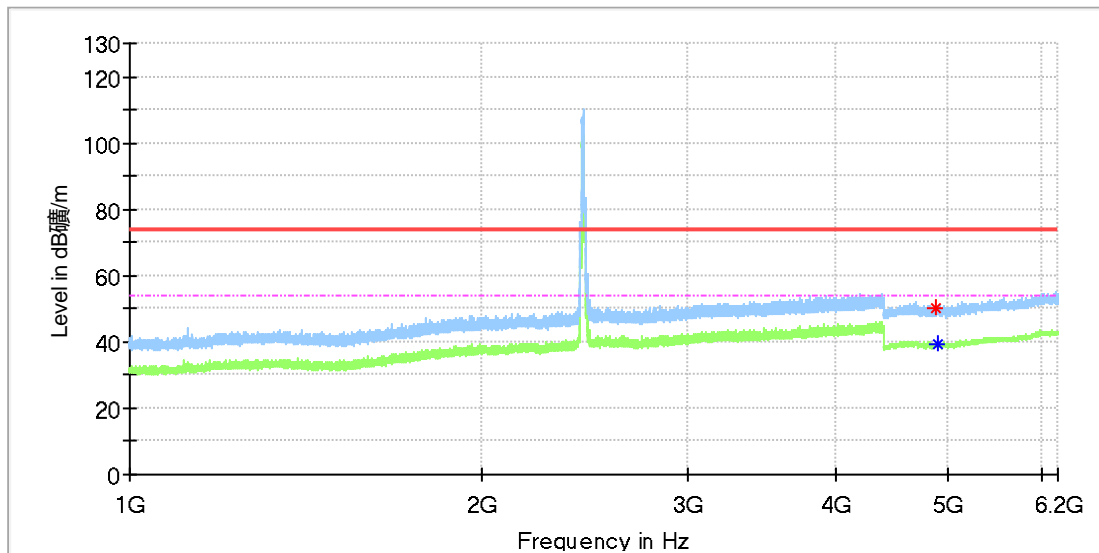

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4873.000000	50.08	---	74.00	23.92	150.0	H	110.0	11.8
4890.000000	---	39.24	54.00	14.76	150.0	H	8.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2437.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

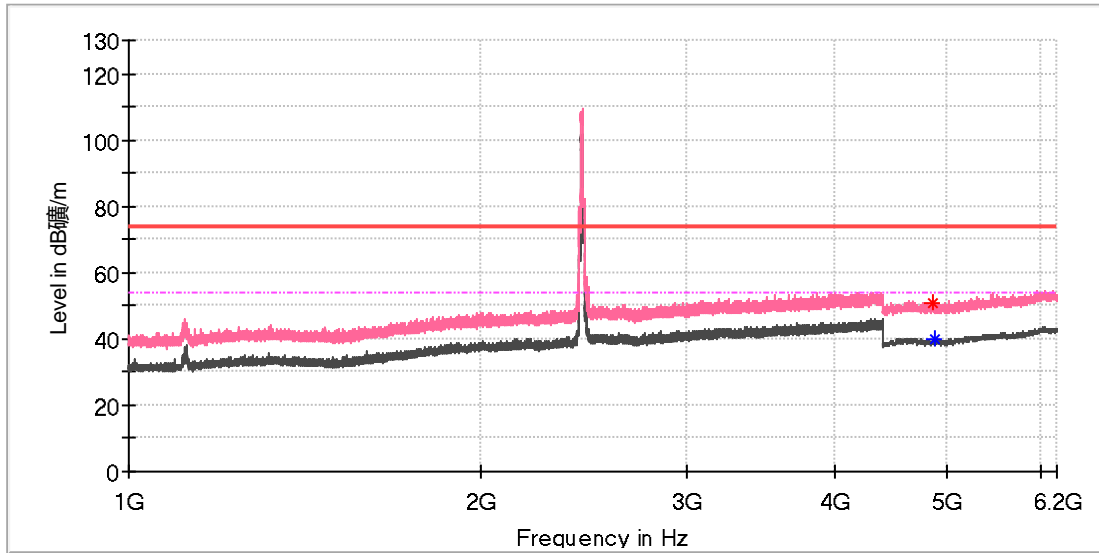

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4862.500000	50.69	---	74.00	23.31	150.0	V	94.0	11.8
4870.000000	---	39.66	54.00	14.34	150.0	V	276.0	11.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

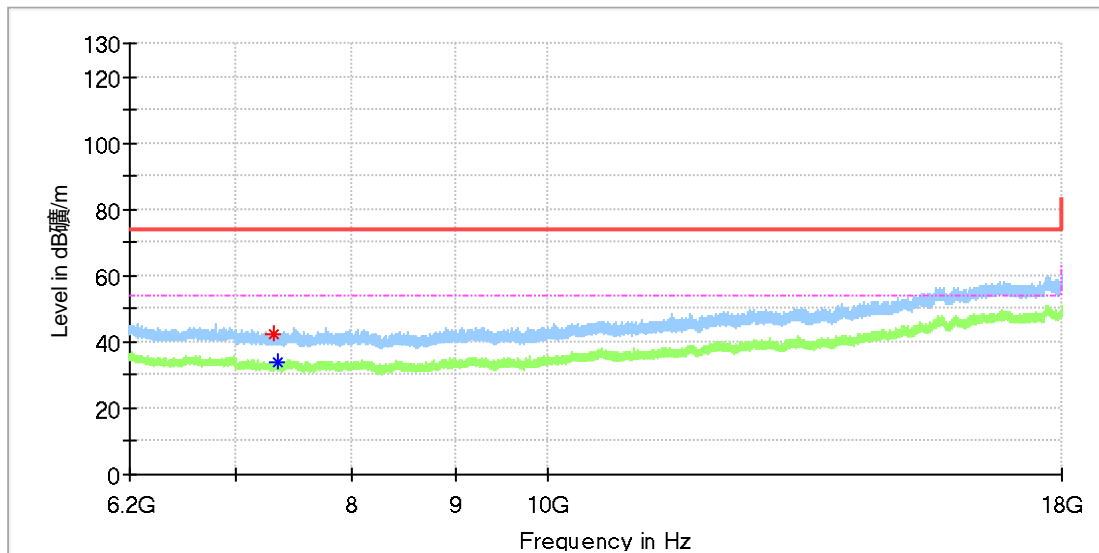

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7303.791667	42.55	---	74.00	31.45	150.0	H	299.0	8.3
7348.041667	---	33.94	54.00	20.06	150.0	H	19.0	8.1

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2437.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

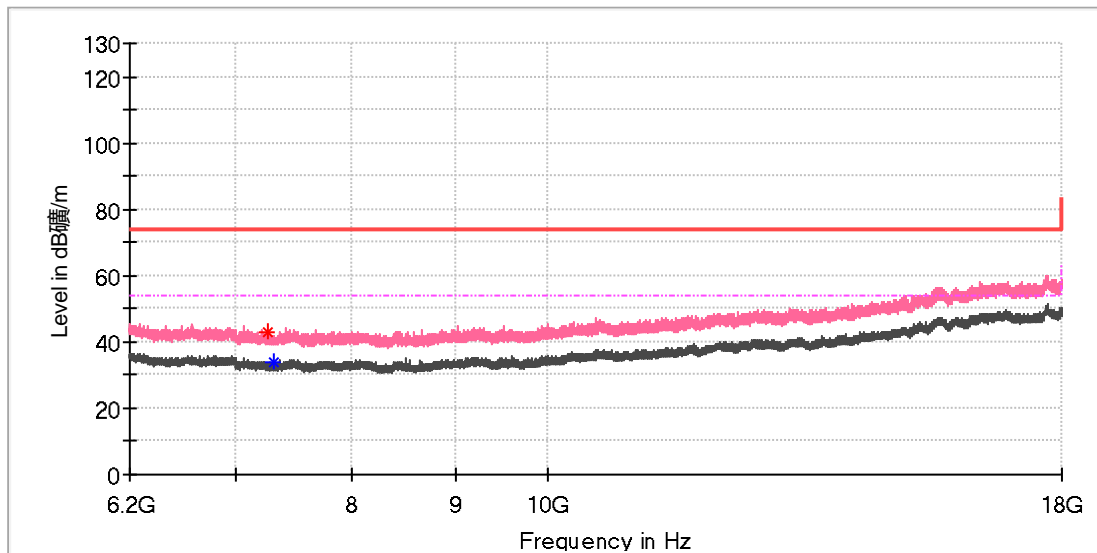

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7261.016667	42.86	---	74.00	31.14	150.0	V	0.0	8.5
7311.166667	---	34.08	54.00	19.92	150.0	V	138.0	8.2

## Final\_Result


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### Appendix B.6: Test Results of Radiated Emissions in Restricted Bands

MIMO mode (Worst case\_ANT0+ANT3)

#### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2403.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

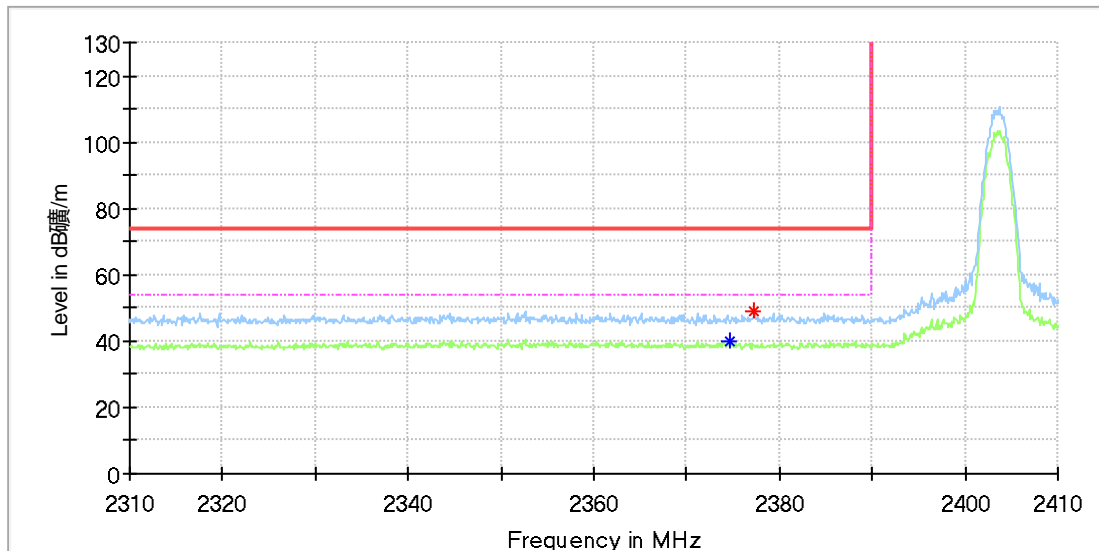

#### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2374.600000	---	40.16	54.00	13.84	150.0	H	107.0	6.9
2377.300000	48.81	---	74.00	25.19	150.0	H	248.0	6.9


#### Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_1.4M\_2403.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

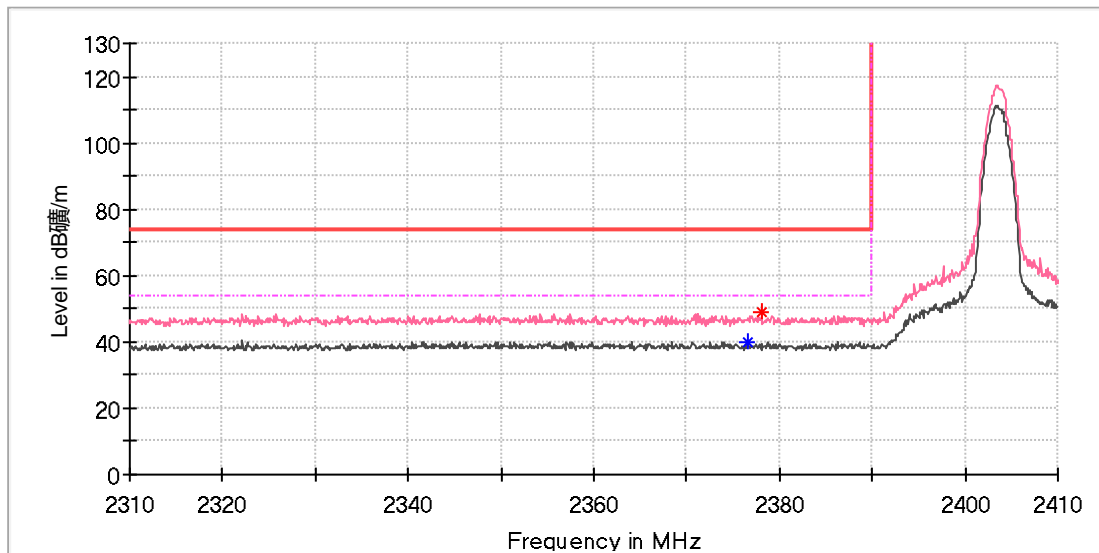

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2376.500000	---	39.91	54.00	14.09	150.0	V	72.0	6.9
2378.100000	48.99	---	74.00	25.01	150.0	V	0.0	6.9

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_1.4M\_2467.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

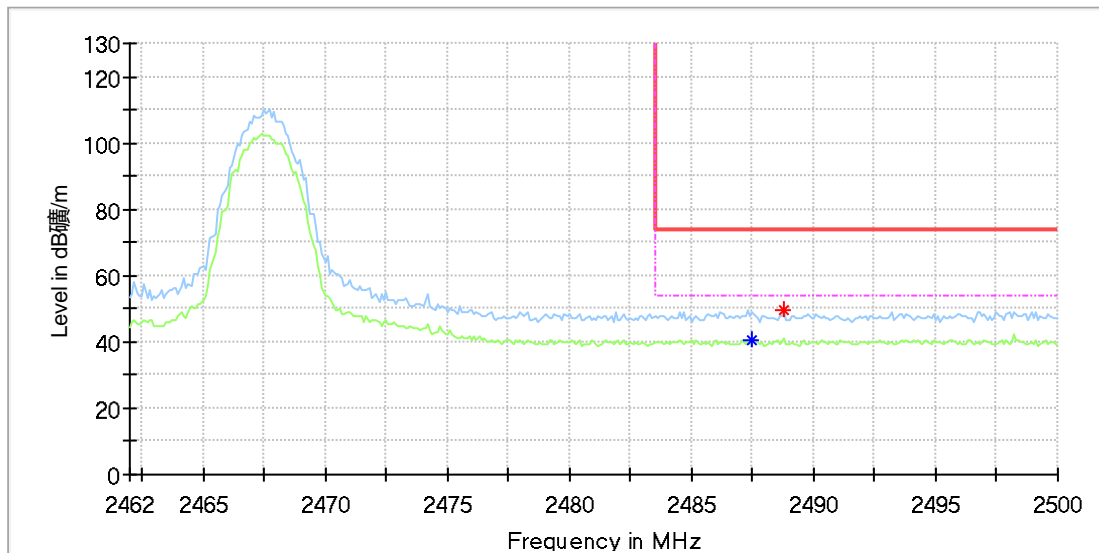

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.500000	---	40.73	54.00	13.27	150.0	H	337.0	7.4
2488.800000	49.52	---	74.00	24.48	150.0	H	359.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2467.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

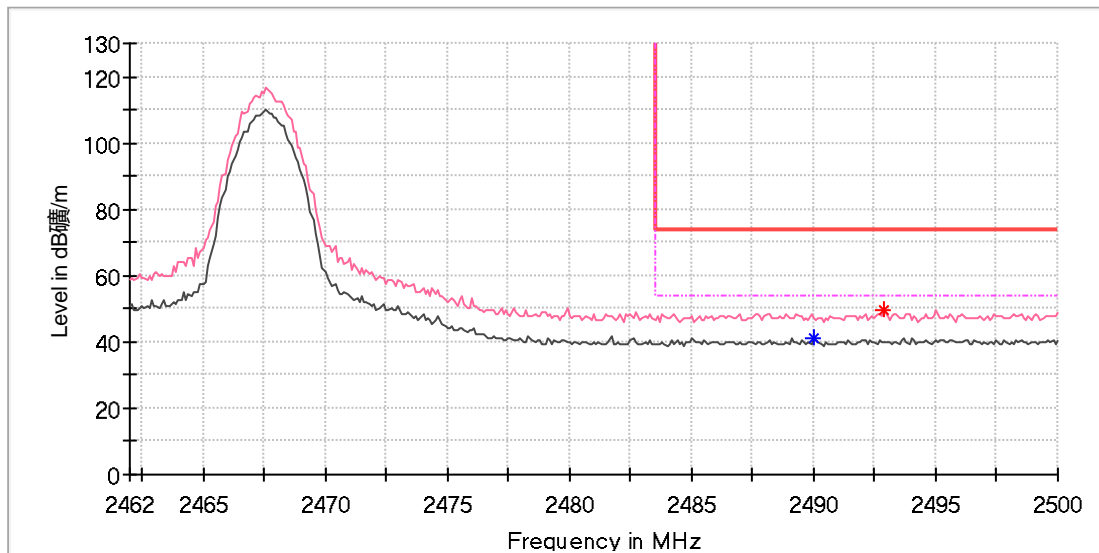

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2490.000000	---	41.28	54.00	12.72	150.0	V	76.0	7.4
2492.900000	49.53	---	74.00	24.47	150.0	V	122.0	7.4

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_3M_2405.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

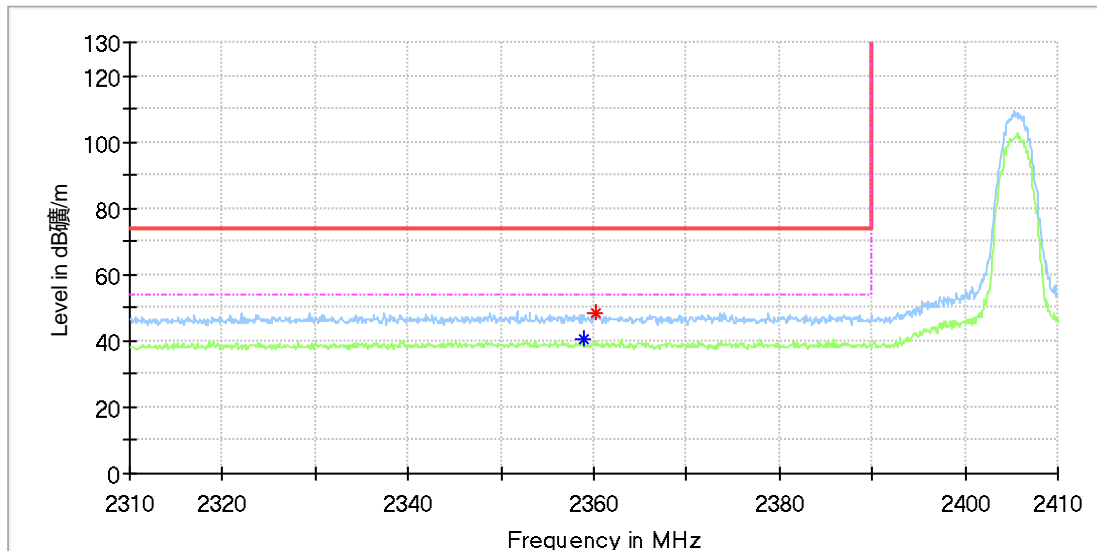

## Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2358.900000	---	40.42	54.00	13.58	150.0	H	314.0	6.9
2360.200000	48.51	---	74.00	25.49	150.0	H	43.0	6.9

## Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_3M\_2405.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

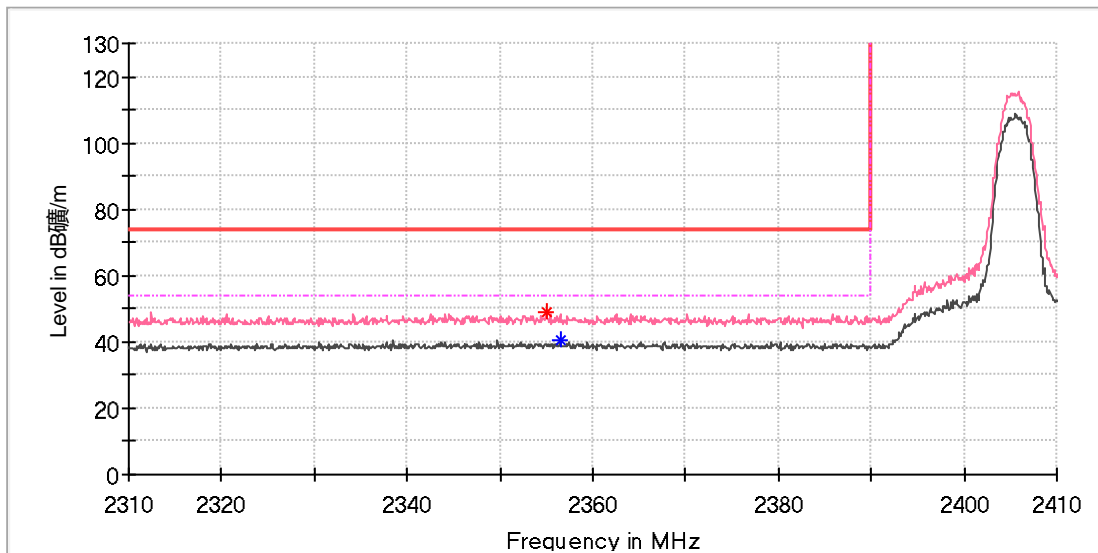

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2355.000000	49.20	---	74.00	24.80	150.0	V	131.0	6.9
2356.500000	---	40.28	54.00	13.72	150.0	V	325.0	6.9

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_3M\_2465.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

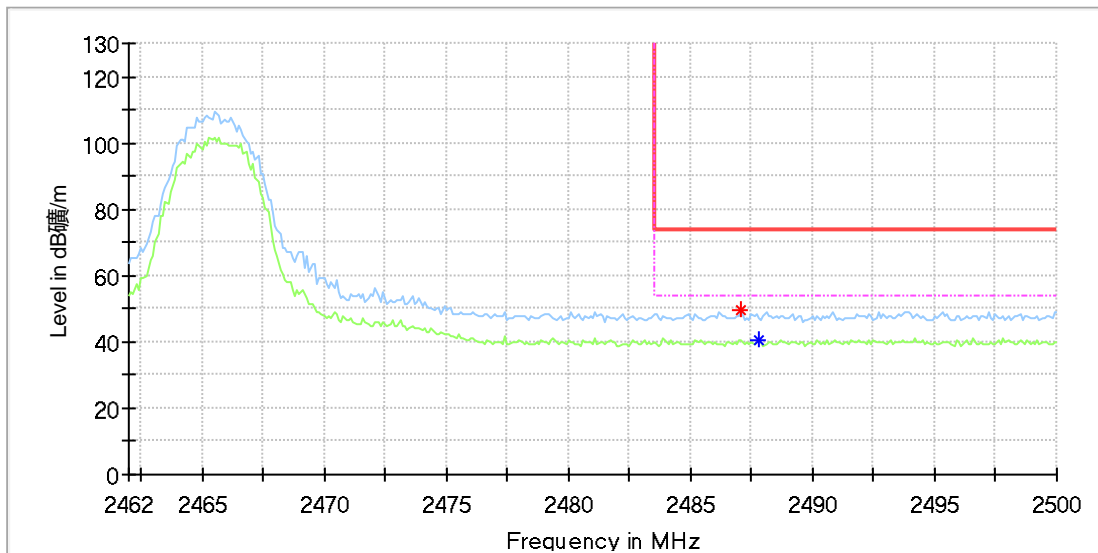

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.100000	49.31	---	74.00	24.69	150.0	H	261.0	7.4
2487.800000	---	40.67	54.00	13.33	150.0	H	4.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_3M_2465.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

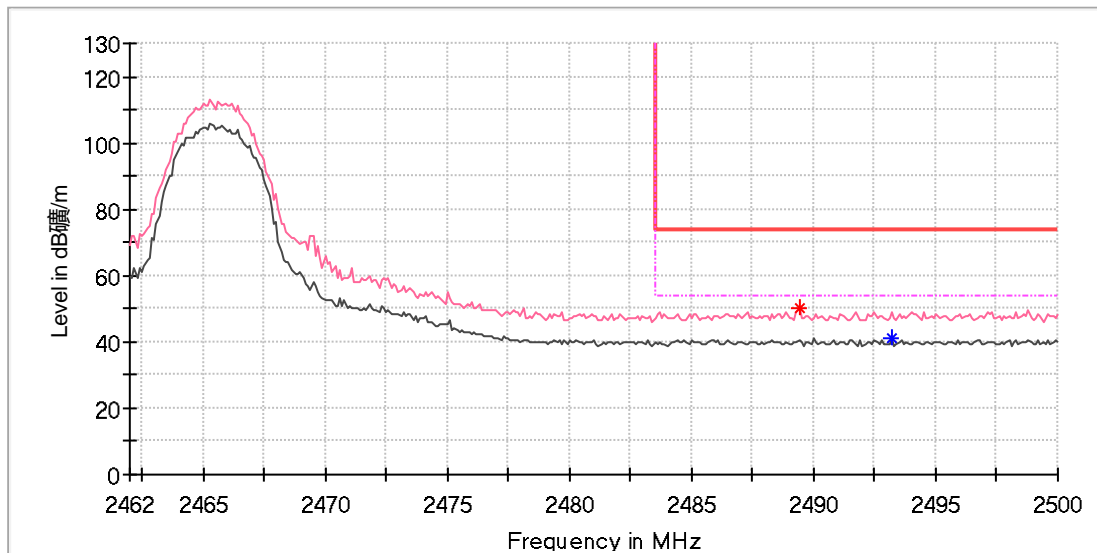

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.400000	50.18	---	74.00	23.82	150.0	V	219.0	7.4
2493.200000	---	41.11	54.00	12.89	150.0	V	253.0	7.4

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_5M\_2404.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

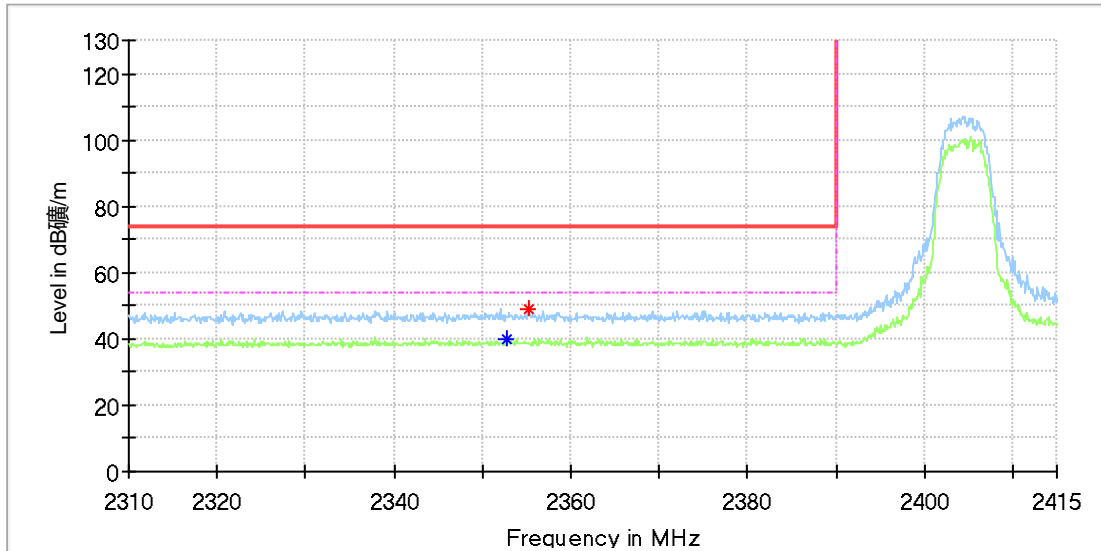

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2352.800000	---	39.86	54.00	14.14	150.0	H	11.0	6.9
2355.200000	49.19	---	74.00	24.81	150.0	H	89.0	6.9


### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_5M\_2404.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

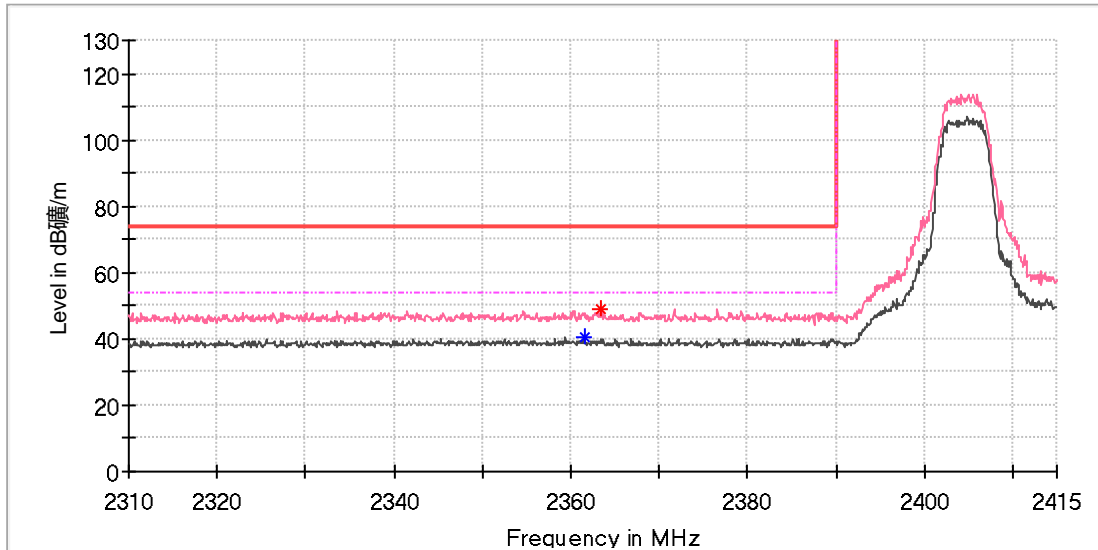

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2361.500000	---	40.71	54.00	13.29	150.0	V	97.0	6.9
2363.500000	49.15	---	74.00	24.85	150.0	V	326.0	6.9

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_5M\_2469.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

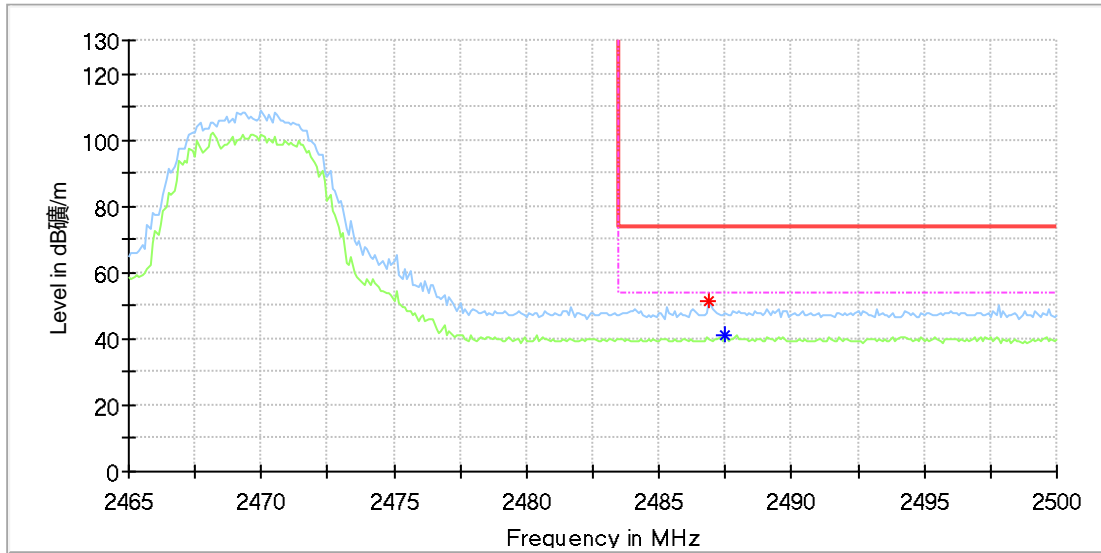

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2486.900000	51.57	---	74.00	22.43	150.0	H	266.0	7.4
2487.500000	---	41.00	54.00	13.00	150.0	H	284.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_5M_2469.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

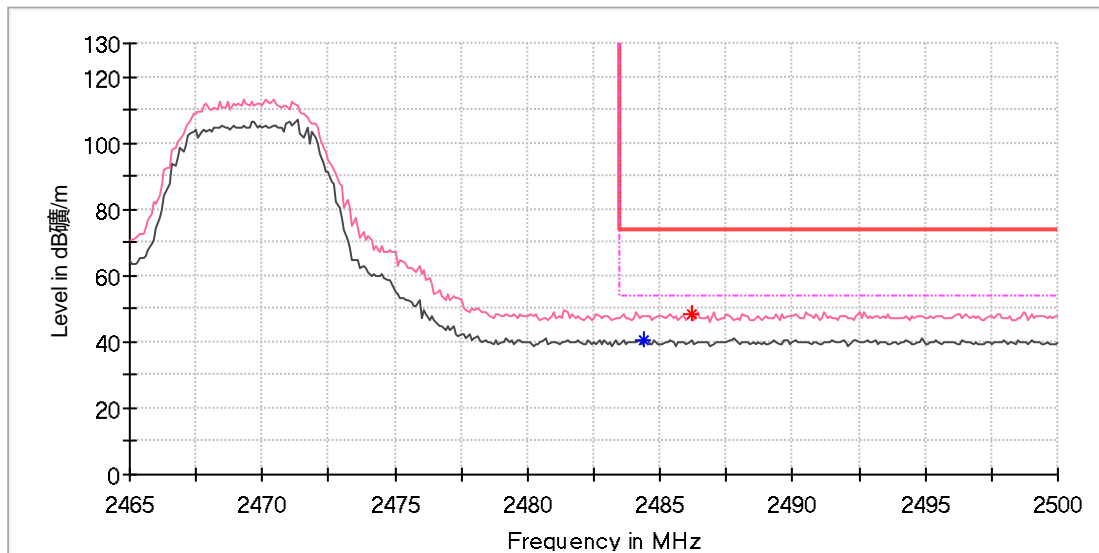

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.400000	---	40.51	54.00	13.49	150.0	V	46.0	7.4
2486.200000	48.61	---	74.00	25.39	150.0	V	280.0	7.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2407.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

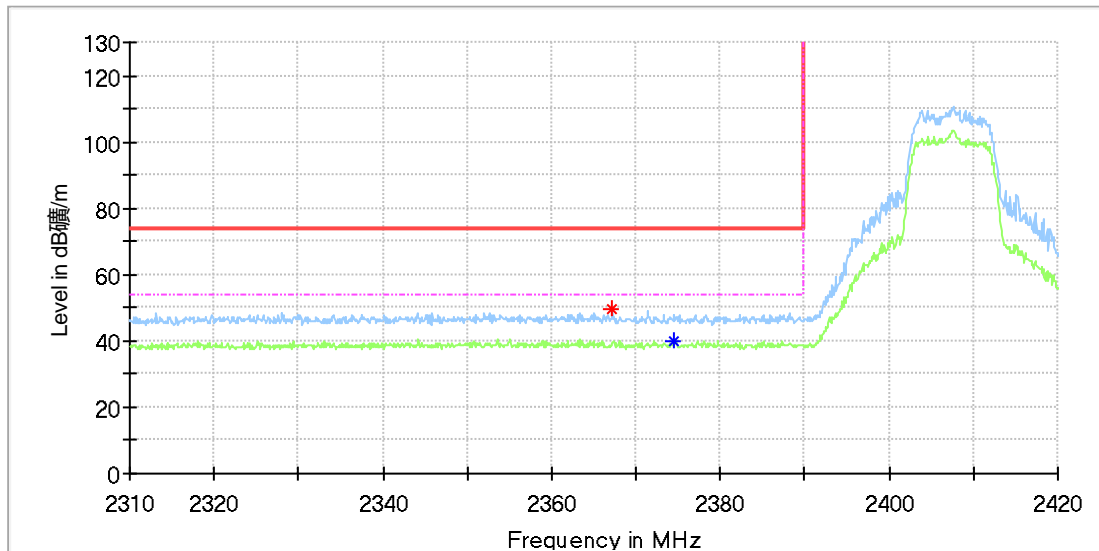

## Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2367.200000	49.32	---	74.00	24.68	150.0	H	92.0	6.9
2374.500000	---	40.10	54.00	13.90	150.0	H	221.0	6.9

## Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2407.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

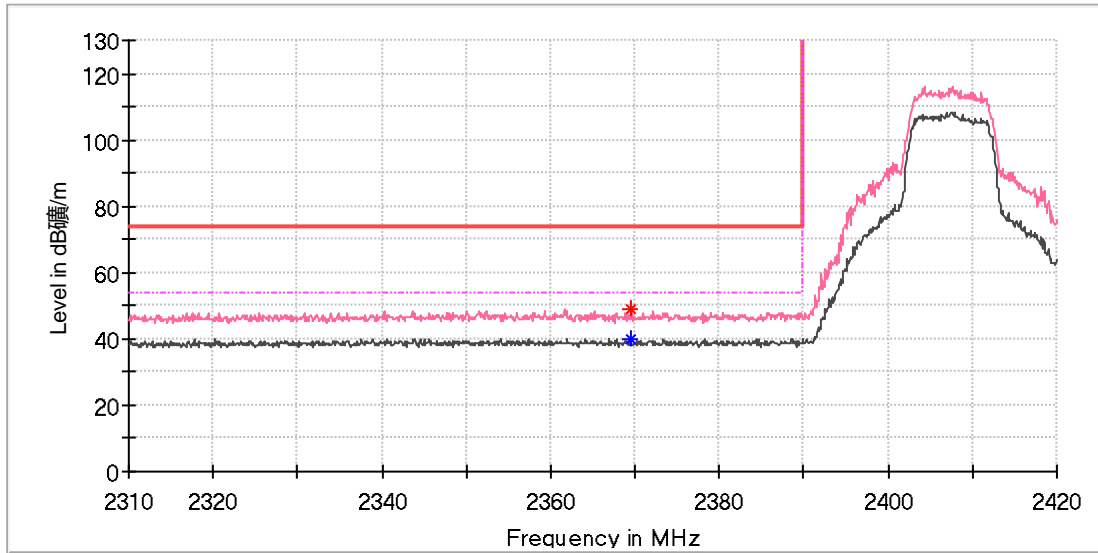

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2369.400000	---	39.92	54.00	14.08	150.0	V	293.0	6.9
2369.600000	49.17	---	74.00	24.83	150.0	V	322.0	6.9

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_10M\_2467.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

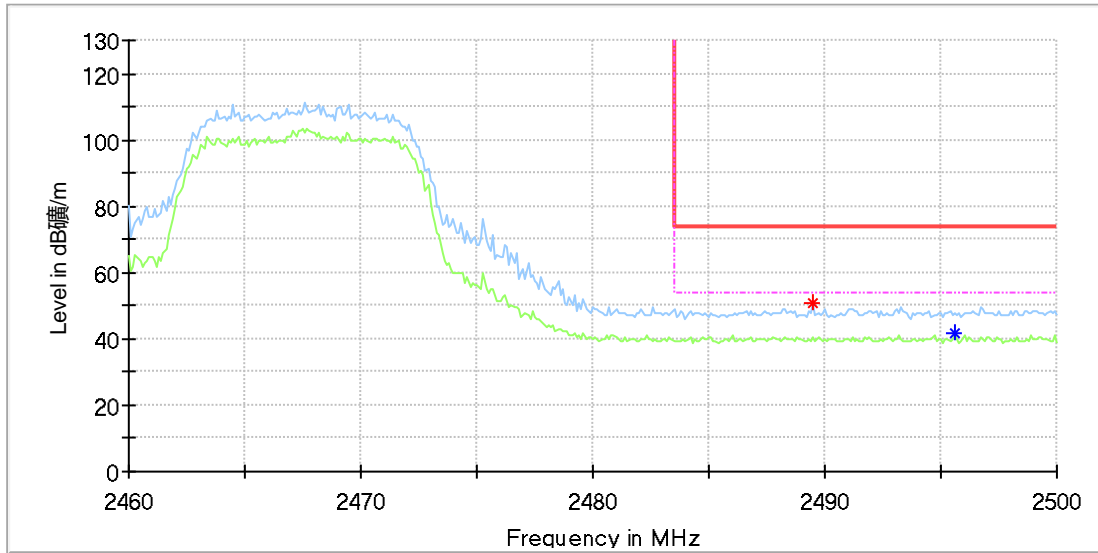

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.500000	50.51	---	74.00	23.49	150.0	H	4.0	7.4
2495.600000	---	41.45	54.00	12.55	150.0	H	182.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_10M_2467.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

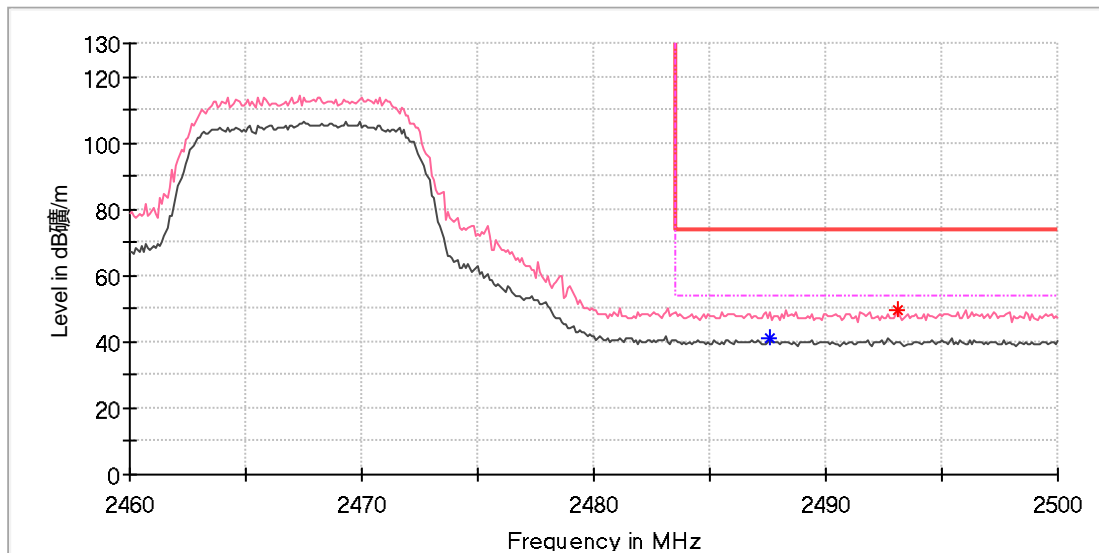

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2487.600000	---	41.18	54.00	12.82	150.0	V	233.0	7.4
2493.100000	49.82	---	74.00	24.18	150.0	V	97.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_20M\_2412.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

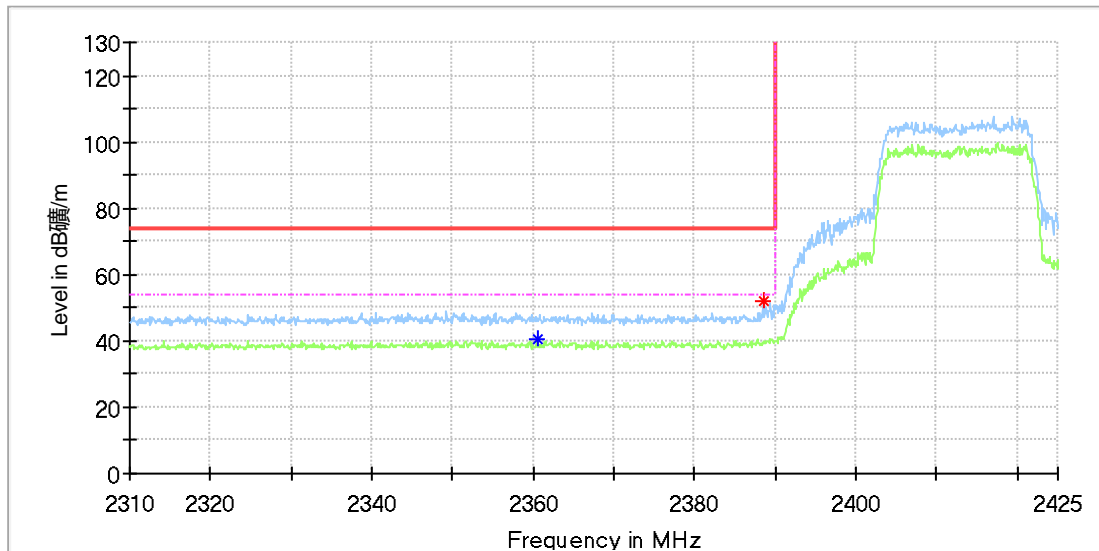

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2360.500000	---	40.52	54.00	13.48	150.0	H	50.0	6.9
2388.500000	51.82	---	74.00	22.18	150.0	H	0.0	7.0


### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_20M\_2412.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

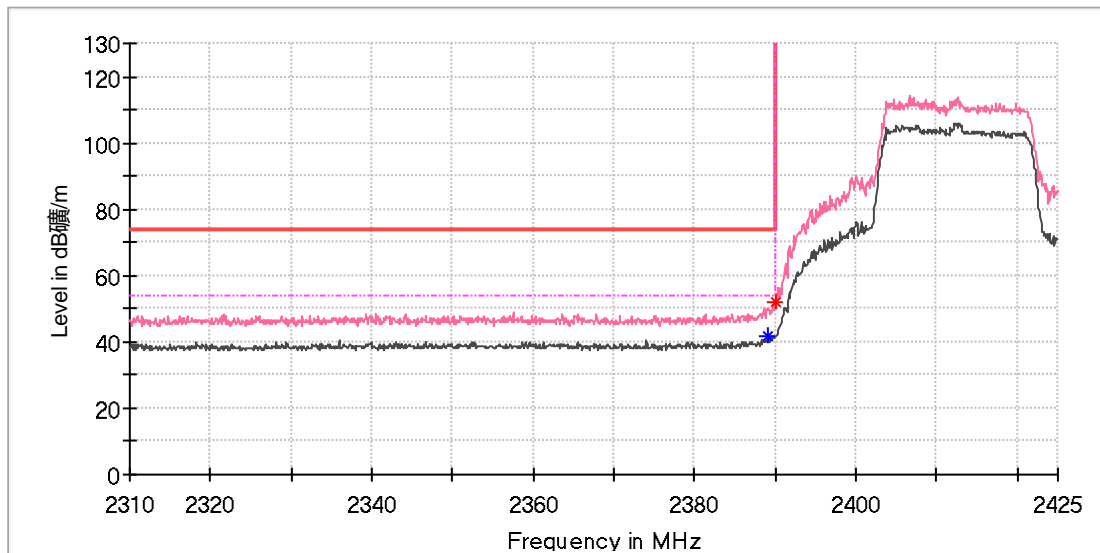

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.100000	---	41.60	54.00	12.40	150.0	V	26.0	7.0
2390.000000	52.27	---	74.00	21.73	150.0	V	45.0	7.0

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_20M\_2462.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

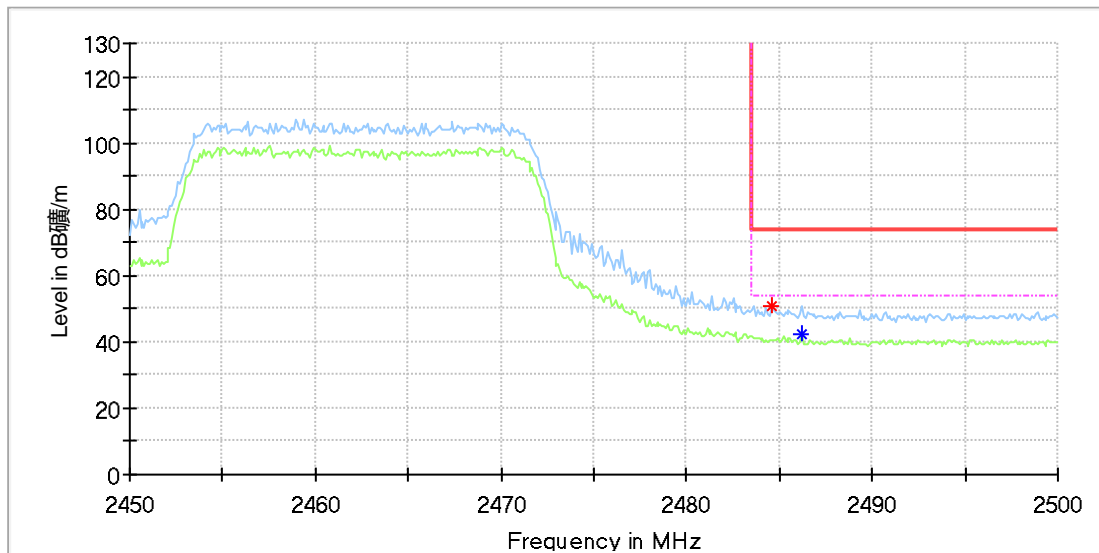

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.600000	50.94	---	74.00	23.06	150.0	H	180.0	7.4
2486.200000	---	42.18	54.00	11.82	150.0	H	143.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_20M_2462.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

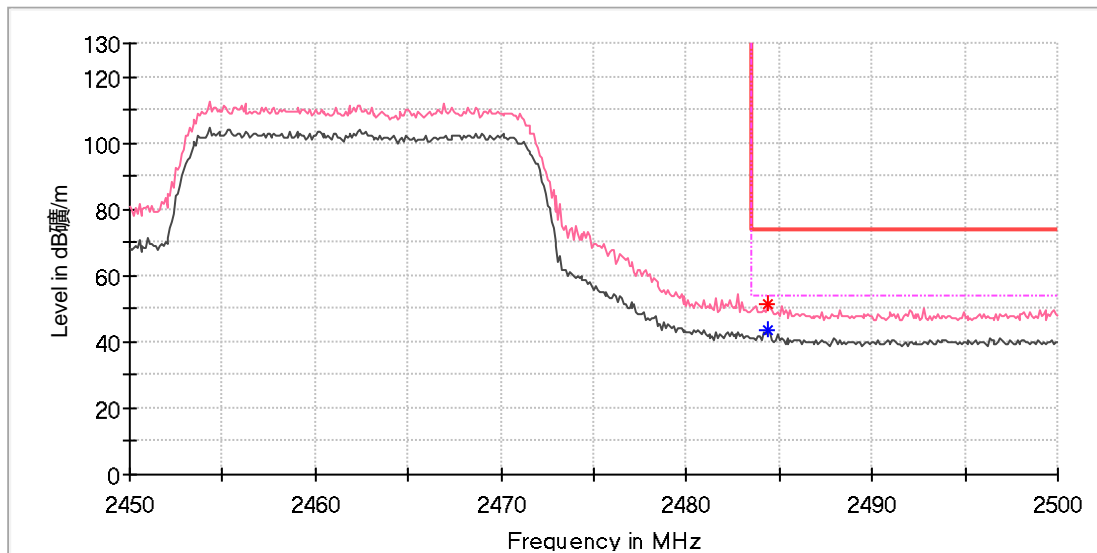

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.400000	---	43.56	54.00	10.44	150.0	V	31.0	7.4
2484.400000	51.55	---	74.00	22.45	150.0	V	31.0	7.4

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2422.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

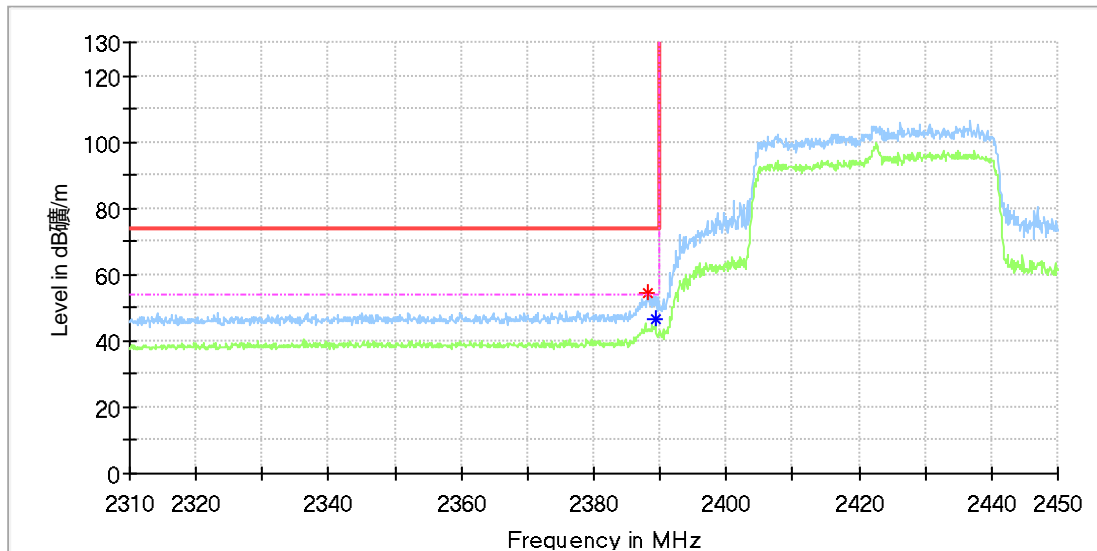

## Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.000000	54.68	---	74.00	19.32	150.0	H	0.0	7.0
2389.400000	---	46.32	54.00	7.68	150.0	H	0.0	7.0

## Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2422.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

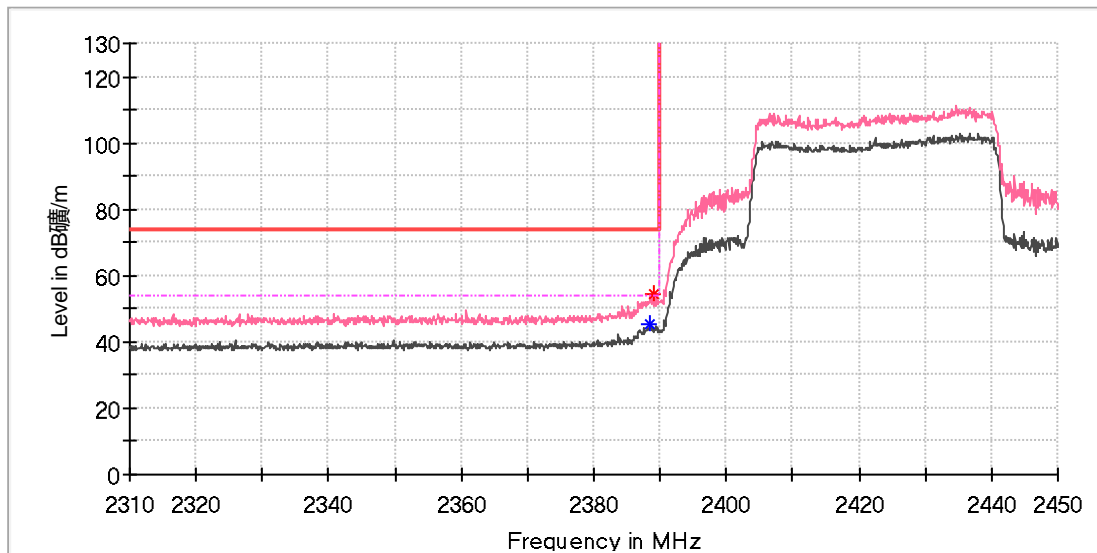

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.500000	---	45.39	54.00	8.61	150.0	V	69.0	7.0
2389.100000	54.27	---	74.00	19.73	150.0	V	295.0	7.0

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_40M\_2452.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

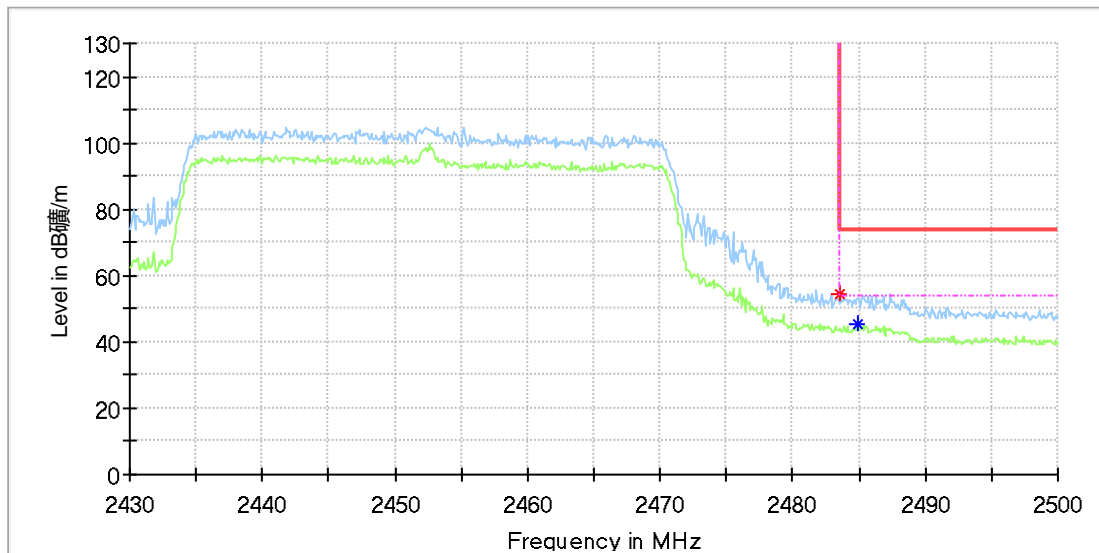

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.600000	54.52	---	74.00	19.48	150.0	H	200.0	7.4
2484.900000	---	45.24	54.00	8.76	150.0	H	208.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2452.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

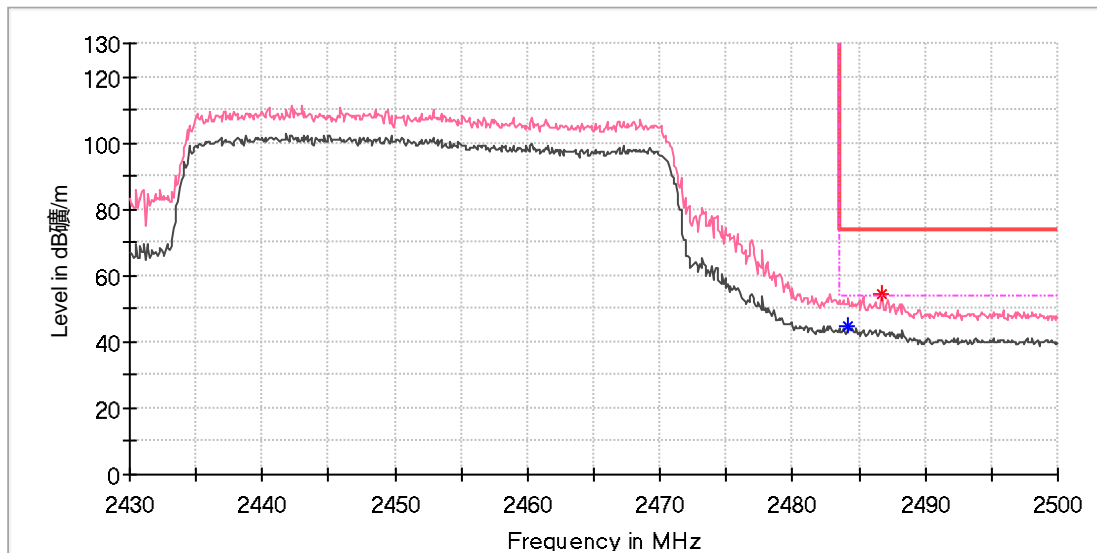

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.200000	---	44.90	54.00	9.10	150.0	V	19.0	7.4
2486.700000	54.34	---	74.00	19.66	150.0	V	51.0	7.4

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_60M\_2432.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

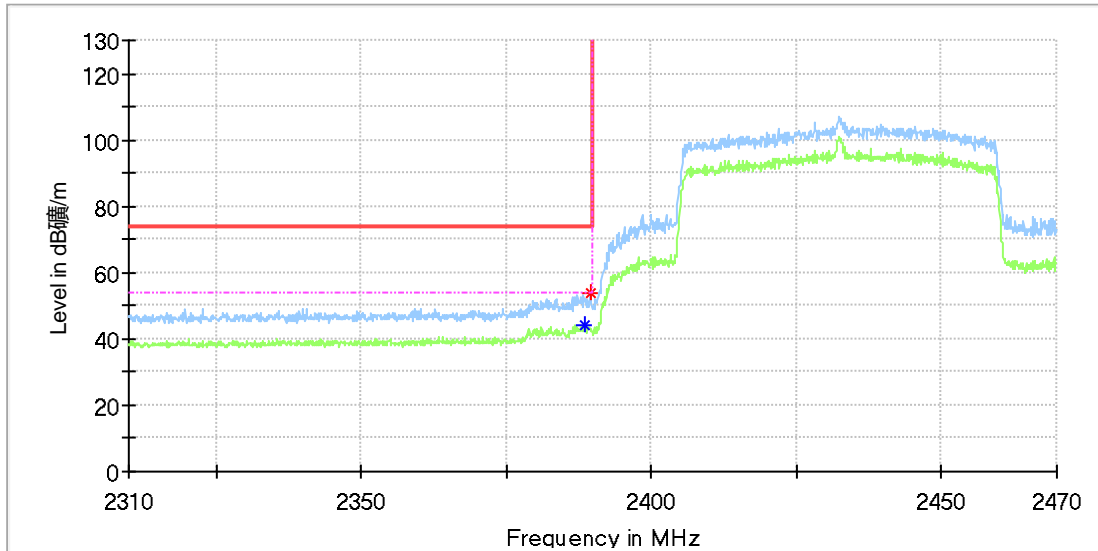

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.600000	---	44.39	54.00	9.61	150.0	H	0.0	7.0
2389.700000	53.98	---	74.00	20.02	150.0	H	355.0	7.0


### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_60M_2432.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

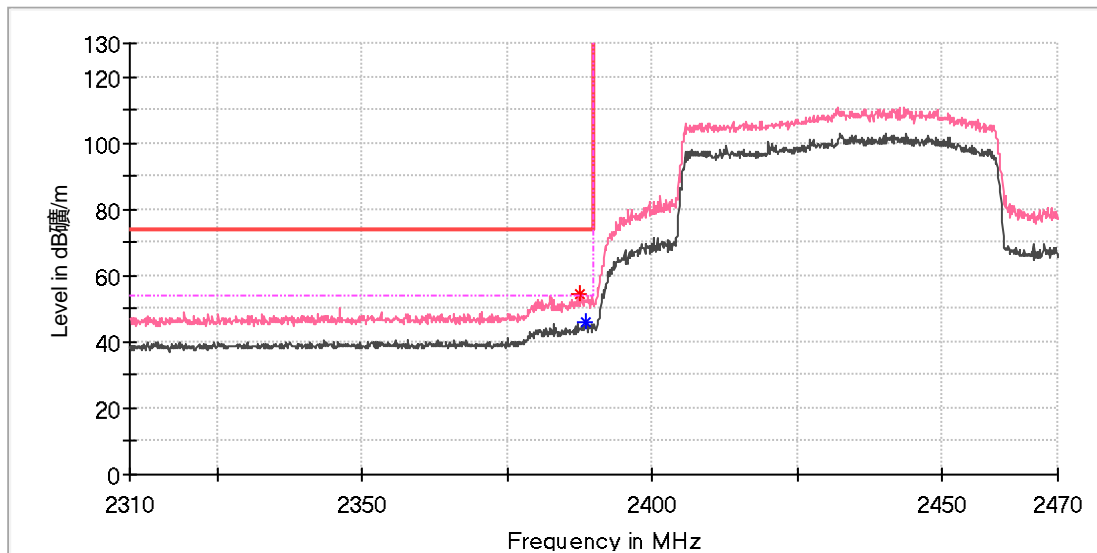

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2387.500000	54.54	---	74.00	19.46	150.0	V	40.0	7.0
2388.600000	---	46.02	54.00	7.98	150.0	V	40.0	7.0

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_60M\_2442.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

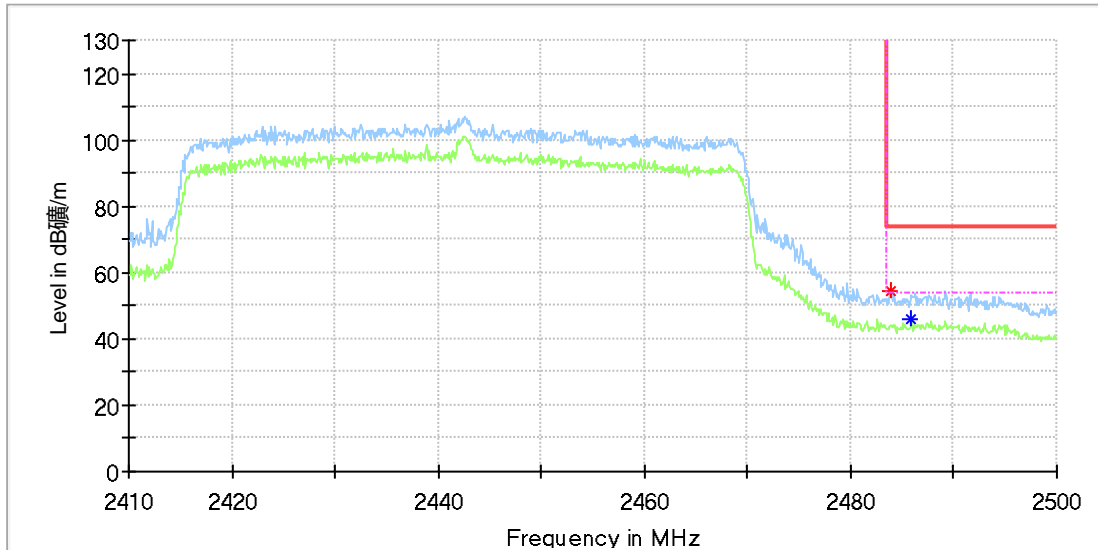

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.900000	54.21	---	74.00	19.79	150.0	H	199.0	7.4
2485.900000	---	46.11	54.00	7.89	150.0	H	191.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_60M_2442.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

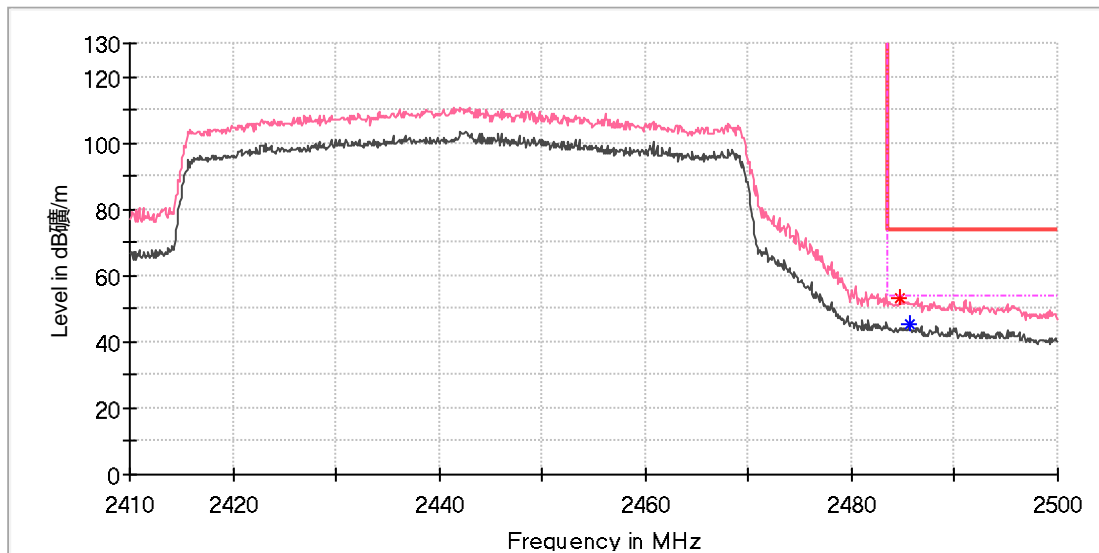

## Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.700000	53.20	---	74.00	20.80	150.0	V	59.0	7.4
2485.600000	---	45.56	54.00	8.44	150.0	V	59.0	7.4


## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

**SISO mode (Worst case\_ANT2)**

**EUT Information**

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_1.4M_2467.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

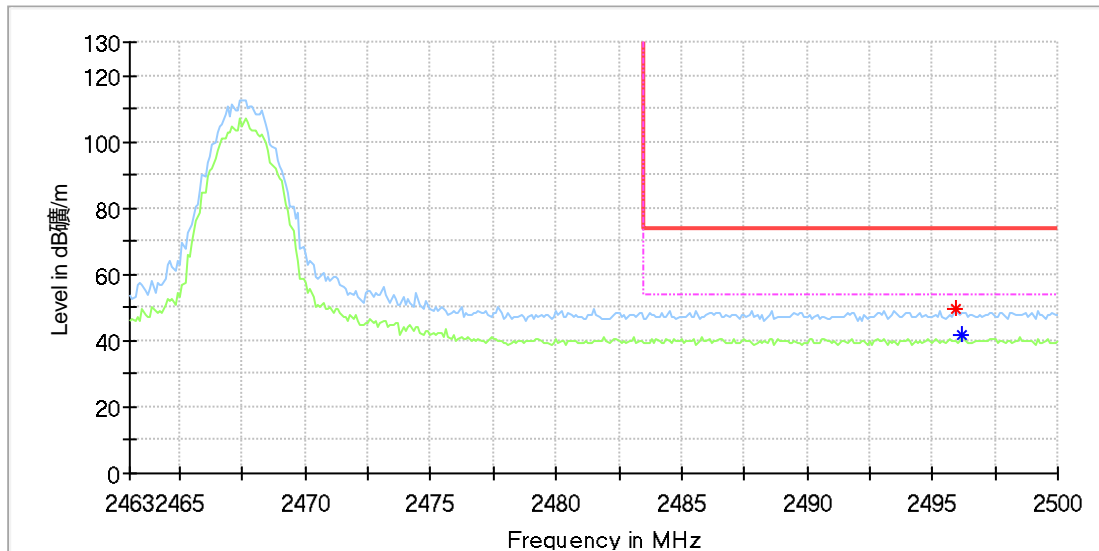

**Critical Freqs**


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2495.900000	49.67	---	74.00	24.33	150.0	H	262.0	7.4
2496.200000	---	41.98	54.00	12.02	150.0	H	135.0	7.4

**Final Result**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_1.4M\_2467.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

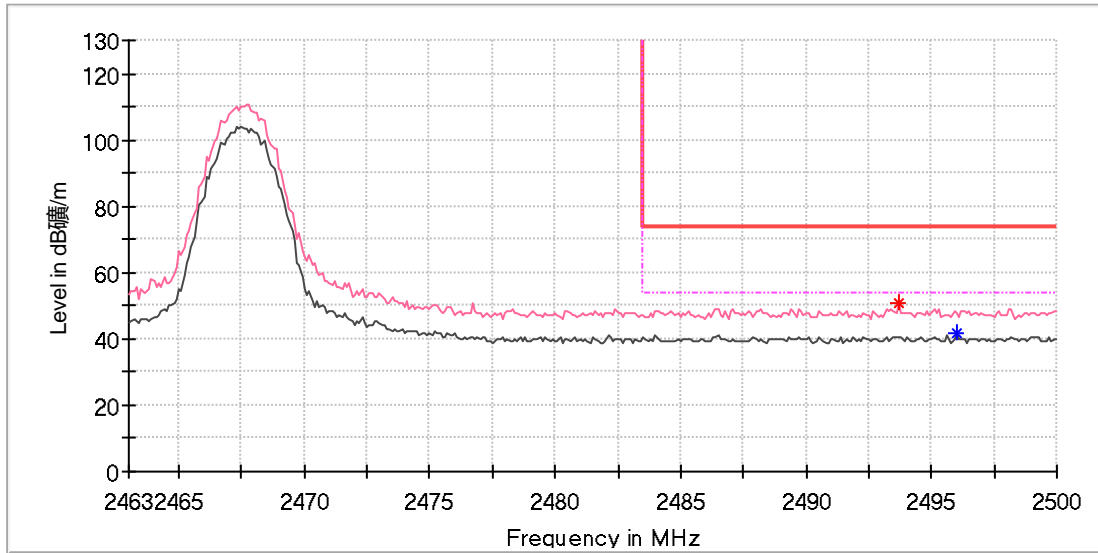

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2493.700000	50.66	---	74.00	23.34	150.0	V	229.0	7.4
2496.000000	---	41.44	54.00	12.56	150.0	V	0.0	7.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 2.4G_40M_2422.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

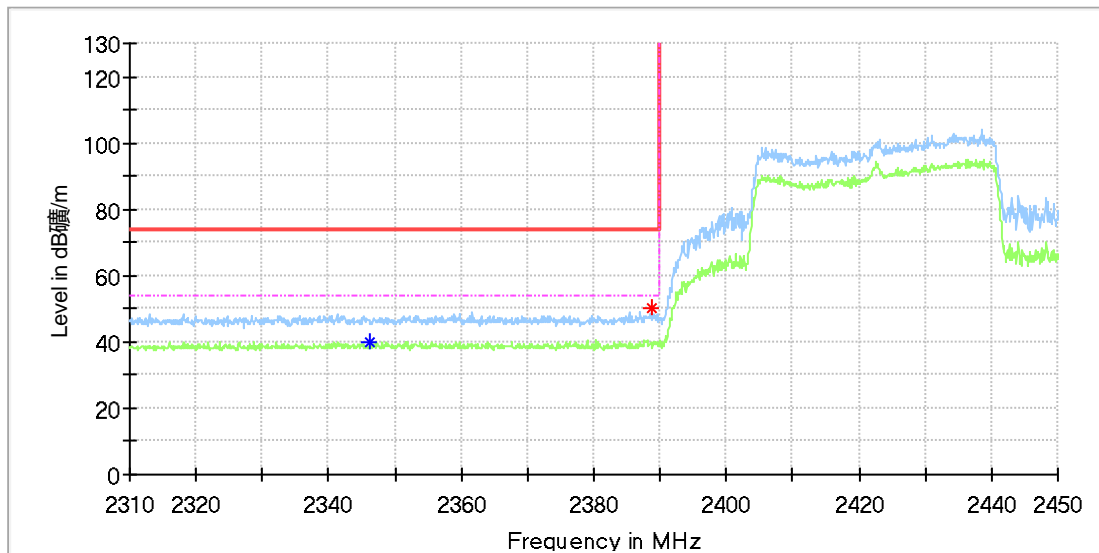

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2346.300000	---	40.01	54.00	13.99	150.0	H	168.0	6.9
2388.800000	50.45	---	74.00	23.55	150.0	H	3.0	7.0

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 2.4G\_40M\_2422.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.247  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

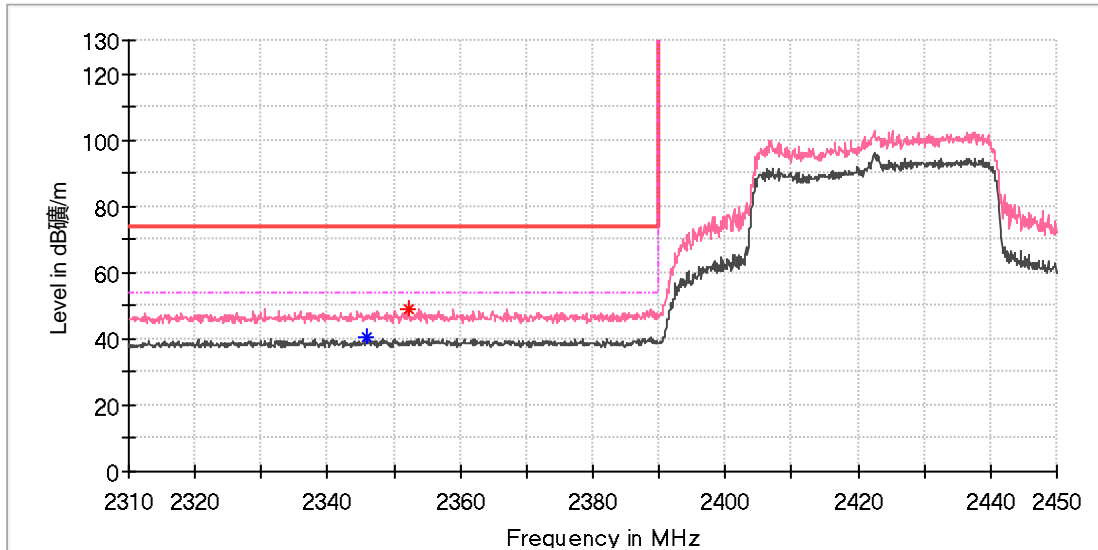

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2345.900000	---	40.24	54.00	13.76	150.0	V	60.0	6.9
2352.100000	48.97	---	74.00	25.03	150.0	V	106.0	6.9

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---