
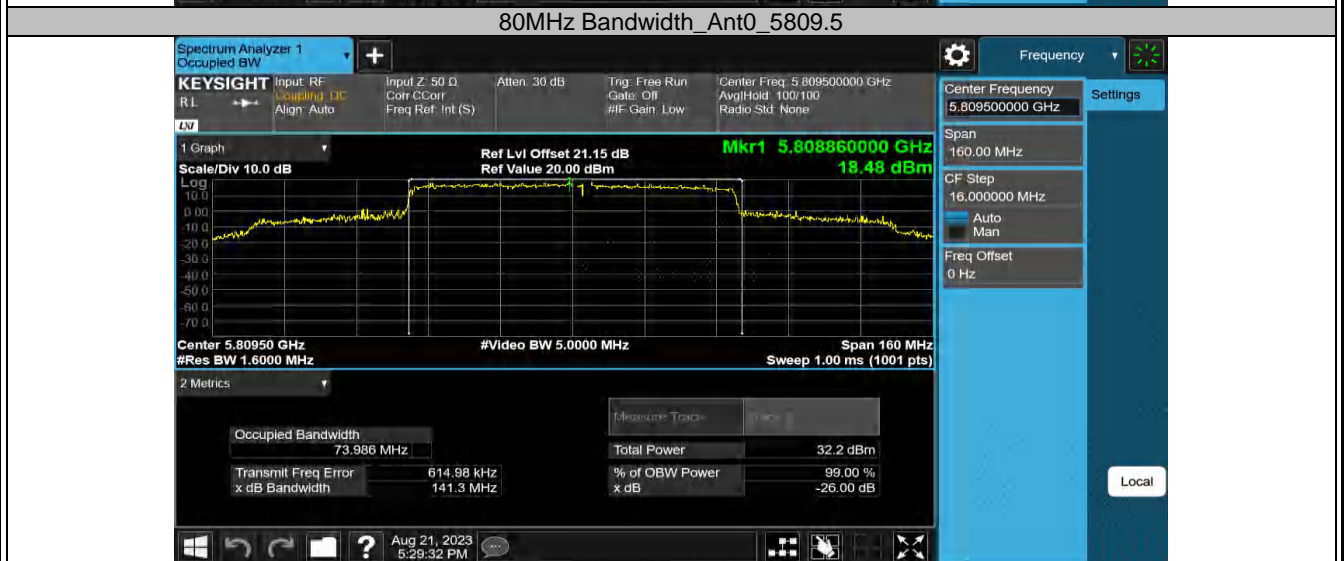
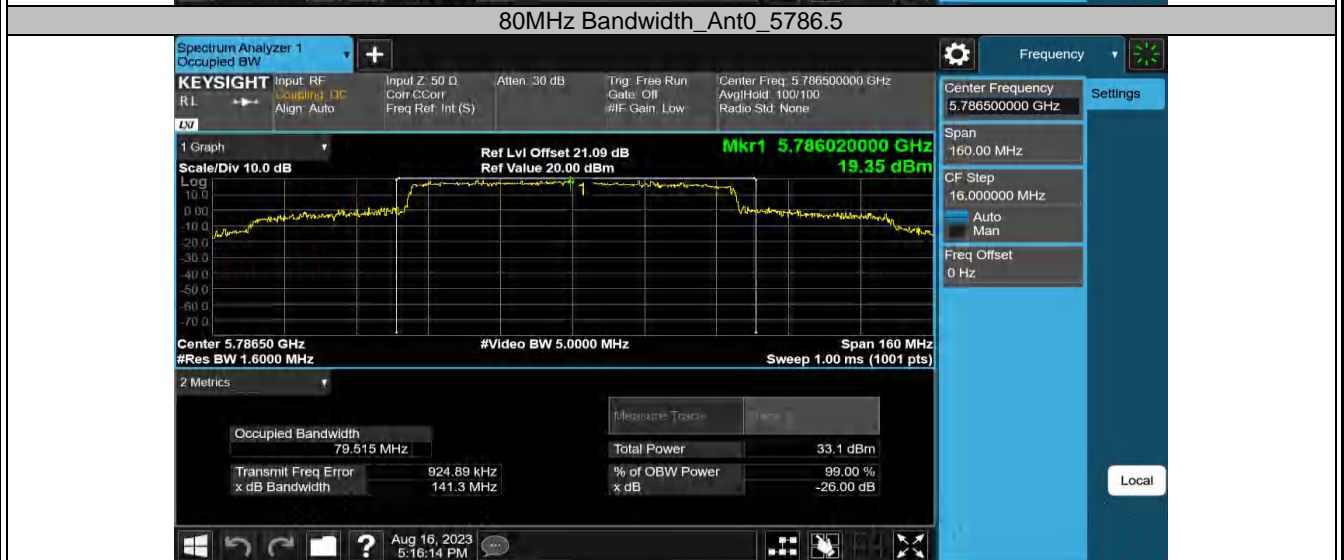


**5.8G SDR, 80MHz BW**

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
80MHz	Ant0	5765.5	72.684	5729.4646	5802.1486	---	PASS
		5786.5	79.515	5747.6674	5827.1824	---	PASS
		5809.5	73.986	5773.1220	5847.1080	---	PASS

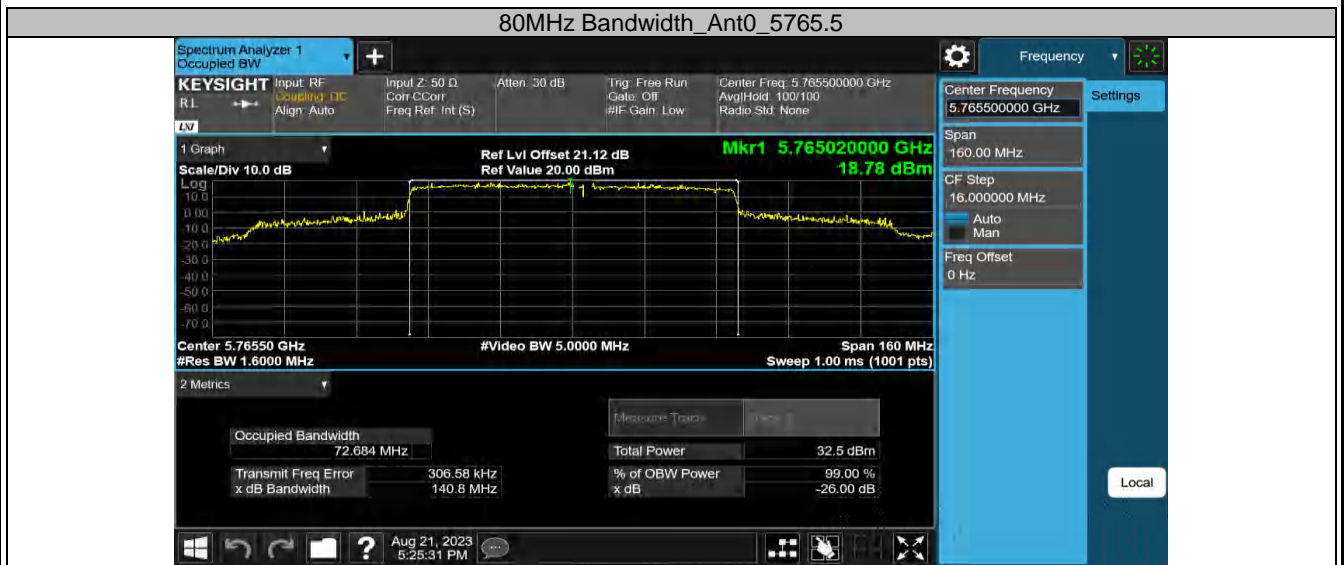


## Appendix A.5: Test Results of Radiated Spurious Emissions

Note: 1, Testing is carried out with frequency rang 9kHz to the tenth harmonics.  
2, The margin is greater than 20 dB are not shown in this Appendix.

### 30MHz - 1GHz (Worst case)

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5788.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

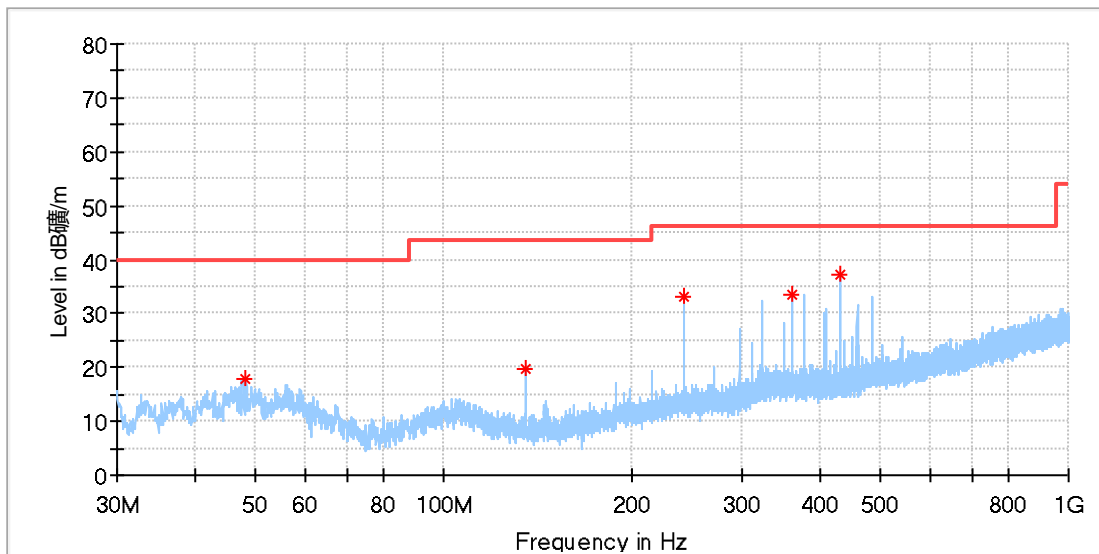

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.284500	18.04	40.00	21.96	100.0	H	0.0	-18.4
135.002500	19.54	43.50	23.96	100.0	H	308.0	-22.1
243.012000	33.21	46.00	12.79	100.0	H	196.0	-17.7
359.994000	33.61	46.00	12.39	100.0	H	32.0	-14.6
432.016500	37.29	46.00	8.71	100.0	H	316.0	-13.3

### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5788.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

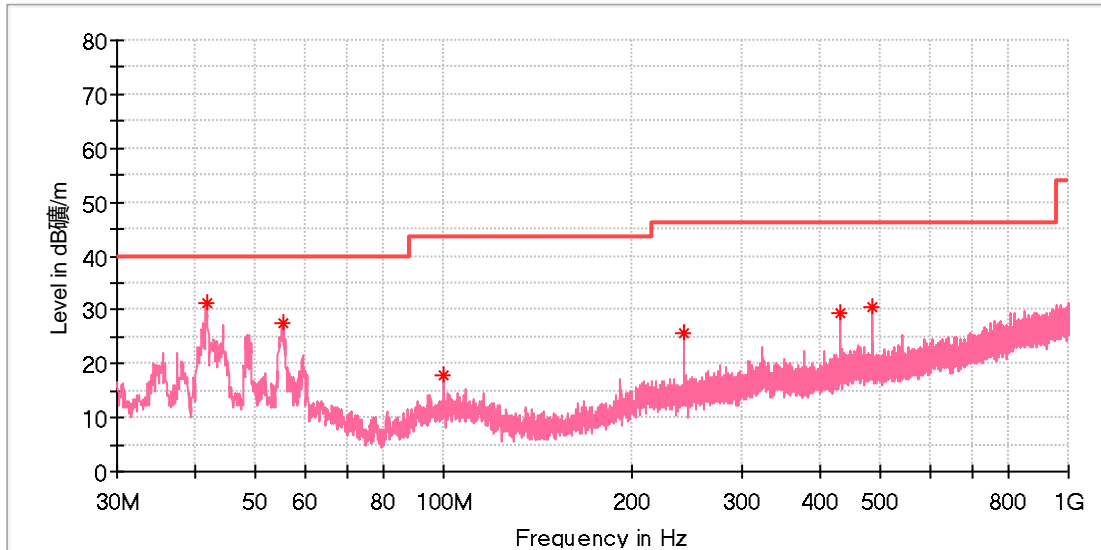

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
41.688500	31.09	40.00	8.91	100.0	V	130.0	-19.7
55.171500	27.45	40.00	12.55	100.0	V	232.0	-18.5
99.985500	18.01	43.50	25.49	100.0	V	344.0	-19.0
243.012000	25.63	46.00	20.37	100.0	V	268.0	-17.7
432.016500	29.53	46.00	16.47	100.0	V	224.0	-13.3
485.997000	30.64	46.00	15.36	100.0	V	12.0	-12.0

### Final\_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---


**1GHz - 18GHz**

Note: The highest waveform in the figure is 5.8G SDR Fundamental.

MIMO mode (Worst case\_ANT0+ANT3)

**EUT Information**

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5788.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

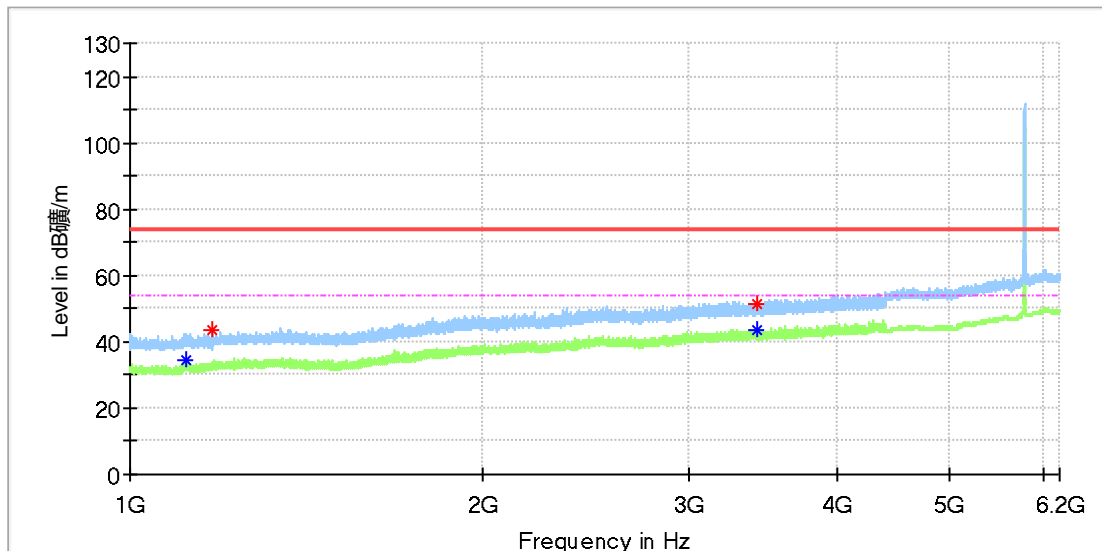

**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1117.810000	---	34.17	54.00	19.83	150.0	H	306.0	0.1
1174.080000	43.78	---	74.00	30.22	150.0	H	0.0	1.0
3424.030000	---	43.56	54.00	10.44	150.0	H	306.0	8.8
3424.200000	51.67	---	74.00	22.33	150.0	H	6.0	8.8

**Final\_Result**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_1.4M CA\_5788.12MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

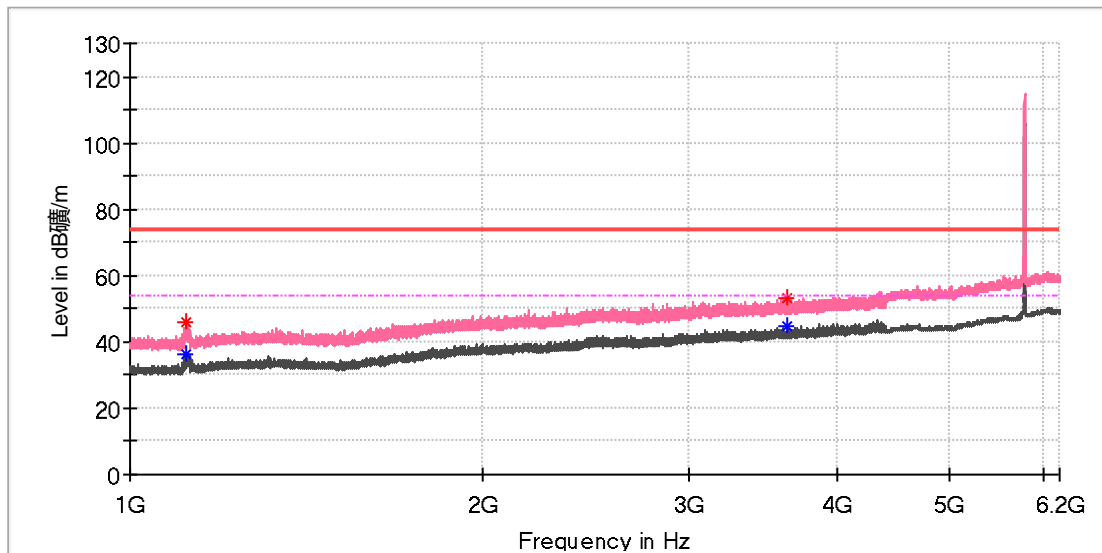

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1117.640000	46.03	---	74.00	27.97	150.0	V	286.0	0.1
1117.810000	---	36.45	54.00	17.55	150.0	V	296.0	0.1
3634.490000	53.24	---	74.00	20.76	150.0	V	41.0	9.4
3635.340000	---	44.56	54.00	9.44	150.0	V	266.0	9.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5788.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

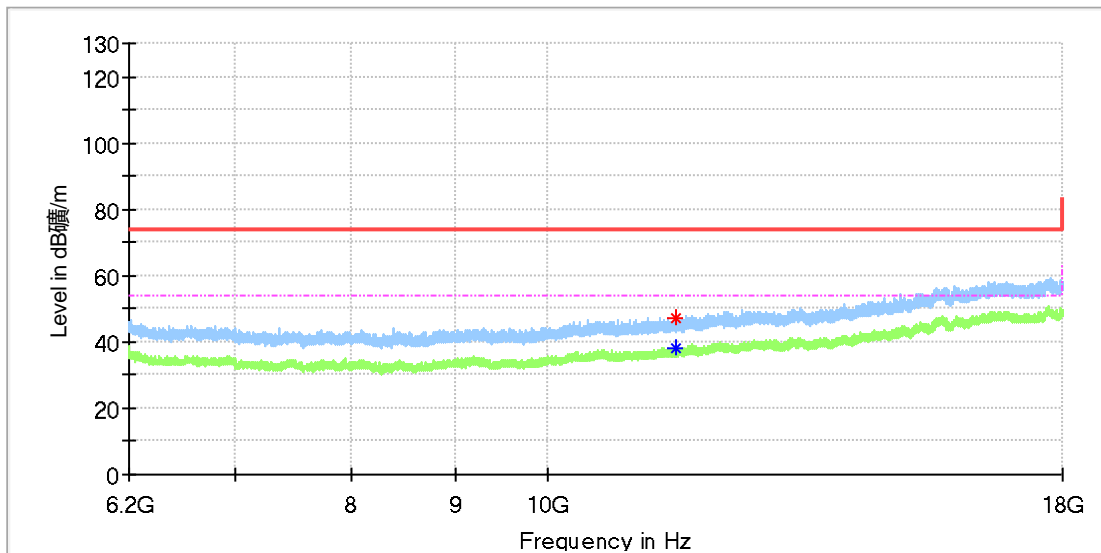

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11572.933333	46.89	---	74.00	27.11	150.0	H	302.0	13.4
11576.375000	---	38.00	54.00	16.00	150.0	H	152.0	13.4


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_1.4M CA\_5788.12MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

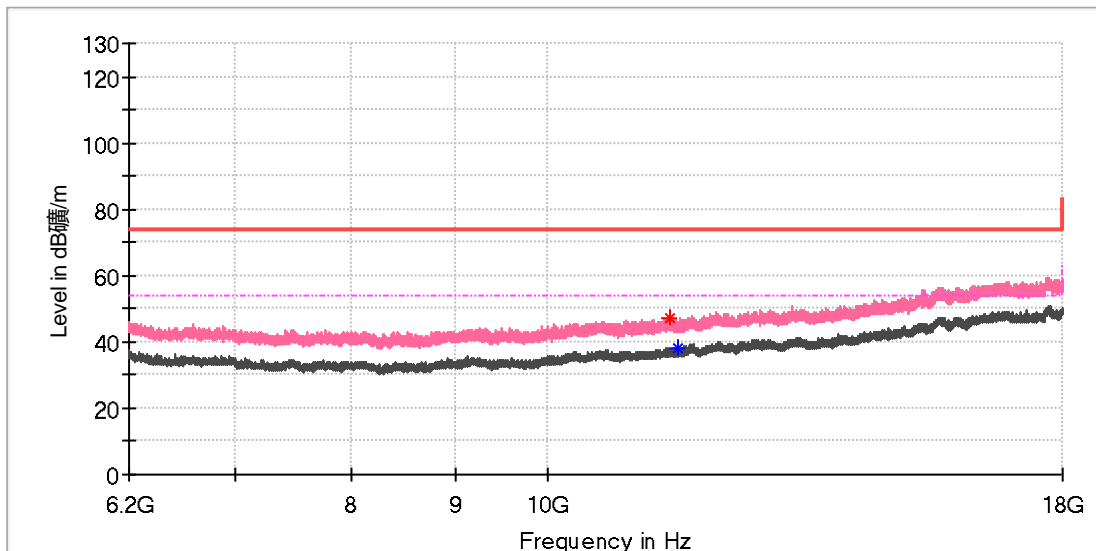

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11491.316667	46.98	---	74.00	27.02	150.0	V	2.0	13.7
11593.091667	---	37.97	54.00	16.03	150.0	V	115.0	13.3

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5787.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

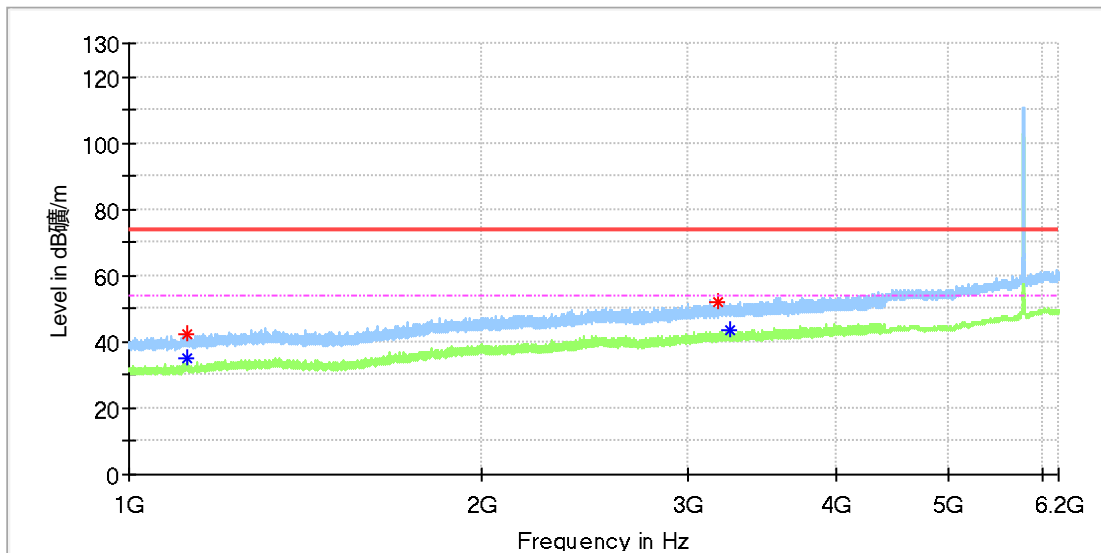

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1121.720000	42.04	---	74.00	31.96	150.0	H	306.0	0.2
1122.740000	---	35.03	54.00	18.97	150.0	H	325.0	0.2
3181.780000	52.26	---	74.00	21.74	150.0	H	296.0	8.6
3259.130000	---	43.64	54.00	10.36	150.0	H	197.0	8.5

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5787.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

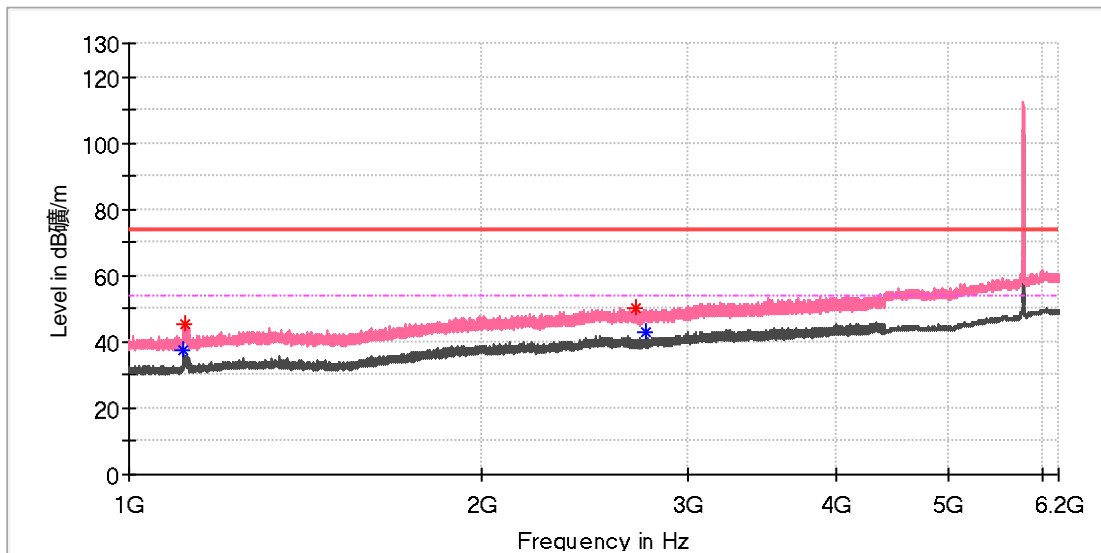

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1110.840000	---	37.26	54.00	16.74	150.0	V	283.0	0.0
1117.300000	45.06	---	74.00	28.94	150.0	V	294.0	0.1
2699.150000	50.21	---	74.00	23.79	150.0	V	0.0	7.5
2757.970000	---	42.65	54.00	11.35	150.0	V	223.0	7.9

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5787.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

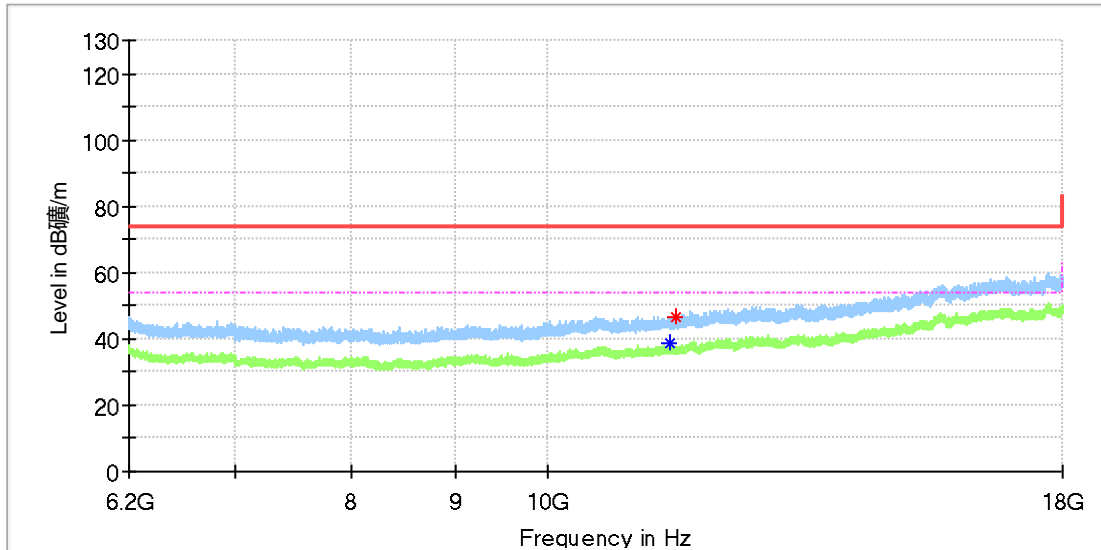

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11508.033333	---	38.90	54.00	15.10	150.0	H	7.0	13.7
11566.050000	46.77	---	74.00	27.23	150.0	H	0.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5787.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

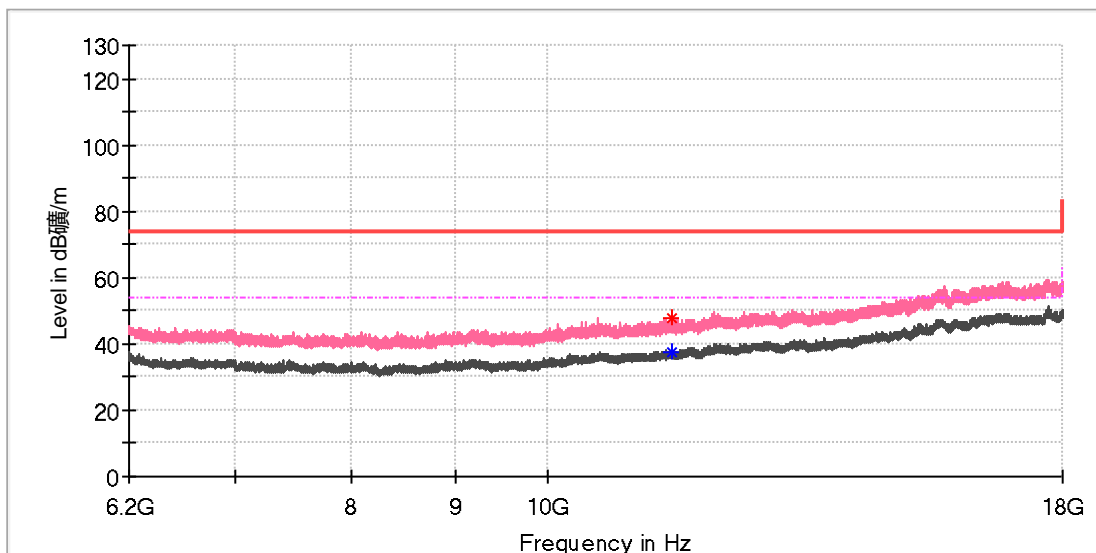

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11517.866667	---	37.64	54.00	16.36	150.0	V	238.0	13.6
11530.158333	47.67	---	74.00	26.33	150.0	V	203.0	13.6

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_5M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

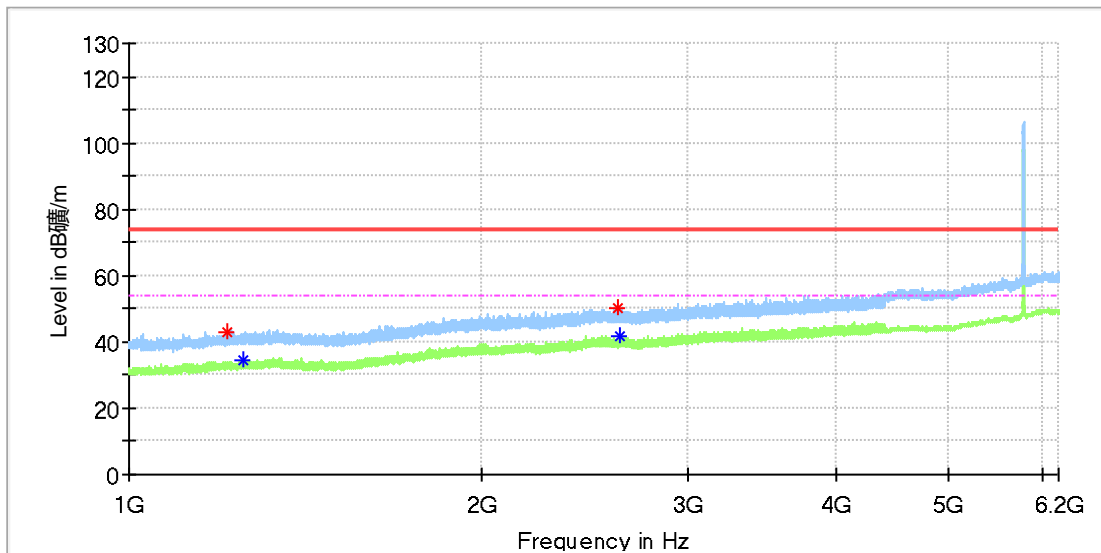

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1214.030000	43.20	---	74.00	30.80	150.0	H	249.0	1.3
1252.620000	---	34.65	54.00	19.35	150.0	H	321.0	1.9
2613.130000	50.00	---	74.00	24.00	150.0	H	198.0	7.4
2616.190000	---	41.99	54.00	12.01	150.0	H	168.0	7.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_5M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

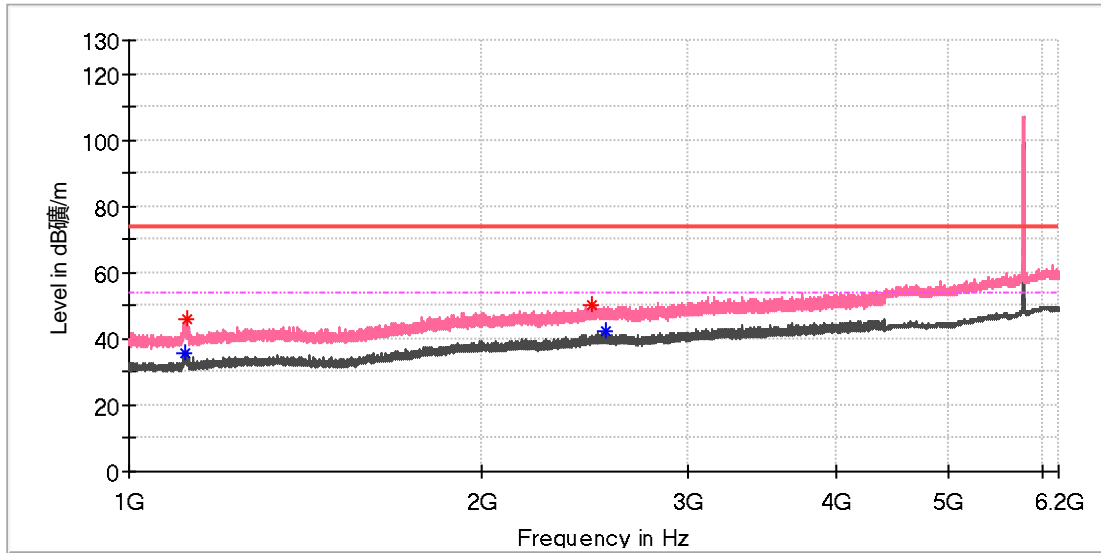

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1116.280000	---	35.94	54.00	18.06	150.0	V	291.0	0.1
1120.190000	46.15	---	74.00	27.85	150.0	V	300.0	0.2
2482.400000	50.34	---	74.00	23.66	150.0	V	321.0	7.4
2550.060000	---	42.51	54.00	11.49	150.0	V	291.0	7.6

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_5M_5787.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

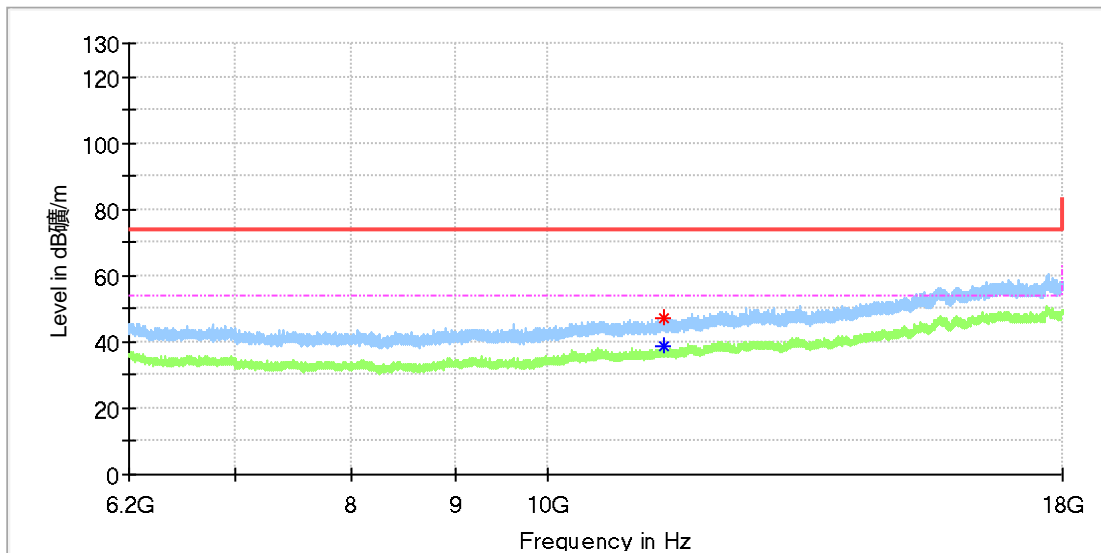

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11406.750000	---	38.47	54.00	15.53	150.0	H	236.0	12.9
11428.383333	47.37	---	74.00	26.63	150.0	H	88.0	13.1


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_5M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

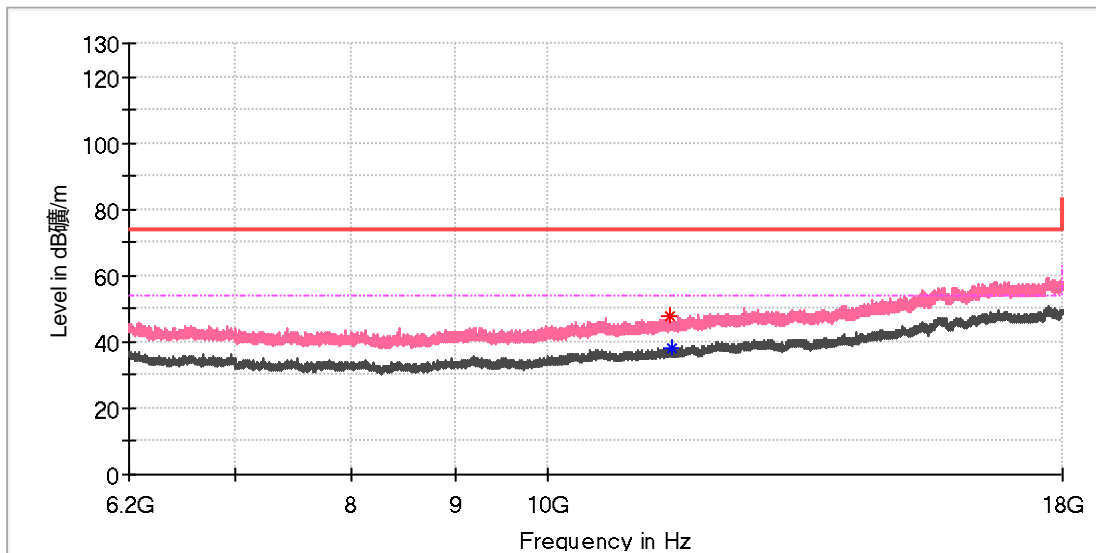

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11507.541667	47.78	---	74.00	26.22	150.0	V	133.0	13.7
11530.650000	---	37.85	54.00	16.15	150.0	V	122.0	13.6

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

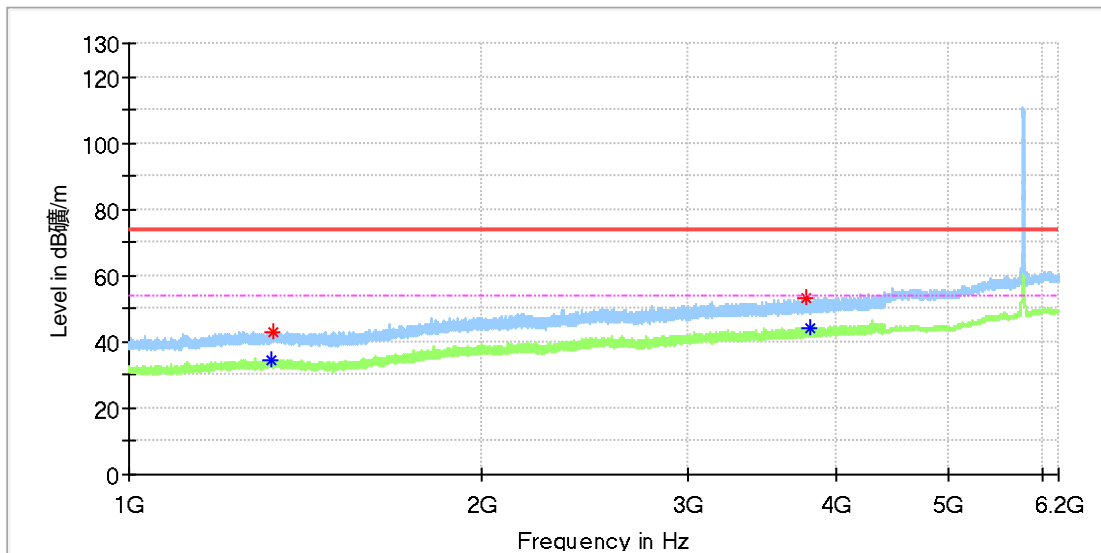

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1320.960000	---	34.67	54.00	19.33	150.0	H	207.0	2.0
1329.800000	43.02	---	74.00	30.98	150.0	H	356.0	2.0
3779.330000	53.31	---	74.00	20.69	150.0	H	216.0	9.8
3809.250000	---	44.44	54.00	9.56	150.0	H	277.0	9.8

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

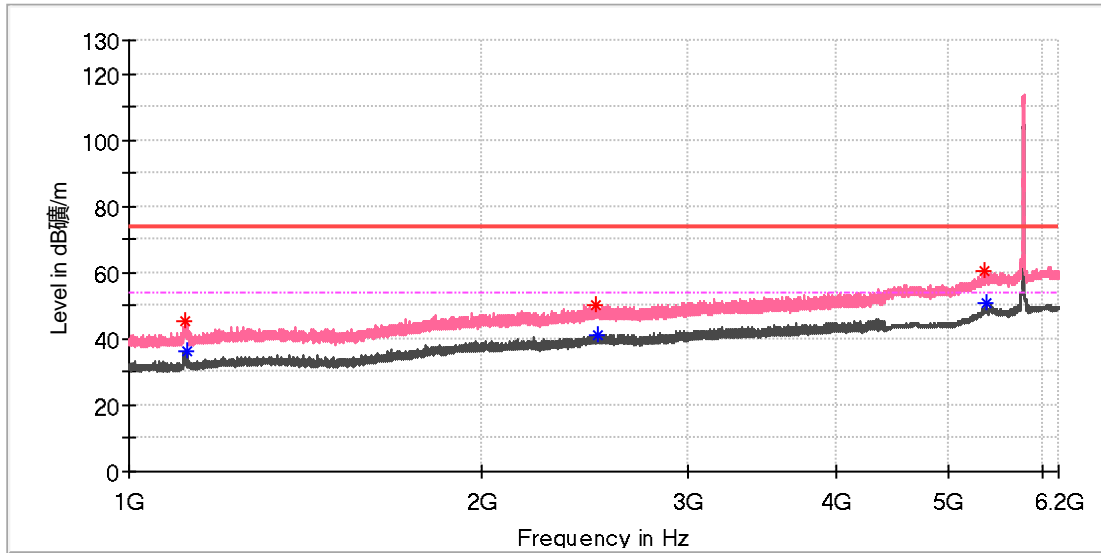

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1115.770000	45.64	---	74.00	28.36	150.0	V	291.0	0.1
1122.400000	---	36.52	54.00	17.48	150.0	V	291.0	0.2
2500.930000	50.46	---	74.00	23.54	150.0	V	221.0	7.4
2510.110000	---	41.22	54.00	12.78	150.0	V	331.0	7.4
5371.000000	60.75	---	74.00	13.25	150.0	V	294.0	13.3
5382.000000	---	50.58	54.00	3.42	150.0	V	332.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

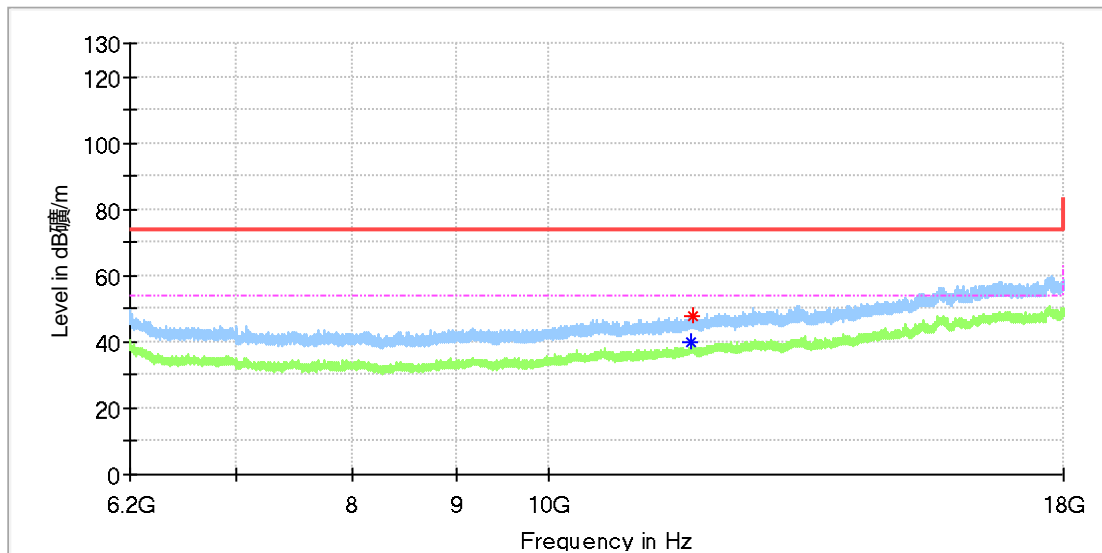

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11773.041667	---	39.61	54.00	14.39	150.0	H	299.0	13.4
11780.908333	47.94	---	74.00	26.06	150.0	H	16.0	13.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5787.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

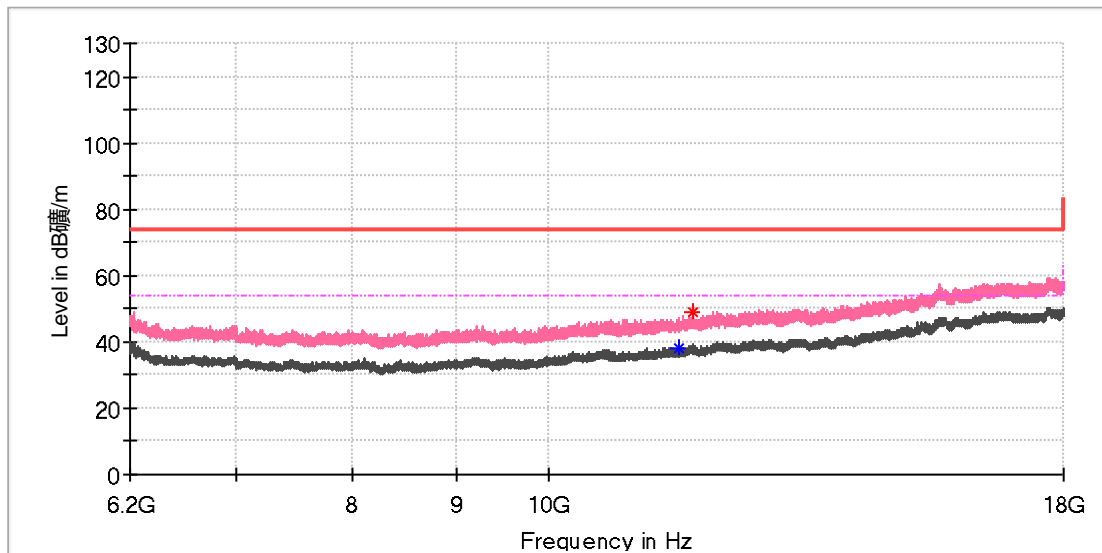

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11592.600000	---	37.86	54.00	16.14	150.0	V	337.0	13.3
11798.608333	48.99	---	74.00	25.01	150.0	V	0.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_20M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

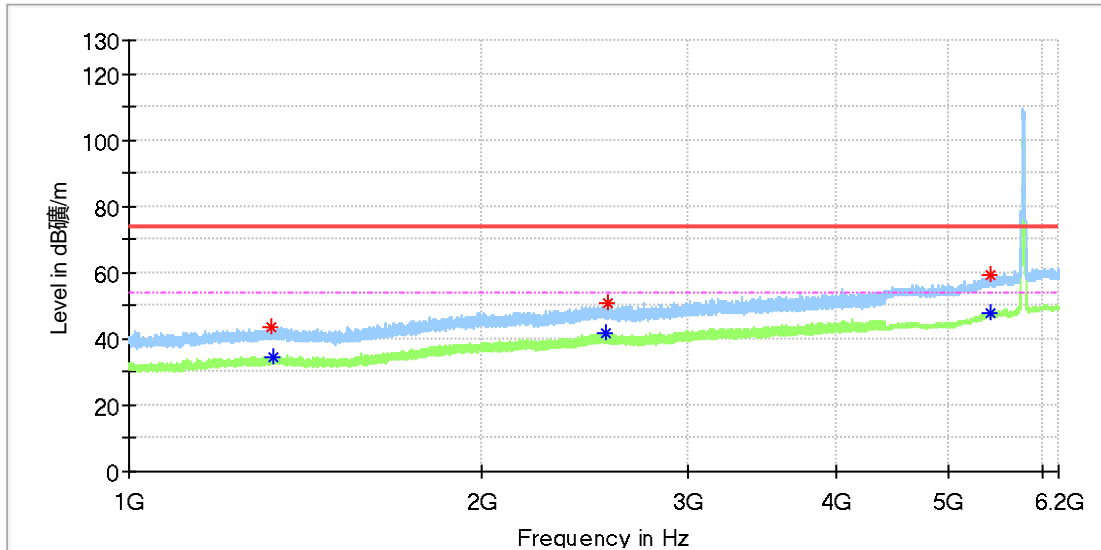

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1321.300000	43.66	---	74.00	30.34	150.0	H	11.0	2.0
1328.440000	---	34.72	54.00	19.28	150.0	H	212.0	2.0
2553.630000	---	41.73	54.00	12.27	150.0	H	267.0	7.6
2555.160000	50.86	---	74.00	23.14	150.0	H	144.0	7.6
5415.000000	58.99	---	74.00	15.01	150.0	H	171.0	13.5
5422.000000	---	47.93	54.00	6.07	150.0	H	72.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_20M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

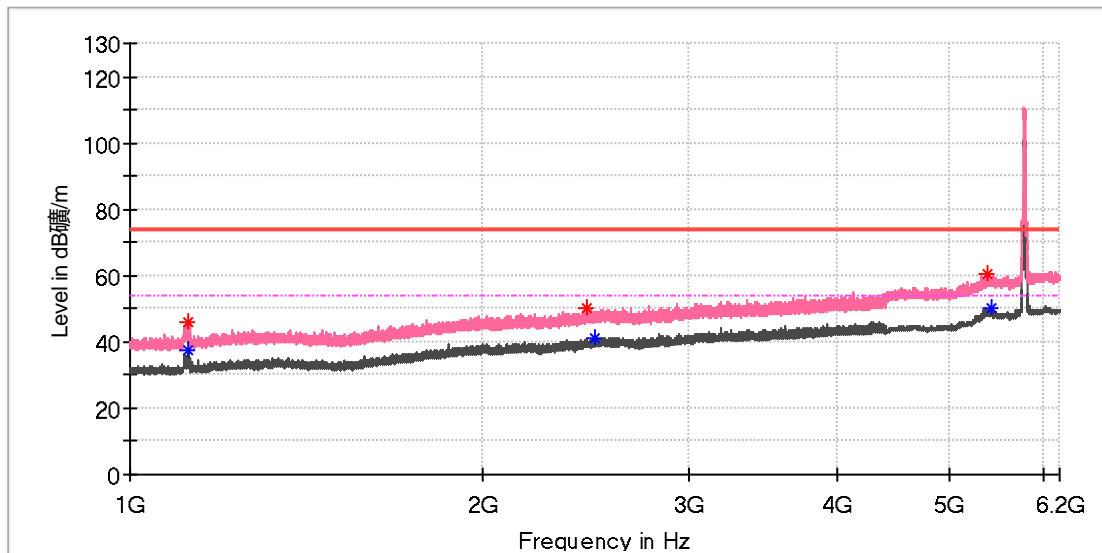

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.660000	45.71	---	74.00	28.29	150.0	V	301.0	0.2
1120.530000	---	37.42	54.00	16.58	150.0	V	289.0	0.2
2448.740000	50.06	---	74.00	23.94	150.0	V	0.0	7.5
2493.450000	---	41.31	54.00	12.69	150.0	V	215.0	7.4
5375.500000	60.58	---	74.00	13.42	150.0	V	279.0	13.4
5425.500000	---	49.89	54.00	4.11	150.0	V	319.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_20M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

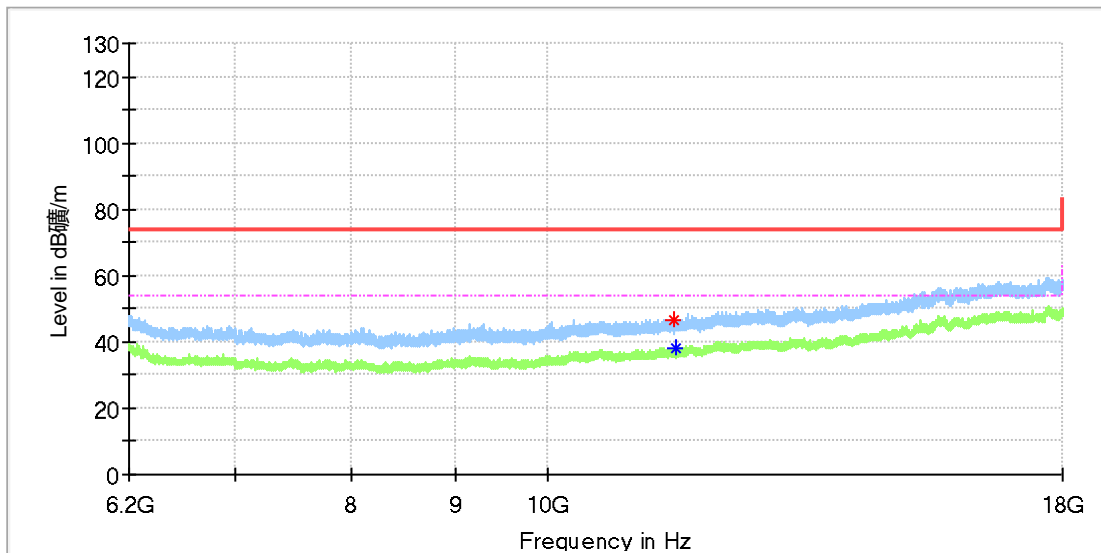

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11558.183333	46.33	---	74.00	27.67	150.0	H	195.0	13.5
11574.408333	---	38.05	54.00	15.95	150.0	H	160.0	13.4


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_20M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

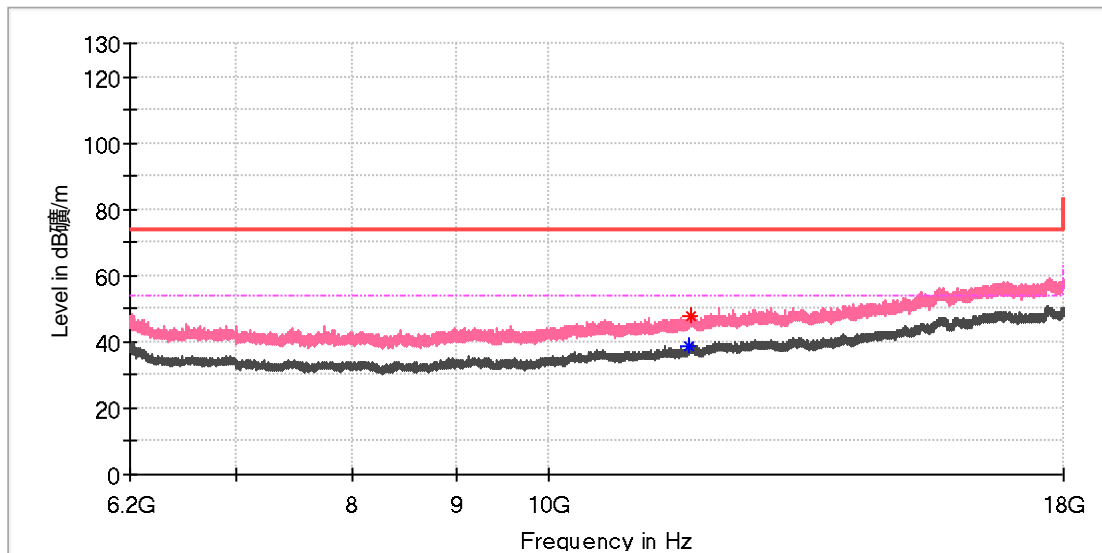

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11737.641667	---	38.91	54.00	15.09	150.0	V	235.0	13.3
11751.408333	47.86	---	74.00	26.14	150.0	V	309.0	13.3

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_40M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

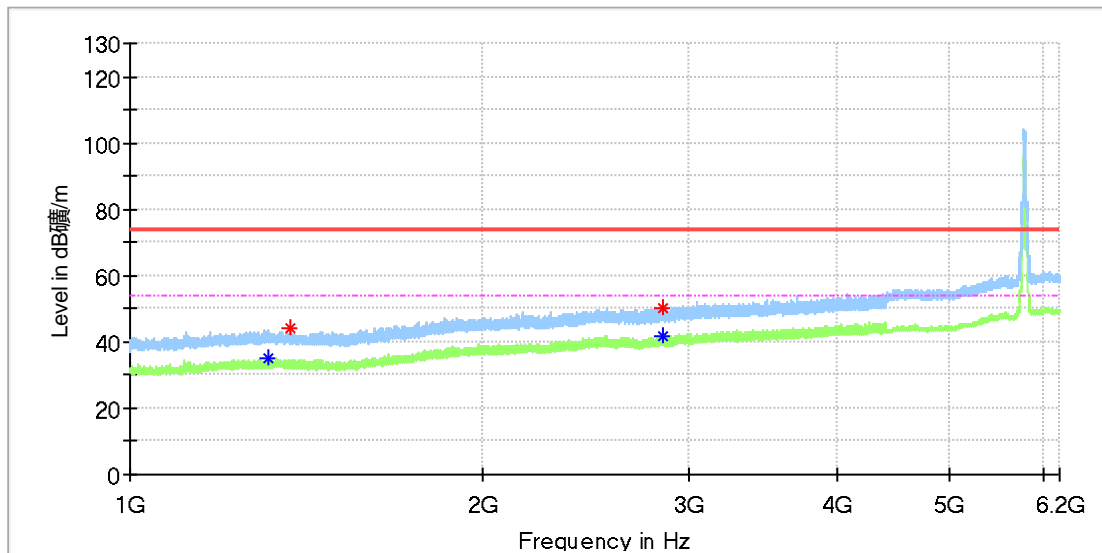

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1313.990000	---	34.99	54.00	19.01	150.0	H	35.0	2.0
1371.620000	44.19	---	74.00	29.81	150.0	H	0.0	1.9
2840.760000	50.36	---	74.00	23.64	150.0	H	95.0	8.1
2840.930000	---	41.67	54.00	12.33	150.0	H	166.0	8.1

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_40M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

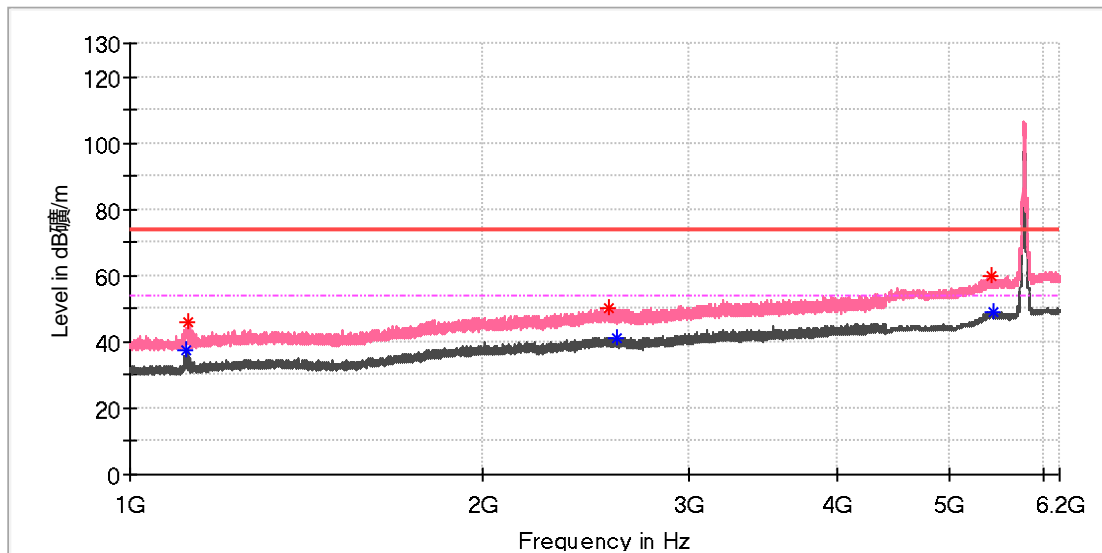

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.490000	---	37.20	54.00	16.80	150.0	V	295.0	0.2
1120.360000	45.65	---	74.00	28.35	150.0	V	295.0	0.2
2558.220000	50.19	---	74.00	23.81	150.0	V	21.0	7.6
2596.810000	---	41.32	54.00	12.68	150.0	V	184.0	7.4
5431.000000	60.12	---	74.00	13.88	150.0	V	349.0	13.5
5447.000000	---	49.04	54.00	4.96	150.0	V	214.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_40M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

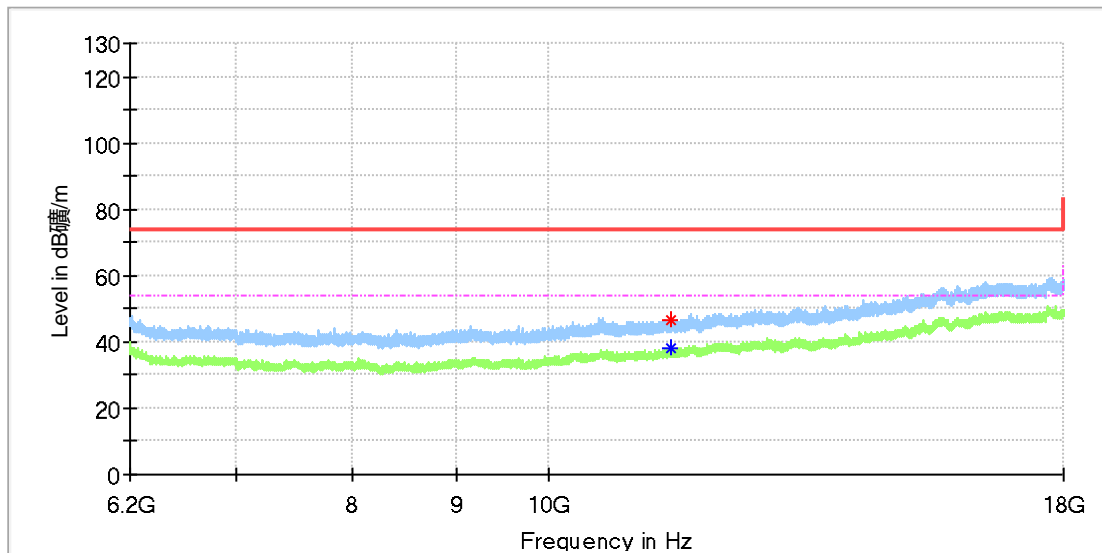

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11502.133333	---	38.03	54.00	15.97	150.0	H	191.0	13.7
11508.525000	46.33	---	74.00	27.67	150.0	H	8.0	13.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_40M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

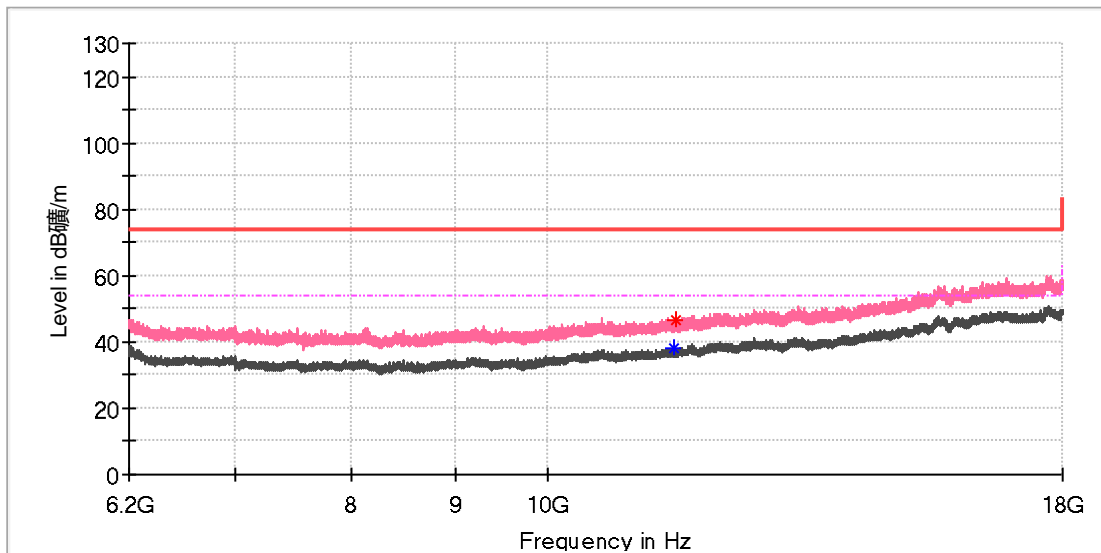

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11537.041667	---	37.98	54.00	16.02	150.0	V	56.0	13.5
11564.575000	46.54	---	74.00	27.46	150.0	V	0.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_60M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

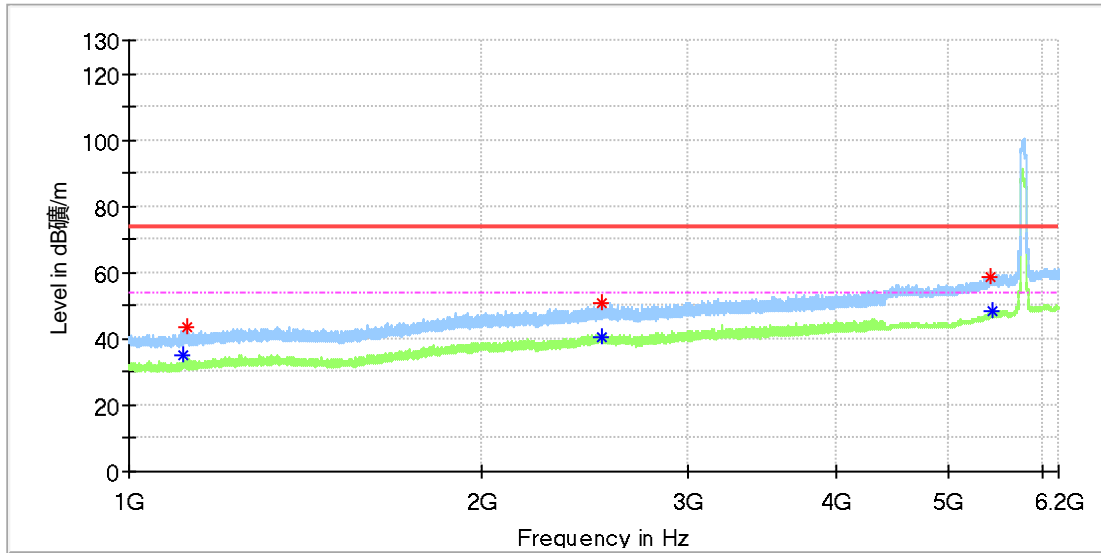

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1113.220000	---	35.12	54.00	18.88	150.0	H	304.0	0.1
1119.170000	43.30	---	74.00	30.70	150.0	H	315.0	0.2
2528.300000	---	40.80	54.00	13.20	150.0	H	224.0	7.5
2532.380000	50.92	---	74.00	23.08	150.0	H	244.0	7.5
5416.000000	58.60	---	74.00	15.40	150.0	H	177.0	13.5
5452.000000	---	48.10	54.00	5.90	150.0	H	177.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

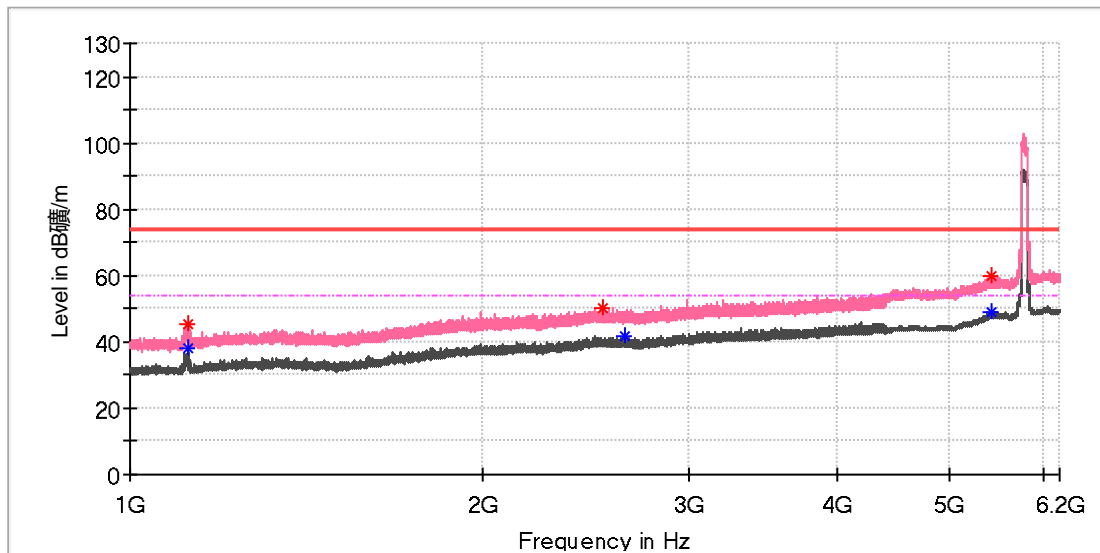

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1119.170000	45.22	---	74.00	28.78	150.0	V	299.0	0.2
1122.060000	---	37.89	54.00	16.11	150.0	V	289.0	0.2
2532.720000	50.20	---	74.00	23.80	150.0	V	251.0	7.5
2645.600000	---	41.50	54.00	12.50	150.0	V	309.0	7.6
5416.500000	---	49.26	54.00	4.74	150.0	V	280.0	13.5
5434.000000	59.69	---	74.00	14.31	150.0	V	334.0	13.5

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

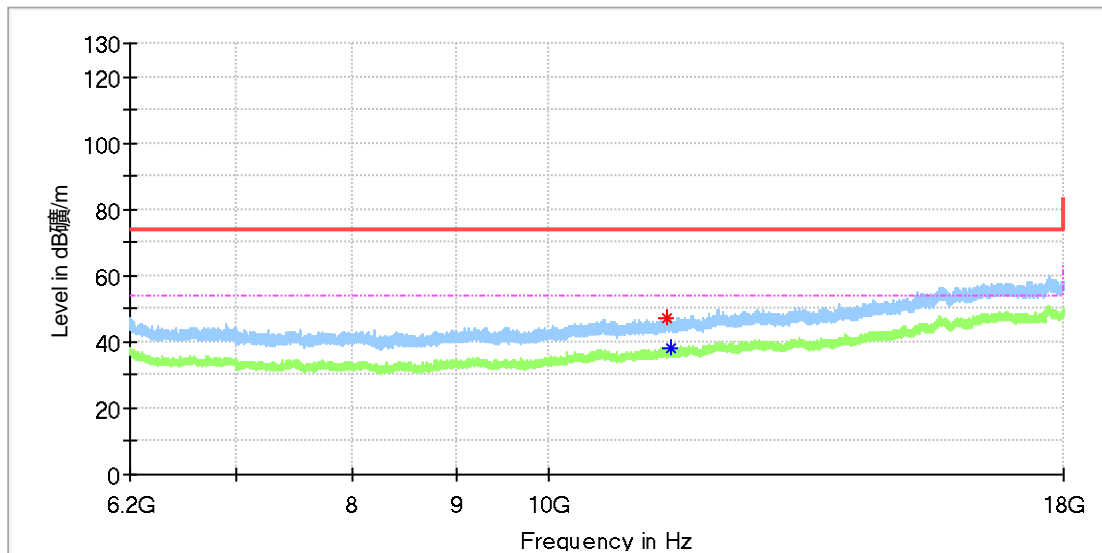

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11445.100000	47.06	---	74.00	26.94	150.0	H	0.0	13.3
11501.641667	---	38.04	54.00	15.96	150.0	H	358.0	13.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

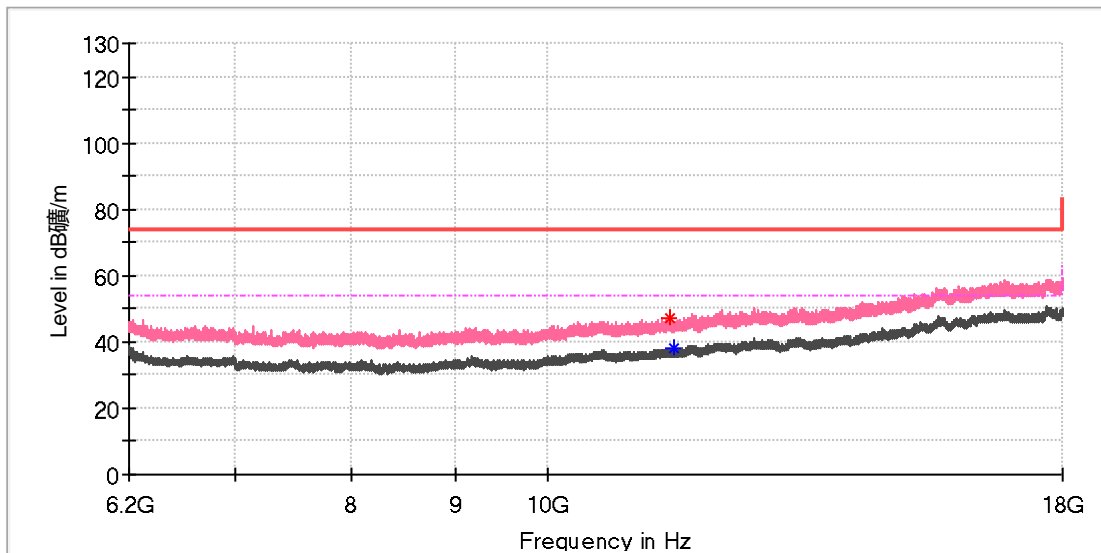

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11502.133333	47.43	---	74.00	26.57	150.0	V	17.0	13.7
11553.758333	---	37.90	54.00	16.10	150.0	V	127.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_80M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

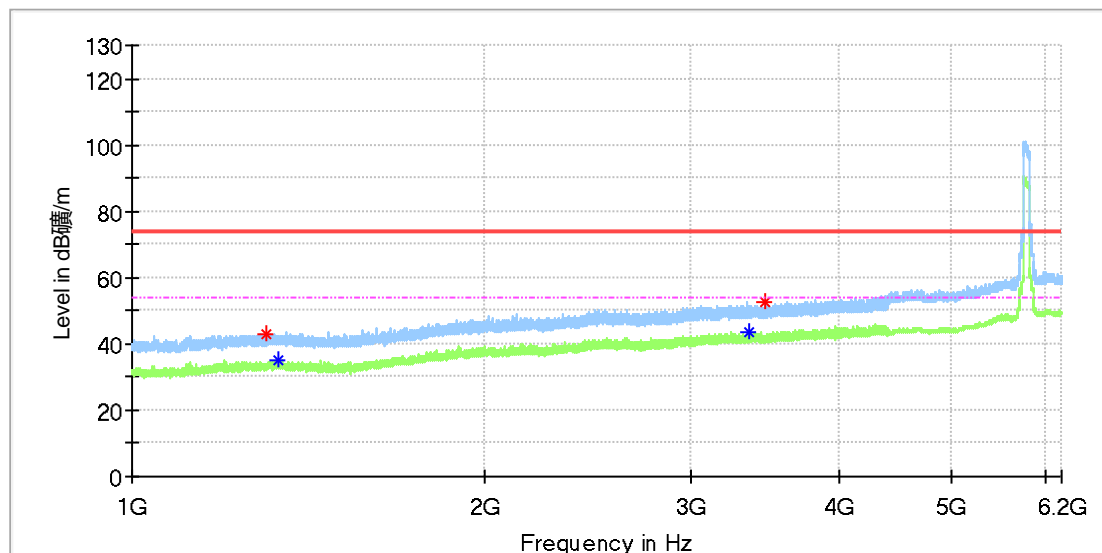

## Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1303.450000	42.93	---	74.00	31.07	150.0	H	43.0	1.9
1330.990000	---	35.29	54.00	18.71	150.0	H	122.0	2.1
3358.240000	---	43.39	54.00	10.61	150.0	H	336.0	8.6
3469.420000	52.62	---	74.00	21.38	150.0	H	325.0	8.9

## Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_80M\_5786.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

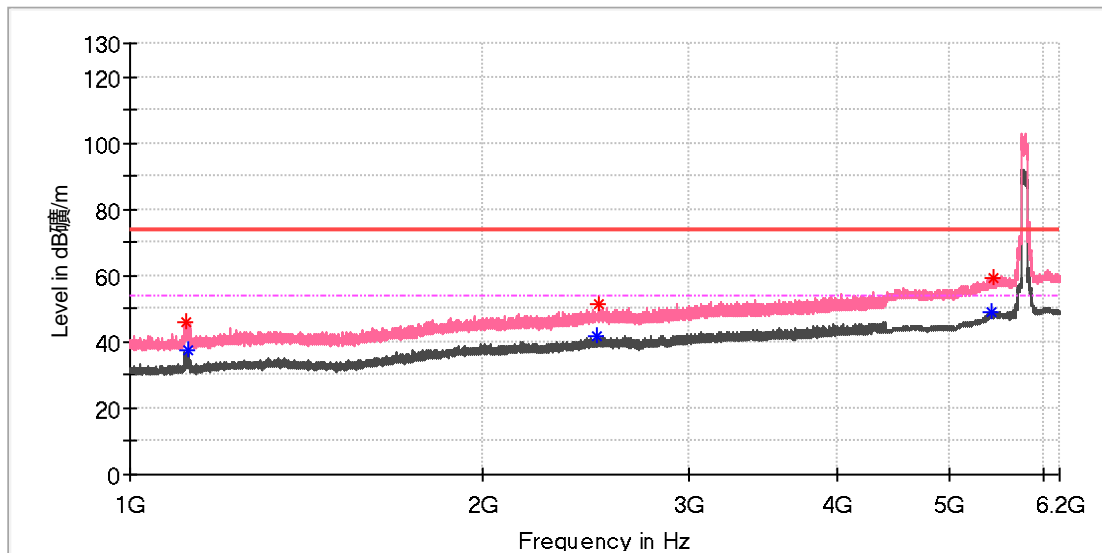

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1116.620000	46.06	---	74.00	27.94	150.0	V	288.0	0.1
1121.550000	---	37.48	54.00	16.52	150.0	V	298.0	0.2
2495.490000	---	42.01	54.00	11.99	150.0	V	248.0	7.4
2505.520000	51.31	---	74.00	22.69	150.0	V	278.0	7.4
5419.000000	---	49.22	54.00	4.78	150.0	V	286.0	13.5
5438.500000	59.33	---	74.00	14.67	150.0	V	326.0	13.5

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

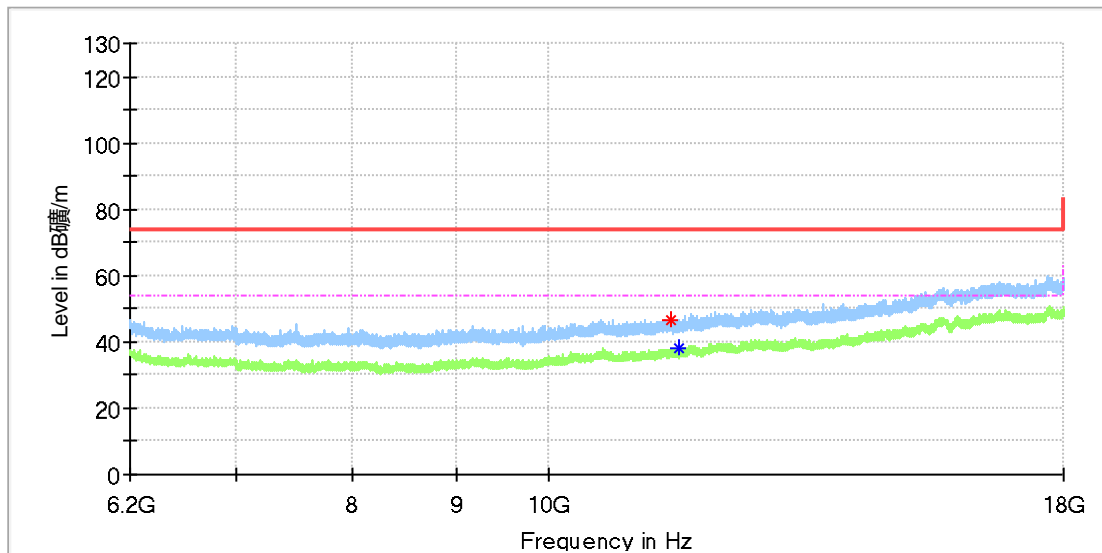

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11501.150000	46.83	---	74.00	27.17	150.0	H	28.0	13.7
11603.908333	---	37.83	54.00	16.17	150.0	H	111.0	13.3

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5786.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

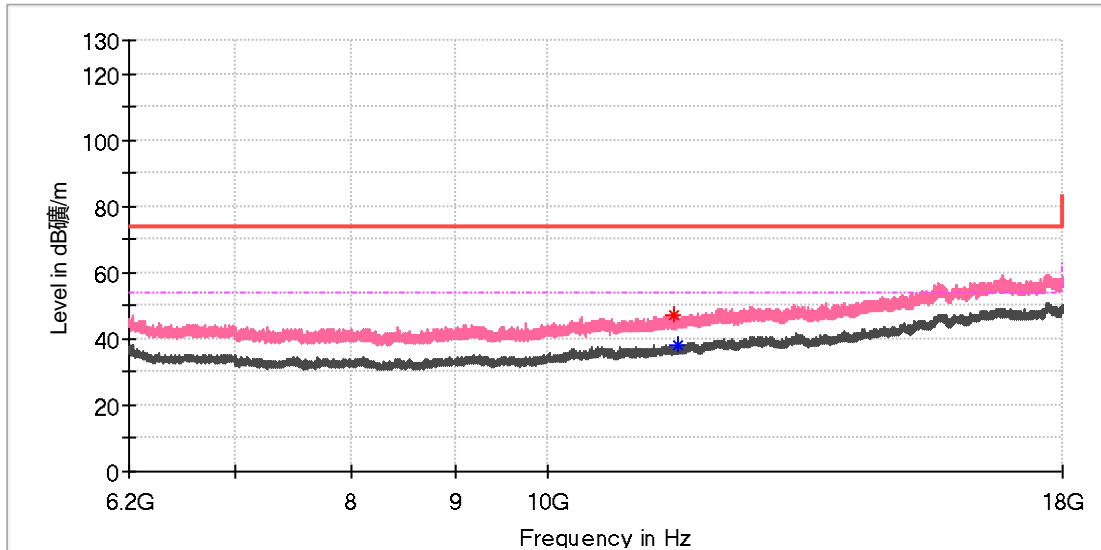

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11542.941667	47.03	---	74.00	26.97	150.0	V	353.0	13.5
11593.583333	---	37.82	54.00	16.18	150.0	V	195.0	13.3


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_1.4M CA\_5788.12MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

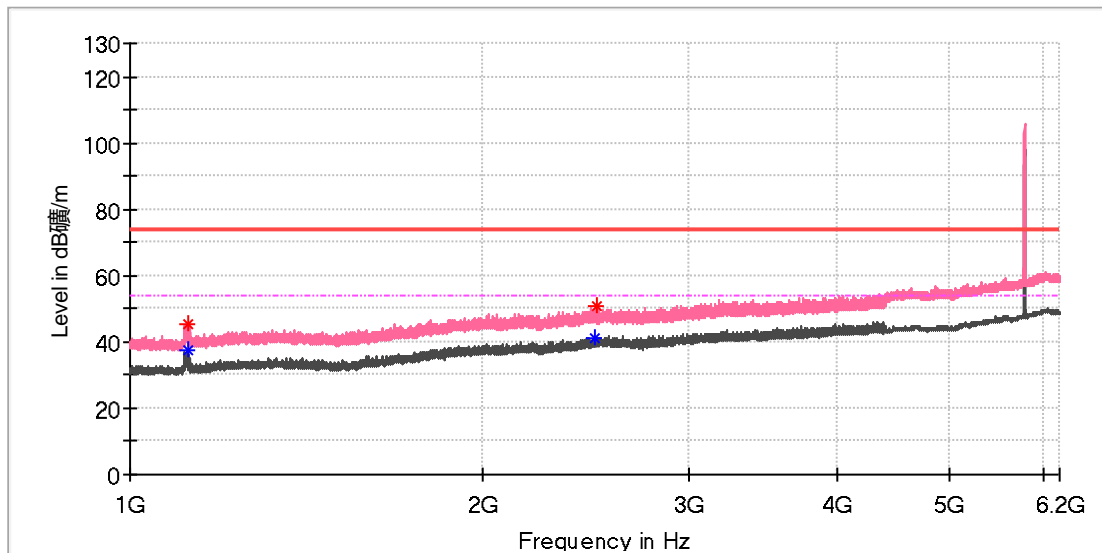

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1120.020000	---	37.54	54.00	16.46	150.0	V	282.0	0.2
1121.720000	45.29	---	74.00	28.71	150.0	V	294.0	0.2
2489.710000	---	41.20	54.00	12.80	150.0	V	94.0	7.4
2494.980000	50.81	---	74.00	23.19	150.0	V	94.0	7.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5788.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

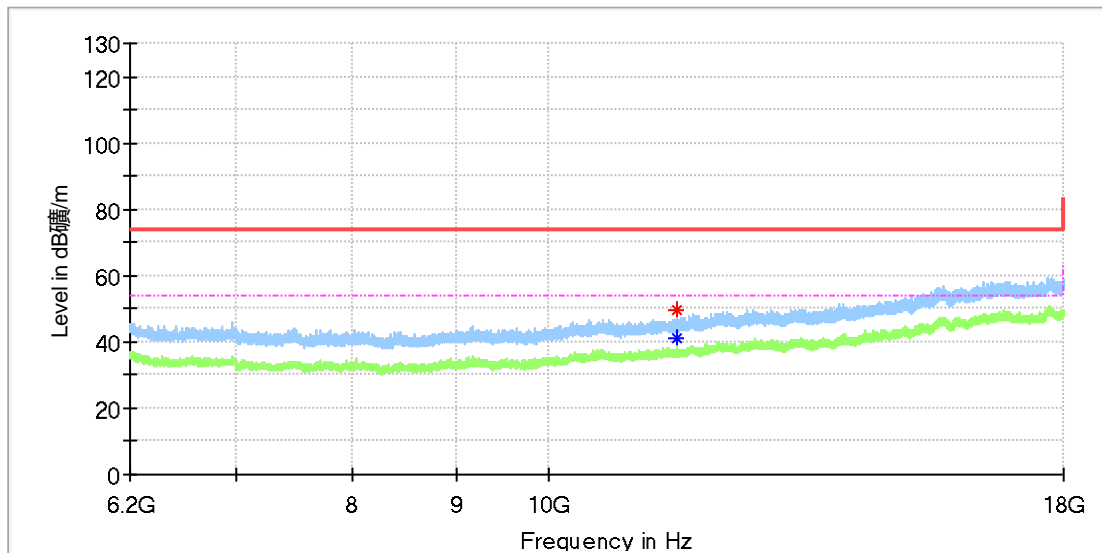

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11576.375000	---	41.03	54.00	12.97	150.0	H	147.0	13.4
11576.375000	49.59	---	74.00	24.41	150.0	H	147.0	13.4


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_1.4M CA\_5788.12MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

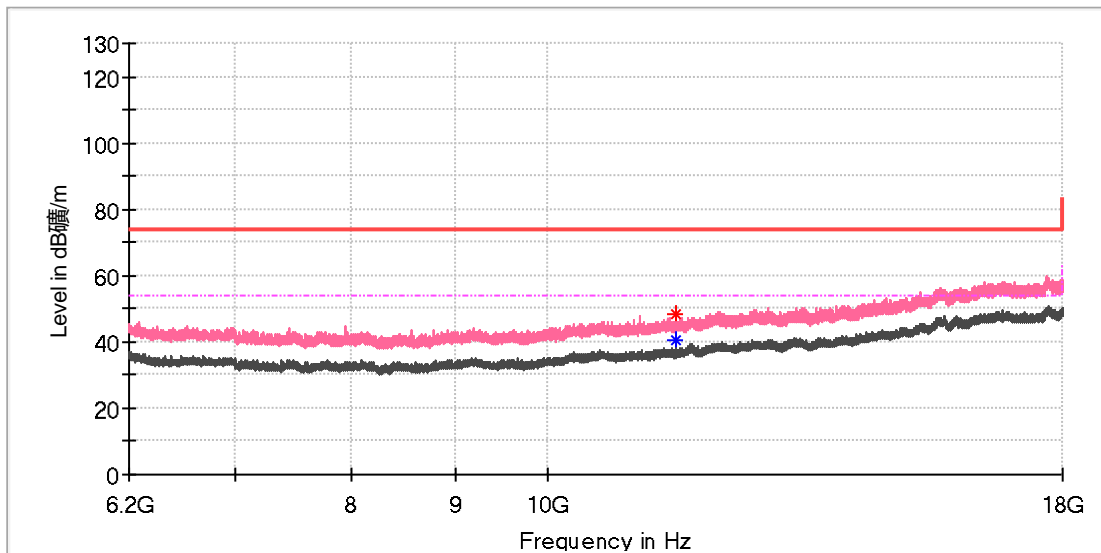

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11576.375000	48.43	---	74.00	25.57	150.0	V	169.0	13.4
11576.375000	---	40.69	54.00	13.31	150.0	V	169.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5787.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

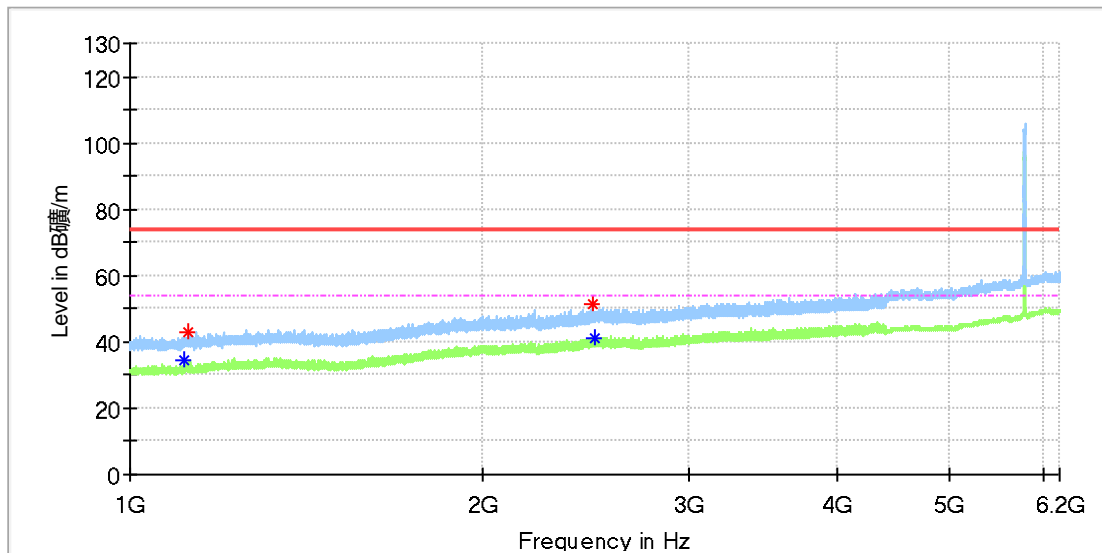

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1113.390000	---	34.69	54.00	19.31	150.0	H	300.0	0.1
1122.060000	43.21	---	74.00	30.79	150.0	H	41.0	0.2
2481.720000	51.62	---	74.00	22.38	150.0	H	16.0	7.4
2494.130000	---	41.31	54.00	12.69	150.0	H	0.0	7.4

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5787.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

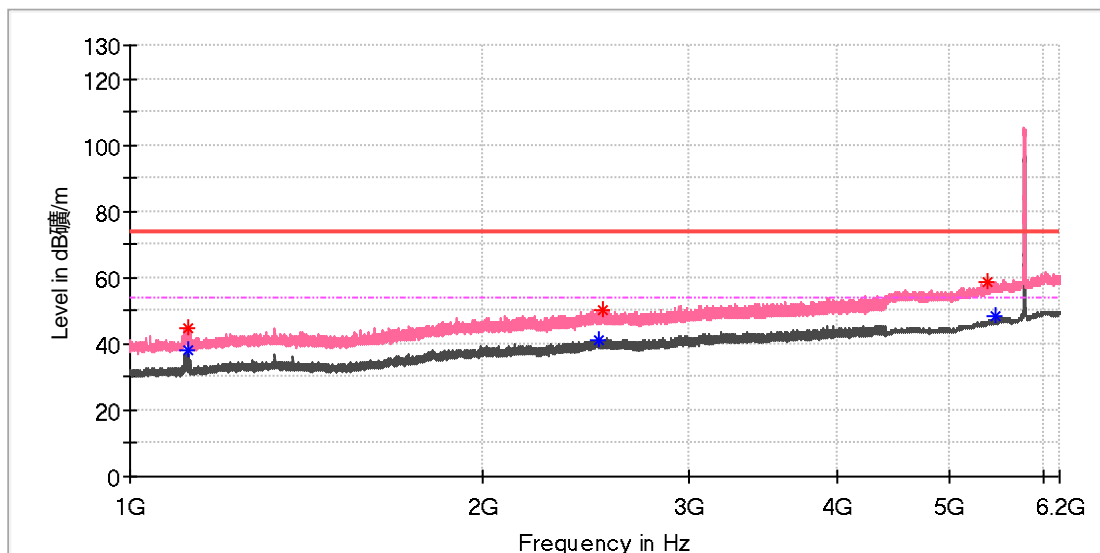

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1121.380000	---	38.12	54.00	15.88	150.0	V	291.0	0.2
1122.740000	44.99	---	74.00	29.01	150.0	V	291.0	0.2
2509.770000	---	41.39	54.00	12.61	150.0	V	231.0	7.4
2524.730000	50.47	---	74.00	23.53	150.0	V	0.0	7.5
5386.500000	58.75	---	74.00	15.25	150.0	V	239.0	13.4
5454.500000	---	48.37	54.00	5.63	150.0	V	265.0	13.6

## Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5787.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

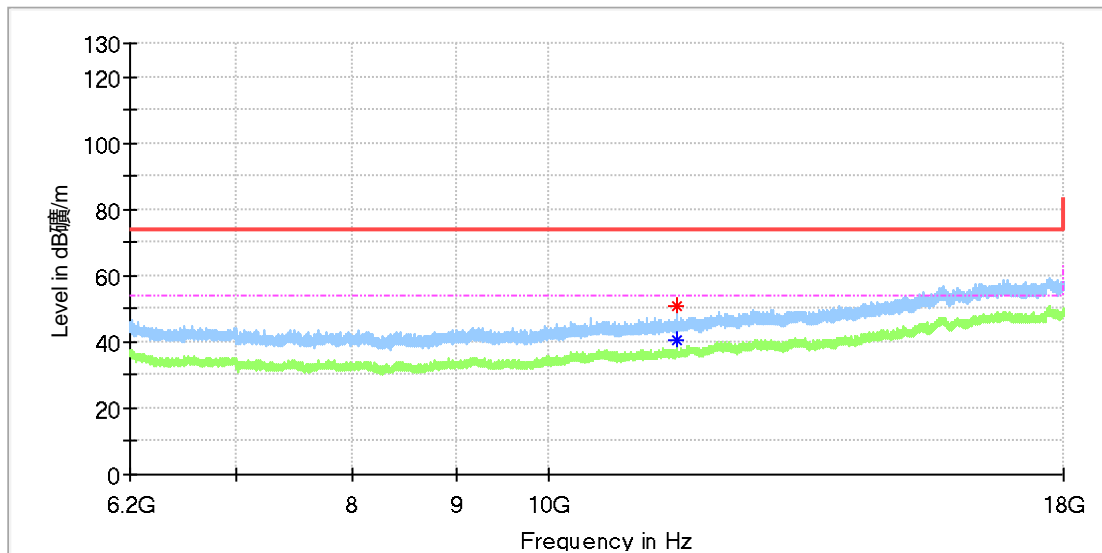

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11575.883333	50.54	---	74.00	23.46	150.0	H	156.0	13.4
11575.883333	---	40.60	54.00	13.40	150.0	H	156.0	13.4

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5787.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

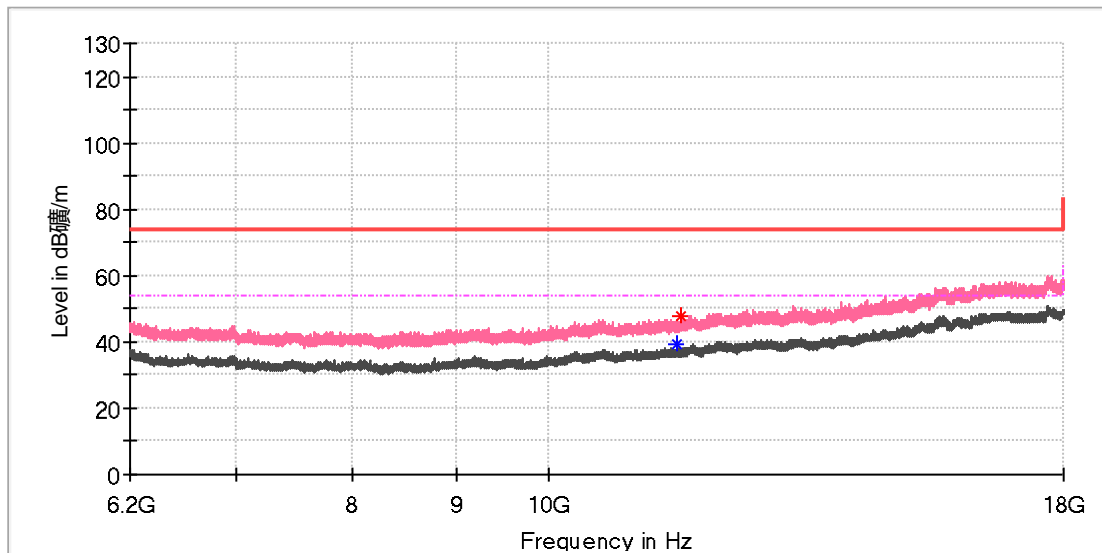

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
11573.916667	---	39.10	54.00	14.90	150.0	V	146.0	13.4
11630.950000	47.71	---	74.00	26.29	150.0	V	31.0	13.3


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5730.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

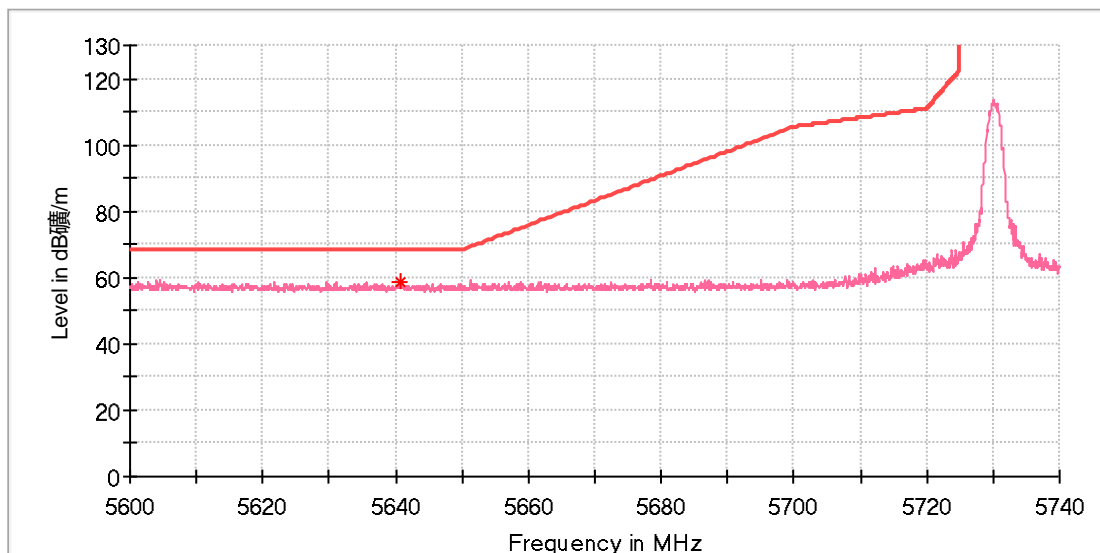

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5640.822222	58.71	68.20	9.49	150.0	V	0.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5846.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

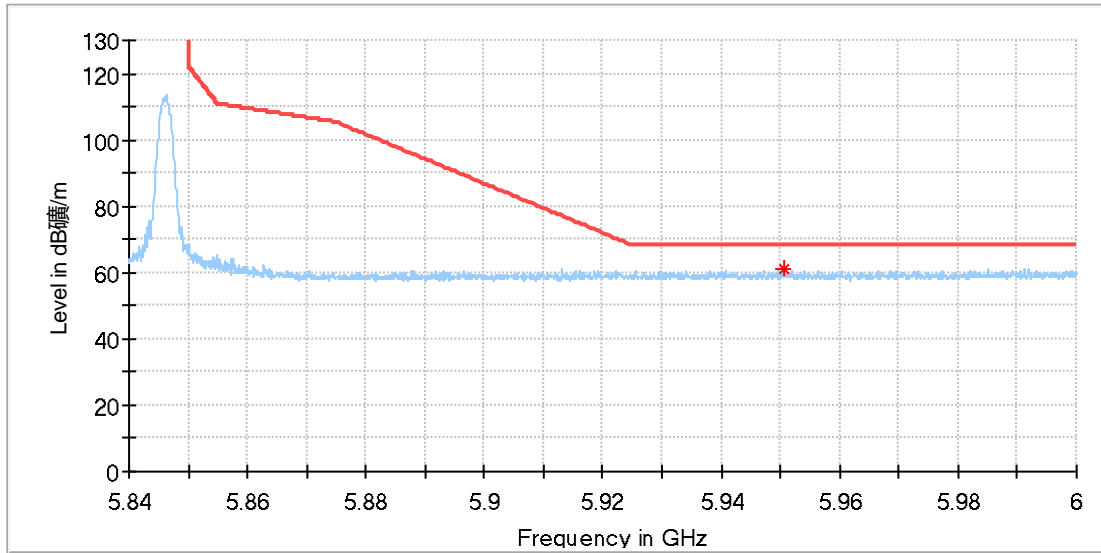

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5950.500000	60.86	68.20	7.34	150.0	H	256.0	14.8


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_1.4M CA_5846.12MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

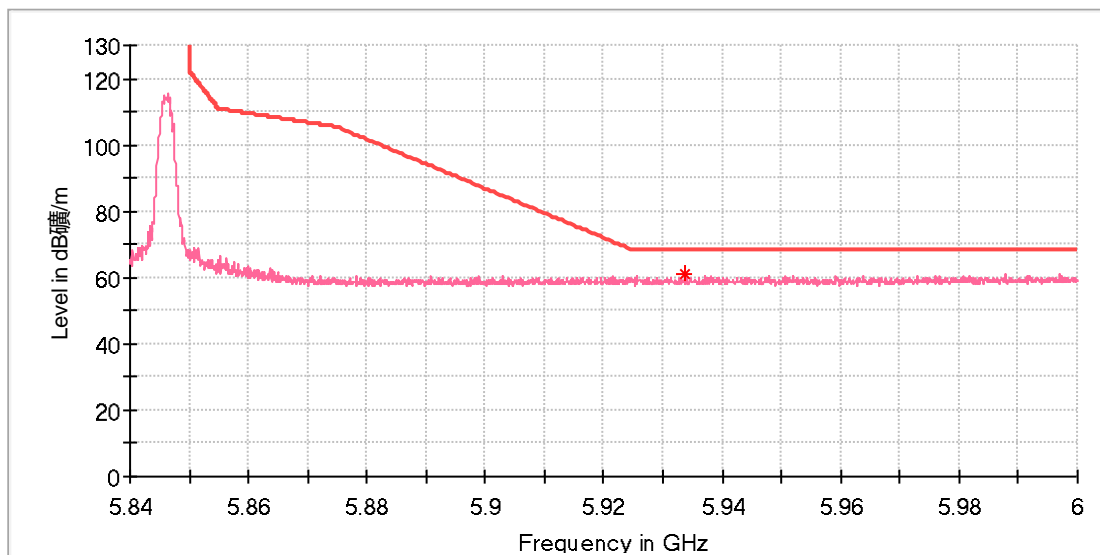

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5933.618056	61.02	68.20	7.18	150.0	V	208.0	14.7

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_3M CA_5730.2MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

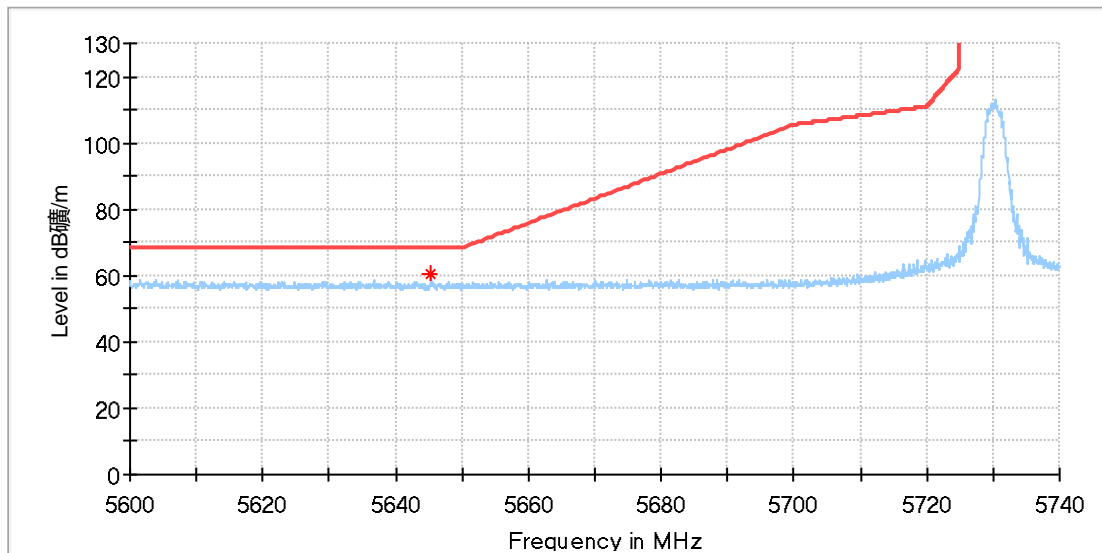

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5645.405556	60.22	68.20	7.98	150.0	H	227.0	13.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_3M CA_5730.2MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

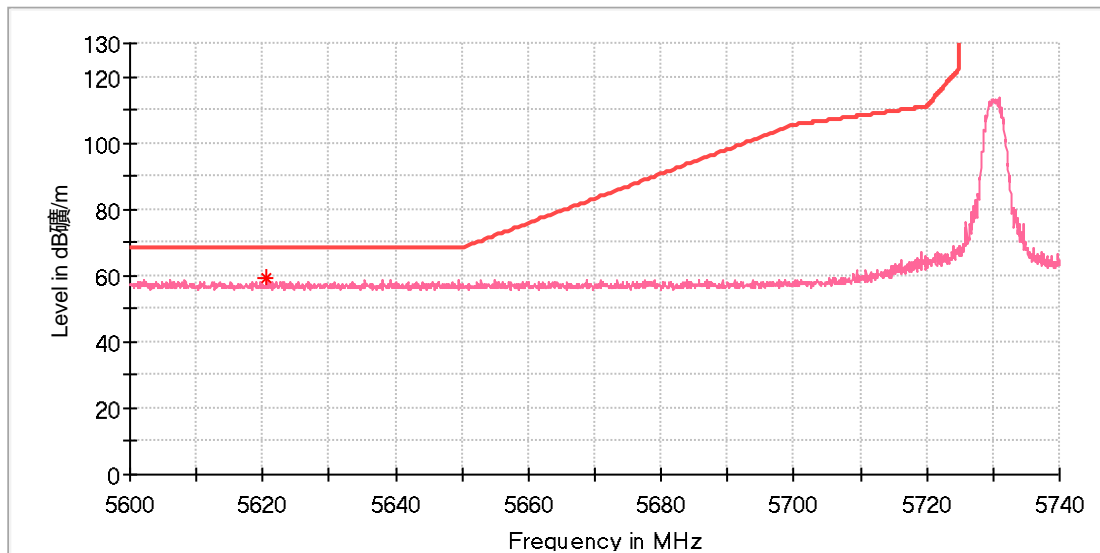

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5620.655556	59.24	68.20	8.96	150.0	V	102.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_3M CA_5847.2MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

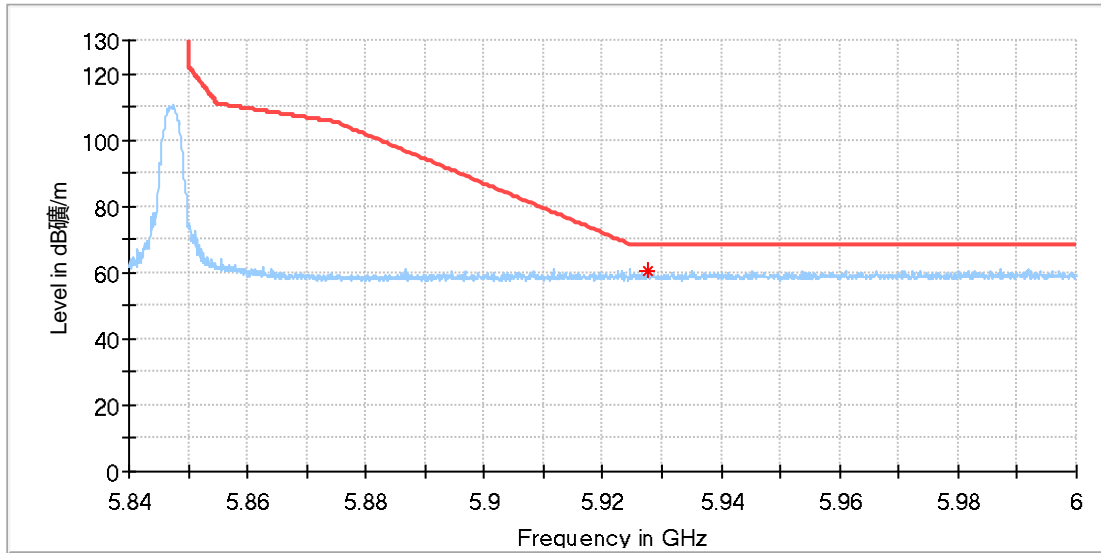

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5927.659722	60.53	68.20	7.67	150.0	H	278.0	14.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5847.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

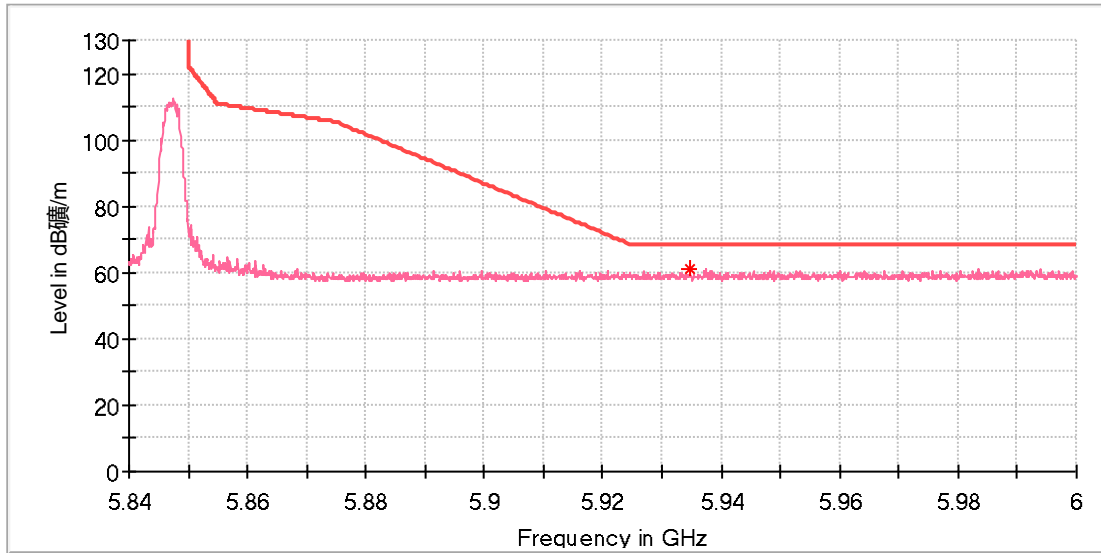

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5934.687500	61.17	68.20	7.03	150.0	V	103.0	14.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_5M_5732.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

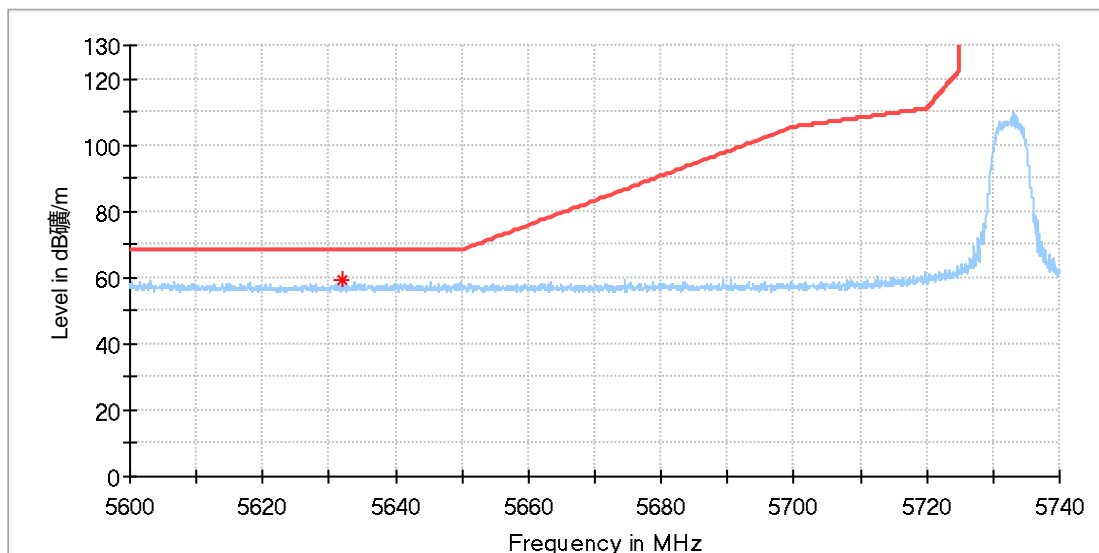

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5632.022222	58.97	68.20	9.23	150.0	H	91.0	13.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_5M_5732.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

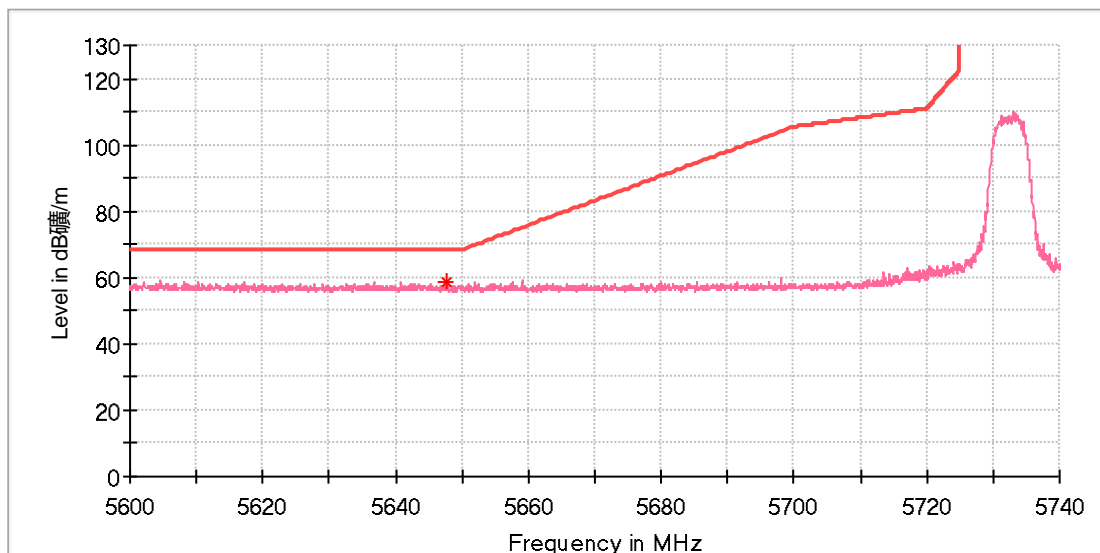

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5647.66667	58.73	68.20	9.47	150.0	V	325.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_5M\_5824.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

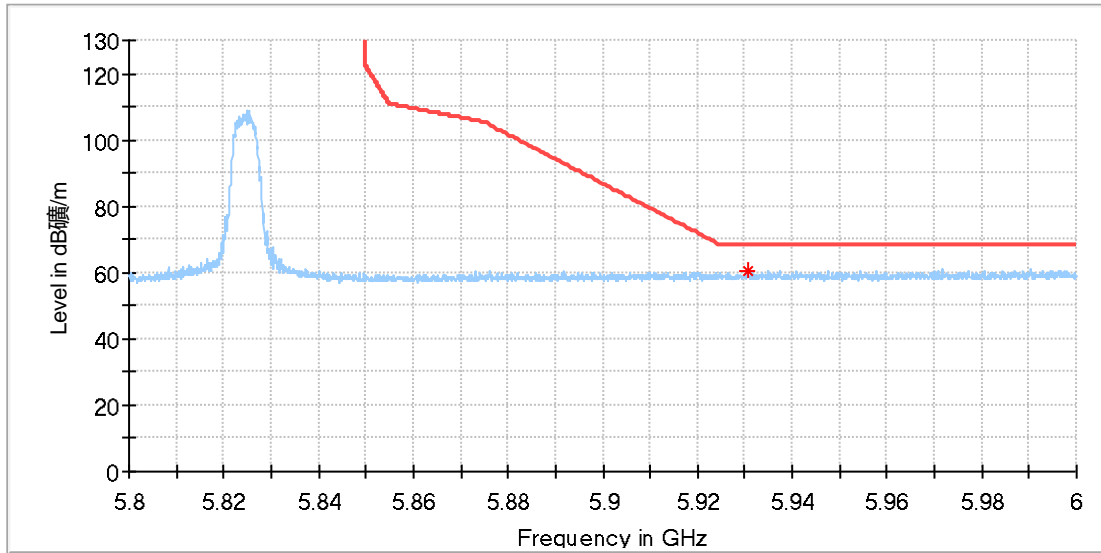

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5930.562500	60.71	68.20	7.49	150.0	H	0.0	14.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_5M_5824.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

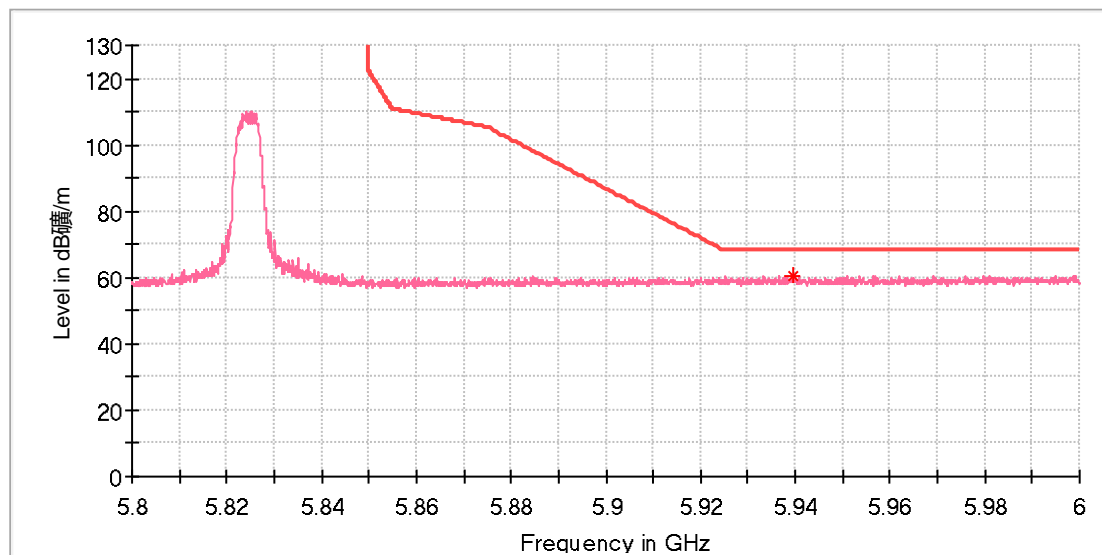

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5939.652778	60.51	68.20	7.69	150.0	V	97.0	14.7

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5730.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

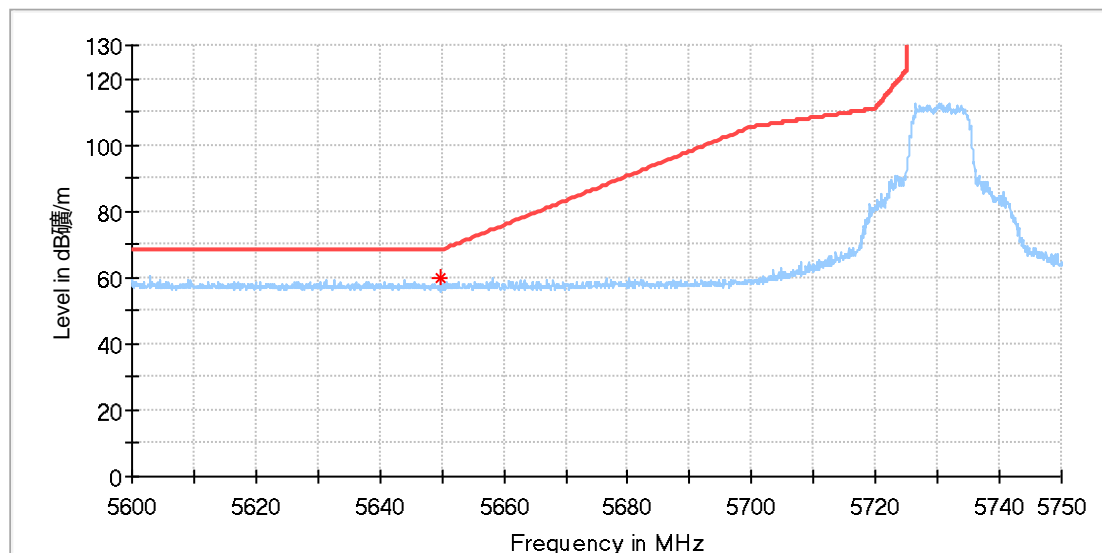

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5649.805556	59.61	68.20	8.59	150.0	H	344.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5730.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

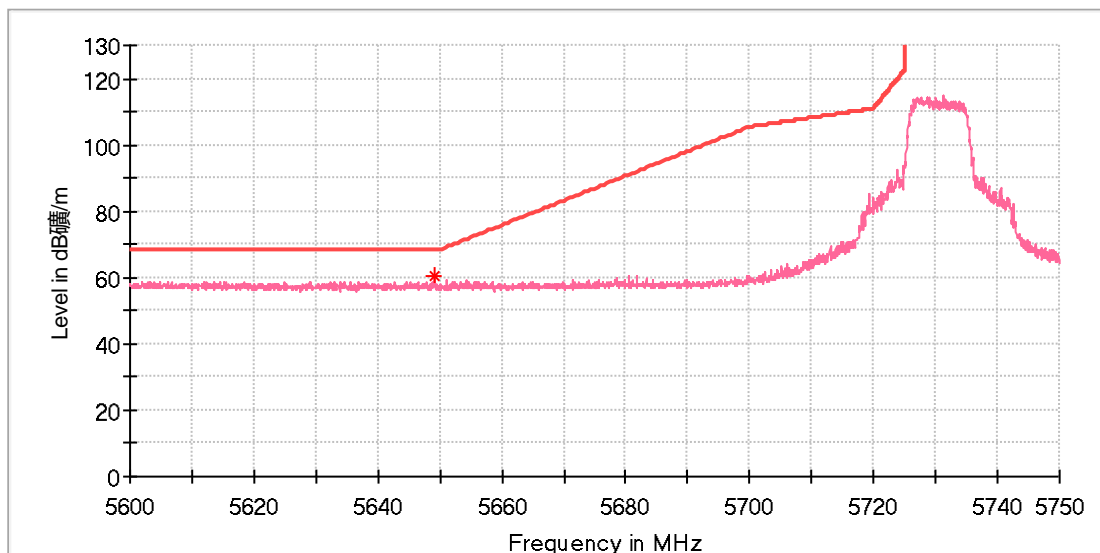

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5649.072222	60.50	68.20	7.70	150.0	V	338.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5844.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

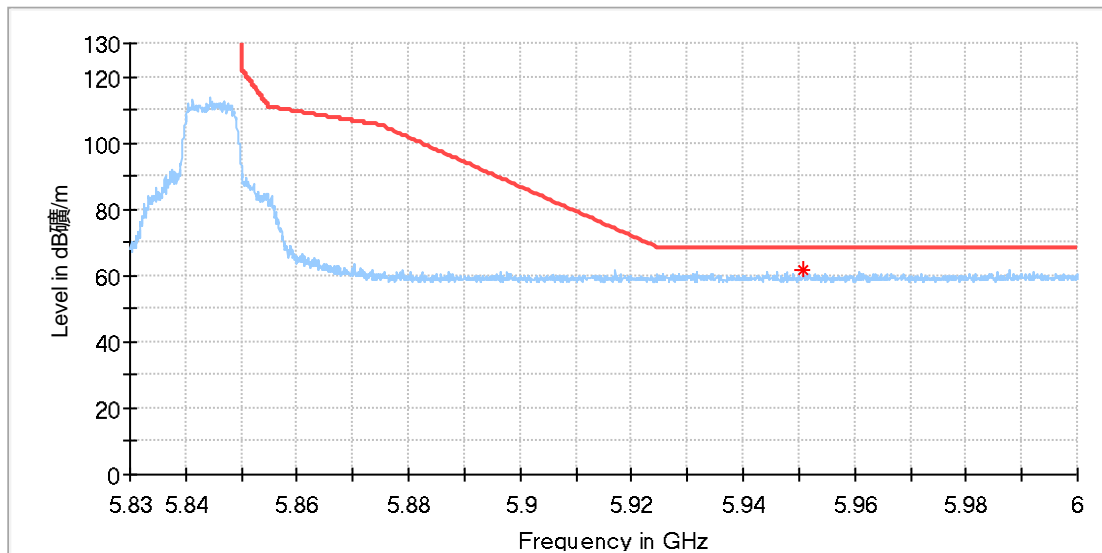

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5950.805556	61.58	68.20	6.62	150.0	H	318.0	14.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5844.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

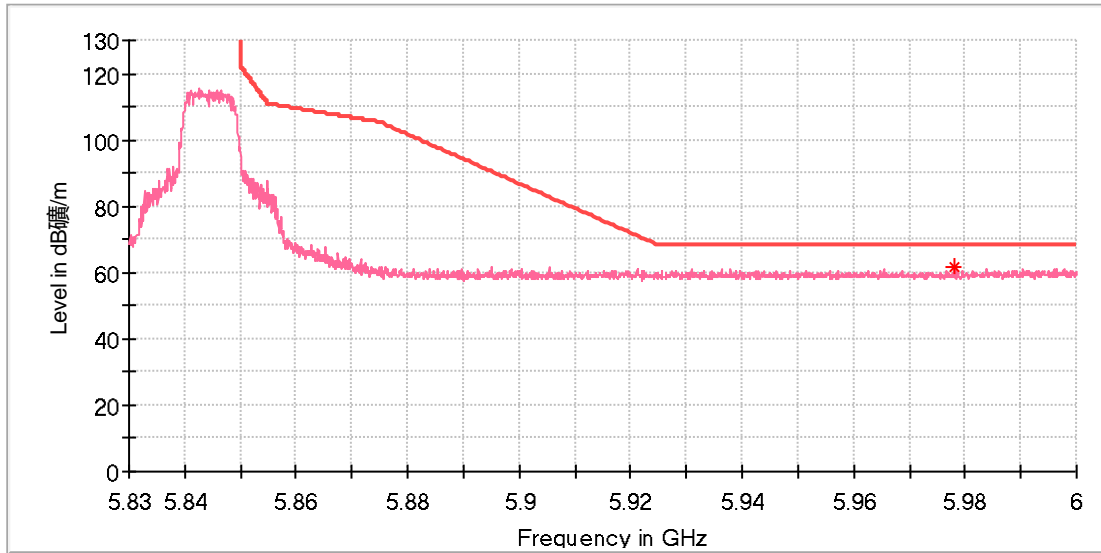

### Critical Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5978.000000	61.53	68.20	6.67	150.0	V	280.0	14.9

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_20M_5735.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

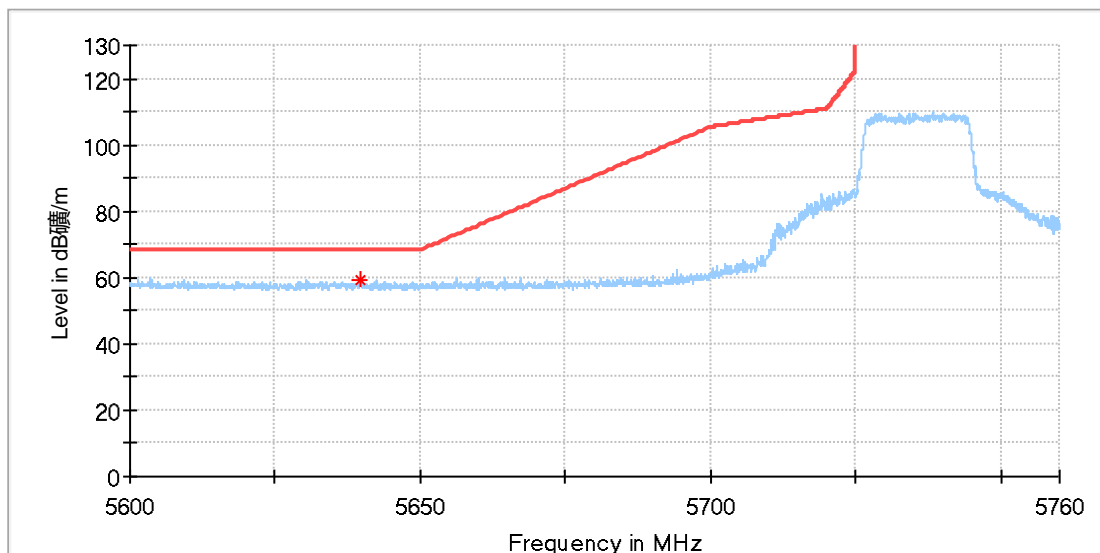

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5639.538889	59.45	68.20	8.75	150.0	H	119.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_20M_5735.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

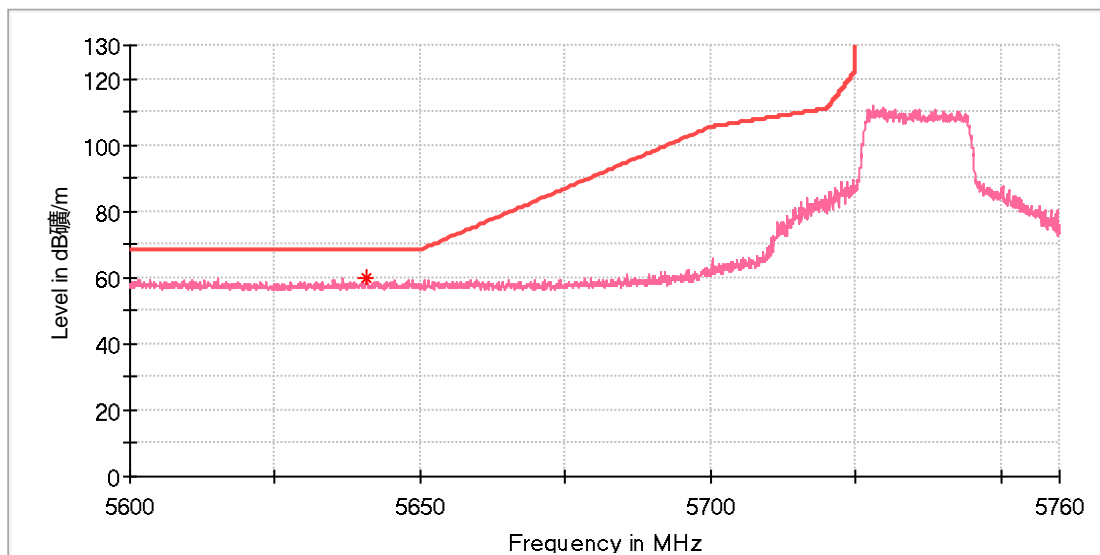

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5640.700000	59.64	68.20	8.56	150.0	V	0.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_20M\_5839.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

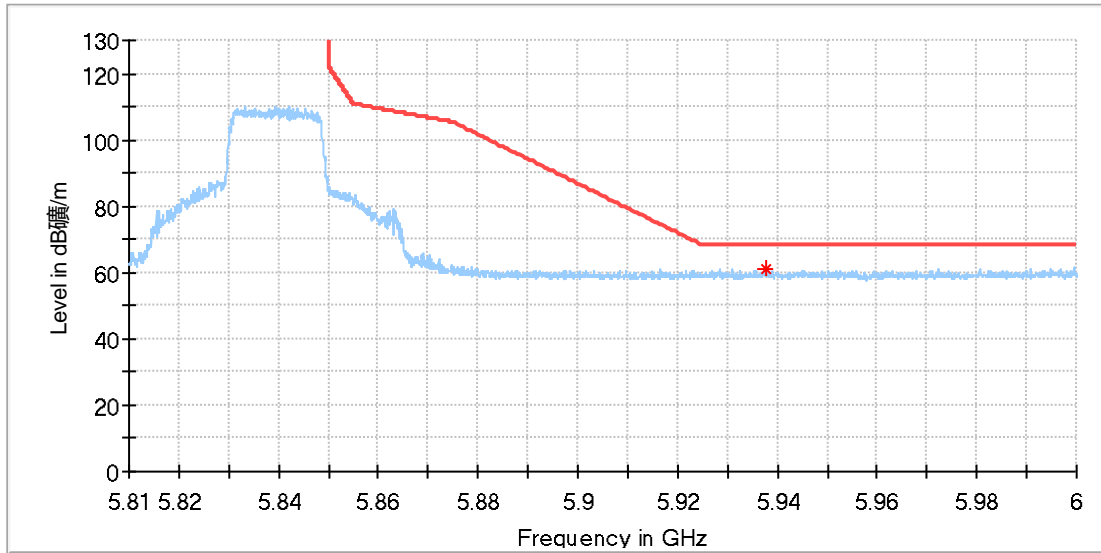

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5937.666667	60.98	68.20	7.22	150.0	H	208.0	14.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_20M\_5839.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

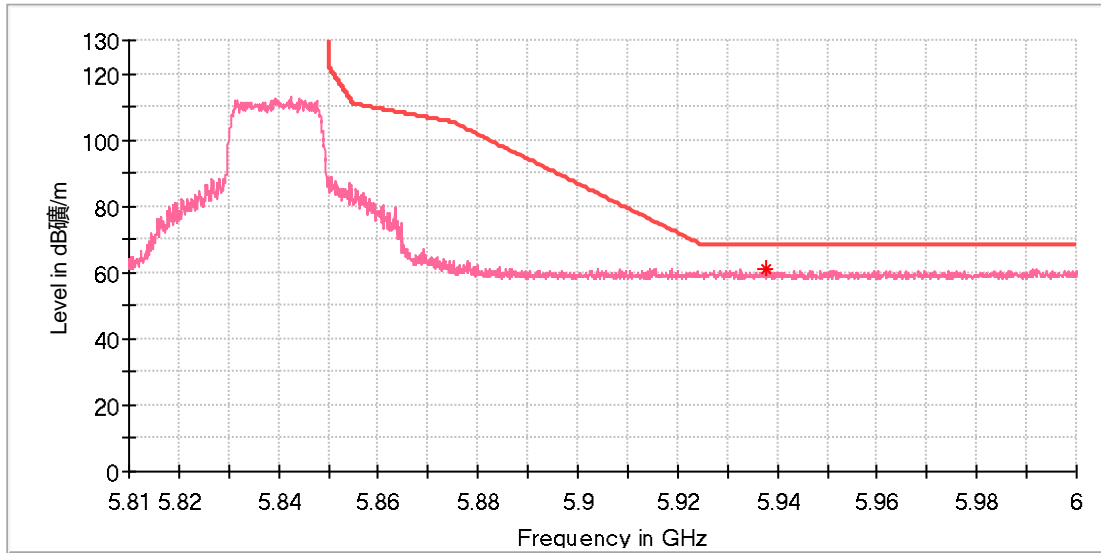

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5937.743056	61.11	68.20	7.09	150.0	V	315.0	14.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_40M_5745.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

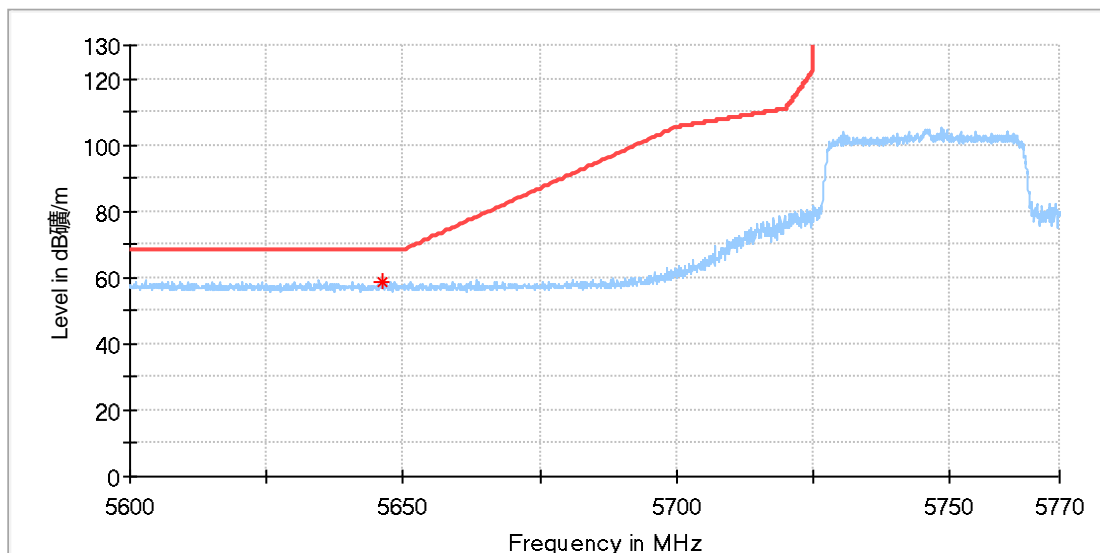

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5646.016667	58.77	68.20	9.43	150.0	H	275.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_40M_5745.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

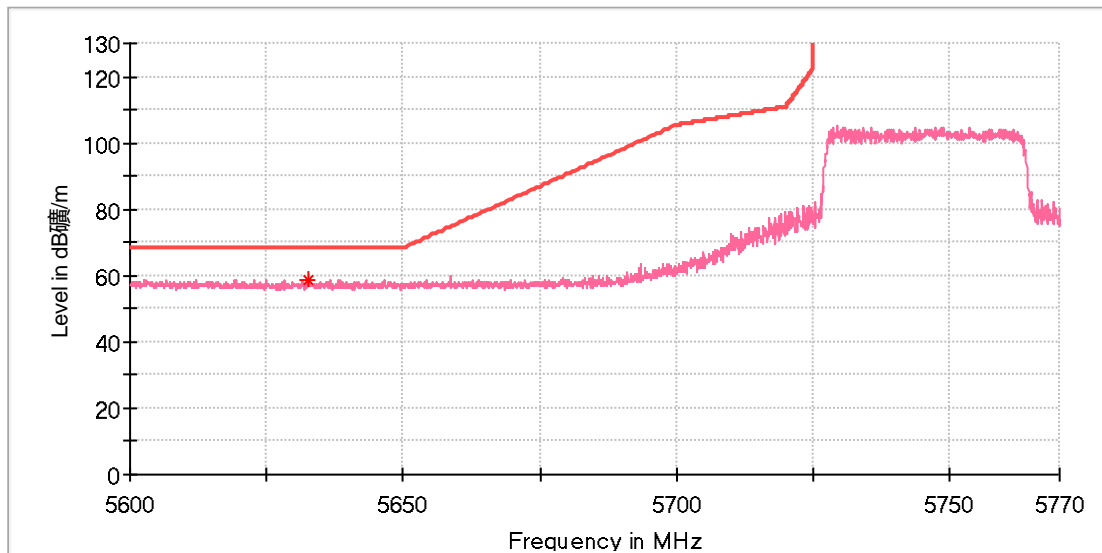

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5632.633333	58.92	68.20	9.28	150.0	V	132.0	13.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_40M_5829.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

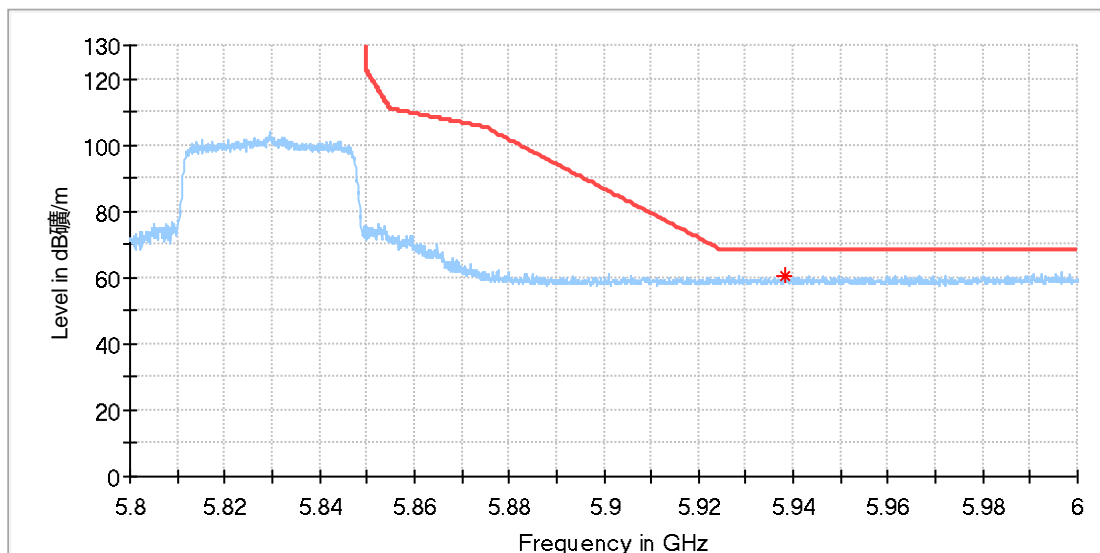

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5938.430556	60.73	68.20	7.47	150.0	H	315.0	14.7

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_40M_5829.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

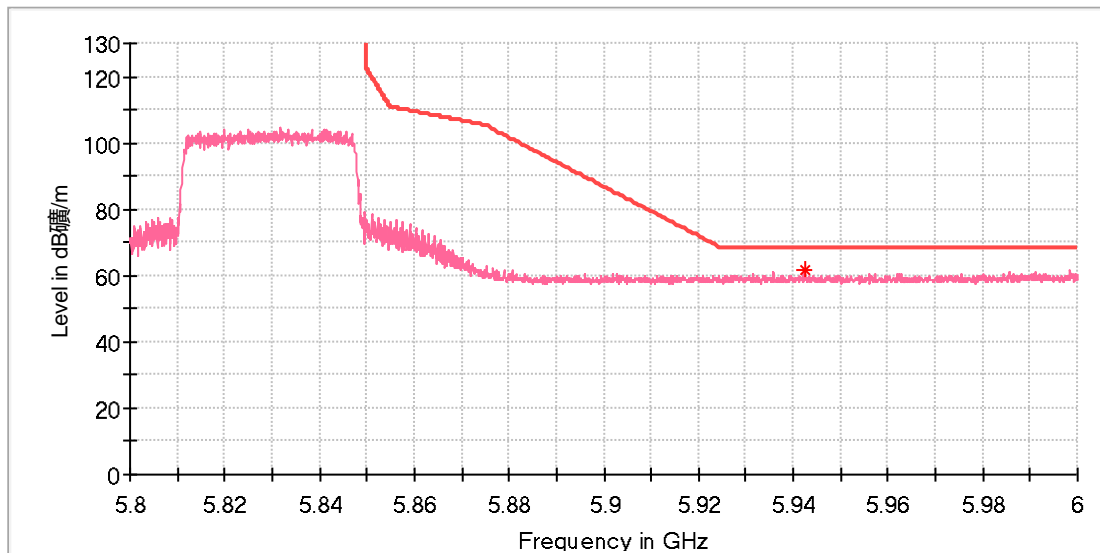

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5942.326389	61.37	68.20	6.83	150.0	V	89.0	14.7

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5755.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

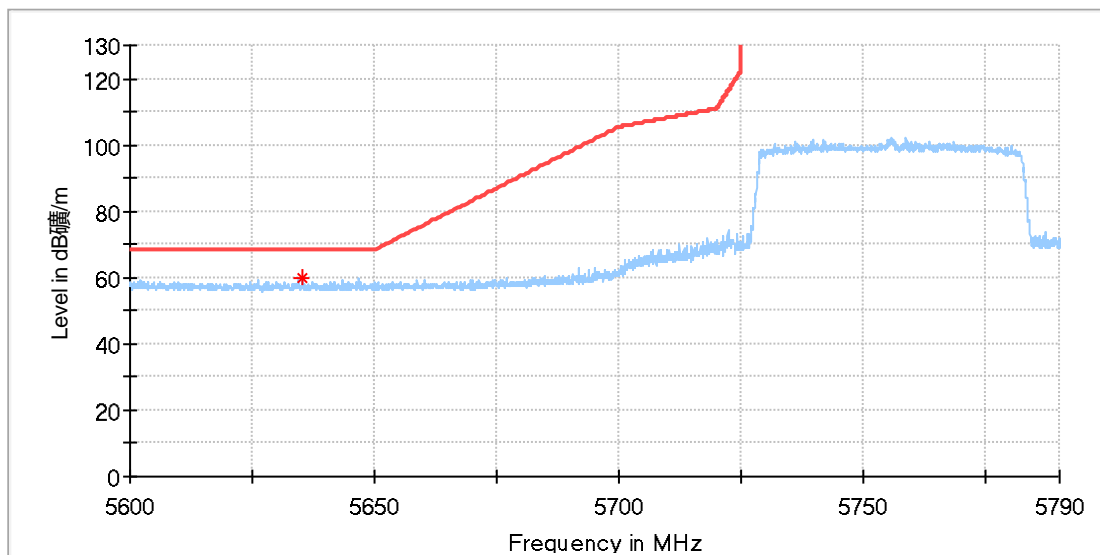

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5635.322222	60.01	68.20	8.19	150.0	H	244.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5755.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

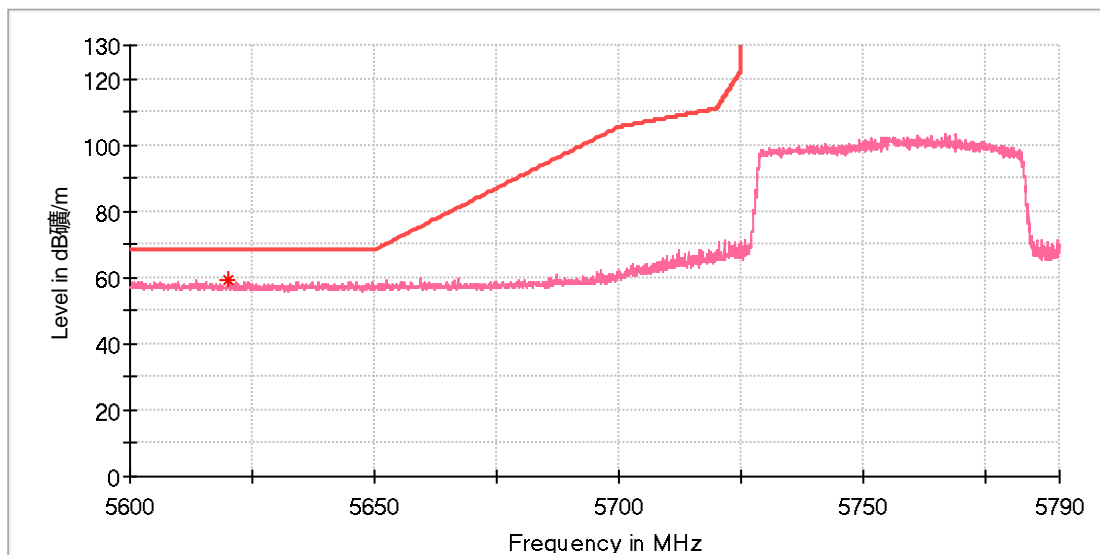

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5619.922222	59.08	68.20	9.12	150.0	V	66.0	13.8

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_60M\_5819.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

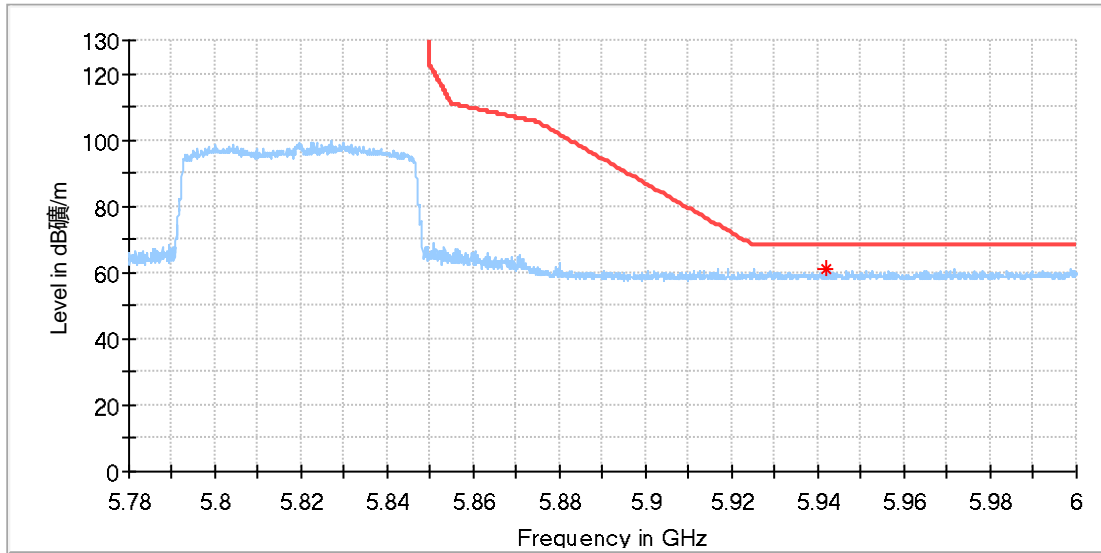

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5941.791667	61.26	68.20	6.94	150.0	H	264.0	14.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_60M_5819.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

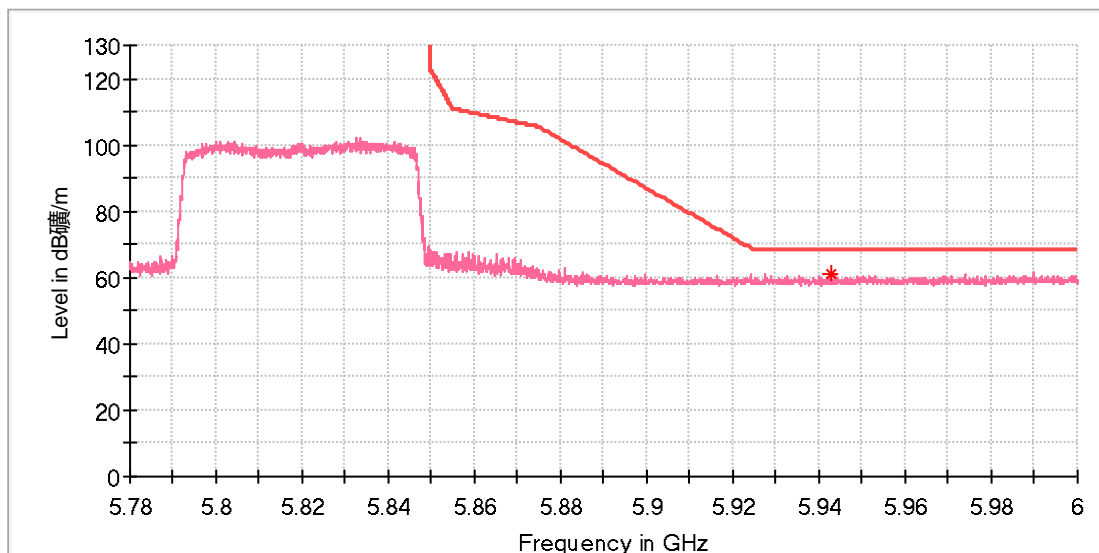

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5942.937500	60.86	68.20	7.34	150.0	V	0.0	14.7

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5765.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

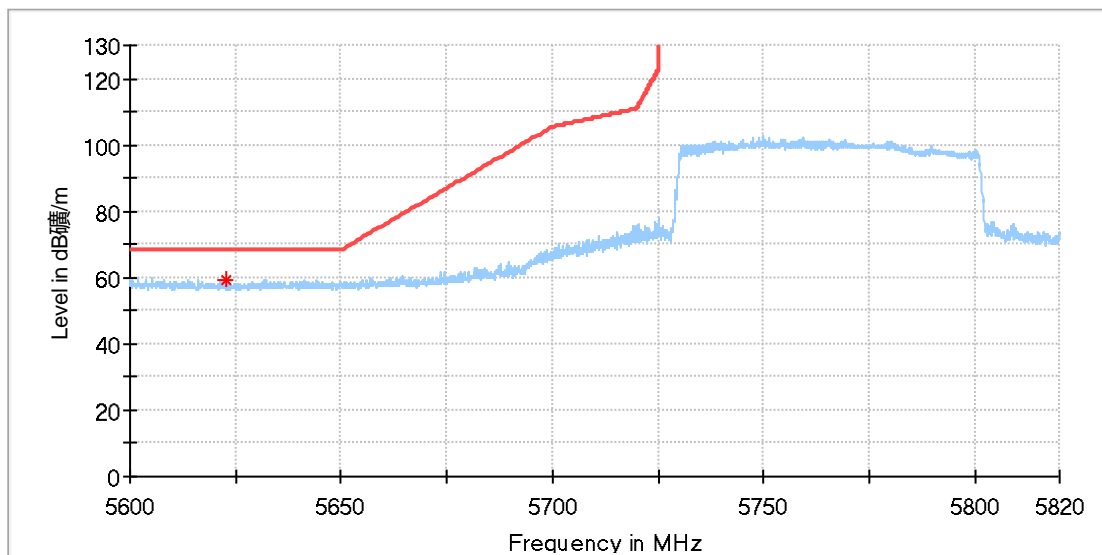

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5622.550000	59.37	68.20	8.83	150.0	H	0.0	13.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5765.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

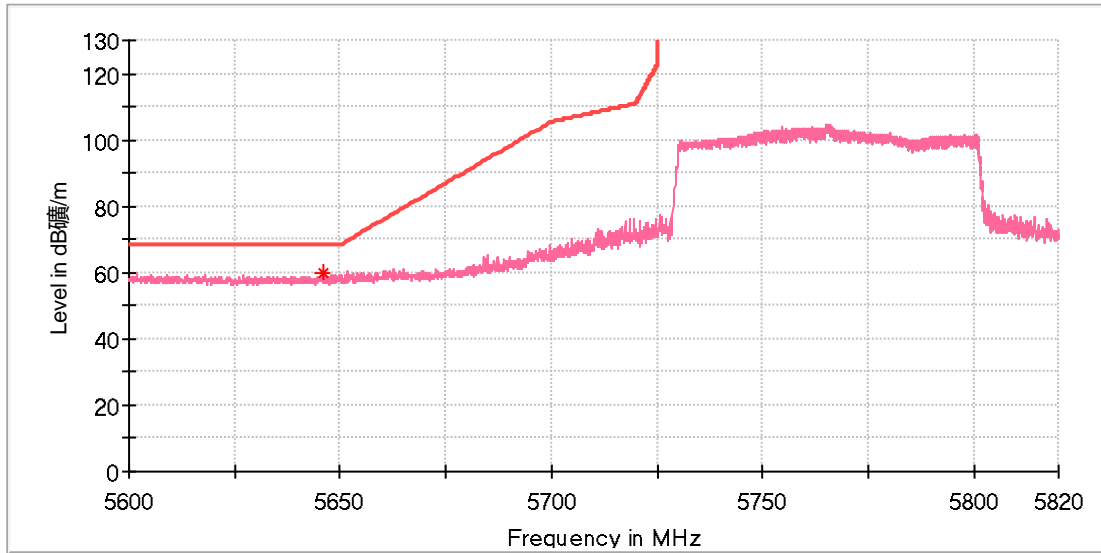

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5645.894445	59.63	68.20	8.57	150.0	V	283.0	13.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

## EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5809.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

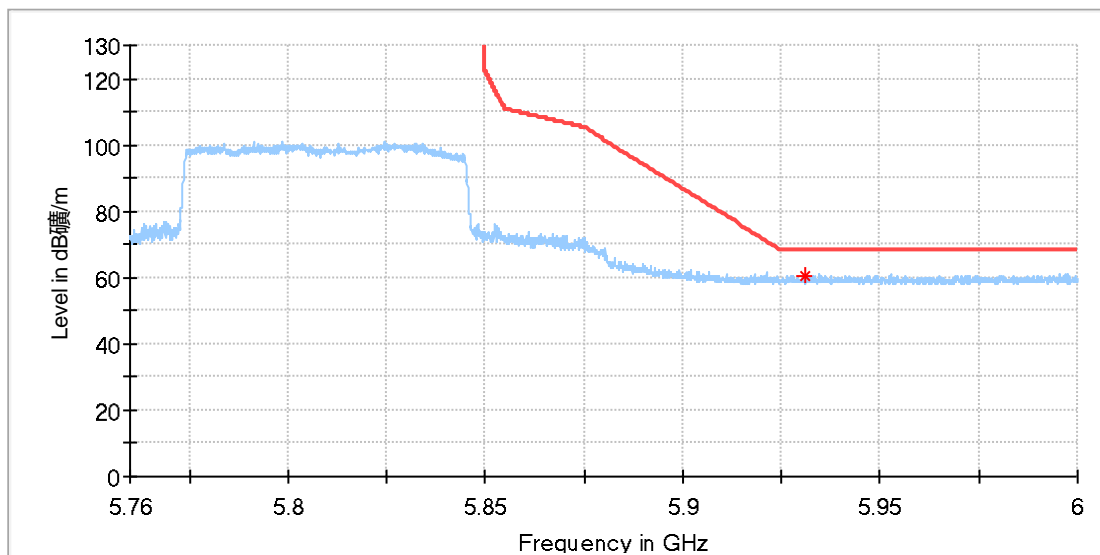

## Critical\_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5930.791667	60.73	68.20	7.47	150.0	H	150.0	14.7

## Final\_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_80M_5809.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

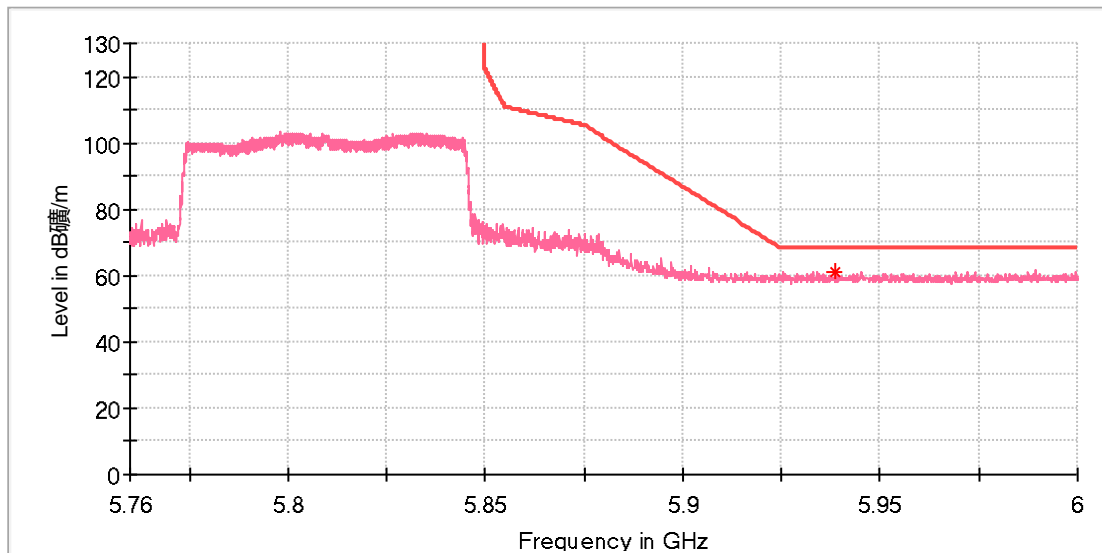

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5938.430556	61.27	68.20	6.93	150.0	V	290.0	14.7


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

**SISO mode (Worst case\_ANT2)**

**EUT Information**

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_3M CA_5847.2MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

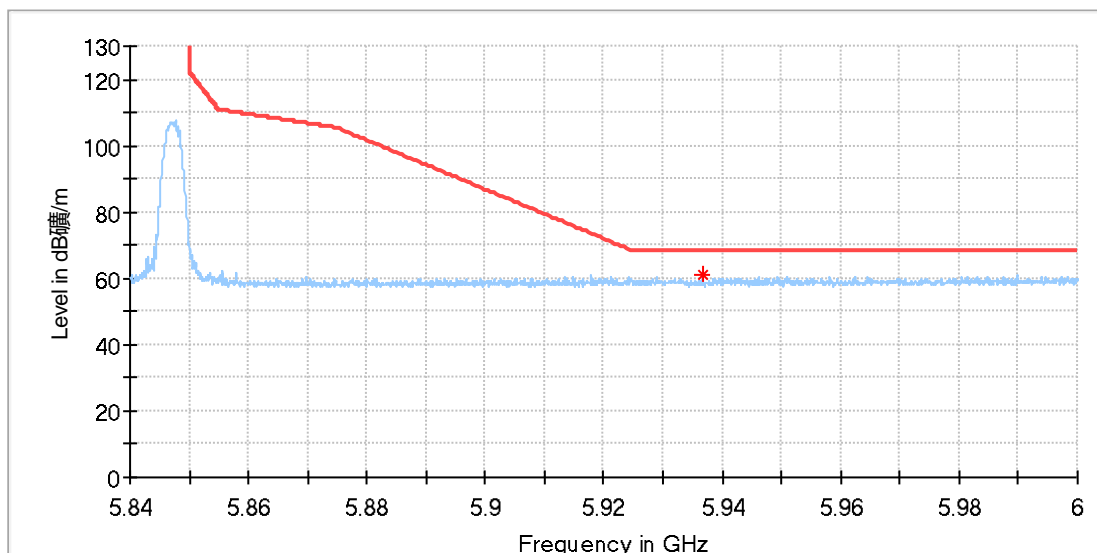

**Critical Freqs**


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5936.597222	60.92	68.20	7.28	150.0	H	162.0	14.7

**Final Result**

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_3M CA\_5847.2MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

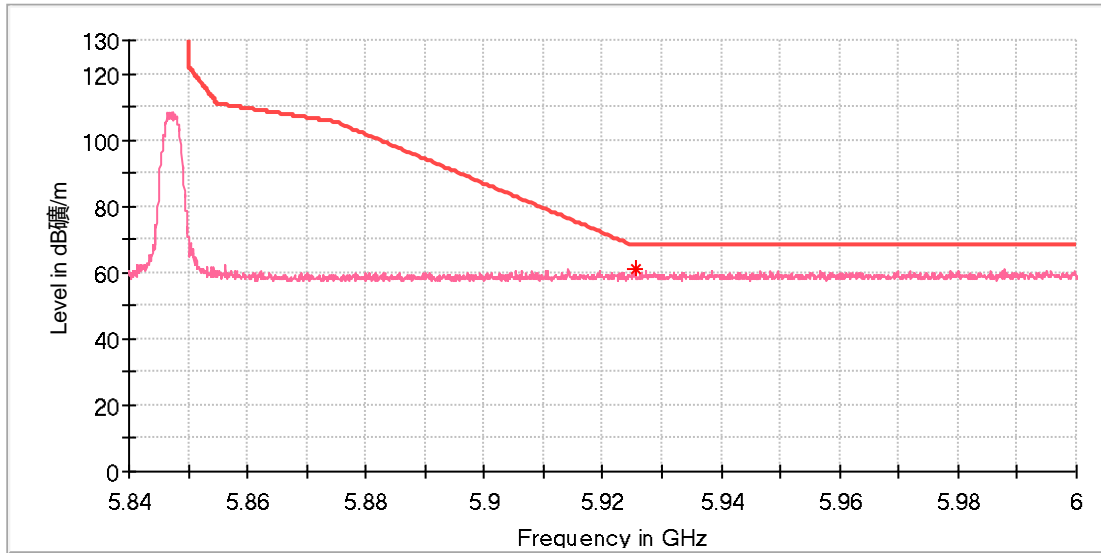

### Critical\_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5925.444445	61.14	68.20	7.06	150.0	V	62.0	14.6

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

### EUT Information

EUT Name:	DJI Mini 4 Pro
Model:	MT4MFVD
Test Mode:	SDR 5.8G_10M_5844.5MHz
Order No/Sample No:	168427672/A003481038-014
Test Voltage:	Battery
Remark:	Temp 22 Humi:55%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

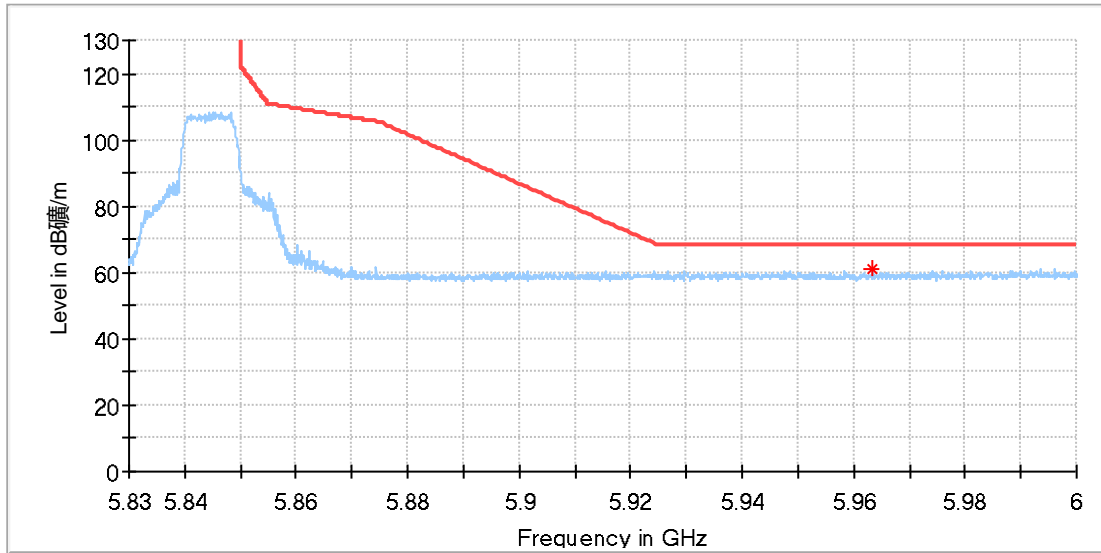

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5963.486111	61.09	68.20	7.11	150.0	H	120.0	14.8


### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



### EUT Information

EUT Name: DJI Mini 4 Pro  
 Model: MT4MFVD  
 Test Mode: SDR 5.8G\_10M\_5844.5MHz  
 Order No/Sample No: 168427672/A003481038-014  
 Test Voltage: Battery  
 Remark: Temp 22 Humi:55%  
 Test Standard: FCC 15.407  
 Tested By: Kei Zhang  
 Reviewed By: Terry Yin

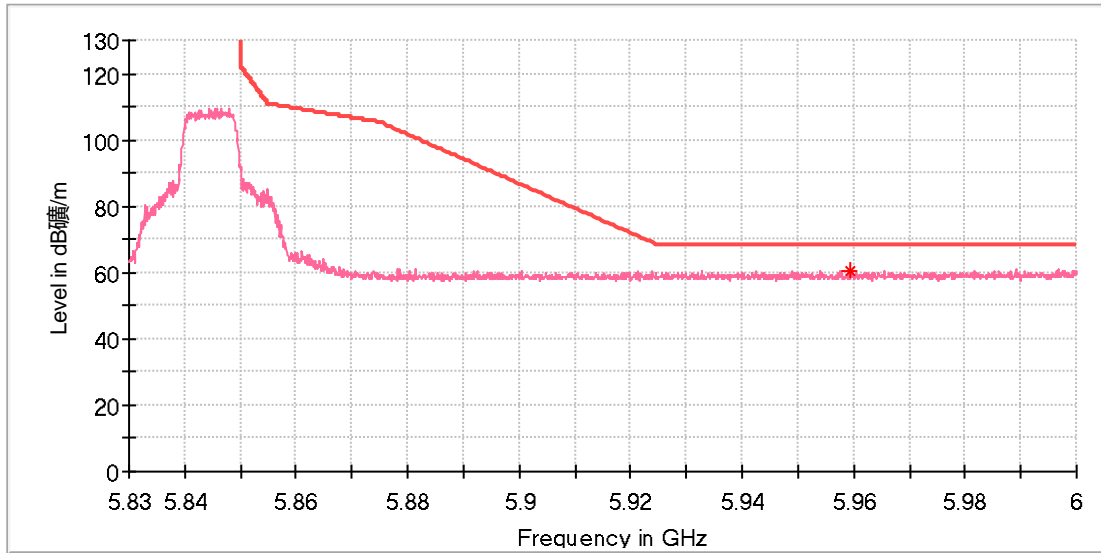

### Critical\_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
5959.437500	60.55	68.20	7.65	150.0	V	124.0	14.8

### Final\_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---