

**Test Plot 1\*#: FSK 2.4G\_Close to Body Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0433 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.540 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.033 W/kg; SAR(10 g) = 0.022 W/kg**

Maximum value of SAR (measured) = 0.0425 W/kg

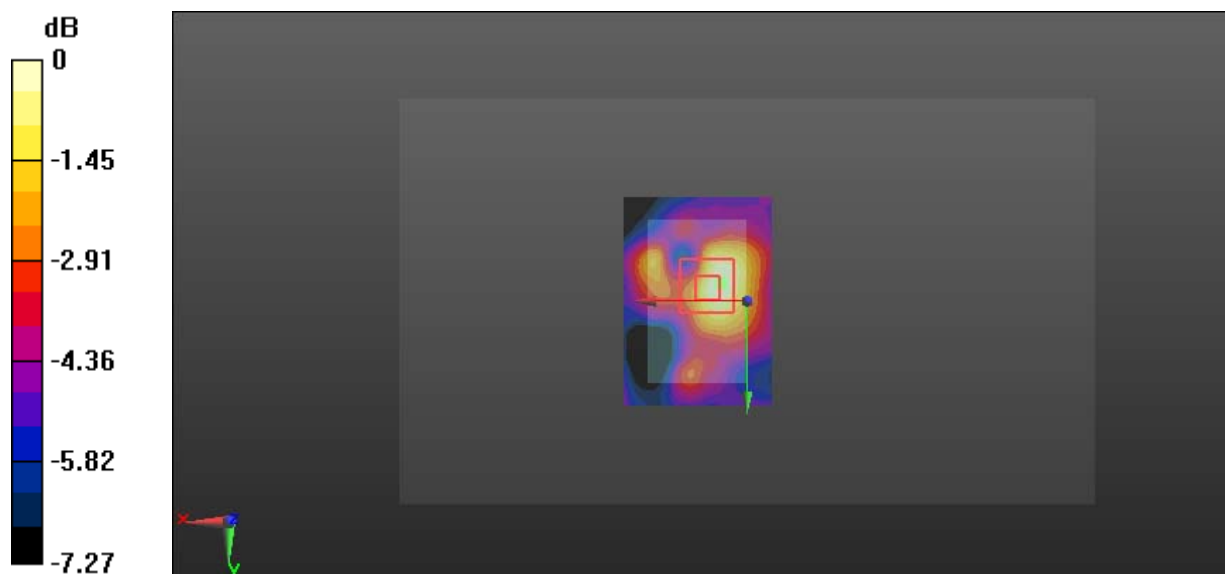

0 dB = 0.0425 W/kg = -13.72 dBW/kg

**Test Plot 2\*#: FSK 2.4G\_Close to Body Right\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55  
 Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x41x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.210 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 4.309 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 0.259 W/kg  
**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.080 W/kg**  
 Maximum value of SAR (measured) = 0.218 W/kg

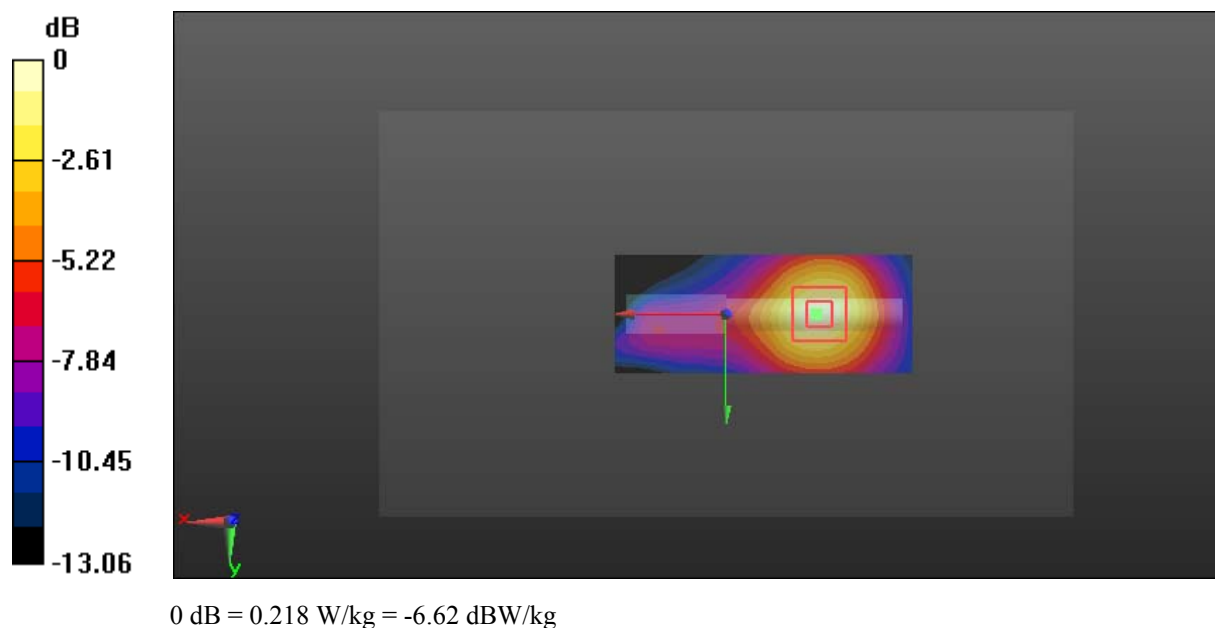

**Test Plot 3\*#: FSK 2.4G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.28 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.188 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.355 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

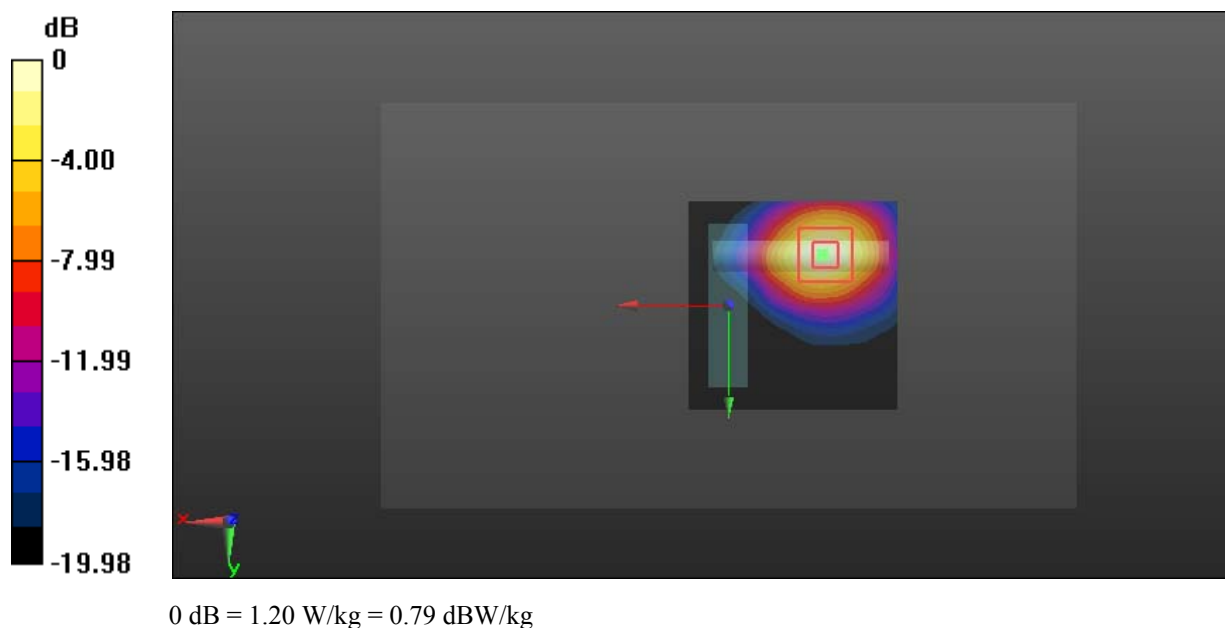

**Test Plot 4\*#: FSK 5.8G\_Close to Body Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0529 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.967 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0860 W/kg

**SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.049 W/kg**

Maximum value of SAR (measured) = 0.0864 W/kg

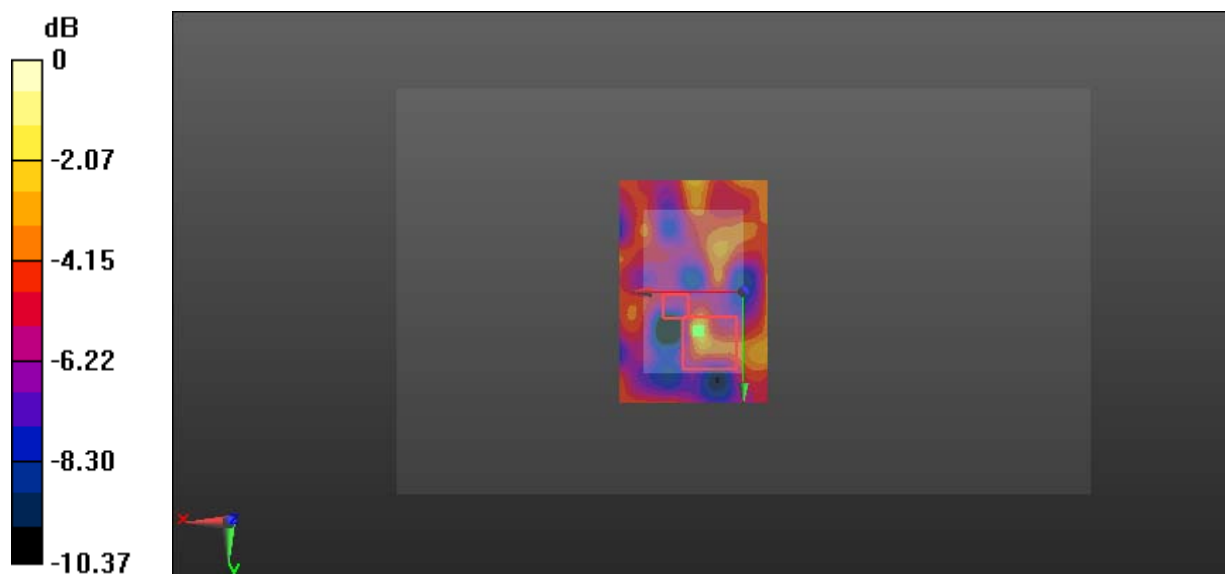

0 dB = 0.0864 W/kg = -10.63 dBW/kg

**Test Plot 5\*#: FSK 5.8G\_Close to Body Right\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.30 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.561 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 2.33 W/kg

**SAR(1 g) = 0.557 W/kg; SAR(10 g) = 0.240 W/kg**

Maximum value of SAR (measured) = 1.29 W/kg

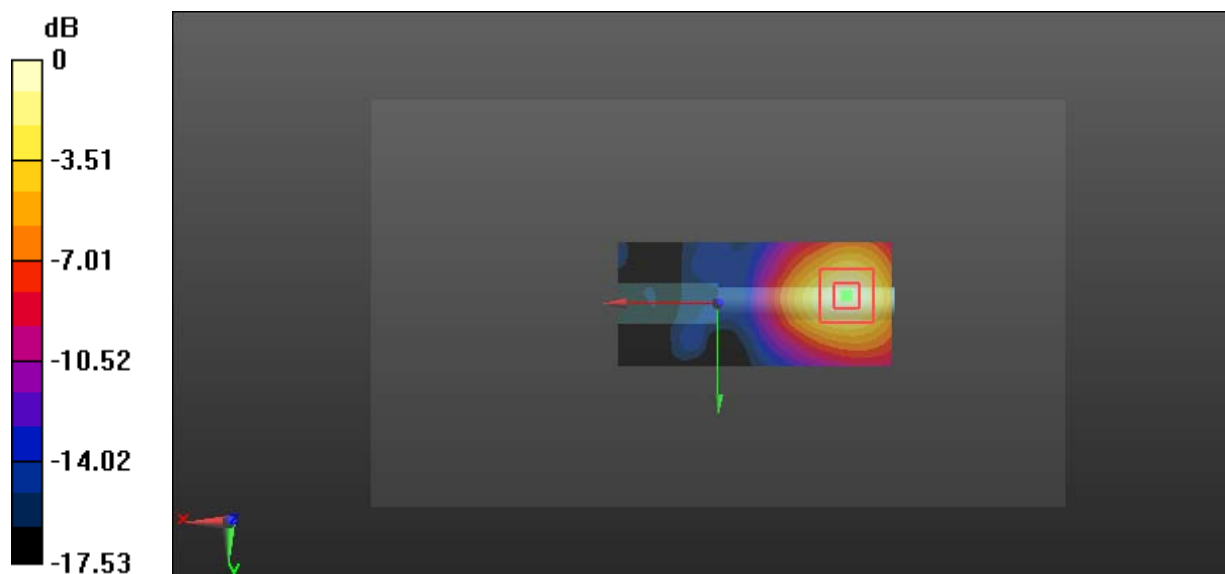

0 dB = 1.29 W/kg = 1.11 dBW/kg

**Test Plot 6\*#: FSK 5.8G\_Close to Body Top\_Low****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5729 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5729$  MHz;  $\sigma = 5.761$  S/m;  $\epsilon_r = 48.611$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.48 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.944 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 4.35 W/kg

**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.369 W/kg**

Maximum value of SAR (measured) = 2.44 W/kg

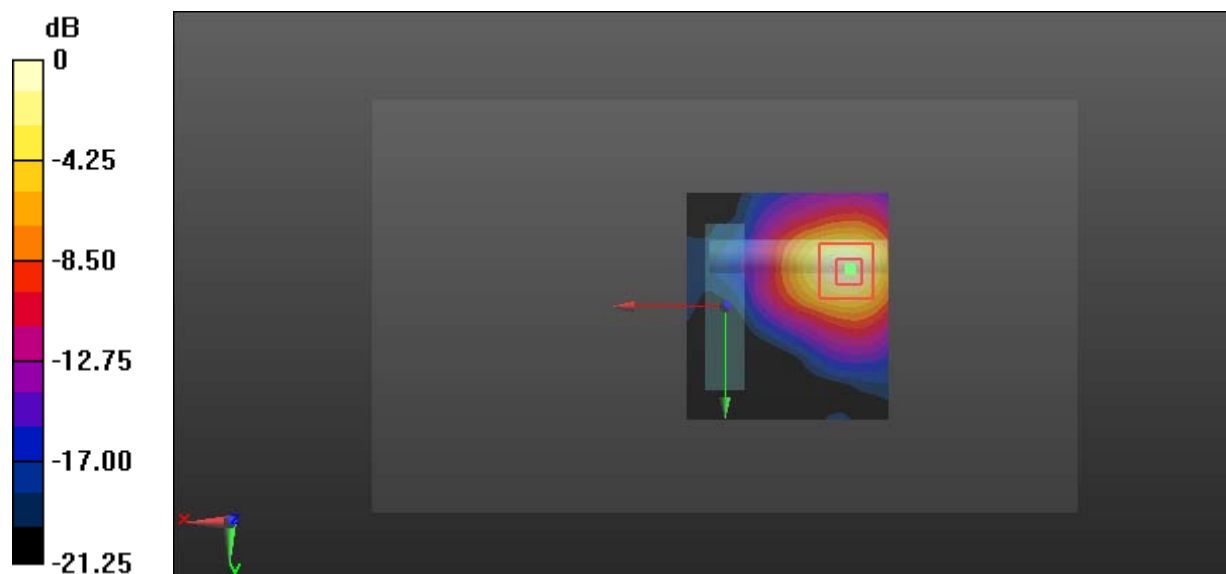

0 dB = 2.44 W/kg = 3.87 dBW/kg

**Test Plot 7\*#: FSK 5.8G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x91x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.81 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.837 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.98 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.398 W/kg**

Maximum value of SAR (measured) = 2.62 W/kg

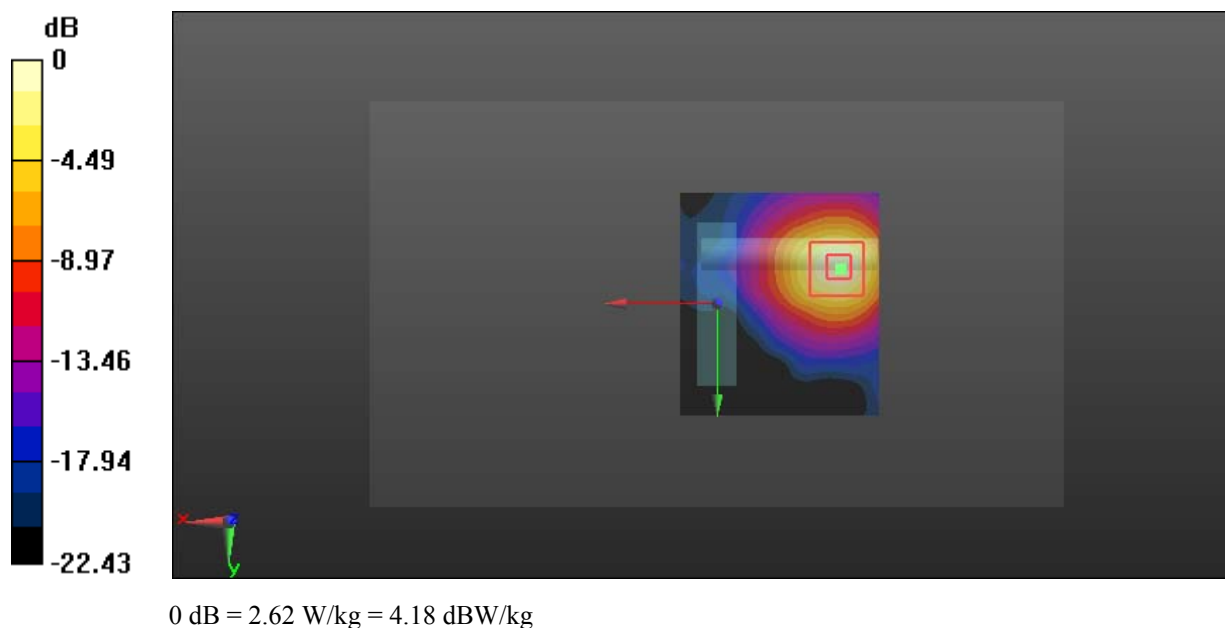

**Test Plot 8\*#: FSK 5.8G\_Close to Body Top\_High**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5843 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5843 \text{ MHz}$ ;  $\sigma = 6.044 \text{ S/m}$ ;  $\epsilon_r = 47.924$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x91x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 2.75 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 1.949 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 4.86 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.389 W/kg**

Maximum value of SAR (measured) = 2.70 W/kg

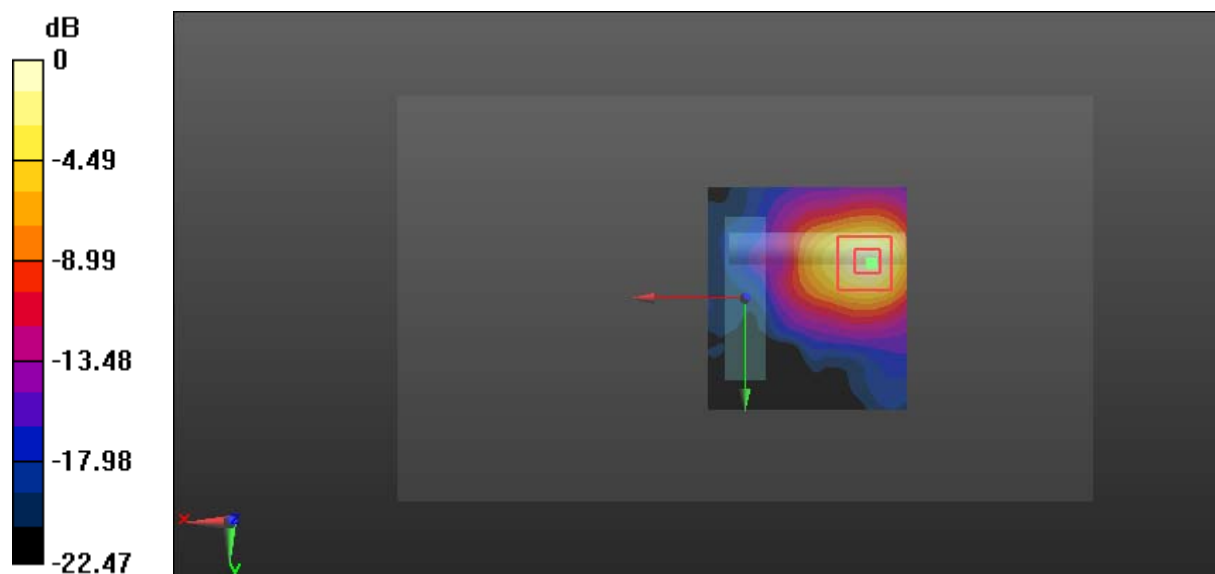

0 dB = 2.70 W/kg = 4.31 dBW/kg



**Test Plot 1#:LB 2.4G\_Handheld Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G; Frequency: 2441.4 MHz;Duty Cycle: 1:6.45

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 53.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.870 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.512 W/kg; SAR(10 g) = 0.248 W/kg**

Maximum value of SAR (measured) = 0.783 W/kg

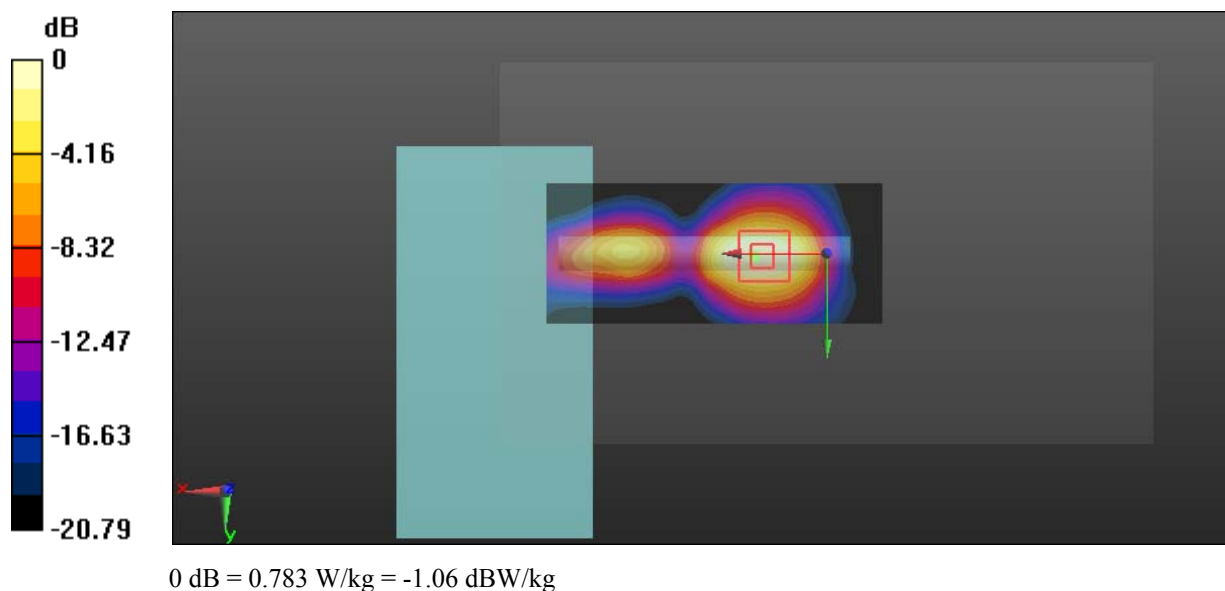

**Test Plot 2#:LB 2.4G\_Handheld Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G; Frequency: 2441.4 MHz;Duty Cycle: 1:6.45

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 53.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.421 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.252 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.208 W/kg

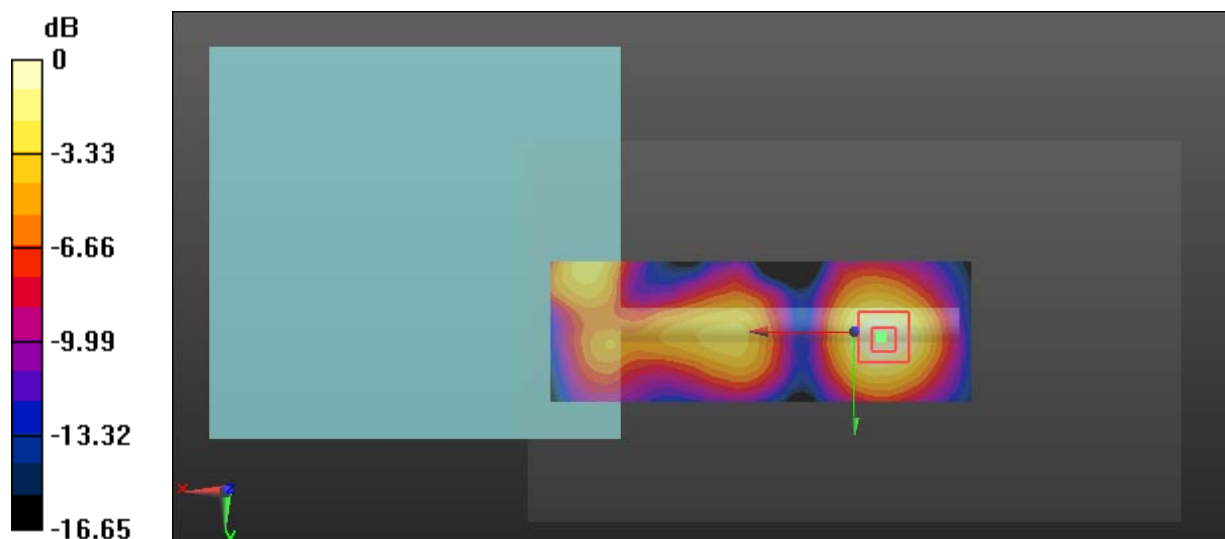

0 dB = 0.208 W/kg = -6.82 dBW/kg

**Test Plot 3#:LB 2.4G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G; Frequency: 2441.4 MHz; Duty Cycle: 1:6.45

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 53.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.569 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.153 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.644 W/kg

**SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.585 W/kg

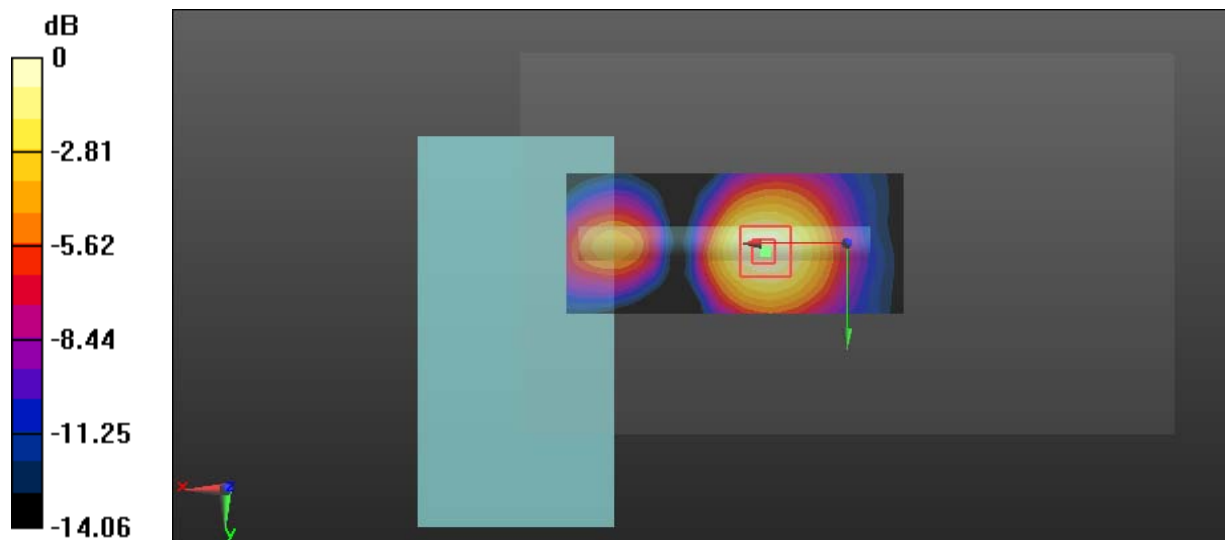

0 dB = 0.585 W/kg = -2.33 dBW/kg

**Test Plot 4#:LB 2.4G\_Close to Body Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G; Frequency: 2441.4 MHz;Duty Cycle: 1:6.45

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 53.401$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0837 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.914 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.0970 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.032 W/kg**

Maximum value of SAR (measured) = 0.0812 W/kg

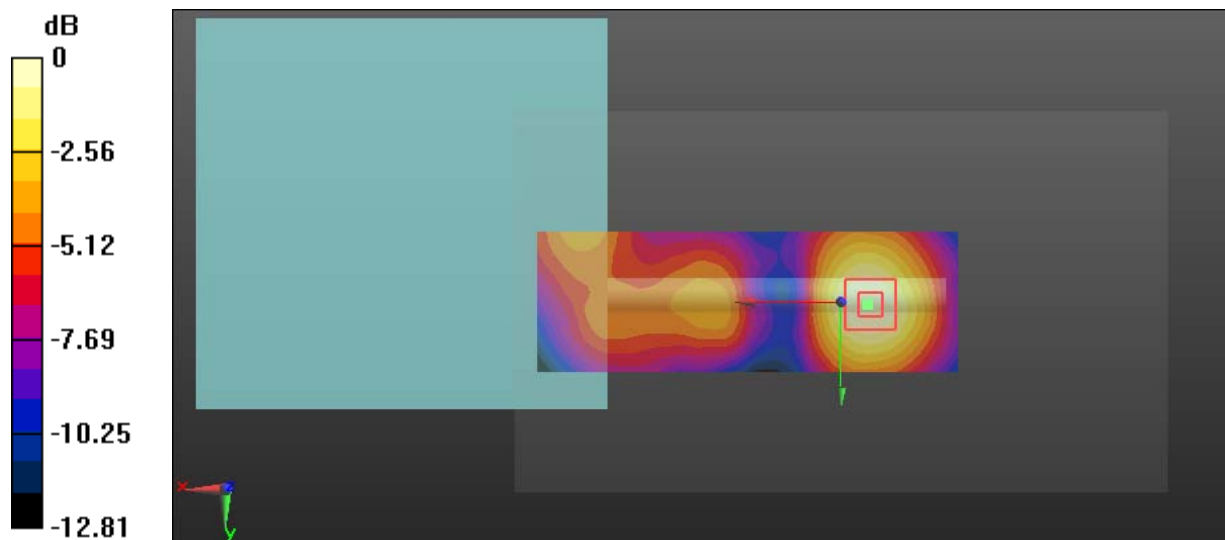

0 dB = 0.0812 W/kg = -10.90 dBW/kg

**Test Plot 5#:LB 5.8G\_Handheld Top\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz;Duty Cycle: 1:6.76

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.876$  S/m;  $\epsilon_r = 48.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.61 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.620 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 5.59 W/kg

**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.322 W/kg**

Maximum value of SAR (measured) = 2.65 W/kg

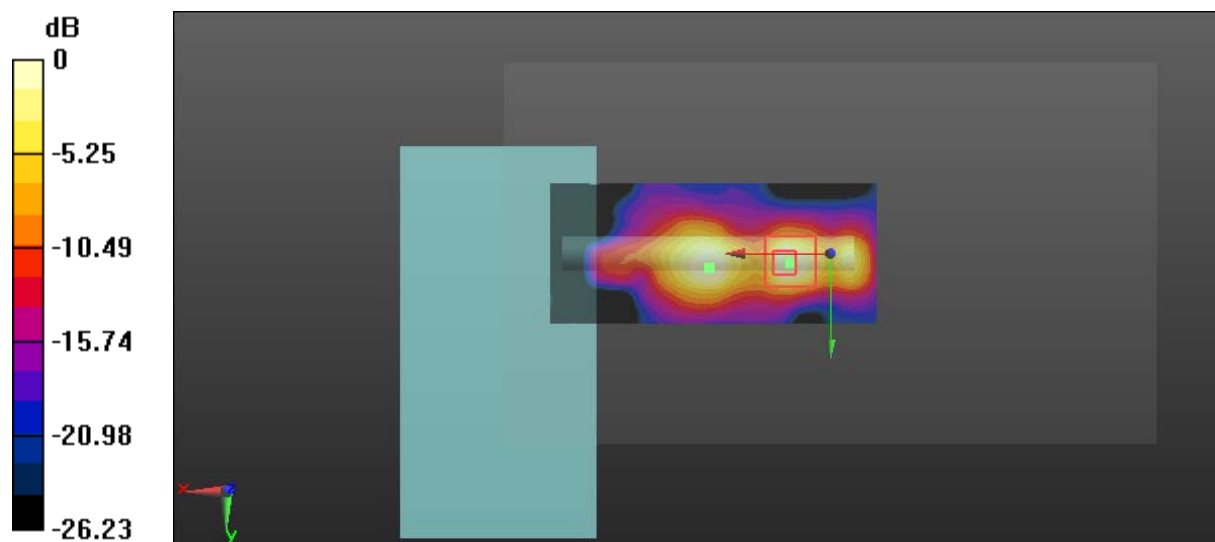

0 dB = 2.65 W/kg = 4.23 dBW/kg

**Test Plot 6#:LB 5.8G\_Handheld Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz;Duty Cycle: 1:6.76

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.876$  S/m;  $\epsilon_r = 48.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (161x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.504 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.677 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.840 W/kg

**SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.487 W/kg

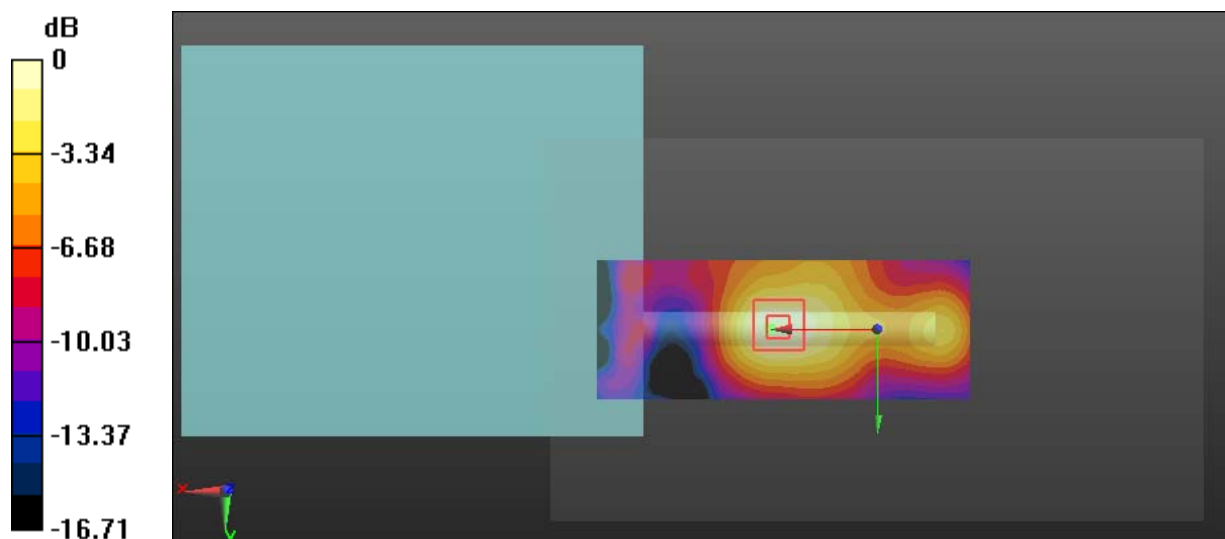

0 dB = 0.487 W/kg = -3.12 dBW/kg

**Test Plot 7#:LB 5.8G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz;Duty Cycle: 1:6.76

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.876$  S/m;  $\epsilon_r = 48.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.506 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.084 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.519 W/kg

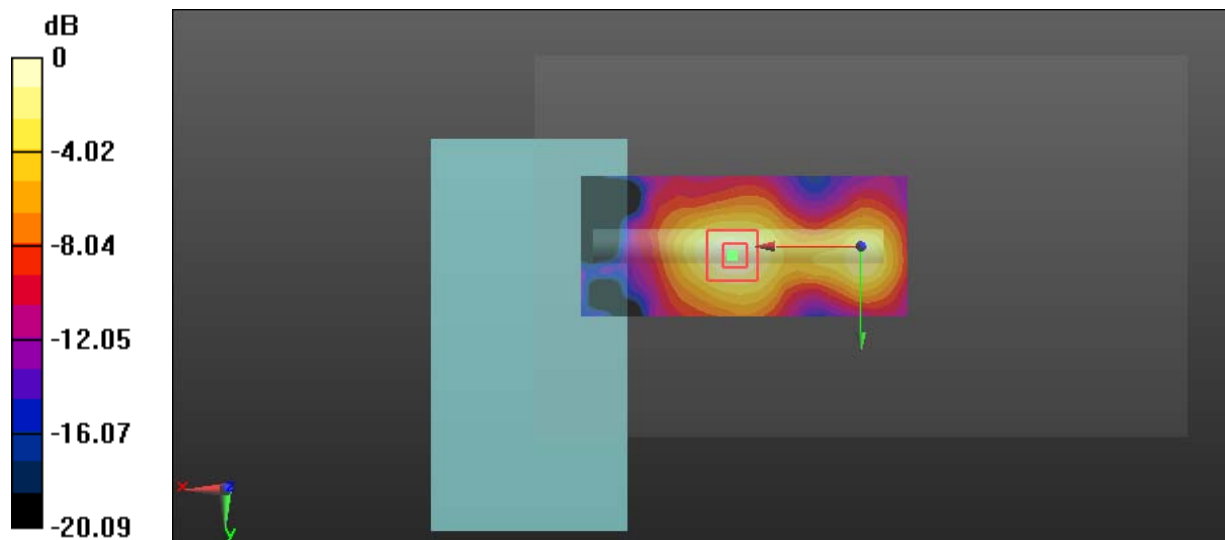

0 dB = 0.519 W/kg = -2.85 dBW/kg

**Test Plot 8#:LB 5.8G\_Close to Body Front\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz;Duty Cycle: 1:6.76

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.876$  S/m;  $\epsilon_r = 48.332$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (161x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.294 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.537 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.529 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.299 W/kg

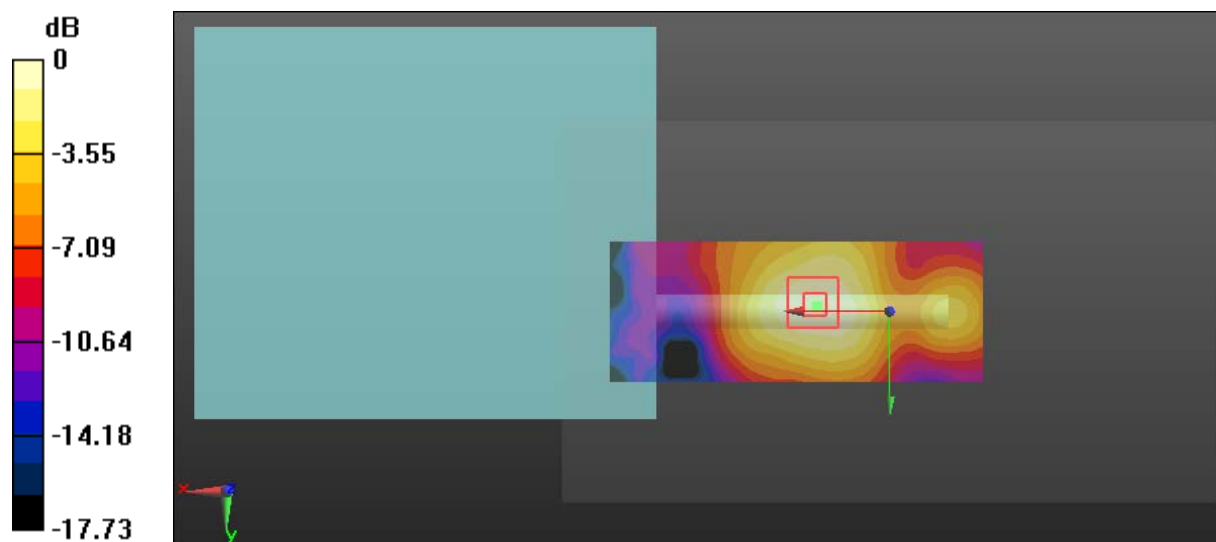

0 dB = 0.299 W/kg = -5.24 dBW/kg



**Test Plot 9#:DTS 2.4G\_Handheld Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.289 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.977 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.426 W/kg

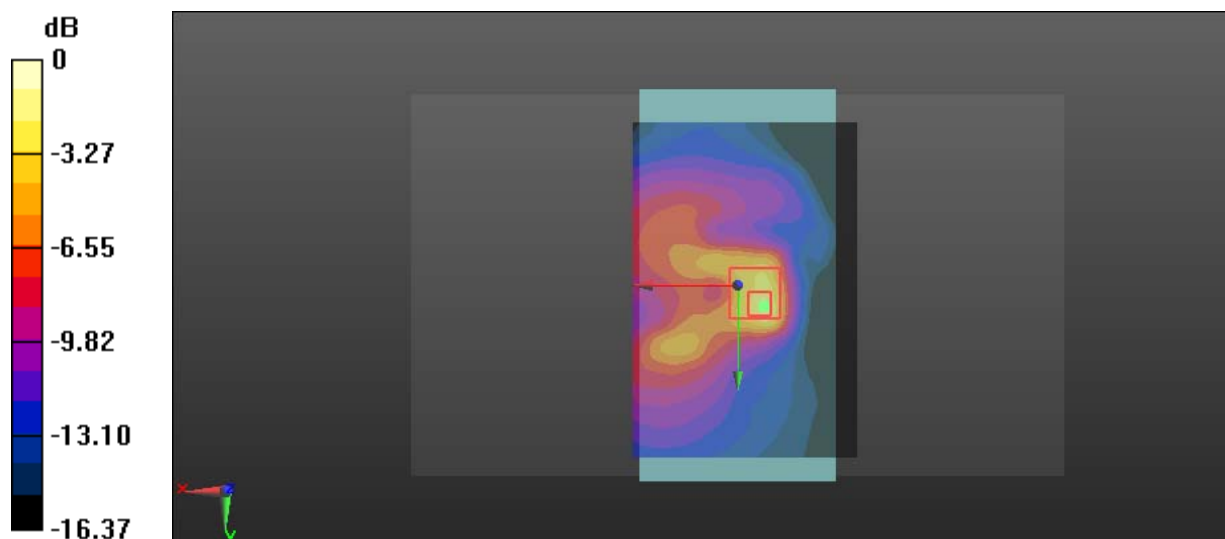

0 dB = 0.426 W/kg = -3.71 dBW/kg

**Test Plot 10#: DTS 2.4G\_Handheld Front\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.568 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.103 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.701 W/kg

**SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.158 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

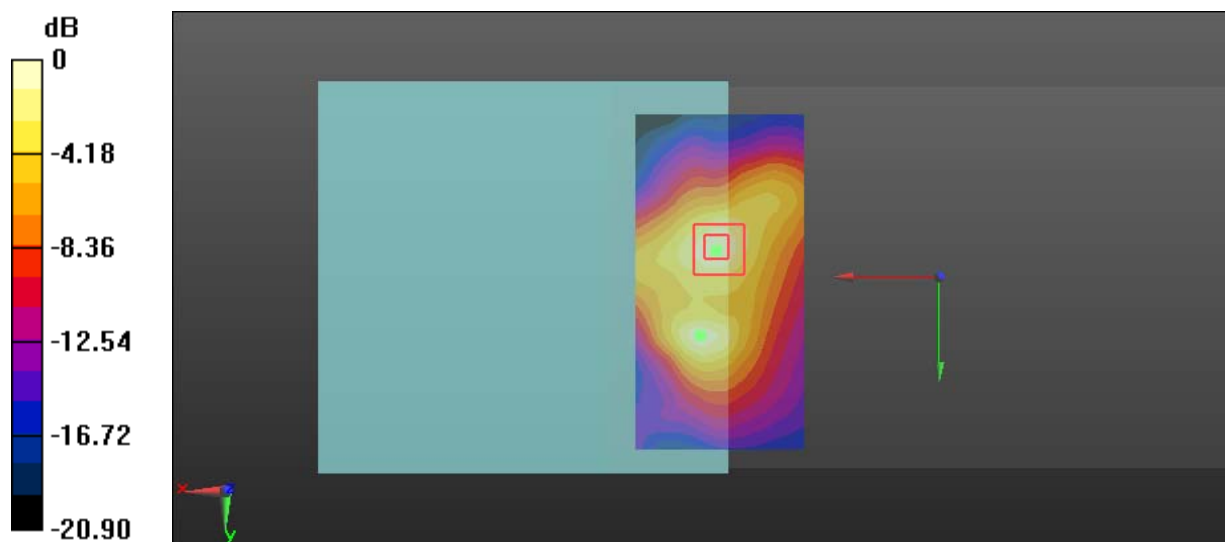

0 dB = 0.561 W/kg = -2.51 dBW/kg

**Test Plot 11#:DTS 2.4G\_Close to Body Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.189 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.915 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.255 W/kg

**SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.184 W/kg

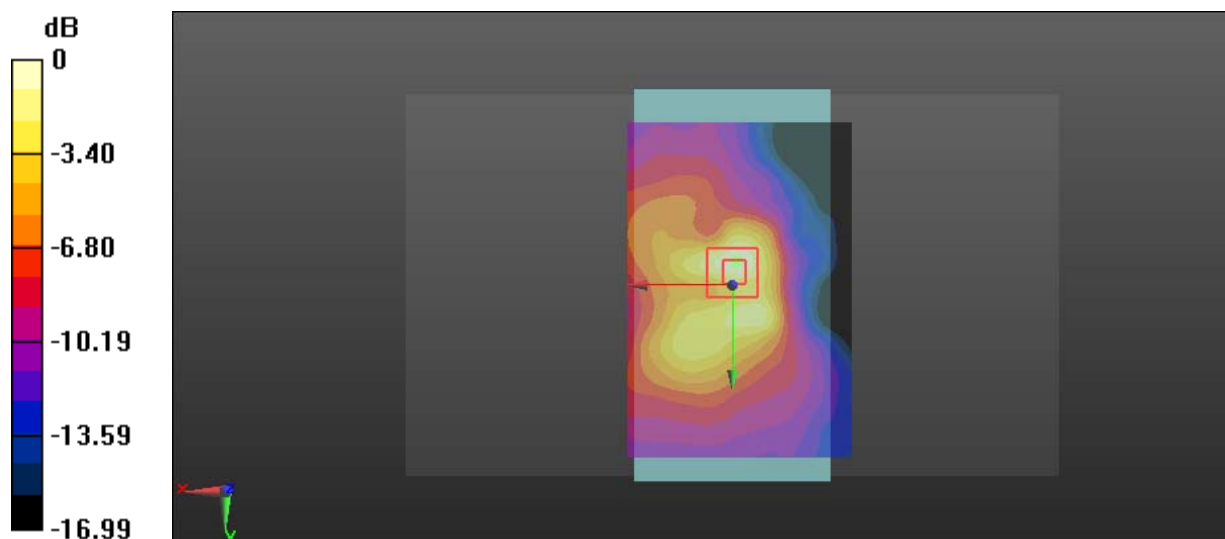

0 dB = 0.184 W/kg = -7.35 dBW/kg

**Test Plot 12#: DTS 2.4G\_Close to Body Front\_Middle\_Chain 1**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: DTS 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.936 \text{ S/m}$ ;  $\epsilon_r = 54.261$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x121x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.231 W/kg

**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.249 V/m; Power Drift = 0.19 dB  
 Peak SAR (extrapolated) = 0.262 W/kg  
**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.081 W/kg**  
 Maximum value of SAR (measured) = 0.220 W/kg

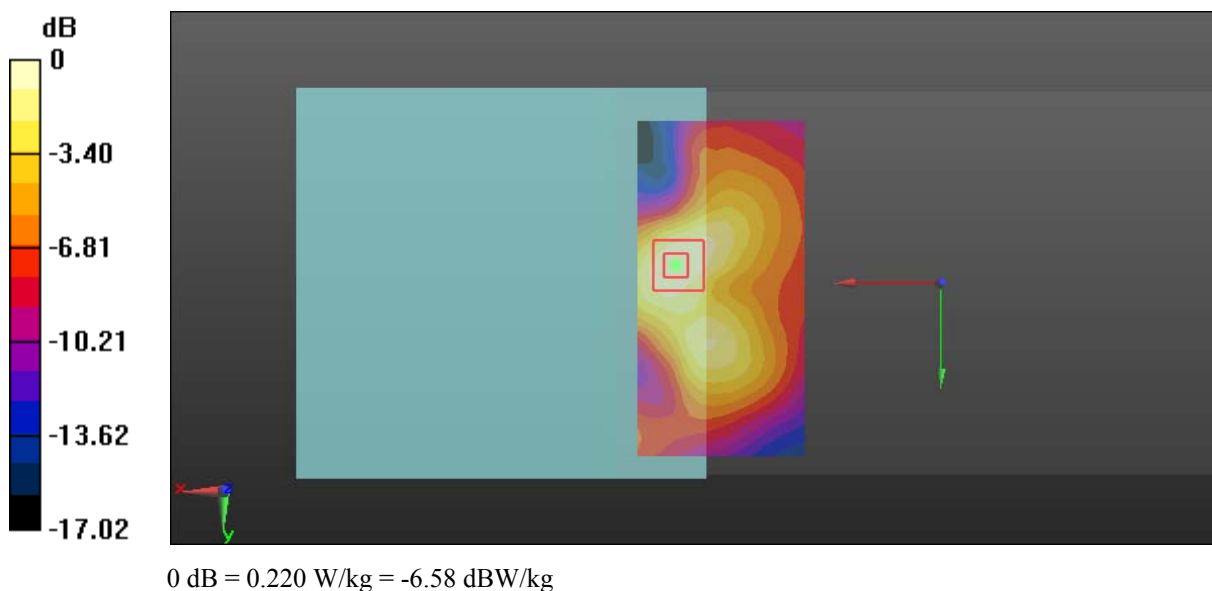

**Test Plot 13#:DTS 2.4G\_Handheld Top\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.142 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.753 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.245 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.178 W/kg

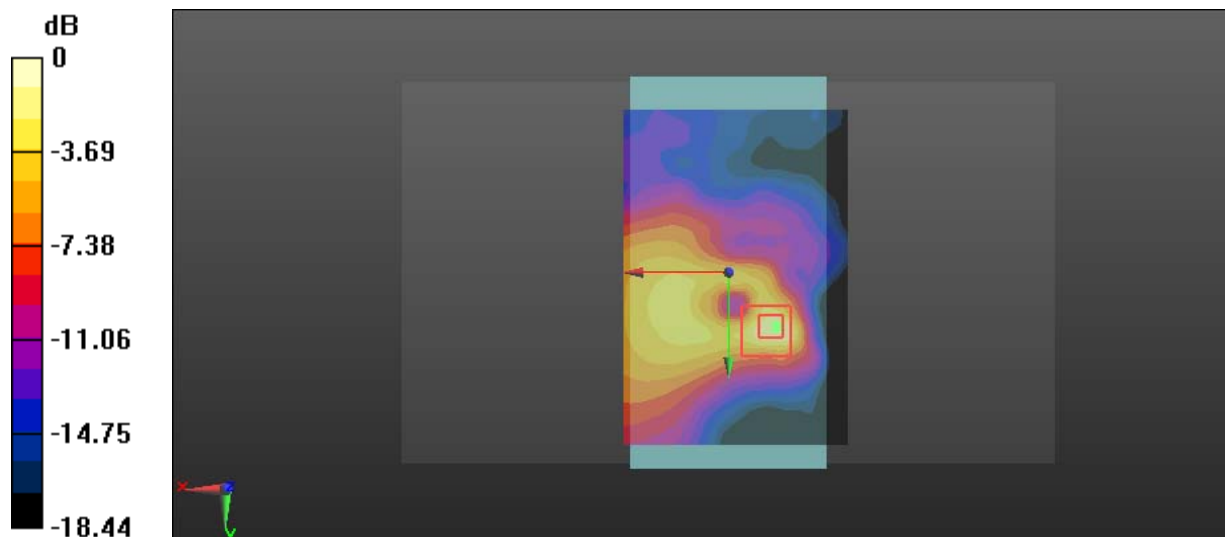

0 dB = 0.178 W/kg = -7.50 dBW/kg

**Test Plot 14#: DTS 2.4G\_Handheld Front\_Middle\_Chain 2**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.936 \text{ S/m}$ ;  $\epsilon_r = 54.261$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x121x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.689 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.865 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.819 W/kg

**SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.207 W/kg**

Maximum value of SAR (measured) = 0.676 W/kg

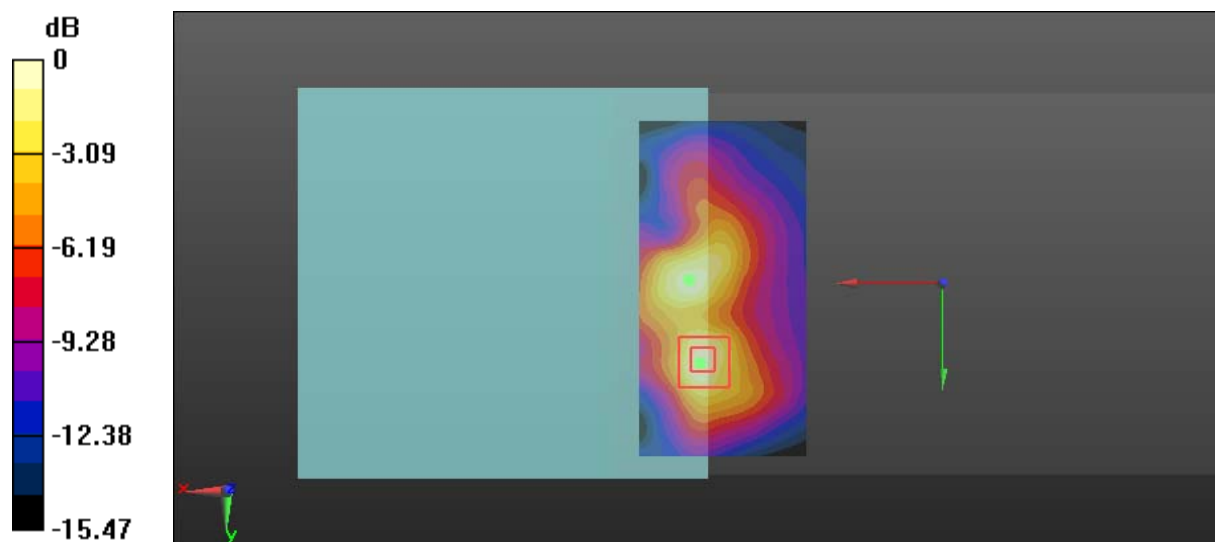

0 dB = 0.676 W/kg = -1.70 dBW/kg

**Test Plot 15#:DTS 2.4G\_Close to Body Top\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (81x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0964 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.684 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0836 W/kg

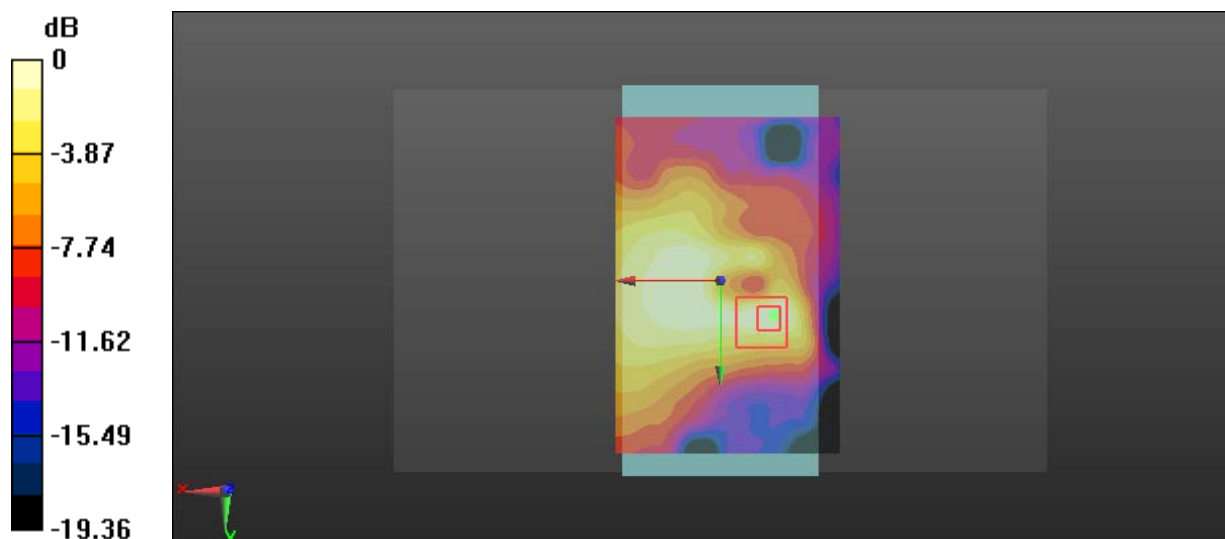

0 dB = 0.0836 W/kg = -10.78 dBW/kg

**Test Plot 16#: DTS 2.4G\_Close to Body Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: DTS 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.936$  S/m;  $\epsilon_r = 54.261$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.185 W/kg


**Zoom Scan (5x5x4)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.265 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.066 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

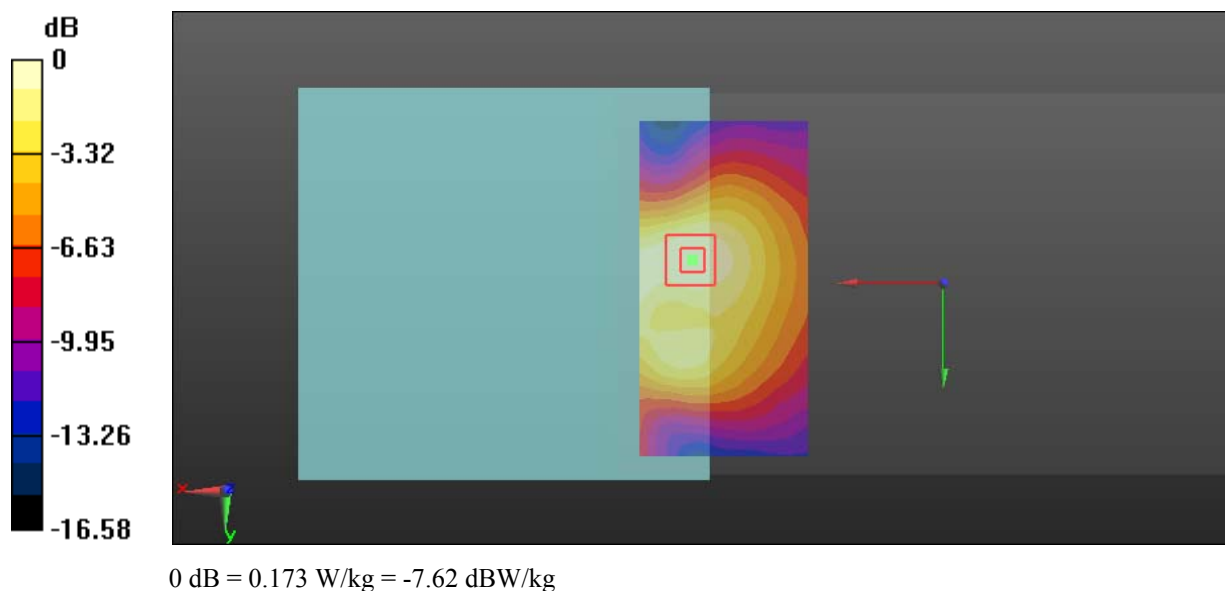



**Test Plot 17#:NII 5.8G\_Handheld Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.62 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.270 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 4.76 W/kg

**SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.319 W/kg**

Maximum value of SAR (measured) = 2.68 W/kg

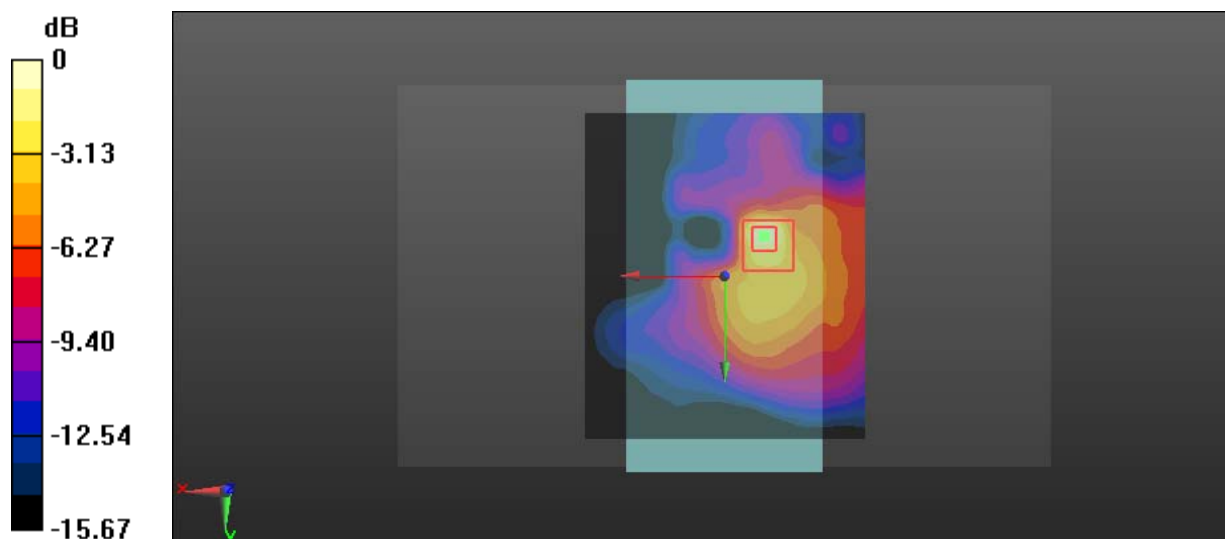

**Test Plot 18#: NII 5.8G\_Handheld Front\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.06 W/kg


**Zoom Scan (8x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.398 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.4 W/kg

**SAR(1 g) = 2.43 W/kg; SAR(10 g) = 0.794 W/kg**

Maximum value of SAR (measured) = 6.53 W/kg

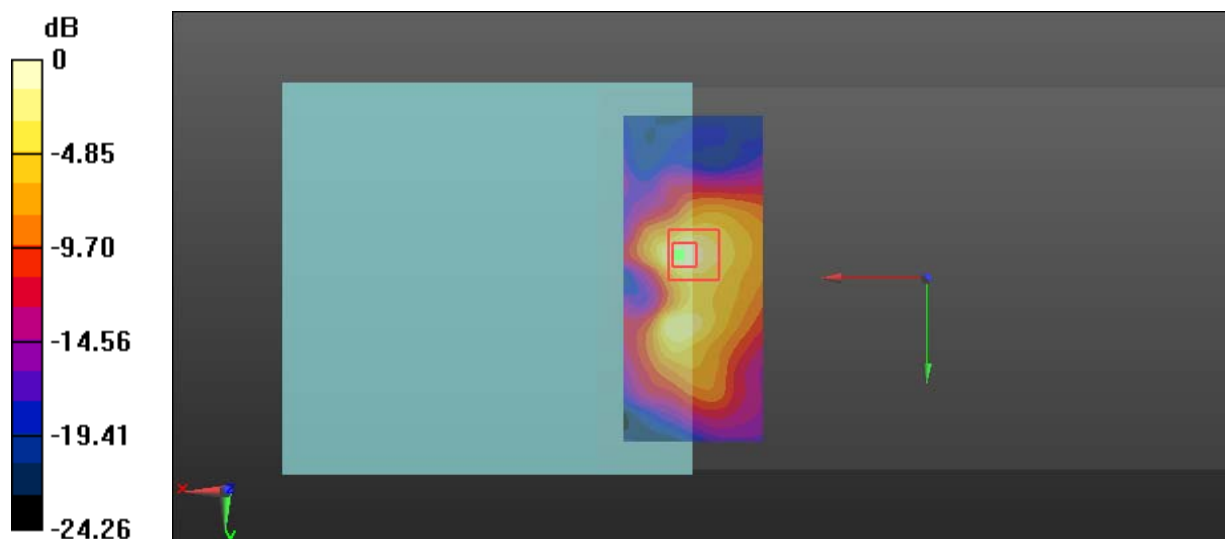

**Test Plot 19#:NII 5.8G\_Close to Body Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.829 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.659 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.51 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.156 W/kg**

Maximum value of SAR (measured) = 0.818 W/kg

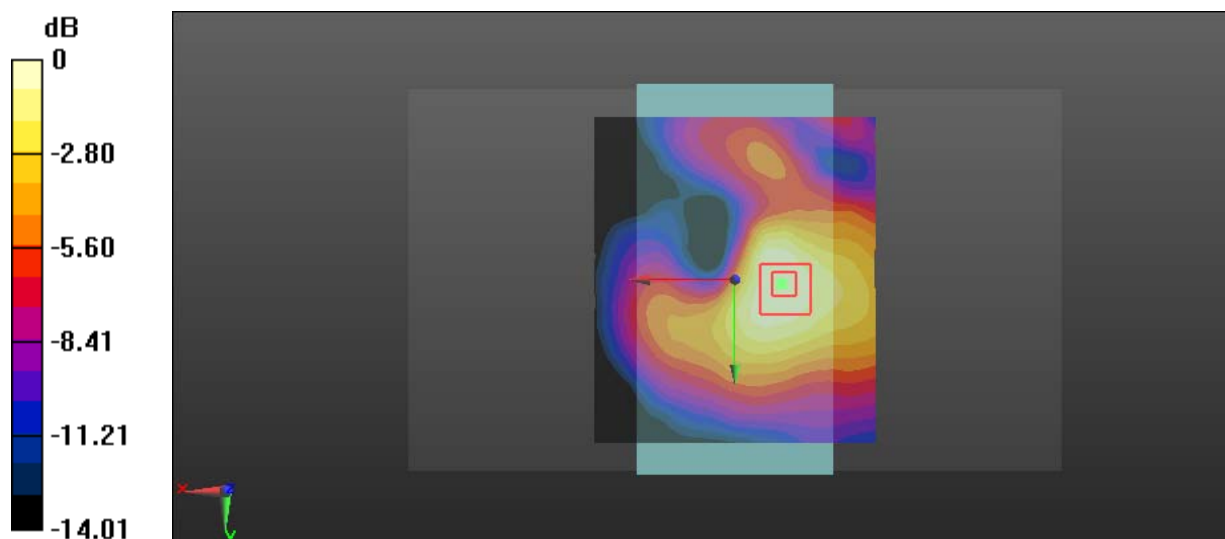

0 dB = 0.818 W/kg = -0.87 dBW/kg

**Test Plot 20#: NII 5.8G\_Close to Body Front\_Middle\_Chain 1**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: NII 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 5.9 \text{ S/m}$ ;  $\epsilon_r = 48.274$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x141x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.48 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 3.340 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 2.62 W/kg  
**SAR(1 g) = 0.621 W/kg; SAR(10 g) = 0.271 W/kg**  
 Maximum value of SAR (measured) = 1.49 W/kg

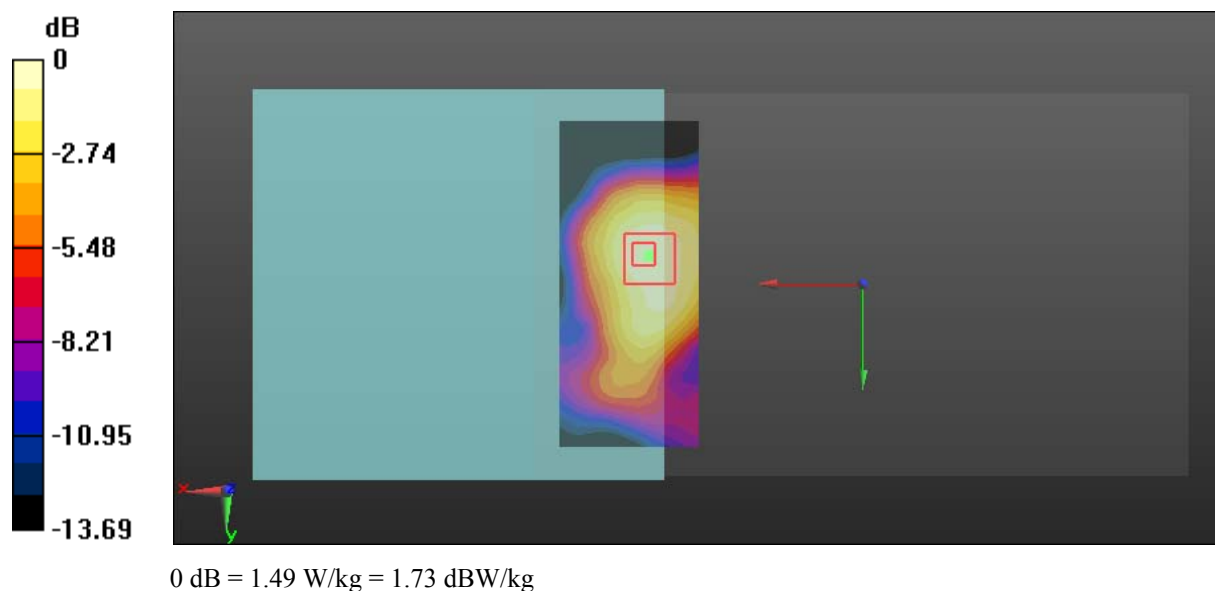

**Test Plot 21#:NII 5.8G\_Handheld Top\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.17 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 9.022 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 4.04 W/kg

**SAR(1 g) = 0.817 W/kg; SAR(10 g) = 0.252 W/kg**

Maximum value of SAR (measured) = 2.25 W/kg

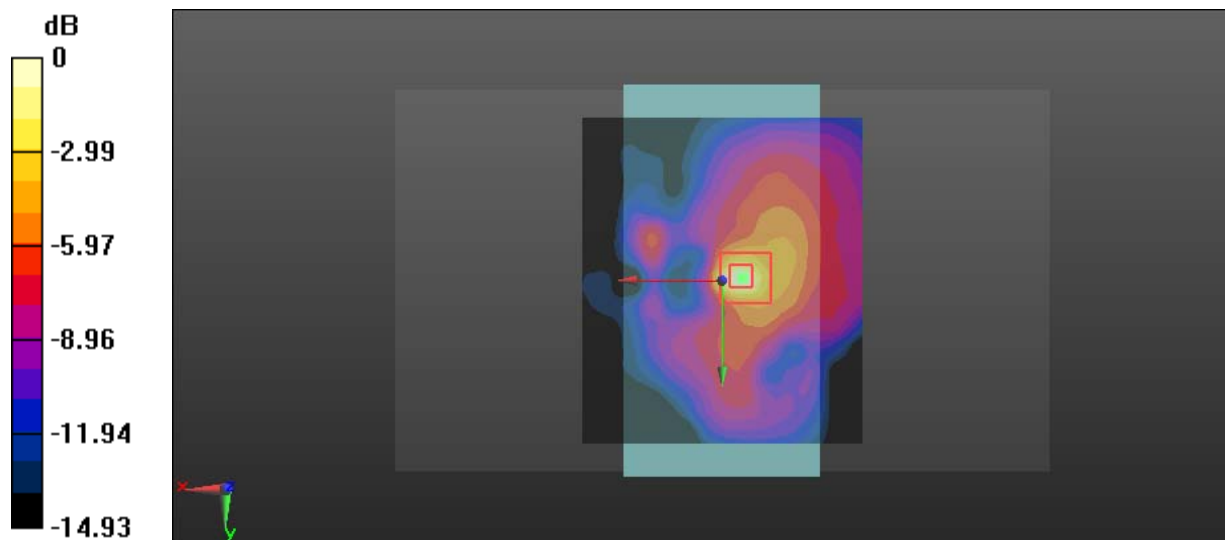

0 dB = 2.25 W/kg = 3.52 dBW/kg

**Test Plot 22#: NII 5.8G\_Handheld Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 6.95 W/kg


**Zoom Scan (8x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.404 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 13.1 W/kg

**SAR(1 g) = 2.65 W/kg; SAR(10 g) = 0.883 W/kg**

Maximum value of SAR (measured) = 6.71 W/kg

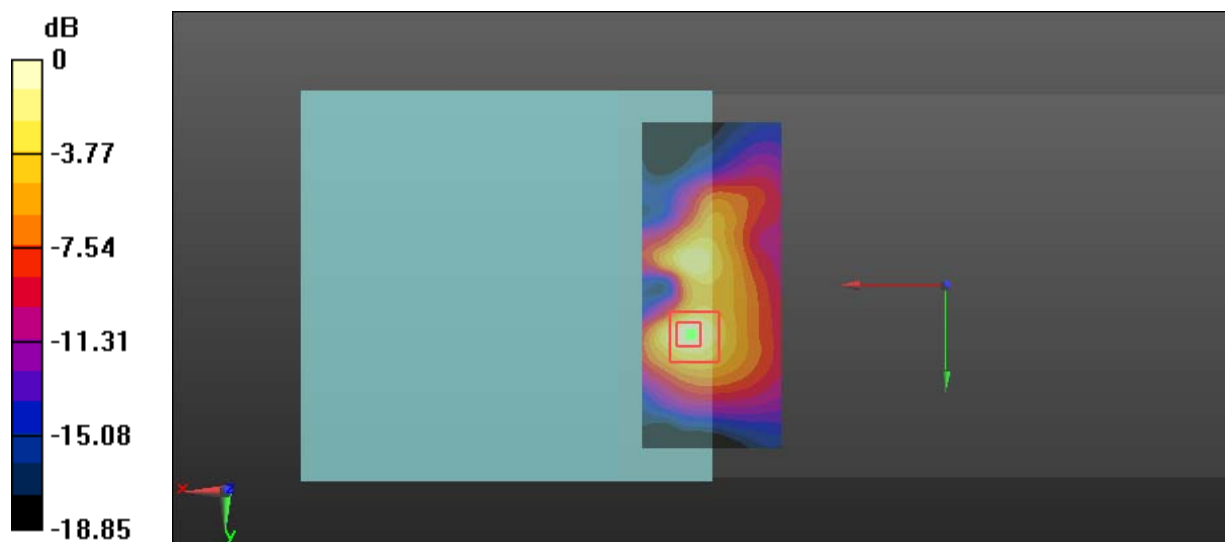

0 dB = 6.71 W/kg = 8.27 dBW/kg

**Test Plot 23#:NII 5.8G\_Close to Body Top\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.891 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.354 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.893 W/kg

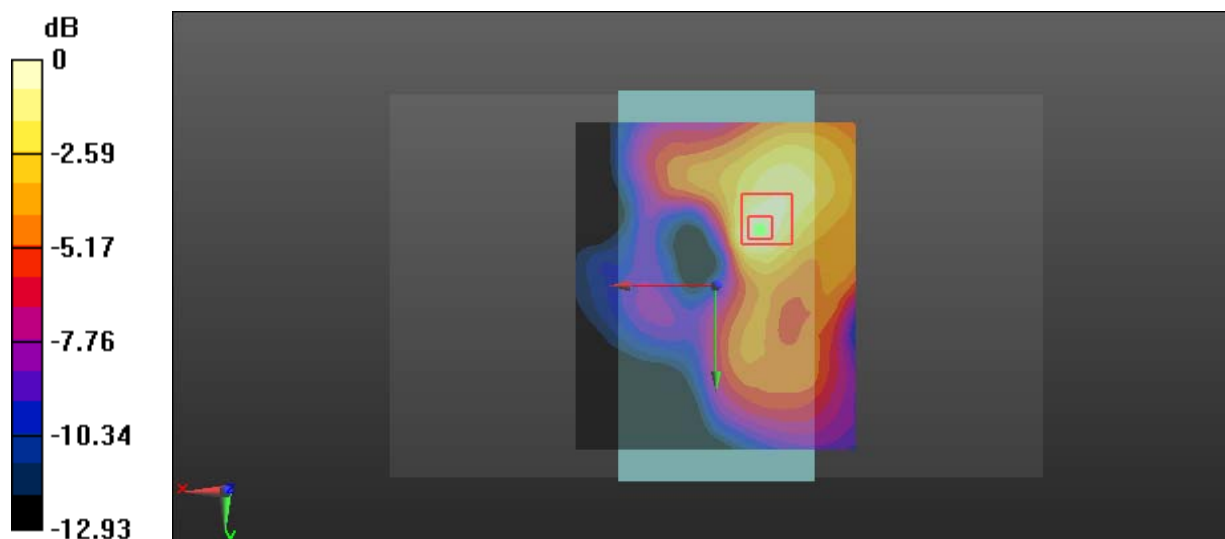

0 dB = 0.893 W/kg = -0.49 dBW/kg

**Test Plot 24#: NII 5.8G\_Close to Body Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: NII 5.8G; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 5.9$  S/m;  $\epsilon_r = 48.274$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x141x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.61 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.272 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 2.83 W/kg

**SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.315 W/kg**

Maximum value of SAR (measured) = 1.59 W/kg

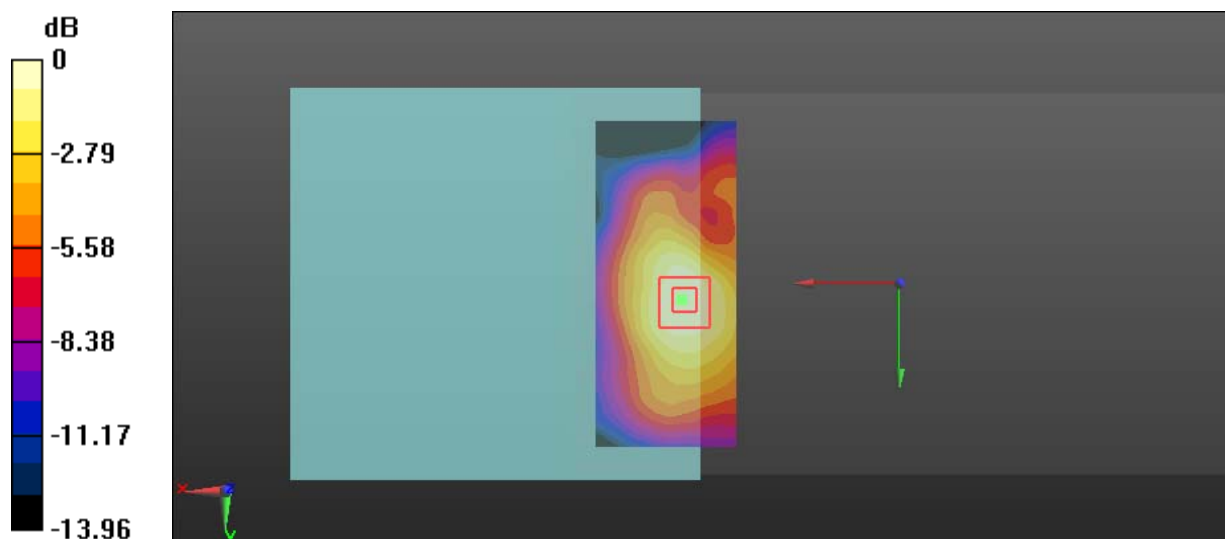



**Test Plot 25#:FSK 2.4G\_Handheld Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz;Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.474 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.724 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.579 W/kg

**SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.468 W/kg

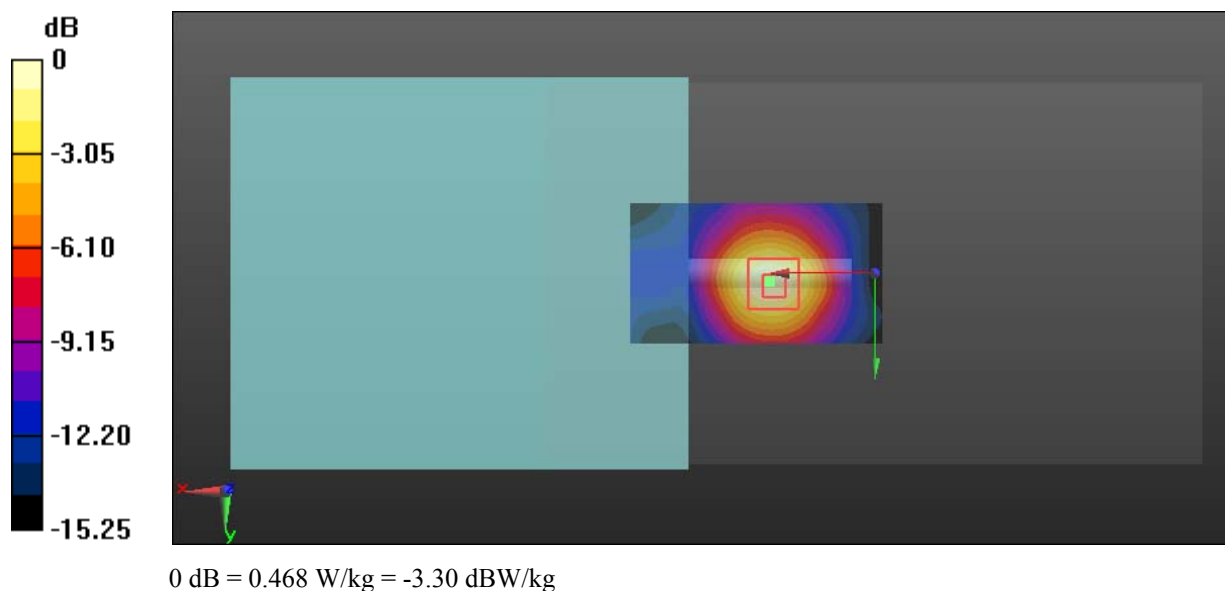

**Test Plot 26#:FSK 2.4G\_Handheld Top\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: FSK 2.4G; Frequency: 2442.5 MHz;Duty Cycle: 1:17.55  
 Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 4.85 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 33.90 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 5.19 W/kg  
**SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.01 W/kg**  
 Maximum value of SAR (measured) = 4.17 W/kg

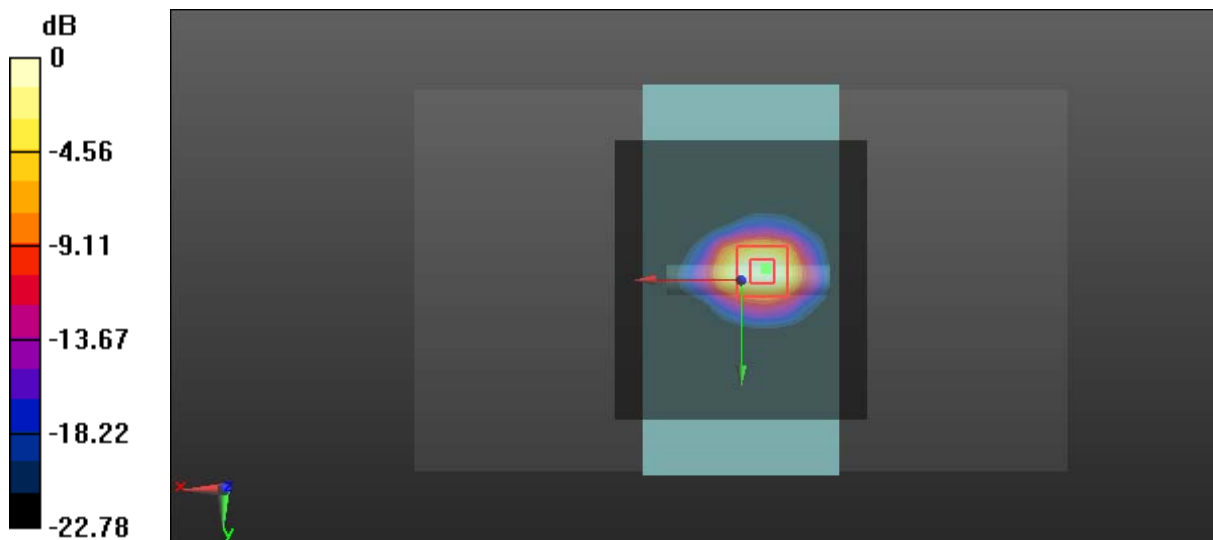

0 dB = 4.17 W/kg = 6.20 dBW/kg

**Test Plot 27#:FSK 2.4G\_Colse to Body Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz;Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.238 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.626 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

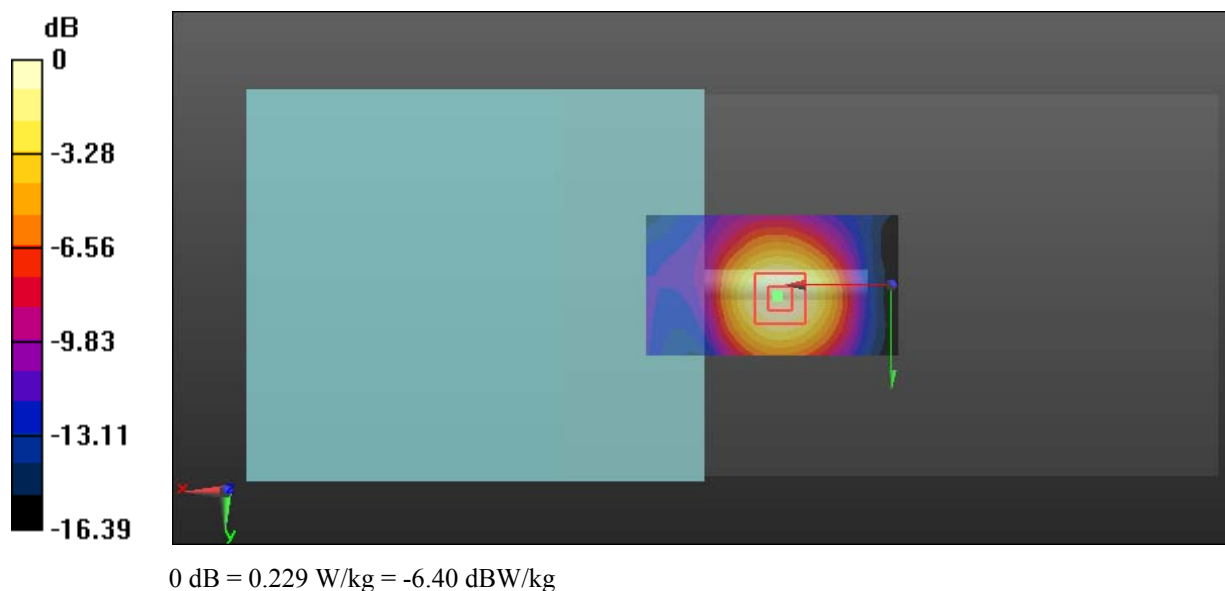

**Test Plot 28#:FSK 2.4G\_Close to Body Top\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: FSK 2.4G; Frequency: 2442.5 MHz;Duty Cycle: 1:17.55  
 Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 53.392$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
 Maximum value of SAR (interpolated) = 0.910 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 14.18 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 1.09 W/kg  
**SAR(1 g) = 0.577 W/kg; SAR(10 g) = 0.284 W/kg**  
 Maximum value of SAR (measured) = 0.905 W/kg

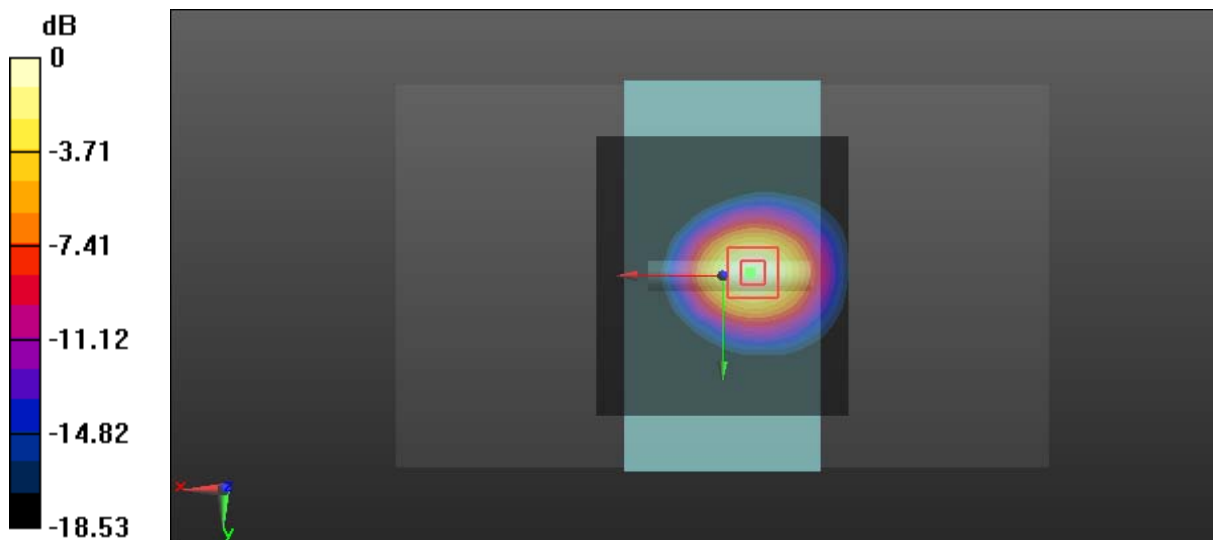

0 dB = 0.905 W/kg = -0.43 dBW/kg

**Test Plot 29#:FSK 5.8G\_Handheld Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz;Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.581 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.263 W/kg**

Maximum value of SAR (measured) = 1.14 W/kg

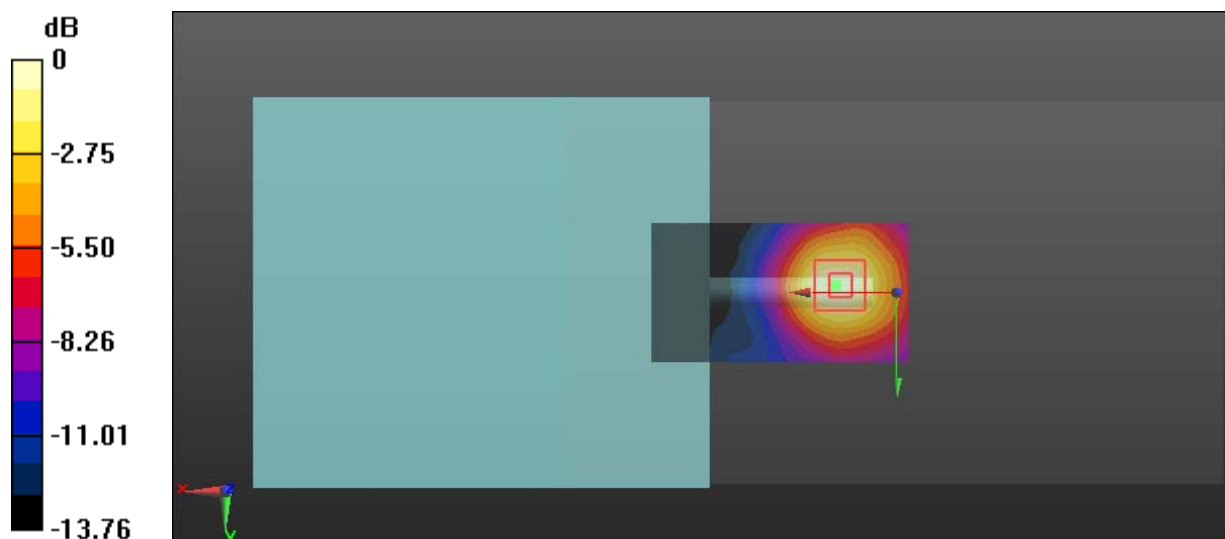

0 dB = 1.14 W/kg = 0.57 dBW/kg

**Test Plot 30#:FSK 5.8G\_Handheld Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 16.9 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 21.14 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 21.1 W/kg

**SAR(1 g) = 3.6 W/kg; SAR(10 g) = 1.09 W/kg**

Maximum value of SAR (measured) = 9.71 W/kg

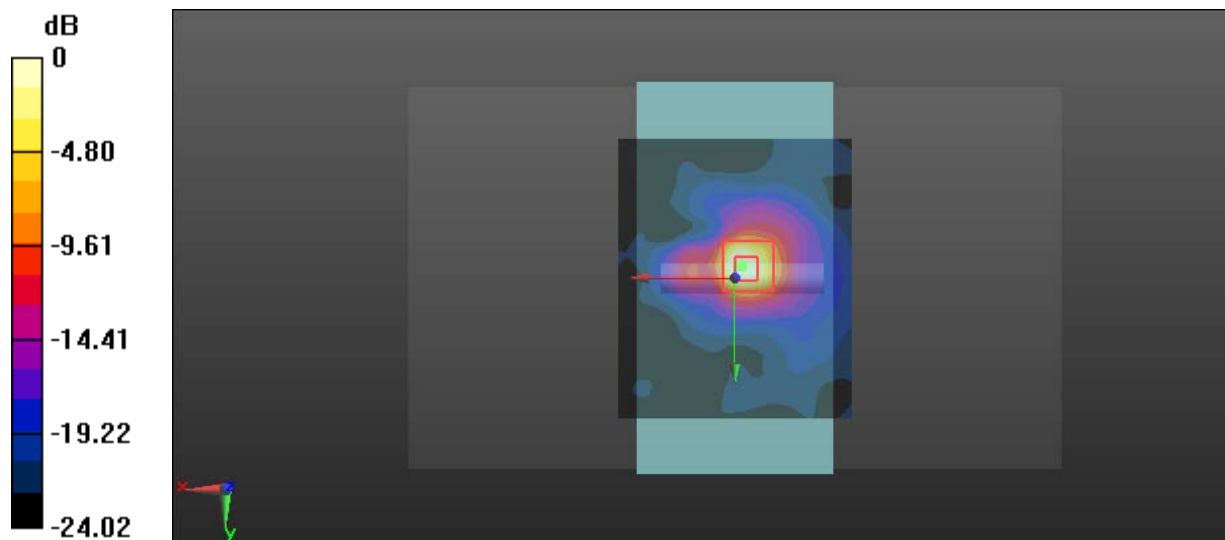

0 dB = 9.71 W/kg = 9.87 dBW/kg

**Test Plot 31#:FSK 5.8G\_Close to Body Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz;Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.848 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.895 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.177 W/kg**

Maximum value of SAR (measured) = 0.864 W/kg

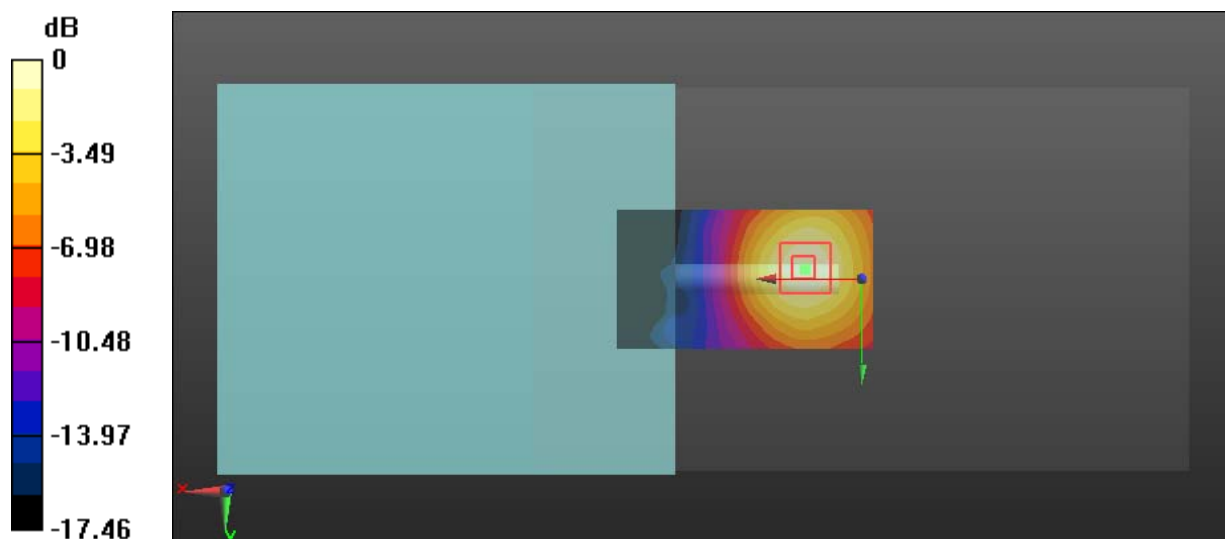

0 dB = 0.864 W/kg = -0.63 dBW/kg

**Test Plot 32#:FSK 5.8G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz;Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.875$  S/m;  $\epsilon_r = 48.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.258 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 0.446 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

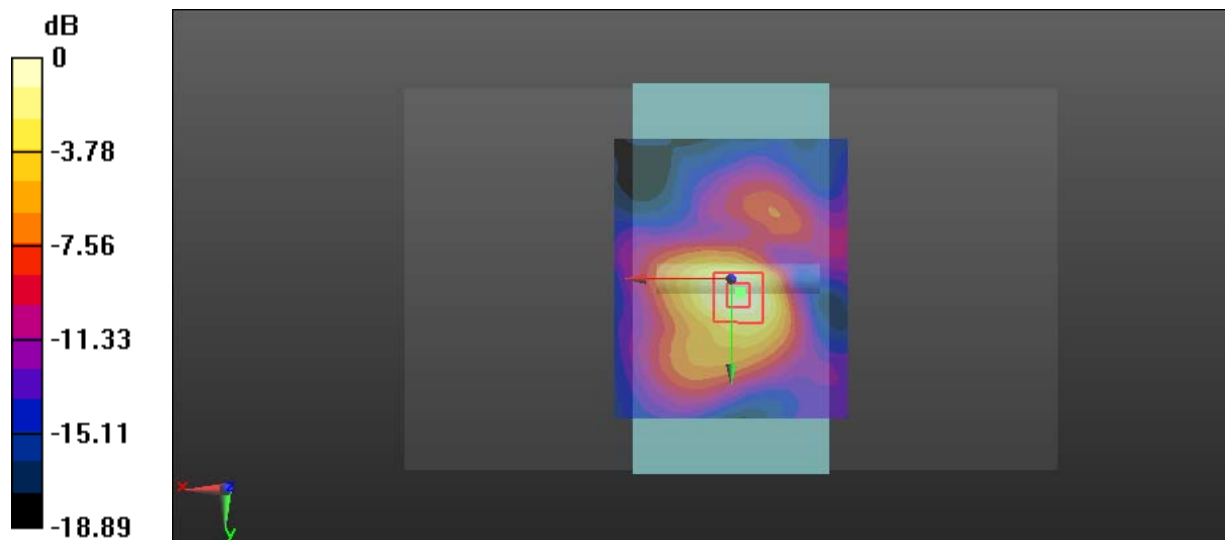

0 dB = 1.04 W/kg = 0.17 dBW/kg



**Test Plot 33#: LB 2.4G\_Handheld Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G ; Frequency: 2441.4 MHz;Duty Cycle: 1:5.83

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 53.351$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.93 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.58 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.07 W/kg

**SAR(1 g) = 0.978 W/kg; SAR(10 g) = 0.436 W/kg**

Maximum value of SAR (measured) = 1.58 W/kg

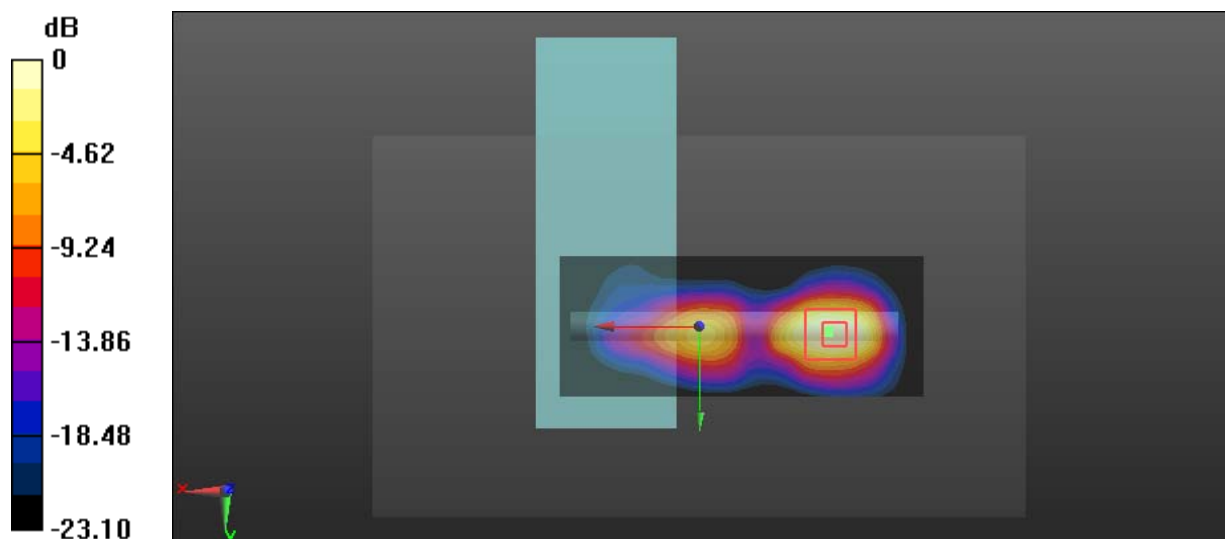

0 dB = 1.58 W/kg = 1.99 dBW/kg

**Test Plot 34#: LB 2.4G\_Handheld Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G ; Frequency: 2441.4 MHz;Duty Cycle: 1:5.83

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 53.351$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0805 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.514 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0778 W/kg

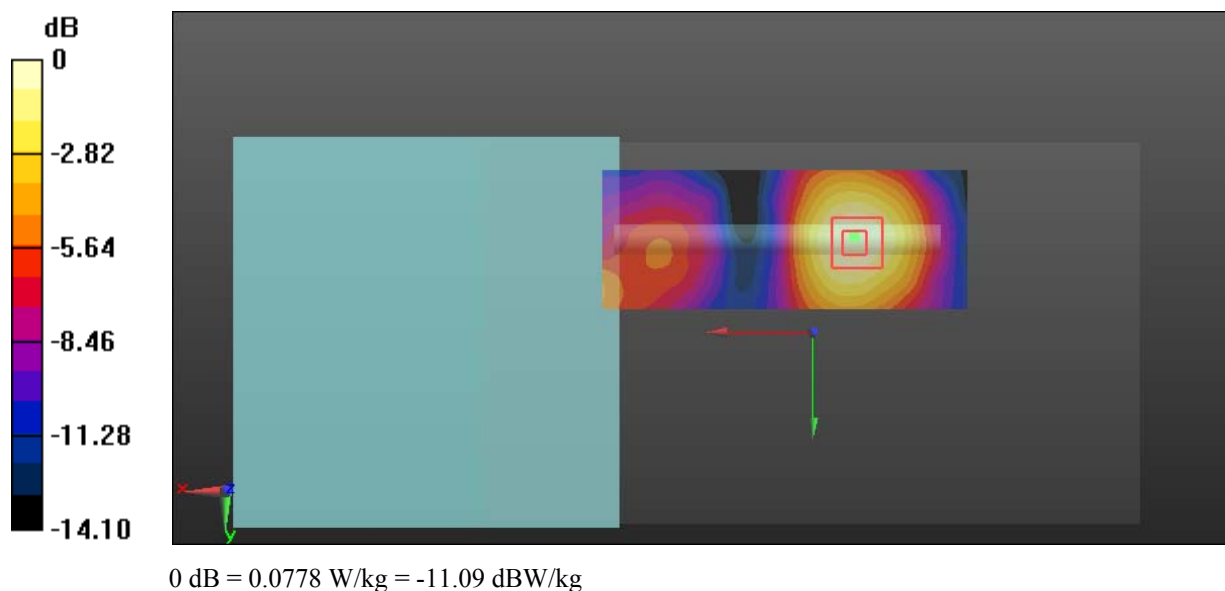

**Test Plot 35#: LB 2.4G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G ; Frequency: 2441.4 MHz;Duty Cycle: 1:5.83

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 53.351$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.365 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.581 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.405 W/kg

**SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.337 W/kg

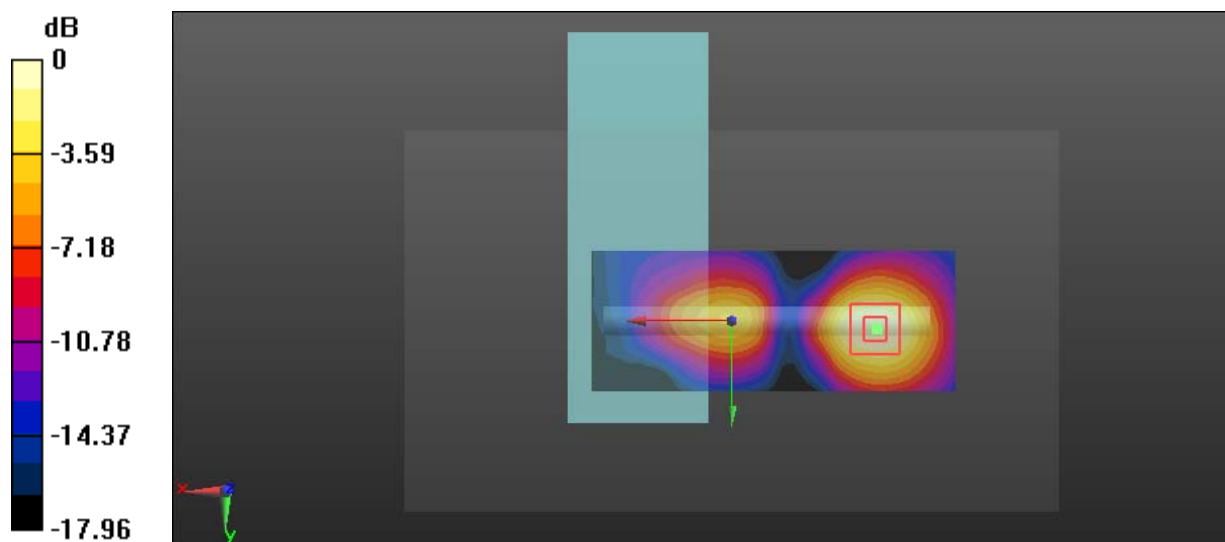

0 dB = 0.337 W/kg = -4.72 dBW/kg

**Test Plot 36#: LB 2.4G\_Close to Body Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 2.4G ; Frequency: 2441.4 MHz;Duty Cycle: 1:5.83

Medium parameters used:  $f = 2441.4$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 53.351$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0500 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.638 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0504 W/kg

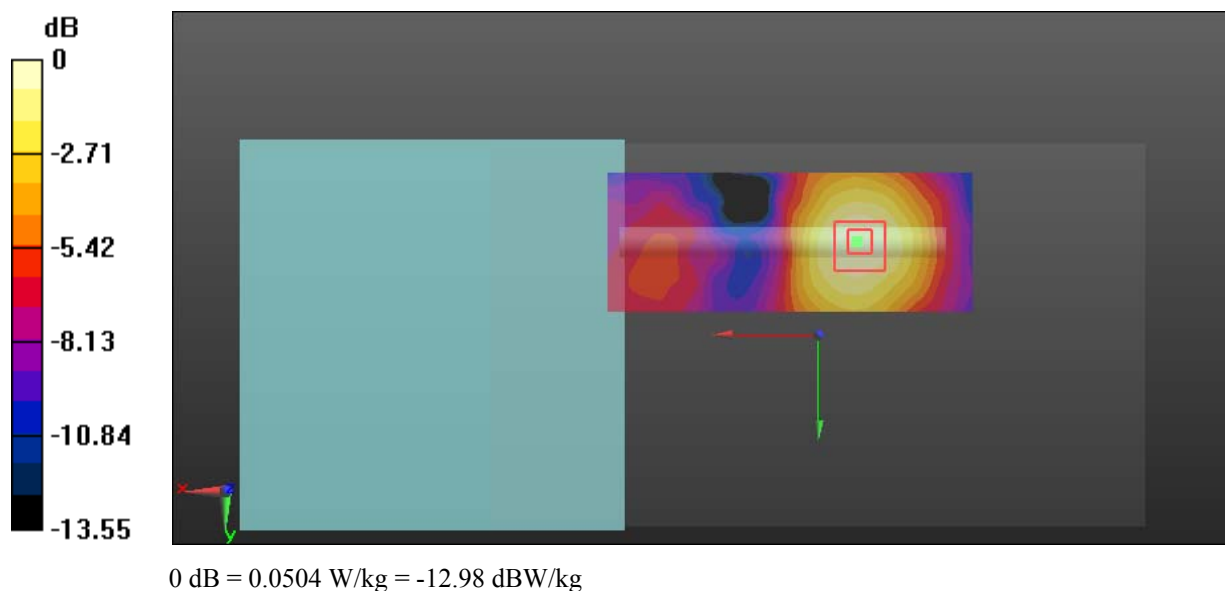

**Test Plot 37#: LB 5.8G\_Handheld Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz; Duty Cycle: 1:6.09

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.976$  S/m;  $\epsilon_r = 48.741$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.81 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.107 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 3.04 W/kg

**SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 1.54 W/kg

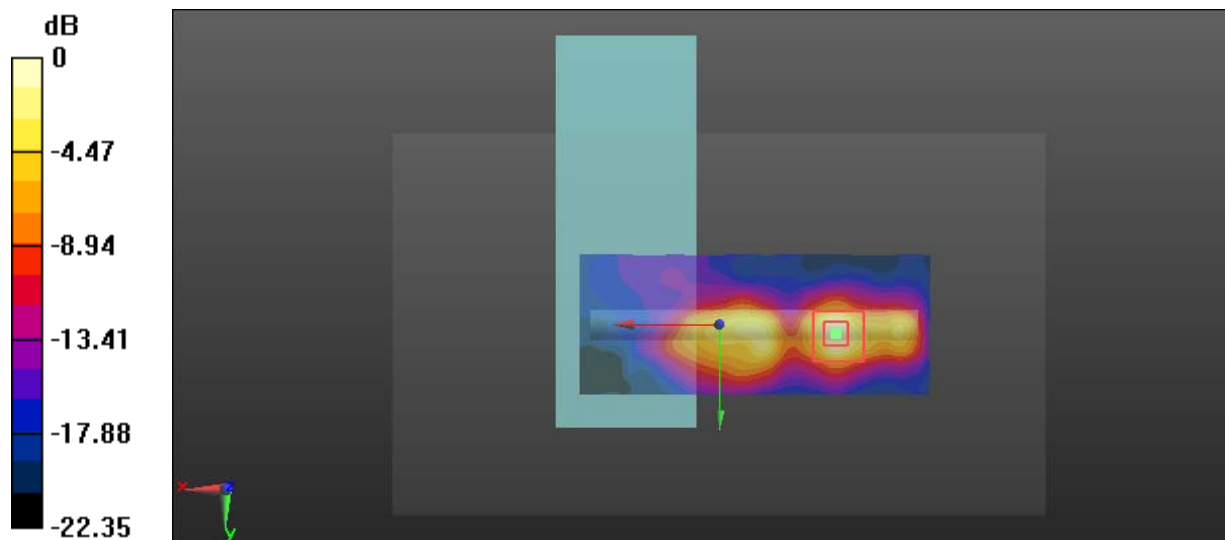

0 dB = 1.54 W/kg = 1.88 dBW/kg

**Test Plot 38#: LB 5.8G\_Handheld Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz; Duty Cycle: 1:6.09

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.976$  S/m;  $\epsilon_r = 48.741$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x51x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.205 W/kg


**Zoom Scan (9x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.991 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.400 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

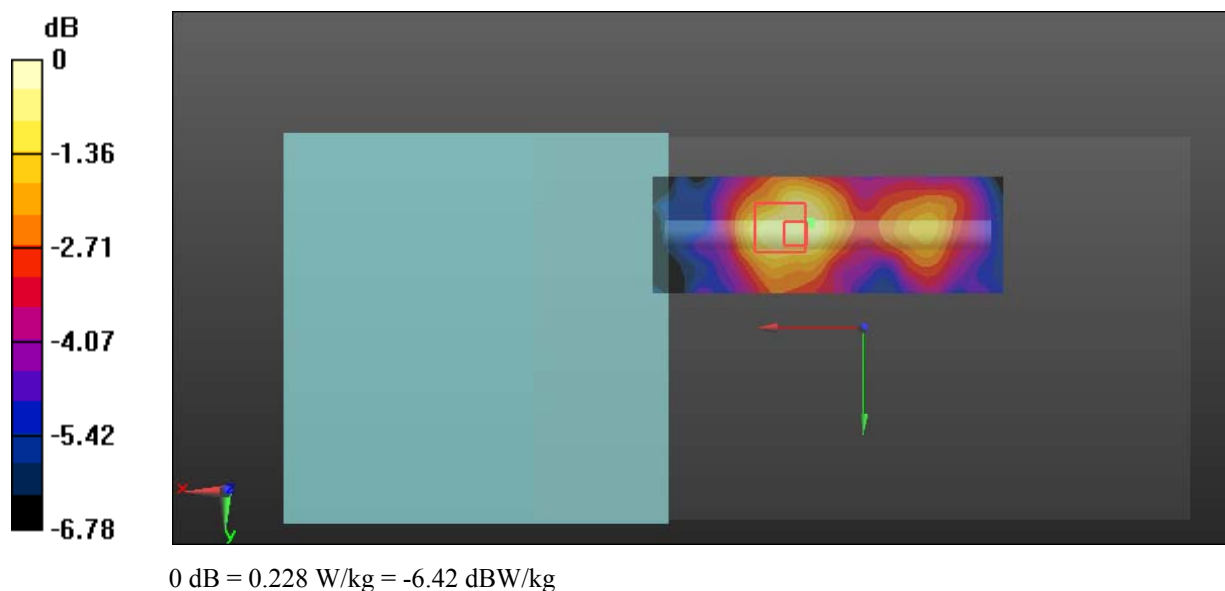

**Test Plot 39#: LB 5.8G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz; Duty Cycle: 1:6.09

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.976$  S/m;  $\epsilon_r = 48.741$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.866 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.381 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

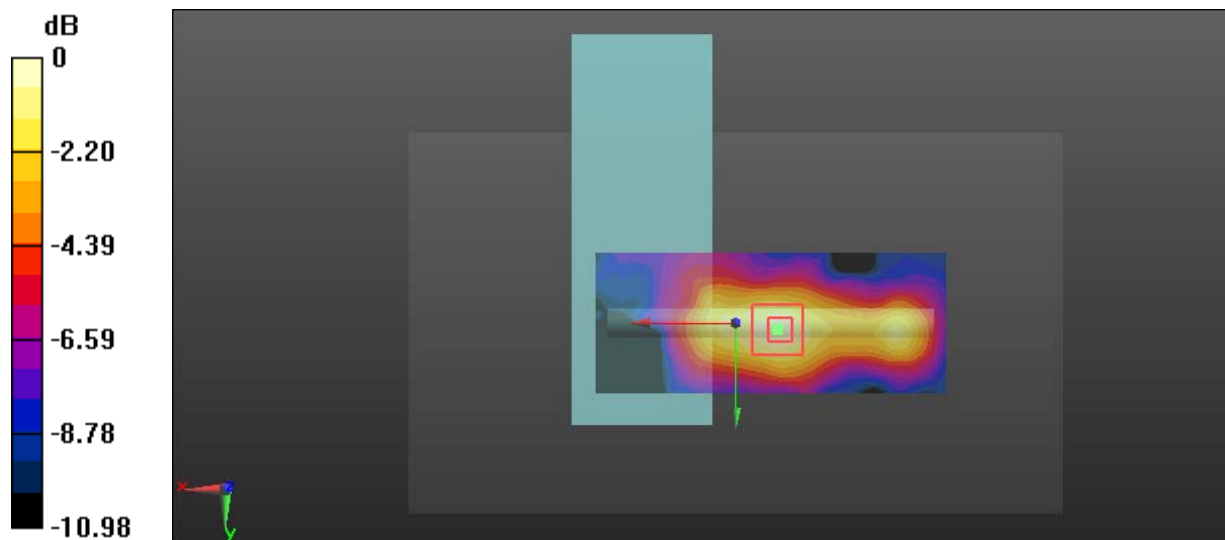

0 dB = 0.200 W/kg = -6.99 dBW/kg

**Test Plot 40#: LB 5.8G\_Close to Body Front\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: LB 5.8G; Frequency: 5775.3 MHz; Duty Cycle: 1:6.09

Medium parameters used:  $f = 5775.3$  MHz;  $\sigma = 5.976$  S/m;  $\epsilon_r = 48.741$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x51x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.108 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.457 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

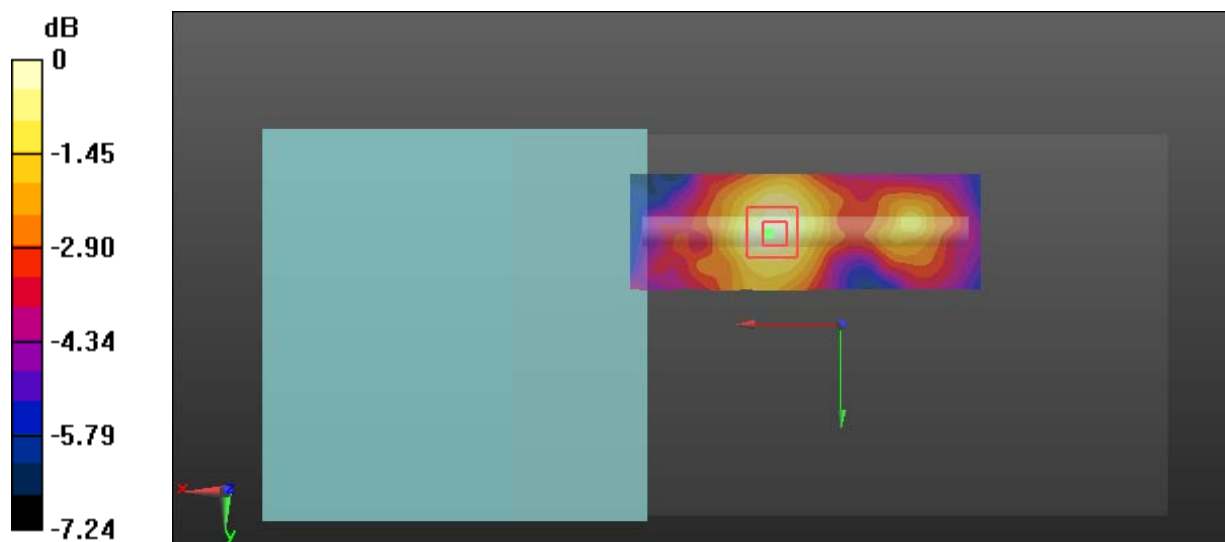

0 dB = 0.112 W/kg = -9.51 dBW/kg



**Test Plot 41#: WLAN 2.4G\_Handheld Top\_Middle\_Chain 1**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.256$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.648 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.48 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 0.743 W/kg  
**SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.176 W/kg**  
 Maximum value of SAR (measured) = 0.617 W/kg

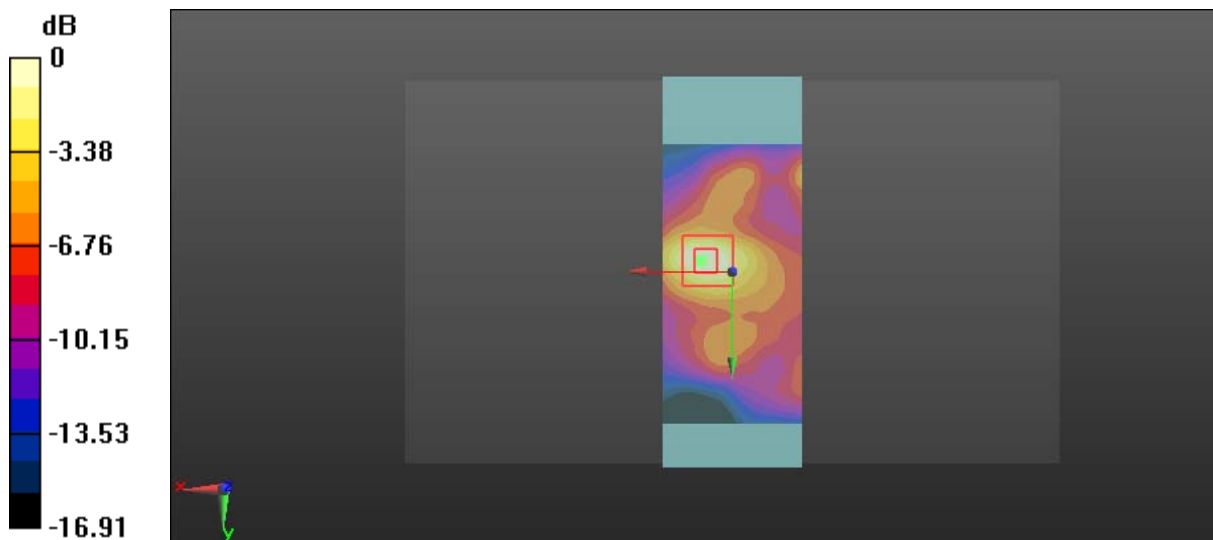

0 dB = 0.617 W/kg = -2.10 dBW/kg

**Test Plot 42#: WLAN 2.4G\_Handheld Front\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.44 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.708 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.75 W/kg

**SAR(1 g) = 0.792 W/kg; SAR(10 g) = 0.379 W/kg**

Maximum value of SAR (measured) = 1.41 W/kg

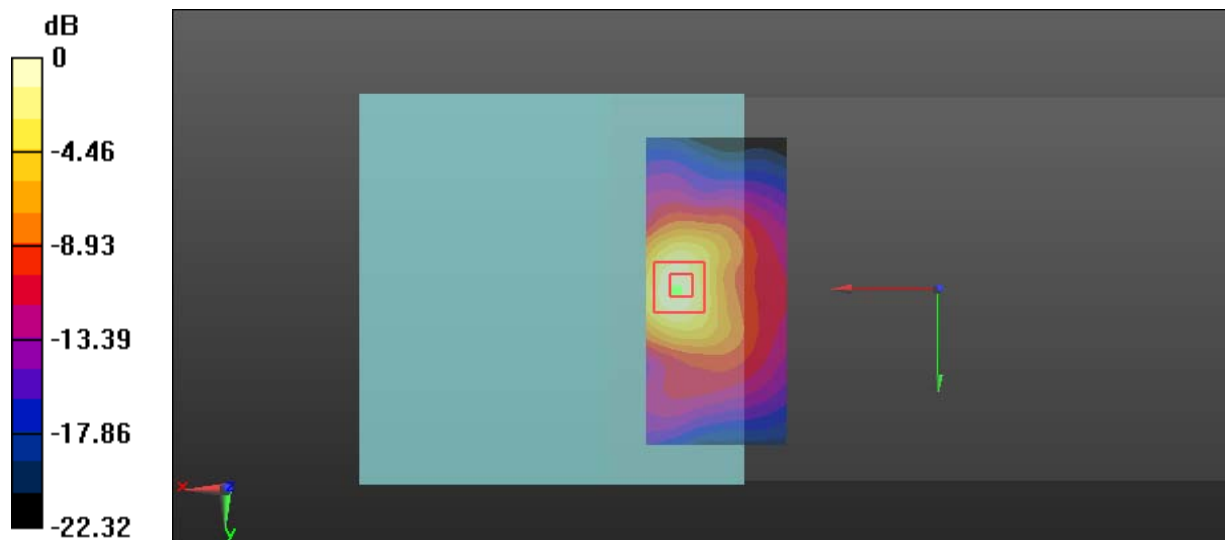

0 dB = 1.41 W/kg = 1.49 dBW/kg

**Test Plot 43#: WLAN 2.4G\_Close to Body Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.193 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.187 W/kg

**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.154 W/kg

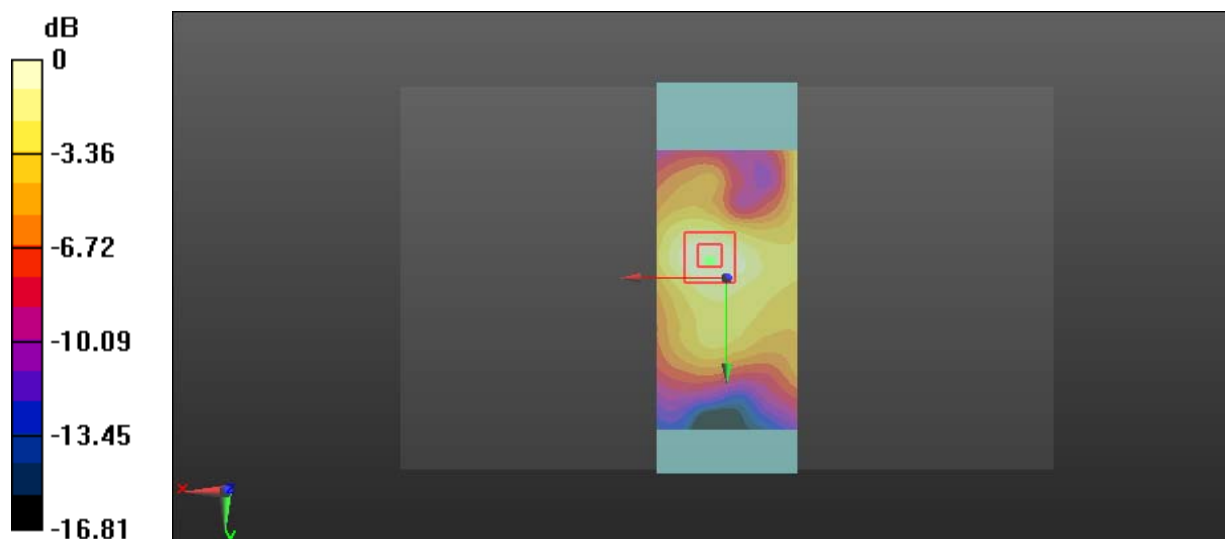

0 dB = 0.154 W/kg = -8.12 dBW/kg

**Test Plot 44#: WLAN 2.4G\_Close to Body Front\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.284 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.867 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.282 W/kg

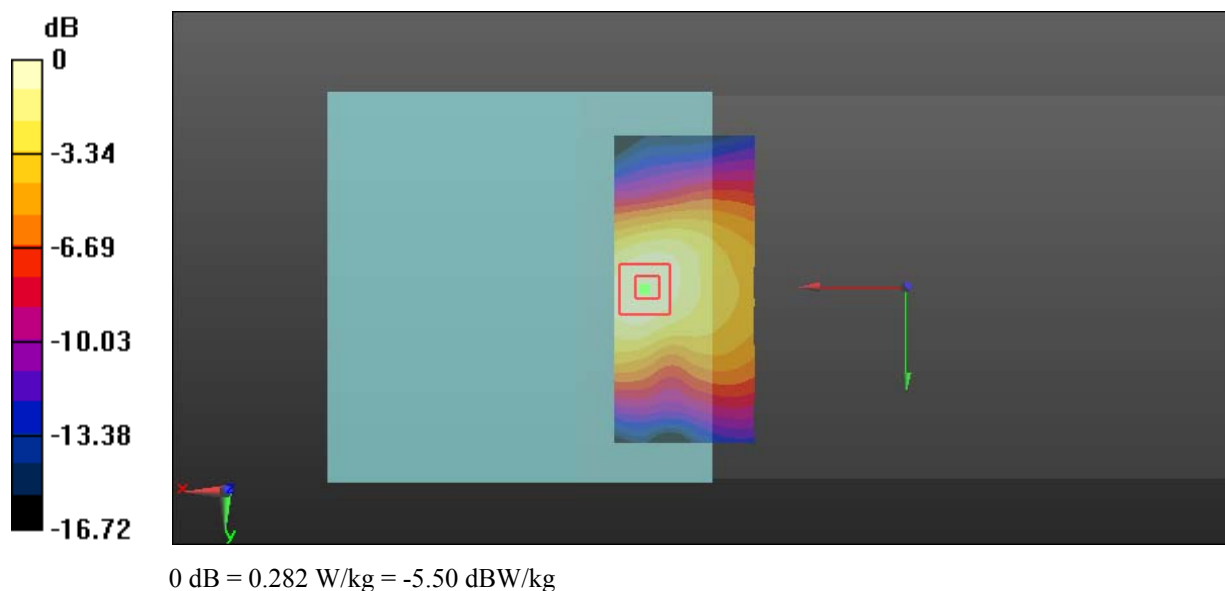

**Test Plot 45#: WLAN 2.4G\_Handheld Top\_Middle\_Chain 2**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.256$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.425 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 8.700 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 0.564 W/kg  
**SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.137 W/kg**  
 Maximum value of SAR (measured) = 0.469 W/kg

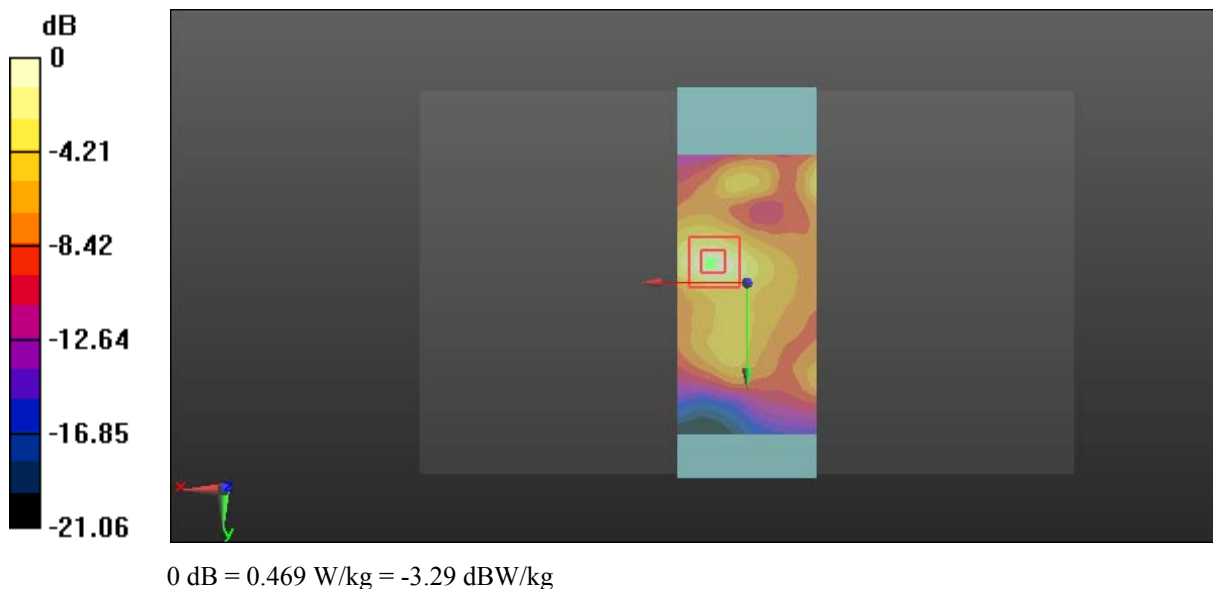

**Test Plot 46#: WLAN 2.4G\_Handheld Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.647 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.98 W/kg

**SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 1.59 W/kg

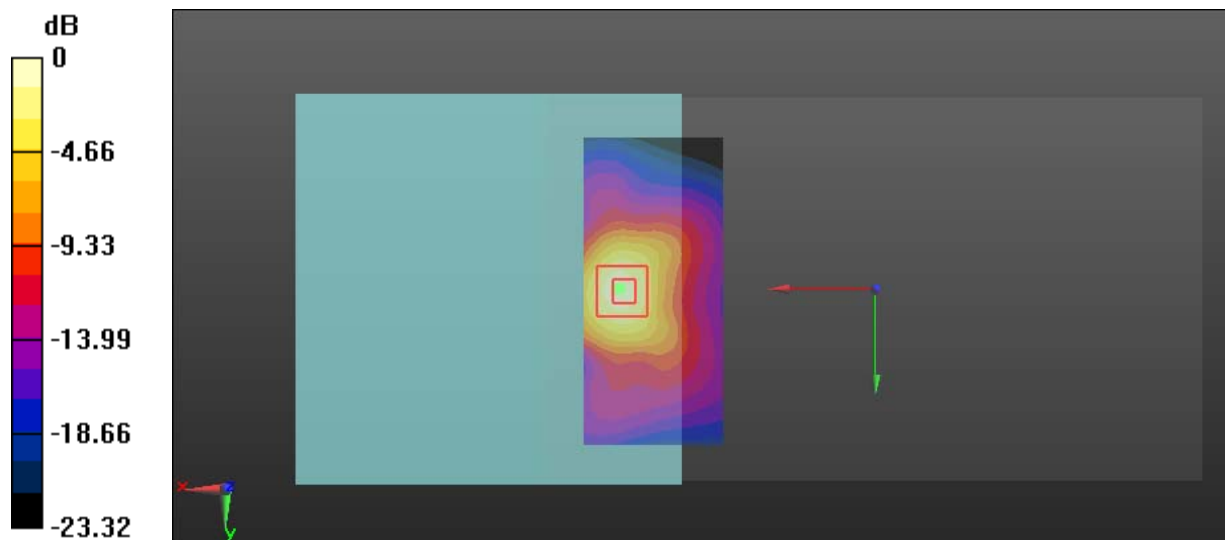

0 dB = 1.59 W/kg = 2.01 dBW/kg

**Test Plot 47#: WLAN 2.4G\_Close to Body Top\_Middle\_Chain 2**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.938 \text{ S/m}$ ;  $\epsilon_r = 54.256$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.188 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.562 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 0.213 W/kg  
**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.061 W/kg**  
 Maximum value of SAR (measured) = 0.179 W/kg

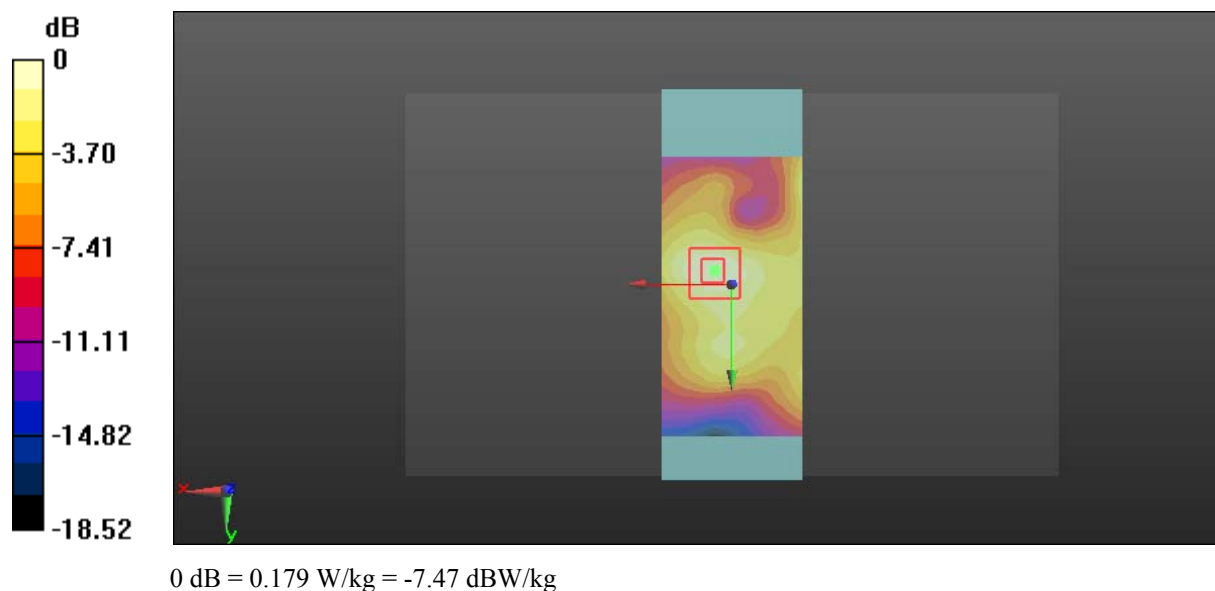

**Test Plot 48#: WLAN 2.4G\_Close to Body Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.938$  S/m;  $\epsilon_r = 54.256$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x111x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.351 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.205 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.428 W/kg

**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.360 W/kg

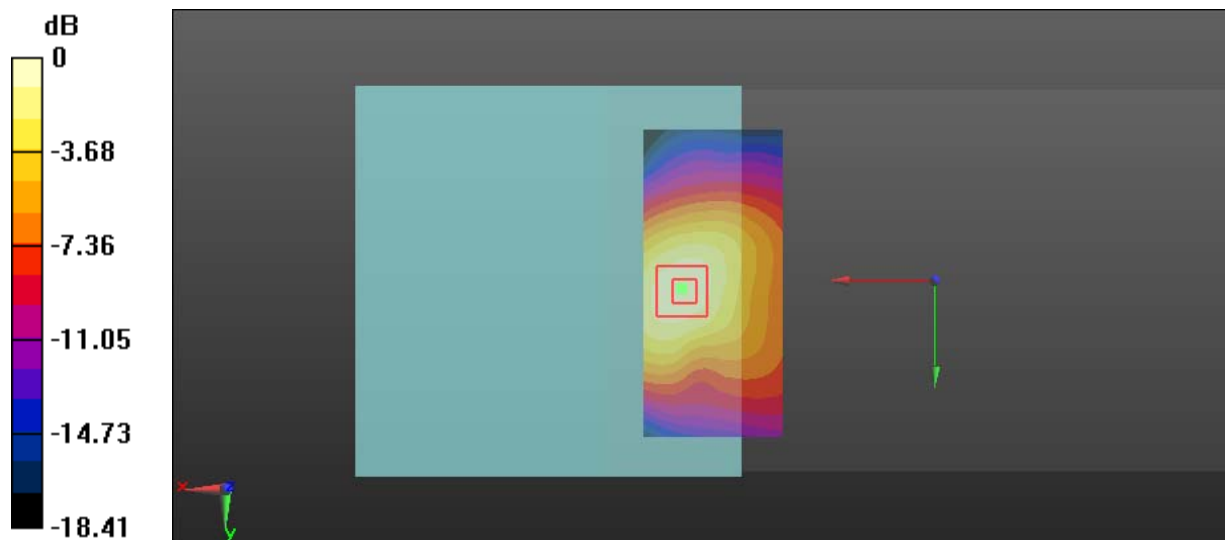

0 dB = 0.360 W/kg = -4.44 dBW/kg



**Test Plot 49#: WLAN 5.8G\_Handheld Top\_Middle\_Chain 1**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.008 \text{ S/m}$ ;  $\epsilon_r = 48.668$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 2.59 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 9.639 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 4.72 W/kg  
**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.434 W/kg**  
 Maximum value of SAR (measured) = 2.55 W/kg

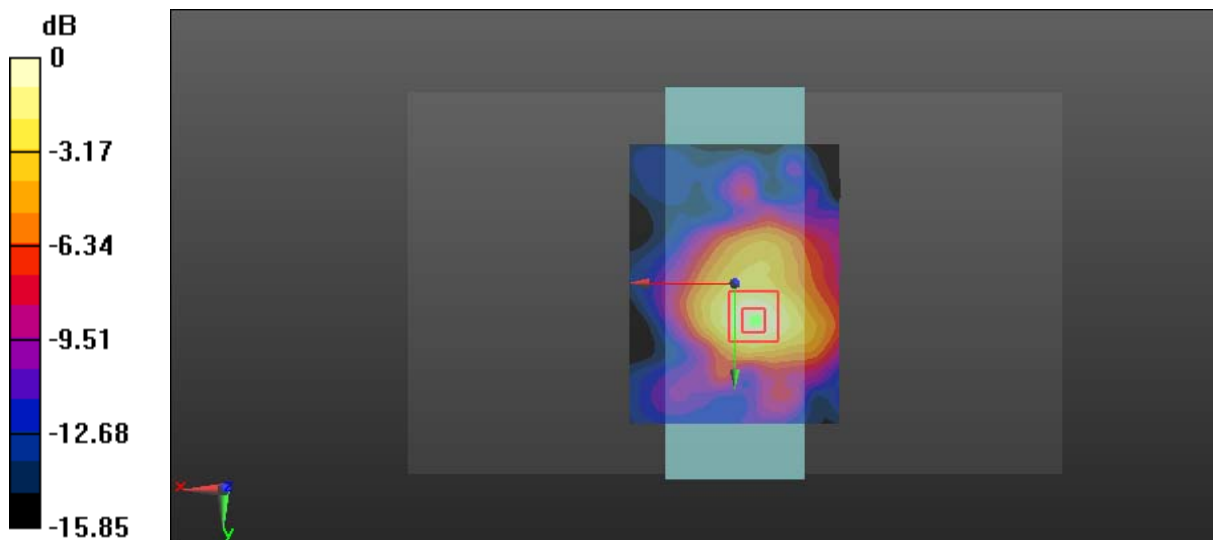

0 dB = 2.55 W/kg = 4.07 dBW/kg

**Test Plot 50#: WLAN 5.8G\_Handheld Front\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.008$  S/m;  $\epsilon_r = 48.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.95 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.759 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.78 W/kg

**SAR(1 g) = 0.790 W/kg; SAR(10 g) = 0.310 W/kg**

Maximum value of SAR (measured) = 1.99 W/kg

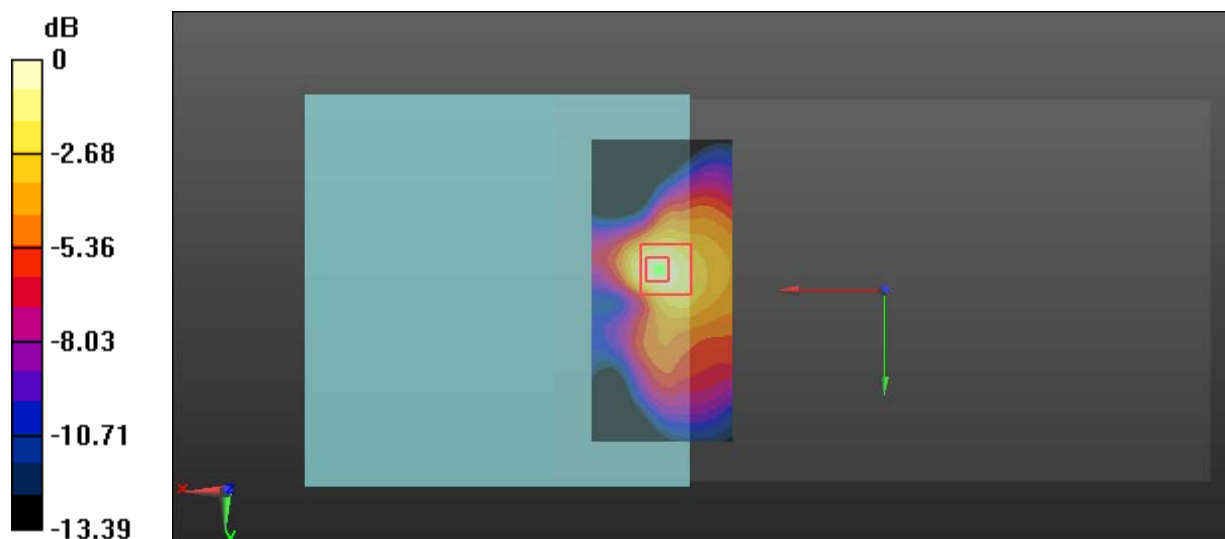

0 dB = 1.99 W/kg = 2.99 dBW/kg

**Test Plot 51#: WLAN 5.8G\_Close to Body Top\_Middle\_Chain 1****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.008$  S/m;  $\epsilon_r = 48.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.56 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.191 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 2.92 W/kg

**SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.282 W/kg**

Maximum value of SAR (measured) = 1.56 W/kg

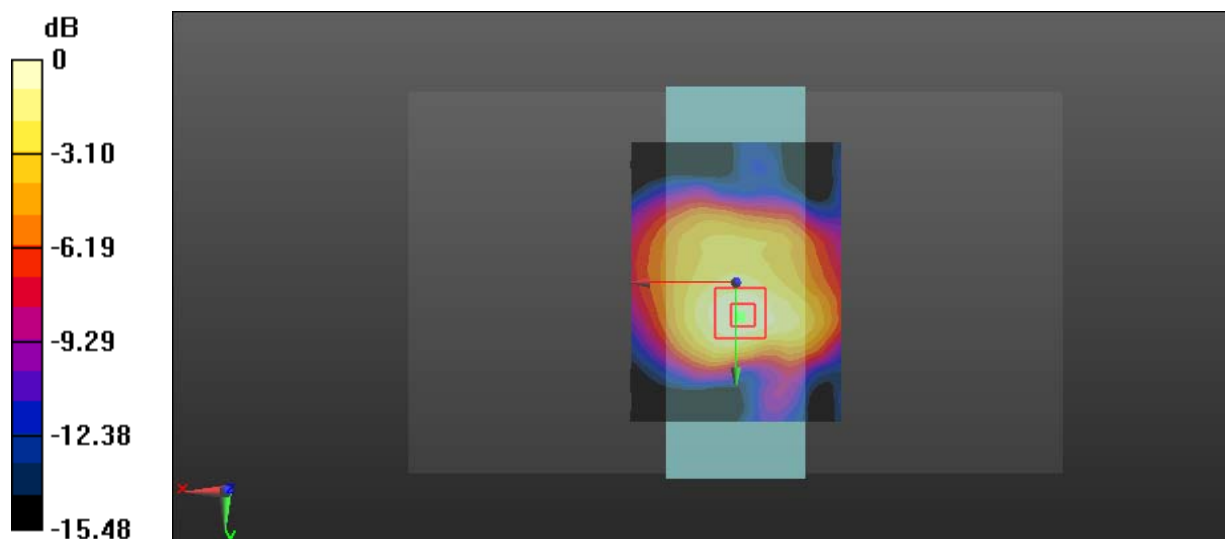

0 dB = 1.56 W/kg = 1.93 dBW/kg

**Test Plot 52#: WLAN 5.8G\_Close to Body Front\_Middle\_Chain 1**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.008 \text{ S/m}$ ;  $\epsilon_r = 48.668$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x131x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.996 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 2.659 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 1.83 W/kg  
**SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.184 W/kg**  
 Maximum value of SAR (measured) = 0.972 W/kg

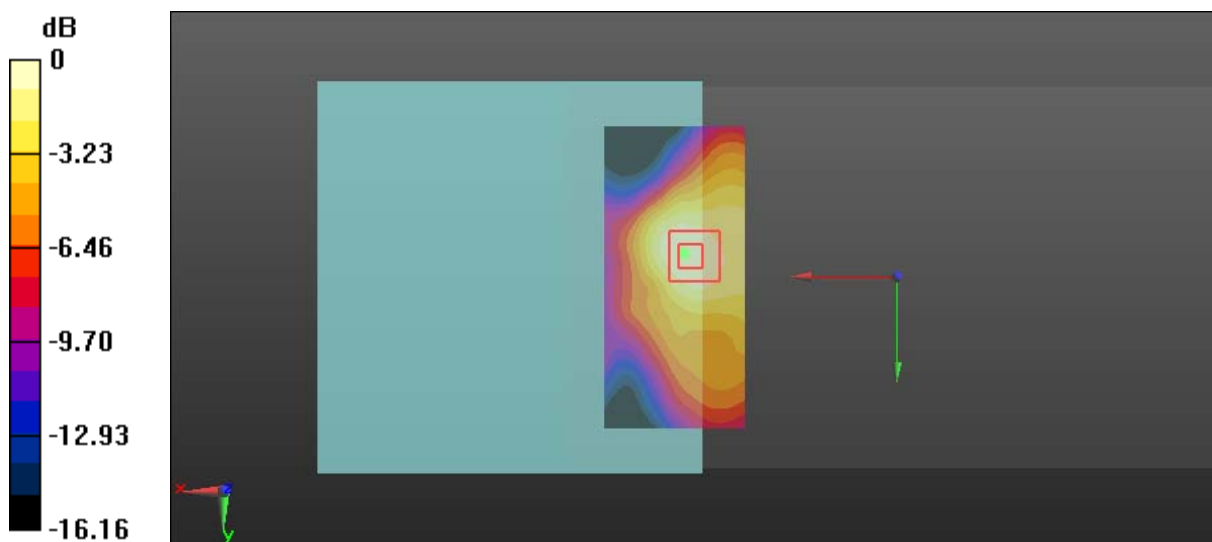

0 dB = 0.972 W/kg = -0.12 dBW/kg

**Test Plot 53#: WLAN 5.8G\_Handheld Top\_Middle\_Chain 2**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**


Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 5785 \text{ MHz}$ ;  $\sigma = 6.008 \text{ S/m}$ ;  $\epsilon_r = 48.668$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 2.97 W/kg

**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 9.429 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 5.17 W/kg  
**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.482 W/kg**  
 Maximum value of SAR (measured) = 2.80 W/kg

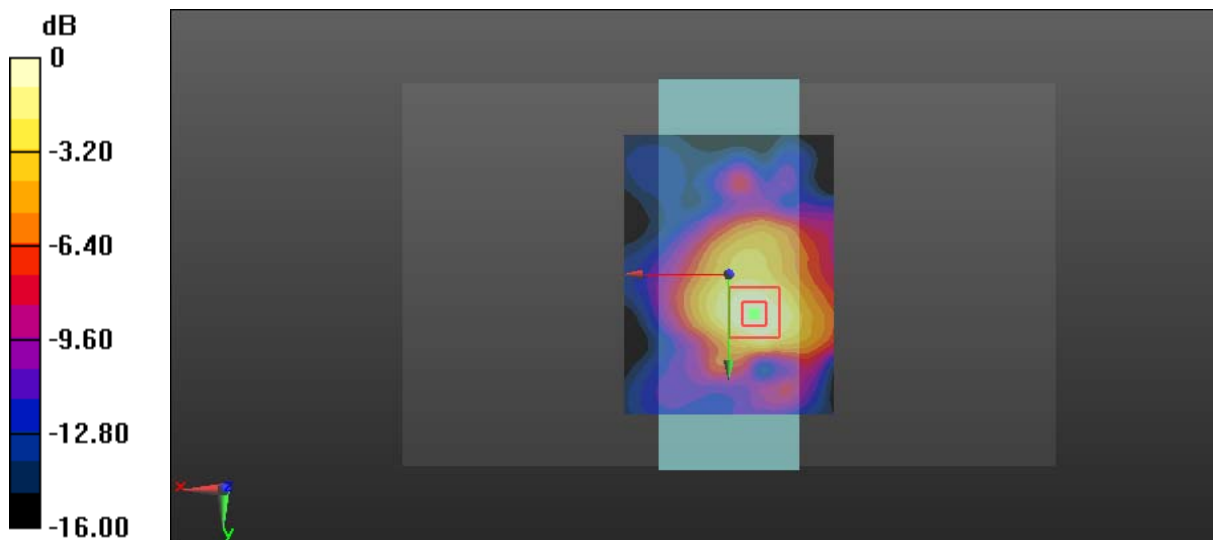

0 dB = 2.80 W/kg = 4.47 dBW/kg

**Test Plot 54#: WLAN 5.8G\_Handheld Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.008$  S/m;  $\epsilon_r = 48.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.32 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.285 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 6.29 W/kg

**SAR(1 g) = 1.28 W/kg; SAR(10 g) = 0.452 W/kg**

Maximum value of SAR (measured) = 3.29 W/kg

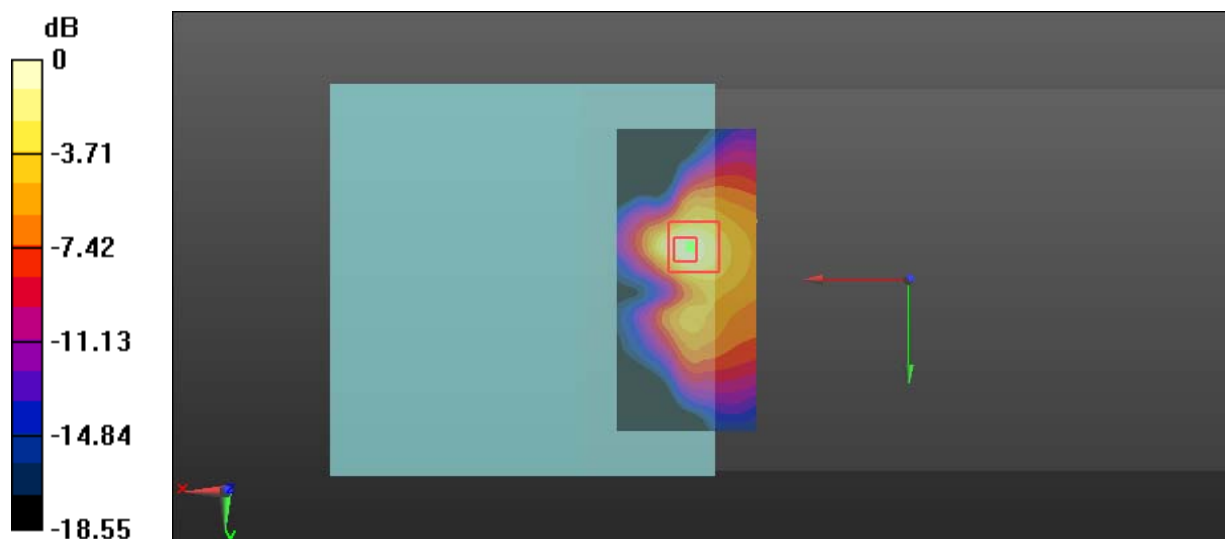

**Test Plot 55#: WLAN 5.8G\_Close to Body Top\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.008$  S/m;  $\epsilon_r = 48.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (91x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.668 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.75 W/kg

**SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.261 W/kg**

Maximum value of SAR (measured) = 1.42 W/kg

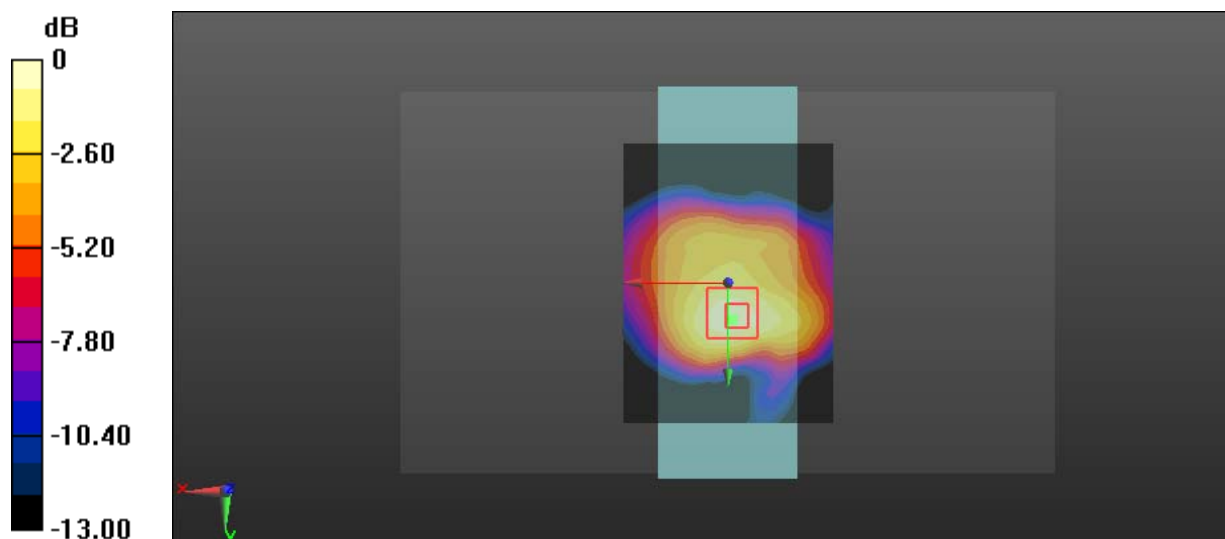

0 dB = 1.42 W/kg = 1.52 dBW/kg

**Test Plot 56#: WLAN 5.8G\_Close to Body Front\_Middle\_Chain 2****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: IEEE 802.11a WiFi 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5785$  MHz;  $\sigma = 6.008$  S/m;  $\epsilon_r = 48.668$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.981 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.544 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (measured) = 0.980 W/kg

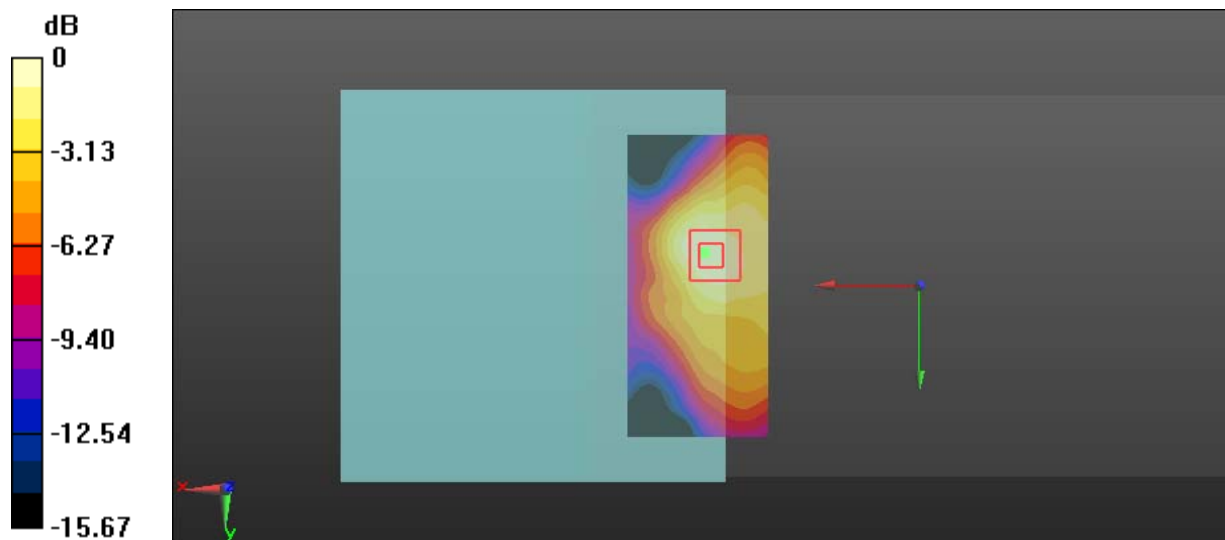

0 dB = 0.980 W/kg = -0.09 dBW/kg



**Test Plot 57#: FSK 2.4G\_Handheld Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.592 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.154 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.685 W/kg

**SAR(1 g) = 0.356 W/kg; SAR(10 g) = 0.182 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

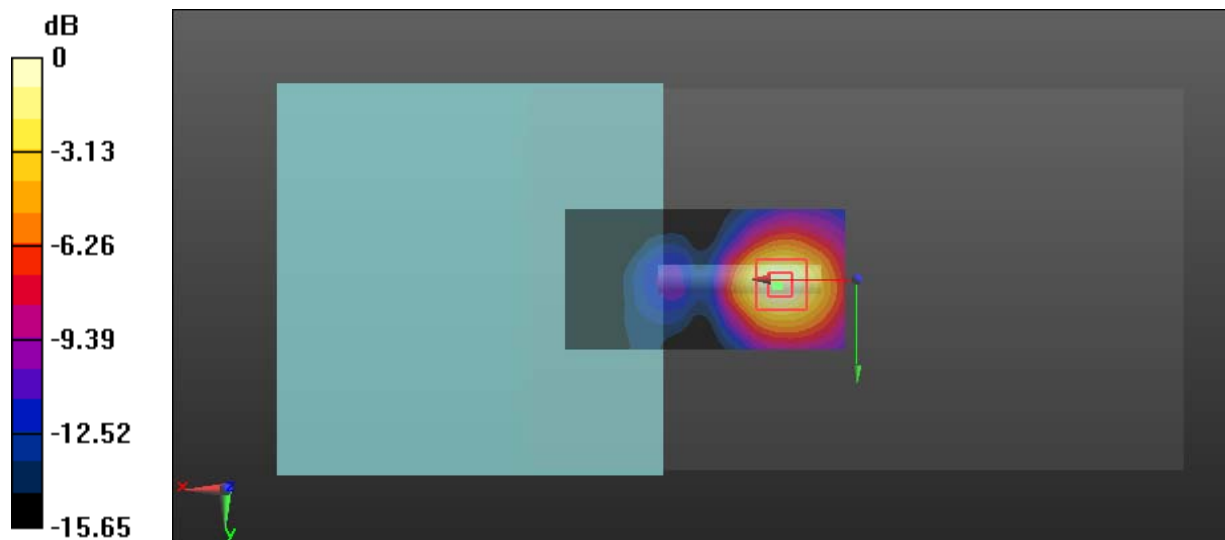

0 dB = 0.561 W/kg = -2.51 dBW/kg

**Test Plot 58#: FSK 2.4G\_Handheld Back Fold\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0587 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.020 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0620 W/kg

**SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0510 W/kg

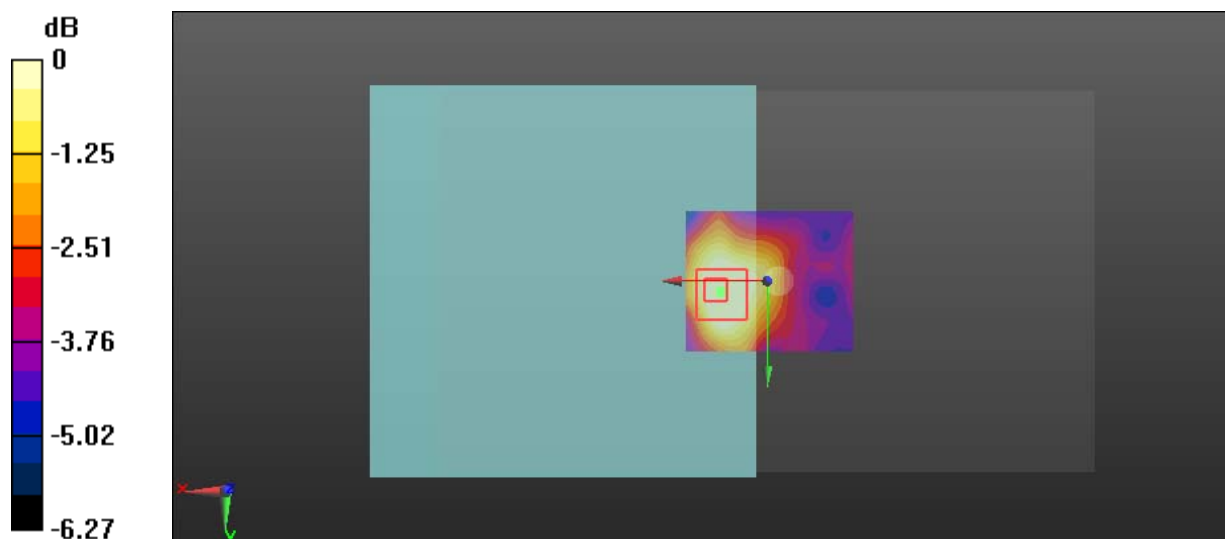

0 dB = 0.0510 W/kg = -12.92 dBW/kg

**Test Plot 59#: FSK 2.4G\_Handheld Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 3.01 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.28 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.34 W/kg

**SAR(1 g) = 1.72 W/kg; SAR(10 g) = 0.849 W/kg**

Maximum value of SAR (measured) = 2.73 W/kg

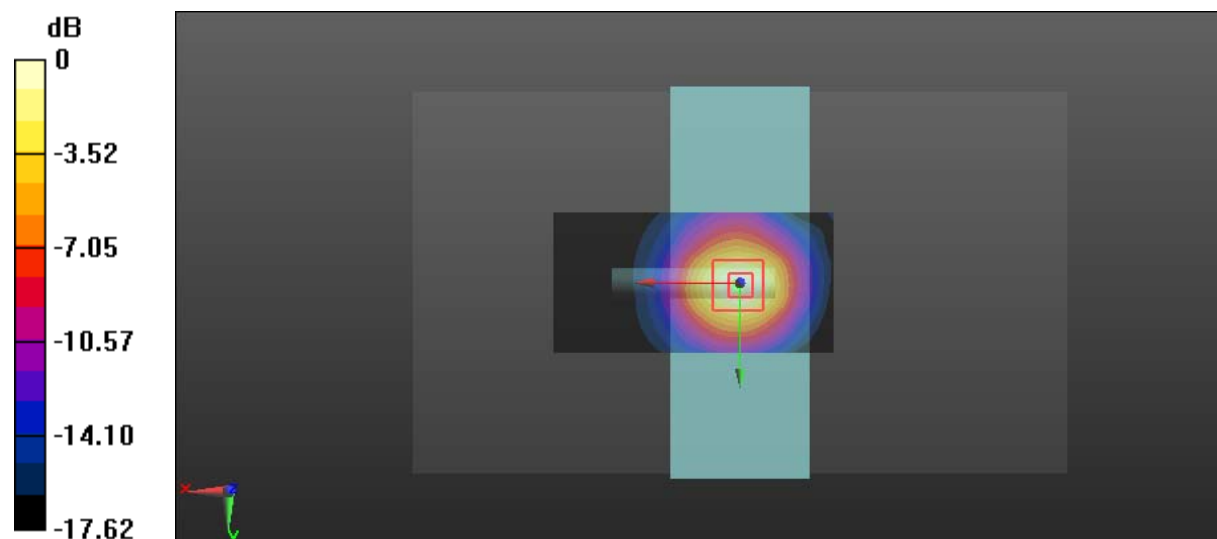

0 dB = 2.73 W/kg = 4.36 dBW/kg

**Test Plot 60#: FSK 2.4G\_Close to Body Back\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.263 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.554 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.307 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.091 W/kg**

Maximum value of SAR (measured) = 0.253 W/kg

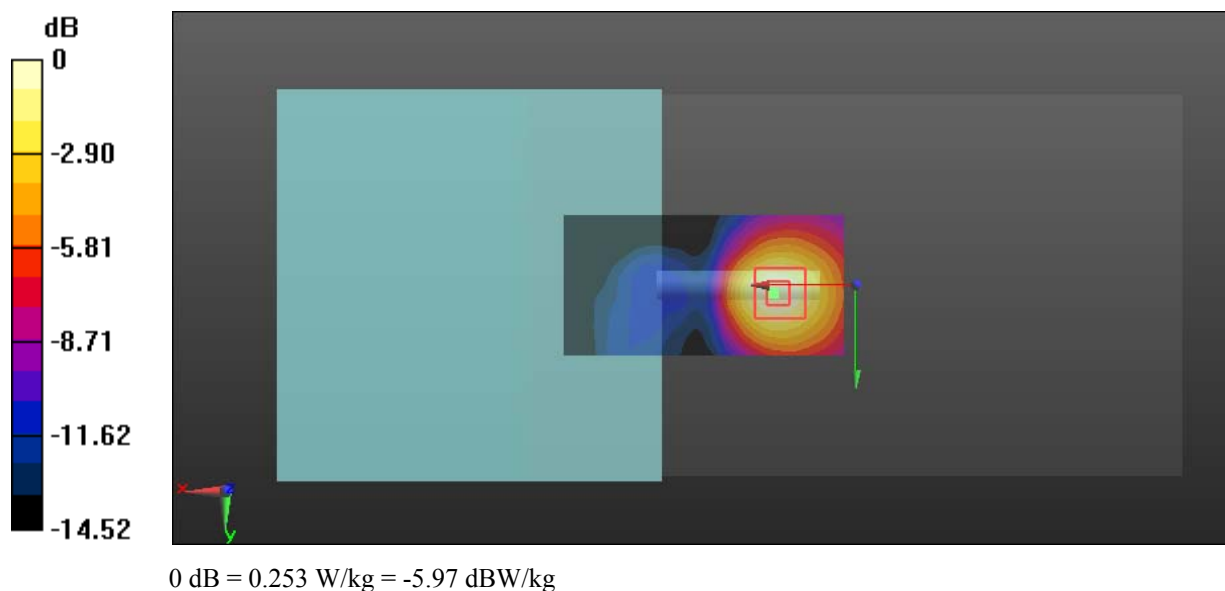

**Test Plot 61#: FSK 2.4G\_Close to Body Back Fold\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0264 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.723 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0300 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0252 W/kg

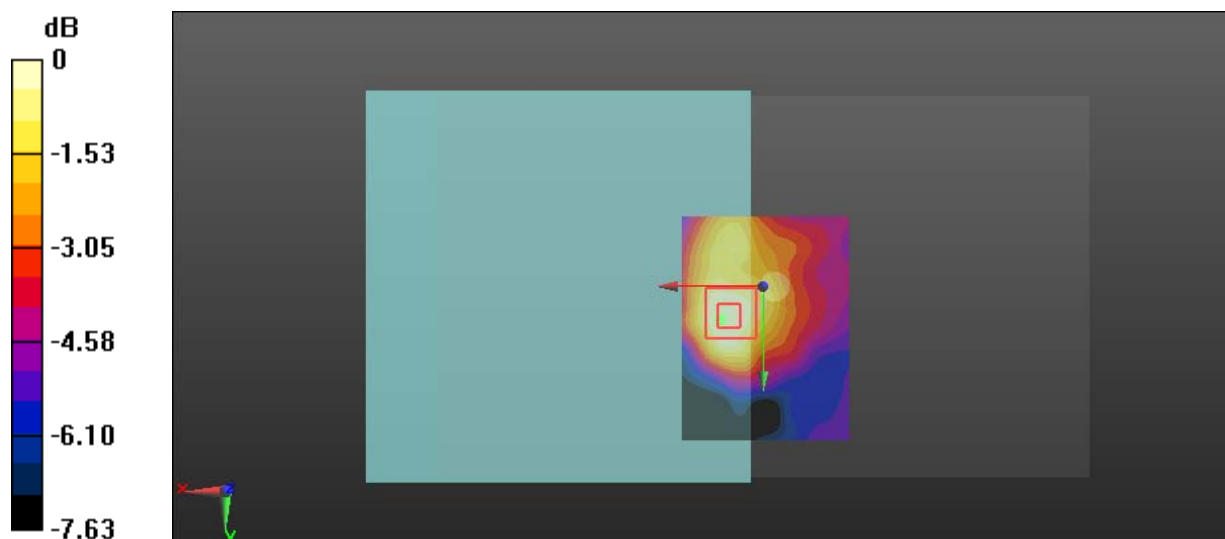

**Test Plot 62#: FSK 2.4G\_Close to Body Top\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 2.4G; Frequency: 2442.5 MHz; Duty Cycle: 1:17.55

Medium parameters used:  $f = 2442.5$  MHz;  $\sigma = 1.945$  S/m;  $\epsilon_r = 52.724$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(7.62, 7.62, 7.62); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x51x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.720 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.345 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.288 W/kg

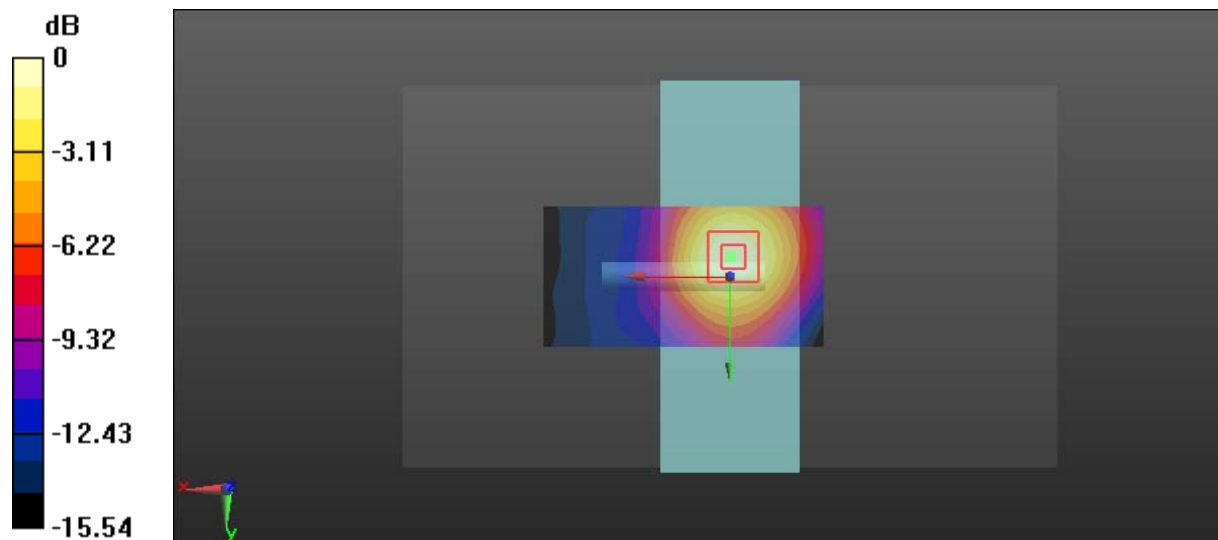

0 dB = 0.288 W/kg = -5.41 dBW/kg

**Test Plot 63#: FSK 5.8G\_Handheld Back\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.975$  S/m;  $\epsilon_r = 48.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.538 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 2.15 W/kg

**SAR(1 g) = 0.476 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

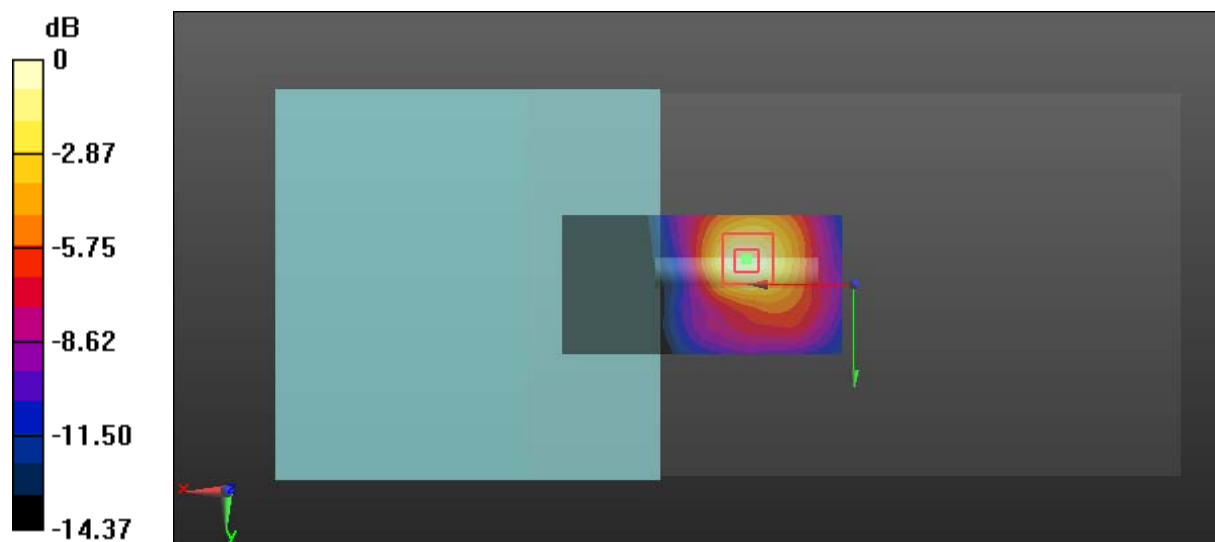

0 dB = 1.05 W/kg = 0.21 dBW/kg

**Test Plot 64#: FSK 5.8G\_Handheld Back Fold\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.975$  S/m;  $\epsilon_r = 48.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.115 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.699 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.175 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

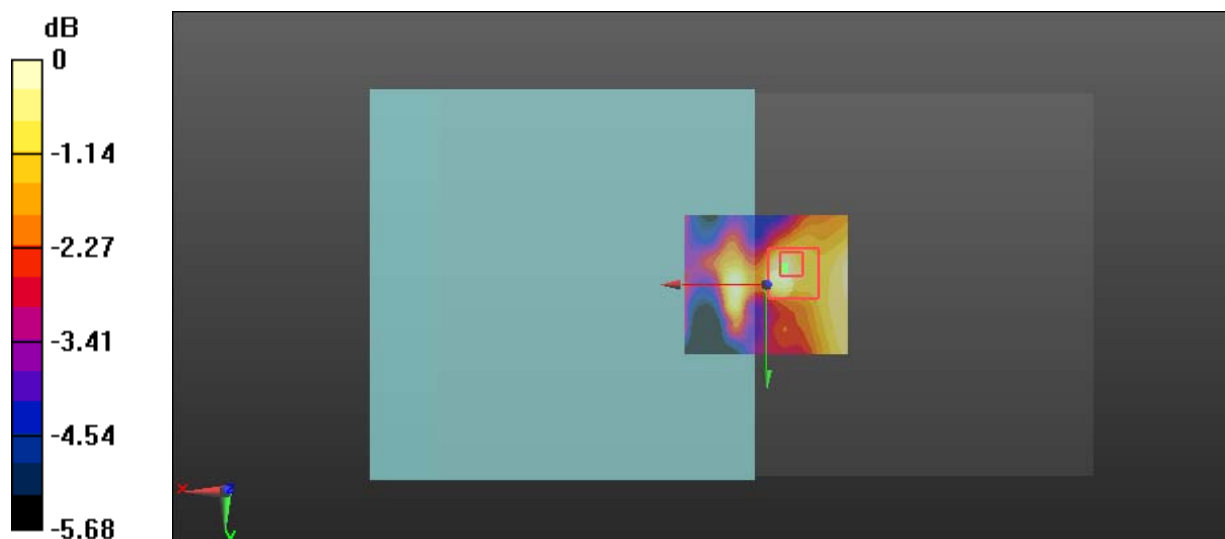

0 dB = 0.110 W/kg = -9.59 dBW/kg



**Test Plot 65#: FSK 5.8G\_Handheld Top\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.975$  S/m;  $\epsilon_r = 48.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.83 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 24.16 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 10.3 W/kg

**SAR(1 g) = 2.21 W/kg; SAR(10 g) = 0.779 W/kg**

Maximum value of SAR (measured) = 5.63 W/kg

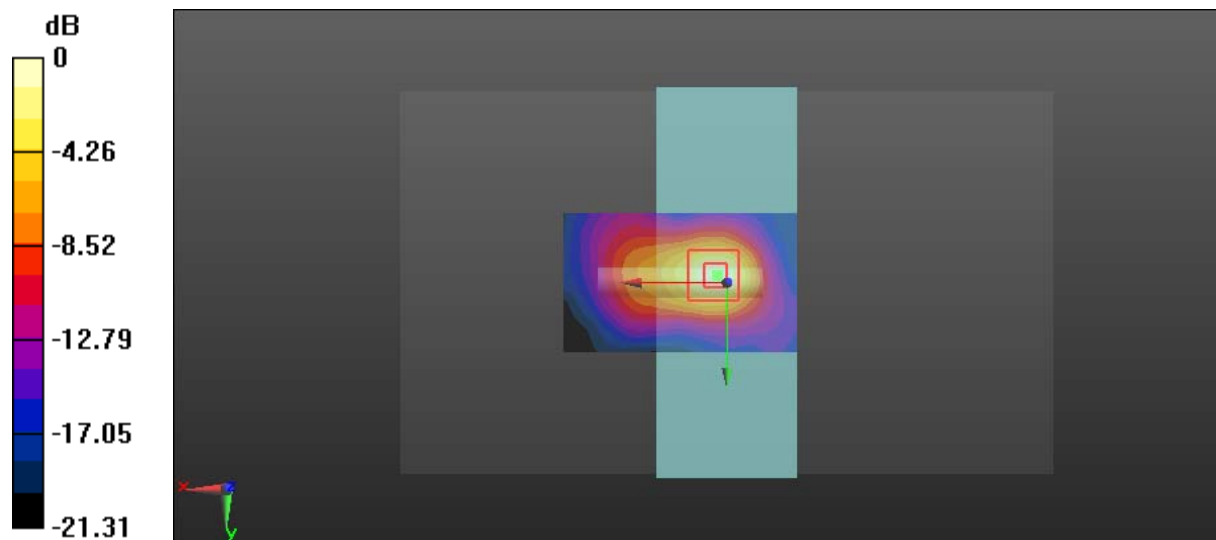

0 dB = 5.63 W/kg = 7.51 dBW/kg

**Test Plot 66#: FSK 5.8G\_Close to Body Back\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775 \text{ MHz}$ ;  $\sigma = 5.975 \text{ S/m}$ ;  $\epsilon_r = 48.743$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x61x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.758 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 2.972 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.153 W/kg**

Maximum value of SAR (measured) = 0.765 W/kg

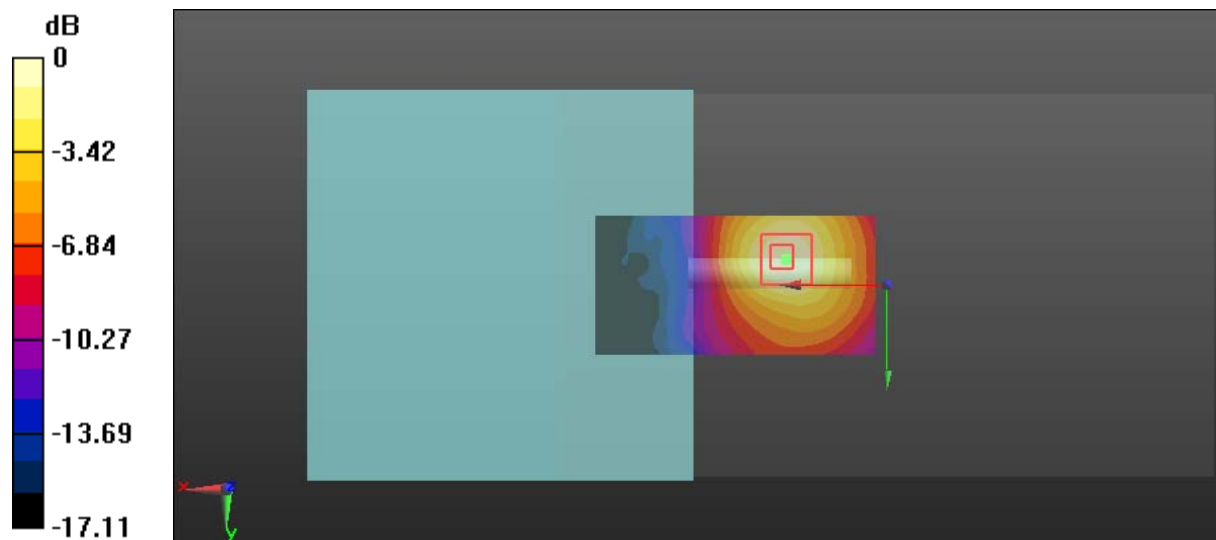

0 dB = 0.765 W/kg = -1.16 dBW/kg

**Test Plot 67#: FSK 5.8G\_Close to Body Back Fold\_Middle**

**DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz;Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.975$  S/m;  $\epsilon_r = 48.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (71x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0624 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.631 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0619 W/kg

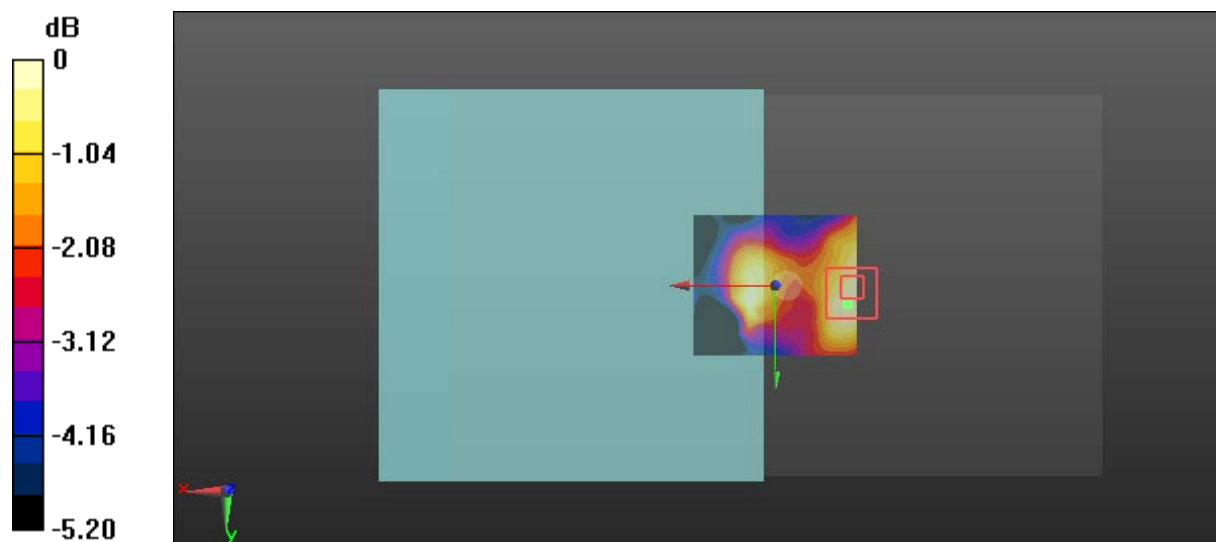

0 dB = 0.0619 W/kg = -12.08 dBW/kg

**Test Plot 68#: FSK 5.8G\_Close to Body Top\_Middle****DUT: Multilink; Type: NB0625; Serial: 18040900220**

Communication System: FSK 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:3.68

Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.975$  S/m;  $\epsilon_r = 48.743$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7431; ConvF(4.43, 4.43, 4.43); Calibrated: 2017/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (101x61x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Zoom Scan (7x7x6)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.825 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.49 W/kg

**SAR(1 g) = 0.592 W/kg; SAR(10 g) = 0.265 W/kg**

Maximum value of SAR (measured) = 1.34 W/kg

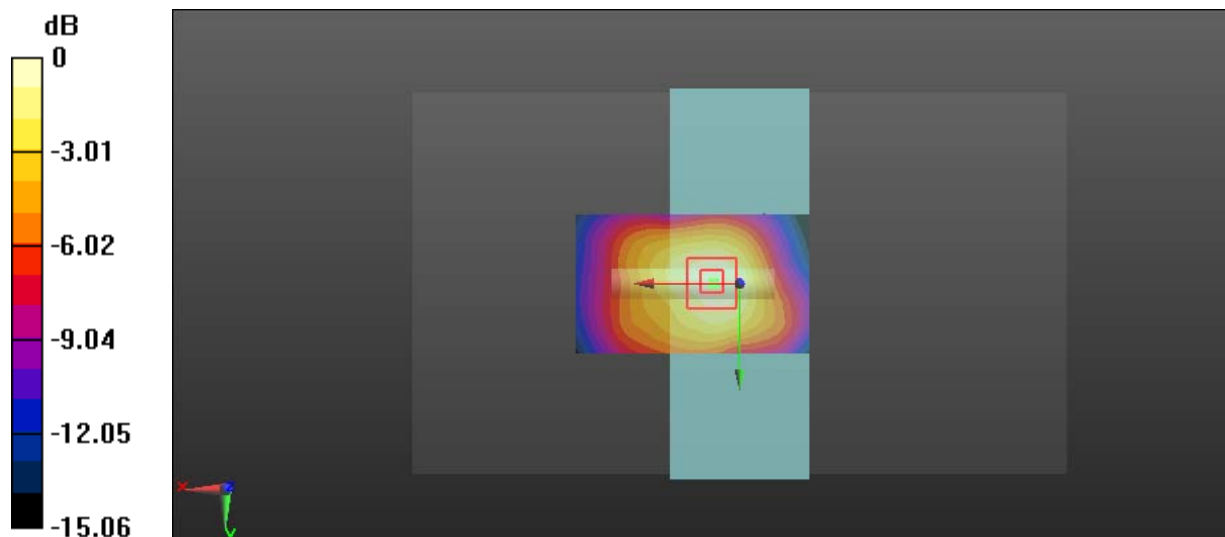

0 dB = 1.34 W/kg = 1.27 dBW/kg