

Test Plot 1#: SDR 5.8G_Ant 0_Handheld Front_Low(CH 1)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5731.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5731.5$ MHz; $\sigma = 5.769$ S/m; $\epsilon_r = 49.652$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 13.0 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.225 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 26.3 W/kg

SAR(1 g) = 5.03 W/kg; SAR(10 g) = 1.5 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

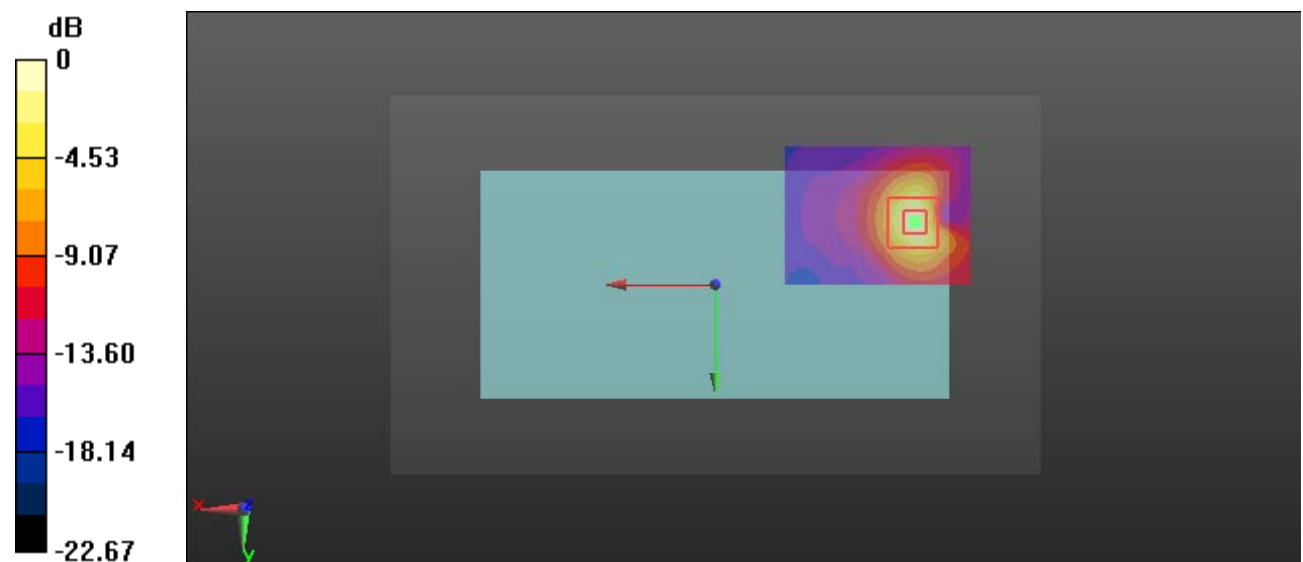

0 dB = 14.0 W/kg = 11.46 dBW/kg

Test Plot 2#: SDR 5.8G_Ant 0_Handheld Front_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.6 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.753 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 29.8 W/kg

SAR(1 g) = 5.28 W/kg; SAR(10 g) = 1.55 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

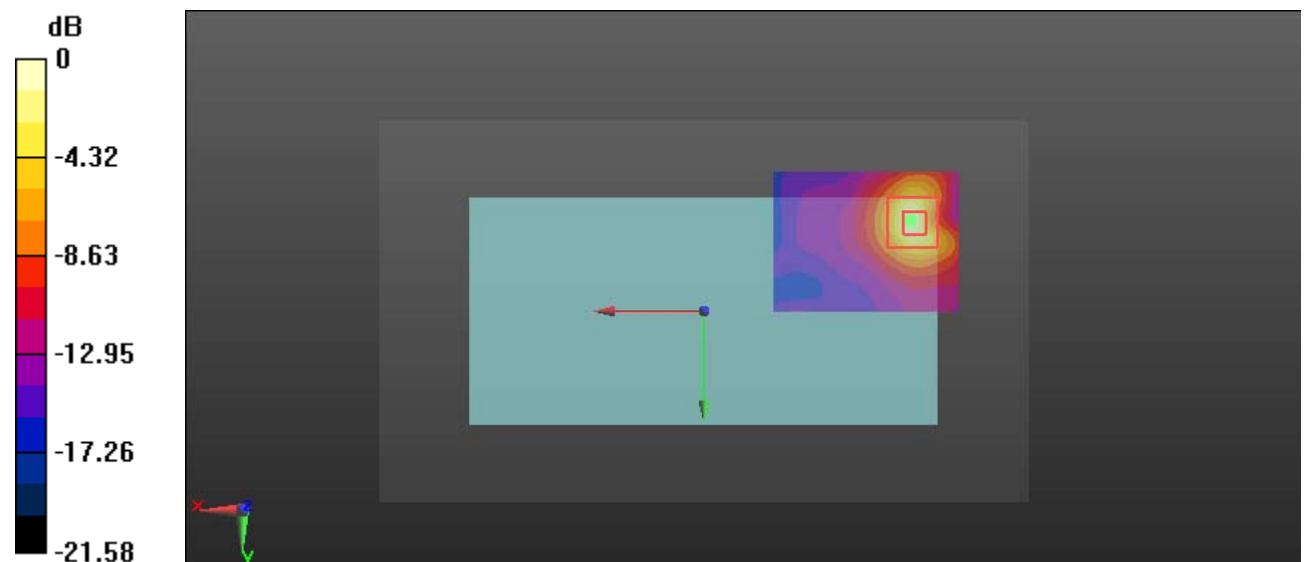

0 dB = 13.4 W/kg = 11.27 dBW/kg

Test Plot 3#: SDR 5.8G_Ant 0_Handheld Front_Low(CH 123)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5844.5 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 5844.5$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 48.826$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.46 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.433 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 0.762 W/kg

Maximum value of SAR (measured) = 6.52 W/kg

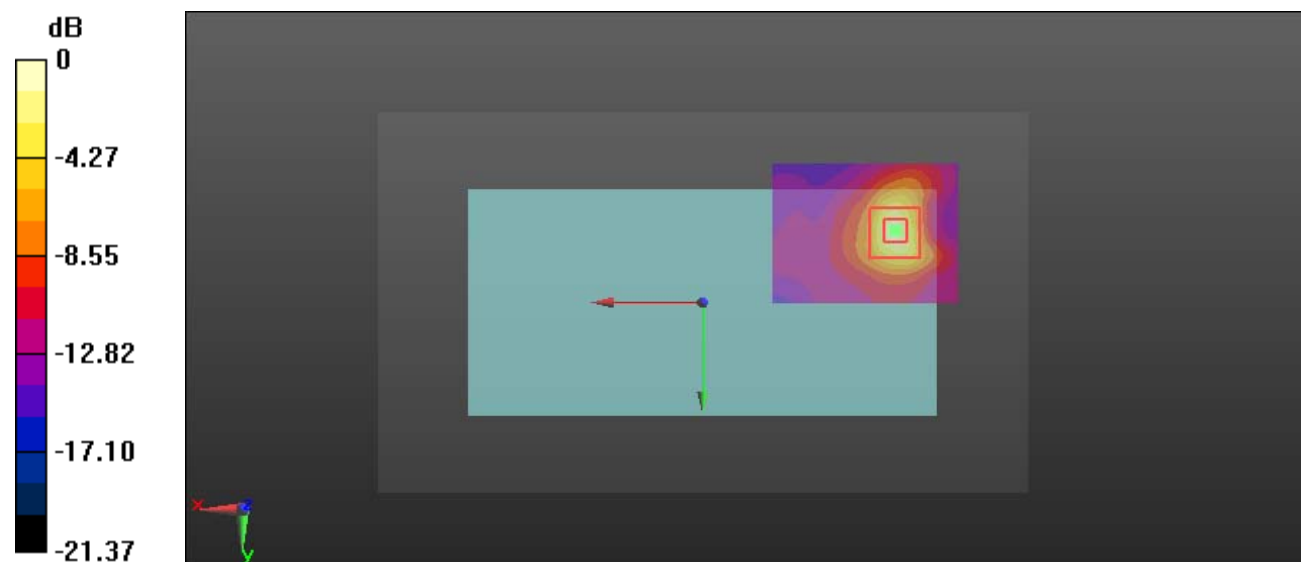

0 dB = 6.52 W/kg = 8.14 dBW/kg

Test Plot 4#: SDR 5.8G_Ant 0_Handheld Bottom_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 10.7 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.279 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 4.85 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

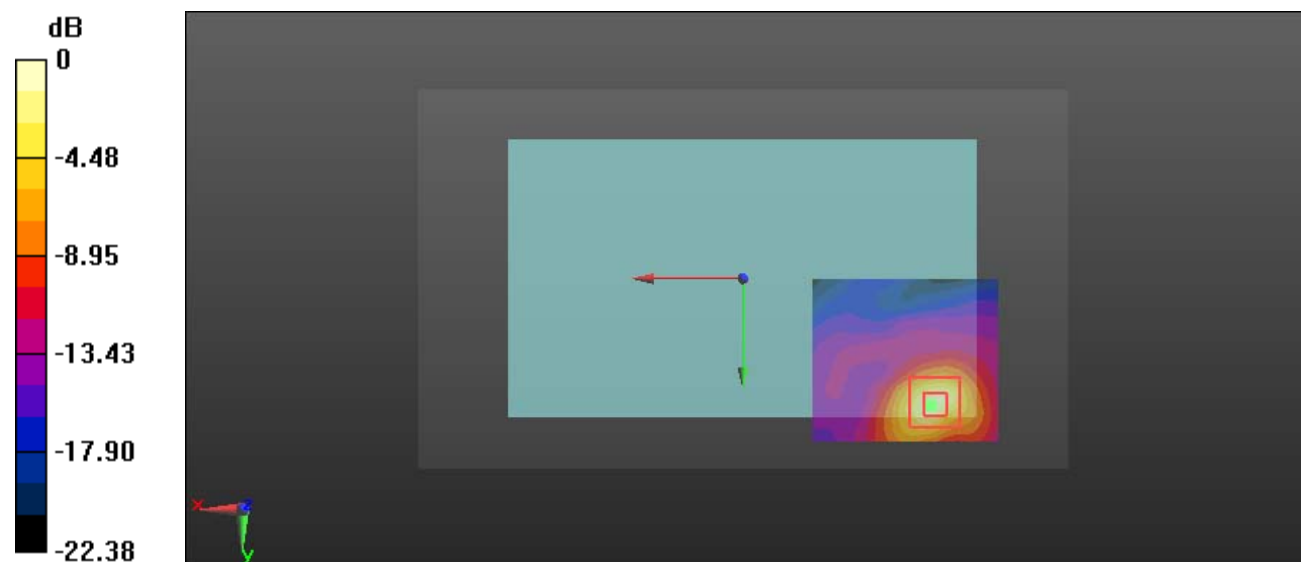

0 dB = 12.6 W/kg = 11.00 dBW/kg

Test Plot 5#: SDR 5.8G_Ant 0_Handheld Left_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 12.0 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.582 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 26.7 W/kg

SAR(1 g) = 4.94 W/kg; SAR(10 g) = 1.45 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

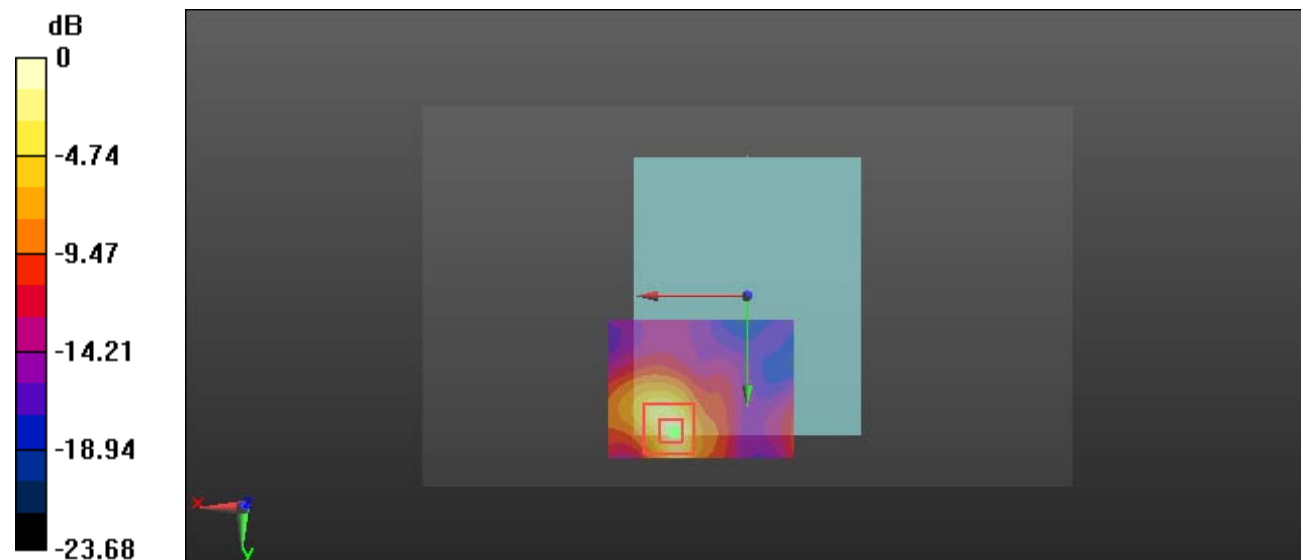

0 dB = 12.6 W/kg = 11.00 dBW/kg

Test Plot 6#: SDR 5.8G_Ant 1_Handheld Front_Low(CH 1)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5731.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5731.5$ MHz; $\sigma = 5.769$ S/m; $\epsilon_r = 49.652$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.5 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.509 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 42.2 W/kg

SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 20.9 W/kg

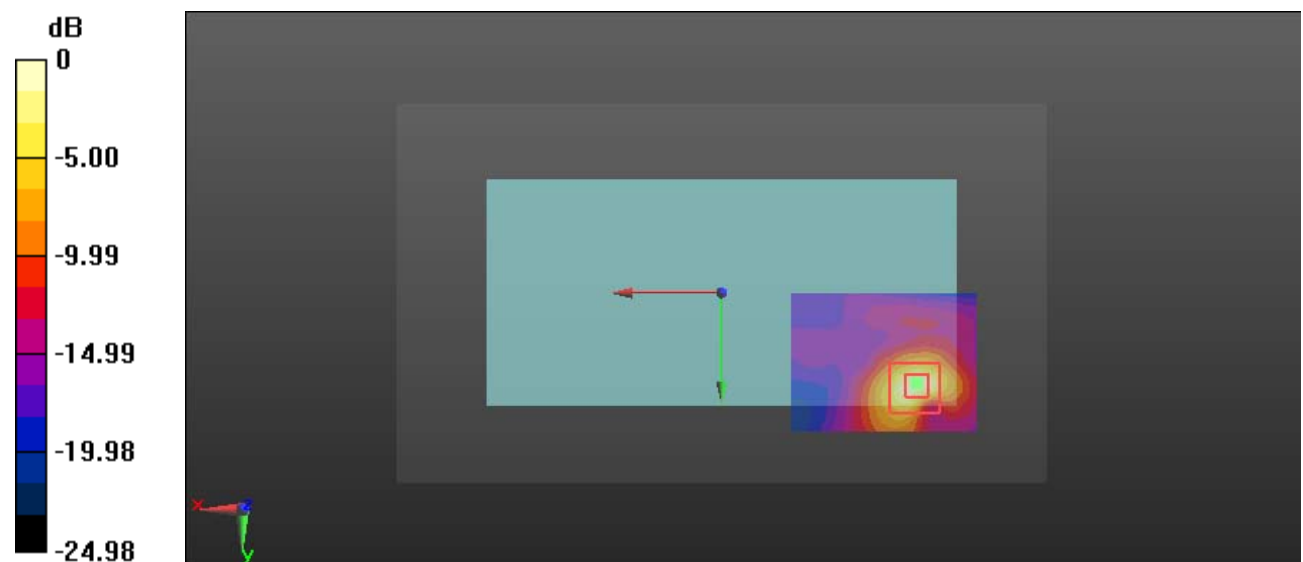

0 dB = 20.9 W/kg = 13.20 dBW/kg

Test Plot 7#: SDR 5.8G_Ant 1_Handheld Front_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 15.8 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.632 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 35.0 W/kg

SAR(1 g) = 6.62 W/kg; SAR(10 g) = 1.88 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

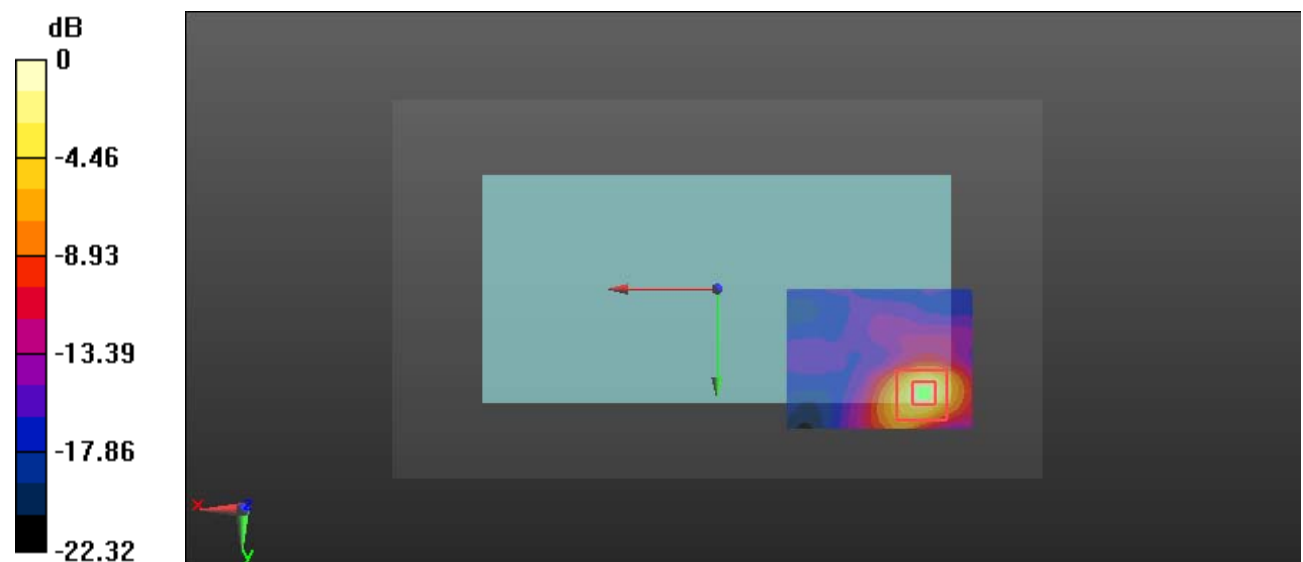

0 dB = 18.6 W/kg = 12.70 dBW/kg

Test Plot 8#: SDR 5.8G_Ant 1_Handheld Front_High(CH 123)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5844.5 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 5844.5$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 48.826$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.71 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.966 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 23.5 W/kg

SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.19 W/kg

Maximum value of SAR (measured) = 11.2 W/kg

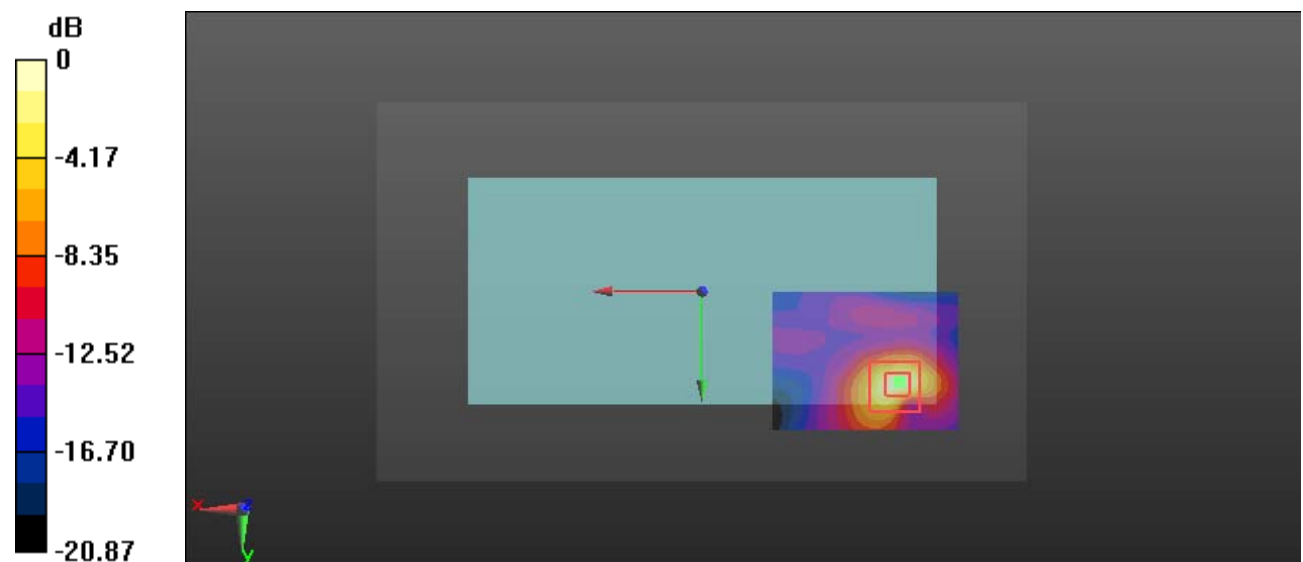

0 dB = 11.2 W/kg = 10.49 dBW/kg

Test Plot 9#: SDR 5.8G_Ant 1_Handheld Top_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.6 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.795 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 25.5 W/kg

SAR(1 g) = 5.1 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 13.3 W/kg

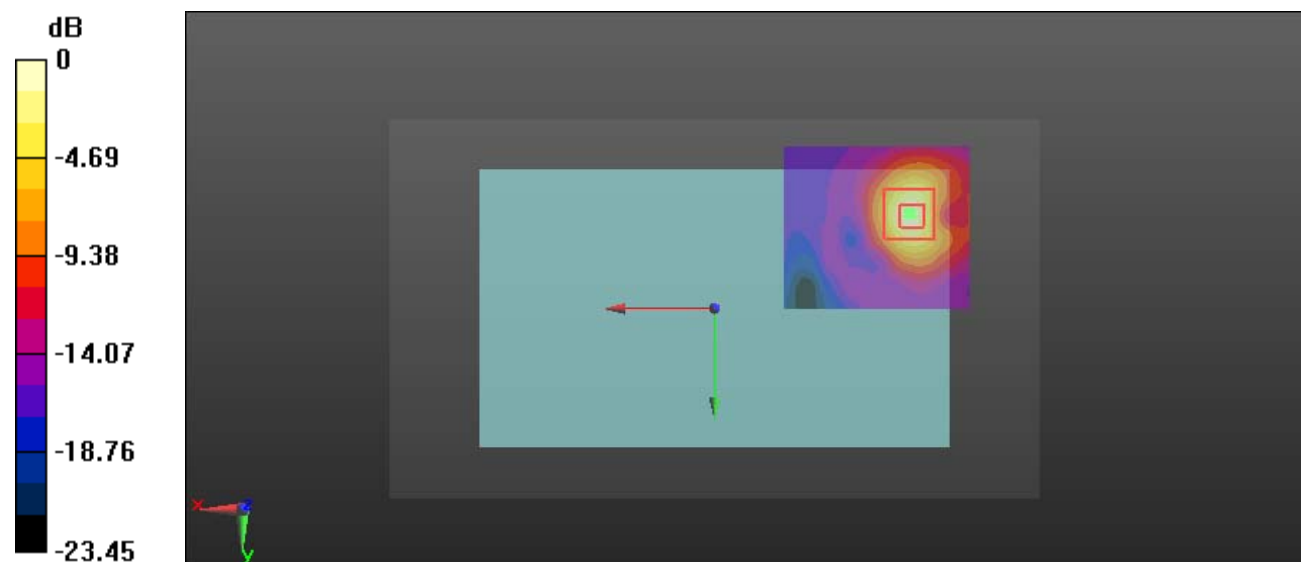

0 dB = 13.3 W/kg = 11.24 dBW/kg

Test Plot 10#: SDR 5.8G_Ant 1_Handheld Left_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.6 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.283 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 5.32 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 15.6 W/kg

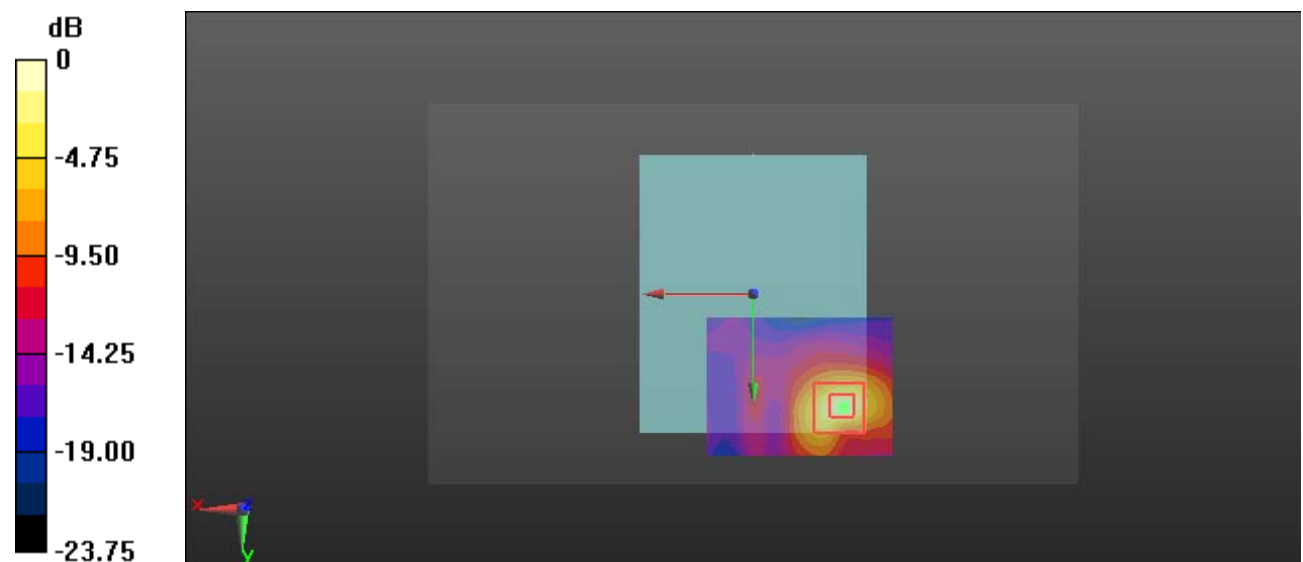

0 dB = 15.6 W/kg = 11.93 dBW/kg

Test Plot 11#: SDR 5.8G_Ant 2_Handheld Front_Low(CH 1)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5731.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5731.5$ MHz; $\sigma = 5.769$ S/m; $\epsilon_r = 49.652$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.5 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.187 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 32.1 W/kg

SAR(1 g) = 5.95 W/kg; SAR(10 g) = 1.73 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

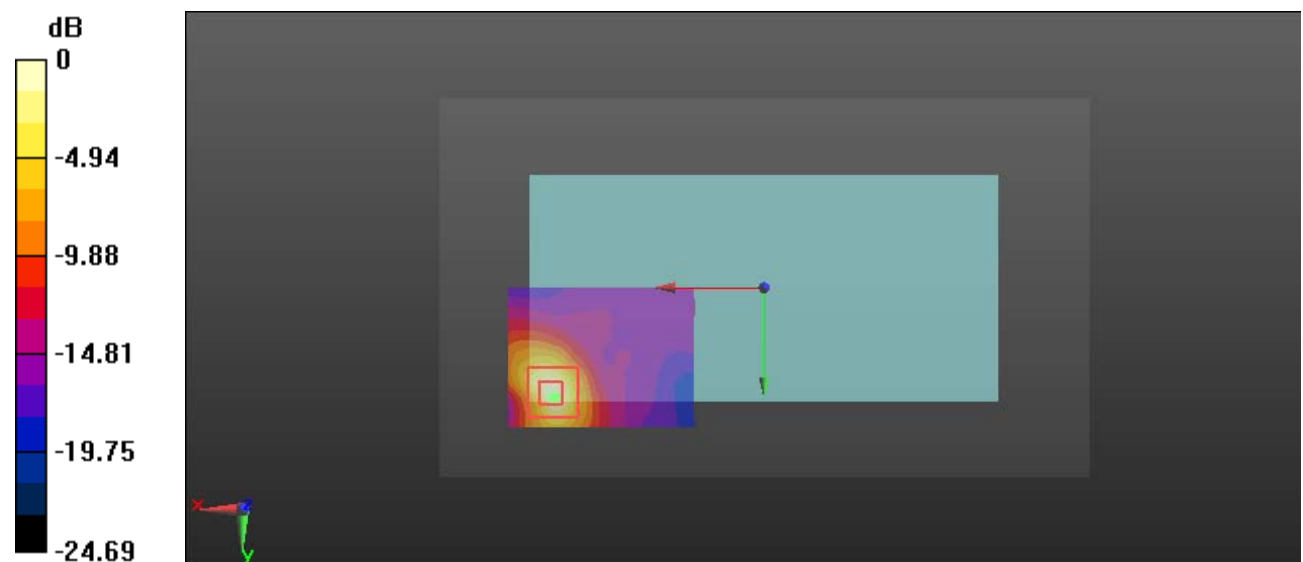

0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Plot 12#: SDR 5.8G_Ant 2_Handheld Front_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.9 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.775 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 33.6 W/kg

SAR(1 g) = 6.13 W/kg; SAR(10 g) = 1.76 W/kg

Maximum value of SAR (measured) = 17.0 W/kg

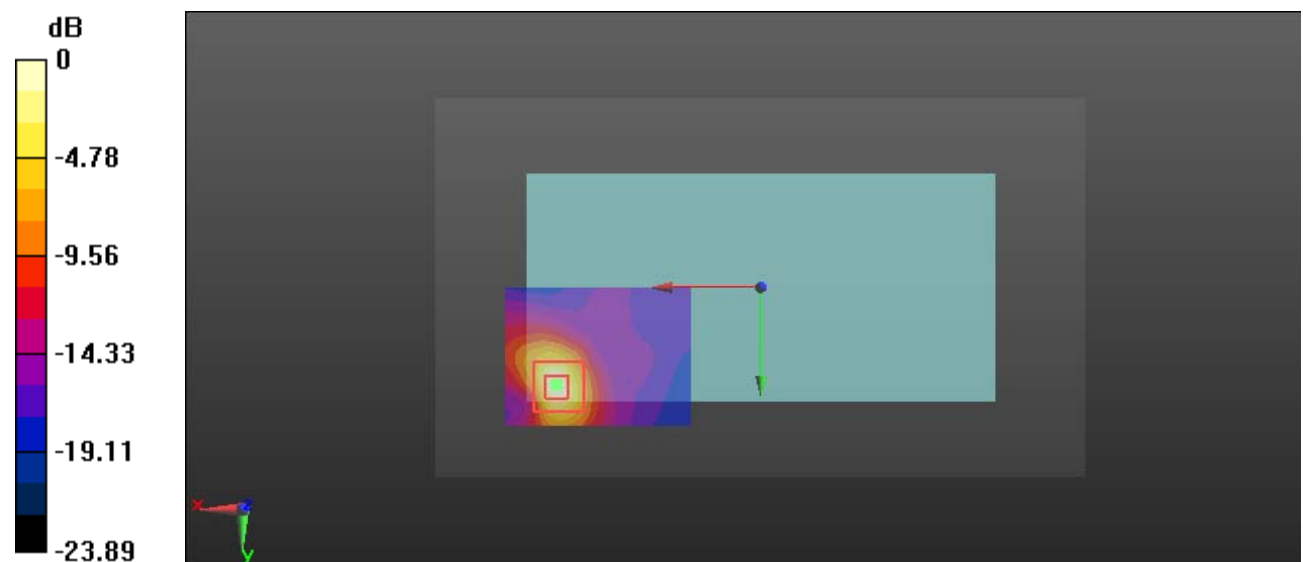

0 dB = 17.0 W/kg = 12.30 dBW/kg

Test Plot 13#: SDR 5.8G_Ant 2_Handheld Front_High(CH 123)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5844.5 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 5844.5$ MHz; $\sigma = 6.035$ S/m; $\epsilon_r = 48.826$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.2 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.401 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 26.2 W/kg

SAR(1 g) = 4.72 W/kg; SAR(10 g) = 1.43 W/kg

Maximum value of SAR (measured) = 12.2 W/kg

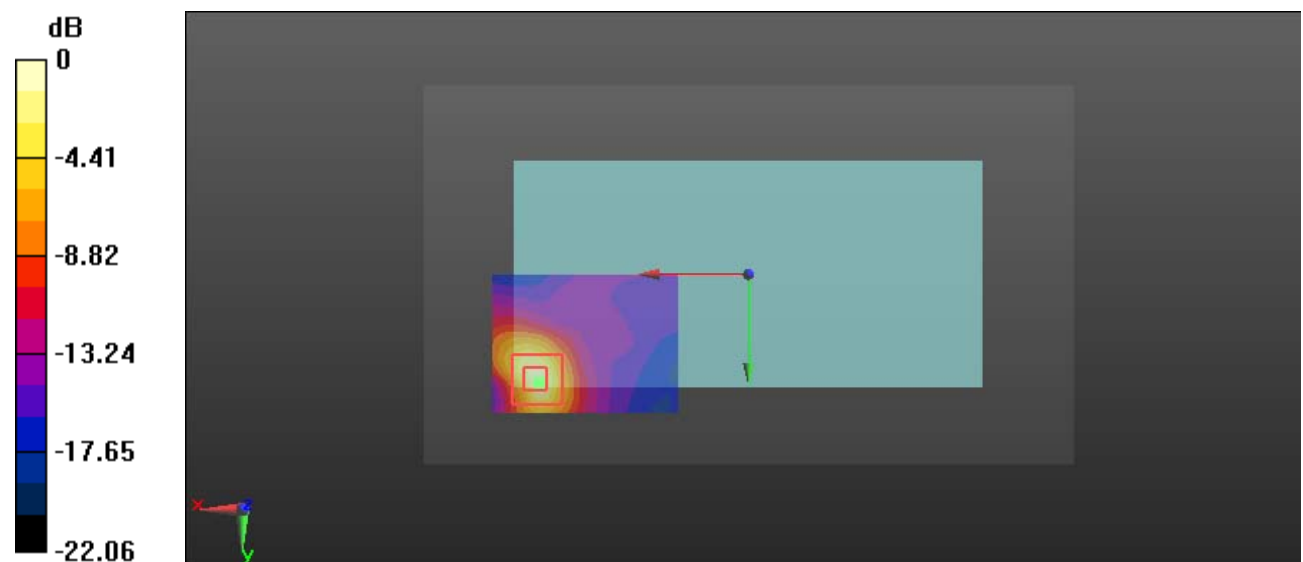

0 dB = 12.2 W/kg = 10.86 dBW/kg

Test Plot 14#: SDR 5.8G_Ant 2_Handheld Top_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 13.7 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.558 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 28.7 W/kg

SAR(1 g) = 5.43 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

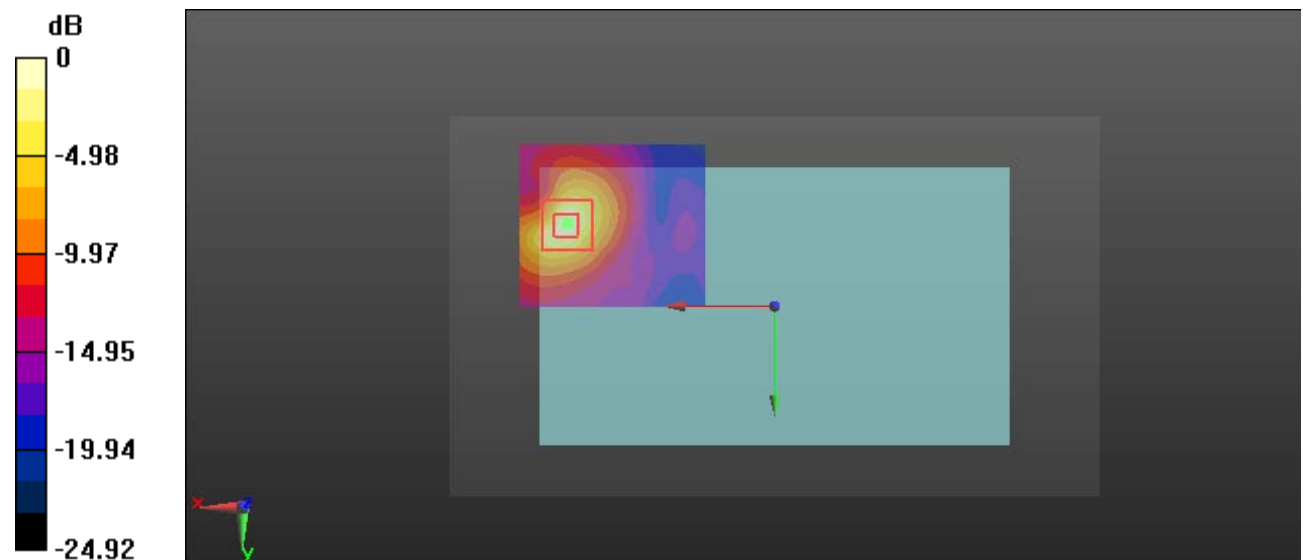

0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Plot 15#: SDR 5.8G_Ant 2_Handheld Right_Middle(CH 62)**DUT: DJI FPV Goggles; Type: PIGS; Serial: 19031500220**

Communication System: 5.8G SDR; Frequency: 5784.12 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5784.12$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.397$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.37, 4.37, 4.37); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 14.9 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.539 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 5.73 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 15.5 W/kg

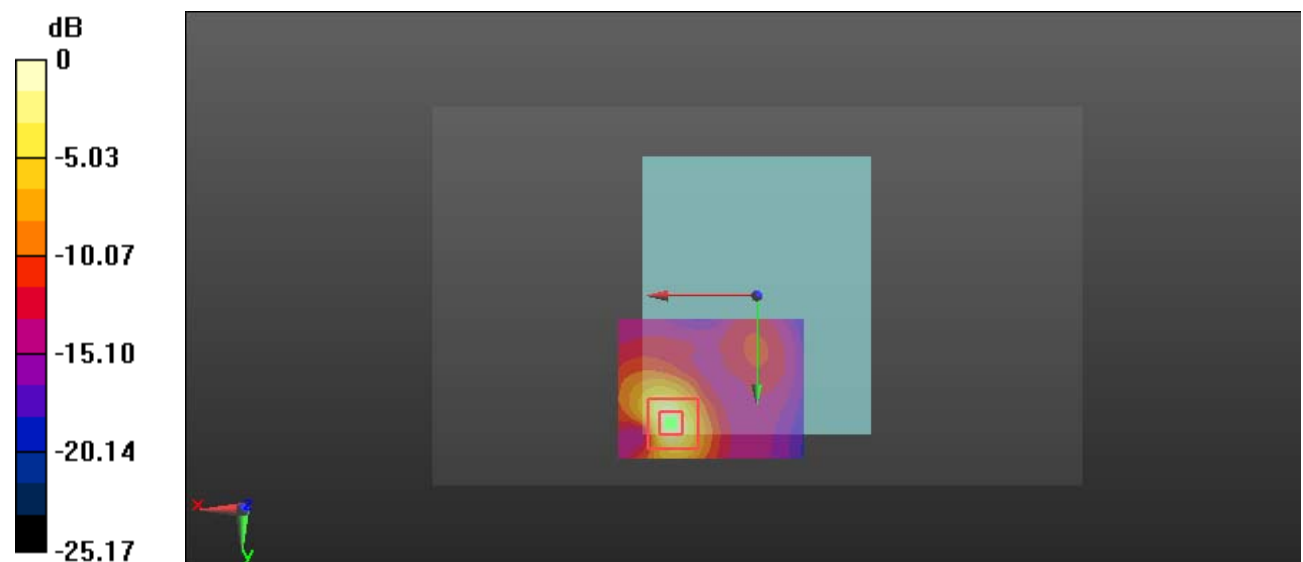

0 dB = 15.5 W/kg = 11.90 dBW/kg