

4790544262 3M 1CH 2410.5MHz inner forehead side 0mm-ant0 folded

Communication System: UID 0, Selfdefined (0); Communication System Band: Random; Frequency: 2410.5 MHz;
 Medium parameters used (interpolated): $f = 2410.5$ MHz; $\sigma = 1.752$ S/m; $\epsilon_r = 39.792$; $\rho = 1000$ kg/m³
 Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.406 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.331 W/kg; SAR(10 g) = 0.163 W/kg

Maximum value of SAR (measured) = 0.537 W/kg

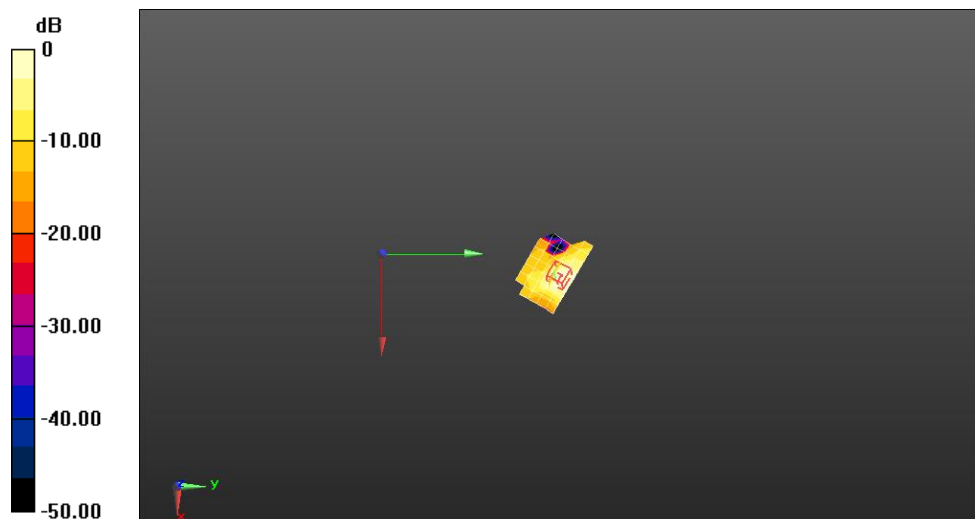

4790544262 3M 18CH 2461.5MHz inner forehead side 0mm-ant1 extended


Communication System: UID 0, Selfdefined (0); Communication System Band: Random; Frequency: 2461.5 MHz;
Medium parameters used (interpolated): $f = 2461.5$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 39.881$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x10x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 0.788 W/kg

Configuration/Head/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 3.792 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.61 W/kg
SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.271 W/kg
Maximum value of SAR (measured) = 1.22 W/kg

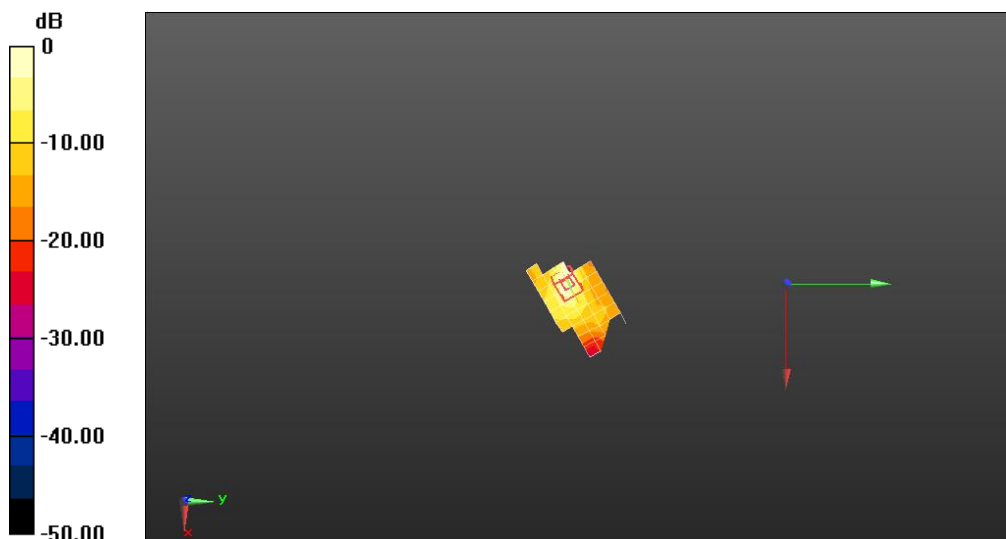

0 dB = 0.788 W/kg = -1.03 dBW/kg

4790544262 3M 40CH 5844.5MHz inner forehead side 0mm-ant0 folded

Communication System: UID 0, Selfdefined (0); Communication System Band: Random; Frequency: 5844.5 MHz;
Medium parameters used (interpolated): $f = 5844.5$ MHz; $\sigma = 5.112$ S/m; $\epsilon_r = 35.174$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.19 W/kg


Configuration/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.196 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 13.2 W/kg

SAR(1 g) = 0.605 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 1.45 W/kg

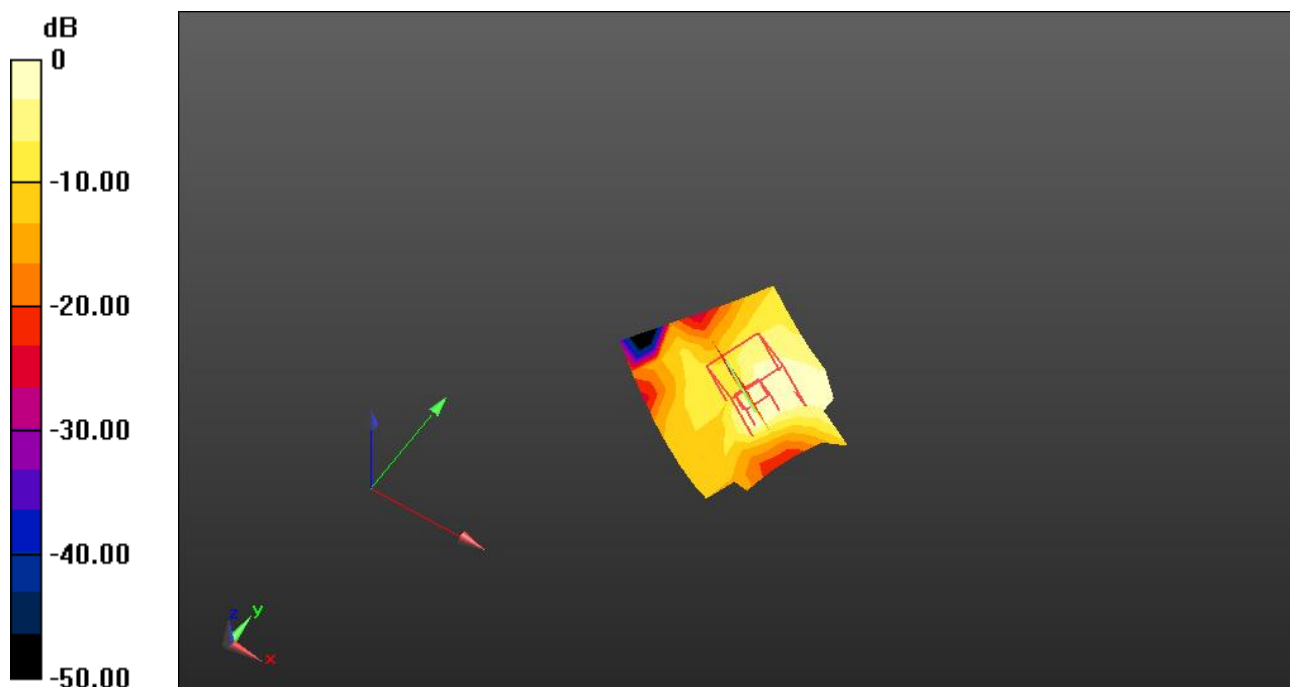

0 dB = 1.19 W/kg = 0.76 dBW/kg

4790544262 1.4M 60CH 5846.5MHz inner forehead side 0mm-ant1 folded

Communication System: UID 0, Selfdefined (0); Communication System Band: Random; Frequency: 5846.5 MHz;
Medium parameters used (interpolated): $f = 5846.5$ MHz; $\sigma = 5.121$ S/m; $\epsilon_r = 35.188$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -19.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.54 W/kg


Configuration/Head/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.984 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.46 W/kg

SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.273 W/kg

Maximum value of SAR (measured) = 1.60 W/kg

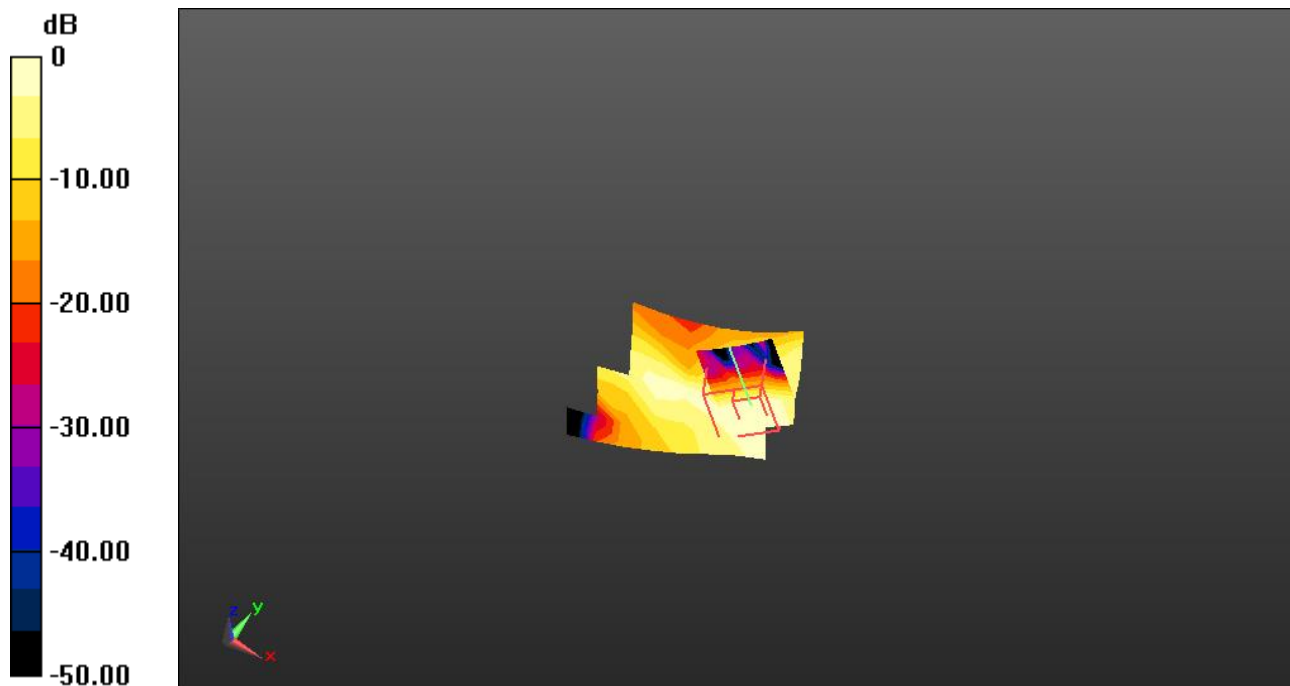

0 dB = 1.54 W/kg = 1.88 dBW/kg