
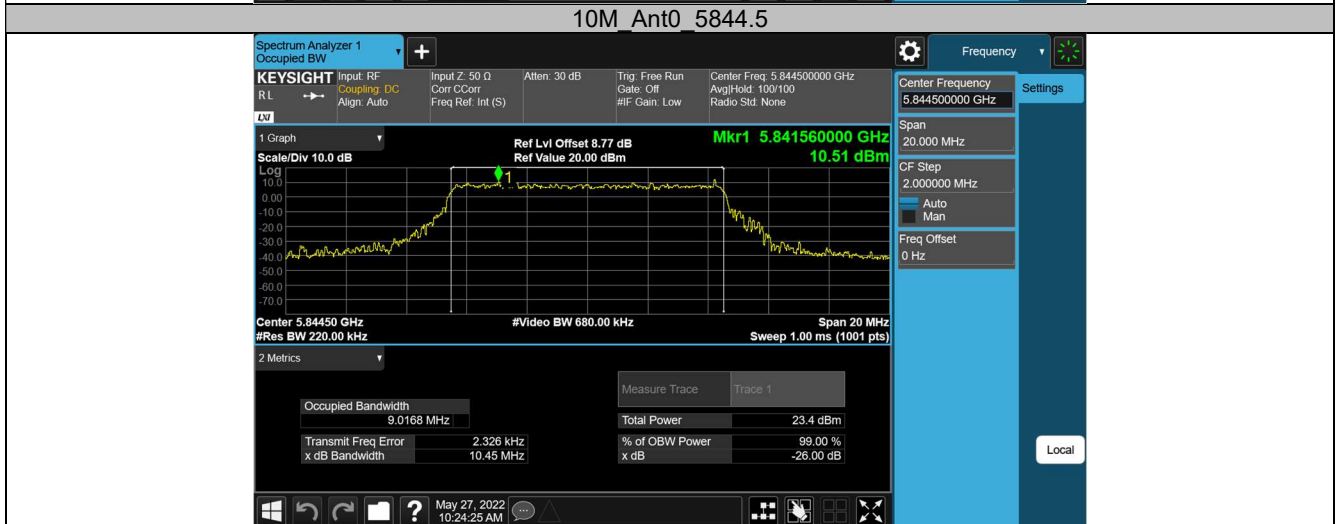
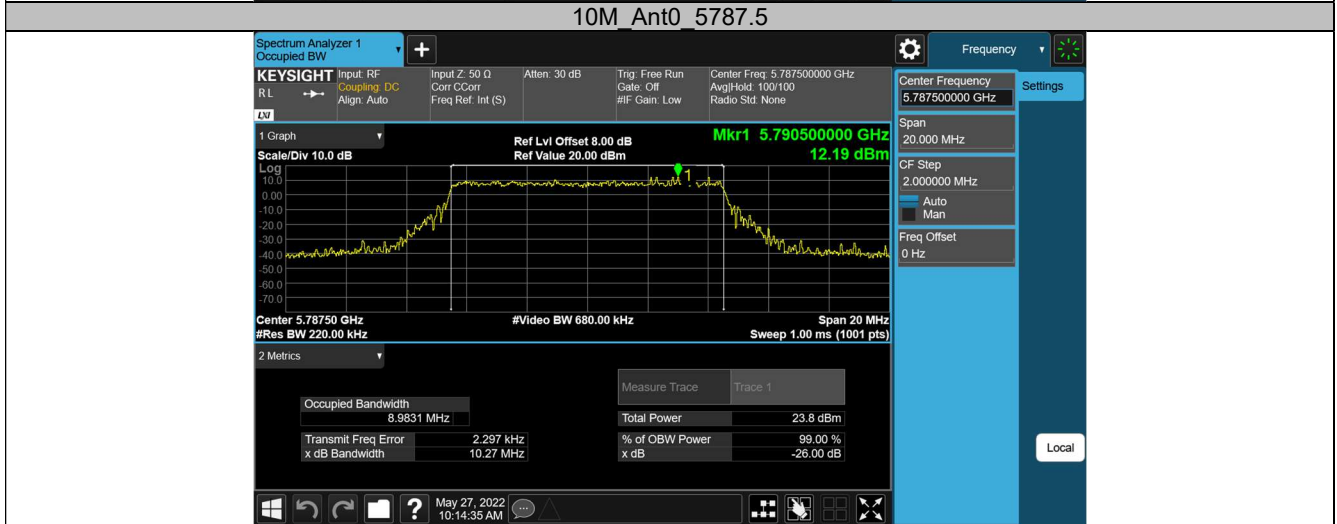





5.8G SDR, 10MHz BW

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| 10M | Ant0 | 5730.5 | 9.0275 | 5726.007 | 5735.035 | --- | PASS |
| | | 5787.5 | 8.9831 | 5783.011 | 5791.994 | --- | PASS |
| | | 5844.5 | 9.0168 | 5839.994 | 5849.011 | --- | PASS |

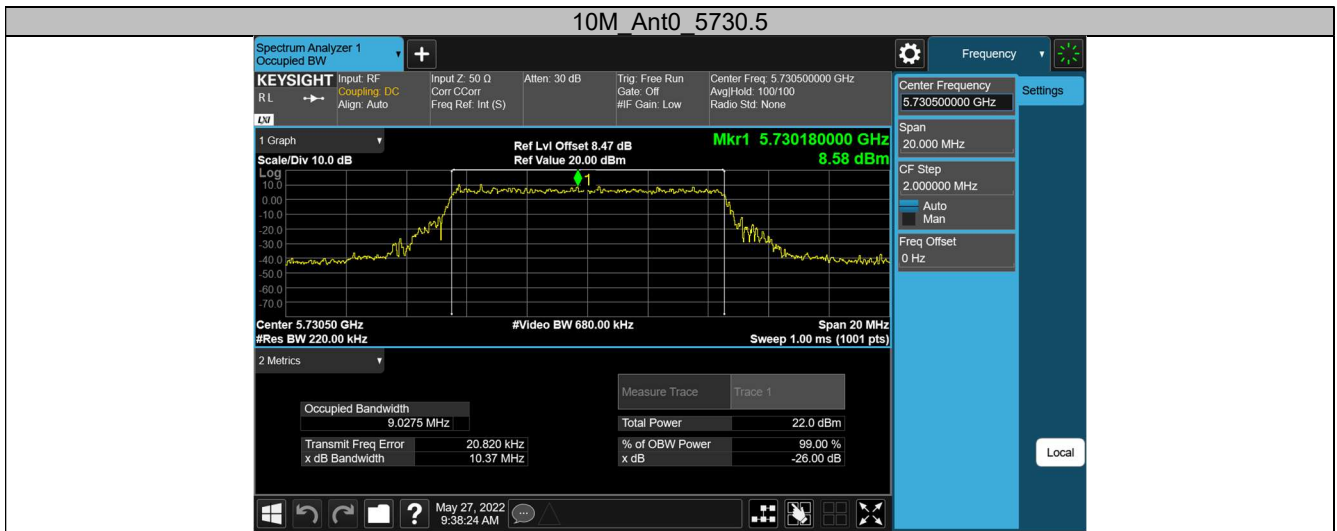




5.8G SDR, 20MHz BW

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| 20M | Ant0 | 5735.5 | 18.280 | 5726.430 | 5744.710 | --- | PASS |
| | | 5787.5 | 17.907 | 5778.540 | 5796.447 | --- | PASS |
| | | 5839.5 | 17.860 | 5830.577 | 5848.437 | --- | PASS |

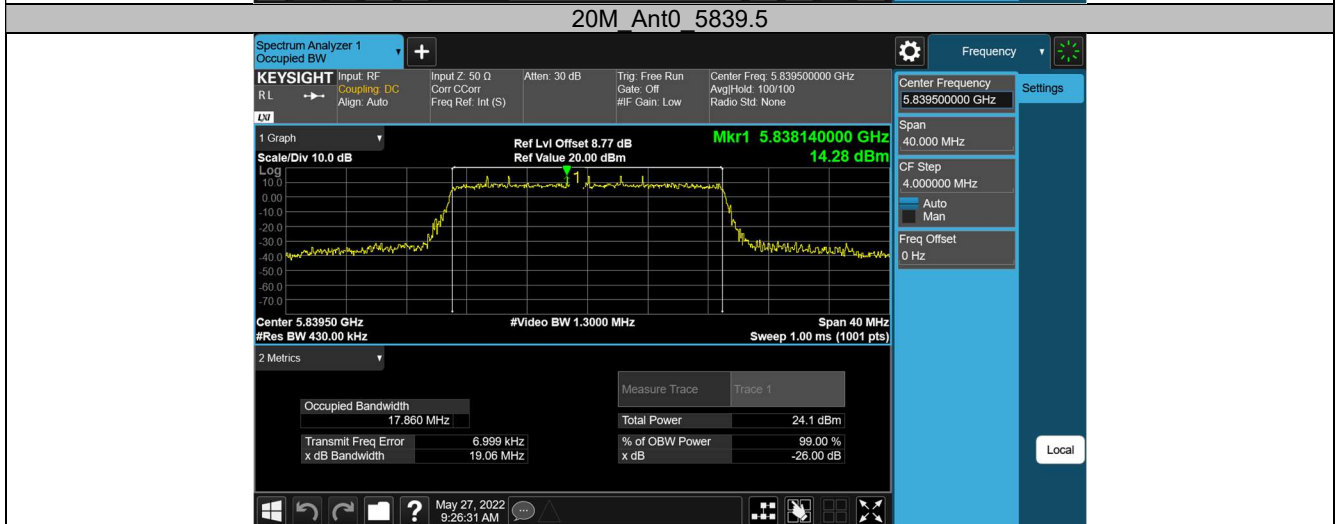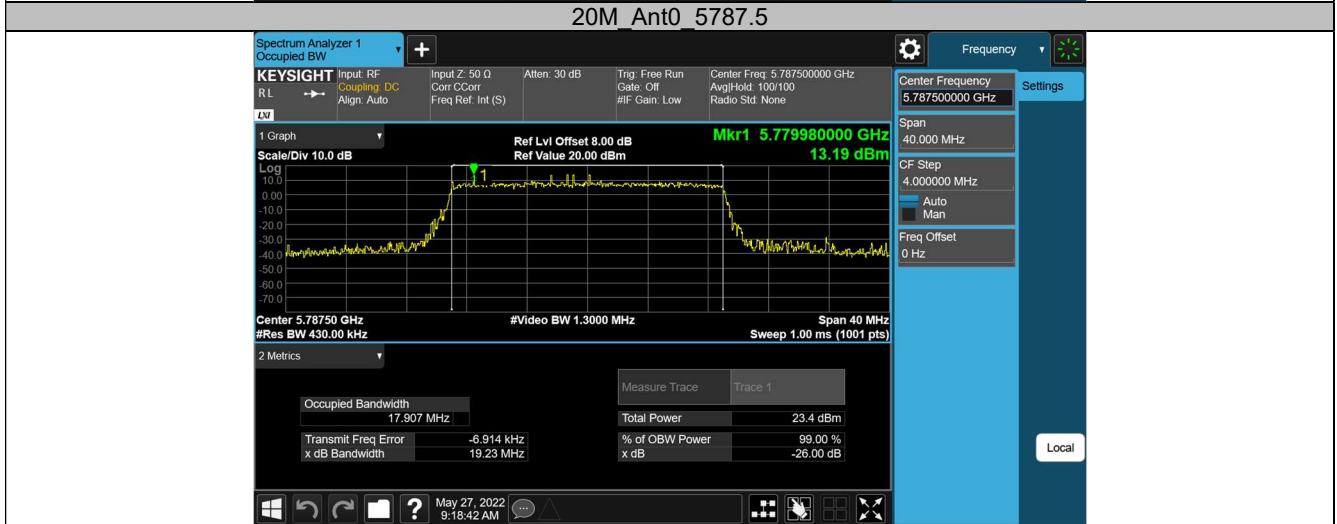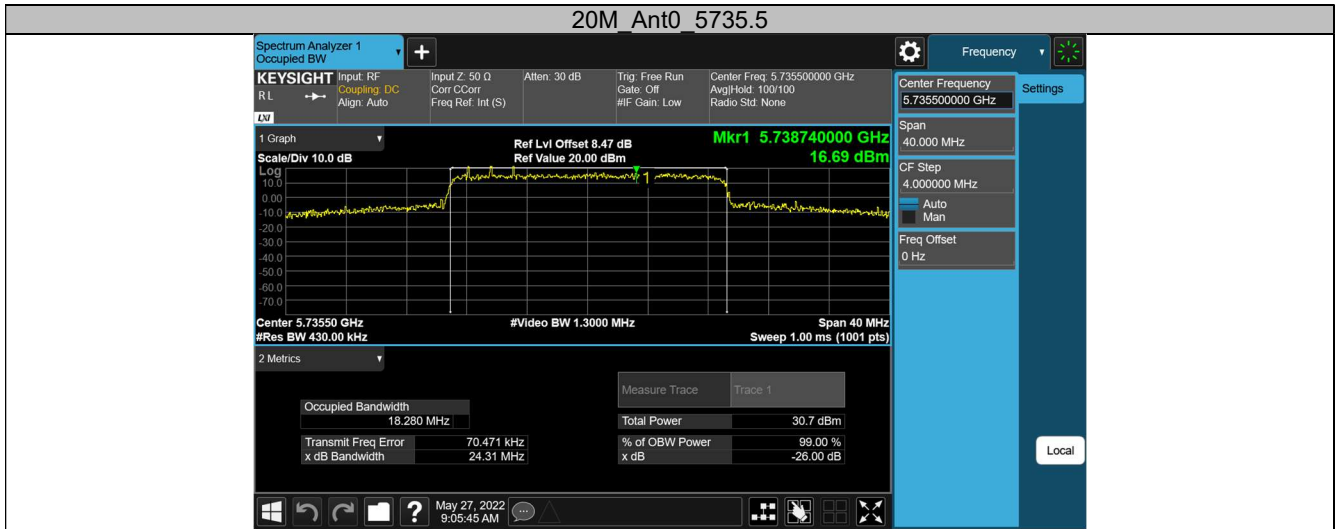

5.8G SDR, 40MHz BW

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|----------|----------|------------|---------|
| 40M | Ant0 | 5745.5 | 35.511 | 5727.779 | 5763.290 | --- | PASS |
| | | 5787.5 | 35.634 | 5769.675 | 5805.309 | --- | PASS |
| | | 5829.5 | 35.685 | 5811.639 | 5847.324 | --- | PASS |

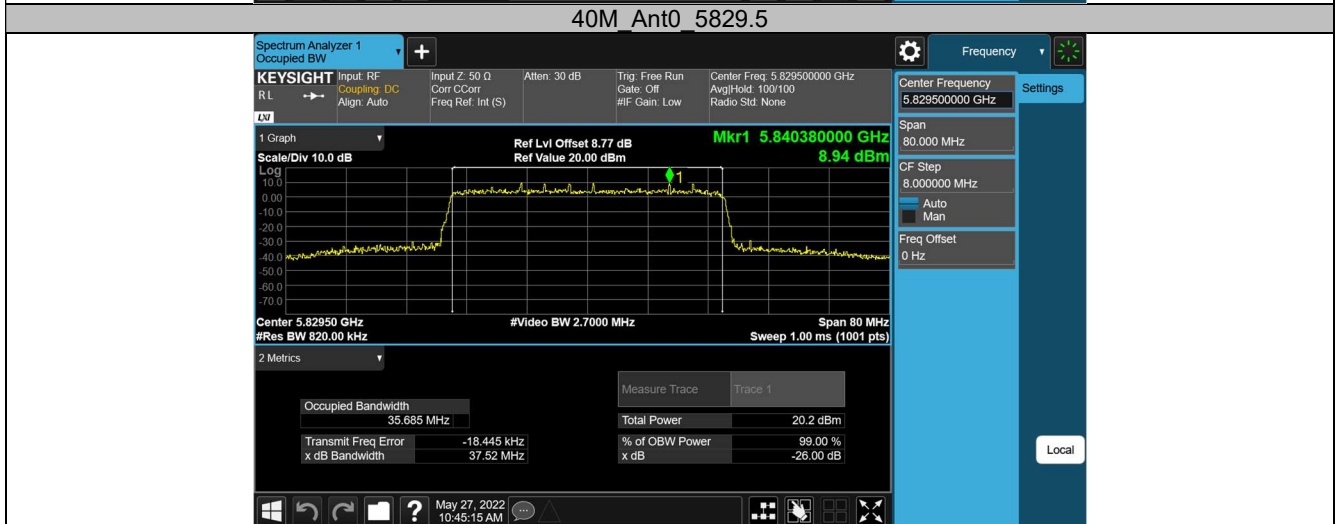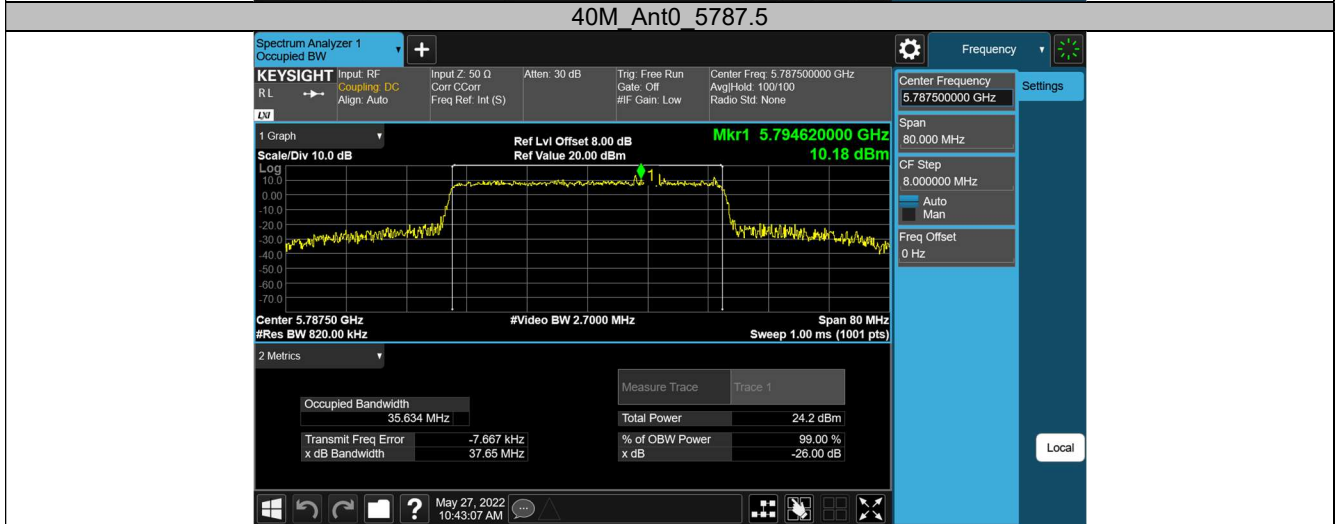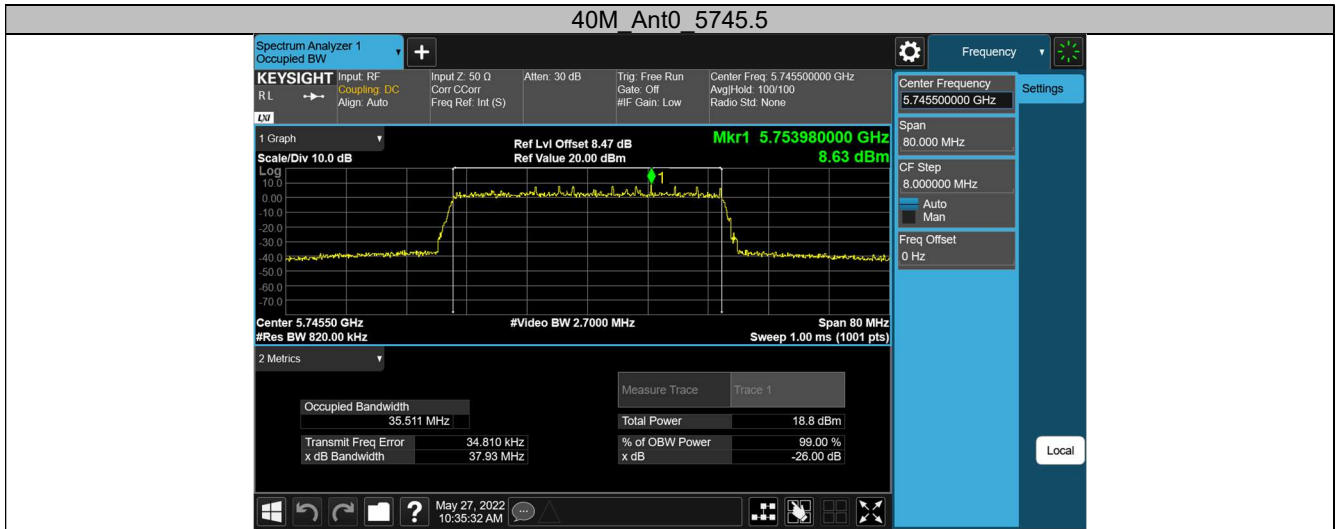


Appendix A.5: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. All modes were tested, only the worst-case data reported.

30MHz - 1GHz (Worst case)

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

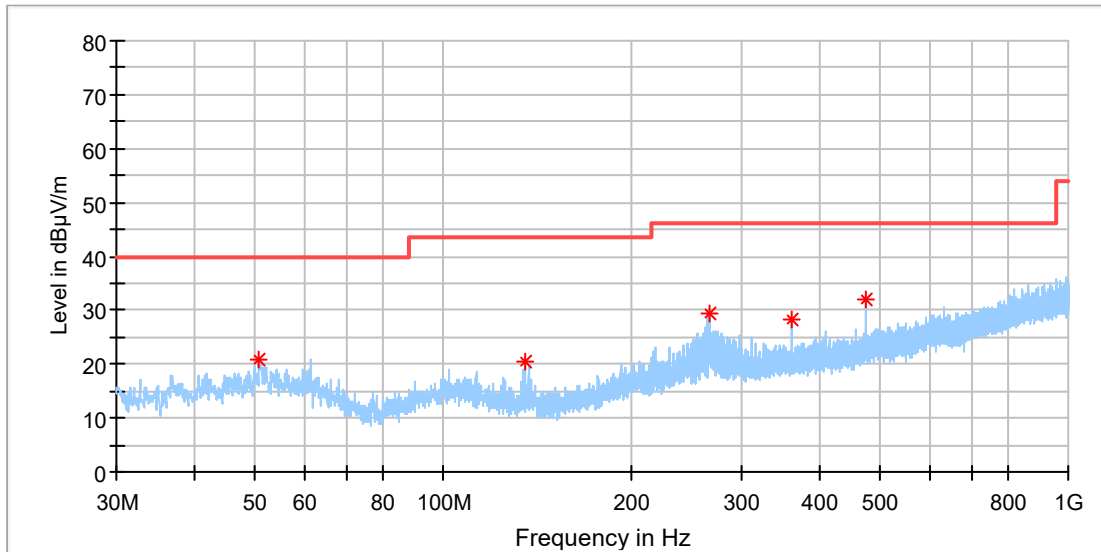

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 50.806500 | 21.01 | 40.00 | 18.99 | 100.0 | H | 243.0 | -18.3 |
| 134.954000 | 20.61 | 43.50 | 22.89 | 100.0 | H | 255.0 | -22.1 |
| 267.407500 | 29.53 | 46.00 | 16.47 | 100.0 | H | 300.0 | -17.0 |
| 359.994000 | 28.32 | 46.00 | 17.68 | 100.0 | H | 262.0 | -14.6 |
| 474.987500 | 32.06 | 46.00 | 13.94 | 100.0 | H | 255.0 | -12.3 |

Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

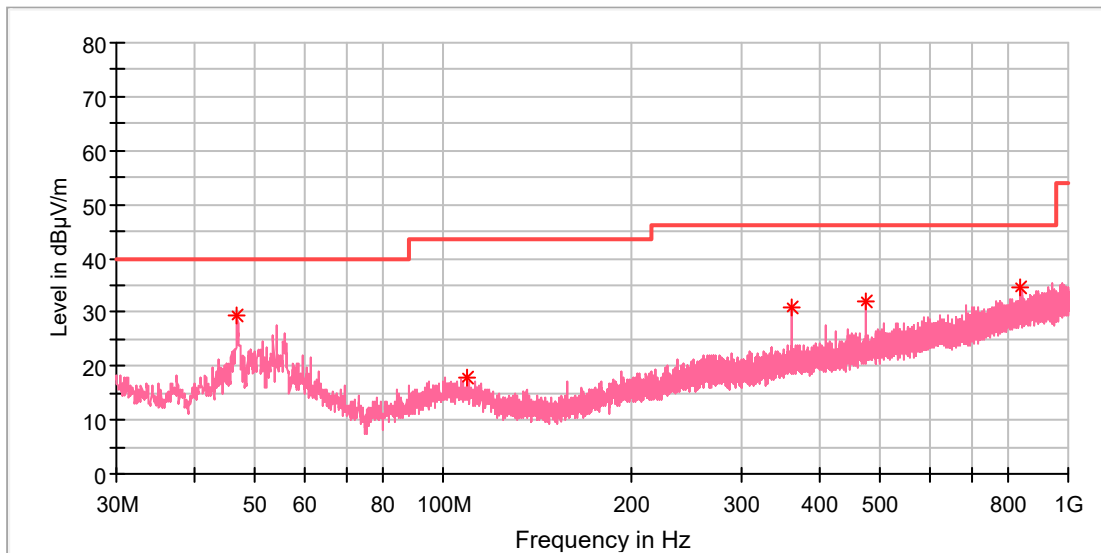

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 46.829500 | 29.27 | 40.00 | 10.73 | 100.0 | V | 322.0 | -18.5 |
| 109.006500 | 17.77 | 43.50 | 25.73 | 100.0 | V | 208.0 | -19.0 |
| 359.994000 | 30.85 | 46.00 | 15.15 | 100.0 | V | 27.0 | -14.6 |
| 474.987500 | 32.11 | 46.00 | 13.89 | 100.0 | V | 103.0 | -12.3 |
| 839.368000 | 34.69 | 46.00 | 11.31 | 100.0 | V | 167.0 | -5.7 |

Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|--------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

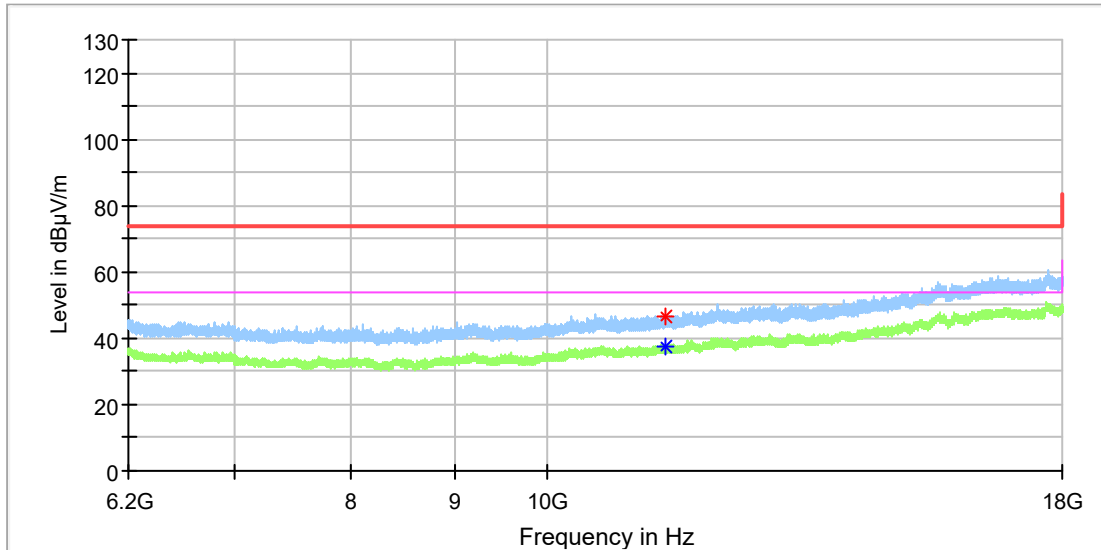

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11443.625000 | --- | 37.65 | 54.00 | 16.35 | 150.0 | H | 162.0 | 13.3 |
| 11447.558333 | 46.77 | --- | 74.00 | 27.23 | 150.0 | H | 35.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

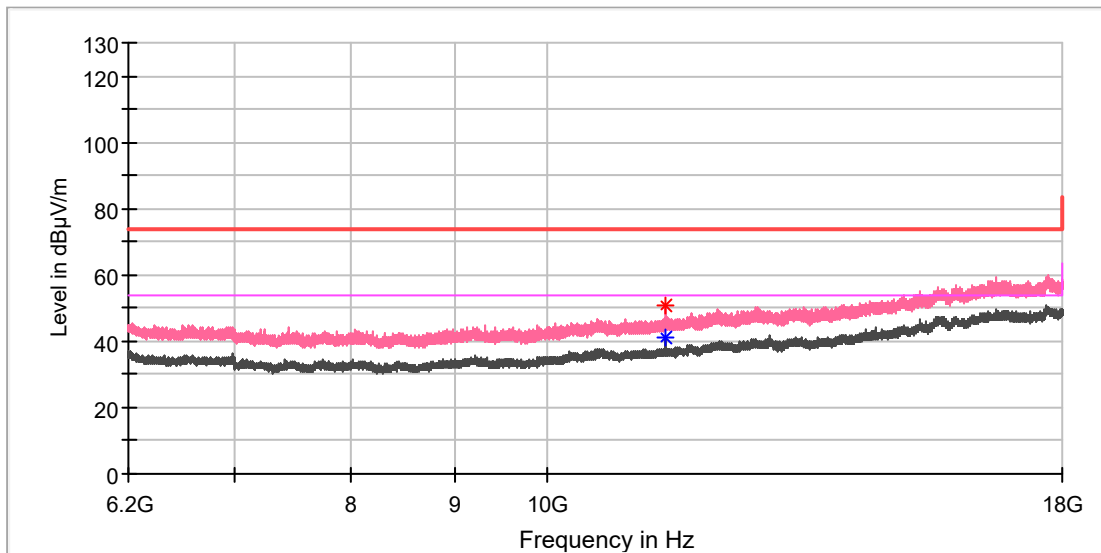

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11456.900000 | 50.86 | --- | 74.00 | 23.14 | 150.0 | V | 24.0 | 13.4 |
| 11456.900000 | --- | 41.05 | 54.00 | 12.95 | 150.0 | V | 24.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

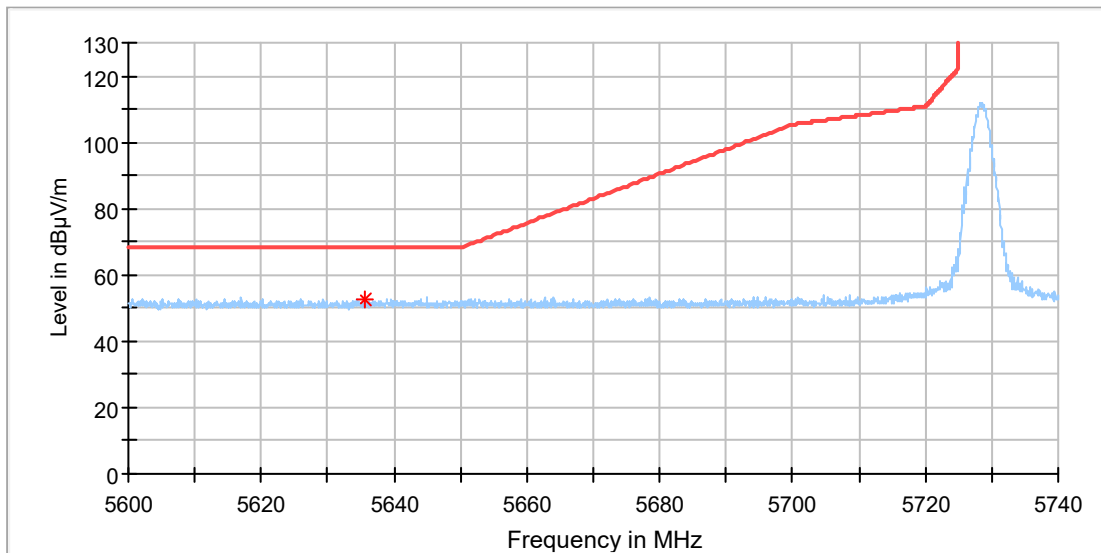

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5635.627778 | 52.86 | 68.20 | 15.34 | 150.0 | H | 117.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5728.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

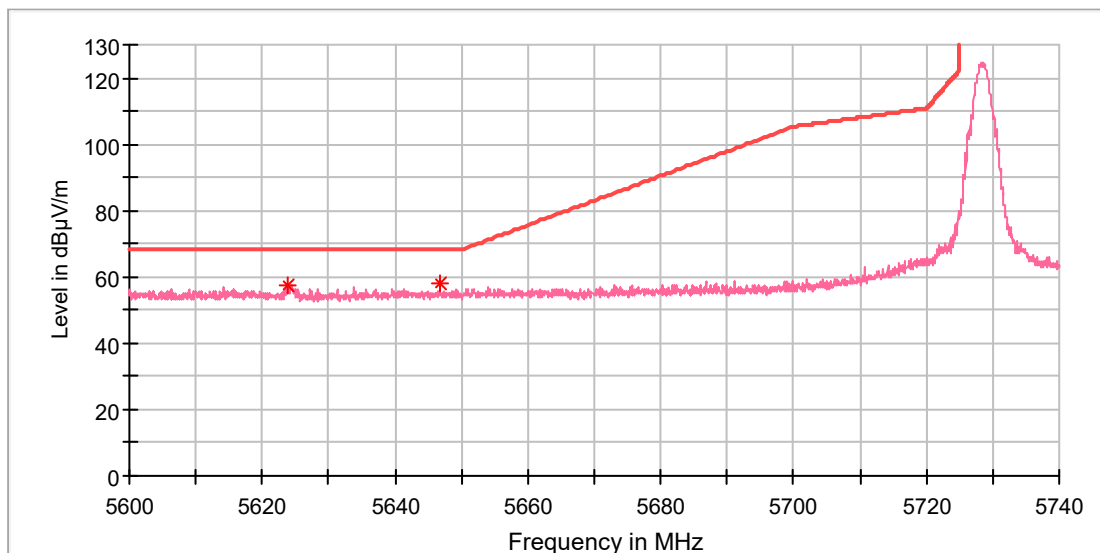

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5623.894445 | 57.32 | 68.20 | 10.88 | 150.0 | V | 244.0 | 13.8 |
| 5646.811111 | 57.79 | 68.20 | 10.41 | 150.0 | V | 230.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

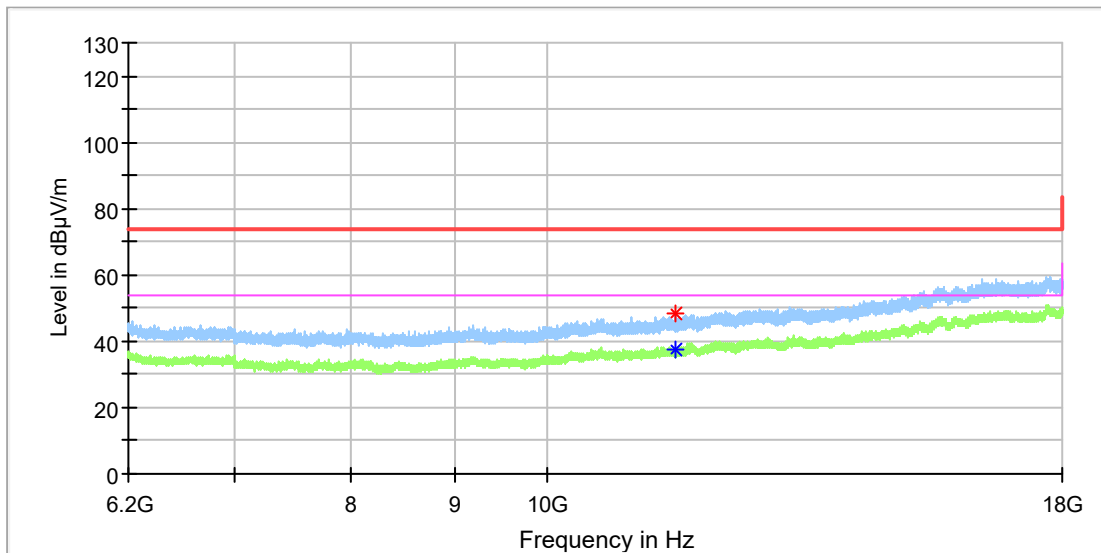

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11567.033333 | --- | 37.59 | 54.00 | 16.41 | 150.0 | H | 238.0 | 13.4 |
| 11573.425000 | 48.43 | --- | 74.00 | 25.57 | 150.0 | H | 10.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5786.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

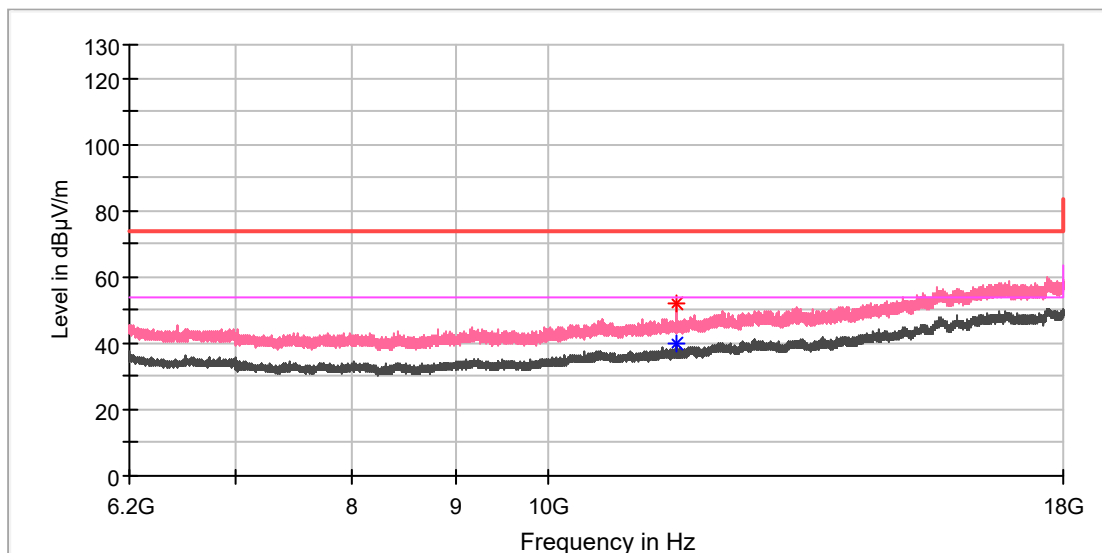

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11572.933333 | 51.96 | --- | 74.00 | 22.04 | 150.0 | V | 57.0 | 13.4 |
| 11573.425000 | --- | 40.19 | 54.00 | 13.81 | 150.0 | V | 57.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

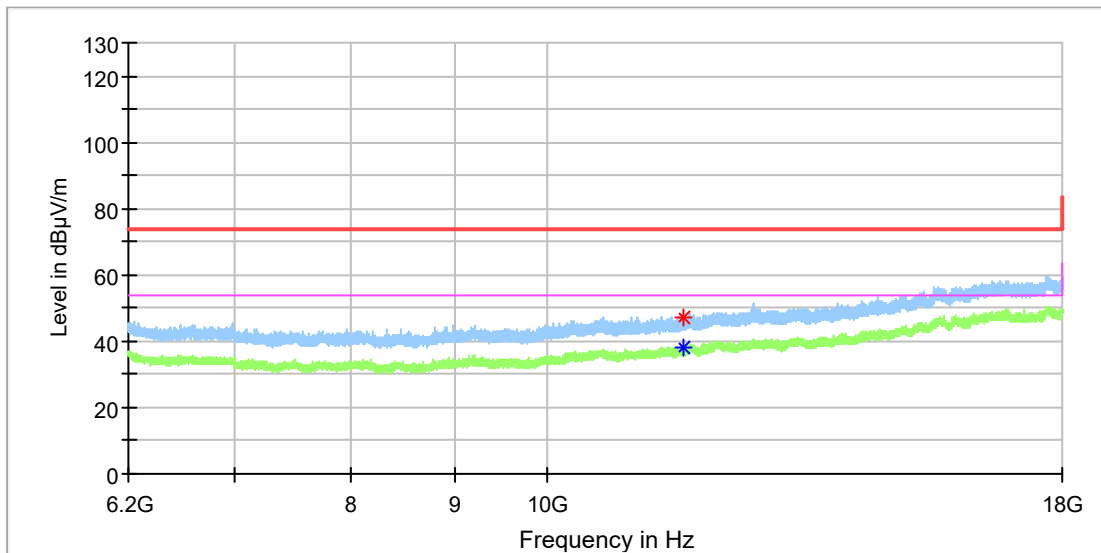

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11676.675000 | 47.41 | --- | 74.00 | 26.59 | 150.0 | H | 85.0 | 13.3 |
| 11692.900000 | --- | 38.24 | 54.00 | 15.76 | 150.0 | H | 346.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

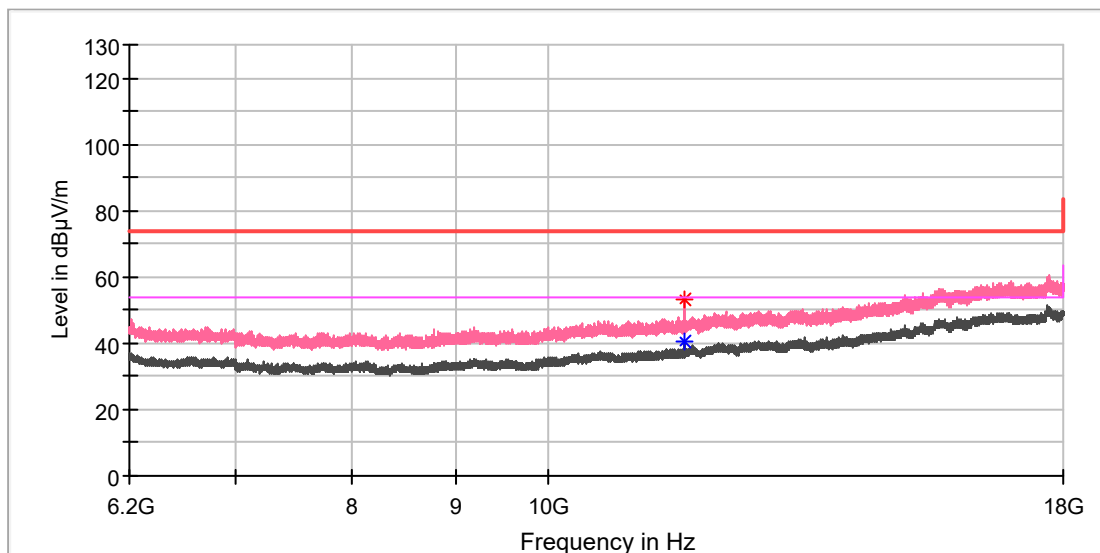

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11692.408333 | --- | 40.43 | 54.00 | 13.57 | 150.0 | V | 6.0 | 13.3 |
| 11693.391667 | 53.23 | --- | 74.00 | 20.77 | 150.0 | V | 55.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

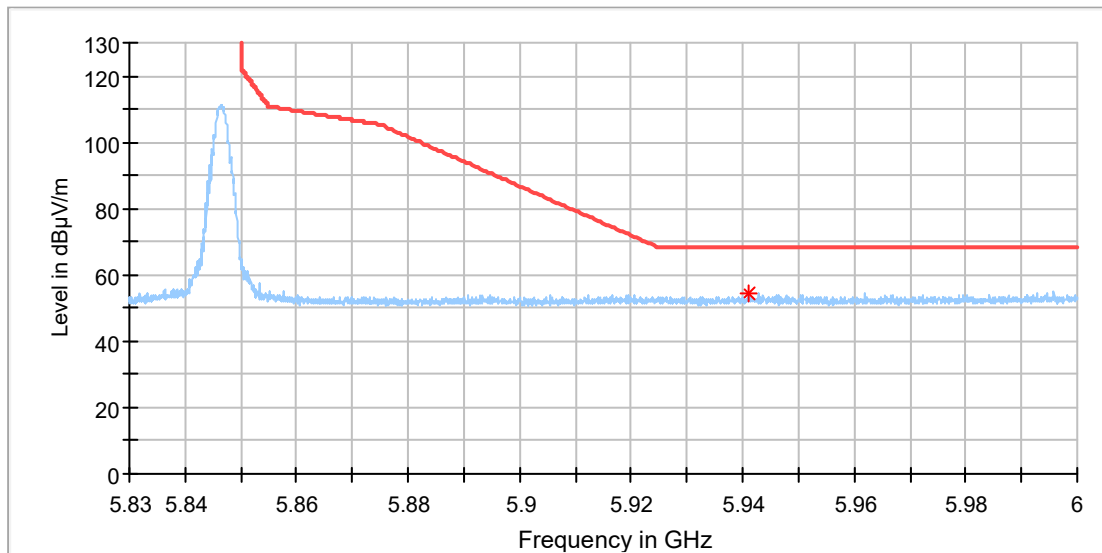

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5941.158333 | 54.64 | 68.20 | 13.56 | 150.0 | H | 144.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M_5846.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

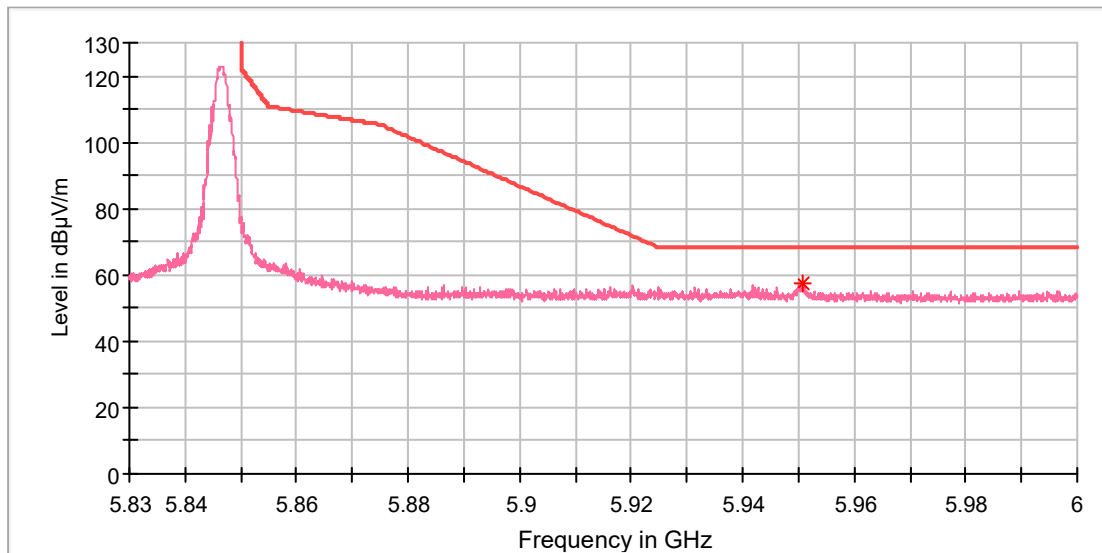

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5950.933333 | 57.39 | 68.20 | 10.81 | 150.0 | V | 209.0 | 14.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

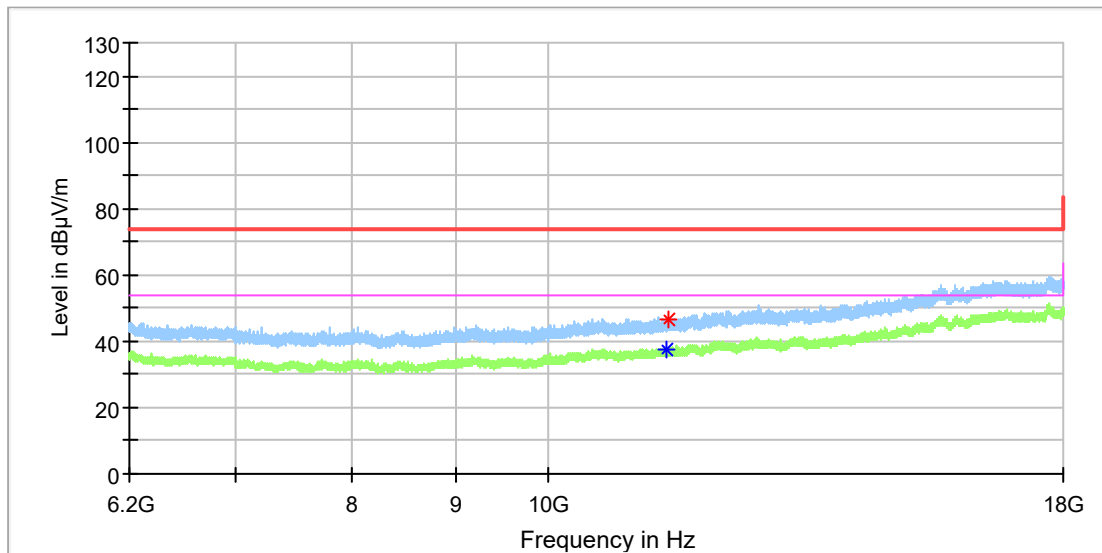

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11441.658333 | --- | 37.77 | 54.00 | 16.23 | 150.0 | H | 69.0 | 13.3 |
| 11469.683333 | 46.57 | --- | 74.00 | 27.43 | 150.0 | H | 130.0 | 13.6 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

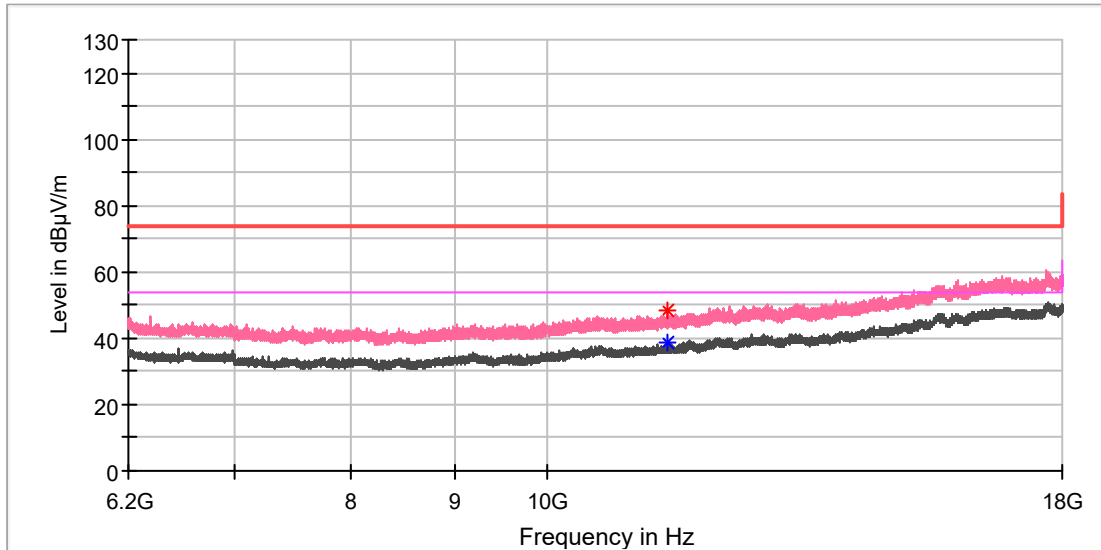

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11459.850000 | 48.64 | --- | 74.00 | 25.36 | 150.0 | V | 353.0 | 13.5 |
| 11459.850000 | --- | 38.51 | 54.00 | 15.49 | 150.0 | V | 353.0 | 13.5 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

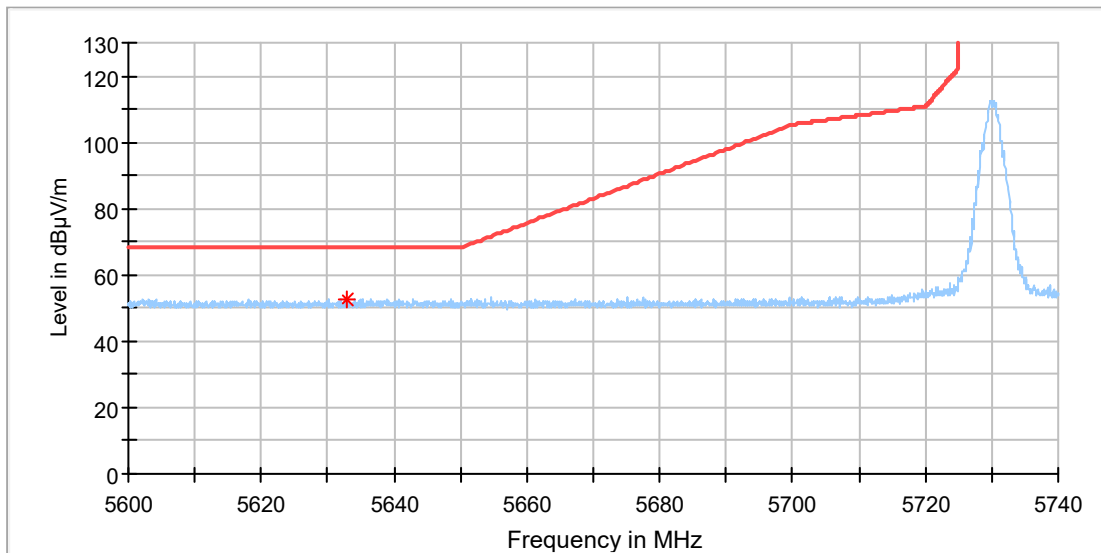

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5632.877778 | 52.35 | 68.20 | 15.85 | 150.0 | H | 126.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5730.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

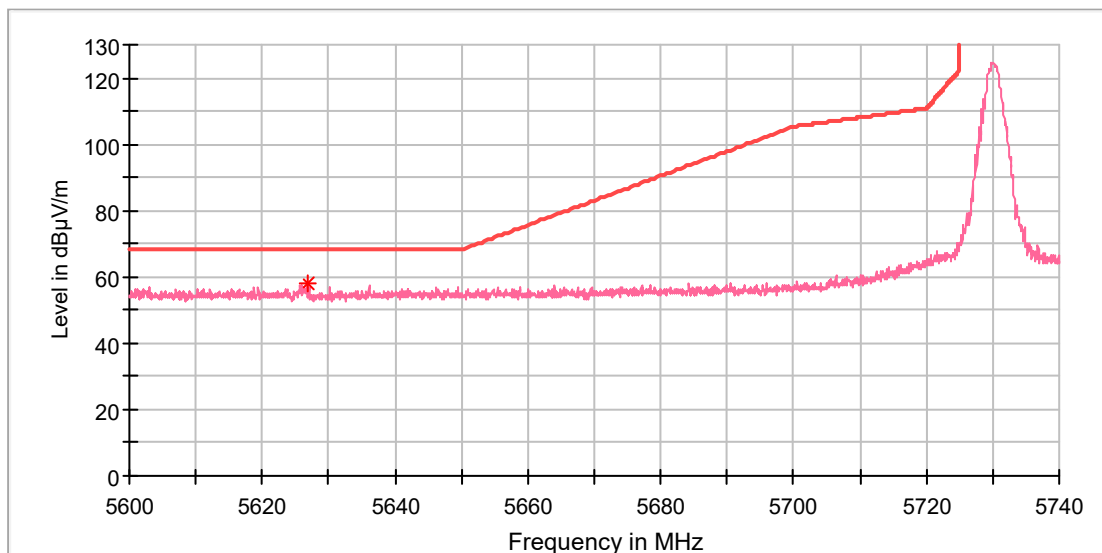

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5626.705556 | 57.83 | 68.20 | 10.37 | 150.0 | V | 227.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

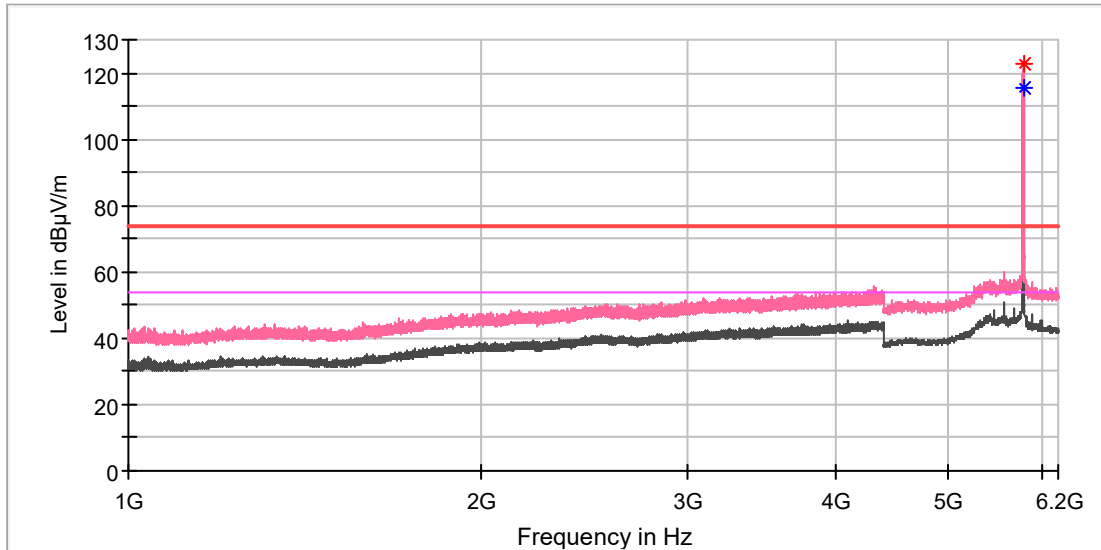

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5788.500000 | --- | 115.20 | --- | --- | 150.0 | V | 215.0 | 14.0 |
| 5788.000000 | 122.67 | --- | --- | --- | 150.0 | V | 222.0 | 14.0 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5788.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

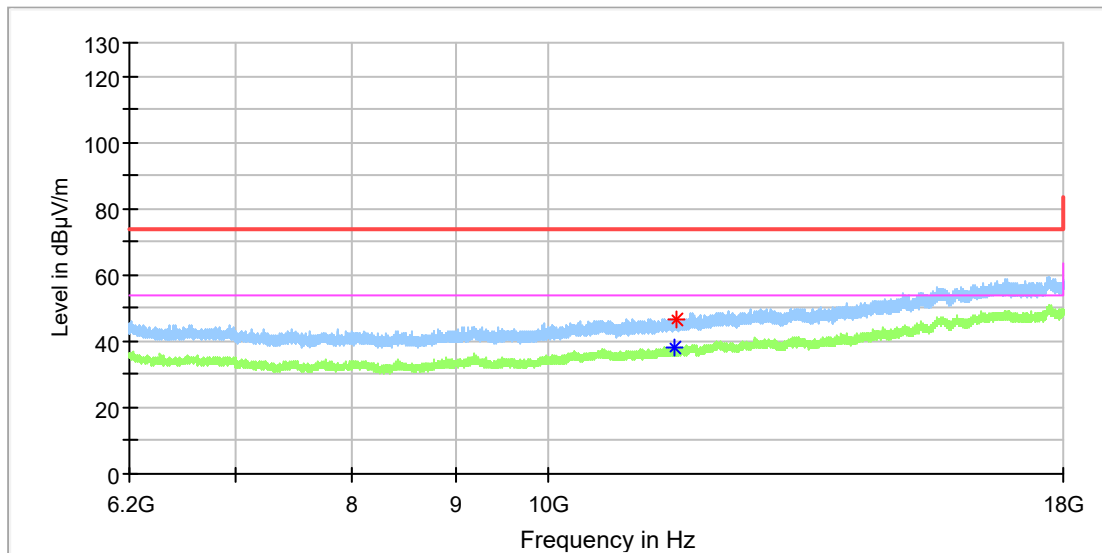

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11556.708333 | --- | 38.09 | 54.00 | 15.91 | 150.0 | H | 321.0 | 13.5 |
| 11576.375000 | 46.55 | --- | 74.00 | 27.45 | 150.0 | H | 298.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

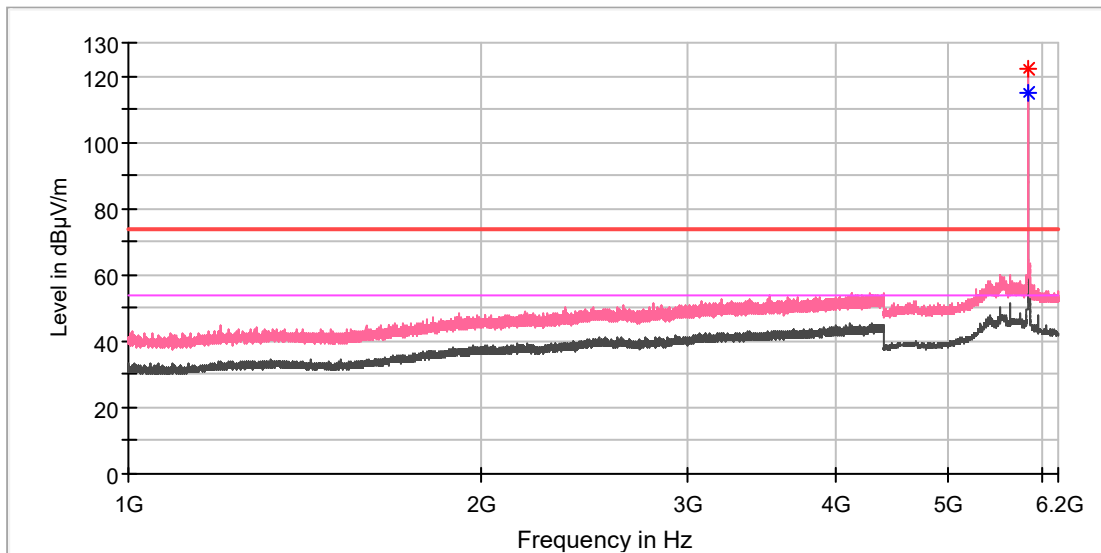

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5848.500000 | --- | 114.85 | --- | --- | 150.0 | V | 200.0 | 14.2 |
| 5848.000000 | 122.02 | --- | --- | --- | 150.0 | V | 217.0 | 14.2 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

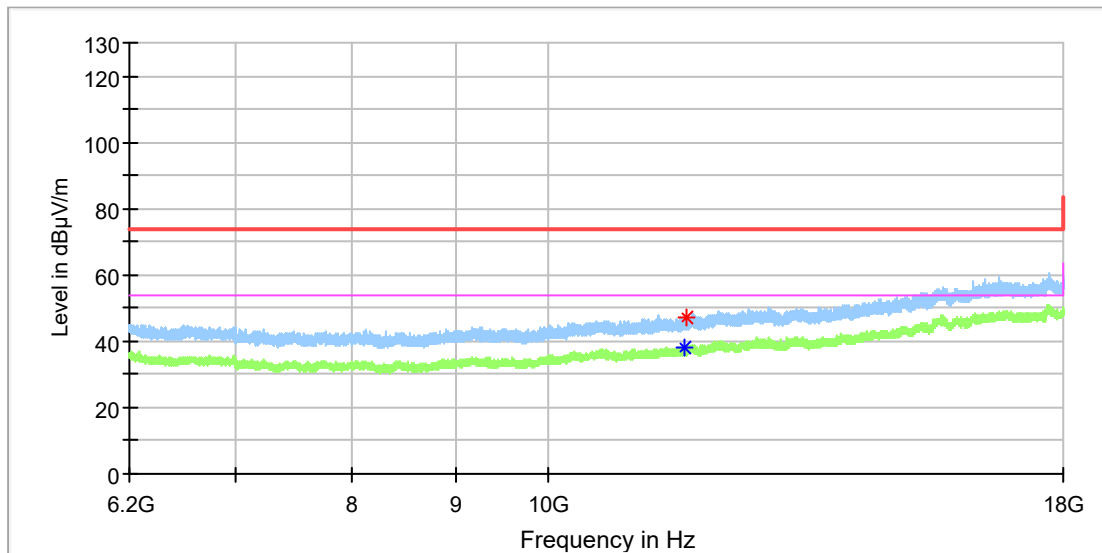

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11672.250000 | --- | 37.85 | 54.00 | 16.15 | 150.0 | H | 209.0 | 13.3 |
| 11696.341667 | 46.97 | --- | 74.00 | 27.03 | 150.0 | H | 11.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

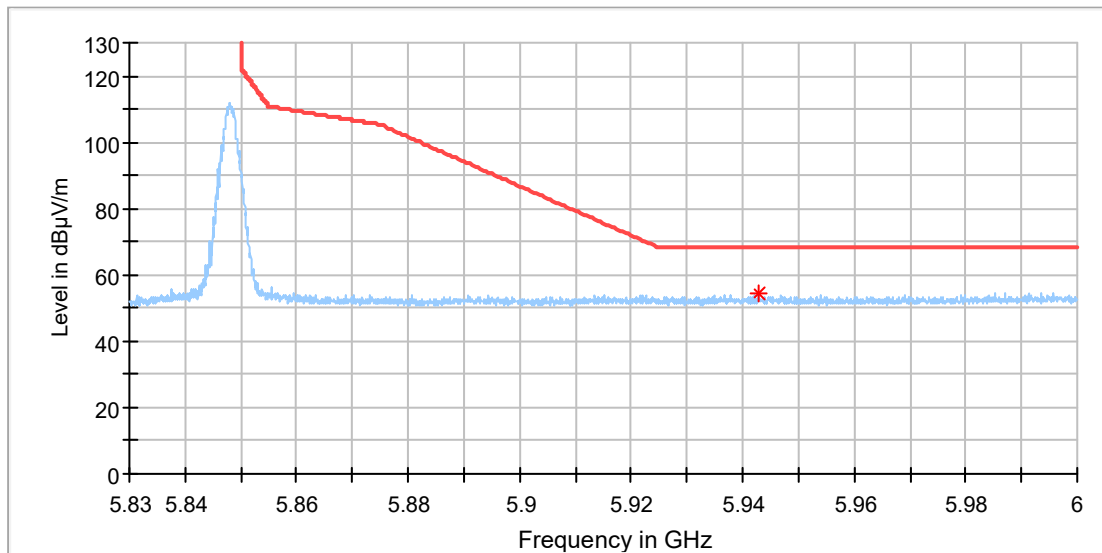

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5942.947222 | 54.44 | 68.20 | 13.76 | 150.0 | H | 65.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_1.4M CA_5848.12MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

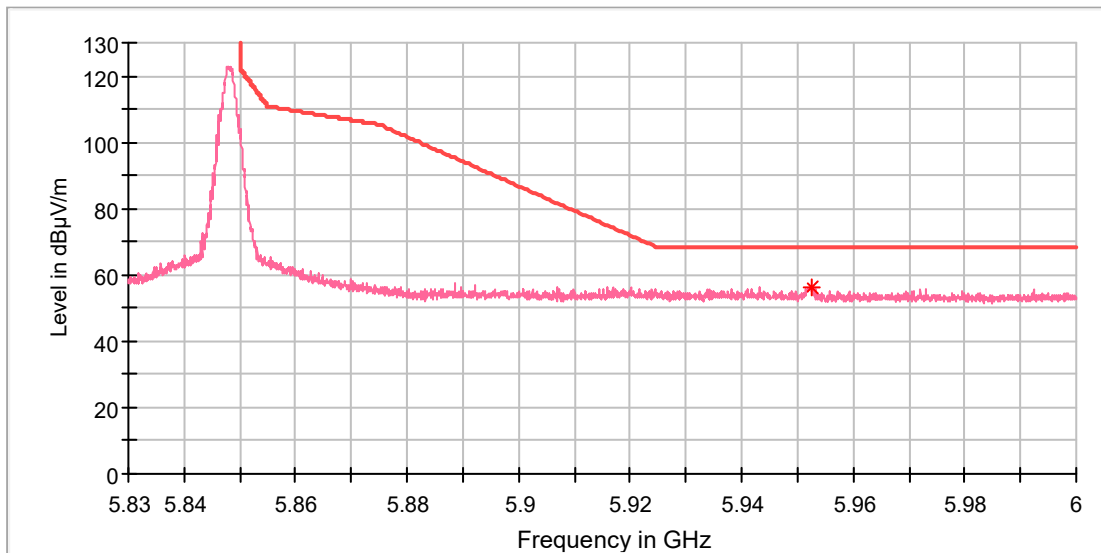

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5952.722222 | 56.21 | 68.20 | 11.99 | 150.0 | V | 232.0 | 14.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

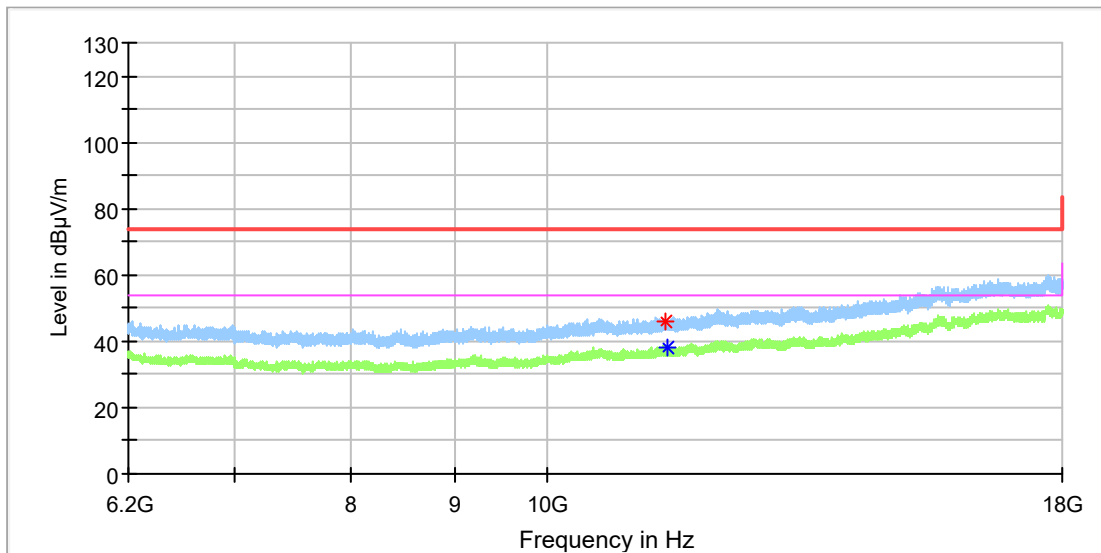

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11456.900000 | 46.18 | --- | 74.00 | 27.82 | 150.0 | H | 356.0 | 13.4 |
| 11462.800000 | --- | 38.37 | 54.00 | 15.63 | 150.0 | H | 48.0 | 13.5 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

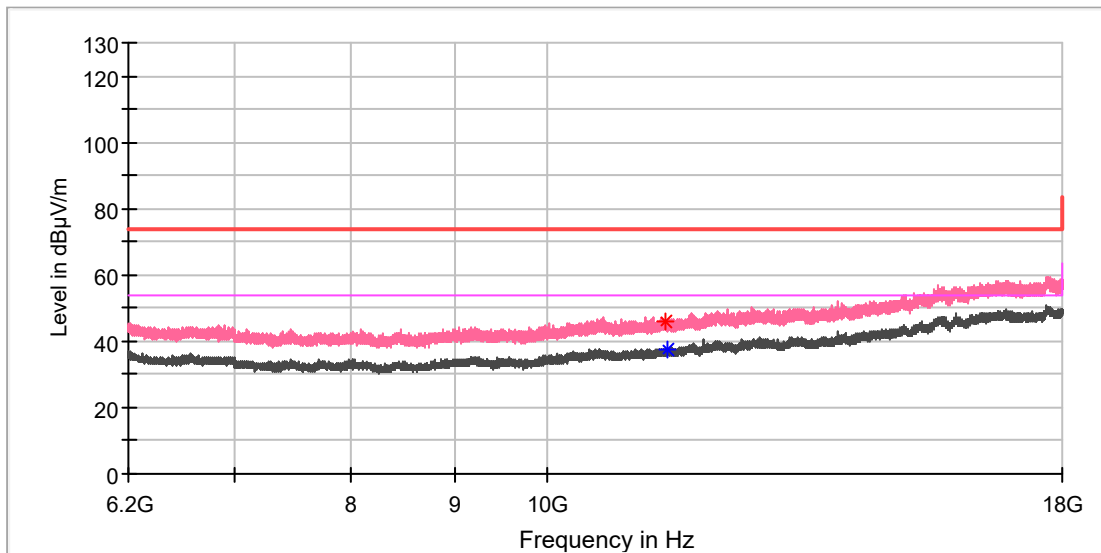

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11438.708333 | 46.11 | --- | 74.00 | 27.89 | 150.0 | V | 12.0 | 13.2 |
| 11459.850000 | --- | 37.49 | 54.00 | 16.51 | 150.0 | V | 84.0 | 13.5 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

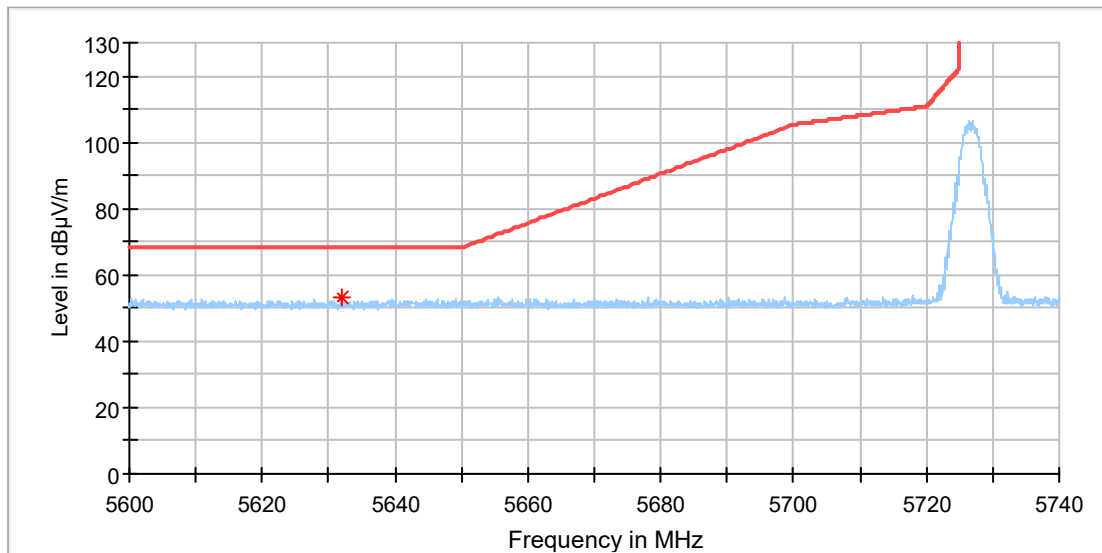

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5631.838889 | 53.34 | 68.20 | 14.86 | 150.0 | H | 62.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5727.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

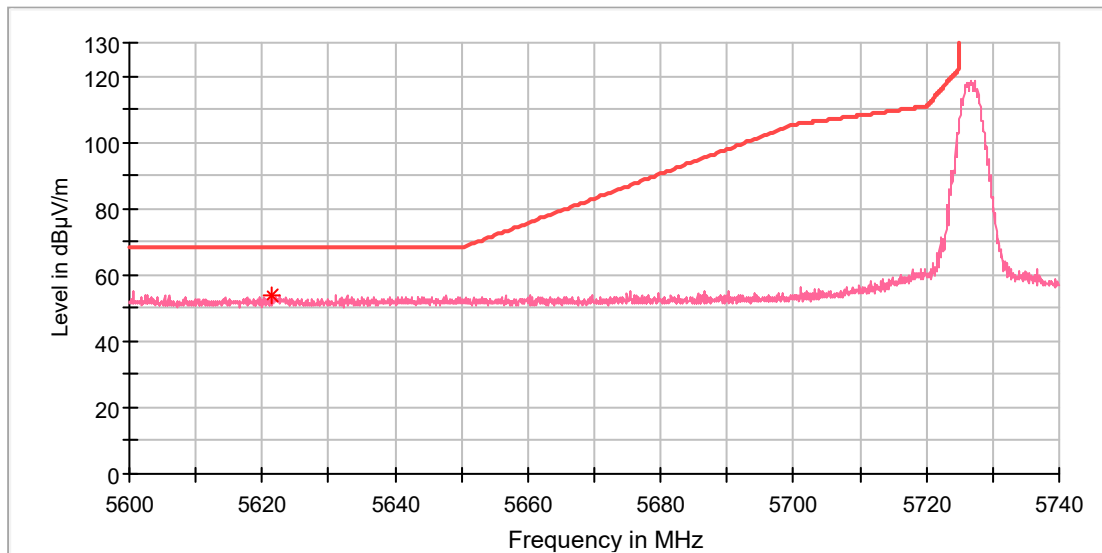

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5621.327778 | 54.09 | 68.20 | 14.11 | 150.0 | V | 235.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5784.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

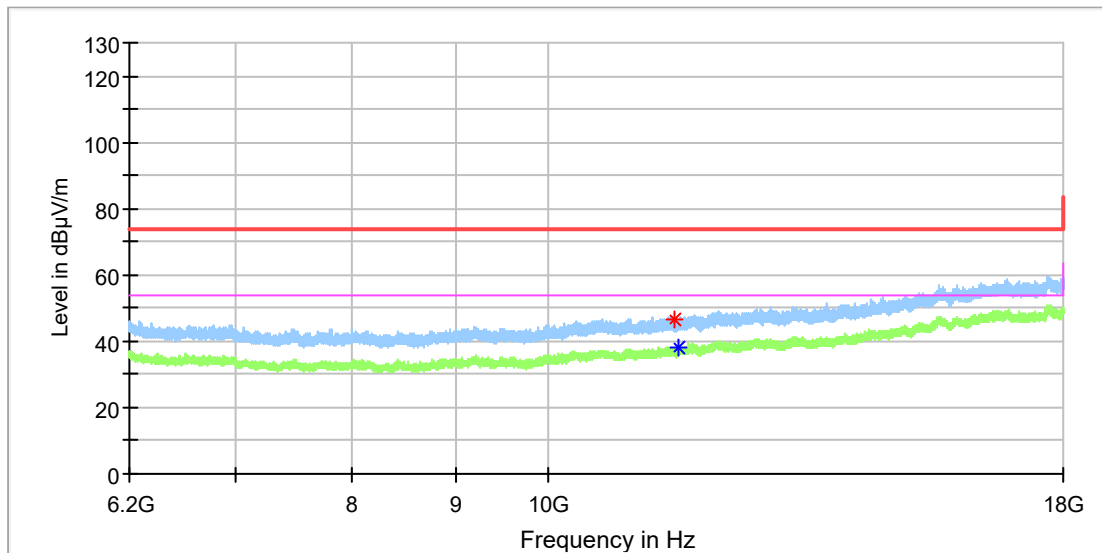

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11543.925000 | 46.44 | --- | 74.00 | 27.56 | 150.0 | H | 227.0 | 13.5 |
| 11593.091667 | --- | 37.93 | 54.00 | 16.07 | 150.0 | H | 130.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5784.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

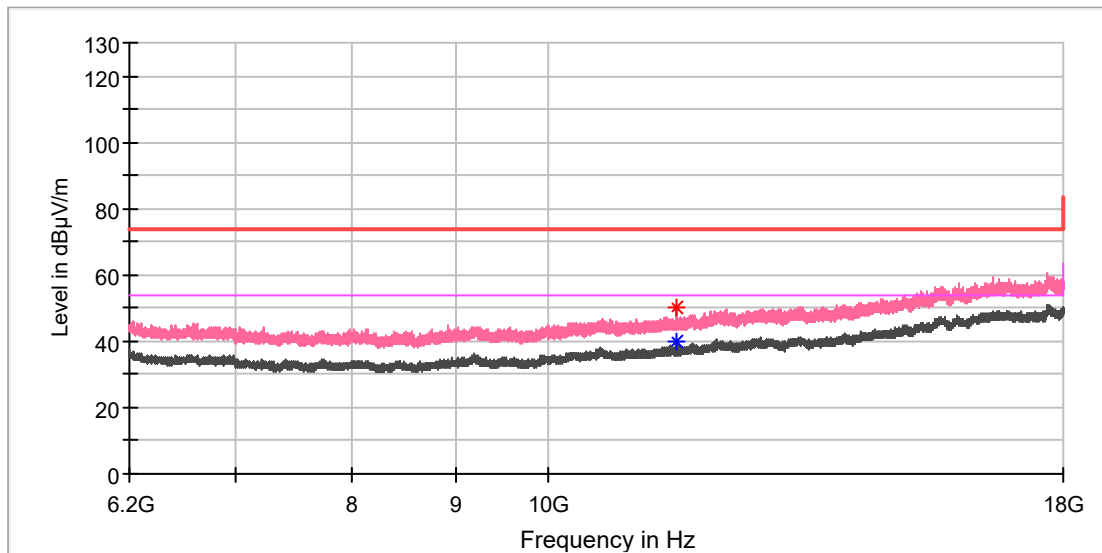

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11569.000000 | 49.90 | --- | 74.00 | 24.10 | 150.0 | V | 74.0 | 13.4 |
| 11569.000000 | --- | 39.87 | 54.00 | 14.13 | 150.0 | V | 74.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

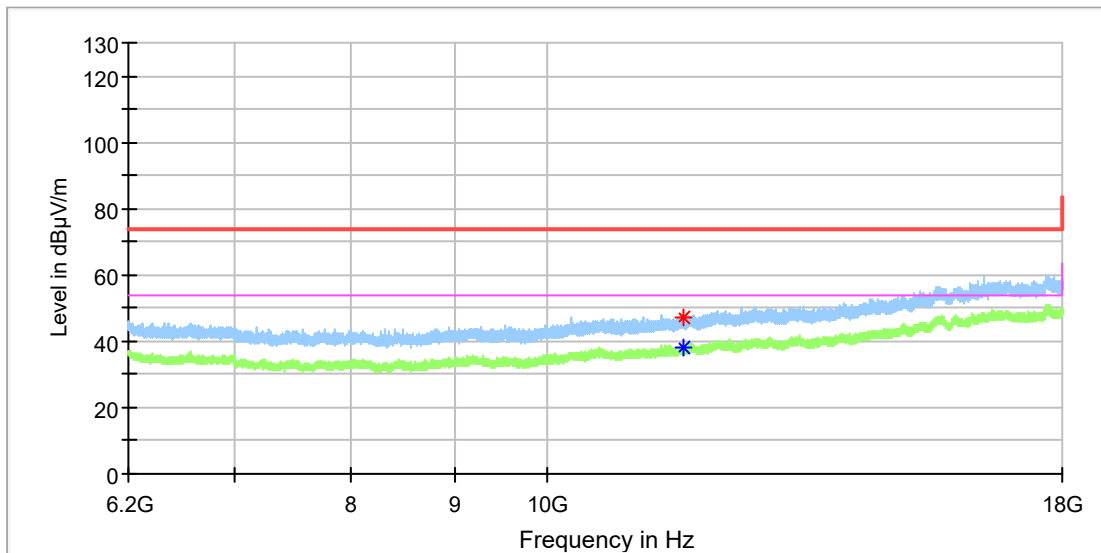

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11687.491667 | 47.02 | --- | 74.00 | 26.98 | 150.0 | H | 330.0 | 13.3 |
| 11688.475000 | --- | 37.82 | 54.00 | 16.18 | 150.0 | H | 318.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | INSPIRE 3 |
| Model: | T740 |
| Test Mode: | SDR 5.8G_3M_5844.5MHz |
| Order No/Sample No: | 168371699/A003258804-005 |
| Test Voltage: | Battery |
| Remark: | Temp 22 Humi:55% |
| Test Standard: | FCC 15.407 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

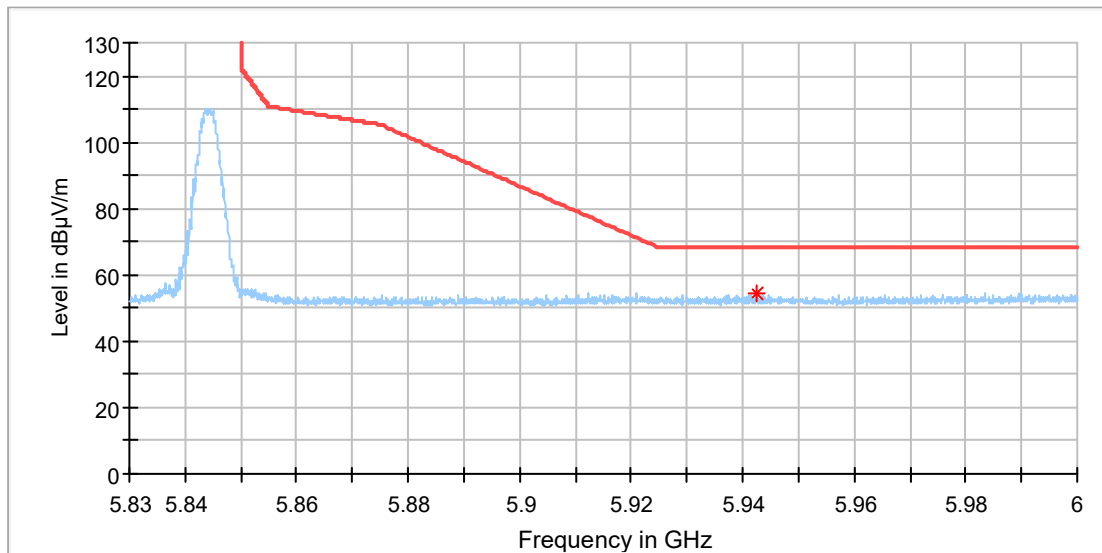

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5942.563889 | 54.23 | 68.20 | 13.97 | 150.0 | H | 245.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

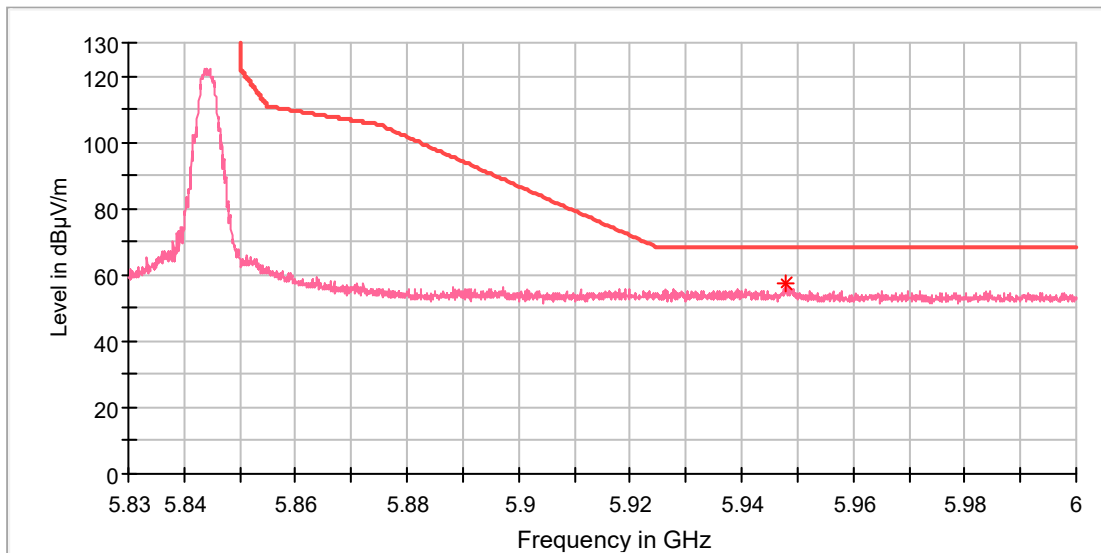

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5948.058333 | 57.35 | 68.20 | 10.85 | 150.0 | V | 213.0 | 14.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5730.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

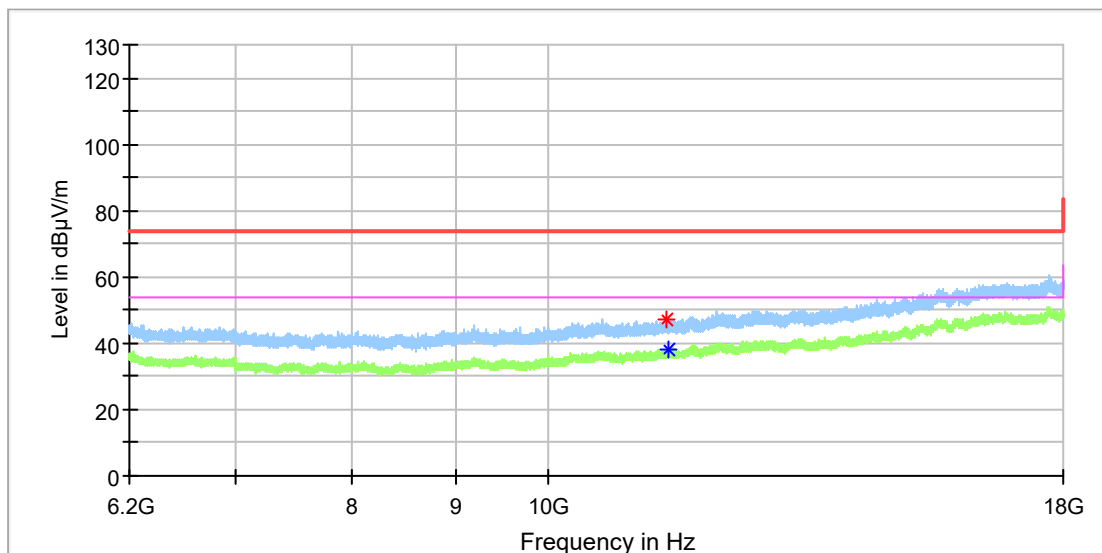

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11451.000000 | 46.92 | --- | 74.00 | 27.08 | 150.0 | H | 142.0 | 13.4 |
| 11469.191667 | --- | 38.20 | 54.00 | 15.80 | 150.0 | H | 259.0 | 13.6 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5730.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

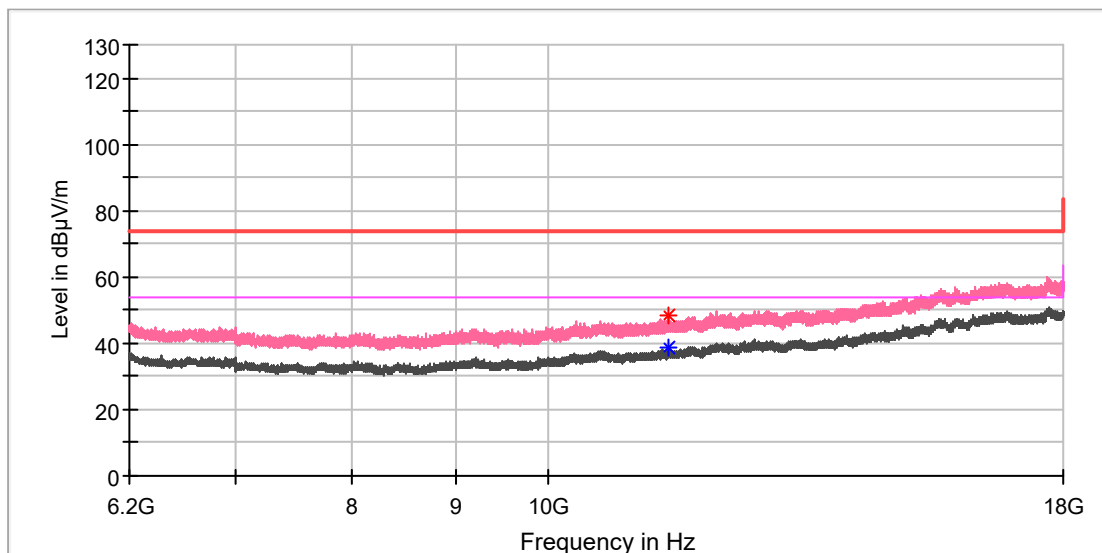

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11459.850000 | 48.15 | --- | 74.00 | 25.85 | 150.0 | V | 291.0 | 13.5 |
| 11461.816667 | --- | 38.59 | 54.00 | 15.41 | 150.0 | V | 97.0 | 13.5 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5730.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

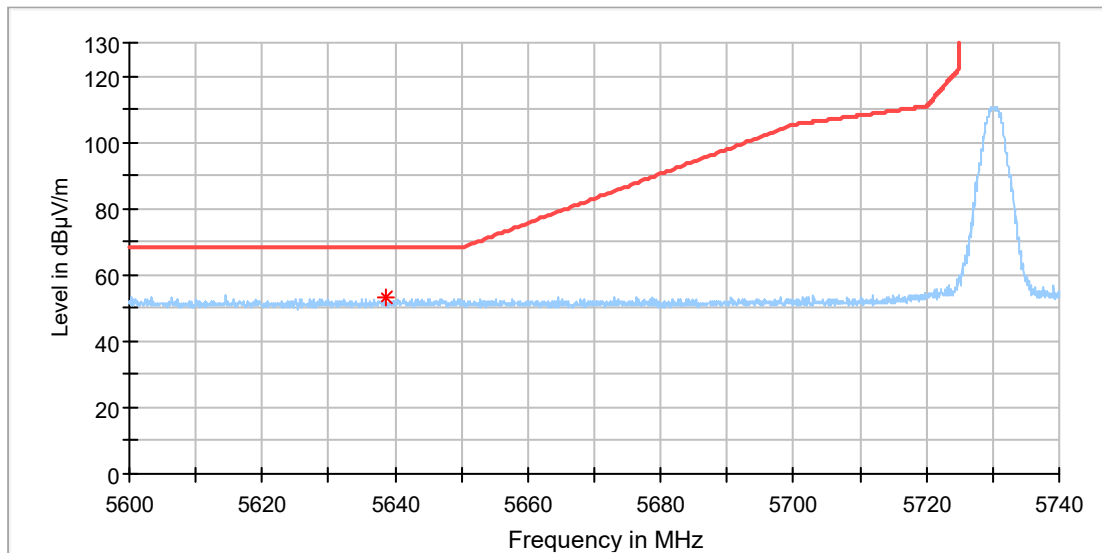

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5638.683333 | 53.38 | 68.20 | 14.82 | 150.0 | H | 263.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5730.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

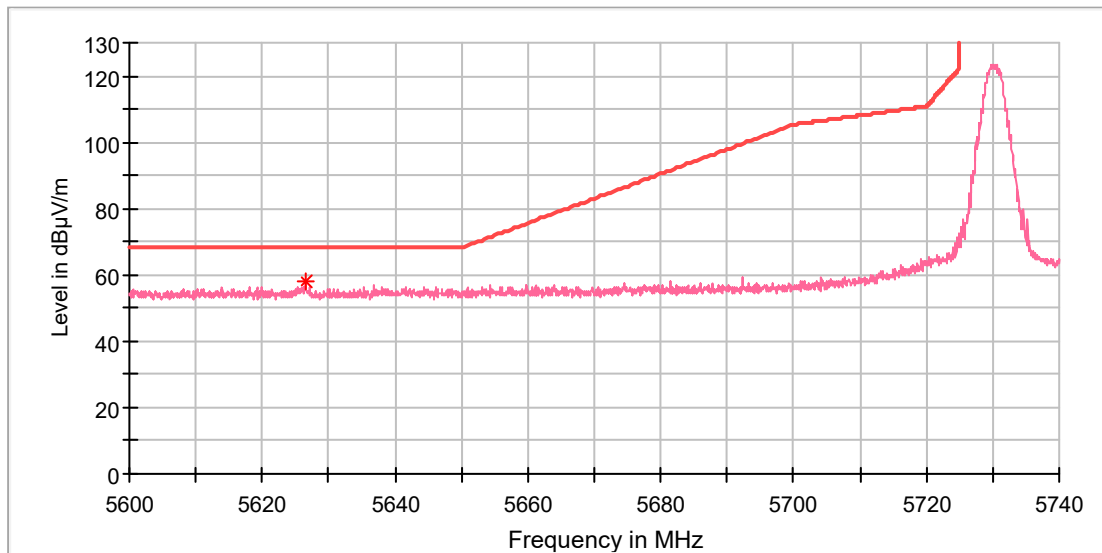

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5626.522222 | 57.77 | 68.20 | 10.43 | 150.0 | V | 203.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5787.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

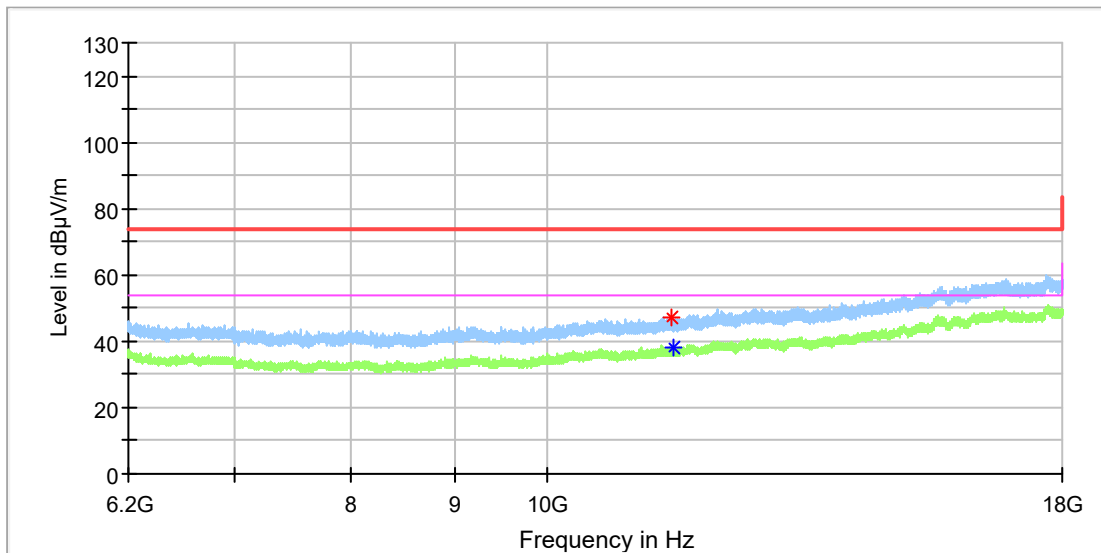

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11535.566667 | 46.88 | --- | 74.00 | 27.12 | 150.0 | H | 248.0 | 13.5 |
| 11559.658333 | --- | 38.14 | 54.00 | 15.86 | 150.0 | H | 73.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5787.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

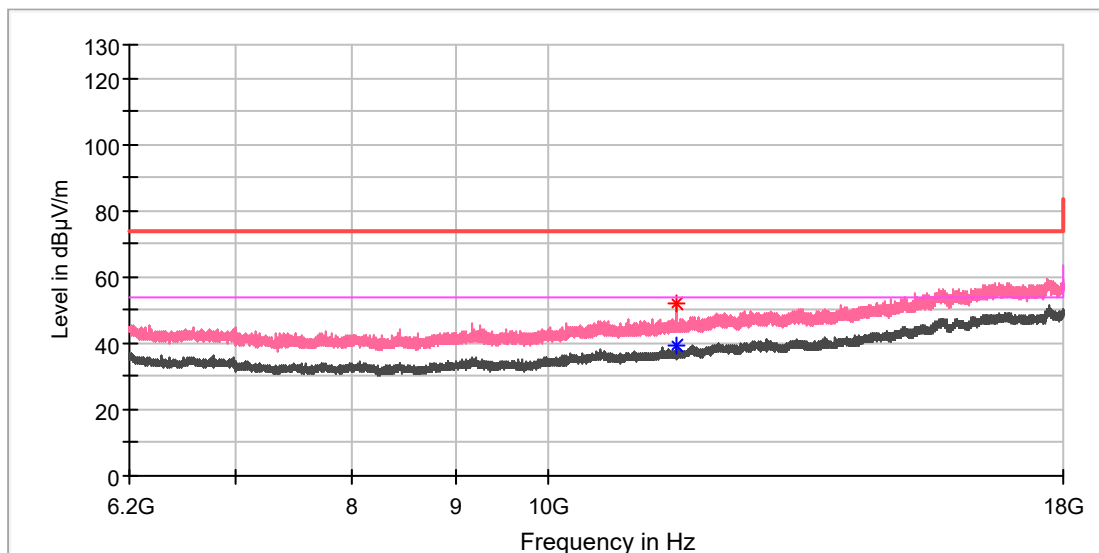

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11573.425000 | 51.92 | --- | 74.00 | 22.08 | 150.0 | V | 49.0 | 13.4 |
| 11573.425000 | --- | 39.46 | 54.00 | 14.54 | 150.0 | V | 49.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5847.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

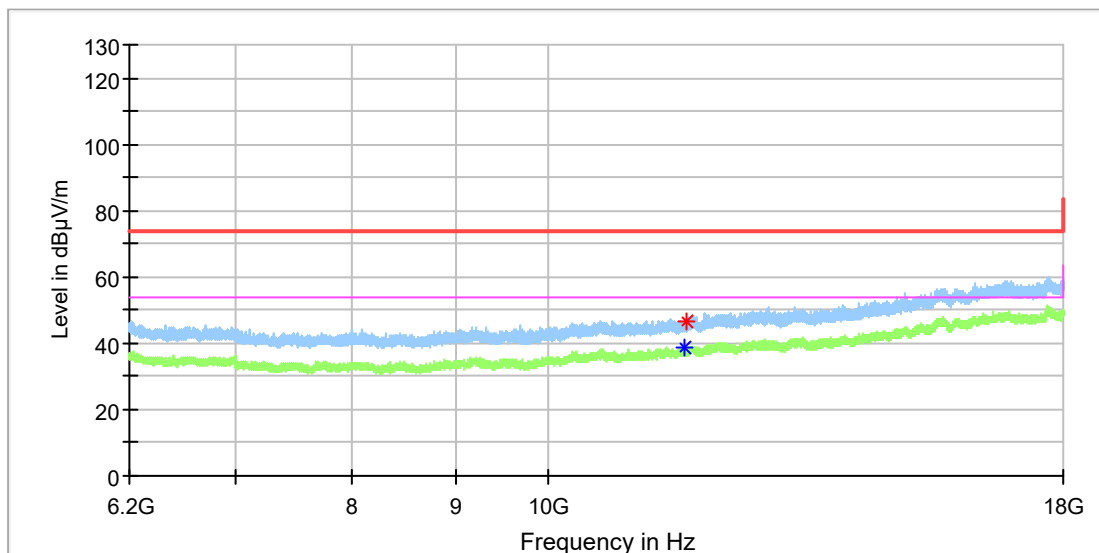

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11693.391667 | --- | 38.50 | 54.00 | 15.50 | 150.0 | H | 225.0 | 13.3 |
| 11696.833333 | 46.79 | --- | 74.00 | 27.21 | 150.0 | H | 75.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_3M CA_5847.2MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

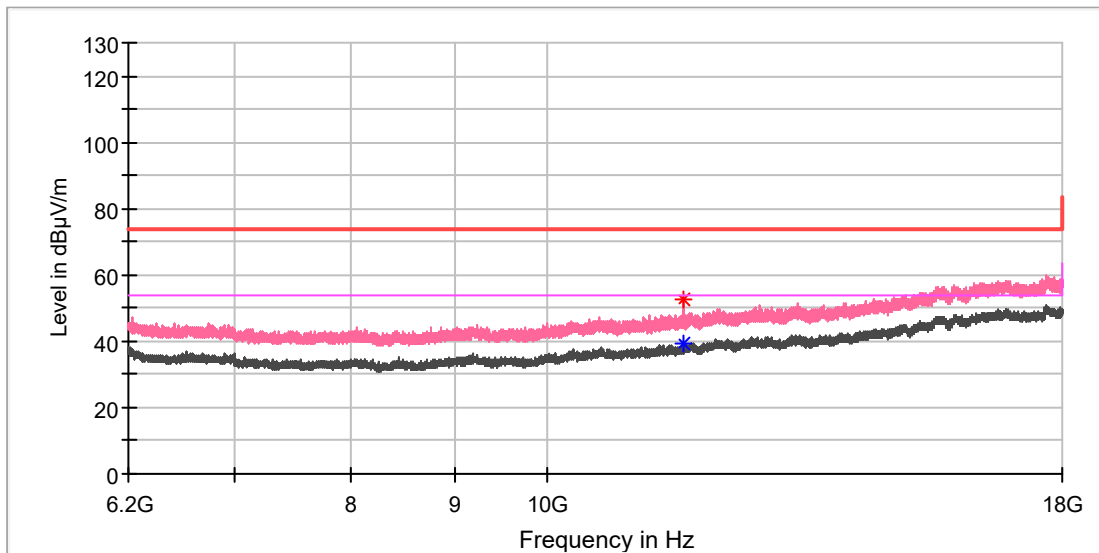

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11694.375000 | --- | 39.31 | 54.00 | 14.69 | 150.0 | V | 338.0 | 13.3 |
| 11694.375000 | 52.63 | --- | 74.00 | 21.37 | 150.0 | V | 338.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | INSPIRE 3 |
| Model: | T740 |
| Test Mode: | SDR 5.8G_3M CA_5847.2MHz |
| Order No/Sample No: | 168371699/A003258804-005 |
| Test Voltage: | Battery |
| Remark: | Temp 22 Humi:55% |
| Test Standard: | FCC 15.407 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

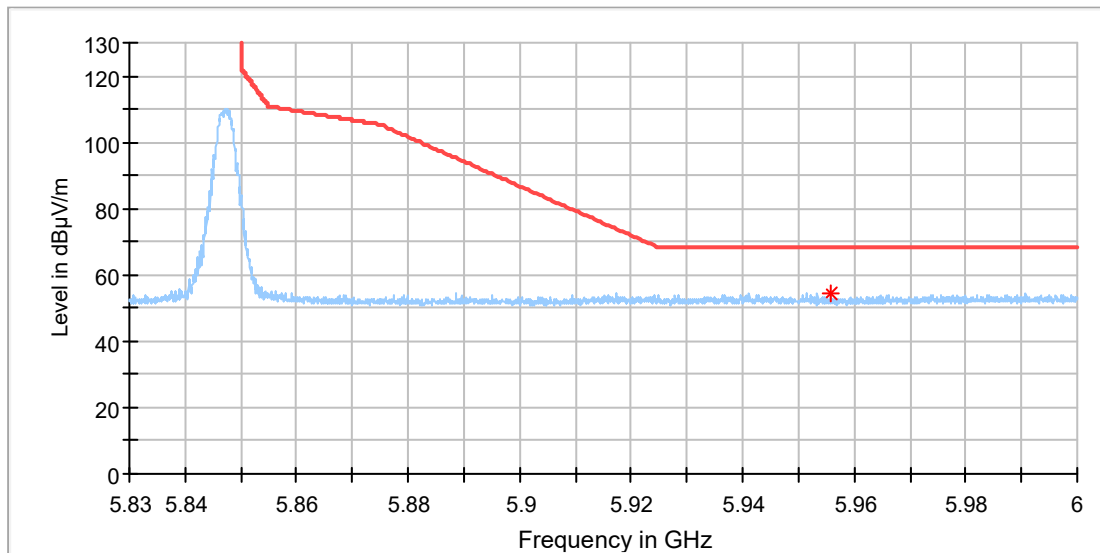

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5955.852778 | 54.13 | 68.20 | 14.07 | 150.0 | H | 233.0 | 14.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | INSPIRE 3 |
| Model: | T740 |
| Test Mode: | SDR 5.8G_3M CA_5847.2MHz |
| Order No/Sample No: | 168371699/A003258804-005 |
| Test Voltage: | Battery |
| Remark: | Temp 22 Humi:55% |
| Test Standard: | FCC 15.407 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

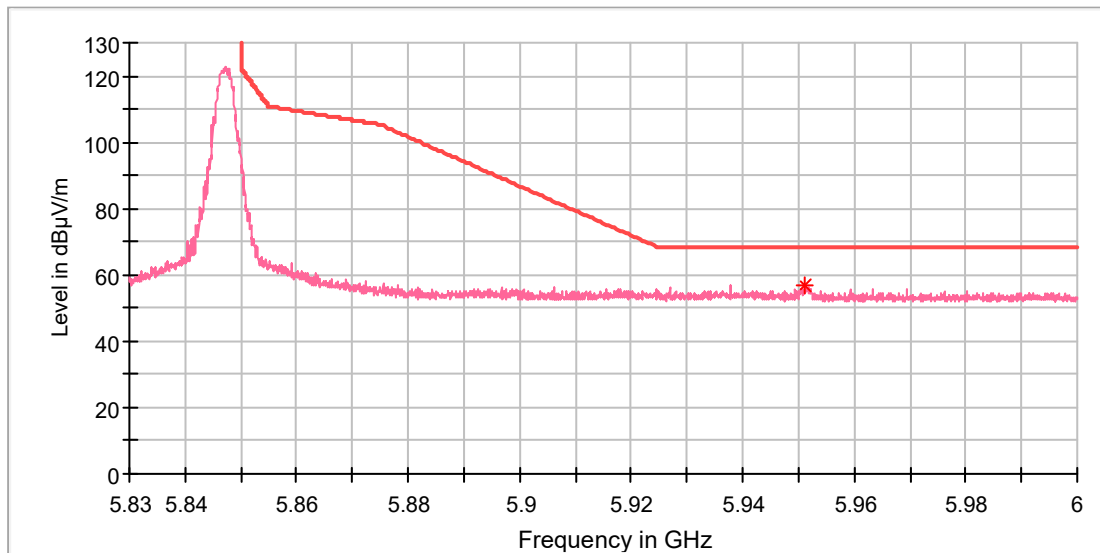

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5951.252778 | 56.67 | 68.20 | 11.53 | 150.0 | V | 218.0 | 14.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5730.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

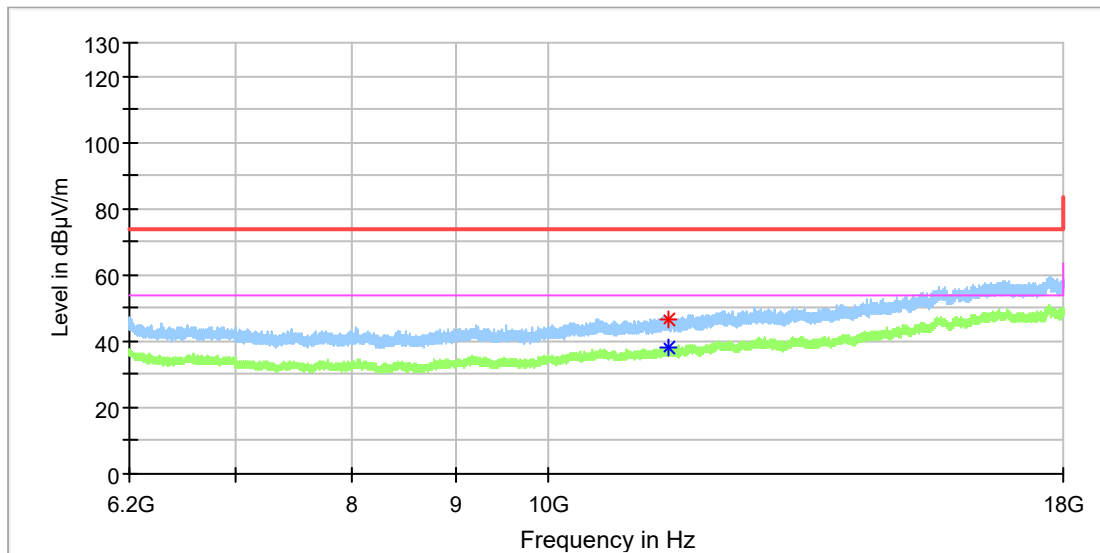

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11465.750000 | 46.42 | --- | 74.00 | 27.58 | 150.0 | H | 52.0 | 13.5 |
| 11471.650000 | --- | 38.21 | 54.00 | 15.79 | 150.0 | H | 115.0 | 13.6 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5730.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

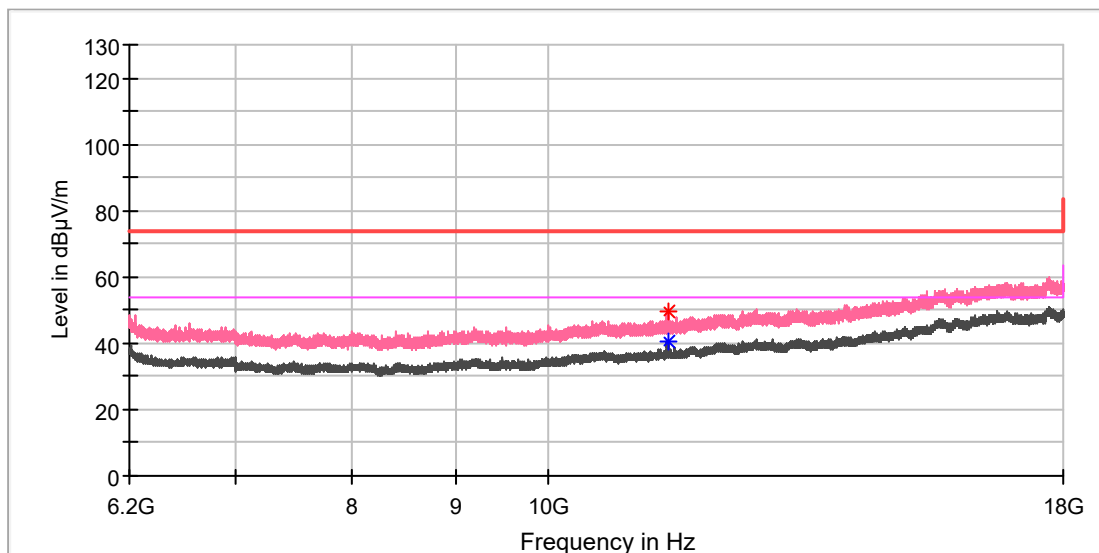

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11461.816667 | 49.28 | --- | 74.00 | 24.72 | 150.0 | V | 47.0 | 13.5 |
| 11464.766667 | --- | 40.77 | 54.00 | 13.23 | 150.0 | V | 60.0 | 13.5 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5730.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

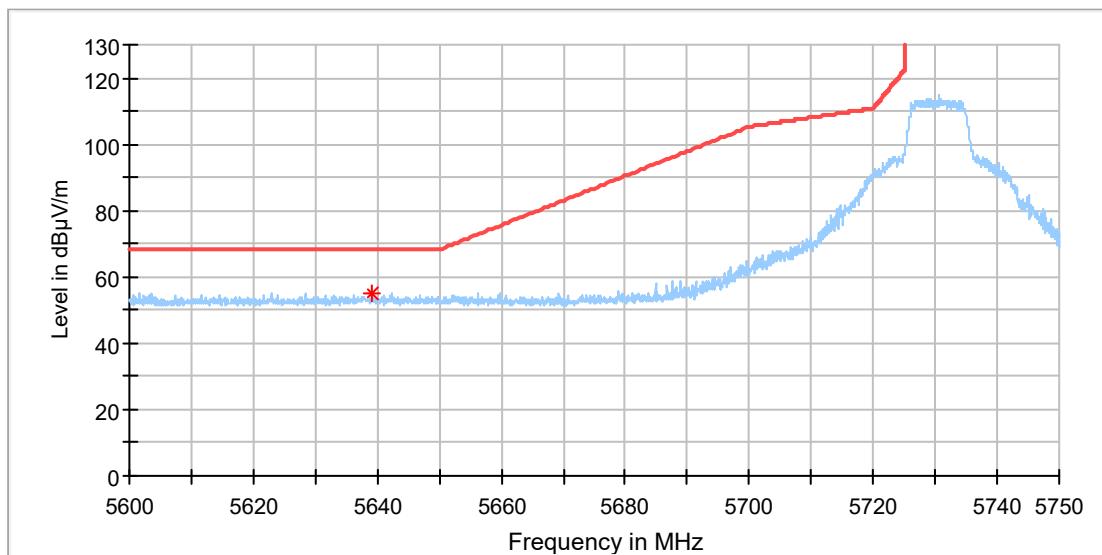

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5639.233333 | 54.81 | 68.20 | 13.39 | 150.0 | H | 240.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5730.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

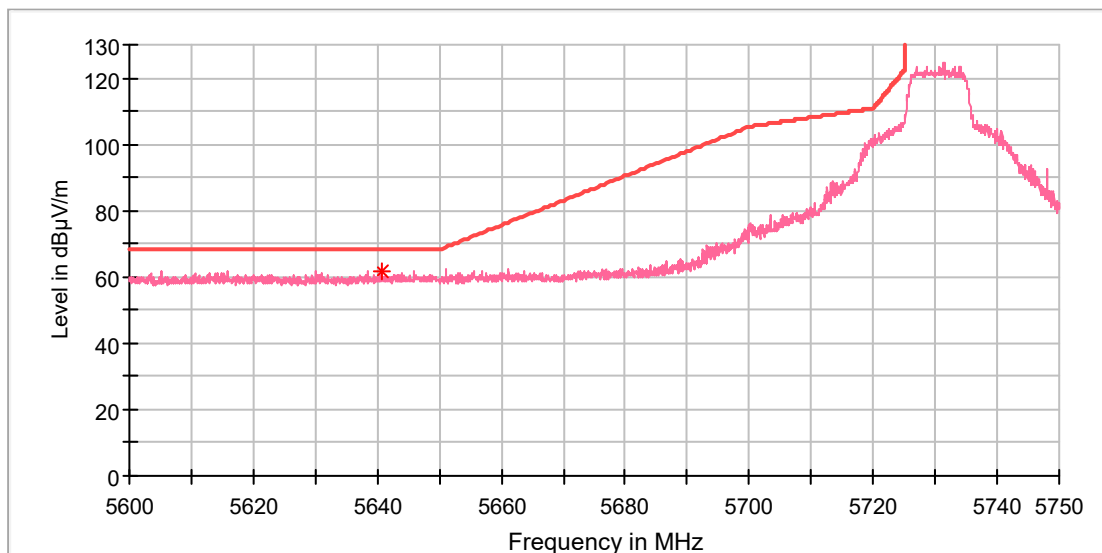

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5640.700000 | 61.49 | 68.20 | 6.71 | 150.0 | V | 207.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

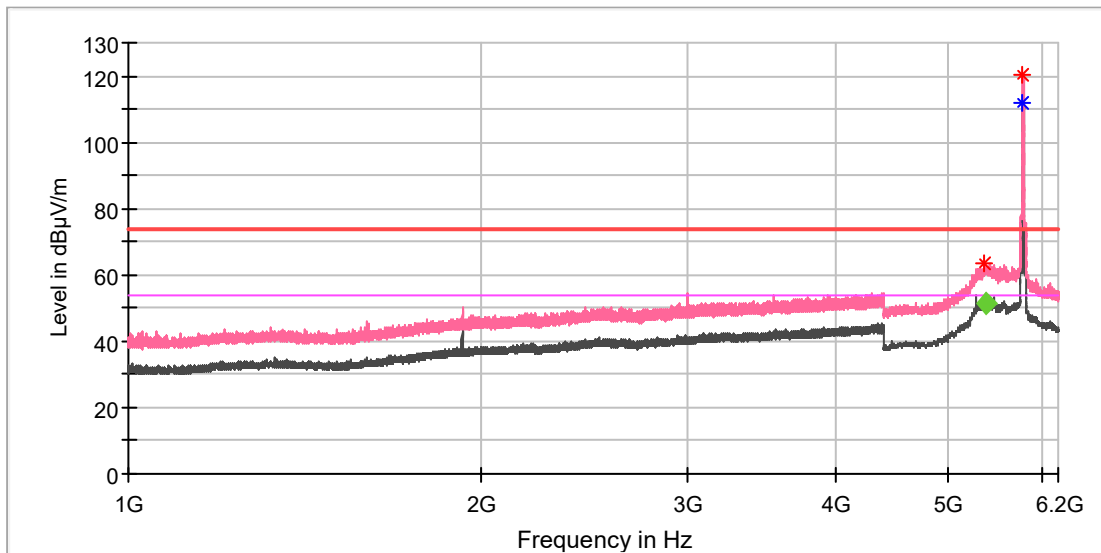

Critical_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5365.000000 | 63.50 | --- | 74.00 | 10.50 | 150.0 | V | 346.0 | 13.3 |
| 5785.500000 | --- | 111.71 | --- | --- | 150.0 | V | 234.0 | 14.0 |
| 5786.000000 | 120.21 | --- | --- | --- | 150.0 | V | 234.0 | 14.0 |

Final_Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5371.416667 | 51.31 | 54.00 | 2.69 | 150.0 | V | 345.0 | 13.3 |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

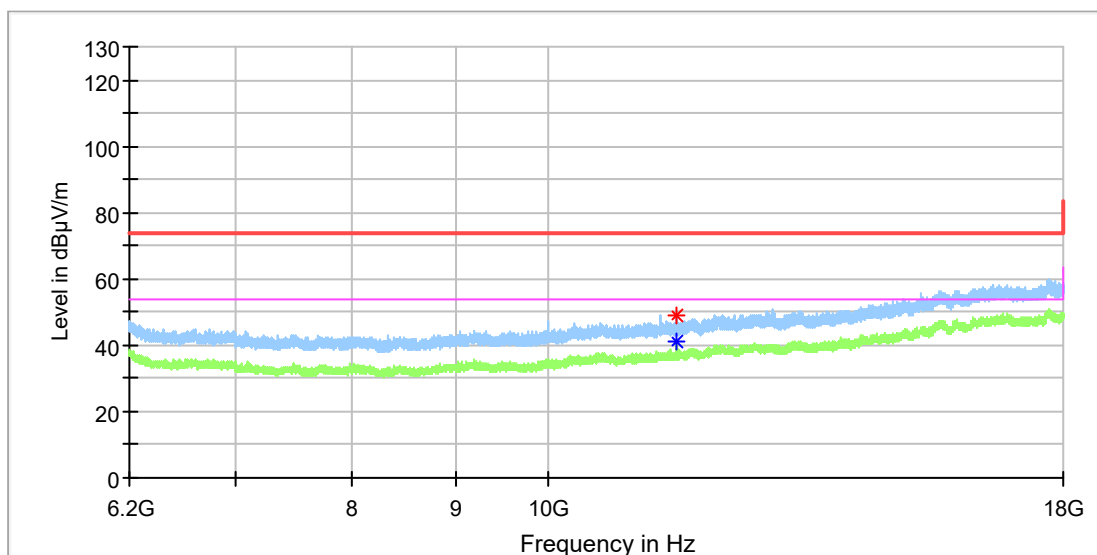

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11574.900000 | --- | 40.92 | 54.00 | 13.08 | 150.0 | H | 164.0 | 13.4 |
| 11578.341667 | 48.91 | --- | 74.00 | 25.09 | 150.0 | H | 164.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

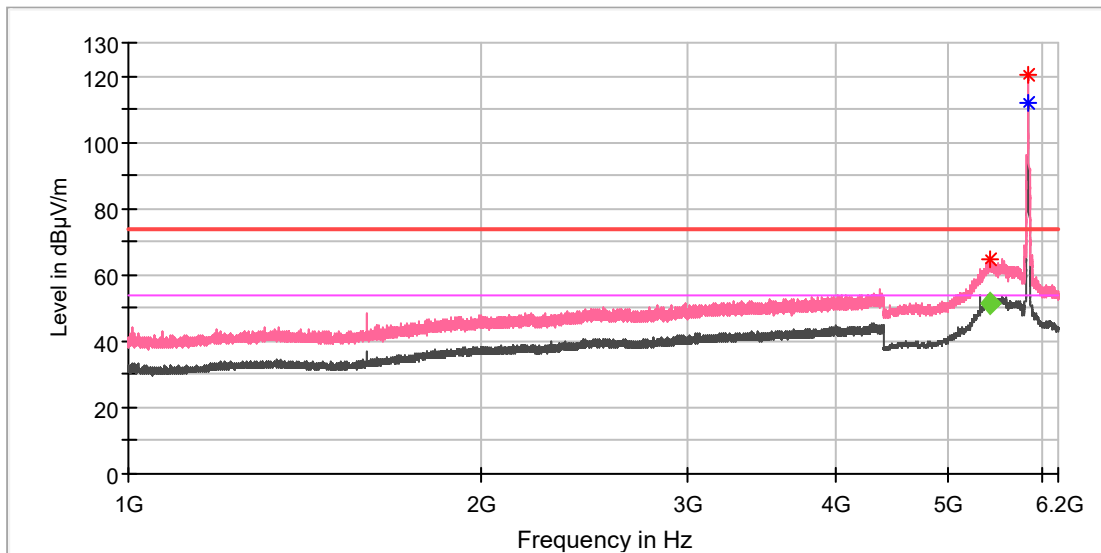

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5429.000000 | 64.55 | --- | 74.00 | 9.45 | 150.0 | V | 334.0 | 13.5 |
| 5847.500000 | --- | 111.77 | --- | --- | 150.0 | V | 217.0 | 14.2 |
| 5848.000000 | 120.22 | --- | --- | --- | 150.0 | V | 209.0 | 14.2 |

Final Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5418.075000 | 51.33 | 54.00 | 2.67 | 151.0 | V | 215.0 | 13.5 |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

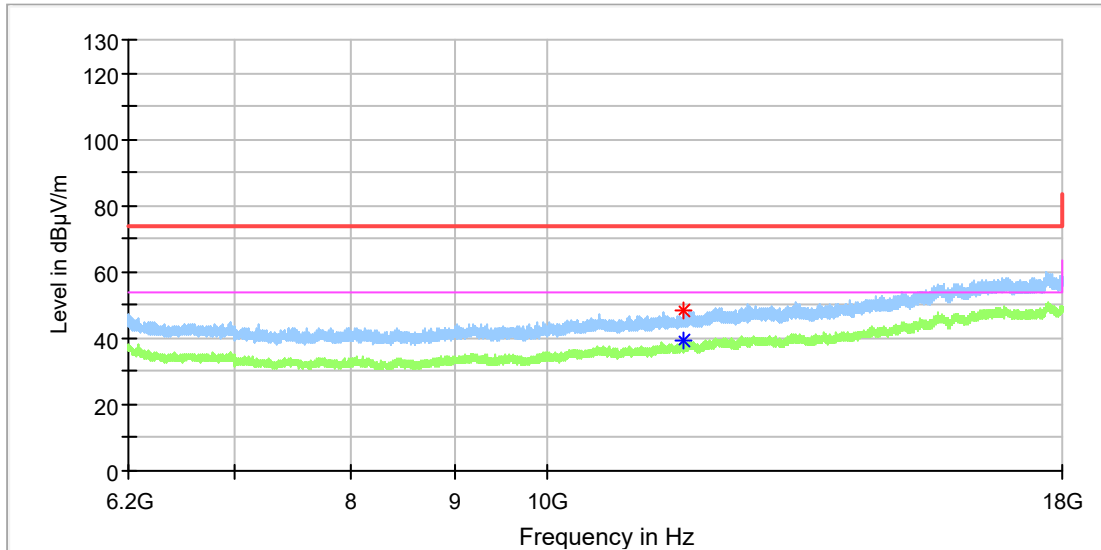

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11682.083333 | 48.11 | --- | 74.00 | 25.89 | 150.0 | H | 278.0 | 13.3 |
| 11688.966667 | --- | 39.54 | 54.00 | 14.46 | 150.0 | H | 352.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | INSPIRE 3 |
| Model: | T740 |
| Test Mode: | SDR 5.8G_10M_5844.5MHz |
| Order No/Sample No: | 168371699/A003258804-005 |
| Test Voltage: | Battery |
| Remark: | Temp 22 Humi:55% |
| Test Standard: | FCC 15.407 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

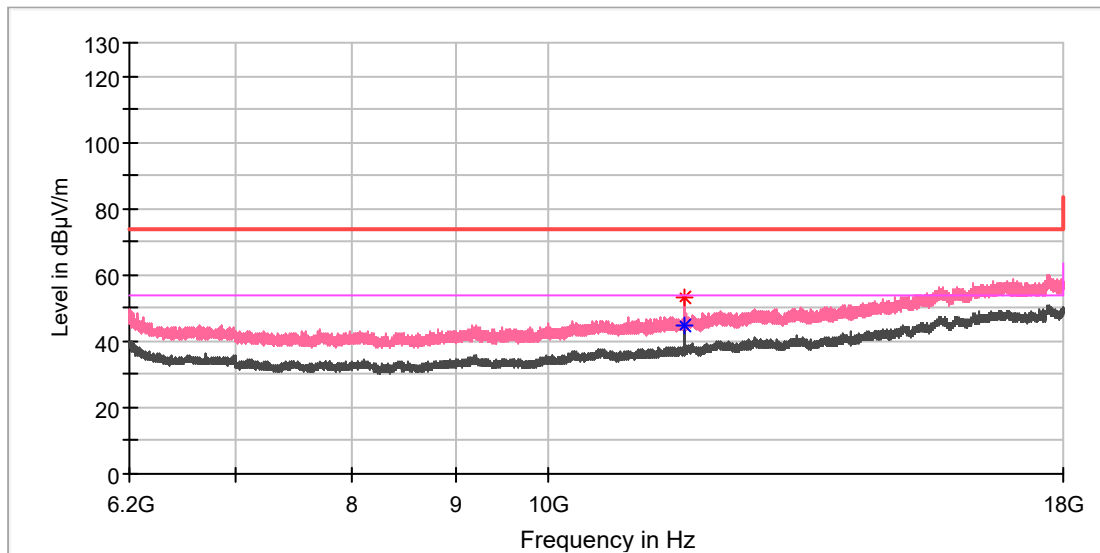

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11685.033333 | 53.08 | --- | 74.00 | 20.92 | 150.0 | V | 6.0 | 13.3 |
| 11688.966667 | --- | 44.63 | 54.00 | 9.37 | 150.0 | V | 65.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

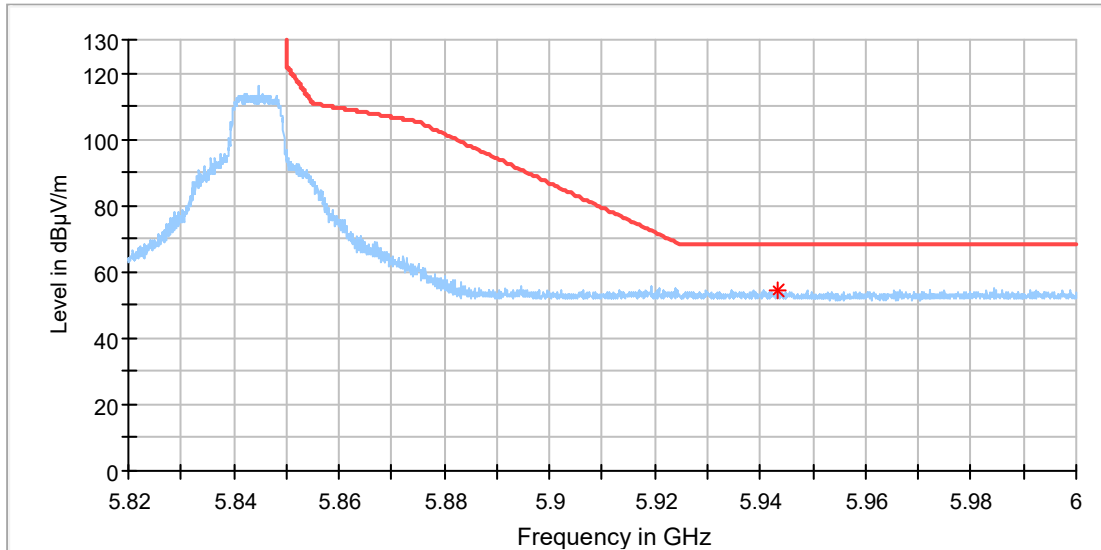

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5943.202778 | 54.71 | 68.20 | 13.49 | 150.0 | H | 314.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_10M_5844.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

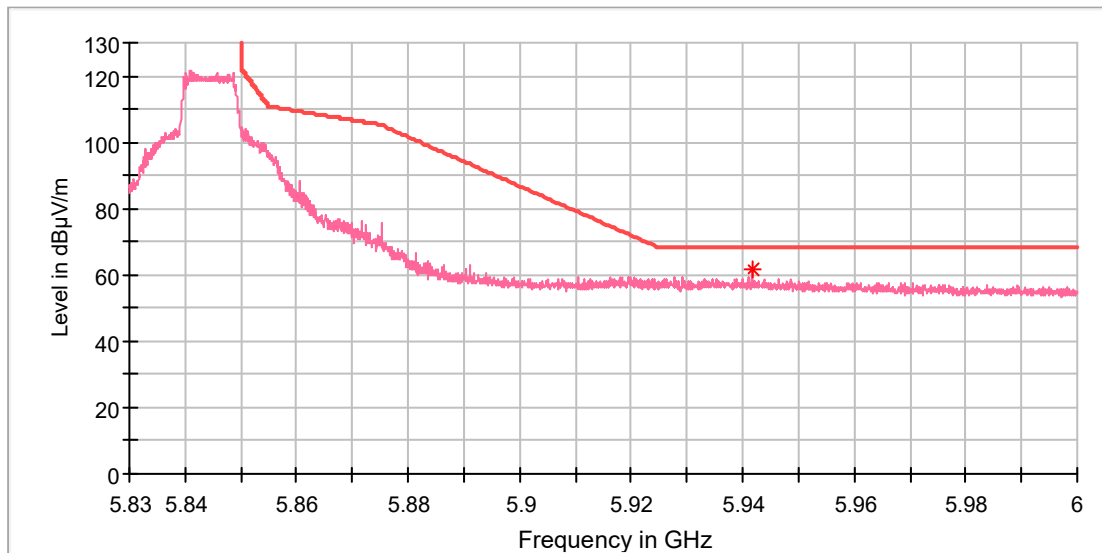

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5941.605556 | 61.66 | 68.20 | 6.54 | 150.0 | V | 207.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5735.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

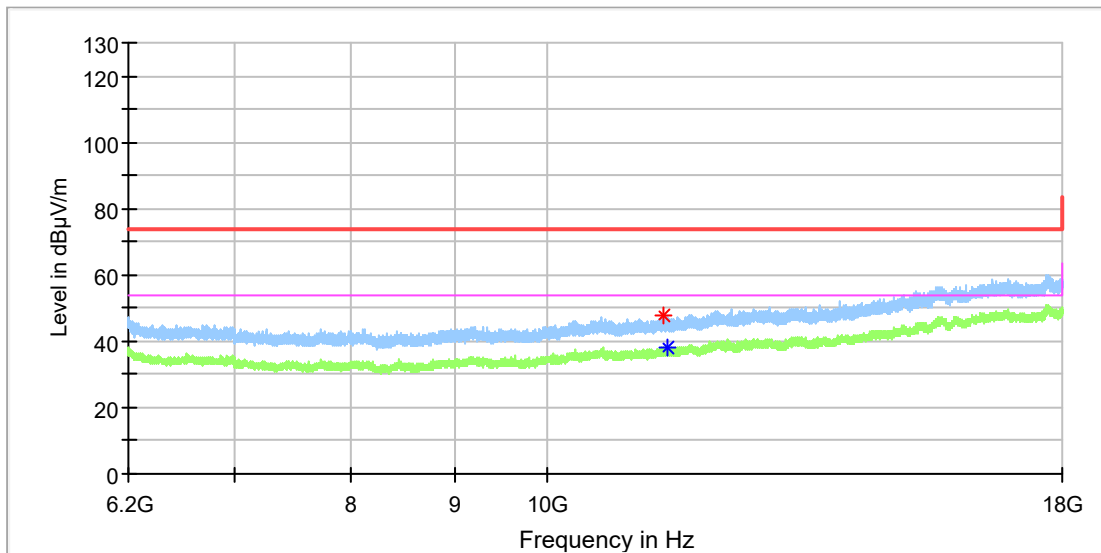

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11428.383333 | 47.93 | --- | 74.00 | 26.07 | 150.0 | H | 306.0 | 13.1 |
| 11474.108333 | --- | 38.24 | 54.00 | 15.76 | 150.0 | H | 18.0 | 13.6 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5735.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

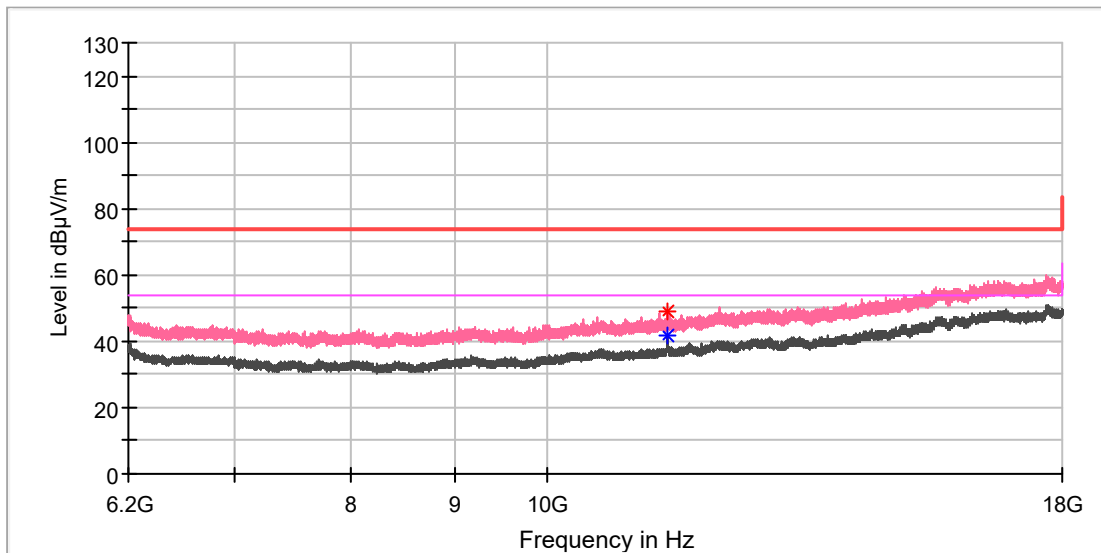

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11464.766667 | 49.25 | --- | 74.00 | 24.75 | 150.0 | V | 57.0 | 13.5 |
| 11471.650000 | --- | 41.54 | 54.00 | 12.46 | 150.0 | V | 57.0 | 13.6 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5735.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

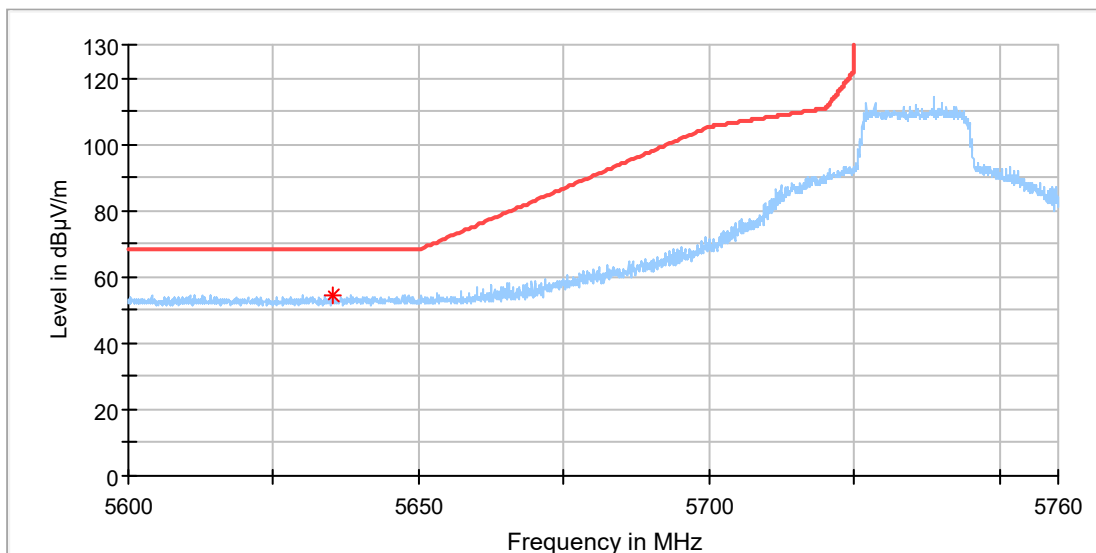

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5635.261111 | 54.44 | 68.20 | 13.76 | 150.0 | H | 142.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5735.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

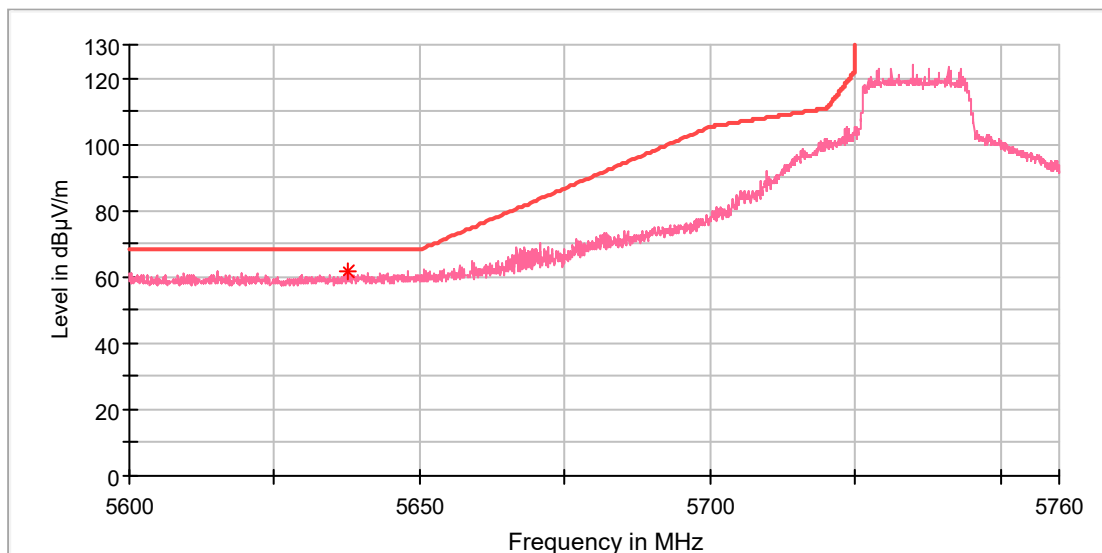

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5637.705556 | 61.40 | 68.20 | 6.80 | 150.0 | V | 216.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

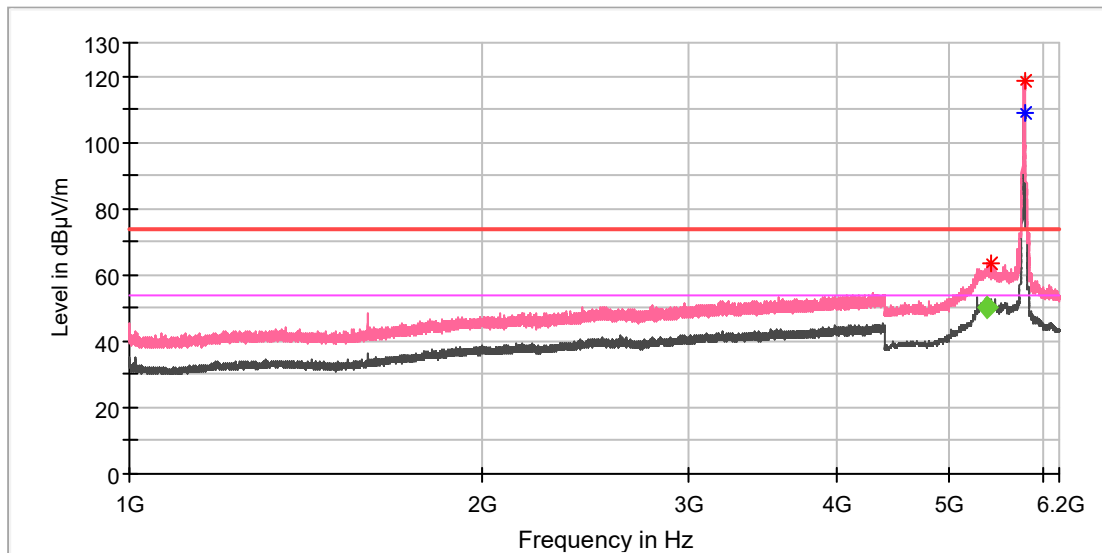

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5413.500000 | 63.61 | --- | 74.00 | 10.39 | 150.0 | V | 211.0 | 13.5 |
| 5793.000000 | --- | 108.98 | --- | --- | 150.0 | V | 203.0 | 14.0 |
| 5796.000000 | 118.46 | --- | --- | --- | 150.0 | V | 218.0 | 14.0 |

Final Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5371.347222 | 50.39 | 54.00 | 3.61 | 148.0 | V | 343.0 | 13.3 |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

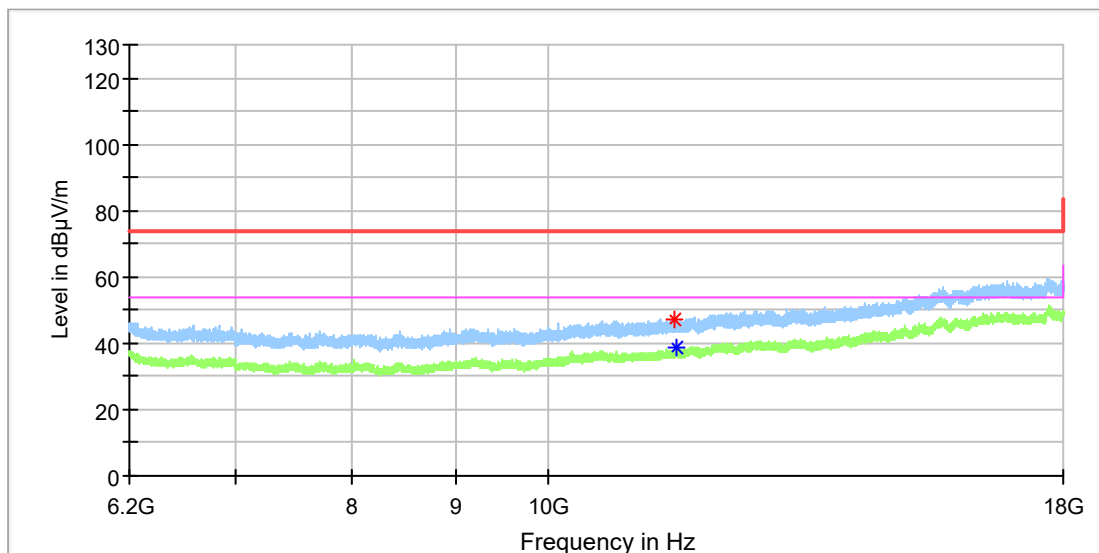

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11557.691667 | 47.22 | --- | 74.00 | 26.78 | 150.0 | H | 122.0 | 13.5 |
| 11572.441667 | --- | 38.91 | 54.00 | 15.09 | 150.0 | H | 158.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

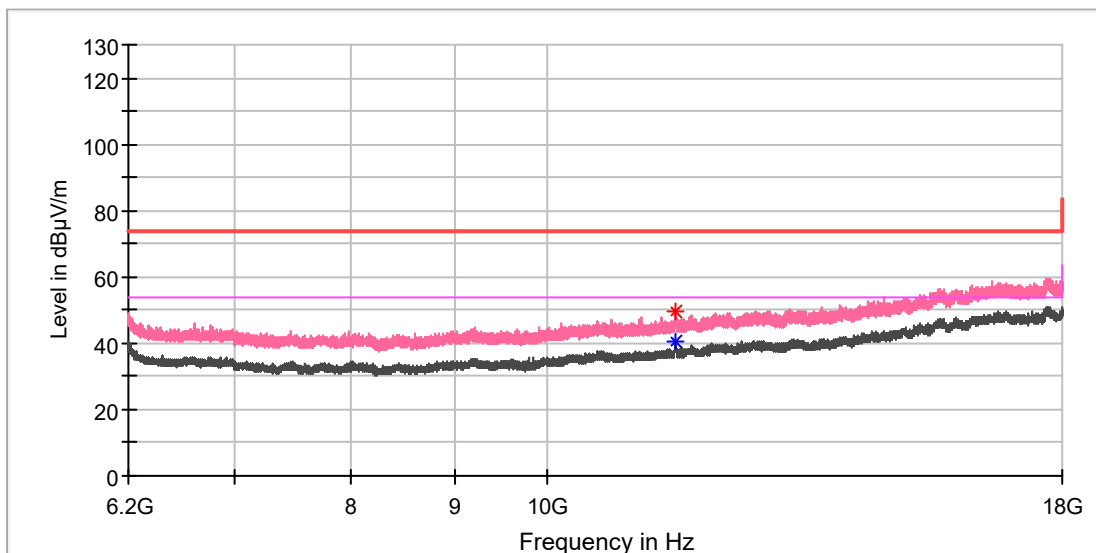

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11576.375000 | 49.81 | --- | 74.00 | 24.19 | 150.0 | V | 63.0 | 13.4 |
| 11578.833333 | --- | 40.73 | 54.00 | 13.27 | 150.0 | V | 21.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5839.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

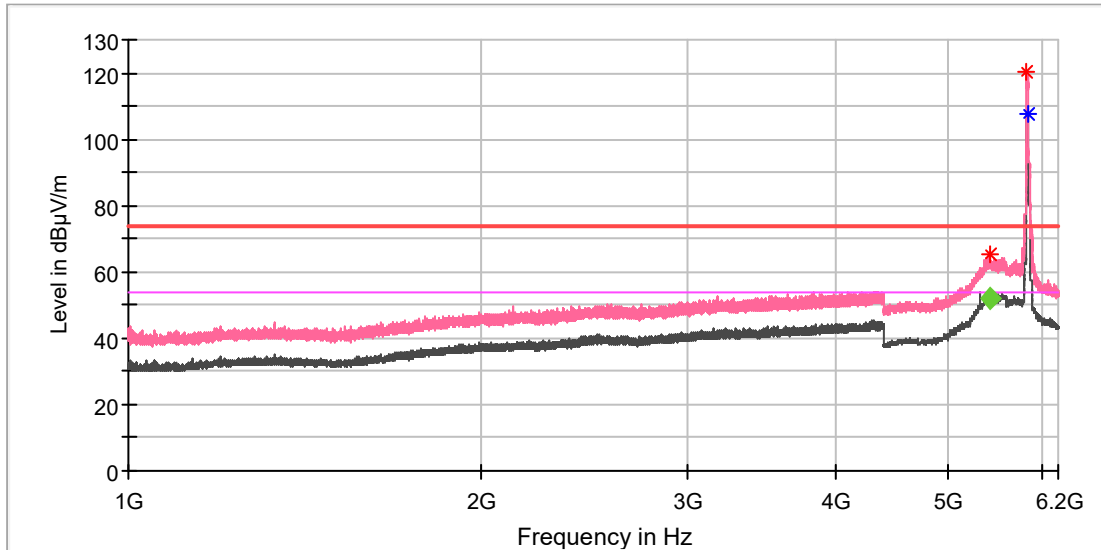

Critical_Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5420.000000 | 65.13 | --- | 74.00 | 8.87 | 150.0 | V | 204.0 | 13.5 |
| 5832.000000 | 120.37 | --- | --- | --- | 150.0 | V | 211.0 | 14.1 |
| 5840.500000 | --- | 107.78 | --- | --- | 150.0 | V | 211.0 | 14.1 |

Final_Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5423.511111 | 51.96 | 54.00 | 2.04 | 148.0 | V | 329.0 | 13.5 |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5839.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

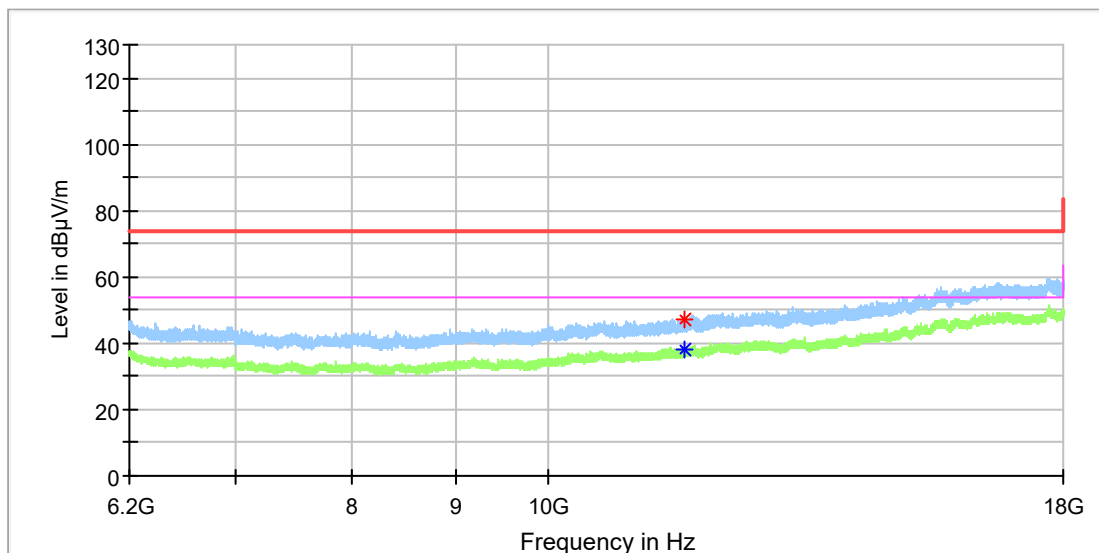

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11669.300000 | 46.93 | --- | 74.00 | 27.07 | 150.0 | H | 19.0 | 13.3 |
| 11675.200000 | --- | 38.39 | 54.00 | 15.61 | 150.0 | H | 140.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5839.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

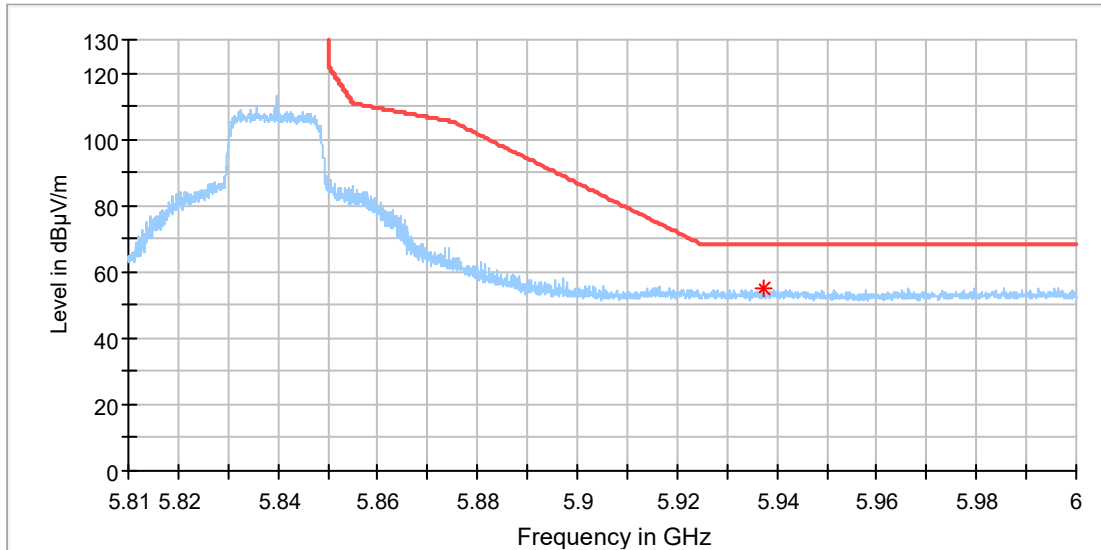

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5937.388889 | 55.19 | 68.20 | 13.01 | 150.0 | H | 158.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_20M_5839.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

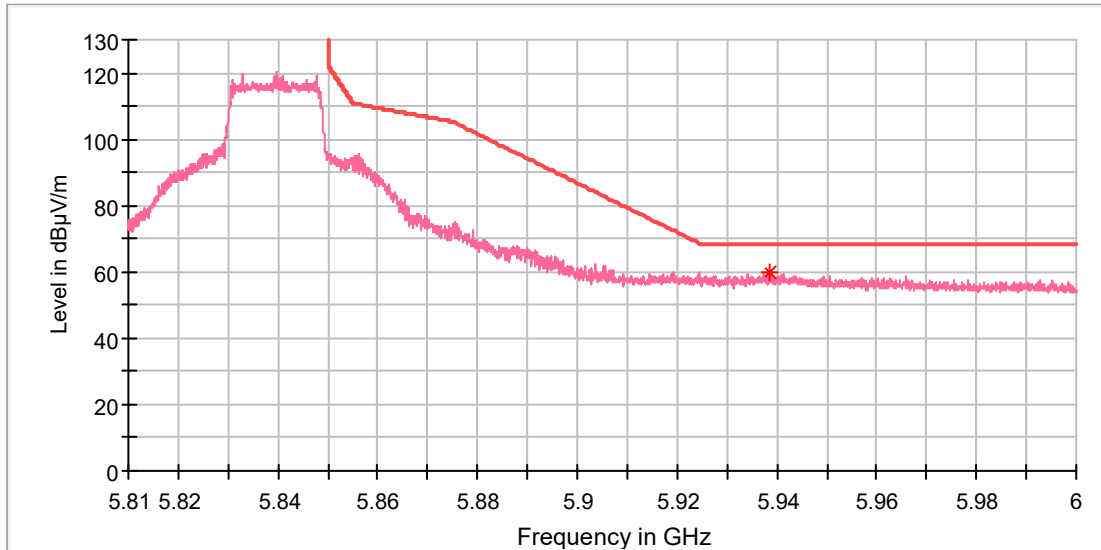

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5938.602778 | 59.85 | 68.20 | 8.35 | 150.0 | V | 215.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5745.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

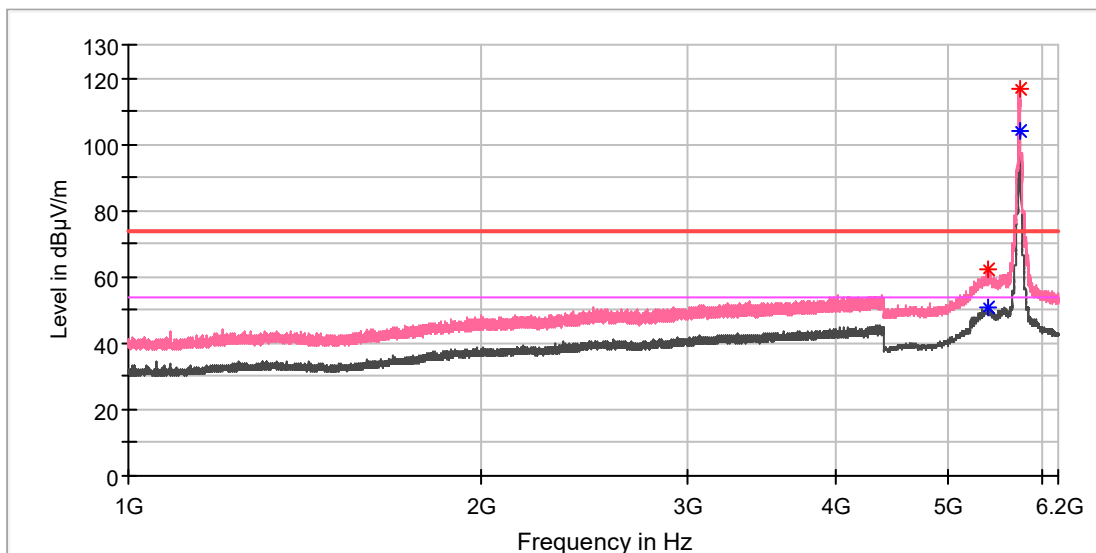

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5407.000000 | --- | 50.83 | 54.00 | 3.17 | 150.0 | V | 213.0 | 13.5 |
| 5412.000000 | 62.09 | --- | 74.00 | 11.91 | 150.0 | V | 213.0 | 13.5 |
| 5743.500000 | --- | 103.83 | --- | --- | 150.0 | V | 213.0 | 13.9 |
| 5745.500000 | 116.86 | --- | --- | --- | 150.0 | V | 234.0 | 13.9 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5745.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

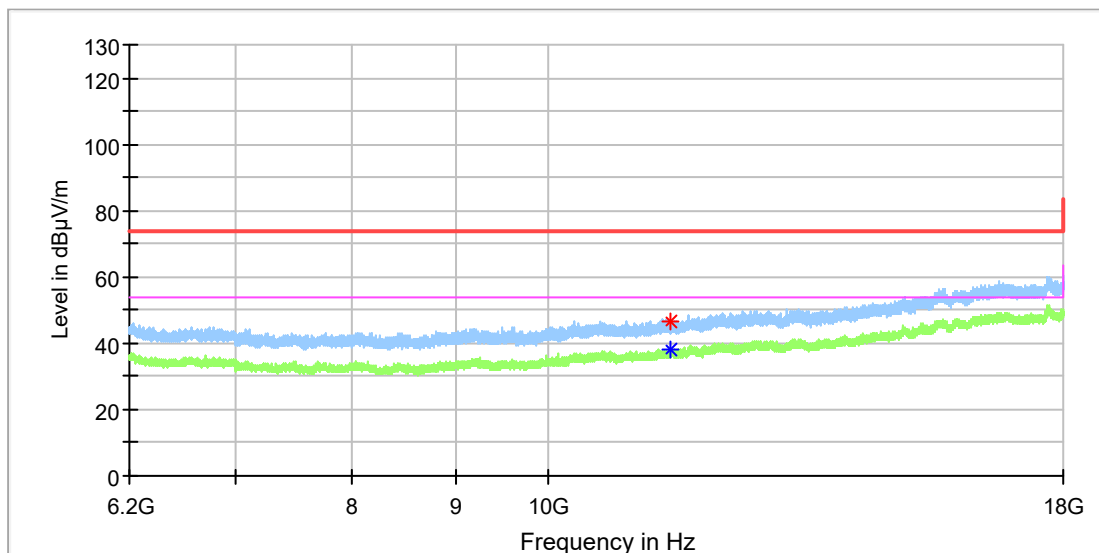

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11484.433333 | 46.61 | --- | 74.00 | 27.39 | 150.0 | H | 284.0 | 13.7 |
| 11501.150000 | --- | 38.22 | 54.00 | 15.78 | 150.0 | H | 122.0 | 13.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5745.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

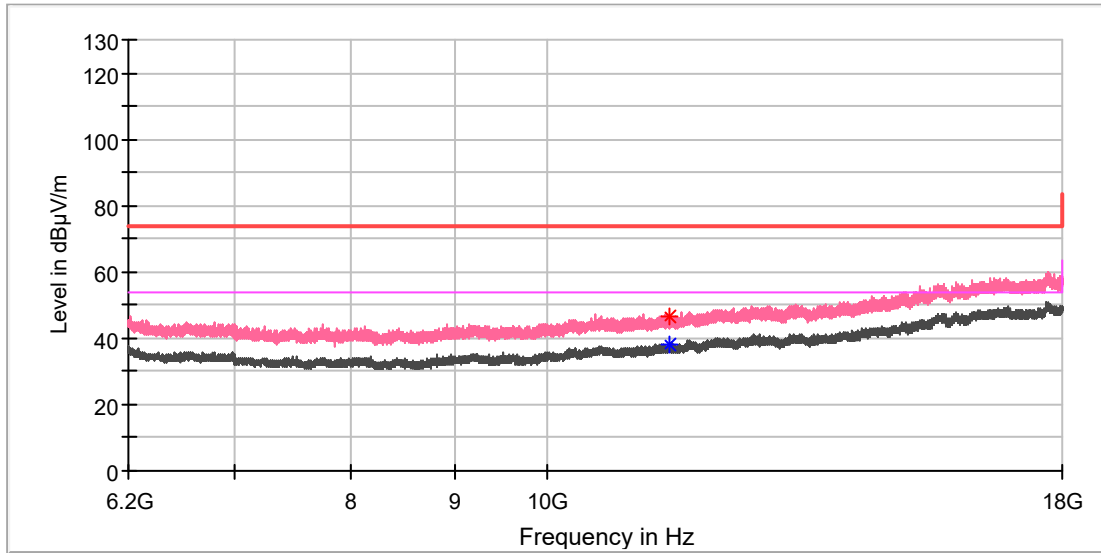

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11491.808333 | --- | 37.85 | 54.00 | 16.15 | 150.0 | V | 340.0 | 13.7 |
| 11508.033333 | 46.61 | --- | 74.00 | 27.39 | 150.0 | V | 340.0 | 13.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5745.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

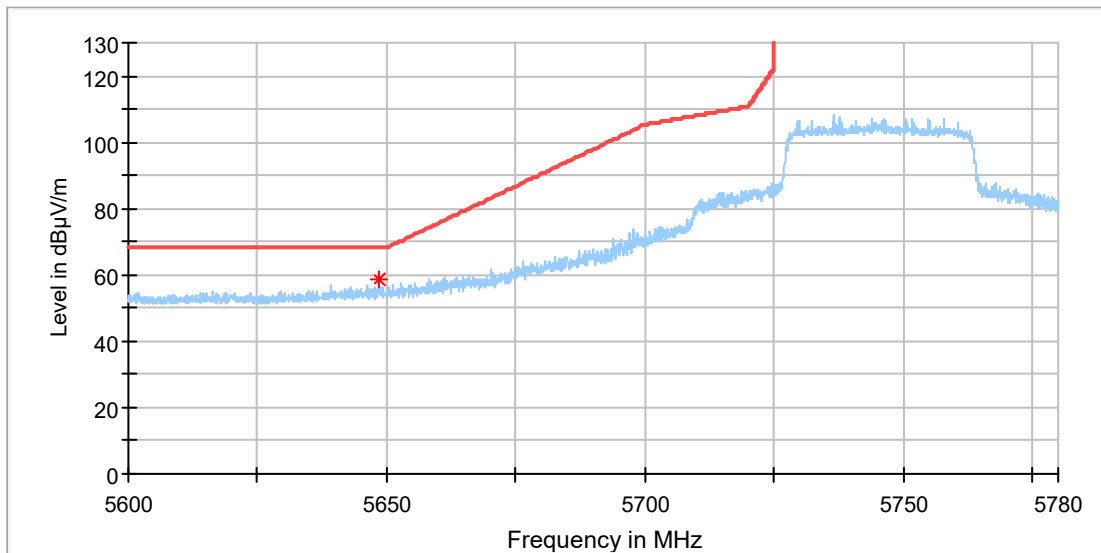

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5648.522222 | 58.56 | 68.20 | 9.64 | 150.0 | H | 154.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5745.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

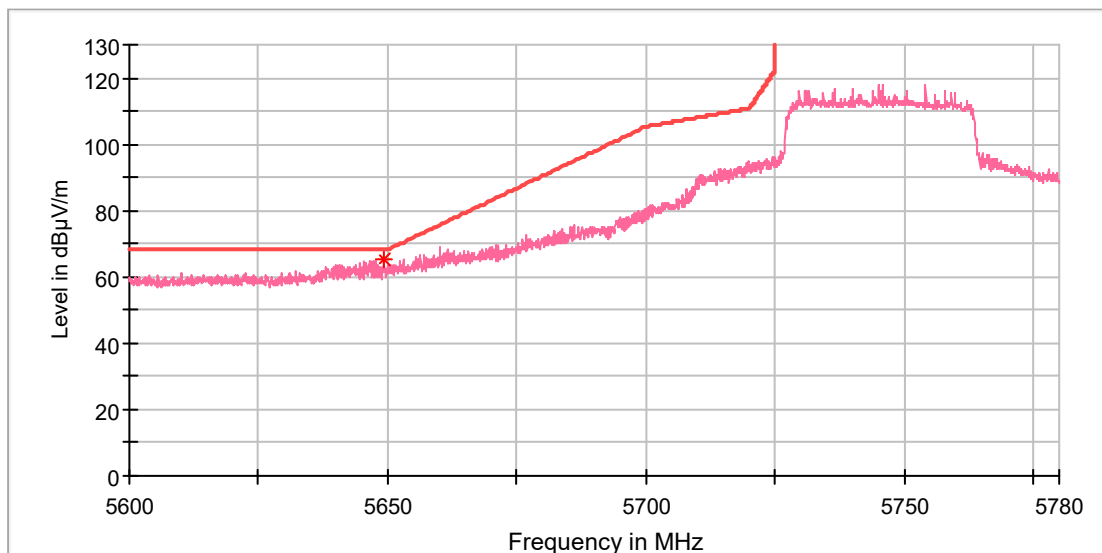

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5649.255556 | 65.09 | 68.20 | 3.12 | 150.0 | V | 199.0 | 13.8 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

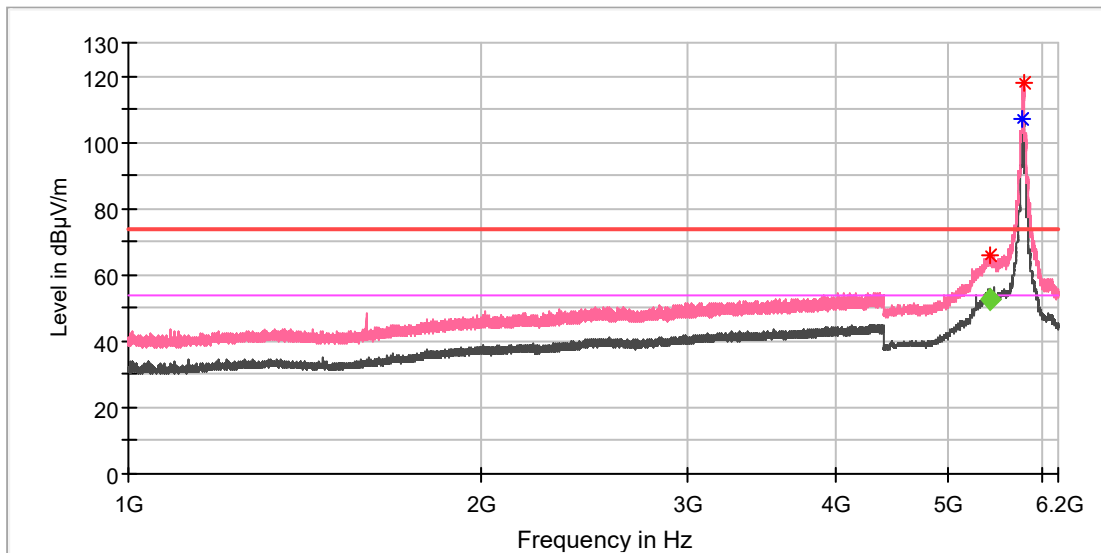

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5413.500000 | 66.02 | --- | 74.00 | 7.98 | 150.0 | V | 211.0 | 13.5 |
| 5775.500000 | --- | 106.92 | --- | --- | 150.0 | V | 316.0 | 14.0 |
| 5797.500000 | 118.02 | --- | --- | --- | 150.0 | V | 330.0 | 14.0 |

Final Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5423.266667 | 51.83 | 54.00 | 2.17 | 148.0 | V | 209.0 | 13.5 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | INSPIRE 3 |
| Model: | T740 |
| Test Mode: | SDR 5.8G_40M_5787.5MHz |
| Order No/Sample No: | 168371699/A003258804-005 |
| Test Voltage: | Battery |
| Remark: | Temp 22 Humi:55% |
| Test Standard: | FCC 15.407 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

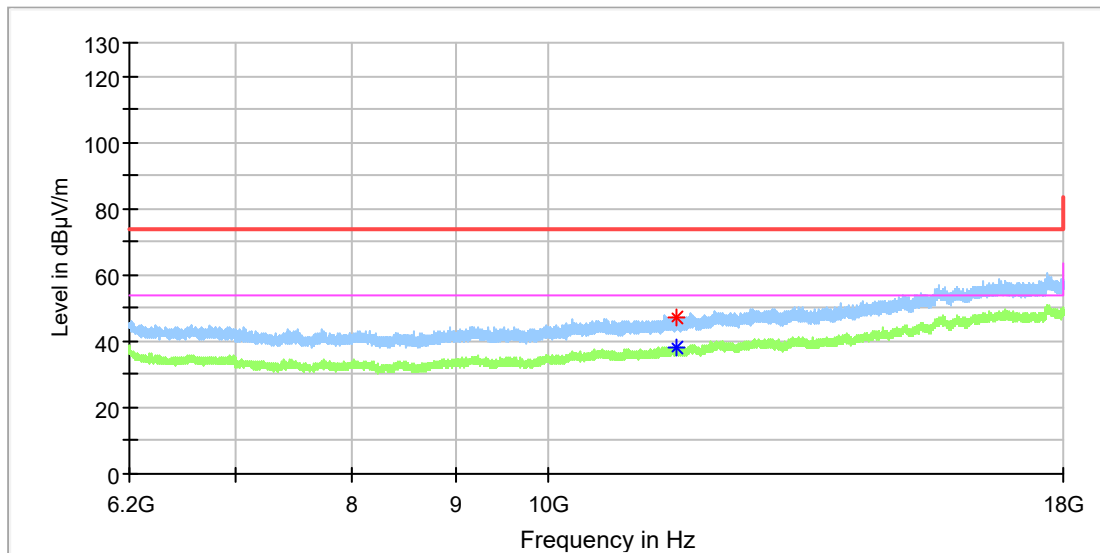

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11567.033333 | 47.24 | --- | 74.00 | 26.76 | 150.0 | H | 304.0 | 13.4 |
| 11577.850000 | --- | 38.05 | 54.00 | 15.95 | 150.0 | H | 184.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5787.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

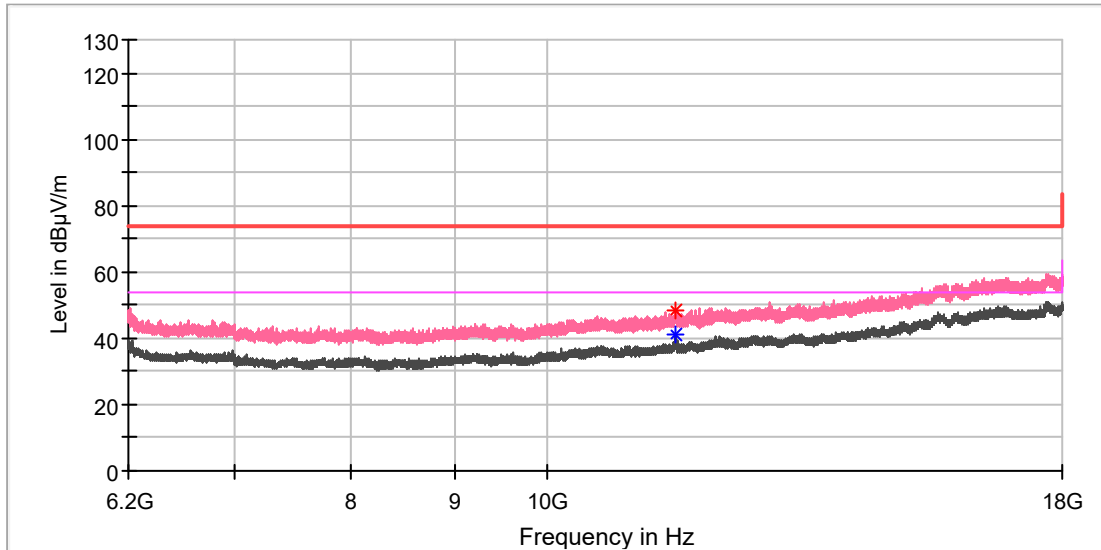

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11577.850000 | 48.42 | --- | 74.00 | 25.58 | 150.0 | V | 50.0 | 13.4 |
| 11582.275000 | --- | 40.98 | 54.00 | 13.02 | 150.0 | V | 50.0 | 13.4 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5829.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

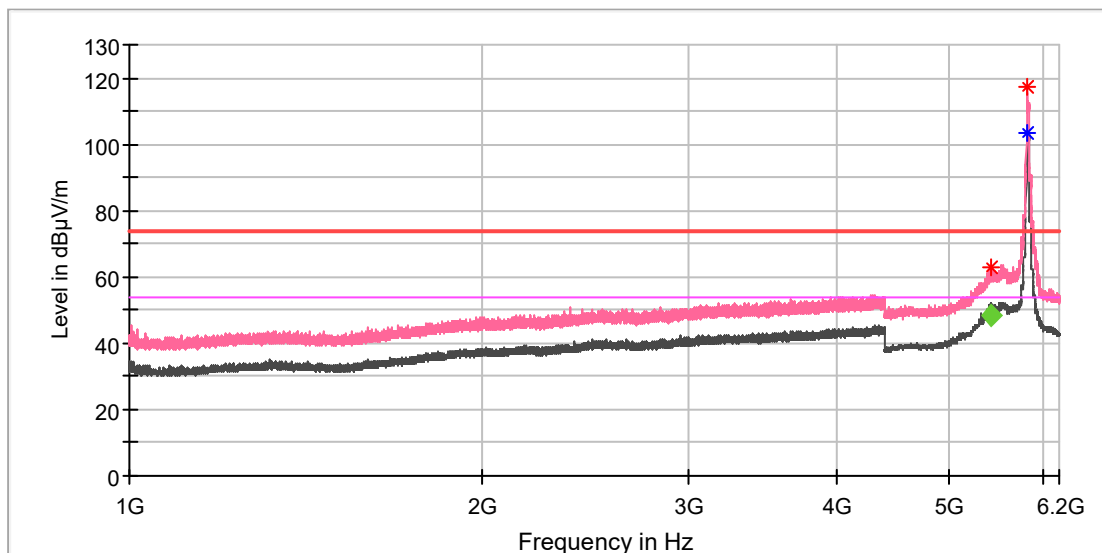

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5413.500000 | 62.63 | --- | 74.00 | 11.37 | 150.0 | V | 210.0 | 13.5 |
| 5820.000000 | 117.29 | --- | --- | --- | 150.0 | V | 226.0 | 14.1 |
| 5826.000000 | --- | 103.15 | --- | --- | 150.0 | V | 210.0 | 14.1 |

Final Result

| Frequency (MHz) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5418.216667 | 48.49 | 54.00 | 5.51 | 155.0 | V | 208.0 | 13.5 |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5829.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

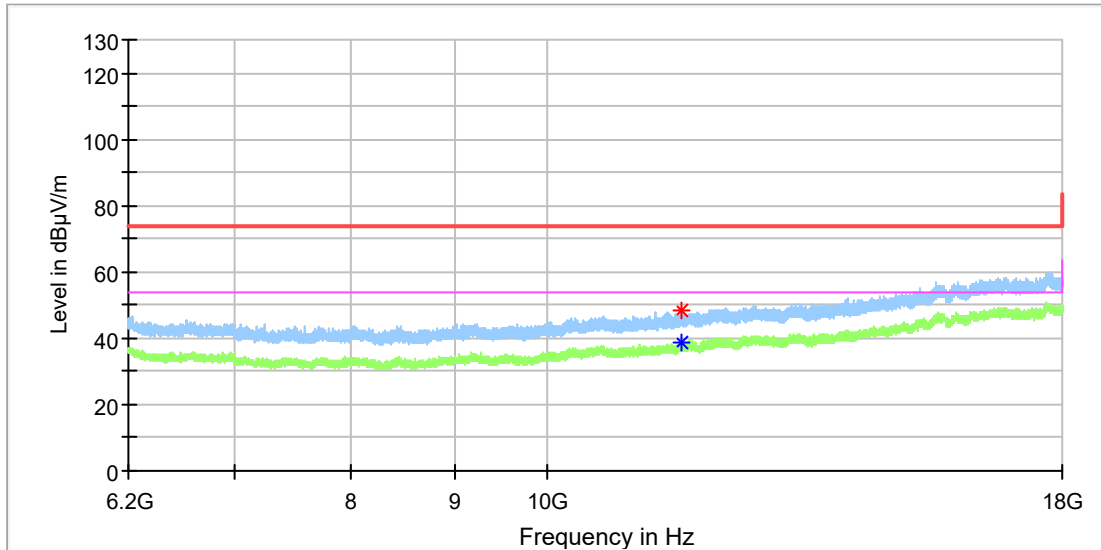

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 11650.125000 | --- | 38.50 | 54.00 | 15.50 | 150.0 | H | 325.0 | 13.3 |
| 11658.483333 | 48.09 | --- | 74.00 | 25.91 | 150.0 | H | 0.0 | 13.3 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5829.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

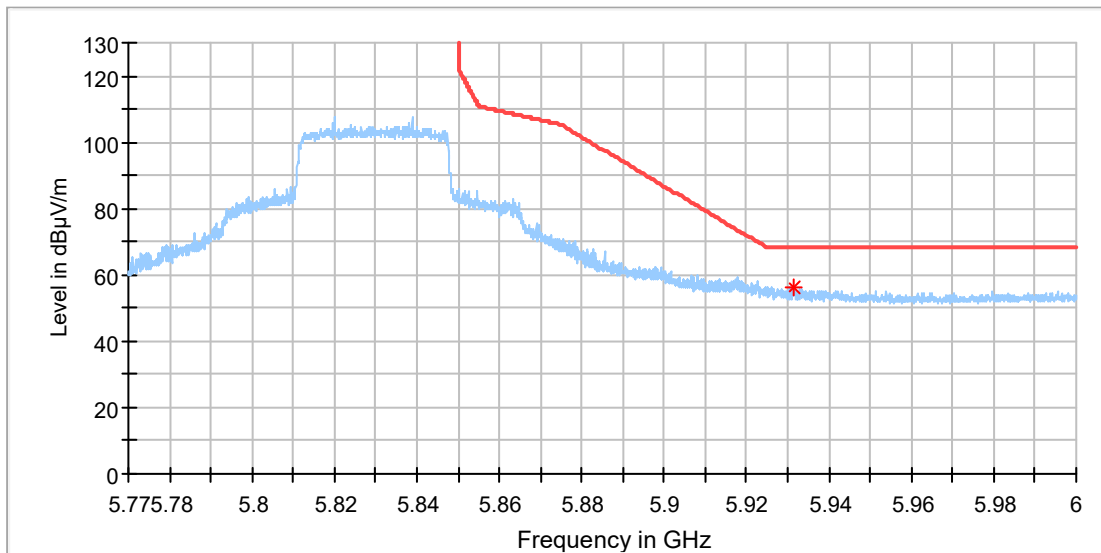

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5931.319445 | 56.12 | 68.20 | 12.08 | 150.0 | H | 31.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |

EUT Information

EUT Name: INSPIRE 3
 Model: T740
 Test Mode: SDR 5.8G_40M_5829.5MHz
 Order No/Sample No: 168371699/A003258804-005
 Test Voltage: Battery
 Remark: Temp 22 Humi:55%
 Test Standard: FCC 15.407
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

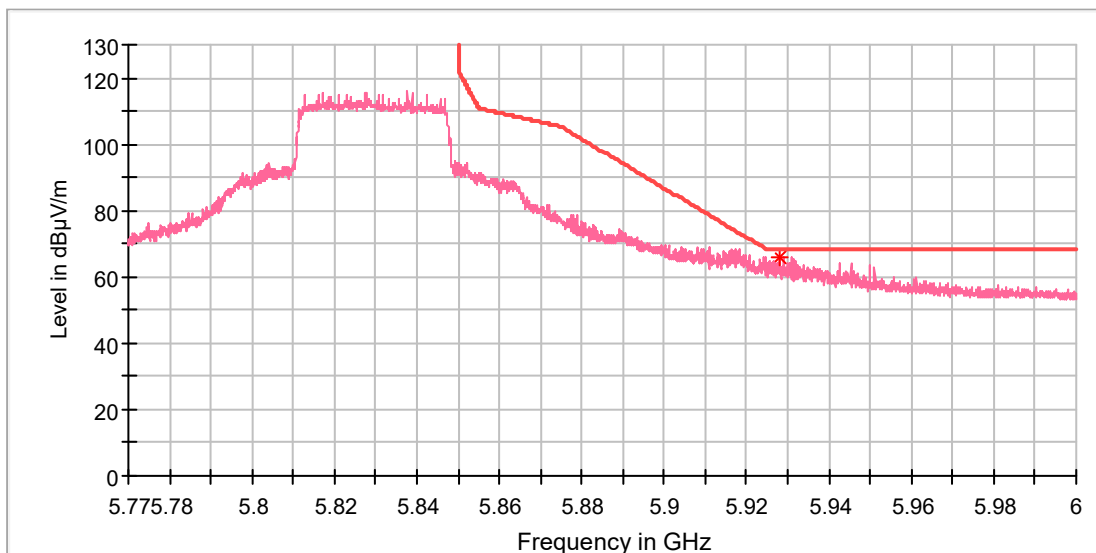

Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 5927.933333 | 66.17 | 68.20 | 2.03 | 150.0 | V | 228.0 | 14.7 |

Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| --- | --- | --- | --- | --- | | --- | --- |