



# 11.5. APPENDIX E: BAND EDGE MEASUREMENTS

### 11.5.1. Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
	Ant0	Low	2403.5	16.89	-36.05	≤-13.11	PASS
	Ant1	Low	2403.5	16.92	-35.99	≤-13.08	PASS
	Ant0	Low	2404.69	17.68	-36.54	≤-12.32	PASS
SRD 1.4M	Ant1	Low	2404.69	17.35	-37.01	≤-12.65	PASS
	Ant0	High	2467.12	18.76	-35.56	≤-11.24	PASS
	Ant1	High	2467.12	19.09	-35.64	≤-10.91	PASS
	Ant0	High	2469.12	17.32	-35.63	≤-12.68	PASS
	Ant1	High	2469.12	17.48	-34.97	≤-12.52	PASS
	Ant0	Low	2405.5	15.50	-36.3	≤-14.5	PASS
	Ant1	Low	2405.5	15.93	-36.77	≤-14.07	PASS
	Ant0	Low	2407.88	17.95	-34.12	≤-12.05	PASS
SRD 3M	Ant1	Low	2407.88	17.59	-36.16	≤-12.41	PASS
0112 0111	Ant0	High	2465.2	18.08	-35.26	≤-11.92	PASS
	Ant1	High	2465.2	18.40	-35.37	≤-11.6	PASS
	Ant0	High	2468.2	16.25	-35.32	≤-13.75	PASS
	Ant1	High	2468.2	16.77	-35.72	≤-13.23	PASS
	Ant0	Low	2404.5	12.09	-29.2	≤-17.91	PASS
	Ant1	Low	2404.5	12.41	-29.09	≤-17.59	PASS
	Ant0	Low	2408.26	13.72	-36.12	≤-16.28	PASS
SRD 5M	Ant1	Low	2408.26	14.42	-36.35	≤-15.58	PASS
	Ant0	High	2467.74	12.94	-35.05	≤-17.06	PASS
	Ant1	High	2467.74	13.82	-35.4	≤-16.18	PASS
	Ant0	High	2469.5	11.69	-34.86	≤-18.31	PASS
	Ant1	High	2469.5	11.94	-35.3	≤-18.06	PASS
	Ant0	Low	2407.5	8.35	-29.4	≤-21.65	PASS
	Ant1	Low	2407.5	9.14	-32.68	≤-20.86	PASS
-	Ant0	Low	2409.5	8.70	-31.42	≤-21.3	PASS
SRD 10M	Ant1	Low	2409.5	9.95	-32.67 -45.91	≤-20.05	PASS
	Ant0	High	2465.5	8.23		≤-21.77	PASS
	Ant1	High	2465.5	8.48	-45.32	≤-21.52	PASS
	Ant0 Ant1	High High	2467.5 2467.5	6.92 7.42	-44.41 -46.04	≤-23.08 ≤-22.58	PASS PASS
	AntO	Low	2407.5	1.81	-40.57	<u>≤-22.56</u> ≤-28.19	PASS
-	Ant1	Low	2412.5	1.16	-40.57	<u>≤-28.84</u>	PASS
-	AntO	Low	2412.5	2.70	-37.7	<u>≤</u> -27.3	PASS
-	Ant1	Low	2413.5	2.18	-39.36	≤-27.82	PASS
SRD 20M	AntO	High	2461.5	-0.23	-46.73	≤-30.23	PASS
-	Ant1	High	2461.5	0.06	-46.06	≤-29.94	PASS
ŀ	AntO	High	2462.5	-1.12	-46.73	≤-31.12	PASS
ŀ	Ant1	High	2462.5	-1.18	-46.61	≤-31.18	PASS
	Ant0	Low	2422.5	2.79	-40.94	≤-27.21	PASS
	Ant1	Low	2422.5	3.02	-39.75	≤-26.98	PASS
	AntO	Low	2424.5	3.92	-41.3	≤-26.08	PASS
	Ant1	Low	2424.5	4.72	-39.48	≤-25.28	PASS
SRD 40M	Ant0	High	2451.5	-2.87	-42	≤-32.87	PASS
	Ant1	High	2451.5	-2.15	-44.12	≤-32.15	PASS
	Ant0	High	2452.5	-3.66	-44.1	≤-33.66	PASS
	Ant1	High	2452.5	-3.25	-41.69	≤-33.25	PASS
	Ant0	Low	2432.5	-7.46	-45.61	≤-37.46	PASS
l l	Ant1	Low	2432.5	-7.72	-45.8	≤-37.72	PASS
SRD 60M	Ant0	Low	2435.5	-6.75	-45.52	≤-36.75	PASS
l l	Ant1	Low	2435.5	-6.27	-43.47	≤-36.27	PASS
i t	Ant0	High	2440.5	-7.34	-46.51	≤-37.34	PASS

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.



### REPORT NO.: 4791399837-1-RF-1 Page 274 of 371

Ant1	High	2440.5	-6.93	-45.33	≤-36.93	PASS
Ant0	High	2442.5	-8.53	-48.08	≤-38.53	PASS
Ant1	High	2442.5	-5.96	-47.52	≤-35.96	PASS




## 11.5.2. Test Graphs


1	Spectrum		
	Ref Level 30.00 dBm Offset 21.74 dB ● F ● Att 30 dB SWT 246.5 µs ● V	RBW 100 kHz	-
	● Att 30 dB SWT 246.5 µs ● V ● 1Pk View		
		M1[1] 16.89 dBm	
	20 dBm	2.4039880 GHz M2[1] -36.80 dBm 2.400040 GHz	
	10 dBm	2.40000D GHz	
	0 dBm		
	-10 dBm D1 -13.110 dBm		
	-20 dBm		
	-30 dBm		
	not to make we have a feat and a set of the	ater and a start of the start and the start of the start	
	-50 dBm		
	-60 dBm		
	Start 2.3 GHz	691 pts Stop 2.41 GHz	
	Marker	691 pts Stop 2.41 GHz	
	Type Ref Trc X-value	Y-value Function Function Result	
	M1 1 2.40308 GHz M2 1 2.4 GHz	16.89 dBm -36.88 dBm	
	M3 1 2.39 GHz M4 1 2.399638 GHz	-39.27 dBm -36.05 dBm	
		-30.05 UBM	
	Date: 30. JUL. 2024 11:03:14		
	SRD 1 4	M_Ant0_Low_2403.5	
	Ref Level 30.00 dBm Offset 21.71 dB	28W 100 kHz	1
	Att 30 dB SWT 246.5 µs .	VBW 300 kHz Mode Auto FFT	
	●1Pk View		
	20 dBm	M1[1] 16.92 dBm 2.403080 GHz	
		M2[1] -36.79 dBm 2.40000 GHz	
	10 dBm	2.40000 GH2	
	0 dBm		
	-10 dBm		
	D1 -13.080 dBm		
	-20 dBm		
	-30 dBm	M3	
	ato damarala minanda and a set and the standard and the set of the	and some south the state of the second and the second and the second second second second second second second	
	-50 dBm		
	-60 dBm		
	Start 2.3 GHz	691 pts Stop 2.41 GHz	
	Marker		
	Type         Ref         Trc         X-value           M1         1         2.40308 GHz	Y-value Function Function Result 16.92 dBm	
	M2 1 2.4 GHz M3 1 2.39 GHz	-36.18 dBm -39.35 dBm	
	M3 1 2.39 GHz M4 1 2.399957 GHz	-39.35 dBm -35.99 dBm	
		Measuring	
	Date: 30.JUL.2024 11:04:13		
	SRD 1.4	M_Ant1_Low_2403.5	
	Spectrum		
	Ref Level 30.00 dBm Offset 21.74 dB 👄 F	RBW 100 kHz	2
	Att 30 dB SWT 246.5 µs .	VBW 300 kHz Mode Auto FFT	
	IPk View	M1[1] 17.68 dBm	
	20 dBm	2 4045 MI GHz	
		M2[1] -37.37dBm 2.400000 GHz	
	10 dBm		
	0 dBm		
	-10 dBm D1 -12.320 dBm		
	-20 dBm		
	-30 dBm	M3 📲 🕺	
	-30 dBm	ullin the series and the function of the series and the series of the se	
		M3 M3	
	₩4 <b>0<sup>4</sup>88<sub>789</sub></b>	uentrale anamatic la participation de Manadas	
	visted all the second		
	-50 dBm -60 dBm Start 2.3 GHz	691 pts Stop 2.41 GHz	
	.50 dBm         .50 dBm <t< td=""><td>مالا میں معمود میں معاملہ کی م 691 pts Stop 2.41 GHz</td><td></td></t<>	مالا میں معمود میں معاملہ کی م 691 pts Stop 2.41 GHz	
	.50 dBm         .50 dBm <t< th=""><th>مالا میں معمود میں معاملہ کی م 691 pts Stop 2.41 GHz</th><th></th></t<>	مالا میں معمود میں معاملہ کی م 691 pts Stop 2.41 GHz	
	Jid 'dBm-         D -         Jid 'dBm-         Jid''dBm-         Jid	Ultrative         Function         Function Result           17.69 dbm	
	JH@10Bmg         D Cm         Junction         Junction <td>UR         Function         Function Result           691 pts         Stop 2.41 GHz           727.34 dBm        </td> <td></td>	UR         Function         Function Result           691 pts         Stop 2.41 GHz           727.34 dBm	
	Jid 'dBm-         D -         Jid 'dBm-         Jid''dBm-         Jid	Ultrative         Function         Function Result           17.69 dbm	
	Jidf //Bim_ent         Directory         Line of the second	UR         Function         Function Result           691 pts         Stop 2.41 GHz           727.34 dBm	
	Md 'dBm,         D Construction         Multiple and the second se	United state         Function         Function Result	
	Md 'dBm,         D Construction         Multiple and the second se	UR         Function         Function Result           691 pts         Stop 2.41 GHz           727.34 dBm	

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.




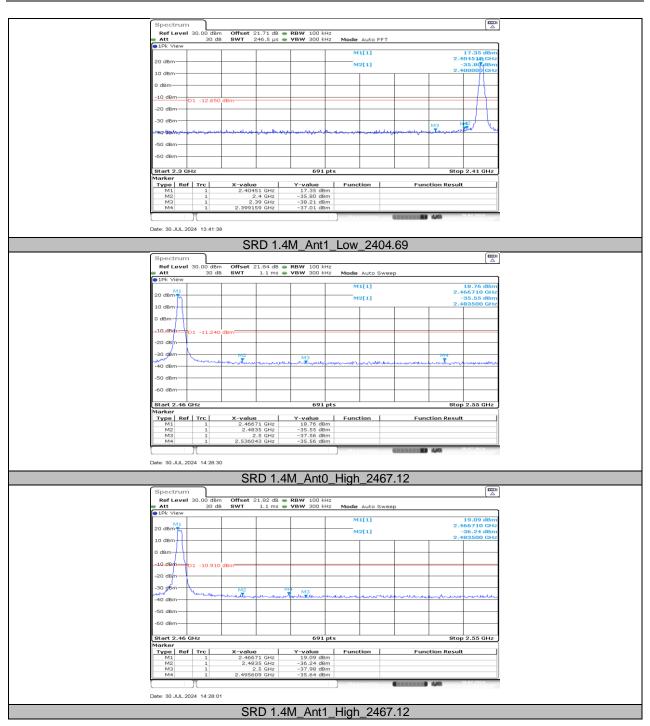




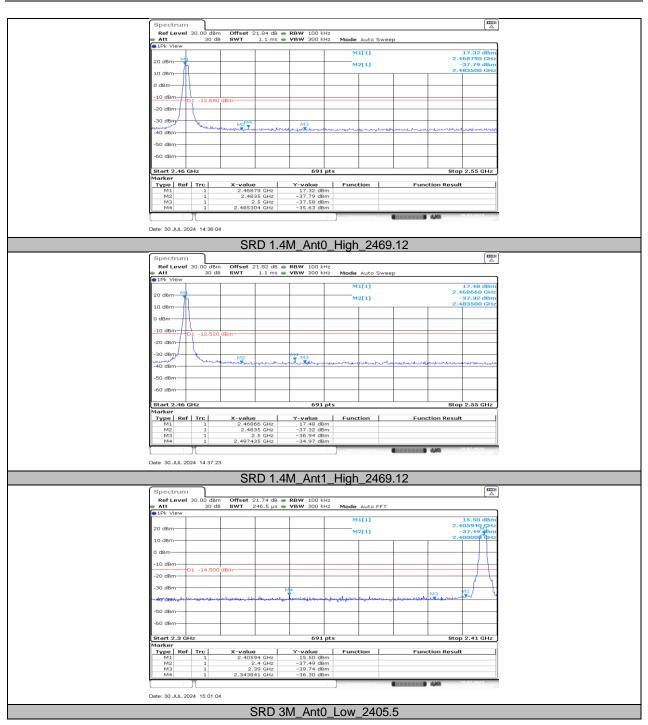



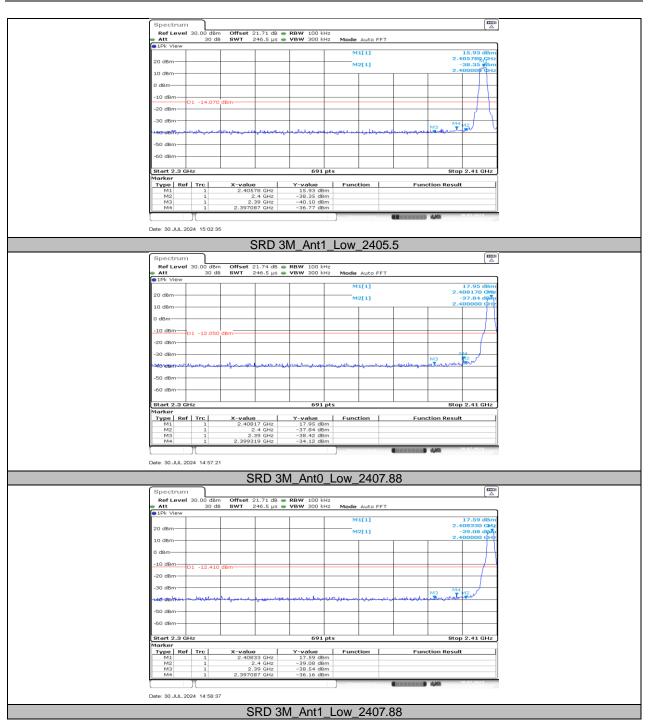




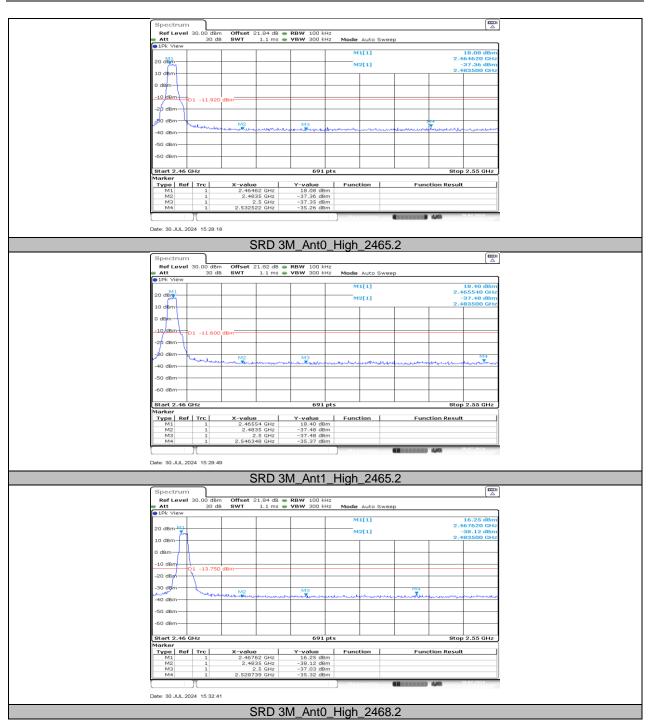









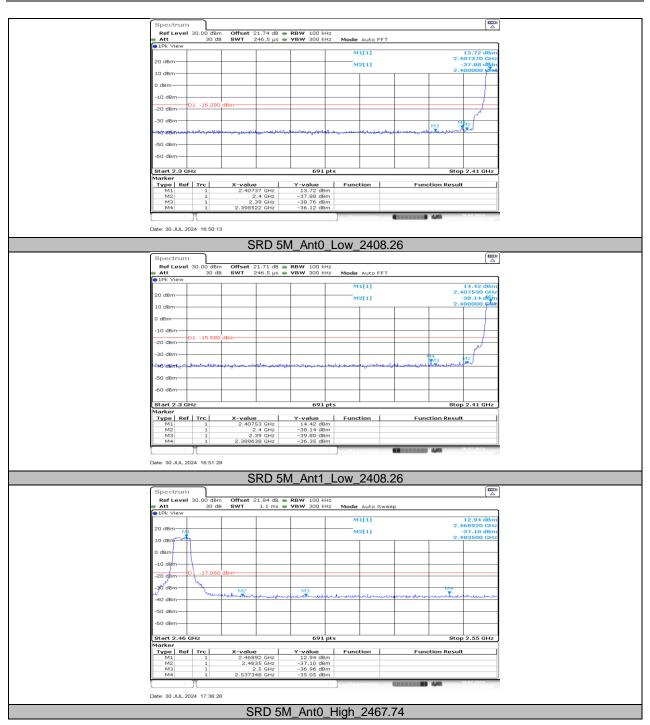




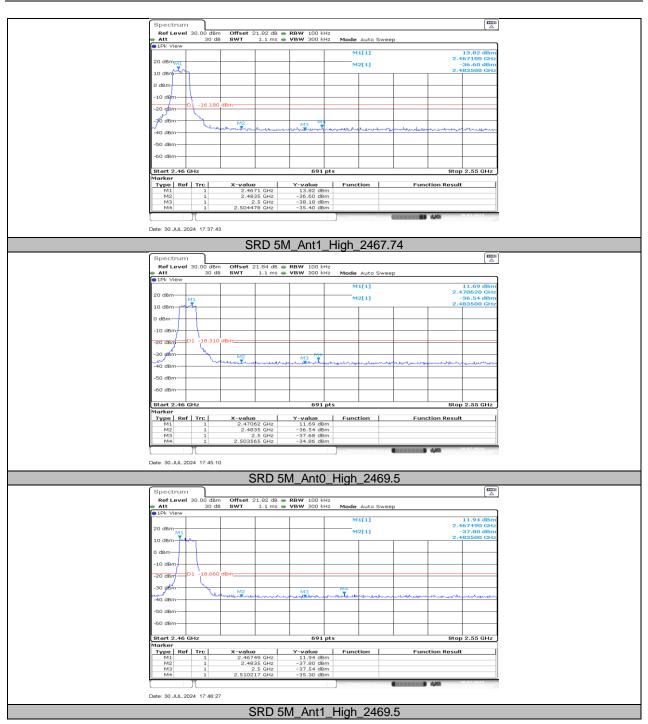




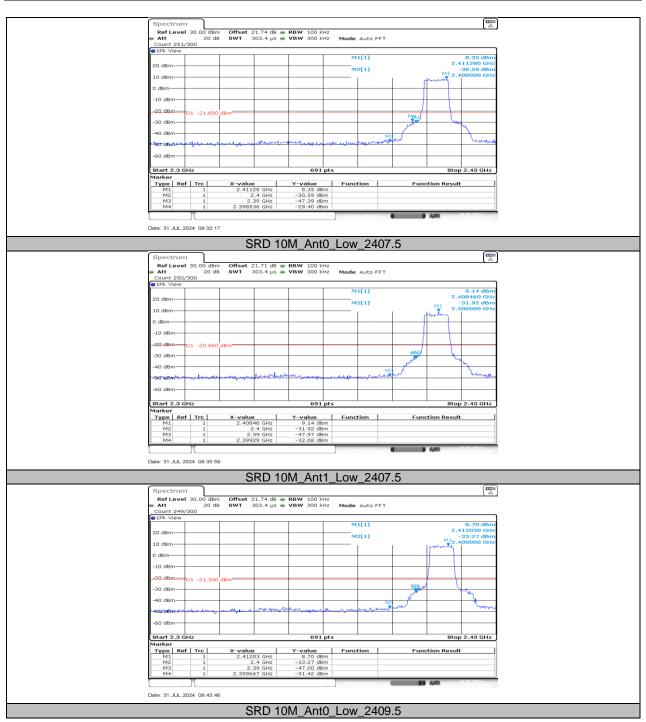




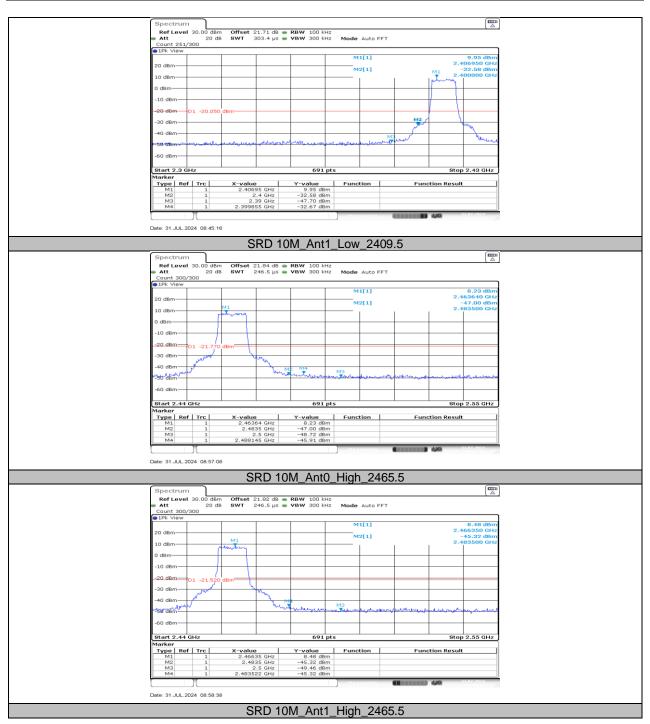




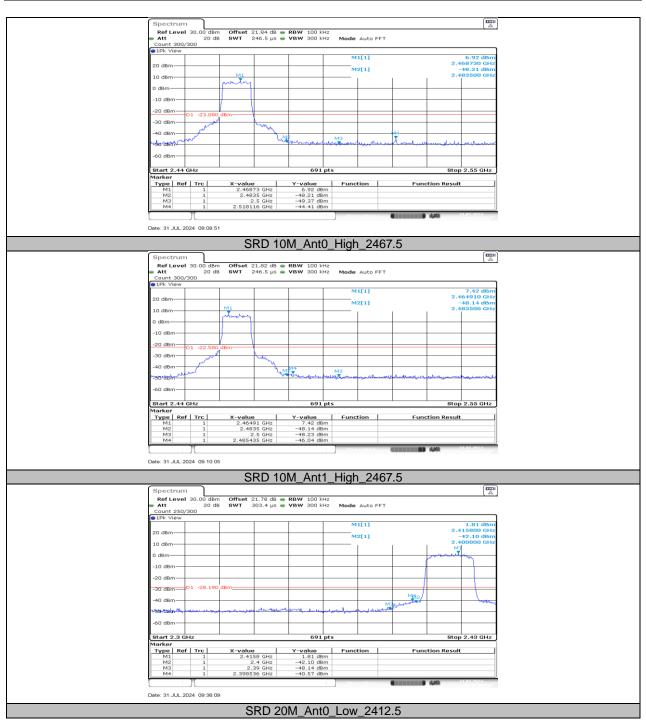




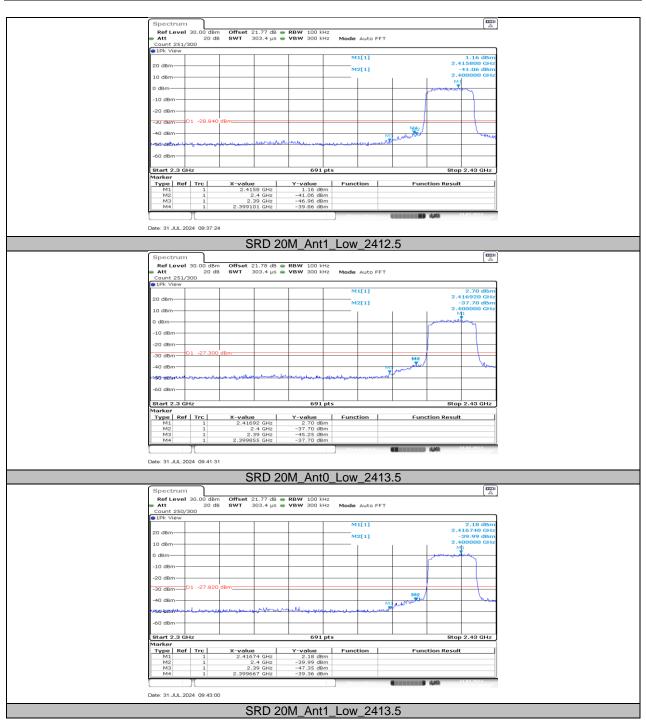




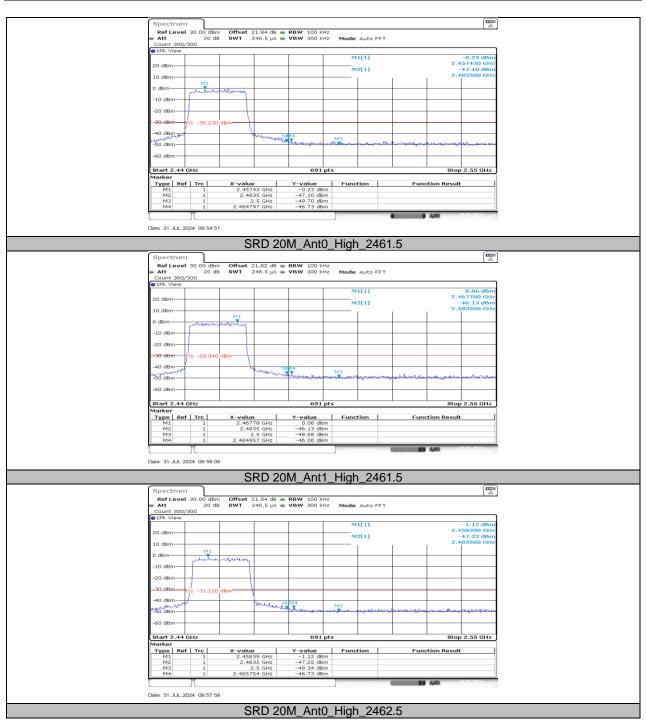




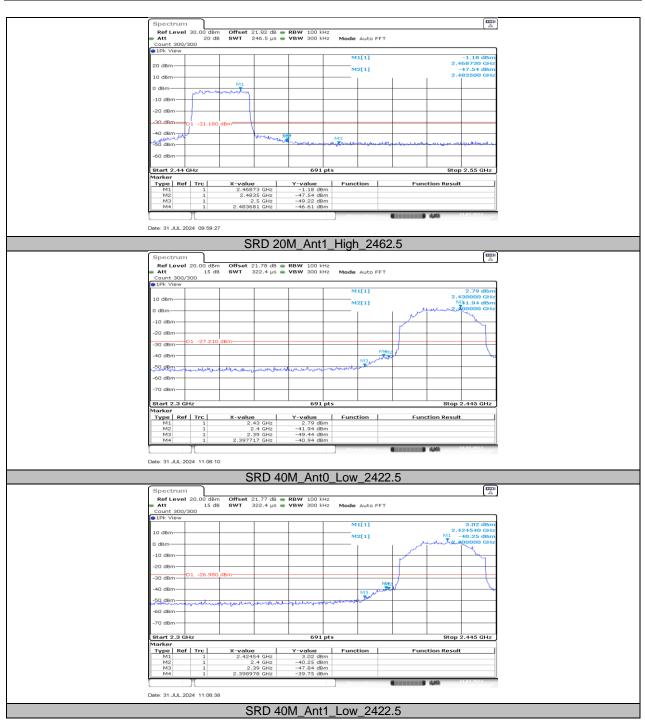




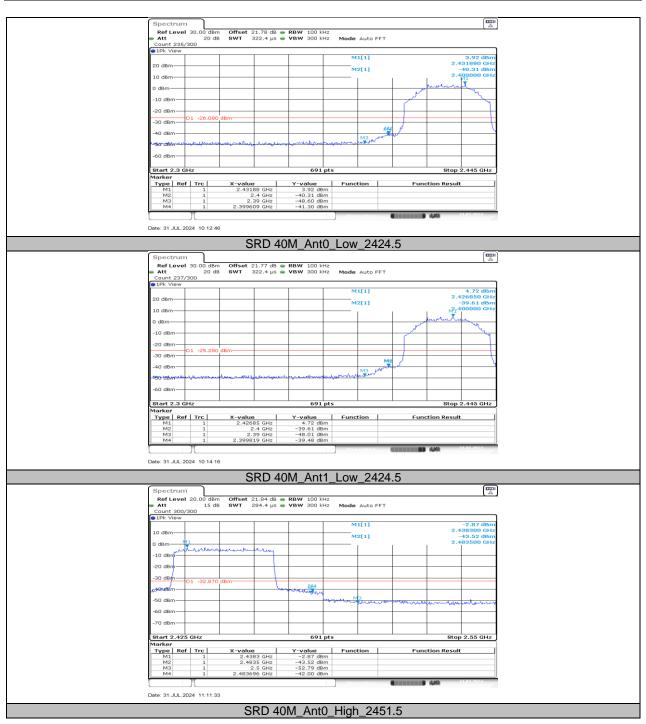




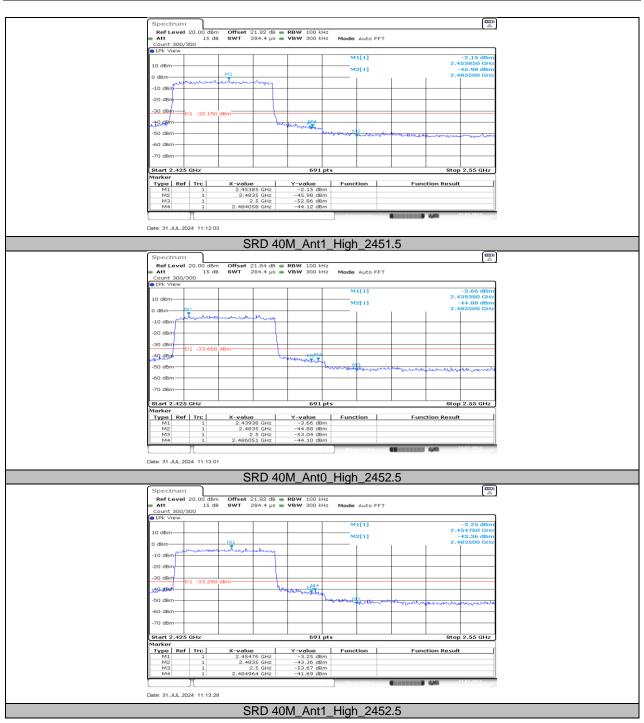



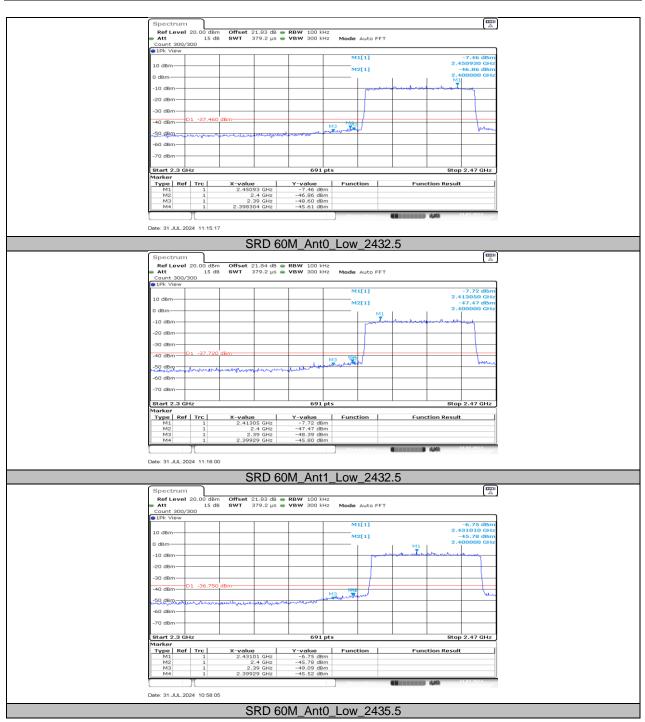



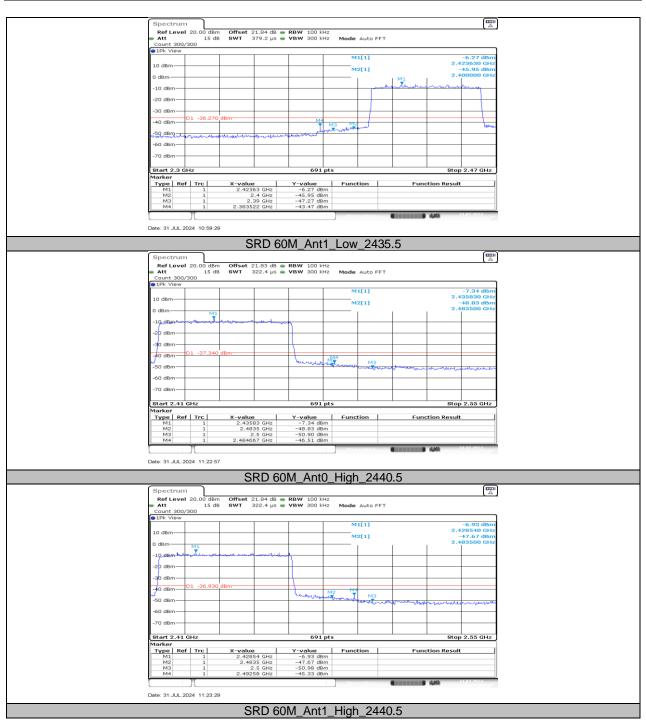







#### 11.6. APPENDIX F: CONDUCTED SPURIOUS EMISSION 11.6.1. Test Result

Test Mode	Antenna	Frequency[MHz]	FreqRange [Mhz]	Result [dBm]	Limit [dBm]	Verdict
			Reference	16.90		PASS
	Ant0	2403.5	30~1000	-40.29	≤-13.1	PASS
	7		1000~26500	-40.79	≤-13.1	PASS
			Reference	16.99		PASS
	Ant1	2403.5	30~1000	-40.4	≤-13.01	PASS
			1000~26500	-40.53	≤-13.01	PASS
			Reference	18.10		PASS
	Ant0	2404.69	30~1000	-39.76	≤-11.9	PASS
			1000~26500	-40.77	≤-11.9	PASS
			Reference	17.65		PASS
	Ant1	2404.69	30~1000	-40.41	≤-12.35	PASS
			1000~26500	-40.33	≤-12.35	PASS
			Reference	19.89		PASS
	Ant0	2435.5	30~1000	-39.63	≤-10.11	PASS
	7		1000~26500	-33.34	≤-10.11	PASS
SRD 1.4M			Reference	20.78		PASS
	Ant1	2435.5	30~1000	-40.13	≤-9.22	PASS
	,	2100.0	1000~26500	-34.65	≤-9.22	PASS
			Reference	18.55		PASS
	Ant0	2467.12	30~1000	-40.75	≤-11.45	PASS
	7 4100	2107.12	1000~26500	-33.41	≤-11.45	PASS
			Reference	18.65	= 11:40	PASS
	Ant1	2467.12	30~1000	-40.35	≤-11.35	PASS
			1000~26500	-34.42	≤-11.35	PASS
			Reference	16.99		PASS
	Ant0	2469.12	30~1000	-39.22		PASS
	Anto	2403.12	1000~26500	-34.29	 ≤-13.01 ≤-13.01	PASS
			Reference	17.09		PASS
	Ant1	2469.12	30~1000	-39.44	≤-12.91	PASS
	700	2403.12	1000~26500	-33.83	<u>≤-12.91</u> ≤-12.91	PASS
			Reference	15.68		PASS
	Ant0	2405.5	30~1000	-39.95	≤-14.32	PASS
	Ano		1000~26500	-33.96	≤-14.32	PASS
			Reference	15.99	==14.02	PASS
	Ant1	2405.5	30~1000	-39.75	≤-14.01	PASS
	7.1.(1	2400.0	1000~26500	-34.22	≤-14.01	PASS
			Reference	18.13	_=-	PASS
	Ant0	2407.88	30~1000	-40.28	<u>≤</u> -11.87	PASS
	Anto	2407.00	1000~26500	-34.22	<u>≤-11.87</u>	PASS
			Reference	18.27		PASS
	Ant1	2407.88	30~1000	-39.46	≤-11.73	PASS
	700	2407.00	1000~26500	-33.91	≤-11.73	PASS
SRD 3M			Reference	19.50		PASS
	Ant0	2436.12	30~1000	-38.93	≤-10.5	PASS
	Anto		1000~26500	-33.98	<u>≤-10.5</u>	PASS
						PASS
	Ant1	2436.12	Reference 30~1000	20.17 -39.99	 ≤-9.83	PASS
	7.11.1	2400.12	1000~26500	-39.99	<u>≤-9.63</u> ≤-9.83	PASS
			Reference	17.85	<u> </u>	PASS
	Ant0	2465.2				PASS
	71110	2400.2	30~1000	-39.31	≤-12.15 ≤-12.15	PASS
			1000~26500	-33.84 18.43	<u>S-12.15</u> 	PASS
	Apt1	2465 2	Reference			
	Ant1	2465.2	30~1000	-39.82	<u>≤-11.57</u>	PASS
	A = 10	0400.0	1000~26500	-33.49	≤-11.57	PASS
	Ant0	2468.2	Reference	15.93		PASS

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.




			30~1000	-39.21	≤-14.07	PASS
			1000~26500	-39.21	<u>≤-14.07</u> ≤-14.07	PASS
			Reference	-33.83	<u>S-14.07</u> 	PASS
	Ant1	2468.2	30~1000	-40.2		PASS
	7 4101	2400.2	1000~26500	-32.26		PASS
			Reference	12.16		PASS
	Ant0	2404.5	30~1000	-39.74	<-17 84	PASS
	74110	2404.0	1000~26500	-33.82		PASS
			Reference	12.65	$ \leq -13.31 \\ \leq -13.31 \\ \\ \leq -17.84 \\ \leq -17.84 \\ \\ \leq -17.35 \\ \leq -17.35 \\ \\ \leq -17.35 \\ \\ \leq -16.13 \\ \\ \leq -15.62 \\ \\ \leq -16.46 \\ \\ \\ \leq -17.46 \\ \\ \leq -18.21 \\ \\ \leq -18.21 \\ \\ \leq -20.85 \\ \leq -20.85 \\ \\ \leq -20.77 \\ \\ \leq -20.77 \\ \\ \leq -20.25 \\ \leq -20.25 \\ \leq -20.25 \\ \leq -20.25 \\ \\ \leq -20.25 \\ \leq -20.25 \\ \\ \leq -20.25 \\ \leq -20.25 \\$	PASS
	Ant1	2404.5	30~1000	-38.91	≤-17.35	PASS
	,	210110	1000~26500	-34.54		PASS
			Reference	13.87		PASS
	Ant0	2408.26	30~1000	-39.97	≤-16.13	PASS
			1000~26500	-34.42	≤-16.13	PASS
			Reference	14.38		PASS
	Ant1	2408.26	30~1000	-40.12	≤-15.62	PASS
			1000~26500	-33.2		PASS
			Reference	17.21		PASS
	Ant0	2436.74	30~1000	-40.17	≤-12.79	PASS
			1000~26500	-33.49		PASS
SRD 5M			Reference	18.45		PASS
	Ant1	2436.74	30~1000	-40.44	≤-11.55	PASS
			1000~26500	-33.28	≤-11.55	PASS
			Reference	12.54		PASS
	Ant0	2467.74	30~1000	-40.14	≤-17.46	PASS
			1000~26500	-33.5	≤-17.46	PASS
	Ant1	2467.74	Reference	13.54		PASS
			30~1000	-39.78	≤-16.46	PASS
			1000~26500	-33.95	≤-16.46	PASS
		2469.5	Reference	11.27		PASS
	Ant0		30~1000	-40.13		PASS
			1000~26500	-33.38		PASS
	Ant1	2469.5	Reference	11.79		PASS
			30~1000	-40.17		PASS
			1000~26500	-32.77	≤-18.21	PASS
			Reference	9.15		PASS
	Ant0	2407.5	30~1000	-40.28		PASS
			1000~26500	-33.79		PASS
		- <i>.</i>	Reference	9.23		PASS
	Ant1	2407.5	30~1000	-40.23		PASS
			1000~26500	-33.35	≤-20.77	PASS
	Anto	0400 F	Reference	9.75		PASS
	Ant0	2409.5	30~1000	-39.64		PASS
			1000~26500	-34.06		PASS
	A p+1	2400 5	Reference 30~1000	10.10	 ≤-19.9	PASS PASS
	Ant1	2409.5	1000~26500	-39.76		PASS
SRD 10M	├		Reference	-34.43 15.20	≤-19.9 	PASS
	Ant0	it0 2437.5	30~1000	-39.41	 ≤-14.8	PASS
	AIIIU	2437.3	1000~26500		<u>≤-14.8</u> ≤-14.8	PASS
	<u>├</u>		Reference	-33.67 15.70	<u>≤-14.0</u> 	PASS
	Apt1	0407 F	30~1000	-40.22	 ≤-14.3	PASS
	Ant1	2437.5	1000~26500	-40.22	<u>≤-14.3</u> ≤-14.3	PASS
			Reference	-33.43	_=- 14.J	PASS
		<b>•</b> /		0.97		
	AntO	2465 5		-30 77	<-21 02	PVdd
	Ant0	2465.5	30~1000	-39.77	<u>≤-21.03</u>	PASS
	Ant0	2465.5	30~1000 1000~26500	-34.05	≤-21.03	PASS
			30~1000 1000~26500 Reference	-34.05 9.90	≤-21.03 	PASS PASS
	Ant0 Ant1	2465.5 2465.5	30~1000 1000~26500	-34.05	≤-21.03	PASS

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.



			30~1000	-39.76	≤-22.86	PASS
			1000~26500	-39.76	<u>≤-22.86</u>	PASS
			Reference	7.87	<u> </u>	PASS
	Ant1	2467.5	30~1000	-39.75	 ≤-22.13	PASS
	Anti	2407.5	1000~26500		<u>≤-22.13</u> ≤-22.13	PASS
				-33.54 2.98	≥-22.13	PASS
	A retO	0440 E	Reference			
	Ant0	2412.5	30~1000	-39.52	≤-27.02	PASS PASS
			1000~26500 Reference	-40.79 1.49	<u>≤-27.02</u>	PASS
	A	0440 5		-		
	Ant1	2412.5	<u>30~1000</u> 1000~26500	-40.34	≤-28.51	PASS
				-40.26	≤-28.51	PASS
	A == 4 O	0440 5	Reference	3.11		PASS
	Ant0	2413.5	30~1000	-39.85	≤-26.89	PASS
			1000~26500	-40.33	≤-26.89	PASS
		0.440 F	Reference	1.95		PASS
	Ant1	2413.5	30~1000	-39.59	≤-28.05	PASS
			1000~26500	-40.5	≤-28.05	PASS
			Reference	12.28		PASS
	Ant0	2437.5	30~1000	-39.52	≤-17.72	PASS
SRD 20M			1000~26500	-39.77	≤-17.72	PASS
OND ZOW			Reference	11.98		PASS
	Ant1	2437.5	30~1000	-40.03	≤-18.02	PASS
			1000~26500	-40.7	≤-18.02	PASS
			Reference	-0.03		PASS
	Ant0	2461.5	30~1000	-39.88	≤-30.03	PASS
			1000~26500	-40.38	≤-30.03	PASS
		2461.5	Reference	-0.20		PASS
	Ant1		30~1000	-40.09	≤-30.2	PASS
			1000~26500	-40.77	≤-30.2	PASS
	Ant0	2462.5	Reference	-0.63		PASS
			30~1000	-39.03	≤-30.63	PASS
			1000~26500	-40.28	≤-30.63	PASS
	Ant1	2462.5	Reference	-0.93		PASS
			30~1000	-40.53	≤-30.93	PASS
			1000~26500	-40.41	≤-30.93	PASS
			Reference	2.78		PASS
	Ant0	2422.5	30~1000	-39.47	≤-27.22	PASS
			1000~26500	-40.4	≤-27.22	PASS
			Reference	3.97		PASS
	Ant1	2422.5	30~1000	-39.77	≤-26.03	PASS
			1000~26500	-40.73	≤-26.03	PASS
			Reference	3.97		PASS
	Ant0	2424.5	30~1000	-39.56	≤-26.03	PASS
		-	1000~26500	-40.74	≤-26.03	PASS
			Reference	4.82		PASS
	Ant1	2424.5	30~1000	-39.98	≤-25.18	PASS
			1000~26500	-40.52	≤-25.18	PASS
SRD 40M			Reference	8.11		PASS
	Ant0	2437.5	30~1000	-39.97	≤-21.89	PASS
			1000~26500	-39.89	≤-21.89	PASS
			Reference	8.57		PASS
		2437 5	30~1000	-39.97	≤-21.43	PASS
	Ant1	2437 5		00.01		
	Ant1	2437.5			<u>≤-</u> 21 <u>4</u> 3	PASS
	Ant1	2437.5	1000~26500	-40.3	≤-21.43 	PASS
			1000~26500 Reference	-40.3 -3.47		PASS
	Ant1 Ant0	2437.5 2451.5	1000~26500 Reference 30~1000	-40.3 -3.47 -39.73	 ≤-33.47	PASS PASS
			1000~26500 Reference 30~1000 1000~26500	-40.3 -3.47 -39.73 -40.4	 ≤-33.47 ≤-33.47	PASS PASS PASS
	AntO	2451.5	1000~26500 Reference 30~1000 1000~26500 Reference	-40.3 -3.47 -39.73 -40.4 -2.11	 ≤-33.47 ≤-33.47 	PASS PASS PASS PASS
			1000~26500 Reference 30~1000 1000~26500	-40.3 -3.47 -39.73 -40.4	 ≤-33.47 ≤-33.47	PASS PASS PASS

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch FORM NO: 10-SL-F0035 This report shall not be reproduced except in full, without the written approval of UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch.





			30~1000	-40.09	≤-34.16	PASS
			1000~26500	-39.44	≤-34.16	PASS
			Reference	-3.55		PASS
	Ant1	2452.5	30~1000	-40.38	≤-33.55	PASS
			1000~26500	-39.16	≤-33.55	PASS
			Reference	-7.72		PASS
	Ant0	2432.5	30~1000	-44.81	≤-37.72	PASS
			1000~26500	-40.6	≤-37.72	PASS
			Reference	-7.65		PASS
	Ant1	2432.5	30~1000	-45.78	≤-37.65	PASS
			1000~26500	-40.13	≤-37.65	PASS
			Reference	-6.56		PASS
	Ant0	2435.5	30~1000	-45.96	≤-36.56	PASS
			1000~26500	-42.63	≤-36.56	PASS
			Reference	-6.03		PASS
	Ant1	2435.5	30~1000	-45.31	≤-36.03	PASS
			1000~26500	-43.81	<u>≤-36.03</u>	PASS
			Reference	-5.51		PASS
	Ant0	2437.5	30~1000	-45.53	≤-35.51	PASS
SRD 60M			1000~26500	-44.54	≤-35.51	PASS
SKD 601VI	Ant1		Reference	-4.95	PASS	
		2437.5	30~1000	-45.48	≤-34.95	PASS
			1000~26500	-43.59	≤-34.95	PASS
			Reference	ference -7.48		PASS
	Ant0	2440.5	30~1000	-45.62	≤-37.48	PASS
			1000~26500	-43.41	≤-37.48	PASS
			Reference	-7.34		PASS
	Ant1	2440.5	30~1000	-45.27	≤-37.34	PASS
			1000~26500	-43.23	≤-37.34	PASS
			Reference	-8.44		PASS
	Ant0	2442.5	30~1000	-45.08	≤-38.44	PASS
			1000~26500	-44	≤-38.44	PASS
			Reference	-8.07		PASS
	Ant1	2442.5	30~1000	-45.2	≤-38.07	PASS
			1000~26500	-43.67	≤-38.07	PASS



### 11.6.2. Test Graphs

