




Shenzhen UnionTrust Quality and Technology Co., Ltd.

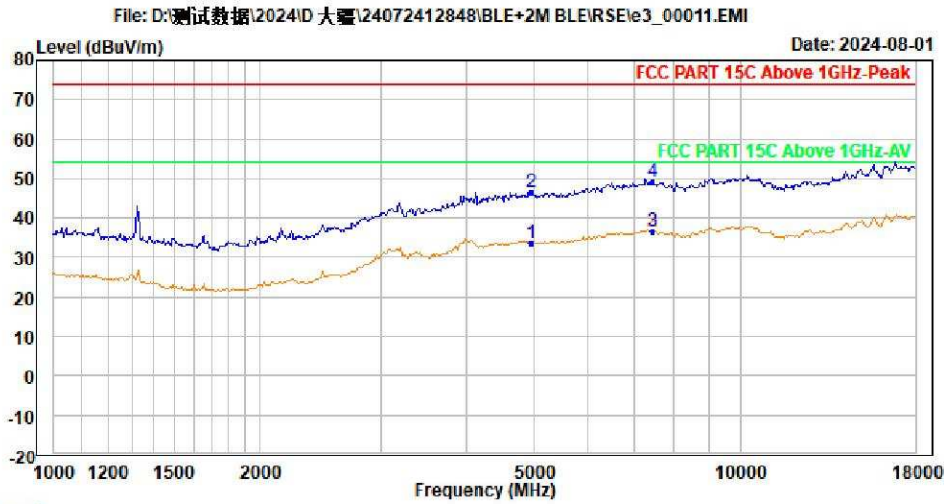


Trace: 1
 Condition : 3m Horizontal
 Temp. (C)/Hum. (%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : 2M BLE_2480
 Remark :

| | Freq | Level | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark |
|------|----------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| | MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 | 4960.000 | 33.80 | 35.82 | 34.49 | 0.00 | 9.38 | 45.89 | 54.00 | -20.20 | Average |
| 2 | 4960.000 | 46.43 | 48.45 | 34.49 | 0.00 | 9.38 | 45.89 | 74.00 | -27.57 | Peak |
| 3 PP | 7440.000 | 36.51 | 35.19 | 36.50 | 0.00 | 10.41 | 45.59 | 54.00 | -17.49 | Average |
| 4 PK | 7440.000 | 49.27 | 47.95 | 36.50 | 0.00 | 10.41 | 45.59 | 74.00 | -24.73 | Peak |

Appendix A.6: Test Results of Radiated Emissions in Restricted Bands



Shenzhen UnionTrust Quality and Technology Co., Ltd.

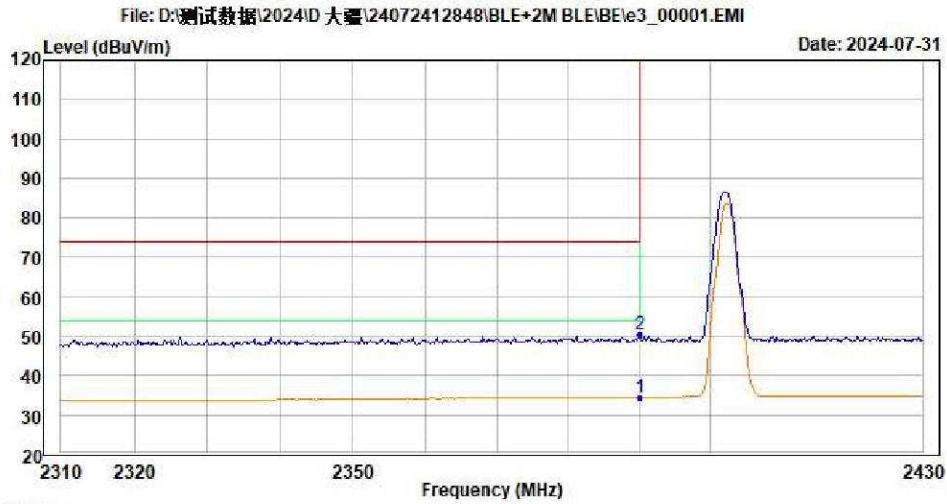


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : BLE_2402
 Remark :

| | Freq | Level | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| | MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 | PP 2390.000 | 34.50 | 32.09 | 32.91 | 10.00 | 6.90 | 47.40 | 54.00 | -19.50 | Average |
| 2 | PK 2390.000 | 50.59 | 48.18 | 32.91 | 10.00 | 6.90 | 47.40 | 74.00 | -23.41 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

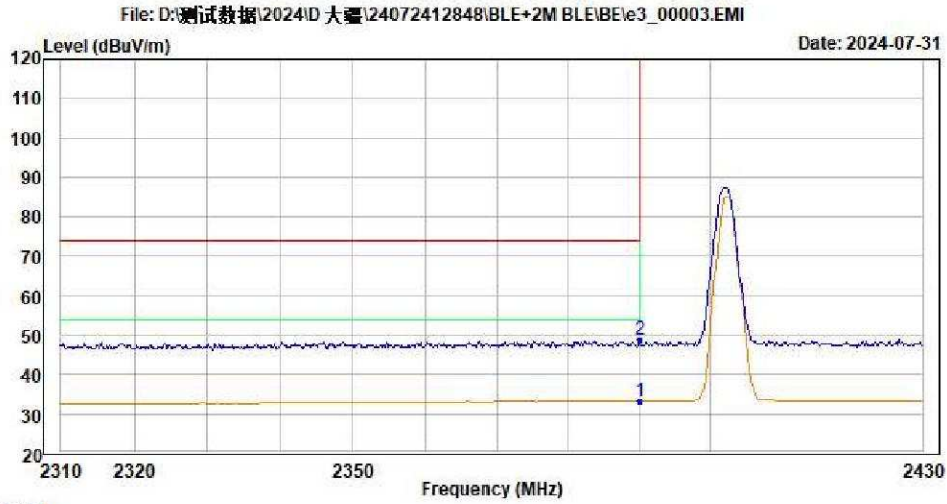


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : BLE_2402
 Remark :

| | Freq | Level | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| | MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 | PP 2390.000 | 33.20 | 32.15 | 31.55 | 10.00 | 6.90 | 47.40 | 54.00 | -20.80 | Average |
| 2 | PK 2390.000 | 49.02 | 47.97 | 31.55 | 10.00 | 6.90 | 47.40 | 74.00 | -24.98 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

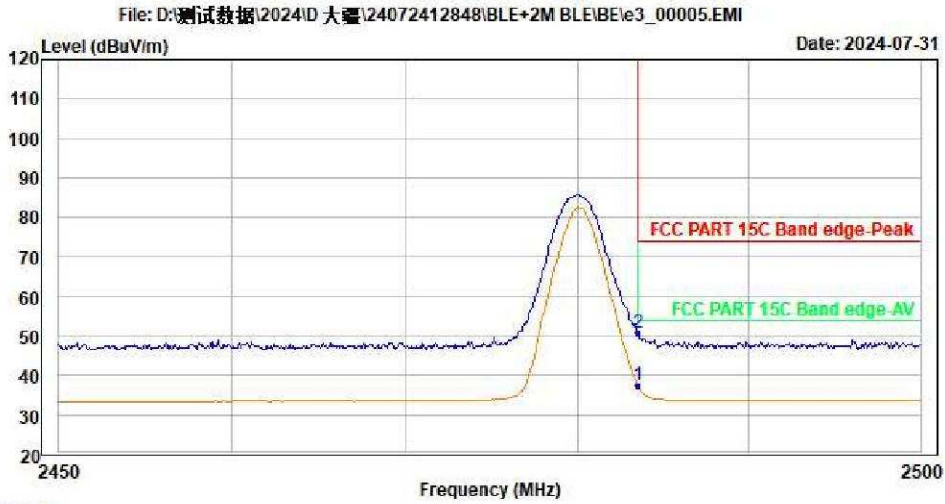


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : BLE_2480
 Remark :

| | Read | Ant | Aux | Cable | Preamp | Limit | Over | |
|---------------|--------|-------|--------|--------|--------|-------|--------|----------------|
| Freq | Level | Level | Factor | Factor | Loss | Line | Limit | Remark |
| MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB |
| 1 PP 2483.500 | 37.53 | 36.22 | 31.68 | 10.00 | 7.03 | 47.40 | 54.00 | -16.47 Average |
| 2 PK 2483.500 | 50.70 | 49.39 | 31.68 | 10.00 | 7.03 | 47.40 | 74.00 | -23.30 Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

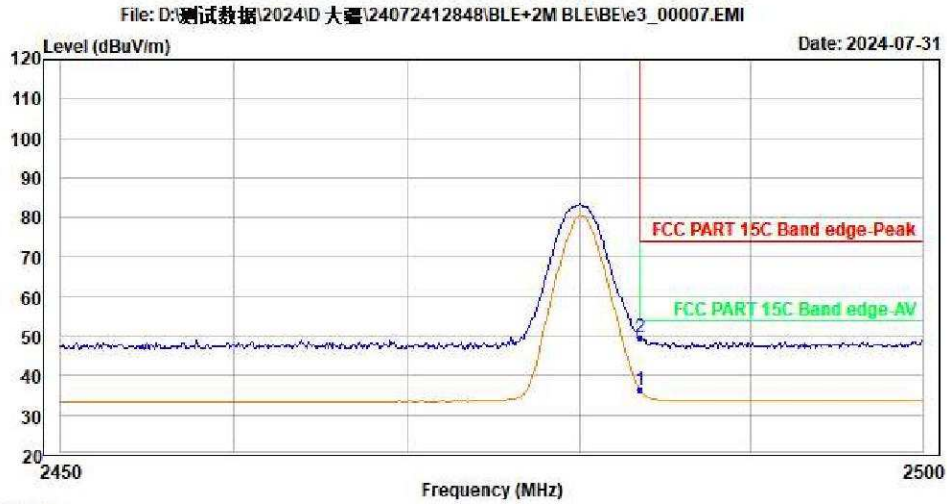

Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : BLE_2480
 Remark :


| | Read | Ant | Aux | Cable | Preamp | Limit | Over | | |
|---------------|--------|-------|--------|--------|--------|--------|--------|--------|---------|
| Freq | Level | Level | Factor | Factor | Loss | Factor | Line | Limit | Remark |
| MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 PP 2483.500 | 36.49 | 35.18 | 31.68 | 10.00 | 7.03 | 47.40 | 54.00 | -17.51 | Average |
| 2 PK 2483.500 | 49.69 | 48.38 | 31.68 | 10.00 | 7.03 | 47.40 | 74.00 | -24.31 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\ID 大疆\24072412848\BLE+2M BLE\BLEe3_00013.EMI

Date: 2024-07-31

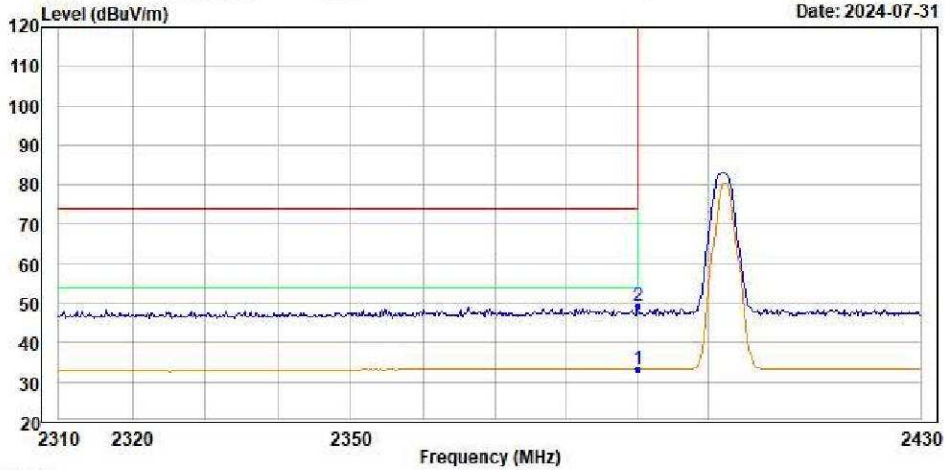


Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : 2M BLE_2402
 Remark :

| | Freq | Level | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| | MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 | PP 2390.000 | 33.37 | 32.32 | 31.55 | 10.00 | 6.90 | 47.40 | 54.00 | -20.63 | Average |
| 2 | PK 2390.000 | 49.27 | 48.22 | 31.55 | 10.00 | 6.90 | 47.40 | 74.00 | -24.73 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

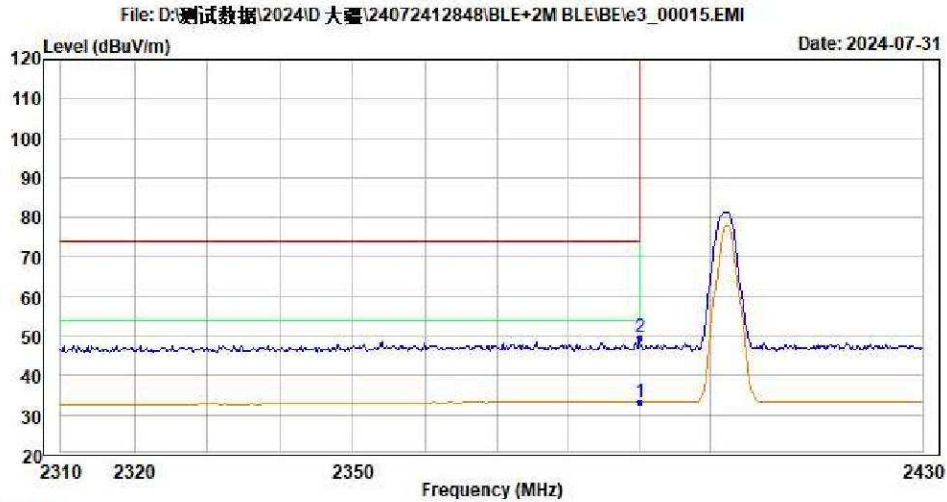

Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : 2M BLE_2402
 Remark :


| | Freq | Level | Read Level | Ant Factor | Aux Factor | Cable Loss | Preamp Factor | Limit Line | Over Limit | Remark |
|---|-------------|--------|------------|------------|------------|------------|---------------|------------|------------|---------|
| | MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 | PP 2390.000 | 33.21 | 32.16 | 31.55 | 10.00 | 6.90 | 47.40 | 54.00 | -20.79 | Average |
| 2 | PK 2390.000 | 49.67 | 48.62 | 31.55 | 10.00 | 6.90 | 47.40 | 74.00 | -24.33 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

File: D:\测试数据\2024\ID 大疆\24072412848\BLE+2M BLE\BLEe3_00009.EMI

Date: 2024-07-31

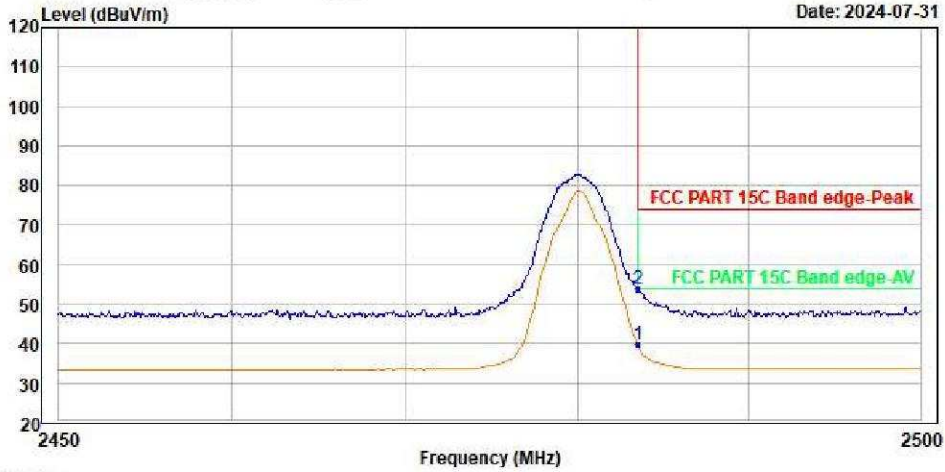


Trace: 1
 Condition : 3m Horizontal
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : 2M BLE_2480
 Remark :

| | Read | Ant | Aux | Cable | Preamp | Limit | Over | | |
|---------------|--------|-------|--------|--------|--------|--------|--------|--------|---------|
| Freq | Level | Level | Factor | Factor | Loss | Factor | Line | Limit | Remark |
| MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB | |
| 1 PP 2483.500 | 39.95 | 38.64 | 31.68 | 10.00 | 7.03 | 47.40 | 54.00 | -14.05 | Average |
| 2 PK 2483.500 | 53.67 | 52.36 | 31.68 | 10.00 | 7.03 | 47.40 | 74.00 | -20.33 | Peak |



Shenzhen UnionTrust Quality and Technology Co., Ltd.

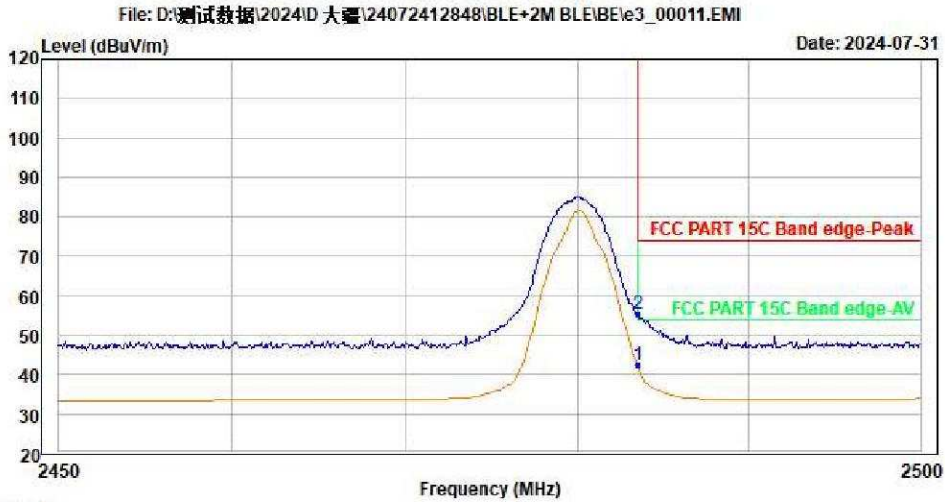

Trace: 1
 Condition : 3m Vertical
 Temp.(C)/Hum.(%): 25.4(C)/55.2(%)
 Press : 100.2kpa
 Product : DJI
 Model No. : WIFI MODULE/DYS_WL2G4
 Power Rating : DC
 Test Engineer : Fire
 Test Mode : 2M BLE_2480
 Remark :

| | Read | Ant | Aux | Cable | Preamp | Limit | Over | |
|---------------|--------|-------|--------|--------|--------|-------|--------|----------------|
| Freq | Level | Level | Factor | Factor | Loss | Line | Limit | Remark |
| MHz | dBuV/m | dBuV | dB/m | dB | dB | dB | dBuV/m | dB |
| 1 PP 2483.500 | 42.33 | 41.02 | 31.68 | 10.00 | 7.03 | 47.40 | 54.00 | -11.67 Average |
| 2 PK 2483.500 | 55.31 | 54.00 | 31.68 | 10.00 | 7.03 | 47.40 | 74.00 | -18.69 Peak |

Appendix A.7: Test Results of Conducted Emission on AC Mains




Shenzhen UnionTrust Quality and Technology Co.,Ltd.

| | | |
|---------------------------------|-------------------|-------------------------|
| Site LAB | Phase: L1 | Temperature: 23.5 °C |
| Limit: FCC Part15 CE-Class B_QP | Power: AC120/60Hz | Humidity: 50.5 %RH |
| EUT: 模块 | | Air Pressure: 100.1 kpa |
| M/N: DY301(无线模块) | | |
| Mode: | | |
| Note: | | |

Conducted Emission Measurement

24072412848_DY301 Data :#1 Date: 2024/8/9 Time: 16:45:32

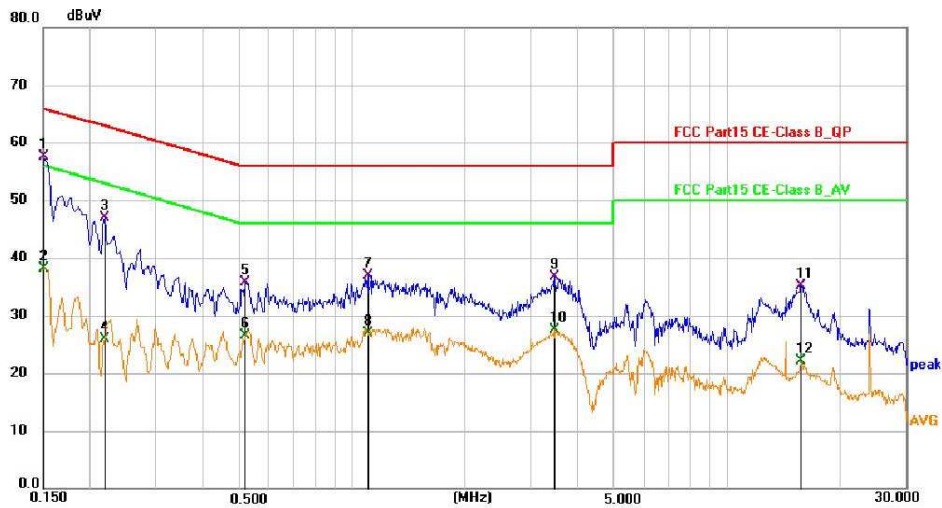

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 * | 0.1500 | 47.37 | 10.20 | 57.57 | 66.00 | -8.43 | QP | P | |
| 2 | 0.1500 | 27.96 | 10.20 | 38.16 | 56.00 | -17.84 | AVG | P | |
| 3 | 0.2174 | 36.79 | 10.17 | 46.96 | 62.92 | -15.96 | QP | P | |
| 4 | 0.2174 | 15.79 | 10.17 | 25.96 | 52.92 | -26.96 | AVG | P | |
| 5 | 0.5190 | 25.48 | 10.19 | 35.67 | 56.00 | -20.33 | QP | P | |
| 6 | 0.5190 | 16.34 | 10.19 | 26.53 | 46.00 | -19.47 | AVG | P | |
| 7 | 1.1040 | 26.63 | 10.34 | 36.97 | 56.00 | -19.03 | QP | P | |
| 8 | 1.1040 | 16.63 | 10.34 | 26.97 | 46.00 | -19.03 | AVG | P | |
| 9 | 3.4664 | 26.43 | 10.25 | 36.68 | 56.00 | -19.32 | QP | P | |
| 10 | 3.4664 | 17.31 | 10.25 | 27.56 | 46.00 | -18.44 | AVG | P | |
| 11 | 15.7515 | 24.52 | 10.55 | 35.07 | 60.00 | -24.93 | QP | P | |
| 12 | 15.7515 | 11.50 | 10.55 | 22.05 | 50.00 | -27.95 | AVG | P | |

*:Maximum data x:Over limit !:over margin




Shenzhen UnionTrust Quality and Technology Co.,Ltd.

| | | |
|---------------------------------|-------------------|-------------------------|
| Site LAB | Phase: N | Temperature: 23.5 °C |
| Limit: FCC Part15 CE-Class B_QP | Power: AC120/60Hz | Humidity: 50.5 %RH |
| EUT: 模块 | | Air Pressure: 100.1 kpa |
| M/N: DY301(无线模块) | | |
| Mode: | | |
| Note: | | |

Conducted Emission Measurement

24072412848_DY301 Data :#2 Date: 2024/8/9 Time: 16:47:05

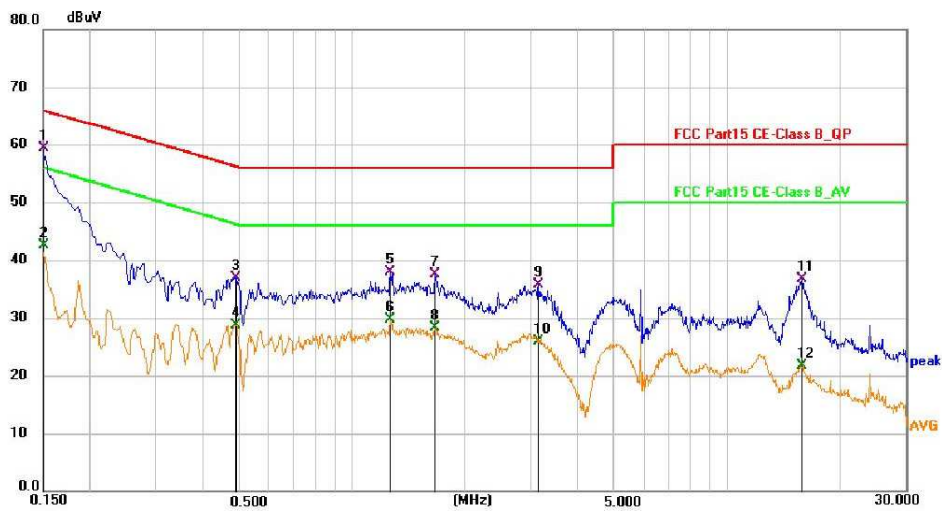

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F | Remark |
|-----|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|--------|
| 1 * | 0.1500 | 49.15 | 10.19 | 59.34 | 66.00 | -6.66 | QP | P | |
| 2 | 0.1500 | 32.37 | 10.19 | 42.56 | 56.00 | -13.44 | AVG | P | |
| 3 | 0.4874 | 26.62 | 10.27 | 36.89 | 56.21 | -19.32 | QP | P | |
| 4 | 0.4874 | 18.52 | 10.27 | 28.79 | 46.21 | -17.42 | AVG | P | |
| 5 | 1.2660 | 27.68 | 10.20 | 37.88 | 56.00 | -18.12 | QP | P | |
| 6 | 1.2660 | 19.60 | 10.20 | 29.80 | 46.00 | -16.20 | AVG | P | |
| 7 | 1.6710 | 27.23 | 10.27 | 37.50 | 56.00 | -18.50 | QP | P | |
| 8 | 1.6710 | 18.10 | 10.27 | 28.37 | 46.00 | -17.63 | AVG | P | |
| 9 | 3.1514 | 25.38 | 10.25 | 35.63 | 56.00 | -20.37 | QP | P | |
| 10 | 3.1514 | 15.56 | 10.25 | 25.81 | 46.00 | -20.19 | AVG | P | |
| 11 | 15.8684 | 25.96 | 10.66 | 36.62 | 60.00 | -23.38 | QP | P | |
| 12 | 15.8684 | 11.02 | 10.66 | 21.68 | 50.00 | -28.32 | AVG | P | |

*:Maximum data x:Over limit !:over margin

Appendix B: Test Results of 2.4GHz Wi-Fi

| | |
|---|----|
| APPENDIX B: TEST RESULTS OF 2.4GHZ WI-FI..... | 1 |
| APPENDIX B.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY | 2 |
| APPENDIX B.2: TEST RESULTS OF 6DB BANDWIDTH | 9 |
| APPENDIX B.3: TEST RESULTS OF 99% BANDWIDTH..... | 16 |
| APPENDIX B.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHZ BANDWIDTH..... | 23 |
| <i>Band Edge</i> | 23 |
| <i>Conducted Spurious Emission</i> | 28 |
| APPENDIX B.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS | 47 |
| 30MHz - 1GHz (<i>Worst case</i>)..... | 47 |
| 1GHz - 18GHz..... | 49 |
| APPENDIX B.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS..... | 73 |
| <i>Wi-Fi 802.11 b mode</i> | 73 |
| <i>Wi-Fi 802.11 g mode</i> | 77 |
| <i>Wi-Fi 802.11 n(HT20) mode</i> | 81 |
| <i>Wi-Fi 802.11 n(HT40) mode</i> | 85 |
| APPENDIX B.7: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS | 89 |

Appendix B.1: Test Results of Conducted Power Spectral Density

| TestMode | Antenna | Frequency[MHz] | Result[dBm/3-100kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|----------------|----------------------|-----------------|---------|
| 11B | Ant1 | 2412 | -16.26 | ≤8.00 | PASS |
| 11B | Ant1 | 2437 | -16.73 | ≤8.00 | PASS |
| 11B | Ant1 | 2462 | -15.74 | ≤8.00 | PASS |
| 11G | Ant1 | 2412 | -17.47 | ≤8.00 | PASS |
| 11G | Ant1 | 2437 | -17.02 | ≤8.00 | PASS |
| 11G | Ant1 | 2462 | -16.35 | ≤8.00 | PASS |
| 11N20SISO | Ant1 | 2412 | -18.92 | ≤8.00 | PASS |
| 11N20SISO | Ant1 | 2437 | -18.38 | ≤8.00 | PASS |
| 11N20SISO | Ant1 | 2462 | -17.61 | ≤8.00 | PASS |
| 11N40SISO | Ant1 | 2422 | -20.05 | ≤8.00 | PASS |
| 11N40SISO | Ant1 | 2437 | -19.81 | ≤8.00 | PASS |
| 11N40SISO | Ant1 | 2452 | -20.19 | ≤8.00 | PASS |


11B-Ant1-2412-PASS




11B-Ant1-2437-PASS



11B-Ant1-2462-PASS

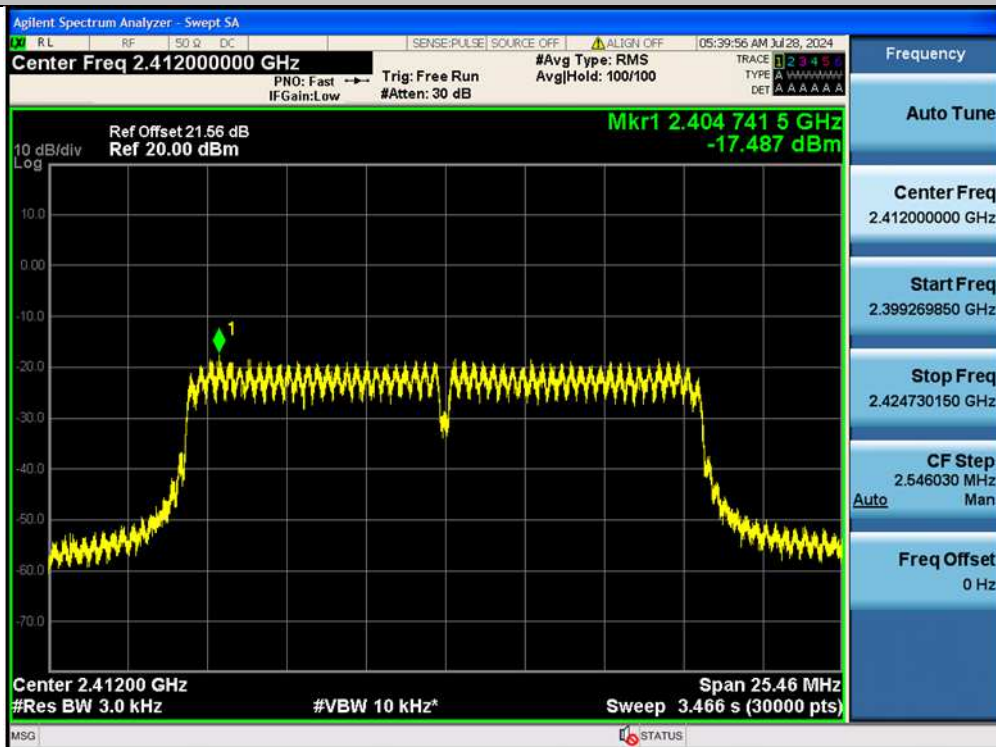


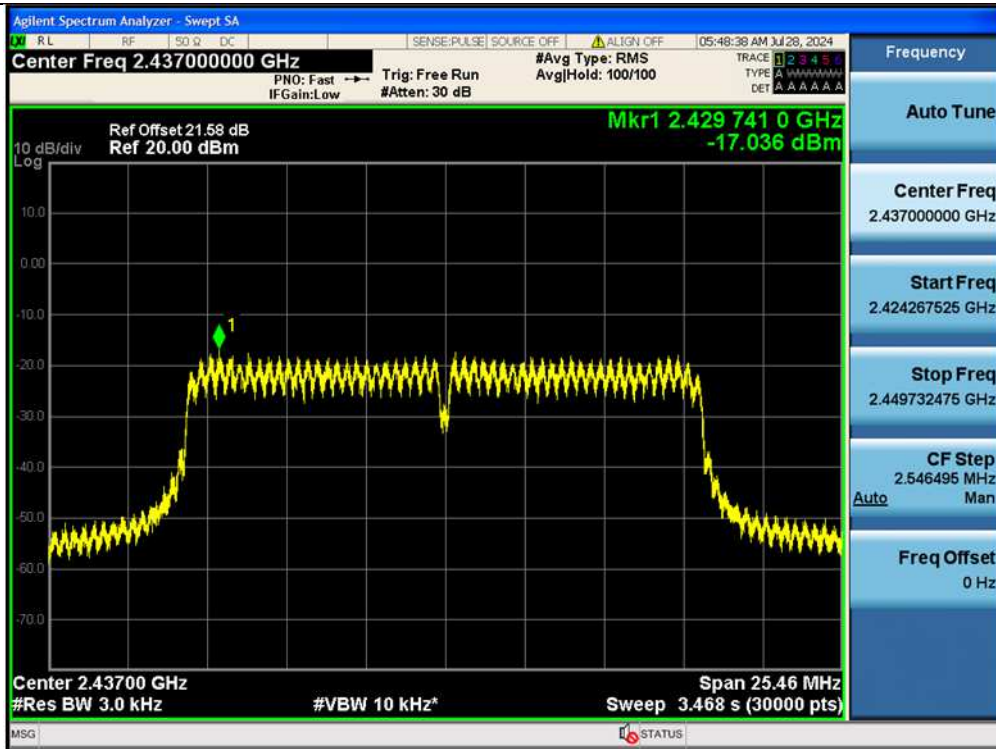

11G-Ant1-2462-PASS




11N20SISO-Ant1-2412-PASS

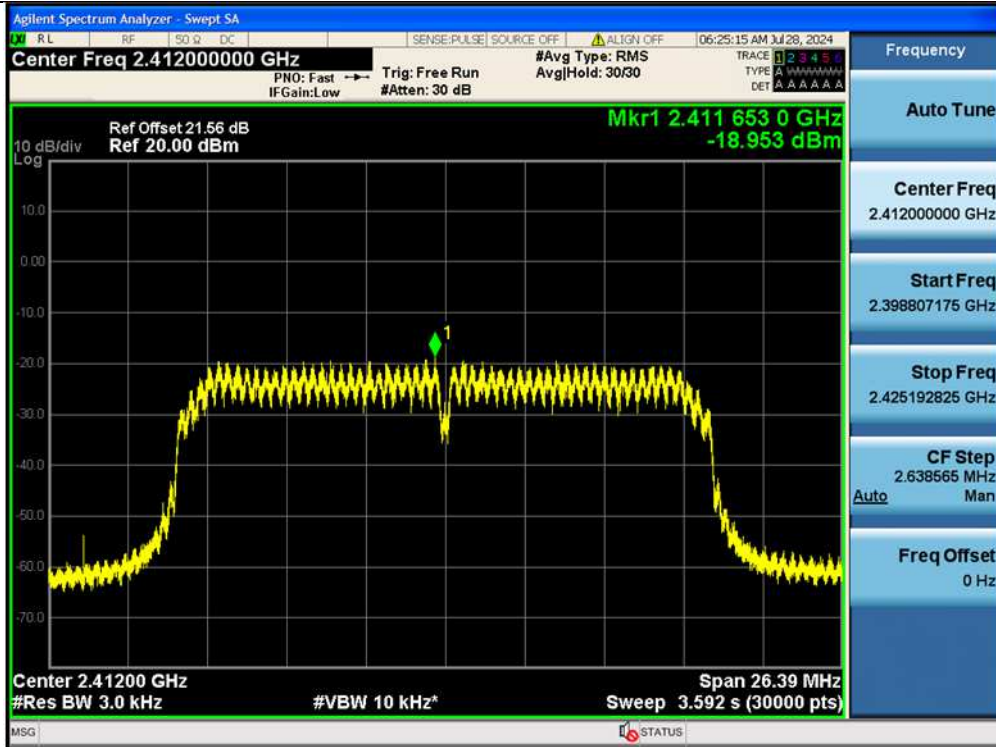


11N20SISO-Ant1-2437-PASS




11N20SISO-Ant1-2462-PASS

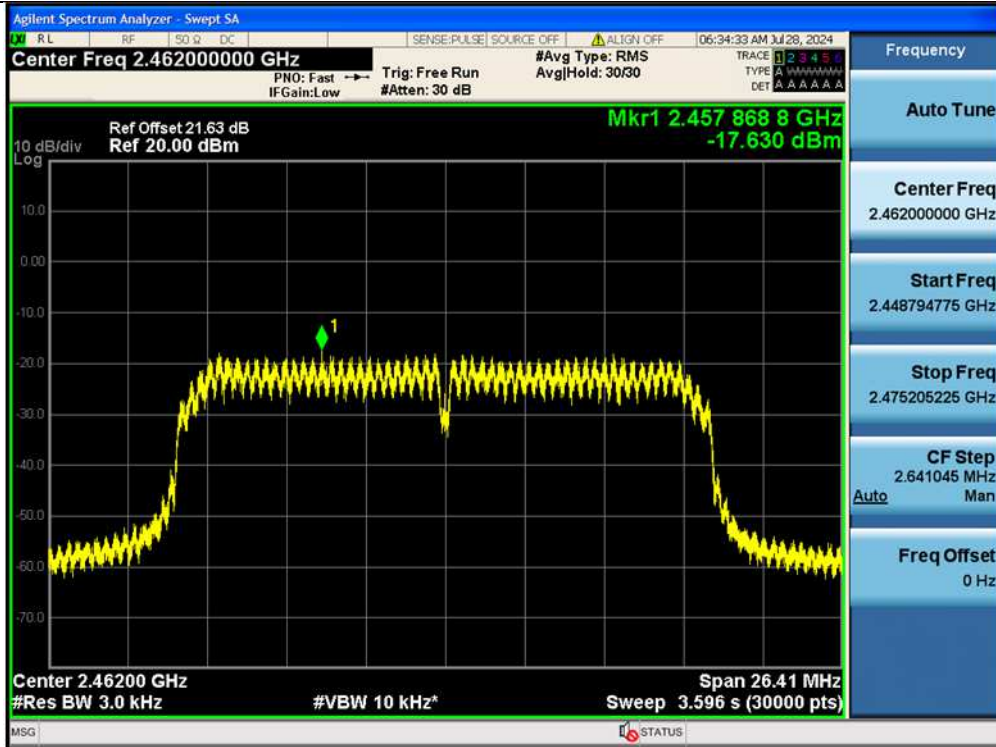


11N40SISO-Ant1-2422-PASS

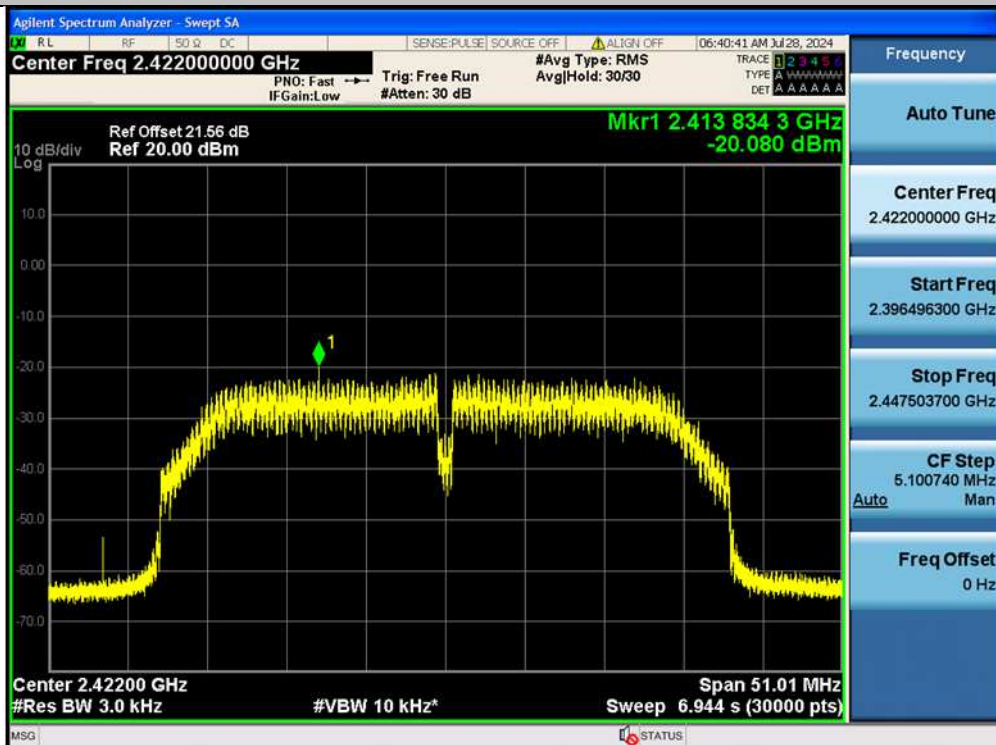

11N40SISO-Ant1-2437-PASS

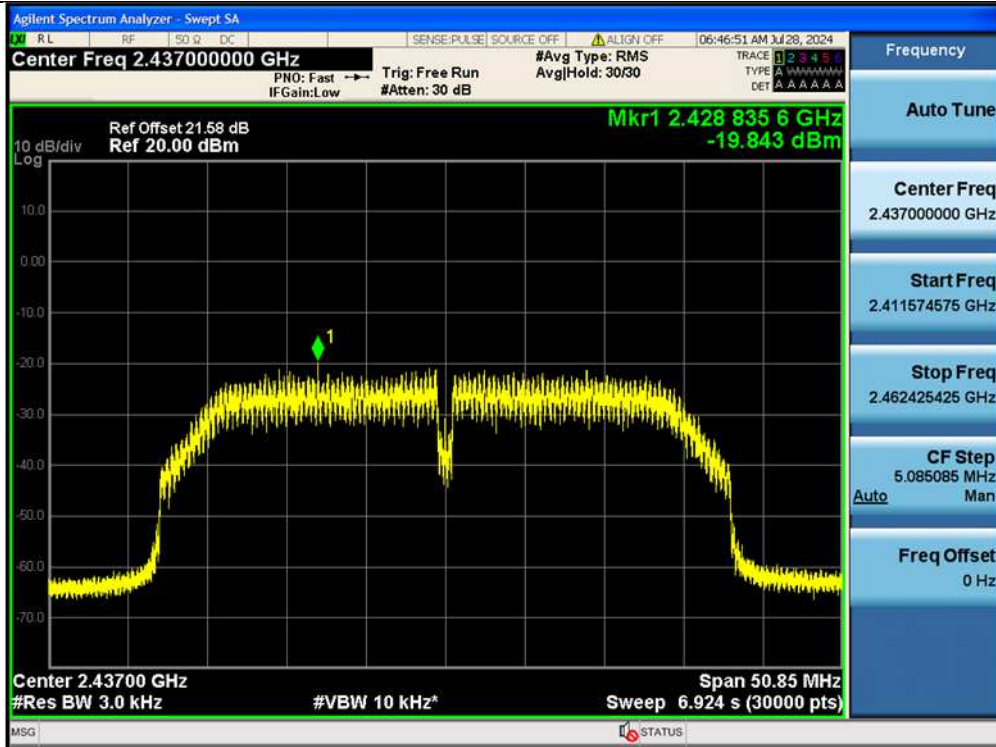

11N40SISO-Ant1-2452-PASS

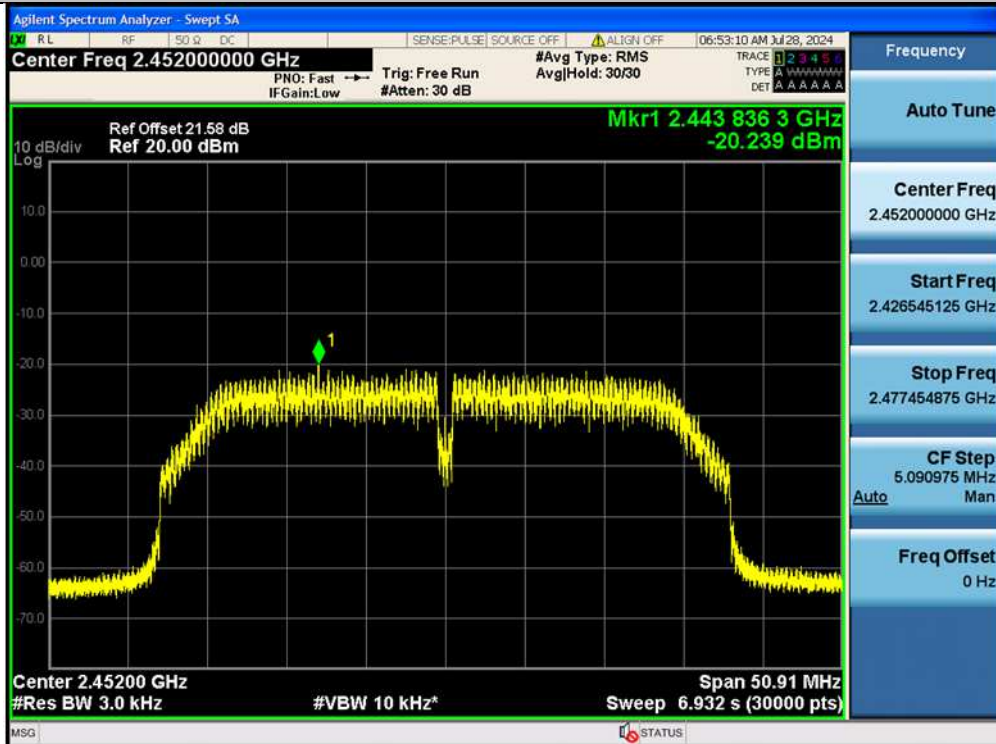


Appendix B.2: Test Results of 6dB Bandwidth

| TestMode | Antenna | Frequency [MHz] | DTS BW [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|-----------------|--------------|----------|----------|------------|---------|
| 11B | Ant1 | 2412 | 9.600 | 2406.960 | 2416.560 | 0.5 | PASS |
| 11B | Ant1 | 2437 | 9.480 | 2431.960 | 2441.440 | 0.5 | PASS |
| 11B | Ant1 | 2462 | 9.280 | 2457.200 | 2466.480 | 0.5 | PASS |
| 11G | Ant1 | 2412 | 16.040 | 2403.840 | 2419.880 | 0.5 | PASS |
| 11G | Ant1 | 2437 | 15.800 | 2429.040 | 2444.840 | 0.5 | PASS |
| 11G | Ant1 | 2462 | 16.000 | 2453.840 | 2469.840 | 0.5 | PASS |
| 11N20SISO | Ant1 | 2412 | 16.400 | 2403.760 | 2420.160 | 0.5 | PASS |
| 11N20SISO | Ant1 | 2437 | 16.640 | 2428.720 | 2445.360 | 0.5 | PASS |
| 11N20SISO | Ant1 | 2462 | 15.800 | 2454.040 | 2469.840 | 0.5 | PASS |
| 11N40SISO | Ant1 | 2422 | 29.200 | 2406.960 | 2436.160 | 0.5 | PASS |
| 11N40SISO | Ant1 | 2437 | 29.360 | 2421.960 | 2451.320 | 0.5 | PASS |
| 11N40SISO | Ant1 | 2452 | 29.200 | 2436.960 | 2466.160 | 0.5 | PASS |

11B-Ant1-2412-PASS



11B-Ant1-2437-PASS

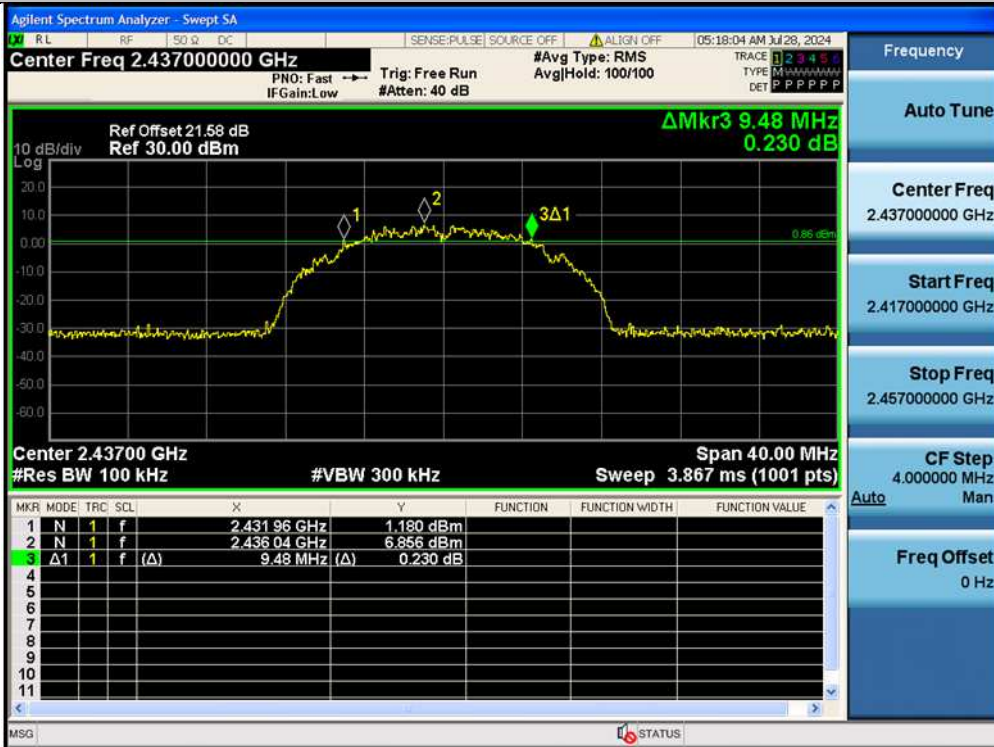


11B-Ant1-2462-PASS



11G-Ant1-2412-PASS




11G-Ant1-2437-PASS

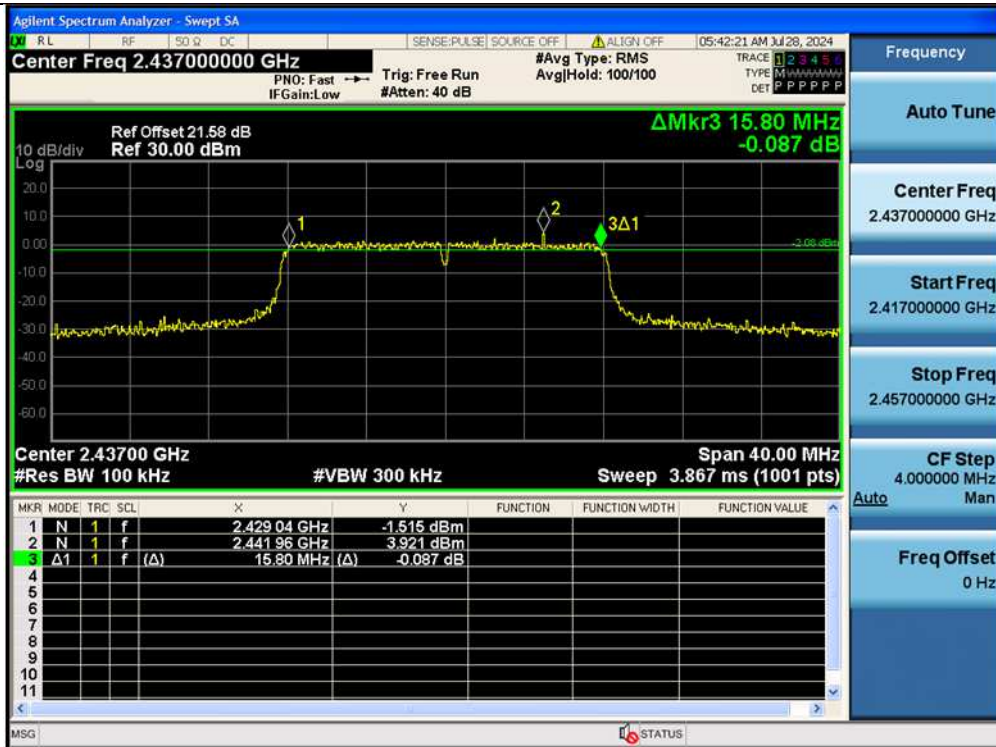


11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS

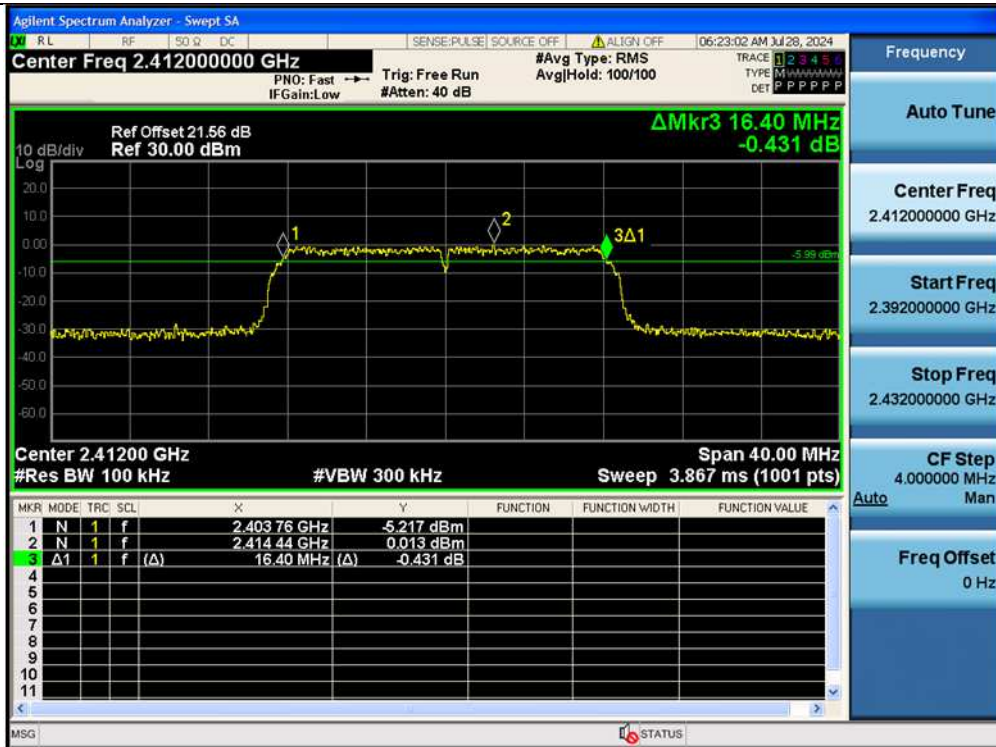

11N20SISO-Ant1-2437-PASS

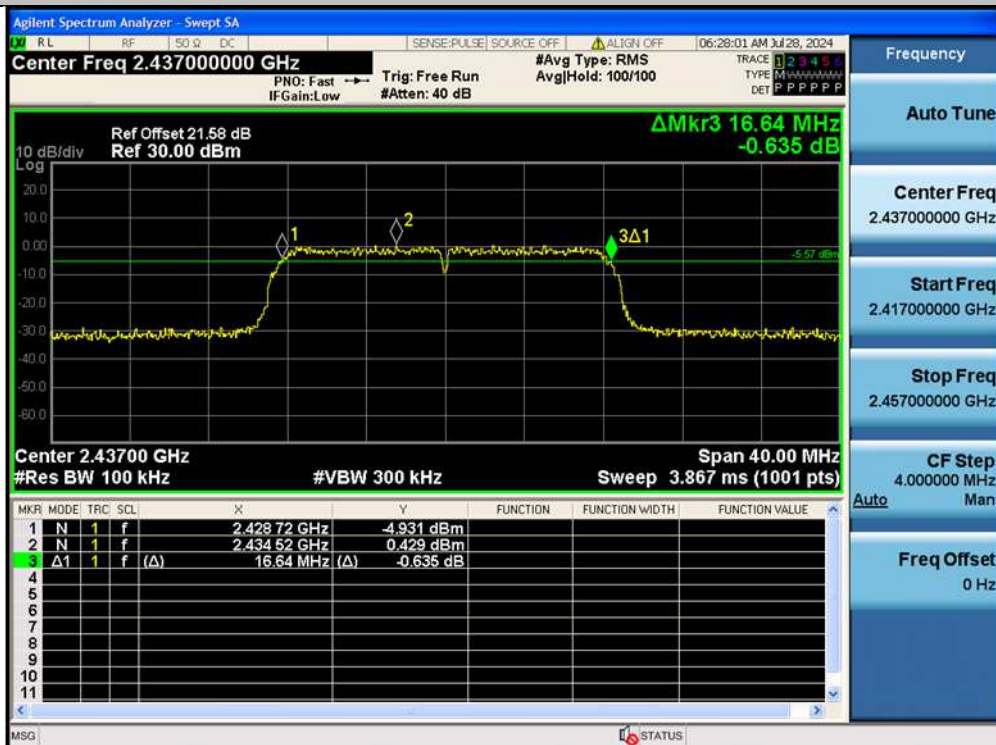

11N20SISO-Ant1-2462-PASS



11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2437-PASS




11N40SISO-Ant1-2452-PASS




Appendix B.3: Test Results of 99% Bandwidth

| TestMode | Antenna | Channel Frequency [MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|-------------------------|-----------|-----------|-----------|------------|---------|
| 11B | Ant1 | 2412 | 13.244 | 2405.2770 | 2418.5210 | --- | PASS |
| 11B | Ant1 | 2437 | 13.249 | 2430.2979 | 2443.5469 | --- | PASS |
| 11B | Ant1 | 2462 | 13.216 | 2455.2956 | 2468.5116 | --- | PASS |
| 11G | Ant1 | 2412 | 16.426 | 2403.7708 | 2420.1968 | --- | PASS |
| 11G | Ant1 | 2437 | 16.429 | 2428.7592 | 2445.1882 | --- | PASS |
| 11G | Ant1 | 2462 | 16.426 | 2453.7450 | 2470.1710 | --- | PASS |
| 11N20SISO | Ant1 | 2412 | 17.023 | 2403.4645 | 2420.4875 | --- | PASS |
| 11N20SISO | Ant1 | 2437 | 17.008 | 2428.4603 | 2445.4683 | --- | PASS |
| 11N20SISO | Ant1 | 2462 | 17.039 | 2453.4291 | 2470.4681 | --- | PASS |
| 11N40SISO | Ant1 | 2422 | 32.908 | 2405.5161 | 2438.4241 | --- | PASS |
| 11N40SISO | Ant1 | 2437 | 32.807 | 2420.6416 | 2453.4486 | --- | PASS |
| 11N40SISO | Ant1 | 2452 | 32.845 | 2435.6016 | 2468.4466 | --- | PASS |


11B-Ant1-2412

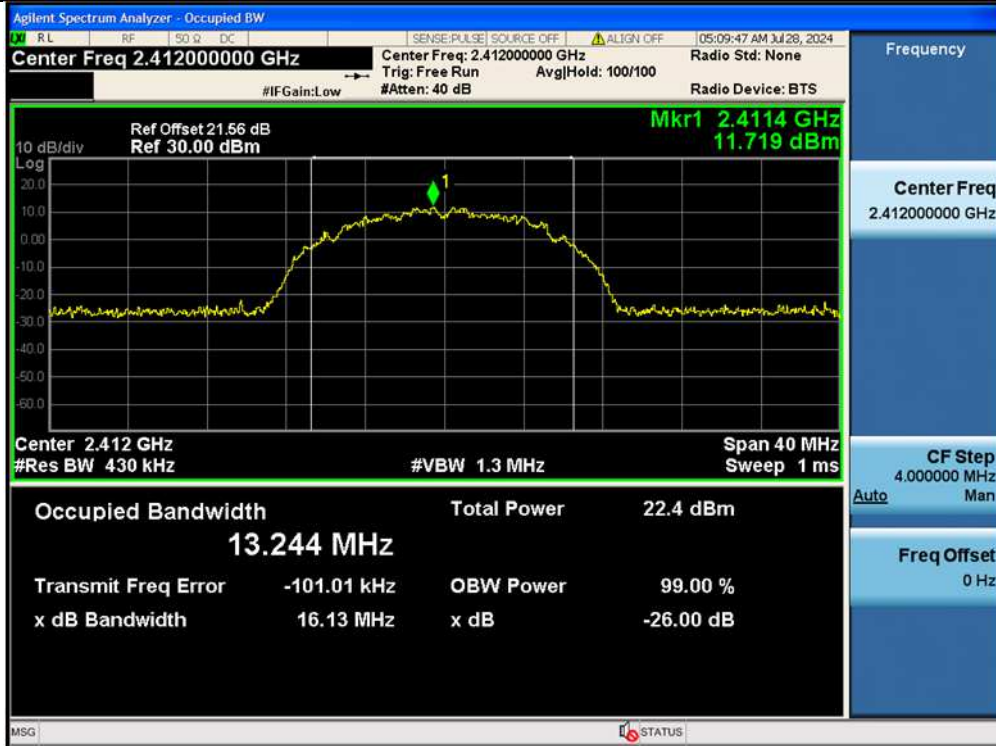


11B-Ant1-2437

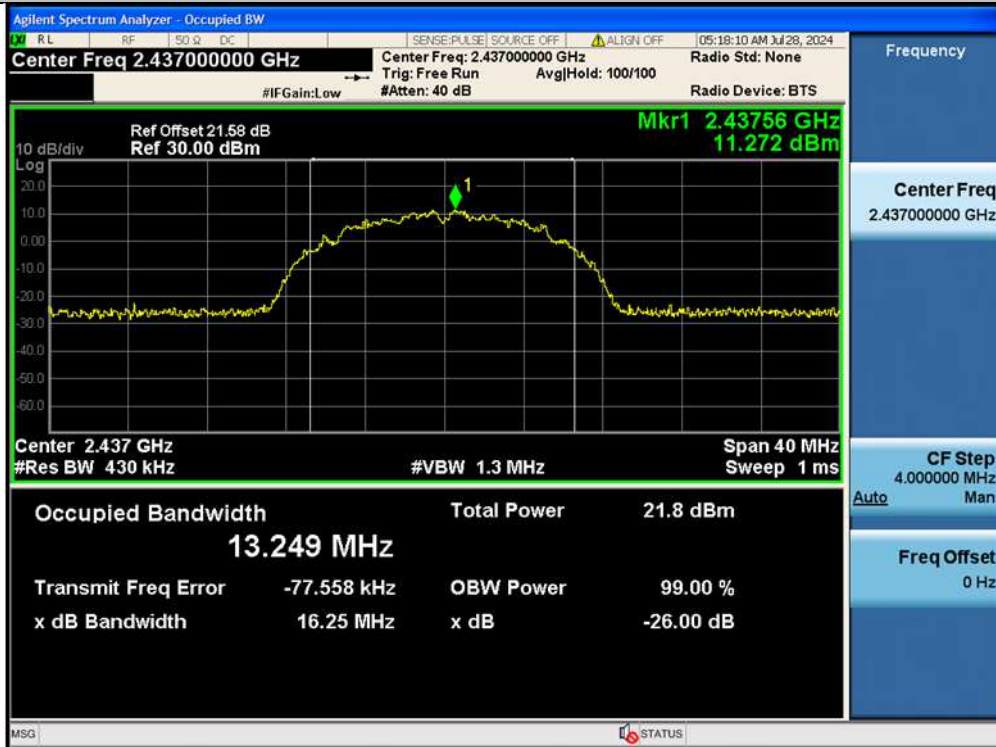


11B-Ant1-2462

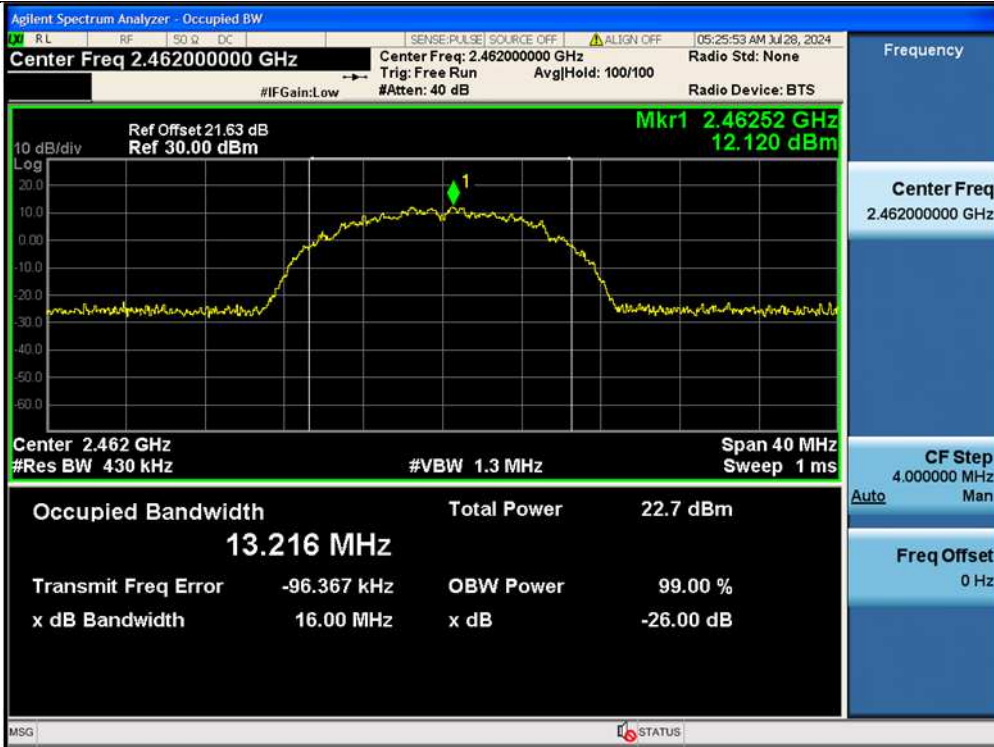


11G-Ant1-2412

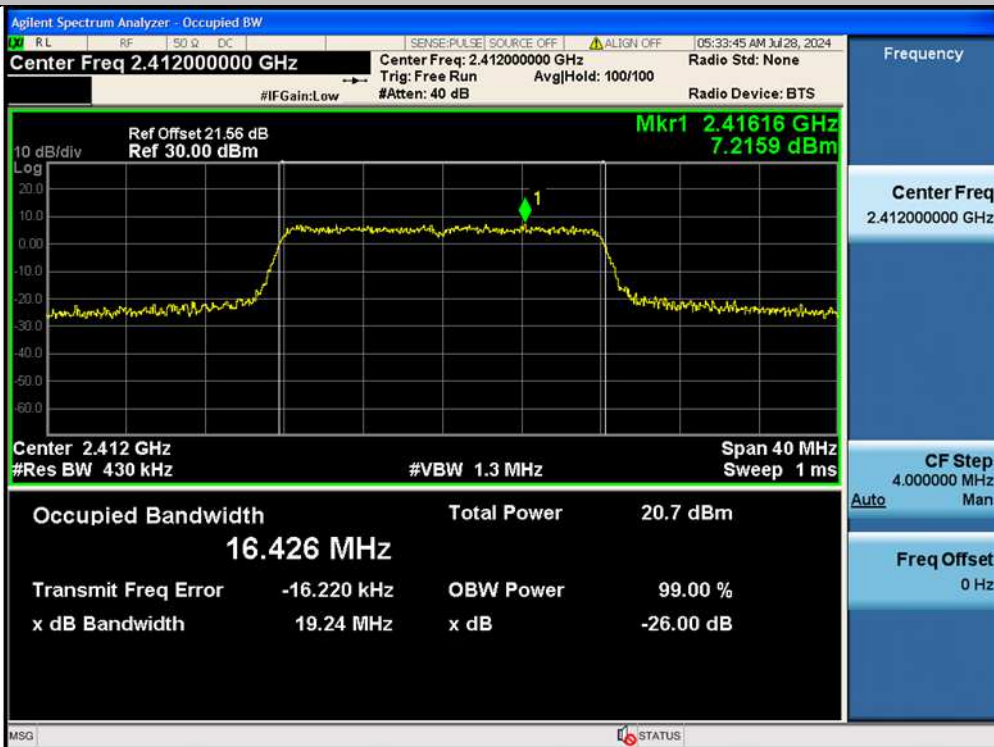

11G-Ant1-2437

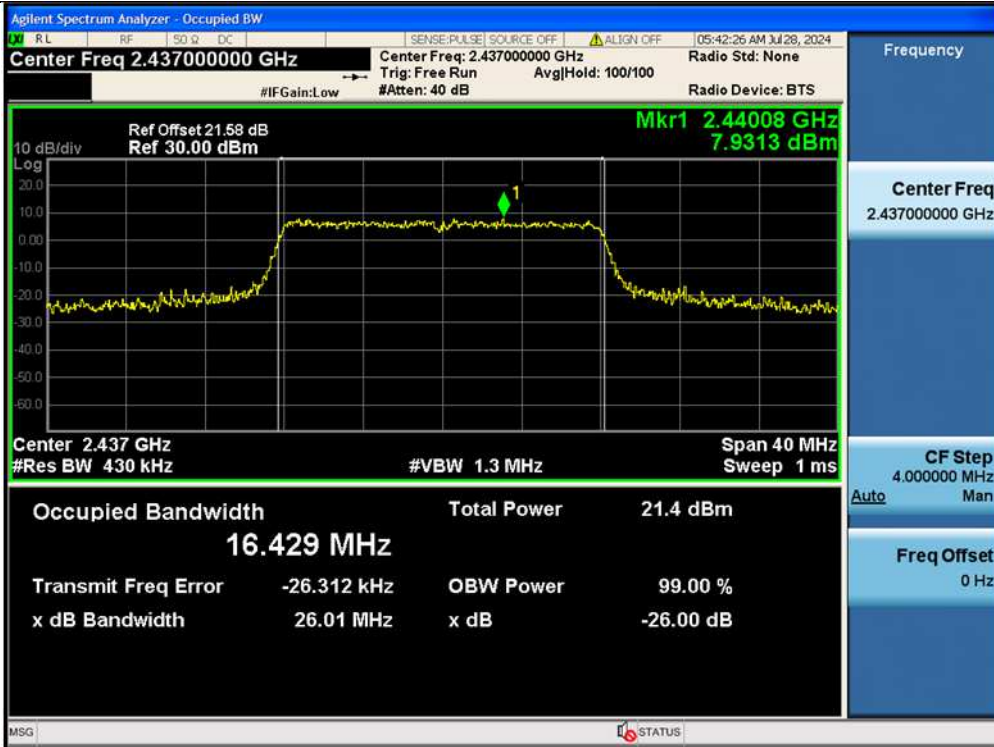

11G-Ant1-2462

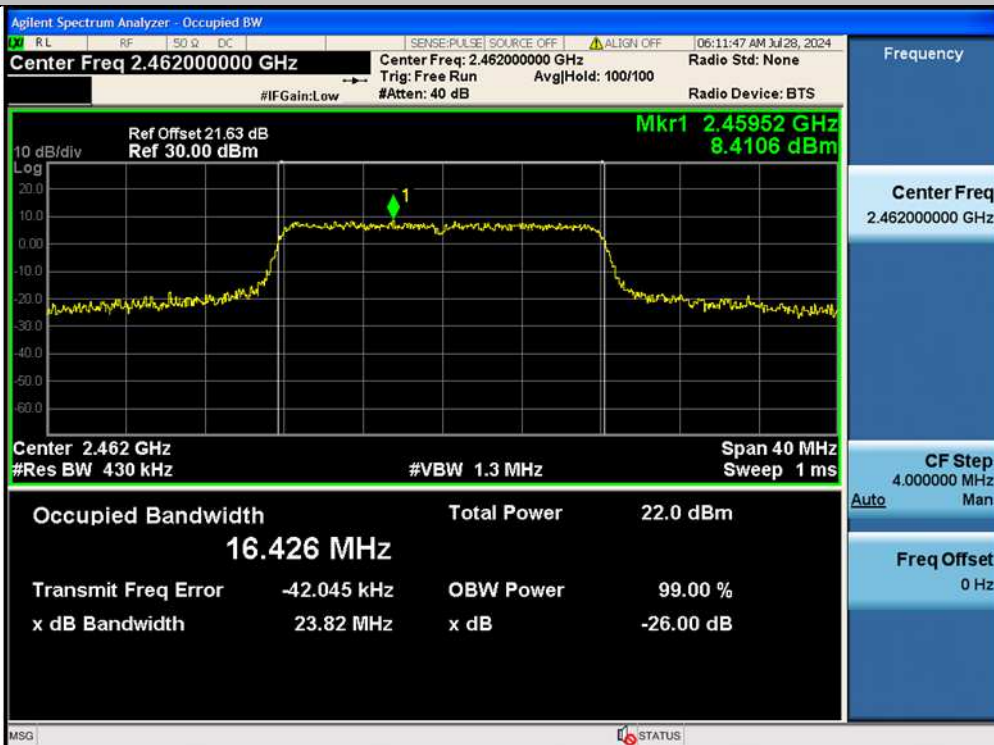


11N20SISO-Ant1-2412




11N20SISO-Ant1-2437




11N20SISO-Ant1-2462

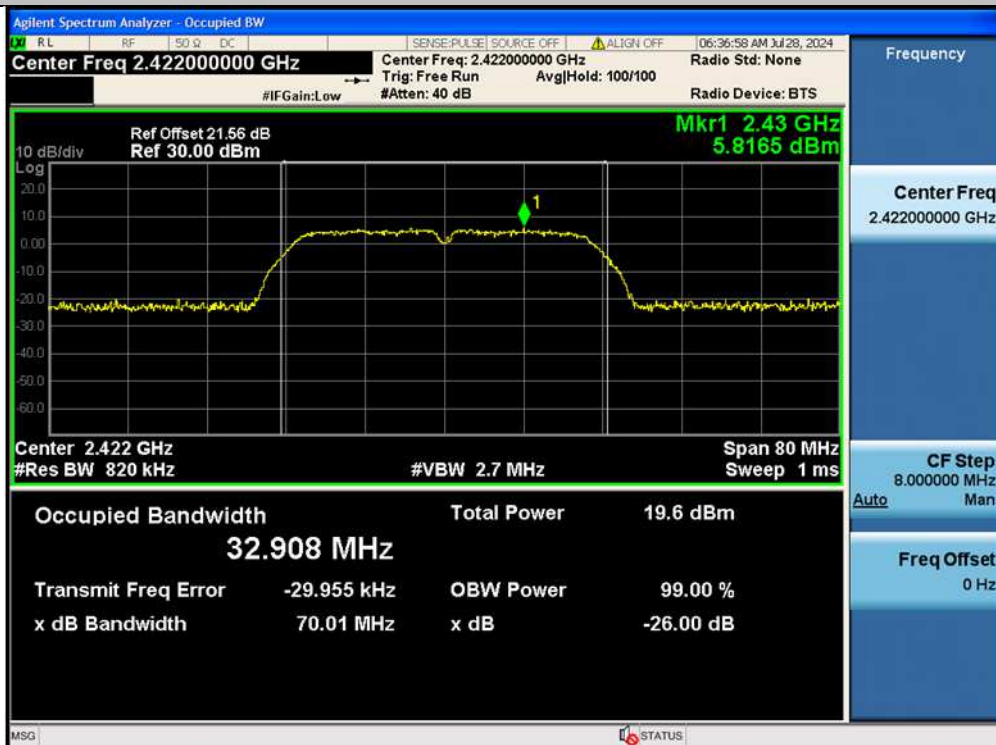

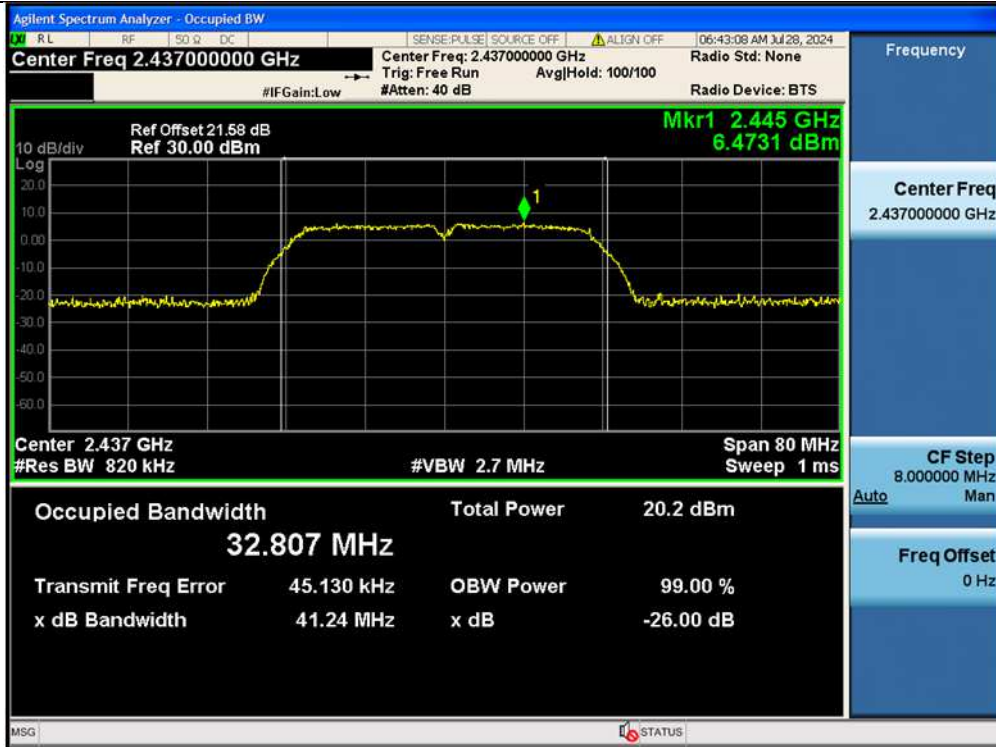

11N40SISO-Ant1-2452

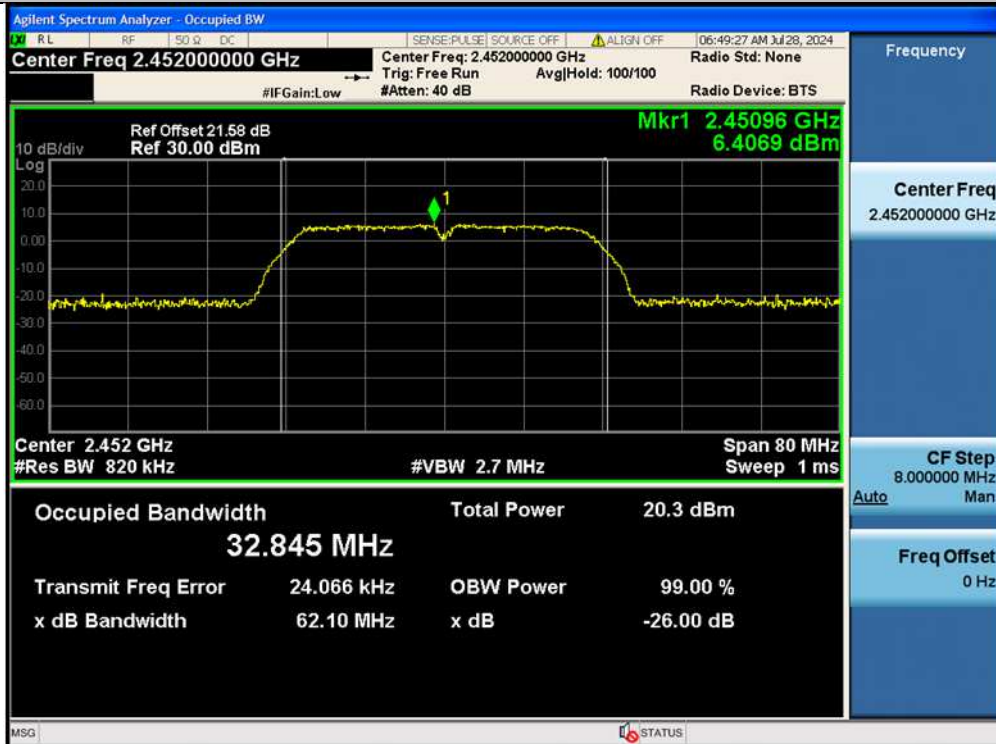


Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Band Edge

| TestMode | Antenna | ChName | Frequency[MHz] | RefLevel[dBm] | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|--------|----------------|---------------|-------------|------------|---------|
| 11B | Ant1 | Low | 2412 | 6.97 | -37.88 | ≤-23.03 | PASS |
| 11B | Ant1 | High | 2462 | 8.01 | -37.71 | ≤-21.99 | PASS |
| 11G | Ant1 | Low | 2412 | 3.31 | -30.2 | ≤-26.69 | PASS |
| 11G | Ant1 | High | 2462 | 4.01 | -35.63 | ≤-25.99 | PASS |
| 11N20SISO | Ant1 | Low | 2412 | 2.43 | -35.62 | ≤-27.58 | PASS |
| 11N20SISO | Ant1 | High | 2462 | 3.34 | -38.06 | ≤-26.67 | PASS |
| 11N40SISO | Ant1 | Low | 2422 | -1.01 | -38.15 | ≤-31.01 | PASS |
| 11N40SISO | Ant1 | High | 2452 | 0.28 | -37.25 | ≤-29.73 | PASS |

11B-Ant1-2412-PASS

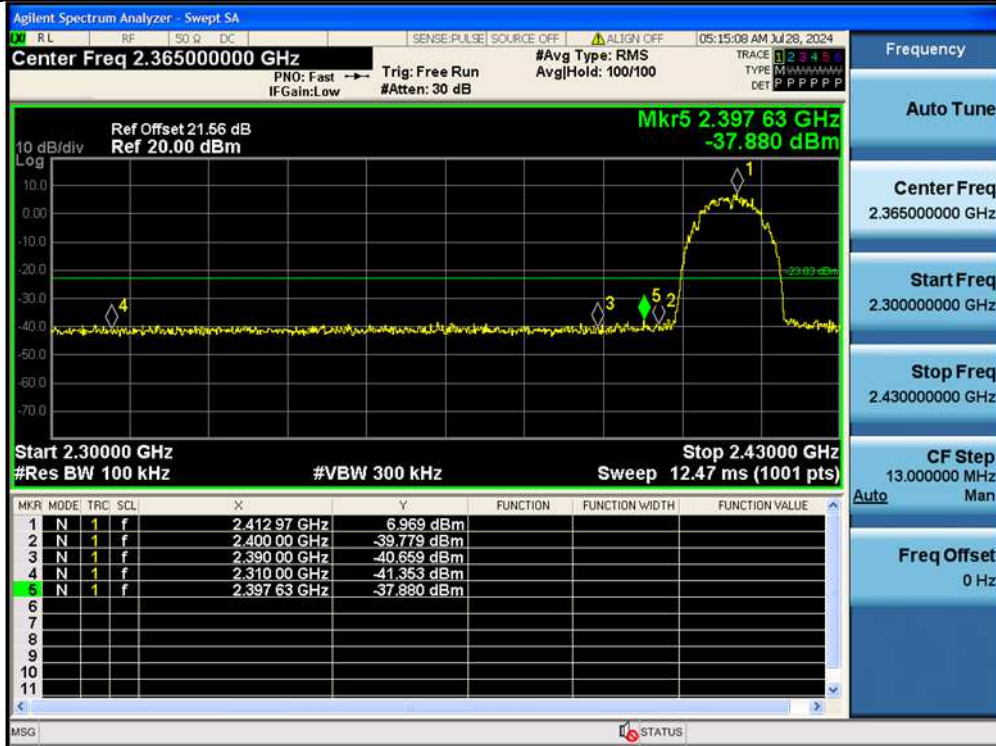

11B-Ant1-2462-PASS

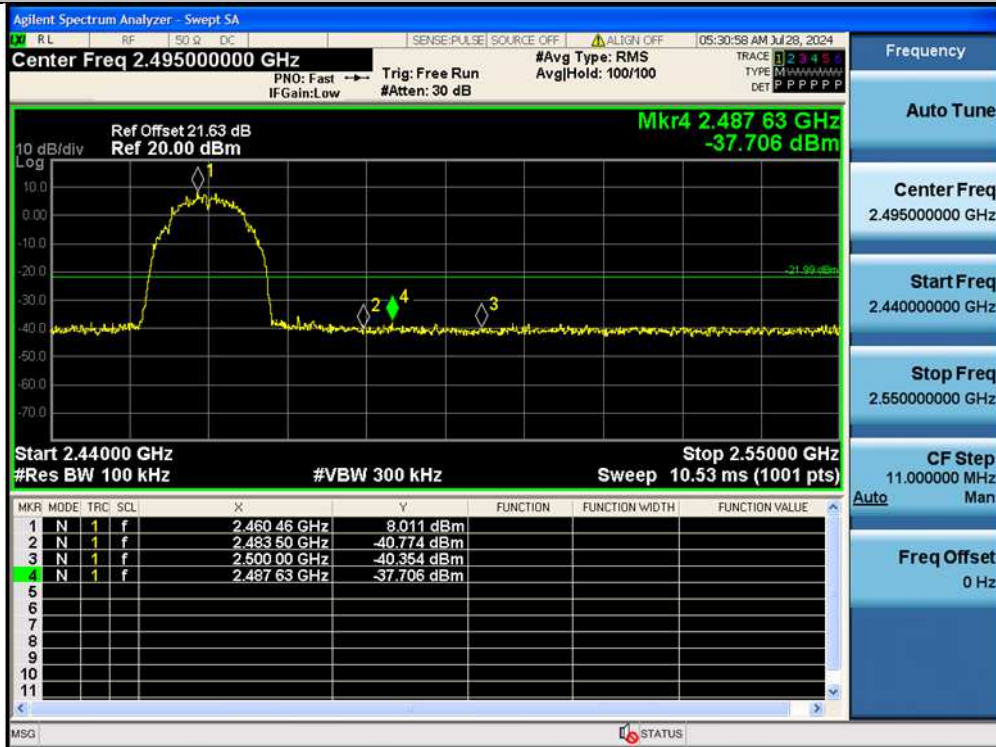


11G-Ant1-2412-PASS




11G-Ant1-2462-PASS



11N20SISO-Ant1-2412-PASS

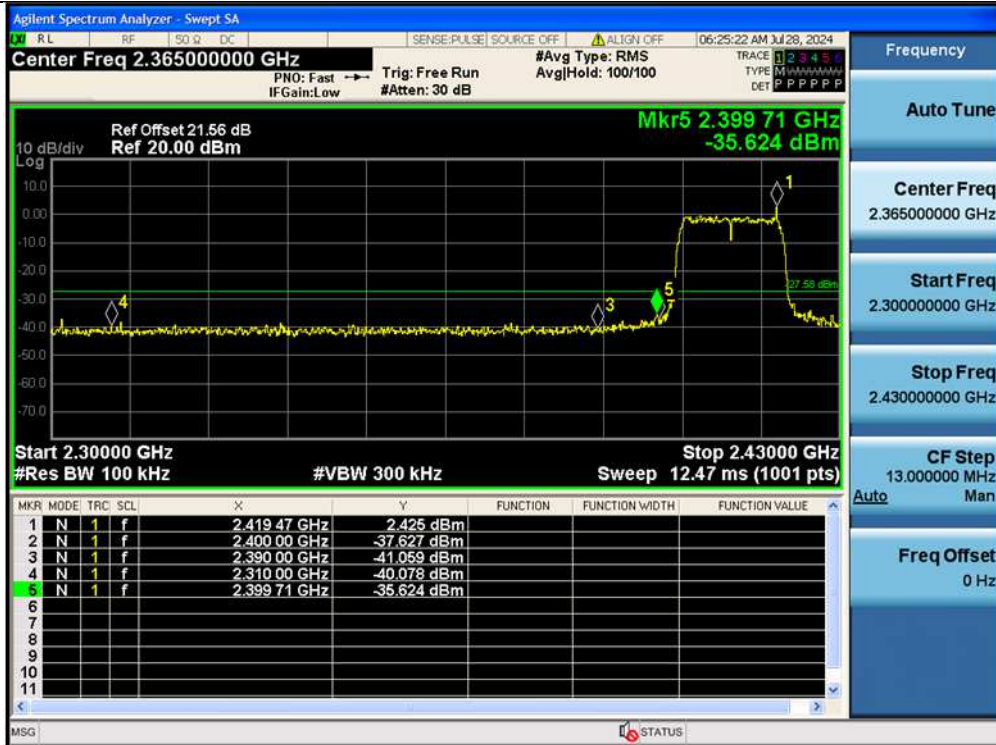


11N20SISO-Ant1-2462-PASS

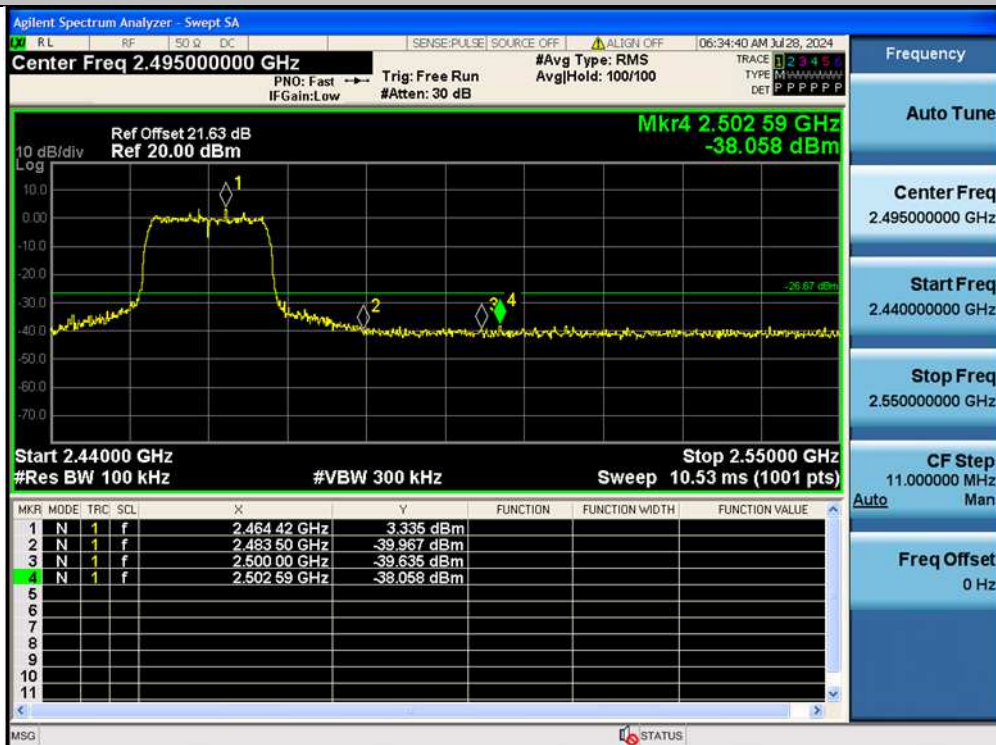

11N40SISO-Ant1-2422-PASS



11N40SISO-Ant1-2452-PASS

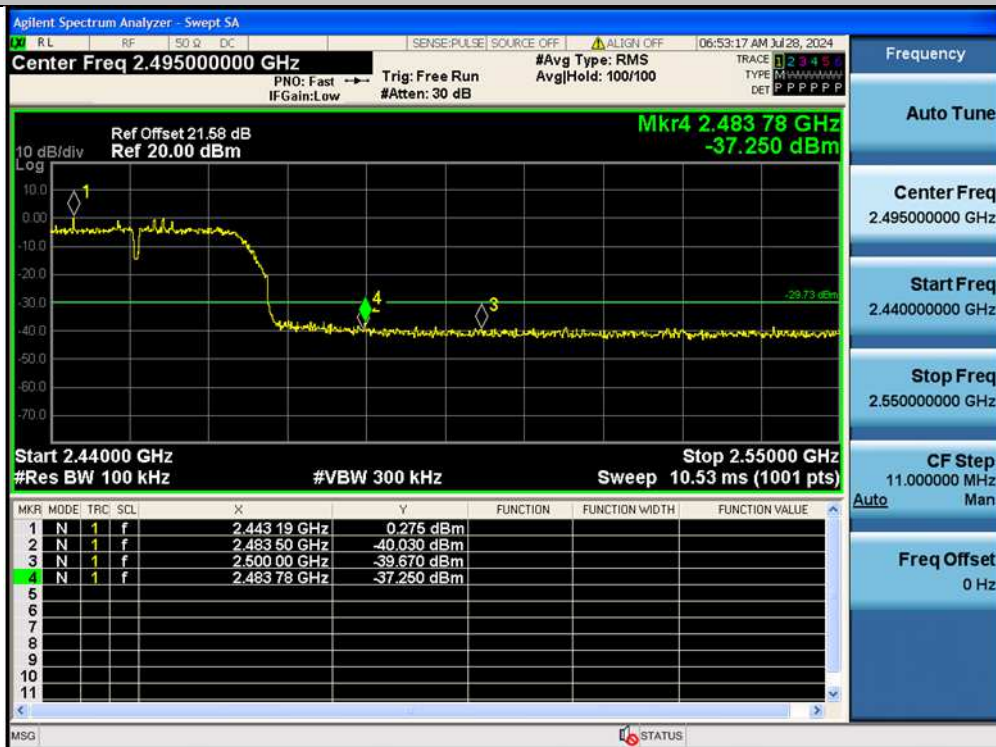


Conducted Spurious Emission

| TestMode | Antenna | Frequency[MHz] | FreqRange [Mhz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|----------------|-----------------|----------------|--------------|-------------|---------|
| 11B | Ant1 | 2412 | 0~Reference | 7.36 | 7.36 | --- | PASS |
| 11B | Ant1 | 2412 | 30~1000 | 7.36 | -49.34 | ≤-22.64 | PASS |
| 11B | Ant1 | 2412 | 1000~26500 | 7.36 | -38.52 | ≤-22.64 | PASS |
| 11B | Ant1 | 2437 | 0~Reference | 5.82 | 5.82 | --- | PASS |
| 11B | Ant1 | 2437 | 30~1000 | 5.82 | -49.4 | ≤-24.18 | PASS |
| 11B | Ant1 | 2437 | 1000~26500 | 5.82 | -39.39 | ≤-24.18 | PASS |
| 11B | Ant1 | 2462 | 0~Reference | 7.56 | 7.56 | --- | PASS |
| 11B | Ant1 | 2462 | 30~1000 | 7.56 | -49.43 | ≤-22.44 | PASS |
| 11B | Ant1 | 2462 | 1000~26500 | 7.56 | -38.54 | ≤-22.44 | PASS |
| 11G | Ant1 | 2412 | 0~Reference | -0.14 | -0.14 | --- | PASS |
| 11G | Ant1 | 2412 | 30~1000 | -0.14 | -49.46 | ≤-30.14 | PASS |
| 11G | Ant1 | 2412 | 1000~26500 | -0.14 | -38.47 | ≤-30.14 | PASS |
| 11G | Ant1 | 2437 | 0~Reference | 0.38 | 0.38 | --- | PASS |
| 11G | Ant1 | 2437 | 30~1000 | 0.38 | -49.08 | ≤-29.62 | PASS |
| 11G | Ant1 | 2437 | 1000~26500 | 0.38 | -38.65 | ≤-29.62 | PASS |
| 11G | Ant1 | 2462 | 0~Reference | 3.05 | 3.05 | --- | PASS |
| 11G | Ant1 | 2462 | 30~1000 | 3.05 | -49.29 | ≤-26.95 | PASS |
| 11G | Ant1 | 2462 | 1000~26500 | 3.05 | -39.1 | ≤-26.95 | PASS |
| 11N20SISO | Ant1 | 2412 | 0~Reference | 0.02 | 0.02 | --- | PASS |
| 11N20SISO | Ant1 | 2412 | 30~1000 | 0.02 | -49.12 | ≤-29.98 | PASS |
| 11N20SISO | Ant1 | 2412 | 1000~26500 | 0.02 | -38.98 | ≤-29.98 | PASS |
| 11N20SISO | Ant1 | 2437 | 0~Reference | -0.25 | -0.25 | --- | PASS |
| 11N20SISO | Ant1 | 2437 | 30~1000 | -0.25 | -49.81 | ≤-30.25 | PASS |
| 11N20SISO | Ant1 | 2437 | 1000~26500 | -0.25 | -38.93 | ≤-30.25 | PASS |
| 11N20SISO | Ant1 | 2462 | 0~Reference | 3.26 | 3.26 | --- | PASS |
| 11N20SISO | Ant1 | 2462 | 30~1000 | 3.26 | -49.17 | ≤-26.74 | PASS |
| 11N20SISO | Ant1 | 2462 | 1000~26500 | 3.26 | -39.44 | ≤-26.74 | PASS |
| 11N40SISO | Ant1 | 2422 | 0~Reference | -3.28 | -3.28 | --- | PASS |
| 11N40SISO | Ant1 | 2422 | 30~1000 | -3.28 | -49.3 | ≤-33.28 | PASS |
| 11N40SISO | Ant1 | 2422 | 1000~26500 | -3.28 | -38.45 | ≤-33.28 | PASS |
| 11N40SISO | Ant1 | 2437 | 0~Reference | -2.38 | -2.38 | --- | PASS |
| 11N40SISO | Ant1 | 2437 | 30~1000 | -2.38 | -49.38 | ≤-32.38 | PASS |
| 11N40SISO | Ant1 | 2437 | 1000~26500 | -2.38 | -39.27 | ≤-32.38 | PASS |
| 11N40SISO | Ant1 | 2452 | 0~Reference | -3.44 | -3.44 | --- | PASS |
| 11N40SISO | Ant1 | 2452 | 30~1000 | -3.44 | -49.84 | ≤-33.44 | PASS |
| 11N40SISO | Ant1 | 2452 | 1000~26500 | -3.44 | -38.06 | ≤-33.44 | PASS |


11B-Ant1-2412-0~Reference-PASS



11B-Ant1-2412-30~1000-PASS

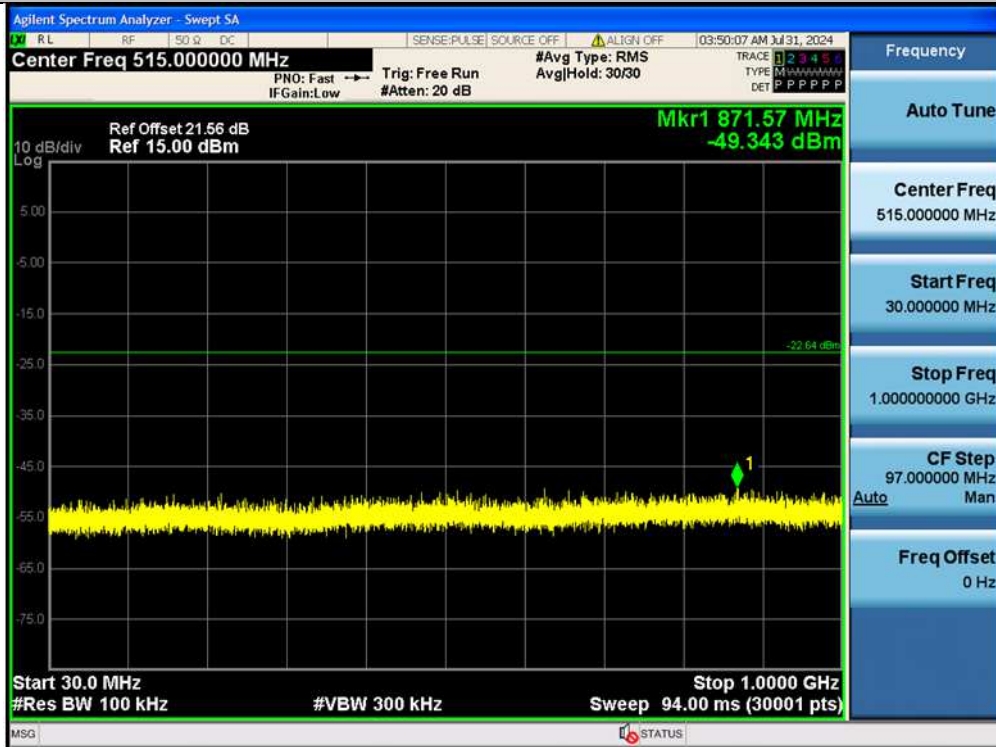


11B-Ant1-2412-1000~26500-PASS

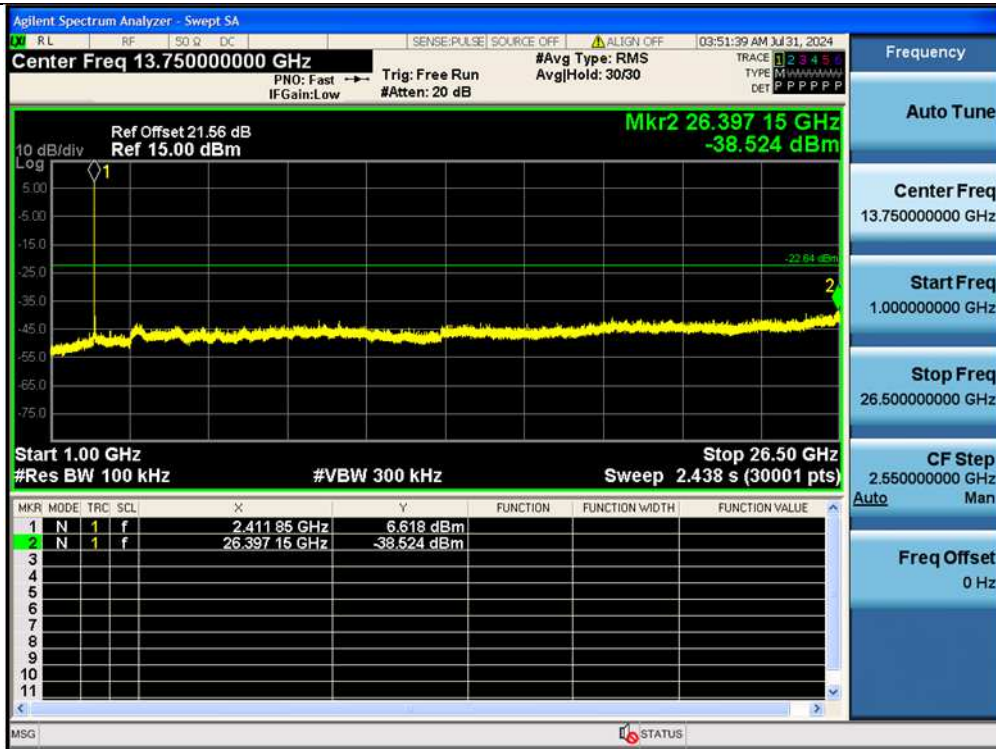


11B-Ant1-2437-0~Reference-PASS



11B-Ant1-2437-30~1000-PASS

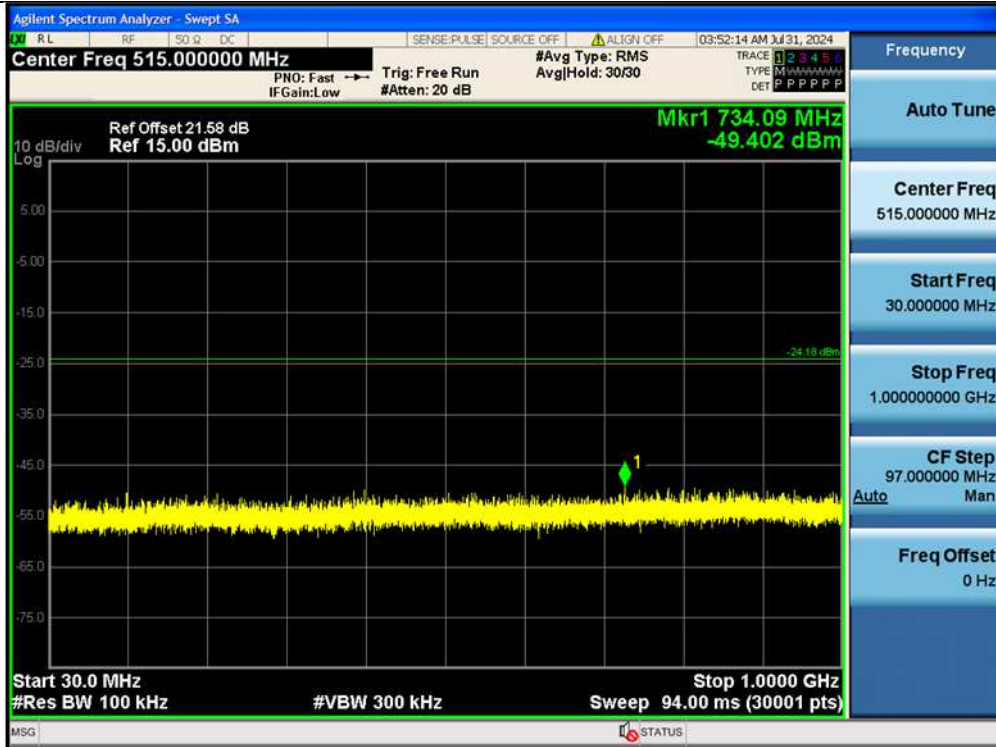


11B-Ant1-2437-1000~26500-PASS

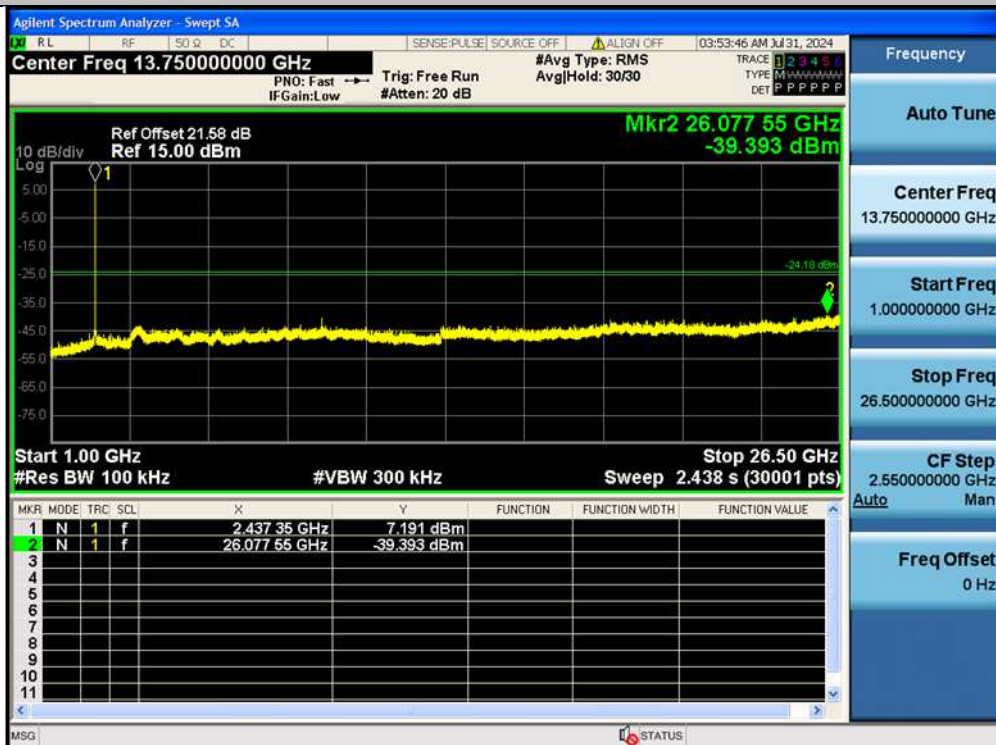


11B-Ant1-2462-0~Reference-PASS



11B-Ant1-2462-30~1000-PASS

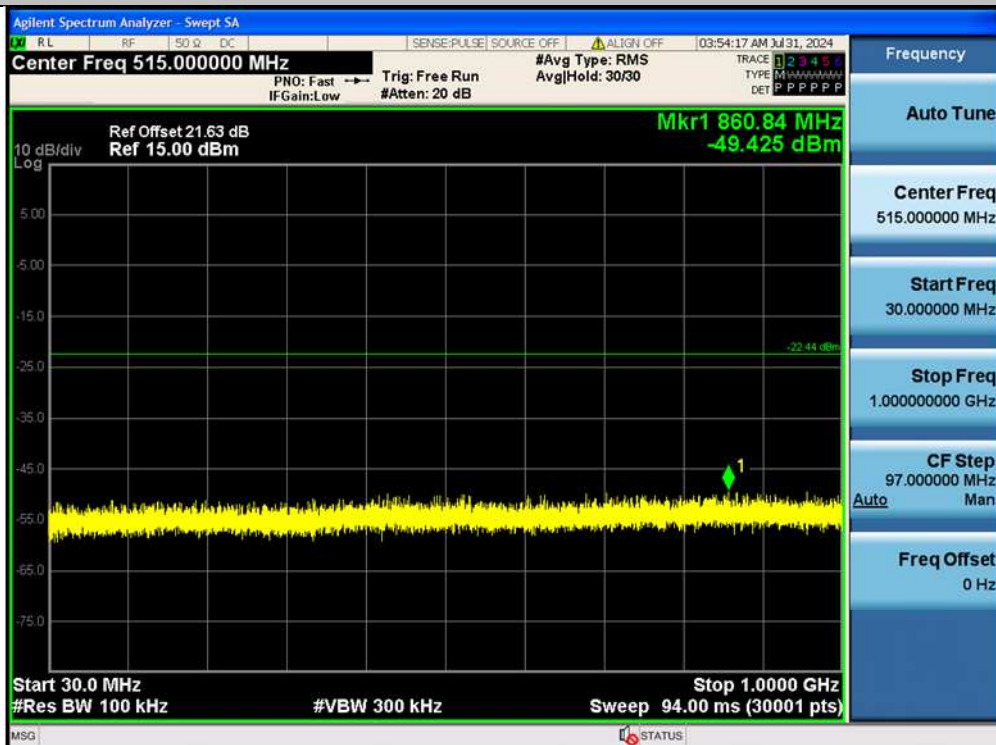


11B-Ant1-2462-1000~26500-PASS

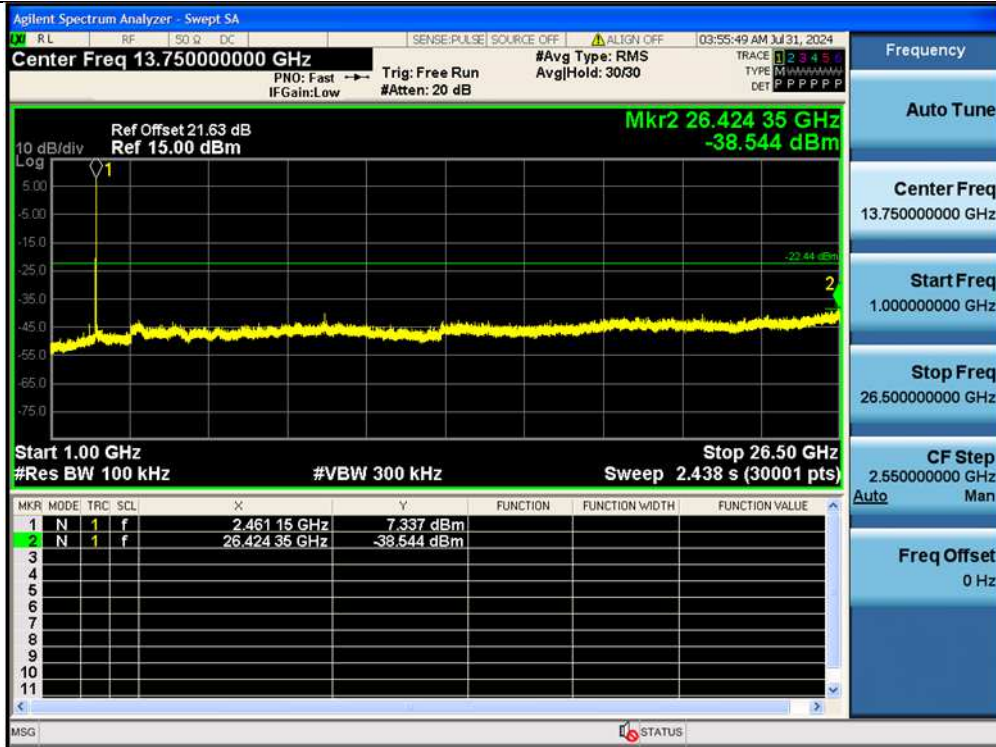


11G-Ant1-2412-0~Reference-PASS



11G-Ant1-2412-30~1000-PASS

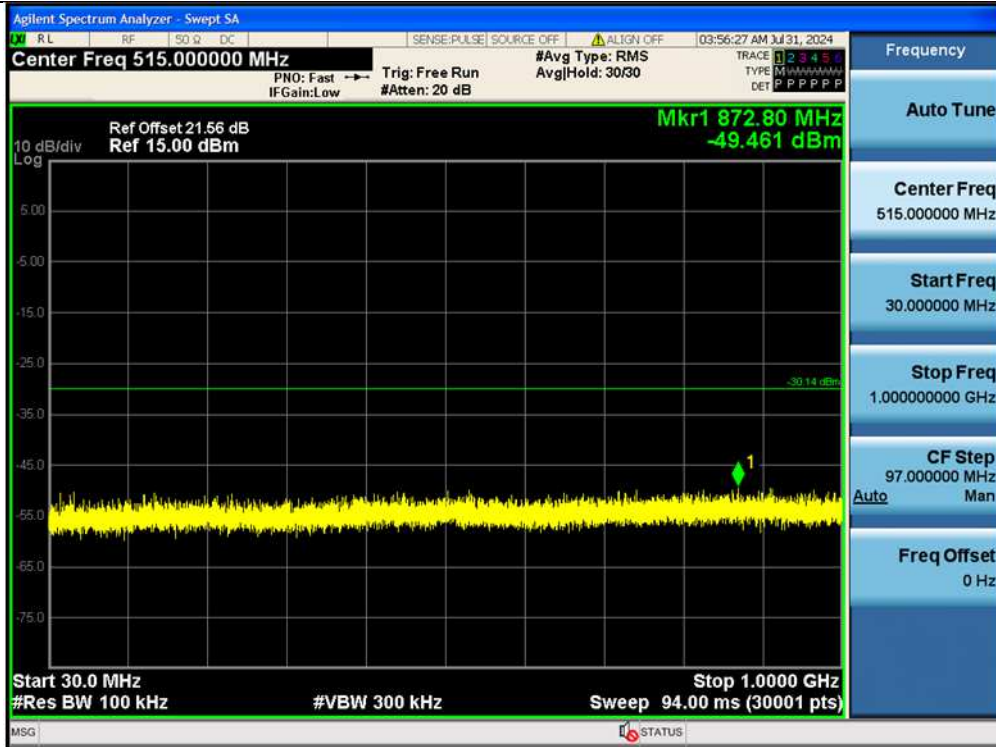

11G-Ant1-2412-1000~26500-PASS

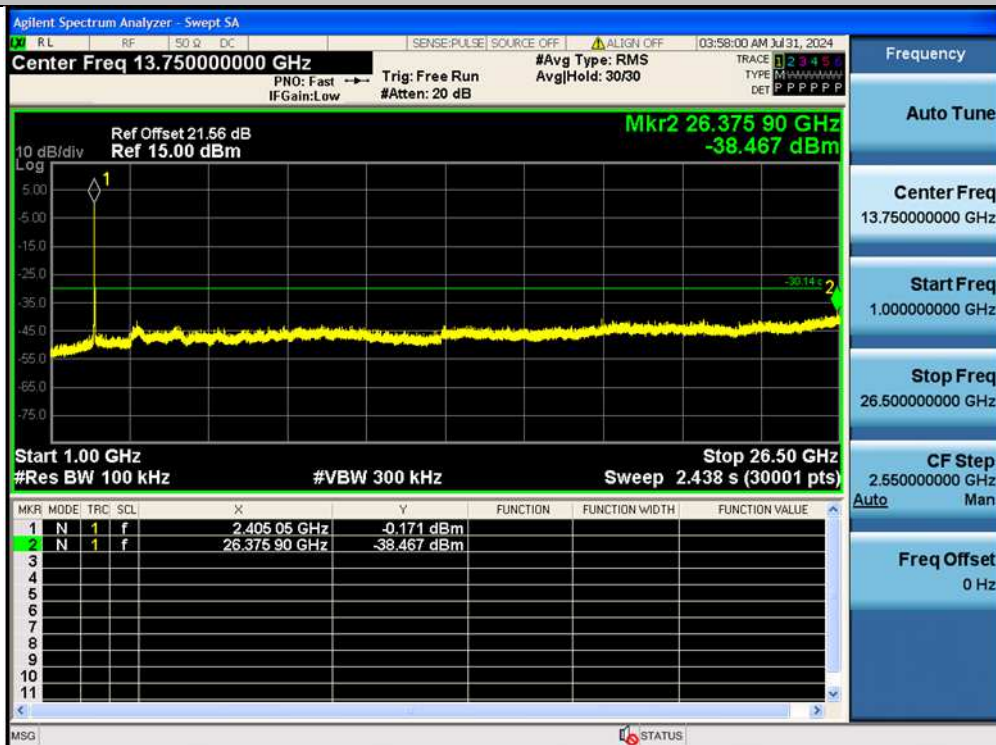

11G-Ant1-2437-0~Reference-PASS