



# FCC PART 15.255

## TEST REPORT

For

### SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,  
Nanshan, Shenzhen, Guangdong, China

**FCC ID: SS3-60TX1604**

<b>Report Type:</b> Amended Report	<b>Product Type:</b> SRW-60G
<b>Test Engineer:</b> Emily Wang	<i>Emily Wang</i>
<b>Report Number:</b> RDG160322002-00A1	
<b>Report Date:</b> 2016-06-13	
<b>Reviewed By:</b> Dean Liu RF Engineer	<i>Dean Liu</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

---

## **DOCUMENT REVISION HISTORY**

---

<b>Revision Number</b>	<b>Report Number</b>	<b>Description of Revision</b>	<b>Date of Revision</b>
0	RDG160322002-00	Original Report	2016-04-21
1	RDG160322002-00A1	First Amended Report	2016-06-13

The First amended report have revised E.I.R.P. test and added the test equipments for this item.

## TABLE OF CONTENTS

**DOCUMENT REVISION HISTORY .....2**

**GENERAL INFORMATION.....5**

PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....5

OBJECTIVE .....5

RELATED SUBMITTAL(S)/GRANT(S).....5

TEST METHODOLOGY .....5

TEST FACILITY .....5

TEST EQUIPMENT LIST AND DETAILS.....6

TEST DATE.....6

**SYSTEM TEST CONFIGURATION.....7**

DESCRIPTION OF TEST CONFIGURATION .....7

EUT EXERCISE SOFTWARE .....7

EQUIPMENT MODIFICATIONS .....7

SUPPORT EQUIPMENT LIST AND DETAILS .....7

EXTERNAL I/O CABLE.....8

BLOCK DIAGRAM OF TEST SETUP .....8

**SUMMARY OF TEST RESULTS .....10**

**FCC§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....11**

APPLICABLE STANDARD ..... 11

**FCC§15.203 - ANTENNA REQUIREMENT.....12**

APPLICABLE STANDARD .....12

ANTENNA CONNECTOR CONSTRUCTION .....12

**FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS .....13**

APPLICABLE STANDARD .....13

MEASUREMENT UNCERTAINTY .....13

EUT SETUP .....13

EMI TEST RECEIVER SETUP.....14

TEST PROCEDURE .....14

CORRECTED AMPLITUDE & MARGIN CALCULATION .....14

TEST EQUIPMENT LIST AND DETAILS.....15

TEST RESULTS SUMMARY .....15

TEST DATA .....15

**FCC§15.255(B) - EQUIVALENT ISOTROPICALLY RADIATED POWER (EIRP) .....18**

APPLICABLE STANDARD .....18

TEST PROCEDURE .....18

ENVIRONMENTAL CONDITIONS .....19

TEST DATA .....19

**FCC§15.255(E)- OCCUPIED BANDWIDTH.....20**

APPLICABLE STANDARD .....20

TEST PROCEDURE .....20

ENVIRONMENTAL CONDITIONS .....20

TEST DATA .....20

**FCC§15.255(E) –PEAK CONDUCTED OUTPUT POWER.....26**

APPLICABLE STANDARD .....26

TEST PROCEDURE .....26

ENVIRONMENTAL CONDITIONS .....26

TEST DATA .....26

**FCC§15.205, §15.209&§15.255(C)- TRANSMITTER SPURIOUS EMISSIONS .....28**

    APPLICABLE STANDARD .....28

    MEASUREMENT UNCERTAINTY .....28

    EUT SETUP .....29

    TEST EQUIPMENT SETUP .....30

    TEST PROCEDURE .....30

    ENVIRONMENTAL CONDITIONS .....30

    TEST DATA .....30

**FCC§15.255(F) - FREQUENCY STABILITY .....37**

    APPLICABLE STANDARD .....37

    TEST PROCEDURE .....37

    ENVIRONMENTAL CONDITIONS .....37

    TEST DATA .....37

**FCC§15.255(D) – PUBLICLY-ACCESSIBLE COORDINATION CHANNEL .....39**

    APPLICABLE STANDARD .....39

    TEST PROCEDURE .....39

    TEST RESULT .....39

**§15.255(A) (H)– OPERATION RESTRICTION AND GROUP INSTALLTION.....40**

    APPLICABLE STANDARD .....40

    RESULT OF OPERATION RESTRICTION .....40

    RESULT OF GROUP INSTALLATION .....40

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *SZ DJI TECHNOLOGY CO., LTD* product, model number: *D-60G TX(FCC ID: SS3-60TX1604)* (the "EUT") in this report was *SRW-60G*, which was measured approximately: 7.6 cm (L) x 3.2 cm (W) x 1.6 cm (H), Nominal input voltage: DC 12V(Voltage range: 7.4-12V) from 4 pin port or 5V form USB port(USB host operation).

*All measurement and test data in this report was gathered from production sample serial number: 160322002 (Assigned byBACL, Dongguan). The EUT was received on 2016-03-24.*

### Objective

This type approval report is prepared on behalf of *SZ DJI TECHNOLOGY CO., LTD.* in accordance with Part 2-Subpart J, and Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203 15.205 15.207 15.209 and 15.255 rules.

### Related Submittal(s)/Grant(s)

Submitted with the Part of a system with FCC ID: SS3-60RX1604

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2014-06-16	2017-06-15
Agilent	Spectrum Analyzer	8564E	3943A01781	2015-5-10	2016-5-9
Agilent	Harmonic Mixer	11970U	2332A00853	2015-8-16	2017-8-15
Flann Microwave	Horn Antenna	24245-AB	26	N/A	N/A
Agilent	Harmonic Mixer	11970V	2521A011767	2015-8-16	2017-8-15
Alpha Industries	Horn Antenna	861V/385	736	N/A	N/A
Agilent	Harmonic Mixer	11970W	2521A00597	2015-8-16	2017-8-15
Alpha Industries	Horn Antenna	861W/387	355	N/A	N/A
OML	Diplexer	DPL.26	N/A	N/A	N/A
OML	Harmonic Mixer	HWD08	F60313-1	2015-1-9	2017-1-8
OML	Horn Antenna	M08RH	N/A	N/A	N/A
OML	Harmonic Mixer	HWD05	G60106-1	2015-2-19	2017-2-18
OML	Horn Antenna	M05RH	N/A	N/A	N/A
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	8m	N/A	2015-05-06	2016-05-06
Agilent	Coaxial Cable	1m	N/A	2015-05-06	2016-05-06
Agilent	Coaxial Cable	1m	N/A	2015-05-06	2016-05-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
Agilent	Coaxial Cable	1m	N/A	2016-05-06	2017-05-06
Agilent	Coaxial Cable	1m	N/A	2016-05-06	2017-05-06
Millitech	RF Detector	DET-15	67	2015-12-10	2017-12-09
Tektronix	DSO	TDS 3054	B015264	2015-11-23	2016-11-22
Agilent	Signal Generator	E8247C	MY43321350	2014-10-16	2016-10-15
Agilent	mm-Wave Source Modules	83557A	2735A00145	2015-8-16	2017-8-15
OML	Horn Antenna	M15RH	N/A	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Date**

2016-03-24~ 2016-06-12

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The device can powered by DC 12V from 4 pin port (CAN port), typical used with a battery; And DC 5V from USB port, typical used with a PC or laptop. Both modes were evaluated in the test. The typical use condition was provided by the manufacturer.

The device supports LRP and MRP mode, the system operation channels list in the below table:

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
1	60163	6	62323
2	60321	7	62481
3	60480	8	62640
4	60639	9	62799
5	60797	10	62957

For LRP total 10 channels were employed, and channel 1, 5, 10 was chose for testing.

For MRP channel 3 and 8 were employed and chose for testing.

### EUT Exercise Software

The software "SWAM3" was used for testing, which was provided by manufacturer. The worst condition (maximum power) was configured by system default setting.

### Equipment Modifications

No modifications were made to the EUT.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
GOPRO	Camera	HERO4	N/A
N/A	Battery	N/A	N/A
Lenovo	Laptop	G510	HY1482

**External I/O Cable**


Cable Description	Shielding Type	Ferrite Core	Length (cm)	From Port	To
HDMI cable	yes	yes	43	Camera	EUT
DC Cable	Yes	yes	100	adapter	Laptop
USB Cable	Yes	Yes	100	Laptop	EUT

**Block Diagram of Test Setup**


Battery Operating(Radiation):

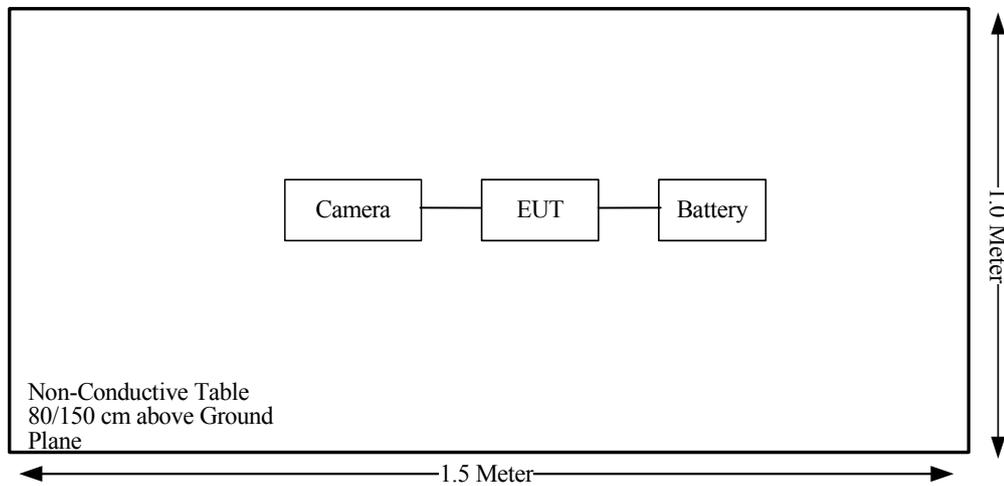

USB Operating(Conduction):

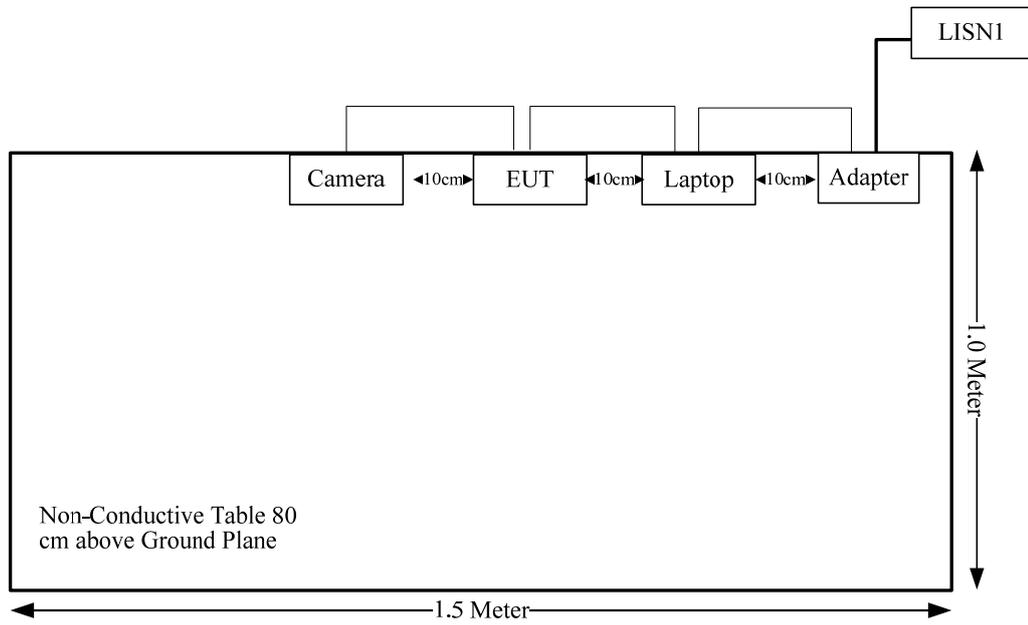

USB Operating(Radation):

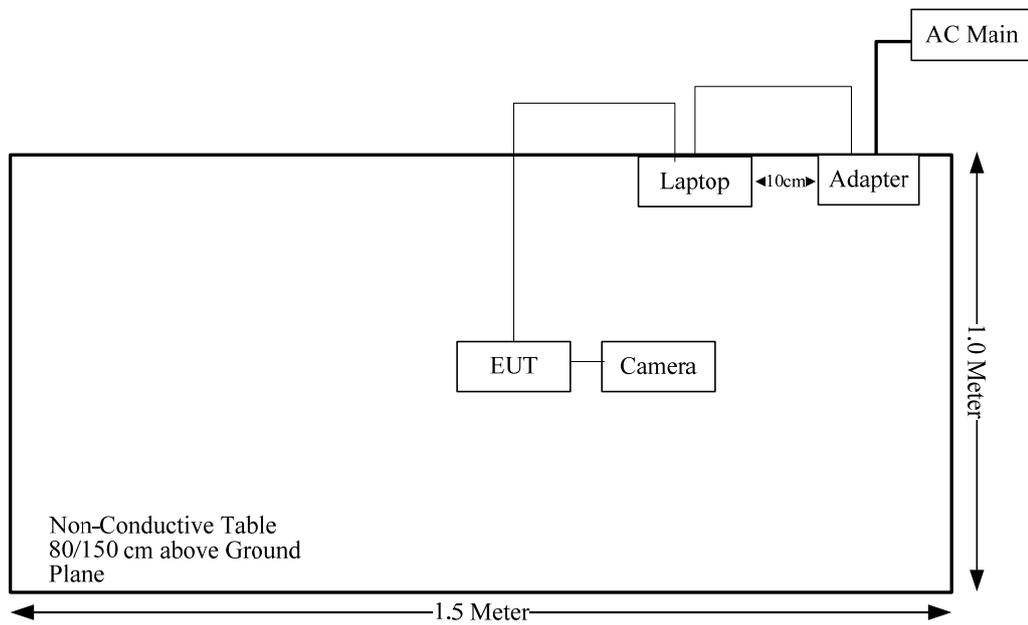

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§1.1310&§2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§ 15.255 (e)	Occupied Bandwidth	Compliance
§15.255 (b)	EIRP Power	Compliance
§15.255 (e)	Peak Conducted Output Power	Compliance
§15.255 (c)	Spurious Emissions	Compliance
§15.255 (f)	Frequency Stability	Compliance
§15.255 (d)	Publicly-Accessible Coordination Channel	Compliance
§15.255 (a)(h)	Operation Restriction And Group Installation	Compliance

**FCC§1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculated Formulary:**

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

Frequency (GHz)	E.I.R.P		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBm)	(mW)			
60.163-62.957	17	50	20.00	0.01	1.0

Note: The tune-up power is 17dBm(E.I.R.P).which declared by the manufacturer.

**Result:** The device meet FCC MPE at 20 cm distance

---

## **FCC§15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

### **Antenna Connector Construction**

The EUT has one integral antenna on chip, which antenna gain is 5 dBi for LRP mode, and 9dBi for MRP mode, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliant.

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS**

**Applicable Standard**

FCC§15.207

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

**EUT Setup**

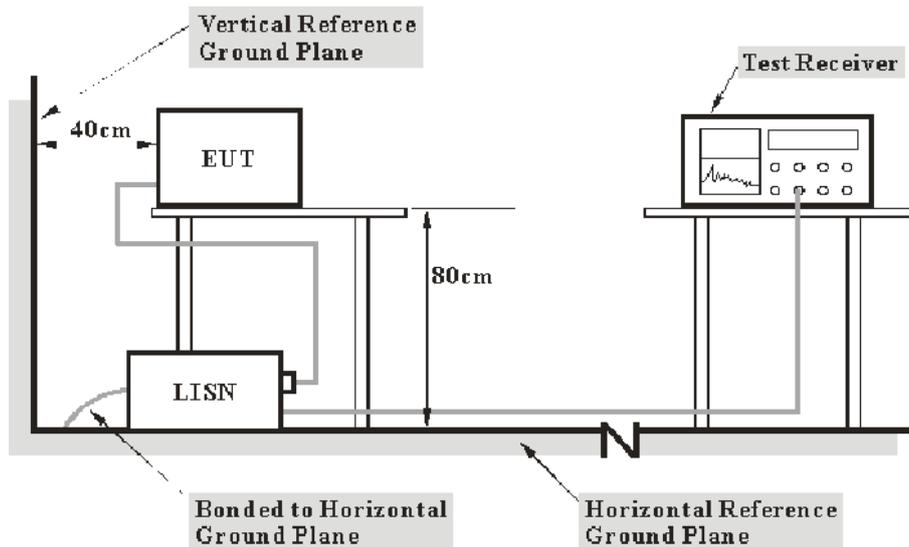

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2015-05-06	2016-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**15.8 dB at 0.150000 MHz in the Neutral conducted mode**


### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25.9°C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	100.8 kPa

Test Mode: Transmitting(USB operation)


AC120 V, 60 Hz, Line:

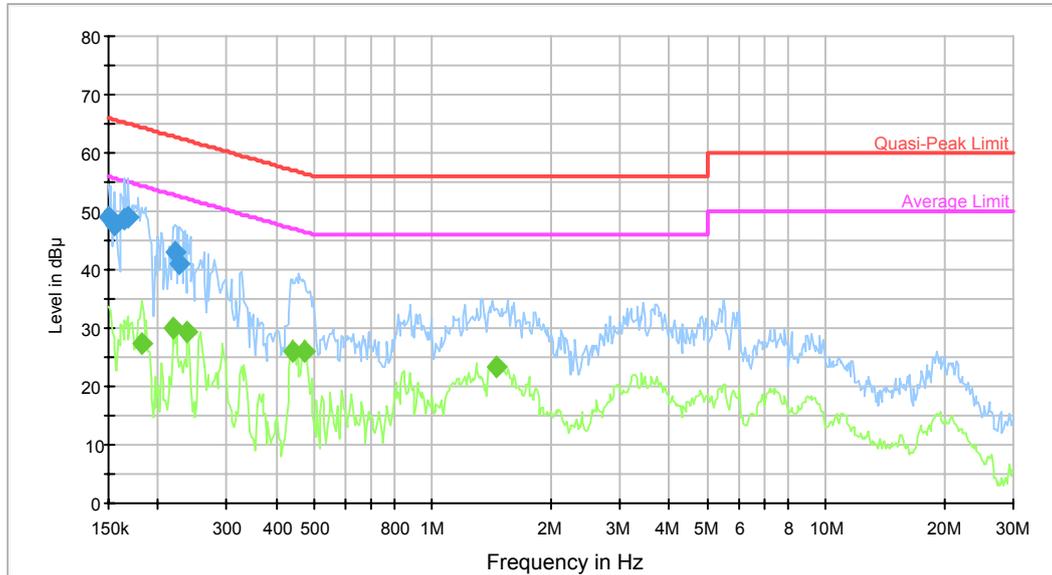

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	48.9	9.000	L1	9.8	17.1	66.0	Compliance
0.154858	47.7	9.000	L1	9.8	18.0	65.7	Compliance
0.165051	48.5	9.000	L1	9.7	16.7	65.2	Compliance
0.167702	49.0	9.000	L1	9.7	16.1	65.1	Compliance
0.221645	43.0	9.000	L1	9.7	19.8	62.8	Compliance
0.227007	40.9	9.000	L1	9.7	21.7	62.6	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.183065	27.3	9.000	L1	9.7	27.0	54.3	Compliance
0.219886	30.0	9.000	L1	9.7	22.8	52.8	Compliance
0.238124	29.3	9.000	L1	9.7	22.9	52.2	Compliance
0.439808	26.1	9.000	L1	9.8	21.0	47.1	Compliance
0.472507	25.9	9.000	L1	9.8	20.6	46.5	Compliance
1.453260	23.3	9.000	L1	9.8	22.7	46.0	Compliance

**AC120 V, 60 Hz, Neutral:**

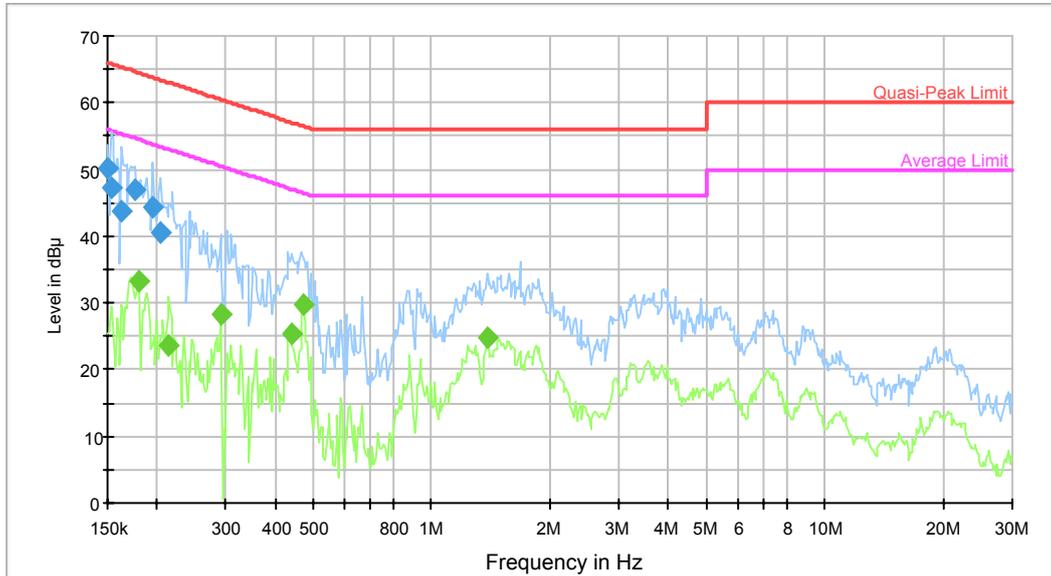

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	50.2	9.000	N	9.7	15.8	66.0	Compliance
0.153629	47.3	9.000	N	9.7	18.5	65.8	Compliance
0.162441	43.7	9.000	N	9.7	21.6	65.3	Compliance
0.175915	46.9	9.000	N	9.7	17.8	64.7	Compliance
0.195114	44.4	9.000	N	9.7	19.4	63.8	Compliance
0.204669	40.6	9.000	N	9.7	22.8	63.4	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.180171	33.2	9.000	N	9.7	21.3	54.5	Compliance
0.214692	23.5	9.000	N	9.7	29.5	53.0	Compliance
0.290613	28.3	9.000	N	9.7	22.2	50.5	Compliance
0.439808	25.4	9.000	N	9.7	21.7	47.1	Compliance
0.472507	29.6	9.000	N	9.7	16.9	46.5	Compliance
1.385415	24.7	9.000	N	9.8	21.3	46.0	Compliance

## **FCC§15.255(b) - Equivalent Isotropically Radiated Power (EIRP)**

---

### **Applicable Standard**

(b) Within the 57-64 GHz band, emission levels shall not exceed the following equivalent isotropically radiated power (EIRP):

(1) Products other than fixed field disturbance sensors shall comply with one of the following emission limits, as measured during the transmit interval:

(i) Except as indicated in paragraph (b)(1)(ii) of this section, the average power of any emission shall not exceed 40 dBm and the peak power of any emission shall not exceed 43 dBm.

(ii) For transmitters located outdoors, the average power of any emission shall not exceed 82 dBm minus 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm minus 2 dB for every dB that the antenna gain is less than 51 dBi. The provisions of §15.204(c)(2) and (c)(4) of this part that permit the use of different antennas of the same type and of equal or less directional gain do not apply to intentional radiator systems operating under this provision. In lieu thereof, intentional radiator systems shall be certified using the specific antenna(s) with which the system will be marketed and operated. Compliance testing shall be performed using the highest gain and the lowest gain antennas for which certification is sought and with the intentional radiator operated at its maximum available output power level. The responsible party, as defined in §2.909 of this chapter, shall supply a list of acceptable antennas with the application for certification.

(2) For fixed field disturbance sensors that occupy 500 MHz or less of bandwidth and that are contained wholly within the frequency band 61.0-61.5 GHz, the average power of any emission, measured during the transmit interval, shall not exceed 40 dBm, and the peak power of any emission shall not exceed 43 dBm. In addition, the average power of any emission outside of the 61.0-61.5 GHz band, measured during the transmit interval, but still within the 57-64 GHz band, shall not exceed 10 dBm, and the peak power of any emission shall not exceed 13 dBm.

(3) For fixed field disturbance sensors other than those operating under the provisions of paragraph (b)(2) of this section, the peak transmitter conducted output power shall not exceed -10 dBm and the peak EIRP level shall not exceed 10 dBm.

(4) The peak power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-64 GHz band and has a video bandwidth of at least 10 MHz. The average emission levels shall be calculated based on the measured peak levels, over the actual time period during which transmission occurs. Measurement procedures that have been found to be acceptable to the Commission in accordance with §2.947 of this chapter may be used to demonstrate compliance.

### **Test Procedure**

Refer to ANSI C63.10-2013 Clause 9.11

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in peak and Average detection modes for frequencies above 1 GHz.

**Environmental Conditions**

<b>Temperature:</b>	24.2 °C
<b>Relative Humidity:</b>	61 %
<b>ATM Pressure:</b>	100.8 kPa

**Test Data**

Please refer to the following table:

*Test Mode: Transmitting*

Frequency	Detector	Polar	Substituted		EIPR Power	Limit	Margin
			SG Level	Antenna Gain			
GHz	PK/QP/AV	H/V	(dBm)	(dBi)	dBm	dBm	dB
LRP							
60.163	PK	H	-5.74	24	18.26	43	24.74
60.163	AV	H	-19.82	24	4.18	40	35.82
60.797	PK	H	-6.08	24	17.92	43	25.08
60.797	AV	H	-21.59	24	2.41	40	37.59
62.957	PK	H	-8.77	24	15.23	43	27.77
62.957	AV	H	-21.93	24	2.07	40	37.93
MRP							
60.48	PK	H	-10.92	24	13.08	43	29.92
60.48	AV	H	-23.72	24	0.28	40	39.72
62.64	PK	H	-11.02	24	12.98	43	30.02
62.64	AV	H	-25.04	24	-1.04	40	41.04

*Note 1: The test distance is 1.0 m.*

*Note 2: E.I.R.P = Substituted SG Level + Substituted Antenna Gain*

*Note 3: The Mixers and it's RF cables is compose a system for calibration.*

*Note 4: the test data recorded was the maximum polarization.*

## FCC§15.255(e)- Occupied Bandwidth

### Applicable Standard

For the purposes of this paragraph (e)(1), emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

### Test Procedure

Refer to ANSI C63.10-2013 Clause 6.9 & 9.3

### Environmental Conditions

<b>Temperature:</b>	25.1 °C
<b>Relative Humidity:</b>	62 %
<b>ATM Pressure:</b>	100.9 kPa

### Test Data

Please refer to the following tables and plots:

*Test Mode: Transmitting*

#### LRP:

Channel	Frequency	6 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Low	60163	93.30	190.00
Middle	60797	89.00	175.00
High	62957	92.30	169.20


#### MRP:

Channel	Frequency	6 dB Bandwidth	99% Bandwidth
	(MHz)	(MHz)	(MHz)
Low	60480	685.00	1380.00
High	62640	815.00	1015.00


LRP:

6dB Bandwidth


Low Channel

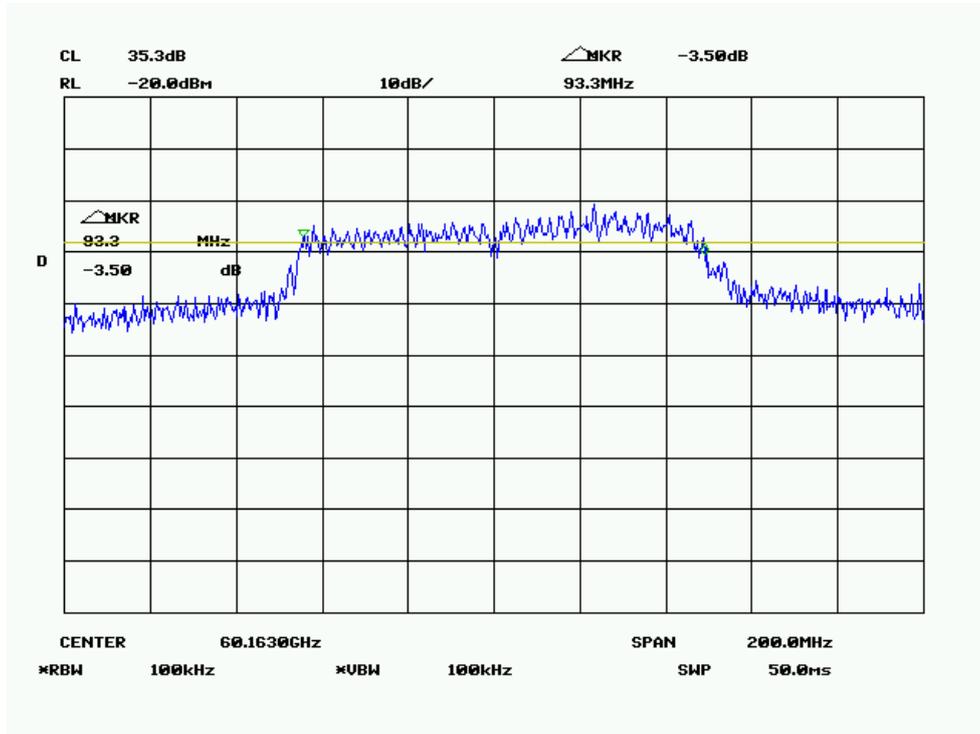

Middle Channel

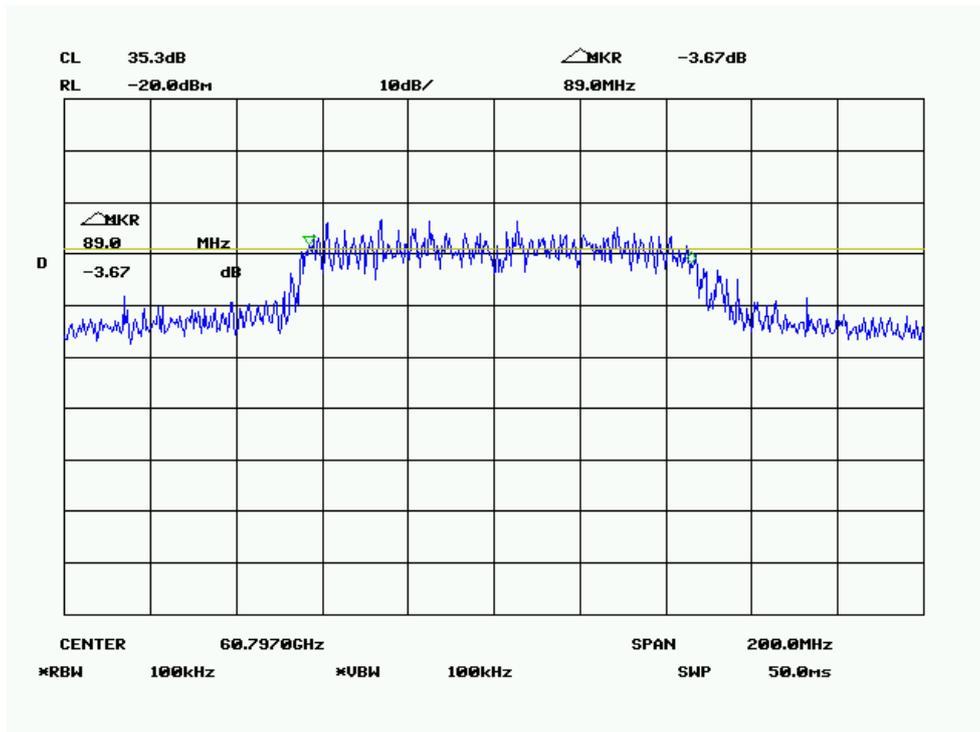


### High Channel

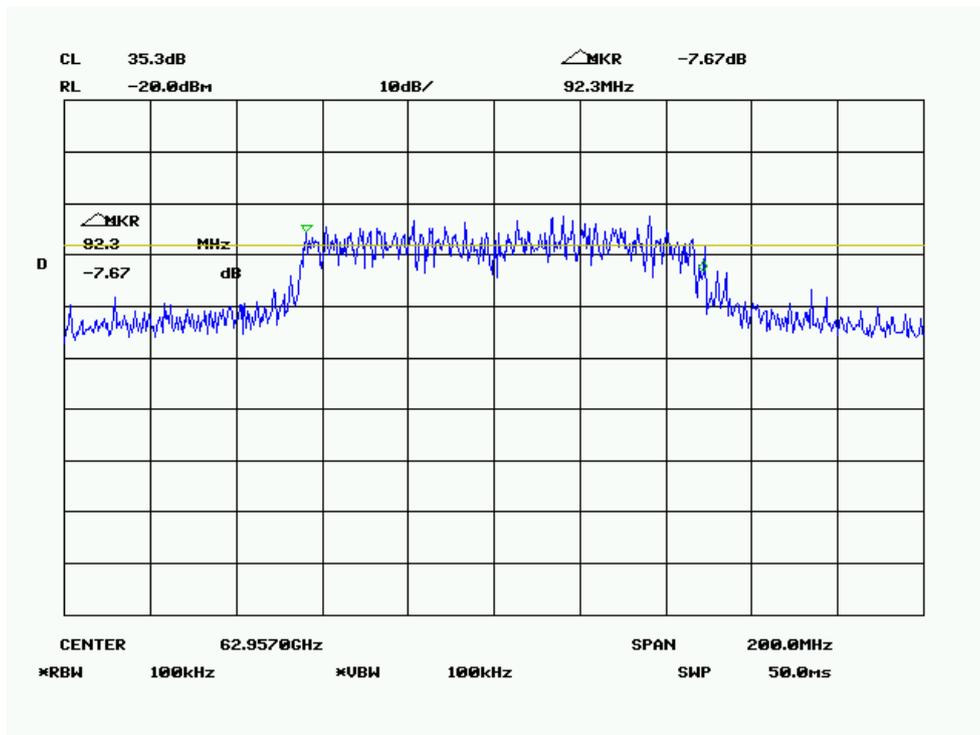


### 99% Bandwidth


### Low Channel

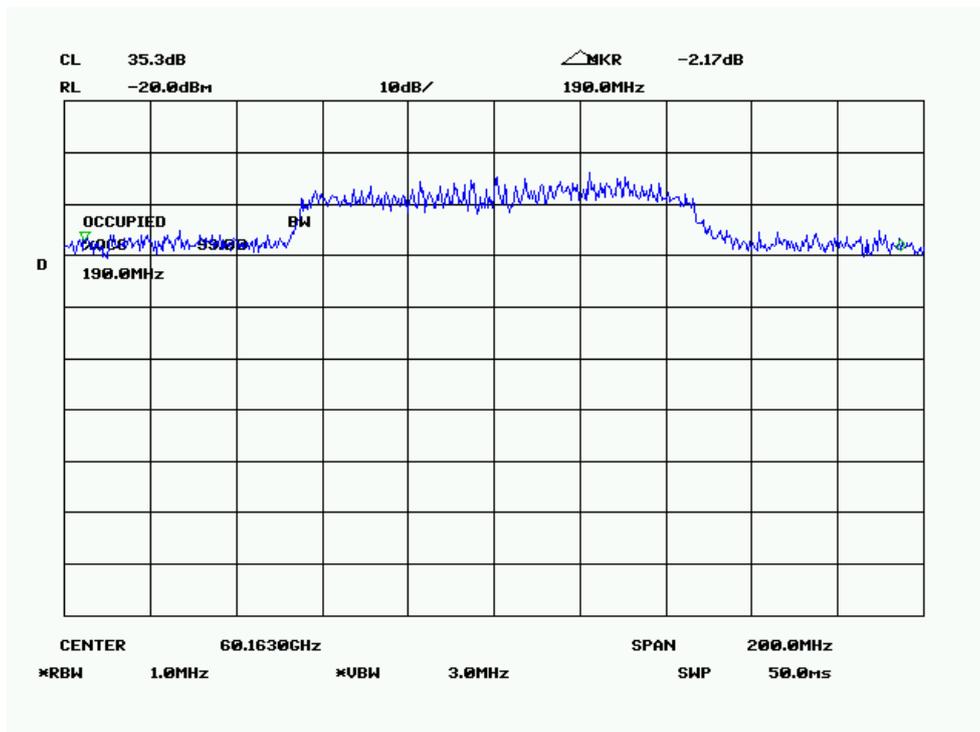

### Middle Channel

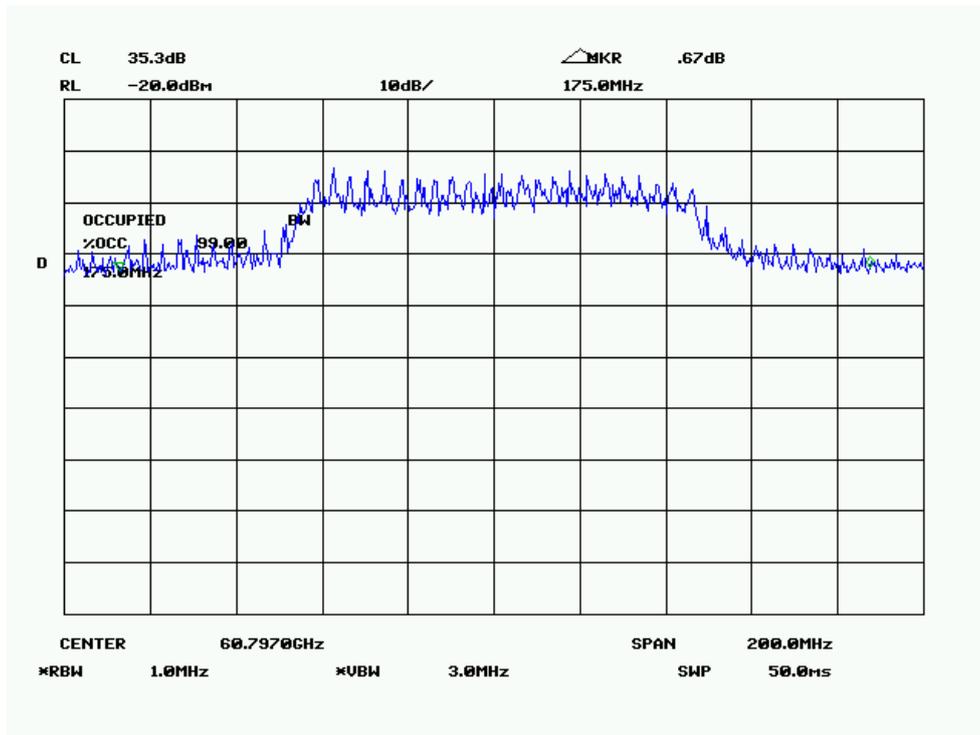


### High Channel

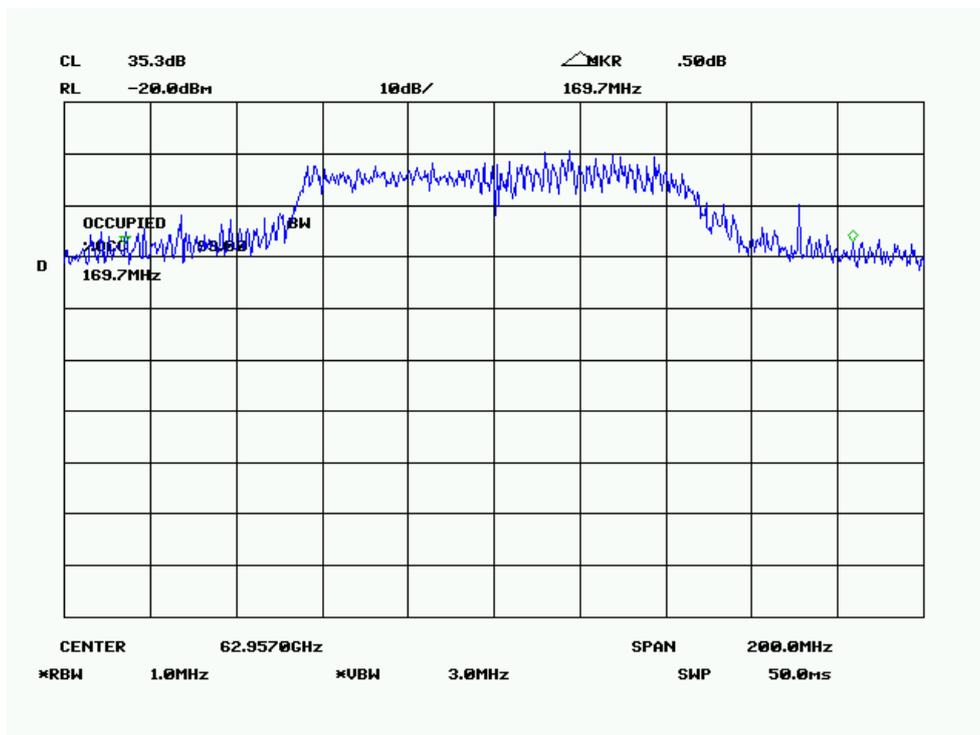


MRP:

6dB Bandwidth

Low Channel

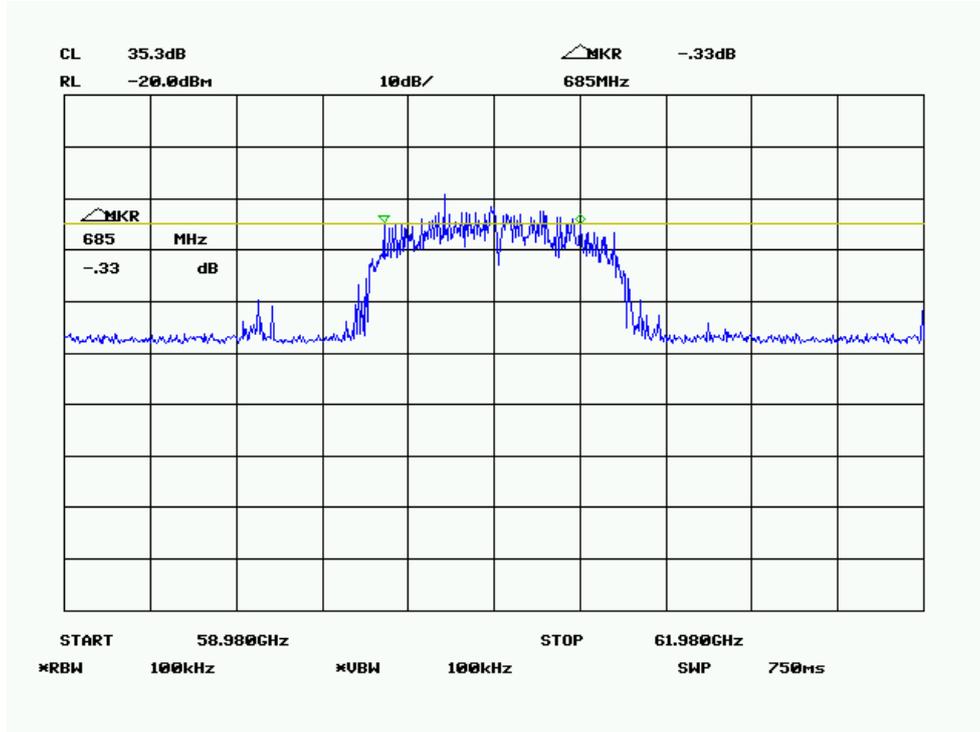


High Channel

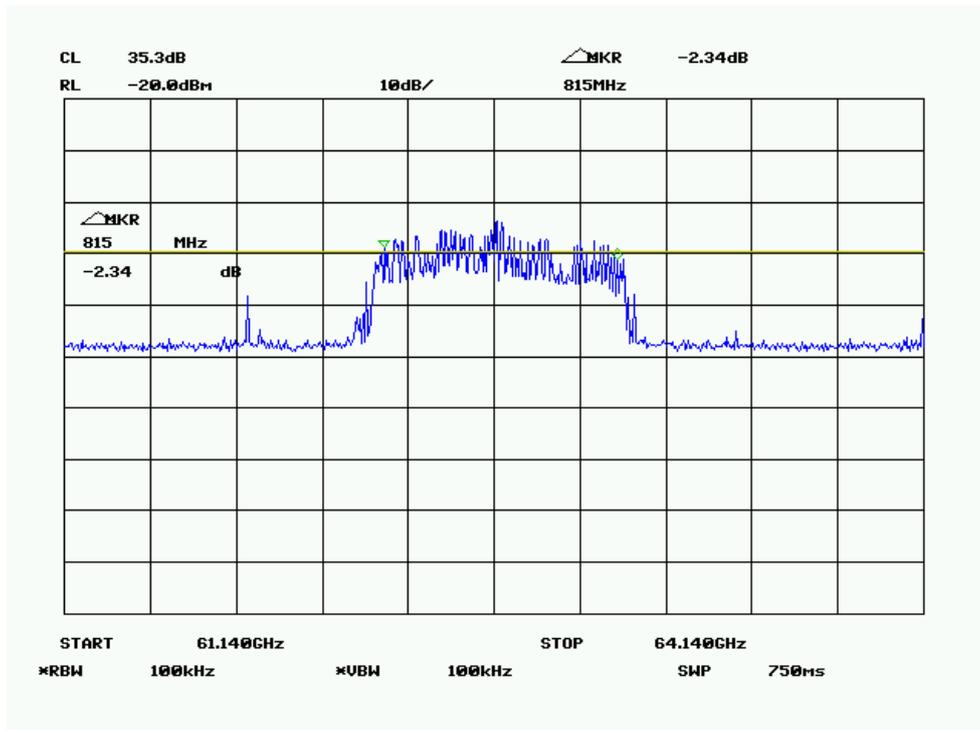


99% Bandwidth

Low Channel

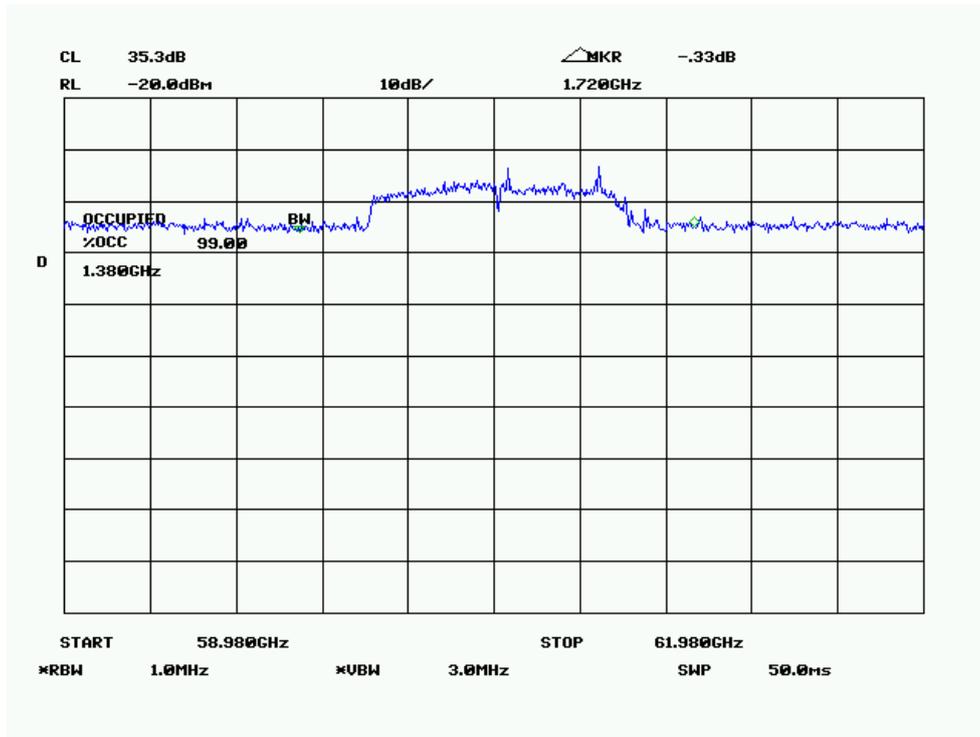

High Channel

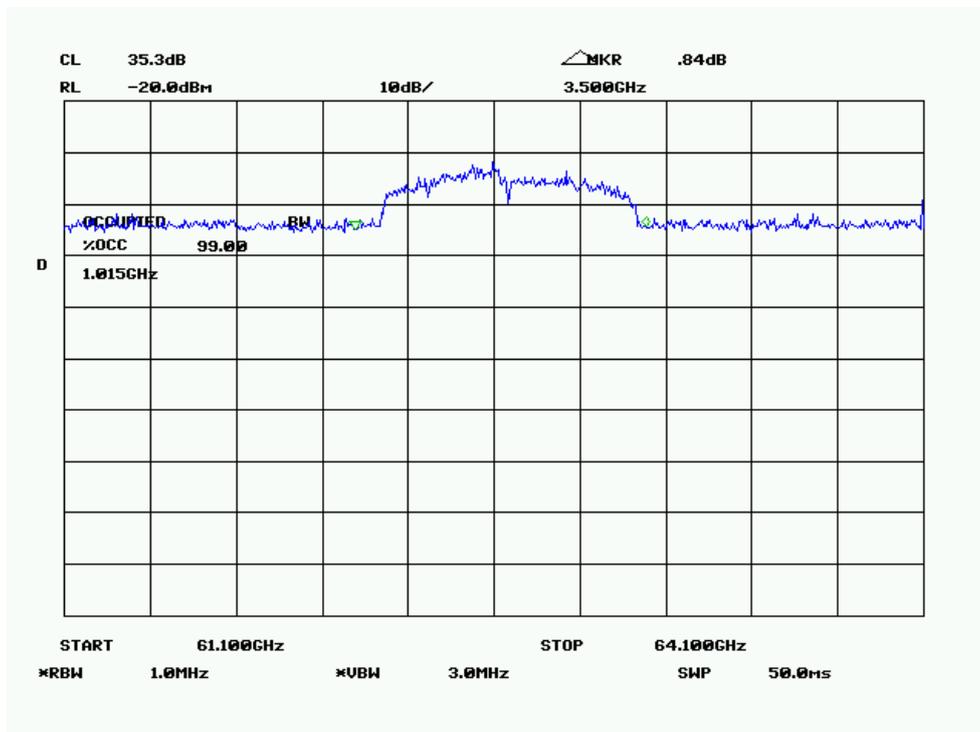

## **FCC§15.255(e) –PEAK CONDUCTED OUTPUT POWER**

### **Applicable Standard**

Except as specified paragraph (e)(1) of this section, the peak transmitter conducted output power shall not exceed 500 mW. Depending on the gain of the antenna, it may be necessary to operate the intentional radiator using a lower peak transmitter output power in order to comply with the EIRP limits specified in paragraph (b) of this section.

(1) Transmitters with an emission bandwidth of less than 100 MHz must limit their peak transmitter conducted output power to the product of 500 mW times their emission bandwidth divided by 100 MHz. For the purposes of this paragraph, emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g., for frequency hopping devices).

(2) Peak transmitter conducted output power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-64 GHz band and that has a video bandwidth of at least 10 MHz. Measurement procedures that have been found to be acceptable to the Commission in accordance with §2.947 of this chapter may be used to demonstrate compliance.

(3) For purposes of demonstrating compliance with this paragraph, corrections to the transmitter conducted output power may be made due to the antenna and circuit loss.

### **Test Procedure**

Refer to ANSI C63.10-2013 Clause 9.7 : equation to calculate power output.

### **Environmental Conditions**

<b>Temperature:</b>	21.4 °C
<b>Relative Humidity:</b>	47 %
<b>ATM Pressure:</b>	101.3 kPa

### **Test Data**

Please refer to the following table:

Test Mode: Transmitting

Frequency	Peak EIRP Power	Antenna Gain	Peak conducted power	6dB Bandwidth	Limit
GHz	dBm	dBi	dBm	MHz	dBm
LRP Mode					
60.163	18.26	5	13.26	93.3	26.69
60.797	17.92	5	12.92	89	26.48
62.957	15.23	5	10.23	92.3	26.64
MRP Mode					
60.48	13.08	9	4.08	685	27.00
62.64	12.98	9	3.98	815	27.00

Note 1: The EUT used for integral antenna without temporary RF connector provided, so Peak conducted power is equal to Peak EIRP Power subtract the antenna gain.

Note 2: EIRP Power refer to §15.255 (b)

Note3: For radiated emissions measurements, calculated transmitter conducted output power  $P(con)$   
 $P(con) = EIRP - Antenna\ gain(dBi)$

Note4: EUT operating in LRP mode with an emission bandwidth of less than 100 MHz, therefore the limit of its peak transmitter conducted output power is:  $10 * \lg(500 * (BW/100))$  dBm  
 Here, BW is 6 dB Bandwidth.

## **FCC§15.205, §15.209&§15.255(c)- TRANSMITTER SPURIOUS EMISSIONS**

### **Applicable Standard**

(c) Limits on spurious emissions:

- (1) The power density of any emissions outside the 57-64 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in §15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed  $90 \text{ pW/cm}^2$  at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.

### **Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{\text{lab}}$  is less than or equal to  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{\text{lab}}$  is greater than  $U_{\text{cispr}}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{\text{lab}} - U_{\text{cispr}})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB

Table 1 – Values of  $U_{\text{cispr}}$


Measurement	$U_{\text{cispr}}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

**EUT Setup**

Below 1 GHz:

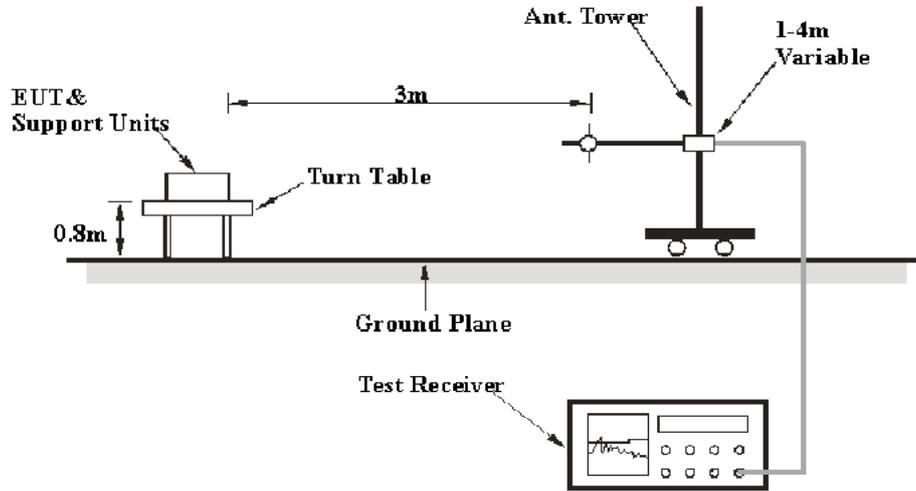

Above 1 GHz:

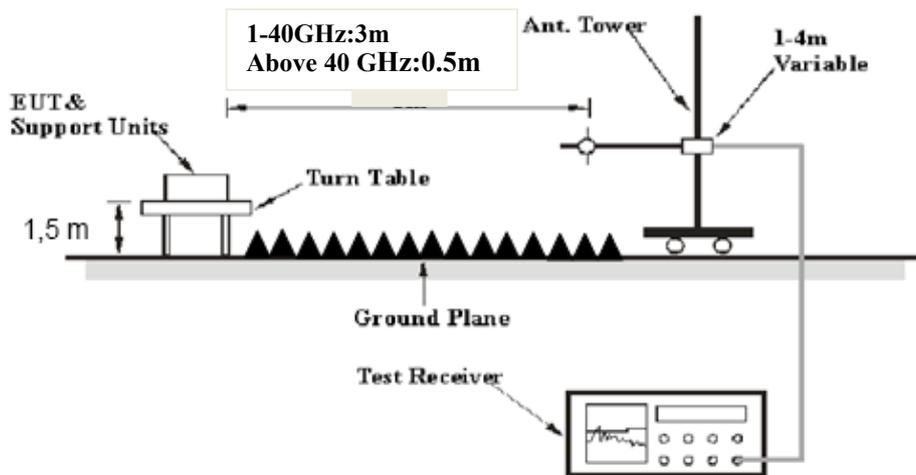

The radiated emission and out of band emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013 The specification used was the FCC 15.209/15.205 and FCC 15.255 limits.

## Test Equipment Setup

The system was investigated from 30 MHz to 200 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
1-40 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave
40 GHz – 200 GHz	1MHz	3 MHz	/	PK

## Test Procedure

Refer to ANSI C63.10-2013 Clause 9.9&9.12&9.13

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detection mode from 30 MHz to 1GHz, peak and average detection mode above 1 GHz to 40 GHz, peak detection mode from 40GHz-200GHz.

## Environmental Conditions

<b>Temperature:</b>	21 °C
<b>Relative Humidity:</b>	73%
<b>ATM Pressure:</b>	101.6 kPa

## Test Data


Please refer to the following table:

Test Mode: Transmitting(the worst case is USB operation)

30MHz-1GHz (Middle Channel)


Horizontal

Frequency (MHz)	Reading (dBUV)	Detector	Corrected (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)
30.0000	22.65	QP	3.45	26.10	40.00	13.90
140.5800	29.72	QP	-6.22	23.50	43.50	20.00
165.8000	33.88	QP	-7.68	26.20	43.50	17.30
232.7300	37.22	QP	-7.82	29.40	46.00	16.60
390.8400	36.24	QP	-3.84	32.40	46.00	13.60
797.2700	32.46	QP	3.24	35.70	46.00	10.30

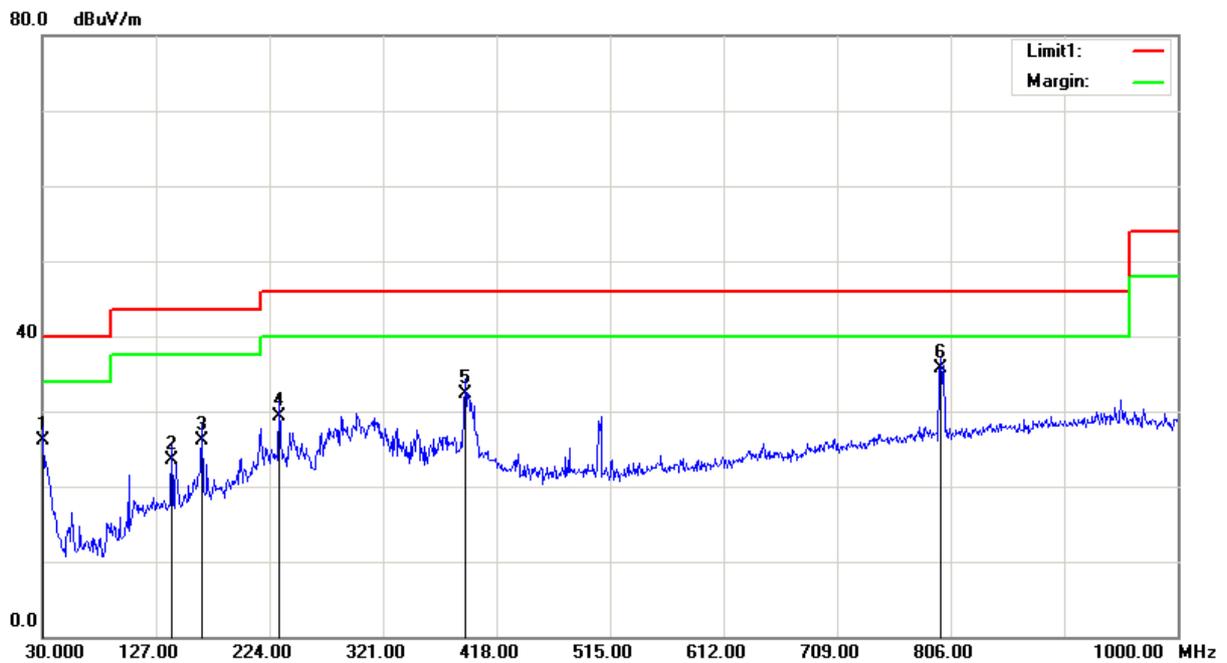

**Vertical**

Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.05	QP	3.45	28.50	40.00	11.50
165.8000	31.08	QP	-7.68	23.40	43.50	20.10
231.7600	36.29	QP	-7.89	28.40	46.00	17.60
288.0200	32.40	QP	-5.80	26.60	46.00	19.40
507.2400	29.79	QP	-1.49	28.30	46.00	17.70
800.1800	28.76	QP	3.34	32.10	46.00	13.90

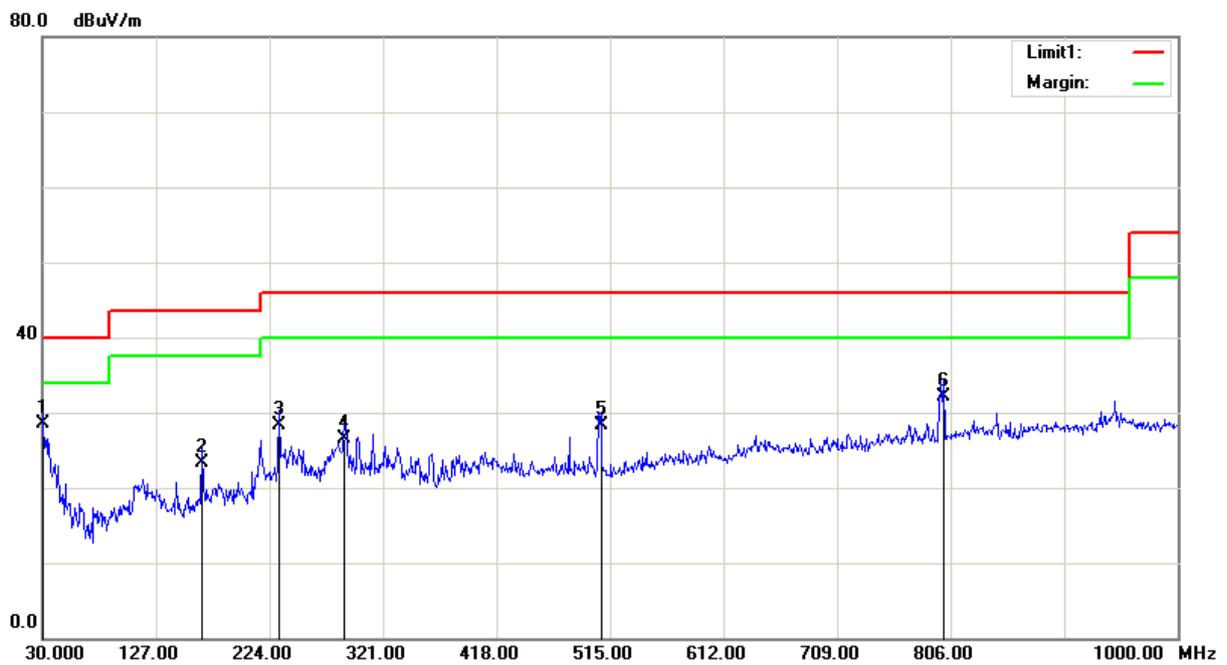

**1GHz~40GHz:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB(1/m))					
<b>LRP, Frequency: 60163 MHz</b>									
1467.5	33.48	PK	H	26.02	2.81	27.27	35.04	74.00	38.96
1467.5	21.31	AV	H	26.02	2.81	27.27	22.87	54.00	31.13
1773.5	33.77	PK	H	26.87	2.61	27.57	35.68	74.00	38.32
1773.5	21.52	AV	H	26.87	2.61	27.57	23.43	54.00	30.57
2419.5	31.5	PK	H	28.51	3.70	27.33	36.38	74.00	37.62
2419.5	19.21	AV	H	28.51	3.70	27.33	24.09	54.00	29.91
24890	43	PK	H	35.67	14.96	36.73	56.90	74.00	17.10
24890	30.82	AV	H	35.67	14.96	36.73	44.72	54.00	9.28
24170	41.83	PK	H	35.42	13.96	37.11	54.10	74.00	19.90
24170	29.56	AV	H	35.42	13.96	37.11	41.83	54.00	12.17
<b>LRP, Frequency: 60797MHz</b>									
1467.5	33.48	PK	H	26.02	2.81	27.27	35.04	74.00	38.96
1467.5	21.31	AV	H	26.02	2.81	27.27	22.87	54.00	31.13
1773.5	33.77	PK	H	26.87	2.61	27.57	35.68	74.00	38.32
1773.5	21.52	AV	H	26.87	2.61	27.57	23.43	54.00	30.57
2419.5	31.5	PK	H	28.51	3.70	27.33	36.38	74.00	37.62
2419.5	19.21	AV	H	28.51	3.70	27.33	24.09	54.00	29.91
24890	41.06	PK	H	35.67	14.96	36.73	54.96	74.00	19.04
24890	29.88	AV	H	35.67	14.96	36.73	43.78	54.00	10.22
24170	42.39	PK	H	35.42	13.96	37.11	54.66	74.00	19.34
24170	28.44	AV	H	35.42	13.96	37.11	40.71	54.00	13.29
<b>LRP, Frequency: 62957MHz</b>									
1467.5	34.22	PK	H	26.02	2.81	27.27	35.78	74.00	38.22
1467.5	22.69	AV	H	26.02	2.81	27.27	24.25	54.00	29.75
1773.5	34.72	PK	H	26.87	2.61	27.57	36.63	74.00	37.37
1773.5	22.19	AV	H	26.87	2.61	27.57	24.10	54.00	29.90
2419.5	30.29	PK	H	28.51	3.70	27.33	35.17	74.00	38.83
2419.5	18.47	AV	H	28.51	3.70	27.33	23.35	54.00	30.65
24890	42.11	PK	H	35.67	14.96	36.73	56.01	74.00	17.99
24890	30.47	AV	H	35.67	14.96	36.73	44.37	54.00	9.63
24170	43.02	PK	H	35.42	13.96	37.11	55.29	74.00	18.71
24170	29.47	AV	H	35.42	13.96	37.11	41.74	54.00	12.26
<b>MRP, Frequency: 60797MHz</b>									
1484.5	48.29	PK	H	26.06	2.69	27.34	49.70	74.00	24.30
1484.5	36.15	AV	H	26.06	2.69	27.34	37.56	54.00	16.44
1782	44.43	PK	H	26.89	2.61	27.56	46.37	74.00	27.63
1782	32.18	AV	H	26.89	2.61	27.56	34.12	54.00	19.88
2963.5	36.09	PK	H	30.65	6.66	27.54	45.86	74.00	28.14
2963.5	23.87	AV	H	30.65	6.66	27.54	33.64	54.00	20.36
24890	42.69	PK	H	35.67	14.96	36.73	56.59	74.00	17.41
24890	30.45	AV	H	35.67	14.96	36.73	44.35	54.00	9.65
24170	42.09	PK	H	35.42	13.96	37.11	54.36	74.00	19.64
24170	29.87	AV	H	35.42	13.96	37.11	42.14	54.00	11.86

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB(1/m))					
<b>MRP, Frequency: 62957MHz</b>									
1484.5	47.15	PK	H	26.06	2.69	27.34	48.56	74.00	25.44
1484.5	37.28	AV	H	26.06	2.69	27.34	38.69	54.00	15.31
1782	45.11	PK	H	26.89	2.61	27.56	47.05	74.00	26.95
1782	33.71	AV	H	26.89	2.61	27.56	35.65	54.00	18.35
2963.5	37.45	PK	H	30.65	6.66	27.54	47.22	74.00	26.78
2963.5	24.66	AV	H	30.65	6.66	27.54	34.43	54.00	19.57
24890	41.22	PK	H	35.67	14.96	36.73	55.12	74.00	18.88
24890	28.44	AV	H	35.67	14.96	36.73	42.34	54.00	11.66
24170	43.27	PK	H	35.42	13.96	37.11	55.54	74.00	18.46
24170	30.05	AV	H	35.42	13.96	37.11	42.32	54.00	11.68

*Note 1: The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:*

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

*Note 2: The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:*

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

40GHz~200GHz:

Frequency GHz	Receiver		Rx Antenna		Corrected Amplitude dBµV/m	EIPR Power dBm	Power Density pW/cm <sup>2</sup>	Limit pW/cm <sup>2</sup>
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)				
<b>LRP, Frequency: 60163 MHz</b>								
50.97	38.65	PK	H	40.91	79.56	-31.16	0.6772	90.00
50.97	37.21	PK	V	40.91	78.12	-32.6	0.4861	90.00
88.53	52.74	PK	H	47.92	100.66	-10.06	87.2384	90.00
88.53	51.26	PK	V	47.92	99.18	-11.54	62.0452	90.00
<b>LRP, Frequency: 60797MHz</b>								
50.97	38.44	PK	H	40.91	79.35	-31.37	0.6452	90.00
50.97	36.85	PK	V	40.91	77.76	-32.96	0.4474	90.00
88.53	51.29	PK	H	47.92	99.21	-11.51	62.4752	90.00
88.53	50.16	PK	V	47.92	98.08	-12.64	48.1624	90.00
<b>LRP, Frequency: 62957MHz</b>								
50.97	36.77	PK	H	40.91	77.68	-33.04	0.4392	90.00
50.97	34.96	PK	V	40.91	75.87	-34.85	0.2895	90.00
88.53	51.03	PK	H	47.92	98.95	-11.77	58.8448	90.00
88.53	52.07	PK	V	47.92	99.99	-10.73	74.7666	90.00
<b>MRP, Frequency: 60797MHz</b>								
50.97	34.77	PK	H	40.91	75.68	-35.04	0.2771	90.00
50.97	32.18	PK	V	40.91	73.09	-37.63	0.1527	90.00
88.53	52.69	PK	H	47.92	100.61	-10.11	86.2398	90.00
88.53	51.04	PK	V	47.92	98.96	-11.76	58.9804	90.00
<b>MRP, Frequency: 62957MHz</b>								
50.97	35.06	PK	H	40.91	75.97	-34.75	0.2963	90.00
50.97	33.28	PK	V	40.91	74.19	-36.53	0.1967	90.00
88.53	52.29	PK	H	47.92	100.21	-10.51	78.6517	90.00
88.53	52.07	PK	V	47.92	99.99	-10.73	74.7666	90.00

Note 1:

$$EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBµV/m

d-meas. : is the measurement distance, in m

Note 2: The test distance is 0.5 m.

Note 3: Corrected Amplitude = Meter Reading + Antenna Factor

*Note 4: The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.*

*Note 5:*

$$PD = \frac{EIRP_{Linear}}{4\pi d^2}$$

where

PD is the power density at the distance specified by the limit, in W/m<sup>2</sup>  
EIRP<sub>Linear</sub> is the equivalent isotropically radiated power, in watts  
*d* is the distance at which the power density limit is specified, in m

*The Specified distance is 3m.*

## FCC§15.255(f) - FREQUENCY STABILITY

### Applicable Standard

Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### Test Procedure

Refer to ANSI C63.10-2013 Clause 9.14

### Environmental Conditions

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	62 %
<b>ATM Pressure:</b>	100.9 kPa

### Test Data

Please refer to the following table:

LRP:

Temperature	Voltage	Frequency (MHz)			
		f <sub>L</sub> at Low Channel	f <sub>H</sub> at High Channel	f <sub>L</sub> Limit	f <sub>H</sub> Limit
°C	V <sub>DC</sub>				
-20	12	60124	63002	57000	64000
-10	12	60122	63007	57000	64000
0	12	60124	63008	57000	64000
10	12	60129	63004	57000	64000
20	12	60122	63000	57000	64000
30	12	60127	63003	57000	64000
40	12	60124	63002	57000	64000
50	12	60121	63001	57000	64000
25	7.4	60122	63005	57000	64000

MRP:

Temperature	Voltage	Frequency (MHz)			
°C	V <sub>DC</sub>	f <sub>L</sub> at Low Channel	f <sub>H</sub> at High Channel	f <sub>L</sub> Limit	f <sub>H</sub> Limit
-20	12	60013	63014	57000	64000
-10	12	60017	63022	57000	64000
0	12	60020	63008	57000	64000
10	12	60010	63010	57000	64000
20	12	60008	63018	57000	64000
30	12	60013	63014	57000	64000
40	12	60012	63022	57000	64000
50	12	60017	63018	57000	64000
25	7.4	60015	63025	57000	64000

---

## **FCC§15.255(d) – PUBLICLY-ACCESSIBLE COORDINATION CHANNEL**

---

### **Applicable Standard**

Only spurious emissions and transmissions related to a publicly-accessible coordination channel, whose purpose is to coordinate operation between diverse transmitters with a view towards reducing the probability of interference throughout the 57-64 GHz band, are permitted in the 57-57.05 GHz band.

Note to paragraph (d): The 57-57.05 GHz is reserved exclusively for a publicly-accessible coordination channel. The development of standards for this channel shall be performed pursuant to authorizations issued under part 5 of this chapter.

### **Test Procedure**

Refer to ANSI C63.10-2013 Clause 9.12

### **Test result**

NO emission was detected within 57-57.05GHz band.

---

## **§15.255(a) (h)– OPERATION RESTRICTION AND GROUP INSTALLTION**

---

### **Applicable Standard**

§15.255 (a) Operation under the provisions of this section is not permitted for the following products:

- (1) Equipment used on aircraft or satellites.
- (2) Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. For the purposes of this section, the reference to fixed operation includes field disturbance sensors installed in fixed equipment, even if the sensor itself moves within the equipment.

§15.255 (h) Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

### **Result of Operation Restriction**

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

### **Result of Group installation**

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array

**\*\*\*\*\* END OF REPORT \*\*\*\*\***