
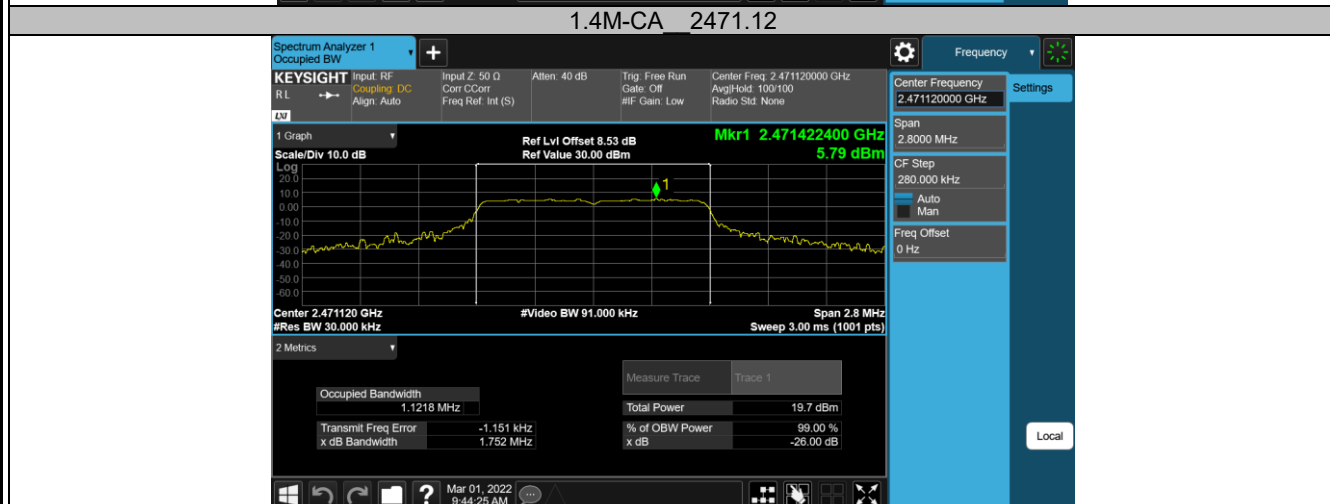
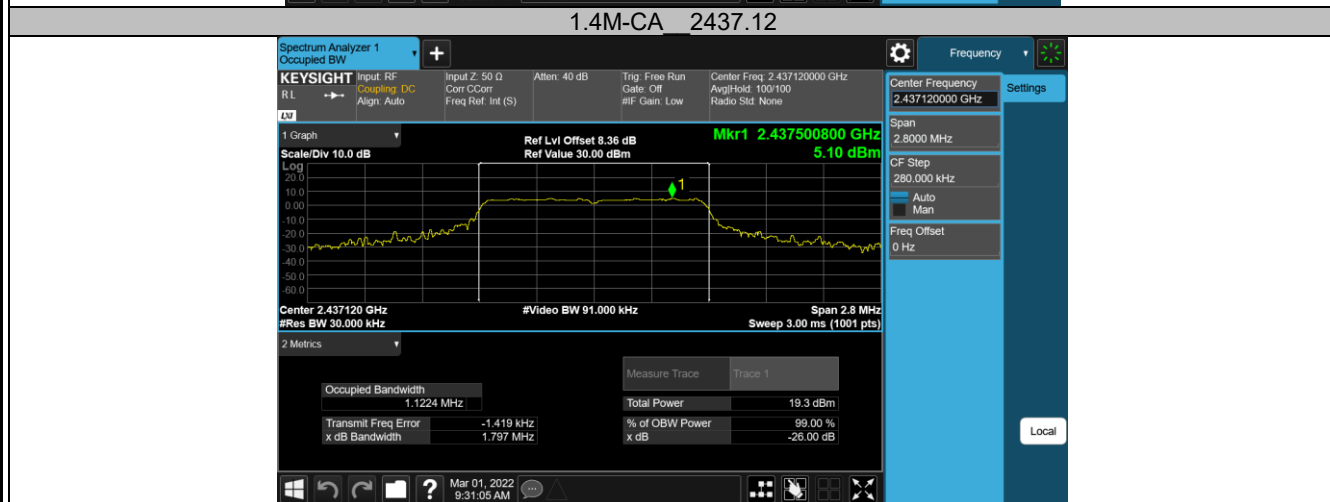



2.4GHz SDR, 1.4MHz BW CA mode

TestMode	Channel	OCB [MHz]	Verdict
1.4M-CA	2405.12	1.1244	PASS
	2437.12	1.1224	PASS
	2471.12	1.1218	PASS

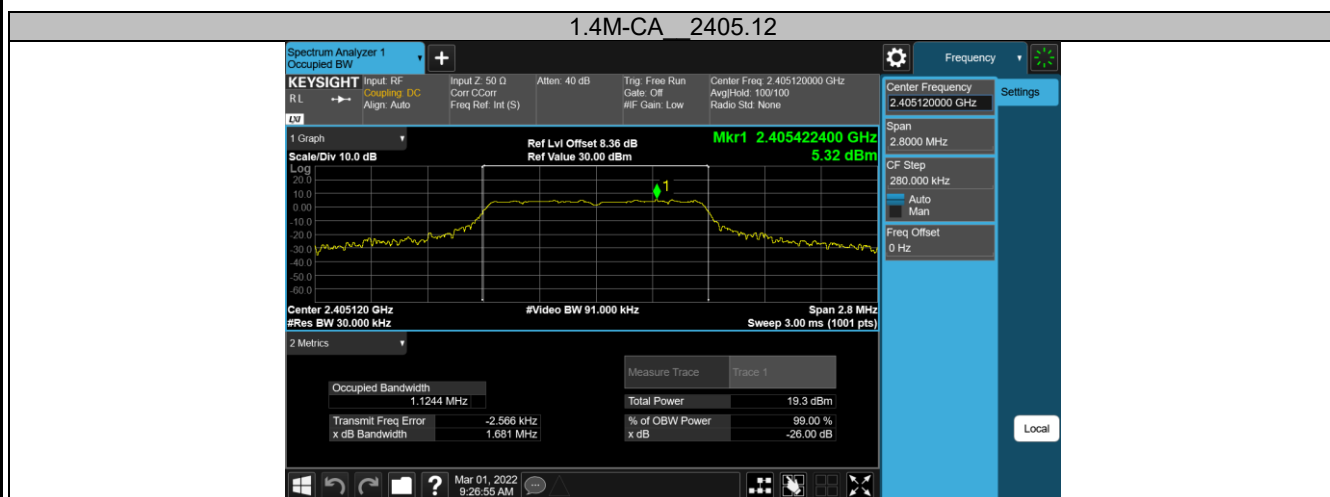



2.4GHz SDR, 3MHz BW

TestMode	Channel	OCB [MHz]	Verdict
3M	2405.5	2.2327	PASS
	2435.5	2.2302	PASS
	2468.5	2.2253	PASS

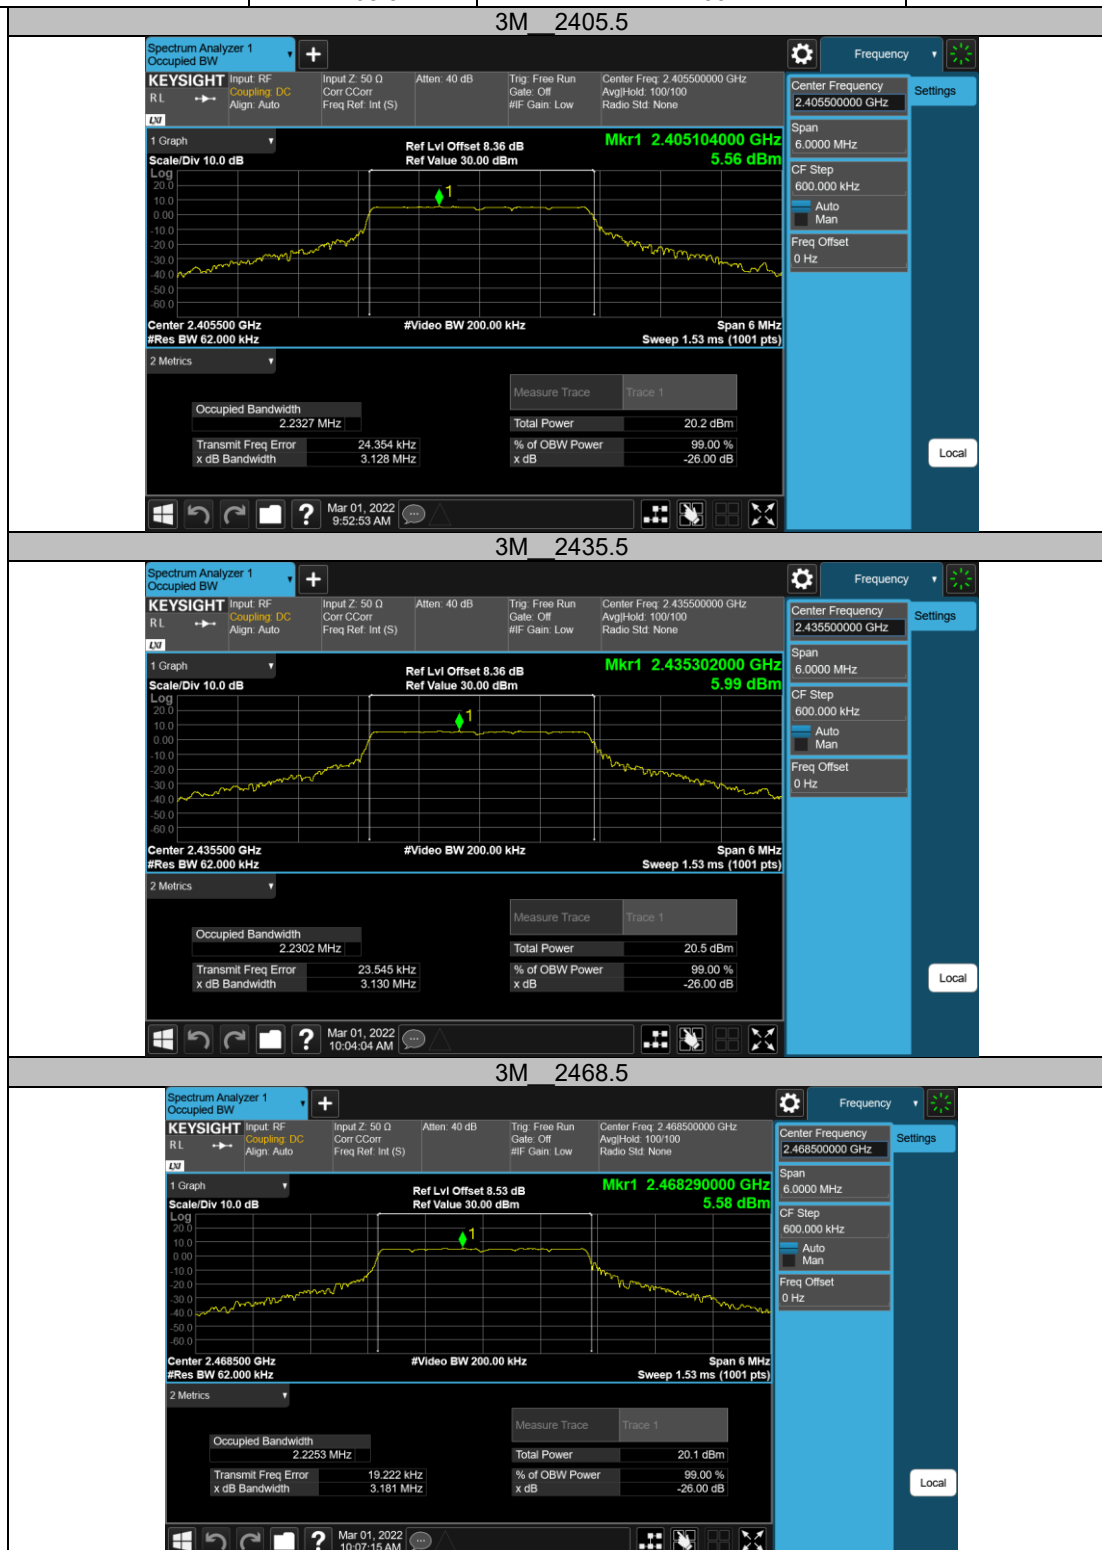




2.4GHz SDR, 3MHz BW CA mode

TestMode	Channel	OCB [MHz]	Verdict
3M-CA	2408.2	2.2372	PASS
	2438.2	2.2351	PASS
	2471.2	2.2307	PASS

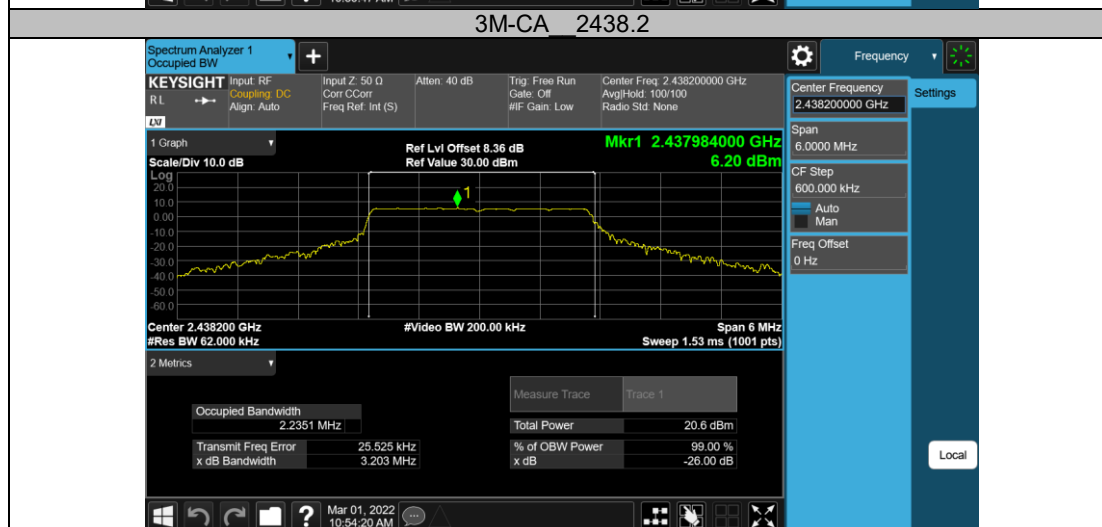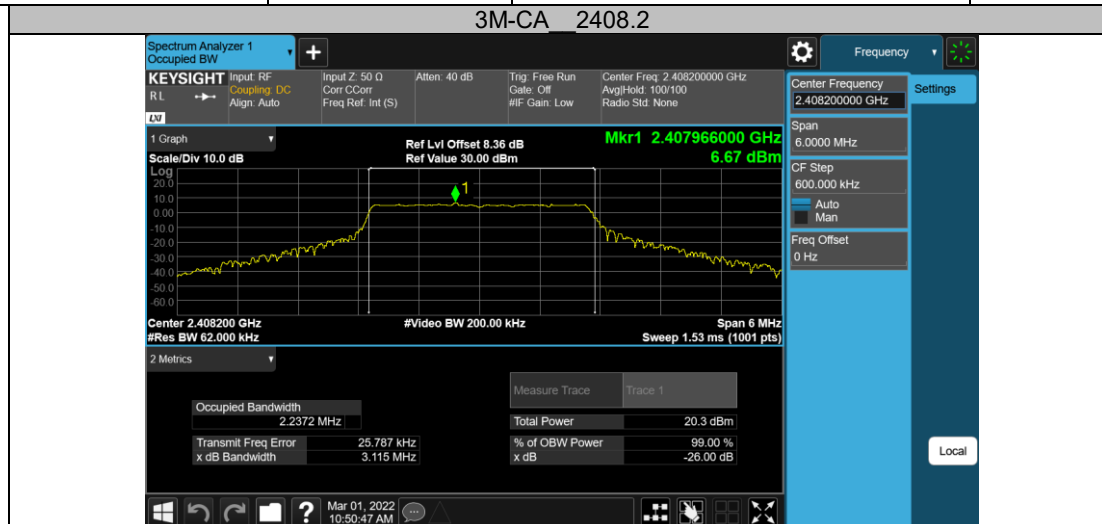




2.4GHz SDR, 10MHz BW

TestMode	Channel	OCB [MHz]	Verdict
10M	2407.5	9.0445	PASS
	2437.5	9.1184	PASS
	2467.5	9.0184	PASS

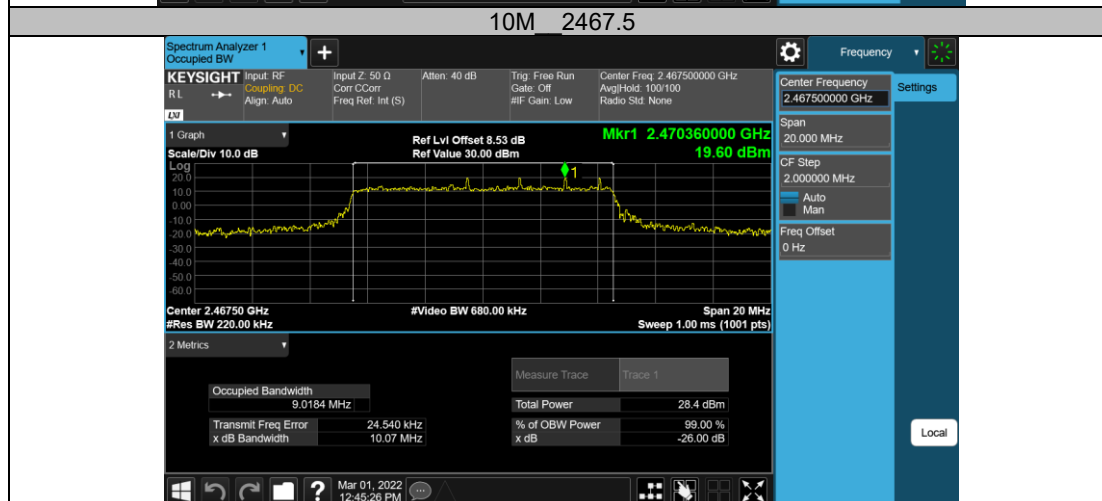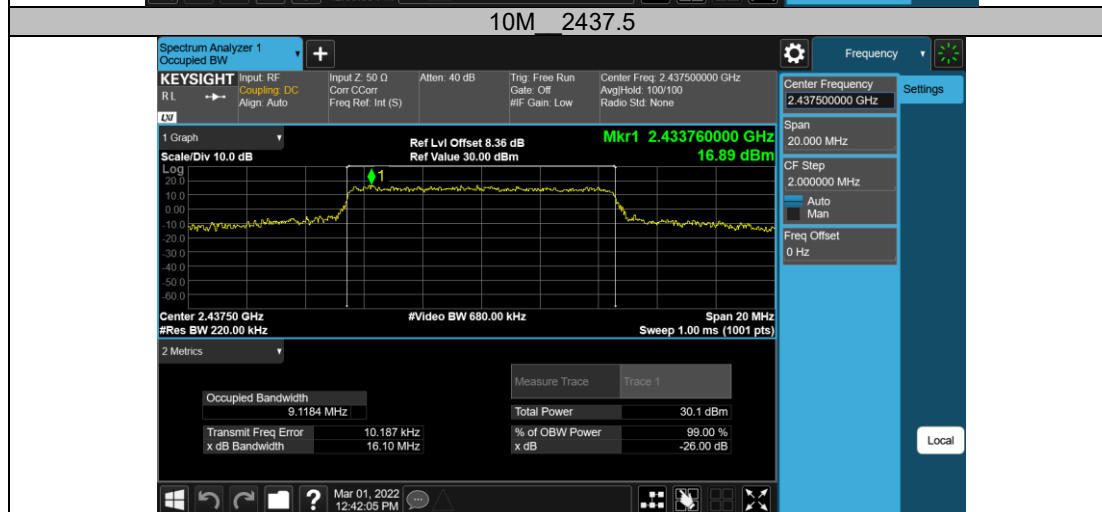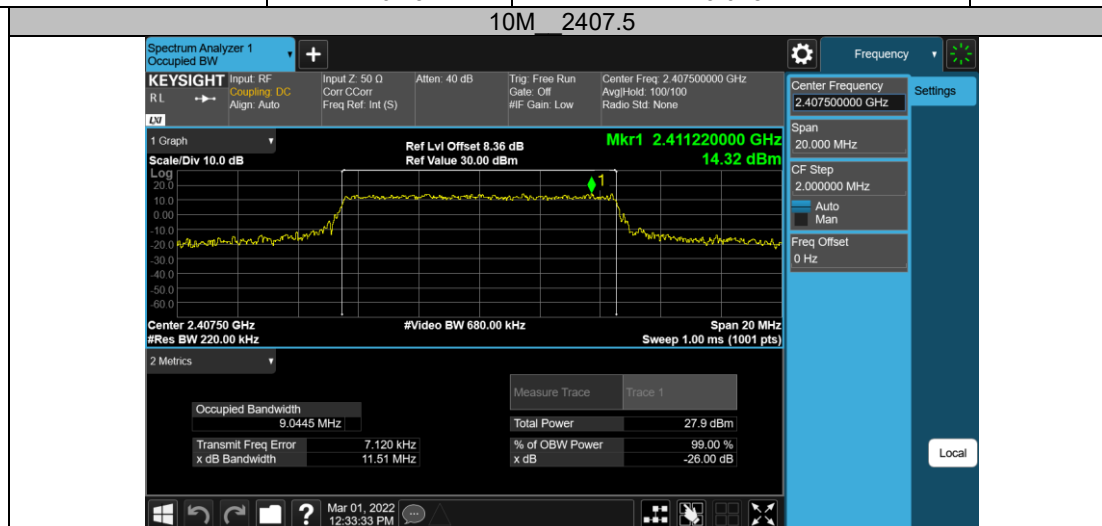




2.4GHz SDR, 20MHz BW

TestMode	Channel	OCB [MHz]	Verdict
20M	2412.5	17.831	PASS
	2437.5	17.941	PASS
	2462.5	17.893	PASS

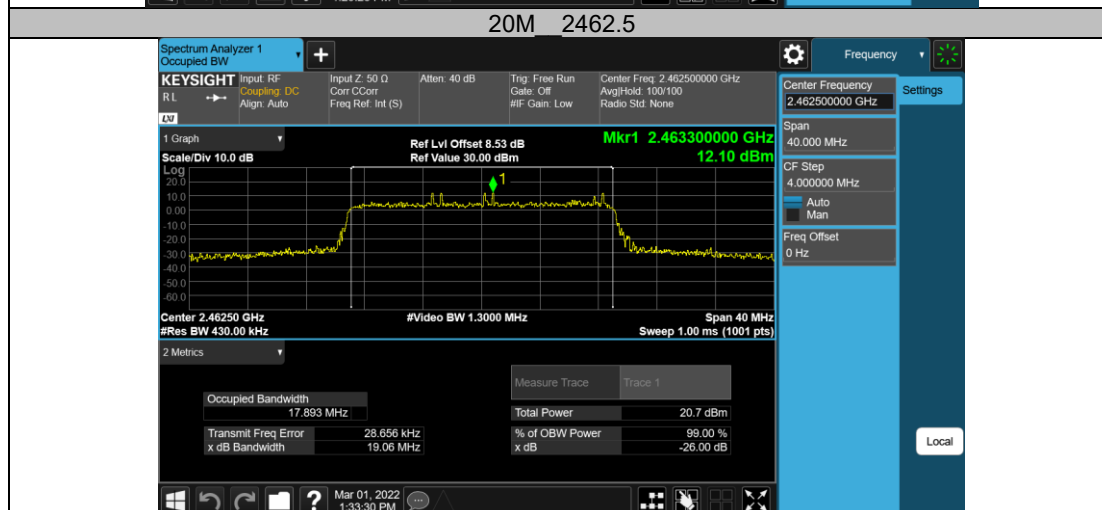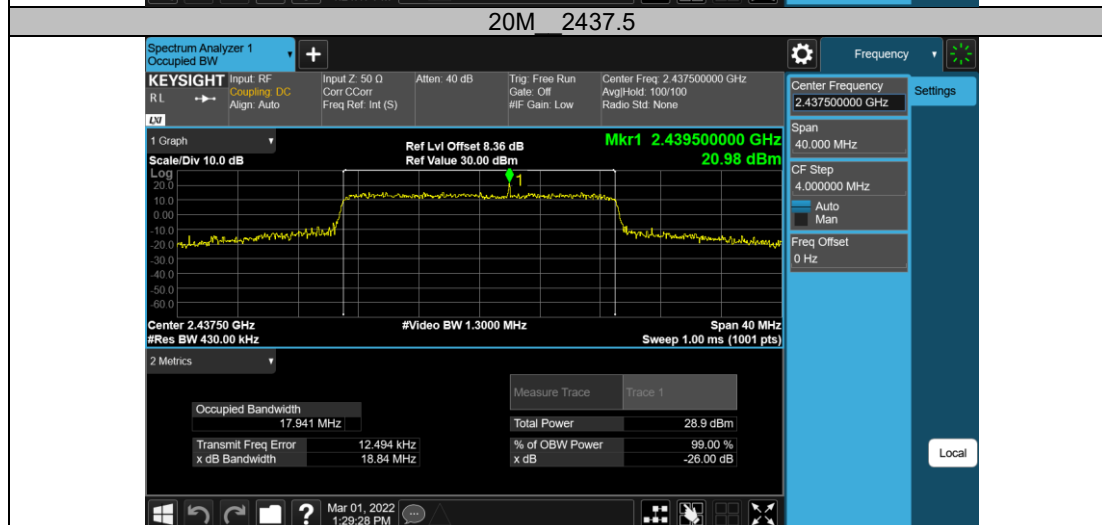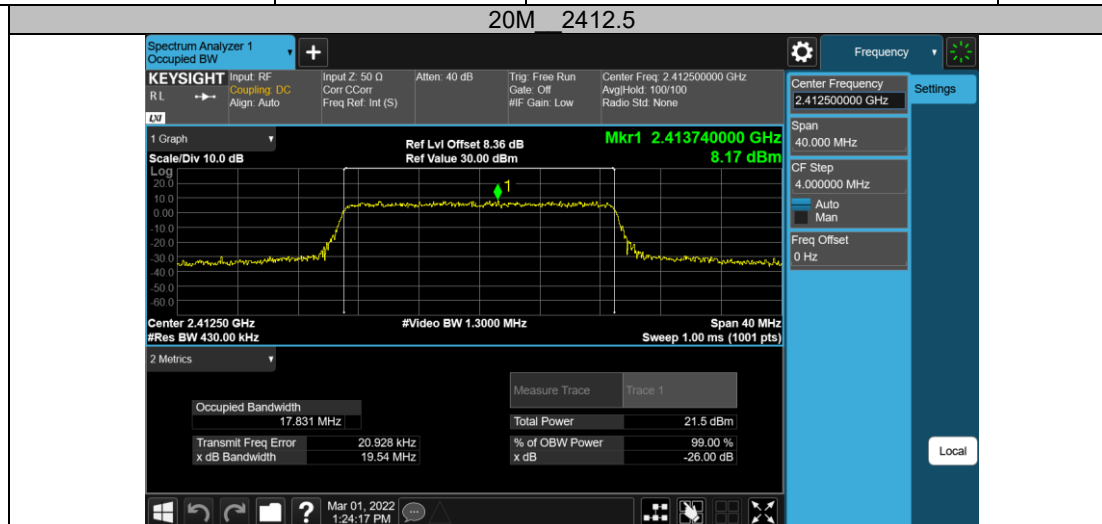

2.4GHz SDR, 40MHz BW

TestMode	Channel	OCB [MHz]	Verdict
40M	2422.5	35.727	PASS
	2437.5	35.632	PASS
	2452.5	35.800	PASS

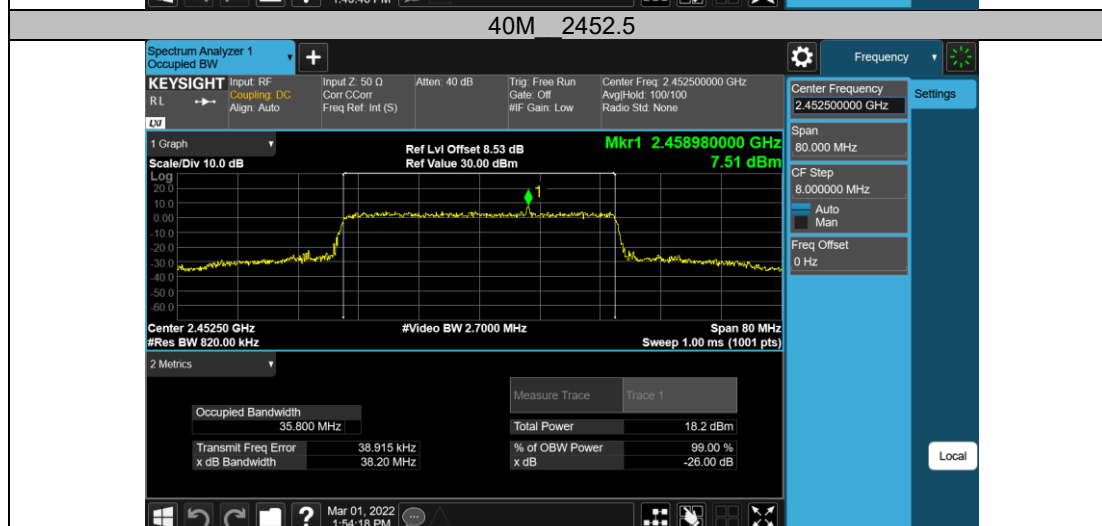
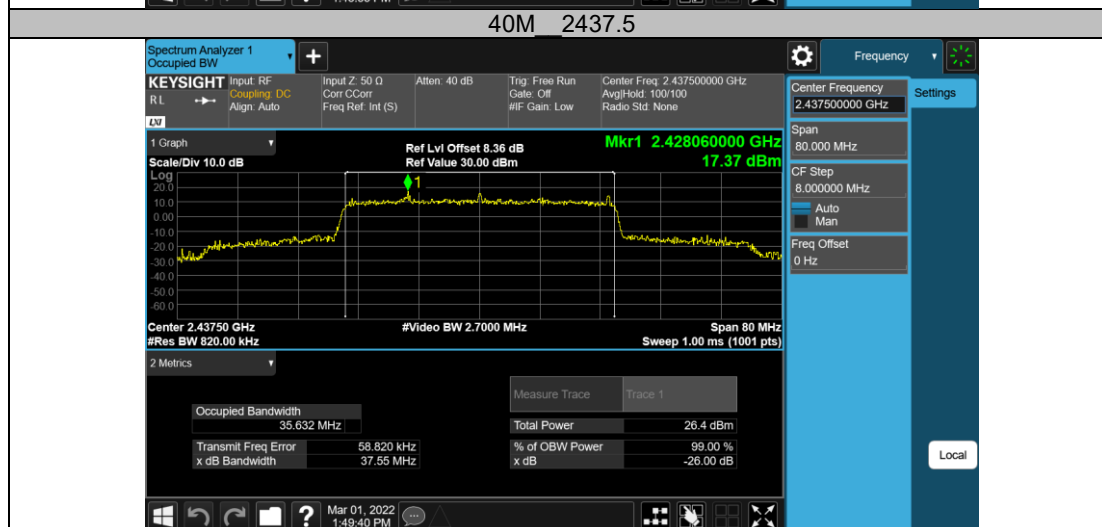
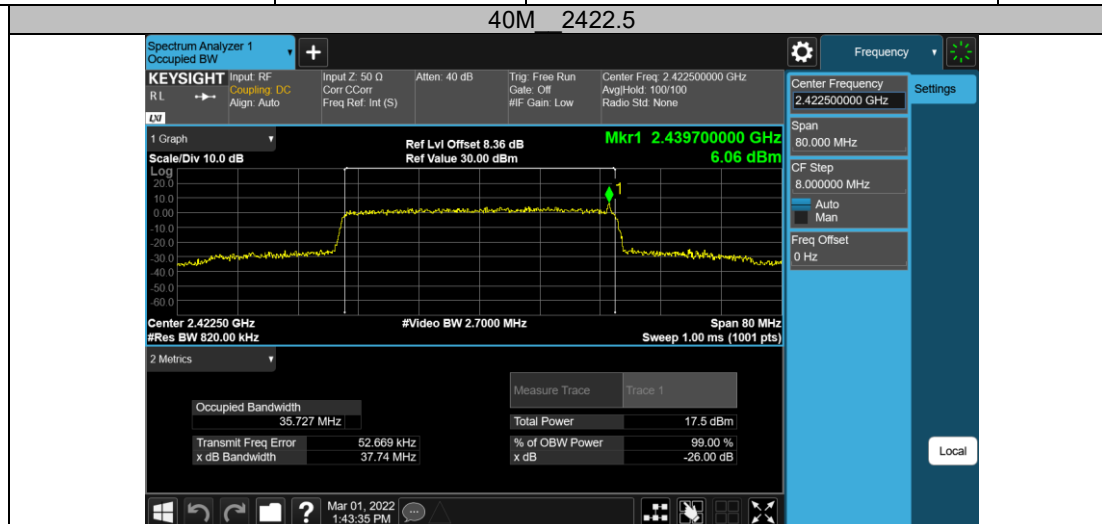


Appendix B.4: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

The transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, thus the attenuation required under this section shall be 30 dB.

2.4GHz SDR, 1.4MHz BW


TestMode	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
1.4M	2403.5	Reference	10.47	10.47	---	PASS
		30~1000	10.47	-62.68	≤-19.53	PASS
		1000~26500	10.47	-53.06	≤-19.53	PASS
	2435.5	Reference	10.88	10.88	---	PASS
		30~1000	10.88	-62.42	≤-19.12	PASS
		1000~26500	10.88	-53.52	≤-19.12	PASS
	2469.5	Reference	10.74	10.74	---	PASS
		30~1000	10.74	-62.88	≤-19.26	PASS
		1000~26500	10.74	-52.79	≤-19.26	PASS

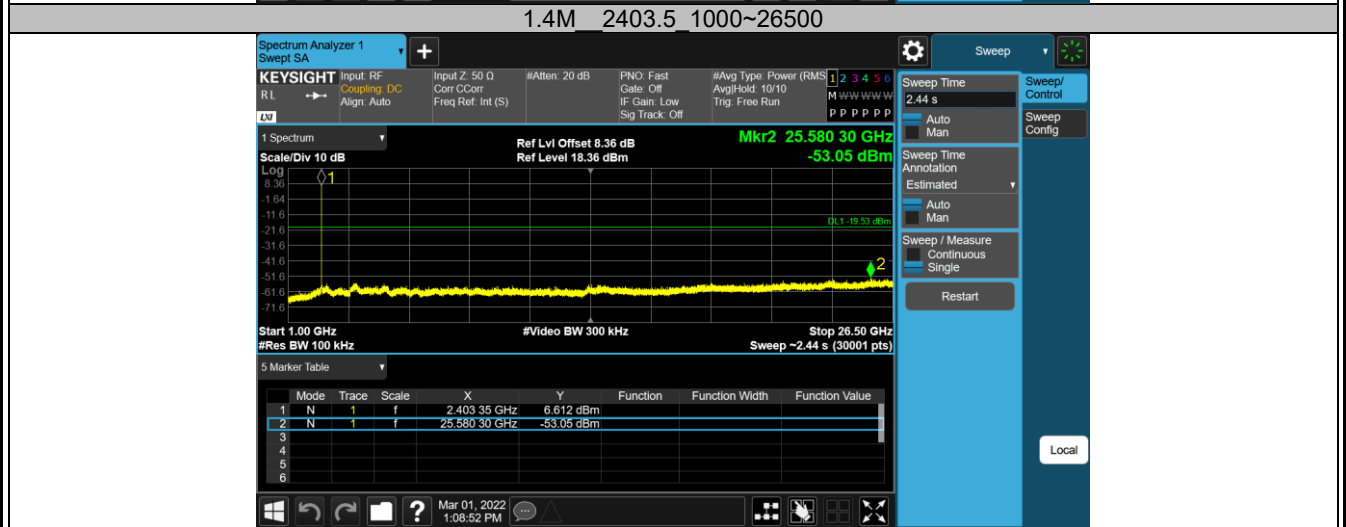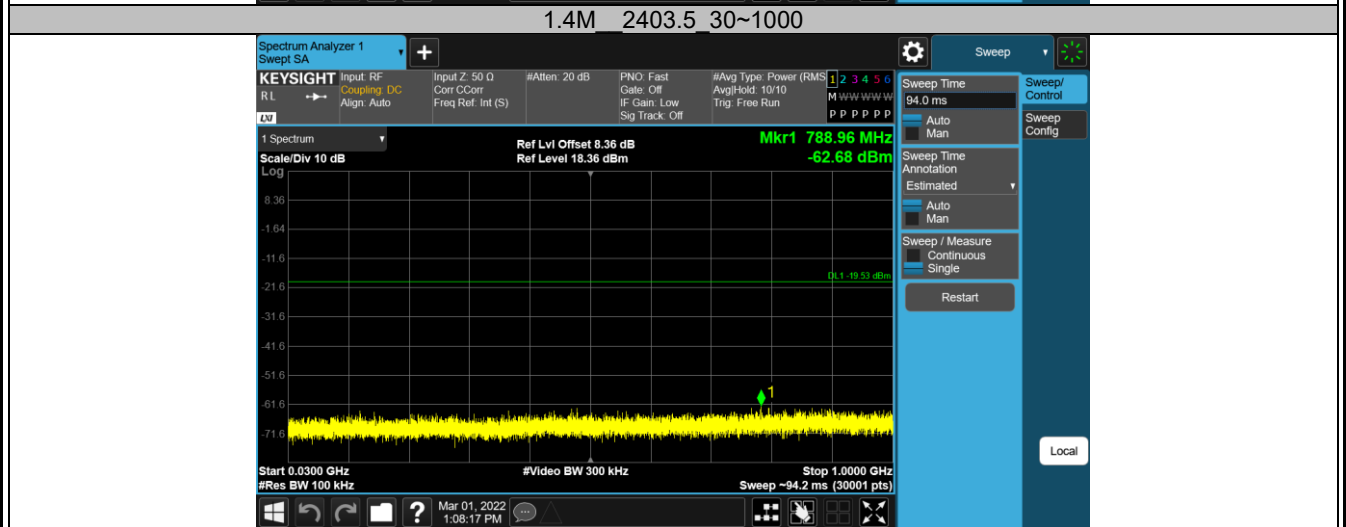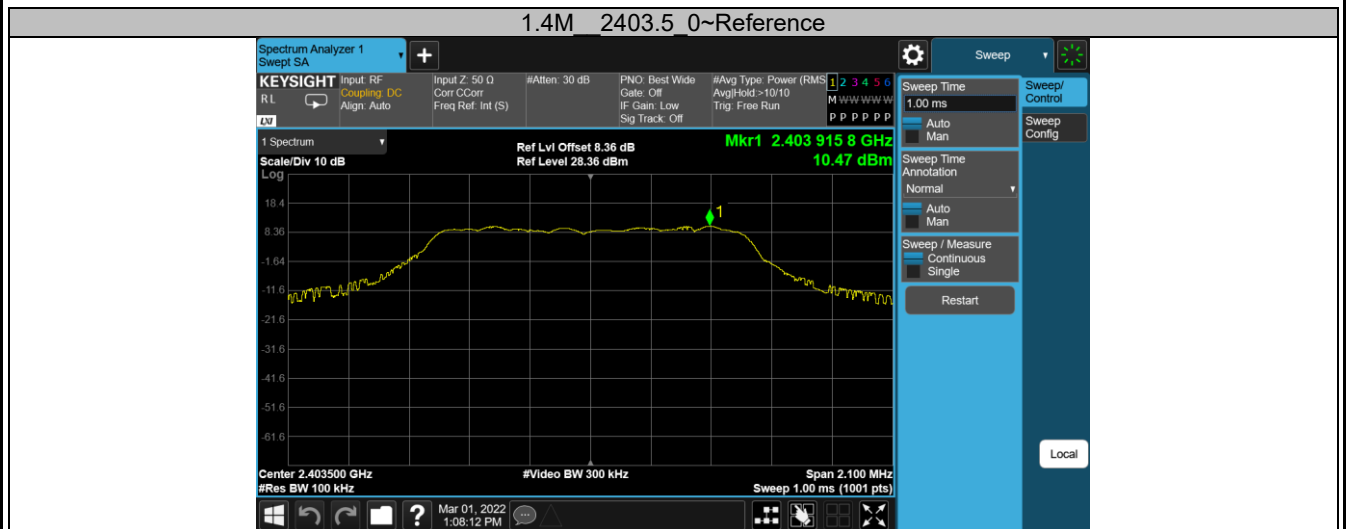


1.4M 2435.5 0~Reference




1.4M 2435.5 30~1000

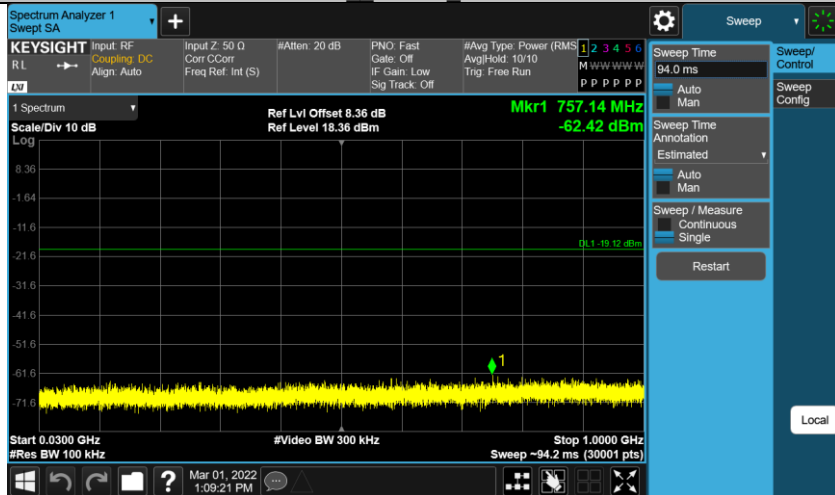


1.4M 2435.5 1000~26500

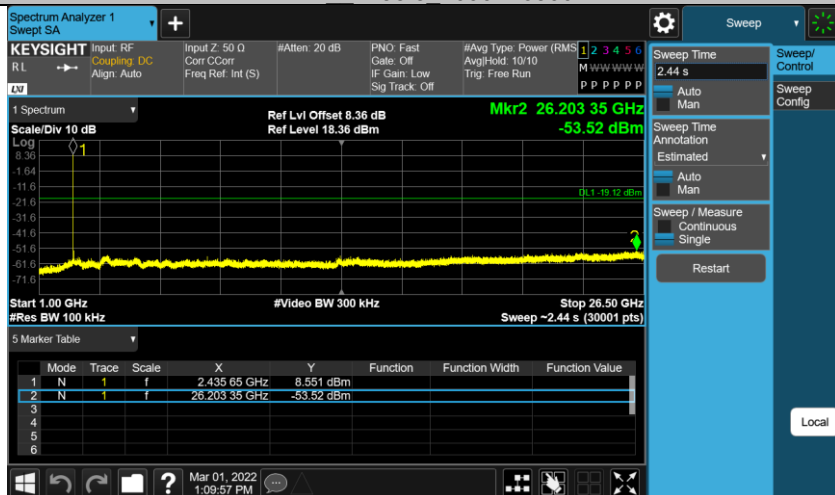


1.4M 2469.5 0~Reference

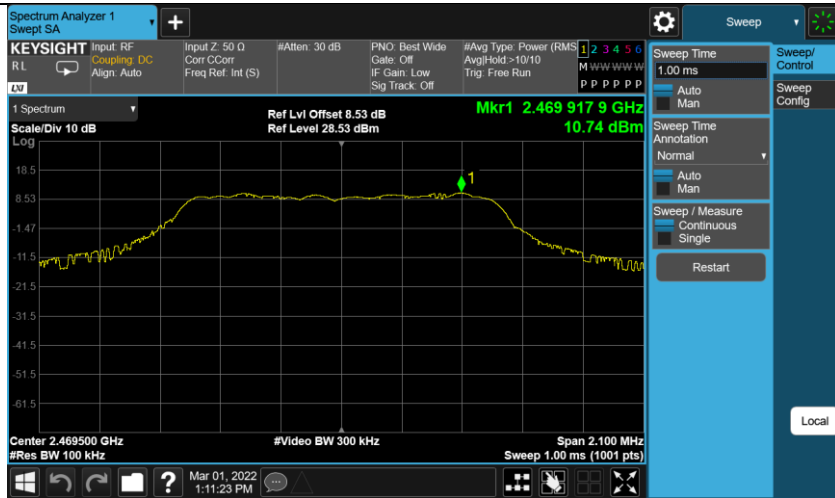



1.4M 2469.5 30~1000

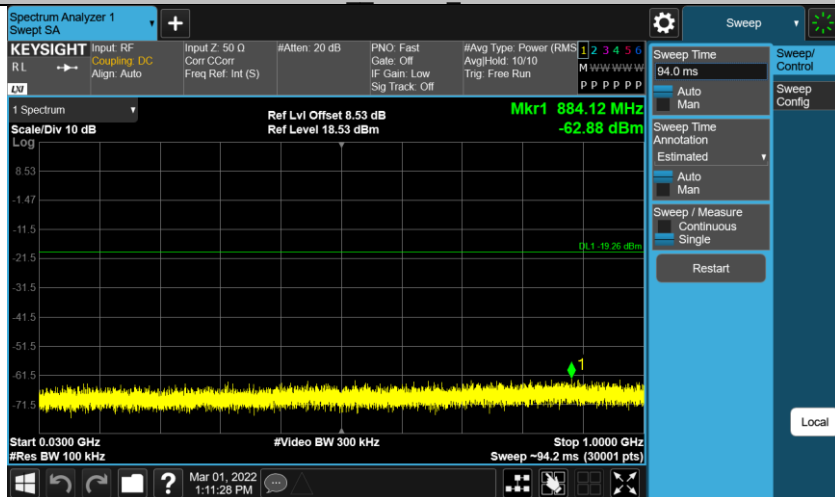

1.4M 2469.5 1000~26500

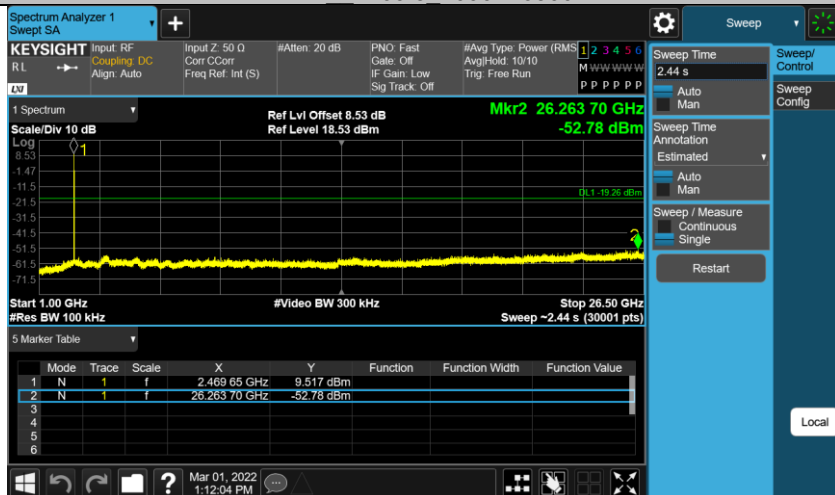

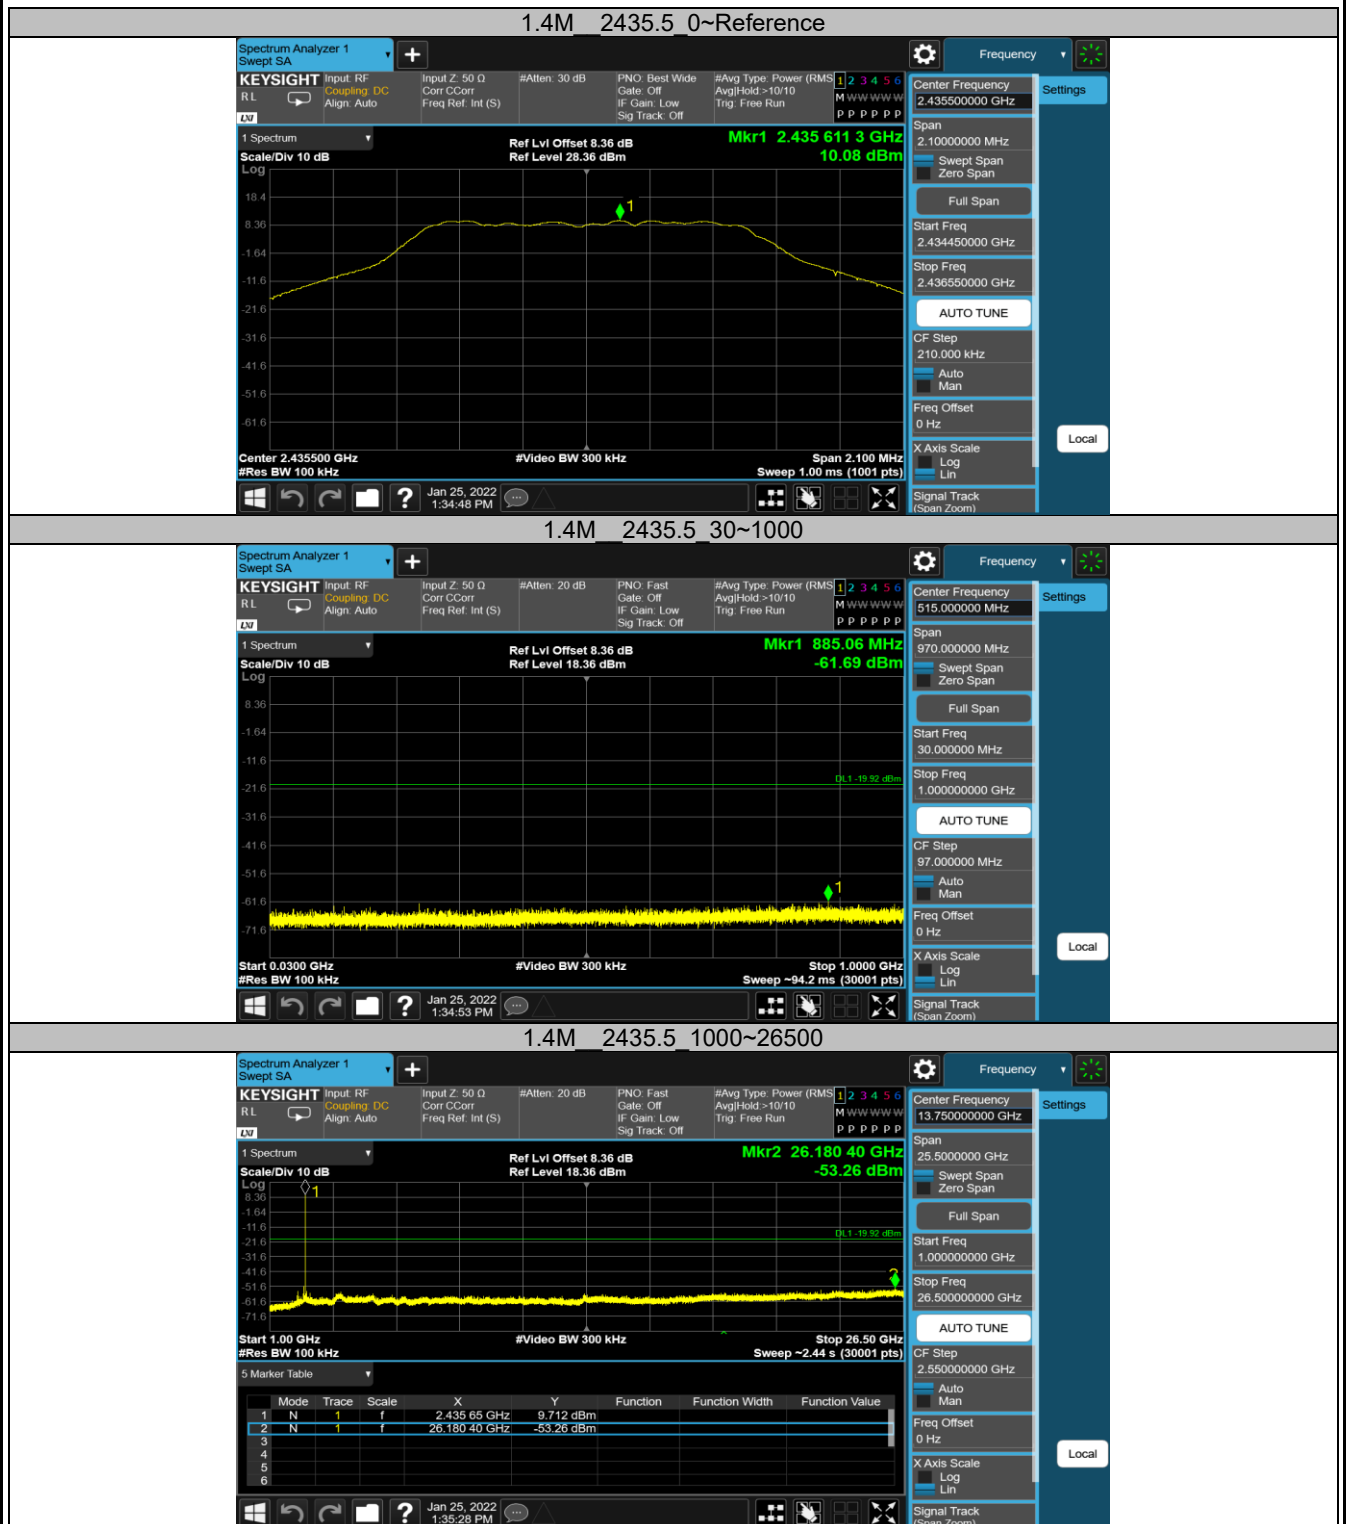


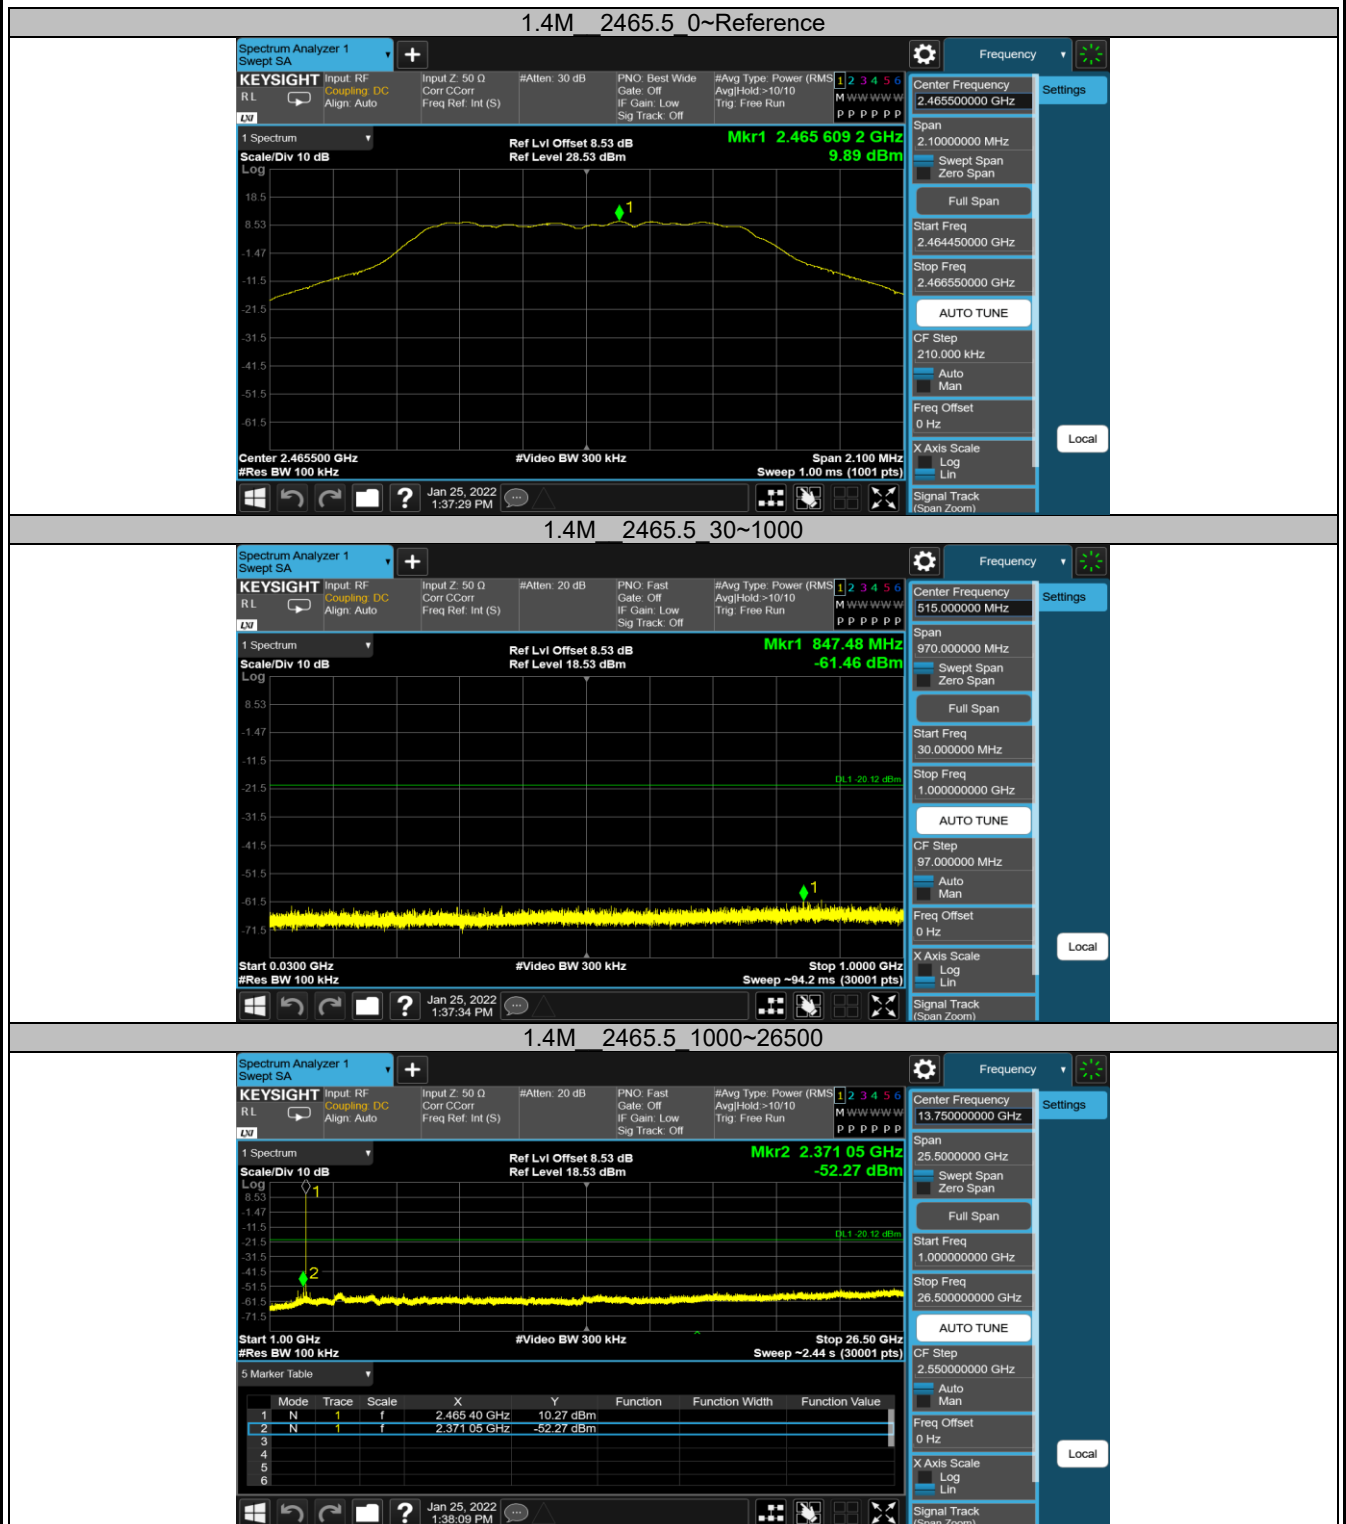


2.4GHz SDR, 1.4MHz BW CA mode

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
1.4M-CA		2405.12	Reference	10.46	10.46	---	PASS
			30~1000	10.46	-62.56	≤-19.54	PASS
			1000~26500	10.46	-53.07	≤-19.54	PASS
		2437.12	Reference	10.85	10.85	---	PASS
			30~1000	10.85	-62.86	≤-19.15	PASS
			1000~26500	10.85	-53.08	≤-19.15	PASS
		2471.12	Reference	10.90	10.90	---	PASS
			30~1000	10.90	-61.66	≤-19.1	PASS
			1000~26500	10.90	-52.91	≤-19.1	PASS


1.4M-CA 2405.12 0~Reference



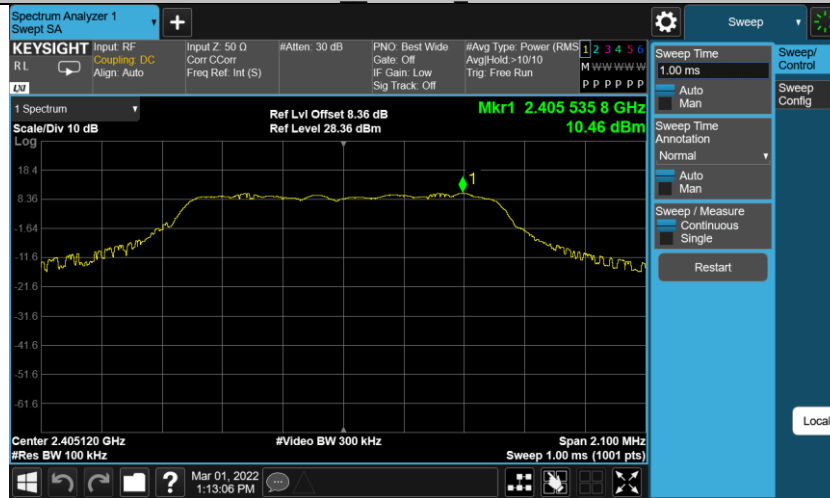



1.4M-CA 2405.12 30~1000

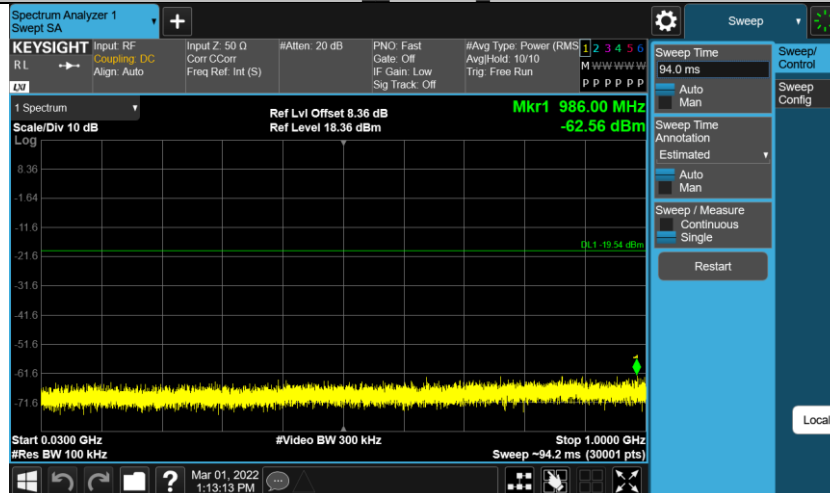

1.4M-CA 2405.12 1000~26500



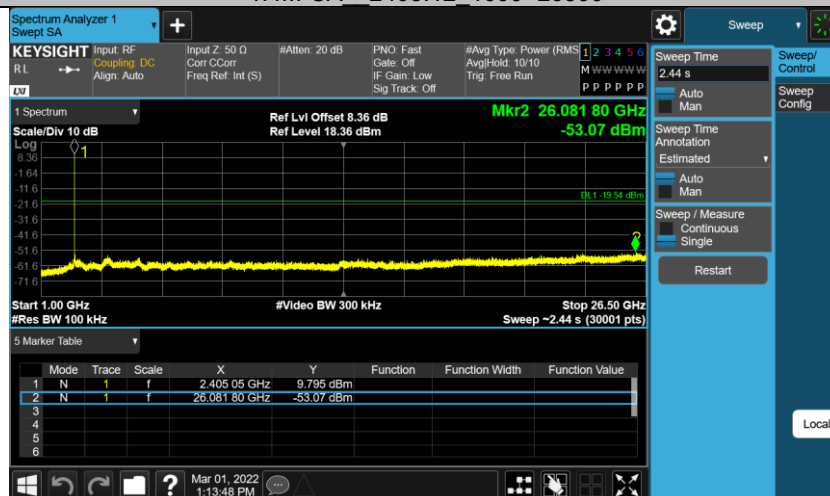


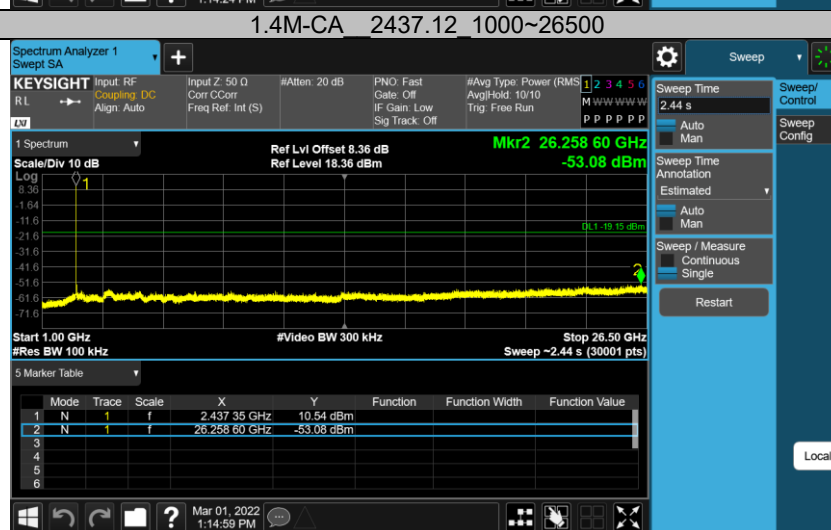
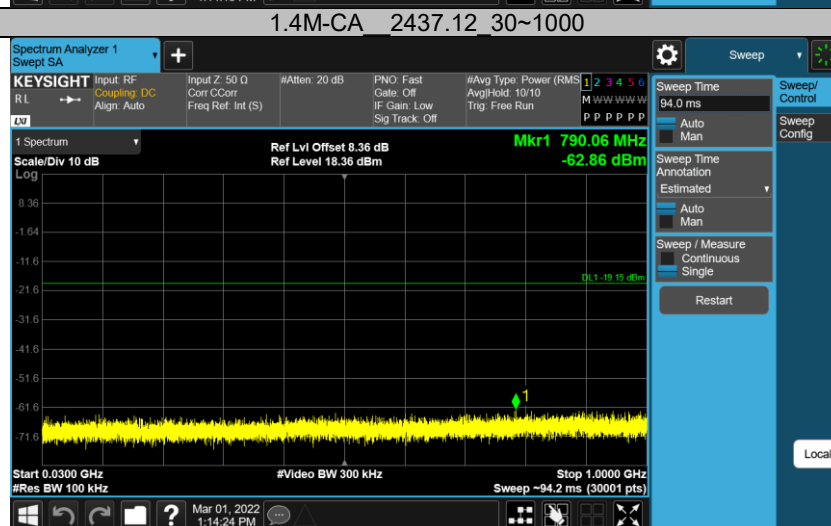
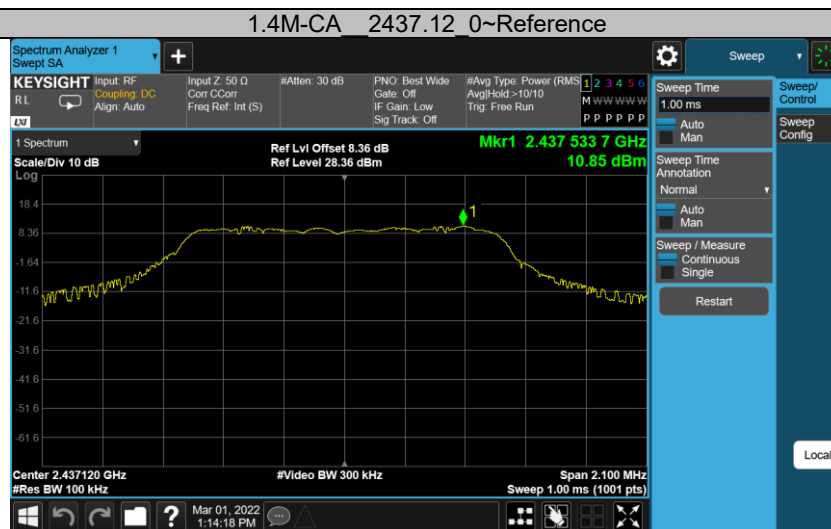


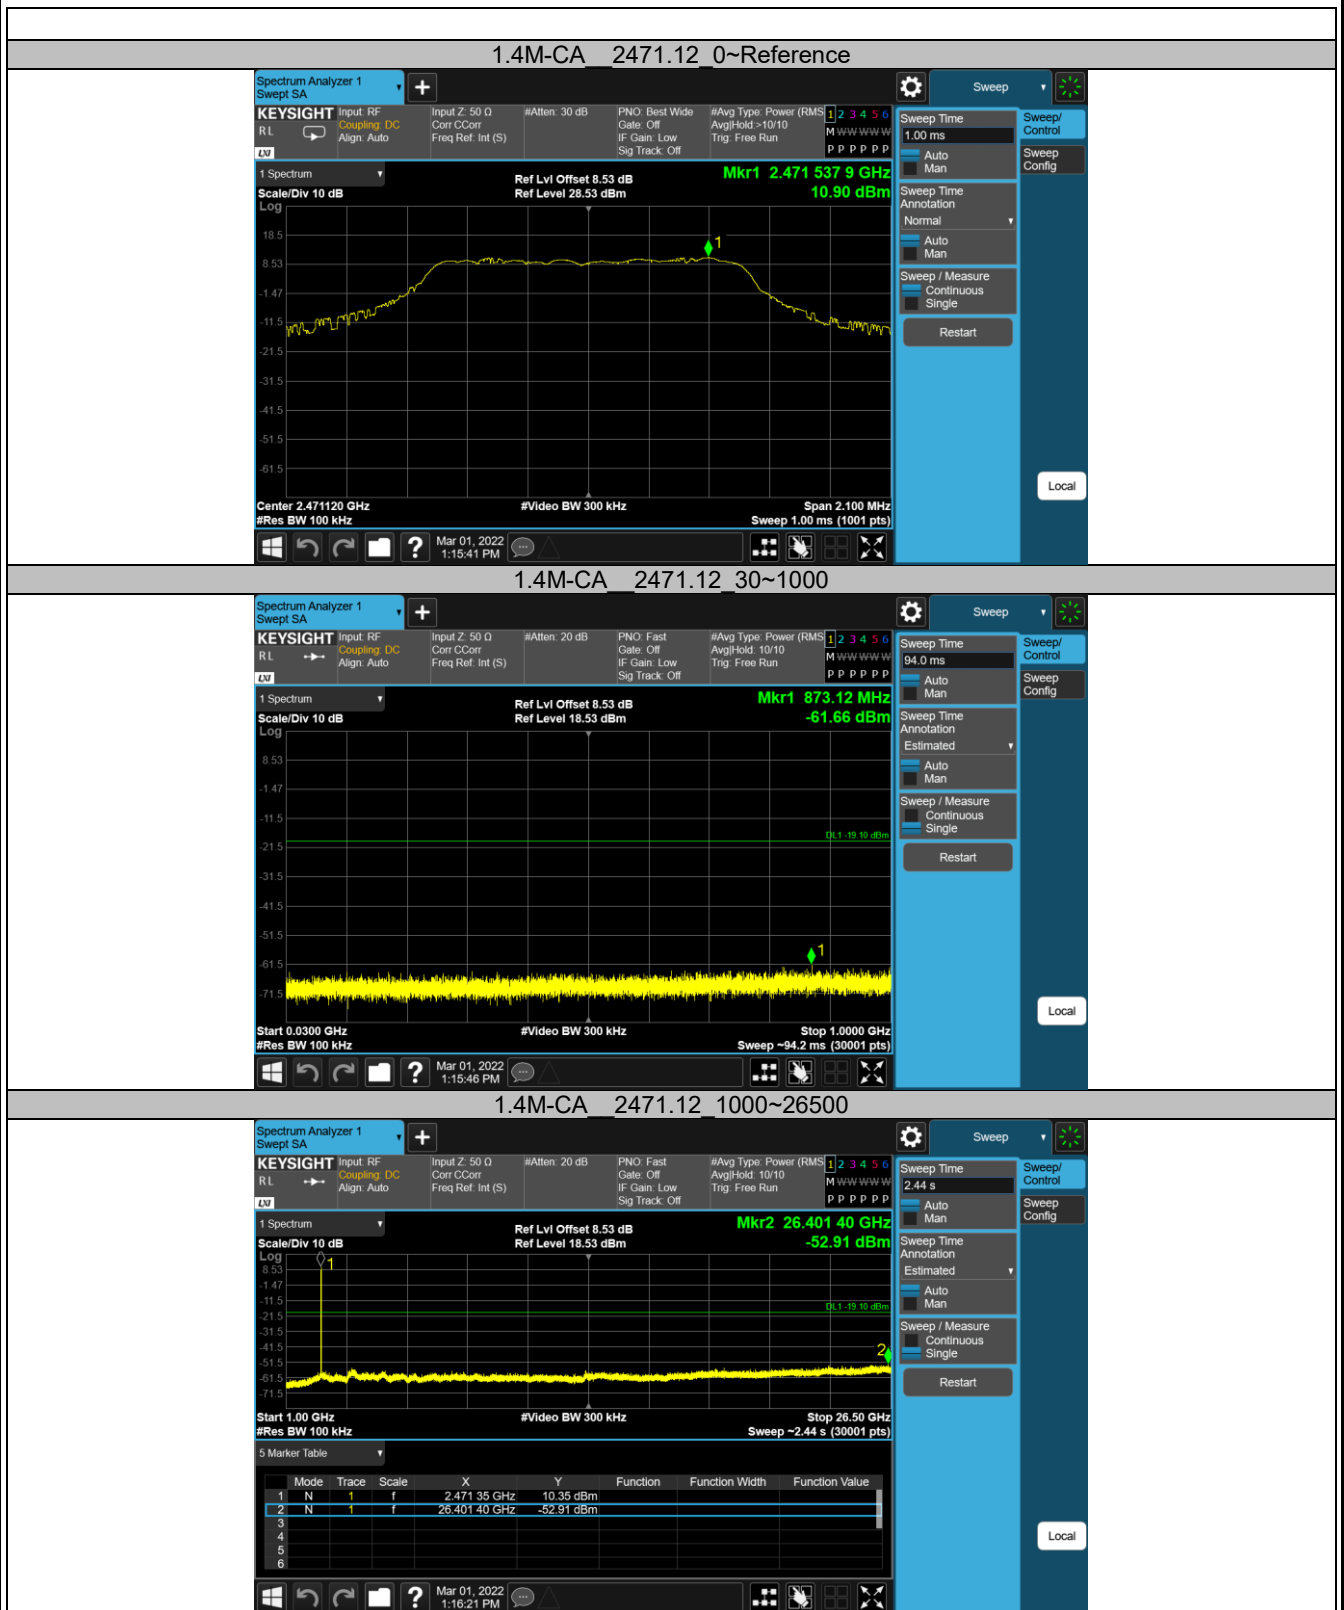

2.4GHz SDR, 3MHz BW

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
3M		2405.5	Reference	6.77	6.77	---	PASS
			30~1000	6.77	-63.02	≤-23.23	PASS
			1000~26500	6.77	-54.81	≤-23.23	PASS
		2435.5	Reference	8.14	8.14	---	PASS
			30~1000	8.14	-62.74	≤-21.86	PASS
			1000~26500	8.14	-53.96	≤-21.86	PASS
		2468.5	Reference	8.18	8.18	---	PASS
			30~1000	8.18	-63.24	≤-21.82	PASS
			1000~26500	8.18	-54.16	≤-21.82	PASS

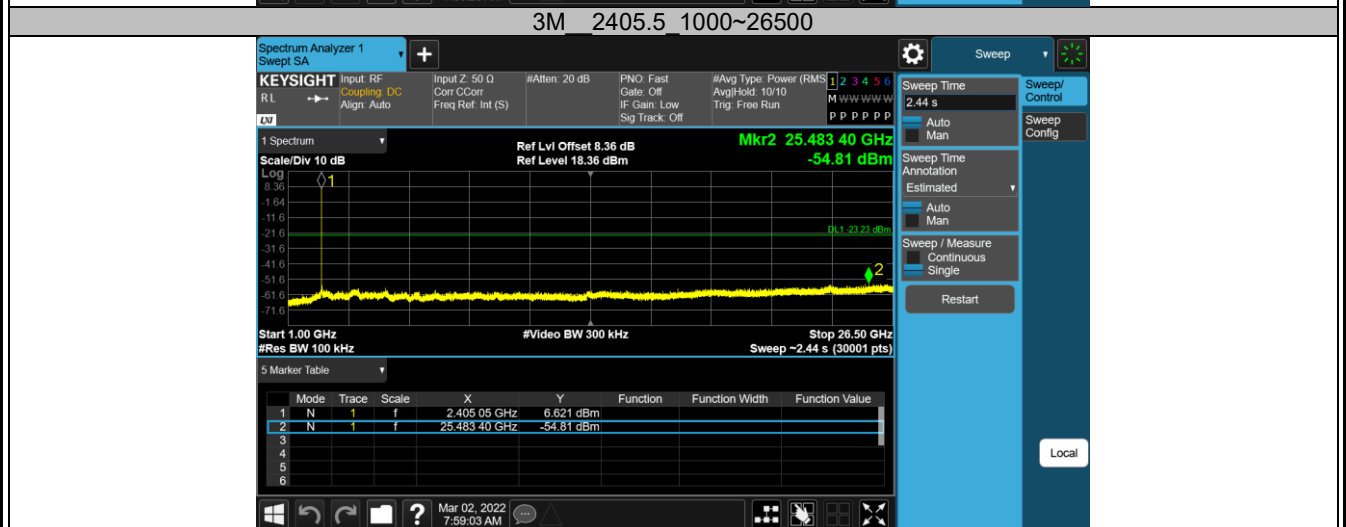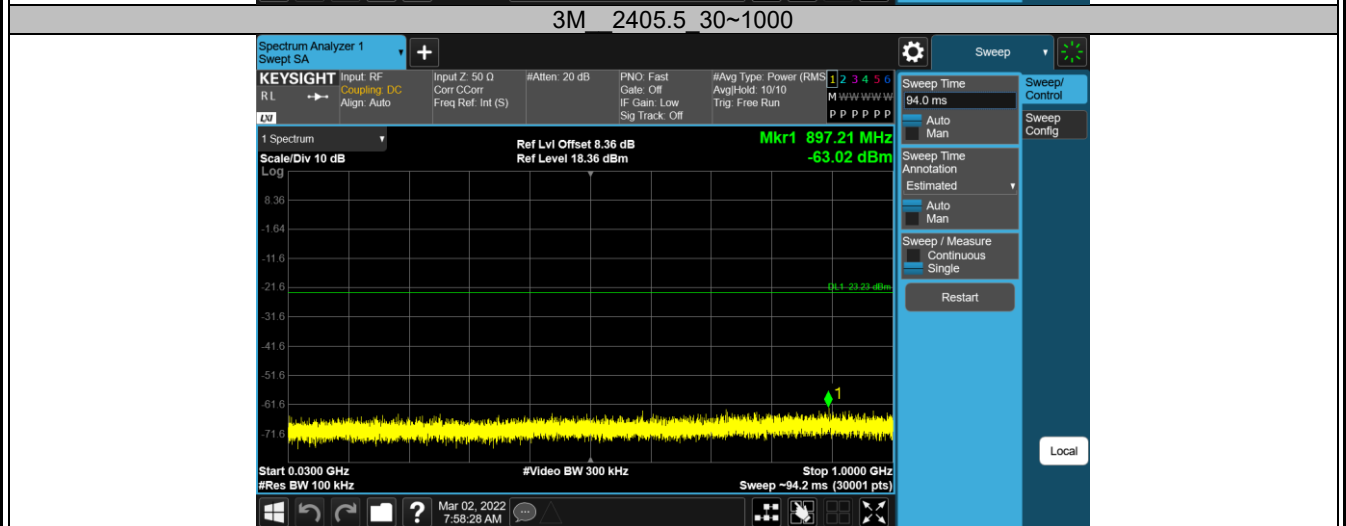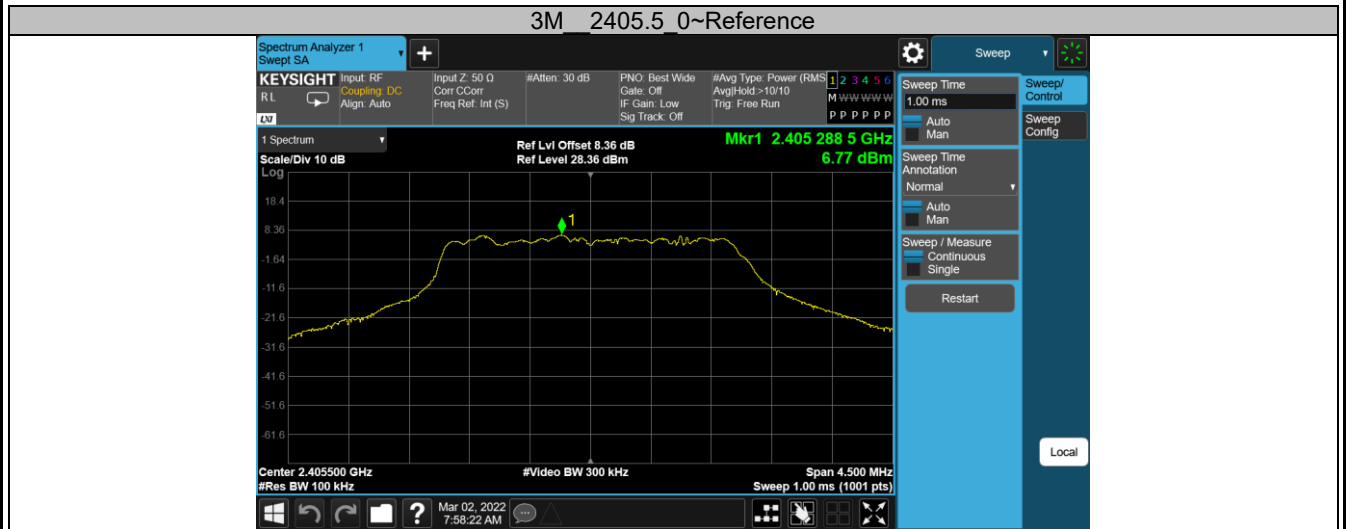

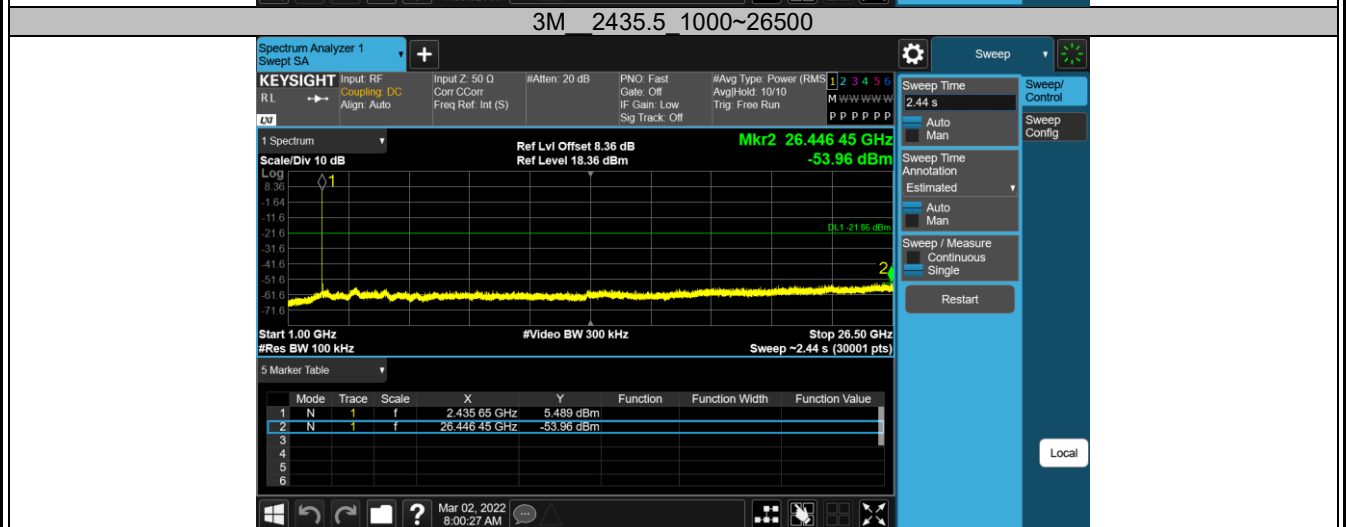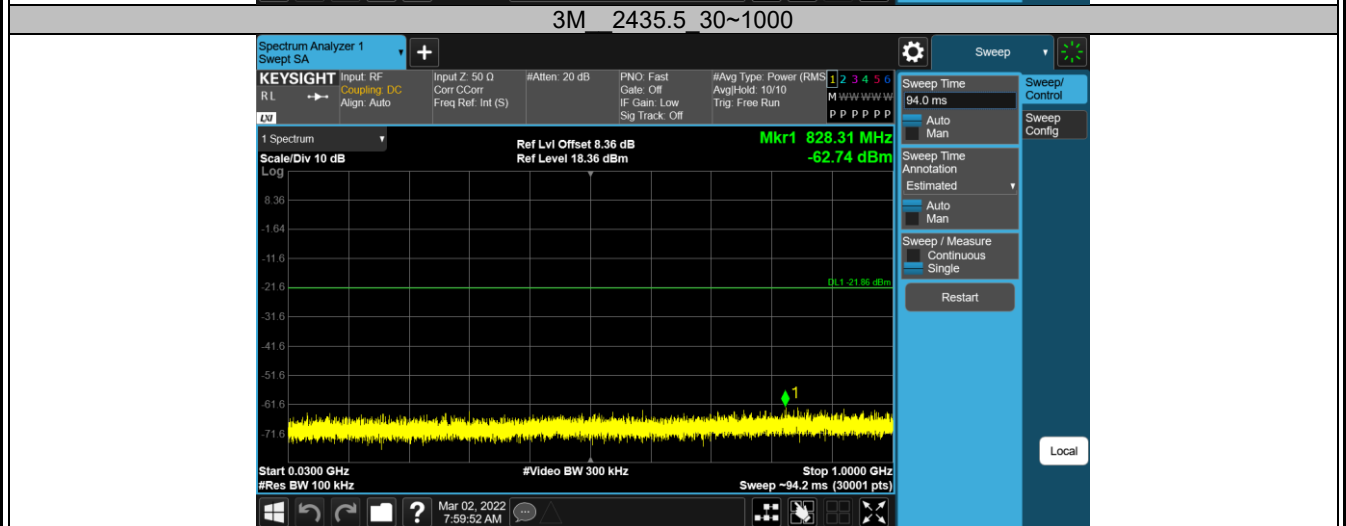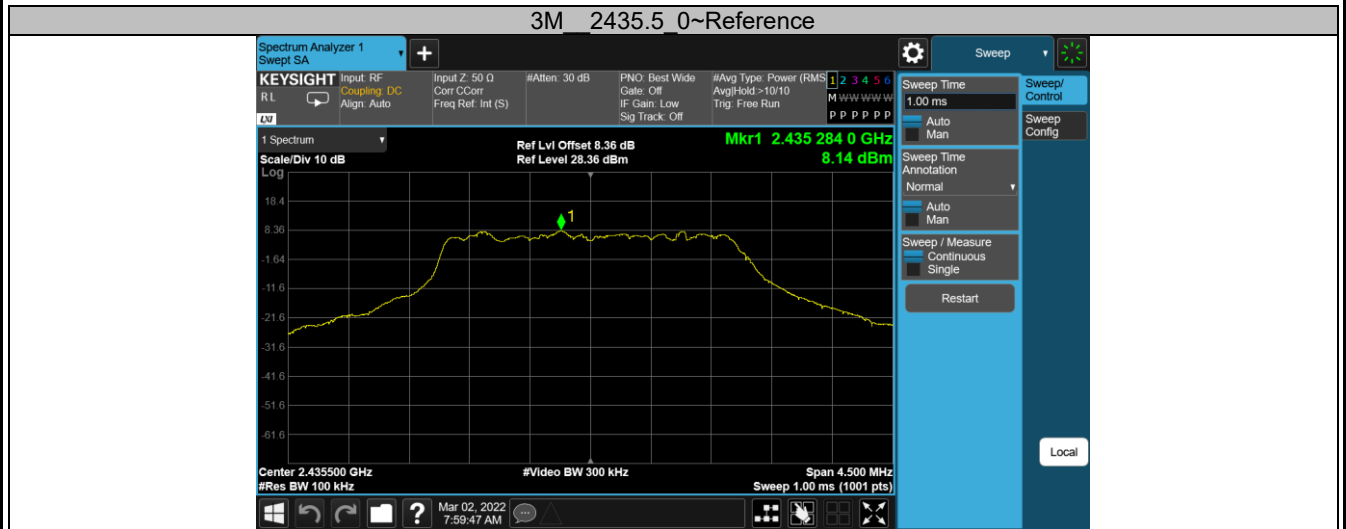





2.4GHz SDR, 3MHz BW (CA Mode)

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
3M-CA		2408.2	Reference	7.86	7.86	---	PASS
			30~1000	7.86	-63.26	≤-22.14	PASS
			1000~26500	7.86	-54.23	≤-22.14	PASS
		2438.2	Reference	8.01	8.01	---	PASS
			30~1000	8.01	-62.94	≤-21.99	PASS
			1000~26500	8.01	-53.79	≤-21.99	PASS
		2471.2	Reference	7.93	7.93	---	PASS
			30~1000	7.93	-62.94	≤-22.07	PASS
			1000~26500	7.93	-54.34	≤-22.07	PASS

3M-CA 2408.2 0~Reference

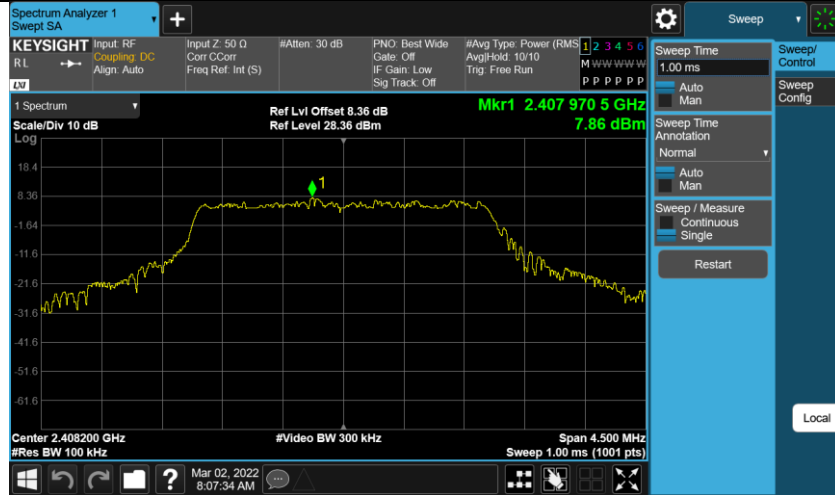

3M-CA 2408.2 30~1000

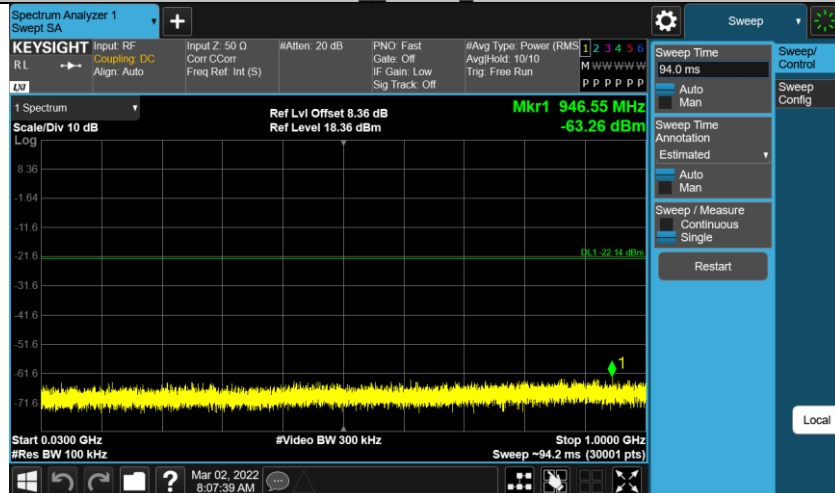

3M-CA 2408.2 1000~26500

