




LTE Band 5 5MHz CH-Low 9kHz~10GHz

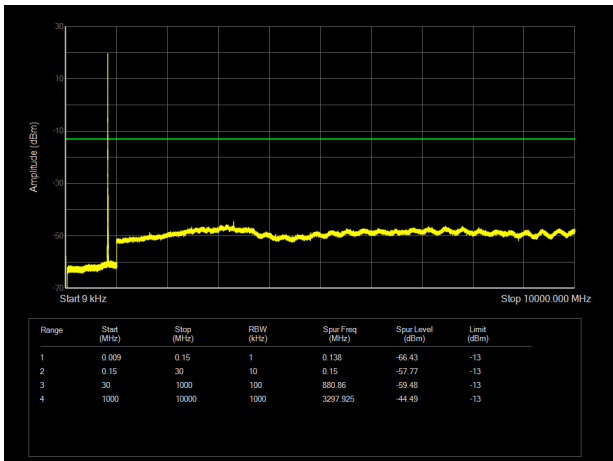


LTE Band 5 10MHz CH-Low 9kHz~10GHz

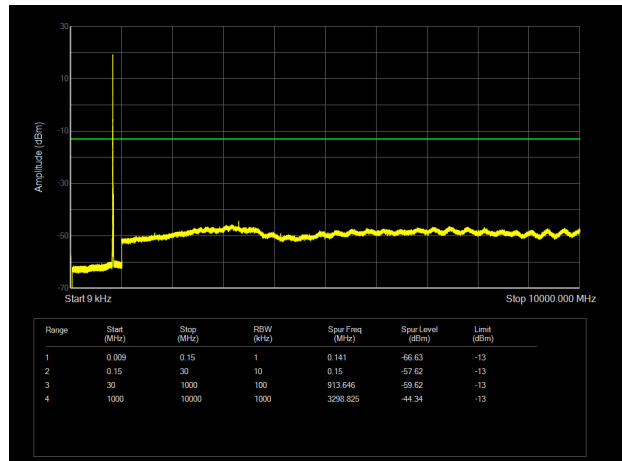


LTE Band 5 5MHz CH-Middle 9kHz~10GHz

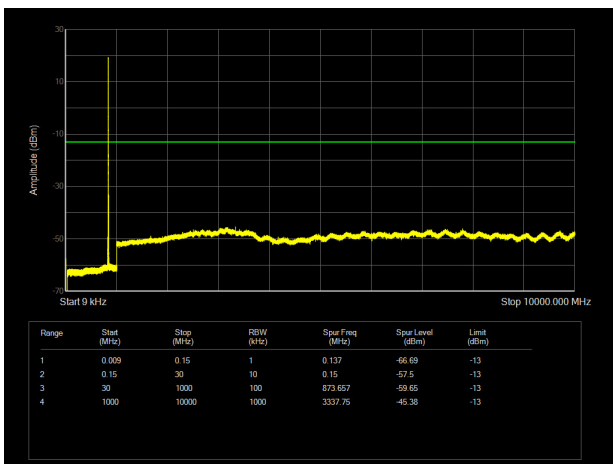


LTE Band 5 10MHz CH-Middle 9kHz~10GHz

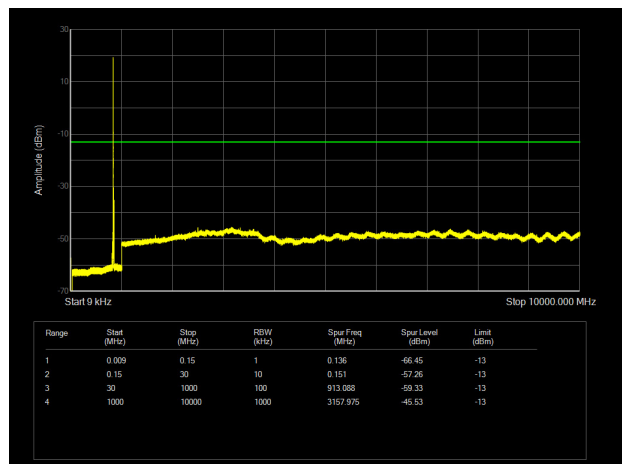


LTE Band 5 5MHz CH-High 9kHz~10GHz

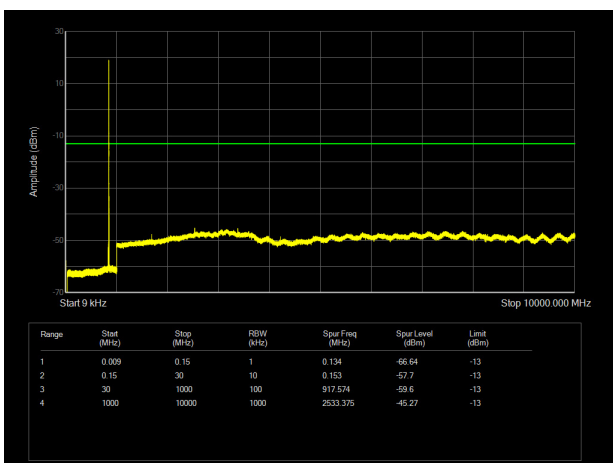


LTE Band 5 10MHz CH-High 9kHz~10GHz

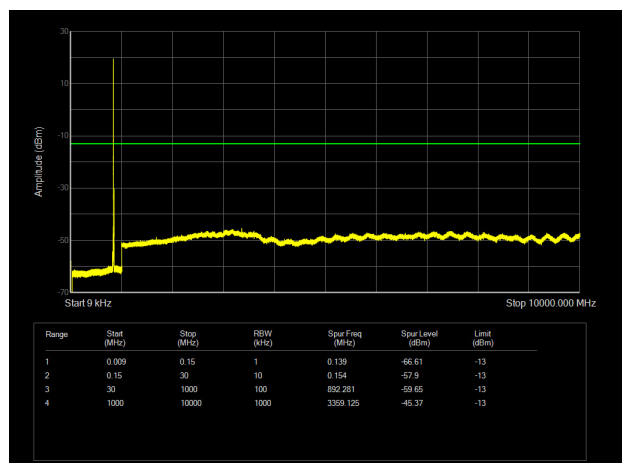


LTE Band 26 1.4MHz CH-Low 9kHz~10GHz

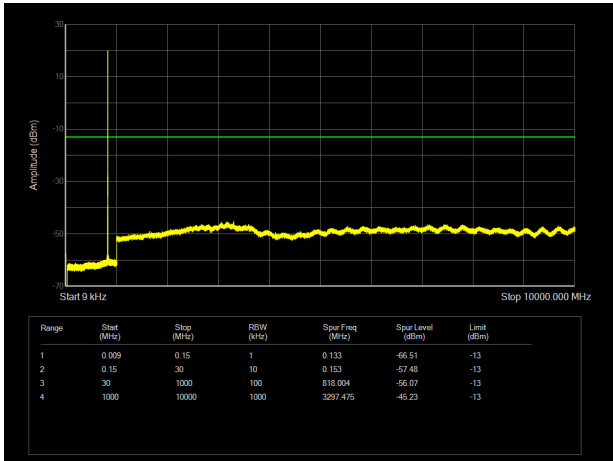


LTE Band 26 3MHz CH-Low 9kHz~10GHz

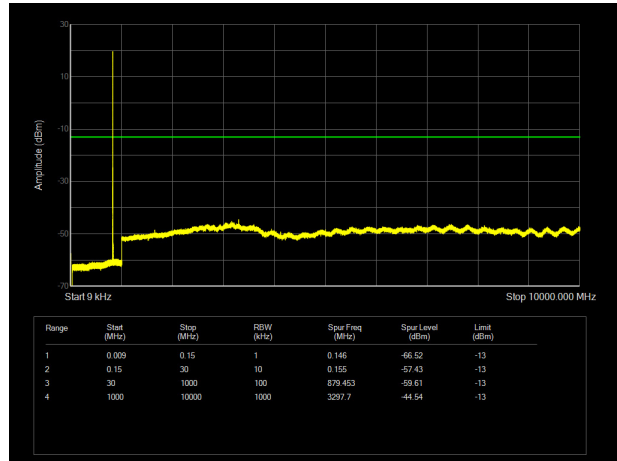


LTE Band 26 1.4MHz CH-Middle 9kHz~10GHz

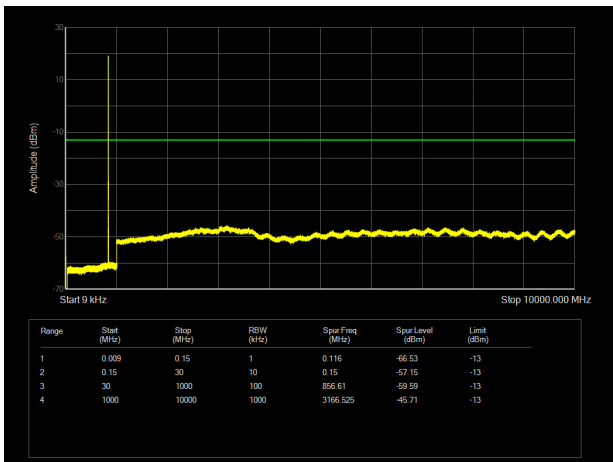


LTE Band 26 3MHz CH-Middle 9kHz~10GHz

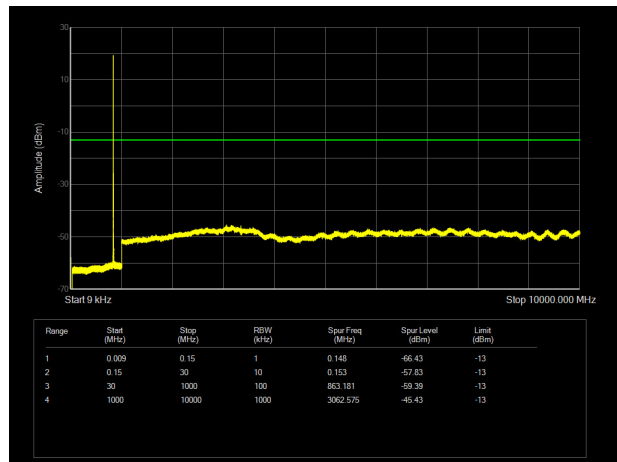


LTE Band 26 1.4MHz CH-High 9kHz~10GHz

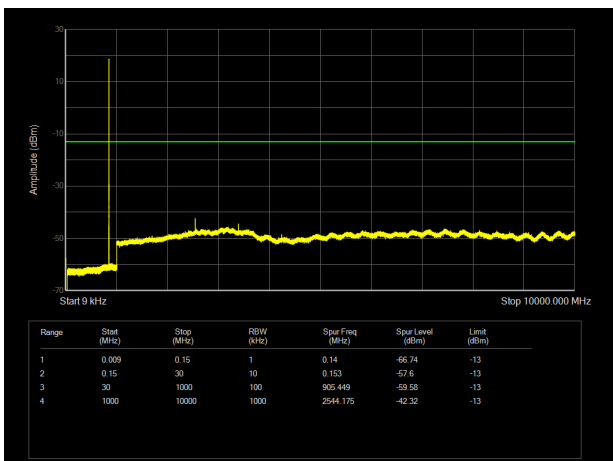


LTE Band 26 3MHz CH-High 9kHz~10GHz

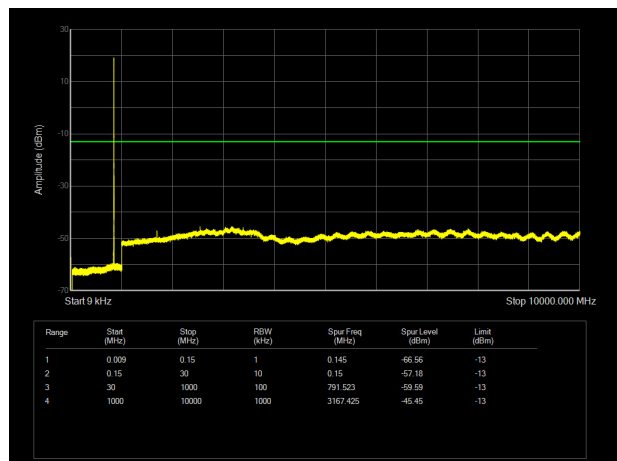


LTE Band 26 5MHz CH-Low 9kHz~10GHz

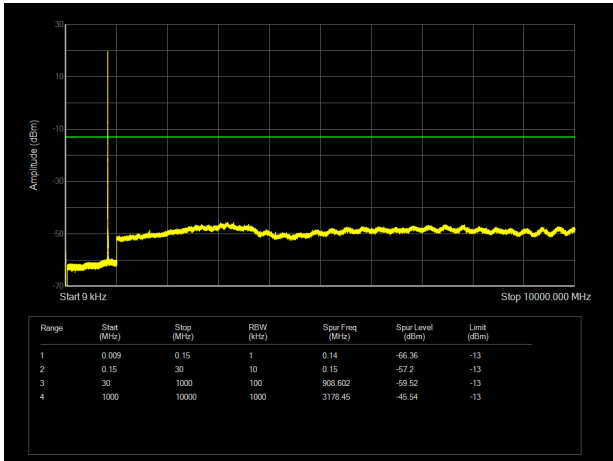


LTE Band 26 10MHz CH-Low 9kHz~10GHz

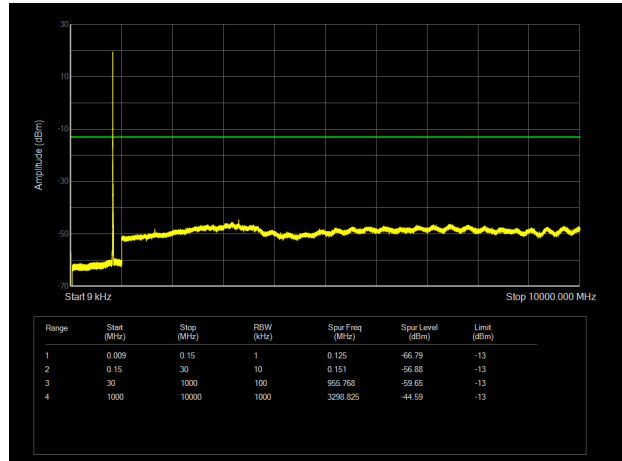


LTE Band 26 5MHz CH-Middle 9kHz~10GHz

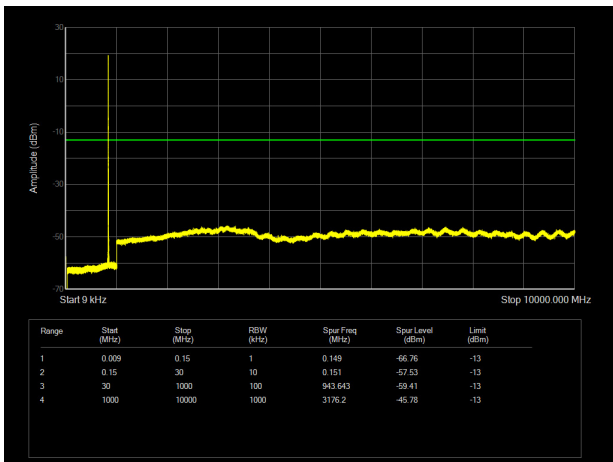


LTE Band 26 10MHz CH-Middle 9kHz~10GHz

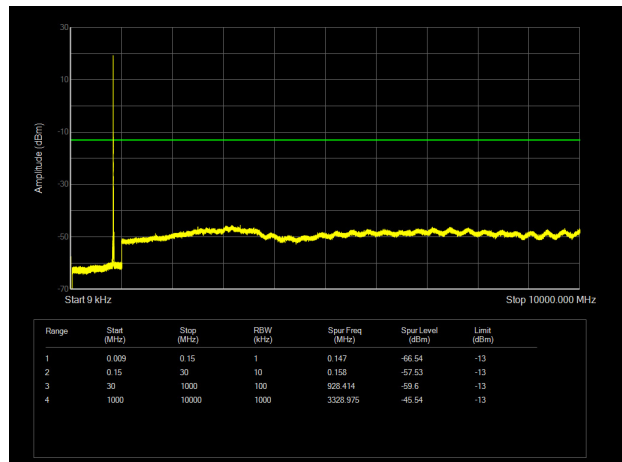


LTE Band 26 5MHz CH-High 9kHz~10GHz

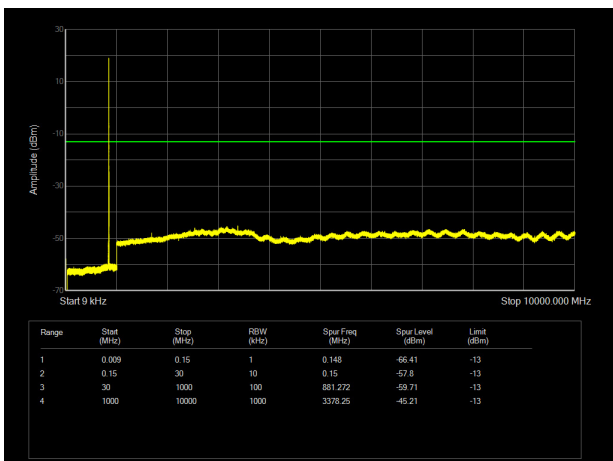


LTE Band 26 10MHz CH-High 9kHz~10GHz

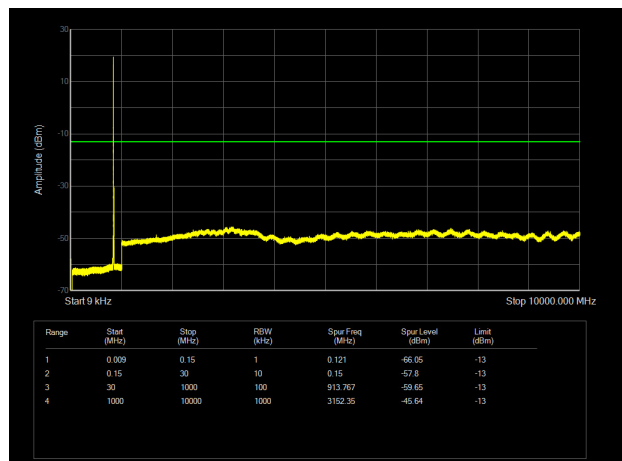


LTE Band 26 15MHz CH-Low 9kHz~10GHz

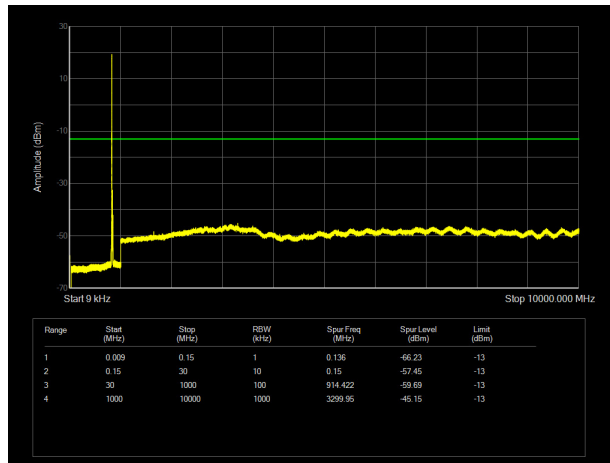

LTE Band 26 15MHz CH-Middle 9kHz~10GHz

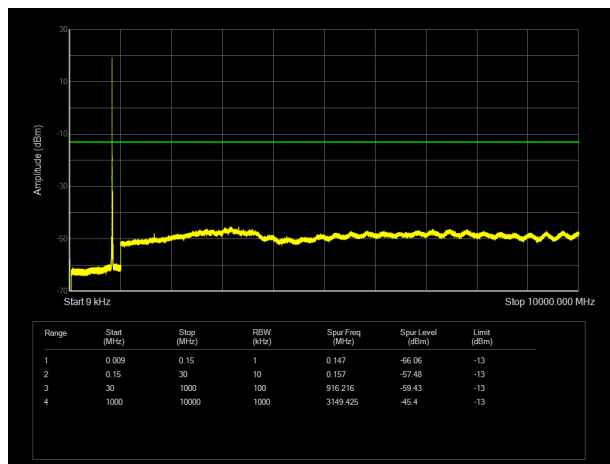

LTE Band 26 15MHz CH-High 9kHz~10GHz

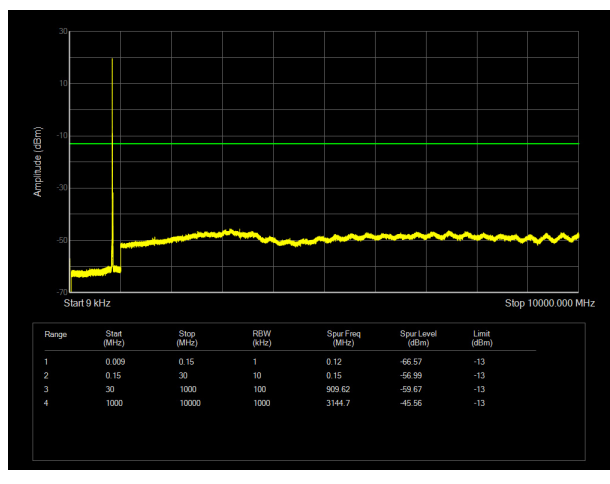

5.7. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Below 1GHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A loop antenna, A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=100kHz, VBW=300kHz for 30MHz to 1GHz and RBW=1MHz, VBW=3MHz for above 1GHz, and the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:
Power(EIRP)=PMea- PAg - Pcl + Ga
The measurement results are amend as described below:
Power(EIRP)=PMea- Pcl + Ga
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dB.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup


9KHz ~ 30MHz

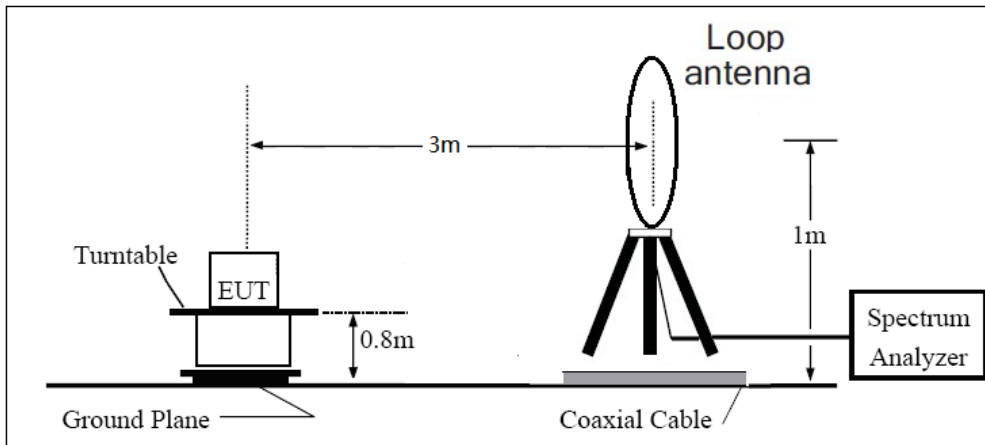

30MHz ~ 1GHz

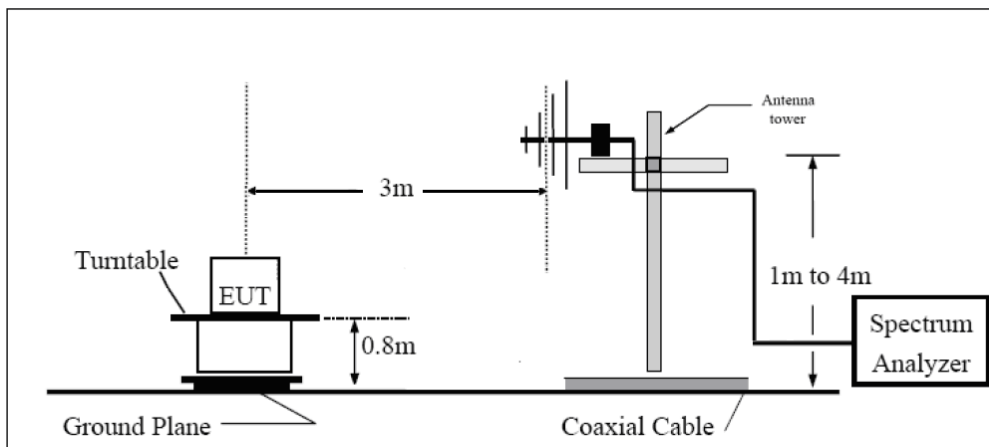

Above 1GHz

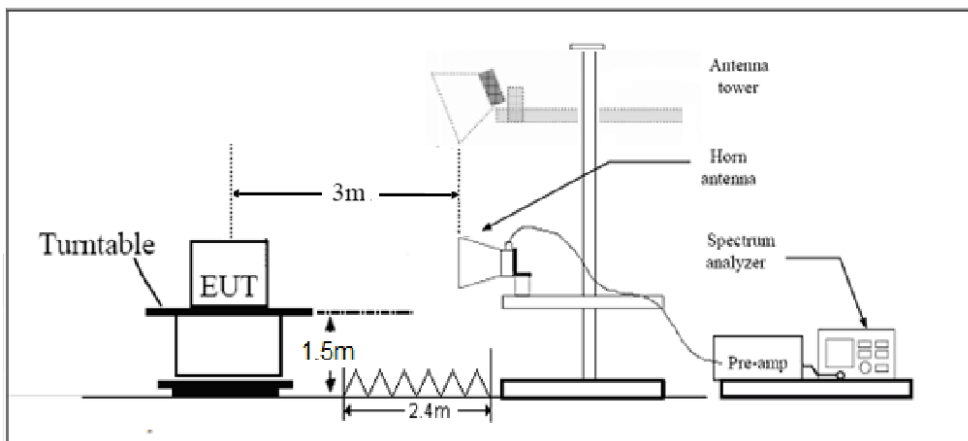

Note: Area side:2.4mX3.6m

Limits

Rule Part 22.917(a) specifies that “The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

**Test Result**

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

GSM 850 CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.20	-44.28	1.70	8.70	Vertical	-39.43	-13.00	26.43	45
3	2509.80	-42.28	2.30	12.00	Vertical	-34.73	-13.00	21.73	135
4	3346.40	-54.75	2.70	12.70	Vertical	-46.90	-13.00	33.90	270
5	4183.00	-56.28	3.00	12.50	Vertical	-48.93	-13.00	35.93	45
6	5019.60	-57.36	3.40	12.50	Vertical	-50.41	-13.00	37.41	315
7	5856.20	-56.40	3.40	12.80	Vertical	-49.15	-13.00	36.15	90
8	6692.80	-46.58	4.10	11.50	Vertical	-41.33	-13.00	28.33	45
9	7529.40	-50.46	4.20	12.20	Vertical	-44.61	-13.00	31.61	225
10	8366.00	-54.58	4.30	12.50	Vertical	-48.53	-13.00	35.53	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Vertical position.

WCDMA Band V CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.20	-59.50	1.70	8.70	Vertical	-54.65	-13.00	41.65	270
3	2510.40	-60.09	2.30	12.00	Vertical	-52.54	-13.00	39.54	90
4	3346.40	-62.10	2.70	12.70	Vertical	-54.25	-13.00	41.25	270
5	4183.00	-59.40	3.00	12.50	Vertical	-52.05	-13.00	39.05	90
6	5019.60	-60.45	3.40	12.50	Vertical	-53.50	-13.00	40.50	0
7	5856.20	-63.07	3.40	12.80	Vertical	-55.82	-13.00	42.82	315
8	6692.80	-51.30	4.10	11.50	Vertical	-46.05	-13.00	33.05	90
9	7529.40	-55.24	4.20	12.20	Vertical	-49.39	-13.00	36.39	45
10	8366.00	-56.62	4.30	12.50	Vertical	-50.57	-13.00	37.57	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.



LTE Band 5 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1671.60	-53.83	1.70	8.70	Vertical	-48.98	-13.00	35.98	315
3	2507.40	-51.66	2.30	12.00	Vertical	-44.11	-13.00	31.11	45
4	3346.00	-55.30	2.70	12.70	Vertical	-47.45	-13.00	34.45	45
5	4182.50	-55.42	3.00	12.50	Vertical	-48.07	-13.00	35.07	315
6	5019.00	-58.89	3.40	12.50	Vertical	-51.94	-13.00	38.94	225
7	5855.50	-58.11	3.40	12.80	Vertical	-50.86	-13.00	37.86	0
8	6692.00	-50.85	4.10	11.50	Vertical	-45.60	-13.00	32.60	45
9	7528.50	-55.01	4.20	12.20	Vertical	-49.16	-13.00	36.16	135
10	8365.00	-53.62	4.30	12.50	Vertical	-47.57	-13.00	34.57	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.

LTE Band 5 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.60	-49.23	1.70	8.70	Vertical	-44.38	-13.00	31.38	135
3	2503.30	-50.19	2.30	12.00	Vertical	-42.64	-13.00	29.64	0
4	3337.50	-54.22	2.70	12.70	Vertical	-46.37	-13.00	33.37	0
5	4171.88	-54.84	3.00	12.50	Vertical	-47.49	-13.00	34.49	270
6	5006.25	-59.56	3.40	12.50	Vertical	-52.61	-13.00	39.61	315
7	5840.63	-57.09	3.40	12.80	Vertical	-49.84	-13.00	36.84	90
8	6675.00	-51.06	4.10	11.50	Vertical	-45.81	-13.00	32.81	45
9	7509.38	-54.91	4.20	12.20	Vertical	-49.06	-13.00	36.06	45
10	8343.75	-50.08	4.30	12.50	Vertical	-44.03	-13.00	31.03	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is Vertical position.

LTE Band 5 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1664.40	-47.29	1.70	8.70	Vertical	-42.44	-13.00	29.44	225
3	2496.60	-43.37	2.30	12.00	Vertical	-35.82	-13.00	22.82	90
4	3346.00	-55.84	2.70	12.70	Vertical	-47.99	-13.00	34.99	90
5	4182.50	-54.18	3.00	12.50	Vertical	-46.83	-13.00	33.83	90
6	5019.00	-60.08	3.40	12.50	Vertical	-53.13	-13.00	40.13	45
7	5855.50	-54.36	3.40	12.80	Vertical	-47.11	-13.00	34.11	315
8	6692.00	-50.72	4.10	11.50	Vertical	-45.47	-13.00	32.47	90
9	7528.50	-47.90	4.20	12.20	Vertical	-42.05	-13.00	29.05	45
10	8365.00	-51.75	4.30	12.50	Vertical	-45.70	-13.00	32.70	270

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
 2.The worst emission was found in the antenna is Vertical position.



LTE Band 26 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1673.00	-54.13	1.70	8.70	Vertical	-49.28	-13.00	36.28	45
3	2509.50	-43.83	2.30	12.00	Vertical	-36.28	-13.00	23.28	180
4	3346.00	-57.40	2.70	12.70	Vertical	-49.55	-13.00	36.55	225
5	4182.50	-56.66	3.00	12.50	Vertical	-49.31	-13.00	36.31	45
6	5019.00	-54.60	3.40	12.50	Vertical	-47.65	-13.00	34.65	135
7	5855.50	-63.12	3.40	12.80	Vertical	-55.87	-13.00	42.87	180
8	6692.00	-58.21	4.10	11.50	Vertical	-52.96	-13.00	39.96	0
9	7528.50	-55.17	4.20	12.20	Vertical	-49.32	-13.00	36.32	315
10	8365.00	-54.92	4.30	12.50	Vertical	-48.87	-13.00	35.87	225

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.

LTE Band 26 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1668.00	-48.67	1.70	8.70	Vertical	-43.82	-13.00	30.82	0
3	2502.00	-45.23	2.30	12.00	Vertical	-37.68	-13.00	24.68	225
4	3336.00	-55.90	2.70	12.70	Vertical	-48.05	-13.00	35.05	45
5	4170.00	-54.98	3.00	12.50	Vertical	-47.63	-13.00	34.63	0
6	5018.00	-55.13	3.40	12.50	Vertical	-48.18	-13.00	35.18	135
7	5838.00	-59.62	3.40	12.80	Vertical	-52.37	-13.00	39.37	180
8	6672.00	-57.18	4.10	11.50	Vertical	-51.93	-13.00	38.93	225
9	7506.00	-56.51	4.20	12.20	Vertical	-50.66	-13.00	37.66	90
10	8340.00	-52.64	4.30	12.50	Vertical	-46.59	-13.00	33.59	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.



LTE Band 26 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	ERP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	1658.00	-45.38	1.70	8.70	Vertical	-40.53	-13.00	27.53	135
3	2487.00	-42.52	2.30	12.00	Vertical	-34.97	-13.00	21.97	270
4	3316.00	-57.69	2.70	12.70	Vertical	-49.84	-13.00	36.84	225
5	4150.00	-55.02	3.00	12.50	Vertical	-47.67	-13.00	34.67	270
6	4980.00	-62.72	3.40	12.50	Vertical	-55.77	-13.00	42.77	90
7	5810.00	-54.27	3.40	12.80	Vertical	-47.02	-13.00	34.02	180
8	6640.00	-56.40	4.10	11.50	Vertical	-51.15	-13.00	38.15	45
9	7470.00	-48.64	4.20	12.20	Vertical	-42.79	-13.00	29.79	315
10	8300.00	-52.03	4.30	12.50	Vertical	-45.98	-13.00	32.98	0

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2.The worst emission was found in the antenna is Vertical position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2021-05-15	2022-05-14
Spectrum Analyzer	Key sight	N9020A	MY52330084	2021-05-15	2022-05-14
Universal Radio Communication Tester	Key sight	E5515C	MY48367192	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV30	104028	2021-05-15	2022-05-14
Thermostat	WEISS	VT 4002	58226119450 010	2021-05-15	2022-05-14
Signal Analyzer	R&S	FSV3030	101411	2020-12-13	2021-12-12
Horn Antenna	Schwarzbeck	BBHA 9120D	1594	2020-12-17	2021-12-16
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.