

TEST REPORT



DT&C Co., Ltd.

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042
Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1801-0018

2. Customer

• Name : BLUEBIRD INC.

• Address : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul South Korea

3. Use of Report : FCC Original Grant

4. Product Name / Model Name : Touch Mobile Computer / EF501R

FCC ID : SS4EF501R



5. Test Method Used : KDB971168 D01v03, ANSI/TIA-603-E-2016, ANSI C63.26-2015

Test Specification : §2, §22, §24, §27

6. Date of Test : 2017.09.20 ~ 2018.01.02

7. Testing Environment : Refer to appended test report.

8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Reviewed by
	Name : JaeHyeok Bang  (Signature)	Name : GeunKi Son  (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 01 . 17 .

DT&C Co., Ltd.

If this report is required to confirmation of authenticity, please contact to report@dtnc.net

Test Report Version

Test Report No.	Date	Description
DRTFCC1801-0018	Jan. 17, 2018	Initial issue

Table of Contents

1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1 EUT DESCRIPTION	6
2.2. EUT CAPABILITIES	6
2.3. TESTING ENVIRONMENT	6
2.4 MEASURING INSTRUMENT CALIBRATION.....	6
2.5. MEASUREMENT UNCERTAINTY.....	6
2.6. TEST FACILITY.....	6
3. DESCRIPTION OF TESTS.....	7
3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)	7
3.2 PEAK TO AVERAGE RATIO	9
3.3 OCCUPIED BANDWIDTH.....	10
3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	12
3.6 UNDESIRABLE EMISSIONS	13
3.7 FREQUENCY STABILITY	14
4. LIST OF TEST EQUIPMENT	15
5. SUMMARY OF TEST RESULTS	16
6. SAMPLE CALCULATION	17
7. TEST DATA.....	18
7.1 OCCUPIED BANDWIDTH.....	18
7.2 PEAK TO AVERAGE RATIO	18
7.3 BAND EDEG EMISSIONS (Conducted).....	18
7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted)	18
7.5 ERP & EIRP	19
7.5.1 LTE Band 5.....	19
7.5.2 LTE Band 4.....	20
7.5.3 LTE Band 2.....	21
7.6 UNDESIRABLE EMISSIONS (Radiated).....	22
7.6.1 LTE Band 5.....	22
7.6.2 LTE Band 4.....	24
7.6.3 LTE Band 2.....	27
7.7 FREQUENCY STABILITY	30
7.7.1 LTE Band 5.....	30
7.7.2 LTE Band 4.....	31
7.7.3 LTE Band 2.....	32
8. TEST PLOTS	33
8.1 OCCUPIED BANDWIDTH.....	33
8.1.1 LTE Band 5.....	33

8.1.2 LTE Band 4.....	37
8.1.3 LTE Band 2.....	43
8.2 PEAK TO AVERAGE RATIO	49
8.2.1 LTE Band 5.....	49
8.2.2 LTE Band 4.....	53
8.2.3 LTE Band 2.....	59
8.3 BAND EDGE EMISSIONS(Conducted).....	65
8.3.1 LTE Band 5.....	65
8.3.2 LTE Band 4.....	73
8.3.3 LTE Band 2.....	85
8.4 SPURIOUS AND HARMONICS EMISSIONS(Conducted)	97
8.4.1 LTE Band 5.....	97
8.4.2 LTE Band 4.....	103
8.4.3 LTE Band 2.....	121

1. GENERAL INFORMATION

Applicant Name : BLUEBIRD INC.
Address : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul South Korea
FCC ID : SS4EF501R
FCC Classification : PCS Licensed Transmitter held to ear (PCE)
EUT Type : Touch Mobile Computer
Model Name : EF501R
Add Model Name : NA
Supplying power : DC 3.8 V
Antenna Information : Internal Antenna

Mode	TX Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max power (dBm)	Max power (W)
LTE Band 5	829 ~ 844	8M93G7D	QPSK	21.04	0.127
LTE Band 5	829 ~ 844	8M95W7D	16QAM	19.96	0.099
LTE Band 5	826.5 ~ 846.5	4M50G7D	QPSK	20.75	0.119
LTE Band 5	826.5 ~ 846.5	4M48W7D	16QAM	19.40	0.087
LTE Band 5	825.5 ~ 847.5	2M70G7D	QPSK	20.92	0.124
LTE Band 5	825.5 ~ 847.5	2M70W7D	16QAM	19.82	0.096
LTE Band 5	824.7 ~ 848.3	1M09G7D	QPSK	21.33	0.136
LTE Band 5	824.7 ~ 848.3	1M09W7D	16QAM	19.78	0.095

Mode	TX Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max power(dBm)	Max power(W)
LTE Band 4	1720 ~ 1745	17M9G7D	QPSK	20.89	0.123
LTE Band 4	1720 ~ 1745	17M9W7D	16QAM	19.67	0.093
LTE Band 4	1717.5 ~ 1747.5	13M4G7D	QPSK	20.75	0.119
LTE Band 4	1717.5 ~ 1747.5	13M4W7D	16QAM	19.42	0.087
LTE Band 4	1715 ~ 1750	8M98G7D	QPSK	20.81	0.121
LTE Band 4	1715 ~ 1750	8M94W7D	16QAM	19.18	0.083
LTE Band 4	1712.5 ~ 1752.5	4M48G7D	QPSK	21.03	0.127
LTE Band 4	1712.5 ~ 1752.5	4M48W7D	16QAM	19.34	0.086
LTE Band 4	1711.5 ~ 1753.5	2M69G7D	QPSK	20.40	0.110
LTE Band 4	1711.5 ~ 1753.5	2M69W7D	16QAM	19.10	0.081
LTE Band 4	1710.7 ~ 1754.3	1M09G7D	QPSK	20.44	0.111
LTE Band 4	1710.7 ~ 1754.3	1M09W7D	16QAM	19.38	0.087
LTE Band 2	1860 ~ 1900	17M9G7D	QPSK	22.18	0.165
LTE Band 2	1860 ~ 1900	17M9W7D	16QAM	21.34	0.136
LTE Band 2	1857.5 ~ 1902.5	13M4G7D	QPSK	21.25	0.133
LTE Band 2	1857.5 ~ 1902.5	13M4W7D	16QAM	20.17	0.104
LTE Band 2	1855 ~ 1905	8M96G7D	QPSK	21.55	0.143
LTE Band 2	1855 ~ 1905	8M94W7D	16QAM	20.90	0.123
LTE Band 2	1852.5 ~ 1907.5	4M49G7D	QPSK	21.66	0.147
LTE Band 2	1852.5 ~ 1907.5	4M48W7D	16QAM	21.08	0.128
LTE Band 2	1851.5 ~ 1908.5	2M69G7D	QPSK	21.76	0.150
LTE Band 2	1851.5 ~ 1908.5	2M69W7D	16QAM	21.07	0.128
LTE Band 2	1850.7 ~ 1909.3	1M09G7D	QPSK	21.53	0.142
LTE Band 2	1850.7 ~ 1909.3	1M09W7D	16QAM	20.62	0.115

2. INTRODUCTION

2.1 EUT DESCRIPTION

The Equipment under Test (EUT) supports WCDMA, LTE, WLAN, Bluetooth and NFC.

2.2. EUT CAPABILITIES

This ETU contains the following capabilities:

850/1900 WCDMA/HSUPA, Multi-band LTE, 802.11b/g/n WLAN(2.4GHz), 802.11a/n WLAN(5GHz), Bluetooth(BDR, EDR, LE), NFC

2.3. TESTING ENVIRONMENT

Ambient Condition	
▪ Temperature	+21 °C ~ +25 °C
▪ Relative Humidity	42 % ~ 45 %

2.4 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
Radiated Disturbance (Below 1 GHz)	± 5.1 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	± 5.4 dB (The confidence level is about 95 %, $k = 2$)
Radiated Disturbance (Above 18 GHz)	± 5.3 dB (The confidence level is about 95 %, $k = 2$)


2.6. TEST FACILITY

DT&C Co., Ltd.		
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The site is constructed in conformance with the requirements.		
- FCC MRA Accredited Test Firm No. : KR0034		
www.dtnet.net		
Telephone	:	+ 82-31-321-2664
FAX	:	+ 82-31-321-1664

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP (Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

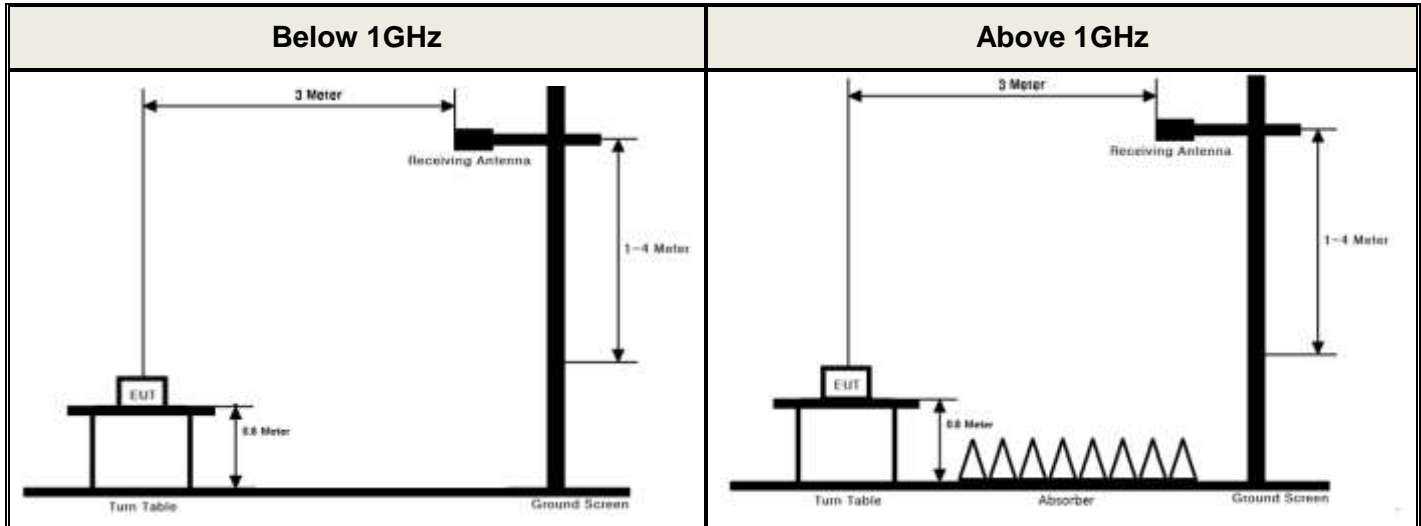

These measurements were performed at 3 m test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.17
- KDB971168 D01v03 - Section 5.2.2
- ANSI C63.26-2015 – Section 5.2.4.4.1

Test setting

1. Set span to 2 x to 3 x the OBW.
2. Set RBW = 1% to 5% of the OBW.
3. Set VBW \geq 3 x RBW.
4. Set number of points in sweep \geq 2 x span / RBW.
5. Sweep time:
 - 1) Set = auto-couple, or
 - 2) Set \geq [10 x (number of points in sweep) x (transmission period)] for single sweep (automation-compatible) measurement. Transmission period is the on and off time of the transmitter.
6. Detector = power averaging (rms).
7. If the EUT can be configured to transmit continuously, then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously, then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Verify that the sweep time is less than or equal to the transmission burst duration. Time gating can also be used under similar constraints (i.e., configured such that measurement data is collected only during active full-power transmissions).
9. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. To accurately determine the average power over multiple symbols, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.

10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band or channel power measurement function, with the band/channel limits set equal to the OBW band edges. If the instrument does not have a band or channel power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receiver antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 PEAK TO AVERAGE RATIO

Test set-up

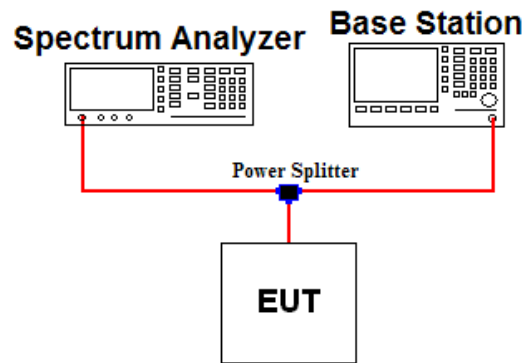

Test Procedure

- KDB971168 D01v03 - Section 5.7.2
- ANSI C63.26-2015 – Section 5.2.3.4

A peak to average ratio measurement is performed at the conducted port of the EUT.

The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The present of time the signal spends at or above the level defines the probability for that particular power level.


Test setting

The spectrum Analyzer's CCDF measurement function is enabled.

1. Set resolution/measurement bandwidth \geq OBW or specified reference bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to the greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
4. Record the maximum PAPR level associated with a probability of 0.1%.
5. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

3.3 OCCUPIED BANDWIDTH.

Test set-up

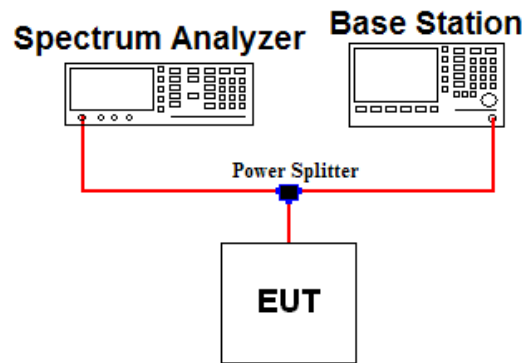

Test Procedure

- KDB971168 D01v03 - Section 4.3
- ANSI C63.26-2015 – Section 5.4.4


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. $RBW = 1 \sim 5 \%$ of the expected OBW & $VBW \geq 3 \times RBW$
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL

Test set-up

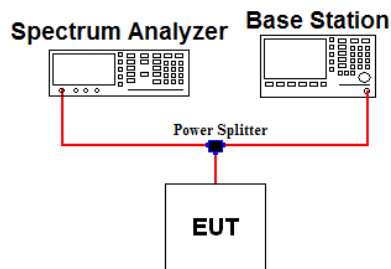

Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 – Section 5.7

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all bandwidths, modulations and RB configurations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.

Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission bandwidth
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point $\geq 2 \times$ span / RBW
8. The trace was allowed to stabilize


Note 1: Per Part 22.917(b)(1) / 24.238(b) / 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Note 2: Per Part 27.53(c.5) for operations in the 776-788 MHz band, compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

Note 3: Per Part 27.53(c.4) for all frequencies between 763-775 MHz and 793-805 MHz, the FCC limit is $65 + 10 \log_{10}(P[\text{Watts}]) = -35 \text{ dBm}$ in a 6.25 kHz bandwidth.

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

Test set-up

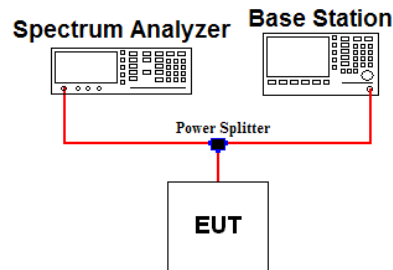

Test Procedure

- KDB971168 D01v03 - Section 6
- ANSI C63.26-2015 – Section 5.7

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths, modulations and RB configurations. The spectrum is scanned from 9 kHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB.


Test setting

1. RBW = 100 kHz(Below 1 GHz) or 1 MHz(Above 1 GHz) & VBW $\geq 3 \times$ RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point $\geq 2 \times$ span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for frequencies less than 1GHz and 1MHz or greater for frequencies greater than 1GHz.

3.6 UNDESIRABLE EMISSIONS

Test Set-up

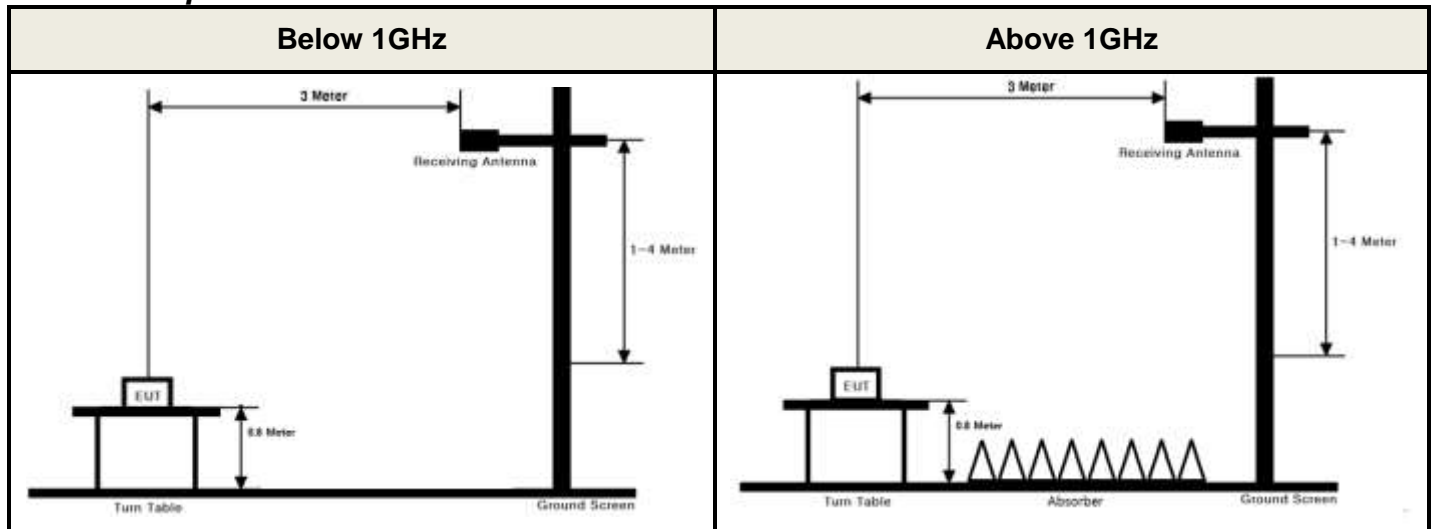

These measurements were performed at 3 test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna. For measurements above 1GHz absorbers are placed on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1 GHz, the absorbers are removed.

Test Procedure

- ANSI/TIA-603-E-2016 - Section 2.2.12
- KDB971168 D01v03 - Section 5.8
- ANSI C63.26-2015 – Section 5.5

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW \geq 3 X RBW
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point \geq 2 X span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.7 FREQUENCY STABILITY

Test Set-up

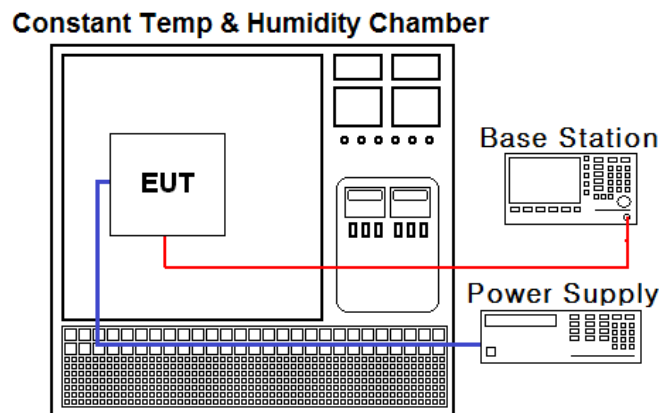

Test Procedure

- ANSI/TIA-603-E-2016
- KDB971168 D01v03 - Section 9

The frequency stability of the transmitter is measured by:

a.) **Temperature:**

The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) **Primary Supply Voltage:**

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24, 27. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(20 °C to provide a reference)
2. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/01/11	18/01/11	MY50200828
Spectrum Analyzer	Agilent Technologies	N9020A	17/09/05	18/09/05	MY46471251
Radio Communication Analyzer	Anritsu	MT8820C	17/01/03	18/01/03	6201274516
DC Power Supply	Agilent Technologies	66332A	17/09/05	18/09/05	GB42110550
Multimeter	FLUKE	17B	17/04/12	18/04/12	26030065WS
Power Splitter	Anritsu	K241B	17/01/11	18/01/11	016681
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	17/01/25	18/01/25	SJ-TH-S50-140205
Thermohyrometer	BODYCOM	BJ5478	17/04/11	18/04/11	120612-1
Signal Generator	R&S	SMBV100A	17/01/04	18/01/04	255571
Signal Generator	R&S	SMF100A	17/04/21	18/04/21	102341
Loop Antenna	Schwarzbeck	FMZB1513	16/04/22	18/04/22	1513-128
Bilog Antenna	Schwarzbeck	VULB9160	16/11/11	18/11/11	3151
Dipole Antenna	Schwarzbeck	VHA9103	17/03/14	19/03/14	2116
Dipole Antenna	Schwarzbeck	VHA9103	16/04/15	18/04/15	2117
Dipole Antenna	Schwarzbeck	UHA9105	17/03/14	19/03/14	2261
Dipole Antenna	Schwarzbeck	UHA9105	16/04/15	18/04/15	2262
HORN ANT	ETS-LINDGREN	3117	16/02/26	18/02/26	00152145
HORN ANT	ETS-LINDGREN	3117	16/05/03	18/05/03	00140394
HORN ANT	A.H.Systems	SAS-574	17/04/25	19/04/25	154
HORN ANT	A.H.Systems	SAS-574	17/07/31	19/07/31	155
Amplifier	EMPOWER	BBS3Q7ELU	17/09/06	18/09/06	1020
PreAmplifier	tsj	MLA-010K01-B01-27	17/03/06	18/03/06	1844539
Amplifier	Agilent	8449B	17/09/05	18/09/05	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	17/09/05	18/09/05	7
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	17/09/05	18/09/05	3

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Status Note 1
2.1046	Conducted Output Power	N/A	Conducted	C Note2
2.1049	Occupied Bandwidth	N/A		C
24.232(d) 27.50(d.5)	Peak to Average Ratio	< 13 dB		C
2.1051 22.917(a) 24.238(a) 27.53(h)	Band Edge / Conducted Spurious Emissions	> 43 + 10log ₁₀ (P) dB at Band edge and for all out-of-band emissions		C
2.1055 22.355 24.235 27.54	Frequency Stability	< 2.5 ppm (Part 22) Fundamental emissions must stay within Authorized frequency block (Part 24, 27)		C
22.913(a.2)	Radiated Output Power (B5)	< 7 Watts max. ERP	Radiated	C
24.232(c)	Radiated Output Power (B2)	< 2 Watts max. EIRP		C
27.50(d.4)	Radiated Output Power (B4)	< 1 Watts max. EIRP		C
2.1053 22.917(a) 24.238(a) 27.53(h)	Undesirable Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions		C
Note 1: C =Comply NC =Not Comply NT =Not Tested NA =Not Applicable Note 2: Refer to RF Exposure Report (Test Report SAR)				

6. SAMPLE CALCULATION

A. Emission Designator

LTE Band 5(QPSK)

Emission Designator = **8M94G7D**
 LTE OBW = 8.935 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data Transmission

LTE Band 5(16QAM)

Emission Designator = **8M95W7D**
 LTE OBW = 8.952 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data Transmission

LTE Band 4(QPSK)

Emission Designator = **17M9G7D**
 LTE OBW = 17.860 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data Transmission

LTE Band 4(16QAM)

Emission Designator = **17M9W7D**
 LTE OBW = 17.921 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data Transmission

LTE Band 2(QPSK)

Emission Designator = **17M9G7D**
 LTE OBW = 17.854 MHz
 G = Phase Modulation
 7 = Quantized/Digital Info
 D = Data Transmission

LTE Band 2(16QAM)

Emission Designator = **17M9W7D**
 LTE OBW = 17.863 MHz
 W = Amplitude/Angle Modulated
 7 = Quantized/Digital Info
 D = Data Transmission

B. For substitution method

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Spectrum Reading Value(dBm)	EUT Axis	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1860	QPSK	1/50	-24.96	X	H	17.16	5.02	22.18	0.165

ERP or EIRP = Level @ Ant Terminal LEVEL(dBm) + Tx Ant. Gain

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with substituted antenna gain is the rating of ERP, EIRP or Radiated spurious emission.

7. TEST DATA

7.1 OCCUPIED BANDWIDTH

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.1

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.2

7.3 BAND EDGE EMISSIONS (Conducted)

- Plots of the EUT's Band Edge Emissions are shown in Clause 8.3

7.4 SPURIOUS AND HARMONICS EMISSIONS (Conducted)

- Plots of the EUT's Spurious Emissions are shown in Clause 8.4

7.5 ERP & EIRP

7.5.1 LTE Band 5

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBd)	ERP (dBm)	ERP (W)
10	829	QPSK	1/25	H	19.48	1.23	20.71	0.118
		16QAM	1/25	H	18.54	1.23	19.77	0.095
	836.5	QPSK	1/25	H	19.82	1.22	21.04	0.127
		16QAM	1/25	H	18.74	1.22	19.96	0.099
	844	QPSK	1/25	H	19.37	1.21	20.58	0.114
		16QAM	1/25	H	18.48	1.21	19.69	0.093
5	826.5	QPSK	1/24	H	19.12	1.23	20.35	0.108
		16QAM	1/24	H	18.00	1.23	19.23	0.084
	836.5	QPSK	1/12	H	19.30	1.22	20.52	0.113
		16QAM	1/12	H	18.07	1.22	19.29	0.085
	846.5	QPSK	1/0	H	19.54	1.21	20.75	0.119
		16QAM	1/0	H	18.19	1.21	19.40	0.087
3	825.5	QPSK	1/14	H	19.03	1.23	20.26	0.106
		16QAM	1/14	H	17.80	1.23	19.03	0.080
	836.5	QPSK	1/0	H	18.59	1.22	19.81	0.096
		16QAM	1/0	H	18.15	1.22	19.37	0.086
	847.5	QPSK	1/0	H	19.71	1.21	20.92	0.124
		16QAM	1/0	H	18.61	1.21	19.82	0.096
1.4	824.7	QPSK	1/2	H	19.28	1.23	20.51	0.112
		16QAM	1/2	H	17.95	1.23	19.18	0.083
	836.5	QPSK	1/2	H	19.19	1.22	20.41	0.110
		16QAM	1/2	H	17.60	1.22	18.82	0.076
	848.3	QPSK	1/2	H	20.12	1.21	21.33	0.136
		16QAM	1/2	H	18.57	1.21	19.78	0.095

Note: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

7.5.2 LTE Band 4

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/ Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1720	QPSK	1/50	H	13.82	5.82	19.64	0.092
		16QAM	1/50	H	12.33	5.82	18.15	0.065
	1732.5	QPSK	1/50	H	14.56	5.75	20.31	0.107
		16QAM	1/50	H	13.90	5.75	19.65	0.092
	1745	QPSK	1/50	H	15.22	5.67	20.89	0.123
		16QAM	1/50	H	14.00	5.67	19.67	0.093
15	1717.5	QPSK	1/36	H	13.14	5.84	18.98	0.079
		16QAM	1/36	H	11.97	5.84	17.81	0.060
	1732.5	QPSK	1/36	H	14.84	5.75	20.59	0.115
		16QAM	1/36	H	13.35	5.75	19.10	0.081
	1747.5	QPSK	1/36	H	15.09	5.66	20.75	0.119
		16QAM	1/36	H	13.76	5.66	19.42	0.087
10	1715	QPSK	1/25	H	12.52	5.85	18.37	0.069
		16QAM	1/25	H	11.75	5.85	17.60	0.058
	1732.5	QPSK	1/25	H	15.06	5.75	20.81	0.121
		16QAM	1/25	H	13.43	5.75	19.18	0.083
	1750	QPSK	1/25	H	14.29	5.64	19.93	0.098
		16QAM	1/25	H	13.22	5.64	18.86	0.077
5	1712.5	QPSK	1/12	H	12.66	5.87	18.53	0.071
		16QAM	1/12	H	11.48	5.87	17.35	0.054
	1732.5	QPSK	1/12	H	15.28	5.75	21.03	0.127
		16QAM	1/12	H	13.59	5.75	19.34	0.086
	1752.5	QPSK	1/12	H	14.08	5.63	19.71	0.094
		16QAM	1/12	H	12.74	5.63	18.37	0.069
3	1711.5	QPSK	1/0	H	12.61	5.87	18.48	0.070
		16QAM	1/0	H	11.20	5.87	17.07	0.051
	1732.5	QPSK	1/0	H	14.65	5.75	20.40	0.110
		16QAM	1/0	H	13.35	5.75	19.10	0.081
	1753.5	QPSK	1/0	H	13.78	5.62	19.40	0.087
		16QAM	1/0	H	12.60	5.62	18.22	0.066
1.4	1710.7	QPSK	1/5	H	12.04	5.88	17.92	0.062
		16QAM	1/5	H	11.07	5.88	16.95	0.050
	1732.5	QPSK	1/2	H	14.69	5.75	20.44	0.111
		16QAM	1/2	H	13.63	5.75	19.38	0.087
	1754.3	QPSK	1/2	H	14.02	5.61	19.63	0.092
		16QAM	1/2	H	12.73	5.61	18.34	0.068

Note: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

7.5.3 LTE Band 2

Channel Bandwidth (MHz)	Test Frequency (MHz)	Test Mode	RB Size/Offset	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain (dBi)	EIRP (dBm)	EIRP (W)
20	1860	QPSK	1/50	H	17.16	5.02	22.18	0.165
		16QAM	1/50	H	16.32	5.02	21.34	0.136
	1880	QPSK	1/50	H	16.08	4.91	20.99	0.126
		16QAM	1/50	H	15.14	4.91	20.05	0.101
	1900	QPSK	1/50	H	16.19	4.81	21.00	0.126
		16QAM	1/50	H	14.83	4.81	19.64	0.092
15	1857.5	QPSK	1/36	H	16.22	5.03	21.25	0.133
		16QAM	1/36	H	15.14	5.03	20.17	0.104
	1880	QPSK	1/36	H	16.13	4.91	21.04	0.127
		16QAM	1/36	H	14.52	4.91	19.43	0.088
	1902.5	QPSK	1/36	H	15.61	4.80	20.41	0.110
		16QAM	1/36	H	14.79	4.80	19.59	0.091
10	1855	QPSK	1/25	H	16.50	5.05	21.55	0.143
		16QAM	1/25	H	15.85	5.05	20.90	0.123
	1880	QPSK	1/25	H	16.01	4.91	20.92	0.124
		16QAM	1/25	H	14.72	4.91	19.63	0.092
	1905	QPSK	1/25	H	15.44	4.79	20.23	0.105
		16QAM	1/25	H	14.64	4.79	19.43	0.088
5	1852.5	QPSK	1/12	H	16.60	5.06	21.66	0.147
		16QAM	1/12	H	16.02	5.06	21.08	0.128
	1880	QPSK	1/12	H	16.25	4.91	21.16	0.131
		16QAM	1/12	H	14.99	4.91	19.90	0.098
	1907.5	QPSK	1/12	H	15.69	4.77	20.46	0.111
		16QAM	1/12	H	14.69	4.77	19.46	0.088
3	1851.5	QPSK	1/7	H	16.70	5.06	21.76	0.150
		16QAM	1/7	H	16.01	5.06	21.07	0.128
	1880	QPSK	1/7	H	16.33	4.91	21.24	0.133
		16QAM	1/7	H	15.18	4.91	20.09	0.102
	1908.5	QPSK	1/14	H	15.73	4.77	20.50	0.112
		16QAM	1/14	H	14.72	4.77	19.49	0.089
1.4	1850.7	QPSK	1/2	H	16.46	5.07	21.53	0.142
		16QAM	1/2	H	15.55	5.07	20.62	0.115
	1880	QPSK	1/2	H	15.38	4.91	20.29	0.107
		16QAM	1/2	H	14.95	4.91	19.86	0.097
	1909.3	QPSK	1/2	H	15.05	4.76	19.81	0.096
		16QAM	1/2	H	13.78	4.76	18.54	0.071

Note: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

7.6 UNDESIRABLE EMISSIONS (Radiated)

7.6.1 LTE Band 5

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
10	829	1/25	QPSK	1657.95	H	-51.43	3.78	-47.65	68.36	33.71
				3316.50	H	-44.29	5.79	-38.50	59.21	
		1/25	16QAM	1658.11	H	-51.55	3.78	-47.77	67.54	32.77
				3316.19	H	-46.14	5.79	-40.35	60.12	
	836.5	1/25	QPSK	1673.17	H	-51.34	3.78	-47.56	68.60	34.04
				3346.44	H	-43.55	5.87	-37.68	58.72	
		1/25	16QAM	1673.21	H	-51.51	3.78	-47.73	67.69	32.96
				3346.38	H	-43.81	5.87	-37.94	57.90	
	844	1/25	QPSK	1688.53	H	-52.38	3.79	-48.59	69.17	33.58
				3376.56	H	-45.72	5.95	-39.77	60.35	
		1/25	16QAM	1688.03	H	-52.42	3.79	-48.63	68.32	32.69
				3376.65	H	-47.26	5.95	-41.31	61.00	
5	826.5	1/24	QPSK	1657.42	H	-51.37	3.78	-47.59	67.94	33.35
				3314.88	H	-45.38	5.79	-39.59	59.94	
		1/24	16QAM	1657.32	H	-51.66	3.78	-47.88	67.11	32.23
				3314.52	H	-47.08	5.79	-41.29	60.52	
	836.5	1/12	QPSK	1672.95	H	-51.44	3.78	-47.66	68.18	33.52
				3346.04	H	-41.63	5.87	-35.76	56.28	
		1/12	16QAM	1673.24	H	-51.67	3.78	-47.89	67.18	32.29
				3345.92	H	-42.57	5.87	-36.70	55.99	
	846.5	1/0	QPSK	1688.77	H	-51.66	3.79	-47.87	68.62	33.75
				3377.45	H	-46.07	5.95	-40.12	60.87	
		1/0	16QAM	1688.94	H	-52.64	3.79	-48.85	68.25	32.40
				3377.24	H	-47.36	5.95	-41.41	60.81	

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBd)	Result		Limit (dBc)
								(dBm)	(dBc)	
3	825.5	1/14	QPSK	1653.58	H	-49.23	3.78	-45.45	65.71	33.26
				3307.00	H	-46.16	5.77	-40.39	60.65	
		1/14	16QAM	1653.53	H	-49.41	3.78	-45.63	64.66	32.03
				3306.90	H	-47.22	5.77	-41.45	60.48	
	836.5	1/0	QPSK	1670.27	H	-51.93	3.78	-48.15	67.96	32.81
				3340.98	H	-42.97	5.86	-37.11	56.92	
		1/0	16QAM	1670.42	H	-52.31	3.78	-48.53	67.90	32.37
				3341.07	H	-44.57	5.86	-38.71	58.08	
	847.5	1/0	QPSK	1692.77	H	-52.16	3.79	-48.37	69.29	33.92
				3385.03	H	-44.20	5.97	-38.23	59.15	
		1/0	16QAM	1692.29	H	-52.87	3.79	-49.08	68.90	32.82
				3384.87	H	-46.36	5.97	-40.39	60.21	
1.4	824.7	1/2	QPSK	1648.98	H	-50.15	3.77	-46.38	66.89	33.51
				3298.38	H	-48.15	5.74	-42.41	62.92	
		1/2	16QAM	1649.05	H	-50.92	3.77	-47.15	66.33	32.18
				3298.49	H	-48.32	5.74	-42.58	61.76	
	836.5	1/2	QPSK	1672.98	H	-51.87	3.78	-48.09	68.50	33.41
				3345.63	H	-43.23	5.87	-37.36	57.77	
		1/2	16QAM	1672.42	H	-52.56	3.78	-48.78	67.60	31.82
				3345.96	H	-44.04	5.87	-38.17	56.99	
	848.3	1/2	QPSK	1696.51	H	-50.48	3.79	-46.69	68.02	34.33
				3392.79	H	-42.34	5.99	-36.35	57.68	
		1/2	16QAM	1696.61	H	-50.72	3.79	-46.93	66.71	32.78
				3392.82	H	-44.21	5.99	-38.22	58.00	

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

7.6.2 LTE Band 4

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
20	1720	1/50	QPSK	3440.23	H	-43.70	8.30	-35.40	55.04	32.64
				5160.25	H	-48.76	10.38	-38.38	58.02	
		1/50	16QAM	3440.28	H	-44.65	8.30	-36.35	54.50	31.15
				5160.42	H	-49.93	10.38	-39.55	57.70	
	1732.5	1/50	QPSK	3465.10	H	-43.59	8.39	-35.20	55.51	33.31
				5197.72	H	-48.76	10.45	-38.31	58.62	
		1/50	16QAM	3465.31	H	-44.29	8.39	-35.90	55.55	32.65
				5198.03	H	-50.75	10.45	-40.30	59.95	
	1745	1/50	QPSK	3490.02	H	-48.20	8.48	-39.72	60.61	33.89
				5235.02	H	-49.54	10.47	-39.07	59.96	
		1/50	16QAM	3490.24	H	-48.61	8.48	-40.13	59.80	32.67
				5235.26	H	-49.72	10.47	-39.25	58.92	
15	1717.5	1/36	QPSK	3434.62	H	-44.12	8.28	-35.84	54.82	31.98
				5151.87	H	-50.23	10.37	-39.86	58.84	
		1/36	16QAM	3434.63	H	-44.92	8.28	-36.64	54.45	30.81
				5151.85	H	-50.54	10.37	-40.17	57.98	
	1732.5	1/36	QPSK	3464.51	H	-43.94	8.39	-35.55	56.14	33.59
				5197.02	H	-49.99	10.44	-39.55	60.14	
		1/36	16QAM	3464.66	H	-44.49	8.39	-36.10	55.20	32.10
				5199.11	H	-50.65	10.45	-40.20	59.30	
	1747.5	1/36	QPSK	3494.53	H	-47.81	8.49	-39.32	60.07	33.75
				5241.58	H	-50.24	10.48	-39.76	60.51	
		1/36	16QAM	3494.76	H	-47.80	8.49	-39.31	58.73	32.42
				5242.20	H	-49.76	10.48	-39.28	58.70	

B.W (MHz)	Test Freq. (MHz)	RB Size/Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
10	1715	1/25	QPSK	3430.06	H	-43.73	8.27	-35.46	53.83	31.37
				5145.47	H	-49.47	10.36	-39.11	57.48	
		1/25	16QAM	3430.12	H	-44.74	8.27	-36.47	54.07	30.60
				5145.28	H	-50.13	10.36	-39.77	57.37	
	1732.5	1/25	QPSK	3465.11	H	-43.59	8.39	-35.20	56.01	33.81
				5197.87	H	-48.27	10.45	-37.82	58.63	
		1/25	16QAM	3465.09	H	-44.20	8.39	-35.81	54.99	32.18
				5197.58	H	-48.41	10.45	-37.96	57.14	
	1750	1/25	QPSK	3500.00	H	-46.28	8.51	-37.77	57.70	32.93
				5250.40	H	-50.26	10.49	-39.77	59.70	
		1/25	16QAM	3500.21	H	-46.75	8.51	-38.24	57.10	31.86
				5250.25	H	-50.41	10.49	-39.92	58.78	
5	1712.5	1/12	QPSK	3424.92	H	-44.61	8.25	-36.36	54.89	31.53
				5137.35	H	-50.08	10.34	-39.74	58.27	
		1/12	16QAM	3425.04	H	-45.20	8.25	-36.95	54.30	30.35
				5137.67	H	-51.09	10.34	-40.75	58.10	
	1732.5	1/12	QPSK	3465.04	H	-43.25	8.39	-34.86	55.89	34.03
				5197.43	H	-49.44	10.45	-38.99	60.02	
		1/12	16QAM	3464.97	H	-44.61	8.39	-36.22	55.56	32.34
				5197.60	H	-50.98	10.45	-40.53	59.87	
	1752.5	1/12	QPSK	3504.88	H	-45.28	8.51	-36.77	56.48	32.71
				5257.68	H	-48.41	10.49	-37.92	57.63	
		1/12	16QAM	3504.99	H	-45.83	8.51	-37.32	55.69	31.37
				5257.45	H	-49.78	10.49	-39.29	57.66	

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
3	1711.5	1/0	QPSK	3420.52	H	-45.11	8.23	-36.88	55.36	31.48
				5130.83	H	-50.60	10.33	-40.27	58.75	
		1/0	16QAM	3420.31	H	-45.34	8.23	-37.11	54.18	30.07
				5130.85	H	-51.25	10.33	-40.92	57.99	
	1732.5	1/0	QPSK	3462.48	H	-44.07	8.38	-35.69	56.09	33.40
				5193.97	H	-49.75	10.44	-39.31	59.71	
		1/0	16QAM	3462.48	H	-44.85	8.38	-36.47	55.57	32.10
				5193.45	H	-51.53	10.44	-41.09	60.19	
	1753.5	1/0	QPSK	3504.57	H	-47.76	8.51	-39.25	58.65	32.40
				5257.05	H	-49.15	10.49	-38.66	58.06	
		1/0	16QAM	3504.54	H	-48.41	8.51	-39.90	58.12	31.22
				5256.91	H	-49.78	10.49	-39.29	57.51	
1.4	1710.7	1/5	QPSK	3422.15	H	-45.58	8.24	-37.34	55.26	30.92
				5133.46	H	-47.19	10.34	-36.85	54.77	
		1/5	16QAM	3422.21	H	-45.70	8.24	-37.46	54.41	29.95
				5133.72	H	-48.34	10.34	-38.00	54.95	
	1732.5	1/2	QPSK	3464.80	H	-45.18	8.39	-36.79	57.23	33.44
				5197.01	H	-47.36	10.44	-36.92	57.36	
		1/2	16QAM	3464.95	H	-45.85	8.39	-37.46	56.84	32.38
				5197.28	H	-47.33	10.45	-36.88	56.26	
	1754.3	1/2	QPSK	3508.48	H	-44.97	8.51	-36.46	56.09	32.63
				5262.46	H	-47.20	10.49	-36.71	56.34	
		1/2	16QAM	3508.38	H	-45.21	8.51	-36.70	55.04	31.34
				5262.51	H	-47.35	10.49	-36.86	55.20	

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.

Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

7.6.3 LTE Band 2

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
20	1860	1/50	QPSK	3720.31	H	-43.91	8.50	-35.41	57.59	35.18
				-	-	-	-	-	-	
		1/50	16QAM	3720.06	H	-45.19	8.50	-36.69	58.03	34.34
				-	-	-	-	-	-	
	1880	1/50	QPSK	3760.33	H	-48.80	8.51	-40.29	61.28	33.99
				-	-	-	-	-	-	
		1/50	16QAM	3760.10	H	-48.96	8.51	-40.45	60.50	33.05
				-	-	-	-	-	-	
	1900	1/50	QPSK	3800.31	H	-49.39	8.53	-40.86	61.86	34.00
				-	-	-	-	-	-	
		1/50	16QAM	3800.11	H	-50.87	8.53	-42.34	61.98	32.64
				-	-	-	-	-	-	
15	1857.5	1/36	QPSK	3714.68	H	-45.68	8.50	-37.18	58.43	34.25
				-	-	-	-	-	-	
		1/36	16QAM	3714.77	H	-45.92	8.50	-37.42	57.59	33.17
				-	-	-	-	-	-	
	1880	1/36	QPSK	3759.63	H	-48.28	8.51	-39.77	60.81	34.04
				-	-	-	-	-	-	
		1/36	16QAM	3759.51	H	-48.60	8.51	-40.09	59.52	32.43
				-	-	-	-	-	-	
	1902.5	1/36	QPSK	3804.67	H	-50.15	8.54	-41.61	62.02	33.41
				-	-	-	-	-	-	
		1/36	16QAM	3804.51	H	-50.18	8.54	-41.64	61.23	32.59
				-	-	-	-	-	-	

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
10	1855	1/25	QPSK	3710.16	H	-46.05	8.49	-37.56	59.11	34.55
				-	-	-	-	-	-	
		1/25	16QAM	3709.96	H	-46.46	8.49	-37.97	58.87	33.90
				-	-	-	-	-	-	
	1880	1/25	QPSK	3760.36	H	-48.20	8.51	-39.69	60.61	33.92
				-	-	-	-	-	-	
		1/25	16QAM	3760.21	H	-48.44	8.51	-39.93	59.56	32.63
				-	-	-	-	-	-	
	1905	1/25	QPSK	3810.25	H	-51.01	8.54	-42.47	62.70	33.23
				-	-	-	-	-	-	
		1/25	16QAM	3810.26	H	-51.19	8.54	-42.65	62.08	32.43
				-	-	-	-	-	-	
5	1852.5	1/12	QPSK	3705.10	H	-45.92	8.49	-37.43	59.09	34.66
				-	-	-	-	-	-	
		1/12	16QAM	3704.82	H	-46.26	8.49	-37.77	58.85	34.08
				-	-	-	-	-	-	
	1880	1/12	QPSK	3760.10	H	-48.63	8.51	-40.12	61.28	34.16
				-	-	-	-	-	-	
		1/12	16QAM	3759.93	H	-49.18	8.51	-40.67	60.57	32.90
				-	-	-	-	-	-	
	1907.5	1/12	QPSK	3815.14	H	-48.56	8.55	-40.01	60.47	33.46
				-	-	-	-	-	-	
		1/12	16QAM	3814.95	H	-48.64	8.55	-40.09	59.55	32.46
				-	-	-	-	-	-	

B.W (MHz)	Test Freq. (MHz)	RB Size/ Offset	Test Mode	Freq.(MHz)	Ant Pol (H/V)	Level(dBm) @ Ant Terminal	TX Ant Gain(dBi)	Result		Limit (dBc)
								(dBm)	(dBc)	
3	1851.5	1/7	QPSK	3703.08	H	-45.17	8.49	-36.68	58.44	34.76
				-	-	-	-	-	-	
		1/7	16QAM	3703.02	H	-45.52	8.49	-37.03	58.10	34.07
				-	-	-	-	-	-	
	1880	1/7	QPSK	3760.12	H	-48.07	8.51	-39.56	60.80	34.24
				-	-	-	-	-	-	
		1/7	16QAM	3760.29	H	-48.84	8.51	-40.33	60.42	33.09
				-	-	-	-	-	-	
	1908.5	1/14	QPSK	3819.49	H	-47.37	8.55	-38.82	59.32	33.50
				-	-	-	-	-	-	
		1/14	16QAM	3819.53	H	-48.27	8.55	-39.72	59.21	32.49
				-	-	-	-	-	-	
1.4	1850.7	1/2	QPSK	3703.08	H	-45.17	8.49	-36.68	58.21	34.53
				-	-	-	-	-	-	
		1/2	16QAM	3703.02	H	-45.52	8.49	-37.03	57.65	33.62
				-	-	-	-	-	-	
	1880	1/2	QPSK	3760.12	H	-48.07	8.51	-39.56	59.85	33.29
				-	-	-	-	-	-	
		1/2	16QAM	3760.29	H	-48.84	8.51	-40.33	60.19	32.86
				-	-	-	-	-	-	
	1909.3	1/2	QPSK	3819.49	H	-47.37	8.55	-38.82	58.63	32.81
				-	-	-	-	-	-	
		1/2	16QAM	3819.53	H	-48.27	8.55	-39.72	58.26	31.54
				-	-	-	-	-	-	

Note 1: Limit Calculation = $43 + 10\log_{10}(P[\text{Watts}])$

Note 2: This device was tested under all bandwidths, modulations and RB configurations and the worst case data are reported in the table above.


Note 3: The frequency spectrum is examined from 9 kHz to the 10th harmonic of the fundamental frequency of the transmitter. No other spurious and harmonic emissions were reported greater than listed emissions above table.

7.7 FREQUENCY STABILITY

7.7.1 LTE Band 5

OPERATING FREQUENCY : 836.5 MHz
 CHANNEL : 20525
 REFERENCE VOLTAGE : 3.80 VDC
 DEVIATION LIMIT(FCC & IC) : $\pm 0.00025\%$ or ± 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.80	+20(Ref)	836,499,991	-9	-0.0108	-0.000001076
100%		-30	836,499,996	-4	-0.0048	-0.000000478
100%		-20	836,499,997	-3	-0.0036	-0.000000359
100%		-10	836,499,995	-5	-0.0060	-0.000000598
100%		0	836,499,993	-7	-0.0084	-0.000000837
100%		+10	836,499,992	-8	-0.0096	-0.000000956
100%		+20	836,499,991	-9	-0.0108	-0.000001076
100%		+30	836,499,993	-7	-0.0084	-0.000000837
100%		+40	836,499,997	-3	-0.0036	-0.000000359
100%		+50	836,500,002	2	0.0024	0.000000239
115%		4.37	+20	836,499,995	-5	-0.0060
BATT.ENDPOINT	3.40	+20	836,500,007	7	0.0084	0.000000837

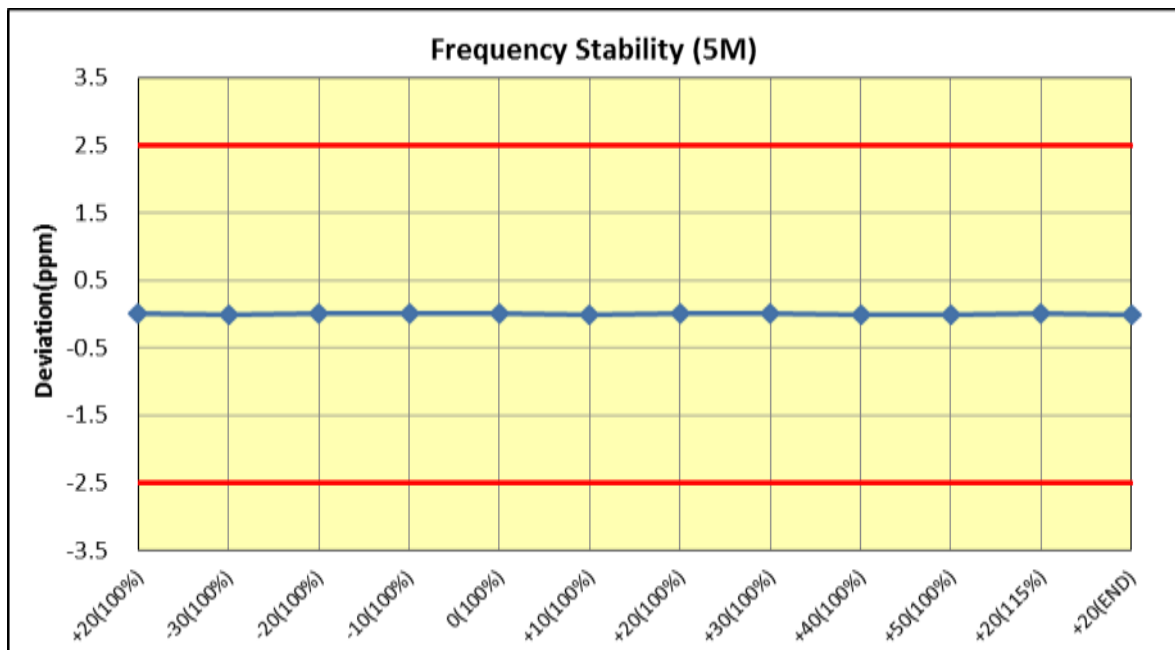

7.7.2 LTE Band 4

OPERATING FREQUENCY : 1732.5 MHz
 CHANNEL : 20175
 REFERENCE VOLTAGE : 3.80 VDC
 LIMIT(FCC & IC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.80	+20(Ref)	1,732,499,991	-9	-0.0052	-0.000000519
100%		-30	1,732,499,994	-6	-0.0035	-0.000000346
100%		-20	1,732,499,993	-7	-0.0040	-0.000000404
100%		-10	1,732,499,992	-8	-0.0046	-0.000000462
100%		0	1,732,499,995	-5	-0.0029	-0.000000289
100%		+10	1,732,499,994	-6	-0.0035	-0.000000346
100%		+20	1,732,499,991	-9	-0.0052	-0.000000519
100%		+30	1,732,499,993	-7	-0.0040	-0.000000404
100%		+40	1,732,499,994	-6	-0.0035	-0.000000346
100%		+50	1,732,499,994	-6	-0.0035	-0.000000346
115%	4.37	+20	1,732,499,998	-2	-0.0012	-0.000000115
BATT.ENDPOINT	3.40	+20	1,732,499,997	-3	-0.0017	-0.000000173

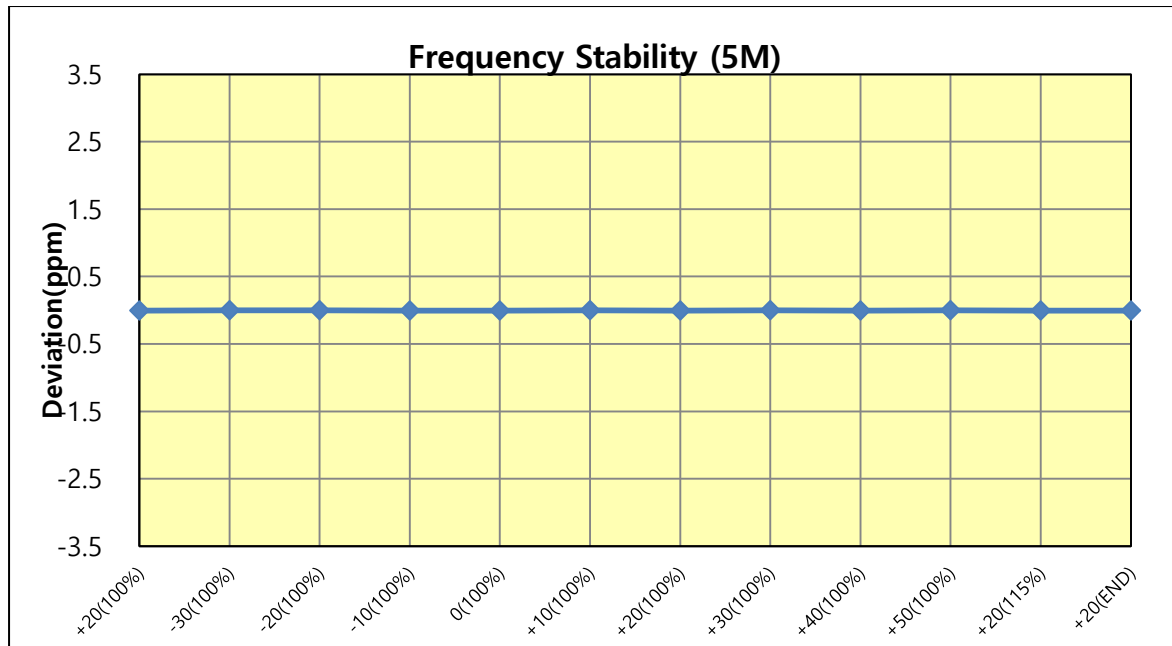


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.7.3 LTE Band 2

OPERATING FREQUENCY : 1880 MHz
 CHANNEL : 18900
 REFERENCE VOLTAGE : 3.80 VDC
 LIMIT(FCC) : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.
 DEVIATION LIMIT(IC) : ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQUENCY (Hz)	FREQ.Dev (Hz)	Deviation	
					(ppm)	(%)
100%	3.80	+20(Ref)	1,880,000,010	10	0.0053	0.000000532
100%		-30	1,879,999,991	-9	-0.0048	-0.000000479
100%		-20	1,879,999,993	-7	-0.0037	-0.000000372
100%		-10	1,879,999,990	-10	-0.0053	-0.000000532
100%		0	1,879,999,994	-6	-0.0032	-0.000000319
100%		+10	1,879,999,993	-7	-0.0037	-0.000000372
100%		+20	1,880,000,010	10	0.0053	0.000000532
100%		+30	1,879,999,996	-4	-0.0021	-0.000000213
100%		+40	1,879,999,998	-2	-0.0011	-0.000000106
100%		+50	1,879,999,993	-7	-0.0037	-0.000000372
115%	4.37	+20	1,879,999,994	-6	-0.0032	-0.000000319
BATT.ENDPOINT	3.40	+20	1,879,999,998	-2	-0.0011	-0.000000106

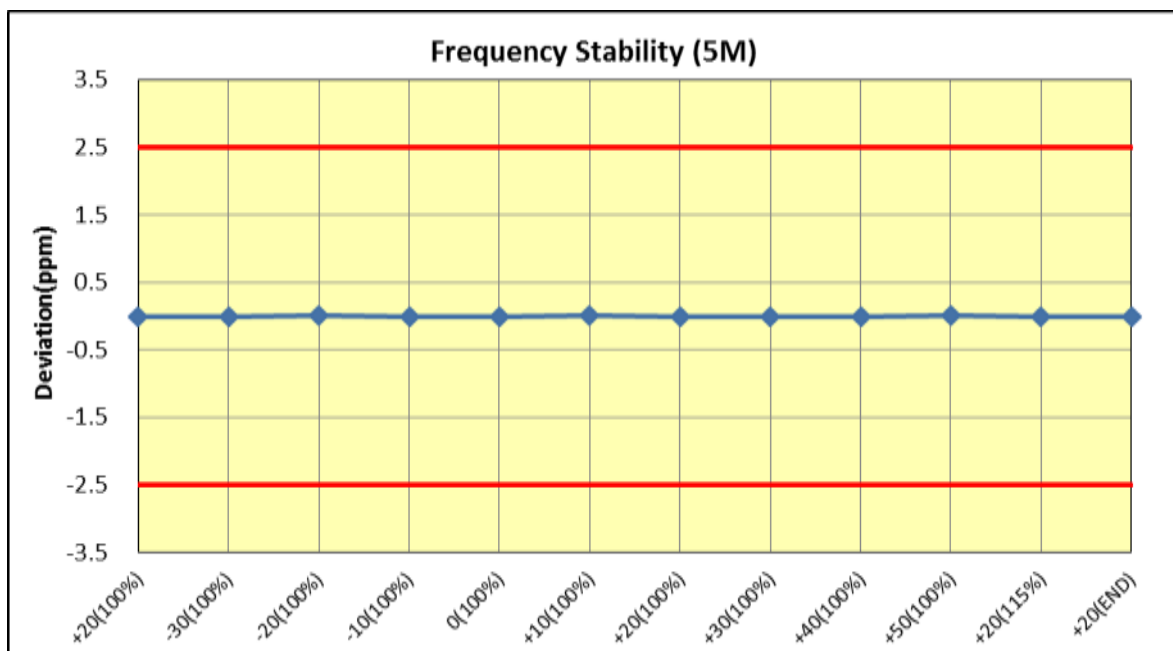


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

8. TEST PLOTS


Note: All bandwidths, RB configurations, and modulations were investigated. The worst case test results are reported below.

8.1 OCCUPIED BANDWIDTH


8.1.1 LTE Band 5

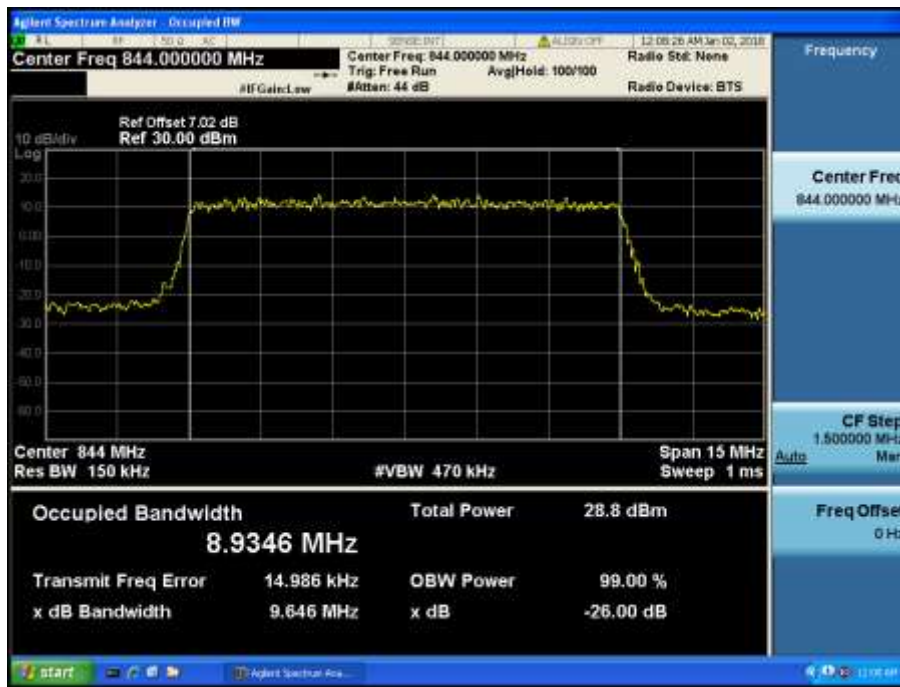


LTE Band 5 / 10 MHz / QPSK - RB Size 50

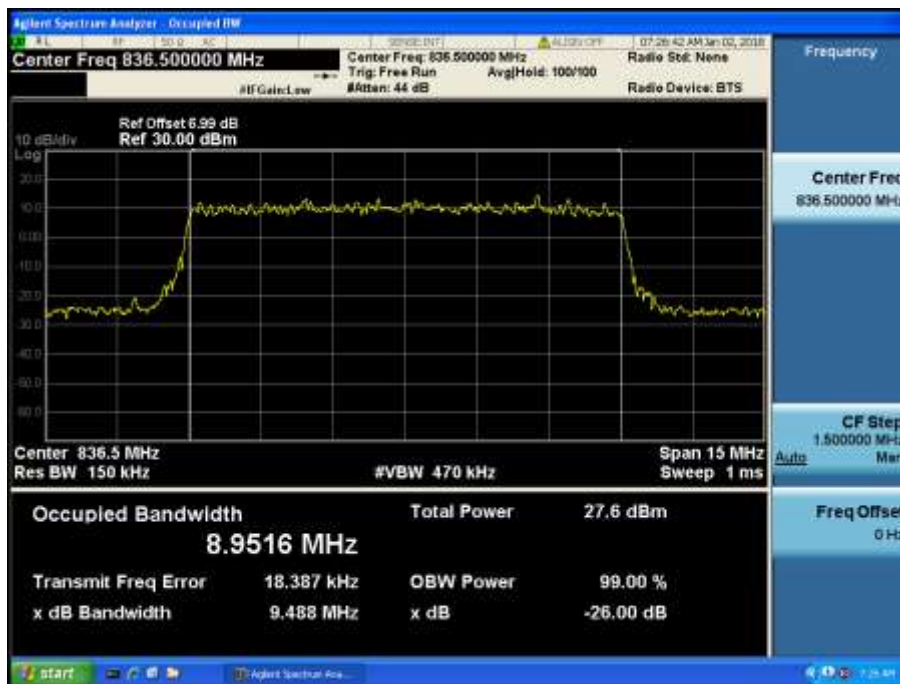


LTE Band 5 / 10 MHz / 16QAM - RB Size 50

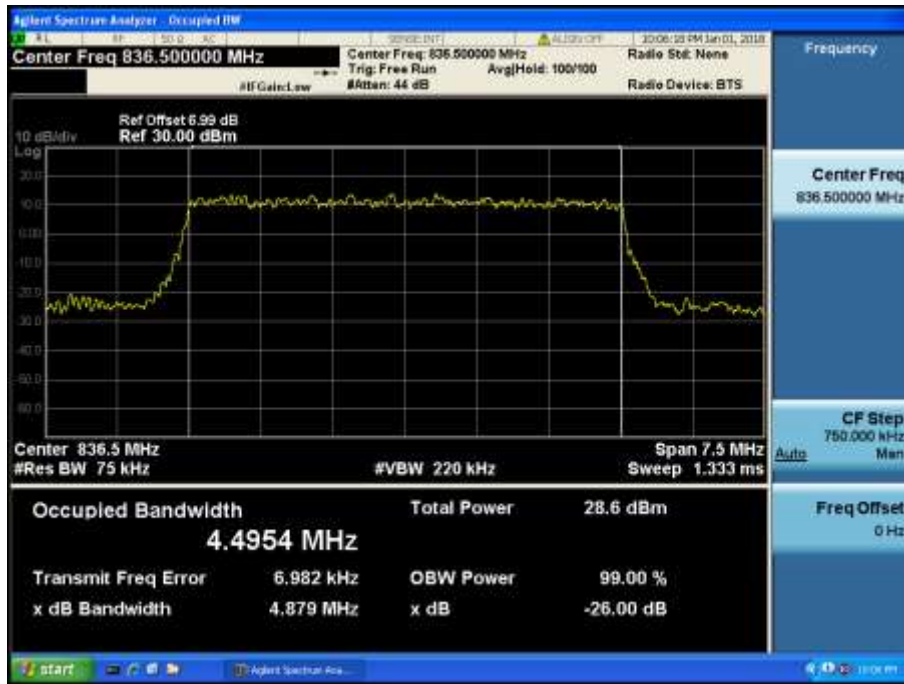


LTE Band 5 / 5 MHz / QPSK - RB Size 25

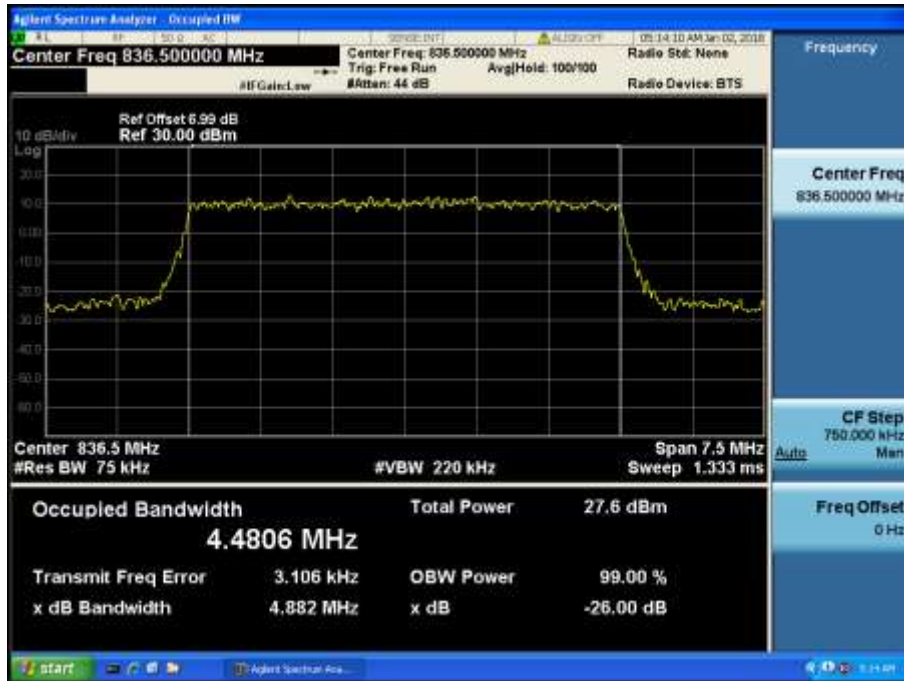


LTE Band 5 / 5 MHz / 16QAM - RB Size 25

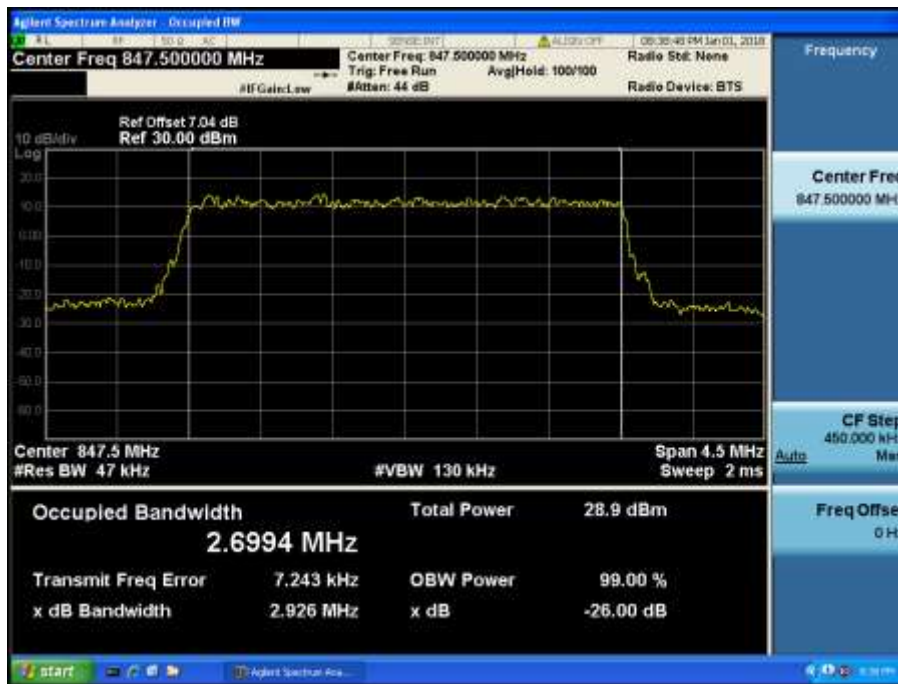

LTE Band 5 / 3 MHz / QPSK - RB Size 15

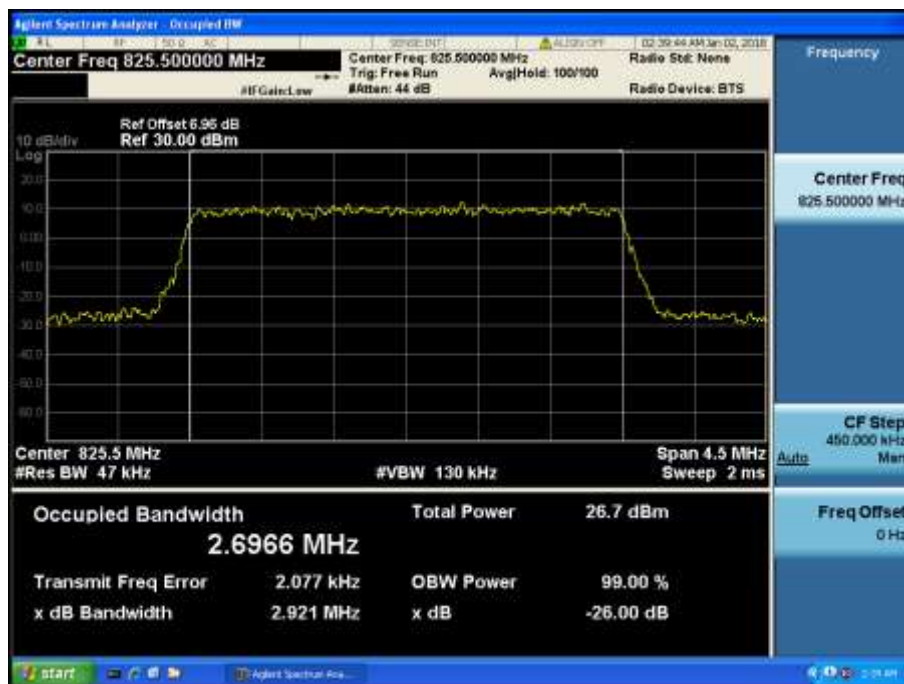

LTE Band 5 / 3 MHz / 16QAM - RB Size 15

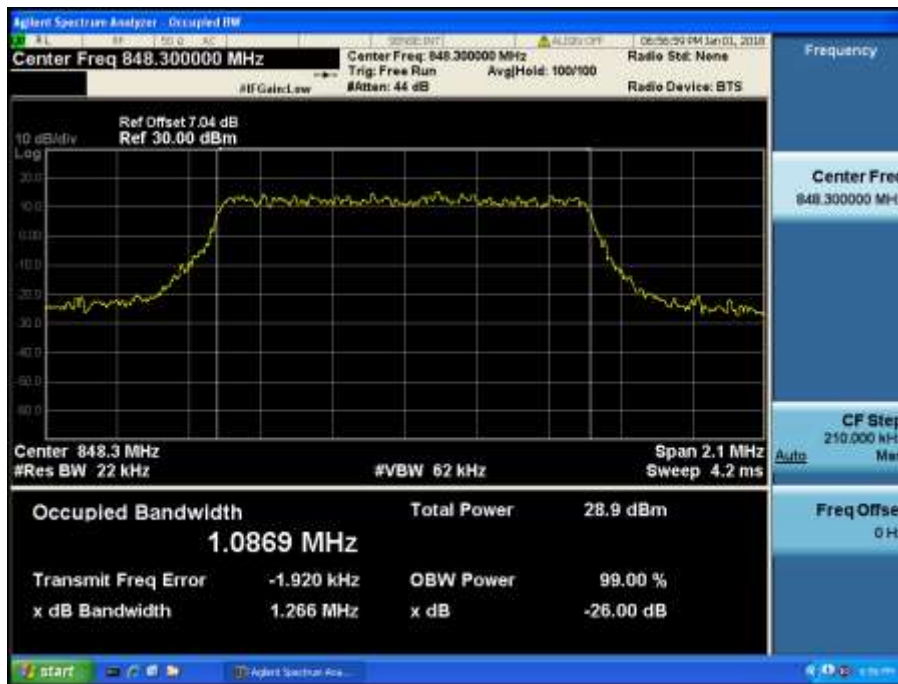


LTE Band 5 / 1.4 MHz / QPSK - RB Size 6




LTE Band 5 / 1.4 MHz / 16QAM - RB Size 6


8.1.2 LTE Band 4

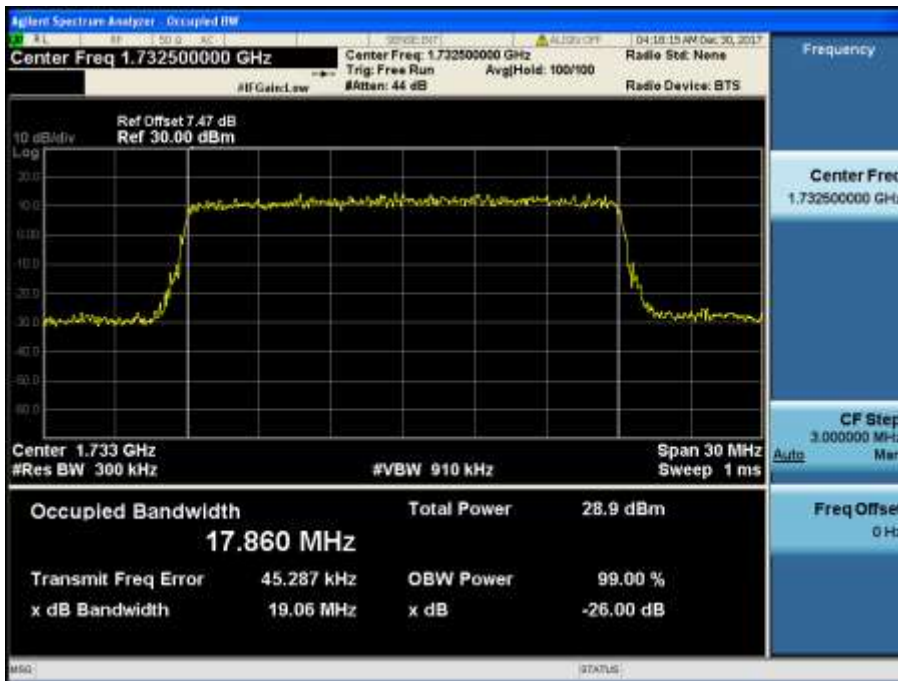


LTE Band 4 / 20 MHz / QPSK - RB Size 100

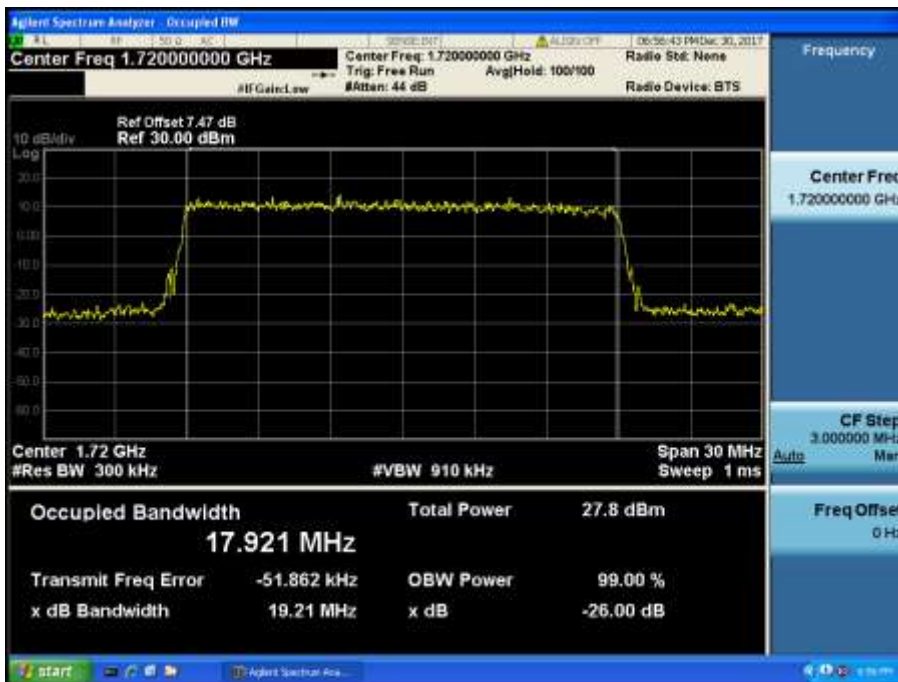

LTE Band 4 / 20 MHz / 16QAM - RB Size 100

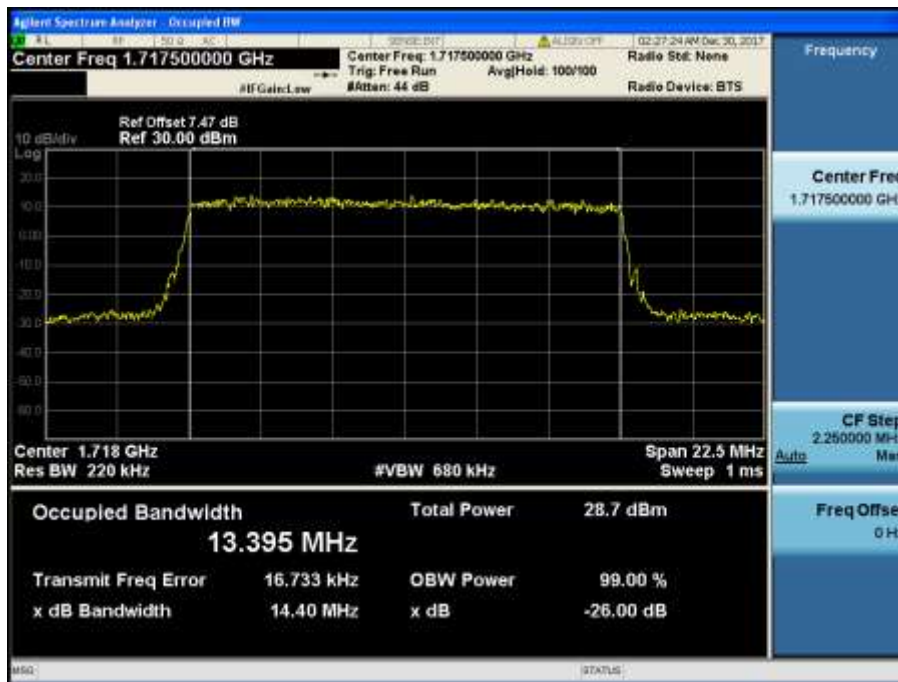


LTE Band 4 / 15 MHz / QPSK - RB Size 75

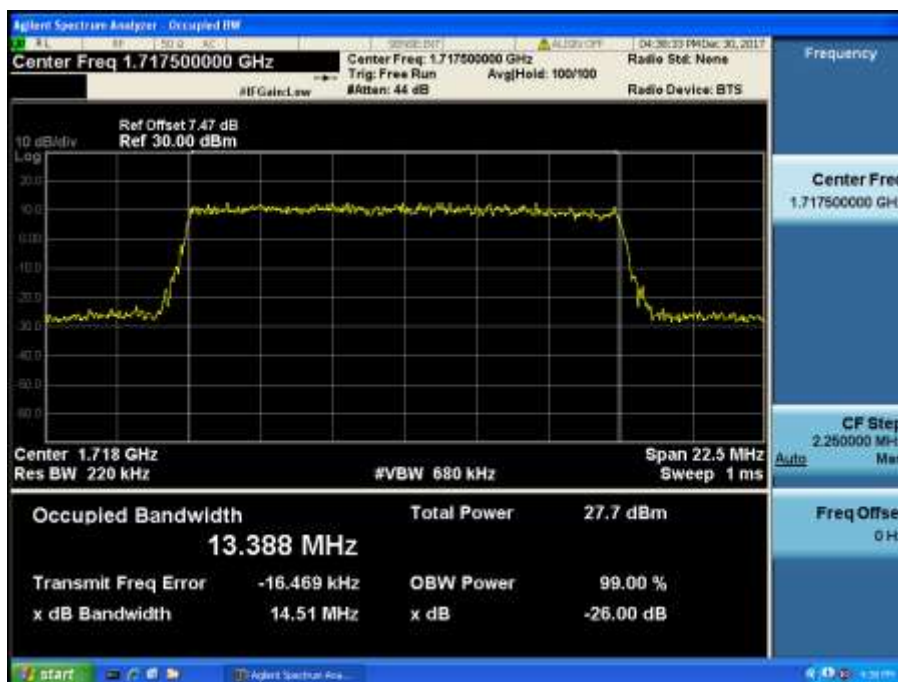


LTE Band 4 / 15 MHz / 16QAM - RB Size 75




LTE Band 4 / 10 MHz / QPSK - RB Size 50

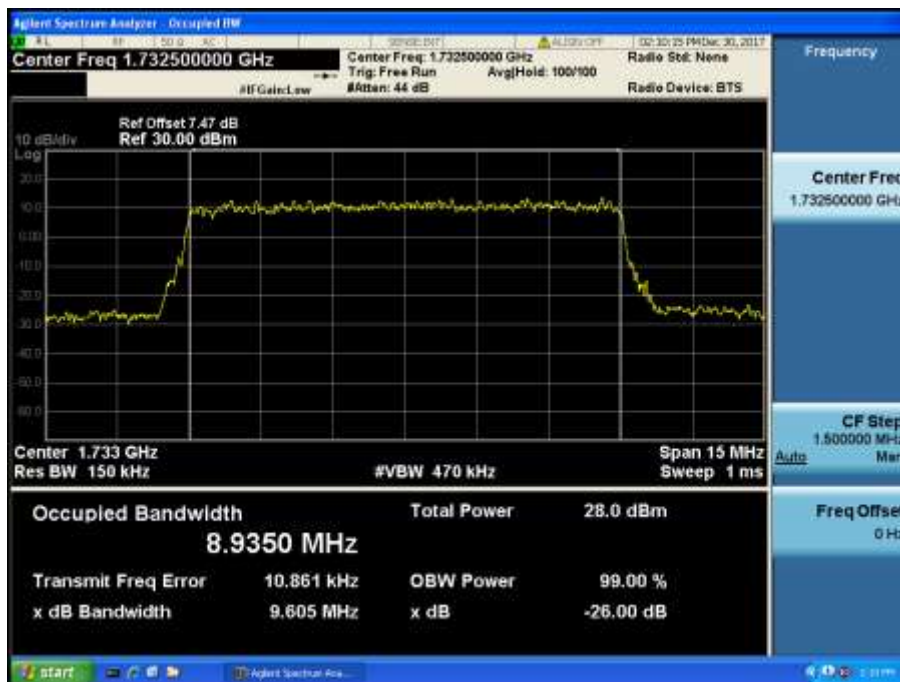


LTE Band 4 / 10 MHz / 16QAM - RB Size 50

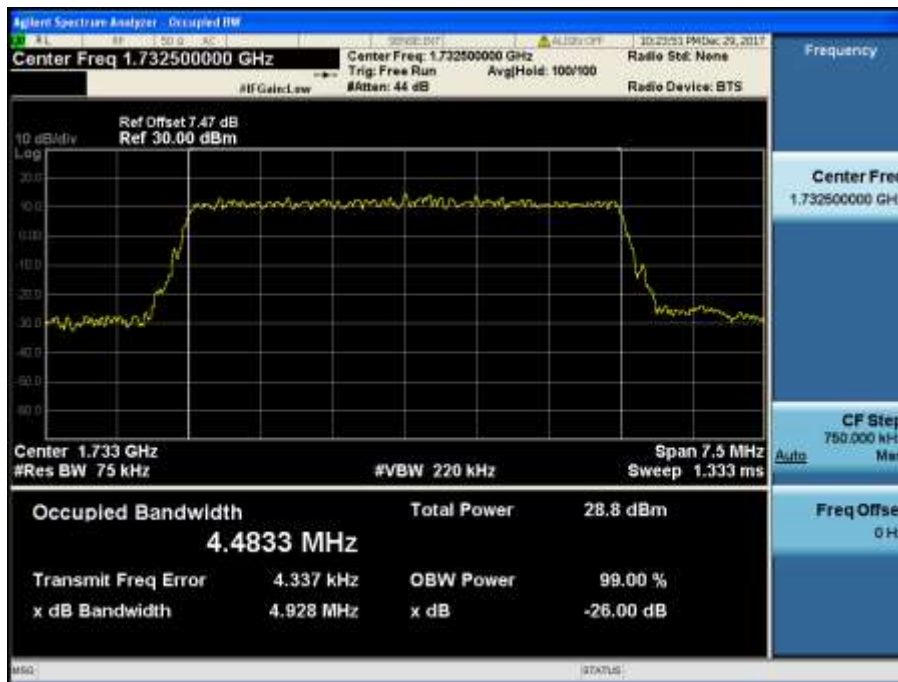


LTE Band 4 / 5 MHz / QPSK - RB Size 25

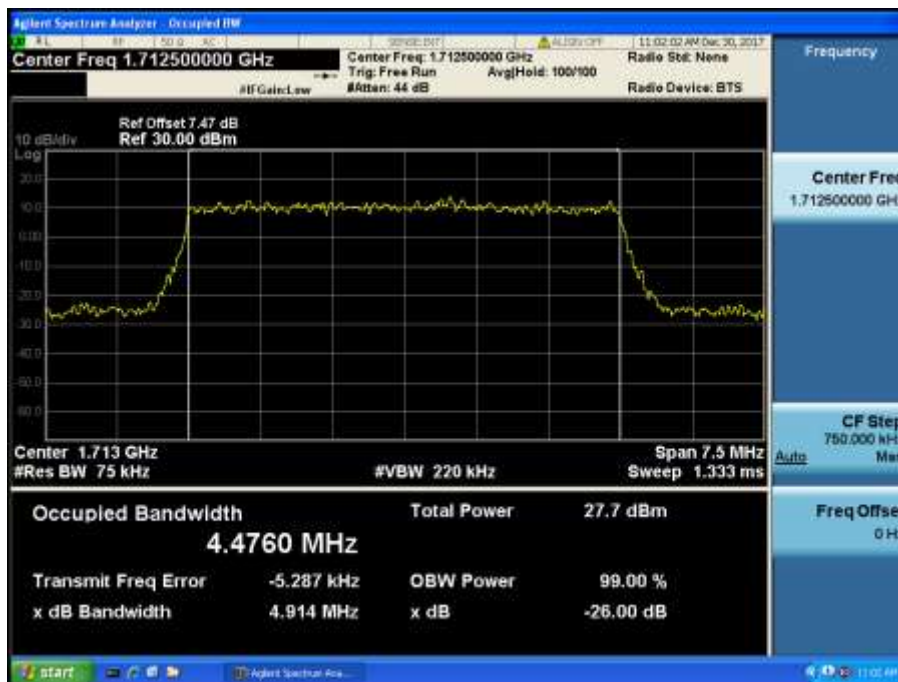

LTE Band 4 / 5 MHz / 16QAM - RB Size 25

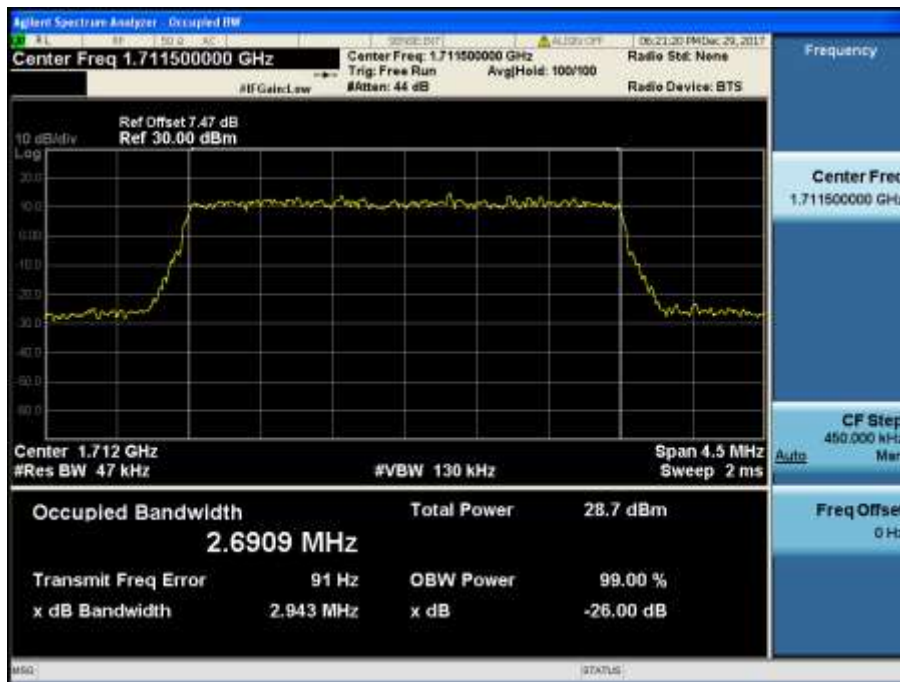


LTE Band 4 / 3 MHz / QPSK - RB Size 15

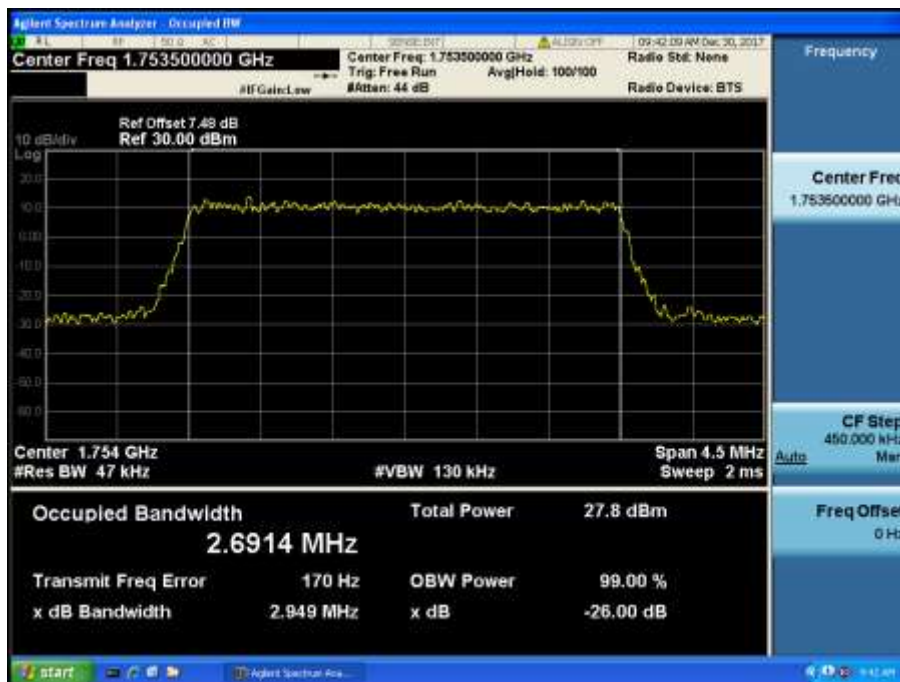

LTE Band 4 / 3 MHz / 16QAM - RB Size 15




LTE Band 4 / 1.4 MHz / QPSK - RB Size 6

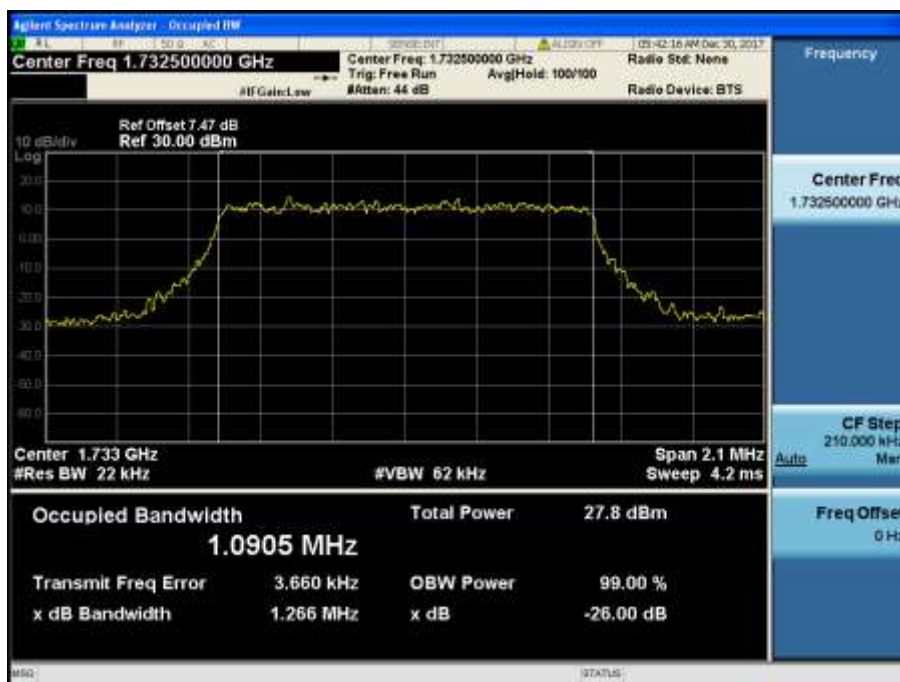


LTE Band 4 / 1.4 MHz / 16QAM - RB Size 6


8.1.3 LTE Band 2

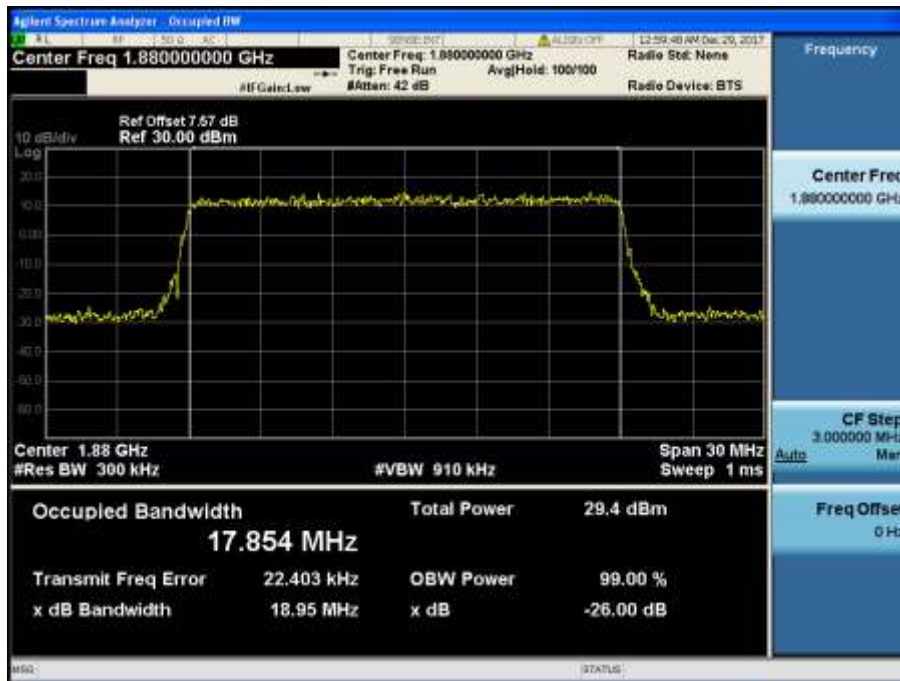


LTE Band 2 / 20 MHz / QPSK - RB Size 100

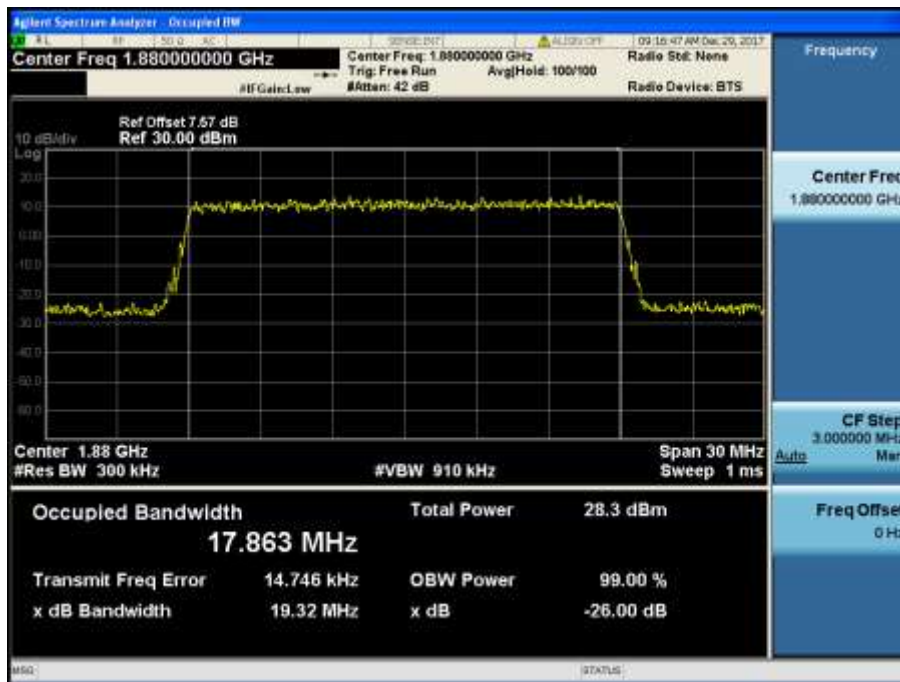


LTE Band 2 / 20 MHz / 16QAM - RB Size 100

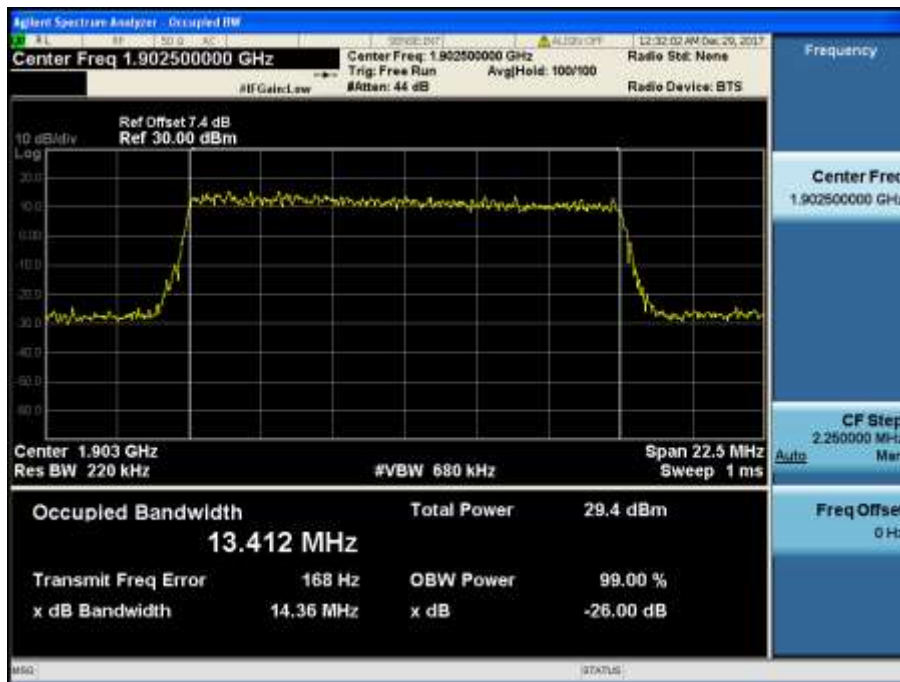


LTE Band 2 / 15 MHz / QPSK - RB Size 75

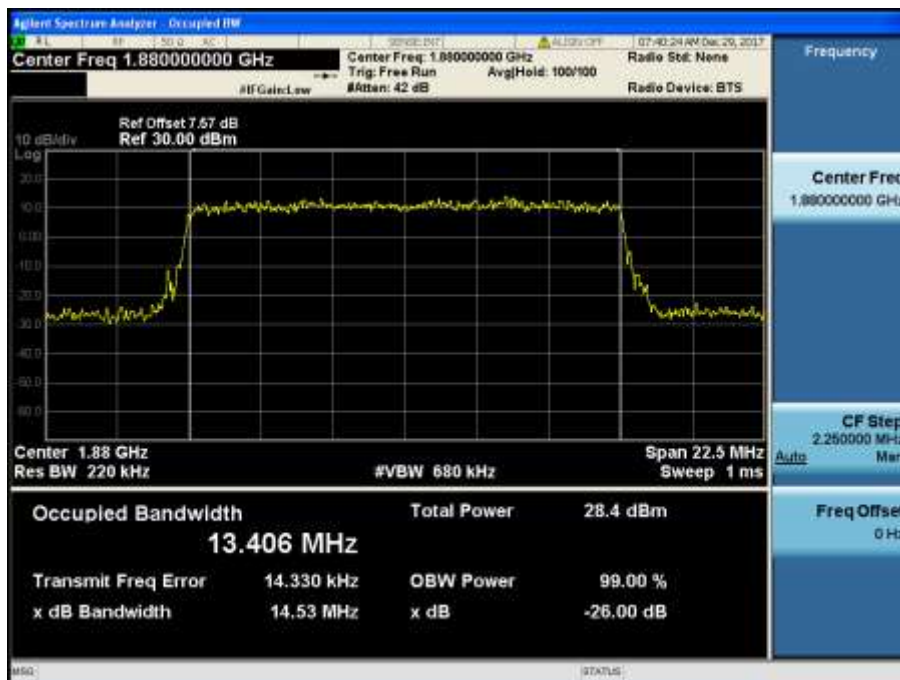


LTE Band 2 / 15 MHz / 16QAM - RB Size 75

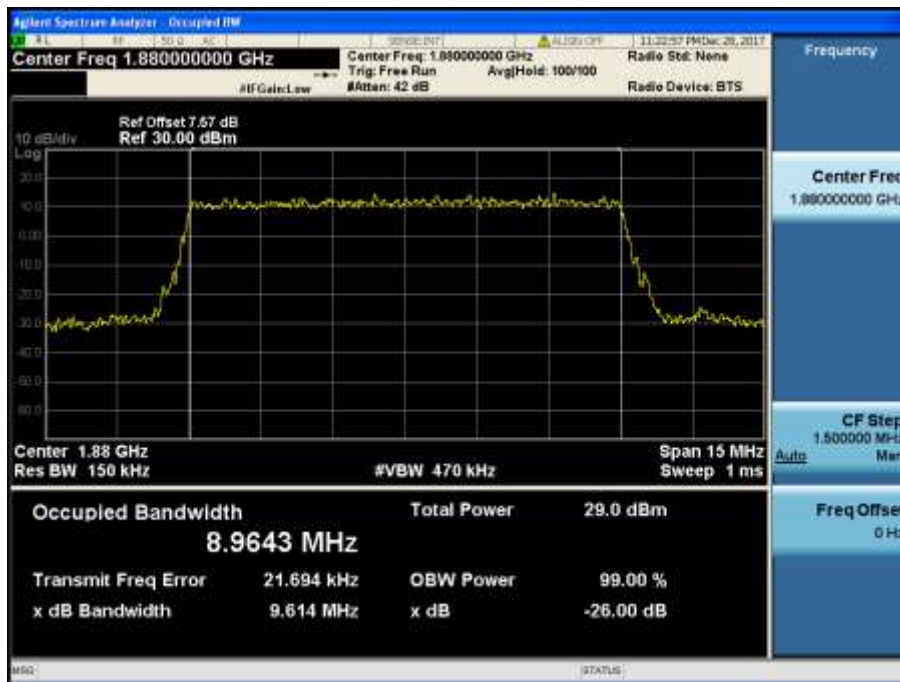


LTE Band 2 / 10 MHz / QPSK - RB Size 50

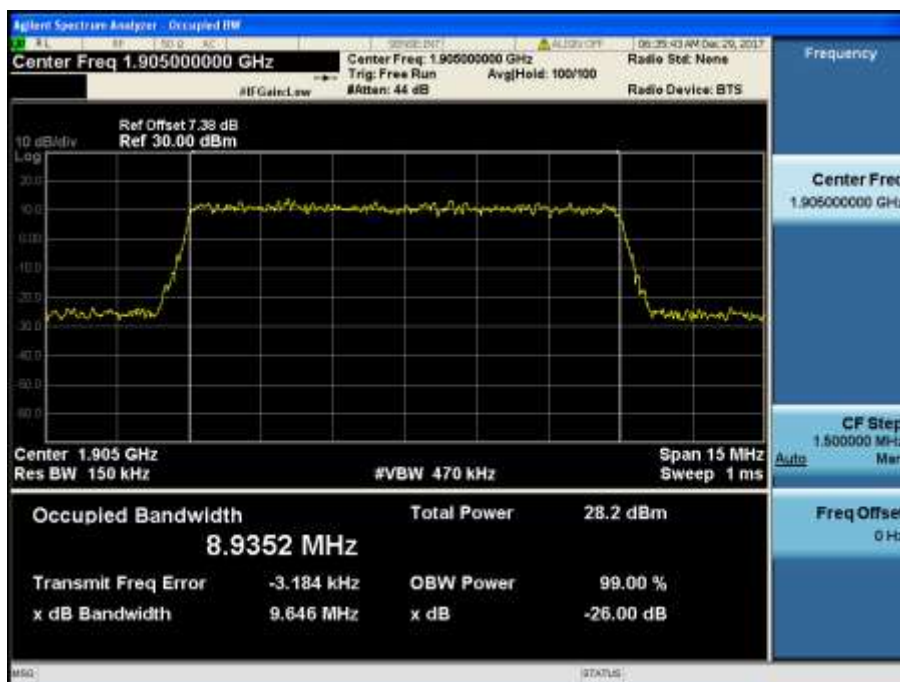

LTE Band 2 / 10 MHz / 16QAM - RB Size 50

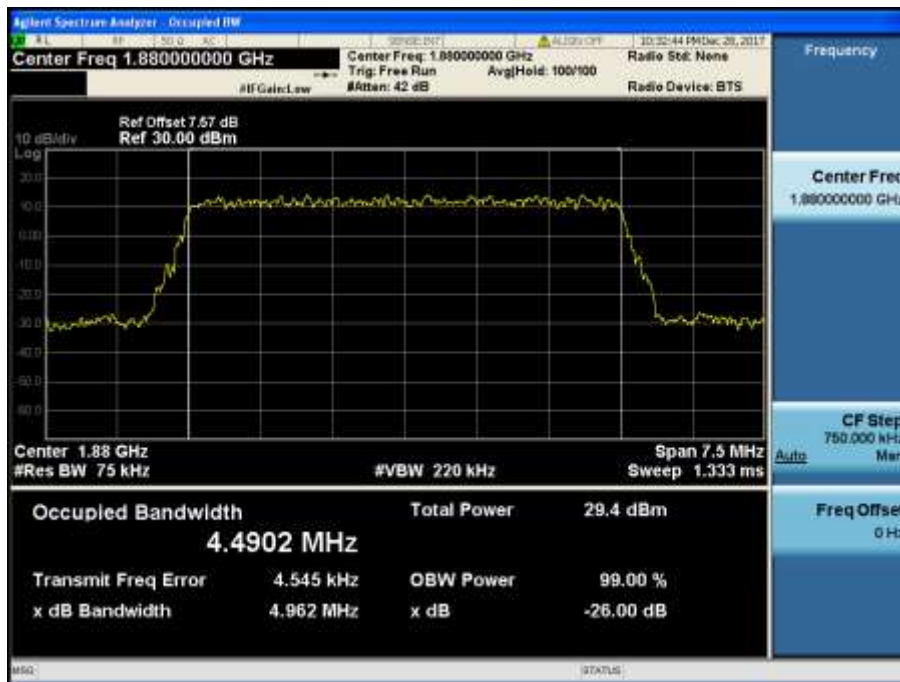


LTE Band 2 / 5 MHz / QPSK - RB Size 25

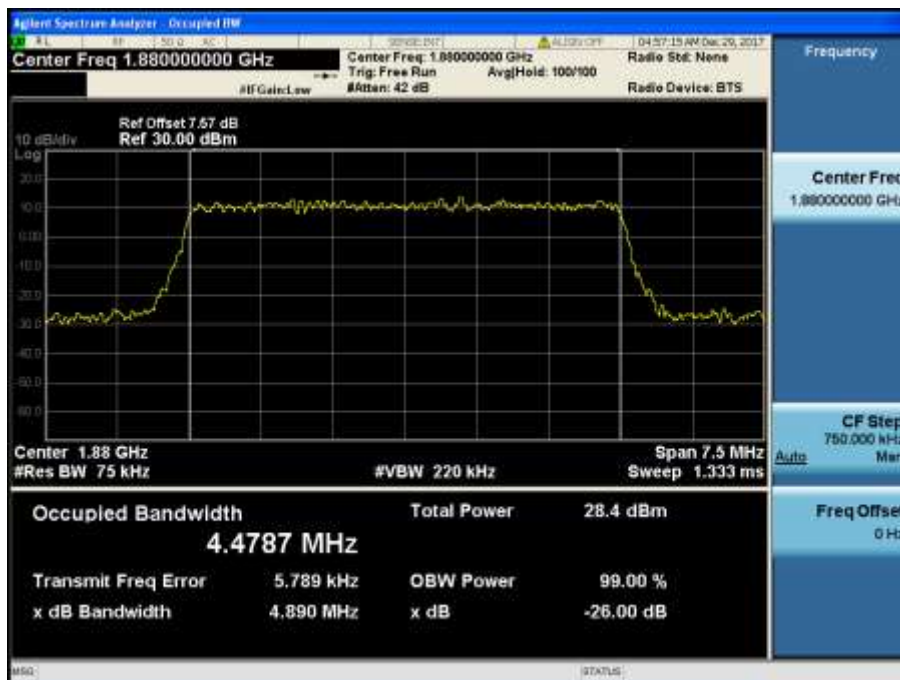

LTE Band 2 / 5 MHz / 16QAM - RB Size 25



LTE Band 2 / 3 MHz / QPSK - RB Size 15

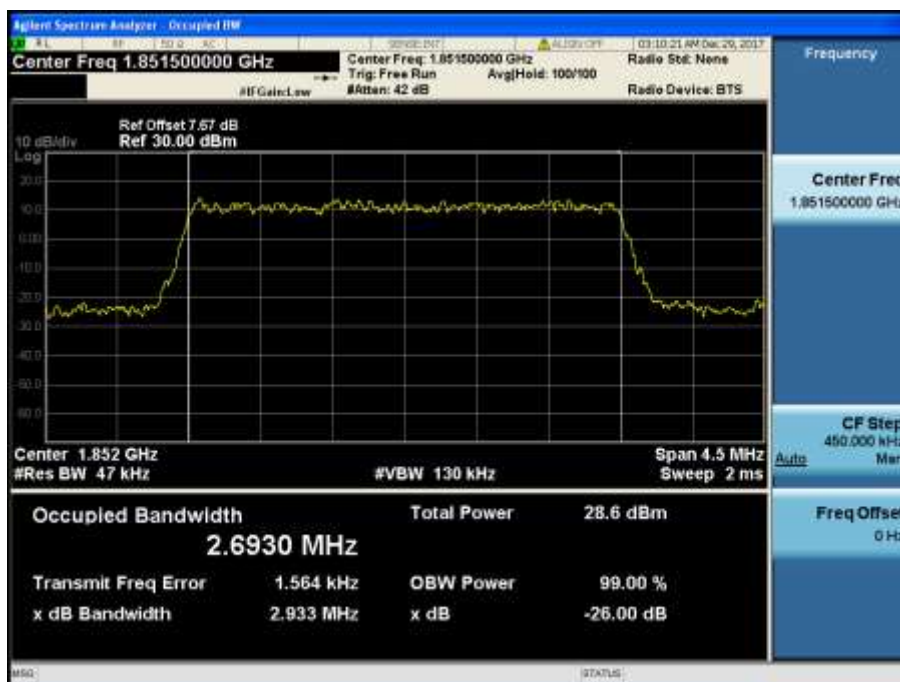

LTE Band 2 / 3 MHz / 16QAM - RB Size 15




LTE Band 2 / 1.4 MHz / QPSK - RB Size 6



LTE Band 2 / 1.4 MHz / 16QAM - RB Size 6

8.2 PEAK TO AVERAGE RATIO

8.2.1 LTE Band 5

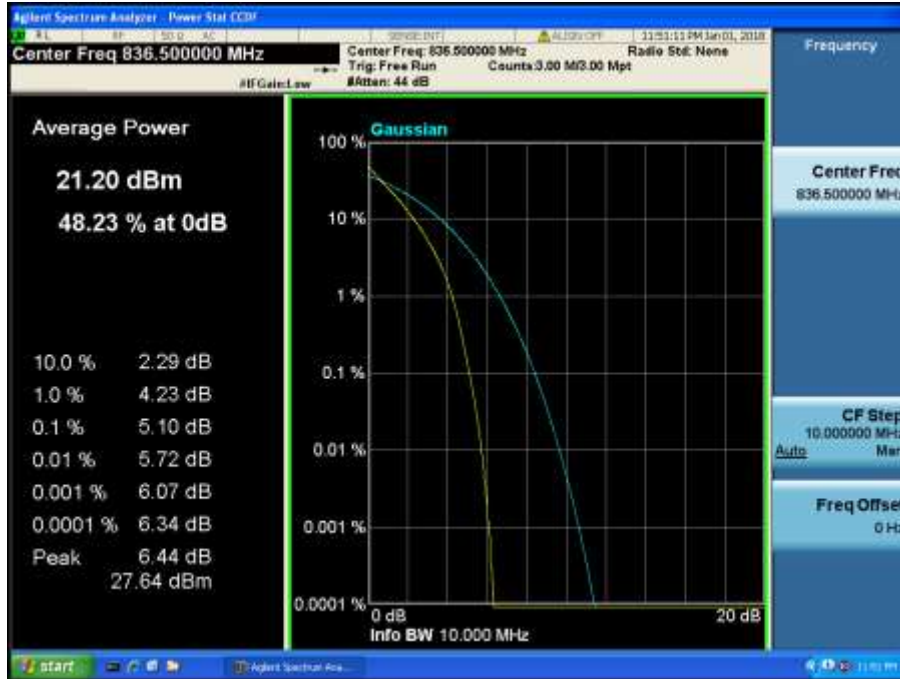

LTE Band 5 / 10 MHz / QPSK - RB Size 50



LTE Band 5 / 10 MHz / 16QAM - RB Size 50



LTE Band 5 / 5 MHz / QPSK - RB Size 25



LTE Band 5 / 5 MHz / 16QAM - RB Size 25



LTE Band 5 / 3 MHz / QPSK - RB Size 15



LTE Band 5 / 3 MHz / 16QAM - RB Size 15




LTE Band 5 / 1.4 MHz / QPSK - RB Size 6



LTE Band 5 / 1.4 MHz / 16QAM - RB Size 6

8.2.2 LTE Band 4

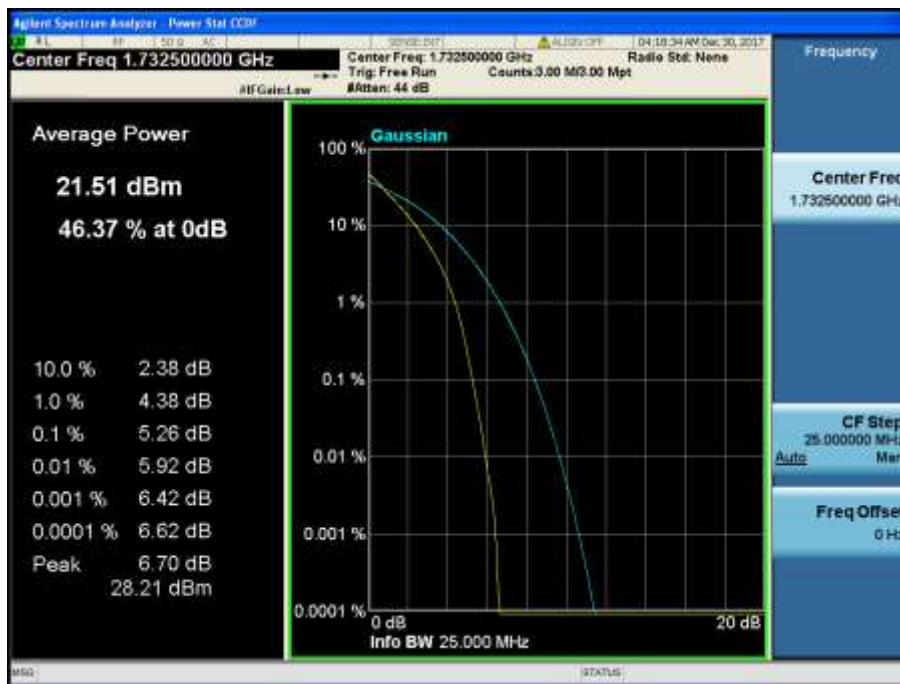

LTE Band 4 / 20 MHz / QPSK - RB Size 100



LTE Band 4 / 20 MHz / 16QAM - RB Size 100



LTE Band 4 / 15 MHz / QPSK - RB Size 75



LTE Band 4 / 15 MHz / 16QAM - RB Size 75



LTE Band 4 / 10 MHz / QPSK - RB Size 50



LTE Band 4 / 10 MHz / 16QAM - RB Size 50



LTE Band 4 / 5 MHz / QPSK - RB Size 25




LTE Band 4 / 5 MHz / 16QAM - RB Size 25



LTE Band 4 / 3 MHz / QPSK - RB Size 15



LTE Band 4 / 3 MHz / 16QAM - RB Size 15

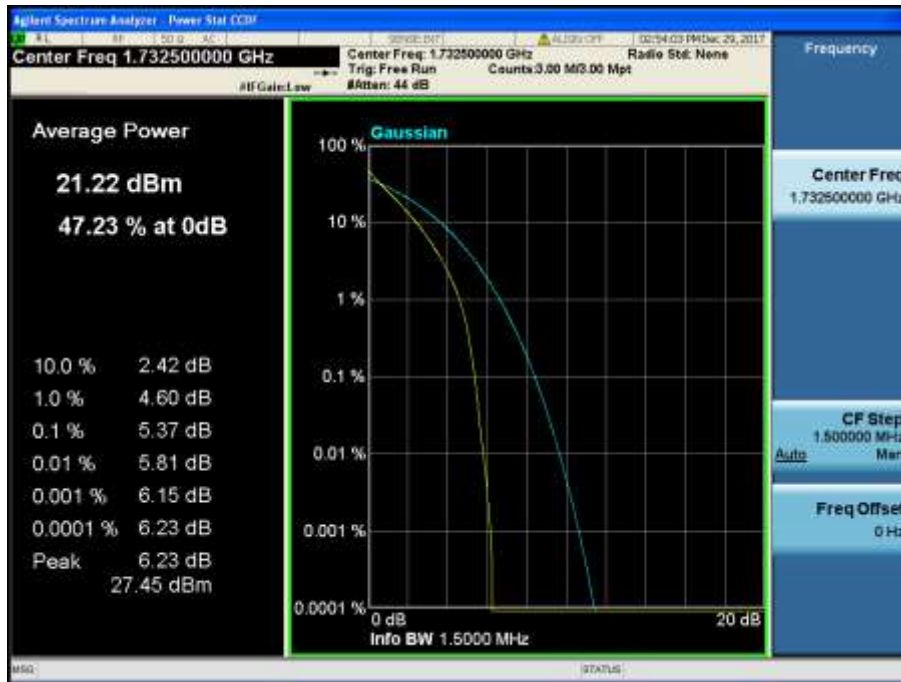


LTE Band 4 / 1.4 MHz / QPSK - RB Size 6



LTE Band 4 / 1.4 MHz / 16QAM - RB Size 6


8.2.3 LTE Band 2

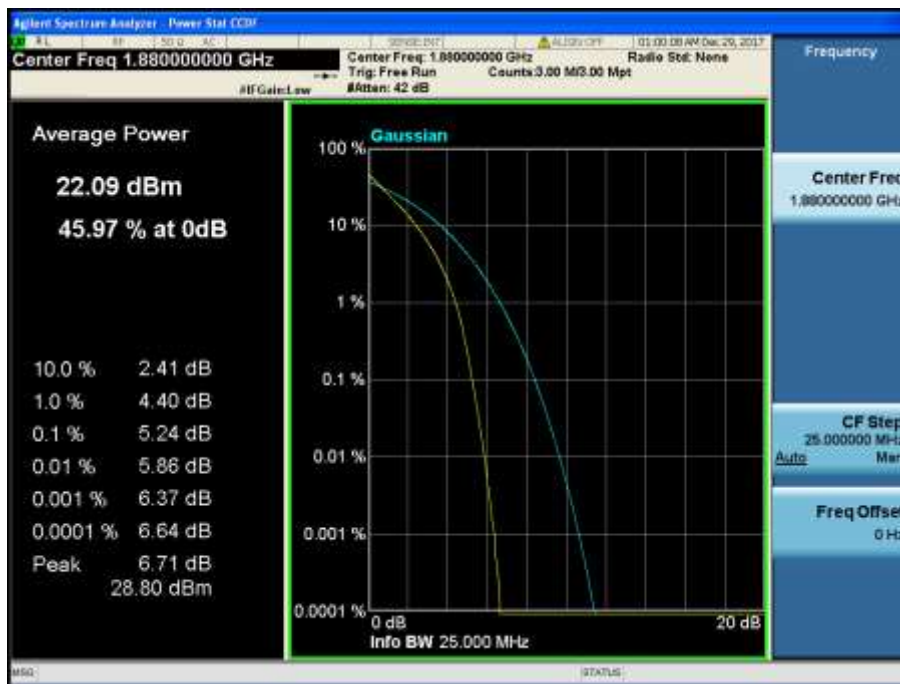

LTE Band 2 / 20 MHz / QPSK - RB Size 100



LTE Band 2 / 20 MHz / 16QAM - RB Size 100

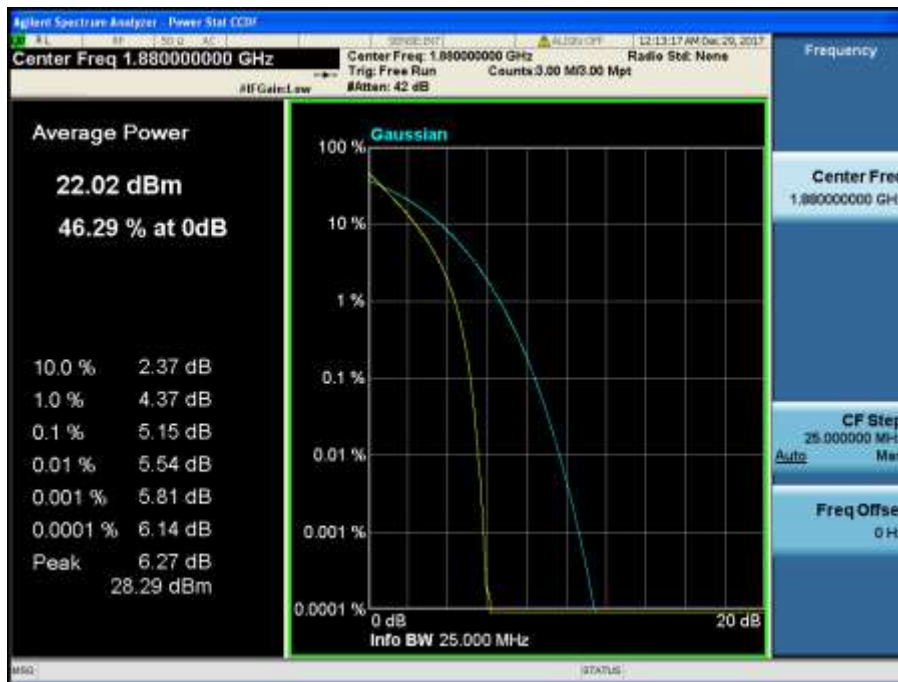


LTE Band 2 / 15 MHz / QPSK - RB Size 75



LTE Band 2 / 15 MHz / 16QAM - RB Size 75



LTE Band 2 / 10 MHz / QPSK - RB Size 50

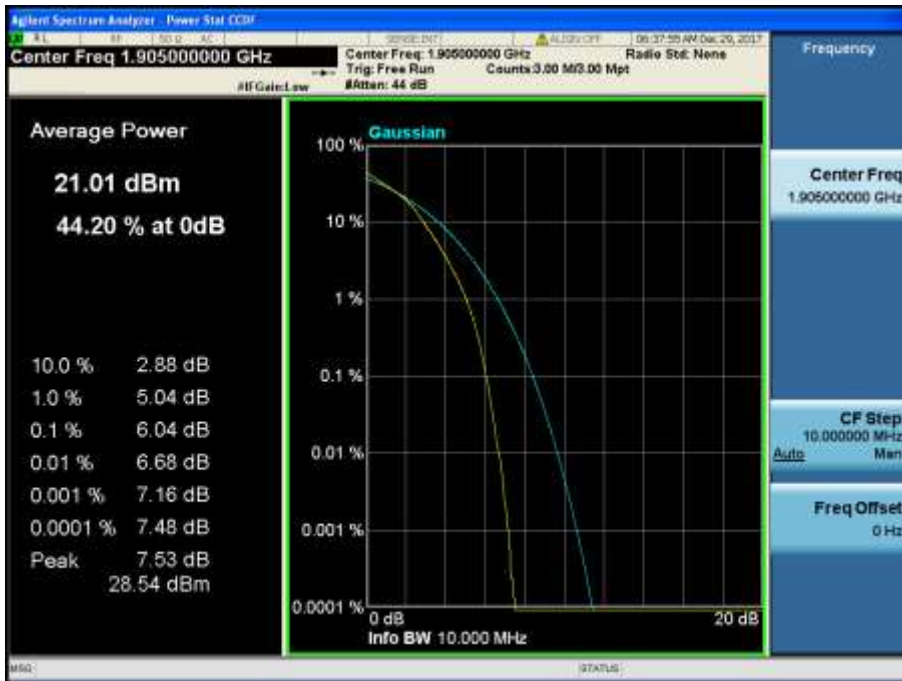

LTE Band 2 / 10 MHz / 16QAM - RB Size 50



LTE Band 2 / 5 MHz / QPSK - RB Size 25



LTE Band 2 / 5 MHz / 16QAM - RB Size 25



LTE Band 2 / 3 MHz / QPSK - RB Size 15



LTE Band 2 / 3 MHz / 16QAM - RB Size 15



LTE Band 2 / 1.4 MHz / QPSK - RB Size 6



LTE Band 2 / 1.4 MHz / 16QAM - RB Size 6

8.3 BAND EDGE EMISSIONS(Conducted)

8.3.1 LTE Band 5

- Lower Band Edge



LTE Band 5 / 10MHz / QPSK - RB Size/Offset (25/0)

- Lower Extended Band Edge



LTE Band 5 / 10MHz / QPSK - RB Size/Offset (25/0)

- Upper Band Edge



LTE Band 5 / 10MHz / QPSK - RB Size/Offset (25/25)

- Upper Extended Band Edge



LTE Band 5 / 10MHz / QPSK - RB Size/Offset (25/25)

- Lower Band Edge




LTE Band 5 / 5MHz / 16QAM Offset/Size (1/0)

- Lower Extended Band Edge



LTE Band 5 / 5MHz / QPSK Offset/Size (12/0)

- Upper Band Edge

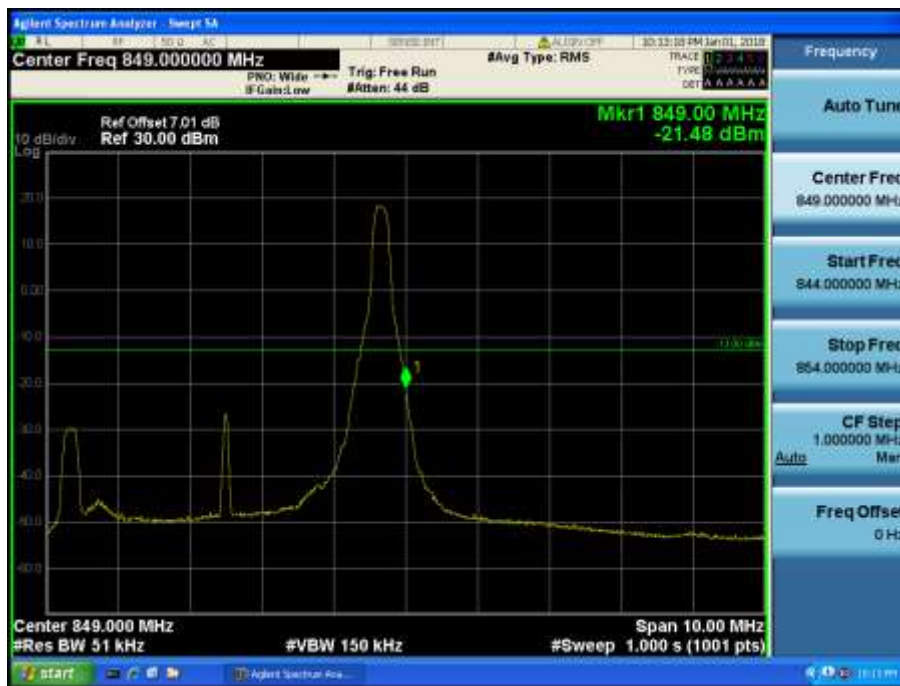

LTE Band 5 / 5MHz / QPSK - RB Size/Offset (1/24)

- Upper Extended Band Edge



LTE Band 5 / 5MHz / 16QAM - RB Size/Offset (12/13)

- Lower Band Edge



LTE Band 5 / 3MHz / QPSK - RB Size/Offset (1/0)

- Lower Extended Band Edge



LTE Band 5 / 3MHz / 16QAM - RB Size/Offset (15/0)

- Upper Band Edge



LTE Band 5 / 3MHz / 16QAM - RB Size/Offset (1/14)

- Upper Extended Band Edge



LTE Band 5 / 3MHz / 16QAM - RB Size/Offset (15/0)