

10184- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	3.46	71.62	20.09	3.01	150.0	± 9.6 %
		Y	3.15	70.03	19.34		150.0	
		Z	3.33	72.38	20.87		150.0	
10185- CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	Х	5.28	79.17	22.88	3.01	150.0	±9.6 %
-		Y	4.68	77.54	22:31		150.0	
		2	6.04	84.21	25.36	Thomas are	150.0	
10186- AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	X	4.28	74.63	20.11	3.01	150.0	±9.6 %
		Y	3.76	72.86	19.37		150.0	
		Z	4.51	77.72	21.81	1 1 1 1	150.0	
10187- CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	Х	3.47	71.67	20.15	3.01	150.0	± 9.6 %
		Y	3.16	70.11	19.42		150.0	
		Z	3.35	72.46	20.95		150.0	
10188- CAE	LTE-FDD (SC-FDMA, 1 RB, 1,4 MHz, 16-QAM)	X	5.49	79.96	23.28	3.01	150.0	± 9.6 %
		Y	4.84	78.25	22.69		150.0	
		2	6.33	85.21	25.84	15.6	150.0	
10189- AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	4.39	75.13	20.41	3.01	150.0	± 9.6 %
	He = 1	Y	3.85	73.31	19.65		150.0	
TU		Z	4.65	78.35	22.15		150.0	
10193- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.63	66.83	16.32	0.00	150.0	± 9.6 %
		Y	4.47	66.92	16.16		150.0	
vi. 330 33		Z	4.50	67.35	16.53		150.0	
10194- CAB	JEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.82	67.19	16.44	0.00	150,0	±9.6 %
0-14-74		Y	4.62	67.18	16.29		150.0	
		Z	4.65	67.61	16.66		150.0	
10195- CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.86	67.21	16.45	0.00	150.0	± 9.6 %
		Y	4.66	67.21	16.31		150.0	
	Harrison of the same and the same	Z	4.69	67.63	16.67		150.0	-
10196- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.64	66.93	16.35	0.00	150.0	± 9.6 %
	p	Y	4.46	66.94	16.16		150.0	
		Z	4.49	67.37	16.53		150.0	
10197- CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16- QAM)	X	4.83	67.21	16.45	0.00	150.0	± 9.6 %
		Y	4.63	67.19	16.30		150.0	
		Z	4.66	67.62	16.67		150.0	
10198- CAB	IEEE 802.11n (HT Mixed, 65 Mbps, 64- QAM)	X	4.86	67.23	16.46	0.00	150.0	± 9.6 %
	1. *	Y	4.65	67.22	16.32		150.0	
		Z	4.68	67.64	16.68		150.0	
10219- CAB	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	Х	4.59	66.94	16.32	0.00	150.0	± 9.6 %
		Y	4.41	66.96	16.12		150.0	
		Z	4.44	67.41	16.50		150.0	-
10220- CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16- QAM)	Х	4.83	67.20	16.45	0.00	150.0	± 9.6 %
		Y	4.62	67.16	16.29		150.0	
1		Z	4.65	67.58	16.65		150.0	
10221- CAB	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64- QAM)	Х	4.87	67.16	16.45	0.00	150.0	± 9.6 %
		Y	4.66	67.15	16.30		150.0	
100		Z	4.70	67.57	16.66		150.0	
10222- CAB	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	Х	5.19	67.41	16.57	0.00	150.0	± 9.6 %
		Y	5.03	67.29	45.44		456.0	
			0.00	07.29	16.44		150.0	

ES3DV3-SN:3327

September 18, 2017

10223- CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16- QAM)	×	5.53	67.69	16.73	0.00	150.0	±9.6 %
		Y	5.31	67.53	16.57		150.0	
		Z	5.34	67.85	16.88		150.0	
10224- CAB	IEEE 802,11n (HT Mixed, 150 Mbps, 64- QAM)	X	5.23	67.50	16.54	0.00	150.0	±9.6 %
		Y	5.07	67.40	16.42		150.0	
		Z	5.09	67.75	16.74		150.0	-
10225- CAB	UMTS-FDD (HSPA+)	X	2.90	66.45	15.66	0.00	150.0	±9.6 %
75.		Y	2.73	66.33	15.08		150.0	
		Z	2.82	67.36	15.82	-	150.0	
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	61.71	118.79	34.36	6.02	65.0	± 9.6 %
		Y	47.44	115.74	33.81		65.0	
		Z	100.00	132.34	38.33		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	42.26	110.32	31.55	6.02	65.0	± 9.6 %
		Y	40.92	111,46	32.09		65.0	
7020		Z	100.00	129.87	37.02		65.0	
10228- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	×	55.57	123.80	37.73	6.02	65.0	±9.6 %
		Y	27.39	111.17	34.52		65.0	
		Z	100.00	142.21	43.48		65.0	-
10229- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	56.59	117.04	33.83	6.02	65.0	± 9.6 %
		Y	43.16	113.85	33.23		65.0	
violation -	A THE PERSON NAMED IN COLUMN 2	Z	100.00	132.12	38.21	-	65.0	
10230- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	X	39.59	109.06	31.14	6.02	65.0	± 9.6 %
		Y	37.47	109.81	31.58		65.0	
		Z	100.00	129.75	36.93	and make the	65.0	-
10231- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	х	51,47	122.13	37.21	6.02	65.0	± 9.6 %
		Y	25,54	109.66	34.02		65.0	
		Z	100.00	142.05	43.38		65.0	
10232- CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	56.65	117.07	33.84	6.02	65.0	± 9.6 %
		Y	43.15	113.85	33.23		65.0	
		Z	100,00	132.14	38.21	To be de	65.0	
10233- CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	Х	39.65	109.10	31.15	6.02	65.0	± 9.6 %
		Y	37.43	109.80	31.58		65.0	
		Z	100,00	129.77	36.94	100000	65.0	
10234- CAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	47.52	120.30	36.62	6.02	65.0	± 9.6 %
		Y	24.03	108.25	33,50		65.0	
		Z	100.00	141.72	43.18		65.0	
10235- CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	57.00	117.19	33.87	6.02	65.0	±9.6 %
		Υ	43.35	113.95	33.26		65.0	
		Z	100,00	132,15	38.22		65.0	177
10236- CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	40.13	109.28	31.20	6.02	65.0	± 9.6 %
- 1.7	200	Y	37.86	109.97	31.61		65.0	
		Z	100.00	129.71	36.92		65.0	T
10237- CAD	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	52.33	122,48	37.31	6.02	65.0	± 9.6 %
		Y	25.72	109.83	34.07		65.0	
		Z	100.00	142.09	43.39		65.0	
10238- CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	56.74	117.10	33.84	6.02	65.0	±9.6 %
AD			12.72	111111111111111111111111111111111111111				
		Y	43.15	113.86	33.23		65.0	

Certificate No: ES3-3327_Sep17

Page 20 of 38



10239- CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	39.69	109.14	31.16	6.02	65.0	±9.6 %
		Υ	37.38	109.80	31.57		65.0	
		Z	100.00	129.79	36.95		65.0	
10240- CAD	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	52.08	122.39	37.28	6.02	65.0	±9.6 %
		Y	25.66	109.79	34.06		65.0	
		Z	100.00	142.10	43.39		65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	×	13.08	88.79	28.33	6.98	65.0	±9.6 %
		Y	13.70	90.83	28.85		65.0	
		Z	17.82	98.86	32.16		65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	×	11.36	85.69	27.08	6.98	65.0	±9.6 %
		Y	11.47	87.08	27.41		65.0	
		Z	17.36	98.30	31.90		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	9.09	82.66	26.84	6.98	65.0	± 9.6 %
		Y	8.87	83.00	26.76		65.0	
		Z	11.38	90.93	30.44		65.0	
	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	Х	9.61	81.05	21.12	3.98	65.0	±9.6 %
	10-14	Y	8.31	78.18	18.91		65.0	
		Z	10.68	83.07	20.72		65.0	
10245- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	Х	9.42	80.48	20.86	3.98	65.0	± 9.6 %
		Υ	7.99	77.35	18.53		65.0	
		Z	9.88	81.64	20.15		65.0	
10246- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	10.12	84.84	22,55	3.98	65.0	± 9.6 %
		Y	8.24	81.01	20.27		65.0	
		Z	12.34	88.48	22.91		65.0	
10247- CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	7.85	78.55	20.82	3.98	65.0	± 9.6 %
		Y	7.03	76.46	19.09		65.0	
		Z	7.80	79.37	20.33		65.0	
10248- CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	×	7.81	78.01	20.60	3.98	65.0	± 9.6 %
		Y	6.87	75.74	18.77		65.0	
		Z	7.47	78.26	19.88		65.0	
10249- CAD	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	11.30	86,99	23.99	3.98	65.0	± 9.6 %
		Y	10.30	85.25	22.78		65.0	
		Z	16.77	94.82	26.11	and the second	65.0	
10250- CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	Х	8.75	80.54	22.90	3.98	65.0	± 9.6 %
		Y	8.40	79.92	22.21		65.0	
		Z	9.27	83.15	23.70		65.0	
10251- CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	8.25	78.34	21.76	3.98	65.0	± 9.6 %
		Y	7.75	77.42	20.87		65.0	
		Z	8.27	79.91	22.10	-	65.0	
10252- CAD	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	10.72	85.58	24.20	3.98	65.0	± 9.6 %
		Y	10.47	85.49	23.95		65.0	
		Z	14.56	93.06	26.82		65.0	
10253- CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	×	8.10	77.27	21.62	3.98	65.0	± 9.6 %
	E DE L	Υ	7.77	76.72	21.05		65.0	
		Z	8.08	78.74	22.13		65.0	
10254- CAD	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	Х	8.47	77.99	22.21	3.98	65.0	± 9.6 %
hiller To a		Υ	8.20	77.65	21.72		65.0	



ES3DV3-SN:3327

September 18, 2017

10255-	LTE-TDD (SC-FDMA, 50% RB, 15 MHz,	X	9.23	81.36	22.87	3.98	65.0	± 9.6 %
CAD	QPSK)				1 2 1		23.44	1.00
		Υ	9.14	81.60	22.84		65.0	
10256-	LIE TOD (SC FDMA 4000) DD 44	Z	10.67	85.94	24.73		65.0	
CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	8.28	78.25	19.21	3.98	65.0	± 9.6 %
		Y	6.31	73.50	16.02		65.0	
		Z	7.16	76.22	17.01		65.0	14.
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	8.04	77.45	18.82	3.98	65.0	± 9.6 %
		Υ	6.02	72.54	15.50		65.0	11-1
	V-5	Z	6.55	74.66	16.27		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	8.35	81.24	20.61	3.98	65.0	±9.6 %
		Y	6.01	75.47	17.26		65.0	
40050	LTC TOO (OR STALL LAND TO A COLUMN	Z	7.39	79.54	18.76		65.0	
10259- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	8.21	79.25	21.55	3.98	65.0	± 9.6 %
		Y	7.58	77.79	20.22		65.0	
40000	LTE TOD (OR POLICE	Z	8.42	80,88	21.58		65.0	
10260- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	8,19	78.92	21.44	3.98	65.0	± 9.6 %
		Y	7.53	77,40	20.06		65.0	
		Z	8.26	80.23	21.32		65.0	
10261- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	10.55	85.66	23.85	3.98	65.0	±9.6 %
		Y	9.89	84.54	22.96		65.0	
40000	LTE TOO YOU FOLLS AND ON THE	Z	14.49	92.65	25.93		65.0	
10262- CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	Х	8.74	80.50	22.86	3.98	65.0	± 9.6 %
		Y	8.38	79.85	22.16		65.0	-
7.000		Z	9.24	83.06	23.64		65.0	1
10263- CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	8.24	78.33	21.76	3.98	65.0	± 9.6 %
		Y	7.74	77.40	20.87		65.0	
10001		Z	8.26	79.88	22.09		65.0	
10264- CAD	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	Х	10.64	85.42	24.12	3.98	65.0	± 9.6 %
		Y	10.36	85.28	23.85		65.0	
		Z	14.35	92.75	26.70		65.0	
10265- CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	Х	8.33	77.91	21.85	3.98	65.0	± 9.6 %
		Y	7.90	77.17	21.30		65.0	
10266- CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	8.27 8.70	79.33 78.61	22.44	3.98	65.0 65.0	± 9.6 %
UNU	INCIE, OTTOKNIJ	Y	8.39	78.22	22.06	_	65.0	
		Z	8.78	80.39	23.20		65.0	
10267- CAD	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	9.55	81.69	22.76	3.98	65.0	± 9.6 %
C/ ID	miles ser only	Y	9.43	81.96	22.83		65.0	
		Z	11.16	86.48	24.76		65.0	
10268- CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	8.72	77.20	21.92	3.98	65.0	± 9.6 %
1,100	2000	Y	8.42	76.83	21.63		65.0	
		Z	8.59	78.41	22.54		65.0	
10269- CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	8.63	76.76	21.82	3.98	65.0	± 9.6 %
-		Y	8.36	76.44	21.51		65.0	
		Z	8.49	77.87	22.37		65.0	
10270- CAD	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	8,84	78.58	21.71	3.98	65.0	± 9.6 %
		Y	8.74	78.84	21.81		65.0	
		Z	9.38	81.38	23.06		65.0	1



10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.65	66.78	15.56	0.00	150,0	± 9.6 %
		Y	2.56	66.83	15.09		150.0	
		Z	2.70	68.23	16.03		150.0	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.73	69.13	16.25	0.00	150.0	± 9.6 %
		Y	1.57	67.80	15.34		150.0	
V. V.		Z	1.90	71.78	17.65		150.0	
10277-	PHS (QPSK)	Х	5.14	68.76	13.26	9.03	50.0	± 9.6 %
CAA					10.00		-	
		Y	5.04	68.52	12.90		50,0	
10070		Z	3.97	66.34	10.94	7.7	50.0	
10278- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	9.36	80.51	20.72	9.03	50.0	± 9.6 %
		Y	7.54	76.12	18.32		50.0	
		Z	7.79	77.66	18.35		50.0	
10279- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	х	9.54	80.73	20.82	9.03	50.0	± 9.6 %
		Y	7.61	76.19	18.37		50.0	
		Z	7.88	77.79	18.44	199 1997 1	50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	X	1.73	70.88	15.41	0.00	150.0	± 9.6 %
		Y	1.22	67.33	12.63		150.0	
		Z	2.22	75.74	16.43		150.0	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	0.97	67.86	13.91	0.00	150.0	± 9.6 %
		Y	0.76	65.20	11.53		150.0	
1 7		Z	1.37	73.83	15.74		150.0	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	X	1.33	73.24	16.76	0,00	150.0	± 9.6 %
		Y	1.00	69.48	14.01		150.0	
		Z	9.50	100.83	24.93		150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	X	2.11	80.32	20.06	0.00	150.0	± 9.6 %
7.0.10		Y	1.72	76.91	17.56		150.0	
		Z	100.00	135.97	34.01		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	X	11.95	86.75	25.22	9.03	50.0	± 9.6 %
V. 4		Y	14.35	88.83	25.12		50.0	
		Z	23.98	99.41	28.43		50.0	
10297- AAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.94	70.60	17.01	0.00	150.0	± 9.6 %
		Y	2.63	69.43	16.49		150.0	
		Z	2.93	71.84	17.92		150.0	
10298- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	1.80	69.34	15.32	0.00	150.0	±9.6 %
		Y	1.36	66.50	12.86		150.0	
		Z	1.80	71.18	15.30	1.0 P	150.0	
10299- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	Х	3.50	73.28	16.46	0.00	150.0	± 9.6 %
		Y	2.59	69.53	13.47		150.0	
		Z	4.58	77.21	16.63	_	150.0	
10300- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	2.53	67.89	13.35	0.00	150.0	± 9.6 %
		Y	1.81	64.59	10.38		150.0	
		Z	2.06	66.51	11.36		150.0	
10301-	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	X	5.63	68.05	18.77	4.17	80.0	± 9.6 %
AAA		Y	5.72	69.39	19.02		80.0	
AAA	and the second s							
AAA				69.31	19.19		80 a	
10302- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)	Z X	5.55 6.21	69.31 69.18	19.19 19.83	4.96	80.0	± 9.6 %
10302-		Z.	5.55			4.96		± 9.6 %



10303- AAA	IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	6.05	69.28	19.90	4.96	80.0	±9.6 %
		Y	5.86	69.13	19.26		80.0	
		Z	5.72	69.31	19.60	_	80.0	
10304- AAA	IEEE 802.16e WIMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	5.68	68.47	19.01	4.17	80.0	± 9.6 %
		Y	5.51	68.51	18.52		80.0	
-		Z	5.42	68.81	18.90		80.0	
10305- AAA	JEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	8.90	82.64	26.81	6.02	50.0	± 9.6 %
		Y	10,24	84.42	26.04		50.0	
		2	8.13	81.10	25.22	5.77	50.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	X	6.52	72.41	22.10	6.02	50.0	± 9.6 %
		Y	7,29	76.07	23.16		50.0	
10007	LIBERT AND AN ANIMALIAN AND ANIMALIAN ANIMALIAN AND ANIMALIAN ANIMALIAN AND ANIMALIAN AND ANIMALIAN AND ANIMALIAN AND ANIMALIAN ANIMANIMANIMANIMANIMANIMANIMANIMANIMANIM	Z	6.04	71.95	21.29		50.0	
10307- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	X	6.63	73.21	22.29	6.02	50.0	± 9.6 %
		Υ	7.59	77.28	23.50		50.0	
10000	IEEE AND TO THE PARTY OF THE PA	Z	6.62	75.37	23.03		50.0	
10308- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	6.71	73.72	22.54	6.02	50.0	± 9.6 %
		Y	7.86	78.26	23.94		50.0	
40000	IEEE OOD TO WILLIAM TO THE	Z	6.80	76.23	23.44	11.00	50.0	
10309- AAA	IEEE 802:16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	X	6.65	72.80	22.31	6.02	50.0	± 9.6 %
		Y	7.35	76.27	23.30		50.0	
10210	ICCC 000 40- WILLIAM VIDD 45 40	Z	6.09	72.14	21.44		50.0	
10310- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	×	6.54	72.70	22.14	6.02	50.0	± 9.6 %
		Y	7.44	76.67	23.34		50.0	
40044	(TE FOR YOU FOLL)	Z	6.05	72.19	21.34	-0.00	50.0	
10311- AAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	×	3.29	69.79	16.61	0.00	150.0	± 9.6 %
		Y	2.99	68.72	16.15		150.0	
40040	1051140	Z	3.30	70.83	17.40		150.0	
10313- AAA	IDEN 1:3	X	8.07	79.86	19.14	6.99	70.0	± 9.6 %
		Y	8.83	81.65	20.11		70.0	
		Z	15.21	90.66	22.90		70.0	
10314- AAA	iDEN 1:6	Х	11.11	87.33	24.20	10,00	30.0	± 9.6 %
		Y	12.39	89.84	25.45		30.0	1
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	Z X	33.08 1.16	108.48 65.10	30.94 15.99	0.17	30.0 150.0	± 9.6 %
	moke, cope only elect	Y	1.18	64.55	15.38		150.0	
		Z	1.23	66.36	16.95	-	150.0	
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	4.73	67.03	16.54	0.17	150.0	± 9.6 %
-	The said of col	Y	4.57	67.10	16.39		150.0	
1-070		Z	4.58	67.49	16.75		150.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.73	67.03	16.54	0.17	150.0	± 9.6 %
		Y	4.57	67.10	16.39		150.0	1-0
F		Z	4.58	67.49	16.75		150.0	
10400- AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	Х	4.83	67.28	16.45	0.00	150.0	±9.6 %
		Y	4.59	67.22	16.28		150.0	
		Z	4.63	67.67	16.67	H-12	150.0	
10401- AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.49	67.42	16.59	0.00	150.0	± 9.6 %
		Y	5.31	67.33	16.45		150.0	
		Z	5.32	67.62	16.73		150.0	



10402- AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.77	67.84	16.63	0.00	150.0	± 9.6 %
		Y	5.58	67.64	16.47		150.0	
		Z	5.61	67.94	16.75		150.0	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	Х	1.73	70.88	15.41	0.00	115.0	± 9.6 %
		Y	1.22	67.33	12.63		115.0	
		Z	2.22	75.74	16.43		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	1.73	70.88	15.41	0.00	115.0	± 9.6 %
		Y	1.22	67.33	12.63		115.0	
		Z	2.22	75.74	16.43		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	X	100.00	122,28	30.90	0.00	100.0	± 9.6 %
		Y	100.00	118.47	28.84		100.0	
		Z	100.00	118.59	28.66		100.0	
10410- AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	119.85	30.23	3.23	80.0	± 9.6 %
		Y	100.00	122.08	31.09		80.0	
		Z	100.00	125,17	32.17		80.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.01	63.51	15.07	0.00	150.0	± 9.6 %
		Y	1.04	63.14	14.54		150.0	
		Z	1.08	64.75	16.03		150.0	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	4.63	66.88	16.38	0.00	150.0	± 9.6 %
		Y	4.46	66.93	16.23		150.0	
		Z	4.50	67.36	16.60		150.0	
10417- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	Х	4.63	66,88	16.38	0,00	150.0	± 9.6 %
		Y	4.46	66.93	16.23		150.0	
		Z	4.50	67.36	16.60		150.0	
10418- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	X	4.62	67.02	16.38	0.00	150.0	± 9.6 %
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Y	4.46	67.11	16.27		150.0	
		Z	4.50	67.57	16.66		150.0	
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	X	4.64	66.98	16.39	0.00	150.0	± 9.6 %
		Y	4.48	67.05	16.27		150.0	
		Z	4.51	67.50	16.65		150.0	
10422- AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	×	4.77	66.98	16.41	0.00	150.0	± 9.6 %
		Y	4.58	67.04	16.28		150.0	
		Z	4.62	67.46	16.64		150.0	
10423- AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.96	67.35	16.54	0.00	150.0	± 9.6 %
AAA		Υ	4.72	67.31	16.38		150.0	
		_	4.76	67.74	16.74		150.0	
		Z	7.70			-		
10424-	IEEE 802.11n (HT Greenfield, 72.2				16.51	0.00	150.0	+96%
10424- AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.87	67.29	16.51	0.00	150.0	± 9.6 %
1,14,11111111		X. Y	4.87 4.65	67.29 67.27	16.35	0.00	150.0	±9.6 %
AAA 10425-		X	4.87	67.29	1	0.00	1,000,000	
AAA 10425-	Mbps, 64-QAM) IEEE 802.11n (HT Greenfield, 15 Mbps,	Y Z X	4.87 4.65 4.68 5.47	67.29 67.27 67.70 67.66	16.35 16.72 16.69		150.0 150.0 150.0	
AAA 10425-	Mbps, 64-QAM) IEEE 802.11n (HT Greenfield, 15 Mbps,	Y Z X	4.87 4.65 4.68 5.47 5.28	67.29 67.27 67.70 67.66 67.54	16.35 16.72 16.69		150.0 150.0 150.0	±9.6 %
10424- AAA 10425- AAA 10426- AAA	Mbps, 64-QAM) IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK) IEEE 802.11n (HT Greenfield, 90 Mbps,	Y Z X	4.87 4.65 4.68 5.47	67.29 67.27 67.70 67.66	16.35 16.72 16.69		150.0 150.0 150.0	
10425- AAA 10426-	Mbps, 64-QAM) IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X Y Z X	4.87 4.65 4.68 5.47 5.28 5.30	67.29 67.27 67.70 67.66 67.54 67.87	16.35 16.72 16.69 16.56 16.86	0.00	150.0 150.0 150.0 150.0	±9.6 %



ES3DV3- SN:3327

September 18, 2017

10427- AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.48	67.65	16.68	0.00	150.0	± 9.6 %
		Y	5.28	67.47	16.52		150.0	
		Z	5.30	67.79	16.81		150.0	
10430- AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.27	70.32	18.07	0.00	150.0	± 9.6 %
		Y	4.18	71.48	18.11		150.0	
		Z	4.34	72.56	18.76		150.0	
10431- AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.35	67.46	16.43	0.00	150.0	±9.6 %
		Y	4.09	67.47	16.14		150.0	
		Z	4.15	68.09	16.61		150.0	
10432- AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	×	4.64	67.34	16.47	0.00	150.0	± 9.6 %
		Y	4.41	67.34	16.28		150.0	
40.400	1-5	Z	4.46	67.84	16.69		150.0	11 10 000
10433- AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	X	4.88	67.33	16.53	0.00	150.0	± 9.6 %
		Y	4.67	67.30	16.37	10000	150.0	
40401	W ARIU MAR T	Z	4.70	67.73	16.74		150.0	
10434- AAA	W-CDMA (BS Test Model 1, 64 DPCH)	Х	4.35	71.06	18.04	0.00	150.0	± 9.6 %
		Y	4.27	72.31	17.96		150.0	
		Z	4.52	73.72	18.74		150.0	
10435- AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	119.68	30.15	3,23	80.0	±9.6 %
		Y	100.00	121.88	31.00		80.0	
7 A T T A		Z	100.00	124.93	32.06		80.0	
10447- AAB	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.66	67.53	15.89	0.00	150.0	± 9.6 %
	A Company of the Comp	Y	3.34	67.34	15.17		150.0	
		Z	3.46	68.32	15.83		150.0	
10448- AAB	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	×	4.17	67.23	16.28	0.00	150.0	± 9.6 %
		Y	3.95	67.26	16.01	1	150.0	
18.772		Z	4.01	67.90	16.49		150.0	
10449- AAB	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	×	4.44	67.16	16.36	0.00	150.0	± 9.6 %
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Y	4.24	67.16	16.17	-	150.0	A section 1
-		Z	4.29	67.68	16.60		150.0	
10450- AAB	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.62	67.08	16.38	0.00	150.0	± 9.6 %
		Y	4.45	67.07	16.22		150,0	
Talled Co.		Z	4.49	67.52	16.61		150.0	
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	Х	3.58	67.79	15.60	0.00	150.0	±9.6 %
		Y	3.18	67.28	14.57		150.0	
	The state of the s	Z	3.32	68.40	15.29		150.0	-
10456- AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.33	68.22	16.84	0.00	150.0	± 9.6 %
	V	Y	6.23	68.24	16.81		150.0	
300.1		Z	6.25	68.51	17.06		150.0	
10457- AAA	UMTS-FDD (DC-HSDPA)	Х	3.83	65.50	16.10	0.00	150.0	± 9.6 %
		Y	3.79	65.63	15.94		150.0	
	the second secon	Z	3.81	66.04	16.33		150.0	
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	Х	3.99	70.32	17.52	0.00	150.0	± 9.6 %
		Y	3.82	71.13	16.98		150.0	
		Z	4.09	72.71	17.84		150.0	1
0459-	CDMA2000 (1xEV-DO, Rev. B, 3	X	5.08	67.72	17.95	0.00	150.0	±9.6 %
AAA	carriers)	110						
	carriers)	Υ	4.90	68.78	17.85		150.0	

Certificate No: ES3-3327_Sep17

Page 26 of 38



10460- AAA	UMTS-FDD (WCDMA, AMR)	X	1.00	70.54	17.39	0.00	150.0	±9.6 %
		Y	0.89	67.63	15.73		150.0	
		Z	1.29	75.71	20.27		150.0	
10461- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	123.73	32.09	3.29	80.0	± 9.6 %
		Y	100.00	126.11	33.00		80.0	
	Learner of the second	Z	100.00	133.47	35.95	-	80.0	
10462- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108,15	24.66	3.23	80.0	± 9.6 %
-		Y	100.00	109.08	24.89		80.0	
		Z	100.00	111.50	25.54	7	80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3.4,7,8,9)	Х	31.96	93.47	20,50	3.23	80.0	± 9.6 %
	F	Y	29.26	93.31	20.41		80.0	
	LET with a series of the series	Z	100.00	106.95	23.40		80.0	
10464- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	121.71	30.99	3.23	0.08	± 9.6 %
		Y	100.00	124.09	31.91		80.0	
		Z	100.00	131.36	34.79		80.0	11 11 11 11
10465- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.66	24.42	3.23	80.0	± 9.6 %
		Y	100.00	108.57	24.64		80.0	
		Z	100.00	110.83	25.23		80.0	
10466- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	17.31	86.93	18.72	3.23	80.0	± 9.6 %
		Υ	13.43	85.13	18.19		80.0	
		Z	100.00	106.32	23.11		80.0	
10467- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	×	100.00	121.92	31.09	3,23	80.0	± 9.6 %
		Y	100.00	124.35	32.03		80.0	
10 kg/1		Z	100.00	131.68	34.94		80.0	
10468- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.81	24.49	3.23	80.0	± 9.6 %
W-00		Y	100.00	108.76	24.73		80.0	
		Z	100.00	111.09	25.34		80.0	
10469- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	17.75	87.20	18.79	3.23	80,0	± 9.6 %
		Y	14.00	85.57	18.31		80.0	
		Z	100.00	106.37	23.13		80.0	
10470- AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	121.94	31.09	3.23	80.0	± 9.6 %
1-12		Y	100.00	124.37	32.03		80.0	
		Z	100.00	131.73	34.95		80.0	
10471- AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	×	100.00	107.76	24.46	3.23	80.0	± 9.6 %
		Y	100.00	108.72	24.71		80.0	
		Z	100,00	111.03	25.31		80.0	
10472- AAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	Х	17.66	87.12	18.76	3.23	80,0	±9.6 %
		Y	13.95	85.51	18.28		80.0	
		Z	100.00	106.29	23.09		80.0	
10473- AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	121.91	31.08	3.23	80.0	± 9.6 %
	A CONTRACTOR OF THE STATE OF TH	Υ	100.00	124.35	32.02	-	80.0	
		Z	100.00	131.71	34.94		80.0	
10474- AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	100.00	107.77	24.46	3.23	80,0	±9.6 %
	Name of the Control o	Y	100.00	108.72	24.71		80.0	
		Z	100.00	111.04	25.31		80.0	
10475- AAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	17.40	86.97	18.72	3.23	80.0	± 9.6 %
4,14		Y	13.69	85.34	18.23		80.0	1

ES3DV3-SN:3327

September 18, 2017

10477- AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.61	24.38	3.23	80.0	± 9.6 %
		Y	100.00	108.54	24.62		80.0	
		Z	100.00	110.80	25.20		80.0	
10478- AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	17.05	86.74	18.65	3.23	80.0	±9.6.9
		Y	13.36	85.05	18.15		80.0	
4		Z	100.00	106.23	23.06		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	16.38	96.25	26.55	3.23	80.0	±9.6%
		Y	67.88	117.63	31.48		80.0	
		Z	100.00	127.65	34.56		80.0	
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	16.32	90.60	23.14	3.23	80.0	± 9.6 %
		Y	50.74	104.65	25.94		80.0	
		Z	100.00	115.68	28.82	1 0 00	80.0	LEV
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	13,22	86.87	21.66	3.23	80.0	± 9.6 %
		Y	27.03	95.30	23.07		80.0	
40400	LEE TO LOS TOURS	Z	100.00	113.38	27.67		80.0	
10482- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.63	81.21	20.60	2.23	80.0	± 9.6 %
		Y	5.02	76.82	18.00		80.0	
10100	LTE TOO (OO FOLK) FOR THE	Z	15.01	92.87	23.34	-	80.0	
10483- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8.9)	X	8.49	81.37	20.38	2.23	80.0	± 9.6 %
_		Y	7.54	78.76	18,15		80.0	
40404	LTE TOD (OG FOLIA SOM DE SAUL	Z	35.01	99.36	24.35		80.0	
10484- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	7.78	79,92	19.89	2.23	80.0	± 9.6 %
		Y	6.47	76.62	17.39		80.0	
40.400	1	Z	20.63	92.43	22.48		80.0	1.00
10485- AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.69	81.72	21.56	2.23	80.0	±9.6 %
		Υ	5.83	79.61	20.17		80.0	
40400	LITE TOD (OC FOLKS FOR DD FARE	Z	12.75	92.98	24.87		80.0	
10486- AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.98	74.19	18.44	2.23	80.0	± 9.6 %
_		Y	4.45	72.65	16.90		80.0	
10487-	LITE TOD (DC EDMA 500) DD E MIL	Z	6.10	78.25	19.23	0.00	80.0	1000
AAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.89	73.60	18.21	2.23	80.0	± 9.6 %
			4.34	71.99	16.61		80.0	
10488- AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.72 6.16	76.98 79.05	18.74 21.16	2.23	80.0	± 9.6 %
		Y	5.43	77.51	20.38		80.0	
	CETA D COMP AND ADMINISTRATION OF THE PARTY	Z	7.50	84.30	23.25		80.0	
10489- AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.90	72.90	18.94	2.23	80.0	± 9.6 %
		Y	4.67	72.57	18.39		80.0	
		Z	5.24	75.60	19.93		80.0	
10490- AAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	×	4.95	72.51	18.81	2.23	0.08	± 9.6 %
		Y	4.72	72.25	18.27		80.0	
	- FE	Z	5.22	75.01	19.69		80.0	1000
10491- AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.72	75.84	20.07	2.23	80.0	± 9.6 %
_		Y	5.20	74.82	19.59		80.0	
	CHECK BY CAR STATE OF BUILDING	Z	6.10	78.75	21.47		80.0	1
10492- AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.06	71.53	18.65	2.23	80.0	± 9.6 %
		Y	4.83	71.25	18.27		80.0	
		Z	5.09	73.11	19.35		80.0	

Certificate No: ES3-3327_Sep17

Page 28 of 38



10493- AAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.11	71.29	18.57	2.23	80.0	± 9.6 %
		Y	4.87	71.04	18.18		80.0	
		Z	5.10	72.78	19.21		80.0	
10494- AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.48	77.93	20.67	2.23	80.0	± 9.6 %
7.7		Y	5.71	76.40	20.08		80.0	
		Z	7.06	81.21	22.25		80.0	
10495- AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.17	72.11	18.89	2,23	80.0	± 9.6 %
		Y	4.89	71.61	18.49		80.0	
		Z	5.16	73.55	19.61		80.0	
10496- AAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.18	71.63	18.73	2,23	80.0	±9.6 %
	A SECTION OF THE SECT	Y	4.93	71.25	18.37		80.0	
		Z	5.15	72.98	19.40		80.0	
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.04	76.98	18.31	2.23	80.0	± 9.6 %
		Y	3.11	70.04	14.27		80.0	
		Z	7.13	80.83	18.17		80.0	
10498- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.32	68.67	14.12	2.23	80.0	± 9.6 %
	A SE VICE CV Y	Y	1.86	62.15	9.60		80.0	
	APPROPRIES TO STORY FOR ALL	Z	1.91	63.20	10.07		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	3.19	67.89	13.65	2.23	80.0	± 9.6 %
		Y	1.77	61.49	9.11		80.0	
		Z	1.75	62.15	9.39		80.0	
10500- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.19	79.93	21.18	2.23	80.0	±9.6 %
		Y	5.54	78.44	20.15		80.0	
		Z	9.37	88.20	23.88		80.0	
10501- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.93	73.55	18.58	2.23	80.0	± 9.6 %
		Y	4.60	72.81	17.53		80.0	
	A R. P. L. CHERT S. H. L. CHERT S.	Z	5.75	77.30	19,53		80.0	
10502- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.94	73.24	18.41	2.23	80.0	± 9.6 %
		Y	4.60	72.48	17.33		80.0	
		Z	5.68	76.71	19.23		80.0	
10503- AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.08	78.83	21.06	2.23	80.0	±9.6 %
		Y	5.35	77.27	20.28		80.0	
	TAXES THE PROPERTY OF THE PARTY	Z	7.35	83.97	23.12		80.0	
10504- AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.88	72.81	18.90	2.23	80.0	± 9.6 %
		Y	4.64	72.45	18.33		80.0	
1 may -		Z	5.21	75.46	19.86		80.0	
10505- AAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.92	72.42	18.76	2.23	80.0	± 9.6 %
		Y	4.69	72.14	18.21		80.0	
Anene	1 TE TOO 100 EDIT	Z	5.18	74.89	19.63		80.0	
10506- AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.42	77.77	20.60	2.23	80.0	± 9.6 %
	and the same and t	Y	5.66	76.23	20.00		80.0	
10567	1 TE TOD 100 FOLL:	2	6.98	81.00	22.16		80.0	
10507- AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.15	72.05	18.85	2.23	0.08	± 9.6 %
		Y	4.87	71.55	18.45		80.0	
		Z	5.14	73.48	19.57		80.0	_

ES3DV3- SN:3327 September 18, 2017

10508- AAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.17	71.57	18.70	2.23	80.0	± 9.6 %
		Y	4.91	71.17	18.33		80.0	
		Z	5.13	72.90	19.35		80.0	
10509- AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.19	75.06	19.59	2.23	80.0	± 9.6 %
		Υ	5.68	74.12	19.23		80.0	
		Z	6.37	77.07	20.71		80.0	
10510- AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	х	5.54	71.31	18.62	2.23	80.0	± 9.6 %
		Y	5.25	70.80	18.30		80.0	
	the state of the same of the s	Z	5.40	72.14	19.15		80.0	
10511- AAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.54	70.92	18.51	2.23	80.0	± 9.6 %
		Y	5.29	70.52	18.22	. —	80.0	
		Z	5.40	71.73	19.01		80.0	
10512- AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.86	77.40	20.31	2.23	80.0	± 9.6 %
		Y	6.07	75.81	19.75		80.0	
4		Z	7.22	79.78	21.58		80.0	
10513- AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	5.49	71.84	18.82	2.23	80.0	±9.6%
		Y	5.17	71.11	18.43		80.0	
		Z	5.35	72.60	19.35		80.0	10000
10514- AAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.43	71.22	18.64	2.23	80.0	± 9.6 %
	Programme and the second	Y	5.16	70.64	18.29		80.0	
0000	ALCOHOLD TO THE	Z	5.29	71.94	19.13	1	80.0	
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	Х	0.98	63.75	15.16	0.00	150.0	± 9.6 %
		Y	1.00	63.29	14.58		150.0	
	Links and the contract of the	Z	1.05	65.08	16.19		150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	0.83	76.97	20.27	0.00	150.0	± 9.6 %
		Y	0.59	68.72	16.49		150.0	
-	TEDEVICE TO SERVICE THE ACT	Z	1.51	88.84	26.21		150.0	11 1000
10517- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.85	66.36	16.14	0.00	150.0	± 9.6 %
		Y	0.84	64.88	15.08		150.0	P. Barrier
1200		Z	0.96	68.59	17.81		150.0	
10518- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.63	66.95	16.36	0.00	150.0	± 9.6 %
		Y	4.45	67.02	16.22		150.0	Li Time
	ALLE VICTORIAN TO A STREET	Z	4.49	67.46	16.60		150.0	
10519- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.83	67.23	16.49	0.00	150.0	± 9.6 %
		Y	4.61	67.21	16.32		150.0	here.
1200		Z	4.64	67.64	16.69	1000	150.0	+
10520- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	х	4.68	67.20	16.42	0.00	150.0	± 9.6 %
		Y	4.47	67.14	16.23		150.0	
VAULU		Z	4.50	67.60	16.62		150.0	P
10521- AAA	IEEE 802,11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.62	67.21	16.40	0.00	150.0	± 9.6 %
		Y	4.40	67.12	16.21		150.0	1
1242		Z	4.44	67.58	16.61	17.75	150.0	1-1-
10522- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	Х	4.67	67.23	16.46	0.00	150.0	± 9.6 %
-		Y	4.46	67.25	16.31		150.0	
		Z	4.49	67.72	16.71		150.0	



10523- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.54	67.10	16.30	0.00	150.0	± 9.6 %
		Υ	4.37	67.19	16.20		150.0	
		Z	4.41	67.68	16.61		150.0	
10524- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.62	67.18	16.44	0.00	150.0	± 9.6 %
777		Y	4.40	67.18	16.29		150.0	
		Z	4.44	67.66	16.69		150.0	
10525- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	X	4.58	66.20	16.02	0.00	150.0	± 9.6 %
,,,,,	oopo daty dydio)	Y	4.42	66.27	15.90		150.0	
		Z	4.47	66.74	16.29		150.0	
10526- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.78	66.60	16.17	0.00	150.0	± 9.6 %
		Y	4.55	66.57	16.02		150.0	
100		Z	4.60	67.05	16.42		150.0	
10527- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	Х	4.69	66.56	16.12	0.00	150.0	± 9.6 %
-		Y	4.48	66.53	15.96		150.0	
		Z	4.53	67.03	16.37		150.0	
10528- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duly cycle)	X	4.71	66.58	16.15	0.00	150.0	± 9.6 %
		Y	4.50	66.55	15.99		150.0	
		Z	4.55	67.04	16.40		150.0	
10529- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	Х	4.71	66.58	16.15	0.00	150.0	± 9.6 %
		Y	4.50	66.55	15.99		150.0	
		Z	4.55	67.04	16.40		150.0	
10531- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	Х	4.72	66.72	16.18	0.00	150.0	± 9.6 %
		Y	4.47	66.59	15.98		150.0	
5.45		Z	4.52	67.10	16.39		150.0	
10532- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	Х	4.57	66.58	16.11	0.00	150.0	± 9.6 %
		Y	4.35	66.45	15.91		150.0	
		Z	4.40	66.96	16.33		150.0	
10533- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.72	66.61	16.13	0.00	150.0	± 9.6 %
		Y	4.50	66.62	15.99		150.0	
		Z	4.56	67.13	16.40		150.0	
10534- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	Х	5.23	66,71	16.20	0.00	150.0	± 9.6 %
		Y.	5.06	66.61	16.08		150.0	
		Z	5.09	66.98	16.40		150.0	
10535- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	Х	5,30	66.87	16.26	0.00	150.0	± 9.6 %
		Υ	5.11	66.77	16.15		150.0	
		Z	5.15	67.15	16.48		150.0	
10536- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	Х	5.17	66.84	16.23	0.00	150.0	±9.6 %
		Y	5.00	66.75	16.12		150.0	
		Z	5.04	67.15	16.46		150.0	77.7
10537- AAA	IEEE 802,11ac WiFi (40MHz, MCS3, 99pc duty cycle)	Х	5.23	66.82	16.22	0,00	150.0	± 9.6 %
	Parameter 2	Y	5.05	66.72	16.11		150.0	
		Z	5.09	67.11	16.44		150.0	
10538- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)	X	5.34	66.88	16.30	0.00	150.0	± 9.6 %
		Y	5.13	66.71	16.14		150.0	
		Z	5.16	67.07	16.46		150.0	
10540-	IEEE 802.11ac WiFi (40MHz, MCS6,	X	5.25	66.84	16.29	0.00	150.0	±9.6 %
	99pc duty cycle)						4 4 4	
AAA	99pc duty cycle)	Y	5.06	66.68	16.14		150.0	



ES3DV3-SN:3327

September 18, 2017

10541- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.22	66,72	16.22	0.00	150.0	± 9.6 %
		Y	5.03	66.57	16.07		150.0	
		Z	5.07	66.94	16.40		150.0	
10542- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.38	66.79	16.27	0.00	150.0	± 9.6 %
		Y	5.19	66.68	16.14		150.0	
VIII.		Z	5.22	67.03	16.46		150.0	
10543- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5.47	66,81	16.30	0.00	150.0	± 9.6 %
		Y	5.26	66.71	16.19		150.0	
10511	THE STATE OF THE S	Z	5.29	67.07	16.50		150.0	
10544- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	×	5.52	66.80	16.18	0.00	150.0	± 9.6 %
		Y	5.40	66.71	16.07		150.0	
10545-	IEEE and de voie ieee v	Z	5.43	67.03	16.37		150.0	
AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	×	5.74	67.26	16.35	0.00	150.0	± 9.6 %
		Y	5.59	67.17	16.26		150.0	
40540	LIEFE OOD ALL LIVE	Z	5.62	67.51	16.56		150.0	
10546- AAA	IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	Х	5.62	67.08	16.28	0.00	150.0	± 9.6 %
		Y	5.43	66.84	16.11	4-1	150.0	4-
40512		Z	5.47	67.17	16.41		150.0	
10547- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.71	67.17	16.31	0.00	150.0	± 9.6 %
		Y	5.51	66.94	16.15		150.0	
10510	1000 444	Z	5.55	67.27	16.45		150.0	
10548- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	Х	6.05	68.39	16.90	0.00	150.0	± 9.6 %
		Y	5.70	67.70	16.51		150.0	
		Z	5.74	68.06	16.82		150.0	
10550- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	X	5,63	67.05	16.27	0.00	150.0	± 9.6 %
		Y	5.49	67.01	16.21		150.0	
****		Z	5.53	67.36	16.51		150.0	
10551- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	×	5.64	67.11	16.26	0.00	150.0	±9.6 %
		Y	5.45	66.86	16.09		150.0	
		Z	5.47	67.17	16.38		150.0	
10552- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.55	66.87	16.16	0.00	150.0	± 9.6 %
		Y	5.40	66.80	16.06	-	150.0	
		Z	5.44	67.13	16.36	0.00	150.0	
10553- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	×	5.64	66.93	16.21	0.00	150.0	± 9.6 %
		Y	5.47	66.77	16.08		150.0	
		Z	5.49	67.09	16.37	Total I	150.0	
10554- AAB	IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	×	5.93	67.19	16.27	0.00	150.0	± 9.6 %
		Y	5.82	67.06	16.16	- 1	150.0	
		Z	5.85	67.36	16.43	1. L 71	150.0	
10555- AAB	IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	×	6.08	67.52	16.42	0.00	150.0	±9.6 %
		Y	5.93	67.32	16.28		150.0	
		Z	5.96	67.63	16.55		150.0	
10556- AAB	IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle).	X	6.09	67.55	16.42	0.00	150.0	±9.6 %
		Y	5.96	67.41	16.31		150.0	
		Z	5.99	67.73	16.59		150.0	
10557- AAB	IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	×	6.07	67.49	16.41	0.00	150.0	± 9.6 %
		Y	5.91	67.27	16.26		150.0	
		Z	5.94					

Certificate No: ES3-3327_Sep17

Page 32 of 38

10558- AAB	IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	X	6.13	67.68	16.53	0.00	150.0	± 9.6 %
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Y	5.94	67.39	16.34		150.0	
		Z	5.97	67.69	16.61		150.0	
10560- AAB	IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	6.12	67.49	16.47	0.00	150.0	± 9,6 %
	1	Y	5.94	67.27	16.31		150.0	
		Z	5.97	67.57	16.58		150.0	
10561- AAB	IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	X	6,03	67,47	16.50	0.00	150.0	± 9.6 %
		Y	5.88	67.27	16.34		150.0	
		Z	5.91	67.57	16.62		150.0	
10562- AAB	IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	6.20	67.97	16.75	0.00	150.0	± 9.6 %
		Y	5.95	67.47	16.45		150.0	
		Z	5.98	67.78	16.73		150.0	
10563- AAB	IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	X	6.58	68.66	17.04	0.00	150.0	± 9.6 %
		Y	6.04	67.41	16.38		150.0	
		Z	6.07	67.70	16.65		150.0	
10564- AAA	IEEE 802 11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle)	X	4.97	67.09	16.55	0.46	150.0	± 9.6 %
		Y	4.79	67.11	16.40		150.0	
		Z	4.82	67.50	16.74		150.0	
10565- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle)	X	5.21	67.54	16.86	0.46	150.0	± 9.6 %
		Y	4.99	67.51	16.70		150.0	
		Z	5.01	67.89	17.03		150.0	
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	X	5.05	67.42	16.70	0.46	150.0	±9.6 %
		Y	4.83	67.35	16.52		150.0	
		Z	4.86	67.74	16.86		150.0	
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	X	5.07	67.76	17.01	0.46	150.0	±9.6 %
		Y	4.86	67.73	16.87		150.0	
		Z	4.89	68.12	17.21		150.0	
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	×	4.97	67.22	16.49	0.46	150.0	±9.6 %
		Y	4.74	67.15	16.30		150.0	
		Z	4.77	67.57	16.67		150.0	
10569- AAA	IEEE 802,11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	X	5.01	67.80	17.03	0.46	150.0	± 9.6 %
		Y	4.85	67.94	17.00		150.0	
		Z	4.88	68.35	17,35		150.0	
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	×	5.06	67.67	16.99	0.46	150.0	± 9.6 %
		Y	4.85	67.73	16.90		150.0	
		Z	4.88	68.13	17,24		150.0	1
10571- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	Х	1.35	66.65	16.75	0.46	130.0	± 9.6 %
		Y	1.36	65.85	16.03		130.0	
		Z	1.42	67.88	17.67	100	130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.38	67.37	17.15	0.46	130.0	± 9.6 %
		Y	1.38	66.47	16.39		130.0	
a and a		Z	1.45	68.73	18.16		130.0	
10573- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	Х	33.02	127.11	34.22	0.46	130.0	±9.6 %
		Υ	2.78	86.95	23.34		130.0	
	A CONTROL OF THE PARTY OF THE PARTY.	Z	100.00	153.11	41.78	1	130.0	
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.76	75.44	20.83	0.46	130.0	± 9.6 %
		Y	1.57	72.37	19.24		130.0	
		Z.	2.03	79.09	22.93		130.0	-



ES3DV3- SN:3327

September 18, 2017

10575- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	4.78	66.97	16.66	0.46	130.0	± 9.6 %
		Y	4.62	67.03	16.50		130.0	
		Z	4.63	67.40	16.85		130.0	
10576- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	х	4.81	67.11	16.71	0.46	130.0	± 9.6 %
		Y	4.65	67.21	16.58		130.0	
		Z	4.66	67.60	16.93		130.0	
10577- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	X	5.03	67.42	16.88	0.46	130.0	± 9.6 %
		Y	4.82	67.44	16.72		130.0	
The last	Table Prints and Landson	Z	4.83	67.81	17.06		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	X	4.92	67.58	16.97	0.46	130.0	± 9.6 %
	A 2-4-1	Y	4.72	67.60	16.83		130.0	
10000		Z	4.74	67.98	17.18		130.0	-
10579- AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	X	4.71	67.00	16.38	0.46	130.0	± 9.6 %
		Y	4.49	66.86	16.13		130.0	
40500	TENER DOMESTIC TO THE PARTY OF	Z	4.51	67.28	16.51		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	×	4.75	67.00	16.39	0.46	130.0	± 9.6 %
		Y	4.53	66.92	16.16		130.0	-
10001	UPPER DOD AND MISTER A COLUMN	Z	4.55	67.35	16.54	-	130.0	
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	X	4.83	67.65	16.92	0.46	130.0	±9.6 %
		Y	4.64	67.69	16.81		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS-	X	4.66 4.66	68.11 66.79	17.18 16.19	0.46	130.0	±9.6 %
AVA	OFDM, 54 Mbps, 90pc duty cycle)	14	4.40	00.00	45.04		400.0	
_		Z	4.42	66.63	15.91 16.31		130.0	
10583- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.78	66.97	16.66	0.46	130.0	±9.6 %
7001	maps, sope day dyna/	Y	4.62	67.03	16.50		130.0	
		Z	4.63	67.40	16.85		130.0	
10584- AAA	IEEE 802,11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.81	67.11	16.71	0.46	130.0	± 9.6 %
		Y	4.65	67.21	16.58		130.0	
Carlotte Control		Z	4.66	67.60	16.93		130.0	
10585- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	Х	5.03	67.42	16.88	0.46	130.0	± 9.6 %
		Y	4.82	67.44	16.72		130.0	
		Z	4.83	67.81	17.06	J. Jane	130.0	1 200
10586- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	Х	4.92	67.58	16.97	0.46	130.0	± 9.6 %
		Y	4.72	67.60	16.83		130.0	
		Z	4.74	67.98	17.18		130.0	
10587- AAA	IEEE 802.11a/h WIFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.71	67.00	16.38	0.46	130.0	± 9.6 %
		Y	4.49	66.86	16.13	-	130.0	
12.05		Z	4.51	67.28	16.51		130.0	2.7.2
10588- AAA	IEEE 802.11a/h WIFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	Х	4.75	67.00	16.39	0.46	130.0	± 9.6 %
		Y	4.53	66.92	16.16		130.0	
10505	THE BOOK WAS A MINE OF THE PARTY OF THE PART	Z	4.55	67.35	16.54	477-	130.0	200
10589- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	×	4.83	67.65	16.92	0.46	130.0	± 9.6 %
		Y	4.64	67.69	16.81		130.0	
10500	TEER DOG 44-11-MIRE TO GET 10-10-10-10-10-10-10-10-10-10-10-10-10-1	Z	4.66	68.11	17.18	0.10	130.0	
10590- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.66	66.79	16.19	0.46	130.0	±9.6 %
		Y	4.42	66.63	15.91		130.0	
		Z	4.44	67.06	16.31		130.0	1



ES3DV3- SN:3327

September 18, 2017

10591- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.93	67.00	16.74	0.46	130.0	± 9.6 %
		Y	4.77	67.09	16.61		130.0	
		Z	4.78	67.43	16.94		130.0	
10592- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	×	5.10	67.34	16.86	0.46	130.0	± 9.6 %
		Y	4.90	67.39	16.73		130.0	
	THE THE PARTY OF T	Z	4.91	67.74	17.06		130.0	
10593- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle)	×	5.03	67.29	16.77	0.46	130.0	± 9.6 %
77.1		Y	4.82	67.28	16.60		130.0	
		Z	4.83	67.64	16.94		130.0	
10594- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	5.08	67.43	16.90	0.46	130.0	± 9.6 %
	1	Y	4.87	67.45	16.76		130.0	
	Manager of the second of the s	Z	4.89	67.81	17.10		130.0	
10595- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duly cycle)	X	5.05	67.41	16.81	0.46	130.0	± 9.6 %
		Y	4.84	67.43	16.67		130.0	
		Z	4.86	67.81	17.02		130.0	
10596- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.99	67.42	16.82	0.46	130.0	± 9,6 %
		Y	4.78	67.41	16.67		130.0	
		Z	4.79	67.80	17.03	H	130.0	1-1-
10597- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	Х	4.94	67.35	16.73	0.46	130.0	± 9.6 %
	Take a description of the second	Y	4.73	67.29	16.53		130.0	
		Z	4.74	67.68	16.89		130.0	1 - 70
10598- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.92	67.56	16.96	0.46	130.0	± 9.6 %
		Y	4.71	67.51	16.79		130.0	-
		Z	4.73	67.89	17.14		130.0	
10599- AAA	IEEE 802.11π (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.60	67.58	16.94	0,46	130.0	± 9.6 %
		Y	5.44	67.55	16.84		130.0	1.2
		Z	5.45	67.84	17.12		130.0	
10600- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	X	5.80	68.21	17.23	0.46	130.0	± 9.6 %
		Y	5.56	67.97	17.02		130.0	
		Z	5.58	68.29	17.33		130.0	
10601- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.65	67.84	17.06	0.46	130.0	± 9.6 %
		Y	5.45	67.71	16.91		130.0	
		Z	5.47	68.02	17.21		130.0	
10602- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.74	67.84	16.98	0.46	130.0	± 9.6 %
		Y	5.59	67.90	16.92		130.0	
		Z	5.60	68.22	17.23		130.0	-
10603- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	Х	5.82	68.10	17.23	0.46	130.0	± 9.6 %
	The first of the second second	Y	5.67	68.21	17.21		130.0	
12.22		Z	5.68	68.52	17.51		130.0	
10604- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.60	67.54	16.94	0.46	130.0	± 9.6 %
		Y	5.54	67.84	17.01		130.0	
1000-		Z	5.55	68.13	17.30		130.0	11.5
10605- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	×	5.73	67.92	17.14	0.46	130.0	± 9.6 %
		Y	5.56	67.86	17.02		130.0	
****	THE RESERVE OF THE PARTY OF THE	Z	5.57	68.17	17.32		130.0	-
10606- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle)	X	5.49	67.32	16.71	0.46	130.0	± 9.6 %
		Y	5.31	67.21	16.55		130.0	
		Z	5.33	W1 .E.	10,00		130.0	



ES3DV3-SN:3327

September 18, 2017

10607- AAA	IEEE 802,11ac WiFi (20MHz, MCS0, 90pc duty cycle)	X	4.76	66.29	16.34	0.46	130.0	± 9.6 %
		Y	4.61	66.41	16.24		130.0	
	7 - V	Z	4.63	66.82	16.60		130.0	
10608- AAA	IEEE 802,11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.97	66.72	16.51	0.46	130.0	± 9.6 %
		Y	4.76	66.75	16.39		130.0	
		Z	4.79	67,17	16.75		130.0	
10609- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	x	4.86	66,60	16.37	0.46	130.0	± 9.6 %
100		Y	4.65	66.60	16.22		130.0	
100		Z	4.69	67.03	16.60		130.0	
10610- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.91	66.74	16.52	0.46	130.0	± 9.6 %
		Y	4.70	66.76	16.38		130.0	
		Z	4.73	67.18	16.75		130.0	
10611- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	×	4.83	66.58	16.39	0.46	130.0	± 9.6 %
		Y	4.62	66.57	16.23		130.0	
10015	total and the same of the same	Z	4.65	67.00	16.61		130.0	
10612- AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	×	4.85	66.75	16.44	0.46	130.0	± 9.6 %
		Y	4.62	66.71	16.28		130.0	
10015		Z	4.65	67.17	16.67	-	130.0	
10613- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	×	4.86	66.67	16.34	0.46	130,0	± 9.6 %
		Y	4.61	66.55	16,13		130.0	
10011		Z	4.65	66.99	16.52		130.0	
10614- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	×	4.79	66.81	16.54	0.46	130.0	± 9.6 %
		Y	4.58	66.76	16.37	-	130.0	
		Z	4.61	67.20	16.76		130.0	
10615- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	×	4.84	66.43	16.19	0.46	130.0	± 9.6 %
		Y	4.62	66.41	16.01		130.0	
10010		Z	4.65	66.86	16.40		130.0	
10616- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.42	66.82	16.53	0.46	130.0	± 9.6 %
		Y	5.24	66.73	16.41		130.0	
10017	APPE 200 11 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Z	5.26	67.06	16.72		130.0	
10617- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	X	5.48	66.95	16.57	0.46	130.0	± 9.6 %
		Y	5.31	66.93	16.49		130.0	
10618- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5.33 5.37	67.26 67.00	16.80 16.61	0.46	130.0 130.0	± 9.6 %
0.340	1224	Y	5.21	66.97	16.52		130.0	
		Z	5.23	67.32	16.84		130.0	100
10619- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.40	66.85	16.48	0.46	130.0	± 9.6 %
		Y	5.22	66.76	16.35		130.0	
		Z	5.24	67.11	16.67		130.0	
10620- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	×	5.50	66.93	16.57	0.46	130.0	±9.6 %
		Y	5.29	66.77	16.40		130.0	
	100 ft 31	Z	5.31	67.11	16.71		130.0	
10621- AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	×	5.47	66.95	16.68	0.46	130.0	±9.6 %
	2072232	Y	5.30	66.89	16.58		130.0	
		Z	5.31	67.19	16.87		130.0	D.I.T.
10622- AAA	IEEE 802 11ac WiFi (40MHz, MCS6, 90pc duty cycle)	X	5.48	67.11	16.76	0.46	130.0	± 9.6 %
		Y	5.29	66.99	16.62		130.0	
		Z	5.31	67.32	16.93		130.0	
		_		A CONTRACTOR OF THE PARTY OF TH	Account to the second second			

Certificate No: ES3-3327_Sep17

Page 36 of 38



10624- AAA 10625- AAA 10626- AAA 10627- AAA 10628- AAA 10629- AAA 10630- AAA 10631- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle) IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	Y Z X Y Z X Y Z X Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X Y Y Z X X Y Y Z X X Y Y Z X X Y Y Z X X Y Y X X Y Y Z X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X Y Y X X X Y Y X X X Y Y X X X Y Y X X X Y Y X X X Y Y X X X Y Y X X X X Y Y X X X X Y Y X X X X Y Y X X X X X Y Y X X X X X X Y Y X	5.18 5.19 5.56 5.37 5.39 6.01 5.53 5.68 5.56 5.58 5.95 5.81 5.83 5.75	66.53 66.86 66.88 66.78 67.09 68.09 67.13 67.40 66.84 66.77 67.06 67.47	16.27 16.57 16.59 16.45 16.75 17.25 16.69 16.96 16.46 16.37 16.64	0.46 0.46 0.46	130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0	±9.6 % ±9.6 % ±9.6 %
10625- AAA 10626- AAA 10627- AAA 10628- AAA 10629- AAA	JEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	X Y Z X Y Z X Y Z X Y Z X	5.19 5.56 5.37 5.39 6.01 5.53 5.53 5.68 5.56 5.58 5.95	66.86 66.88 66.78 67.09 68.09 67.13 67.40 66.84 66.77 67.06 67.47	16.57 16.59 16.45 16.75 17.25 16.69 16.96 16.46 16.37 16.64 16.74	0.46	130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0	±9.6 %
10625- AAA 10626- AAA 10627- AAA 10628- AAA 10629- AAA	JEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)	Y Z X Y Z X Y Z X X	5.56 5.37 5.39 6.01 5.53 5.53 5.68 5.56 5.58 5.95 5.81 5.83	66.88 66.78 67.09 68.09 67.13 67.40 66.84 66.77 67.06 67.47	16.45 16.75 17.25 16.69 16.96 16.46 16.37 16.64 16.74	0.46	130.0 130.0 130.0 130.0 130.0 130.0 130.0 130.0	±9.6 %
10626- AAA 10627- AAA 10628- AAA 10629- AAA	JEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	Z X Y Z X Y Z X Y Z X X Y Z X X X X X X X X X	5.39 6.01 5.53 5.53 5.68 5.56 5.58 5.95 5.81 5.83	67.09 68.09 67.13 67.40 66.84 66.77 67.06 67.47	16.75 17.25 16.69 16.96 16.46 16.37 16.64 16.74	0.46	130.0 130.0 130.0 130.0 130.0 130.0 130.0	±9.6 %
10626- AAA 10627- AAA 10628- AAA 10629- AAA	JEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	Z X Y Z X Y Z X Y Z X X Y Z X X X X X X X X X	5.39 6.01 5.53 5.53 5.68 5.56 5.58 5.95 5.81 5.83	67.09 68.09 67.13 67.40 66.84 66.77 67.06 67.47	16.75 17.25 16.69 16.96 16.46 16.37 16.64 16.74	0.46	130.0 130.0 130.0 130.0 130.0 130.0 130.0	±9.6 %
10626- AAA 10627- AAA 10628- AAA 10629- AAA 10630- AAA	JEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) JEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X Y Z X Y Z X	5.53 5.53 5.68 5.56 5.58 5.95 5.81 5.83	68.09 67.13 67.40 66.84 66.77 67.06 67.47	17.25 16.69 16.96 16.46 16.37 16.64 16.74	0.46	130.0 130.0 130.0 130.0 130.0	±9.6 %
10627- AAA 10628- AAA 10629- AAA 10630- AAA	JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X Y Z X Y Z	5.53 5.68 5.56 5.58 5.95 5.81 5.83	67.40 66.84 66.77 67.06 67.47	16.96 16.46 16.37 16.64 16.74		130.0 130.0 130.0 130.0	
10627- AAA 10628- AAA 10629- AAA 10630- AAA	JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X Y Z X Y Z	5.53 5.68 5.56 5.58 5.95 5.81 5.83	67.40 66.84 66.77 67.06 67.47	16.96 16.46 16.37 16.64 16.74		130.0 130.0 130.0 130.0	
10627- AAA 10628- AAA 10629- AAA 10630- AAA	JEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)	X Y Z X Y Z	5.68 5.56 5.58 5.95 5.81 5.83	66.84 66.77 67.06 67.47	16.46 16.37 16.64 16.74		130.0 130.0 130.0	
10628- AAA 10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	X Y Z X	5.58 5.95 5.81 5.83	67.06 67.47 67.41	16.64 16.74	0.46	130.0	± 9.6 %
10628- AAA 10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	X Y Z X	5.95 5.81 5.83	67.06 67.47 67.41	16.64 16.74	0.46	130.0	± 9.6 %
10628- AAA 10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	Y Z X	5.81 5.83	67.47 67.41	16.74	0.46		± 9.6 %
10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	Z	5.83		10		1	110000000000000000000000000000000000000
10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	X		67.70	16.66	-	130.0	
10629- AAA 10630- AAA	90pc duty cycle) IEEE 802.11ac WiFi (80MHz, MCS3,	X		67.72	16.95		130.0	
10630- AAA 10631-	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	Y	0.70	67.03	16.46	0.46	130.0	± 9.6 %
10630- AAA 10631-	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)		5.57	66.78	16.27	-	130.0	
10630- AAA 10631-	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	Z	5.59	67.08	16.56		130.0	
10631-		X	5.83	67.08	16.48	0.46	130.0	± 9.6 %
10631-		Y	5.66	66.92	16.34		130.0	
10631-	And the first second	Z	5.68	67.24	16.63		130.0	
	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	X	6.46	69.14	17.51	0.46	130.0	±9.6 %
	10. 47.4	Y	5.98	68.08	16.93		130.0	
		Z	6.01	68.42	17.23		130.0	
	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	X	6.24	68.58	17,40	0.46	130.0	± 9.6 %
		Y	5.90	67.96	17.05		130.0	
		Z	5.92	68.25	17.32		130.0	
10632- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	×	5.91	67,45	16.85	0.46	130.0	± 9.6 %
		Y	5.79	67.52	16.85		130.0	
-0.24		Z	5.81	67.82	17.13		130.0	-
10633- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	x	5.82	67.19	16.56	0.46	130.0	±9.6 %
	71 72 72 72 72 72 72 72 72 72 72 72 72 72	Y	5.63	66.97	16.40		130.0	
	A CONTRACTOR OF THE PARTY OF TH	Z	5.64	67.25	16.68		130.0	
10634- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.79	67.17	16.61	0.46	130.0	± 9.6 %
		Y	5.61	67.01	16.47		130.0	
		Z	5.63	67.30	16.75		130.0	-
10635- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.70	66.61	16.09	0.46	130.0	± 9.6 %
		Y	5.48	66.31	15.86		130.0	-
		Z	5.50	66.62	16.16	-10	130.0	
10636- AAB	IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	6.10	67.24	16.56	0.46	130.0	± 9.6 %
		Y	5.99	67.13	16.46	= ====	130.0	
		Z	6.01	67.39	16.71		130.0	
10637- AAB	IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.27	67.65	16.75	0.46	130.0	± 9.6 %
		Y	6.13	67.48	16.62		130.0	
		Z	6.15	67.76	16.88		130.0	
10638- AAB	IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle)	Х	6.27	67.63	16.72	0.46	130.0	± 9.6 %
		Y	6.14	67.48	16.60		130.0	_
		Z	6.16	67.77	16.86		130.0	

ES3DV3- SN:3327 September 18, 2017

10639- AAB	IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.26	67.59	16.75	0.46	130.0	± 9.6 %
		Y	6.10	67.38	16.59	111111111111111111111111111111111111111	130.0	1
		Z	6.12	67.65	16.85		130.0	
10640- AAB	IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.29	67.69	16.74	0.46	130.0	± 9.6 %
		Y	6.08	67.35	16.52		130.0	
		Z	6.10	67.63	16.78		130.0	
10641- AAB	IEEE 802.11ac WiFl (160MHz, MCS5, 90pc duty cycle)	X	6.29	67.45	16.64	0.46	130.0	±9.6 %
		Y	6.17	67.38	16.56		130.0	
		Z	6.19	67.66	16.82		130.0	
10642- AAB	IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.34	67.72	16.93	0.46	130.0	± 9.6 %
10		Y	6.18	67.55	16.80		130.0	
		Z	6.20	67.81	17.05		130.0	-710
10643- AAB	IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)	X	6.18	67.45	16.71	0.46	130.0	± 9.6 %
		Y	6.04	67.28	16.56		130.0	
		Z	6.06	67.56	16.83		130.0	
10644- AAB	IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	×	6.41	68.15	17.08	0.46	130,0	± 9.6 %
		Y	6.11	67.52	16.70		130.0	
		Z	6.13	67.79	16.97		130.0	
10645- AAB	IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.89	69.09	17.50	0.46	130.0	± 9.6 %
		Y	6.27	67.66	16.74		130.0	
	1	Z	6.29	67.94	17.01		130.0	
10646- AAD	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	X	64.19	131.45	42.80	9.30	60.0	± 9.6 %
	ALCOHOLD VIEW VIEW	Y	39.44	122.26	40.64		60.0	
		Z	100.00	149.64	48.88		60.0	
10647- AAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	68.56	133.96	43.63	9.30	60.0	± 9.6 %
		Y	38.11	122.47	40.87		60.0	
		Z	100.00	151.09	49.52		60.0	
10648- AAA	CDMA2000 (1x Advanced)	X	0.78	64.98	11.92	0.00	150.0	±9.6 %
		Y	0.62	63.02	9.83		150.0	
		Z	0.79	66.75	12.01		150.0	
10652- AAB	LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	×	4.43	69.08	17.63	2.23	80.0	± 9.6 %
		Y	4.33	69.22	17.26		80.0	
40050	130 200 (000)	Z	4.47	70.61	18.13		80.0	
10653- AAB	LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	X	4.88	68,18	17.64	2.23	80.0	±9.6 %
		Y	4.77	68.18	17.37		80.0	
1005		Z	4.79	68.93	17.94	1377	80.0	
10654- AAB	LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	Х	4.81	67.82	17.62	2.23	80.0	± 9.6 %
		Y	4.74	67.78	17.39		80.0	
		Z	4.74	68.41	17.91		80.0	
10655- AAB	LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.87	67.84	17.67	2.23	80.0	± 9.6 %
		Y	4.81	67.69	17.41		80.0	
		Z	4.79	68.28	17.91		80.0	

^E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client DT&C (Dymstec)

Certificate No: EX3-3930_Jul17

CALIBRATION CERTIFICATE

Object EX3DV4 - SN:3930

Calibration procedure(s) A CAL-01.v9, QA CAL-14.v4, QA CAL-23.v5, QA CAL-25.v6

Calibration procedure for dosimetric E-field probes

Calibration date: July 26, 2017

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

plant work the state of			
Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 660	7-Dec-16 (No. DAE4-660_Dec16)	Dec-17
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-16)	In house check: Oct-17

Name Function Signature

Calibrated by: Michael Weber Laboratory Technician

Approved by: Katja Pokovic Technical Manager

Issued: July 26, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of Schmid & Partner

Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst C Service suisse d'étalonnage

Servizio svizzero di taratura Swiss Calibration Service

Accreditation No.: SCS 0108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid
NORMx,y,z sensitivity in free space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty_cycle) of the RF signal A, B, C, D modulation dependent linearization parameters

Polarization φ φ rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, ", "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from handheld and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is
 implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
 in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z; Dx,y,z; VRx,y,z: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORMx (no uncertainty required).

FCC ID: SS4EF501R



EX3DV4 - SN:3930

July 26, 2017

Probe EX3DV4

SN:3930

Manufactured: July 24, 2013 Calibrated: July 26, 2017

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: EX3-3930_Jul17

Page 3 of 38



DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (µV/(V/m) ²) ^A	0.41	0.48	0.41	± 10.1 %
Norm (μV/(V/m) ²) ^A DCP (mV) ^B	102.3	100.5	102.3	1

Modulation Calibration Parameters

DID	Communication System Name		A dB	B dB√μV	С	D dB	VR mV	Unc ^b (k=2)
0	CW	X	0.0	0.0	1.0	0.00	156.8	±3.3 %
		Y	0.0	0.0	1.0		166.7	
		Z	0.0	0.0	1.0	-	161.8	11 7

Note: For details on UID parameters see Appendix.

Sensor Model Parameters

	C1 fF	C2 fF	α V-1	T1 ms.V ⁻²	T2 ms.V ⁻¹	T3 ms	T4 V-2	T5 V-1	T6
X	42,59	309.7	34.17	18.79	0.314	5.099	0.610	0.364	1.003
Υ	37.98	282.6	35.37	16.16	0.628	5.077	0.521	0.401	1,005
Z	42.19	308.3	34.31	21.95	0.506	5.100	1,499	0.287	1.006

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: EX3-3930_Jul17

FCC ID: SS4EF501R

A The uncertainties of Norm X,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

B Numerical linearization parameter: uncertainty not required,

Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4-SN:3930

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Report No.: DRRFCC1801-0009

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
2450	39.2	1.80	7.87	7.87	7.87	0.37	0.90	± 12.0 %
2600	39.0	1.96	7.73	7.73	7.73	0.38	0.92	± 12.0 %
5200	36.0	4.66	5.46	5.46	5.46	0.35	1.80	± 13.1 %
5300	35.9	4.76	5.24	5.24	5.24	0.35	1.80	± 13.1 %
5500	35.6	4.96	4.97	4.97	4.97	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.86	4.86	4.86	0.40	1.80	± 13.1 %
5800	35.3	5.27	4.83	4.83	4.83	0.40	1.80	± 13.1 %

Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to

Althrequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

FCC ID: SS4EF501R

EX3DV4-SN:3930

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Report No.: DRRFCC1801-0009

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^C	Relative Permittivity F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha G	Depth ^G (mm)	Unc (k=2)
2450	52.7	1.95	7.90	7,90	7.90	0.35	0.95	± 12.0 %
2600	52.5	2.16	7.60	7.60	7.60	0.35	0.95	± 12.0 %
5200	49.0	5.30	4.87	4.87	4.87	0.40	1.90	± 13.1 %
5300	48.9	5.42	4.70	4.70	4.70	0.40	1.90	± 13.1 %
5500	48.6	5.65	4.41	4,41	4.41	0.40	1.90	± 13,1 %
5600	48.5	5.77	4.22	4,22	4.22	0.45	1.90	± 13.1 %
5800	48.2	6.00	4.33	4.33	4.33	0.45	1.90	± 13.1 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

validity can be extended to ± 110 MHz.


At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to ± 5%. The uncertainty is the RSS of the Convert for indicated larget tissue parameters.

the ConvF uncertainty for indicated target tissue parameters.

Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

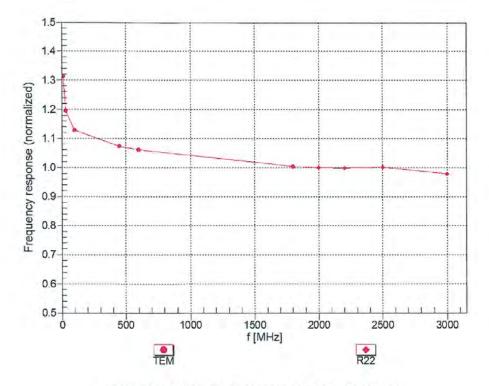


Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)



Receiving Pattern (\$\phi\$), \$\partial = 0°




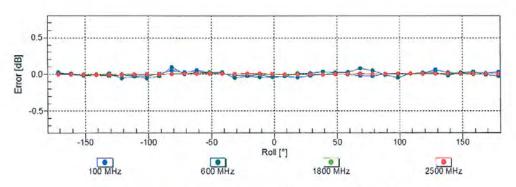


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)



Dynamic Range f(SAR_{head}) (TEM cell , f_{eval}= 1900 MHz)

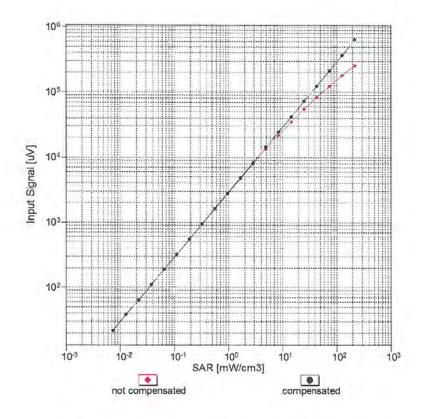


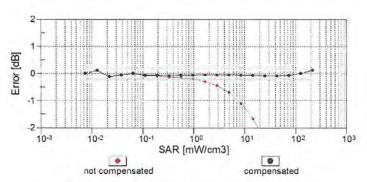


Uncertainty of Linearity Assessment: ± 0.6% (k=2)



Conversion Factor Assessment

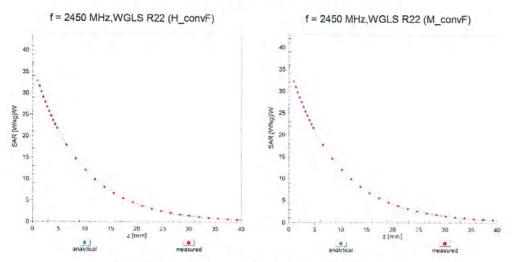

Deviation from Isotropy in Liquid

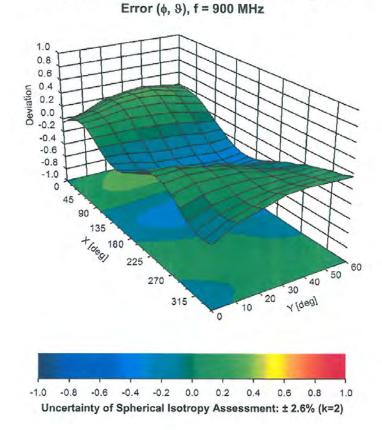

EX3DV4-SN:3930

July 26, 2017

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3930

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	118.7
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm



מוט	ix: Modulation Calibration Paral Communication System Name		A dB	B dBõV	С	D dB	VR mV	Max Unc ^E (k=2)
0	CW	X	0.00	0.00	1.00	0.00	156.8	± 3.3 %
		Y	0.00	0.00	1.00	3100	166.7	20.0 /
		Z	0.00	0.00	1.00	1 -4	161.8	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	33.98	95.02	20.39	10.00	20.0	± 9.6 %
		Y	12,31	85.76	18.73		20.0	+
		Z	36.97	97.49	21.78		20.0	1-10-0
10011- CAB	UMTS-FDD (WCDMA)	X	1,32	72.73	18.36	0.00	150.0	±9.69
		Y	0.95	66.04	14.44		150.0	
		Z	1.05	67.88	15.60		150.0	
	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.27	66.02	16.87	0.41	150.0	± 9.6
		Y	1.19	63.75	15.02		150.0	
		Z	1.24	64.77	15.76		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps)	X	4.89	67.27	17.48	1.46	150.0	±9.6
		Υ	4.81	66.88	17.12		150.0	
		Z	4.88	67.08	17.28	1.00	150.0	11.00
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	118.50	29.46	9.39	50.0	±9.6
		Y	100.00	120.04	30.47		50.0	
		Z	100.00	119.12	30.12		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	117.91	29.22	9.57	50.0	±9.6
		Υ	100.00	119.43	30.24		50.0	
		Z	100.00	118.72	29.96		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	118,87	28.78	6.56	60.0	±9,6
		Y	100.00	119.40	.49		60.0	
		Z	100.00	117,69			60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	6.09	83,18	1	12.57	50.0	± 9.6
		Y	4.16	69.03			150.0 41 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 50.0	
		Z	7.41	87.92				
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	x	16.43	108.30	1000	9.56	102.00	± 9.6
		Y	8.80	90.83	The second second		60.0	111
40007	COOC COO CTOMA COMO TO A CO	Z	17.86	108.64		4.00	60.0	166
DAC GPRS-FDE	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	×	100.00	121.78	1000	4.80	80.0	± 9.6
		Y	100.00	120.90			80.0	
	0000 000 00011 01101 01101	Z	100.00	118,68	28.36	0.55	80.0	1000
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	126.85	30.88	3.55	100.0	± 9.6
		Y	100.00	123.74	29.56		100.0	
40000	FROE FROM FROM ARRIVE THE A CO.	Z	100.00	121.16	28.77	7.00	100.0	1601
10029-	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	8.49	91.15	31.68	7.80	80.0	± 9.6 9

Certificate No: EX3-3930_Jul17

IEEE 802.15.1 Bluetooth (GFSK, DH1)

IEEE 802.15.1 Bluetooth (GFSK, DH3)

DAC

10030-CAA

10031-

CAA

5.92

9.27

100.00

100.00

100.00

100.00

100.00

100.00

X

81.55

91.80

118.04

117.70

116.25

135.43

124.47

123.75

27.56

31.56

27.99

27.90 27.53

32.90

28.40 28.45 5.30

1.88

80.0

80.0

70.0

70.0 70.0

100.0

100.0

100.0

± 9.6 %

±9.6 %



10032- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Х	100.00	158.27	40.81	1.17	100.0	± 9.6 %
		Υ	100.00	132.40	30.62		100.0	
		Z	100.00	133.39	31.35		100.0	
10033- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	Х	100.00	130.12	35.27	5.30	70.0	± 9.6 %
		Y	47.92	115.56	31.04		70.0	
		Z	100.00	127.31	34.17		70.0	
10034- IEEE 802.15.1 Blue CAA DH3)	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	100.00	127.72	32.57	1.88	100.0	±9.6 %
		Y	5.40	84.00	20.03		100.0	
		Z	26.50	106.08	26.87		100.0	
10035- CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	Х	98.14	127.45	32.05	1.17	100.0	±9.6 %
27-		Y	2.68	75.86	16.83		100.0	
E. T		Z	6.47	87.81	21.42		100.0	
10036- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	×	100.00	130.64	35,51	5.30	70.0	± 9.6 %
- **		Υ	100.00	127.36	33.94	10	70.0	
		Z	100.00	127.74	34.37		70.0	
10037- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Х	100.00	127.73	32.53	1.88	100.0	± 9.6 %
		Y	4.58	81.94	19.33		100.0	
	Contract to the	Z	19.79	102.15	25.82		100.0	
10038- CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	100.00	128.63	32.52	1.17	100.0	± 9.6 %
+ 5-		Y	2.70	76.24	17.10		100.0	
		Z	6.68	88.65	21.82	7	100.0	
10039- CAB	CDMA2000 (1xRTT, RC1)	X	6,20	89.91	22.06	0.00	150.0	± 9.6 %
		Y	1.39	69.12	13.61	-	150.0	
		Z	1.97	73.64	16.08		150.0	
10042- CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Halfrate)	Х	100.00	114.51	26.96	7.78	50.0	± 9.6 %
		Y	100.00	115.91	27.79		50.0	
		Z	100.00	114.70	27.39		50.0	
10044- CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	×	0.00	104.05	0.58	0.00	150.0	± 9.6 %
		Y	0.01	90.05	0.67		150.0	
		Z	0.00	93.86	0.01		150.0	
10048- CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	100.00	118.84	30.69	13.80	25.0	± 9.6 %
		Y	100.00	118.92	31.37		25.0	
		Z	100.00	121.71	32.37		25.0	
10049- CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	×	100.00	116.35	28.73	10.79	40.0	±9.6 %
		Y	100.00	118.18	29.97		40.0	
		Z	100.00	118.06	29.88		40.0	2.07
10056- CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	×	100.00	126.32	34.62	9.03	50.0	± 9.6 %
		Y	100.00	125.02	34.10		50.0	
		Z	100.00	125.44	34.44		50.0	
10058- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	6.05	83.52	27.88	6.55	100.0	± 9.6 %
		Y	4.69	76.91	24.81		100.0	
	Lucia La Companya da Cara de C	Z	6.52	83.98	27.72		100.0	
10059- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.39	68.10	18.00	0.61	110.0	± 9.6 %
		Y	1,25	64.97	15.72	-	110.0	
la company		Z	1.34	66.55	16.72	1 . 7	110.0	
10060- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	100,00	145.37	39.14	1.30	110.0	± 9.6 %
		Y	14.08	108.54	29.23		110.0	
		Z	100.00	138.14	36.18		110.0	

EX3DV4- SN:3930 July 26, 2017

10061- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	25.81	121.10	35.51	2.04	110.0	± 9.6 %
		Y	3.44	82.74	23.20		110.0	
		Z	9.74	100.38	29.02		110.0	
10062- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.68	67.22	16.86	0.49	100.0	± 9.6 %
		Y	4.58	66.75	16.46		100.0	
		Z	4.65	66.95	16.61		100.0	
10063-	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9	X	4.70	67.34	16.99	0.72	100.0	±9.6 %
CAB Mbps)	Y	4.60	66.87	16.58	0.72	100.0	2-0.0 /0	
		Z	4.68	67.08	16.74	-	100.0	
10064- CAB	IEEE 802.11a/h WIFI 5 GHz (OFDM, 12 Mbps)	X	4.97	67.56	17.19	0.86	100.0	± 9.6 %
		Y	4.86	67.09	16.80		100.0	
		Z	4.95	67.31	16.96		100.0	
10065- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	Х	4.85	67.50	17.34	1.21	100.0	± 9.6 %
		Y	4.74	67.00	16.91	-	100.0	
						-	100.0	
10066- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.87	67,54	17.52	1.46	100.0	± 9.6 %
		Y	4.77	67.05	17.10		100.0	
		Z	4.87		17.30		100.0	14
10067- CAB	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	Х	5.17	67.72	17.97	2.04	100.0	± 9.6 %
		Y	5.07	67.34	17.60	-	100.0	
		Z	5.17	67.57	17.79		100.0	
10068- CAB	IEEE 802,11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.21	67.74	18.19	2.55	100.0	± 9.6 %
		Y	5.11	67.31	17.81		100.0	
		Z	5.22	67.61	18.02		100.0	
10069- CAB	IEEE 802,11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.29	67.72	18.37	2.67	100.0	±9.6 %
			5.19	67.34	17.99		100.0	
		Z	5.30	67.62	18.21		100.0	
10071- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.99	67.37	17.81	1.99	100.0	± 9.6 %
	A Year A Street Street		4.92	67.00	17.45		100.0	
		Z	5.00	67.22	17.62		100.0	
10072- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	Х	4.98	67.76	18.08	2.30	100.0	± 9.6 %
		EE 802.11a/h WiFi 5 GHz (OFDM, 24	100.0					
		Z	4.99	67.61	17.89		100.0	
10073- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	5.06	67.98	18.45	2.83	100.0	± 9.6 %
M. A. T. T.			4.98	67.55			100.0	
			5.08	67.86			100.0	
10074- CAB	IEEE 802,11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)		5.05			3.30	100.0	±9.6 %
		Y	4.99	67.53	18.25		100.0	
	Live and the second	Z	5.09	67.84	18.48	1	100.0	11.00
10075- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	5.09	68.03	18.96	3.82	90.0	±9.6 %
7 7 7		Y	5.03	67.61	18.55		90.0	
	No. of the state o	Z	5.14	68.00	18.83		90.0	11
10076- CAB	IEEE 802.11g WIFI 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	5.11	67.82	19.08	4.15	90.0	±9.6 %
		Y	5.07	67.47	18.71		90.0	
A	Library Co. Inc. of the Co. of the Co.	Z	5.17	67.83	18.99	1,00,00	90.0	14.0.0
10077- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	Х	5.14	67.90	19.19	4.30	90.0	± 9.6 %
		Y	5.10	67.57	18.83	-	90.0	
			5.20		10.00			



10081-	CDMA2000 (1xRTT, RC3)	X	1.47	74.80	16.59	0,00	150.0	± 9.6 %
CAB							1	
		Y	0.71	64.40	10.98		150.0	
10000	IC EA LIC 426 FDD /TDMA/FDM DVA	Z	0.85	66.68	12.68	177	150.0	1000
10082- CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4- DQPSK, Fullrate)	Х	0.84	60.00	4.97	4.77	80.0	± 9.6 %
		Υ	0.83	60.00	5.19		80.0	
		Z	0.96	60.05	5.34		80.0	
10090- GPRS-FDD (TDMA, GMSK, TN 0-4) DAC	X	100.00	118.89	28.81	6.56	60.0	± 9.6 %	
		Y	100.00	119,41	29.18		60.0	
		Z	100.00	117.72	28.64		60.0	
10097- CAB	UMTS-FDD (HSDPA)	X	2.10	70.90	17.44	0.00	150.0	±9.6 %
		Y	1.77	67.39	15.22		150.0	
		Z	1.86	68.35	15.93		150.0	
10098- CAB	UMTS-FDD (HSUPA, Subtest 2)	X	2.06	70.89	17.44	0.00	150.0	± 9.6 %
		Y	1.73	67.32	15.18		150.0	
1555		Z	1.82	68.30	15.90		150.0	
10099- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	16.64	108.59	39.15	9.56	60.0	± 9.6 %
		Y	8.86	90.97	32.50		60.0	
70100		Z	18.05	108.86	38.84	Later Control	60.0	1.000
10100- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	3.43	72.59	17.97	0.00	150.0	± 9.6 %
		Y	2.93	69.49	16.35		150.0	
		Z	3.12	70.62	16.88		150.0	-
10101- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.32	68.53	16.59	0,00	150.0	± 9.6 %
		Y	3.12	67.11	15.68		150.0	
12.122		Z	3.21	67.66	15.99		150.0	
10102- CAC	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.41	68.45	16.65	0.00	150.0	± 9.6 %
		Υ	3.23	67_14	15.80		150.0	
100		Z	3.31	67.64	16.08		150.0	
10103- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	8,48	81.63	23.12	3.98	65.0	± 9.6 %
		Υ	6.79	77.32	21.30		65.0	
		Z	8.35	80.51	22.48		65.0	
10104- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	7.32	77.12	22.10	3.98	65.0	± 9.6 %
		Y	6.47	74.49	20.81		65.0	
14:11		Z	7.50	76.91	21.82		65.0	
10105- CAC	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	6.60	74.99	21,49	3.98	65.0	± 9.6 %
		Y	6.13	73.28	20.58		65.0	
10107		Z	6.95	75.36	21.46	-5.P.	65.0	
10108- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.97	71.84	17.84	0.00	150.0	± 9.6 %
		Y	2.54	68.77	16,15		150.0	
18185		Z	2.71	69.84	16.70		150.0	
10109- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.98	68.61	16.61	0.00	150.0	± 9.6 %
		Y	2.76	66.99	15.53		150.0	
10777		Z	2.86	67.57	15.90		150,0	
10110- LTE-FDD (SC CAD QPSK)	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	2.44	71.26	17.61	0.00	150.0	±9.6 %
		Y	2.04	67.88	15.62		150.0	100
18117		Z	2.19	69.00	16.29		150.0	
10111- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.81	70,37	17.31	0.00	150.0	±9.6 %
		Y	2.49	68.01	15.76		150.0	1
		Z	2.61	68.69	16.27		150.0	



10112- CAD	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	3.10	68.56	16.63	0.00	150.0	± 9.6 %
		Y	2.89	67.08	15.63		150.0	
		Z	2.99	67.59	15.96		150.0	
10113- CAD	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	Х	2.96	70.43	17.38	0.00	150.0	± 9.6 %
		Y	2.64	68.23	15.92	-	150.0	
		Z	2.76	68.84	16.40		150.0	
	IEEE 802,11n (HT Greenfield, 13.5 Mbps, BPSK)	X	5.10	67.56	16.67	0.00	150.0	± 9.6 %
	19000	Y	5.00	67.06	16.33		150.0	
		Z	5.06	67.28	16.42		150.0	
10115- CAB	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.35	67.59	16.69	0.00	150.0	± 9.6 %
		Y	5.25	67.14	16.38		150.0	
		Z	5.32	67.33	16.46		150.0	
10116- CAB	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.19	67.74	16,69	0.00	150.0	± 9.6 %
		Y	5.09	67.25	16.36		150.0	
		Z	5.15	67.45	16.44	/ 25.31	150.0	
10117- CAB	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	Х	5.07	67.43	16.63	0.00	150.0	±9.6 %
		Υ	4,99	67.01	16.32	-	150.0	
10117		Z	5.03	67.16	16.38		150.0	
10118- CAB	IEEE 802:11n (HT Mixed, 81 Mbps, 16- QAM)	Х	5.43	67.76	16.78	0.00	150.0	± 9.6 %
		Y	5.32	67.31	16.47		150.0	
		Z	5.39	67.50	16.55		150.0	
10119- CAB	IEEE 802.11n (HT Mixed, 135 Mbps, 64- QAM)	Х	5.17	67.69	16.68	0.00	150.0	± 9.6 %
		Y	5.08	67.23	16.36		150.0	
		Z	5.13	67.40	16.43	-	150.0	
10140- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.45	68.45	16.56	0.00	150.0	± 9.6 %
		Y	3.25	67.15	15.72		150.0	
10111		Z	3.34	67.65	16.00		150.0	
10141- CAC	LTE-FDD (SC-FDMA, 100% RB, 15 MHz. 64-QAM)	×	3,57	68.54	16.72	0.00	150.0	± 9.6 %
		Υ	3.38	67.32	15.92		150.0	
71.00		Z	3.47	67_77	16.17	4000	150.0	
10142- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	×	2,30	72.11	17.60	0.00	150.0	± 9.6 %
		Y	1.80	67.79	15.04		150.0	
10143- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	Z	1.97 2.87	72.31	15.94 17.44	0.00	150.0 150.0	± 9.6 %
UND	10-SANVI)	Y	2.30	68.51	15.11		150.0	
		Z	2.49	69.65	15.11		150.0	
10144- CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	2.38	68.49	15.12	0.00	150.0	± 9.6 %
J110	2. 4000	Y	2.02	65.87	13.27		150.0	
	11-1-12	Z	2.19	66.86	14.10		150.0	
10145- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	1.44	68.19	13.11	0.00	150.0	±9.6 %
-		Y	0.93	62.67	9.45		150.0	
		Z	1.13	64.81	11.22		150.0	
10146- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	Х	1.65	65.01	10.48	0.00	150.0	± 9.6 %
		Y	1.27	62.22	8.43		150.0	
		Z	1.79	65.38	10.60		150,0	7
10147- CAD	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.96	66.95	11.55	0.00	150.0	± 9.6 %
		Υ	1.37	62.92	8.91		150.0	
		Z	2.12	67.23	11.60		150.0	



10149- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	Х	2.99	68.69	16.66	0.00	150.0	± 9.6 %
		Y	2.77	67.06	15.58		150.0	
		Z	2.87	67.64	15.95		150.0	
10150- CAC	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	Х	3.11	68.63	16.68	0.00	150.0	± 9.6 %
-		Y	2.90	67.14	15.67		150.0	
		Z	2.99	67.65	16.00		150.0	
10151- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	Х	10.17	86.64	25.07	3.98	65.0	±9.6 %
		Y	7.45	80.64	22.65		65.0	
-		Z	9.66	84.69	24.12		65.0	
10152- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	6.99	77,66	22.02	3,98	65.0	± 9.6 %
		Y	6.03	74.58	20.48		65.0	
		Z	7.14	77.28	21.65		65.0	
10153- CAC	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	7.50	78.88	22.89	3.98	65.0	±9.6 %
		Y	6.49	75.82	21.38		65.0	
		Z	7.64	78.46	22.50		65.0	
10154- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	2.51	71.85	17.95	0.00	150.0	± 9.6 %
		Y	2.08	68.26	15.86		150.0	
		Z	2.24	69.43	16.55		150.0	7777
10155- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.82	70.39	17.33	0.00	150.0	±9.6 %
7 10		Y	2.49	68.04	15.78		150.0	
		Z	2.61	68.71	16.29		150.0	- 1
10156- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	2.23	73.00	17.70	0.00	150.0	±9.6 %
S/ID GI		Y	1.62	67.61	14.59	-	150.0	
		Z	1.83	69.27	15.71		150.0	
10157- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	Х	2,33	69.89	15.51	0.00	150.0	± 9.6 %
		Y	1.83	66.15	13.07		150.0	-
W		Z	2.04	67.51	14.15		150.0	
10158- CAD	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.97	70.52	17.44	0.00	150.0	± 9.6 %
		Y	2,64	68.31	15.98		150.0	
	Water to the second	Z	2.77	68.92	16.45		150.0	
10159- CAD	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	Х	2.49	70.59	15.88	0.00	150.0	± 9.6 %
		Υ	1.92	66.54	13.31		150.0	
-		Z	2.15	68.02	14.44		150.0	
10160- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.90	70.43	17.37	0.00	150.0	±9.6 %
		Y	2.59	68.16	15.99		150.0	
7		Z	2.70	68.88	16.41		150.0	
10161- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	3.02	68.67	16.64	0.00	150.0	± 9.6 %
		Y	2.79	67.10	15.56		150.0	
		Z	2.89	67.63	15.93		150.0	
10162- CAC	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	Х	3.13	68.82	16.75	0.00	150.0	± 9.6 %
		Υ	2.90	67.31	15.71		150.0	
		Z	3.00	67.80	16.05		150.0	
10166- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	Х	3.47	69.86	19.28	3.01	150.0	± 9.6 %
		Y	3.31	68.79	18.69		150.0	
		Z	3.64	70.40	19.47		150.0	
10167- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	4.28	73.01	19.82	3.01	150.0	±9.6 %
		Y	3.94	71.46	19.05		150.0	



10168- CAD	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.88	75.83	21.41	3.01	150,0	± 9.6 %
		Y	4.44	74.13	20.63		150.0	
		Z	5.44	77.36	21.91		150.0	
10169- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.85	69.01	18.94	3.01	150.0	± 9.6 %
		Y	2.74	67.56	18.10		150.0	
		Z	3.13	70.29	19.43		150.0	
10170- CAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	4.01	75.69	21.63	3.01	150.0	± 9.6 %
		Y	3.58	72.93	20.34	-	150.0	
	vertex excess excess	Z	4.93	78.73	22.65		150.0	
10171- AAC	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	Х	3.21	70.97	18.56	3.01	150.0	± 9.6 %
		Y	2.96	68.95	17.54		150.0	
		Z	3.78	73.14	19.33		150.0	
10172- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	11.64	99.70	31.90	6.02	65.0	± 9.6 %
		Y	6.31	86.23	27.05		65.0	
		Z	19.09	108.21	34.23		65.0	
10173- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	81.65	130.61	37.97	6.02	65.0	± 9.6 %
		Y	14.18	98.21	29.17		65.0	
77-1	THE THE RESERVE AND THE PROPERTY OF	Z	100.00	132.05	37.94		65.0	
10174- CAC	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	35.41	113.54	33.00	6.02	65.0	± 9.6 %
		Y	10.88	92.45	26.81		65.0	
	The second secon	Z	73.87	124.65	35.53	100	65.0	
	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.82	68.68	18.68	3.01	150.0	± 9.6 9
		Y	2.71	67.27	17.86		150.0	
		Z	3.09	69.93	19.16		150.0	
10176- CAD		×	4.02	75.71	21.64	3.01	150.0	± 9.6 %
		Y	3.59	72.95	20.35		150.0	
		Z	4.94	78.76	22.66	DE TOTAL	150.0	
10177- CAF	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.84	68.84	18.77	3.01	150.0	± 9.6 %
		Y	2.72	67.40	17.94		150.0	
	The second secon	Z	3.12	70.10	19.25		150.0	
10178- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	×	3.98	75.49	21.52	3.01	150.0	± 9.6 %
		Y	3,56	72.79	20.26		150.0	-
		Z	4.88	78.50	22.53	100	150.0	
10179- CAD	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	×	3.57	73.19	19.96	3.01	150.0	± 9.6 %
		Y	3.23	70.79	18.80		150.0	
		Z	4.29	75.74	20.83		150.0	
10180- CAD	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	X	3.20	70.90	18.51	3.01	150.0	± 9.6 %
	1	Y	2.95	68.90	17.50		150.0	T
12.71		Z	3.76	73.06	19.28		150.0	Hara to
10181- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.84	68.82	18.77	3.01	150.0	± 9.6 %
		Y	2.72	67.38	17.94		150.0	1
		Z	3.11	70.08	19.25		150.0	1
10182- CAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3,97	75.46	21.51	3.01	150.0	± 9.6 %
		Y	3.55	72.76	20.24	1	150.0	
	dament defined to the second	Z	4.87	78.47	22.52		150.0	12.7
10183- AAB	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	3.19	70.87	18.50	3.01	150.0	± 9.6 %
		Y	2.95	68.88	17.49		150.0	
		1	2.90	00.00	17.49		150.0	




10185- CAD 10186- AAD 10187- CAD 10188- CAD 10189- AAD 10193- CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	Y Z X Y Z X Y Z X Y Z X X Y Z X X Y Z X X Y Z X X Y Z X X Y Z X X Y Z X X Y Z X X X Y Z X X X Y Z X X X X	2.73 3.12 3.99 3.57 4.90 3.21 2.96 3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	67.42 70.12 75.54 72.83 78.56 70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43 71.41	17.96 19.27 21.55 20.28 22.56 18.54 17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 % ±9.6 %
10186- AAD 10187- CAD 10188- CAD 10188- CAD 10189- AAD 10193- CAB 10194- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	Z X Y Z X Y Z X Y Z X Y Z X Y Z X	3.12 3.99 3.57 4.90 3.21 2.96 3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	70.12 75.54 72.83 78.56 70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43	19.27 21.55 20.28 22.56 18.54 17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9,6 % ±9.6 %
10186- AAD 10187- CAD 10188- CAD 10188- CAD 10193- CAB 10194- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X Y Z X Y Z X Y Z X Y Z X Y Z X	3.99 3.57 4.90 3.21 2.96 3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	75.54 72.83 78.56 70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43	21.55 20.28 22.56 18.54 17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9,6 % ±9.6 %
10186- AAD 10187- CAD 10188- CAD 10189- AAD 10193- CAB 10194- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM) LTE-FDD (SC-FDMA, 1 RB, 1,4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	Z X Y Z X Y Z X Y Z X Y Z X	4.90 3,21 2.96 3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	78.56 70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43	22.56 18.54 17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0 150.0 150.0 150.0	±9.6 %
10187- CAD 10188- CAD 10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X Y Z X Y Z X Y Z X Y Z X	3,21 2,96 3,78 2,86 2,74 3,13 4,13 3,67 5,10 3,29	70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43	18.54 17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0 150.0	± 9.6 %
10187- CAD 10188- CAD 10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X Y Z X Y Z X Y Z X Y Z X	3,21 2,96 3,78 2,86 2,74 3,13 4,13 3,67 5,10 3,29	70.94 68.94 73.11 68.93 67.49 70.20 76.28 73.44 79.43	17.52 19.31 18.86 18.03 19.34 21.96	3.01	150.0 150.0 150.0 150.0	± 9.6 %
10187- CAD 10188- CAD 10188- CAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	Z X Y Z X Y Z X	3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	73.11 68.93 67.49 70.20 76.28 73.44 79.43	19.31 18.86 18.03 19.34 21.96	04	150.0 150.0 150.0 150.0	
10188- CAD 10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	Z X Y Z X Y Z X	3.78 2.86 2.74 3.13 4.13 3.67 5.10 3.29	73.11 68.93 67.49 70.20 76.28 73.44 79.43	19.31 18.86 18.03 19.34 21.96	04	150.0 150.0 150.0 150.0	
10188- CAD 10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	QPSK) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X Y Z X Y Z X	2.86 2.74 3.13 4.13 3.67 5.10 3.29	68.93 67.49 70.20 76.28 73.44 79.43	18.86 18.03 19.34 21.96	04	150.0 150.0 150.0	
10188- CAD 10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM) LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	Z X Y Z X	3.13 4.13 3.67 5.10 3.29	70.20 76.28 73.44 79.43	19.34 21.96 20.65	3.01	150.0	
10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X Y Z X Y Z	4.13 3.67 5.10 3.29	76.28 73.44 79.43	21.96 20.65	3.01		
10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X Y Z X Y Z	4.13 3.67 5.10 3.29	76.28 73.44 79.43	21.96 20.65	3.01		11.4 4 4 4 4
10189- AAD 10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM) IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X X Y Z	5.10 3.29	79.43			150.0	± 9.6 %
10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X X Y Z	5.10 3.29	79.43		-	150.0	
10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps,	X Y Z	3.29		23.01		150.0	
10193- CAB 10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	IEEE 802.11n (HT Greenfield, 6.5 Mbps,	Y	G.EO		18.84	3.01	150.0	± 9.6 %
10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB		Z	4 (11.7)	69.31	17.78	0.01	150.0	2 0.0 70
10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB			3.02	73.65	19.63		150.0	
10194- CAB 10195- CAB 10196- CAB 10197- CAB 10198- CAB	Bron)		4.51	67.12	16.43	0.00	150.0	± 9.6 %
10195- CAB 10196- CAB 10197- CAB 10198- CAB		Y	4.41	66.65	16.03		150.0	
10195- CAB 10196- CAB 10197- CAB 10198- CAB		Z	4.47	66.79	16.14		150.0	
10195- CAB 10196- CAB 10197- CAB 10198- CAB	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.67	67.40	16.55	0.00	150.0	± 9.6 %
10196- CAB 10197- CAB 10198- CAB	10 02 111	Y	4.56	66.90	16.16		150.0	
10196- CAB 10197- CAB 10198- CAB		Z	4.63	67.07	16.27		150.0	
10196- CAB 10197- CAB 10198- CAB	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.71	67.43	16.57	0.00	150.0	± 9.6 %
10197- CAB 10198- CAB 10219-	S-1 St 111/	Y	4.59	66.92	16.18		150.0	
10197- CAB 10198- CAB 10219-		Z	4.66	67.10	16.29		150.0	
10197- CAB 10198- CAB	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.51	67.16	16.44	0.00	150.0	±9.6 %
10198- CAB		Y	4.40	66.66	16.02		150.0	
10198- CAB		Z	4.46	66.83	16.15		150.0	
10198- CAB	IEEE 802.11n (HT Mixed, 39 Mbps, 16- QAM)	X	4.68	67.42	16.56	0.00	150.0	±9.6 %
10219-		Y	4.56	66.91	16.17		150.0	
10219-		Z	4.64	67.09	16.28		150.0	
10219-	IEEE 802.11n (HT Mixed, 65 Mbps, 64- QAM)	X	4.71	67.44	16.58	0.00	150.0	±9.6 %
		Y	4.59	66.93	16.18		150.0	
		Z	4.66	67.11	16.30		150.0	
	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.46	67.20	16.42	0.00	150.0	± 9.6 %
		Y	4.35	66.68	15.99		150.0	
		Z	4.41	66.85	16.12	1	150.0	
10220- CAB	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16- QAM)	X	4.67	67.38	16.55	0.00	150.0	± 9.6 %
		Y	4.56	66.87	16.15		150.0	
		Z	4.63	67.05	16.27	4.5	150.0	
10221- CAB			4.72	67.36	16.56	0.00	150.0	±9.6 %
	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	Y	4.60	66.87	16.17		150.0	
-		Z	4.67	67.04	16.28		150.0	
10222- CAB		4	5.04	67.44	16.62	0.00	150.0	±9,6 %
		X					150.0	
	IEEE 802.11n (HT Mixed, 15 Mbps,		4.96	66.99	16.30		150.0	

EX3DV4- SN:3930 July 26, 2017

10223- CAB	IEEE 802.11n (HT Mixed, 90 Mbps, 16- QAM)	X	5.33	67.63	16.73	0.00	150.0	± 9.6 %
		Y	5.24	67.19	16.42		150.0	
		Z	5.30	67.37	16.50		150.0	
10224- CAB	IEEE 802.11n (HT Mixed, 150 Mbps, 64- QAM)	X	5.09	67.56	16.61	0.00	150.0	± 9.6 %
		Y	5.00	67.10	16.29		150.0	
		Z	5.05	67.27	16.36		150.0	
10225- CAB	UMTS-FDD (HSPA+)	X	2.85	67.23	15.91	0.00	150.0	± 9.6 %
		Y	2.68	65.99	14.87		150.0	_
		Z	2.76	66.40	15.30		150.0	-
10226- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	100.00	134.64	39.04	6.02	65.0	± 9.6 %
		Y	15.50	99.99	29.80		65.0	
		Z	100.00	132.31	38.10		65.0	
10227- CAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	89.98	129.81	37.07	6.02	65.0	± 9.6 %
		Y	15.57	98.63	28.75		65.0	
		Z	100.00	129.61	36.69		65.0	
10228-	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz,	X	22.76	113.67	36.12	6.02	65.0	±9.69
CAA	QPSK)	Ŷ		91.55		0.02	C'EST	± 8.0 7
			8.10		29.00		65.0	-
10229-	LITE TOD (SC FOMA 4 DR 24M) 40	Z	34.50	120.43	37.70	0.00	65.0	1000
CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM)	×	82.62	130.81	38.03	6.02	65.0	±9.6 9
_		Υ	14.30	98.35	29.21		65.0	
10000	175 700 (00 501)	Z	100.00	132.04	37.95	1	65.0	
	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM)	X	73.67	126.07	36.09	6.02	65.0	± 9.6 %
		Y	14.23	96,95	28.16		65.0	
		Z	100.00	129.44	36.58		65.0	100
10231- CAB	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	Х	20.71	111.58	35.44	6.02	65.0	±9.6 %
		Y	7.71	90.47	28.55		65.0	
		Z	30.95	118.05	36.97		65.0	Commercial Contract of the
10232- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM)	X	82.54	130.81	38.03	6.02	65.0	± 9.6 %
		Y	14.28	98.32	29.21		65.0	
		Z	100.00	132.06	37.95		65.0	
10233- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM)	Х	73.30	126.00	36,07	6.02	65.0	±9.6 %
		Y	14.18	96.90	28.15		65.0	
		Z	100.00	129.45	36.58		65.0	1
10234- CAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	19.21	109.78	34.79	6.02	65,0	± 9.6 %
		Y	7.42	89.56	28.12		65.0	
		Z	28.31	115.96	36.27		65.0	
10235- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	Х	83.09	130.95	38.07	6.02	65,0	± 9.6 %
		Y	14.29	98.36	29.22		65.0	
		Z	100.00	132.07	37.96		65.0	
10236- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	Х	75.41	126.45	36.17	6.02	65.0	± 9.6 %
		Y	14.36	97.08	28.20		65.0	
		Z	100.00	129.40	36.56		65.0	
10237- CAC	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	Х	20.84	111.74	35.49	6.02	65.0	± 9.6 %
		Y	7.71	90.51	28.56		65.0	
		Z	31.21	118.26	37.03		65.0	
10238- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	82.49	130.82	38.03	6.02	65.0	± 9.6 %
	3. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2. 2.	Y	14.24	98.30	29.20		65.0	
			1 1 4 100 1	4-100	- www.			

10239- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	Х	72.98	125.95	36.06	6.02	65.0	± 9.6 %
		Υ	14.12	96.85	28.14		65.0	
		Z	100.00	129.48	36.59		65.0	
10240- CAC	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	20.77	111.69	35.47	6.02	65.0	± 9.6 %
		Y	7.70	90.48	28.55		65.0	
		Z	31.11	118.21	37.01		65.0	
10241- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	Х	9.67	86.02	27.48	6.98	65.0	± 9.6 %
		Y	8.34	82.75	26.06	1000	65.0	
		Z	11.45	88.99	28.49		65.0	
10242- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	Х	8.24	82.61	26.07	6.98	65.0	± 9.6 %
	1.000	Y	7.55	80.70	25.17		65.0	-
		Z	9.88	85.88	27.26		65.0	
10243- CAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	×	6.30	77.89	25.05	6.98	65.0	± 9.6 %
		Υ	5.98	76.58	24.31		65.0	
		Z	7.19	80.31	26.01	3.3	65.0	1 7 7
10244- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	8.63	81.55	20.39	3.98	65.0	± 9.6 %
		Y	5.64	74.67	17.26		65.0	
		Z	9.19	81.68	20.37		65.0	
10245- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	X	8,00	80.12	19.81	3.98	65.0	± 9.6 %
		Υ	5.39	73.76	16.82		65.0	
		Z	8.56	80.34	19.82		65.0	
10246- CAB	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	Х	18.63	97.78	26.34	3.98	65.0	± 9.6 %
		Y	6.44	80.36	20.03		65.0	
		Z	11.95	89.50	23.51		65.0	
10247- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	7.43	80.73	21.39	3.98	65.0	±9.6 %
		Y	5.32	74.70	18.44		65.0	
		Z	7.01	78.79	20.41		65.0	
10248- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	6.95	79.12	20.73	3.98	65.0	± 9.6 %
		Υ	5.15	73.72	18.00		65.0	
		Z	6.69	77.57	19.90		65.0	
10249- CAC	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	Х	21.73	102.12	28.84	3.98	65.0	± 9.6 %
		Y	8.49	85.50	23.07		65.0	
		Z	14.93	94.32	26.17		65.0	
10250- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	8.08	82.63	23.96	3.98	65.0	± 9.6 %
		Y	6.42	77.94	21.75		65.0	U .
		Z	7.98	81.42	23.23		65.0	
10251- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	х	7.09	78.80	22.04	3.98	65.0	± 9.6 %
		Y	5.86	75.03	20.13	4.	65.0	
		Z	7.14	78.09	21,53		65.0	
10252- CAC	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	13.90	94.66	27.76	3.98	65.0	± 9.6 %
		Y.	8.17	84.54	23.98	-	65.0	
		Z	12.05	90.77	26.17		65.0	1.
10253- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	×	6.81	77.00	21.71	3.98	65.0	± 9.6 %
		Y	5.93	74.14	20.21		65.0	
		Z	6.96	76.68	21.36		85.0	
10254- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	×	7.26	78.10	22.47	3.98	65.0	± 9.6 %
		Y	6.33	75.23	21.00		65.0	



10255- CAC	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	9.31	85.32	24.81	3.98	65.0	± 9.6 %
		Y	7.05	79.83	22.50	7	65.0	
		Z	9.02	83.71	23.96		65.0	
10256- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	Х	5.69	74.67	16.55	3.98	65.0	± 9.6 %
		Y	3.89	69.11	13.66		65.0	
		Z	6.22	75.16	16.73		65.0	77.7
10257- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	Х	5.22	73.12	15.81	3.98	65.0	± 9.6 %
		Y	3.72	68.22	13.13		65.0	
		Z	5.73	73.68	16.03		65.0	
10258- CAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	9.96	86.48	21.68	3.98	65.0	± 9.6 %
		Y	4.13	73.03	16.06		65.0	
40050	175 755 (00 551)	Z	7.28	80.82	19.52	I and	65.0	
10259- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	7.71	81.48	22,33	3.98	65.0	± 9.6 %
		Y	5.78	76.03	19.69		65.0	
40000	LTE TOD 100 FOLIA 1000 FF TO THE	Z	7.42	79.83	21.44		65.0	
10260- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	7.53	80.71	22.02	3.98	65.0	±9.6 %
		Y	5.75	75.59	19.50		65.0	1 -
10064	LTE TOD (SC EDMA 1000 CD 01111	Z	7.30	79.22	21.20		65.0	
10261- CAB	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	15.17	96.18	27.57	3.98	65.0	± 9.6 %
		Y	7.78	83.92	23.01		65.0	
10000	LITE TOD /CC FONA 4000 DD F MILE	Z	12.21	91.04	25.60	0.00	65.0	
	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	8.05	82.54	23.90	3.98	65.0	± 9.6 %
		Y	6.39	77.84	21.69		65.0	
10263- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	7.96	81.33 78.77	23.17	3.98	65.0 65.0	± 9.6 %
Orto	04 SD (W)	Y	5.85	75.01	20.12	_	65.0	
		ż	7.12	78.06	21.52		65.0	
10264- CAC	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	13.62	94.25	27.60	3.98	65.0	± 9.6 %
		Y	8.06	84.25	23.85		65.0	
		Z	11.85	90.44	26.03		65.0	
10265- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	6.99	77.67	22.02	3.98	65.0	± 9.6 %
		Y	6.03	74.58	20,48		65.0	
		Z	7.14	77.28	21.66	5	65.0	1
10266- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	7.49	78.85	22,87	3.98	65.0	± 9.6 %
4.1		Y	6.48	75.81	21.37		65.0	
		Z	7.63	78.44	22,49		65.0	Total
10267- CAC	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	10.13	86.55	25.04	3.98	65.0	± 9.6 %
CA.		Y	7.43	80.58	22.63		65.0	
-		Z	9.63	84.62	24.09		65.0	
10268- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	7.40	76.77	22.05	3.98	65.0	± 9.6 %
		Y	6.63	74.41	20.87		65.0	
12277		Z	7.60	76.62	21.80		65.0	
10269- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	×	7.30	76.16	21.84	3,98	65.0	± 9.6 %
		Y	6.61	73.98	20.72		65.0	
1007-	LITE TOP 100 EDITE 100 EDITE	Z	7.51	76.08	21.62	0.75	65.0	
10270- CAC	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	X	8.33	80.69	22.98	3.98	65.0	± 9.6 %
		Y	6.98	77.17	21.43		65.0	
		Z	8.31	79.84	22,44		65.0	

EX3DV4- SN:3930 July 26, 2017

10274- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)	X	2.69	67.96	16.04	0.00	150.0	± 9.6 %
	1370-0374	Υ	2.50	66.44	14.86		150.0	
		Z	2.58	66.90	15.30		150.0	
10275- CAB	UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)	X	1.89	71.54	17.59	0.00	150.0	± 9.6 %
	127.1574	Υ	1.50	67.06	14.93	-	150.0	
-		Z	1.62	68.41	15.79	1	150.0	
10277-	PHS (QPSK)	X	2.20	61.99	7.39	9.03	50.0	±9.6 %
CAA	1	Υ	2.25	62.04	7.58		50.0	
		Z	2.54	62.86	8.21		50.0	
10278-	PHS (QPSK, BW 884MHz, Rolloff 0.5)	X	11.72	85.68	20.59	9.03	50.0	± 9.6 %
CAA	1 710 (Q1 SIX, BW 004WI12, IXSIISII 0.0)	Y	5.21		15.97	5,00	50.0	2 5.0 70
		Z		73.63 81.76	19.46		50.0	_
10070	DUC (ODC)C DW 9944411- D-11-950 391		9.14			0.02		+000
10279- CAA	PHS (QPSK, BW 884MHz, Rolloff 0.38)	X	11.89	85.89	20.73	9.03	50.0	±9.6 %
		Υ	5.30	73.84	16.11		50.0	
-10.01		Z	9.28	81.96	19.59		50.0	
10290- AAB	CDMA2000, RC1, SO55, Full Rate	×	2.55	77.51	17.57	0.00	150.0	±9.6 %
		Y	1.11	66.19	11.94		150.0	
		Z	1.43	69.23	13.91		150.0	
10291- AAB	CDMA2000, RC3, SO55, Full Rate	Х	1.39	74.07	16.28	0.00	150.0	±9.6 %
		Υ	0.70	64.23	10.87		150.0	
		Z	0.83	66.42	12.53		150.0	
10292- AAB	CDMA2000, RC3, SO32, Full Rate	Х	9.82	102.29	25.87	0.00	150.0	±9.6 %
		Y	0.89	68.01	13.15		150.0	
		Z	1.24	72.67	15.80		150.0	
10293- AAB	CDMA2000, RC3, SO3, Full Rate	Х	100.00	138.23	35.17	0.00	150.0	±9.6 %
		Y	1.51	75.03	16.60		150.0	
		Z	2.84	84.41	20.67		150.0	
10295- AAB	CDMA2000, RC1, SO3, 1/8th Rate 25 fr.	Х	27.33	105.84	30.81	9.03	50.0	± 9.6 %
100		Y	18.18	96.31	27.25		50.0	
		Z	19.90	99.06	28.68		50.0	
10297- AAB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	2.99	71.99	17.93	0.00	150.0	± 9.6 %
-		Y	2.55	68.87	16.22		150.0	
		Z	2.72	69.95	16.77		150.0	
10298- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	X	2.01	72.44	16.26	0.00	150.0	± 9.6 %
		Y	1.27	65.63	12.31		150.0	
		Z	1.51	67.87	13.91		150.0	
10299- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	X	2.57	69.98	13.97	0.00	150.0	± 9.6 %
-		Y	1.86	65.75	11.46		150.0	
		Z	2.76	70.20	13.95		150.0	
			1.73	64.40	10.56	0.00	150.0	±9.6 %
10300- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz,	X	1.70	7.37.30	75.0.00			
10300- AAC	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	Y	1.47	62.59	9.11		150.0	
AAC				62.59 64.77	9.11 10.68		150.0 150.0	
		Y	1.47			4.17		± 9.6 %
10301-	64-QAM) IEEE 802.16e WiMAX (29:18, 5ms,	Y	1.47	64.77 66.72	10.68 18.02	4.17	150.0 50.0	± 9.6 %
10301-	64-QAM) IEEE 802.16e WiMAX (29:18, 5ms,	Y Z X	1.47 1.87 4.92	64.77 66.72 65.76	10.68 18.02 17.35	4.17	150.0 50.0 50.0	± 9.6 %
10301- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	Y Z X	1.47 1.87 4.92	64.77 66.72	10.68 18.02	4.17	150.0 50.0	± 9.6 %
10301- AAA	64-QAM) IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)	Y Z X Y	1.47 1.87 4.92 4.65 5.01	64.77 66.72 65.76 66.93	10.68 18.02 17.35 18.03		150.0 50.0 50.0 50.0	E



10303- AAA	IEEE 802.16e WIMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)	X	5.06	66.56	18.33	4.96	50.0	±9.6 %
1 1 1		Υ	4.93	66.03	17.83		50.0	
		Z	5.12	66.63	18.26		50.0	
10304- AAA	IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)	X	4,88	66.48	17,86	4.17	50.0	± 9.6 %
		Υ	4.73	65.90	17.33		50.0	-
		Z	4.92	66.45	17.72		50.0	
10305- AAA	IEEE 802.16e WIMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)	X	4,68	69.38	20.33	6.02	35.0	± 9.6 9
		Y	4.66	69.11	19.71	-	35.0	
		Z	4.92	70.15	20.56		35.0	
10306- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)	×	4.88	67.84	19.71	6.02	35.0	± 9.6 %
		Y	4.84	67.64	19.25		35.0	
		Z	5.02	68.29	19.83		35.0	
10307- AAA	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)	×	4.79	68,06	19.71	6.02	35.0	±9.6 %
		Y	4.74	67.80	19.21		35.0	
		Z	4.95	68.57	19.84	5.00	35.0	
10308- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)	X	4.79	68.35	19.89	6.02	35.0	± 9.6 %
		Y	4.74	68.07	19.38		35.0	
		Z	4.96	68.89	20.04	-	35.0	
10309- AAA	IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	×	4.92	68.02	19.84	6.02	35.0	± 9.6 %
		Y	4.86	67.74	19.35		35.0	
		Z	5.07	68.47	19.96		35.0	
	IEEE 802.16e WIMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	×	4.84	67.95	19,71	6.02	35.0	± 9.6 %
		Y	4.80	67.75	19.26		35.0	
		Z	4.99	68.43	19.84		35.0	
10311- AAB	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	×	3.38	71.09	17.45	0.00	150.0	± 9.6 %
		Y	2.91	68.21	15.92		150.0	
		Z	3.09	69.24	16.41		150.0	
10313- AAA	IDEN 1:3	×	29.79	102.17	25.80	6.99	70.0	± 9,6 %
		Y	6.70	82.11	20.08		70.0	
		Z	13.51	90.09	22.33		70.0	
10314- AAA	IDEN 1:6	Х	100.00	132.14	37.01	10.00	30.0	± 9.6 %
		Y	12.30	96.44	27.92		30.0	
		Z	39.07	114.28	32.48		30.0	
10315- AAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)	Х	1.17	65.90	16.81	0.17	150.0	± 9.6 9
		Y	1.10	63.55	14.86		150.0	
		Z	1.13	64.47	15.57		150.0	-
10316- AAB	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 96pc duty cycle)	X	4.57	67.20	16.62	0.17	150.0	±9.6 %
		Υ	4.46	66.69	16.19		150.0	
		Z	4.54	66.90	16.34		150.0	
10317- AAB	IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)	X	4.57	67.20	16.62	0.17	150.0	± 9.6 9
		Y	4.46	66.69	16.19		150.0	
		Z	4.54	66.90	16.34		150.0	
10400- AAC	IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)	X	4.65	67.44	16.54	0.00	150.0	± 9.6 %
¥		Y	4.52	66.90	16.13		150.0	
		Z	4.60	67.10	16.26		150.0	
10401- AAC	IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)	X	5.31	67.36	16.56	0.00	150.0	± 9.6 9
		1 32	5.00	00.00	40.04		450.0	
		Y	5.20	66.85	16.21		150.0	



10402- AAC	IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)	X	5.60	67.77	16.63	0.00	150.0	± 9.6 %
2.10		Y	5.52	67.35	16.35		150.0	
		Z	5.57	67.52	16.41		150.0	
10403- AAB	CDMA2000 (1xEV-DO, Rev. 0)	X	2.55	77.51	17.57	0.00	115.0	± 9.6 %
		Y	1.11	66.19	11.94		115.0	
		Z	1.43	69.23	13.91		115.0	
10404- AAB	CDMA2000 (1xEV-DO, Rev. A)	X	2.55	77.51	17.57	0.00	115.0	± 9.6 %
		Y	1.11	66.19	11.94		115.0	
		Z	1.43	69.23	13.91		115.0	
10406- AAB	CDMA2000, RC3, SO32, SCH0, Full Rate	Х	100.00	121.94	30.15	0.00	100.0	± 9.6 %
		Y	54.91	111.96	27.35		100.0	
		Z	100.00	117.01	28,11		100.0	
10410- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	125.45	31.76	3.23	80.0	± 9.6 %
		Υ	100.00	125.36	31.73		80.0	
		Z	100.00	123.08	30.95		80.0	
10415- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)	X	1.06	64.63	16.00	0.00	150.0	±9.6 %
		Y	1.02	62.69	14.25		150.0	
		Z	1.03	63.30	14.80		150.0	
10416- AAA	IEEE 802.11g WiFi 2.4 GHz (ERP- OFDM, 6 Mbps, 99pc duty cycle)	X	4.51	67.14	16.50	0.00	150.0	± 9.6 %
		Y	4.40	66.65	16.10		150.0	
		Z	4.47	66.81	16.21		150.0	
10417- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)	X	4.51	67.14	16.50	0.00	150.0	± 9.6 %
		Y	4.40	66.65	16.10		150.0	
		Z	4.47	66.81	16.21		150.0	
10418- AAA	IEEE 802.11g WIFI 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Long preambule)	Х	4.51	67.34	16.55	0.00	150.0	±9.6 %
	· · · · · · · · · · · · · · · · · · ·	Y	4.40	66.84	16.14		150.0	
		Z	4.46	67.00	16.25		150.0	
10419- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 99pc duty cycle, Short preambule)	х	4.52	67.27	16.54	0,00	150.0	± 9.6 %
		Y	4.42	66.77	16.13		150.0	
		Z	4.48	66.94	16.24		150.0	1
10422- AAA	IEEE 802.11n (HT Greenfield, 7.2 Mbps. BPSK)	X	4.63	67.24	16.53	0.00	150.0	± 9.6 %
-		Y	4.52	66.76	16.15		150.0	-
		Z	4.59	66.92	16.25		150.0	
10423- AAA	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	X	4.78	67.53	16.63	0.00	150.0	± 9.6 %
		Y	4.66	67.02	16.24		150.0	
		Z	4.74	67.20	16.35		150.0	
10424- AAA	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	X	4.71	67.49	16.61	0.00	150.0	± 9.6 %
	1.004.7	Y	4.59	66.98	16.22		150.0	
		Z	4.66	67.16	16.33	1	150.0	
10425- AAA	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	X	5.29	67.61	16.70	0.00	150.0	±9.6 %
	1000	Y	5.20	67.21	16.41		150.0	
		Z	5.25	67.35	16.46		150.0	
	1	X	5.30	67.67	16,72	0.00	150.0	± 9.6 %
10426- AAA	IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)	^	5.50	01.01	10,12	0.00	100.0	20.0 %
10426- AAA	16-QAM)	Y	5.22	67.27	16.43	0.00	150.0	2 0.0 %



10427- AAA	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	X	5.30	67.61	16.69	0.00	150.0	±9.6 %
		Υ	5.20	67.12	16.36		150.0	
4 77		Z	5,27	67.34	16.45		150.0	
10430- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	X	4.57	73.13	19.26	0.00	150.0	± 9.6 %
		Y	4.25	71.86	18.29		150.0	
		Z	4.30	71.73	18.42		150.0	-
10431- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	X	4.19	67.88	16.57	0.00	150.0	± 9.6 %
-		Y	4.02	67.17	15.98		150.0	
		Z	4.13	67.40	16.19		150.0	
10432- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	X	4.48	67.62	16.60	0.00	150.0	± 9.6 %
		Y	4.35	67.04	16.14		150.0	
		Z	4.43	67.24	16.28		150.0	
10433- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	×	4.72	67.53	16.63	0.00	150.0	± 9.6 %
		Y	4.60	67.01	16.24		150.0	
		Z	4.68	67.19	16.35		150.0	
10434- AAA	W-CDMA (BS Test Model 1, 64 DPCH)	Х	4.85	74.62	19.43	0.00	150.0	± 9.6 %
		Y	4.36	72.77	18.16		150.0	
		Z	4.45	72.79	18.42		150.0	L. Territori
10435- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	×	100.00	125.20	31.64	3,23	80.0	± 9.6 %
		Y	100.00	125.11	31.61		80.0	
		Z	100.00	122.85	30.84		80.0	
10447- AAA	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	X	3.53	68.22	15.98	0.00	150.0	± 9.6 %
		Y	3.27	66.98	14.95		150.0	
		Z	3.41	67.43	15.42		150.0	+
10448- AAA	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clippin 44%)	X	4.04	67.68	16.45	0.00	150.0	± 9,6 %
1		Y	3.89	66.96	15.85		150.0	
		Z	3.98	67.19	16.06	-	150.0	
10449- AAA	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Cliping 44%)	X	4.31	67.48	16.52	0.00	150.0	±9.6 %
	1.5.	Y	4.18	66.87	16.04		150.0	
		Z	4.26	67.08	16.19		150.0	
10450- AAA	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	X	4.50	67.33	16.51	0.00	150.0	± 9.6 %
		Y	4.39	66.79	16.09		150.0	
		Z	4.46	66.98	16.21		150.0	1
10451- AAA	W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)	X	3.42	68.46	15.57	0.00	150.0	±9.6 %
		Y	3.09	66.85	14.32		150.0	
Tarini.	A TOTAL OF THE PARTY OF THE PAR	Z	3.28	67.52	14.94		150.0	
10456- AAA	IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)	X	6.17	68.15	16.83	0.00	150.0	± 9.6 %
		Y	6.14	67.85	16.62		150.0	
		Z	6.15	67.95	16.64		150.0	1127
10457- AAA	UMTS-FDD (DC-HSDPA)	Х	3.79	65.80	16.22	0.00	150.0	± 9.6 %
		Y	3.74	65.37	15.81		150.0	
		Z	3.77	65.49	15.93		150.0	110000
10458- AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	Х	3.19	67.53	14.76	0.00	150.0	± 9.6 %
		Y	2.84	65.80	13.33		150.0	1
		Z	3.06	66,68	14.17		150.0	172.7
10459- AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	×	4.34	66.03	15.88	0.00	150.0	± 9.6 %
		Y	3.91	64,46	14.68		150.0	
		Z	4.11	64.97	15.22		150.0	

EX3DV4-SN:3930 July 26, 2017

10460- AAA	UMTS-FDD (WCDMA, AMR)	X	1.27	75.54	20.22	0.00	150.0	±9.6 %
		Υ	0.83	66.56	15:11		150.0	
		Z	0.92	68.82	16.54		150.0	
10461- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	132.60	35.03	3.29	80.0	±9.6 %
		Y	100.00	129.12	33.55		80.0	
		Z	100.00	129.87	34.06	Line of the	80.0	
10462- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	108.03	23.65	3.23	80.0	± 9.6 %
7		Y	3.50	73.92	14.70		80.0	
		Z	100.00	107.06	23.42	i nyelvo di l	80.0	
10463- AAA	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	23.45	89.85	18.33	3.23	80.0	±9.6 %
		Υ	1.43	64.41	10.45		80.0	
5.00		Z	23.26	89.31	18,29		80.0	CHARLES AND ADDRESS OF THE PARTY.
10464- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	129.90	33,60	3.23	80.0	± 9.6 %
		Υ	96.78	125.96	32.03		80.0	
-		Z	100.00	127.32	32.71		80.0	
10465- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.18	23,25	3.23	80.0	± 9.6 %
		Υ	2.49	70.38	13.38		80.0	
		Z	100.00	106.32	23.07		80.0	
10466- AAA	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	5.37	76.40	14.60	3.23	80.0	± 9.6 %
	6 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Y	1.29	63.36	9.93		80.0	
-0780		Z	7.20	78.43	15.29		80.0	
10467- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	100.00	130.27	33.76	3.23	80.0	± 9.6 %
		Y	100.00	126.74	32.27		0.08	
		Z	100.00	127.65	32.86		80.0	
10468- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	Х	100.00	107.46	23.37	3.23	80.0	± 9.6 %
		Y	2.71	71.30	13,74		80.0	
		Z	100.00	106.56	23.18		80.0	
10469- AAB	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	5.59	76.77	14.71	3.23	80.0	± 9.6 %
		Y	1.30	63.41	9.95		80.0	
		Z	7.47	78.79	15.40		80.0	
10470- AAB	LTE-TOD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	130.32	33.77	3.23	80.0	±9.6 %
		Y	100.00	126.77	32,28		80.0	
		Z	100.00	127.69	32.87		80.0	
10471- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.37	23.33	3.23	80.0	± 9.6 %
		Y	2.68	71.19	13.69	500	80.0	
		Z	100.00	106.49	23.14		80.0	
10472- AAB	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	5.39	76.42	14.59	3.23	80.0	± 9.6 %
		Y	1.29	63.36	9,92		80.0	
		Z	7,28	78.52	15.30		80.0	
10473- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	×	100.00	130.28	33.76	3.23	80.0	± 9.6 %
		Y	100.00	126.74	32.26		80.0	
75.10		Z	100.00	127.65	32.85		80.0	0.000
10474- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107.38	23.33	3.23	80.0	± 9.6 %
		Y	2.66	71.11	13.66		80.0	
		Z	100.00	106.49	23.14	100	80.0	
10475- AAB	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	×	5.28	76.25	14.54	3.23	80.0	± 9.6 %
		Y	1.28	63.34	9.91		80.0	
		Z	7.14	78.36	15.25		80.0	

EX3DV4- SN:3930 July 26, 2017

10477- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16- QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	107,11	23.21	3.23	80.0	± 9.6 %
		Y	2.49	70.42	13.38		80.0	
		Z	100.00	106.26	23.03		80.0	
10478- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64- QAM, UL Subframe=2,3,4,7,8,9)	X	5.06	75.82	14.39	3.23	80.0	± 9.6 %
		Y	1.28	63.28	9.87		80.0	
		Z	6.87	77.99	15.13		80.0	
10479- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	100.00	126.93	34.02	3.23	80.0	± 9.6 %
		Y	13.38	95.37	25.60		80.0	
		Z	94.85	124.77	33.35		80.0	-
10480- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	100.00	115,10	28.45	3.23	80.0	± 9.6 %
		Y	10.61	85.67	20.42		80.0	
		Z	100.00	114.05	28.08	-	80.0	-
10481- AAA	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	72.99	108.90	26.41	3.23	80.0	± 9.6 %
		Y	6.63	78.99	17.85		80.0	
		Z	50.22	103.51	25.05		80.0	
10482-	LTE-TDD (SC-FDMA, 50% RB, 3 MHz,	X	22.45	101.11	26.27	2,23	80.0	± 9.6 %
AAA	QPSK, UL Subframe=2,3,4,7,8,9)		-					1434
		Y	3.07	72.50	16.40		80.0	
40400	1	Z	6.67	82.90	20.59		80.0	100
10483- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	×	11.24	85.83	20.71	2.23	80.0	± 9.6 %
_		Y	3.41	70.08	14.59		80.0	1
		Z	9.47	83.02	19.78		80.0	-5
10484- AAA	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	8.51	82.05	19.52	2,23	80.0	± 9.6 %
		Y	3.13	68.80	14.05		80.0	
		Z	7.60	80.01	18.80		80.0	
10485- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	11.52	93.72	25.67	2.23	80.0	± 9.6 %
		Y	3.68	75.26	18.76		80.0	
		Z	6.26	82.99	21.85		80.0	
10486- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	6.05	79.59	20.24	2.23	80.0	± 9.6 %
		Y	3.22	69.88	15.80		80.0	
		Z	4.55	74.57	18.10		80.0	
10487- AAB	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.65	78.19	19.70	2.23	80.0	± 9.6 %
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Y	3.17	69.31	15,53		80.0	
		Z	4.40	73.72	17.74		80.0	
10488- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.27	82.82	23.06	2.23	80.0	± 9.6 %
7		Y	3.70	73.56	19.11		80.0	
		Z	5.09	78.35	21.09	1	80.0	
10489- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.60	74.50	19.82	2.23	80.0	± 9.6 %
		Y	3.57	69.95	17,46		80.0	
		Z	4.26	72.50	18.73		80.0	
10490- AAB	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.60	73.92	19.58	2.23	80.0	± 9.6 %
		Y	3.64	69.73	17.37		80.0	
		Z	4.31	72.12	18.57		80.0	
10491- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	5.31	77.49	21.21	2.23	80.0	± 9.6 %
		Y	3.85	71.68	18.53		80.0	
		Z	4.80	74.99	19.94		80.0	
10492- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.52	71.91	19.07	2,23	80.0	± 9.6 %
	The state of the s				-			-
		Y	3.85	68.89	17.42		80.0	



10493- AAB	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.54	71.58	18.93	2.23	80.0	±9.6 %
		Y	3.90	68.74	17.35		80.0	
		Z	4.42	70.55	18.25		80.0	
10494- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.30	80.44	22.16	2.23	80.0	±9,6 %
		Y	4.17	73.15	19.03		80.0	
		Z	5.43	77.14	20.64		80.0	
10495- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.59	72.41	19.33	2.23	80.0	± 9.6 %
		Y	3.88	69.19	17.62		80.0	
	the state of the second	Z	4.44	71.21	18.58		80.0	
10496- AAB	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8.9)	Х	4.60	71.83	19.11	2.23	80.0	± 9.6 %
		Y	3.95	68.92	17.54		80.0	
	A the standard of the standard	Z	4.48	70.78	18.43		80.0	
10497- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	16.04	93.03	22.43	2.23	80.0	± 9.6 %
		Y	1.83	65.71	12.24		80.0	
		Z	4.14	75.38	16.71		80.0	-
10498- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	2.09	65.14	11.49	2.23	80.0	± 9.6 %
		Y	1.29	60.00	8.18		80.0	
1 110		Z	1.80	62.99	10.35		80.0	
10499- AAA	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	1.86	63.61	10.61	2.23	80.0	± 9.6 %
		Y	1.30	60.00	8.02		80.0	
		Z	1.68	62.07	9.73		80.0	
10500- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	7.85	87.28	24.05	2.23	80.0	± 9.6 %
	100000000000000000000000000000000000000	Y	3.62	74.30	18.81		80.0	
		Z	5.46	80.32	21.30		80.0	
10501- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	5.28	77.27	19.98	2.23	80.0	± 9.6 %
		Y	3.43	70.19	16.55		80.0	
		Z	4.44	73.78	18.35	- VI	80.0	
10502- AAA	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	5.26	76.75	19.70	2.23	80.0	± 9.6 %
		Y	3.46	69.95	16.37		80.0	
		Z	4.45	73.43	18.14		80.0	
10503- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6.13	82.44	22,90	2,23	80,0	± 9.6 %
		Y	3.65	73.33	19.00	1	80.0	
		Z	5.01	78.06	20.96		80.0	100
10504- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.56	74.35	19.74	2.23	80.0	± 9.6 %
		Y	3,55	69.83	17.39	1	80.0	
		Z	4.23	72.37	18.66		80.0	
10505- AAB	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	х	4,57	73.78	19.51	2.23	80.0	± 9.6 %
	The state of the s	Y	3.62	69.62	17.30		80.0	6
		Z	4.28	72.00	18.50		80.0	
10506- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	X	6,21	80.19	22.05	2.23	80.0	± 9.6 %
	The Second Control of	Y	4.13	72.99	18.95		80.0	
		Z	5.37	76.94	20.55		80.0	
10507- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.57	72.33	19.29	2.23	80.0	± 9.6 %
		3.5	200	CD 40	1 47 50		00.0	
		Y	3.86	69.12	17.58		80.0	



10508- AAB	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.58	71.73	19.06	2.23	80.0	± 9.6 %
		Y	3.94	68.84	17.49		80.0	
		Z	4.46	70.69	18.38		80.0	
10509- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	5.83	76.49	20.61	2.23	80.0	± 9.6 %
		Y	4.46	71.62	18.40		80.0	
Tree Co.		Z	5.37	74.46	19.57		80.0	-
10510- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	X	4.89	71.13	18.85	2.23	80.0	±9.6 %
		Y	4.31	68.67	17.53		80.0	7
		Z	4.81	70.33	18.30		80.0	
10511- AAB	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.90	70.69	18.70	2.23	80.0	±9.6 %
		Y	4.37	68.45	17.47		80.0	
		Z	4.84	69.99	18.19		80.0	
10512- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	Х	6.75	79.67	21.67	2.23	80.0	± 9.6 %
		Y	4.65	73.10	18.88		80.0	
		Z	5.92	76.77	20.32		80.0	
10513- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	Х	4.83	71.62	19.07	2.23	80.0	± 9.6 %
		Y	4.21	68.87	17.63		80.0	
		Z	4.73	70.71	18.47		80.0	
10514- AAB	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	X	4.78	70.93	18.82	2.23	80.0	±9.6 %
		Y	4.23	68.48	17.50		80.0	
		Z	4.71	70.15	18.28		80.0	
10515- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)	Х	1.03	64.96	16.17	0.00	150.0	± 9.6 %
		Y	0.98	62.82	14.28		150.0	
	Laboratory and the same of the	Z	0.99	63.49	14.87		150.0	
10516- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)	X	1,36	87.70	25.78	0.00	150.0	±9.6 %
		Y	0.53	66.95	15.48		150.0	
		Z	0.62	70.94	17.85		150.0	
10517- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)	X	0.94	68.49	17.78	0.00	150.0	±9.6 %
		Y	0.80	64.15	14.62		150.0	
		Z	0.84	65.42	15.57	300	150.0	
10518- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)	X	4.50	67,24	16.49	0.00	150.0	± 9.6 %
		Y	4.40	66.74	16.08		150.0	
12-17-1		Z	4.46	66.90	16.20		150.0	
10519- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)	X	4.67	67.42	16.58	0.00	150.0	± 9.6 %
		Y	4.55	66.92	16.18		150.0	
		Z	4.62	67.09	16.30		150.0	
10520- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)	×	4.53	67.40	16.52	0.00	150.0	± 9.6 %
		Y	4.40	66.85	16.09		150.0	
1055	AFFE DOD AT IN VALUE OF THE COLUMN TO THE CO	Z	4.48	67.05	16.22		150.0	11.615.00
10521- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)	X	4.46	67.40	16.52	0.00	150.0	± 9.6 %
		Y	4.34	66.82	16.07		150.0	
40505	THE PART ALL WHEN E OF TARRETT AND	Z	4.41	67.04	16.21	0.00	150.0	1555
10522- AAA	IEEE 802.11a/h WIFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)	X	4.52	67.52	16.61	0.00	150.0	±9.6 %
		Y	4.39	66.94	16.17		150.0	
		Z	4.47	67.15	16.31		150.0	



	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)	X	4.42	67.45	16.50	0.00	150.0	±9.6 %
		Y	4.31	66.91	16.07		150.0	
Parenth of	The state of the second second	Z	4.37	67.08	16.18	-	150.0	Harry P.
10524- AAA	IEEE 802,11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)	X	4.46	67.44	16.58	0.00	150.0	± 9.6 %
		Y	4.34	66.89	16.15		150.0	
		Z	4.42	67.08	16.27		150.0	
10525- AAA	IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)	Х	4.48	66.54	16.20	0,00	150.0	±9.6 %
7.7		Y	4.36	66.00	15.77	-	150.0	
		Z	4.43	66.17	15.89		150.0	
10526- AAA	IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)	X	4.63	66.87	16.33	0.00	150.0	± 9.6 %
	T. Charles and	Y	4.49	66.28	15.89		150.0	
	and the second second	Z	4.57	66.49	16.02		150.0	
10527- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)	X	4.56	66.85	16.28	0.00	150.0	± 9.6 %
40-00-		Y	4.42	66.24	15.83		150.0	
		Z	4.50	66.46	15.96		150.0	
10528- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)	X	4.57	66.86	16.31	0.00	150.0	±9.6 %
		Y	4.43	66.26	15.86		150,0	
	F 2 90 C - F - F - F - F - F - F - F - F - F -	Z	4.51	66.47	15.99		150.0	
10529- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)	X	4.57	66.86	16.31	0.00	150.0	± 9.6 %
		Y	4.43	66.26	15.86		150.0	
		Z	4.51	66.47	15.99		150.0	
10531- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)	X	4.55	66.94	16.31	0.00	150.0	± 9.6 %
	3500 350, 0, 050	Y	4.40	66.29	15.84		150.0	
		Z	4.49	66.54	15.99		150.0	
10532- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)	X	4.42	66.82	16.26	0.00	150.0	± 9.6 %
	1370 337 3737	Y	4.28	66.15	15.77		150.0	
		Z	4.36	66.40	15.93		150.0	
10533- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)	X	4.58	66.94	16.31	0.00	150.0	± 9.6 %
12.11		Y	4.44	66.33	15.86		150.0	
		Z	4.52	66.54	15.99		150.0	
10534- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)	X	5.10	66.82	16.29	0.00	150.0	± 9.6 %
	- Sept and of the	Y	4.99	66.31	15.94		150.0	
		Z	5.05	66.51	16.03		150.0	
10535- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)	Х	5.15	66.98	16.37	0.00	150.0	± 9.6 %
		Y	5.04	66.45	16.01		150.0	
V - 1		Z	5.11	66.67	16.10	10000	150.0	177
10536- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)	X	5.04	66.97	16.35	0.00	150.0	± 9.6 %
		Y	4.93	66.44	15.98	1	150.0	
		Z	4.99	66.65	16.08		150.0	
10537-	IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)	X	5.09	66.92	16.32	0.00	150.0	± 9.6 %
10537- AAA	The second secon	Y	4.98	66.42	15.97		150.0	
						_		
			5.04	66.60	16.06		150.0	
	IEEE 802.11ac WiFl (40MHz, MCS4, 99pc duty cycle)	Z	5.04 5.16	66.60 66.90	16.06 16.35	0.00	150.0 150.0	± 9.6 %
AAA 10538-		Z X				0.00		± 9.6 %
AAA 10538-		Z X	5.16 5.05	66.90 66.40	16.35 16.00	0.00	150.0 150,0	± 9.6 %
AAA 10538-		Z X	5.16	66.90	16.35	0.00	150.0	± 9.6 %



10541- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)	X	5.08	66.80	16.30	0.00	150.0	± 9.6 %
		Y	4.97	66.28	15.94	,	150.0	-
		Z	5.03	66.49	16.04		150.0	
10542- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)	X	5.23	66,86	16.34	0.00	150.0	± 9.6 %
		Y	5.12	66.38	16.01		150.0	
		Z	5.19	66.57	16.10		150.0	
10543- AAA	IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)	X	5,29	66,86	16.37	0.00	150.0	± 9.6 %
	Private State Stat	Y	5.19	66.42	16.06		150.0	
		Z	5.25	66.58	16.12		150.0	
10544- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)	X	5.42	66.89	16.26	0.00	150.0	± 9.6 %
		Y	5.33	66.42	15.95		150.0	11
200	the same of the sa	Z	5.38	66.62	16.03		150.0	-
10545- AAA	IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)	X	5.59	67.26	16.39	0.00	150.0	±9.6 %
		Y	5.50	66.82	16.11		150.0	
	TA	Z	5.54	66.98	16.16		150.0	
10546- AAA	JEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)	X	5.46	67.05	16.31	0.00	150.0	±9.6 %
		Y	5.37	66.54	15.98		150.0	
		Z	5.42	66.77	16.07		150.0	-
10547- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)	X	5.53	67.10	16.32	0.00	150.0	± 9,6 %
		Y	5.44	66.63	16.02		150.0	
		Z	5.49	66.82	16.09		150.0	
10548- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)	Х	5.70	67.79	16.64	0.00	150.0	±9,69
		Y	5.59	67.25	16.30		150.0	
		Z	5.64	67.47	16.39		150.0	
10550- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)	Х	5.49	67.10	16.35	0.00	150.0	± 9.6 %
		Y	5.42	66.68	16.06		150.0	
2		Z	5.45	66.82	16.11		150.0	ALC: U
10551- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)	X	5.49	67.10	16.30	0.00	150.0	±9.6 %
		Y	5.37	66.52	15.95		150.0	
		Z	5.44	66.81	16.06		150.0	
10552- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)	X	5.43	66.99	16.26	0.00	150.0	± 9.6 %
		Y	5.34	66.52	15.94		150.0	
		Z	5.39	66.71	16.02		150.0	
10553- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)	X	5.50	66.97	16.28	0.00	150.0	±9.6 %
		Y	5.40	66.49	15.96		150.0	
		Z	5.46	66,70	16.05		150.0	
10554- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle)	Х	5.82	67,21	16.32	0.00	150.0	± 9.6 %
		Y	5.75	66.76	16.03		150.0	
		Z	5.78	66.95	16.10		150.0	110 -
10555- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle)	Х	5.93	67.46	16.43	0.00	150.0	±9.6 %
	J 777	Y	5.85	66.99	16.13		150.0	1
		Z	5.89	67.20	16.21	1	150.0	11 -
10556- AAA	IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle)	Х	5.96	67.52	16.45	0.00	150.0	±9.6 %
		Y	5.88	67.08	16.16		150.0	1
		Z	5.91	67.26	16.23		150.0	15.00
10557- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle)	Х	5.92	67.43	16.42	0.00	150.0	± 9.6 %
		Y	5.84	66.96	16.13		150.0	1
		Z	5.88	67.17	16.20		150.0	

EX3DV4- SN:3930 July 26, 2017

10558- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)	×	5.96	67.57	16.51	0.00	150.0	±9.6 %
	5.50 5637	Y	5.86	67.06	16.19		150.0	
	1.4	Z	5.92	67.31	16.29		150.0	
10560- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)	X	5.96	67.44	16.48	0.00	150.0	± 9.6 %
	X 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	Y	5.87	66.96	16.18		150.0	
/ AL		Z	5.92	67.18	16.26		150.0	
10561- AAA	IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)	Х	5.89	67.40	16.50	0,00	150.0	± 9.6 %
		Y	5.80	66.94	16.20		150.0	
		Z	5.84	67.14	16.28		150.0	
10562- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)	X	5.98	67.69	16.64	0.00	150.0	± 9.6 %
		Y	5.86	67.13	16.30		150.0	
		Z	5.93	67.41	16.41		150.0	
10563- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)	Х	6.05	67.54	16.52	0.00	150.0	± 9.6 %
		Y	5.95	67.06	16.22		150.0	
		Z	6.00	67.28	16.30		150.0	L
10564- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 99pc duty cycle)	х	4.82	67.24	16.60	0.46	150.0	± 9.6 %
		Y	4.72	66.79	16.24		150.0	
		Z	4.78	66.96	16.35		150.0	
10565- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 99pc duty cycle)	X	5.03	67.66	16.91	0.46	150.0	± 9.6 %
1.10		Y	4.92	67.21	16.56		150.0	
		Z	4.99	67.37	16.66	-	150,0	
10566- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 99pc duty cycle)	×	4.87	67.51	16.74	0.46	150.0	± 9.6 %
		Y	4.75	67.02	16.36		150.0	
		Z	4.83	67.21	16.48	1.0	150.0	1
10567- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 99pc duty cycle)	X	4.91	67.97	17.14	0.46	150.0	± 9.6 %
7/		Y	4.79	67.45	16.75		150.0	
		Z	4.87	67.63	16.85		150.0	
10568- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 99pc duty cycle)	X	4.77	67.27	16.50	0.46	150.0	± 9.6 %
		Y	4.65	66.75	16.09		150.0	
		Z	4.74	66.99	16.25		150.0	
10569- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 99pc duty cycle)	X	4.89	68.16	17.26	0.46	150.0	± 9.6 %
		Y	4.78	67.67	16.89		150.0	
		Z	4.84	67.81	16.97		150.0	10.75
10570- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 99pc duty cycle)	X	4.90	67.92	17.14	0.46	150.0	± 9.6 %
		Y	4.78	67.44	16.76		150.0	
		Z	4.86	67.60	16.86	100	150.0	
10571- AAA	IEEE 802,11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	X	1.29	66.90	17.34	0.46	130.0	± 9.6 %
		Y	1.18	64.21	15.26		130.0	
		Z	1.25	65.49	16.13	100	130.0	
10572- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	X	1.32	67.77	17.86	0.46	130.0	± 9.6 %
		Y	1.20	64.74	15.60		130.0	
	La Jacob S. St. of S.	Z	1.27	66.15	16.53		130.0	
10573- AAA	IEEE 802,11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	X	100.00	157.80	43.41	0.46	130.0	± 9.6 %
	F +8 12 12 12 12 12 12 12 12 12 12 12 12 12	Y	1.35	77.92	20.42		130.0	
		Z	4.07	96.53	27.00		130.0	
10574- AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	X	1.82	78.36	22.91	0.46	130.0	± 9.6 %
		Υ	1,27	69.71	18.21		130.0	



EX3DV4- SN:3930 July 26, 2017

10575- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 6 Mbps, 90pc duty cycle)	X	4.61	67.09	16.70	0.46	130.0	± 9.6 %
		Y	4.51	66.61	16.30		130.0	
and the second		Z	4.59	66.81	16.44		130.0	
10576- AAA	IEEE 802:11g WiFi 2.4 GHz (DSSS- OFDM, 9 Mbps, 90pc duty cycle)	X	4.65	67.29	16.79	0.46	130.0	± 9.6 %
***		Y	4.54	66.81	16.39		130.0	-
4-1		Z	4.61	67.00	16.52		130.0	
10577- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 12 Mbps, 90pc duty cycle)	X	4.83	67.53	16.93	0.46	130.0	± 9.6 %
		Y	4.71	67.05	16.53		130.0	
		Z	4.79	67.24	16.67		130.0	
10578- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 18 Mbps, 90pc duty cycle)	Х	4.74	67.74	17.07	0.46	130.0	± 9.6 %
		Y	4.62	67.21	16.65		130.0	
20.00		Z	4.70	67.42	16.79		130.0	10.00
10579- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 24 Mbps, 90pc duty cycle)	X	4.49	66.93	16.32	0.46	130.0	±9.6 %
2.70		Y	4.37	66.37	15.88		130.0	
- P		Z	4.46	66.65	16.07		130.0	
10580- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 36 Mbps, 90pc duty cycle)	X	4.53	66.98	16.35	0.46	130.0	±9.6 %
		Y	4.41	66.43	15.90		130.0	
		Z	4.50	66.70	16.09		130.0	in many
10581- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 48 Mbps, 90pc duty cycle)	Х	4.65	67,83	17.05	0.46	130.0	± 9.6 %
111111		Y	4.53	67.28	16.62		130.0	
		Z	4.61	67.49	16.76		130.0	
10582- AAA	IEEE 802.11g WiFi 2.4 GHz (DSSS- OFDM, 54 Mbps, 90pc duty cycle)	X	4.42	66.66	16.09	0.46	130.0	± 9.6 %
		Y	4.29	66.11	15.64		130.0	
		Z	4.39	66.39	15.84		130.0	
10583- AAA	IEEE 802,11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	X	4.61	67.09	16.70	0.46	130.0	± 9.6 %
		Y	4.51	66.61	16.30		130.0	
		Z	4.59	66.81	16.44		130.0	
10584- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	X	4.65	67.29	16.79	0.46	130.0	± 9.6 %
	1771 30-12-3	Y	4.54	66.81	16.39		130.0	
		Z	4.61	67.00	16.52		130.0	
10585- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	Х	4.83	67.53	16.93	0.46	130.0	± 9.6 %
		Y	4.71	67.05	16.53		130.0	
		Z	4.79	67.24	16.67		130.0	
10586- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	X	4.74	67.74	17.07	0.46	130.0	±9.6 %
		Y	4.62	67.21	16.65		130.0	
		Z	4.70	67.42	16.79		130.0	
10587- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	X	4.49	66.93	16.32	0.46	130.0	±9.6 %
		Y	4.37	66.37	15.88		130.0	
		Z	4.46	66.65	16.07		130.0	
10588- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	Х	4.53	66.98	16.35	0.46	130.0	±9.6 %
	E CHARLE CONTRACTOR	Y	4.41	66.43	15.90		130.0	
		Z	4.50	66.70	16.09		130.0	
10589- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	X	4.65	67.83	17.05	0.46	130.0	±9.6 %
	12 A TO 10 T	Y	4.53	67.28	16.62		130.0	
		Z	4.61	67.49	16.76		130.0	17.7
10590- AAA	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	X	4.42	66.66	16.09	0.46	130.0	± 9.6 %
		Y	4.29	66.11	15.64		130.0	
		Z	4.39	66.39	15.84		130.0	

EX3DV4— SN:3930 July 26, 2017

10591- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle)	X	4.76	67.13	16.79	0.46	130.0	± 9.6 %
		Y	4.67	66.70	16.42		130.0	
		Z	4.74	66.87	16.55		130.0	had a second
10592- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle)	X	4.91	67.46	16,92	0.46	130.0	± 9.6 %
-		Y	4.79	67.00	16.55		130.0	
		Z	4.87	67.19	16.67		130.0	
10593-	IEEE 802.11n (HT Mixed, 20MHz,	X	4.82	67.35	16.79	0.46	130.0	± 9.6 %
AAA	MCS2, 90pc duty cycle)	Y	4.71	66.87	16.40	1.00	130.0	
		Z	4.79	67.08	16.54		130.0	
10594- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle)	X	4.88	67.54	16.96	0.46	130.0	± 9.6 %
AAA	WOSS, SOPE duty Cycle)	Y	4.77	67.06	16.58	_	130.0	
		Z	4.85	67.26	16.71		130.0	
10595-	IEEE 802.11n (HT Mixed, 20MHz,	X	4.85	67.50	16.87	0.46	130.0	± 9.6 %
AAA	MCS4, 90pc duty cycle)			7.4		0.40		1 5.0 %
		Y	4.73	67.02	16.48		130.0	
40500	(EEE 000 44 - UIT 15 - 1 COLUL	Z	4.82	67.23	16.61	0.10	130.0	1000
10596- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle)	X	4.78	67,50	16.87	0.46	130.0	± 9.6 %
		Y	4.66	66.99	16.47		130.0	
10.1		Z	4.75	67.21	16.61		130.0	
10597- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle)	X	4.73	67.38	16.74	0.46	130.0	±9.6 %
		Y	4.61	66.86	16.32	1-0-	130.0	. 1
-		Z	4.70	67.09	16.48		130.0	
10598- AAA	IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle)	X	4.73	67.65	17.03	0.46	130.0	± 9.6 %
		Y	4.61	67.11	16.61		130.0	
		Z	4.69	67.34	16.75		130.0	-
10599- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)	X	5.40	67.48	16.91	0.46	130.0	± 9.6 %
		Y	5.34	67.15	16.64		130.0	
		Z	5.38	67.26	16.70		130.0	
10600- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle)	Х	5.50	67.81	17.04	0.46	130.0	± 9.6 %
	most, separately eyers)	Y	5.43	67.47	16.78		130.0	
		Z	5.48	67.58	16.83		130.0	
10601- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle)	X	5.42	67.65	16.98	0.46	130.0	± 9.6 %
7001	mode, cope daty cycle)	Y	5.34	67.28	16.70		130.0	
		Z	5.39	67.42	16.77		130.0	
10602- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle)	X	5.54	67.77	16.95	0.46	130.0	± 9.6 %
	7,500	Y	5.45	67.37	16.66		130.0	
		Z	5.51	67.54	16.75		130.0	
10603- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle)	X	5.61	68.05	17.23	0,46	130.0	± 9.6 %
	The state of older	Y	5.52	67.67	16.95		130.0	
		Z	5.58	67.82	17.02		130.0	
10604- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle)	X	5.47	67.68	17.03	0.46	130.0	± 9.6 %
.,,,,,		Y	5.41	67,35	16.77		130.0	
		Z	5.45	67.46	16.82		130.0	
10605- AAA	IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle)	X	5.51	67.76	17.07	0.46	130.0	± 9.6 %
	inode, cope daily cycle)	Y	5.43	67.38	16.78		130.0	
		Z	5.48	67.54	16.86		130.0	
10606-	IEEE 802.11n (HT Mixed, 40MHz,	X	5.26	67.11	16.60	0.46	130.0	± 9.6 %
AAA	MCS7, 90pc duty cycle)				0.50	0.40		± 9.0 %
1.5		Y	5.21	66.79	16.34		130.0	
		Z	5.24	66.90	16.40		130.0	

EX3DV4- SN:3930 July 26, 2017

10607- AAA	IEEE 802,11ac WiFI (20MHz, MCS0, 90pc duty cycle)	X	4.62	66.55	16.47	0.46	130.0	± 9.6 %
		Y	4.51	66.04	16.06		130.0	
		Z	4.58	66.23	16.20		130.0	
10608- AAA	IEEE 802 11ac WiFi (20MHz, MCS1, 90pc duty cycle)	X	4.79	66.93	16.63	0.46	130.0	± 9.6 %
		Y	4.66	66.37	16.21		130.0	
		Z	4.75	66.59	16.35		130.0	
10609- AAA	IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle)	X	4.68	66.77	16.47	0.46	130.0	± 9.6 %
		Y	4.55	66.20	16.03		130.0	1
	The second secon	Z	4.64	66.44	16.18		130.0	
10610- AAA	IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle)	X	4.74	66.95	16.64	0.46	130.0	± 9.6 %
		Y	4.60	66.38	16.20	-	130.0	
		Z	4.69	66.60	16.35		130.0	
10611- AAA	IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle)	X	4,65	66,74	16.48	0.46	130,0	± 9.6 %
		Y	4.52	66.17	16.04		130.0	
	h	Z	4.60	66.41	16.20	7	130.0	
10612- AAA	IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle)	X	4.65	66.90	16.53	0.46	130.0	± 9.6 %
		Y	4.51	66.29	16.07		130.0	
		Z	4.61	66.55	16.24		130.0	
10613- AAA	IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle)	X	4.65	66.73	16.38	0.46	130.0	± 9.6 %
AD		Y	4.50	66.11	15.92		130.0	
		Z	4.60	66.39	16.10		130.0	
10614- AAA	IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle)	×	4.61	66.99	16.66	0.46	130.0	± 9.6 %
		Y	4.47	66.36	16.19	-	130.0	
		Z	4:56	66.62	16.35		130.0	
10615- AAA	IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle)	×	4.64	66,55	16.24	0.46	130.0	± 9.6 %
		Y	4.51	65.98	15.80		130.0	
		Z	4.60	66.23	15.97		130.0	
10616- AAA	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	X	5.25	66.84	16,58	0.46	130.0	± 9.6 %
		Y	5.15	66.38	16.25		130.0	
	P	Z	5.21	66.57	16.34		130.0	
10617- AAA	IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle)	Х	5.31	67.01	16.64	0.46	130.0	± 9.6 %
		Y	5.20	66.52	16.29		130.0	
		Z	5.27	66.74	16.40		130.0	
10618- AAA	IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle)	X	5,21	67.08	16.69	0.46	130.0	± 9.6 %
4.50		Y	5.11	66.58	16.34		130.0	
		Z	5.17	66.79	16.44		130.0	
10619- AAA	IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle)	X	5.21	66.83	16,50	0.46	130.0	± 9.6 %
		Y	5.12	66.36	16.16		130.0	
		Z	5.18	66.56	16.26		130.0	
10620- AAA	IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle)	X	5.29	66.84	16.55	0.46	130.0	± 9.6 %
		Y	5.19	66.38	16.22		130.0	
		Z	5.26	66.58	16.32		130.0	
10621- AAA	IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle)	Х	5.31	67.02	16.76	0.46	130.0	± 9.6 %
15:-		Y	5.21	66.53	16.42		130.0	
		Z	5.27	66.74	16.52	I	130.0	-
10622- AAA	IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle)	Х	5.31	67.15	16.82	0.46	130.0	± 9.6 %
		Y	5.20	66.63	16.46		130.0	
		Z	5.27	66.85	16.57	1	130.0	



10623- AAA	IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)	Х	5.19	66.67	16.45	0.46	130.0	±9.6 %
25-		Y	5.08	66.15	16.08		130.0	
		Z	5.16	66.40	16.22		130.0	
10624- AAA	IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)	Х	5.38	66.86	16.60	0,46	130.0	± 9.6 %
		Y	5.28	66.41	16.28		130.0	
		Z	5.34	66.61	16.38		130.0	7 9 97
10625-	IEEE 802,11ac WiFi (40MHz, MCS9,	X	5.62	67.45	16.95	0.46	130.0	±9.6 %
AAA	90pc duty cycle)	Y	5.40	66.65	16.46		130.0	
		Z	5.57	67.16	16.71		130.0	
10626- AAA	IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)	X	5.56	66.87	16.51	0.46	130.0	± 9.6 %
7001	Seps dary sydiay	Y	5.48	66.42	16.21		130.0	
		Z	5.52	66.63	16.30		130.0	
10627-	IEEE 802.11ac WiFi (80MHz, MCS1,	X	5.77	67.39	16.73	0.46	130.0	±9.6 %
AAA	90pc duty cycle)	Y	5.69	66.98	16.46	0,40	130.0	2 3.0 70
		Z	5.73		16.52		130.0	
10000	IEEE 802 11aa WiE: (80ML) - MCC2	X		67.13		0.40	130.0	+060/
10628- AAA	IEEE 802,11ac WiFi (80MHz, MCS2, 90pc duty cycle)	-	5.56	66.89	16.42	0.46	7.77.750	± 9.6 %
		Y	5.47	66.40	16.09	-	130.0	
40000	TEEE DOD ALL THE FOOL IN THE	Z	5.53	66.64	16.21	0.40	130.0	1000
10629- AAA	IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)	X	5.64	66.95	16.44	0.46	130.0	± 9.6 %
		Y	5.56	66.53	16.16		130.0	
1070		Z	5.60	66.71	16.24	2.72	130.0	
10630- AAA	IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)	Х	5.93	68.03	16.99	0.46	130.0	± 9.6 %
		Y	5.81	67.48	16.64		130.0	
	BACK OF STATE AND ADDRESS.	Z	5.88	67.74	16.75		130.0	
10631- AAA	IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)	Х	5.92	68.13	17.23	0.46	130.0	± 9.6 %
		Y	5.80	67.56	16.87		130.0	
L0-		Z	5.87	67.82	16.98		130.0	
10632- AAA	IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)	X	5.75	67.50	16.94	0.46	130.0	± 9.6 %
		Y	5.69	67.14	16.68		130.0	
	Laurence de la companya de la compan	Z	5.71	67.24	16.71		130.0	
10633- AAA	IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)	Х	5.64	67.11	16.56	0.46	130.0	± 9.6 %
		Y	5.52	66.57	16.21		130.0	
		Z	5.60	66.85	16.34		130.0	
10634- AAA	IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)	X	5.63	67.16	16.65	0.46	130.0	± 9.6 %
		Y	5.53	66.68	16.33		130.0	
	Long to the late of the late o	Z	5.59	66.90	16.42		130.0	
10635- AAA	IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)	X	5.48	66.39	15.99	0.46	130.0	±9.6 %
		Y	5.39	65.91	15.66		130.0	
		Z	5.45	66,17	15.79		130.0	
10636- AAA	IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle)	X	5.97	67.20	16.57	0.46	130.0	± 9.6 %
		Y	5.90	66.77	16.29		130.0	
		Z	5.94	66.97	16.38		130.0	
10637- AAA	IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle)	X	6.10	67.53	16.72	0.46	130.0	± 9.6 %
		Y	6.03	67.08	16.43		130.0	
-		Z	6.07	67.30	16.52	-	130.0	
10638-	IEEE 1602.11ac WiFi (160MHz, MCS2,	X	6.11	67.54	16.70	0.46	130.0	± 9.6 %
	90nc duty cycle)							
10638- AAA	90pc duty cycle)	Y	6.04	67.12	16.43		130.0	



EX3DV4- SN:3930 July 26, 2017

10639- AAA	IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)	X	6.09	67.47	16.71	0.46	130.0	± 9.6 %
		Y	6.01	67.02	16.42		130.0	-
		Z	6.05	67.24	16.51		130.0	-
10640- AAA	IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)	X	6.08	67.45	16.64	0.46	130.0	± 9.6 %
		Y	5.98	66.95	16.33		130.0	
		Z	6,04	67.22	16.45		130.0	
10641- AAA	IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)	X	6.13	67.37	16.62	0.46	130.0	± 9.6 %
	The same of the sa	Y	6.06	66.97	16.36		130.0	
		Z	6.10	67.16	16.43		130.0	
10642- AAA	IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)	X	6.18	67.65	16,93	0.46	130.0	±9.6 %
		Y	6.09	67.21	16.65		130.0	
		Z	6.14	67.42	16.73	-	130.0	
10643- AAA	IEEE 1602,11ac WiFi (160MHz, MCS7, 90pc duty cycle)	×	6.01	67.31	16.66	0.46	130.0	±9.6 %
	The state of the s	Y	5.93	66.88	16.37		130.0	
-		Z	5.98	67.09	16.46		130.0	
10644- AAA	IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)	X	6.12	67,67	16.86	0.46	130.0	±9.6 %
		Y	6.01	67.11	16.51		130.0	
		Z	6.08	67.43	16.65		130.0	
10645- AAA	IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)	X	6.23	67.62	16.79	0.46	130.0	± 9.6 %
		Y	6.13	67.13	16.48	-	130.0	
		Z	6.19	67.38	16.59		130.0	
10646- AAC	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)	Х	44.06	133.17	44.84	9.30	60.0	± 9.6 %
		Y	12.39	101.54	35.15		60.0	
1 (0)		Z	58.66	138.52	46.07		60.0	-
10647- AAB	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7)	X	33.76	127.67	43.54	9.30	60.0	±9.6 %
		Y	10.83	99.05	34.46		60.0	
		Z	44.69	133.00	44.82	1000	60.0	
10648- AAA	CDMA2000 (1x Advanced)	X	0.82	66.98	12.55	0.00	150.0	± 9.6 %
		Υ	0.58	62,24	9.25		150.0	
		Z	0.65	63.58	10.51		150.0	

E Uncertainty is determined using the max, deviation from linear response applying rectangular distribution and is expressed for the square of the field value.