

# TEST REPORT

of

FCC Part 22 Subpart H and Part 24 Subpart E  
FCC ID : SS4P1770

Equipment Under Test : GSM/WCDMA PDA phone with Bluetooth & WLAN  
Model Name : BIP-6000  
Serial No. : N/A  
Applicant : Bluebird Soft, Inc.  
Manufacturer : Bluebird Soft, Inc.  
Date of Test(s) : 2009-03-18 ~ 2009-06-03  
Date of Issue : 2009-06-03

In the configuration tested, the EUT complied with the standards specified above.

Tested By:



Date

2009-06-03

Feel Jeong

Approved By



Date

2009-06-03

Charles Kim

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

**Table of contents**

<b>1. General information -----</b>	<b>3</b>
<b>2. RF radiated output power &amp; spurious radiated emission -----</b>	<b>7</b>

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 1. General information

### 1.1 Testing laboratory

SGS Testing Korea Co., Ltd.

Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

[www.electrolab.kr.sgs.com](http://www.electrolab.kr.sgs.com)

Telephone : +82 +31 428 5700

FAX : +82 +31 427 2371

### 1.2 Details of applicant

Applicant : Bluebird Soft, Inc.

Address : 558-5, Sinsa-dong, Kangnam-gu, Seoul, Korea

Contact Person : In-Gu Kim

Phone No. : +82 +2 541 4002

### 1.3 Description of EUT

<b>Kind of Product</b>	GSM/WCDMA PDA phone with Bluetooth & WLAN
<b>Model Name</b>	BIP-6000
<b>Serial Number</b>	N/A
<b>2G/3G FCC ID</b>	QIPHC25
<b>Power Supply</b>	DC 3.7 V
<b>Frequency Range</b>	GSM : 824.2 MHz ~ 848.8 MHz and 1850.2 MHz ~ 1909.8 MHz
	WCDMA : 826.4 MHz ~ 846.6 MHz and 1852.4 MHz ~ 1907.6 MHz
	2412 MHz ~ 2462 MHz (11b/g)
	2402 MHz ~ 2480 MHz (Bluetooth)
	13.56 MHz(RFID)
<b>Modulation Technique</b>	GSM/WCDMA : GMSK, 8DPSK, QPSK
	11b : DSSS (CCK, BPSK, QPSK), 11g : OFDM (BPSK, QPSK, 16QAM, 64QAM)
	Bluetooth : GFSK, $\pi/4$ DQPSK, 8DPSK
	RFID:ASK
<b>Number of Channels</b>	GSM 850(125), GSM 1900(300), WCDMA 850(103), WCDMA 1900 (103)
	11b(11), 11g(11), Bluetooth(79),RFID(1)
<b>Antenna Type</b>	Integral Type(BT,WLAN)
<b>Antenna Gain</b>	0 dBi(BT), 0 dBi(WLAN)
<b>Operating Conditions</b>	-20 ~ 50

\* The spurious emission was measured in three orthogonal EUT positions (X-axis, Y-axis and Z-axis). Worst case is X-axis (GSM850, GSM1900, UMTS850, UMTS1900)

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

#### 1.4. Description of test mode

Band	Mode		Frequency (MHz)	Peak output power (dBm)	Average output power (dBm)
GSM 850	GMSK		824.2	31.66	31.58
			836.4	31.62	31.54
			848.8	<b>32.07</b>	31.99
GSM 850	8PSK	1 Tx Slot	824.2	27.55	27.48
			836.4	27.52	27.41
			848.8	27.68	27.55
GSM 1900	GMSK		1850.2	29.28	29.17
			1880.0	29.16	29.06
			1909.8	<b>29.68</b>	29.57
GSM 1900	8PSK	1 Tx Slot	1850.2	27.45	27.35
			1880.0	27.38	27.29
			1909.8	27.92	27.84

GSM (850 / 1900)

We found out the test mode with the highest power level after we analyze all the data rates. So we chose GSM/GMSK (worst case) as a representative.

Band	Mode		Frequency (MHz)	Peak output power (dBm)	Average output power (dBm)
WCDMA V	RMC		826.4	27.09	25.35
			836.6	27.00	25.37
			848.6	27.37	25.55
WCDMA V	HSDPA		826.4	27.15	25.41
			836.6	27.21	25.48
			848.6	<b>27.41</b>	25.65

Band	Mode		Frequency (MHz)	Peak output power (dBm)	Average output power (dBm)
WCDMA II	RMC		1852.4	25.90	22.88
			1880.0	26.36	23.42
			1907.6	26.22	23.17
WCDMA II	HSDPA		1852.4	26.04	22.94
			1880.0	<b>26.47</b>	23.51
			1907.6	26.30	23.28

WCDMA (850 / 1900)

We found out the test mode with the highest power level after we analyze all the data rates. So we chose HSDPA (worst case) as a representative.

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.5. Test equipment list

Equipment	Manufacturer	Model	Cal Due.
Signal Generator	Agilent	E4438C	Apr. 01, 2010
Spectrum Analyzer	H.P.	8565E	Oct. 01, 2009
Spectrum Analyzer	Agilent	E4440A	Apr. 01, 2010
CMU200	R&S	109495	Oct. 02, 2009
Preamplifier	H.P.	8447F	Sep. 03, 2009
Band Reject Filter	Wainwright	WRCG824/849-814/85960/10SS	Apr. 01, 2010
High Pass Filter	Wainwright	WHK3.0/18G-10SS	Oct. 01, 2009
Ultra Broadband Antenna	R&S	HL562	Oct. 09, 2009
Horn Antenna	R&S	HF 906	Oct. 09, 2009
Horn Antenna	SCHWARZBECK	BBHA9120D(0600)	Jul. 16, 2009
Dipole Antenna	VHAP/UHAP	975/958	Jan. 18, 2010
Anechoic Chamber	SY Corporation	L W H (6.5 m 3.5 m 3.5 m)	Feb. 15, 2009

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

### 1.6. Summary of test results

The EUT has been tested according to the following specifications:

Applied standard : FCC Part 22 Subpart H and Part 24 Subpart E		
Standard section	Test item	Result
22.913(a) 24.232(c)	RF radiated output power	Complied
22.917(a) 24.238(a)	Spurious radiated emission	Complied

### 1.7. Test report revision


Revision	Report number	Description
0	F690501/RF-RTL003052	Initial
1	F690501/RF-RTL003052-1	Add EDGE/850 and EDGE/1900 MHz

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*


## 2. RF radiated output power & spurious radiated emission

### 2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

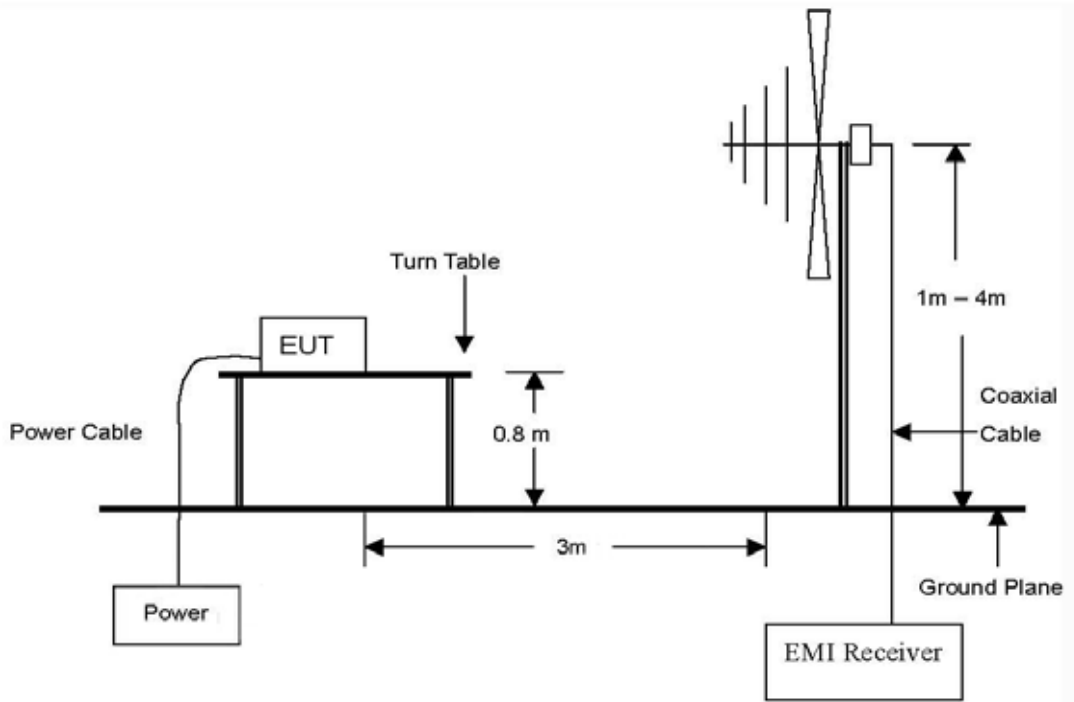


The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 18 GHz Emissions.

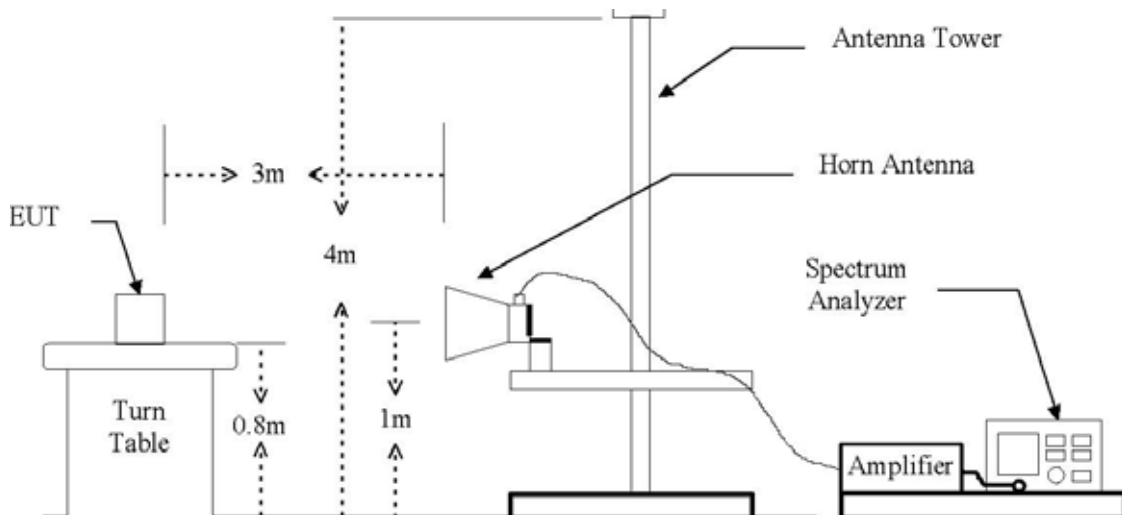

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

The diagram below shows the test setup for substituted method

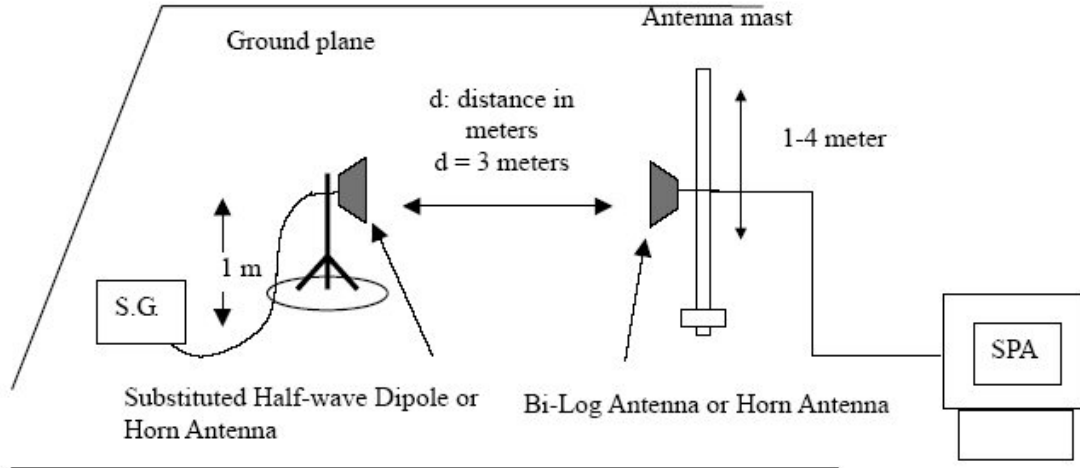

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



## 2.2. Limit

FCC §22.913(a), the ERP of mobile transmitters must not exceed 7 watts. FCC §24.232(b) Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

## 2.3. Test procedure: Based on ANSI/TIA 603C: 2004

1. On a test site, the EUT shall be placed at 80cm height on a turn table, and in the position closest to normal use as declared by the applicant.
2. The test antenna shall be oriented initially for vertical polarization located 3m from EUT to correspond to the fundamental frequency of the transmitter.
3. The output of the test antenna shall be connected to the measuring receiver and the peak detector is used for the measurement.
4. During the measurement of the EUT, the resolution bandwidth was to 1 MHz and the average bandwidth was set to 1 MHz.
5. The transmitter shall be switched on, the measuring receiver shall be tuned to the frequency of the transmitter under test.
6. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
7. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
8. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
9. The maximum signal level detected by the measuring receiver shall be noted.
10. The EUT was replaced by half-wave dipole (824~849 MHz) or horn antenna (1850~1910 MHz) connected to a signal generator.
11. In necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
12. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
13. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, which is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
14. The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
15. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.

---

*The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.*

## 2.4. Test result for RF output power

Ambient temperature : 23  
 Relative humidity : 45 % R.H.

### Test mode: GSM 850 (GSM)

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBd)	E.R.P.	
					(dBm)	(mW)
824.2	H	3.42	30.10	-10.44	16.24	42.07
824.2	V	3.42	39.42	-10.44	25.56	359.75
836.4	H	3.38	31.62	-10.48	17.76	59.70
836.4	V	3.38	40.47	-10.48	26.61	458.14
848.8	H	3.33	32.78	-10.53	18.92	77.98
848.8	V	3.33	40.52	-10.53	26.66	463.45

### Test mode: GSM 850 (EDGE)

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBd)	E.R.P.	
					(dBm)	(mW)
824.2	H	3.42	26.34	-10.44	12.48	17.70
824.2	V	3.42	35.31	-10.44	21.45	139.64
836.4	H	3.38	27.71	-10.48	13.85	24.27
836.4	V	3.38	36.31	-10.48	22.45	175.79
848.8	H	3.33	28.85	-10.53	14.99	31.55
848.8	V	3.33	36.47	-10.53	22.61	182.39

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Test mode: GSM1900 (GSM)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBi)	E.I.R.P.	
					(dBm)	(mW)
1850.2	H	4.92	17.50	8.79	21.37	137.09
1850.2	V	4.92	23.45	8.79	27.32	539.51
1880.0	H	4.97	16.26	8.90	20.19	104.47
1880.0	V	4.97	24.23	8.90	28.16	654.64
1909.8	H	5.02	17.61	9.00	21.59	144.21
1909.8	V	5.02	24.48	9.00	28.46	701.46

**Test mode: GSM1900 (EDGE)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBi)	E.I.R.P.	
					(dBm)	(mW)
1850.2	H	4.92	15.99	8.79	19.86	96.83
1850.2	V	4.92	22.01	8.79	25.88	387.26
1880.0	H	4.97	14.91	8.90	18.84	76.56
1880.0	V	4.97	22.69	8.90	26.62	459.20
1909.8	H	5.02	16.16	9.00	20.14	103.28
1909.8	V	5.02	23.07	9.00	27.05	506.99

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Test mode: UMTS 850(HSDPA)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBd)	E.R.P.	
					(dBm)	(mW)
826.4	H	3.41	24.61	-10.45	10.75	11.89
826.4	V	3.41	33.89	-10.45	20.03	100.69
836.0	H	3.38	23.54	-10.48	9.68	9.29
836.0	V	3.38	34.29	-10.48	20.43	110.41
846.6	H	3.34	22.99	-10.52	9.13	8.17
846.6	V	3.34	34.51	-10.52	20.65	116.14

**Test mode: UMTS 1900(HSDPA)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level + Amp. (dBm)	Ant. gain (dBi)	E.I.R.P.	
					(dBm)	(mW)
1852.4	H	4.92	15.50	8.80	19.38	86.69
1852.4	V	4.92	19.73	8.80	23.61	229.61
1880.0	H	4.97	13.94	8.90	17.87	61.24
1880.0	V	4.97	21.35	8.90	25.28	337.32
1907.6	H	5.01	15.08	8.99	19.06	80.55
1907.6	V	5.01	20.70	8.99	24.68	293.83

**Remark:**

$E.R.P. \ \& \ E.I.R.P = [S.G \ level + Amp.](dBm) + Ant. \ gain \ (dBd/dBi) - Cable \ loss(dB)$

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

## 2.5. Test result for spurious radiated emission

Ambient temperature : 23  
 Relative humidity : 45 % R.H.

### Test mode: GSM 850 (GSM)

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBd)	E.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(824.2 MHz)							
1648.4	H	4.58	-23.61	5.93	-22.26	-13.00	9.26
1648.4	V	4.58	-35.16	5.93	-33.81	-13.00	20.81
2472.6	H	5.83	-35.95	7.76	-34.02	-13.00	21.02
2472.6	V	5.83	-37.40	7.76	-35.47	-13.00	22.47
Middle Channel(836.4 MHz)							
1672.8	H	4.62	-21.41	6.01	-20.02	-13.00	7.02
1672.8	V	4.62	-35.46	6.01	-34.07	-13.00	21.07
2509.2	H	5.83	-37.19	7.81	-35.21	-13.00	22.21
2509.2	V	5.83	-35.95	7.81	-33.97	-13.00	20.97
High Channel(848.8 MHz)							
1697.6	H	4.67	-21.03	6.10	-19.60	-13.00	6.60
1697.6	V	4.67	-32.42	6.10	-30.99	-13.00	17.99
2546.4	H	5.83	-34.83	7.85	-32.81	-13.00	19.81
2546.4	V	5.83	-36.29	7.85	-34.27	-13.00	21.27

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Test mode: GSM 850 (EDGE)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBd)	E.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(824.2 MHz)							
1648.4	H	4.58	-27.75	5.93	-26.40	-13.00	13.40
1648.4	V	4.58	-39.27	5.93	-37.92	-13.00	24.92
2472.6	H	5.83	-39.84	7.76	-37.91	-13.00	24.91
2472.6	V	5.83	-40.94	7.76	-39.01	-13.00	26.01
Middle Channel(836.4 MHz)							
1672.8	H	4.62	-24.83	6.01	-23.44	-13.00	10.44
1672.8	V	4.62	-39.31	6.01	-37.92	-13.00	24.92
2509.2	H	5.83	-41.34	7.81	-39.36	-13.00	26.36
2509.2	V	5.83	-40.06	7.81	-38.08	-13.00	25.08
High Channel(848.8 MHz)							
1697.6	H	4.67	-24.55	6.10	-23.12	-13.00	10.12
1697.6	V	4.67	-36.31	6.10	-34.88	-13.00	21.88
2546.4	H	5.83	-38.71	7.85	-36.69	-13.00	23.69
2546.4	V	5.83	-40.13	7.85	-38.11	-13.00	25.11

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Test mode: GSM1900 (GSM)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBi)	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(1850.2 MHz)							
3700.4	H	7.33	-43.04	11.20	-39.17	-13.00	26.17
3700.4	V	7.33	-48.15	11.20	-44.28	-13.00	31.28
Middle Channel(1880.0 MHz)							
3760.0	H	7.53	-39.09	11.25	-35.37	-13.00	22.37
3760.0	V	7.53	-46.32	11.25	-42.60	-13.00	29.60
High Channel(1909.8 MHz)							
3819.6	H	7.69	-37.37	11.31	-33.75	-13.00	20.75
3819.6	V	7.69	-44.57	11.31	-40.95	-13.00	27.95

**Test mode: GSM1900 (EDGE)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBi)	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(1850.2 MHz)							
3700.4	H	7.33	-44.52	11.20	-40.65	-13.00	27.65
3700.4	V	7.33	-49.47	11.20	-45.60	-13.00	32.60
Middle Channel(1880.0 MHz)							
3760.0	H	7.53	-40.47	11.25	-36.75	-13.00	23.75
3760.0	V	7.53	-47.90	11.25	-44.18	-13.00	31.18
High Channel(1909.8 MHz)							
3819.6	H	7.69	-38.96	11.31	-35.34	-13.00	22.34
3819.6	V	7.69	-45.87	11.31	-42.25	-13.00	29.25

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.

**Test mode: UMTS 850(HSDPA)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBd)	E.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(826.4 MHz)							
1652.8	H	4.59	-40.44	5.94	-39.09	-13.00	26.09
1652.8	V	4.59	-52.47	5.94	-51.12	-13.00	38.12
2479.20	H	5.83	-48.98	7.77	-47.04	-13.00	34.04
2479.20	V	5.83	-49.46	7.77	-47.52	-13.00	34.52
Middle Channel(836.0 MHz)							
1672.0	H	4.62	-40.35	6.01	-38.96	-13.00	25.96
1672.0	V	4.62	-54.09	6.01	-52.70	-13.00	39.70
2509.20	H	5.83	-49.62	7.81	-47.64	-13.00	34.64
2509.20	V	5.83	-48.34	7.81	-46.36	-13.00	33.36
High Channel(846.6 MHz)							
1693.2	H	4.66	-40.83	6.09	-39.40	-13.00	26.40
1693.2	V	4.66	-52.83	6.09	-51.40	-13.00	38.40
2539.80	H	5.83	-48.51	7.84	-46.50	-13.00	33.50
2539.80	V	5.83	-48.45	7.84	-46.44	-13.00	33.44

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



**Test mode: UMTS 1900(HSDPA)**

Frequency (MHz)	Ant. Pol. (H/V)	Cable loss (dB)	S.G level (dBm)	Ant. gain (dBi)	E.I.R.P (dBm)	Limit (dBm)	Margin (dB)
Low Channel(1852.4 MHz)							
3704.8	H	7.35	-49.31	11.20	-45.46	-13.00	32.46
3704.8	V	7.35	-51.58	11.20	-47.73	-13.00	34.73
Middle Channel(1880.0 MHz)							
3760.0	H	7.53	-47.78	11.25	-44.06	-13.00	31.06
3760.0	V	7.53	-50.86	11.25	-47.14	-13.00	34.14
High Channel(1907.6 MHz)							
3815.2	H	7.69	-47.88	11.30	-44.27	-13.00	31.27
3815.2	V	7.69	-52.20	11.30	-48.59	-13.00	35.59

**Remark:**

1.  $E.R.P. \ \& \ E.I.R.P = [S.G \ level + Amp.](dBm) + Ant. \ gain \ (dBd/dBi) - Cable \ loss(dB)$
2. No more harmonic above 3<sup>rd</sup> harmonic for all channel.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.