

FCC Test Report

(PART 27)

Report No.: RF170808D14-2

FCC ID: SSA-JW1402

Test Model: JW1402-LTE-X

Received Date: Aug. 08, 2017

Test Date: Aug. 29, 2017 ~ Jan. 18, 2018

Issued Date: Jan. 23, 2018

Applicant: KORENIX TECHNOLOGY CO., LTD.

Address: 14F, No. 213, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C)

Test Location (1): No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

Test Location (2): No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan, R.O.C

**FCC Registration /
Designation Number:** 427177 / TW0011



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agency

Table of Contents

Release Control Record	4
1 Certificate of Conformity	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Test Site and Instruments	8
3 General Information	9
3.1 General Description of EUT	9
3.2 Configuration of System under Test	10
3.2.1 Description of Support Units	10
3.3 Test Mode Applicability and Tested Channel Detail	10
3.4 EUT Operating Conditions	15
3.5 General Description of Applied Standards	15
4 Test Types and Results	16
4.1 Output Power Measurement	16
4.1.1 Limits of Output Power Measurement	16
4.1.2 Test Procedures	16
4.1.3 Test Setup	17
4.1.4 Test Results	18
4.2 Modulation Characteristics Measurement	27
4.2.1 Limits of Modulation Characteristics	27
4.2.2 Test Procedure	27
4.2.3 Test Setup	27
4.2.4 Test Results	28
4.3 Frequency Stability Measurement	30
4.3.1 Limits of Frequency Stability Measurement	30
4.3.2 Test Procedure	30
4.3.3 Test Setup	30
4.3.4 Test Results	31
4.4 Occupied Bandwidth Measurement	41
4.4.1 Limits of Occupied Bandwidth Measurement	41
4.4.2 Test Procedure	41
4.4.3 Test Setup	41
4.4.4 Test Result	42
4.5 Band Edge Measurement	47
4.5.1 Limits of Band Edge Measurement	47
4.5.2 Test Setup	47
4.5.3 Test Procedures	47
4.5.4 Test Results	48
4.6 Peak to Average Ratio	60
4.6.1 Limits of Peak to Average Ratio Measurement	60
4.6.2 Test Setup	60
4.6.3 Test Procedures	60
4.6.4 Test Results	61
4.7 Conducted Spurious Emissions	66
4.7.1 Limits of Conducted Spurious Emissions Measurement	66
4.7.2 Test Setup	66
4.7.3 Test Procedure	66
4.7.4 Test Results	67
4.8 Radiated Emission Measurement	76
4.8.1 Limits of Radiated Emission Measurement	76
4.8.2 Test Procedure	76
4.8.3 Deviation from Test Standard	76
4.8.4 Test Setup	77

4.8.5 Test Results	78
5 Pictures of Test Arrangements.....	94
Appendix – Information on the Testing Laboratories	95



Release Control Record

Issue No.	Description	Date Issued
RF170808D14-2	Original Release	Jan. 23, 2018

1 Certificate of Conformity

Product: JetWave 1402 LTE Module

Brand: KORENIX

Test Model: JW1402-LTE-X


Sample Status: Identical Prototype


Applicant: KORENIX TECHNOLOGY CO., LTD.

Test Date: Aug. 29, 2017 ~ Jan. 18, 2018

Standards: FCC Part 27, Subpart F, L

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Jan. 23, 2018
Gina Liu / Specialist

Approved by :  , **Date:** Jan. 23, 2018
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -37.87 dB at 3440 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -17.81 dB at 1564 MHz.

Applied Standard: FCC Part 27 & Part 2 (LTE 17)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(C)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	Pass	Meet the requirement of limit.
2.1049 27.53(g)	Occupied Bandwidth	Pass	Meet the requirement of limit.
27.50(d)(5)	Peak to Average Ratio	Pass	Meet the requirement of limit.
27.53(g)	Band Edge Measurements	Pass	Meet the requirement of limit.
2.1051 27.53(g)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -8.64 dB at 1422 MHz.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.44 dB
Radiated Emissions up to 1 GHz	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Jul. 05, 2017	Jul. 04, 2018
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 13, 2016	Dec. 12, 2017
			Jan. 11, 2018	Jan. 10, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 13, 2016	Dec. 12, 2017
			Dec. 06, 2017	Dec. 05, 2018
HORN Antenna ETS-Lindgren	3117	00143293	Jun. 26, 2017	Jun. 25, 2018
Double Ridge Guide Horn Antenna EMCO	3115	5619	Dec. 15, 2016	Dec. 14, 2017
			Nov. 30, 2017	Nov. 29, 2018
BILOG Antenna SCHWARZBECK	VULB 9168	9168-153	Dec. 13, 2016	Dec. 12, 2017
			Dec. 06, 2017	Dec. 05, 2018
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 14, 2016	Dec. 13, 2017
			Dec. 01, 2017	Nov. 30, 2018
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 07, 2017	Jul. 06, 2018
Bluetooth Tester	CBT	100980	Jun. 28, 2017	Jun. 27, 2019
Loop Antenna	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
MXG Vector signal generator Agilent	N5182B	MY53050430	Oct. 24, 2017	Oct. 23, 2018
Preamplifier Agilent	310N	187226	Jun. 23, 2017	Jun. 22, 2018
Preamplifier Agilent	83017A	MY39501357	Jun. 23, 2017	Jun. 22, 2018
Power Meter Anritsu	ML2495A	1012010	Aug. 15, 2017	Aug. 14, 2018
Power Sensor Anritsu	MA2411B	1315050	Aug. 15, 2017	Aug. 14, 2018
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC-SMS-100-SMS-120+RFC-SMS-100-SMS-400)	Jun. 26, 2017	Jun. 25, 2018
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC-SMS-100-SMS-24)	Jun. 26, 2017	Jun. 25, 2018
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
Fixed Attenuator Mini-Circuits	BW-N10W5+	NA	Jul. 08, 2017	Jul. 07, 2018

- Note: 1. The calibration interval of the above test instruments is 12 / 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HsinTien Chamber 1.
3. The horn antenna and preamplifier (model: 83017A) are used only for the measurement of emission frequency above 1 GHz if tested.
4. The IC Site Registration No. is IC7450I-1.

3 General Information


3.1 General Description of EUT

Product	JetWave 1402 LTE Module	
Brand	KORENIX	
Test Model	JW1402-LTE-X	
Status of EUT	Identical Prototype	
Power Supply Rating	54 Vdc (power supply)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1710.7 ~ 1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz)	1711.5 ~ 1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz)	706.5 ~ 713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz)	709 ~ 711 MHz
Emission Designator	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	1M09W7D
	LTE Band 4 (Channel Bandwidth: 3 MHz)	2M70G7D
	LTE Band 4 (Channel Bandwidth: 5 MHz)	4M49W7D
	LTE Band 4 (Channel Bandwidth: 10 MHz)	8M97G7D
	LTE Band 4 (Channel Bandwidth: 15 MHz)	13M5G7D
	LTE Band 4 (Channel Bandwidth: 20 MHz)	18M0W7D
	LTE Band 13 (Channel Bandwidth: 5 MHz)	4M50W7D
	LTE Band 13 (Channel Bandwidth: 10 MHz)	8M94W7D
	LTE Band 17 (Channel Bandwidth: 5 MHz)	4M50G7D
LTE Band 17 (Channel Bandwidth: 10 MHz)	8M99W7D	
Max. ERP Power	LTE Band 13 (Channel Bandwidth: 5 MHz)	64.33mW
	LTE Band 13 (Channel Bandwidth: 10 MHz)	65.57mW
	LTE Band 17 (Channel Bandwidth: 5 MHz)	65.10mW
	LTE Band 17 (Channel Bandwidth: 10 MHz)	65.75mW
Max. EIRP Power	LTE Band 4 (Channel Bandwidth: 1.4 MHz)	160.88mW
	LTE Band 4 (Channel Bandwidth: 3 MHz)	161.99mW
	LTE Band 4 (Channel Bandwidth: 5 MHz)	162.55mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	161.81mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	162.07mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	164.44mW
Antenna Type	LTE Band 4: Omni antenna with 2.66 dBi gain LTE Band 13: Omni antenna with 2.31 dBi gain LTE Band 17: Omni antenna with 2.45 dBi gain	
Accessory Device	N/A	
Data Cable Supplied	N/A	

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

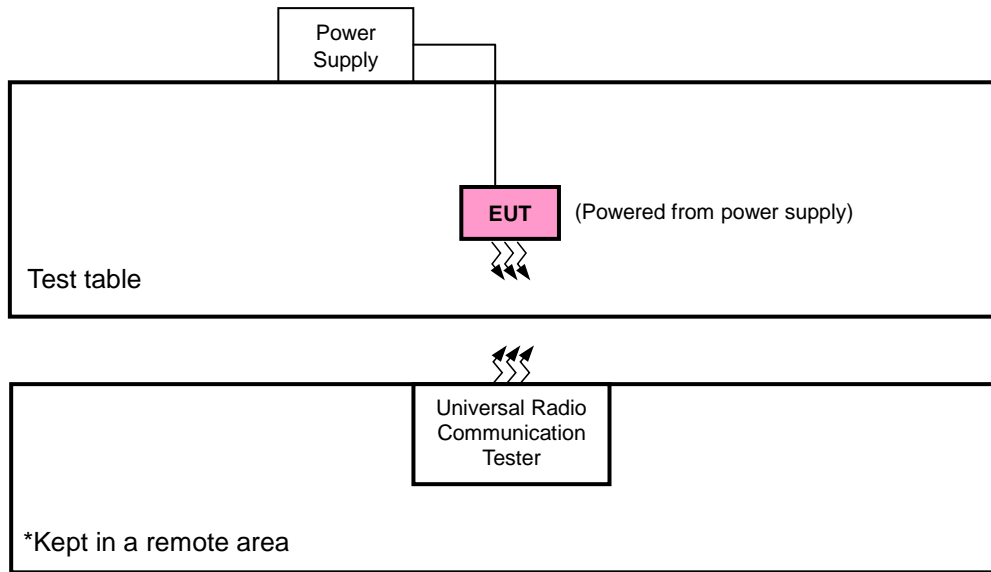

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
LTE Band 4	X-plane	X-axis
LTE Band 13	X-plane	X-axis
LTE Band 17	X-plane	X-axis

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 14 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 49 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 74 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 99 RB Offset
-	Frequency Stability	19957 to 20393	19957, 20393	1.4 MHz	QPSK	1 RB / 5 RB Offset
		19965 to 20385	19965, 20385	3 MHz	QPSK	1 RB / 14 RB Offset
		19975 to 20375	19975, 20375	5 MHz	QPSK	1 RB / 24 RB Offset
		20000 to 20350	20000, 20350	10 MHz	QPSK	1 RB / 49 RB Offset
		20025 to 20325	20025, 20325	15 MHz	QPSK	1 RB / 74 RB Offset
		20050 to 20300	20050, 20300	20 MHz	QPSK	1 RB / 99 RB Offset
-	Occupied Bandwidth	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	Peak to Average Ratio	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK, 16QAM	1 RB / 2 RB Offset
		19965 to 20385	19965, 20175, 20385	3 MHz	QPSK, 16QAM	1 RB / 7 RB Offset
		19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	12 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	36 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	50 RB / 0 RB Offset

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode		
-	Band Edge	19957 to 20393	19957	1.4 MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset		
			20393	1.4 MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset		
		19965 to 20385	19965	3 MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset		
			20385	3 MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset		
		19975 to 20375	19975	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			20375	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		20000 to 20350	20000	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			20350	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		20025 to 20325	20025	15 MHz	QPSK	1 RB / 0 RB Offset 75 RB / 0 RB Offset		
			20325	15 MHz	QPSK	1 RB / 74 RB Offset 75 RB / 0 RB Offset		
		20050 to 20300	20050	20 MHz	QPSK	1 RB / 0 RB Offset 100 RB / 0 RB Offset		
			20300	20 MHz	QPSK	1 RB / 99 RB Offset 100 RB / 0 RB Offset		
		-	Conducted Emission	19957 to 20393	19957, 20175, 20393	1.4 MHz	QPSK	1 RB / 2 RB Offset
				19965 to 20385	19965, 20175, 20385	3 MHz	QPSK	1 RB / 7 RB Offset
				19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	12 RB / 0 RB Offset
				20000 to 20350	20000, 20175, 20350	10 MHz	QPSK	50 RB / 0 RB Offset
20025 to 20325	20025, 20175, 20325			15 MHz	QPSK	36 RB / 0 RB Offset		
20050 to 20300	20050, 20175, 20300			20 MHz	QPSK	50 RB / 0 RB Offset		
-	Radiated Emission (above 1 GHz)	20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 99 RB Offset		
-	Radiated Emission (below 1 GHz)	20050 to 20300	20050(note 2)	20 MHz	QPSK	1 RB / 99 RB Offset		

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. The radiation below 1GHz test mode is refer from above 1GHz radiated emission worse mode.

LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Frequency Stability	23205 to 23255	23205, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset
-	Occupied Bandwidth	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Band Edge	23205 to 23255	23205	5 MHz	QPSK	1 RB / 0 RB Offset
			23255	5 MHz	QPSK	25 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset
			23230	10 MHz	QPSK	25 RB / 0 RB Offset
			23230	10 MHz	QPSK	1 RB / 0 RB Offset
			23230	10 MHz	QPSK	50 RB / 0 RB Offset
-	Conducted Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 0 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset
-	Radiated Emission (above 1 GHz)	23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset
						1 RB / 50 RB Offset
-	Radiated Emission (below 1 GHz)	23230	23230	10 MHz	QPSK	1 RB / 24 RB Offset
						1 RB / 50 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. The radiation below 1GHz test mode is refer from above 1GHz radiated emission worse mode.

LTE Band 17

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Frequency Stability	23755 to 23825	23755, 23825	5 MHz	QPSK	1 RB / 12 RB Offset
		23780 to 23800	23780, 23800	10 MHz	QPSK	1 RB / 24 RB Offset
-	Occupied Bandwidth	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM	50 RB / 0 RB Offset
-	Peak to Average Ratio	23755 to 23825	23755, 23790, 23825	5 MHz	QPSK, 16QAM	1 RB / 12 RB Offset
		23780 to 23800	23780, 23790, 23800	10 MHz	QPSK, 16QAM	1 RB / 24 RB Offset
-	Band Edge	23755 to 23825	23755	5 MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			23825	5 MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		23780 to 23800	23780	10 MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			23800	10 MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.
2. The radiation below 1GHz test mode is refer from above 1GHz radiated emission worse mode.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	54 Vdc	Charles Hsiao, Karl Lee
Frequency Stability	25 deg. C, 65 % RH	54 Vdc	Carlos Chen
Occupied Bandwidth	25 deg. C, 65 % RH	54 Vdc	Carlos Chen
Band Edge	25 deg. C, 65 % RH	54 Vdc	Carlos Chen
Peak to Average Ratio	25 deg. C, 65 % RH	54 Vdc	Carlos Chen
Condcudeted Emission	25 deg. C, 65 % RH	54 Vdc	Carlos Chen
Radiated Emission	25 deg. C, 65 % RH	120 Vac, 60 Hz	Charles Hsiao, Karl Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 704-716 MHz band are limited to 3 watts ERP

4.1.2 Test Procedures

EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RWB and VBW is 5MHz for WCDMA, HSDPA, HSUPA mode and 5MHz for LTE Mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}$.

Where:

$$ERP/EIRP = P_{Meas} + GT - LC$$

PMeas: Measure transmitter output power.

GT: Gain of the transmitting antenna.

LC: signal attenuation in the connecting cable between the transmitter and antenna.


Conducted Power Measurement:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

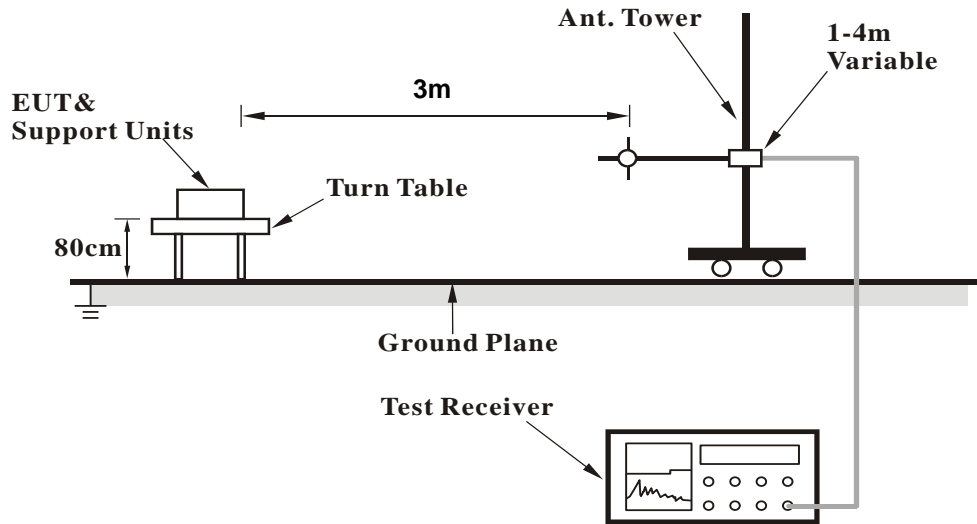

<Radiated Emission above 1 GHz>

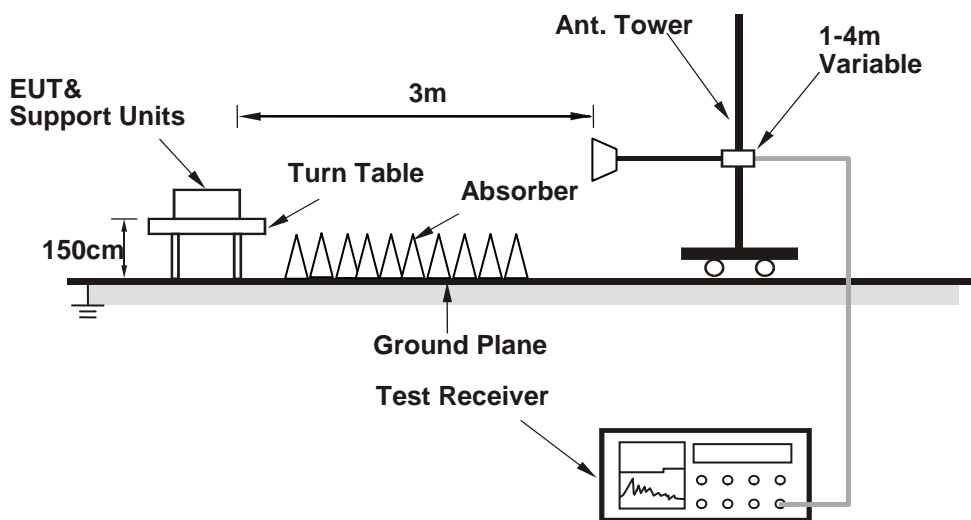

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19957	Mid Ch 20175	High Ch 20393		Low Ch 19957	Mid Ch 20175	High Ch 20393	
			1710.7 MHz	1732.5 MHz	1754.3 MHz		1710.7 MHz	1732.5 MHz	1754.3 MHz	
4 / 1.4M	1	0	22.31	22.26	22.59	0	21.27	21.22	21.47	1
	1	2	22.13	22.18	22.43	0	21.07	21.16	21.3	1
	1	5	22.05	22.04	22.32	0	20.94	21.02	21.21	1
	3	0	21.11	21.13	21.46	0	20.07	20.07	20.45	1
	3	1	20.91	20.9	21.21	0	19.83	19.91	20.21	1
	3	3	20.91	20.92	21.16	0	19.79	19.76	20.12	1
	6	0	21.1	21.1	21.39	1	20.12	20.08	20.29	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19965	Mid Ch 20175	High Ch 20385		Low Ch 19965	Mid Ch 20175	High Ch 20385	
			1711.5 MHz	1732.5 MHz	1753.5 MHz		1711.5 MHz	1732.5 MHz	1753.5 MHz	
4 / 3M	1	0	22.33	22.37	22.62	0	21.04	20.95	21.35	1
	1	7	22.19	22.28	22.5	0	21.14	21.18	21.49	1
	1	14	22.16	22.03	22.24	0	20.94	20.94	21.15	1
	8	0	21.17	21.17	21.53	1	20.12	20.02	20.54	2
	8	3	21	21.01	21.3	1	19.91	19.92	20.31	2
	8	7	20.98	20.9	21.33	1	19.89	19.89	20.18	2
	15	0	21.16	21.14	21.43	1	20.15	20.1	20.44	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 19975	Mid Ch 20175	High Ch 20375		Low CH 19975	Mid CH 20175	High CH 20375	
			1712.5 MHz	1732.5 MHz	1752.5 MHz		1712.5 MHz	1732.5 MHz	1752.5 MHz	
4 / 5M	1	0	22.33	22.45	22.65	0	21.11	21.13	21.44	1
	1	12	22.29	22.18	22.58	0	21.1	21.09	21.57	1
	1	24	22.05	22.14	22.46	0	21.07	20.95	21.34	1
	12	0	21.23	21.28	21.63	1	20.06	20.07	20.47	2
	12	6	21.07	21.04	21.37	1	19.89	19.95	20.45	2
	12	13	20.9	20.91	21.26	1	19.92	19.81	20.22	2
	25	0	21.21	21.21	21.52	1	20.2	20.18	20.44	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20000	Mid Ch 20175	High Ch 20350		Low Ch 20000	Mid Ch 20175	High Ch 20350	
			1715.0 MHz	1732.5 MHz	1750.0 MHz		1715.0 MHz	1732.5 MHz	1750.0 MHz	
4 / 10M	1	0	22.46	22.45	22.79	0	21.25	21.19	21.56	1
	1	24	22.22	22.33	22.62	0	21.23	21.26	21.57	1
	1	49	22.04	22.08	22.41	0	21.09	21.22	21.33	1
	25	0	21.33	21.27	21.61	1	20.24	20.17	20.43	2
	25	12	21.11	21.07	21.41	1	20.07	20	20.46	2
	25	25	21.02	21.01	21.44	1	19.91	19.93	20.21	2
	50	0	21.25	21.34	21.67	1	20.16	20.17	20.54	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20025	Mid Ch 20175	High Ch 20325		Low Ch 20025	Mid Ch 20175	High Ch 20325	
			1717.5 MHz	1732.5 MHz	1747.5 MHz		1717.5 MHz	1732.5 MHz	1747.5 MHz	
4 / 15M	1	0	22.49	22.52	22.82	0	21.34	21.33	21.66	1
	1	37	22.36	22.38	22.67	0	21.32	21.26	21.65	1
	1	74	22.27	22.25	22.46	0	21.11	21.17	21.42	1
	36	0	21.4	21.36	21.66	1	20.3	20.15	20.45	2
	36	19	21.19	21.14	21.43	1	20.06	20.12	20.42	2
	36	39	21.09	21.03	21.38	1	20.01	20.02	20.37	2
	75	0	21.3	21.36	21.61	1	20.34	20.29	20.64	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 20050	Mid Ch 20175	High Ch 20300		Low Ch 20050	Mid Ch 20175	High Ch 20300	
			1720.0 MHz	1732.5 MHz	1745.0 MHz		1720.0 MHz	1732.5 MHz	1745.0 MHz	
4 / 20M	1	0	22.53	22.55	22.87	0	21.46	21.46	21.78	1
	1	50	22.41	22.42	22.74	0	21.34	21.36	21.68	1
	1	99	22.27	22.32	22.49	0	21.21	21.15	21.41	1
	50	0	21.37	21.44	21.74	1	20.19	20.18	20.62	2
	50	25	21.15	21.23	21.54	1	20.17	20.1	20.53	2
	50	50	21.1	21.14	21.49	1	20.12	20.07	20.39	2
	100	0	21.32	21.39	21.7	1	20.27	20.39	20.65	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23205	Mid Ch 23230	High Ch 23255		Low Ch 23205	Mid Ch 23230	High Ch 23255	
			779.5 MHz	782.0 MHz	784.5 MHz		779.5 MHz	782.0 MHz	784.5 MHz	
13 / 5M	1	0	22.39	22.29	22.44	0	21.24	21.18	21.22	1
	1	12	22.24	22.12	22.23	0	21.2	21.12	21.19	1
	1	24	22.09	22.06	22.24	0	20.98	20.87	21.21	1
	12	0	21.27	21.15	21.74	1	20.17	19.96	20.62	2
	12	6	21.05	21.02	21.51	1	20	19.9	20.48	2
	12	13	20.95	20.93	21.48	1	19.9	19.72	20.39	2
	25	0	21.23	21.16	21.63	1	20.11	20.06	20.56	2

Band / BW	RB Size	RB Offset	QPSK		3GPP MPR (dB)	16QAM		3GPP MPR (dB)
			Mid Ch 23230	782.0 MHz		Mid Ch 23230	782.0 MHz	
			782.0 MHz	782.0 MHz				
13 / 10M	1	0	22.54	21.29	0	21.29	1	
	1	24	22.2	21.16	0	21.16	1	
	1	49	22.11	21.04	0	21.04	1	
	25	0	21.19	20.18	1	20.18	2	
	25	12	21.02	19.94	1	19.94	2	
	25	25	20.92	19.96	1	19.96	2	
	50	0	21.19	20.06	1	20.06	2	

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23755	Mid Ch 23790	High Ch 23825		Low Ch 23755	Mid Ch 23790	High Ch 23825	
			706.5 MHz	710.0 MHz	713.5 MHz		706.5 MHz	710.0 MHz	713.5 MHz	
17 / 5M	1	0	22.4	22.62	22.64	0	21.32	21.51	21.5	1
	1	12	22.28	22.51	22.54	0	21.2	21.43	21.5	1
	1	24	22.1	22.37	22.37	0	21.05	21.16	21.43	1
	12	0	21.24	21.52	21.53	1	20.11	20.29	20.53	2
	12	6	21.09	21.31	21.32	1	19.97	20.24	20.36	2
	12	13	20.97	21.28	21.28	1	19.91	20.21	20.26	2
	25	0	21.19	21.43	21.57	1	20.21	20.38	20.48	2

Band / BW	RB Size	RB Offset	QPSK			3GPP MPR (dB)	16QAM			3GPP MPR (dB)
			Low Ch 23780	Mid Ch 23790	High Ch 23800		Low Ch 23780	Mid Ch 23790	High Ch 23800	
			709.0 MHz	710.0 MHz	711.0 MHz		709.0 MHz	710.0 MHz	711.0 MHz	
17 / 10M	1	0	22.43	22.66	22.72	0	21.38	21.58	21.68	1
	1	24	22.31	22.56	22.61	0	21.2	21.46	21.52	1
	1	49	22.08	22.35	22.4	0	20.98	21.43	21.35	1
	25	0	21.31	21.56	21.61	1	20.14	20.33	20.6	2
	25	12	21.12	21.38	21.43	1	20.04	20.26	20.35	2
	25	25	21.04	21.23	21.35	1	19.95	20.15	20.26	2
	50	0	21.26	21.48	21.61	1	20.17	20.37	20.51	2

ERP Power (dBm)

LTE Band 13							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23205	779.5	-12.61	32.771	18.01	63.26	H
	23230	782.0	-12.56	32.741	18.03	63.55	
	23255	784.5	-12.62	32.854	18.08	64.33	
	23205	779.5	-17.26	32.5	13.09	20.36	V
	23230	782.0	-17.34	32.52	13.03	20.09	
	23255	784.5	-17.36	32.62	13.11	20.46	
Channel Bandwidth: 5 MHz / 16QAM							
X	23205	779.5	-13.60	32.771	17.02	50.36	H
	23230	782.0	-13.51	32.741	17.08	51.06	
	23255	784.5	-13.66	32.854	17.04	50.63	
	23205	779.5	-18.24	32.5	12.11	16.26	V
	23230	782.0	-18.29	32.52	12.08	16.14	
	23255	784.5	-18.44	32.62	12.03	15.96	

LTE Band 13							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23230	782.0	-12.42	32.737	18.17	65.57	H
	23230	782.0	-17.21	32.52	13.16	20.70	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23230	782.0	-13.42	32.737	17.17	52.08	H
	23230	782.0	-18.26	32.52	12.11	16.26	V

LTE Band 17							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23755	706.5	-12.54	32.719	18.03	63.52	H
	23790	710.0	-12.45	32.736	18.14	65.10	
	23825	713.5	-12.34	32.591	18.10	64.58	
	23755	706.5	-17.46	32.69	13.08	20.32	V
	23790	710.0	-17.56	32.81	13.10	20.42	
	23825	713.5	-17.56	32.74	13.03	20.09	
Channel Bandwidth: 5 MHz / 16QAM							
X	23755	706.5	-13.56	32.719	17.01	50.22	H
	23790	710.0	-13.54	32.736	17.05	50.65	
	23825	713.5	-13.44	32.591	17.00	50.13	
	23755	706.5	-18.51	32.69	12.03	15.96	V
	23790	710.0	-18.59	32.81	12.07	16.11	
	23825	713.5	-18.42	32.74	12.17	16.48	

LTE Band 17							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23780	709.0	-12.44	32.727	18.14	65.12	H
	23790	710.0	-12.41	32.739	18.18	65.75	
	23800	711.0	-12.56	32.728	18.02	63.36	
	23780	709.0	-17.54	32.75	13.06	20.23	V
	23790	710.0	-17.62	32.81	13.04	20.14	
	23800	711.0	-17.60	32.84	13.09	20.37	
Channel Bandwidth: 10 MHz / 16QAM							
X	23780	709.0	-13.58	32.727	17.00	50.08	H
	23790	710.0	-13.36	32.739	17.23	52.83	
	23800	711.0	-13.56	32.728	17.02	50.33	
	23780	709.0	-18.52	32.75	12.08	16.14	V
	23790	710.0	-18.63	32.81	12.03	15.96	
	23800	711.0	-18.68	32.84	12.01	15.89	

EIRP Power (dBm)

LTE Band 4							
Channel Bandwidth: 1.4 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19957	1710.7	-20.42	42.49	22.07	160.88	H
	20175	1732.5	-20.29	42.33	22.04	159.85	
	20393	1754.3	-20.05	42.10	22.05	160.32	
	19957	1710.7	-24.96	42.99	18.03	63.53	V
	20175	1732.5	-24.63	42.74	18.11	64.71	
	20393	1754.3	-24.19	42.21	18.02	63.39	
Channel Bandwidth: 1.4 MHz / 16QAM							
X	19957	1710.7	-21.06	42.49	21.43	138.84	H
	20175	1732.5	-20.84	42.33	21.49	140.83	
	20393	1754.3	-20.70	42.10	21.40	138.04	
	19957	1710.7	-25.53	42.99	17.46	55.72	V
	20175	1732.5	-25.34	42.74	17.40	54.95	
	20393	1754.3	-24.76	42.21	17.45	55.59	

LTE Band 4							
Channel Bandwidth: 3 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19965	1711.5	-20.39	42.49	22.10	161.99	H
	20175	1732.5	-20.30	42.33	22.03	159.48	
	20385	1753.5	-20.02	42.10	22.08	161.44	
	19965	1711.5	-24.89	42.99	18.10	64.57	V
	20175	1732.5	-24.68	42.74	18.06	63.97	
	20385	1753.5	-24.12	42.21	18.09	64.42	
Channel Bandwidth: 3 MHz / 16QAM							
X	19965	1711.5	-21.48	42.49	21.01	126.04	H
	20175	1732.5	-21.26	42.33	21.07	127.85	
	20385	1753.5	-21.03	42.10	21.07	127.94	
	19965	1711.5	-25.90	42.99	17.09	51.17	V
	20175	1732.5	-25.70	42.74	17.04	50.58	
	20385	1753.5	-25.12	42.21	17.09	51.17	

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	19975	1712.5	-22.41	42.49	20.08	101.74	H
	20175	1732.5	-20.32	42.33	22.01	158.74	
	20375	1752.5	-19.99	42.10	22.11	162.55	
	19975	1712.5	-24.90	42.99	18.09	64.42	V
	20175	1732.5	-24.62	42.74	18.12	64.86	
	20375	1752.5	-24.16	42.21	18.05	63.83	
Channel Bandwidth: 5 MHz / 16QAM							
X	19975	1712.5	-21.38	42.49	21.11	128.97	H
	20175	1732.5	-21.27	42.33	21.06	127.56	
	20375	1752.5	-21.07	42.10	21.03	126.77	
	19975	1712.5	-25.94	42.99	17.05	50.70	V
	20175	1732.5	-25.71	42.74	17.03	50.47	
	20375	1752.5	-25.16	42.21	17.05	50.70	

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20000	1715.0	-20.43	42.49	22.06	160.51	H
	20175	1732.5	-20.27	42.33	22.06	160.58	
	20350	1750.0	-20.01	42.10	22.09	161.81	
	20000	1715.0	-24.91	42.99	18.08	64.27	V
	20175	1732.5	-24.62	42.74	18.12	64.86	
	20350	1750.0	-24.11	42.21	18.10	64.57	
Channel Bandwidth: 10 MHz / 16QAM							
X	20000	1715.0	-21.43	42.49	21.06	127.50	H
	20175	1732.5	-21.29	42.33	21.04	126.97	
	20350	1750.0	-21.01	42.10	21.09	128.53	
	20000	1715.0	-25.90	42.99	17.09	51.17	V
	20175	1732.5	-25.67	42.74	17.07	50.93	
	20350	1750.0	-25.16	42.21	17.05	50.70	

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20025	1717.5	-20.39	42.49	22.10	161.99	H
	20175	1732.5	-20.23	42.33	22.10	162.07	
	20325	1747.5	-20.06	42.10	22.04	159.96	
	20025	1717.5	-24.92	42.99	18.07	64.12	V
	20175	1732.5	-24.71	42.74	18.03	63.53	
	20325	1747.5	-24.19	42.21	18.02	63.39	
Channel Bandwidth: 15 MHz / 16QAM							
X	20025	1717.5	-21.38	42.49	21.11	128.97	H
	20175	1732.5	-21.31	42.33	21.02	126.39	
	20325	1747.5	-21.06	42.10	21.04	127.06	
	20025	1717.5	-25.97	42.99	17.02	50.35	V
	20175	1732.5	-25.64	42.74	17.10	51.29	
	20325	1747.5	-25.20	42.21	17.01	50.23	

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
X	20050	1720.0	-20.43	42.49	22.06	160.51	H
	20175	1732.5	-20.30	42.33	22.03	159.48	
	20300	1745.0	-19.94	42.10	22.16	164.44	
	20050	1720.0	-24.92	42.99	18.07	64.12	V
	20175	1732.5	-24.70	42.74	18.04	63.68	
	20300	1745.0	-24.13	42.21	18.08	64.27	
Channel Bandwidth: 20 MHz / 16QAM							
X	20050	1720.0	-21.30	42.49	21.19	131.37	H
	20175	1732.5	-21.24	42.33	21.09	128.44	
	20300	1745.0	-21.05	42.10	21.05	127.35	
	20050	1720.0	-25.93	42.99	17.06	50.82	V
	20175	1732.5	-25.64	42.74	17.10	51.29	
	20300	1745.0	-25.10	42.21	17.11	51.40	

4.2 Modulation Characteristics Measurement


4.2.1 Limits of Modulation Characteristics

N/A



4.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, The frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

4.2.3 Test Setup



4.2.4 Test Results

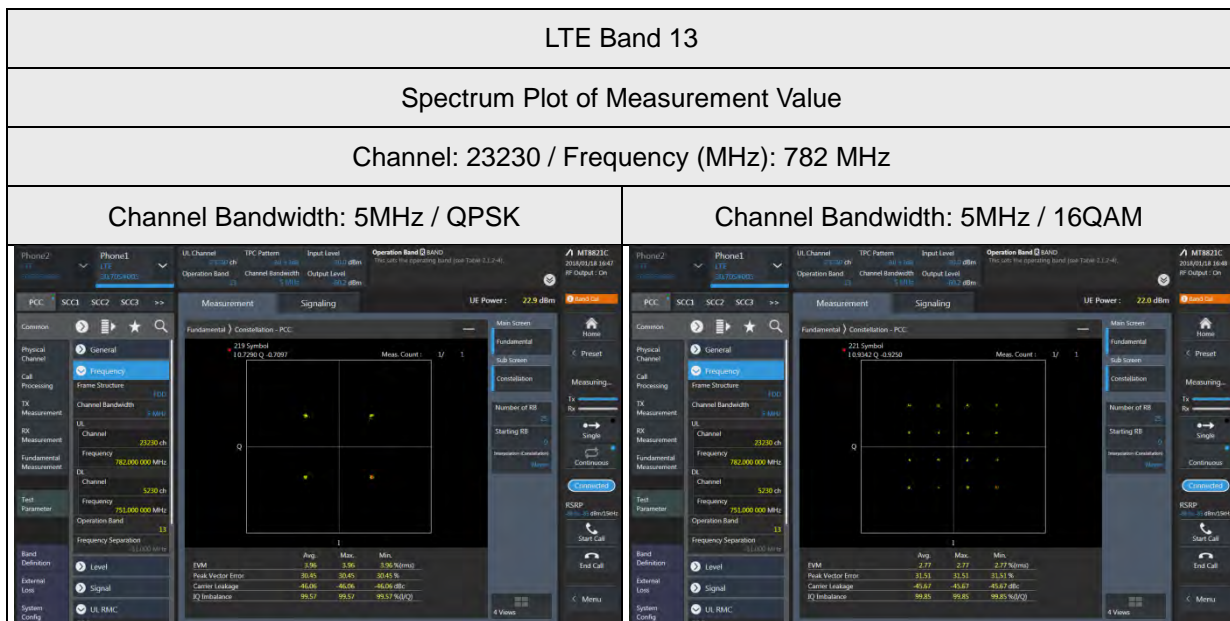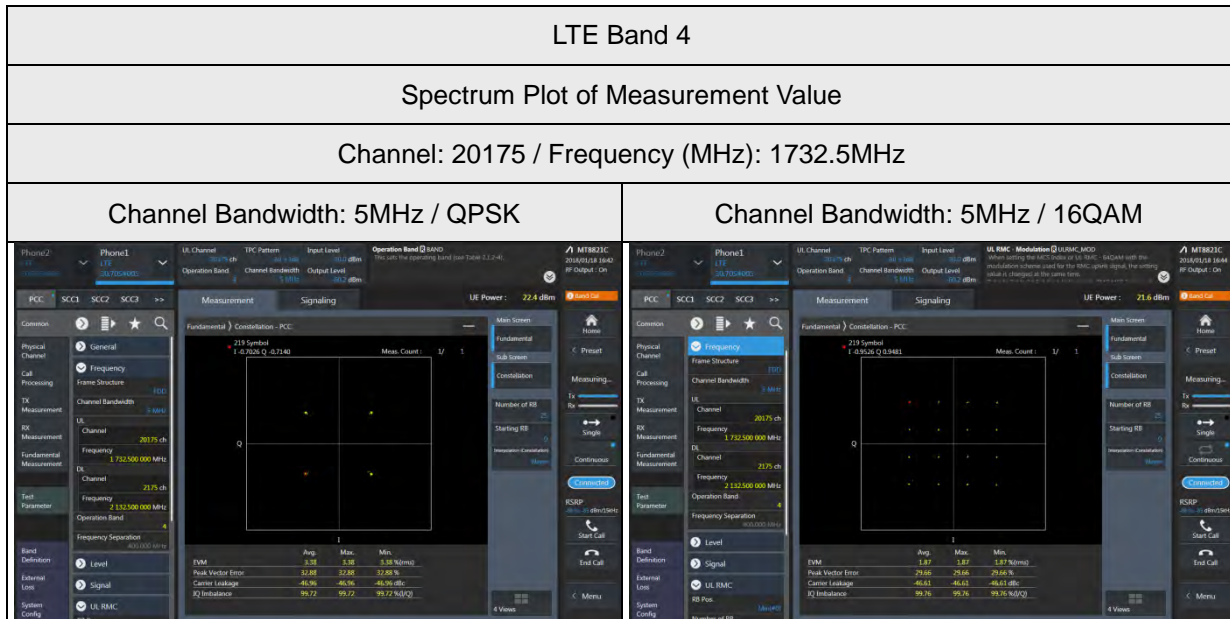


LTE Band 17

Spectrum Plot of Measurement Value

Channel: 23790 / Frequency (MHz): 710 MHz

Channel Bandwidth: 5MHz / QPSK

Channel Bandwidth: 5MHz / 16QAM

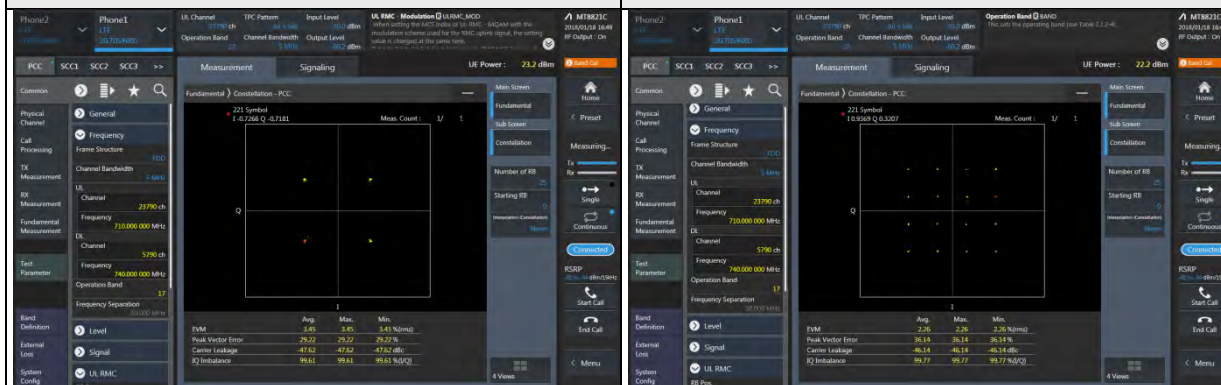

4.3 Frequency Stability Measurement

4.3.1 Limits of Frequency Stability Measurement


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.3.2 Test Procedure

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the ± 0.5 °C during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

4.3.3 Test Setup

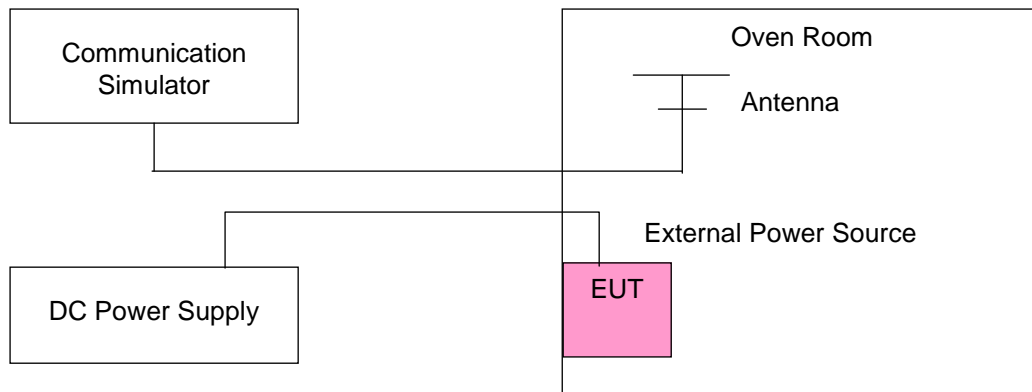

4.3.4 Test Results

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1710.700002	0.001	1754.300003	0.002	2.5
48	1710.700004	0.002	1754.300004	0.002	2.5
57	1710.700003	0.002	1754.300003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 1.4 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1710.700003	0.001	1754.300001	0.001	2.5
-30	1710.700004	0.002	1754.300002	0.001	2.5
-20	1710.700001	0.001	1754.300001	0.001	2.5
-10	1710.700003	0.002	1754.300002	0.001	2.5
0	1710.700003	0.002	1754.300001	0.001	2.5
10	1710.700003	0.002	1754.300002	0.001	2.5
20	1710.699999	-0.001	1754.299997	-0.002	2.5
30	1710.699998	-0.001	1754.299998	-0.001	2.5
40	1710.699998	-0.001	1754.299998	-0.001	2.5
50	1710.699998	-0.001	1754.299996	-0.002	2.5
60	1710.699996	-0.002	1754.299996	-0.002	2.5
70	1710.699996	-0.002	1754.299998	-0.001	2.5
75	1710.699997	-0.002	1754.299997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1711.500002	0.001	1753.500003	0.002	2.5
48	1711.500003	0.001	1753.500004	0.002	2.5
57	1711.500004	0.002	1753.500002	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 3 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1711.500003	0.002	1753.500002	0.001	2.5
-30	1711.500001	0.001	1753.500002	0.001	2.5
-20	1711.500002	0.001	1753.500004	0.002	2.5
-10	1711.500003	0.001	1753.500002	0.001	2.5
0	1711.500003	0.002	1753.500003	0.002	2.5
10	1711.500004	0.002	1753.500001	0.001	2.5
20	1711.499998	-0.001	1753.499999	-0.001	2.5
30	1711.499997	-0.002	1753.499998	-0.001	2.5
40	1711.499996	-0.002	1753.499996	-0.002	2.5
50	1711.499999	-0.001	1753.499999	-0.001	2.5
60	1711.499999	-0.001	1753.499999	-0.001	2.5
70	1711.499997	-0.002	1753.499997	-0.002	2.5
75	1711.499998	-0.001	1753.499999	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1712.500003	0.001	1752.500002	0.001	2.5
48	1712.500001	0.001	1752.500004	0.002	2.5
57	1712.500002	0.001	1752.500003	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1712.500001	0.001	1752.500002	0.001	2.5
-30	1712.500002	0.001	1752.500003	0.002	2.5
-20	1712.500003	0.002	1752.500002	0.001	2.5
-10	1712.500004	0.002	1752.500003	0.002	2.5
0	1712.500001	0.001	1752.500001	0.001	2.5
10	1712.500001	0.001	1752.500001	0.001	2.5
20	1712.499996	-0.002	1752.499999	-0.001	2.5
30	1712.499998	-0.001	1752.499999	-0.001	2.5
40	1712.499998	-0.001	1752.499999	-0.001	2.5
50	1712.499998	-0.001	1752.499998	-0.001	2.5
60	1712.499997	-0.002	1752.499998	-0.001	2.5
70	1712.499999	-0.001	1752.499998	-0.001	2.5
75	1712.499996	-0.002	1752.499998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1715.000003	0.002	1750.000003	0.002	2.5
48	1715.000003	0.002	1750.000003	0.002	2.5
57	1715.000002	0.001	1750.000003	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1715.000003	0.002	1750.000003	0.002	2.5
-30	1715.000002	0.001	1750.000001	0.001	2.5
-20	1715.000004	0.002	1750.000003	0.002	2.5
-10	1715.000002	0.001	1750.000004	0.002	2.5
0	1715.000002	0.001	1750.000002	0.001	2.5
10	1715.000002	0.001	1750.000004	0.002	2.5
20	1714.999998	-0.001	1749.999996	-0.002	2.5
30	1714.999998	-0.001	1749.999996	-0.002	2.5
40	1714.999998	-0.001	1749.999996	-0.002	2.5
50	1714.999997	-0.002	1749.999999	-0.001	2.5
60	1714.999998	-0.001	1749.999999	-0.001	2.5
70	1714.999996	-0.002	1749.999997	-0.002	2.5
75	1714.999996	-0.002	1749.999997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1717.500003	0.002	1747.500001	0.001	2.5
48	1717.500002	0.001	1747.500002	0.001	2.5
57	1717.500004	0.002	1747.500001	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 15 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1717.500003	0.002	1747.500001	0.001	2.5
-30	1717.500003	0.002	1747.500004	0.002	2.5
-20	1717.500004	0.002	1747.500003	0.002	2.5
-10	1717.500001	0.001	1747.500004	0.002	2.5
0	1717.500003	0.001	1747.500002	0.001	2.5
10	1717.500004	0.002	1747.500002	0.001	2.5
20	1717.499999	-0.001	1747.499997	-0.002	2.5
30	1717.499996	-0.002	1747.499999	-0.001	2.5
40	1717.499997	-0.002	1747.499996	-0.002	2.5
50	1717.499997	-0.002	1747.499999	-0.001	2.5
60	1717.499998	-0.001	1747.499998	-0.001	2.5
70	1717.499998	-0.001	1747.499997	-0.002	2.5
75	1717.499998	-0.001	1747.499998	-0.001	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	1720.000004	0.002	1745.000001	0.001	2.5
48	1720.000003	0.001	1745.000004	0.002	2.5
57	1720.000004	0.002	1745.000001	0.001	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 4				Limit (ppm)
	Channel Bandwidth: 20 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	1720.000003	0.002	1745.000001	0.001	2.5
-30	1720.000003	0.002	1745.000003	0.002	2.5
-20	1720.000001	0.001	1745.000003	0.002	2.5
-10	1720.000002	0.001	1745.000002	0.001	2.5
0	1720.000003	0.002	1745.000003	0.001	2.5
10	1720.000001	0.001	1745.000003	0.002	2.5
20	1719.999998	-0.001	1744.999997	-0.002	2.5
30	1719.999997	-0.002	1744.999999	-0.001	2.5
40	1719.999996	-0.002	1744.999999	-0.001	2.5
50	1719.999997	-0.002	1744.999999	-0.001	2.5
60	1719.999998	-0.001	1744.999999	-0.001	2.5
70	1719.999997	-0.002	1744.999997	-0.002	2.5
75	1719.999997	-0.002	1744.999997	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	779.500002	0.002	784.500002	0.003	2.5
48	779.500003	0.004	784.500002	0.002	2.5
57	779.500002	0.002	784.500002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	779.500002	0.003	784.500002	0.003	2.5
-30	779.500002	0.002	784.500004	0.005	2.5
-20	779.500002	0.003	784.500003	0.004	2.5
-10	779.500002	0.002	784.500003	0.003	2.5
0	779.500002	0.003	784.500003	0.004	2.5
10	779.500004	0.005	784.500002	0.003	2.5
20	779.499997	-0.003	784.499999	-0.002	2.5
30	779.499999	-0.002	784.499998	-0.003	2.5
40	779.499997	-0.003	784.499997	-0.003	2.5
50	779.499999	-0.002	784.499996	-0.005	2.5
60	779.499997	-0.003	784.499998	-0.003	2.5
70	779.499999	-0.001	784.499999	-0.002	2.5
75	779.499997	-0.004	784.499999	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 13		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
54	782.000002	0.003	2.5
48	782.000003	0.004	2.5
57	782.000003	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 13		Limit (ppm)
	Channel Bandwidth: 10 MHz		
	Frequency (MHz)	Frequency Error (ppm)	
-40	782.000002	0.002	2.5
-30	782.000001	0.001	2.5
-20	782.000003	0.004	2.5
-10	782.000004	0.005	2.5
0	782.000002	0.002	2.5
10	782.000001	0.002	2.5
20	781.999999	-0.001	2.5
30	781.999997	-0.004	2.5
40	781.999997	-0.003	2.5
50	781.999999	-0.001	2.5
60	781.999997	-0.004	2.5
70	781.999998	-0.002	2.5
75	781.999998	-0.002	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	706.500002	0.003	713.500004	0.005	2.5
48	706.500003	0.005	713.500004	0.005	2.5
57	706.500003	0.005	713.500002	0.003	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 5 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	706.500001	0.002	713.500002	0.003	2.5
-30	706.500003	0.004	713.500001	0.002	2.5
-20	706.500002	0.002	713.500004	0.006	2.5
-10	706.500003	0.004	713.500001	0.002	2.5
0	706.500003	0.005	713.500003	0.004	2.5
10	706.500004	0.005	713.500004	0.005	2.5
20	706.499998	-0.003	713.499998	-0.003	2.5
30	706.499996	-0.005	713.499997	-0.004	2.5
40	706.499996	-0.005	713.499998	-0.003	2.5
50	706.499997	-0.004	713.499996	-0.005	2.5
60	706.499996	-0.006	713.499997	-0.005	2.5
70	706.499997	-0.005	713.499998	-0.002	2.5
75	706.499999	-0.001	713.499997	-0.004	2.5

Frequency Error vs. Voltage

Voltage (Volts)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
54	709.000003	0.004	711.000002	0.003	2.5
48	709.000002	0.002	711.000003	0.004	2.5
57	709.000004	0.006	711.000001	0.002	2.5

Note: The applicant defined the normal working voltage of the battery is from 48 Vdc to 57 Vdc.

Frequency Error vs. Temperature

Temp. (°C)	LTE Band 17				Limit (ppm)
	Channel Bandwidth: 10 MHz				
	Low Channel		High Channel		
	Frequency (MHz)	Frequency Error (ppm)	Frequency (MHz)	Frequency Error (ppm)	
-40	709.000002	0.003	711.000001	0.002	2.5
-30	709.000002	0.002	711.000001	0.002	2.5
-20	709.000001	0.002	711.000001	0.002	2.5
-10	709.000001	0.002	711.000002	0.002	2.5
0	709.000002	0.003	711.000003	0.005	2.5
10	709.000003	0.004	711.000001	0.001	2.5
20	708.999998	-0.003	710.999999	-0.002	2.5
30	708.999998	-0.003	710.999997	-0.005	2.5
40	708.999998	-0.002	710.999999	-0.002	2.5
50	708.999999	-0.002	710.999996	-0.005	2.5
60	708.999999	-0.002	710.999998	-0.002	2.5
70	708.999997	-0.005	710.999999	-0.002	2.5
75	708.999997	-0.005	710.999999	-0.002	2.5

4.4 Occupied Bandwidth Measurement


4.4.1 Limits of Occupied Bandwidth Measurement

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

4.4.2 Test Procedure


- The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.4.3 Test Setup

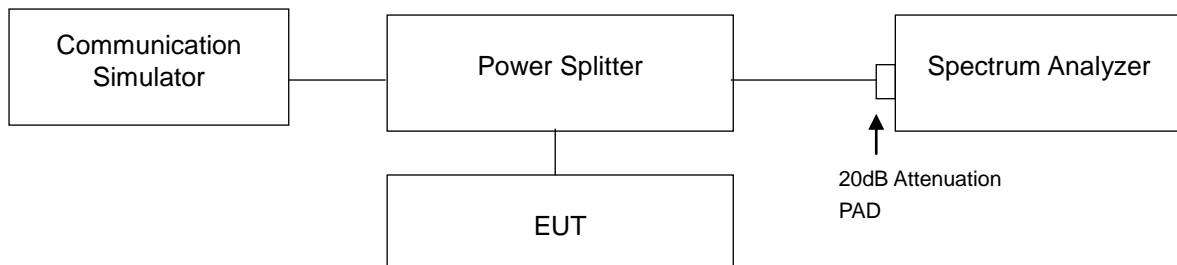

4.4.4 Test Result


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.09	1.09	19965	1711.5	2.70	2.70
20175	1732.5	1.09	1.09	20175	1732.5	2.70	2.70
20393	1754.3	1.09	1.09	20385	1753.5	2.70	2.70

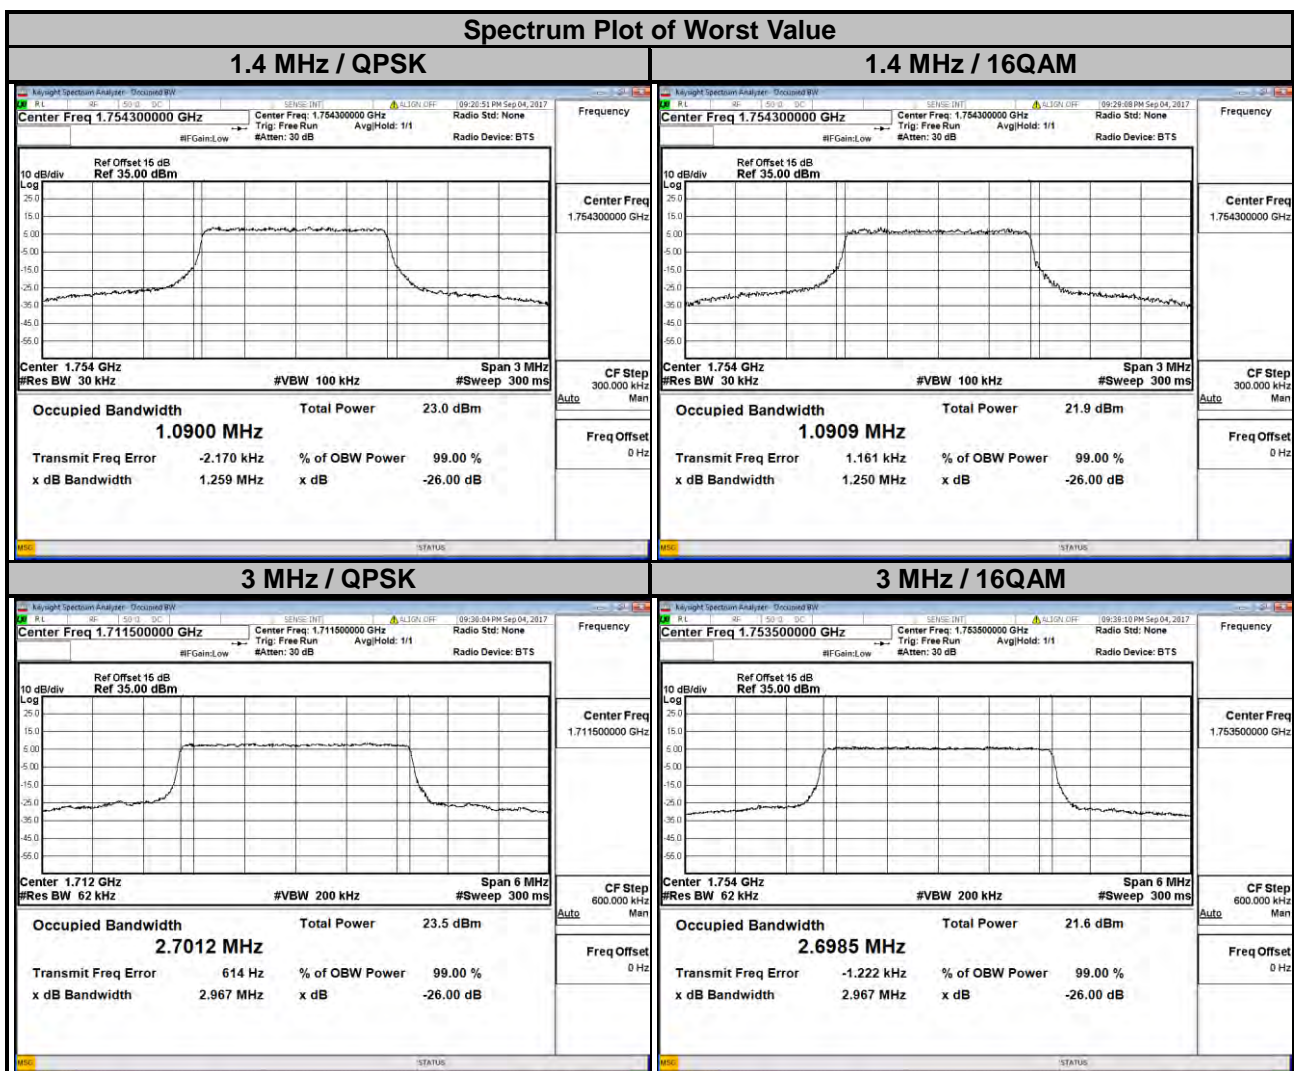

LTE Band 4

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.49	4.49	20000	1715.0	8.97	8.97
20175	1732.5	4.49	4.49	20175	1732.5	8.95	8.96
20375	1752.5	4.49	4.49	20350	1750.0	8.96	8.96


Spectrum Plot of Worst Value

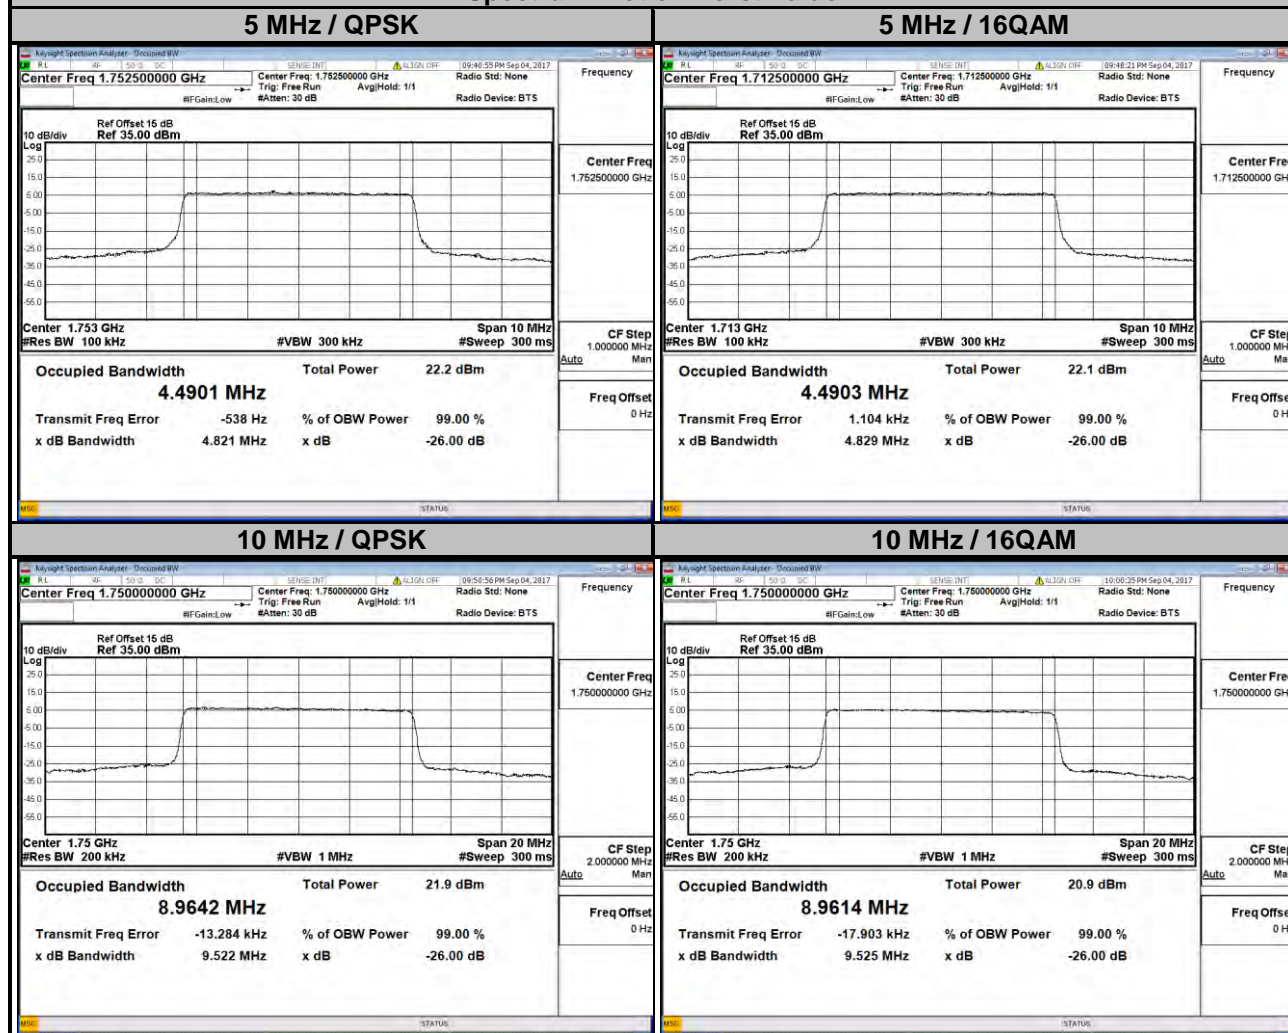

LTE Band 4

Channel Bandwidth: 15 MHz				Channel Bandwidth: 20 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.47	13.45	20050	1720.0	17.95	17.97
20175	1732.5	13.42	13.40	20175	1732.5	17.85	17.86
20325	1747.5	13.45	13.44	20300	1745.0	17.89	17.91


Spectrum Plot of Worst Value

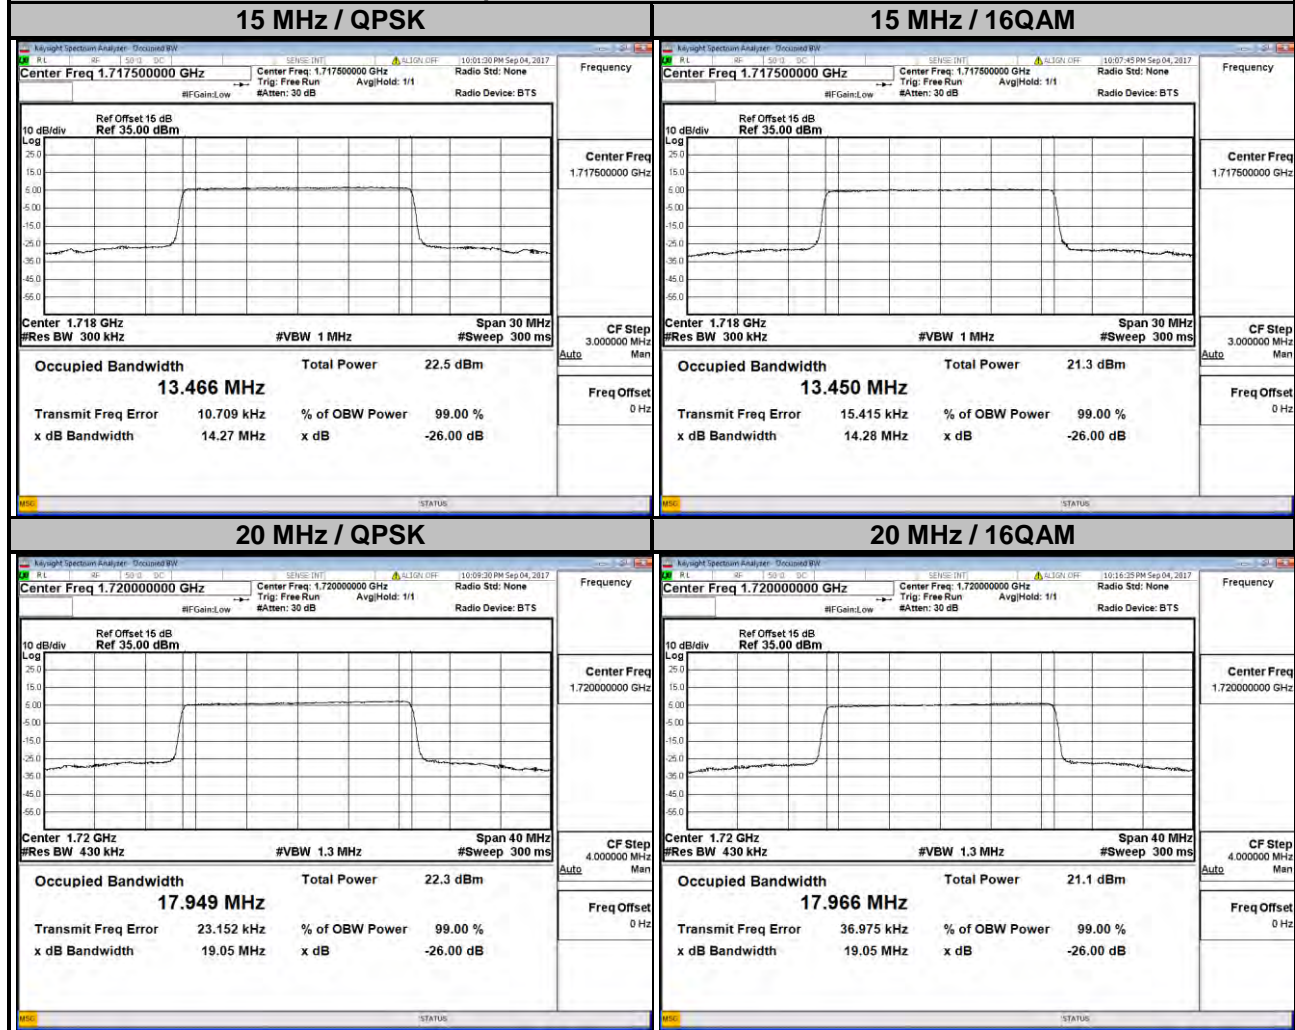

LTE Band 13

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	4.48	4.48	23230	782.0	8.93	8.94
23230	782.0	4.48	4.48				
23255	784.5	4.50	4.50				


Spectrum Plot of Worst Value

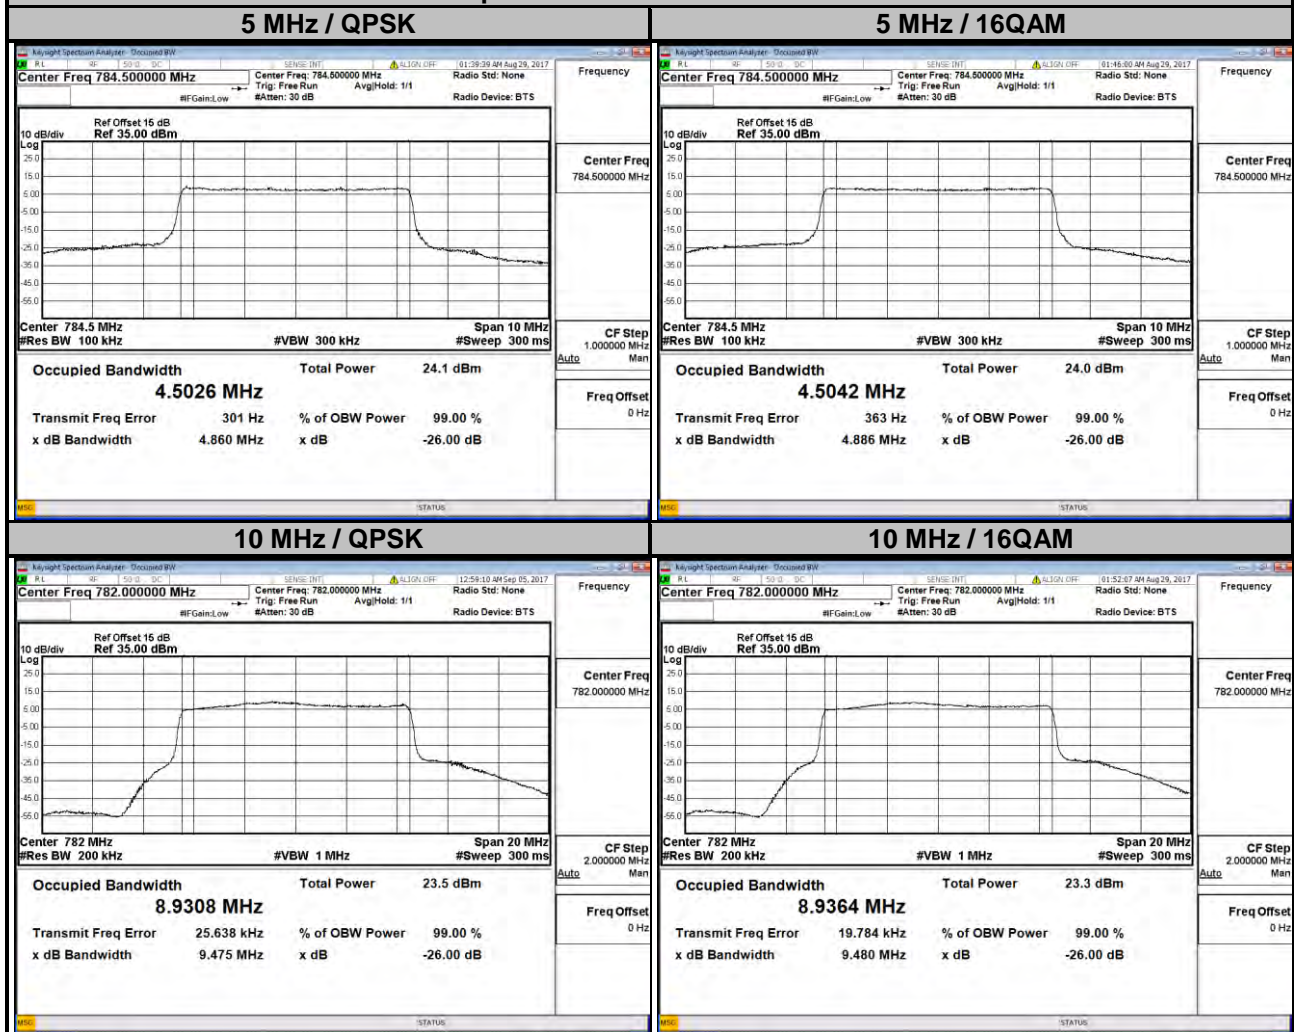

LTE Band 17

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)		Channel	Frequency (MHz)	99 % Occupied Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	4.48	4.49	23780	709.0	8.95	8.96
23790	710.0	4.49	4.49	23790	710.0	8.97	8.97
23825	713.5	4.50	4.50	23800	711.0	8.99	8.99

Spectrum Plot of Worst Value

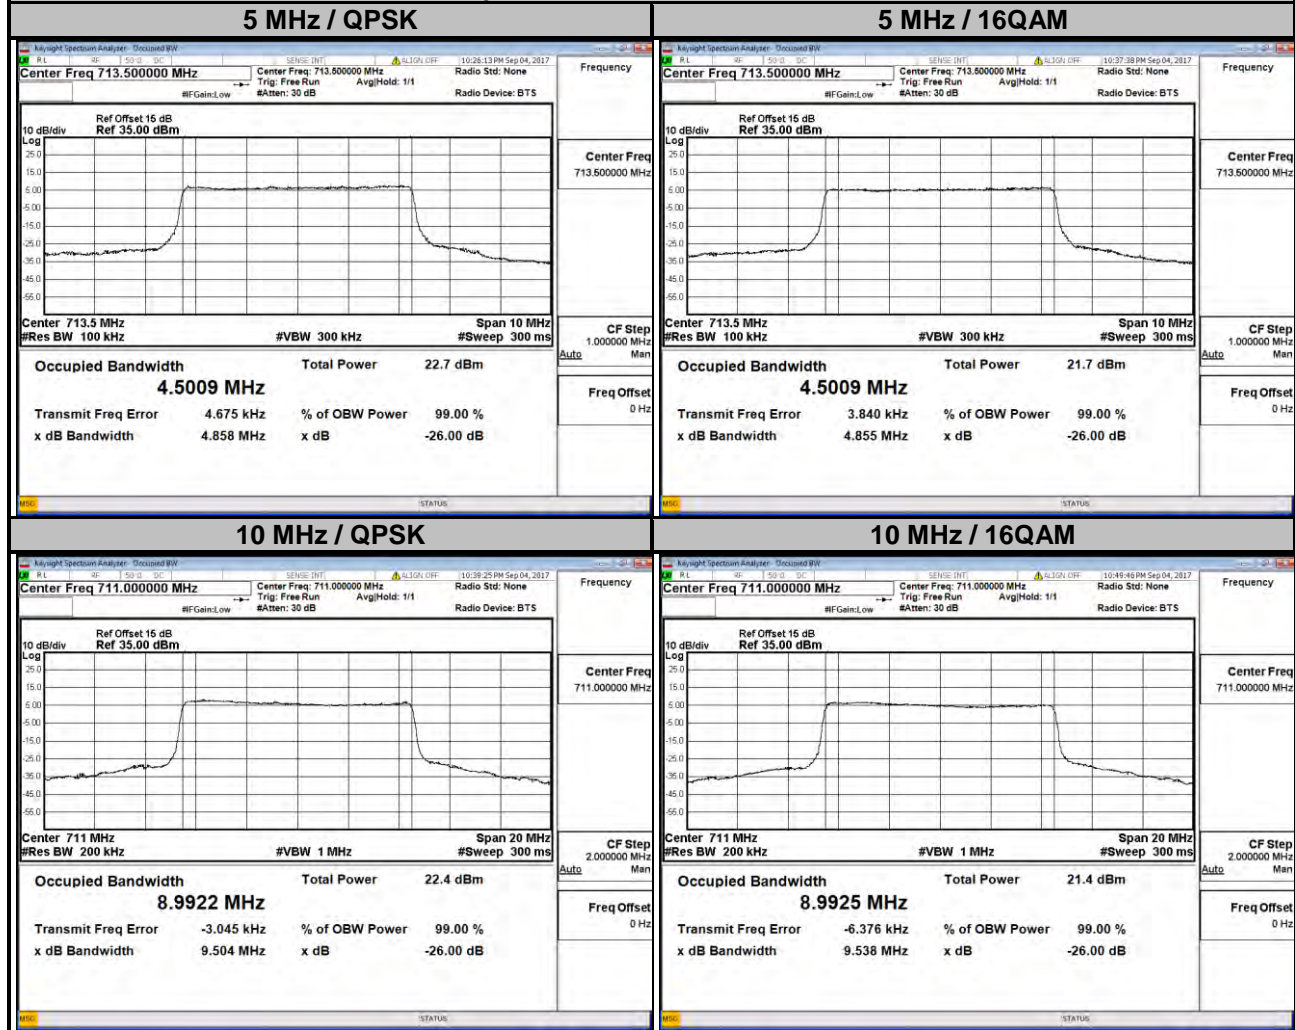

4.5 Band Edge Measurement


4.5.1 Limits of Band Edge Measurement

For operations in the 704-716 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

For operations in the 1710–1755 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB.


4.5.2 Test Setup

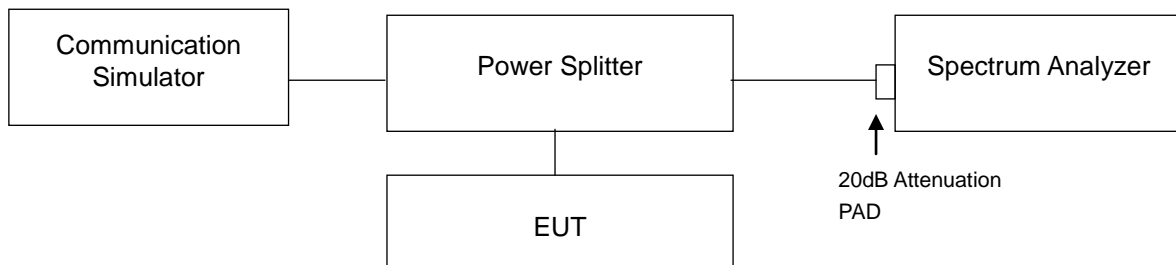



4.5.3 Test Procedures

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 13 kHz and VB of the spectrum is 51 kHz (LTE Bandwidth 1.4 MHz).
- c. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 30 kHz and VB of the spectrum is 100 kHz (LTE Bandwidth 3 MHz).
- d. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 100 kHz and VB of the spectrum is 300 kHz (LTE Bandwidth 5 MHz/10 MHz).
- e. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 150 kHz and VB of the spectrum is 470 kHz (LTE Bandwidth 15 MHz).
- f. The center frequency of spectrum is the band edge frequency and span is 1 MHz. RB of the spectrum is 180 kHz and VB of the spectrum is 560 kHz (LTE Bandwidth 20 MHz).
- g. Record the max trace plot into the test report.



4.5.4 Test Results

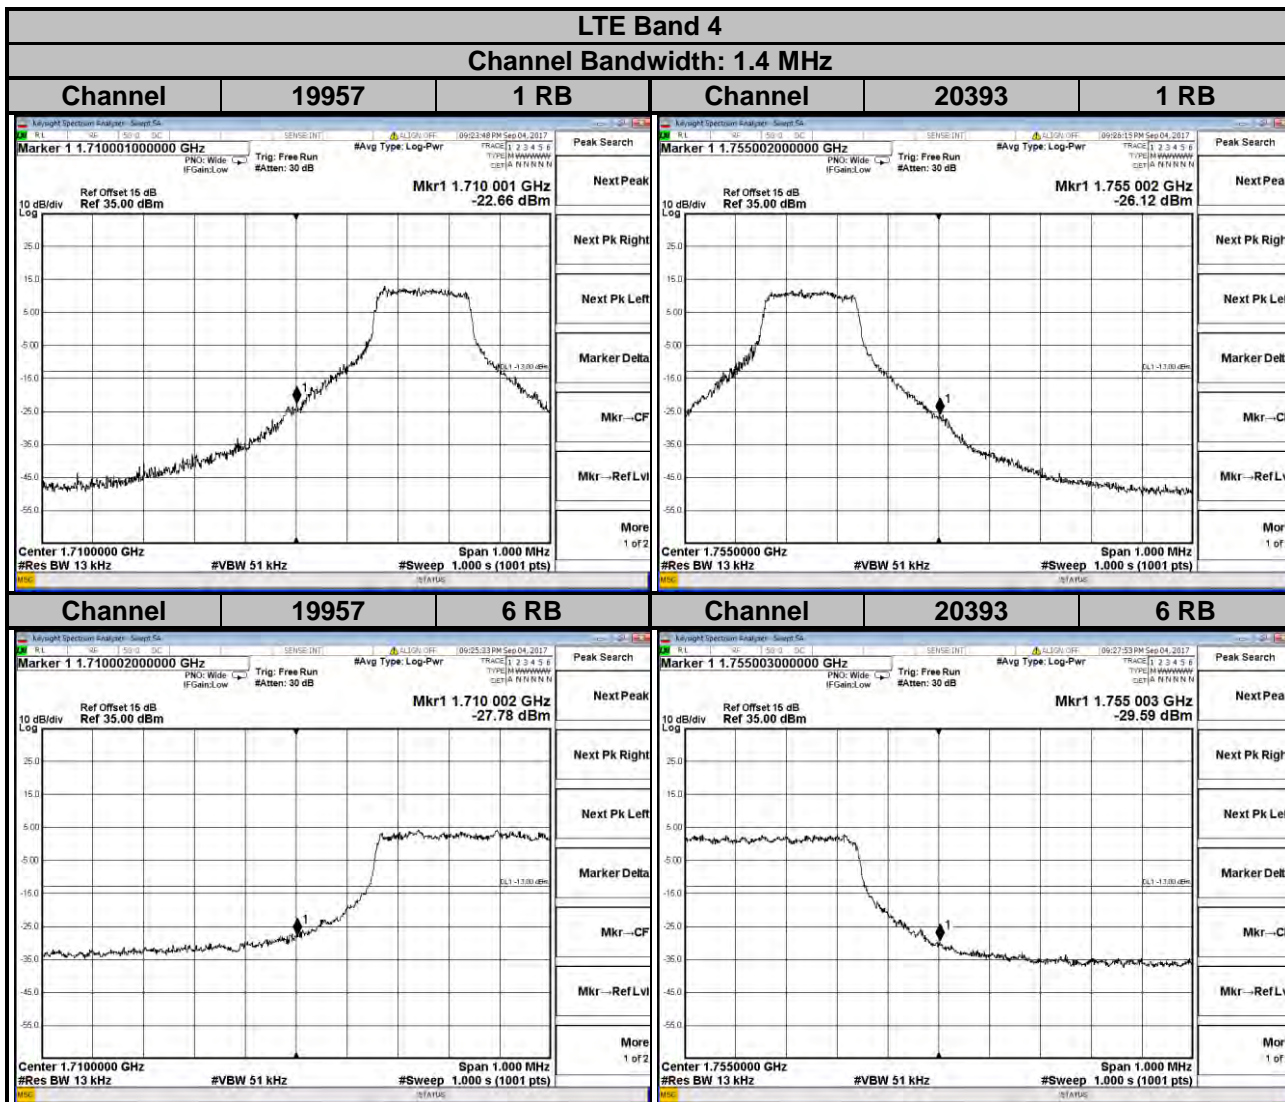



LTE Band 4
Channel Bandwidth: 3 MHz

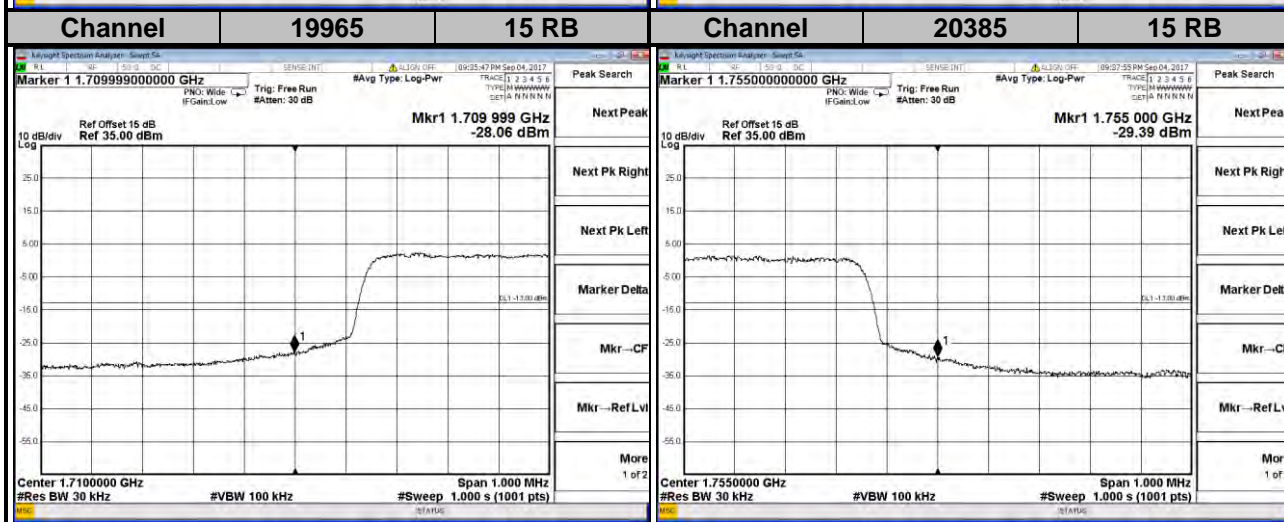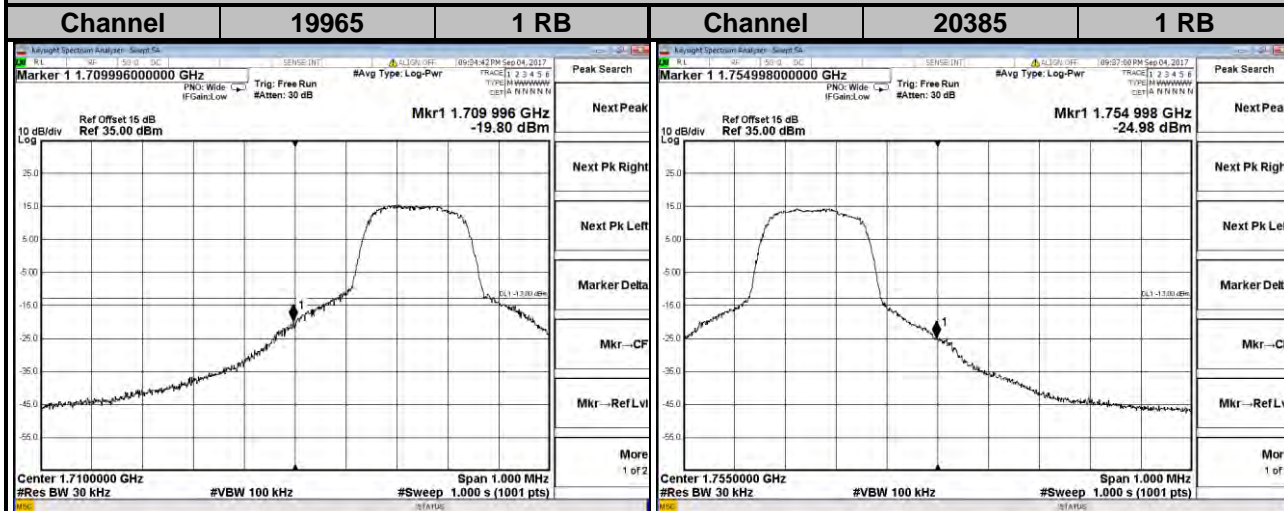



LTE Band 4
Channel Bandwidth: 5 MHz

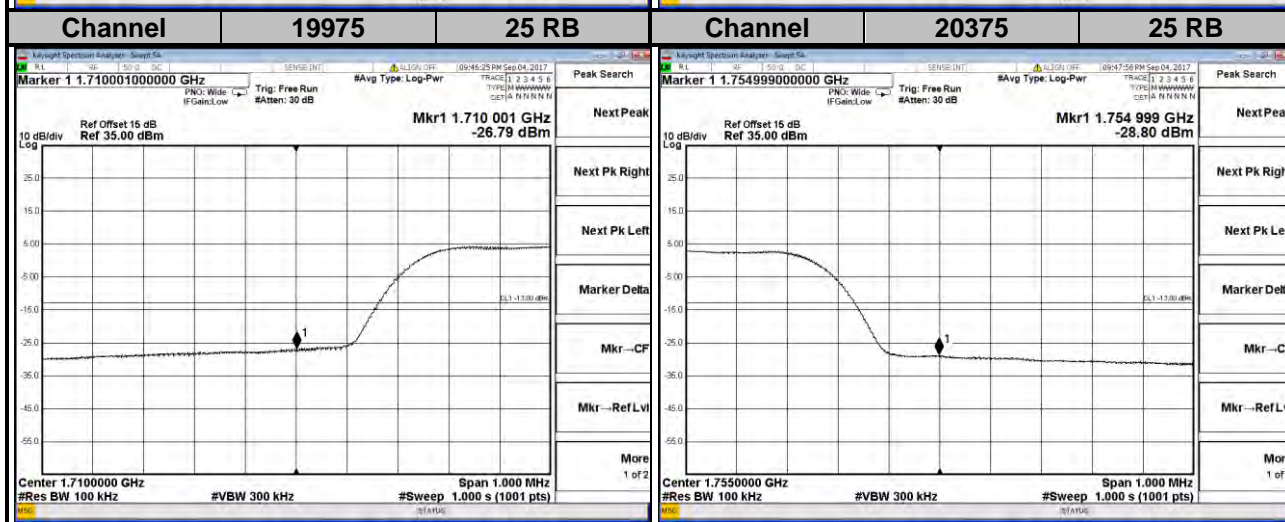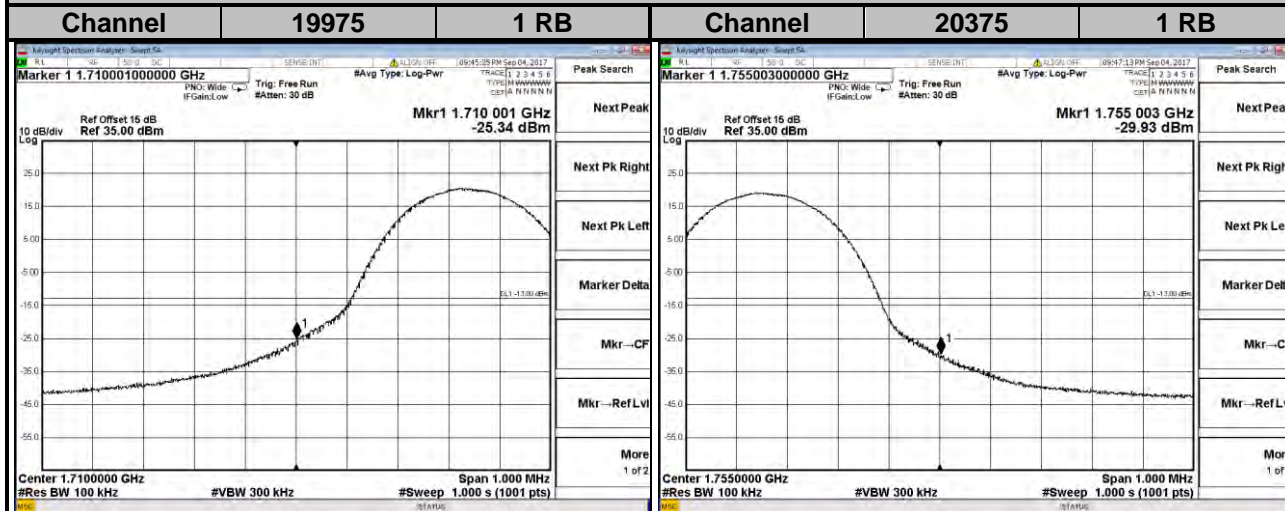



LTE Band 4
Channel Bandwidth: 10 MHz

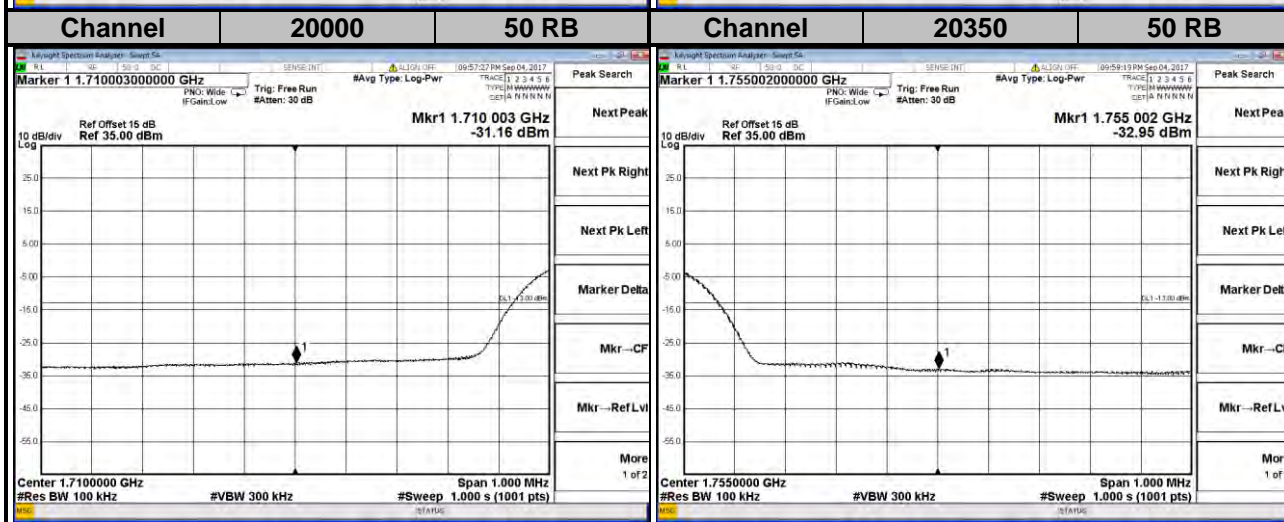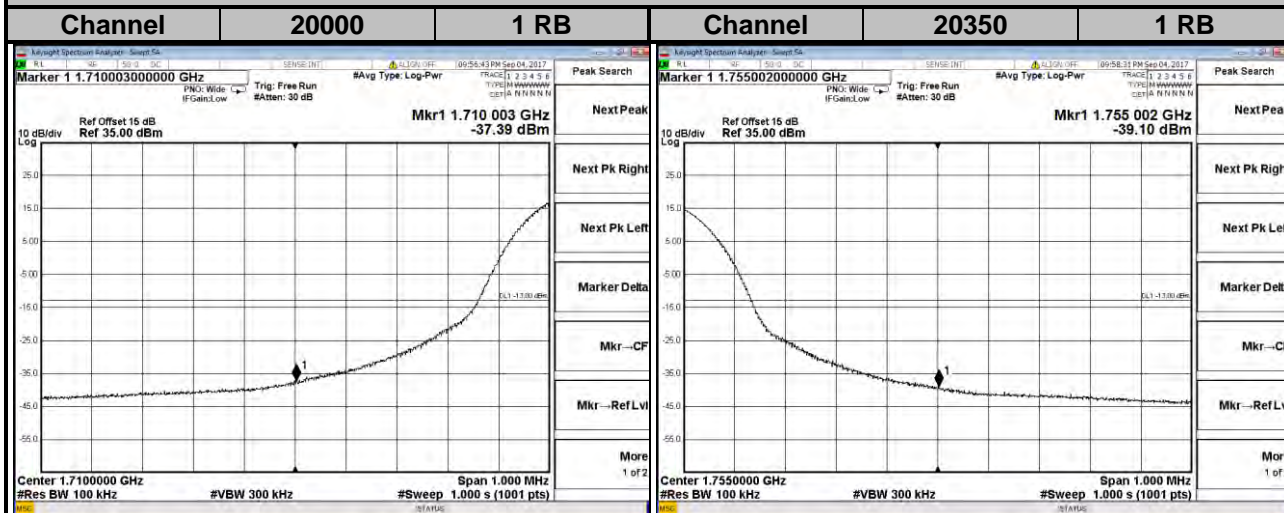



LTE Band 4
Channel Bandwidth: 15 MHz

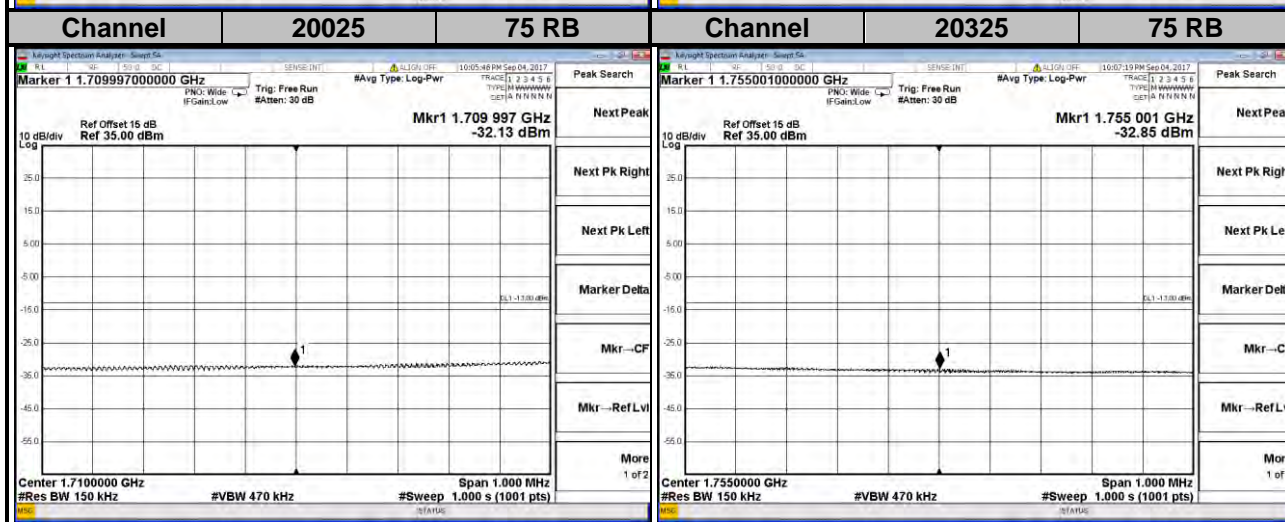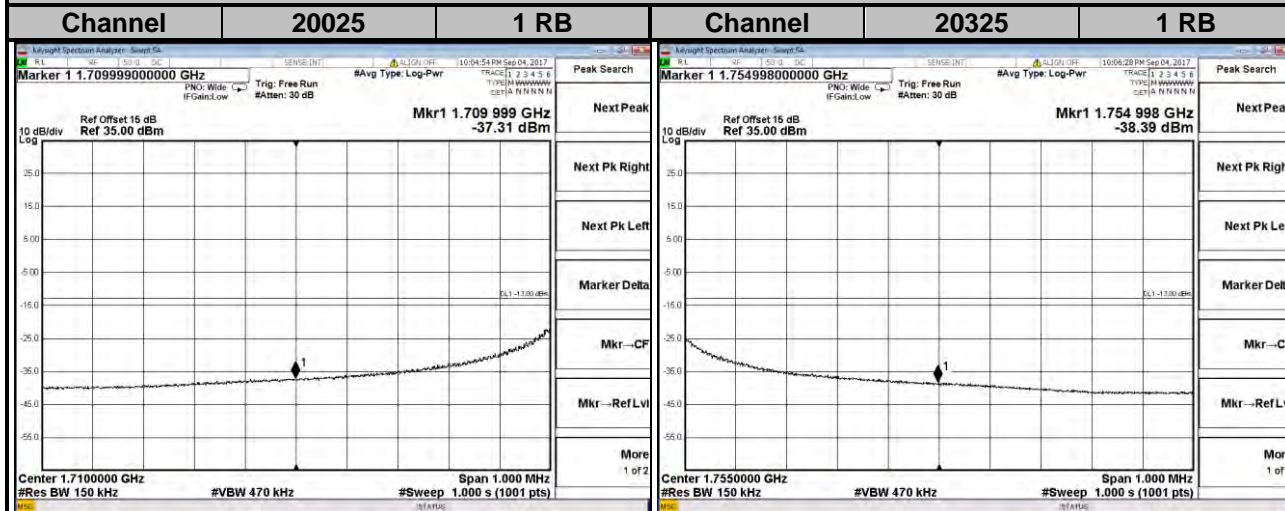

LTE Band 4
Channel Bandwidth: 20 MHz

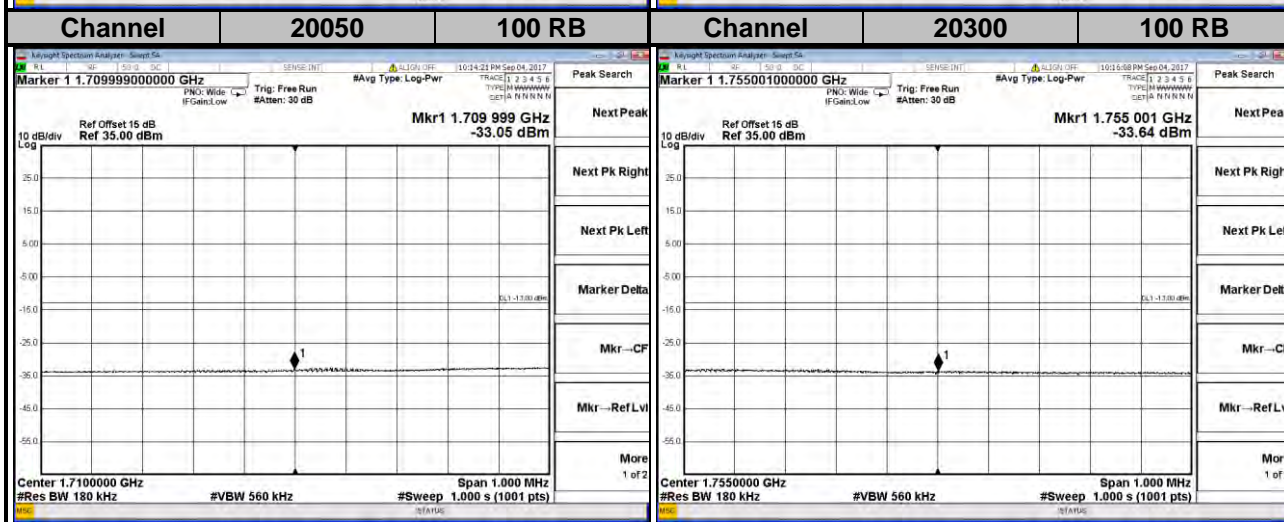
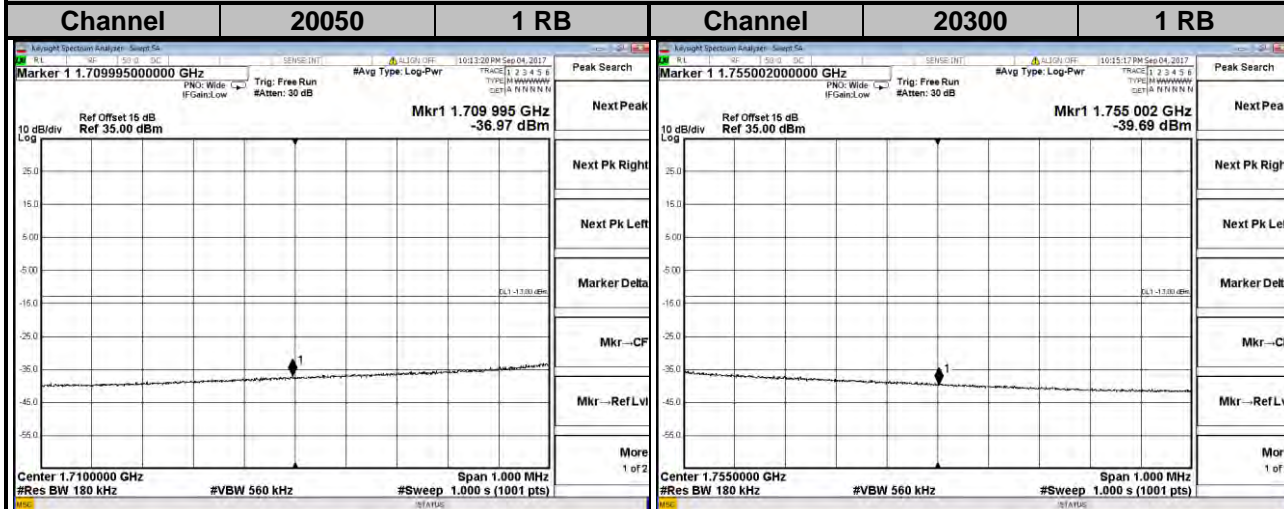


LTE Band 13
Channel Bandwidth: 5 MHz

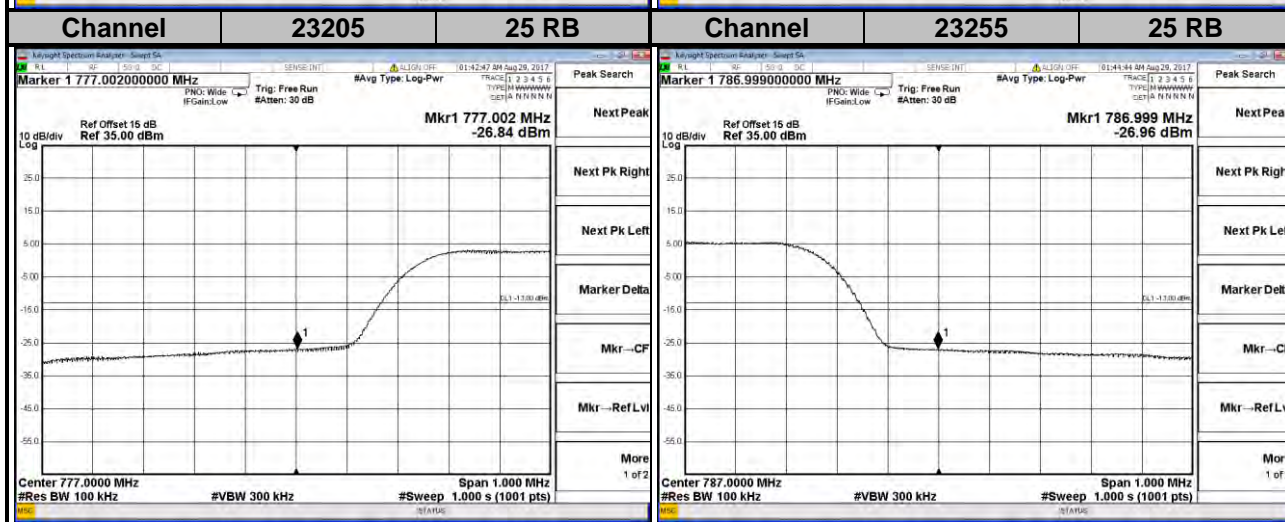
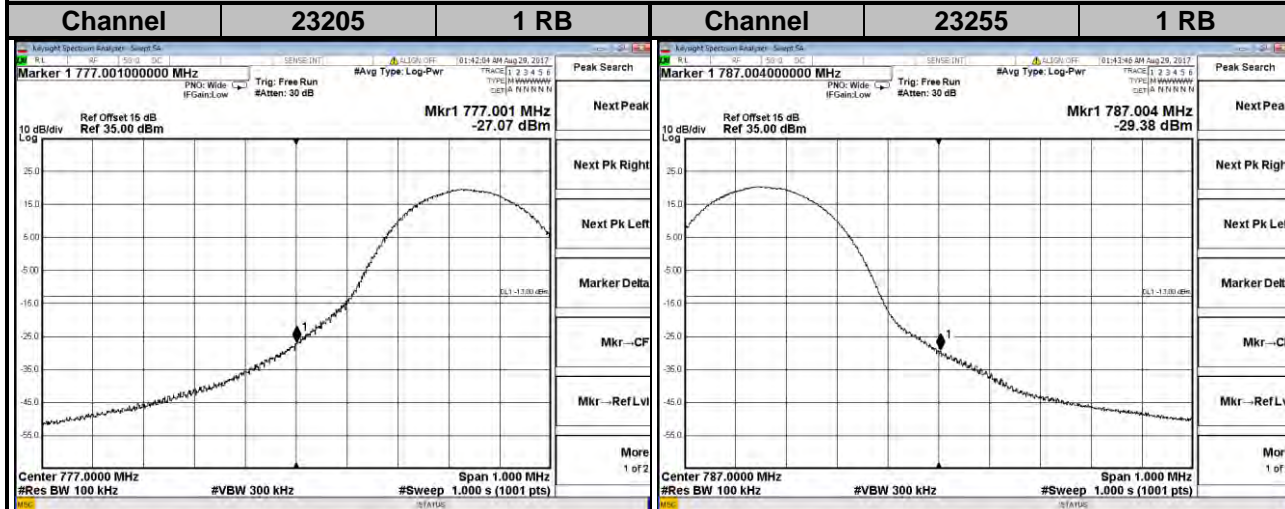



LTE Band 13

Channel Bandwidth: 10 MHz

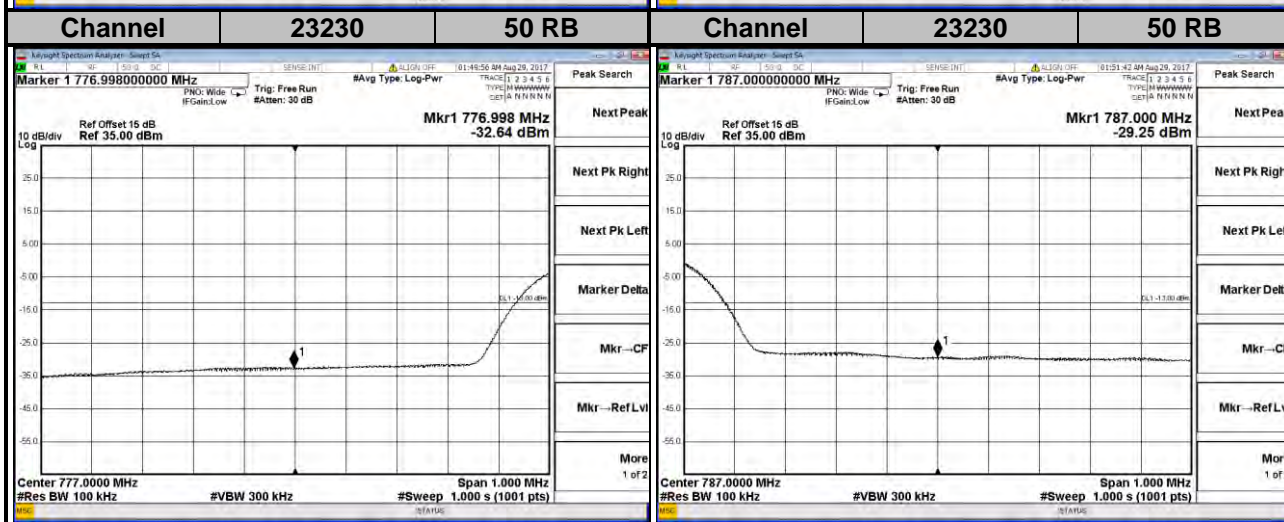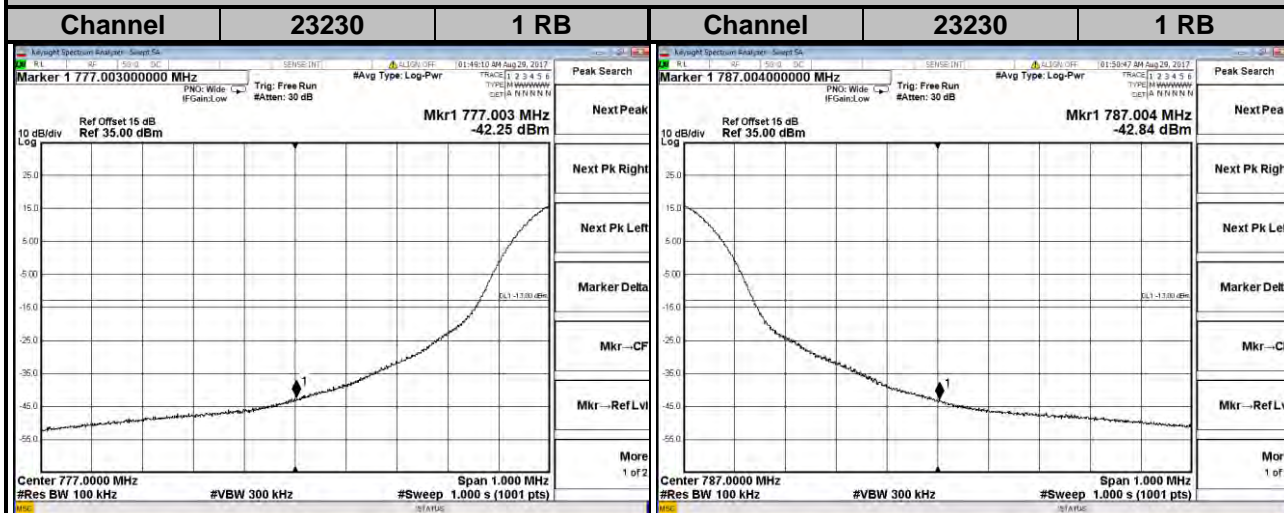


LTE Band 17
Channel Bandwidth: 5 MHz

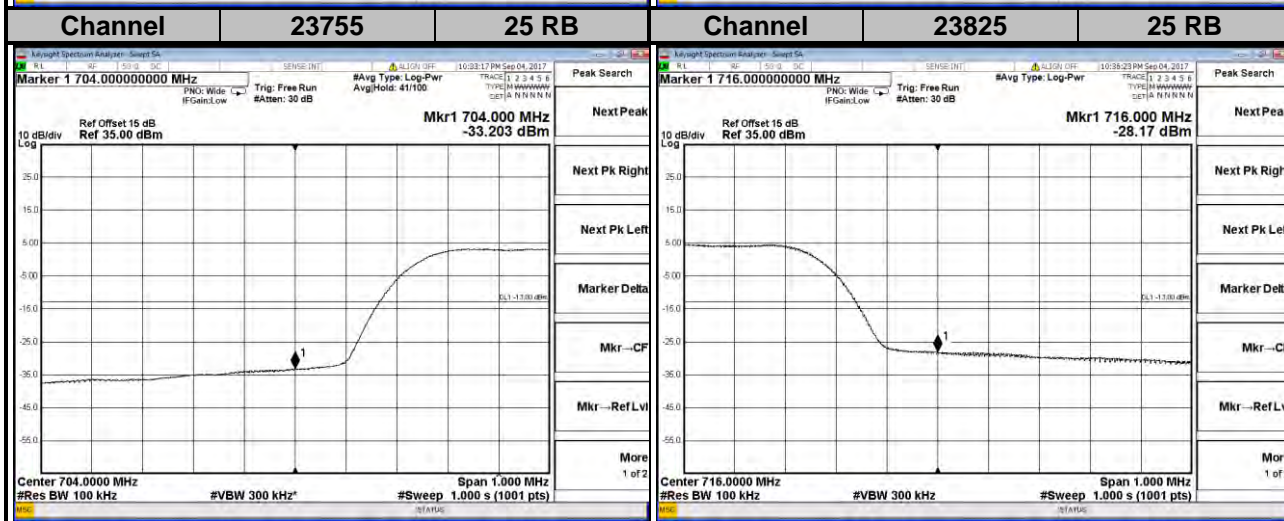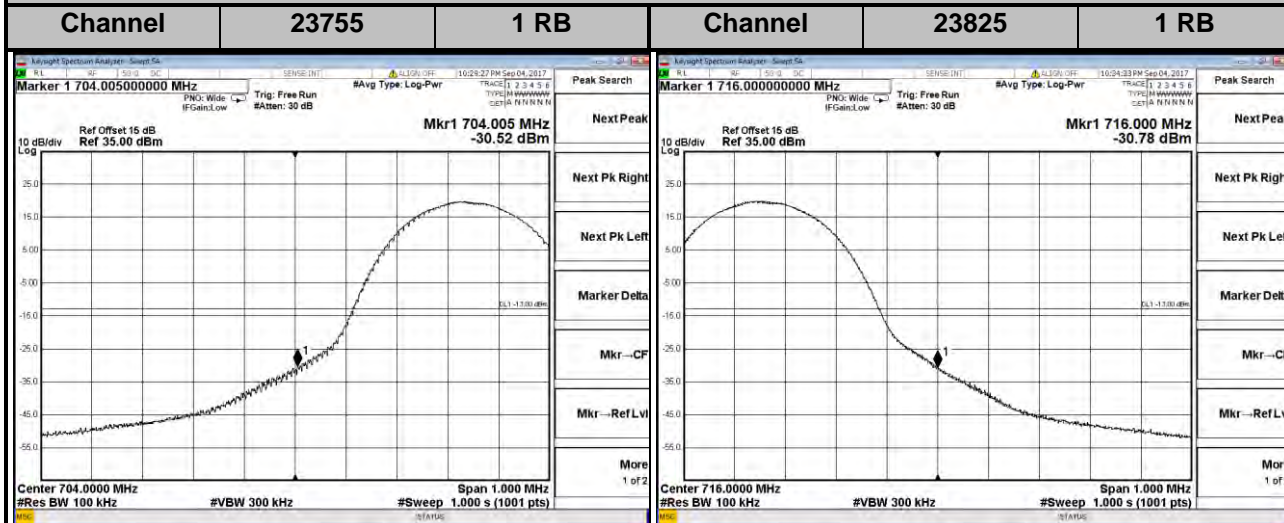

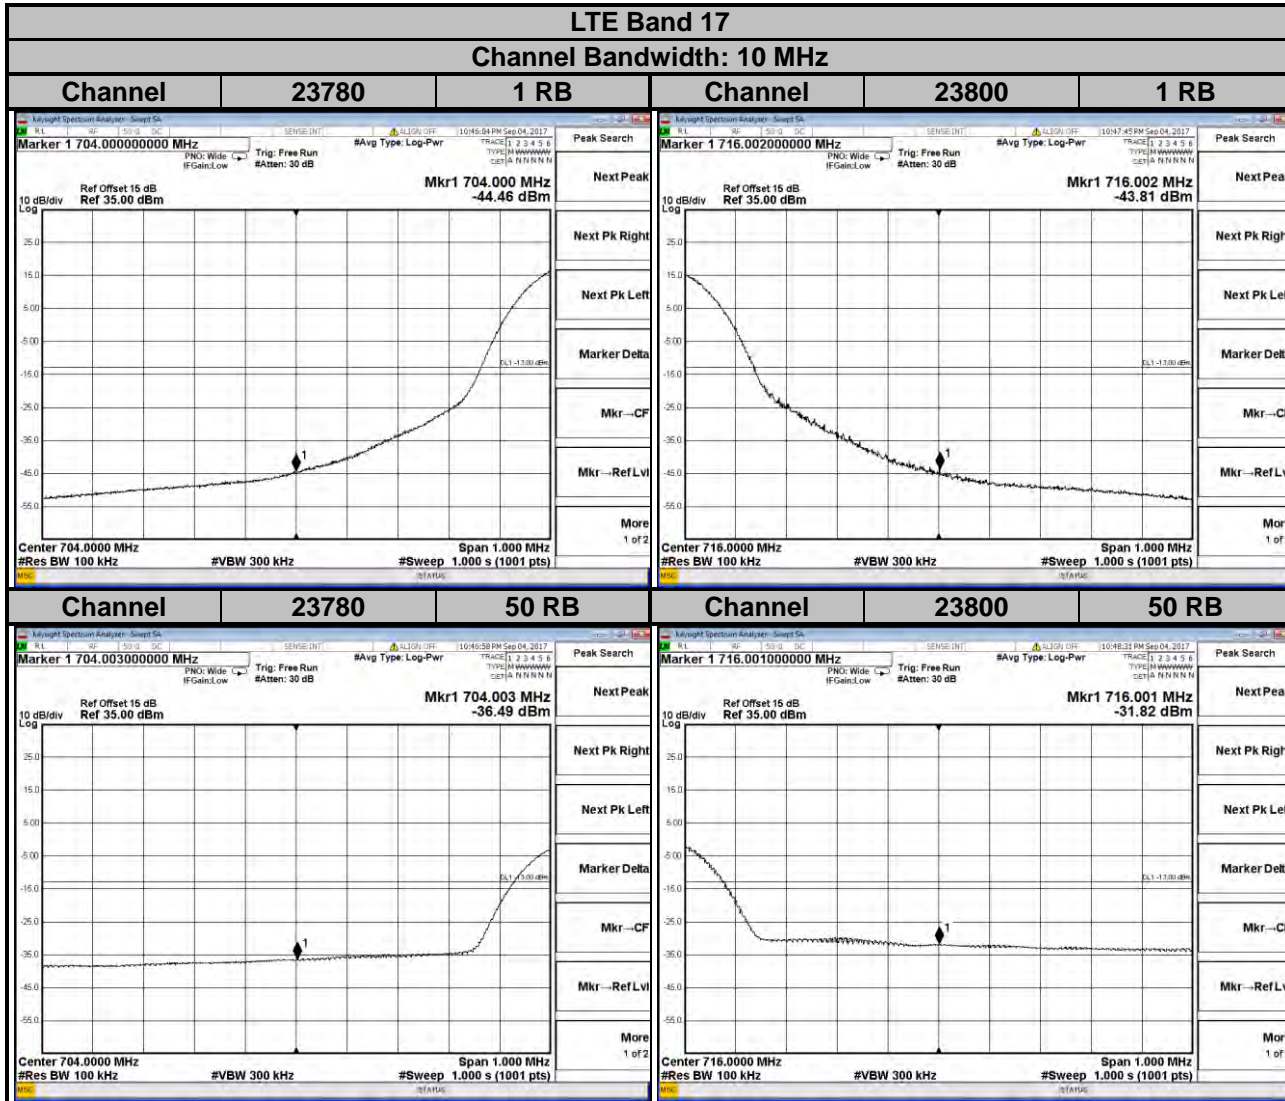


Emission Mask

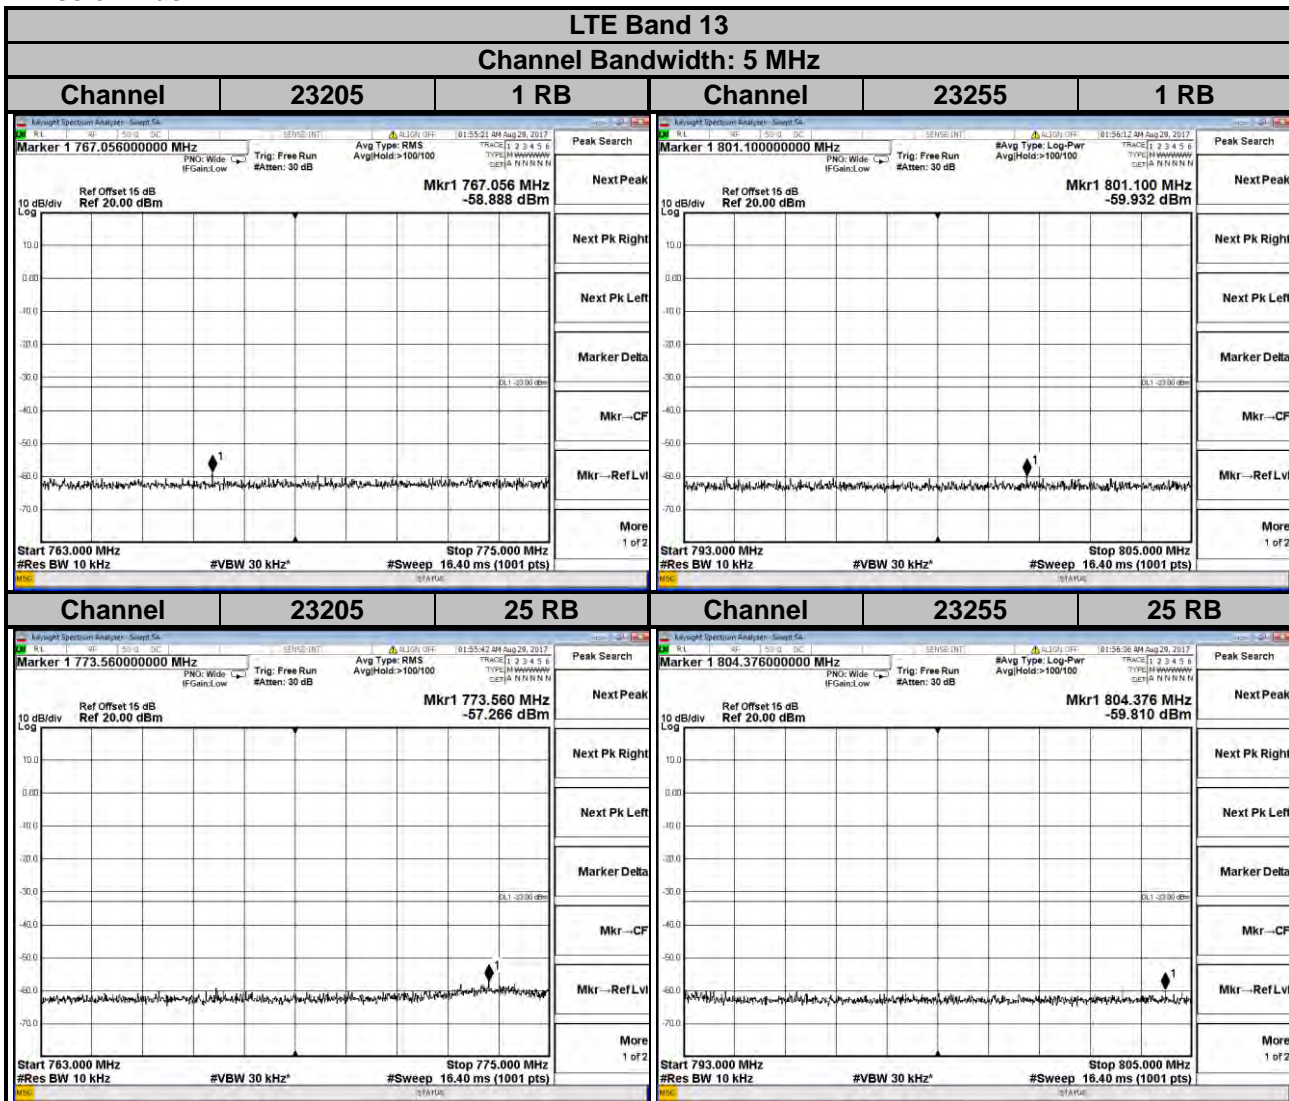

For the 763 - 775 MHz and 793 - 805 MHz band ,the FCC limit is $65+10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth . Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment , a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$

$$\text{Limit line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

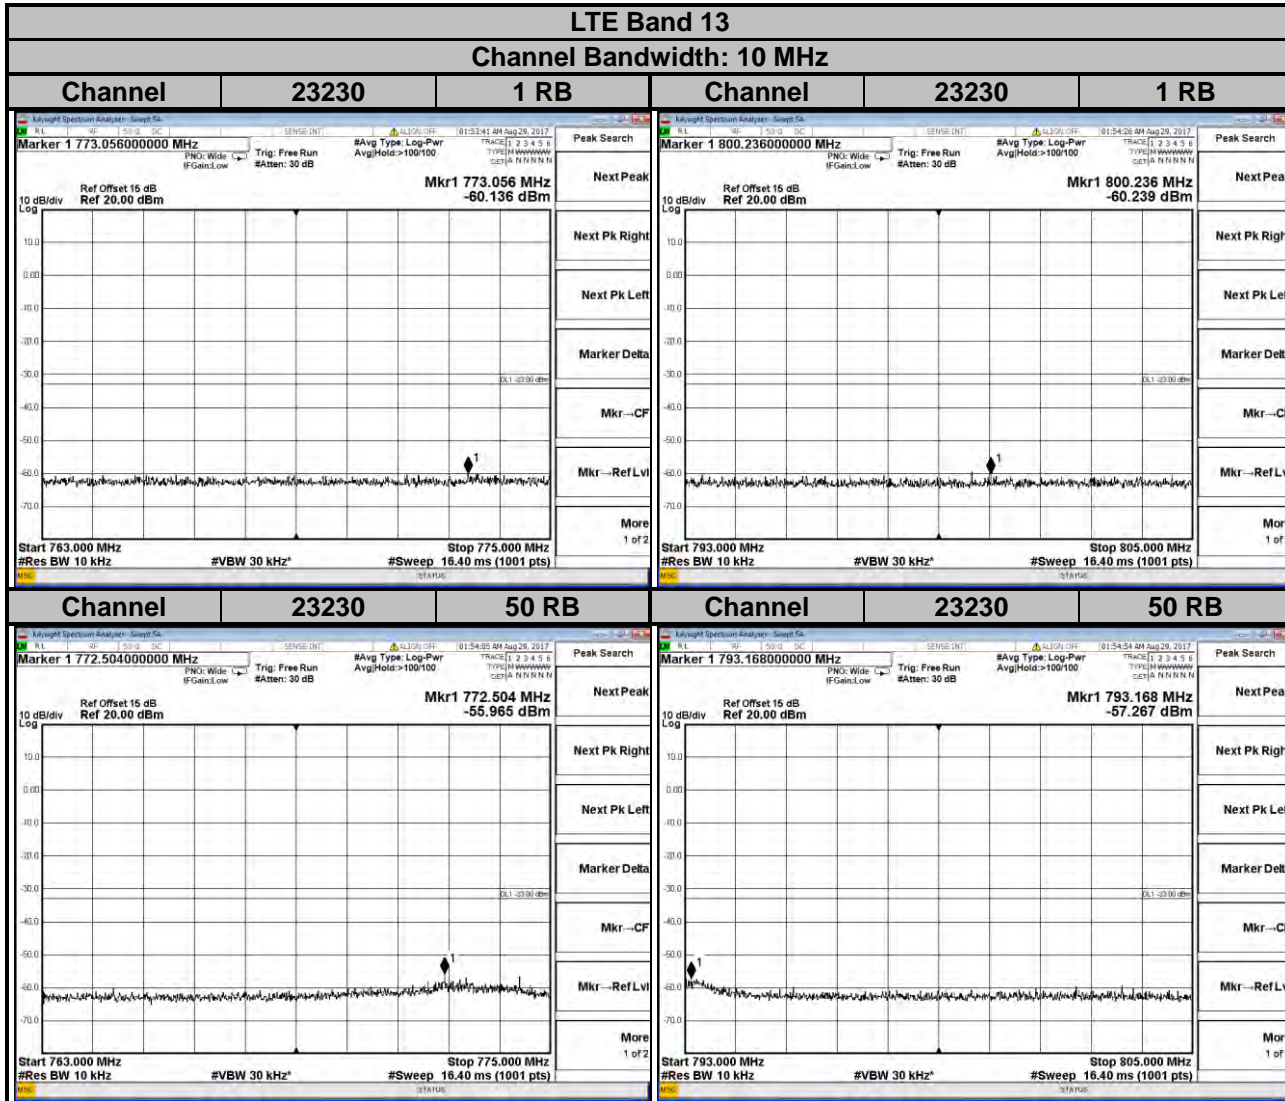

For the 763 - 775 MHz and 793 - 805 MHz band ,the FCC limit is $65+10\log(P[\text{watt}])$ in a 6.25 kHz bandwidth . Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment , a bandwidth of 10 kHz was used instead to show compliance. By using a 10 kHz bandwidth on the spectrum analyzer.

$$10\log(10\text{kHz}/6.25\text{kHz}) = 2.04 \text{ dB}$$


$$\text{Limit line} = -35 \text{ dBm} + 2.04 \text{ dB} = -32.96 \text{ dBm}$$

4.6 Peak to Average Ratio

4.6.1 Limits of Peak to Average Ratio Measurement

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 Test Setup

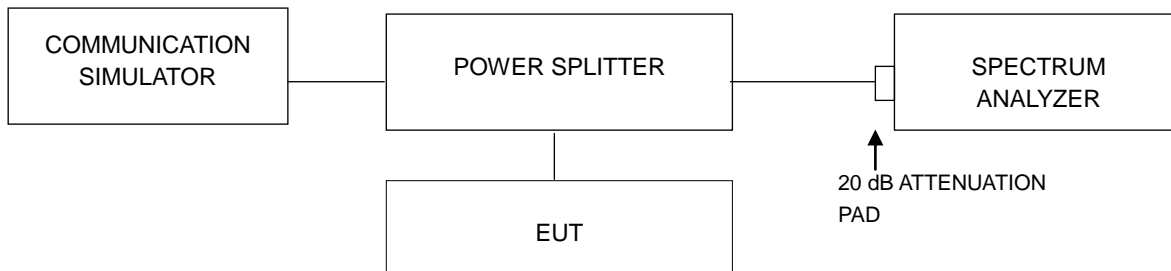


4.6.3 Test Procedures

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1 %.

4.6.4 Test Results


LTE Band 4							
Channel Bandwidth: 1.4 MHz				Channel Bandwidth: 3 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.27	5.01	19965	1711.5	3.98	5.06
20175	1732.5	4.88	6.04	20175	1732.5	5.03	6.18
20393	1754.3	5.27	6.33	20385	1753.5	5.04	6.19

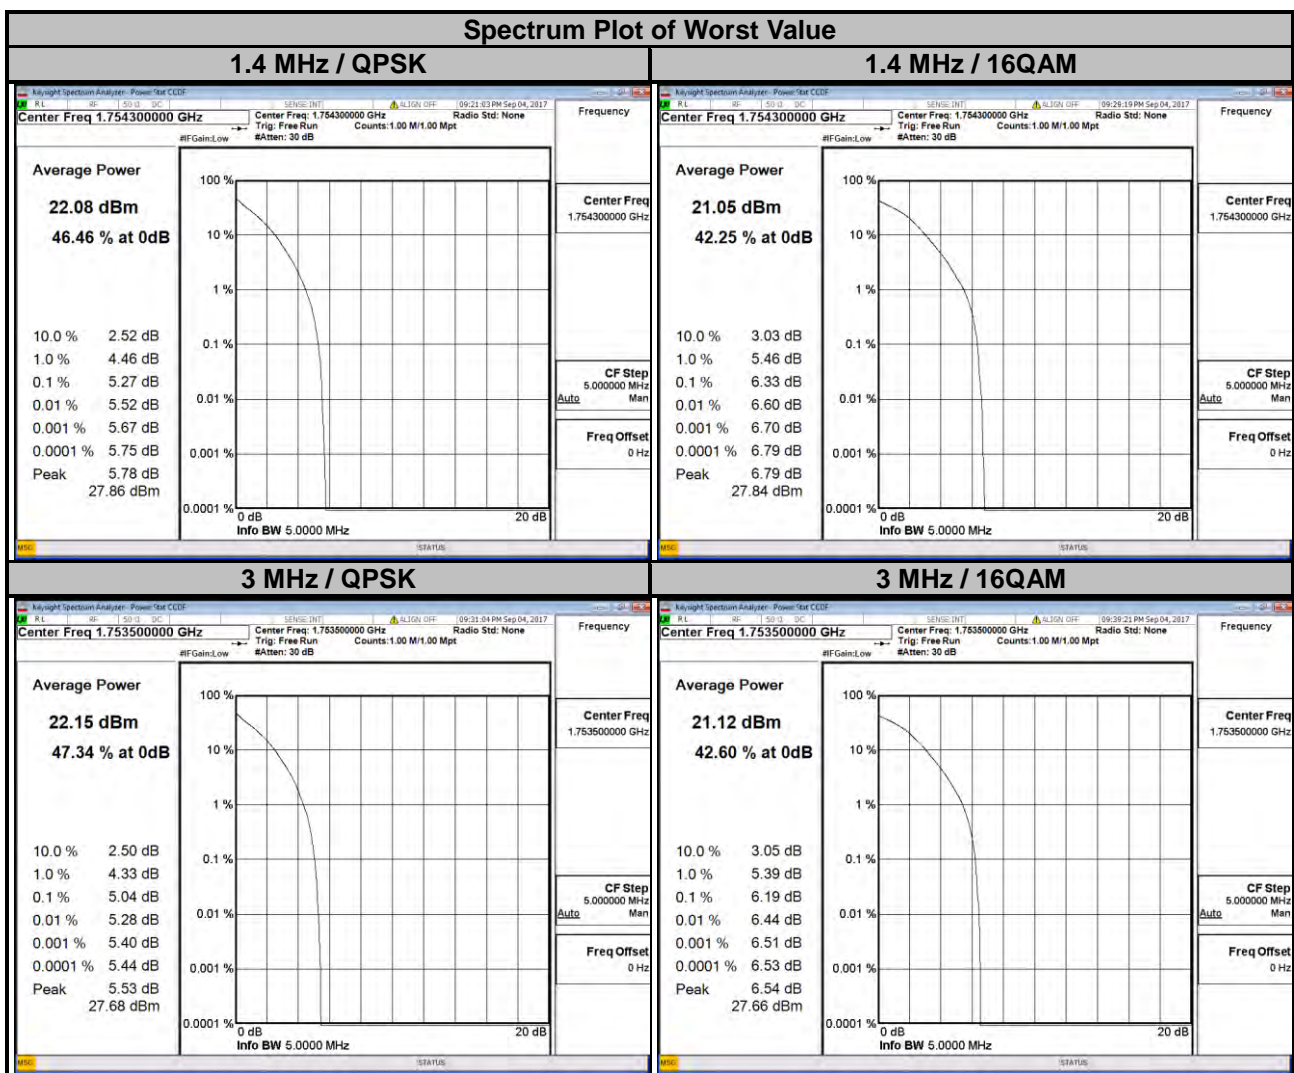

LTE Band 4

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.01	4.48	20000	1715.0	4.10	4.59
20175	1732.5	5.09	6.21	20175	1732.5	5.26	6.39
20375	1752.5	4.85	6.01	20350	1750.0	4.39	4.87

Spectrum Plot of Worst Value

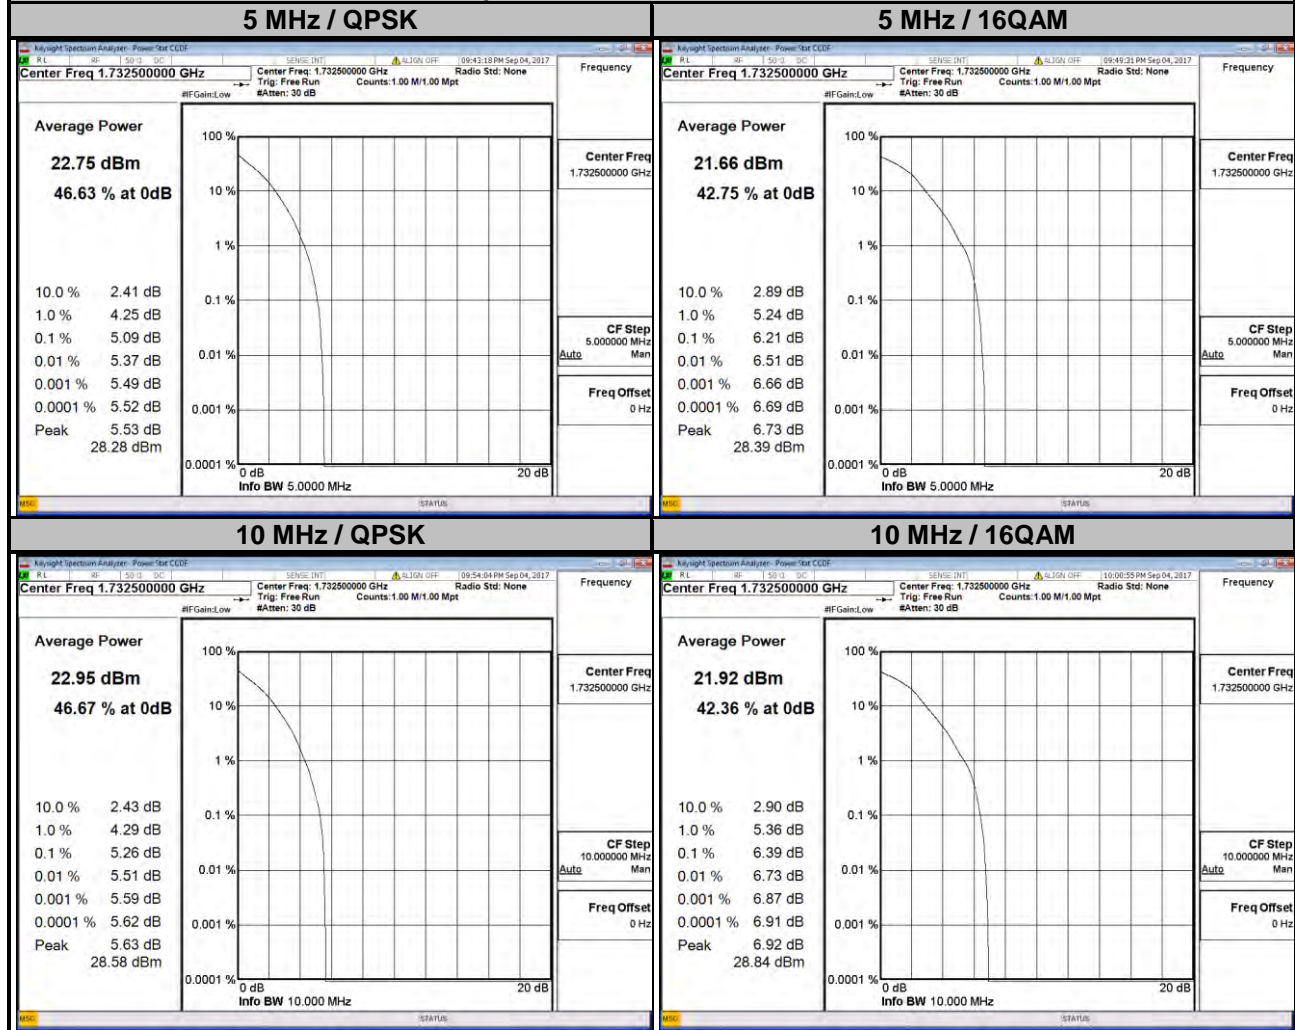

LTE Band 4

Channel Bandwidth: 15 MHz



Channel Bandwidth: 20 MHz

Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.11	4.73	20050	1720.0	4.21	4.87
20175	1732.5	5.51	6.48	20175	1732.5	5.61	6.53
20325	1747.5	3.94	4.36	20300	1745.0	4.31	4.80

Spectrum Plot of Worst Value



15 MHz / QPSK

15 MHz / 16QAM

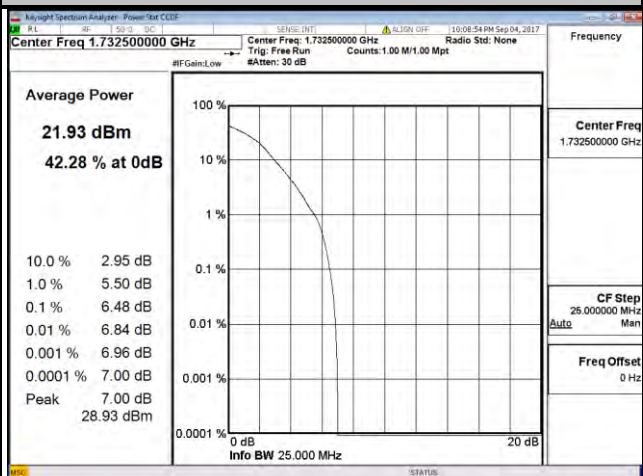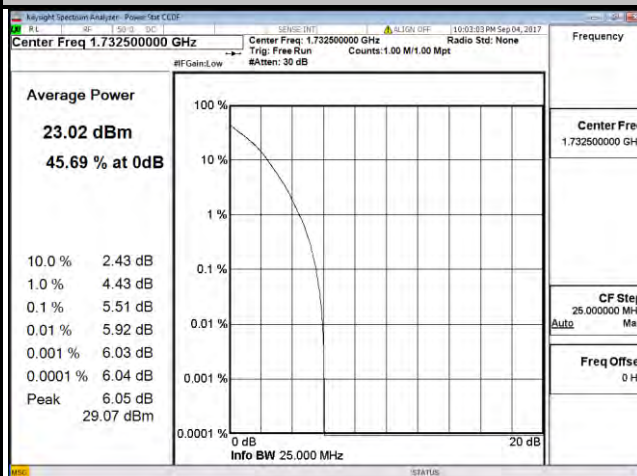

20 MHz / QPSK


20 MHz / 16QAM

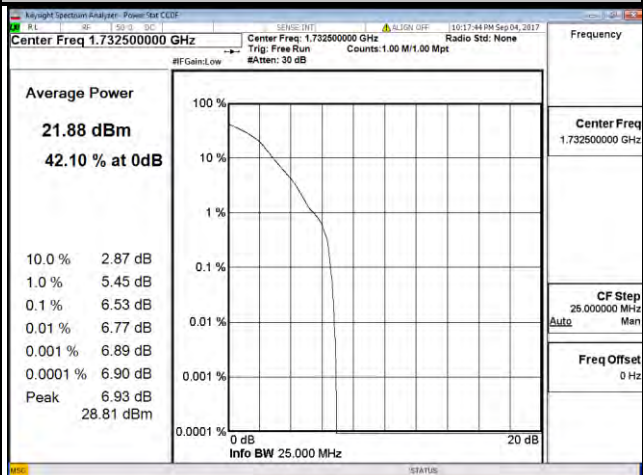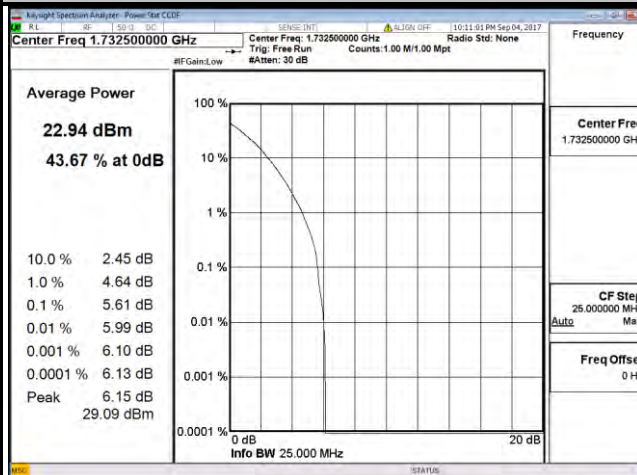

LTE Band 13

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23205	779.5	3.63	3.95	23230	782.0	4.13	4.41
23230	782.0	4.28	4.81				
23255	784.5	4.62	5.06				


Spectrum Plot of Worst Value

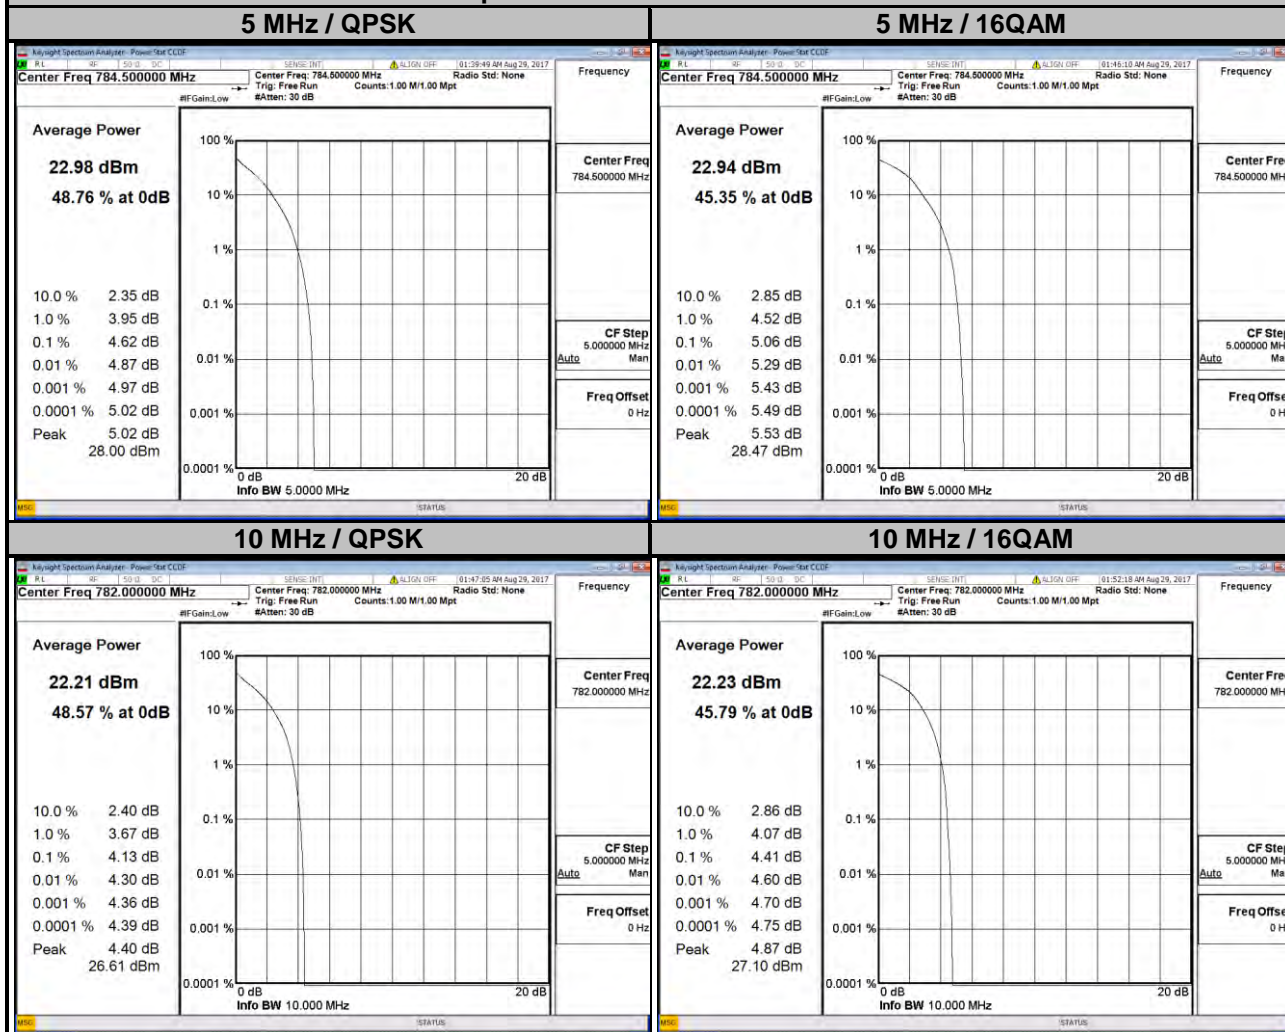

LTE Band 17

Channel Bandwidth: 5 MHz				Channel Bandwidth: 10 MHz			
Channel	Frequency (MHz)	Peak to Average Ratio (dB)		Channel	Frequency (MHz)	Peak to Average Ratio (dB)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	5.43	6.67	23780	709.0	5.42	6.49
23790	710.0	4.50	5.62	23790	710.0	5.02	6.23
23825	713.5	5.64	6.89	23800	711.0	4.62	5.78

Spectrum Plot of Worst Value

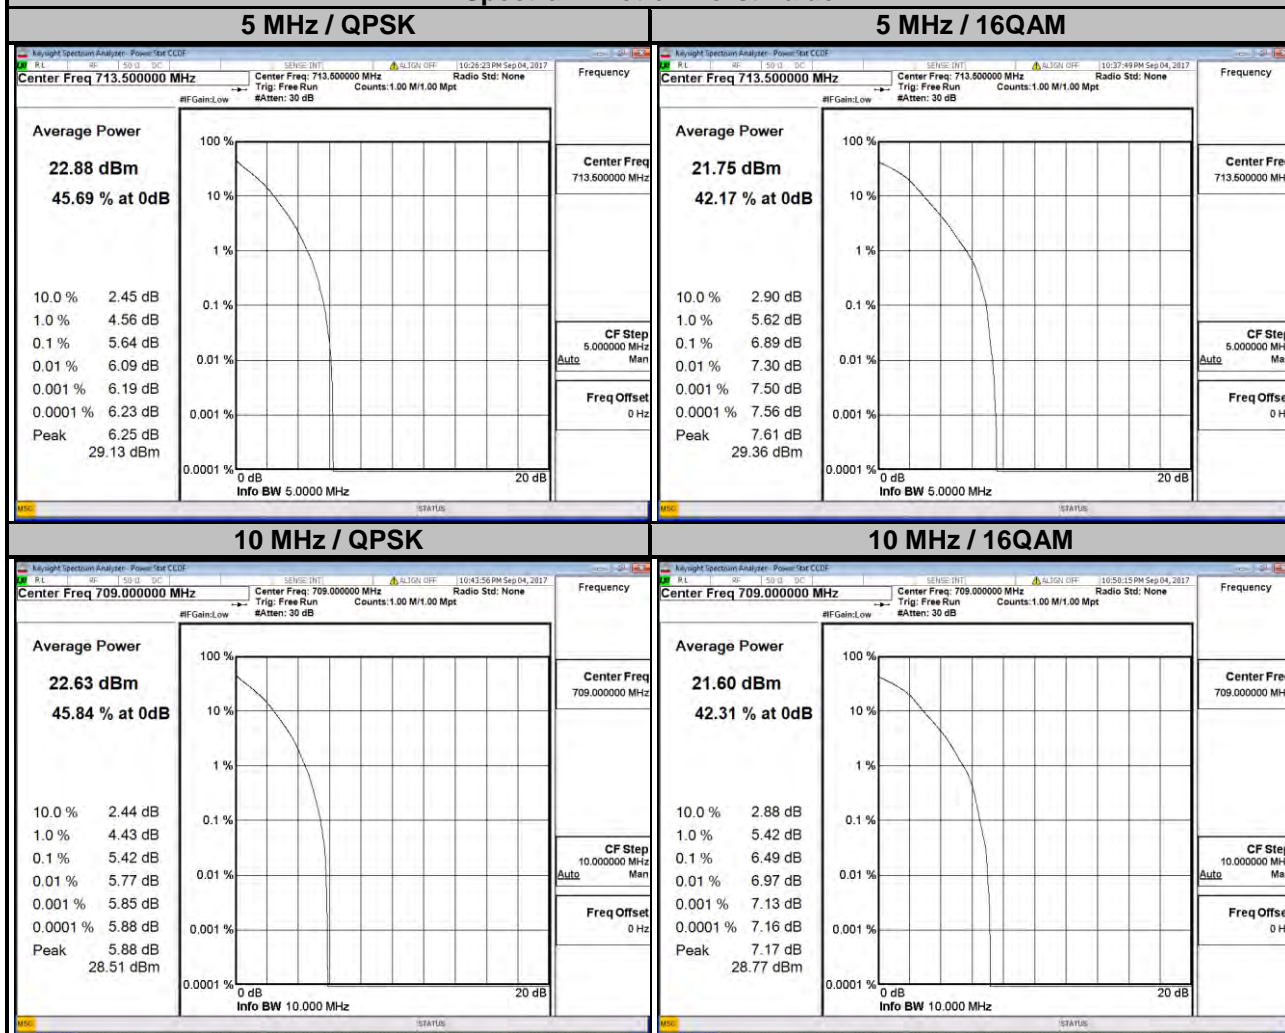


4.7 Conducted Spurious Emissions

4.7.1 Limits of Conducted Spurious Emissions Measurement

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.


4.7.2 Test Setup

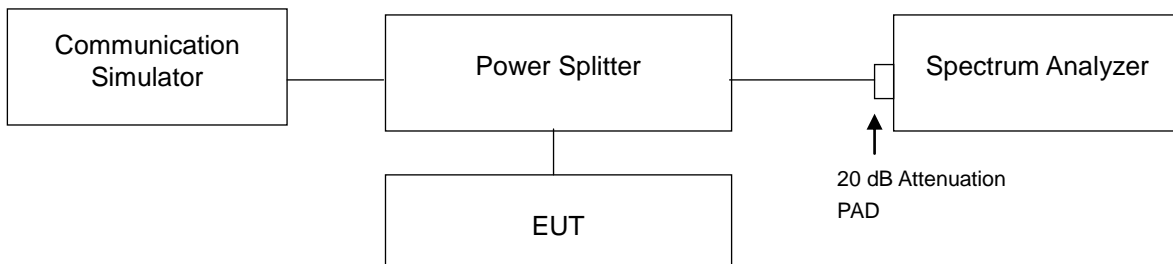

4.7.3 Test Procedure

- The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- Measuring frequency range is from 30 MHz to 8 GHz for LTE Band 13, 17 and from 30 MHz to 18 GHz for LTE Band 4. 10 dB attenuation pad is connected with spectrum. RBW=1 MHz and VBW=3 MHz are used for conducted emission measurement.



4.7.4 Test Results

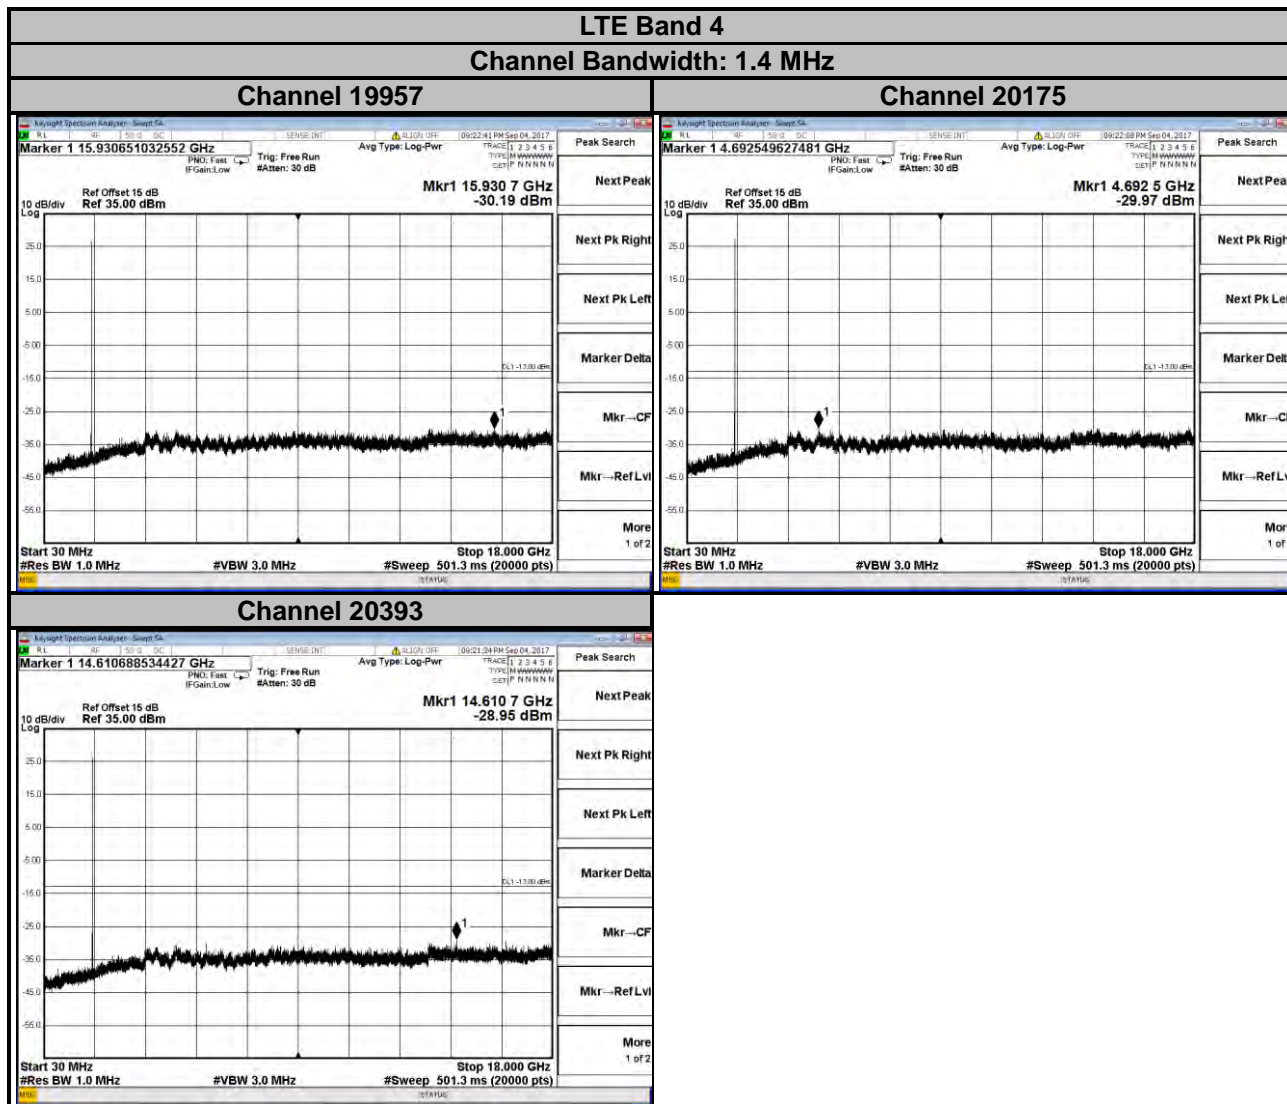


LTE Band 4
Channel Bandwidth: 3 MHz

Channel 19965

Channel 20175

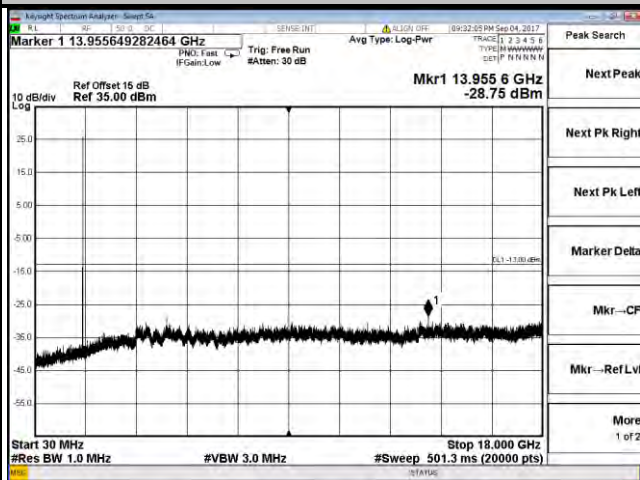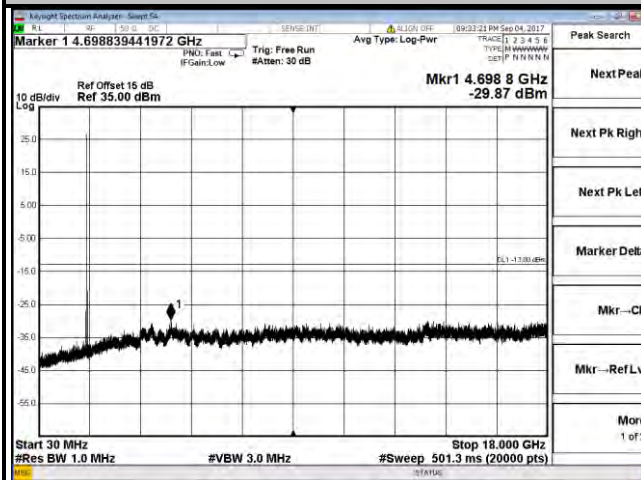


Channel 20385

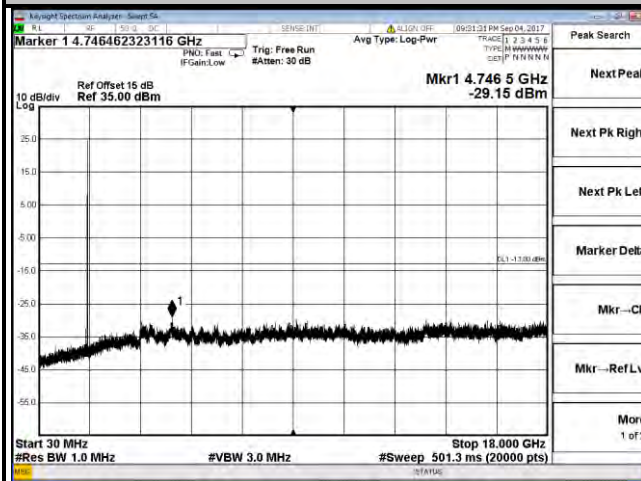


LTE Band 4
Channel Bandwidth: 5 MHz


Channel 19975

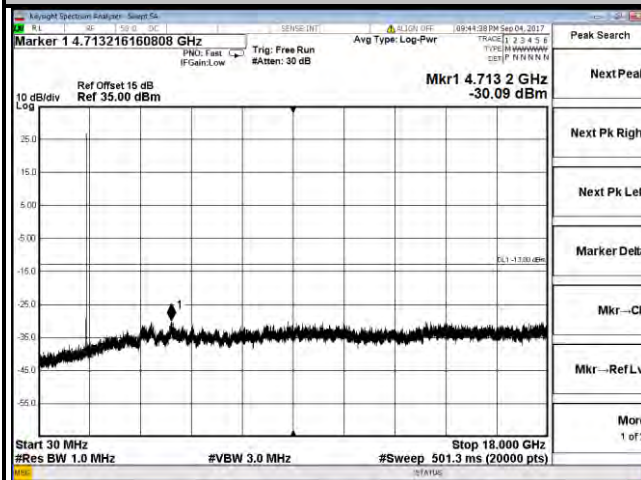

Channel 10175

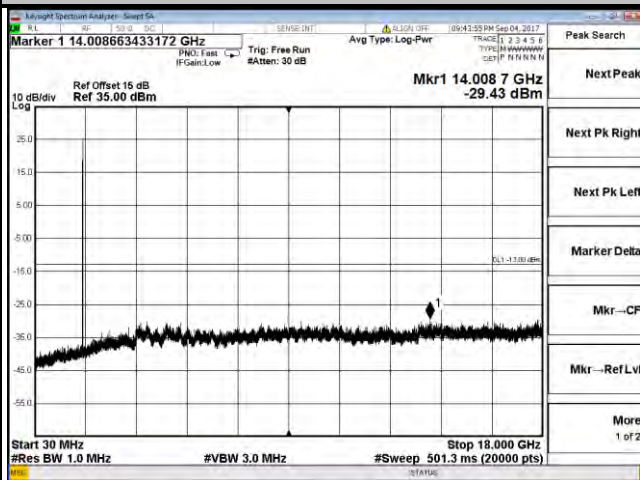


Channel 20375

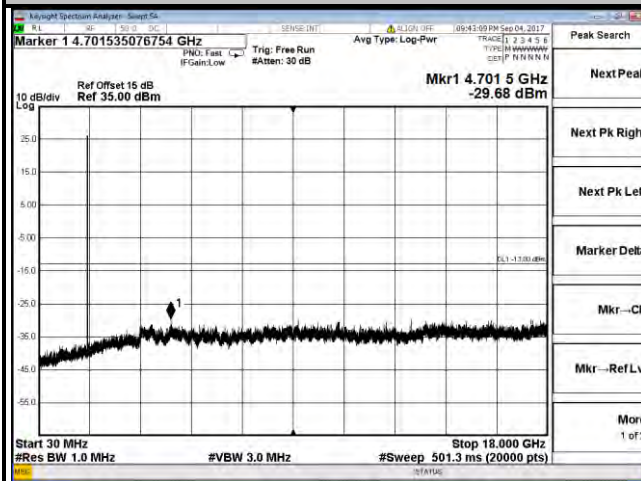


LTE Band 4
Channel Bandwidth: 10 MHz


Channel 2000

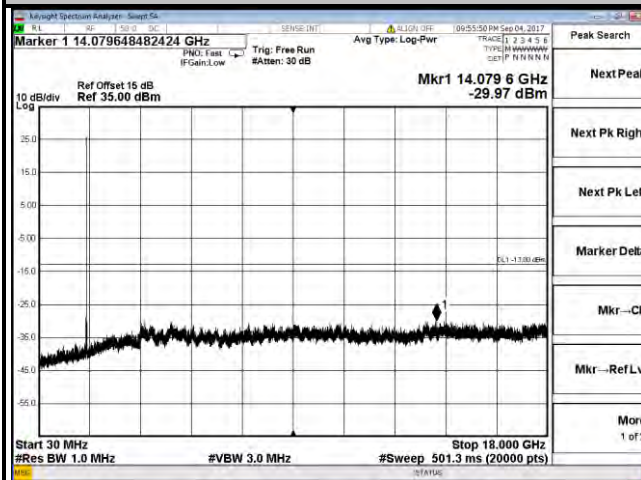

Channel 1715

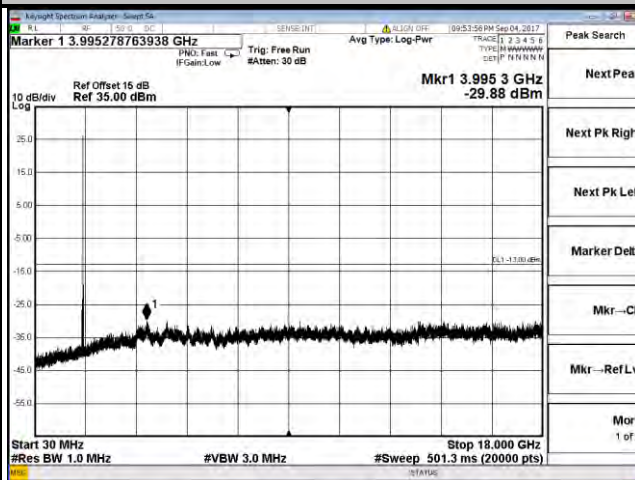



Channel 20350

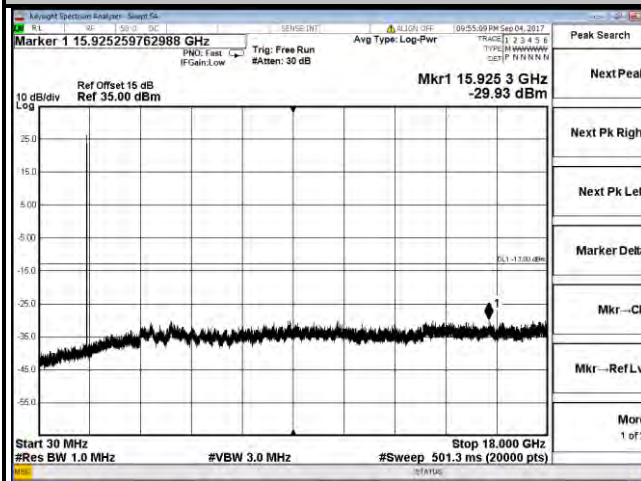


LTE Band 4
Channel Bandwidth: 15 MHz

Channel 20025

Channel 17175

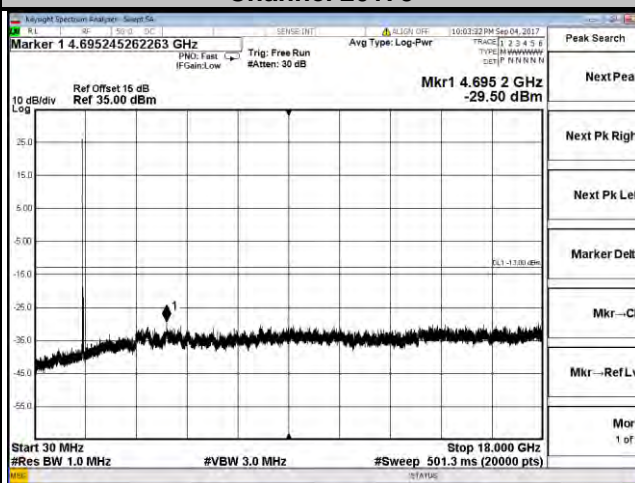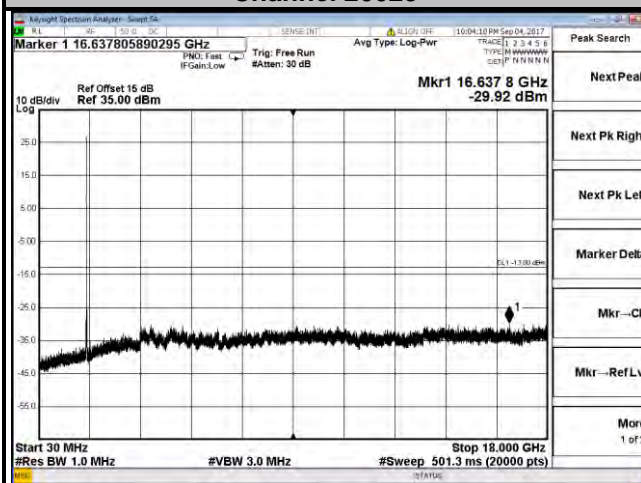

Channel 20325


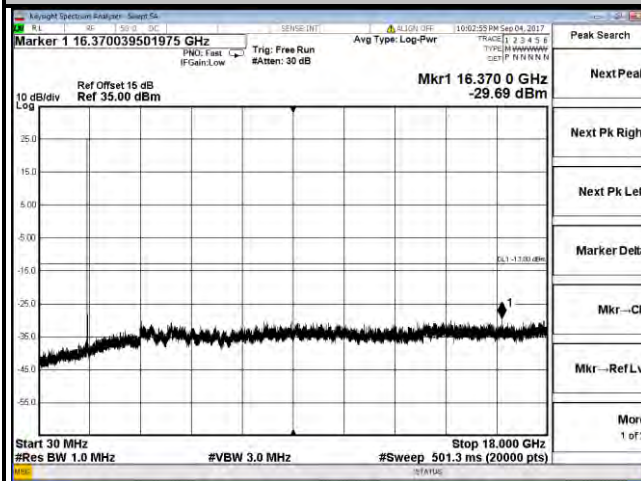


LTE Band 4


Channel Bandwidth: 20 MHz

Channel 20050




Channel 17175

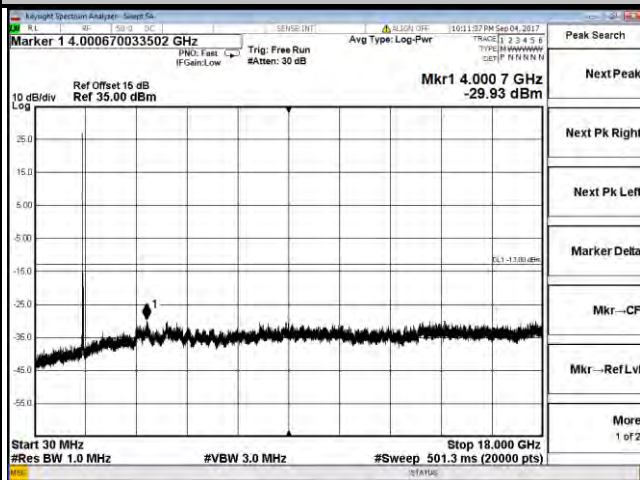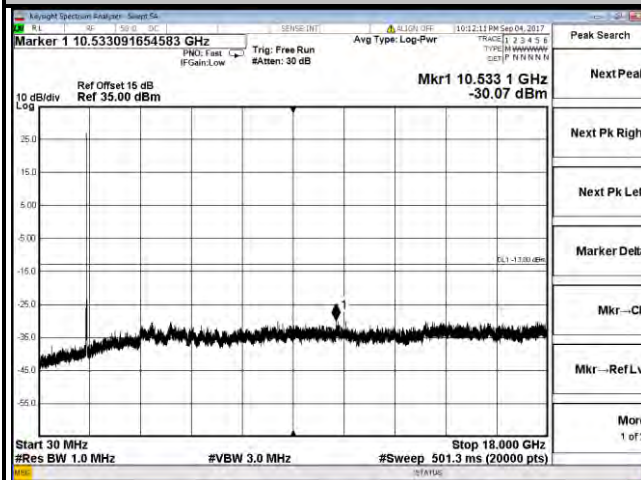


Channel 20300

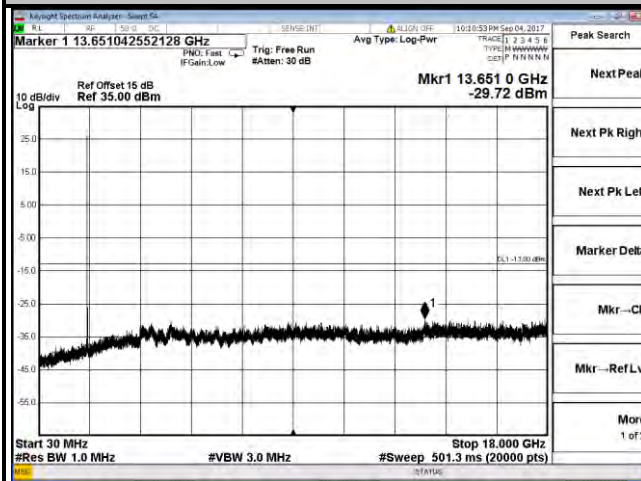

LTE Band 13
Channel Bandwidth: 5 MHz

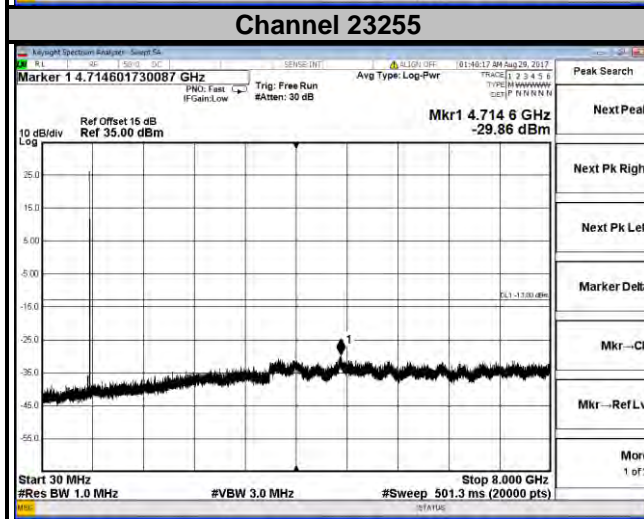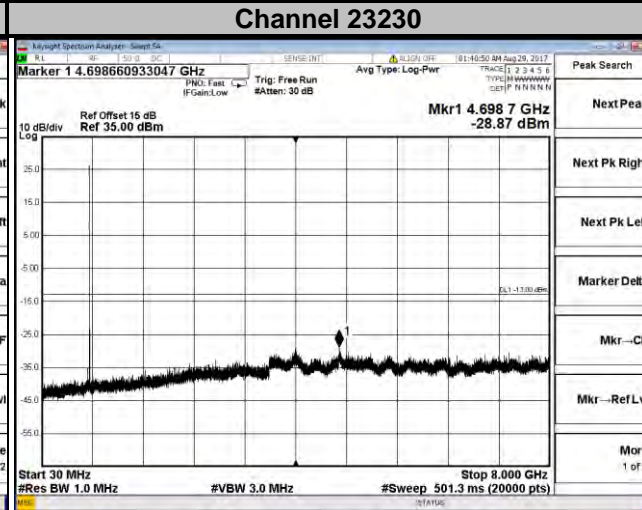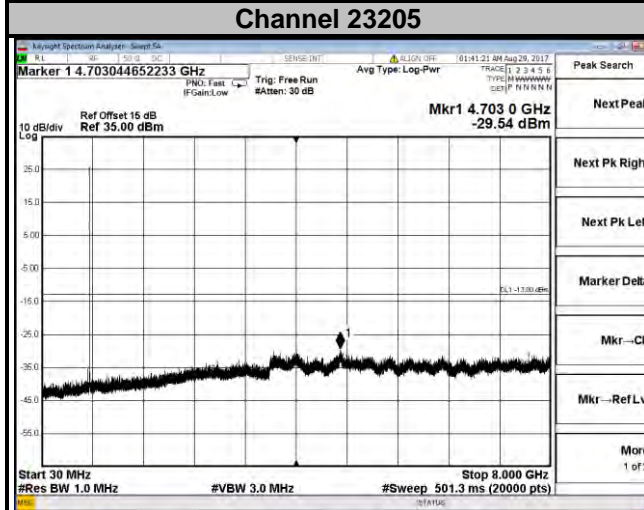



LTE Band 13
Channel Bandwidth: 10 MHz
Channel 23230

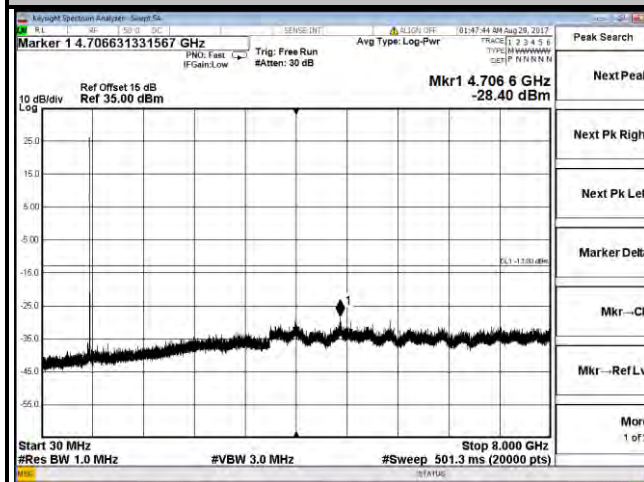


LTE Band 17
Channel Bandwidth: 5 MHz

Channel 23755





Channel 23790

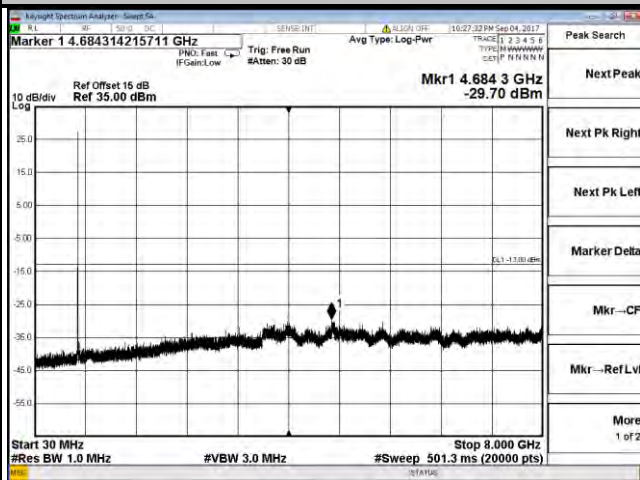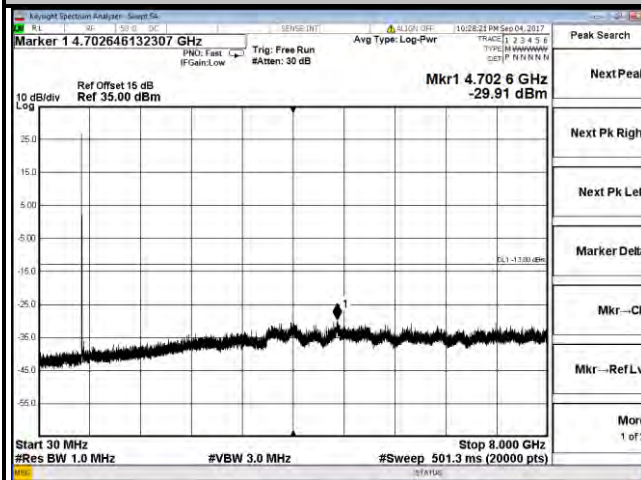

Channel 23825

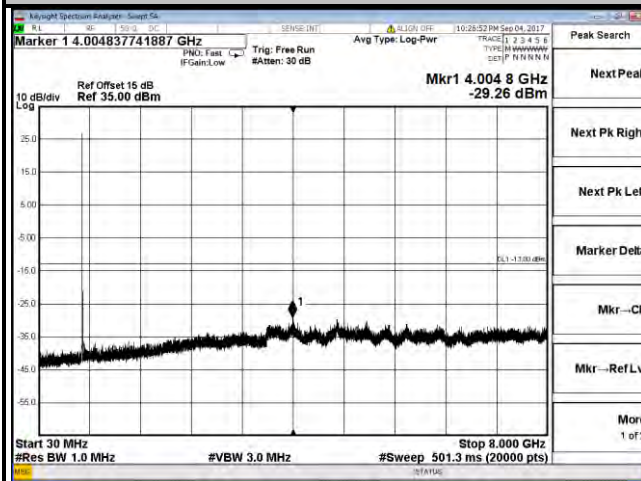

LTE Band 17
Channel Bandwidth: 10 MHz

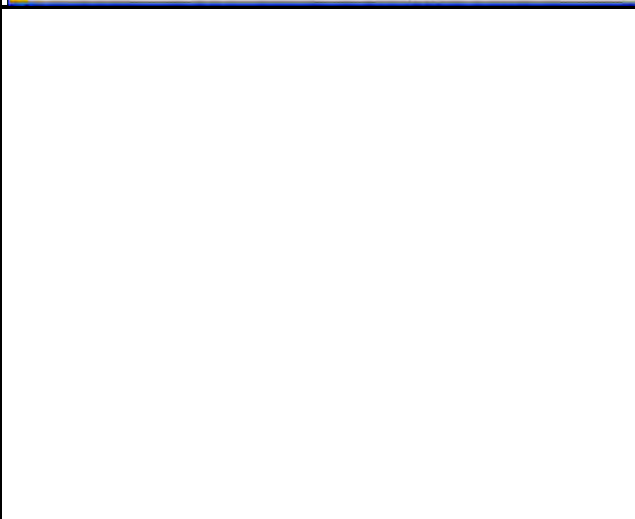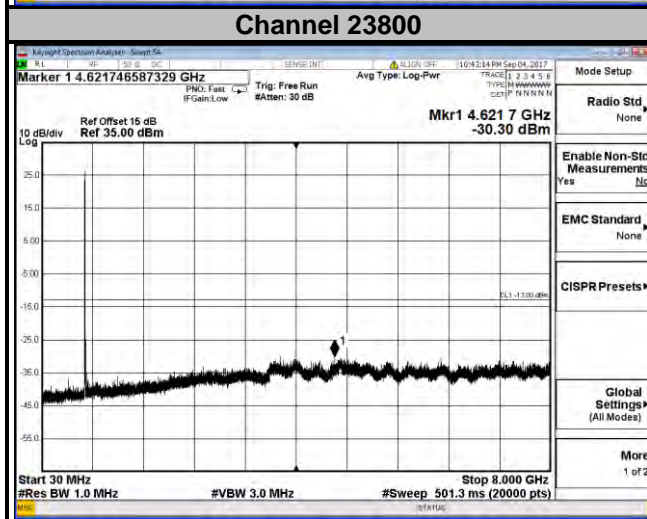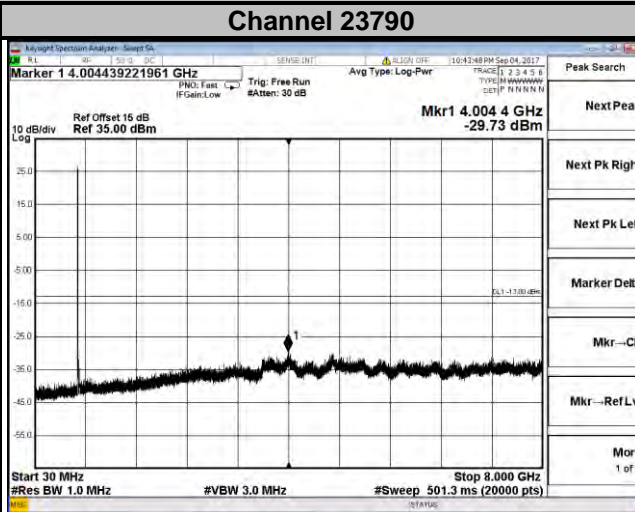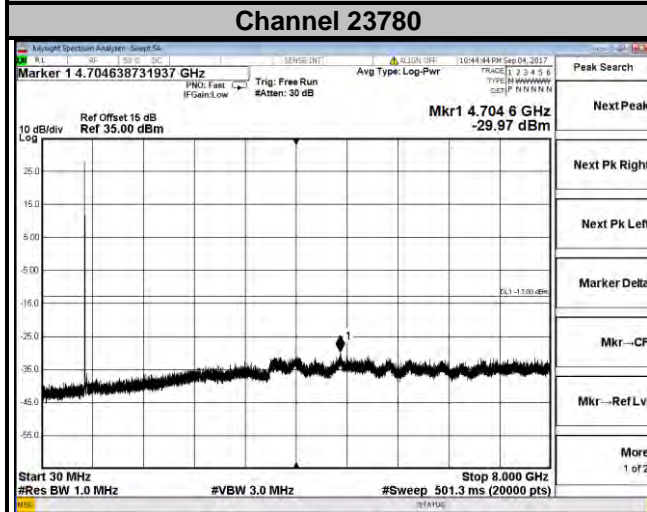

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission is equal to -13 dBm.
- b. For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

4.8.2 Test Procedure


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15 \text{ dBi}$.

Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.8.3 Deviation from Test Standard

No deviation.

4.8.4 Test Setup

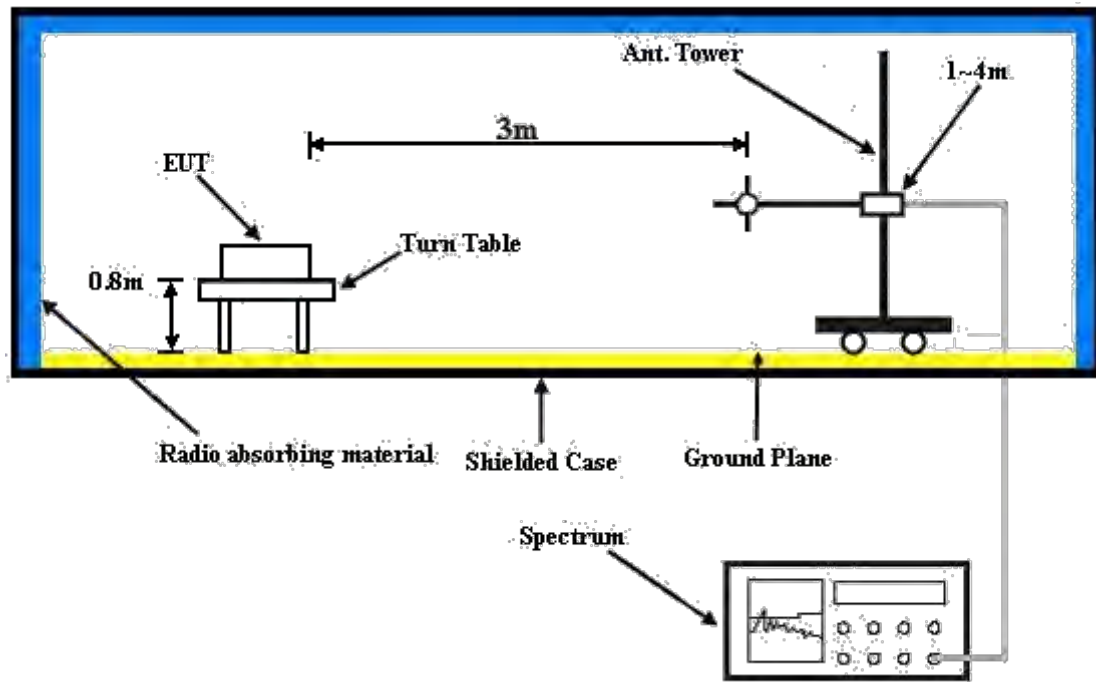

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

LTE Band 4

Channel Bandwidth: 20 MHz / QPSK

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 13

Date: 2017-08-29

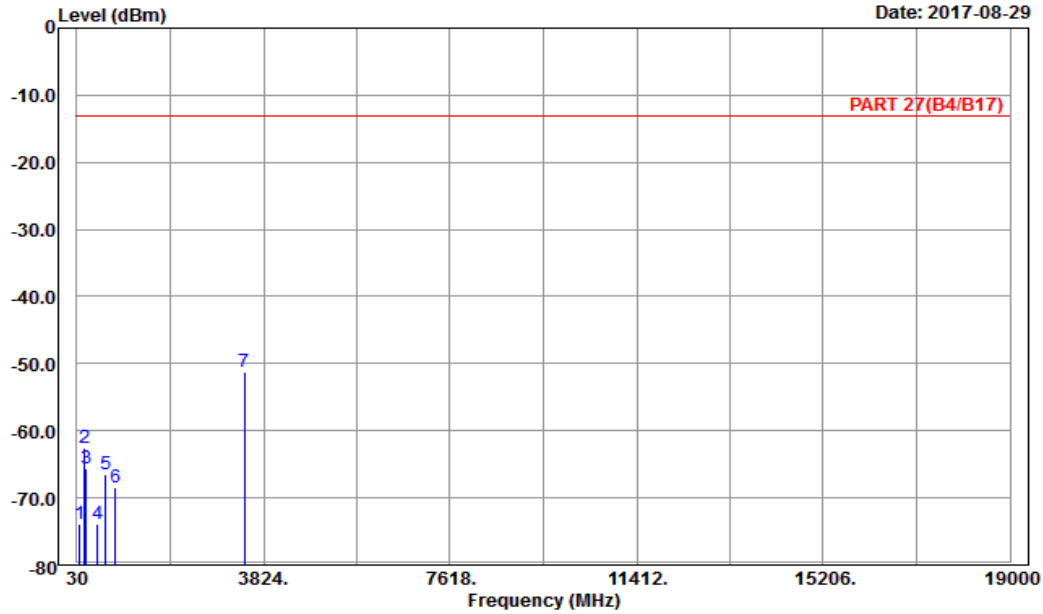

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Horizontal
 Remark : LTE_Band 4_Link_CH20050
 Tested by: Karl Lee


	Read	Limit	Over				
Freq	Level	Level	Line	Limit	Factor	Remark	
MHz	dBm	dBm	dBm	dB	dB		
1	93.72	-73.98	-63.53	-13.00	-60.98	-10.45	Peak
2	182.55	-62.54	-56.93	-13.00	-49.54	-5.61	Peak
3	215.22	-65.56	-59.58	-13.00	-52.56	-5.98	Peak
4	442.80	-73.85	-70.15	-13.00	-60.85	-3.70	Peak
5	615.70	-66.55	-66.80	-13.00	-53.55	0.25	Peak
6	808.20	-68.34	-70.26	-13.00	-55.34	1.92	Peak
7 pp	3440.00	-51.16	-65.51	-13.00	-38.16	14.35	Peak



A D T

Data: 14

Date: 2017-08-29

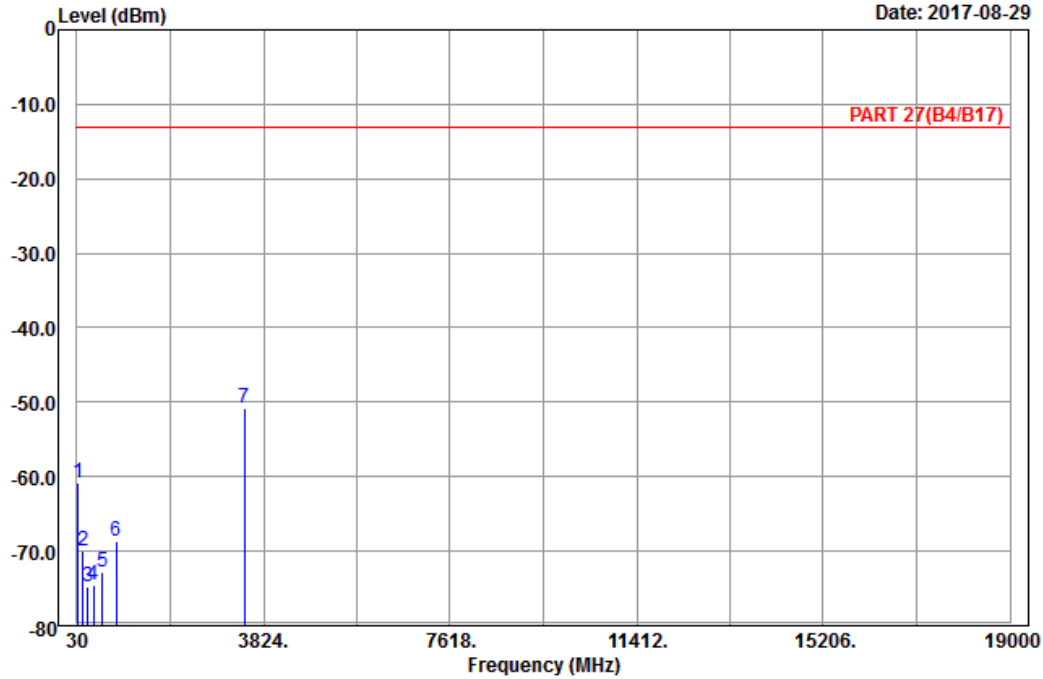

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 4_Link_CH20050
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	59.70	-60.88	-46.81	-13.00	-47.88	-14.07	Peak
2	147.72	-69.94	-62.06	-13.00	-56.94	-7.88	Peak
3	251.94	-74.72	-69.20	-13.00	-61.72	-5.52	Peak
4	365.80	-74.48	-69.93	-13.00	-61.48	-4.55	Peak
5	541.50	-72.77	-70.47	-13.00	-59.77	-2.30	Peak
6	834.10	-68.73	-70.35	-13.00	-55.73	1.62	Peak
7 pp	3440.00	-50.87	-65.22	-13.00	-37.87	14.35	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-08-29

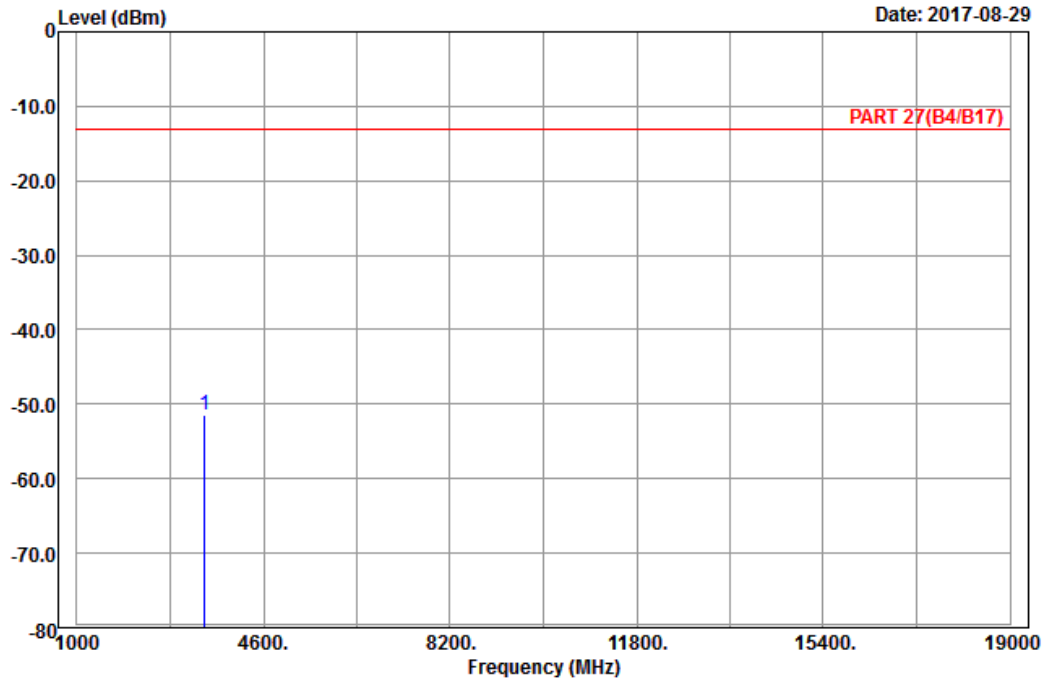

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Horizontal
 Remark : LTE_Band 4_Link_CH20175
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit	Over	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3465.00	-51.36	-65.70	-13.00	-38.36	14.34	Peak



A D T

Data: 10

Date: 2017-08-29

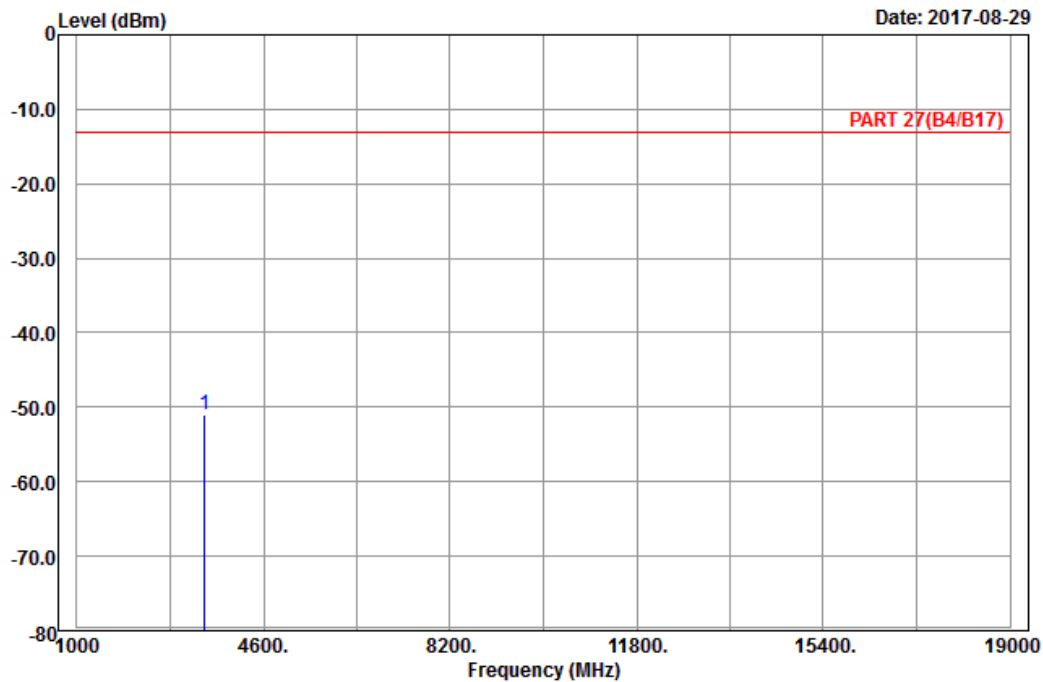

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 4_Link_CH20175
 Tested by: Karl Lee

	Read	Limit	Over			
Freq	Level	Level	Line	Limit	Factor	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3465.00	-51.06	-65.40	-13.00	-38.06	14.34	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-08-29

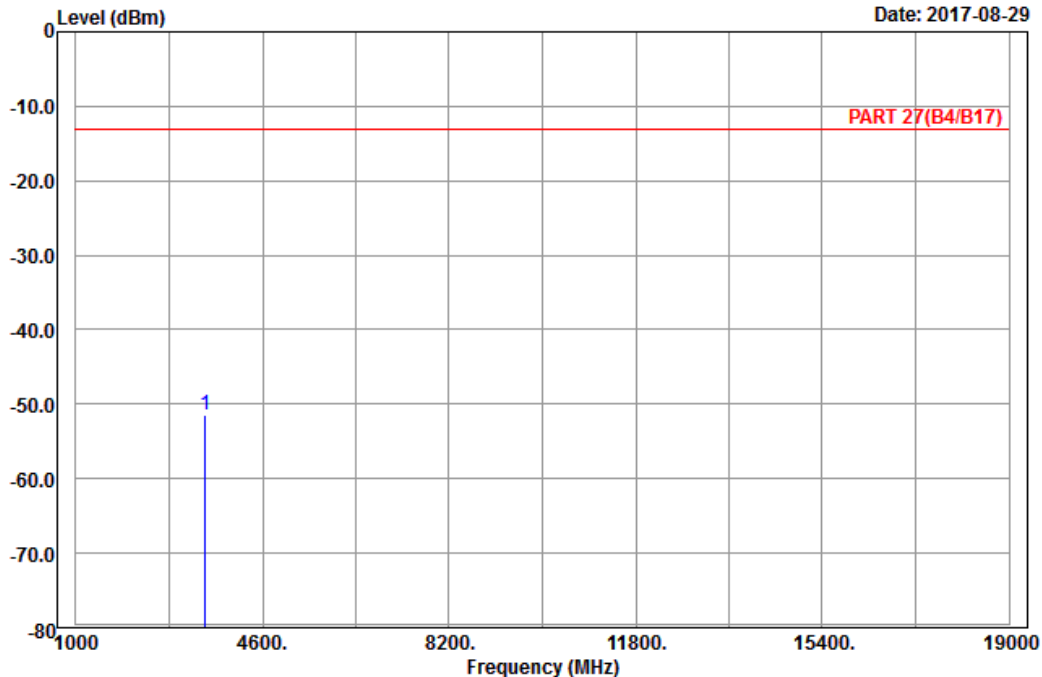

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Horizontal
 Remark : LTE_Band 4_Link_CH20300
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit	Over	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3490.00	-51.55	-65.86	-13.00	-38.55	14.31	Peak



A D T

Data: 10

Date: 2017-08-29

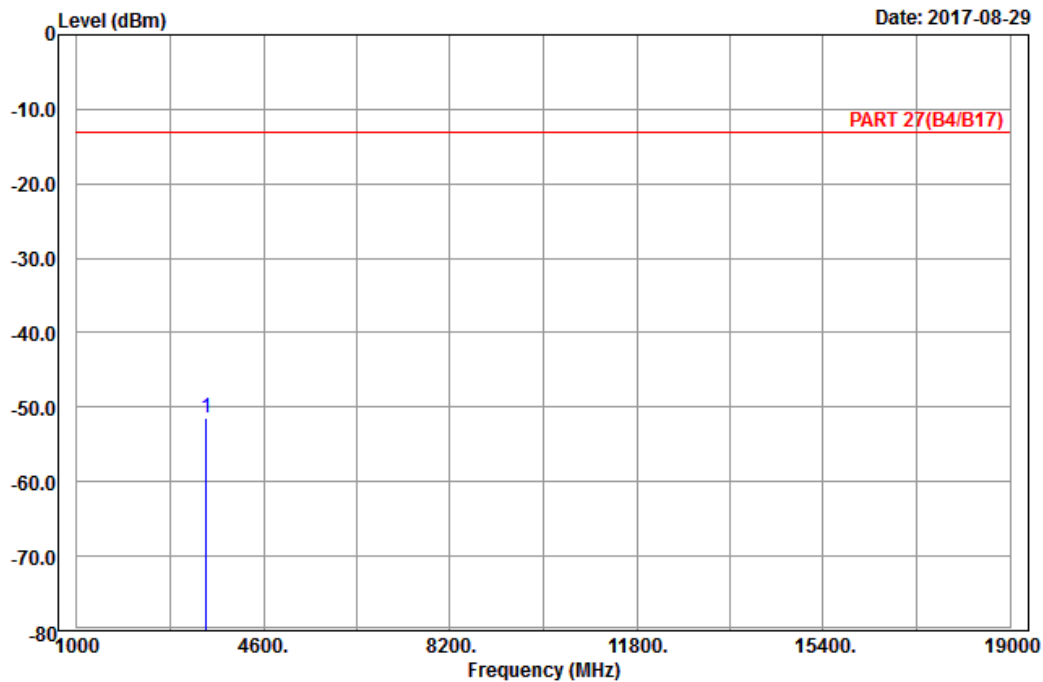

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 4_Link_CH20300
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 3490.00	-51.40	-65.71	-13.00	-38.40	14.31	Peak

LTE Band 13
 Channel Bandwidth: 10 MHz / QPSK
 Middle Channel (1, 0)




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-09-16

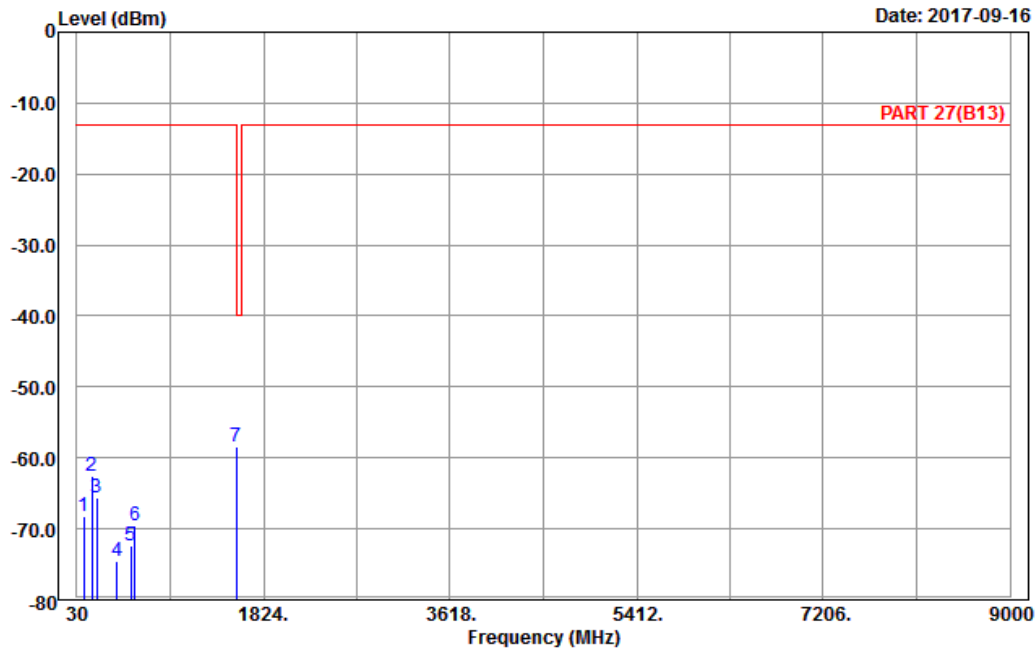

Site : 966 chamber 1
 Condition: PART 27(B13) Horizontal
 Remark : LTE_Band 13_Link_CH23230
 Tested by: Harry Hsueh


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	97.50	-68.22	-57.99	-13.00	-55.22	-10.23	Peak
2	177.15	-62.66	-56.78	-13.00	-49.66	-5.88	Peak
3	221.16	-65.71	-59.81	-13.00	-52.71	-5.90	Peak
4	413.40	-74.48	-71.44	-13.00	-61.48	-3.04	Peak
5	547.10	-72.29	-70.42	-13.00	-59.29	-1.87	Peak
6	589.10	-69.61	-69.56	-13.00	-56.61	-0.05	Peak
7 pp	1564.00	-58.44	-65.30	-40.00	-18.44	6.86	Peak



A D T

Data: 10

Date: 2017-09-16

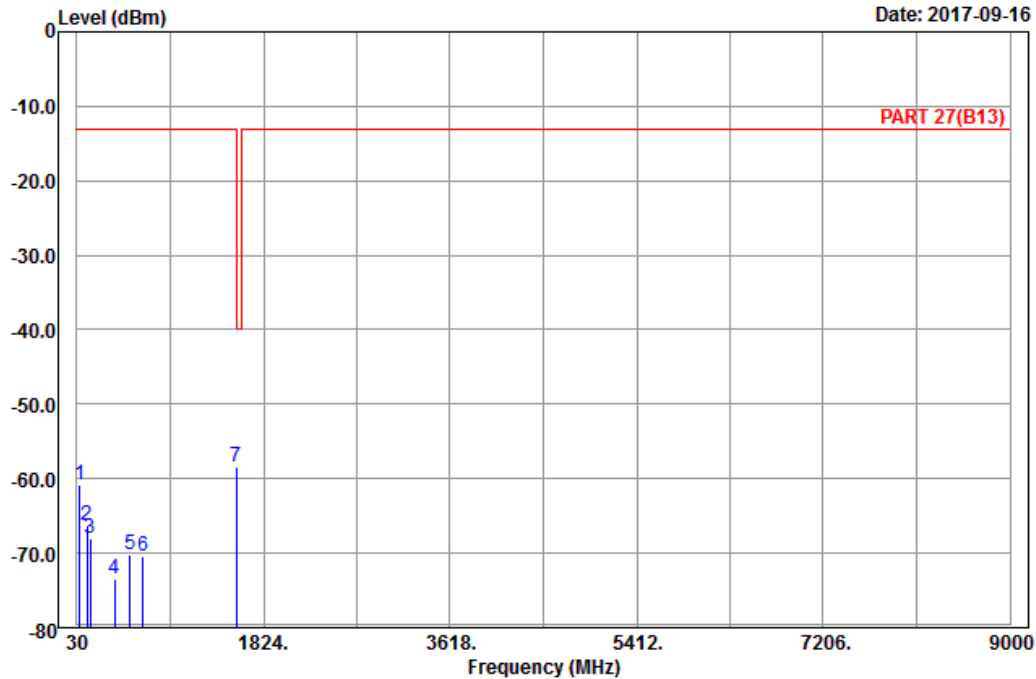

Site : 966 chamber 1
 Condition: PART 27(B13) Vertical
 Remark : LTE_Band 13_Link_CH23230
 Tested by: Harry Hsueh

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	59.70	-60.88	-46.81	-13.00	-47.88	-14.07	Peak
2	128.28	-66.37	-58.60	-13.00	-53.37	-7.77	Peak
3	160.68	-68.06	-60.49	-13.00	-55.06	-7.57	Peak
4	388.90	-73.55	-70.24	-13.00	-60.55	-3.31	Peak
5	543.60	-70.12	-67.96	-13.00	-57.12	-2.16	Peak
6	664.70	-70.33	-70.13	-13.00	-57.33	-0.20	Peak
7 pp	1564.00	-58.46	-65.32	-40.00	-18.46	6.86	Peak

Middle Channel (50, 0)




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-09-16

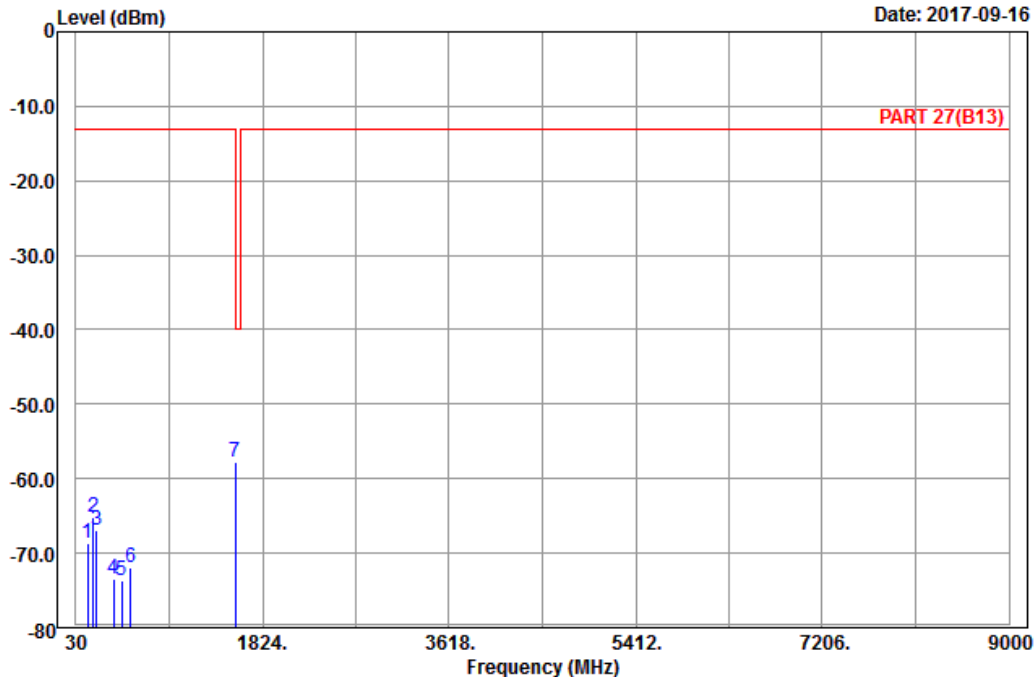

Site : 966 chamber 1
 Condition: PART 27(B13) Horizontal
 Remark : LTE_Band 13_Link_CH23230
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	143.40	-68.56	-60.77	-13.00	-55.56	-7.79	Peak
2	198.75	-65.15	-59.01	-13.00	-52.15	-6.14	Peak
3	226.02	-66.97	-61.14	-13.00	-53.97	-5.83	Peak
4	390.30	-73.50	-70.24	-13.00	-60.50	-3.26	Peak
5	469.40	-73.64	-69.24	-13.00	-60.64	-4.40	Peak
6	554.80	-72.01	-70.55	-13.00	-59.01	-1.46	Peak
7 pp	1564.00	-57.81	-64.67	-40.00	-17.81	6.86	Peak



A D T

Data: 10

Date: 2017-09-16

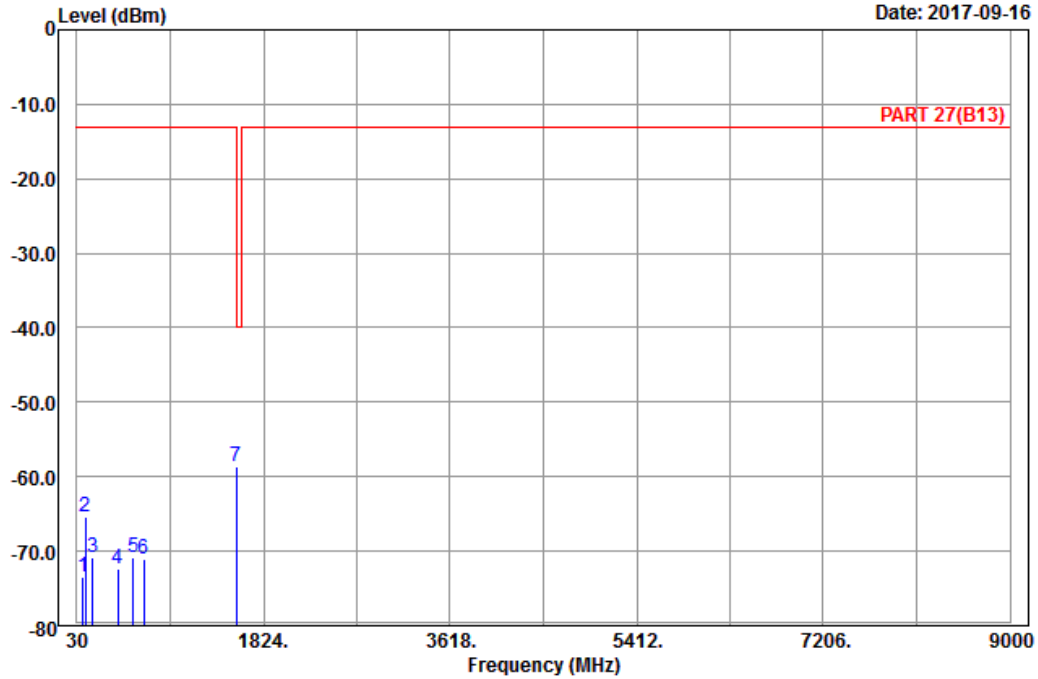

Site : 966 chamber 1
 Condition: PART 27(B13) Vertical
 Remark : LTE_Band 13_Link_CH23230
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	85.35	-73.36	-62.14	-13.00	-60.36	-11.22	Peak
2	113.43	-65.36	-56.67	-13.00	-52.36	-8.69	Peak
3	183.09	-70.79	-65.17	-13.00	-57.79	-5.62	Peak
4	427.40	-72.47	-69.11	-13.00	-59.47	-3.36	Peak
5	568.80	-70.95	-70.05	-13.00	-57.95	-0.90	Peak
6	675.20	-71.01	-70.75	-13.00	-58.01	-0.26	Peak
7 pp	1564.00	-58.57	-65.43	-40.00	-18.57	6.86	Peak

LTE Band 17
Channel Bandwidth: 10 MHz / QPSK
Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-08-30

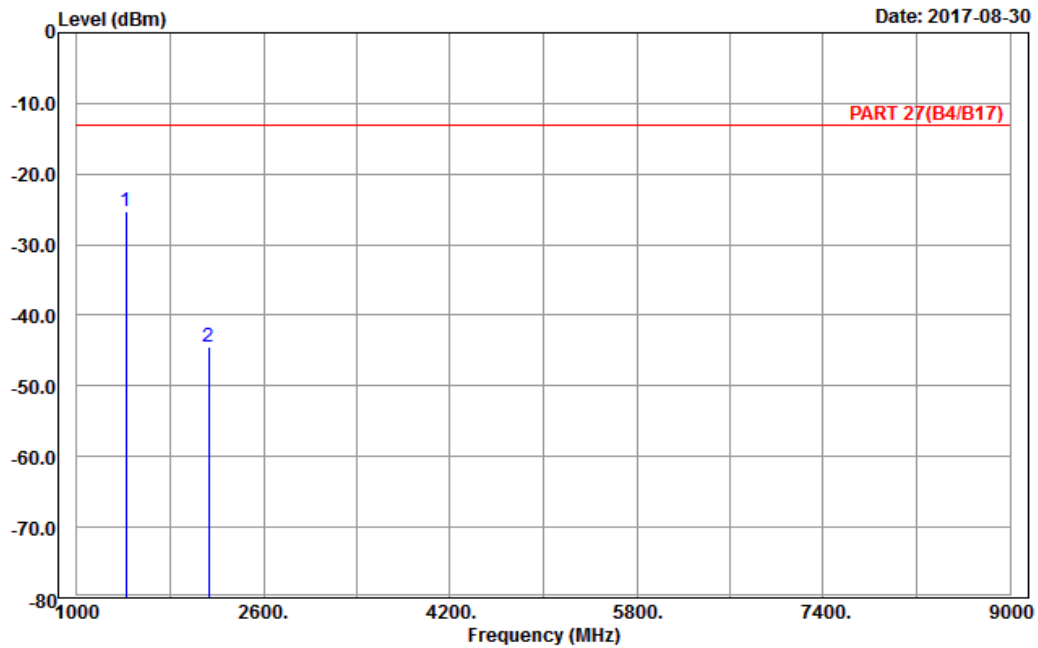

Site : 966 chamber 1
Condition: PART 27(B4/B17) Horizontal
Remark : LTE_Band 17_Link_CH23780
Tested by: Karl Lee


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1418.00	-25.20	-31.56	-13.00	-12.20	6.36	Peak
2	2127.00	-44.56	-55.84	-13.00	-31.56	11.28	Peak



A D T

Data: 6

Date: 2017-08-30

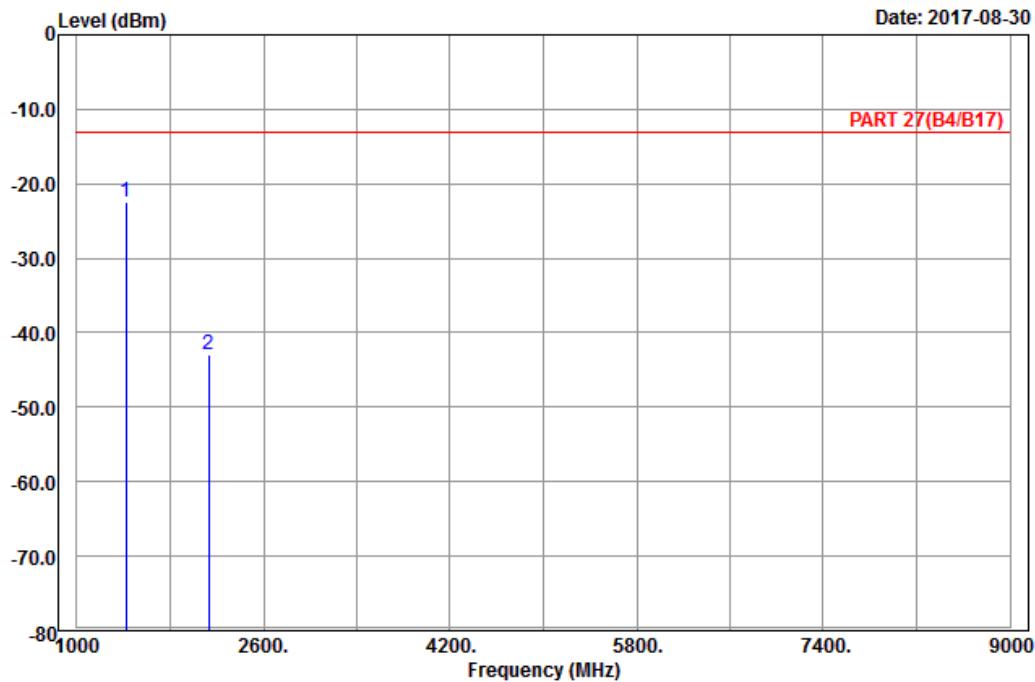

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 17_Link_CH23780
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1418.00	-22.56	-28.92	-13.00	-9.56	6.36	Peak
2	2127.00	-43.01	-54.29	-13.00	-30.01	11.28	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 2017-08-30

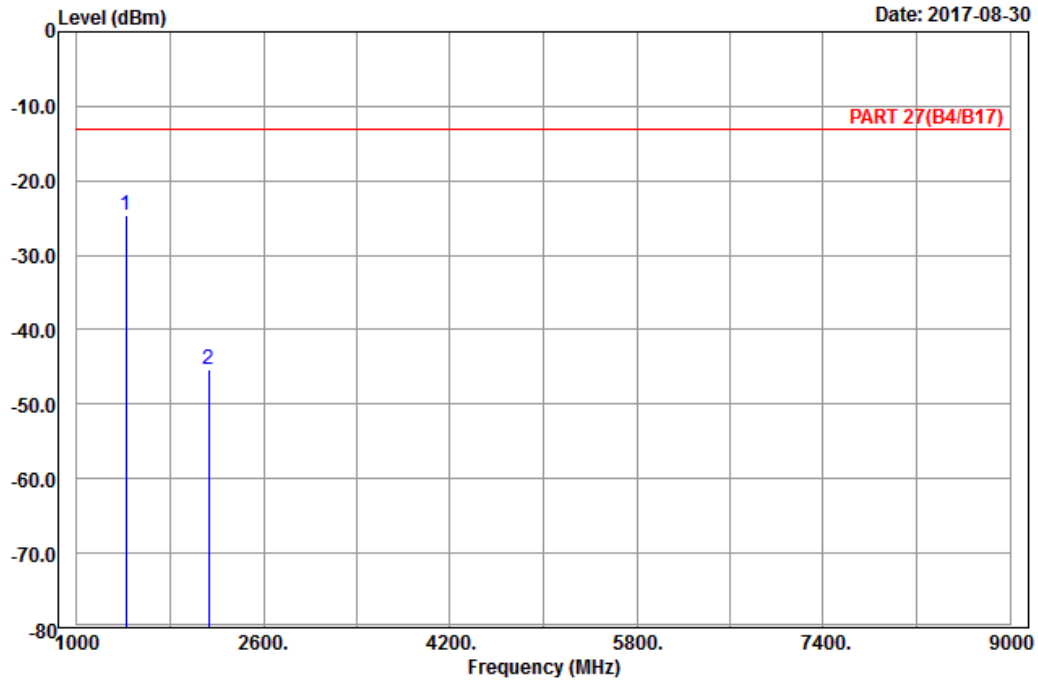

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Horizontal
 Remark : LTE_Band 17_Link_CH23790
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1420.00	-24.70	-31.06	-13.00	-11.70	6.36	Peak
2	2130.00	-45.36	-56.64	-13.00	-32.36	11.28	Peak



A D T

Data: 6

Date: 2017-08-30

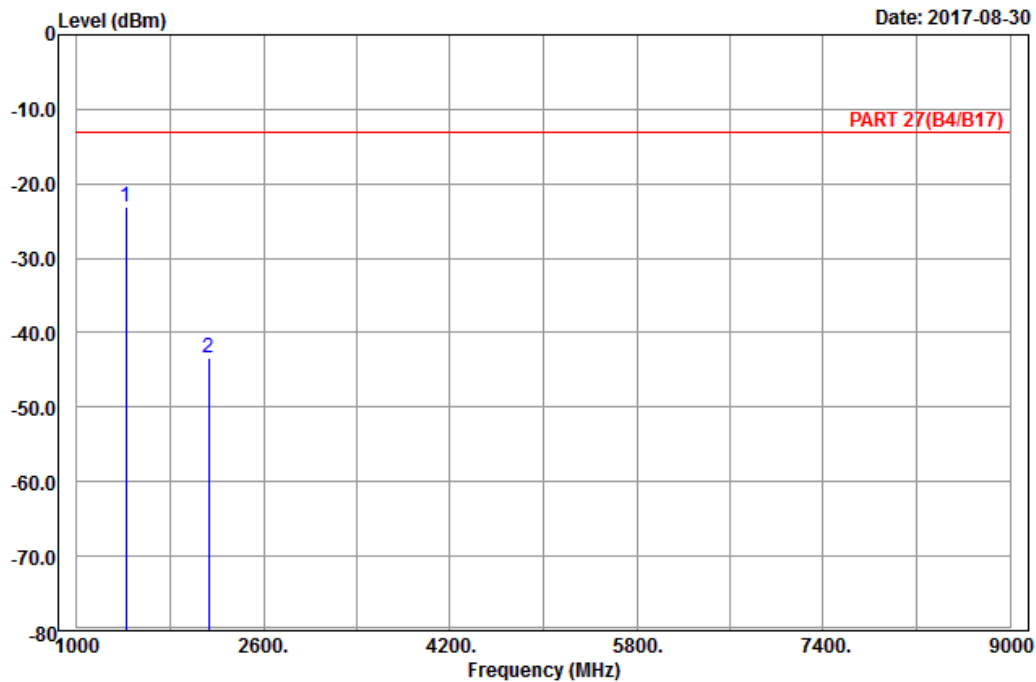

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 17_Link_CH23790
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1420.00	-23.17	-29.53	-13.00	-10.17	6.36	Peak
2	2130.00	-43.46	-54.74	-13.00	-30.46	11.28	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 9

Date: 2017-08-30

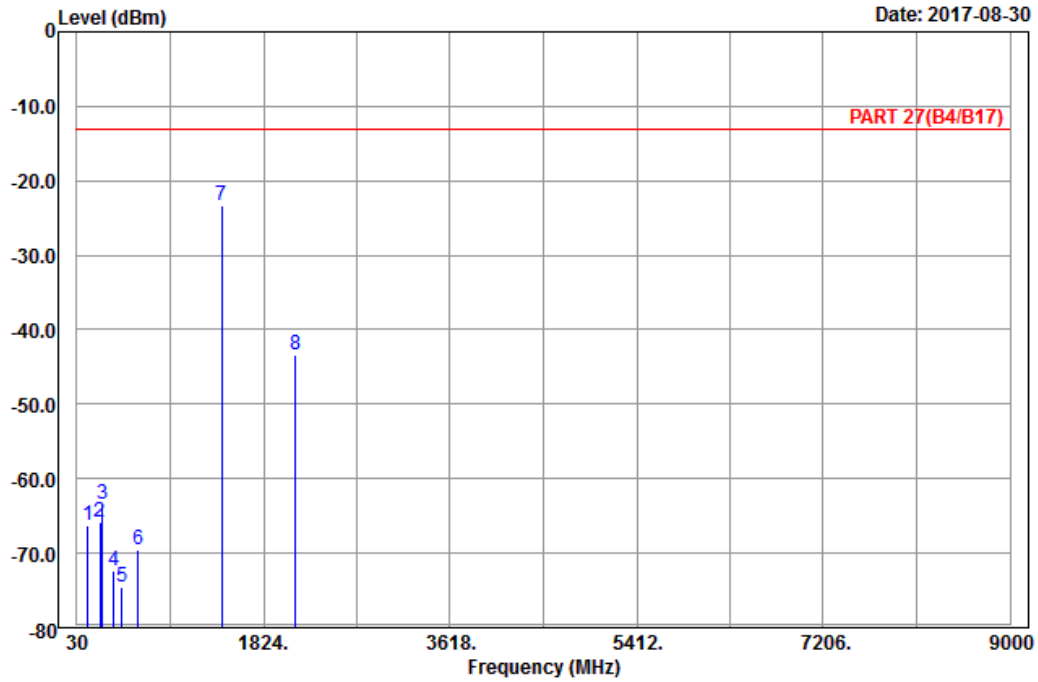

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Horizontal
 Remark : LTE_Band 17_Link_CH23800
 Tested by: Karl Lee


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	138.00	-66.22	-58.54	-13.00	-53.22	-7.68	Peak
2	249.24	-65.76	-60.24	-13.00	-52.76	-5.52	Peak
3	276.51	-63.33	-57.58	-13.00	-50.33	-5.75	Peak
4	388.20	-72.33	-68.97	-13.00	-59.33	-3.36	Peak
5	463.80	-74.62	-70.39	-13.00	-61.62	-4.23	Peak
6	622.70	-69.54	-69.71	-13.00	-56.54	0.17	Peak
7 pp	1422.00	-23.22	-29.58	-13.00	-10.22	6.36	Peak
8	2133.00	-43.27	-54.55	-13.00	-30.27	11.28	Peak



A D T

Data: 10

Date: 2017-08-30

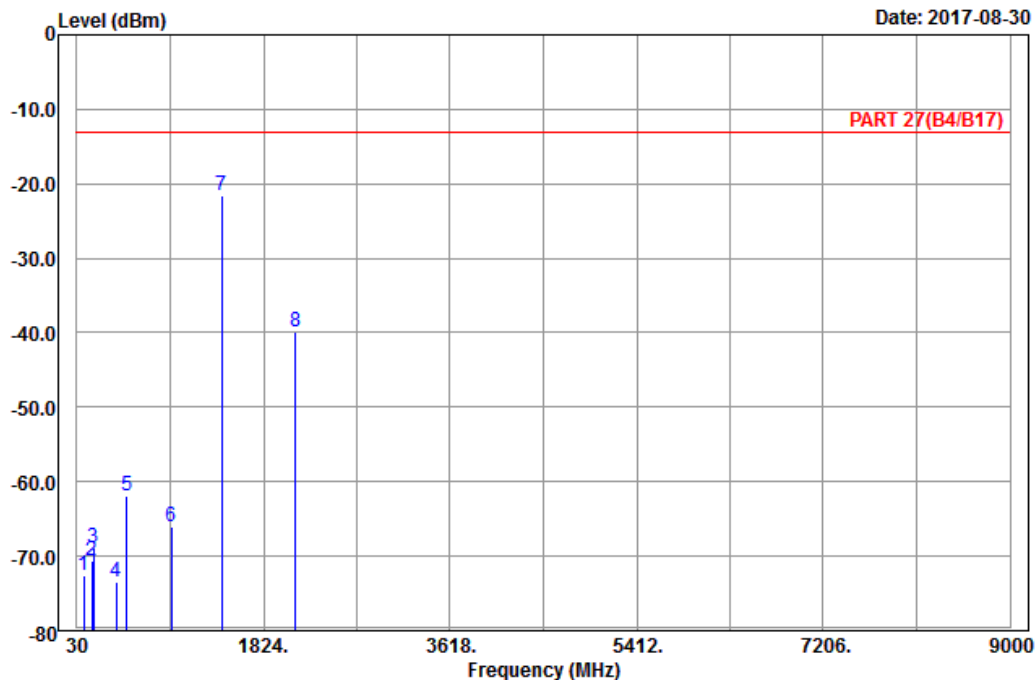

Site : 966 chamber 1
 Condition: PART 27(B4/B17) Vertical
 Remark : LTE_Band 17_Link_CH23800
 Tested by: Karl Lee

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	96.42	-72.64	-62.30	-13.00	-59.64	-10.34	Peak
2	172.29	-70.69	-64.29	-13.00	-57.69	-6.40	Peak
3	189.84	-68.92	-63.19	-13.00	-55.92	-5.73	Peak
4	411.30	-73.39	-70.39	-13.00	-60.39	-3.00	Peak
5	507.90	-61.92	-57.21	-13.00	-48.92	-4.71	Peak
6	941.90	-65.94	-70.70	-13.00	-52.94	4.76	Peak
7 pp	1422.00	-21.64	-28.00	-13.00	-8.64	6.36	Peak
8	2133.00	-39.80	-51.08	-13.00	-26.80	11.28	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---