



RF TEST REPORT



Report No.: FCC-IC_RF_SL15052101-STR-002_RFID Rev 1.0
Supersede Report No.: FCC-IC_RF_SL15052101-STR-002_RFID





Applicant	:	Stryker Endoscopy
Product Name	:	Universal Gateway (hereafter called Spoke)
Model No.	:	0240-060-150
Test Standard	:	FCC 15.225 FCC 15.207 RSS 210 Issue 8 (2010)
Test Method	:	ANSI C63.10: 2013 RSS Gen 4.6, RSS Gen 4.7 & RSS Gen 4.9
FCC ID	:	SSH-UNIGTY15
IC ID	:	4919C-UNIGTY15
Dates of test	:	09/05/2015
Issue Date	:	11/10/2015
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification [X] Equipment did not comply with the specification []		

This Test Report is Issued Under the Authority of:	
	
Ronak Patel	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:    

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1 REPORT REVISION HISTORY4

2 EXECUTIVE SUMMARY5

3 CUSTOMER INFORMATION5

4 TEST SITE INFORMATION5

5 MODIFICATION5

6 EUT INFORMATION6

6.1 EUT Description6

6.2 Radio Description6

6.3 EUT test modes/configuration Description.....7

6.4 EUT Photos – External8

6.5 EUT Photos – Internal.....9

6.6 EUT Test Setup Photos11

7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....13

7.1 Supporting Equipment13

7.2 Cabling Description13

7.3 Test Software Description13

8 TEST SUMMARY14

9 MEASUREMENT UNCERTAINTY15

10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS16

10.1 Antenna Requirement.....16

10.2 Conducted Emission Test Result17

10.3 Radiated Measurement20

10.3.1 Radiated Measurement 30MHz - 1GHz.....21

10.3.2 Radiated Measurement below 30MHz23

10.4 Frequency Stability.....29

10.5 Occupied bandwidth.....31

ANNEX A. TEST INSTRUMENT33

ANNEX B. SIEMIC ACCREDITATION34

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC-IC_RF_SL15052101-STR-002_RFID	-	Original	10/29/2015
FCC-IC_RF_SL15052101-STR-002_RFID Rev 1.0	Rev 1.0	Updated product name	11/10/2015

2 Executive Summary

The purpose of this test program was to demonstrate compliance of the HID Global Corporation., and model: V371 against the current Stipulated Standards. The V371 has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Stryker Endoscopy
Applicant Address	:	5900 OPTICAL CT, SAN JOSE, CA, 95138
Manufacturer Name	:	Styker Endoscopy
Manufacturer Address	:	5900 OPTICAL CT, SAN JOSE, CA, 95138

4 Test site information

Lab performing tests	:	SIEMIC Laboratories
Lab Address	:	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	:	881796
IC Test Site No.	:	4842D-2
VCCI Test Site No.	:	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	:	Universal Gateway (hereafter called Spoke)
Model No.	:	0240-060-150
Trade Name	:	Stryker Endoscopy
Serial No.	:	Radiated Emission Unit: UGPP10074
Input Power	:	100-240V, 50-60Hz
Date of EUT received	:	07/08/2015
Equipment Class/ Category	:	DXX
Clock/Operating Frequencies	:	8MHz/13.56 MHz
Port/Connectors	:	USB, Ethernet, HDMI

6.2 Radio Description

Spec for Radio

Radio Type	RFID
Operating Frequency	13.56MHz
Modulation	ASK
Antenna Type	PCB
Antenna Gain	

6.3 EUT test modes/configuration Description

Mode	Note
RF test	EUT continuous transmit when power on
Note: None	

Test Item	Operating mode	Tested antenna port	Test frequencies
Antenna Requirement	N/A	-	13.56MHz
Conducted Emissions Voltage	Continuous Transmit	-	
Limit in the band of 13.553 – 13.567 MHz	Continuous Transmit	-	
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	Continuous Transmit	-	
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Continuous Transmit	-	
Limit outside the band of 13.110 – 14.010 MHz	Continuous Transmit	-	
Frequency Stability	Continuous Transmit	-	
Occupied Bandwidth	Continuous Transmit	-	
Note: EUT uses a PCB trace antenna attached to the PCB board. Only radiated measurements were tested.			


6.4 EUT Photos – External




Top Side




Bottom Side

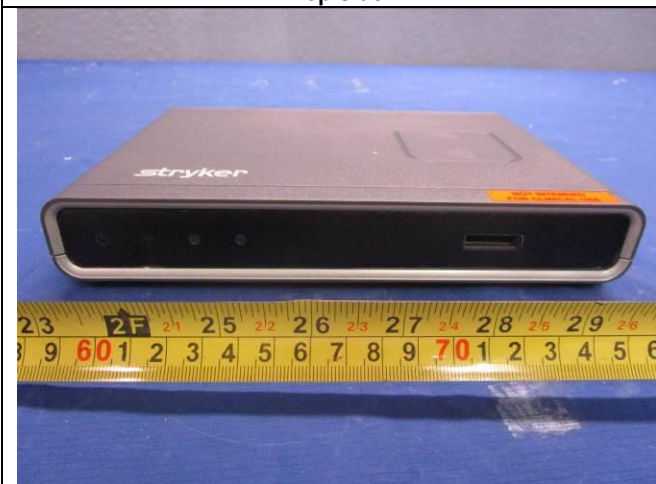


Front Side

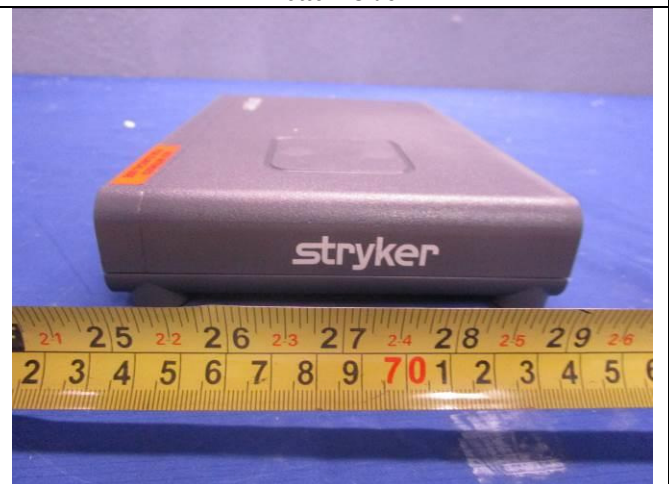

Rear Side

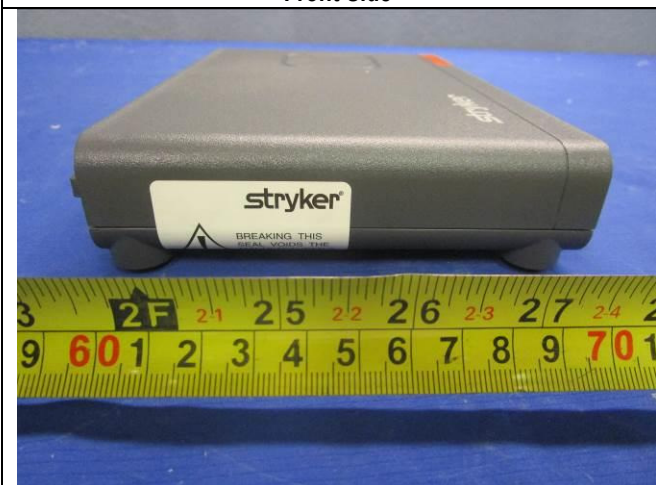

Left Side

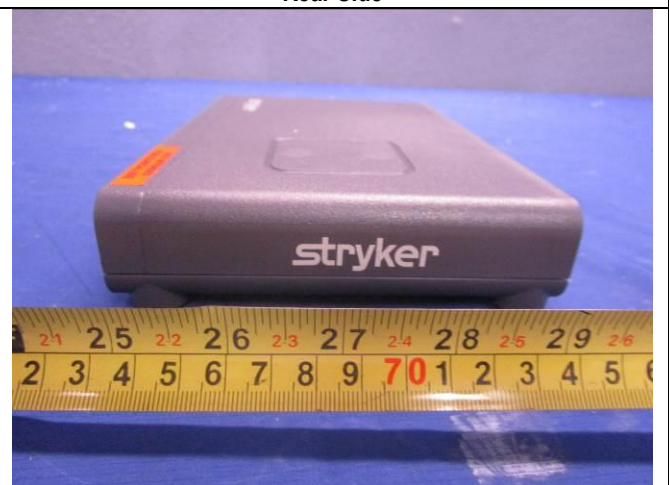


Right Side


6.5 EUT Photos – Internal



Cover off View 1

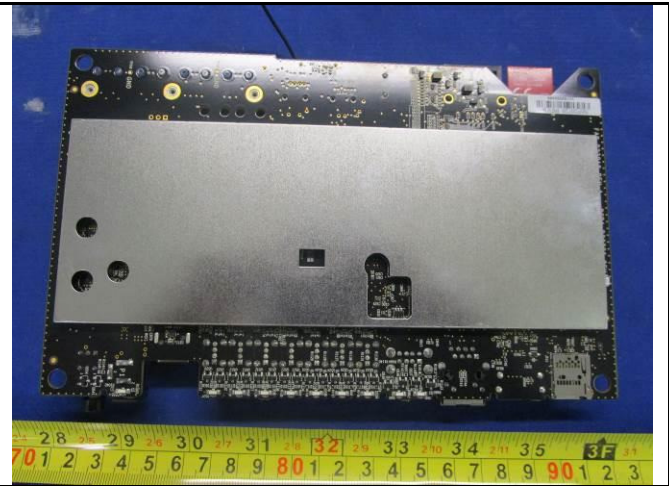


Cover off View 2 with PCBA1

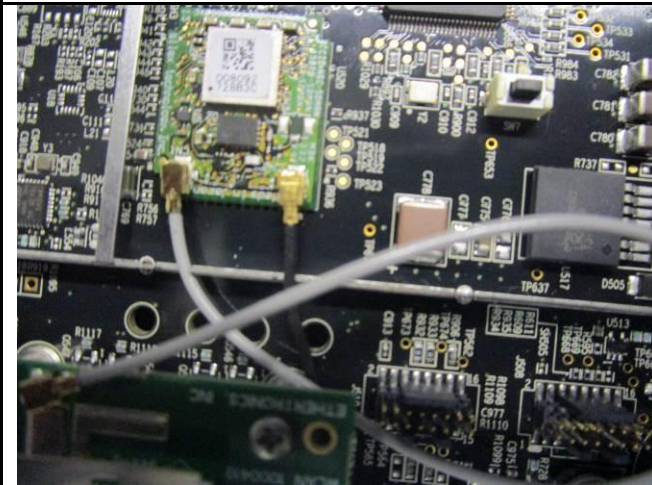

PCBA1 Top View



PCBA Bottom View

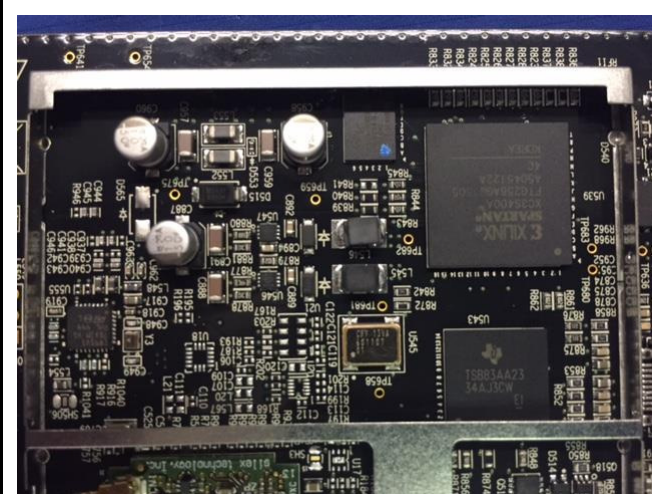

PCBA Bottom View



PCBA 2 Bottom View



PCBA WLAN Antenna



PCBA RFID Antenna



Power Adapter – top view




Power Adapter – Bottom view


6.6 EUT Test Setup Photos




Radiated Emission Test setup (<1GHz) – Front View

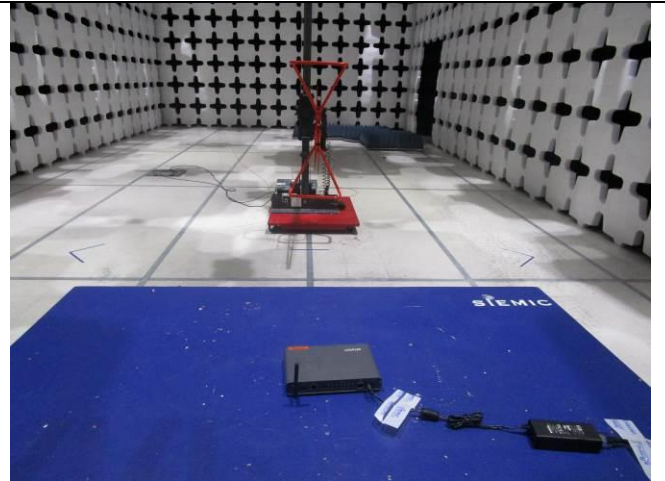


Radiated Emission Test setup (<1GHz) – Rear View

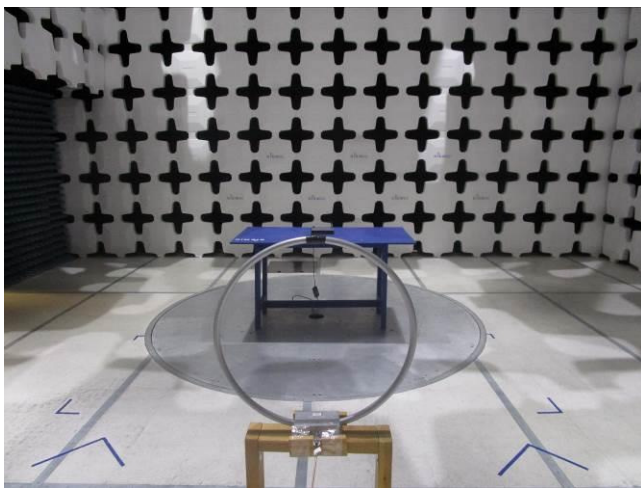


Radiation Emission Test setup (<30MHz) – Front View 0 deg

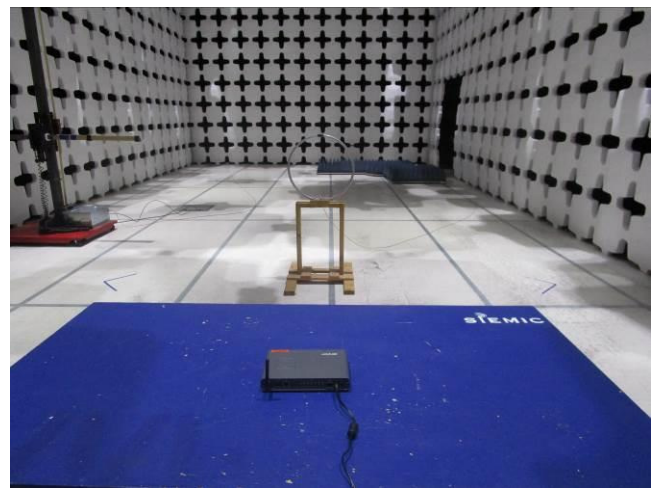

R Emission Test setup (<30MHz) – Rear View 0 deg

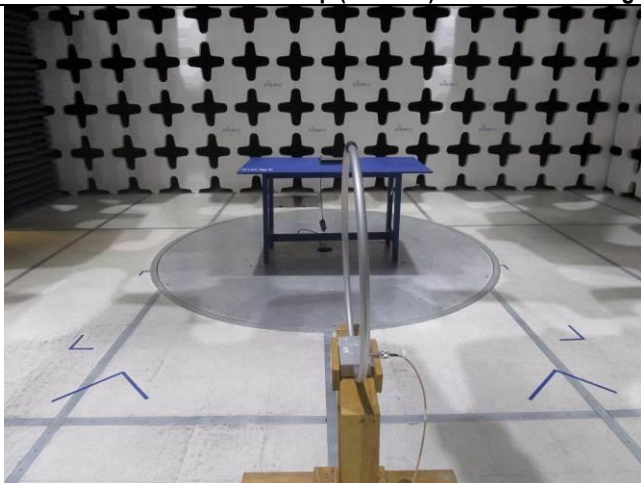

Radiation Emission Test setup (<30MHz) – Front View 90 deg

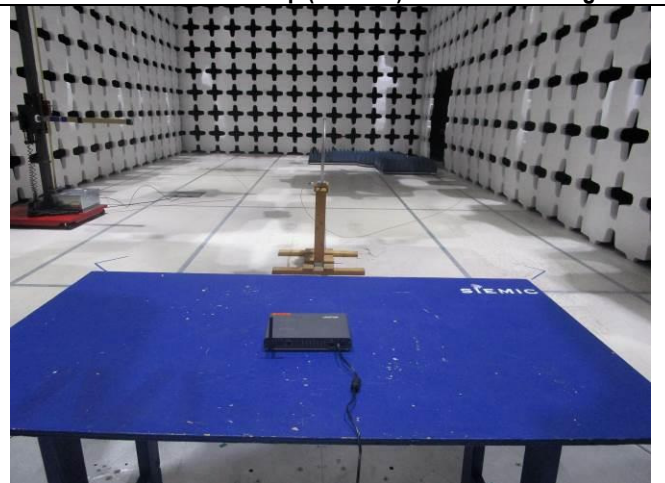

R Emission Test setup (<30MHz) – Rear View 90 deg



Conducted Emission test setup- Front View



Conducted Emission Test setup – Rear View

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Index	Supporting Equipment Description	Model	Serial No.	Manu	Note
1	Laptop	D6410	18209556397	DELL	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

7.3 Test Software Description

Test Item	Software	Description
N/A	N/A	N/A

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Antenna Requirement	FCC	15.203	FCC	-	<input checked="" type="checkbox"/> Pass
	IC		IC	-	<input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.207(a)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen (7.2.2)	IC	-	<input type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Limit in the band of 13.553 – 13.567 MHz	FCC	15.225(a)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	FCC	15.225(b)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	FCC	15.225(c)	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Limit outside the band of 13.110 – 14.010 MHz	FCC	15.225(d), 15.209	FCC	ANSI C63.10 2013	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.9	<input type="checkbox"/> N/A
Frequency Stability	FCC	15.225(e)	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS210(A2.6)	IC	RSS Gen 4.7	<input type="checkbox"/> N/A
Occupied Bandwidth	FCC	-	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS-210(5.9.1)	IC	RSS Gen 4.6	<input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Test Method: ANSI C63.10: 2009 / RSS – Gen Issue 4: 2014 				

9 Measurement Uncertainty

Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions Voltage	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Limit in the band of 13.553 – 13.567 MHz	13.553 – 13.567 MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	13.410 – 13.553 MHz and 13.567 – 13.710 MHz		+5.6dB/-4.5dB
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	13.110 – 13.410 MHz and 13.710 – 14.010 MHz		+5.6dB/-4.5dB
Limit outside the band of 13.110 – 14.010 MHz	9KHz – 30MHz		+5.6dB/-4.5dB
Radiated Spurious Emissions	30MHz – 1GHz		+5.6dB/-4.5dB

10 Measurements, examination and derived results


10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	<input checked="" type="checkbox"/>
Remark	The RFID antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 Conducted Emission Test Result

Conducted Emission Limits


Section	Frequency ranges (MHz)	Limit (dBuV)	
		QP	Average
Class B devices	0.15 ~ 0.5	66 – 56	56 – 46
	0.5 ~ 5	56	46
	5 ~ 30	60	50

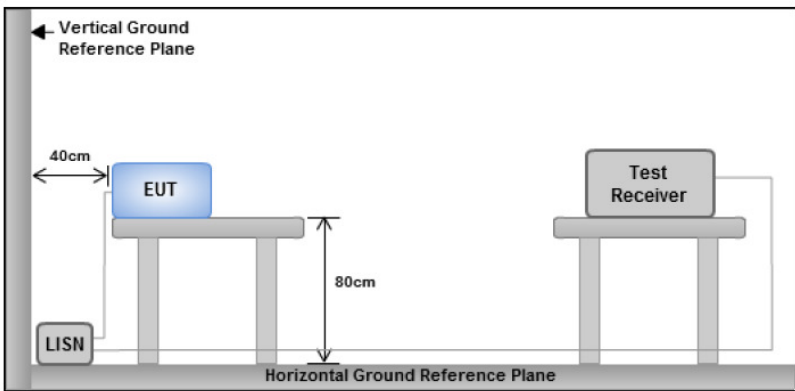Spec	Item	Requirement	Applicable
§ 15.207, RSS210(A8.1)	a)	For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits set in § 15.207, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). AC Line conducted emission within the band 150KHz to 30MHz	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>		
Procedure	<ul style="list-style-type: none"> - The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. - The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. - The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. - All other supporting equipment was powered separately from another main supply. 		
Test Date	09/05/2015	Environmental condition	Temperature 22°C Relative Humidity 31% Atmospheric Pressure 1021 HPA
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes N/A


Line Plot at V= 120V_{AC}, 60Hz

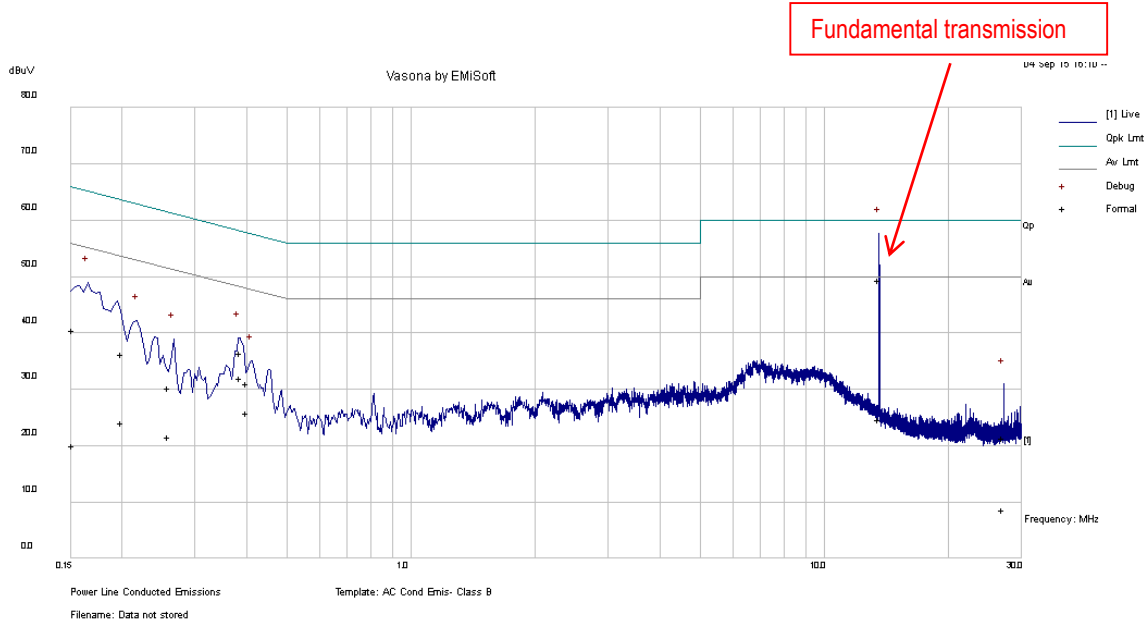

Live Measurements

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line/ Neutral	Limit dBuV	Margin dB	Pass /Fail
13.56	38.85	10.06	0.59	49.50	Quasi Peak	Live	60.00	-10.50	Pass
0.15	28.68	10.00	1.77	40.45	Quasi Peak	Live	65.89	-25.43	Pass
0.39	25.73	10.01	0.77	36.51	Quasi Peak	Live	58.15	-21.65	Pass
0.20	25.05	10.00	1.31	36.36	Quasi Peak	Live	63.63	-27.27	Pass
0.26	19.19	10.00	1.03	30.23	Quasi Peak	Live	61.44	-31.21	Pass
0.40	20.29	10.01	0.75	31.04	Quasi Peak	Live	57.82	-26.78	Pass
13.56	14.12	10.06	0.59	24.76	Average	Live	50.00	-25.24	Pass
0.15	8.31	10	1.77	20.09	Average	Live	55.89	-35.80	Pass
0.39	21.19	10.01	0.77	31.96	Average	Live	48.15	-16.19	Pass
0.20	12.84	10	1.31	24.16	Average	Live	53.63	-29.47	Pass
0.26	10.63	10	1.03	21.66	Average	Live	51.44	-29.78	Pass
0.40	15.05	10.01	0.75	25.81	Average	Live	47.82	-22.02	Pass

Neutral Line Plot at V= 120V_{AC}, 60Hz

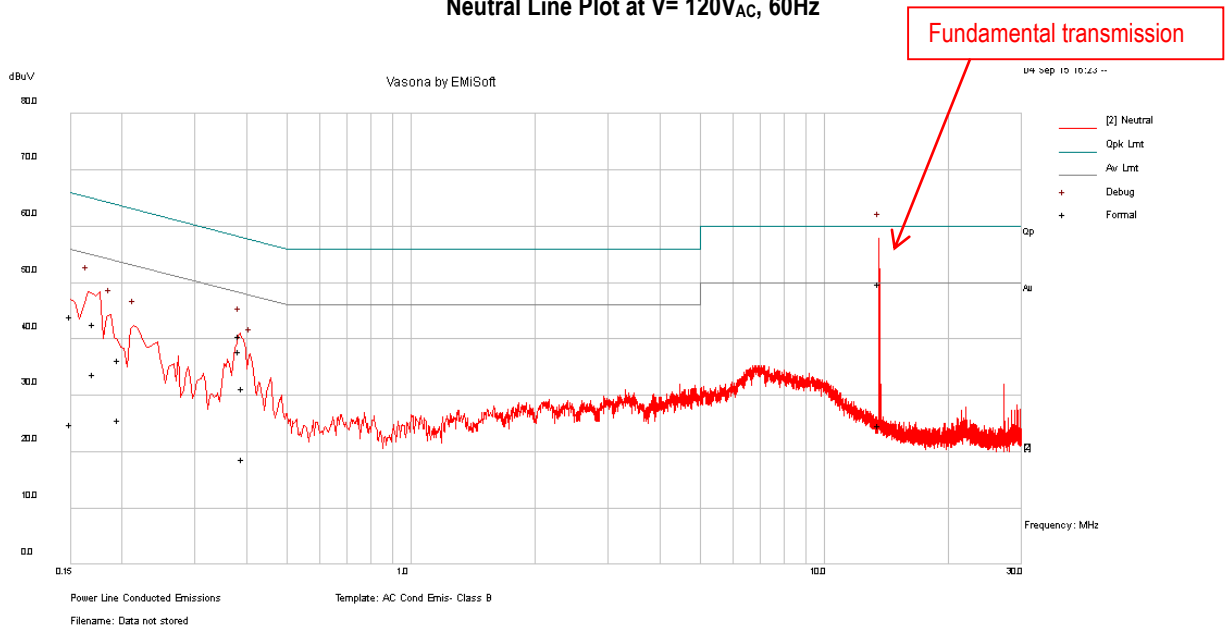

Neutral Line Measurements

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line/ Neutral	Limit dBuV	Margin dB	Pass /Fail
13.56	39.23	10.06	0.59	49.87	Quasi Peak	Neutral	60.00	-10.13	Pass
0.15	32.13	10.00	1.80	43.93	Quasi Peak	Neutral	66.00	-22.07	Pass
0.38	29.70	10.01	0.77	40.47	Quasi Peak	Neutral	58.20	-17.73	Pass
0.17	31.14	10.00	1.55	42.69	Quasi Peak	Neutral	64.94	-22.25	Pass
0.39	20.51	10.01	0.76	31.28	Quasi Peak	Neutral	58.03	-26.75	Pass
0.20	25.04	10.00	1.34	36.38	Quasi Peak	Neutral	63.76	-27.38	Pass
13.56	13.98	10.06	0.59	24.62	Average	Neutral	50.00	-25.38	Pass
0.15	13.08	10.00	1.80	24.88	Average	Neutral	56.00	-31.12	Pass
0.38	26.96	10.01	0.77	37.74	Average	Neutral	48.20	-10.46	Pass
0.17	22.25	10.00	1.55	33.80	Average	Neutral	54.94	-21.14	Pass
0.39	8.03	10.01	0.76	18.80	Average	Neutral	48.03	-29.23	Pass
0.20	14.33	10.00	1.34	25.67	Average	Neutral	53.76	-28.09	Pass

10.3 Radiated Measurement

Receiver/Spectrum analyzer setting

TEST	Detector	RBW	VBW	Test Distance	NOTES
Radiated Emission < 1GHz (30MHz – 1GHz)	PK	100KHz	300KHz	3m	-
Radiated Emission < 30MHz	PK	10KHz	30KHz	3m	-

10.3.1 Radiated Measurement 30MHz - 1GHz


Requirement(s):

Spec	Requirement	Applicable																																							
§ 15.209 RSS210 (A8.5)	<p>Except higher limit as specified elsewhere in another section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th colspan="5">FCC Part 15.209</th> </tr> <tr> <th rowspan="2">Frequency (MHz)</th> <th colspan="2">Field Strength Limit (uV/m)</th> <th colspan="2">Field Strength Limit at 3m Measurement (dBuV/m)</th> </tr> <tr> <th>(uV/m)</th> <th>Dist</th> <th>(uV/m)</th> <th>(dBuV/m)</th> </tr> </thead> <tbody> <tr> <td>30.0 – 88.0</td> <td>100</td> <td>3m</td> <td>100</td> <td>20log 100</td> </tr> <tr> <td>88.0 – 216.0</td> <td>150</td> <td>3m</td> <td>150</td> <td>20log 150</td> </tr> <tr> <td>216.0 – 960.0</td> <td>200</td> <td>3m</td> <td>200</td> <td>20log 200</td> </tr> <tr> <td>Above 960.0</td> <td>500</td> <td>3m</td> <td>500</td> <td>20log 500</td> </tr> <tr> <td>Note</td> <td colspan="4">The measurement distance was 3 meter</td> </tr> </tbody> </table>	FCC Part 15.209					Frequency (MHz)	Field Strength Limit (uV/m)		Field Strength Limit at 3m Measurement (dBuV/m)		(uV/m)	Dist	(uV/m)	(dBuV/m)	30.0 – 88.0	100	3m	100	20log 100	88.0 – 216.0	150	3m	150	20log 150	216.0 – 960.0	200	3m	200	20log 200	Above 960.0	500	3m	500	20log 500	Note	The measurement distance was 3 meter				☒
FCC Part 15.209																																									
Frequency (MHz)	Field Strength Limit (uV/m)		Field Strength Limit at 3m Measurement (dBuV/m)																																						
	(uV/m)	Dist	(uV/m)	(dBuV/m)																																					
30.0 – 88.0	100	3m	100	20log 100																																					
88.0 – 216.0	150	3m	150	20log 150																																					
216.0 – 960.0	200	3m	200	20log 200																																					
Above 960.0	500	3m	500	20log 500																																					
Note	The measurement distance was 3 meter																																								
Test Setup																																									
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 																																								
Remark	-																																								
Result	☒ Pass ☐ Fail																																								

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test specification:	Radiated Spurious Emissions		
Environmental Conditions:	Temp(°C):	20	Result:
	Humidity (%):	36	
	Atmospheric(mbar):	1021	
Mains Power:	12VDC		<input checked="" type="checkbox"/> Pass
Tested by:	Ronak Patel		<input type="checkbox"/> Fail
Test Date:	09/04/2015		
Remarks:	30 – 1000 MHz		

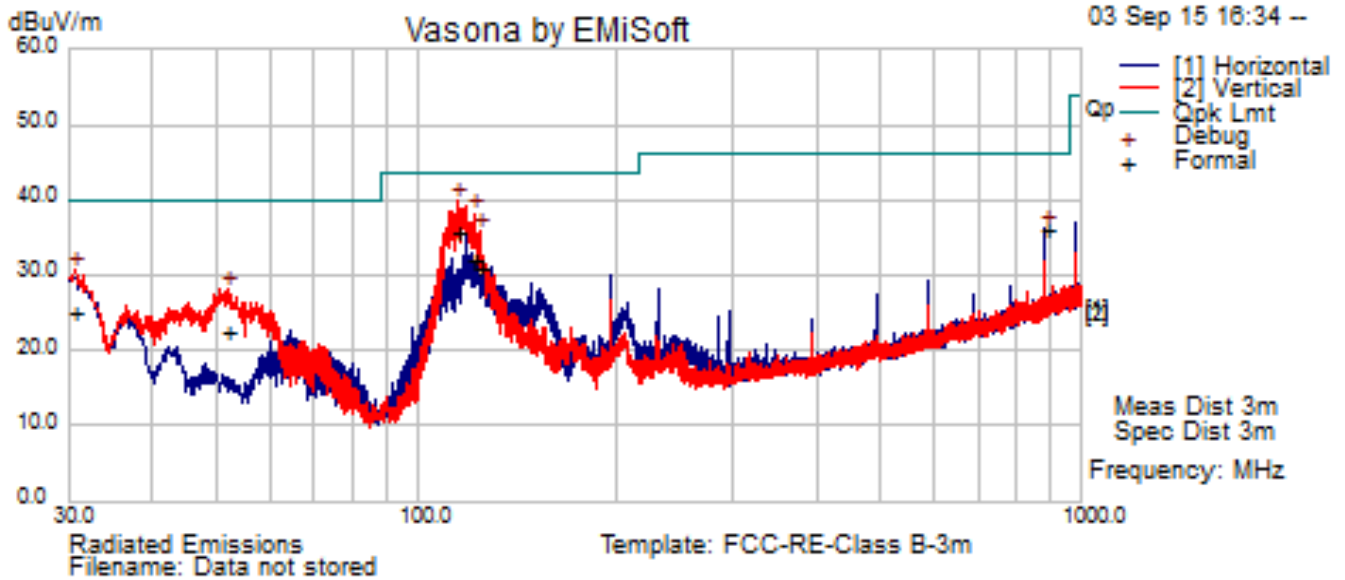

Test Data


Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
114.75	59.02	1.75	-25.22	35.55	Quasi Max	V	100	250	43.52	-7.97	Pass
122.06	54.98	1.82	-24.64	32.16	Quasi Max	V	105	187	43.52	-11.36	Pass
124.45	53.53	1.84	-24.62	30.75	Quasi Max	V	101	314	43.52	-12.77	Pass
30.44	38.85	0.81	-14.8	24.86	Quasi Max	V	400	283	40.00	-15.14	Pass
884.73	46.92	5.38	-16.29	36.00	Quasi Max	H	101	34	46.02	-10.02	Pass
51.75	50.72	1.10	-29.32	22.50	Quasi Max	V	185	298	40.00	-17.50	Pass

Note: test was performed at 3 meter distance.

10.3.2 Radiated Measurement below 30MHz

Requirement(s):


Spec	Requirement	Applicable				
47 CFR §15.225 RSS-210 (A2.6)	<p>Operation within the band 13.110–14.010 MHz.</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p>	☒				
	FCC Part 15.225(a)/(b)/(c)					
	Frequency (MHz)		Field Strength Limit	Field Strength Limit at 3m Measurement Dist		
			(uV/m) Dist	(dBuV/m)	Dis ConvF (dB)	(dBuV/m)
	13.553 – 13.567		15,848 30m	84	40	124
	13.410 – 13.553 13.567 – 13.710		334 30m	50.5	40	90.5
	13.110 – 13.410 13.710 – 14.010		106 30m	40.5	40	80.5
	FCC Part 15.209					
	Frequency (MHz)		Field Strength Limit		Field Strength Limit at 3m Measurement	
			(uV/m) Dist	(dBuV/m)	Dis ConvF (dB)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz) 300m	20log 2400/F(KHz)	80	20log 2400/F(KHz) + 80		
0.490 – 1.705	24000 / F(KHz) 30m	20log 24000/F(KHz)	40	20log 24000/F(KHz) + 40		
1.705 – 30.00	30 30m	29.5	40	69.5		
Note	The measurement distance was 3 meter					
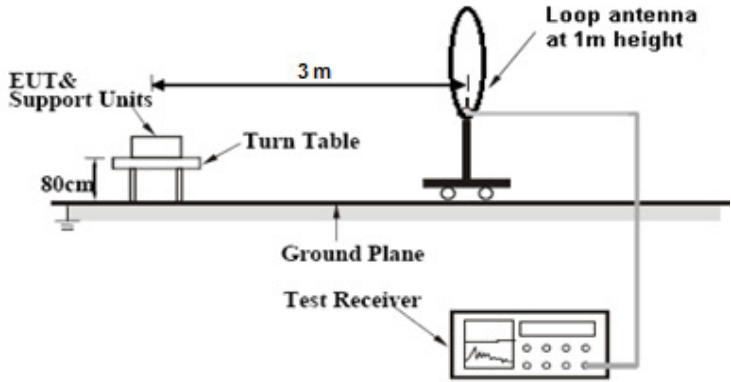
<p>Test Setup</p>	 <ol style="list-style-type: none"> 1. The EUT and supporting equipment was set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table. 2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable. 3. The relevant loop antenna was set at the required test distance away from the EUT and supporting equipment boundary.
<p>Procedure</p>	<p>For < 30MHz, Radiated emissions were measured according to ANSI C63.10. The EUT was set to transmit at the highest output power. The EUT was set 3 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the centre of the loop. The measuring bandwidth was set to 10 kHz. The limit is converted from microvolt/meter to decibel microvolt/meter. Note: The limit convert from distance D1(dBuV/m) to D2(dBuV/m): add the factor $20 \cdot \log(D1/D2)$ for above 30MHz, and $40 \cdot \log(D1/D2)$ for below 30MHz.</p>
<p>Remark</p>	<p>-</p>
<p>Result</p>	<p><input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail</p>

Test Data Yes (See below) N/A
Test Plot Yes (See below) N/A

Test specification:	Radiated Spurious Emissions			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	21			
	Humidity (%):	35			
	Atmospheric(mbar):	1021			
Mains Power:	12VDC				
Tested by:	Ronak Patel				
Test Date:	09/14/2015				
Remarks:	100kHz – 30 MHz				


Loop Antenna at 0 degree @ 3meter distance

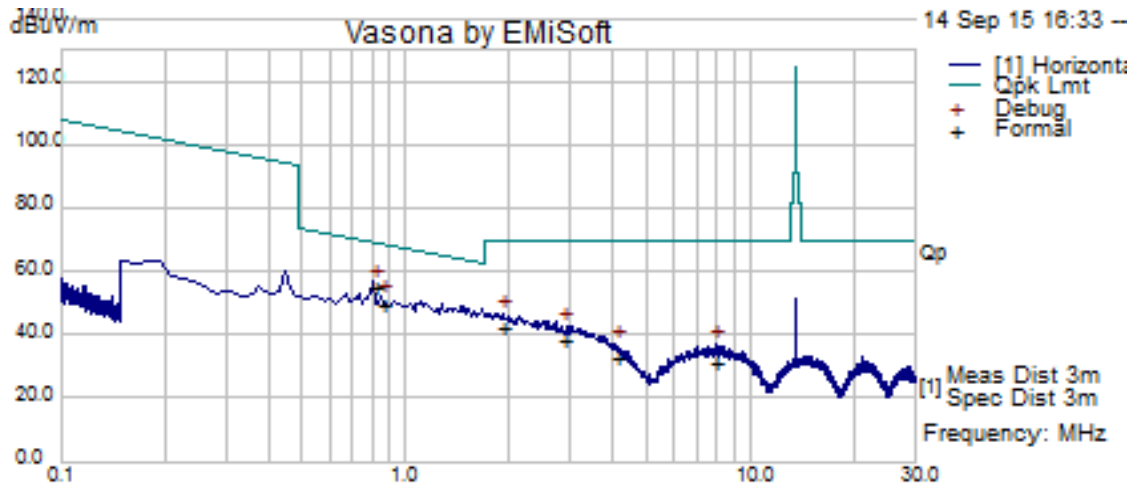

Note: test was performed at 3 meter distance.

Frequency (MHz)	Raw (dBUV)	Cable Loss (dB)	AF (dB)	Level (dBUV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBUV/m)	Margin (dB)	Pass /Fail
0.81	40.57	-0.20	14.29	54.66	Quasi Max	H	100.00	118.00	69.44	-14.78	Pass
0.86	36.02	-0.21	13.84	49.66	Quasi Max	H	100.00	252.00	68.93	-19.28	Pass
1.90	35.06	-0.28	7.74	42.52	Quasi Max	H	100.00	239.00	69.54	-27.02	Pass
2.85	34.09	-0.31	4.86	38.64	Quasi Max	H	100.00	324.00	69.54	-30.90	Pass
7.91	30.89	-0.46	0.83	31.26	Quasi Max	H	100.00	232.00	69.54	-38.29	Pass
4.06	30.55	-0.30	2.77	33.02	Quasi Max	H	100.00	35.00	69.54	-36.52	Pass


Loop Antenna at 90 degree @ 3meter distance

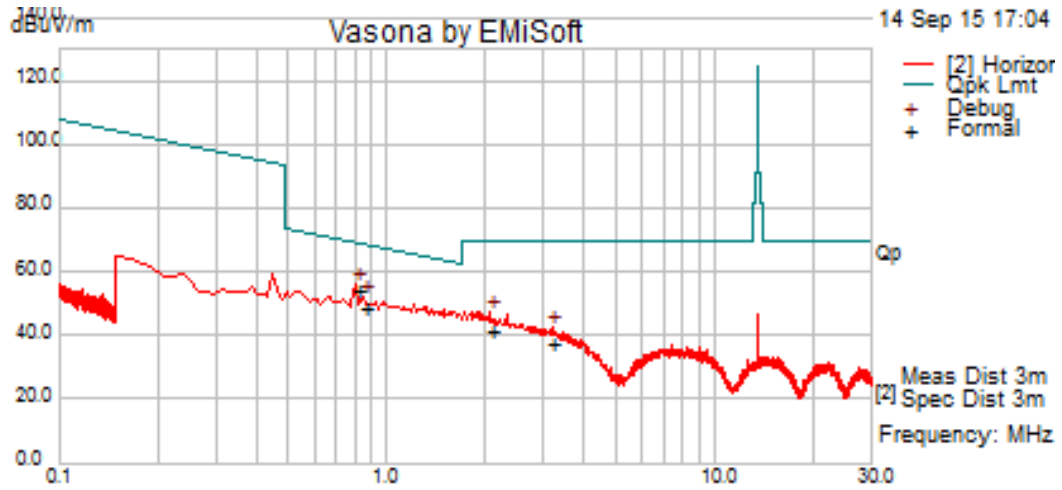

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Hgt (cm)	Antenna (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
0.81	40.49	-0.20	14.28	54.56	Quasi Max	H	100.00	63.00	69.43	-14.87
0.86	35.30	-0.21	13.80	48.90	Quasi Max	H	100.00	181.00	68.89	-19.99
2.08	35.01	-0.29	7.10	41.82	Quasi Max	H	100.00	57.00	69.54	-27.72
3.19	33.79	-0.31	4.15	37.64	Quasi Max	H	100.00	114.00	69.54	-31.90


Note: test was performed at 3 meter distance.

Loop Antenna at 0 degree @ 3meter distance

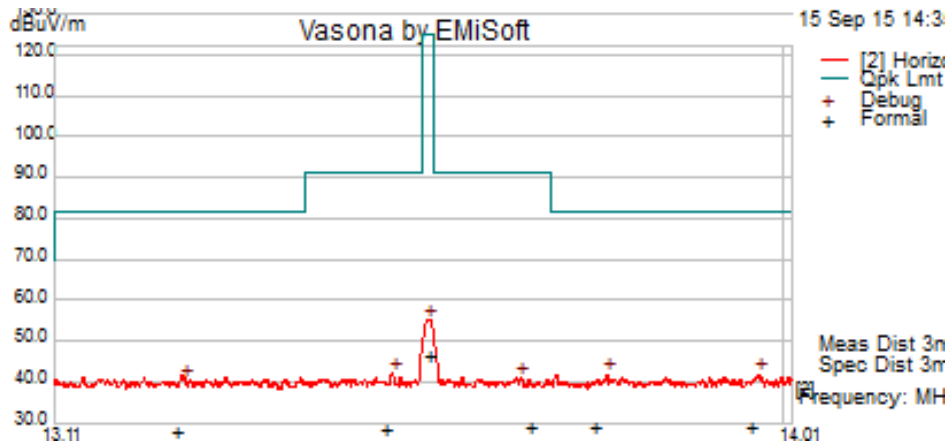

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
13.96	29.65	-0.62	-0.19	28.84	Quasi Max	H	100.00	111.00	81.43	-52.59	Pass
13.76	29.47	-0.62	-0.17	28.67	Quasi Max	H	100.00	31.00	81.43	-52.75	Pass
13.26	28.81	-0.62	-0.13	28.07	Quasi Max	H	100.00	146.00	81.43	-53.36	Pass
13.51	29.28	-0.62	-0.15	28.51	Quasi Max	H	100.00	67.00	91.39	-62.87	Pass
13.68	29.44	-0.62	-0.17	28.65	Quasi Max	H	100.00	140.00	91.39	-62.73	Pass
13.56	46.93	-0.62	-0.16	46.16	Quasi Max	H	100.00	357.00	124.92	-78.76	Pass

Loop Antenna at 90 degree @ 3meter distance

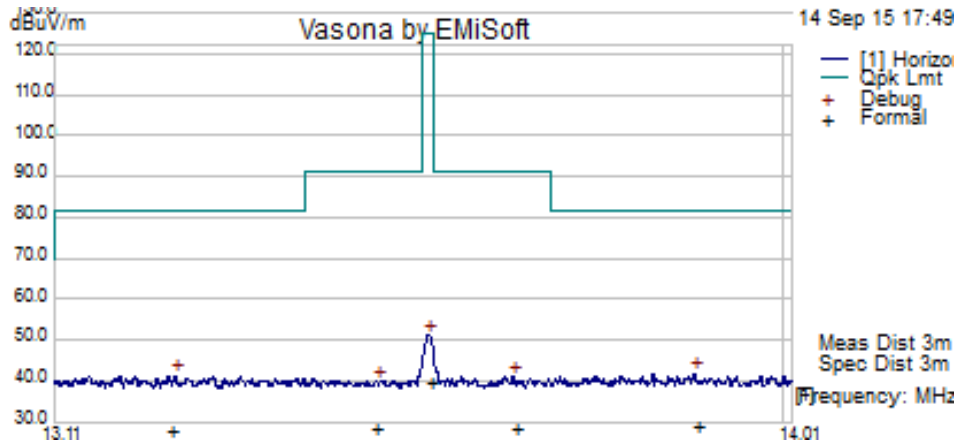

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
13.89	29.46	-0.62	-0.19	28.65	Quasi Max	H	100.00	339.00	81.43	-52.77	Pass
13.25	28.65	-0.62	-0.13	27.91	Quasi Max	H	100.00	158.00	81.43	-53.52	Pass
13.67	29.17	-0.62	-0.16	28.39	Quasi Max	H	100.00	171.00	91.39	-63.00	Pass
13.49	29.06	-0.62	-0.15	28.30	Quasi Max	H	100.00	285.00	91.39	-63.09	Pass
13.56	40.29	-0.62	-0.16	39.51	Quasi Max	H	100.00	230.00	124.92	-85.40	Pass

10.4 Frequency Stability

Requirement(s):

Spec	Requirement	Applicable
47 CFR §15.225 e) RSS-210 (A2.6)	Limit: $\pm 0.01\%$ of 13.56 MHz = 1356 Hz	<input checked="" type="checkbox"/>
Test Setup	1. The EUT was set up inside an environmental chamber. 2. The EUT was placed in the centre of the environmental.	
Procedure	Frequency Stability was measured according to 47 CFR §2.1055. Measurement was taken with a spectrum analyzer. The spectrum analyzer bandwidth and span was set to read in hertz. A voltmeter was used to monitor when varying the voltage.	
Remark	None	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test specification:	Frequency Stability			
Environmental Conditions:	Temp(°C):	22	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
	Humidity (%):	35		
	Atmospheric(mbar):	1022		
Mains Power:	12VDC			
Tested by:	Ronak Patel			
Test Date:	09/23/2015			
Remarks:	-			

Test Result

Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of $+10^{\circ}\text{C}$ to $+40^{\circ}\text{C}$ at normal supply voltage.

Reference Frequency: 13.56040 MHz at 20°C

Temperature (°C)	Measured Freq. (MHz)	Freq. Drift (KHz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
40	13.559929	0.000033	<0.01	Pass
30	13.559940	0.000012	<0.01	Pass
25	Reference (13.559962 MHz)			
20	13.559955	0.000007	<0.01	Pass
10	13.559960	0.000002	<0.01	Pass


Frequency Stability versus Input Voltage: The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$, the frequency of the transmitter was measured at 85% and at 115% of the rated power supply voltage at a 25°C environmental temperature.

Carrier Frequency: 13.559962 MHz at 25°C at 12VDC

Measured Voltage $\pm 15\%$ of nominal (AC)	Measured Freq. (MHz)	Freq. Drift (Hz)	Freq. Deviation (Limit: 0.01%)	Pass/Fail
10.2	13.560400	0	<0.01	Pass
13.8	13.560400	0	<0.01	Pass

10.5 Occupied bandwidth

Requirement(s):

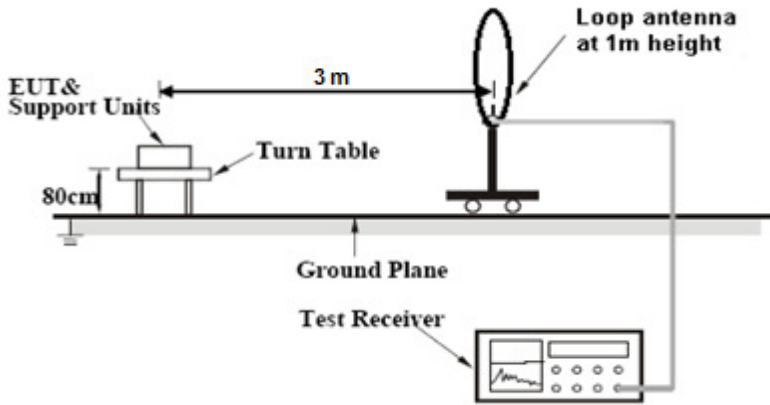Spec	Requirement	Applicable
RSS-Gen 4.6.1	The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.	☒
Test Setup	 <p>The EUT was set up inside a semi-anechoic chamber in accordance with the standard. 1. The EUT was placed on top of a 0.8m high, non-metallic table in a typical configuration.</p>	
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. To measure conducted, an SMA cable was used to replace the EUT antenna. To measure radiated, an external antenna was used to detect EUT transmission signal. Measurement of the 99% Occupied Bandwidth of EUT transmission signal and make records. 	
Remark	-	
Result	☒ Pass ☐ Fail	


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test specification:	Frequency Stability			Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Environmental Conditions:	Temp(°C):	20			
	Humidity (%):	36			
	Atmospheric(mbar):	1021			
Mains Power:	12VDC				
Tested by:	Ronak Patel				
Test Date:	09/23/2015				
Remarks:	-				

Test Results:



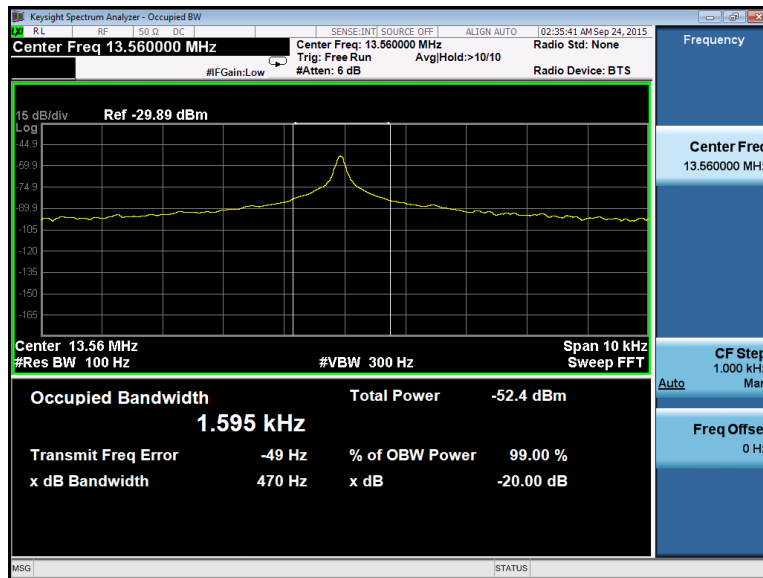













Radio	Channel Frequency (MHz)	99% Occupied BW (kHz)	Limit (MHz)
13.56MHz	13.56	1.595KHz	N/A










Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	08/07/2015	1 Year	08/07/2016	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESL6	100178	05/27/2015	1 Year	05/27/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/12/2015	1 Year	05/12/2016	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2015	1 Year	08/12/2016	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	08/08/2015	1 Year	08/08/2016	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	08/20/2015	1 Year	08/20/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	05/23/2015	1 Year	05/23/2016	<input checked="" type="checkbox"/>
Test Equity Environment Chamber	1007H	61201	07/31/2015	1 Year	07/31/2016	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2