


NOTES:

1. INTERPRET DRAWING PER AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME) Y14.5M-1994 STANDARD.
2. MATERIAL: .002 BRIGHT SILVER POLYESTER LAMINATED W/ .001 IMPRINTABLE POLYESTER (COMPUCAL OR EQUIVALENT).
3. ADHESIVE: FLEXMOUNT V23 BACK SIDE
4. TEXT AND GRAPHICS: PMS BLACK C
5. NO CHANGES IN MATERIAL OR PROCESS WITHOUT THE WRITTEN CONSENT OF STRYKER
6. MANUFACTURING DATE TO BE PRINTED AT TIME OF PRODUCTION USE FORMAT: YYYY-MM (YEAR-MONTH).
7. SERIAL NUMBER TO BE PRINTED AT TIME OF PRODUCTION

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	ECO92822 NEW RELEASE	04/28/15	S/C. BARNARD
B	ECO97878 ADD DC VOLTAGE AND RATING & TUV SYMBOLS	08/27/15	S/C. BARNARD
C	ECO22183 ADD FCC & IC NUMBER	11/20/15	S/P. HSU

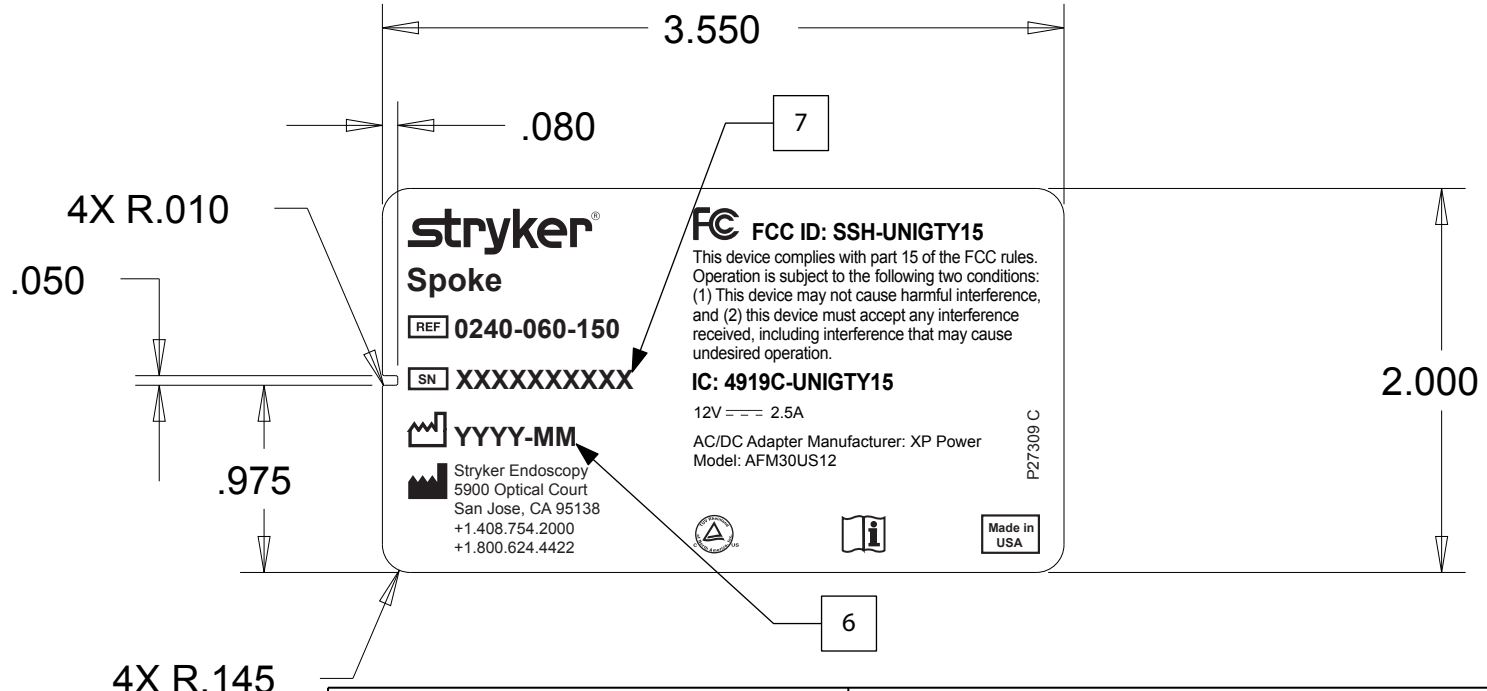

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES  
 DECIMALS .XX ±.01 XXX ±.005 ANGLES ±.5°

REQUIREMENTS FOR FINISHED PARTS UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS APPLY AFTER COATING  
 ON ALL PLATED PARTS CORNERS MUST BEND SMOOTHLY

TOLERANCES FRACTIONAL..... ±1.64  
 CORNER BREAK (EXTERNAL)(DEBUR)..... .002 TO 0.20R (OR EQUIVALENT)  
 FILLET RADII (INTERNAL)..... .002 TO 0.20R  
 THREAD CHAMFER (OR CSK)..... 1 TO 1/2 THREADS DEEP  
 SURFACE INTERSECTIONS..... ±.010 MAX  
 HOLES AND FEATURES TO BE ON THE GENERAL FINISH..... 63 MAX

CONCENTRICITY .006 TIR  
 PERPENDICULARITY .006 IN/IN TOTAL (MAX)  
 PARALLELISM .010 (MAX)  
 ROUNDNESS .006 (MAX)  
 FLATNESS .006 IN/IN (MAX)  
 STRAIGHTNESS .001 IN/IN (MAX)  
 SYMMETRY .020 (MAX)

THIRD ANGLE PROJECTION

**stryker**®

STRYKER ENDOSCOPY  
 5900 OPTICAL COURT  
 SAN JOSE, CA 95138

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF STRYKER ENDOSCOPY, SAN JOSE. NEITHER THIS DOCUMENT NOR THE INFORMATION HEREIN MAY BE REPRODUCED, OR DISCLOSED TO OR FOR THE BENEFIT OF ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF STRYKER.

TITLE:  
**DEVICE LABEL, "0240-060-150"**

DRAWN BY:  
**F. TURPO**

DATE  
**11/20/15**

SIZE <b>A</b>	DWG. NO. <b>P27309</b>	REV. <b>C</b>
-DO NOT SCALE DRAWING-		SHEET 1 OF 1

