


NOTES:

1. INTERPRET DRAWING PER AMERICAN SOCIETY OF MECHANICAL ENGINEERS ASME Y14.5M-1994 STANDARD.
2. PRIMARY TEXT: BLACK, 9 PT ARIAL
3. FUSE SYMBOL TEXT: BLACK, 5 PT HELVETICA
4. 7A WARNING TRIANGLE BACKGROUND COLOR: PMS YELLOW C
5. PRINT IS FOR REFERENCE ONLY. USE .AI FILE FOR ACTUAL PRINTING.
6. LABEL P19049 (INTERTEK ETL CERTIFICATION) WILL BE ADDED UPON APPROVAL BY INTERTEK.
7. LABEL P19211 WILL BE PLACED OVER "PLACE SN HERE"
8. "SAFETY SYMBOL (CONSULT IFU) BLUE BACKGROUND: PANTONE P294 (R5005 IN RAL COLORS)."

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	ECO#44198 - NEW RELEASE	08/02/11	A. ROBERTS
B	ECO#50598 - ADDED HARMONIZED SYMBOLS	12/01/11	A. ROBERTS
C	ECO#55304 - ADDED SAFETY SYMBOL (CONSULT IFU) AND FCC RULES	05/23/12	M.DERHARTUNIAN

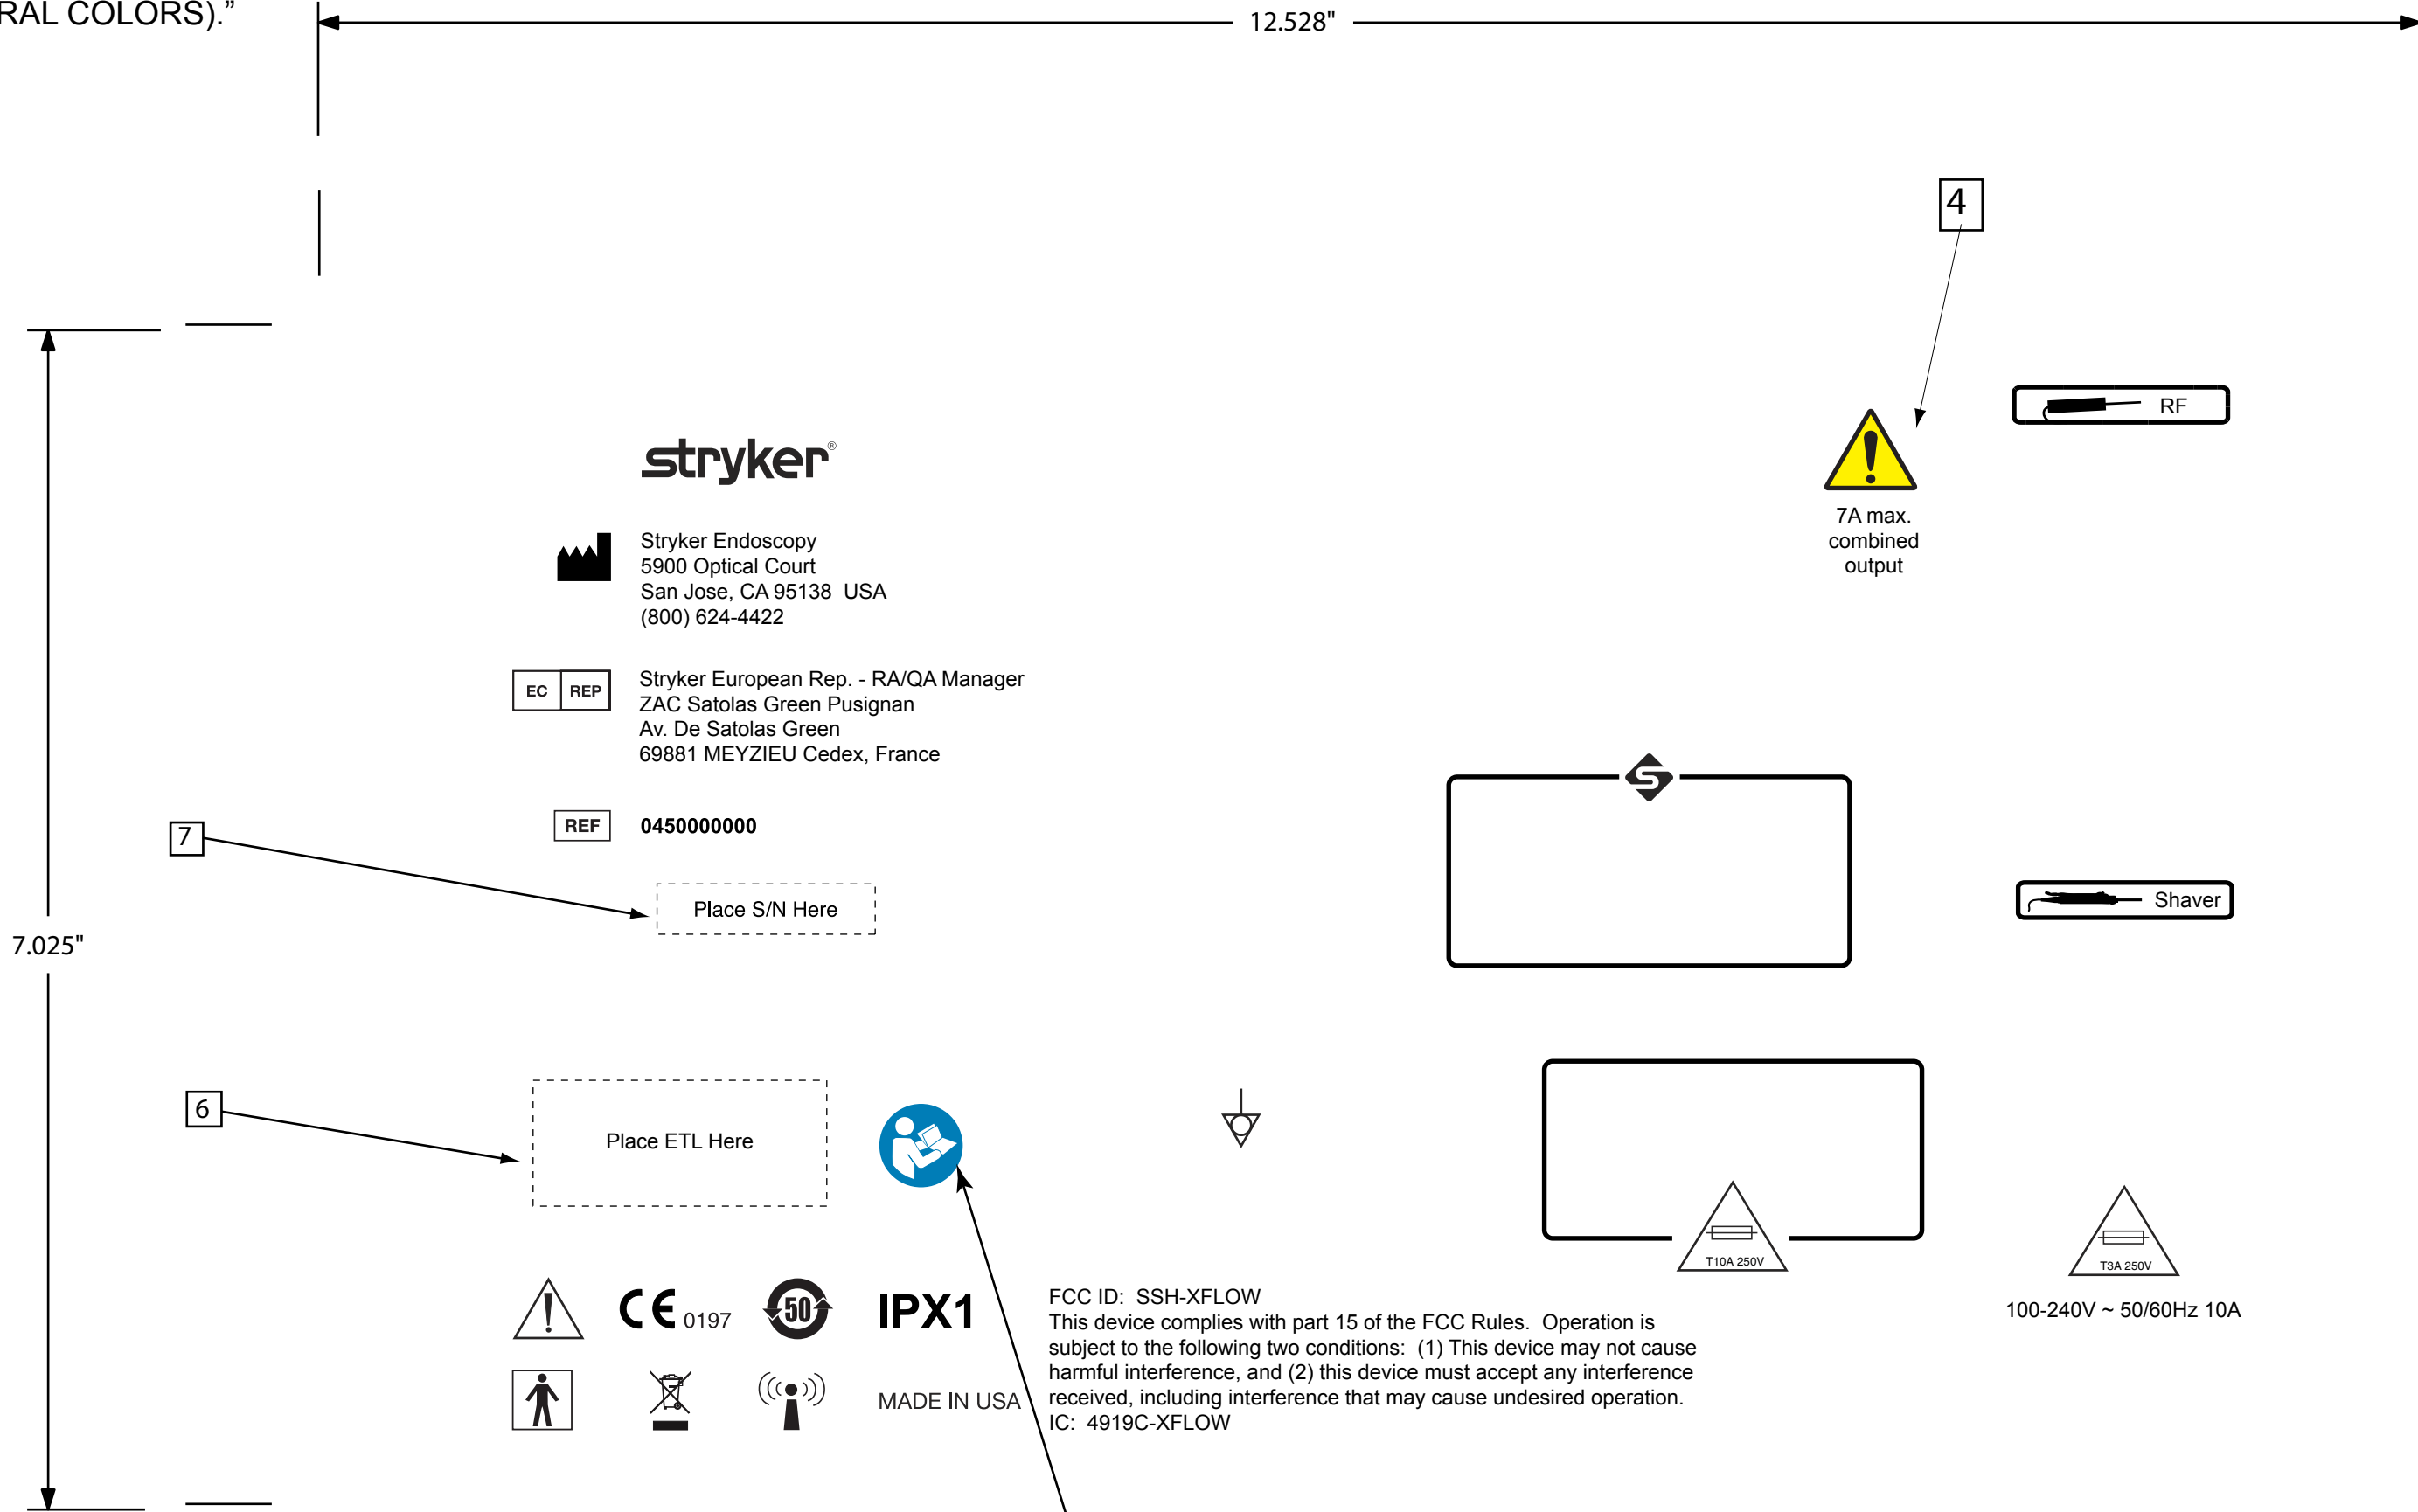

stryker


Stryker Endoscopy
5900 Optical Court
San Jose, CA 95138 USA
(800) 624-4422

EC REP Stryker European Rep. - RA/QA Manager
ZAC Satolas Green Pusignan
Av. De Satolas Green
69881 MEYZIEU Cedex, France

REF 0450000000

Place S/N Here




Place ETL Here

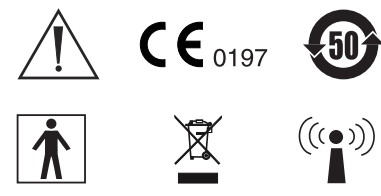

IPX1
MADE IN USA
FCC ID: SSH-XFLOW
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
IC: 4919C-XFLOW



7A max. combined output



100-240V ~ 50/60Hz 10A

UNLESS OTHERWISE SPECIFIED DIMS ARE IN INCHES
DECIMALS .XX ± .01 .XXX ± .005 ANGLES X ± 1/2°

REQUIREMENTS FOR FINISHED PART UNLESS OTHERWISE SPECIFIED
ALL DIMS APPLY AFTER COATING.
ALL PLATED PARTS CORNERS MUST BEND SMOOTHLY

TOLERANCES FRACTIONAL	± 1/64
CORNER BREAK (EXTERNAL) (DEBURR)	.002 TO .020R (OR EQUIVALENT)
FILLET RADI (INTERNAL)	.002 TO .020R
THREAD CHAMFER (OR CSK)	1 TO 1/2 THREADS DEEP
SURFACE INTERSECTIONS	± .010 MAX
HOLES AND FEATURES TO BE ON THE ⌀	± .010 MAX
GENERAL FINISH	63/MAX

⊙ CONCENTRICITY	.006 TIR
⊥ PERPENDICULARITY	.006 IN/IN TOTAL (MAX)
∥ PARALLELISM	.010 (MAX)
○ ROUNDNESS	.006 (MAX)
▭ FLATNESS	.006 IN/IN (MAX)
— STRAIGHTNESS	.001 IN/IN (MAX)
≡ SYMMETRY	.020 (MAX)

THIRD ANGLE PROJECTION

stryker STRYKER ENDOSCOPY
5900 OPTICAL COURT
SAN JOSE, CA 95138

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF STRYKER ENDOSCOPY. SAN JOSE NEITHER THIS DOCUMENT NOR THE INFORMATION HEREIN MAY BE REPRODUCED, OR DISCLOSED TO OR FOR THE BENEFIT OF ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF STRYKER

TITLE:
ARTWORK, REAR CONSOLE, CROSSFLOW PUMP

SIZE C	DWG. NO. P17976	REV C
DO NOT SCALE DRAWING		SHEET 1 OF 1

DRAWN M.SALINAS DATE 05/23/12

SW