

No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
Email:	ee.shenzhen@sgs.com

Report No.: SZEM161100934702 Page: 1 of 69

## FCC REPORT

Test Result:	PASS *
Date of Issue:	2016-11-15
Date of Test:	2016-11-08 to 2016-11-12
Date of Receipt:	2016-11-03
Standards:	47 CFR Part 15, Subpart C (2015)
FCC ID:	SSM6961368BT
Add Model No.:	SP613, MD1368BT
Model No.(EUT):	MET1368BT
Product Name:	Discoball Bluetooth Speaker
Factory:	Keng Fu Jia Electronics (Shenzhen) Co., Ltd.
Manufacturer:	MODERN ELECTRONICS FACTORY LTD
Applicant:	MODERN ELECTRONICS FACTORY LTD
Application No.:	SZEM1611009347CR

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions.spx">http://www.sgs.com/en/Terms-and-Conditions.spx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 2 of 69

## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2016-11-15		Original

Authorized for issue by:		
Tested By	feter Gene	2016-11-12
	(Peter Geng) /Project Engineer	Date
Checked By	Eric Fu	2016-11-15
	(Eric Fu) /Reviewer	Date

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-e



Report No.: SZEM161100934702 Page: 3 of 69

## 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	A		PASS
Restricted bands around fundamental frequency (Radiated Emission)47 CFR Part 15, Subpart C Section 15.205/15.209ANS		ANSI C63.10 (2013)	PASS



Report No.: SZEM161100934702 Page: 4 of 69

### 4 Contents

1	CC	OVER PAGE	
2	VE	ERSION	2
3	TF	EST SUMMARY	3
		ONTENTS	
4			
5	G	ENERAL INFORMATION	5
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	Test Environment	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9 5.10	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	TE	EST RESULTS AND MEASUREMENT DATA	
	6.1	ANTENNA REQUIREMENT	
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	20dB Occupy Bandwidth	
	6.5	CARRIER FREQUENCIES SEPARATION	
	6.6	HOPPING CHANNEL NUMBER	
	6.7	DWELL TIME	
	6.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.9	Spurious RF Conducted Emissions	
	6.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	
	6.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	
	6.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	HOTOGRAPHS - EUT TEST SETUP	68
	7.1	Conducted Emission	
	7.2	RADIATED EMISSION	
	7.3	RADIATED SPURIOUS EMISSION	69
8	PH	HOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	69



Report No.: SZEM161100934702 Page: 5 of 69

### 5 General Information

### 5.1 Client Information

Applicant:	MODERN ELECTRONICS FACTORY LTD
Address of Applicant:	FLAT C, 10/F, PHASE 4, KWUN TONG INDUSTRIAL CENTRE, 472- 478 KWUN TONG ROAD, HONG KONG
Manufacturer:	MODERN ELECTRONICS FACTORY LTD
Address of Manufacturer:	FLAT C, 10/F, PHASE 4, KWUN TONG INDUSTRIAL CENTRE, 472- 478 KWUN TONG ROAD, HONG KONG
Factory:	Keng Fu Jia Electronics (Shenzhen) Co., Ltd.
Address of Factory:	Sui Wai Sun Chuen, Tai Long, Lung Wah, Shenzhen, GDGZ

### 5.2 General Description of EUT

Product Name:	Discoball Bluetooth Speaker
Model No.:	MET1368BT
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	Bluetooth 2.1+EDR
Modulation Type:	GFSK, π/4DQPSK
Number of Channel:	79
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	-0.68dBi
Battery:	DC 3.7V, 550mAh, which charge by AC adapter of AC 120V/60Hz

#### Remark:

Model No.: MET1368BT, SP613, MD1368BT

Only the model MET1368BT was tested, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, only different on model name, artwork and cosmetic.



Report No.: SZEM161100934702 Page: 6 of 69

Operation F	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 7 of 69

### 5.3 Test Environment

Operating Environment:		
Temperature:	24.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1010 mbar	

### 5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Adapter	Apple	A1357 W010A051
USB cable:50cm unshielded	Supplied by SGS	N/A

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

### 5.6 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
		3.45dB (9kHz to 150kHz)
1	Conduction emission	3.0dB (150kHz to 30MHz)
		4.5dB (30MHz-1GHz )
2	Radiated emission	4.8dB (1GHz-26GHz )



Report No.: SZEM161100934702 Page: 8 of 69

### 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### • A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

### • VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

### 5.8 Deviation from Standards

None.

### 5.9 Abnormalities from Standard Conditions

None.

### 5.10 Other Information Requested by the Customer

None.



Report No.: SZEM161100934702 Page: 9 of 69

### 5.11 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8- 02	EMC0120	2016-09-28	2017-09-28	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4- 02	EMC0121	2016-09-28	2017-09-28	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2- 02	EMC0122	2016-09-28	2017-09-28	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25	
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09	

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	10m Semi- Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
2	EMI Test Receiver (9k-3GHz)	Rohde & Schwarz	ESCI	SEM004-01	2016-04-25	2017-04-25
3	Trilog-Broadband Antenna(30M- 1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29
4	Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06
5	Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 10 of 69

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz- 40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118- 352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



Report No.: SZEM161100934702 Page: 11 of 69

### 6 Test results and Measurement Data

### 6.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requireme An intentional rad responsible party antenna that use so that a broken electrical connec 15.247(b) (4) req The conducted o antennas with div section, if transm power from the in (b)(2), and (b)(3)	diator shall be designed to ensure that no antenna other than that furnished by the y shall be used with the device. The use of a permanently attached antenna or of an s a unique coupling to the intentional radiator, the manufacturer may design the unit antenna can be replaced by the user, but the use of a standard antenna jack or tor is prohibited. uirement: utput power limit specified in paragraph (b) of this section is based on the use of rectional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this itting antennas of directional gain greater than 6 dBi are used, the conducted output ntentional radiator shall be reduced below the stated values in paragraphs (b)(1), of this section, as appropriate, by the amount in dB that the directional gain of the
antenna exceeds EUT Antenna:	
The antenna is ir of the antenna is	ntegrated on the main PCB and no consideration of replacement. The best case gain -0.68dBi.



Report No.: SZEM161100934702 Page: 12 of 69

Test Requirement:	47 CFR Part 15C Section 15.2	207					
Test Method:	ANSI C63.10: 2013						
Test Frequency Range:	150kHz to 30MHz						
Limit:		Limit (c	lBuV)				
	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5	66 to 56*	56 to 46*				
	0.5-5	56	46				
	5-30	60	50				
	* Decreases with the logarithm	n of the frequency.					
Test Procedure:	<ol> <li>The mains terminal disturbation.</li> <li>The EUT was connected to Impedance Stabilization Naimpedance. The power call connected to a second LIS reference plane in the same measured. A multiple sock power cables to a single Life exceeded.</li> <li>The tabletop EUT was place ground reference plane. An placed on the horizontal great of the EUT shall be 0.4 m for vertical ground reference preference plane. The LISN unit under test and bonded mounted on top of the grout between the closest points the EUT and associated ed</li> <li>In order to find the maximut equipment and all of the im ANSI C63.10: 2013 on con</li> </ol>	AC power source thro etwork) which provides oles of all other units of SN 2, which was bonder the way as the LISN 1 for et outlet strip was used ISN provided the rating and for floor-standing an round reference plane, th a vertical ground ref from the vertical ground plane was bonded to th 1 was placed 0.8 m for 1 to a ground reference and reference plane. The of the LISN 1 and the quipment was at least 0 im emission, the relative terface cables must be	bugh a LISN 1 (Line a $50\Omega/50\mu$ H + $5\Omega$ linear if the EUT were d to the ground or the unit being d to connect multiple of the LISN was not c table 0.8m above the rangement, the EUT was erence plane. The rear d reference plane. The e horizontal ground om the boundary of the e plane for LISNs his distance was EUT. All other units of 0.8 m from the LISN 2. re positions of				

### 6.2 Conducted Emissions



Report No.: SZEM161100934702 Page: 13 of 69

Test Setup:	Shielding Room         Image: Comparison of the second se
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM161100934702 Page: 14 of 69


#### **Measurement Data**

Site

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

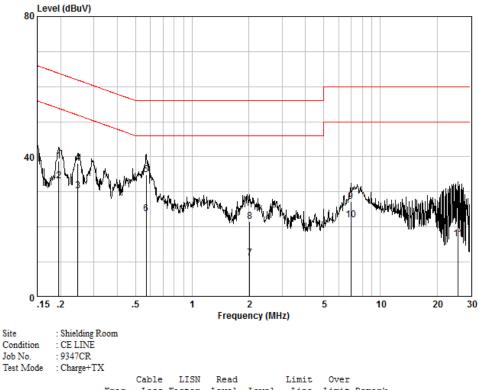


	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19550	0.02	9.60	29.09	38.71	63.80	-25.09	QP
2	0.19550	0.02	9.60	23.62	33.24	53.80	-20.56	AVERAGE
3	0.24682	0.02	9.60	20.76	30.38	51.86	-21.49	AVERAGE
4	0.24682	0.02	9.60	28.44	38.06	61.86	-23.80	QP
5	0.57010	0.02	9.60	25.35	34.98	56.00	-21.02	QP
6	0.57010	0.02	9.60	14.10	23.72	46.00	-22.28	AVERAGE
7	2.023	0.03	9.64	1.52	11.19	46.00	-34.81	AVERAGE
8	2.023	0.03	9.64	11.91	21.57	56.00	-34.43	QP
9	6.951	0.08	9.68	17.42	27.18	60.00	-32.82	QP
10	6.951	0.08	9.68	12.32	22.08	50.00	-27.92	AVERAGE
11	25.864	0.16	9.86	6.63	16.65	50.00	-33.35	AVERAGE
12	25.864	0.16	9.86	11.66	21.68	60.00	-38.32	QP

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 15 of 69

#### Neutral line:

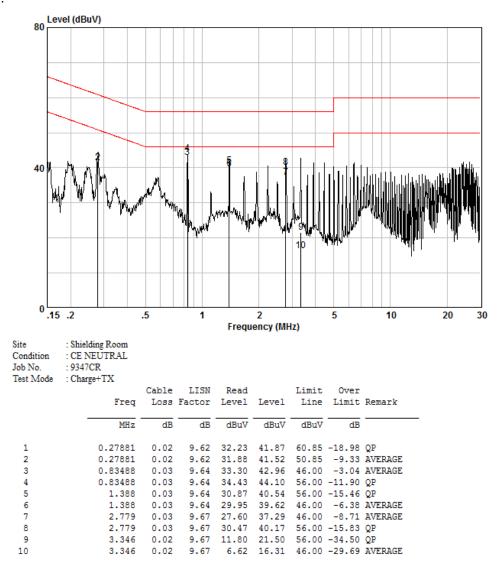

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM161100934702 Page: 16 of 69

### 6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.5		
Test Setup:	Spectrum Analyzer   Image: Description of the spectrum analyzer   Semark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	20.97dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi$ /4DQPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		



Report No.: SZEM161100934702 Page: 17 of 69


#### **Measurement Data**

	GFSK mode						
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-1.61	20.97	Pass				
Middle	-0.88	20.97	Pass				
Highest	0.28	20.97	Pass				
	π/4DQPSK m	node					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result				
Lowest	-1.04	20.97	Pass				
Middle	-0.26	20.97	Pass				
Highest	0.92	20.97	Pass				

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-




Report No.: SZEM161100934702 Page: 18 of 69

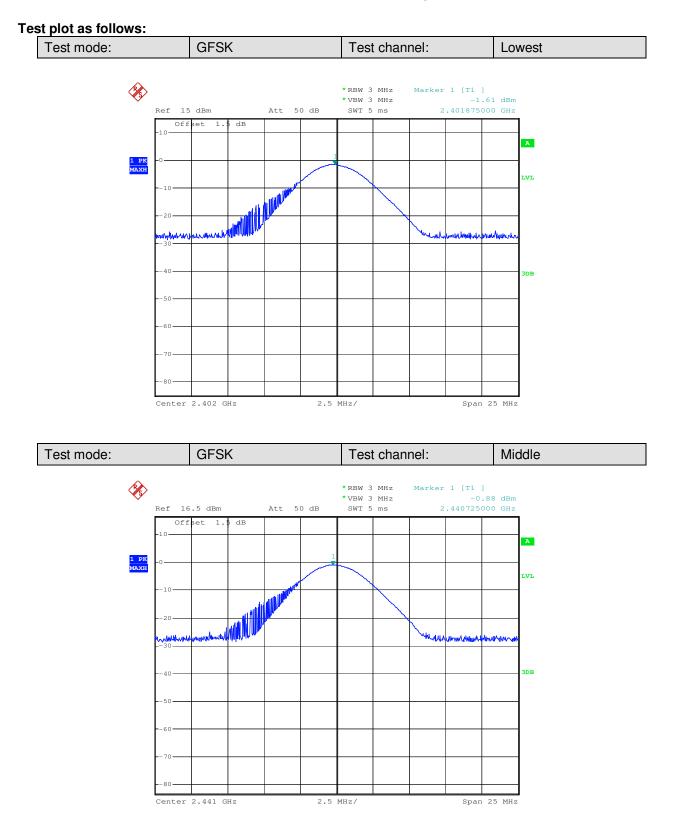




Report No.: SZEM161100934702 Page: 19 of 69

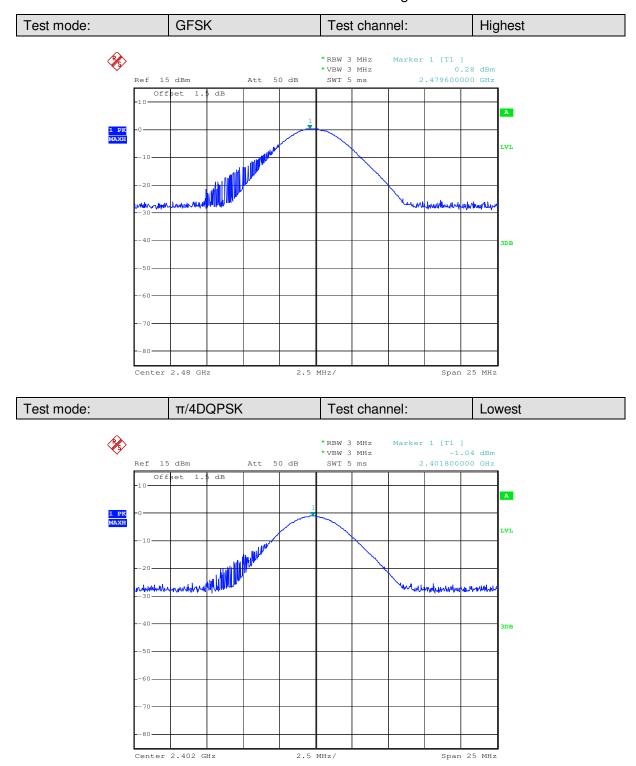



Report No.: SZEM161100934702 Page: 20 of 69

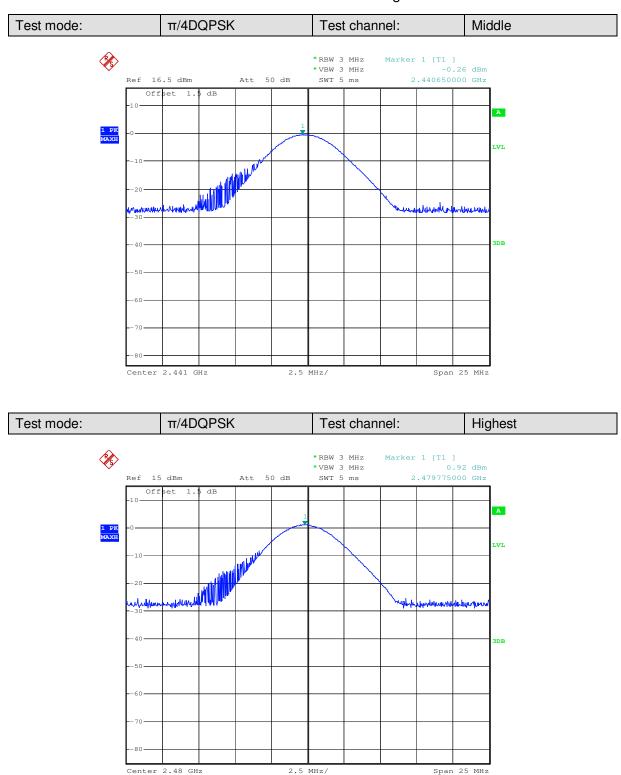



Report No.: SZEM161100934702 Page: 21 of 69

### 6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.7		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Limit:	NA		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type.		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi$ /4DQPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

#### **Measurement Data**

<b>-</b>	20dB Occupy Bandwidth (kHz)		
Test channel	GFSK	π/4DQPSK	
Lowest	981	1329	
Middle	966	1326	
Highest	969	1323	




Report No.: SZEM161100934702 Page: 22 of 69

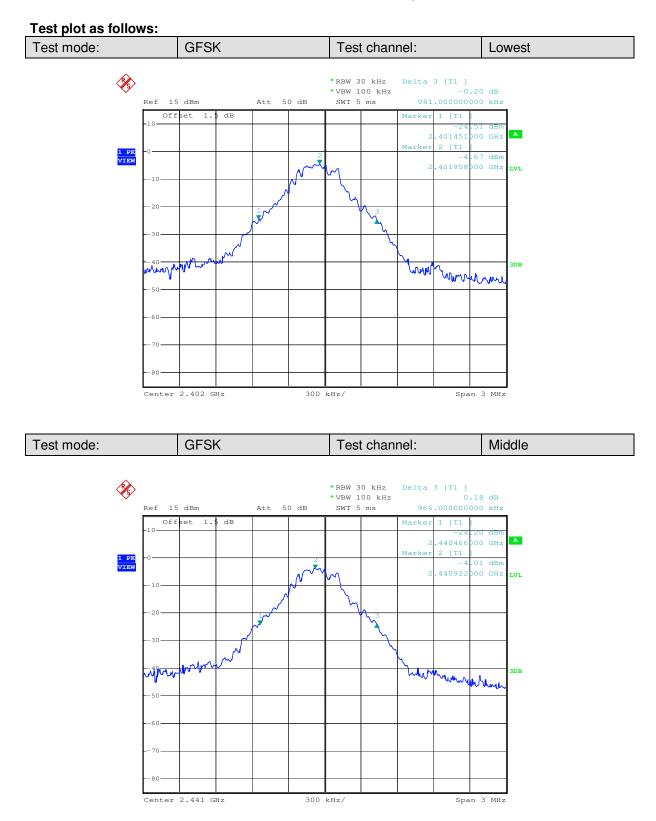



This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 23 of 69




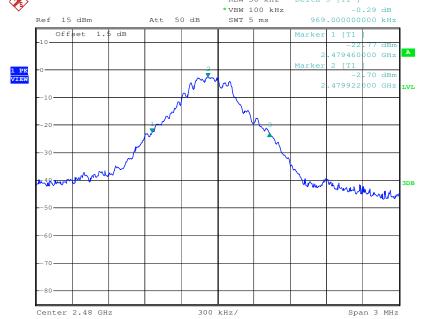

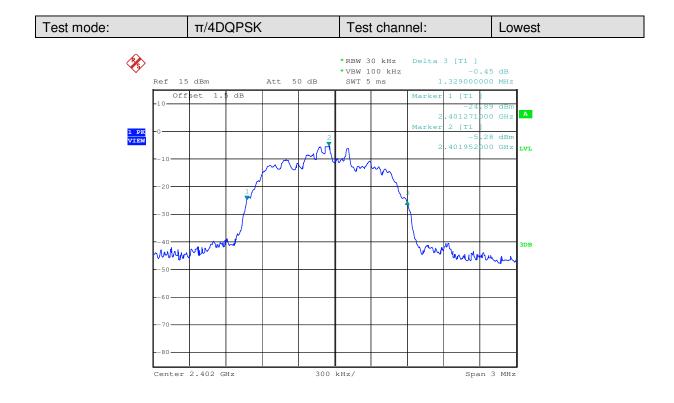



Report No.: SZEM161100934702 Page: 24 of 69

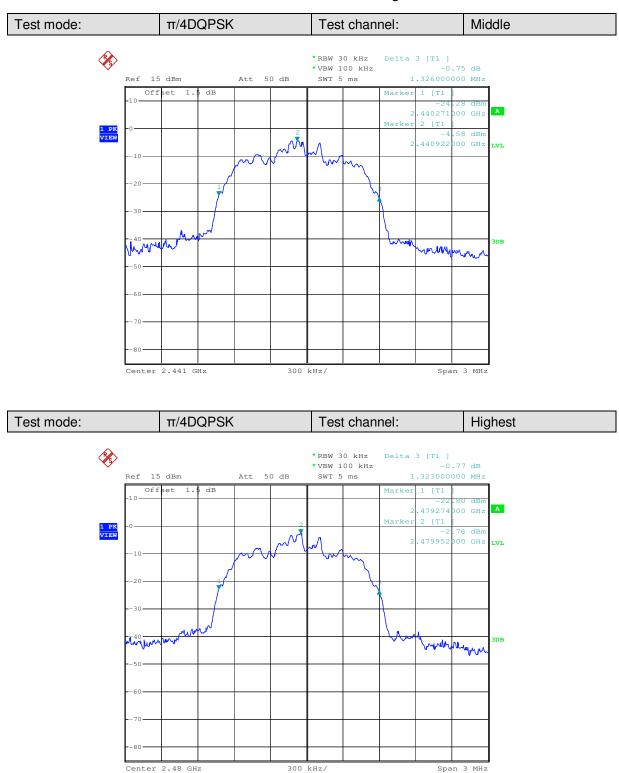



Report No.: SZEM161100934702 Page: 25 of 69

### 6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.2		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi$ /4DQPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		



Report No.: SZEM161100934702 Page: 26 of 69

GFSK mode				
Test channel	Carrier Frequencies Separation (kHz) Limit (kHz) Result			
Middle	1035	654	Pass	
π/4DQPSK mode				
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result	
Middle	1020	886 P		


Note: According to section 6.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)	
	(worse case) (Carrier Frequencies Sepa		
GFSK	981 654		
π/4DQPSK	1329 886		



Report No.: SZEM161100934702 Page: 27 of 69

#### Test plot as follows:

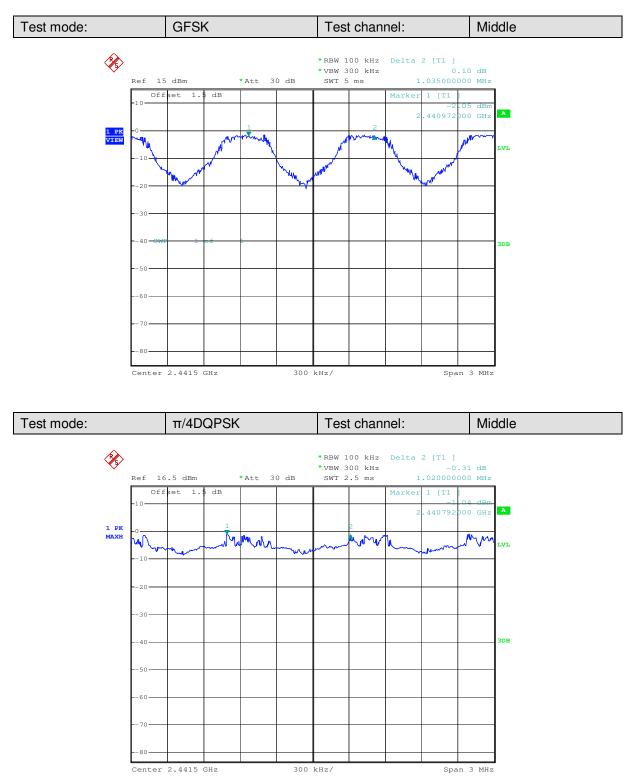

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-e



Report No.: SZEM161100934702 Page: 28 of 69

### 6.6 Hopping Channel Number


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.3		
Test Setup:	ANSI C63. 10:2013 Section 7.8.3		
Limit:	At least 15 channels		
Test Mode:	Hopping transmitting with all kind of modulation		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

#### **Measurement Data**

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15



Report No.: SZEM161100934702 Page: 29 of 69

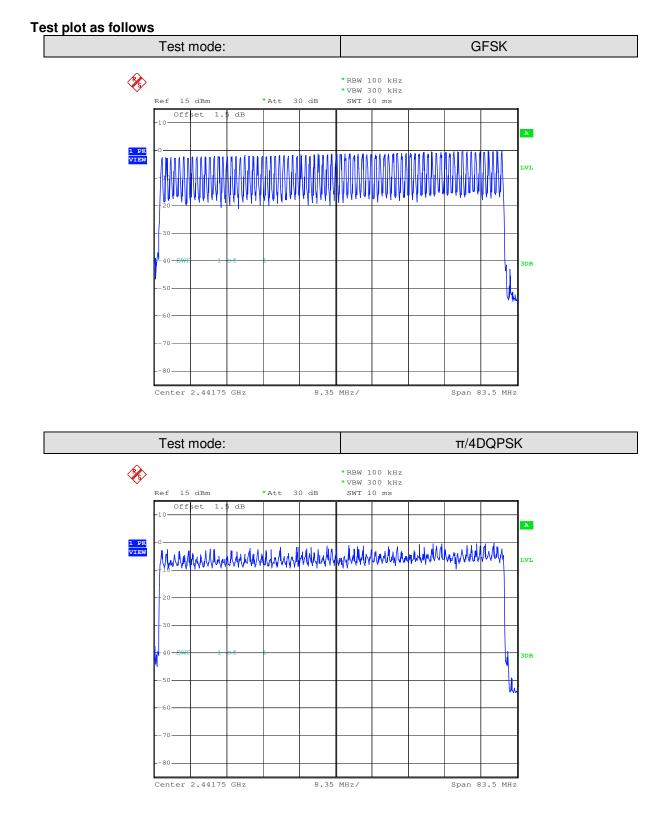

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 30 of 69

### 6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.4		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
	Ground Reference Plane		
Instruments Used:	Refer to section 5.10 for details		
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.		
Limit:	0.4 Second		
Test Results:	Pass		

#### **Measurement Data**

Mode	Packet	Total number	Dwell time (second)	Limit (second)
GFSK	DH1	300	0.11	≤0.4
	DH3	130	0.21	≤0.4
	DH5	110	0.32	≤0.4
π/4DQPSK	2-DH1	300	0.11	≤0.4
	2-DH3	130	0.21	≤0.4
	2-DH5	110	0.32	≤0.4

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)\*total number=dwell time (ms)

The lowest channel (2441MHz), as below:

DH1 time slot=0.368 (ms)\*total number=110.40 (ms)

DH3 time slot=1.626 (ms)\* total number = 211.38 (ms)

DH5 time slot= $2.880 \text{ (ms)}^*$  total number = 316.80 (ms)

2-DH1 time slot=0.379 (ms)\*total number=113.70 (ms)

2-DH3 time slot=1.632 (ms)\* total number = 212.16 (ms)


2-DH5 time slot=2.884 (ms)\* total number = 317.24 (ms)

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-




Report No.: SZEM161100934702 Page: 31 of 69


#### Test plot as follows:

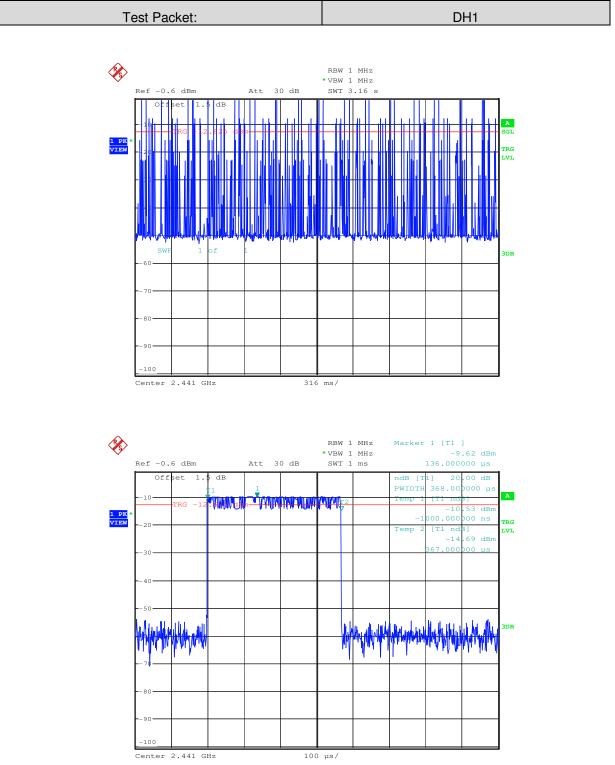




Report No.: SZEM161100934702 Page: 32 of 69



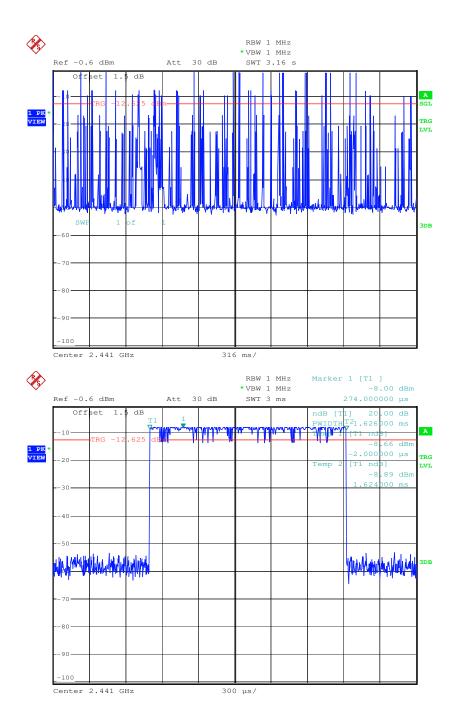




Report No.: SZEM161100934702 Page: 33 of 69

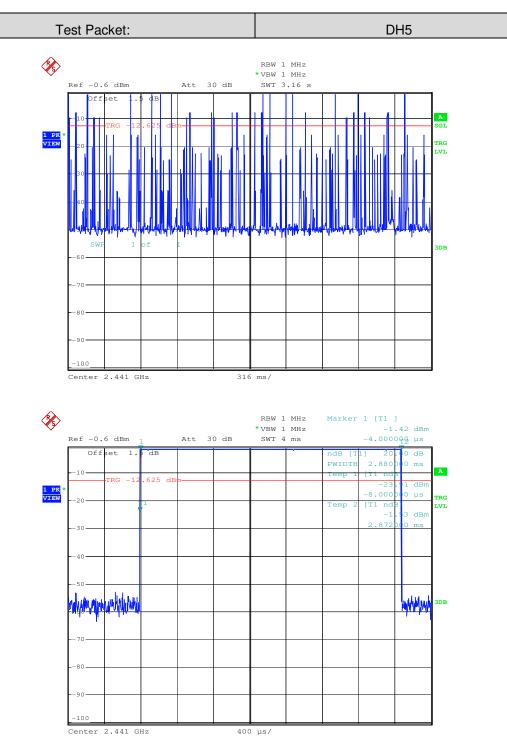

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-




Report No.: SZEM161100934702 Page: 34 of 69

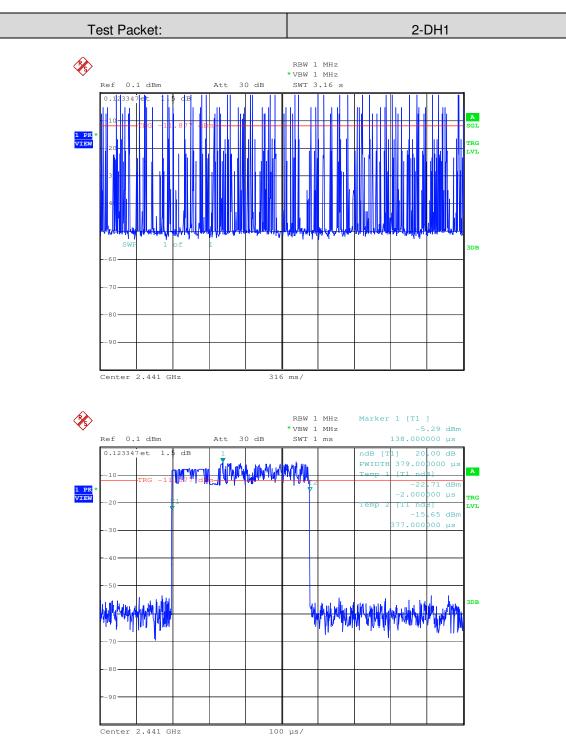




Report No.: SZEM161100934702 Page: 35 of 69

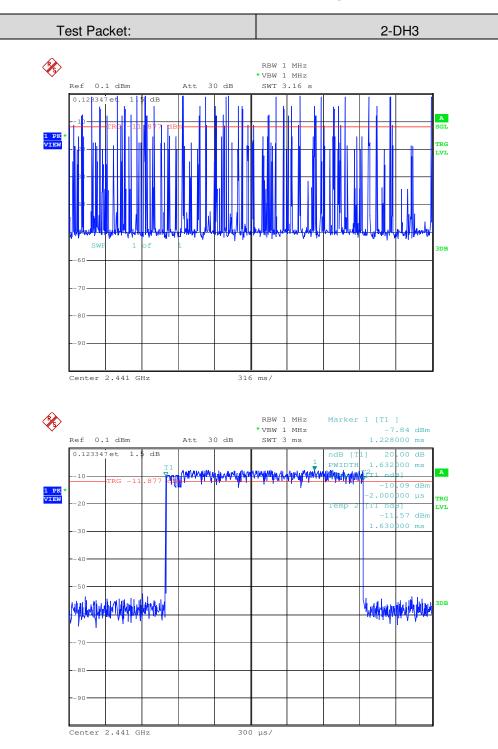



Report No.: SZEM161100934702 Page: 36 of 69

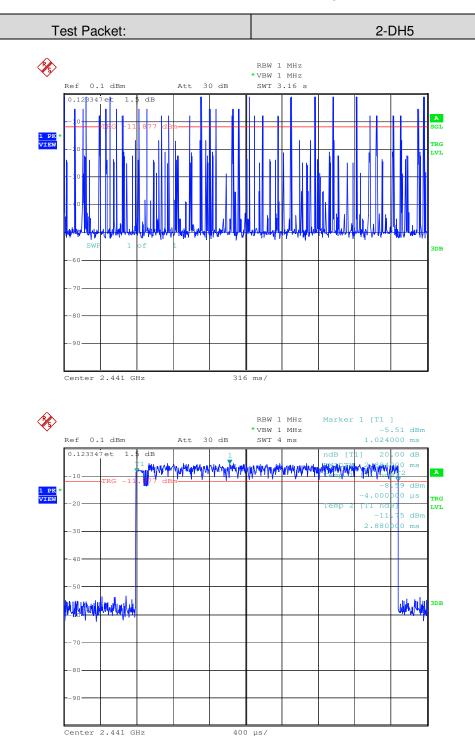



Report No.: SZEM161100934702 Page: 37 of 69


#### **Test Requirement:** 47 CFR Part 15C Section 15.247 (d) Test Method: ANSI C63.10:2013 Section 7.8.6 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type. Refer to section 5.10 for details Instruments Used: **Test Results:** Pass

#### 6.8 Band-edge for RF Conducted Emissions

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction for exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.




Report No.: SZEM161100934702 Page: 38 of 69

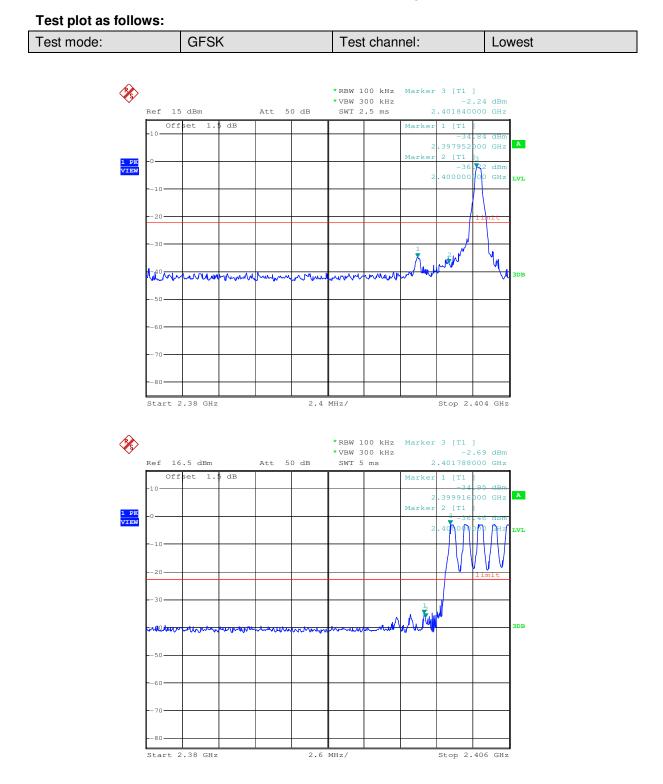




Report No.: SZEM161100934702 Page: 39 of 69

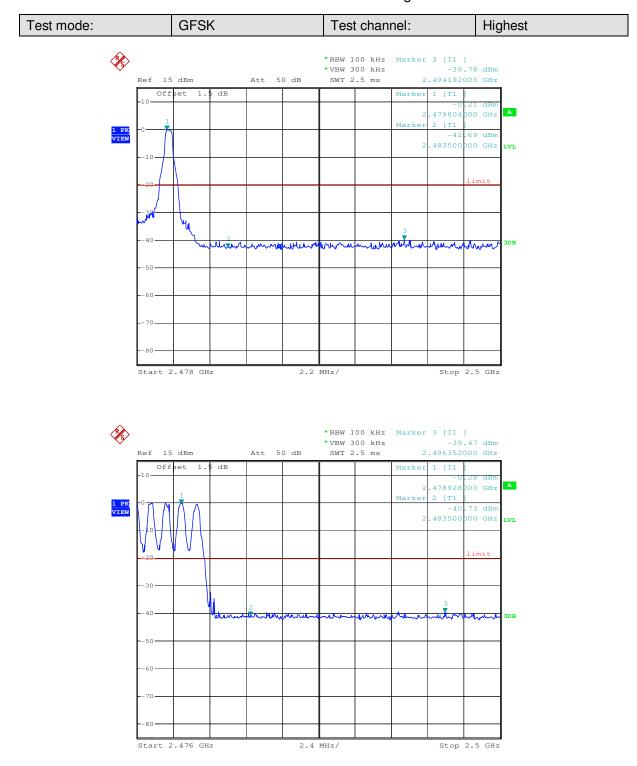




Report No.: SZEM161100934702 Page: 40 of 69

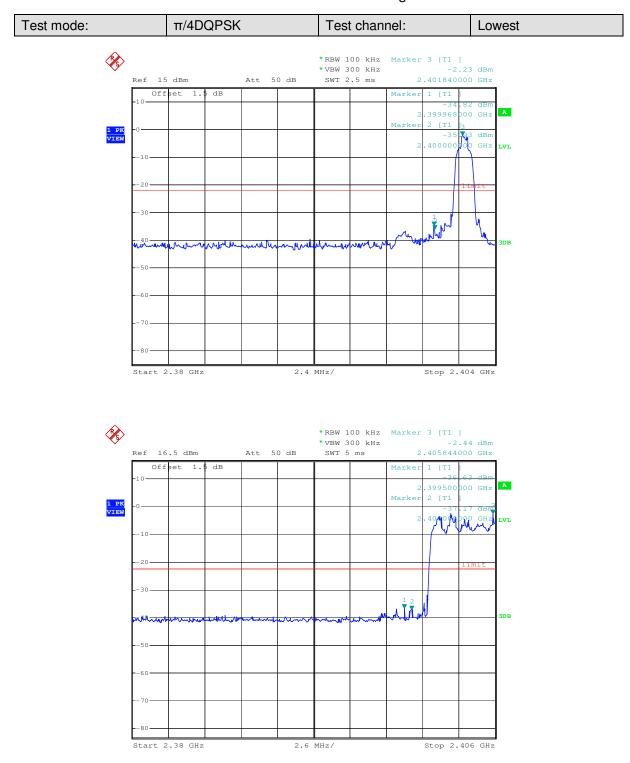

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 41 of 69

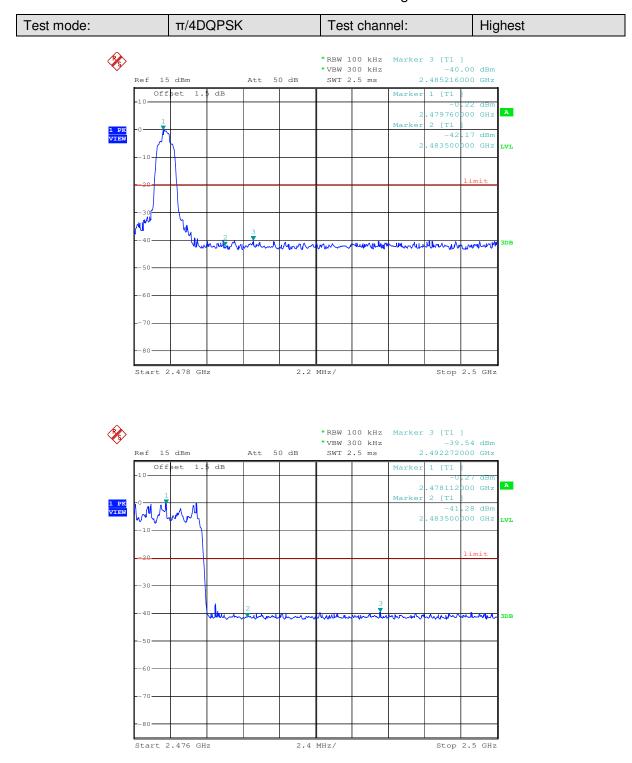

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 42 of 69

### 6.9 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 Section 7.8.8
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi$ /4DQPSK modulation type.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-




Report No.: SZEM161100934702 Page: 43 of 69


#### Test plot as follows:

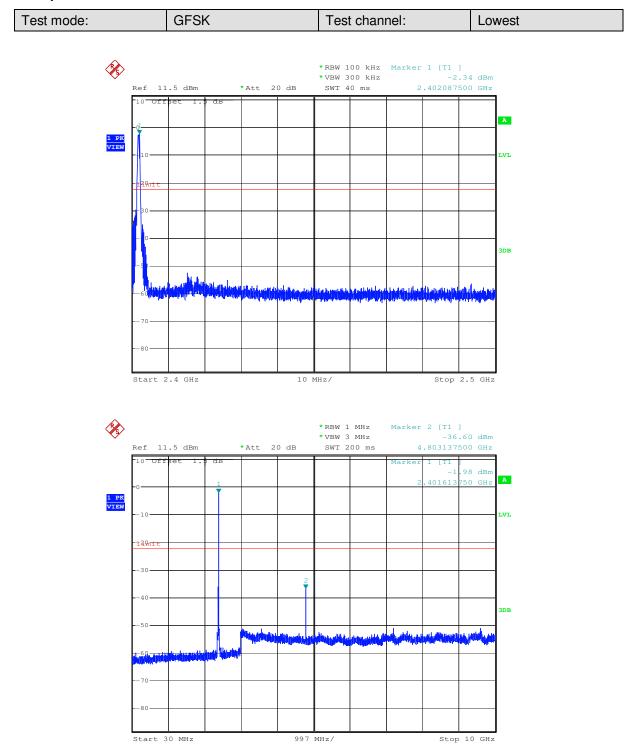

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-

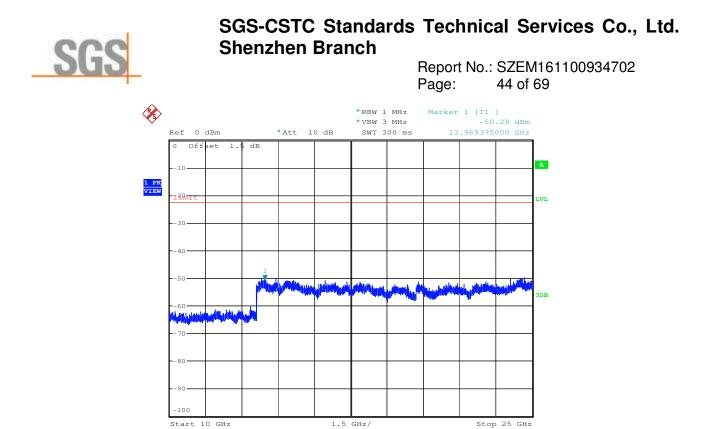




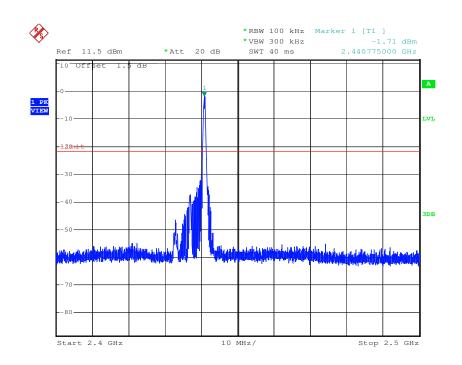




Report No.: SZEM161100934702 Page: 45 of 69

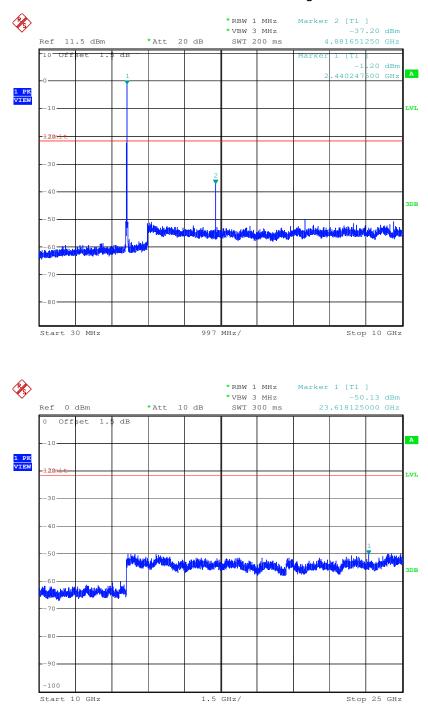


This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-




Report No.: SZEM161100934702 Page: 46 of 69

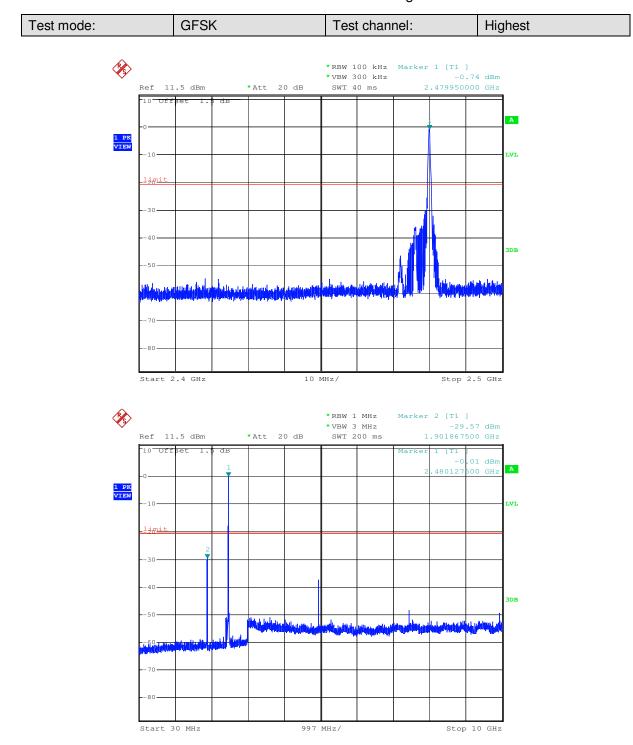

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-

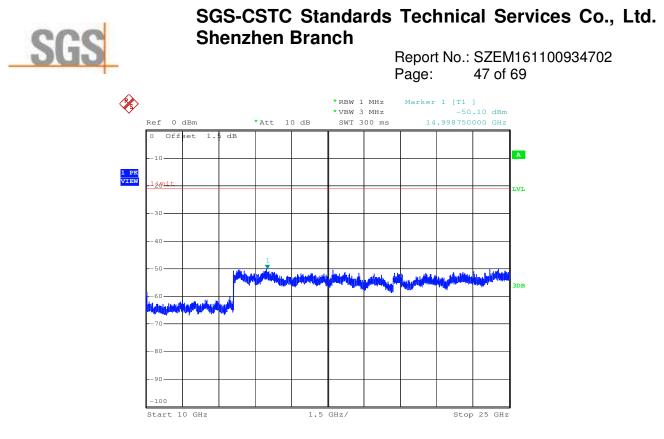


Test mode:	π/4DQPSK	Test channel:	Lowest
------------	----------	---------------	--------

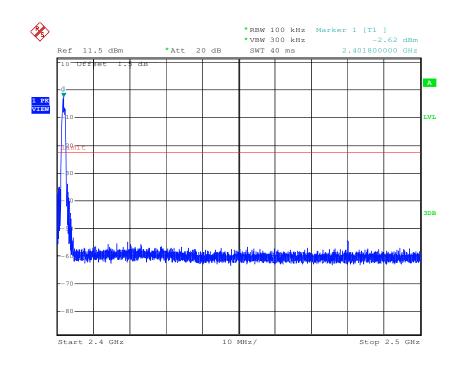

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.




Report No.: SZEM161100934702 Page: 48 of 69

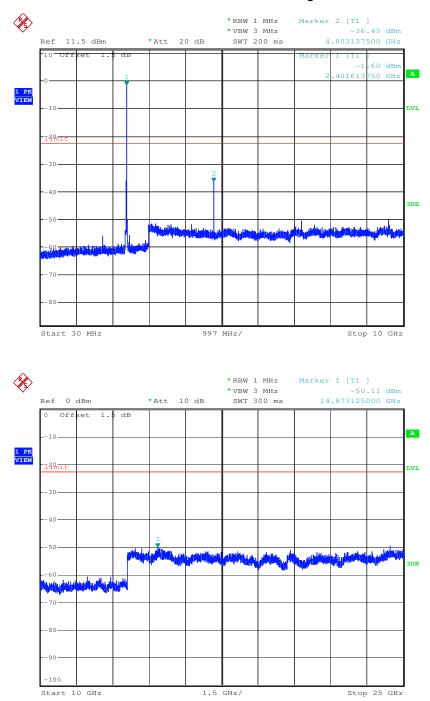




Report No.: SZEM161100934702 Page: 49 of 69

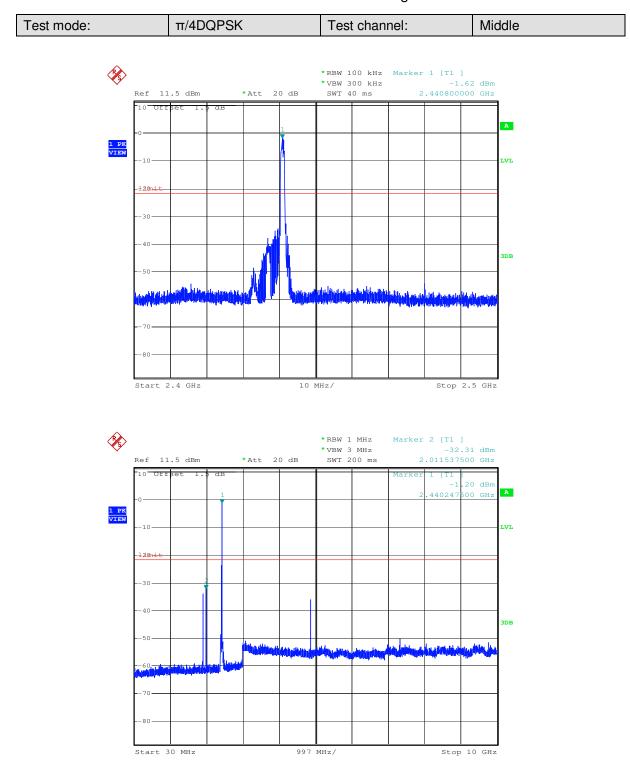

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.

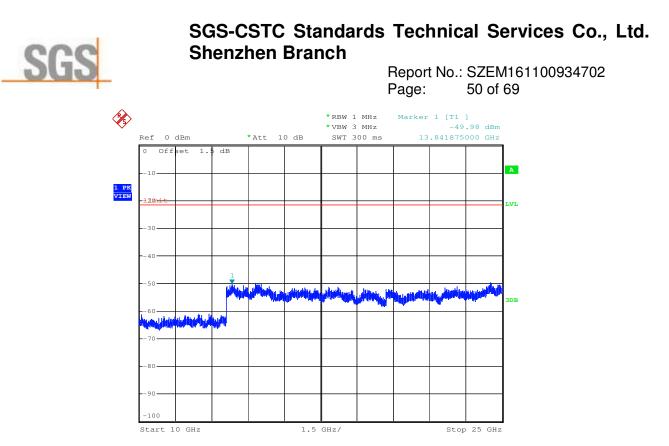

Test mode:		π/4D	QPSK			Tes	t chan	nel:		Hig	ghest
×	Ref 11	-	dв	*Att 2	0 dB		00 kHz		1 [T1 ] -1. .4799125	08 dBm	1
1 P3 Viet	-0										A
											ЗДВ
	50			alibudi alibuya		i anti inclusione di constante di La constante di const				l <mark>a, akt (</mark> kithatiki	

10 MHz/


Stop 2.5

GHz

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 51 of 69

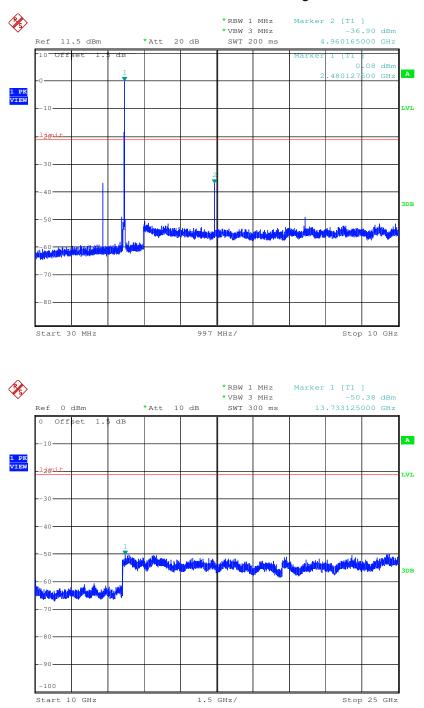

#### Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM161100934702 Page: 52 of 69

### 6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
rate from a Pseudorandom of on the average by each trans	nel frequencies that are selected at the system hopping rdered list of hopping frequencies. Each frequency must be used equally mitter. The system receivers shall have input bandwidths that match the of their corresponding transmitters and shall shift frequencies in smitted signals.
channels during each transm receiver, must be designed to transmitter be presented with employing short transmission	pectrum systems are not required to employ all available hopping ission. However, the system, consisting of both the transmitter and the o comply with all of the regulations in this section should the a continuous data (or information) stream. In addition, a system bursts must comply with the definition of a frequency hopping system hissions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and a The coordination of frequenc	nce within a frequency hopping spread spectrum system that permits r users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. y hopping systems in any other manner for the express purpose of ccupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15.	247(a)(1)
stage shift register whose 5th outputs are added in a modul	o-two addition stage. And the result is fed back to the input of the first with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ges: 9 equence: $2^9 - 1 = 511$ bits
Linear Feedback Sl	hift Register for Generation of the PRBS sequence
An example of Pseudorandor	n Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1
According to Bluetooth Core bandwidths that match the	on the average by each transmitter. Specification, Bluetooth receivers are designed to have input and IF hopping channel bandwidths of any Bluetooth transmitters and shift n with the transmitted signals.
Compliance for section 15.	

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 53 of 69

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 54 of 69


#### **Test Requirement:** 47 CFR Part 15C Section 15.209 and 15.205 Test Method: ANSI C63.10: 2013 Test Site: Below 1GHz: Measurement Distance: 10m (Semi-Anechoic Chamber) Above 1GHz: Measurement Distance: 3m (Full-Anechoic Chamber) **Receiver Setup:** Detector RBW VBW Remark Frequency 0.009MHz-0.090MHz Peak 10kHz 30kHz Peak 0.009MHz-0.090MHz 10kHz 30kHz Average Average Quasi-peak 10kHz 30kHz Quasi-peak 0.090MHz-0.110MHz 0.110MHz-0.490MHz Peak 10kHz 30kHz Peak 0.110MHz-0.490MHz Average 10kHz 30kHz Average Quasi-peak 0.490MHz -30MHz 10kHz 30kHz Quasi-peak 30MHz-1GHz Quasi-peak 100 kHz 300kHz Quasi-peak Peak Peak 1MHz 3MHz Above 1GHz Peak 1MHz 10Hz Average Limit: Measurement Field strength Limit Frequency Remark (dBuV/m) distance (m) (microvolt/meter) 0.009MHz-0.490MHz 2400/F(kHz) 300 0.490MHz-1.705MHz 24000/F(kHz) -30 \_ 30 1.705MHz-30MHz 30 -30MHz-88MHz 100 40.0 Quasi-peak 3 3 88MHz-216MHz 150 43.5 Quasi-peak 216MHz-960MHz 200 46.0 Quasi-peak 3 960MHz-1GHz 3 500 54.0 Quasi-peak Above 1GHz 500 54.0 Average 3 Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

#### 6.11 Radiated Spurious Emission

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful and offenders may be prosecuted to the fulle, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 55 of 69

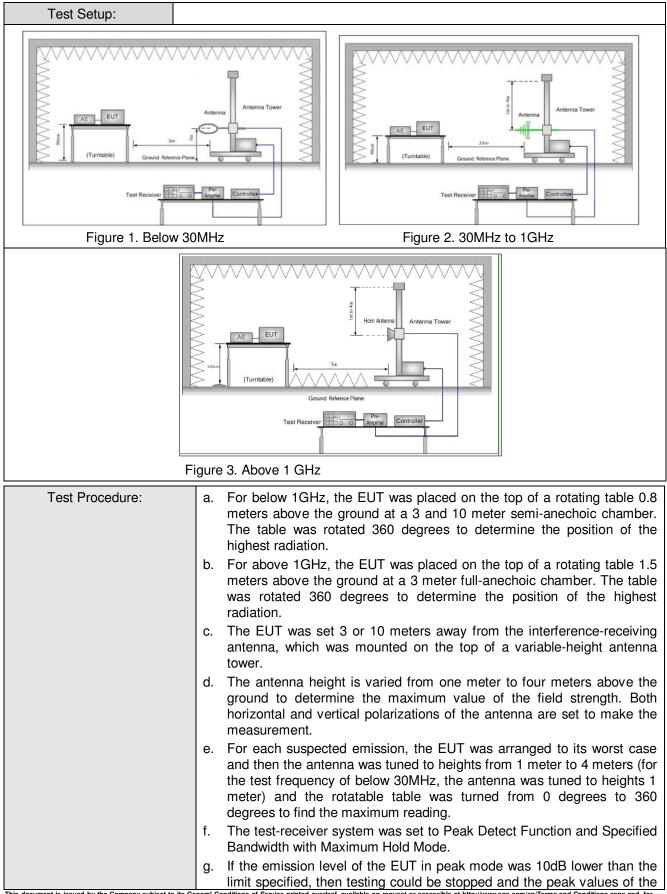

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions of Service printed by the Company subject to Terms and Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction is subject to Terms and Conditions aspx and, for only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconerate parties to a transaction for exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.



Report No.: SZEM161100934702 Page: 56 of 69


	<ul> <li>EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>h. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type Transmitting mode, Charge + Transmitting mode.
	Transmitting mode, onlarge + transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode, found the Charge + Transmitting mode which it is worse case
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM161100934702 Page: 57 of 69

#### 6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge + Transmitting	Vertical

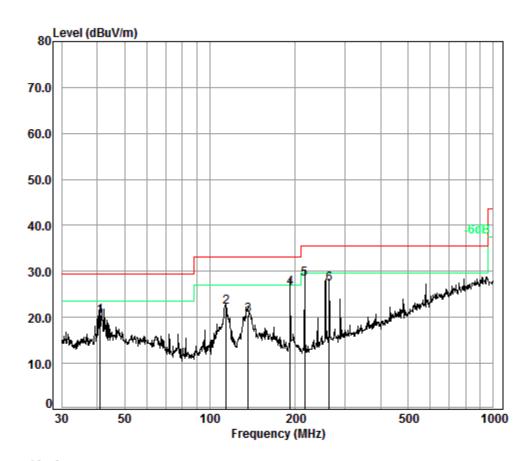

Condition: 10m VERTICAL Job No. : 9347CR Test Mode: TX+Charging


	Freq			Preamp Factor				
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 pp 5	136.46	7.27 7.38 7.56	10.84 12.51 9.70	32.99 32.78 32.76 32.71 32.68	36.81 33.29 41.88	22.14 20.42 26.43	33.10 33.10 33.10	-10.96 -12.68 -6.67
6	263.82	7.92	11.62	32.63	40.43	27.34	35.60	-8.26

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 58 of 69

Test mode: Charge + Transmitting Horizontal	
---	--

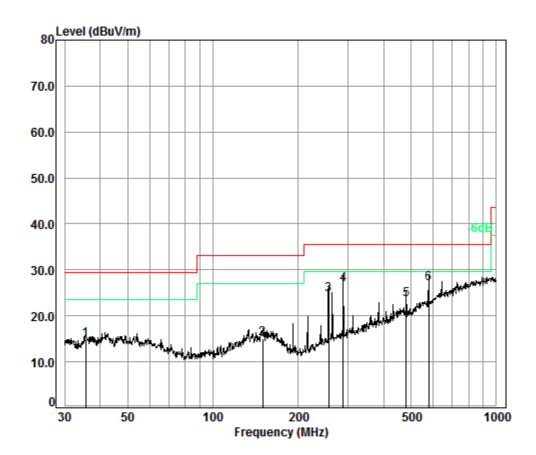

Condition: 10m HORIZONTAL Job No. : 9347CR Test Mode: TX+Charging Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit MHz dB dB/m dB dBuV dBuV/m dBuV/m dB 35.62 6.71 12.73 32.98 28.46 14.92 29.50 -14.58 1 2 150.01 7.45 13.41 32.74 27.02 15.14 33.10 -17.96 3 256.52 7.89 11.40 32.64 37.89 24.54 35.60 -11.06 4 287.99 8.02 12.36 32.61 38.94 26.71 35.60 -8.89 5 480.53 8.50 16.53 32.60 31.05 23.48 35.60 -12.12 6 pp 576.64 8.84 18.22 32.60 32.55 27.01 35.60 -8.59

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Conditions/Terms-en-Conditions/Terms-end-Conditions/Terms-



Report No.: SZEM161100934702 Page: 59 of 69

#### **Below 1GHz**

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

 $L_3 / L_{10} = D_{10} / D_3$ 

Note:

L<sub>3</sub>: Level @ 3m distance. Unit: uV/m;

L<sub>10</sub>: Level @ 10m distance. Unit: uV/m;

D<sub>3</sub>: 3m distance. Unit: m

D<sub>10</sub>: 10m distance. Unit: m

The level at 3m test distance is below:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
41.13	20.37	10.44	34.78	30.83	40.00	-9.17	V
114.11	22.14	12.79	42.65	32.60	43.50	-10.90	V
136.46	20.42	10.50	34.98	30.88	43.50	-12.62	V
191.75	26.43	20.97	69.88	36.89	43.50	-6.61	V
216.02	28.30	26.00	86.67	38.76	46.00	-7.24	V
263.82	27.34	23.28	77.60	37.80	46.00	-8.20	V
35.62	14.92	5.57	18.57	25.38	40.00	-14.62	Н
150.01	15.14	5.71	19.05	25.60	43.50	-17.90	Н
256.52	24.54	16.87	56.22	35.00	46.00	-11.00	Н
287.99	26.71	21.65	72.17	37.17	46.00	-8.83	Н
480.53	23.48	14.93	49.76	33.94	46.00	-12.06	Н
576.64	27.01	22.41	74.71	37.47	46.00	-8.53	Н

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 60 of 69

#### Test mode: GFSK(DH1) Test channel: Remark: Lowest Peak Antenna Cable Preamp Read Over Frequency Level Limit Line factors Loss Factor Limit Polarization Level (MHz) (dBuV/m) (dBuV/m) (dB/m) (dB) (dB) (dBuV) (dB) 3842.163 33.18 7.76 38.63 47.12 74 -26.88 Vertical 44.81 -23.29 4804.000 34.16 8.87 39.03 46.71 50.71 74 Vertical 6069.413 34.76 10.47 38.96 45.61 51.88 74 -22.12 Vertical Vertical 7206.000 36.42 10.68 38.18 43.54 52.46 74 -21.54 37.52 9608.000 12.50 36.99 39.18 52.21 74 -21.79 Vertical 12476.260 38.89 14.17 38.79 39.21 53.48 74 -20.52 Vertical 3847.726 33.19 7.76 38.63 45.27 47.59 74 -26.41 Horizontal 74 4804.000 34.16 8.87 39.03 47.32 51.32 -22.68 Horizontal 5973.576 34.68 10.49 39.00 45.35 51.52 74 -22.48 Horizontal 7206.000 36.42 10.68 38.18 43.21 52.13 74 -21.87 Horizontal 37.52 Horizontal 9608.000 12.50 36.99 39.64 52.67 74 -21.33 12190.740 38.72 14.40 38.50 38.34 52.96 74 -21.04 Horizontal

#### 6.11.2 Transmitter Emission above 1GHz

Test mod	de:	GFSK(DH1	)	Tes	t channel:	Middle	;	Re	mark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Cab Los (dB	s	Reading Level (dBµV)	Emission Level (dBµV/m)		nit V/m)	Over limit (dB)	Polarization
3909.457	33.36	7.78	38.6	6	45.09	47.57	7	4	-26.43	Vertical
4882.000	34.30	8.98	39.0	6	47.14	51.36	7	4	-22.64	Vertical
5947.702	34.67	10.42	39.0	0	45.22	51.31	7	4	-22.69	Vertical
7323.000	36.37	10.72	38.0	6	43.83	52.86	7	4	-21.14	Vertical
9764.000	37.55	12.58	36.9	)1	40.45	53.67	7	4	-20.33	Vertical
12639.790	38.87	14.55	38.9	)5	38.81	53.28	7	4	-20.72	Vertical
3943.545	33.45	7.79	38.6	8	44.49	47.05	7	4	-26.95	Horizontal
4882.000	34.30	8.98	39.0	6	46.28	50.50	7	4	-23.50	Horizontal
6060.637	34.75	10.48	38.9	6	44.65	50.92	7	4	-23.08	Horizontal
7323.000	36.37	10.72	38.0	6	44.05	53.08	7	4	-20.92	Horizontal
9764.000	37.55	12.58	36.9	)1	39.70	52.92	7	4	-21.08	Horizontal
12566.850	38.89	14.34	38.8	8	39.39	53.74	7	4	-20.26	Horizontal

1)

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 61 of 69

Test mod	de:	GFSK(DH	1)	Tes	t channel:	Highes	t	Re	mark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	a Cable Loss (dB)	fac	amp ctor IB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/ı		Over limit (dB)	Polarization
3842.163	33.18	7.76	38	.63	45.22	47.53	74		-26.47	Vertical
4960.000	34.43	9.09	39	.09	46.66	51.09	74		-22.91	Vertical
5939.103	34.66	10.39	39	.01	44.47	50.51	74		-23.49	Vertical
7440.000	36.32	10.77	37	.94	42.81	51.96	74		-22.04	Vertical
9920.000	37.58	12.67	36	.84	39.43	52.84	74		-21.16	Vertical
12694.780	38.86	14.70	39	.00	38.97	53.53	74		-20.47	Vertical
3954.973	33.48	7.79	38	.68	45.29	47.88	74		-26.12	Horizontal
4960.000	34.43	9.09	39	.09	46.11	50.54	74		-23.46	Horizontal
6131.199	34.81	10.39	38	.92	45.30	51.58	74		-22.42	Horizontal
7440.000	36.32	10.77	37	.94	43.39	52.54	74		-21.46	Horizontal
9920.000	37.58	12.67	36	.84	39.03	52.44	74		-21.56	Horizontal
12332.670	38.80	14.29	38	.64	39.12	53.57	74		-20.43	Horizontal

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM161100934702 Page: 62 of 69

#### 6.12 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section	15.209 and 15.205								
Test Method:	ANSI C63.10: 2013									
Test Site:	Above 1GHz:									
	Measurement Distance: 3m (Full-Anechoic Chamber)									
Limit:	Frequency	Frequency Limit (dBuV/m@3m) Remark								
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHZ	74.0	Peak Value							
Test Setup:										
Test Setup:         Image: state										
Figure 1. 30MH	Iz to 1GHz	Figure 2. Abov	ve 1 GHz							

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx">http://www.sgs.com/en/Terms-en-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents is unlawful unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized alteration, store of this document is unlawful unauthorized anteration and preserve of this document is unlawful unauthorized intervention of the company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful unauthorized intervention of the sample(s) tested and such sample(s) are retained for 30 days only.




Report No.: SZEM161100934702 Page: 63 of 69

Test Procedure:	<ul> <li>a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> <li>h. Test the EUT in the lowest channel , the Highest channel</li> <li>i. Repeat above procedures until all frequencies measured was complete.</li> </ul>
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
	Transmitting mode, Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case.
	Pretest the EUT at Transmitting mode and Charge + Transmitting mode,
	found the Charge + Transmitting mode which it is worse case Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	
	Pass



Report No.: SZEM161100934702 Page: 64 of 69

Test plot as follows:								
Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical		

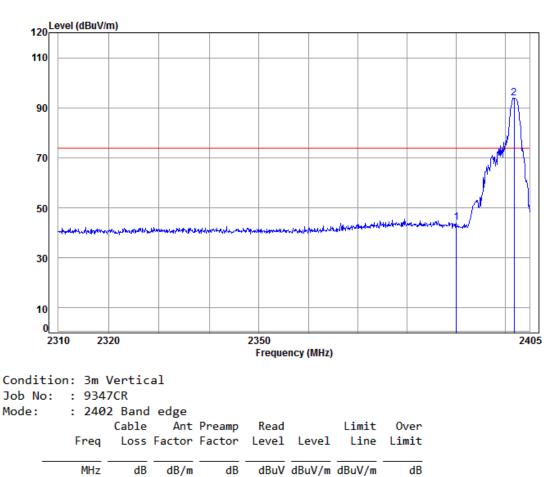


1	2390.000	5.34	29.08	38.14	47.96	44.24	74.00	-29.76
2 pp	2401.803	5.35	29.11	38.15	97.69	94.00	74.00	20.00



Report No.: SZEM161100934702 Page: 65 of 69

Worse case mode: GFSK (DH5) Test channel:	Lowest	Remark:	Peak	Horizontal
---	--------	---------	------	------------

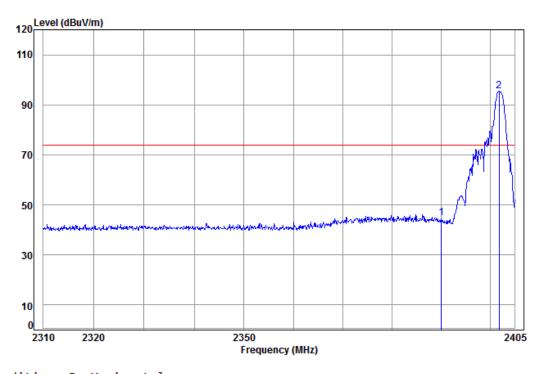


Conditio	n: 3m	Horizo	ntal					
Job No:	: 934	7CR						
Mode:	: 240	2 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 23	90.000	5.34	29.08	38.14	48.37	44.65	74.00	-29.35
2 nn 24	01 803	5.35	29.11	38.15	99.17	95.48	74.00	21.48
	01.005							

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 66 of 69

Worse case mode: GFSK (DH5) Test chann	nel: Highest R	Remark: Peak	Vertical
--	----------------	--------------	----------

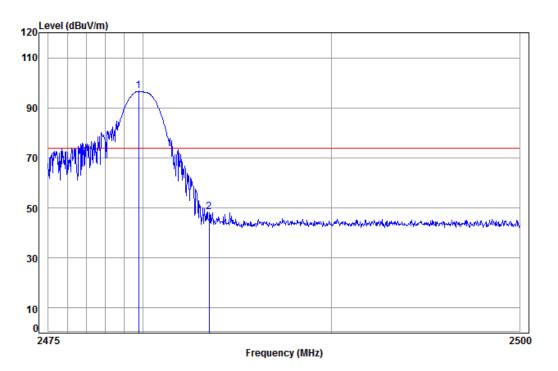


Conditio	n: 3m \	Vertic	al						
Job No:	: 9343	7CR							
Mode:	: 248	0 Band	edge						
		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
_									
1 pp 24									
2 24	83.500	5.41	29.35	38.15	51.67	48.28	74.00	-25.72	

This document is issued by the Company subject to its General Conditions of Service printed overleaf,-available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-



Report No.: SZEM161100934702 Page: 67 of 69

Worse case mode: GFSK(DH5) Tes	est channel: Highest	Remark:	Peak	Horizontal
--------------------------------	----------------------	---------	------	------------

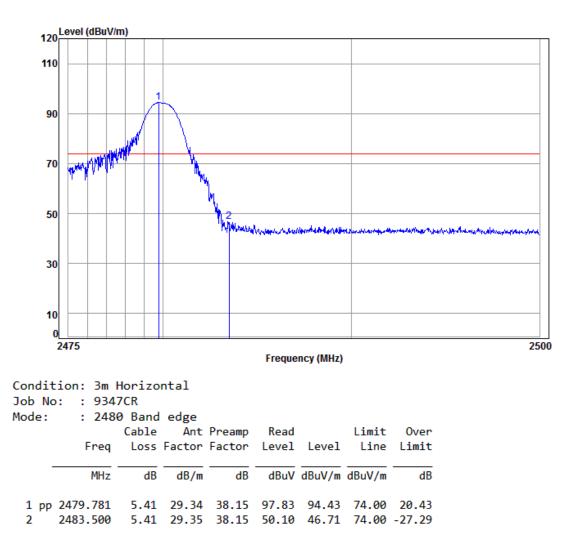

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM161100934702 Page: 68 of 69

### 7 Photographs - EUT Test Setup

Test Model No.: MET1368BT

### 7.1 Conducted Emission



### 7.2 Radiated Emission





Report No.: SZEM161100934702 Page: 69 of 69

7.3 Radiated Spurious Emission



### 8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1611009347CR.