

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C
REQUIREMENTS**

OF

Bluetooth FM Portable Speaker

**MODEL No.: MET-1216, SP2412-BLACK-PL, SP2412B, SP2412, P2412-PL,
P2412B, P2412**

FCC ID: SSMMEF1216

Trademark: SYLVANIA, CURTIS, PROSCAN, MET

REPORT NO.: ES140930384E

ISSUE DATE: November 4, 2014

Prepared for

Modern Electronics Factory Ltd.

**Flat C, 10/F, Phase 4, Kwun Tong Industrial Centre, 472-478 Kwun Tong
Road, Kwun Tong, Kowloon, Hong Kong**

Prepared by

SHENZHEN EMTEK CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China.**

TEL: 86-755-26954280

FAX: 86-755-26954282

VERIFICATION OF COMPLIANCE

Applicant:	Modern Electronics Factory Ltd. Flat C, 10/F, Phase 4, Kwun Tong Industrial Centre, 472-478 Kwun Tong Road, Kwun Tong,Kowloon, Hong Kong
Manufacturer:	Modern Electronics Factory Ltd. Flat C, 10/F, Phase 4, Kwun Tong Industrial Centre, 472-478 Kwun Tong Road, Kwun Tong,Kowloon, Hong Kong
Product Description:	Bluetooth FM Portable Speaker
Model Number:	MET-1216, SP2412-BLACK-PL, SP2412B, SP2412, P2412-PL, P2412B, P2412
Trademark:	SYLVANIA, CURTIS, PROSCAN, MET
Serial Number:	N/A
File Number:	ES140930384E
Date of Test:	October 15, 2014 to November 4, 2014

We hereby certify that:


The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247 REQUIREMENTS

The test results of this report relate only to the tested sample identified in this report.

Date of Test : October 15, 2014 to November 4, 2014



Prepared by : _____
Joe Xia /Editor



Reviewer : _____
Jack Li /Supervisor



Approve & Authorized Signer : _____
Lisa Wang/Manager

Table of Contents

1.	GENERAL INFORMATION	6
1.1	Product Description.....	6
1.2	Related Submittal(s) / Grant (s).....	6
1.3	Test Methodology	6
1.4	Special Accessories.....	6
1.5	Equipment Modifications.....	6
1.5	Test Facility	7
2.	System Test Configuration.....	8
2.1	EUT Configuration	8
2.2	EUT Exercise	8
2.3	Test Procedure.....	8
2.4	Limitation	8
2.5	Configuration of Tested System.....	10
2.6	Description of test modes.....	11
3.	Summary of Test Results	12
4.	Conducted Emissions Test	13
4.1	Measurement Procedure:	13
4.2	Test SET-UP (Block Diagram of Configuration).....	13
4.3	Measurement Equipment Used:	13
4.4	Conducted Emission Limit.....	13
4.5	Measurement Result:.....	14
5.	Radiated Emission Test.....	16
5.1	Measurement Procedure	16
5.2	Test SET-UP (Block Diagram of Configuration).....	17
5.3	Measurement Equipment Used:	18
5.4	Measurement Result	19
6.	Channel Separation test	29
6.1	Measurement Procedure	29
6.2	Test SET-UP (Block Diagram of Configuration).....	29
6.3	Measurement Equipment Used:	29
6.4	Measurement Results:	29
7.	Bandwidth test.....	36
7.1	Measurement Procedure	36
7.2	Test SET-UP (Block Diagram of Configuration).....	36
7.3	Measurement Equipment Used:	36
7.4	Measurement Results:.....	36
8.	Quantity of Hopping Channel Test	43

8.1	Measurement Procedure	43
8.2	Test SET-UP (Block Diagram of Configuration).....	43
8.3	Measurement Equipment Used:	43
8.4	Measurement Results:	43
9.	Time of Occupancy (Dwell Time) test.....	44
9.1	Measurement Procedure	44
9.2	Test SET-UP (Block Diagram of Configuration).....	44
9.3	Measurement Equipment Used:	44
9.4	Measurement Results:	44
10.	MAXIMUM PEAK OUTPUT POWER TEST	47
10.1	Measurement Procedure	47
10.2	Test SET-UP (Block Diagram of Configuration).....	47
10.3	Measurement Equipment Used:	47
10.4	Measurement Results:	47
11.	Band EDGE test.....	49
11.1	Measurement Procedure	49
11.2	Test SET-UP (Block Diagram of Configuration).....	49
11.3	Measurement Equipment Used:	49
11.4	Measurement Results:	49
12.	Antenna Port Emission.....	56
12.1	Test Equipment	56
12.2	Measuring Instruments and setting.....	56
12.3	Test Procedures	56
12.4	Block Diagram of Test setup.....	56
12.5	Test Result	56
13.	Antenna Application	60
13.1	Antenna requirement.....	60
13.2	Result	60

Modified Information

Rev.	Summary	Date of Rev.	Report No.
Ver.1.0	Original Report	/	ES140930384E

1. GENERAL INFORMATION

1.1 Product Description

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz;
- B). Modulation: GFSK, 1/4Π-DQPSK, 8DPSK;
- C). Number of Channel: 79 channels;
- D). RF Output Power: 1.69dBm Max;
- E). Antenna Type: PCB antenna
- F). Antenna GAIN: 0dBi
- G). Power Supply: DC 3.7V from Li-ion Battery DC 5V from USB Port

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SSMMEF1216 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

The composite system is compliance with Subpart B is authorized under a DOC procedure.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009) and FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Test Facility

Site Description
EMC Lab.

- : Accredited by CNAS, 2013.10.29
The certificate is valid until 2016.10.28
The Laboratory has been assessed and proved to be in compliance with
CNAS/CL01:2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L2291
- Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC
17025
- Accredited by FCC, April 17, 2013
The Certificate Registration Number is 406365.
- Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 4480A.

Name of Firm
Site Location

- : SHENZHEN EMTEK CO., LTD
: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009.

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1) and RSS 210 A8.1(2) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2) 20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

(3) Quantity of Hopping Channel

FCC Part 15, Subpart C Section 15.247 and RSS 210 A8.1(4)

Frequency Range (MHz)	Limit(Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250k Hz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) Time of Occupancy(Dwell Time)

FCC Part 15, Subpart C Section 15.247 and RSS 210 A8.1(4)

Frequency Range (MHz)	LIMIT(rms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25 Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()”is all channel’s average time of occupancy.

(5) Maximum Peak Output Power

FCC Part 15, Subpart C Section 15.247 and RSS 210 A8.4

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928	1(30dBm)	0.125(21dBm)	NA	NA	NA
2400-2483.5	NA	NA	0.125(21dBm)	1(30dBm)	1(30dBm)
5725-5850	NA	NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247 and RSS 210 A8.5

Operating Frequency Range(MHz)	Spurious emission frequency	Peak power ration to emission(dBc)	Limit
			Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

FCC Part15, Subpart C Section 15.247 and RSS-GEN, Section 7.2.2

Frequency(MHz)	Quasi-peak	Average
----------------	------------	---------

0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission


FCC Part 15, Subpart C Section 15.209 and RSS 210 A8.5 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
0.009~0.490	2400/F(KHz)	300	
0.490~1.705	2400/F(KHz)	30	See the remark
1.705~30.0	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

- Remark:
1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\text{uV/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Distance extrapolation factor $=40 \log (\text{Specific distance/ test distance})$ (dB);
 Limit line=Specific limits($\text{dB}\mu\text{V}$) + distance extrapolation factor.

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
Bluetooth FM Portable Speaker	MET	MET-1216	SSMMEF1216	N/A	EUT
Adapter	ARCHOS	HNEB050150UX	N/A	N/A	

2.6 Description of test modes

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

3. Summary of Test Results


FCC Rule	Description Of Test	Result
15.247(a)(1)	Channel Separation test	Pass
15.247(a)(1)	20dB Bandwidth	Pass
15.247(a)(1)	Quantity of Hopping Channel	Pass
15.247(a)(1)	Time of Occupancy (Dwell Time)	Pass
15.247(b)(1)	Max Peak output Power test	Pass
15.247(d)	Band edge test	Pass
15.207	AC Power Conducted Emission	Pass
15.247(d)	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
15.203&15.247(b)	Antenna Application	Pass

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

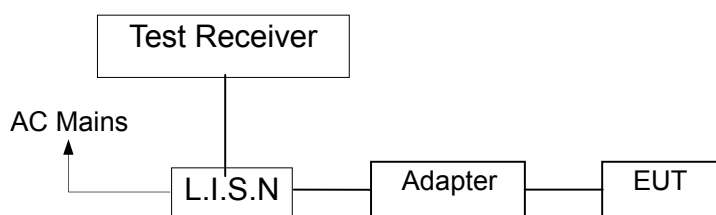

4.3 Measurement Equipment Used:

Conducted Emission Test Site # 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/17/2014	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/17/2014	05/16/2015

4.4 Conducted Emission Limit


(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


4.5 Measurement Result:

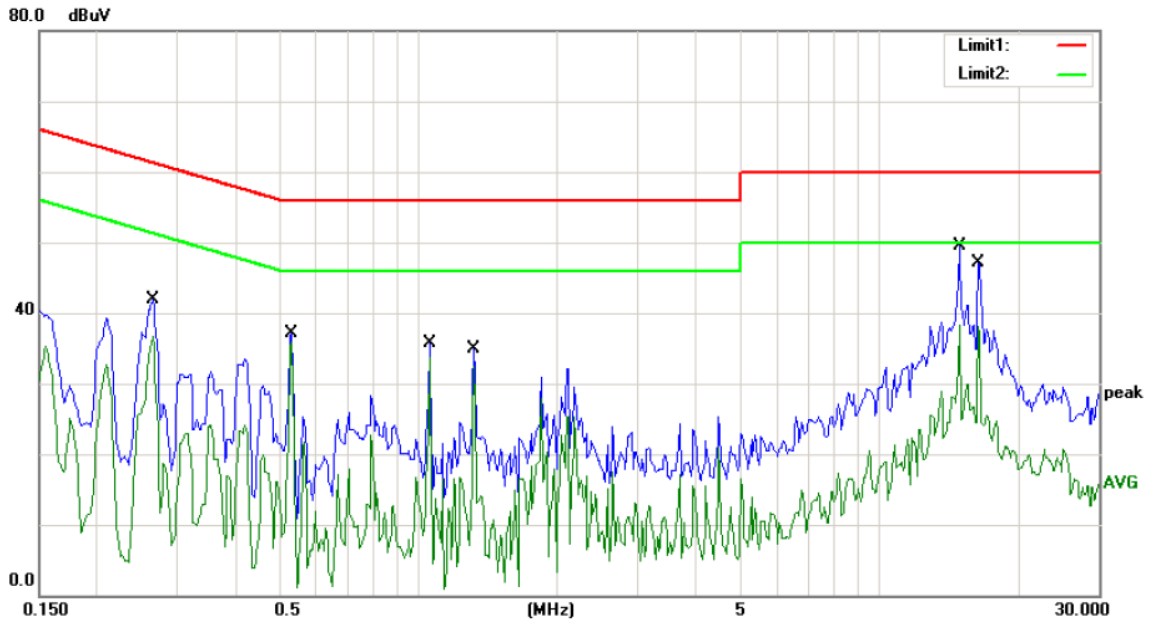

Site Conduction #1 Phase: **L1** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 60 %
 EUT:
 M/N: MET-1216
 Mode: BT ON
 Note: EUT:Portable Bluetooth Speaker with FM PLL Radio

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.2650	41.86	0.00	41.86	61.27	-19.41	QP	
2	0.2650	36.78	0.00	36.78	51.27	-14.49	AVG	
3	0.5300	37.04	0.00	37.04	56.00	-18.96	QP	
4 *	0.5300	35.95	0.00	35.95	46.00	-10.05	AVG	
5	1.0550	35.76	0.00	35.76	56.00	-20.24	QP	
6	1.0550	33.66	0.00	33.66	46.00	-12.34	AVG	
7	1.3200	34.87	0.00	34.87	56.00	-21.13	QP	
8	1.3200	32.58	0.00	32.58	46.00	-13.42	AVG	
9	14.9750	49.59	0.00	49.59	60.00	-10.41	QP	
10	14.9750	38.40	0.00	38.40	50.00	-11.60	AVG	
11	16.4750	47.07	0.00	47.07	60.00	-12.93	QP	
12	16.4750	38.02	0.00	38.02	50.00	-11.98	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: FENG

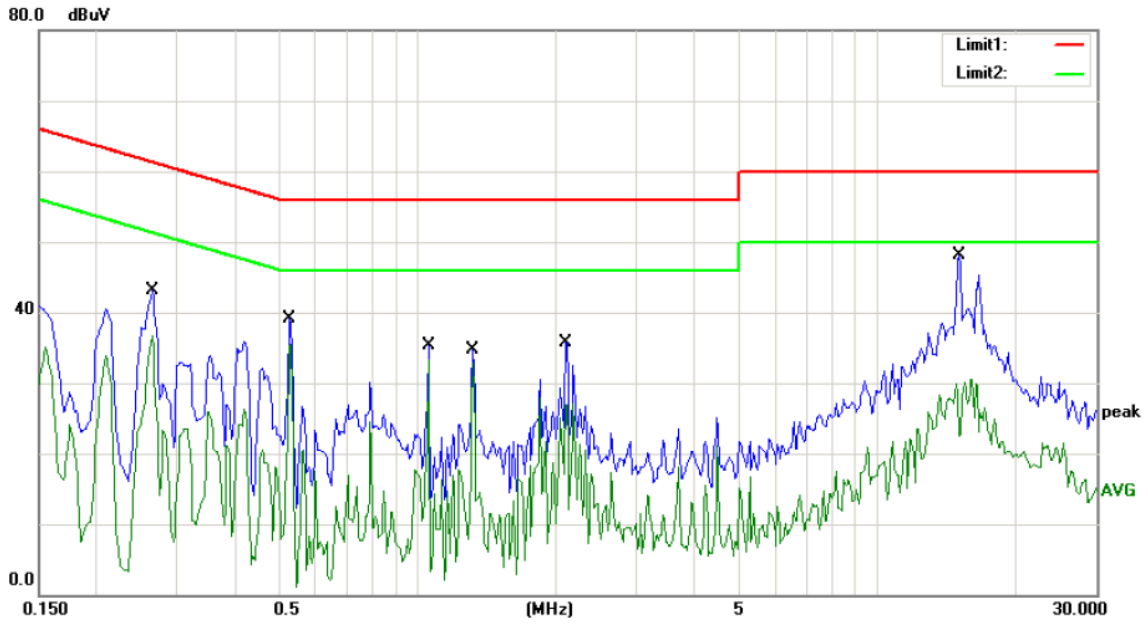

Site Conduction #1 Phase: **N** Temperature: 26
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 60 %
 EUT:
 M/N: MET-1216
 Mode: BT ON
 Note: EUT:Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2650	43.06	0.00	43.06	61.27	-18.21	QP	
2		0.2650	36.70	0.00	36.70	51.27	-14.57	AVG	
3		0.5250	39.17	0.00	39.17	56.00	-16.83	QP	
4	*	0.5250	35.51	0.00	35.51	46.00	-10.49	AVG	
5		1.0550	35.32	0.00	35.32	56.00	-20.68	QP	
6		1.0550	33.24	0.00	33.24	46.00	-12.76	AVG	
7		1.3200	34.67	0.00	34.67	56.00	-21.33	QP	
8		1.3200	33.00	0.00	33.00	46.00	-13.00	AVG	
9		2.1100	35.70	0.00	35.70	56.00	-20.30	QP	
10		2.1100	27.88	0.00	27.88	46.00	-18.12	AVG	
11		15.1250	48.18	0.00	48.18	60.00	-11.82	QP	
12		15.1250	30.57	0.00	30.57	50.00	-19.43	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: FENG

5. Radiated Emission Test

5.1 Measurement Procedure

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured was complete.

When spectrum scanned from 30 MHz to 1GHz setting resolution bandwidth 120 kHz and video bandwidth 300kHz.

EMI Test Receiver	Setting
Attenuation	Auto
RB	120kHz
VB	300kHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz.


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

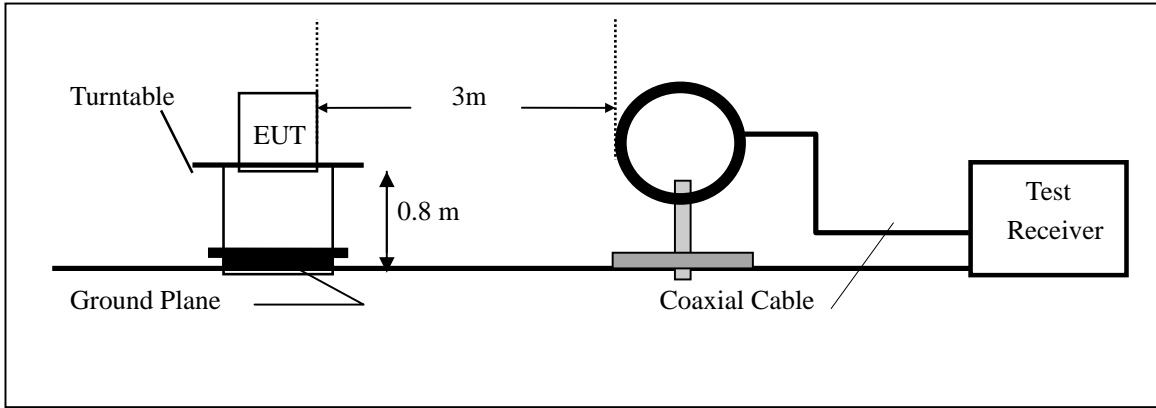

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

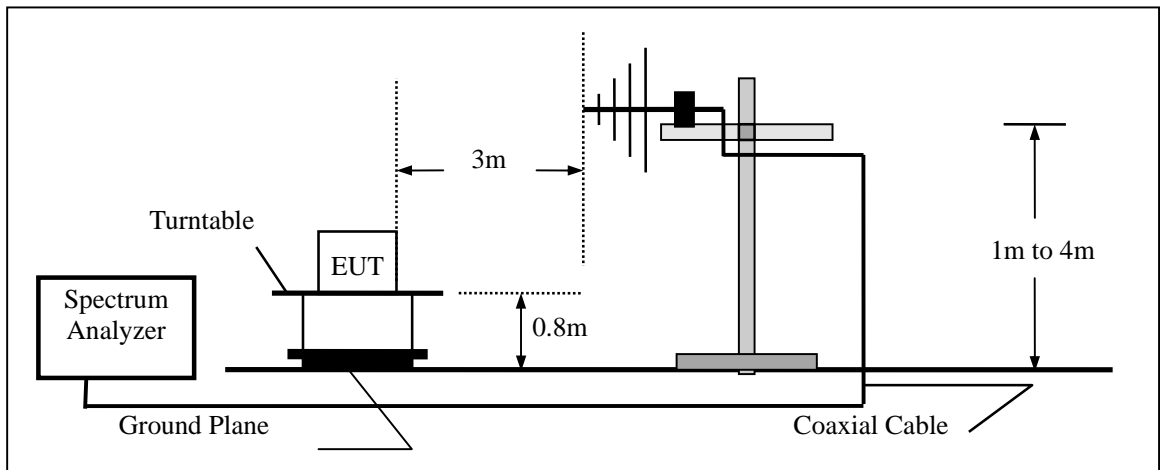

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

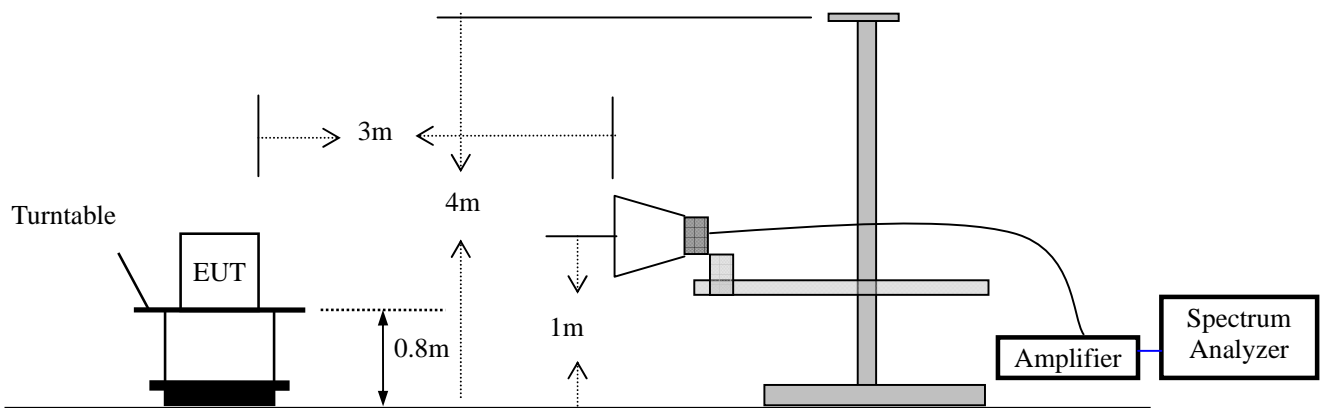

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/17/2014	05/16/2015
Spectrum Analyzer	HP	E4407B	839840481	05/17/2014	05/16/2015
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/17/2014	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/17/2014	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/17/2014	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/17/2014	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/17/2014	05/16/2015

5.4 Measurement Result

All the modulation modes were tested the data of the Worse result(GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Operation Mode: TX Mode Test Date : October 25, 2014
Frequency Range: 9KHz~30MHz Temperature : 24℃
Test Result: PASS Humidity : 63 %
Measured Distance: 3m Test By: RU


Note:

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/\text{test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor.

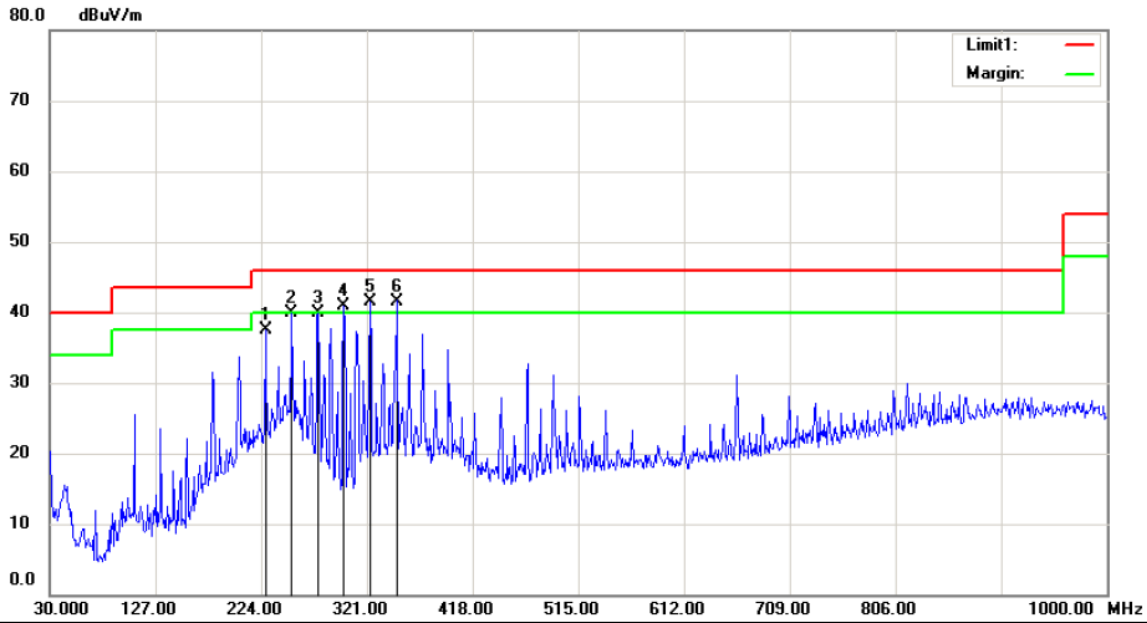


Site 3m Chamber #2 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2402
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		227.8800	52.34	-14.81	37.53	46.00	-8.47			QP
2		252.1300	53.10	-13.19	39.91	46.00	-6.09			QP
3		276.3800	52.22	-12.38	39.84	46.00	-6.16			QP
4	!	299.6600	54.08	-13.20	40.88	46.00	-5.12			QP
5	!	323.9100	53.49	-12.02	41.47	46.00	-4.53			QP
6	*	348.1600	52.39	-10.79	41.60	46.00	-4.40			QP

*:Maximum data x:Over limit !:over margin

Operator: Wang

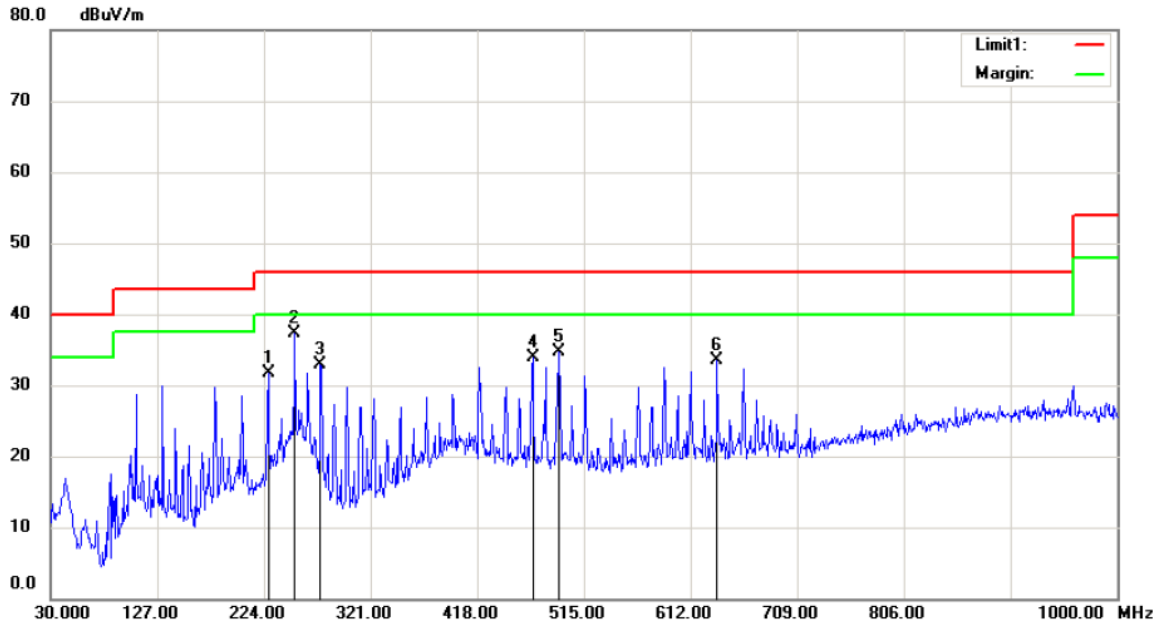


Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2402
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		227.8800	46.59	-14.81	31.78	46.00	-14.22			
2	*	252.1300	50.46	-13.19	37.27	46.00	-8.73			
3		275.4100	45.39	-12.42	32.97	46.00	-13.03			
4		468.4400	42.82	-8.83	33.99	46.00	-12.01			
5		491.7200	42.06	-7.33	34.73	46.00	-11.27			
6		636.2500	38.68	-5.17	33.51	46.00	-12.49			

*:Maximum data x:Over limit !:over margin

Operator: Wang

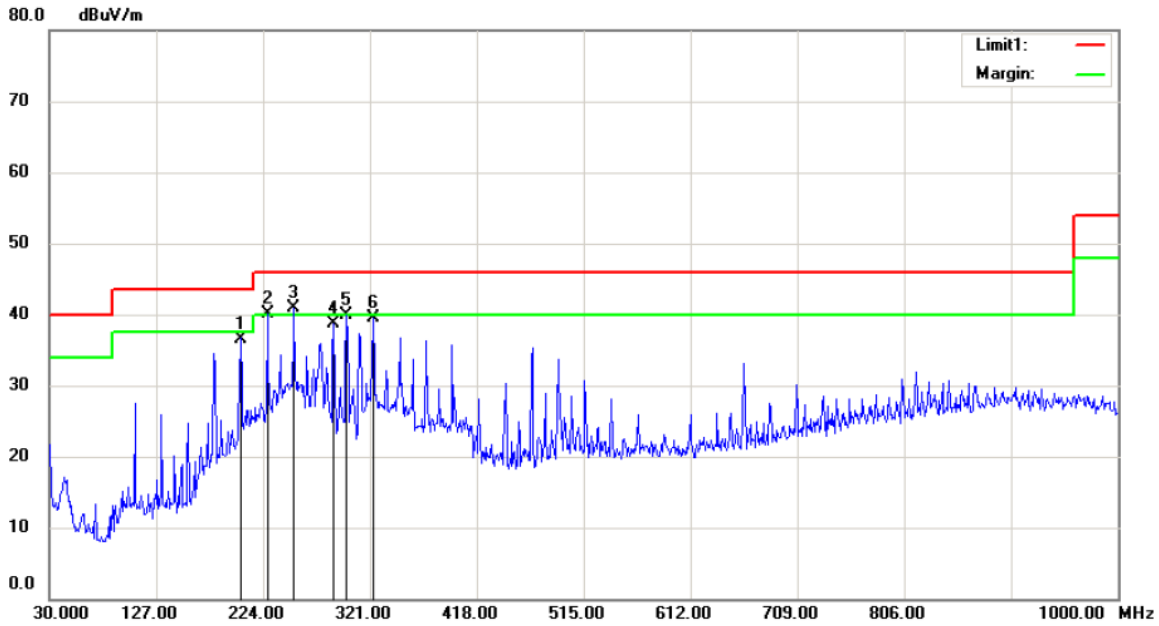


Site 3m Chamber #2 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2441
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		203.6300	53.29	-16.69	36.60	43.50	-6.90	QP		
2	!	227.8800	54.84	-14.81	40.03	46.00	-5.97	QP		
3	*	252.1300	54.10	-13.19	40.91	46.00	-5.09	QP		
4		288.0200	51.01	-12.35	38.66	46.00	-7.34	QP		
5		299.6600	53.08	-13.20	39.88	46.00	-6.12	QP		
6		323.9100	51.49	-12.02	39.47	46.00	-6.53	QP		

*:Maximum data x:Over limit !:over margin

Operator: Wang

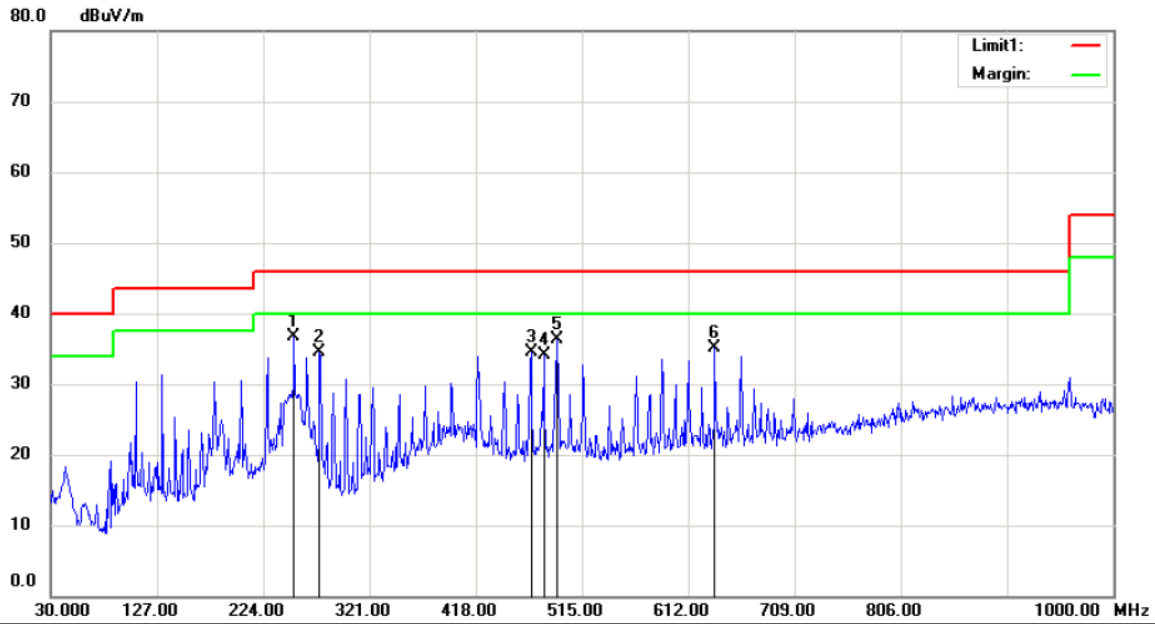


Site 3m Chamber #2 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2441
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	252.1300	49.96	-13.19	36.77	46.00	-9.23			QP
2		275.4100	46.89	-12.42	34.47	46.00	-11.53			QP
3		468.4400	43.32	-8.83	34.49	46.00	-11.51			QP
4		480.0800	42.16	-8.09	34.07	46.00	-11.93			QP
5		491.7200	43.56	-7.33	36.23	46.00	-9.77			QP
6		636.2500	40.18	-5.17	35.01	46.00	-10.99			QP

*:Maximum data x:Over limit l:over margin

Operator: Wang

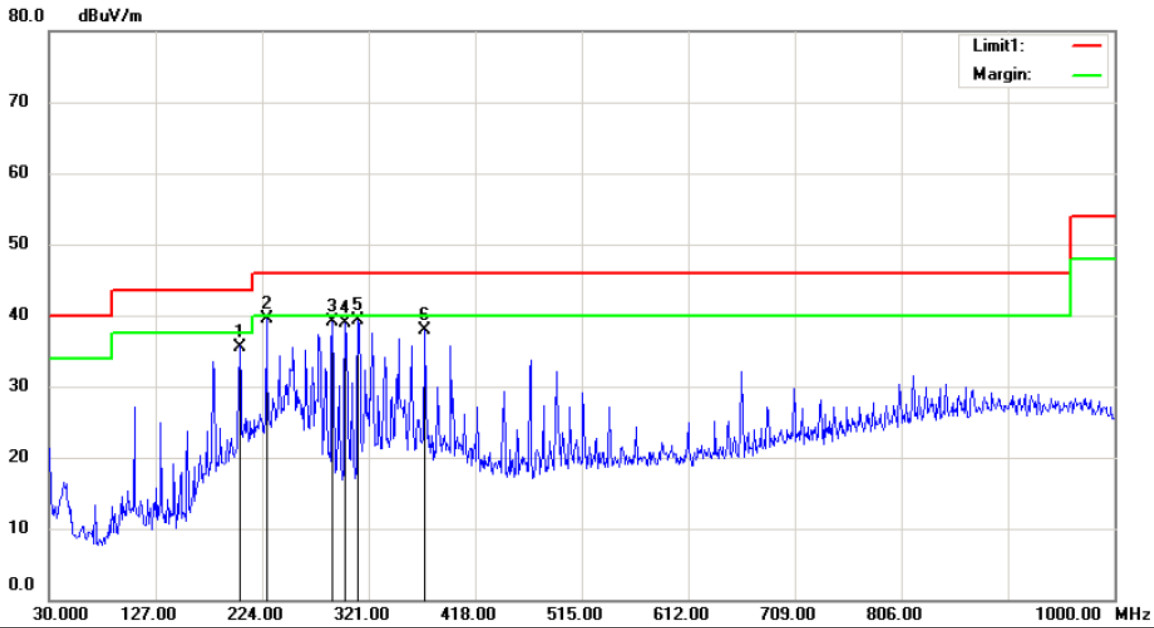


Site 3m Chamber #2 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2480
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		203.6300	52.29	-16.69	35.60	43.50	-7.90			QP
2	*	227.8800	54.34	-14.81	39.53	46.00	-6.47			QP
3		288.0200	51.51	-12.35	39.16	46.00	-6.84			QP
4		299.6600	52.08	-13.20	38.88	46.00	-7.12			QP
5		311.3000	51.93	-12.66	39.27	46.00	-6.73			QP
6		372.4100	47.44	-9.56	37.88	46.00	-8.12			QP

*:Maximum data x:Over limit !:over margin

Operator: Wang

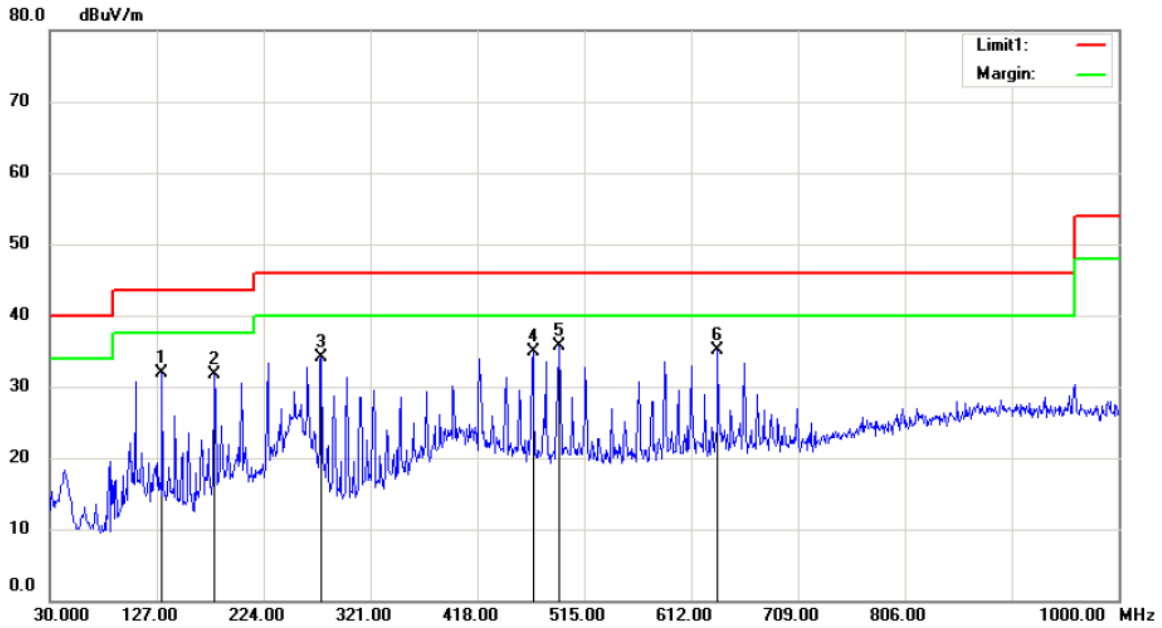

Site 3m Chamber #2 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: DC 5V Humidity: 53 %
 EUT:
 M/N: MET-1216
 Mode:2480
 Note: EUT: Portable Bluetooth Speaker with FM PLL Radio

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		131.8500	49.48	-17.65	31.83	43.50	-11.67			QP
2		179.3800	50.57	-18.85	31.72	43.50	-11.78			QP
3		276.3800	46.49	-12.38	34.11	46.00	-11.89			QP
4		468.4400	43.82	-8.83	34.99	46.00	-11.01			QP
5	*	491.7200	43.06	-7.33	35.73	46.00	-10.27			QP
6		636.2500	40.18	-5.17	35.01	46.00	-10.99			QP

*:Maximum data x:Over limit !:over margin

Operator: Wang

All the modulation modes were tested the data of the Worse result(GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Operation Mode: CH1: 2402MHz Test Date : October 27, 2014
 Frequency Range: 1-25GHz Temperature : 24℃
 Test Result: PASS Humidity : 53 %
 Measured Distance: 3m Test By: KK
 Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
5356.18	V	42.65	25.93	74.00	54.00	-31.35	-28.07
7790.37	V	46.22	28.68	74.00	54.00	-27.78	-25.32
7921.95	V	45.92	29.45	74.00	54.00	-28.08	-24.55
9962.73	V	51.97	34.36	74.00	54.00	-22.03	-19.64
11131.72	V	51.38	34.03	74.00	54.00	-22.62	-19.97
14133.37	V	50.47	34.35	74.00	54.00	-23.53	-19.65
5356.09	H	44.31	26.98	74.00	54.00	-29.69	-27.02
7790.26	H	48.28	31.29	74.00	54.00	-25.72	-22.71
7921.87	H	48.53	30.40	74.00	54.00	-25.47	-23.60
9960.15	H	50.60	33.45	74.00	54.00	-23.40	-20.55
10614.06	H	48.96	34.07	74.00	54.00	-25.04	-19.93
14460.30	H	47.95	41.81	74.00	54.00	-26.05	-12.19

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: CH40: 2441MHz Test Date : October 27, 2014
 Frequency Range: 1-25GHz Temperature : 24℃
 Test Result: PASS Humidity : 53 %
 Measured Distance: 3m Test By: KK
 Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
5356.21	V	42.33	25.79	74.00	54.00	-31.67	-28.21
7790.55	V	46.02	28.65	74.00	54.00	-27.98	-25.35
7922.01	V	45.63	29.44	74.00	54.00	-28.37	-24.56
9960.40	V	51.81	34.35	74.00	54.00	-22.19	-19.65
11136.69	V	50.95	34.00	74.00	54.00	-23.05	-20.00
14133.51	V	50.17	34.27	74.00	54.00	-23.83	-19.73
5356.29	H	43.96	26.94	74.00	54.00	-30.04	-27.06
7795.39	H	47.92	31.08	74.00	54.00	-26.08	-22.92
7917.17	H	48.26	30.20	74.00	54.00	-25.74	-23.80
9960.38	H	50.30	33.28	74.00	54.00	-23.70	-20.72
10619.12	H	48.63	33.69	74.00	54.00	-25.37	-20.31
14460.53	H	47.72	41.47	74.00	54.00	-26.28	-12.53

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: CH79: 2480MHz Test Date : October 27, 2014
 Frequency Range: 1-25GHz Temperature : 24℃
 Test Result: PASS Humidity : 53 %
 Measured Distance: 3m Test By: KK
 Test mode: GFSK

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
5361.11	V	42.79	26.27	74.00	54.00	-31.21	-27.73
7790.53	V	46.35	28.97	74.00	54.00	-27.65	-25.03
7921.95	V	46.13	29.90	74.00	54.00	-27.87	-24.10
9965.24	V	52.22	34.60	74.00	54.00	-21.78	-19.40
11131.93	V	51.37	34.48	74.00	54.00	-22.63	-19.52
14133.53	V	50.50	34.57	74.00	54.00	-23.50	-19.43
5356.27	H	44.35	27.11	74.00	54.00	-29.65	-26.89
7790.51	H	48.35	31.49	74.00	54.00	-25.65	-22.51
7922.01	H	48.65	30.62	74.00	54.00	-25.35	-23.38
9965.34	H	50.62	33.68	74.00	54.00	-23.38	-20.32
10614.12	H	49.21	34.26	74.00	54.00	-24.79	-19.74
14460.29	H	48.37	41.91	74.00	54.00	-25.63	-12.09

No others harmonics emissions are higher than 20dB below the limits of 47 CFR Part 15.247.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6. Channel Separation test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015


6.4 Measurement Results:



The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

Spectrum Detector: PK Test Date: October 27, 2014
 Test By: KK Temperature: 28 °C
 Test Result: PASS Humidity: 65 %
 Modulation: GFSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	700.67
40	2441	1000.00	700.00
79	2480	1000.00	700.67


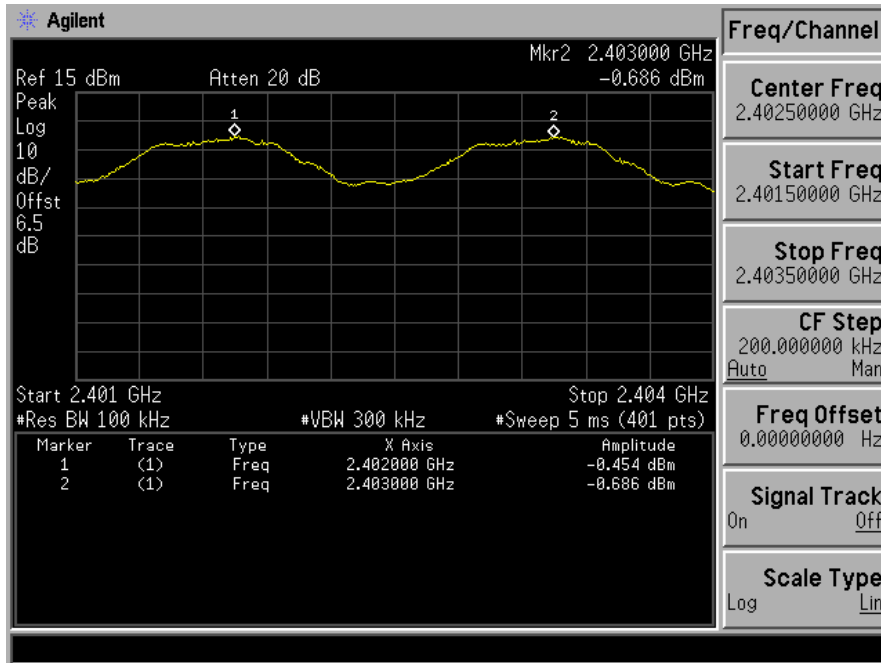


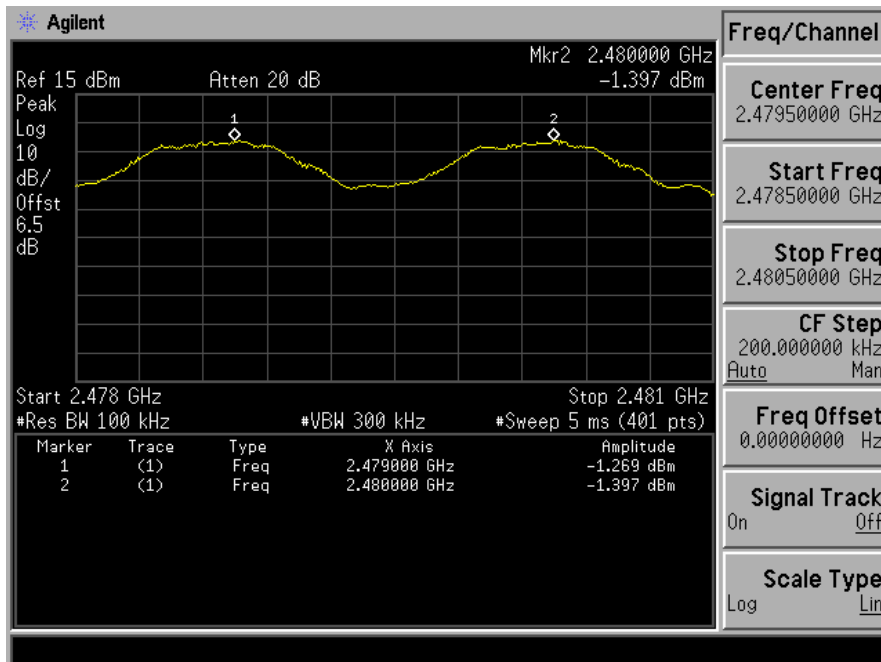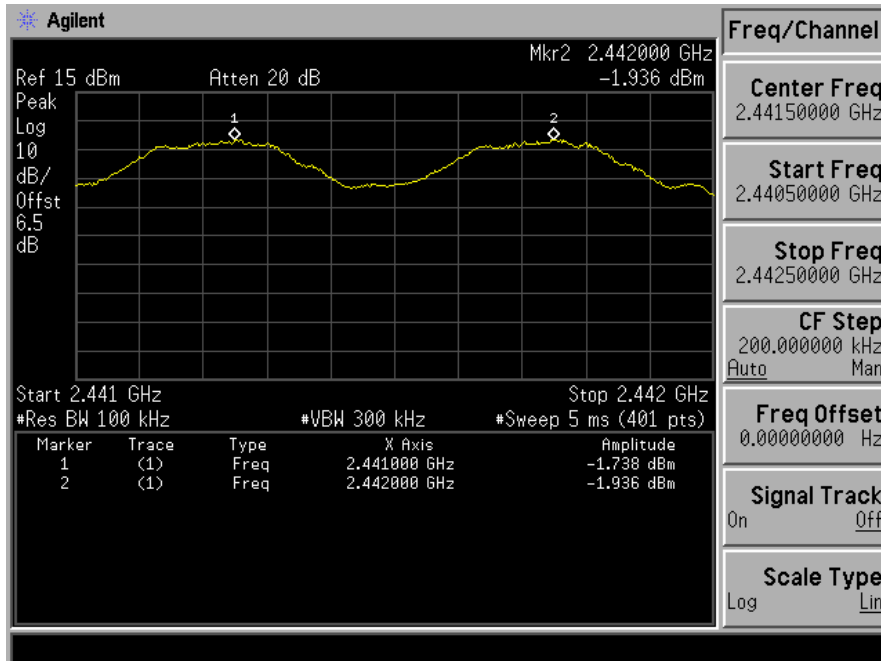

Spectrum Detector: PK Test Date: October 27, 2014
 Test By: KK Temperature: 28 °C
 Test Result: PASS Humidity: 65 %
 Modulation: 1/4Π-DQPSK


Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	798.00
40	2441	1000.00	769.33
79	2480	1000.00	775.33


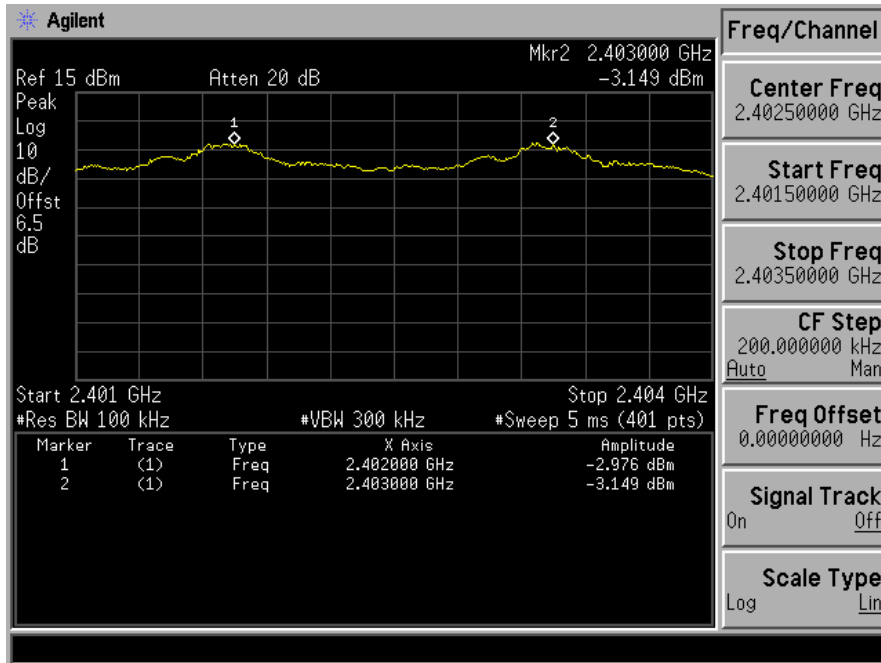


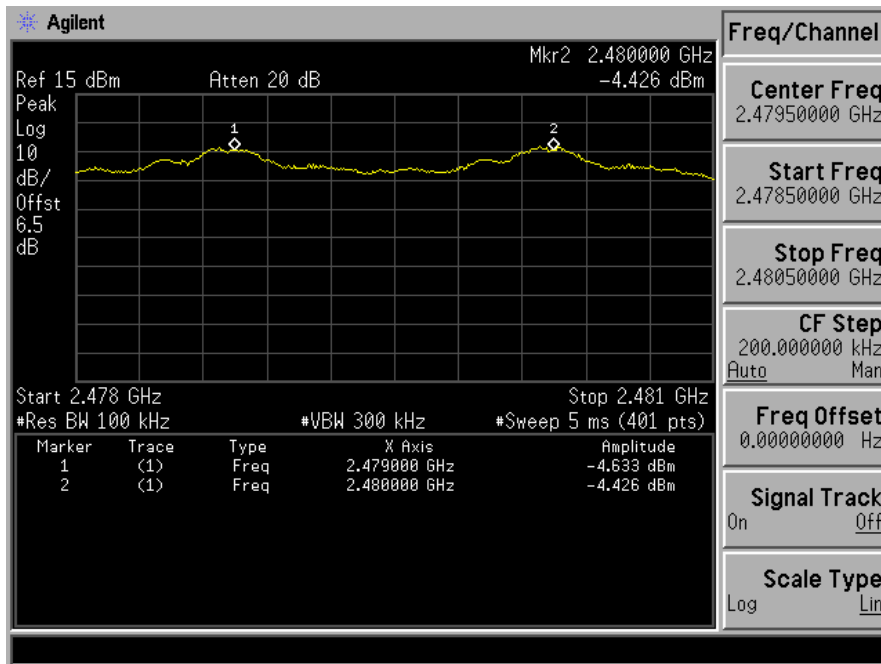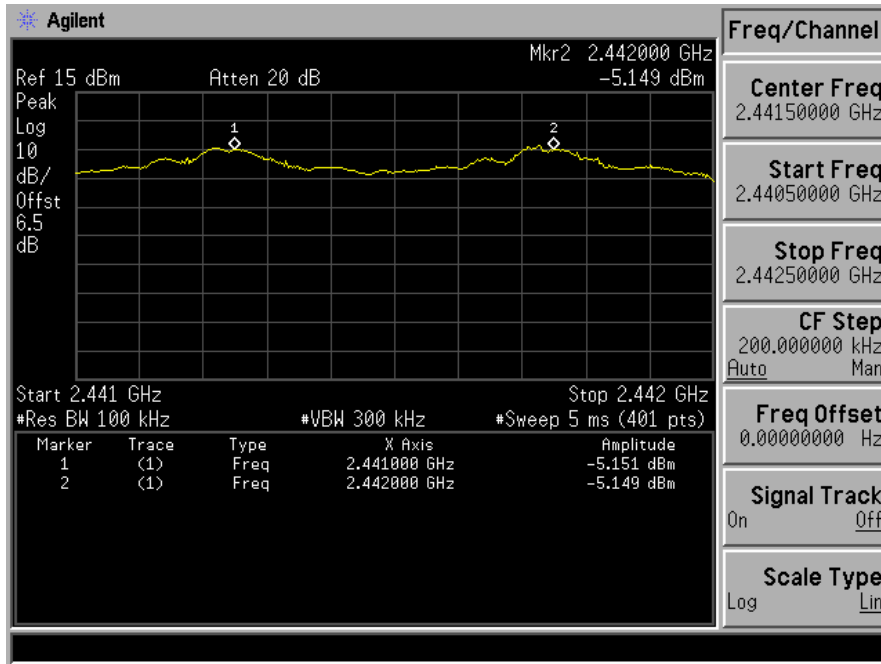

Spectrum Detector: PK Test Date: October 27, 2014
 Test By: KK Temperature: 28 °C
 Test Result: PASS Humidity: 65 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	799.33
40	2441	1000.00	810.00
79	2480	1000.00	806.67

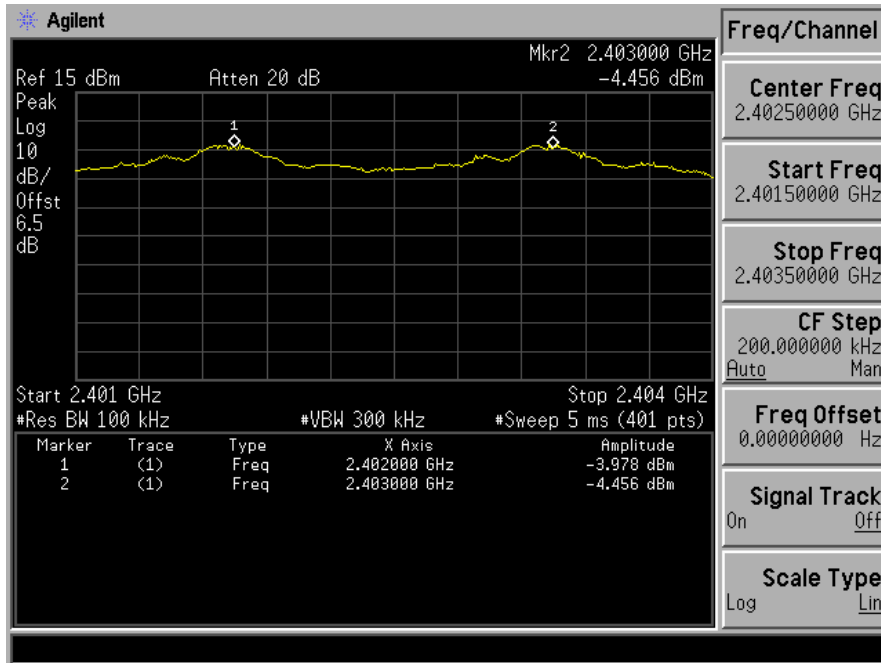

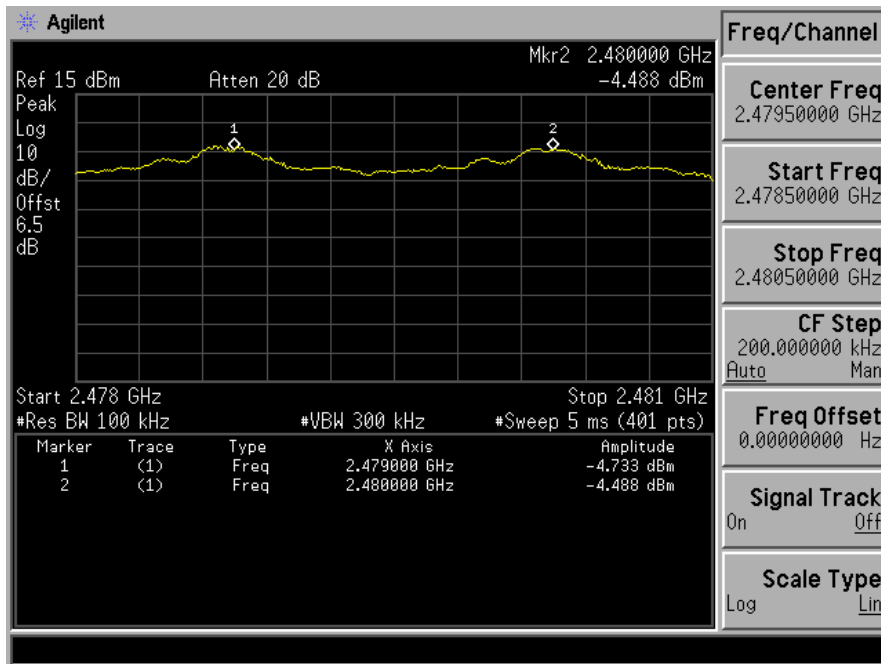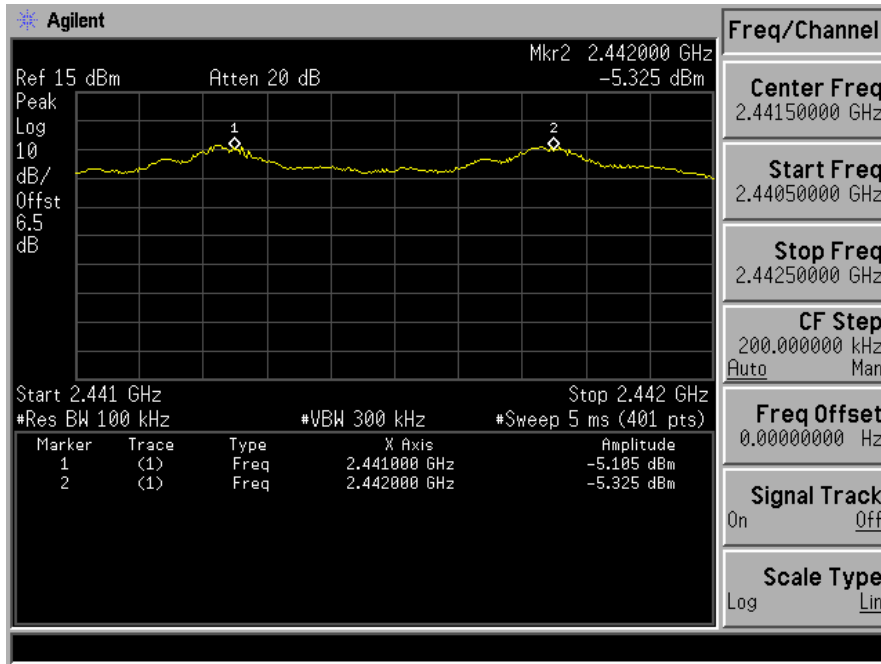


7. Bandwidth test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

7.4 Measurement Results:


The following table is the setting of spectrum analyzer.



EMI Test Receiver	Setting
Attenuation	Auto
Span	3MHz
RB	30kHz
VB	100kHz
Detector	Peak
Trace	Max hold

7.4.1. 20dB Bandwidth test data Chart:

Spectrum Detector:	PK	Test Date:	October 27, 2014
Test By:	KK	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	GFSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1051
40	2441	1050
79	2480	1051


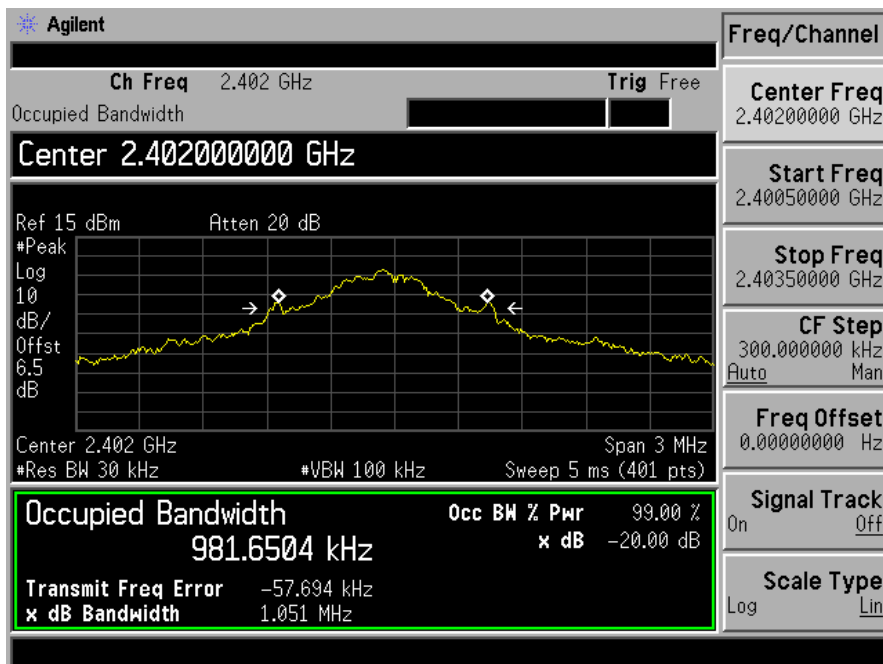


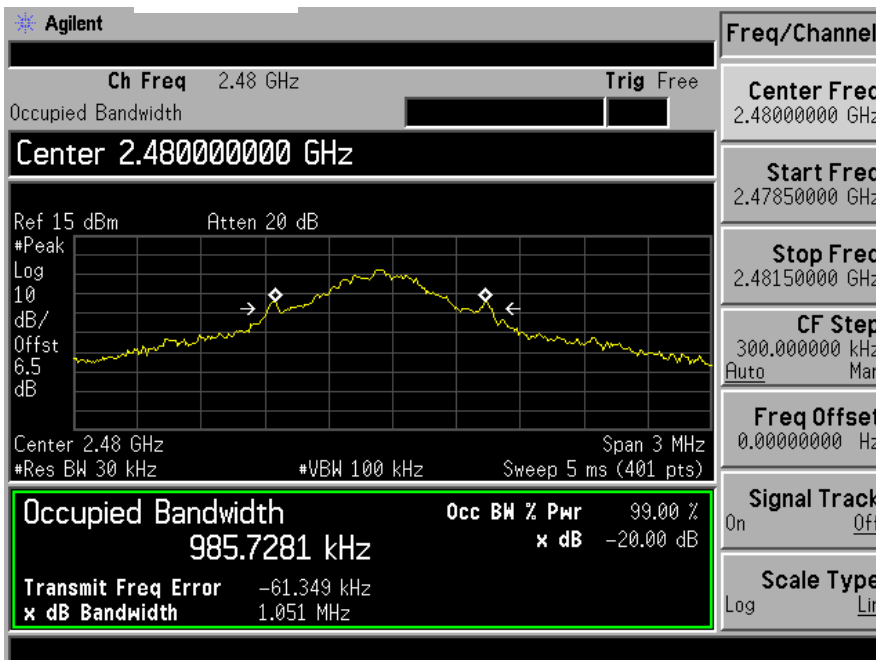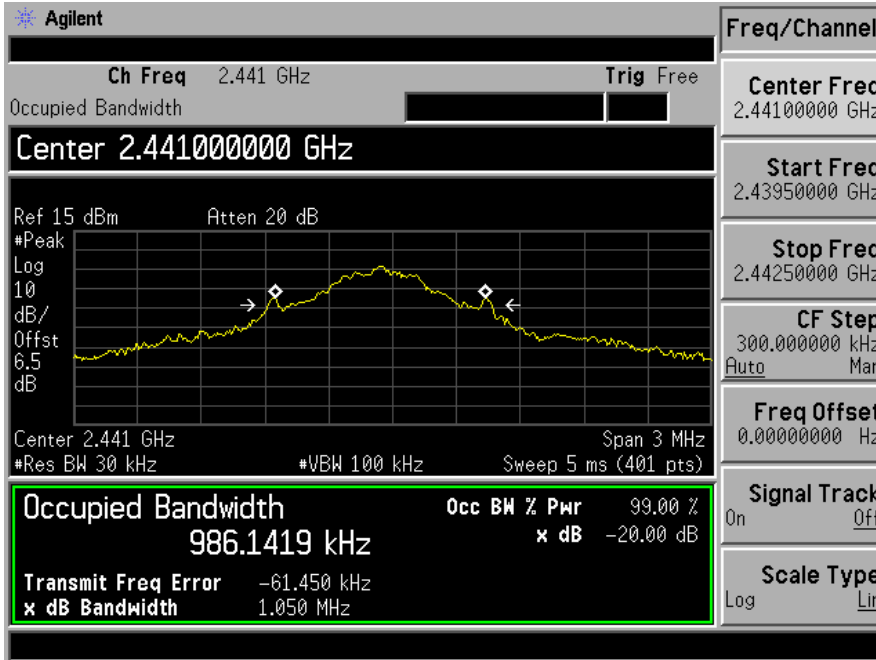

Spectrum Detector:	PK	Test Date:	October 27, 2014
Test By:	KK	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	1/4Π-DQPSK		


Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1197
40	2441	1154
79	2480	1163


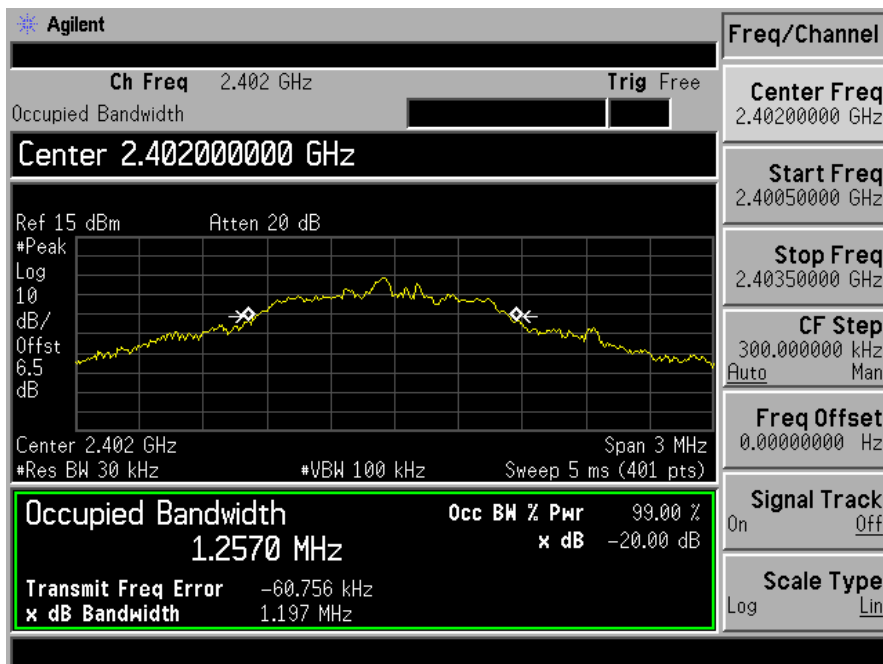


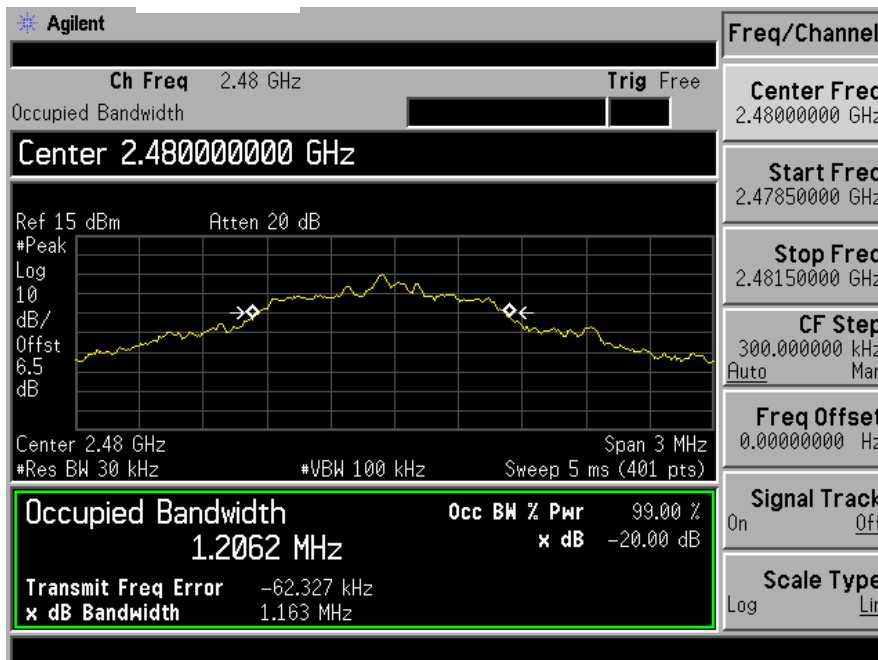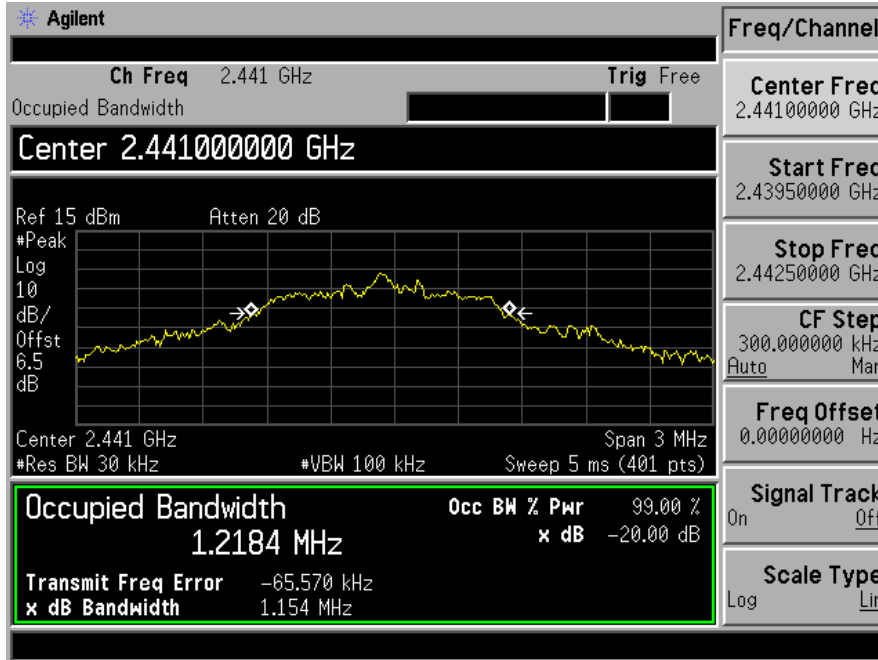

Spectrum Detector:	PK	Test Date:	October 27, 2014
Test By:	KK	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1199
40	2441	1215
79	2480	1210

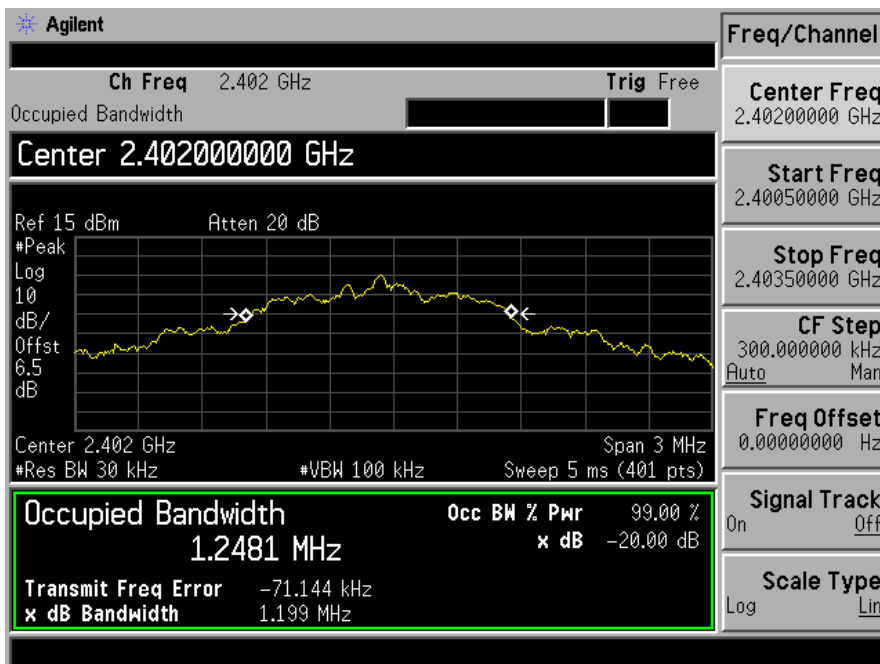

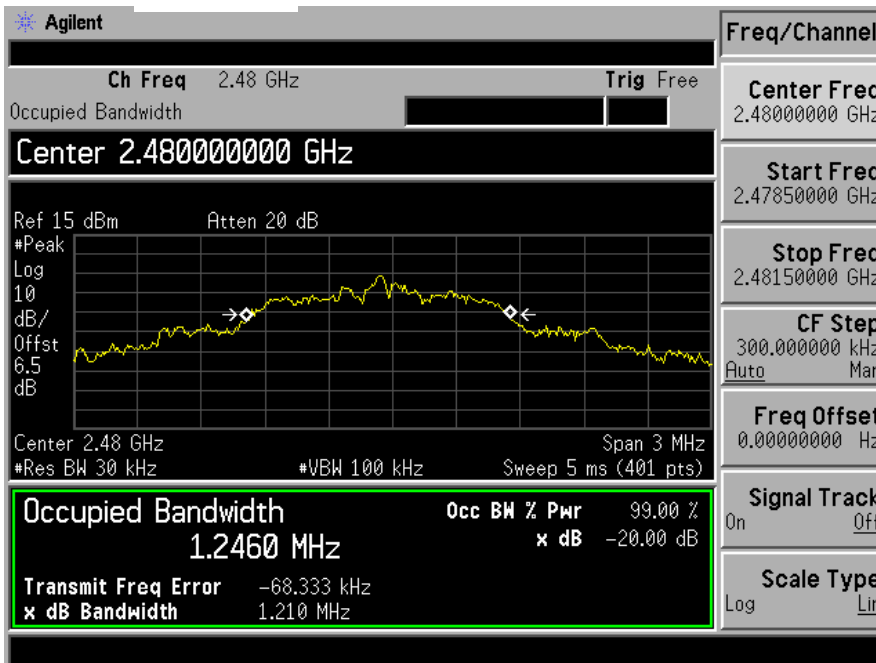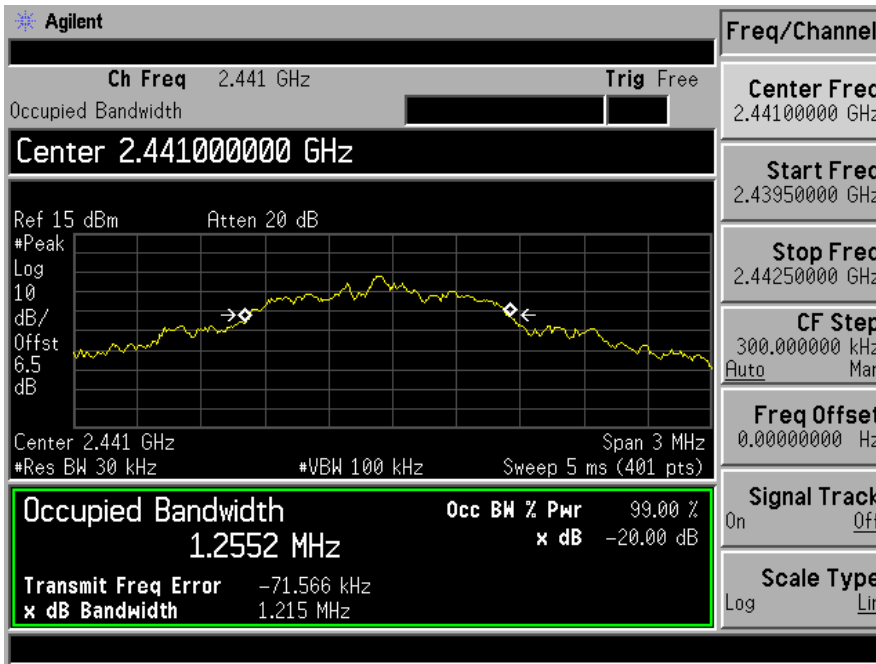

8. Quantity of Hopping Channel Test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

8.4 Measurement Results:

All the modulation modes were tested the data of the GFSK mode are recorded in the following pages.

Spectrum Detector:	PK	Test Date:	October 27, 2014
Test By:	KK	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480	79	> 15

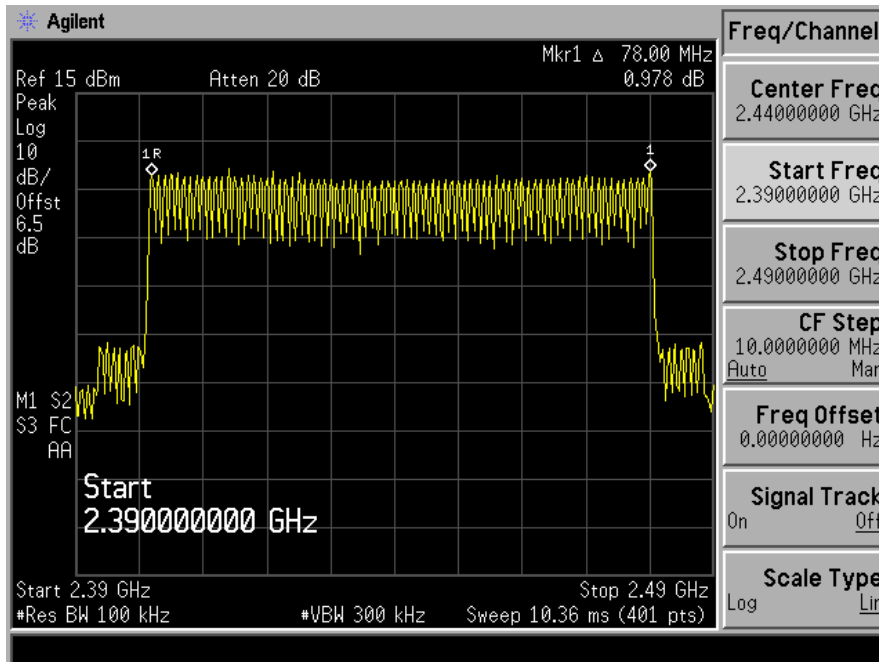


9. Time of Occupancy (Dwell Time) test

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015


9.4 Measurement Results:

(All the modulation modes were tested and the data of the worst mode (GFSK) are attached within report.)


Spectrum Detector: PK Test Date: October 27, 2014
 Test By: KK Temperature: 28 °C
 Test Result: PASS Humidity: 65 %

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.475	152.00	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.738	278.08	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.987	318.62	400


DH1

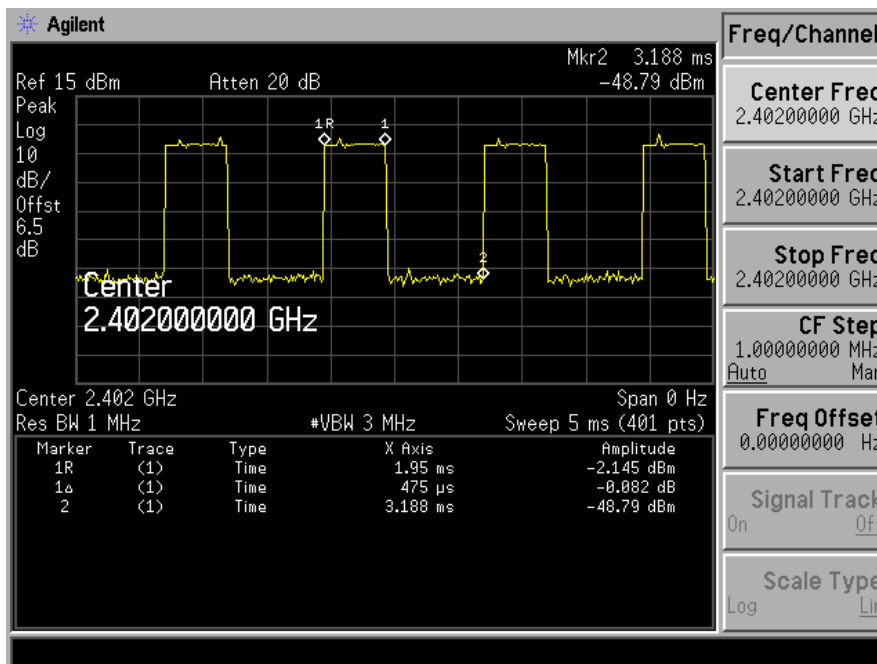

DH3

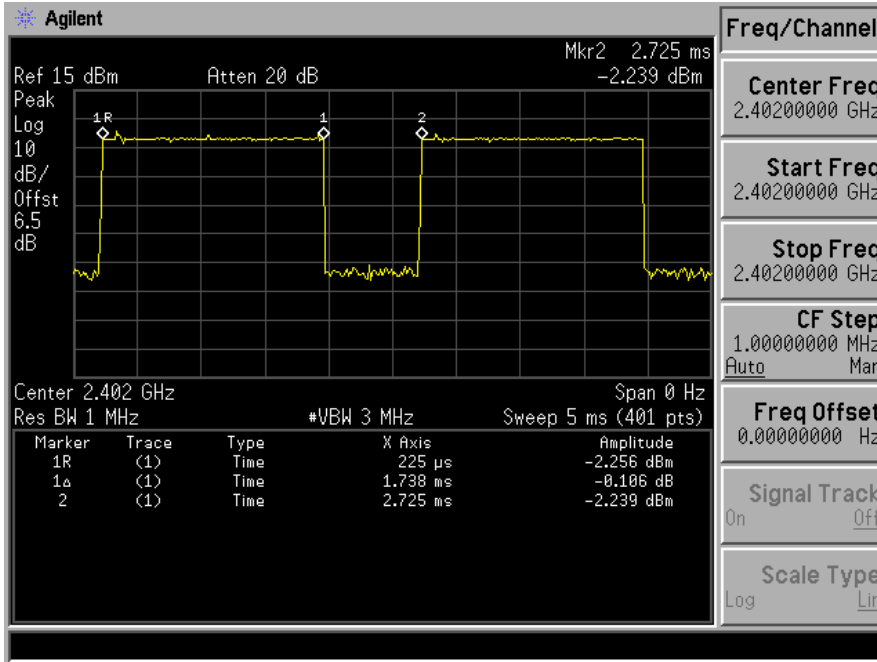

DH5

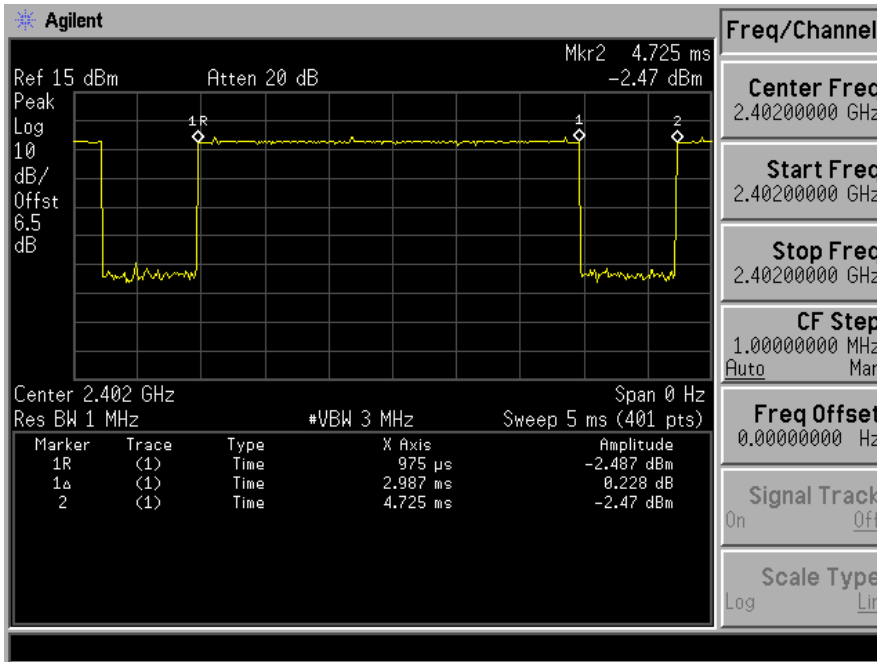

Spectrum Detector: PK Test Date: October 27, 2014
Test By: KK Temperature: 28 °C
Test Result: PASS Humidity: 65 %
Modulation: 8DPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	-1.29	125mW	PASS
40	2441.00	-1.16	125mW	PASS
79	2480.00	-0.68	125mW	PASS

11. Band EDGE test

11.1 Measurement Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of FCC Public Notice DA00-705 Measurement Guidelines.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
The RBW of test receiver/spectrum analyzer is 1MHz and the VBW for Peak detection of test receiver/spectrum analyzer is 10Hz above 1GHz.

The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

11.2 Test SET-UP (Block Diagram of Configuration)


As 5.2 Test set up (B) and (C)

11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

11.4 Measurement Results:

All the modes GFSK, 1/4π-DQPSK,8DPSK have been tested and the worst result (GFSK) recorded in the following pages and the others modulation methods do not exceed the limits.

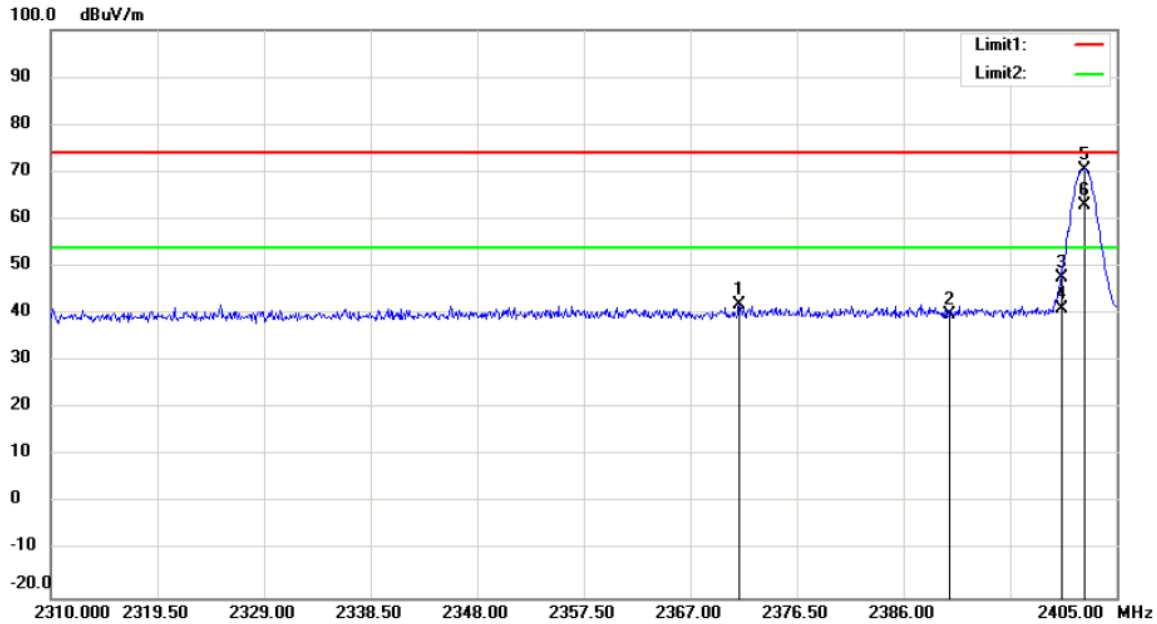


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:2402
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2371.370	49.18	-7.35	41.83	74.00	-32.17	peak			
2		2390.000	47.10	-7.18	39.92	74.00	-34.08	peak			
3		2400.000	54.87	-7.09	47.78	74.00	-26.22	peak			
4		2400.000	48.02	-7.09	40.93	54.00	-13.07	AVG			
5		2402.150	77.67	-7.07	70.60	74.00	-3.40	peak			
6	*	2402.150	70.16	-7.07	63.09	54.00	9.09	AVG			

*:Maximum data x:Over limit !:over margin

Operator: KK

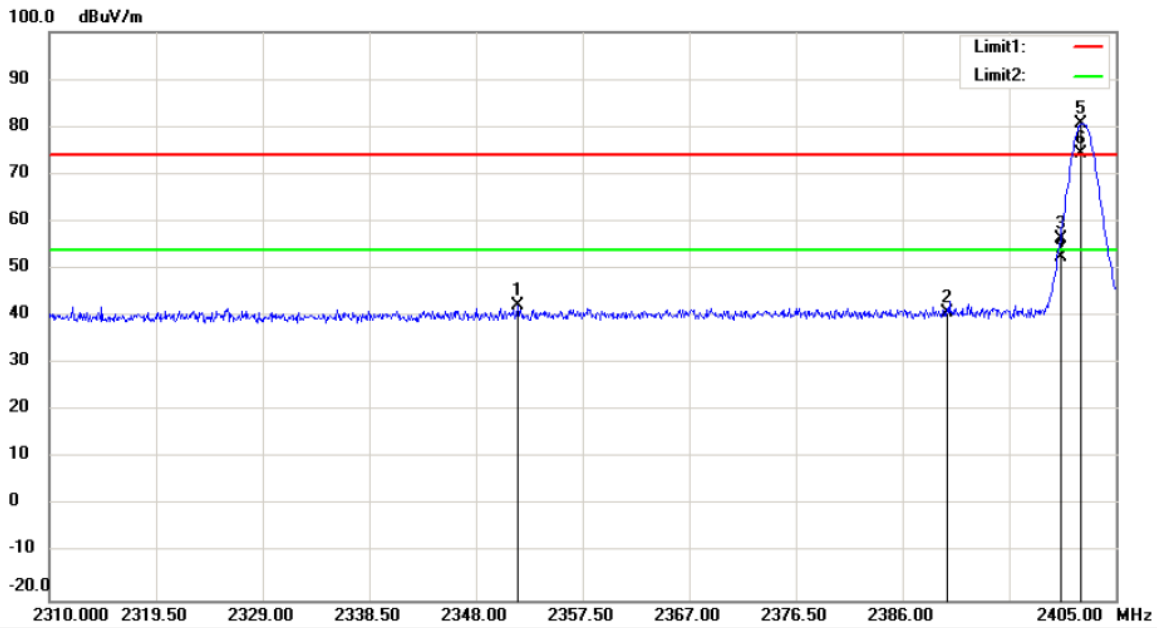


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2351.705	49.75	-7.52	42.23	74.00	-31.77			peak
2		2390.000	48.03	-7.18	40.85	74.00	-33.15			peak
3		2400.000	63.36	-7.09	56.27	74.00	-17.73			peak
4		2400.000	59.42	-7.09	52.33	54.00	-1.67			AVG
5	X	2401.865	87.65	-7.07	80.58	74.00	6.58			peak
6	*	2401.865	81.35	-7.07	74.28	54.00	20.28			AVG

*:Maximum data x:Over limit l:over margin

Operator: KK

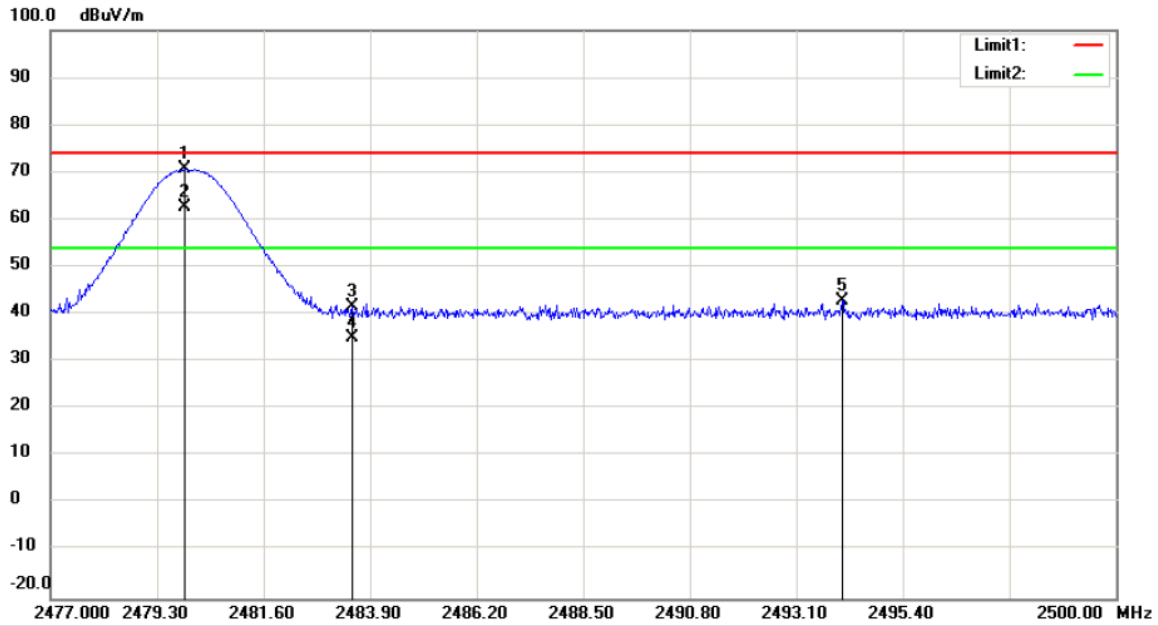


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2479.898	77.11	-6.39	70.72	74.00	-3.28			peak
2	*	2479.898	68.96	-6.39	62.57	54.00	8.57			AVG
3		2483.500	48.03	-6.36	41.67	74.00	-32.33			peak
4		2483.500	41.41	-6.36	35.05	54.00	-18.95			AVG
5		2494.089	49.26	-6.27	42.99	74.00	-31.01			peak

*:Maximum data x:Over limit !:over margin

Operator: KK

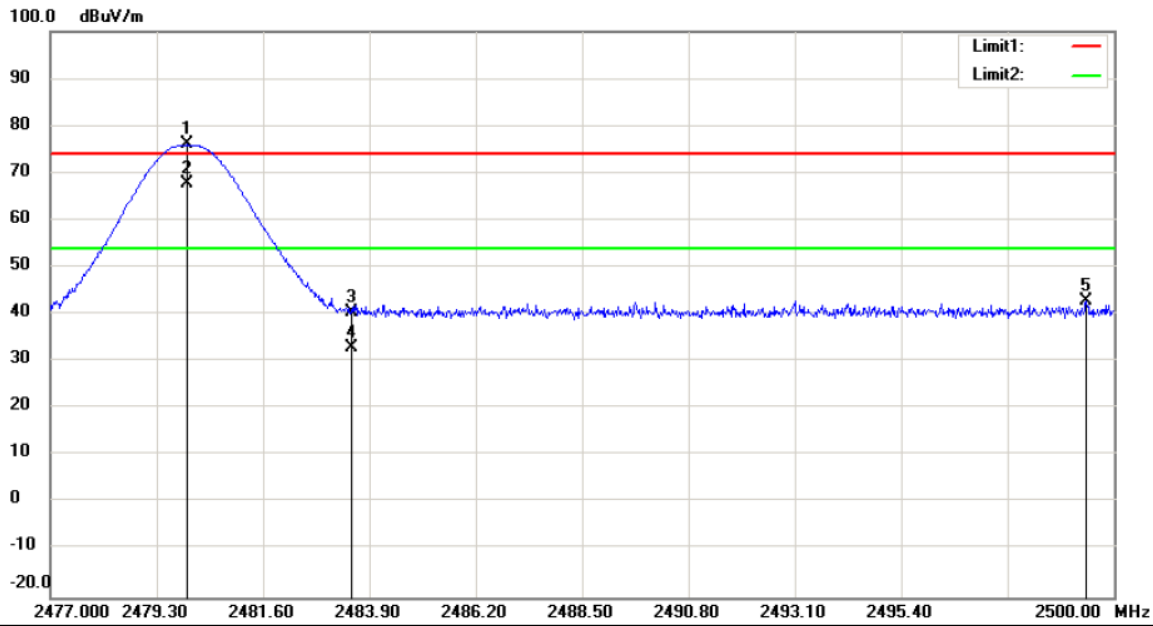


Site 3m Chamber #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:2480
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	X	2479.967	82.41	-6.39	76.02	74.00	2.02			peak
2	*	2479.967	74.25	-6.39	67.86	54.00	13.86			AVG
3		2483.500	46.92	-6.36	40.56	74.00	-33.44			peak
4		2483.500	39.20	-6.36	32.84	54.00	-21.16			AVG
5		2499.402	48.92	-6.21	42.71	74.00	-31.29			peak

*:Maximum data x:Over limit !:over margin

Operator: KK

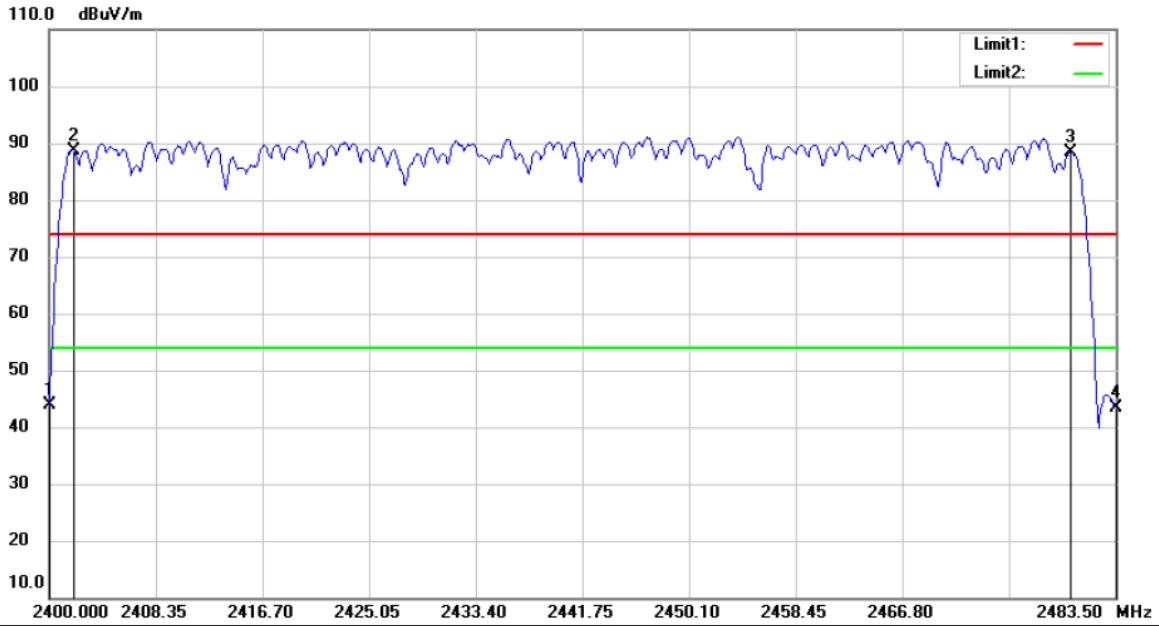


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:HOPPING
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2400.000	67.06	-23.06	44.00	74.00	-30.00			peak
2	*	2402.000	111.60	-23.04	88.56	74.00	14.56			peak
3	X	2480.000	110.93	-22.63	88.30	74.00	14.30			peak
4		2483.500	66.10	-22.62	43.48	74.00	-30.52			peak

*:Maximum data x:Over limit !:over margin

Operator: KK

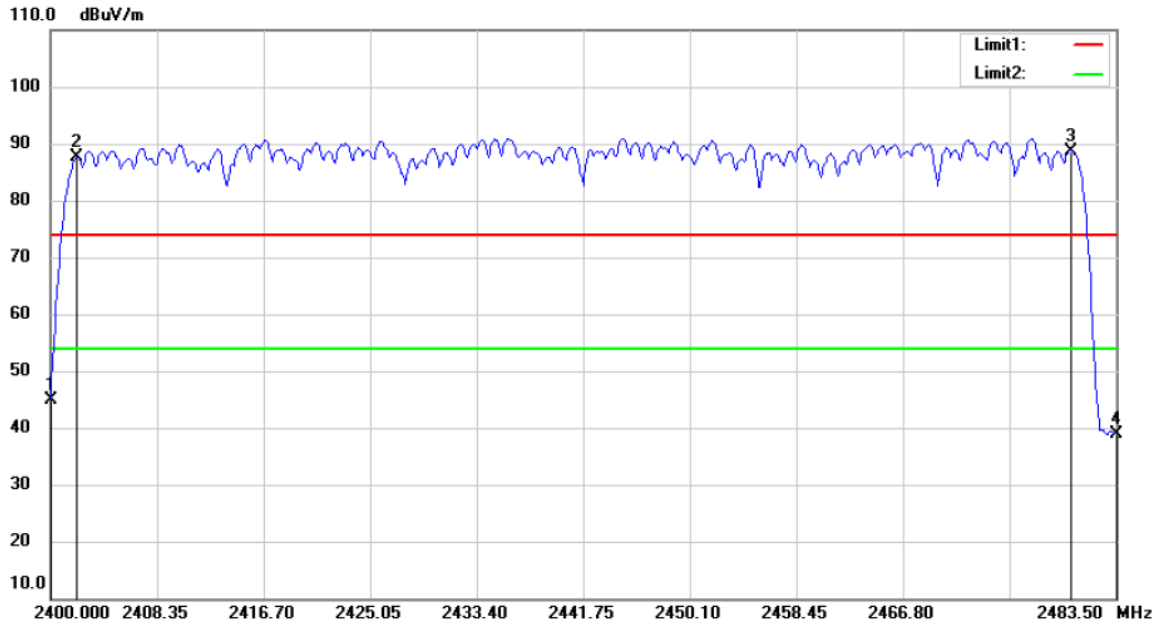

Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 CLASS B Power: Humidity: 53 %
 EUT:Portable Bluetooth Speaker with FM PLL Radio
 M/N:MET-1216
 Mode:HOPPING
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2400.000	67.83	-23.06	44.77	74.00	-29.23			peak
2	X	2402.000	110.72	-23.04	87.68	74.00	13.68			peak
3	*	2480.000	111.35	-22.63	88.72	74.00	14.72			peak
4		2483.500	61.38	-22.62	38.76	74.00	-35.24			peak

*:Maximum data x:Over limit !:over margin

Operator: KK

12. Antenna Port Emission

12.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/17/2014	05/16/2015

12.2 Measuring Instruments and setting

All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages and the others modulation methods do not exceed the limits.


The following table is the setting of spectrum analyzer.

EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

12.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, the limit was determined by attenuation 20dB of the RF peak power output.

12.4 Block Diagram of Test setup





12.5 Test Result

PASS.

All the modes GFSK, 1/4Π-DQPSK,8DPSK have been tested and the worst result (GFSK) recorded in the following pages and the others modulation methods do not exceed the limits.

TX 2480MHz

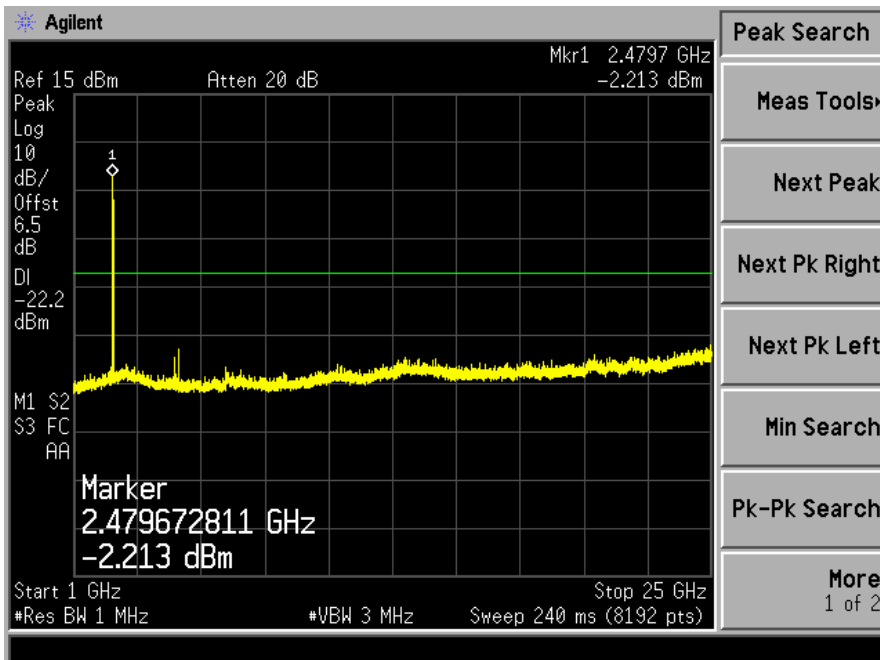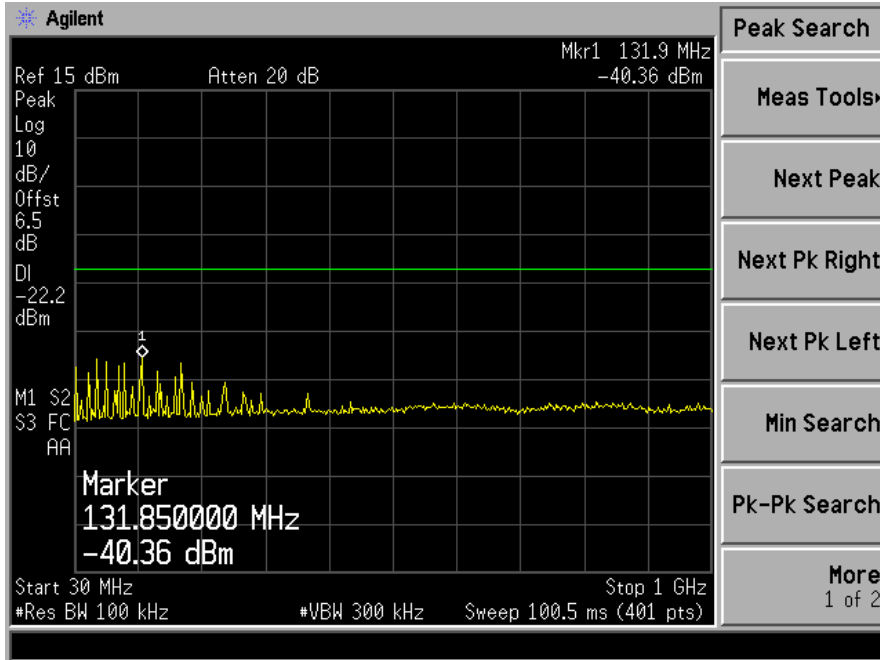

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.247

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The antenna of EUT is a PCB antenna. using a permanently attached antenna which is not replaceable, The antenna's gain is 0dBi and meets the requirement.