



TEST REPORT NO: RU1142/6217
COPY NO: 2
ISSUE NO: 1
FCC ID: SSULD20D300

**REPORT ON THE CERTIFICATION TESTING OF A
SOLUTIONS MADE EASY Ltd
LEAK TRACKER LD20-D WET SENSOR
WITH RESPECT TO
THE FCC RULES CFR 47, PART 15.249 January 2005
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 15th April 2005 – 18th April 2005

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ P GREEN
EMC PRODUCT
MANAGER

DATE: 5th December 2005 _____

Distribution:

Copy Nos: 1. SOLUTIONS MADE EASY Ltd
2. FCC EVALUATION LABORATORIES
3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

TRL COMPLIANCE SERVICES LTD EMC DIVISION

MOSS VIEW NIPE LANE UP HOLLAND WEST LANCASHIRE WN8 9PY UNITED KINGDOM

TELEPHONE +44 (0)1695 556666 FAX +44 (0)1695 557077

E-MAIL test@trl-emc.co.uk www.trlcompliance.com



FS 21805



0728

CONTENTS

	PAGE
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	5
TEST RESULTS	6-8

ANNEX

PHOTOGRAPHS	A
-------------	---

- PHOTOGRAPH No. 1: Test setup
- PHOTOGRAPH No. 2: Transmitter front view
- PHOTOGRAPH No. 3: Transmitter rear view
- PHOTOGRAPH No. 4: Transmitter PCB track side
- PHOTOGRAPH No. 5: Transmitter PCB component side

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
BAND OCCUPANCY PLOT	C
SCAN PLOT(s)	D

Notes:

1. Component failure during test	YES []	NO [X]
2. If Yes, details of failure:		
3. The facilities used for the testing of the product contain in this report are FCC Listed.		
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.		



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: SSULD20D300

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15.249 January 2005

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: LEAK TRACKER LD20-D WET SENSOR

EQUIPMENT SERIAL No: Engineering Sample

EQUIPMENT TYPE: Water sensor

PRODUCT USE: Leak Detection

CARRIER EMISSION: 5.31 mV/m @ 3m

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: Not applicable

FREQUENCY OF OPERATION: 910.0MHz

CHANNEL SPACING: Not applicable, Wideband

NUMBER OF CHANNELS: Not applicable

FREQUENCY GENERATION: SAW Resonator Crystal Synthesiser

MODULATION METHOD: Amplitude Digital Angle

POWER SOURCE(s): +9Vdc

TEST DATE(s): 15th April 2005 – 18th April 2005

ORDER No(s): 800015

APPLICANT: Solutions Made Easy Ltd

ADDRESS: 261 Bath Road
Bawdrip
Somerset
TA7 8PW

TESTED BY: D WINSTANLEY

APPROVED BY: P GREEN
EMC PRODUCT
MANAGER

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): LEAK TRACKER LD20-D WET SENSOR

EQUIPMENT TYPE: Leak Detector

SERIAL NUMBER OF EUT: Engineering Sample

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15.249 January 2005

TEST RESULT: COMPLIANT Yes [X]
No []

APPLICANT'S CATEGORY: MANUFACTURER [X]
IMPORTER []
DISTRIBUTOR []
TEST HOUSE []
AGENT []

APPLICANT'S ORDER No(s): 800015

APPLICANT'S CONTACT PERSON(s): Mr M Lee

E-mail address: mike@soleeasy.co.uk

APPLICANT: Solutions Made Easy Ltd

ADDRESS: 261 Bath Road
Bawdrip
Somerset
TA7 8PW

TEL: +44 (0) 1278 686160

FAX: +44 (0) 1278 684077

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRL EMC

UKAS ACCREDITATION No: 0728

TEST DATE(s): 15th April 2005 – 18th April 2005

TEST REPORT No: RU1142/6217

EQUIPMENT TEST / EXAMINATIONS REQUIRED

TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
Intentional Emission Frequency:	15.249(a)	Quasi Peak	YES
Intentional Emission Field Strength:	15.249(a)	Quasi Peak	YES
Intentional Emission Band Occupancy:	15.215	Peak	YES
Intentional Emission ERP (mW):	N/A	-	NO
Spurious Emissions – Conducted:	15.207	-	NO
Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak	YES
Spurious Emissions – Radiated >1000MHz:	15.209 15.249(a)	Average	YES
Maximum Frequency of Search:	15.33	-	YES
Antenna Arrangements Integral:	15.203	-	YES
Antenna Arrangements External Connector:	15.204	-	YES
Restricted Bands	15.205	-	YES
Extrapolation Factor	15.31(f)	-	YES

2. Product Use:	Leak Detection
3. Emission Designator:	
4. Duty Cycle:	<100%
5. Transmitter bit or pulse rate and level:	bps
6. Temperatures:	Ambient (T _{nom}) 8°C

Note: V_{nom} voltages are as stated above unless otherwise shown on the test report page

8. Equipment Category: Single channel [X]
Two channel []
Multi-channel []

9. Channel spacing: Narrowband []
Wideband [X]

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature	=	28°C(<1GHz)	3m measurements <1GHz	[X]
Relative humidity	=	30%(<1GHz),	0.3m measurements >1GHz	[X]
Conditions	=	Open Area Test Site (OATS)	3m extrapolated from 0.3m	[X]
Supply voltage	=	+9Vdc		
Channel number	=	1		

	FREQ. (MHz)	MEAS. Rx. (dB μ V)	CABLE LOSS (dB)	ANT FACT	FIELD STRENGTH (dB μ V/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (μ V/m)	LIMIT (μ V/m)
30MHz - 88MHz								
88MHz - 216MHz								
216MHz - 960MHz								
960MHz - 1GHz								
1GHz - 5GHz	1819.80 2730.00(R) 3639.58(R) 4550.00	43.09 40.26 40.06 34.09	0.85 0.99 0.87 1.50	26.9 29.8 31.8 32.7	70.84 71.05 72.73 68.29	-20 -20 -20 -20	348.34 356.86 433.01 259.71	500 500 500 500
Limits	1.705MHz to 30MHz				30 μ V/m	@ 30m		
	30MHz to 88MHz				100 μ V/m	@ 3m		
	88MHz to 216MHz				150 μ V/m	@ 3m		
	216MHz to 960MHz				200 μ V/m	@ 3m		
	960MHz to 1GHz				500 μ V/m	@ 3m		
	1GHz to 5GHz				500 μ V/m	@ 3m		

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 20dB from 0.3m to 3m, as per Part 15.31f
- 4 Measurements >1GHz @ 0.3m as per Part 15.31f(1)
- 5 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 6 Receiver detector >1GHz = Average, 1MHz resolution bandwidth
- 7 New batteries used for battery powered products.
- 8 (R) Indicates restricted bands, as per Part 15.205
- 9 Results not within 10 dB's of limit are not necessarily recorded
- 10 See annex D for scan data
- 11 Unit containing modified software continuously transmitting a modulated carrier.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	X
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	X

TRANSMITTER TESTS

TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.249 January 2005

Ambient temperature	=	8°C(<1GHz),	3m measurements @ fc	[X]
Relative humidity	=	47%(<1GHz),	10m measurements @ fc	[]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[]
Supply voltage	=	+9Vdc	30m extrapolated from 3m	[]
Channel number	=	1	30m extrapolated from 10m	[]

FREQ. (MHz)	MEASUREMENT Rx. READING (dB μ V)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dB μ V/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (mV/m)
910.0	49.7	3.9	20.9	74.5	-	5.3088
Limit value @ fc			50 (mV/m)			
Band occupancy @ -20dBc			f lower		f higher	
			909.742 MHz		910.196 MHz	

See spectrum analyser plot – Annex C

Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Receiver detector @ fc = Quasi Peak 120kHz bandwidth
- 3 When battery powered the EUT was powered with new batteries
- 4 Unit containing modified software continuously transmitting a modulated carrier.

Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances 3m
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded


The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.249 January 2005 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONE ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONE 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

ANNEX A
PHOTOGRAPHS

PHOTOGRAPH No. 1

TEST SETUP

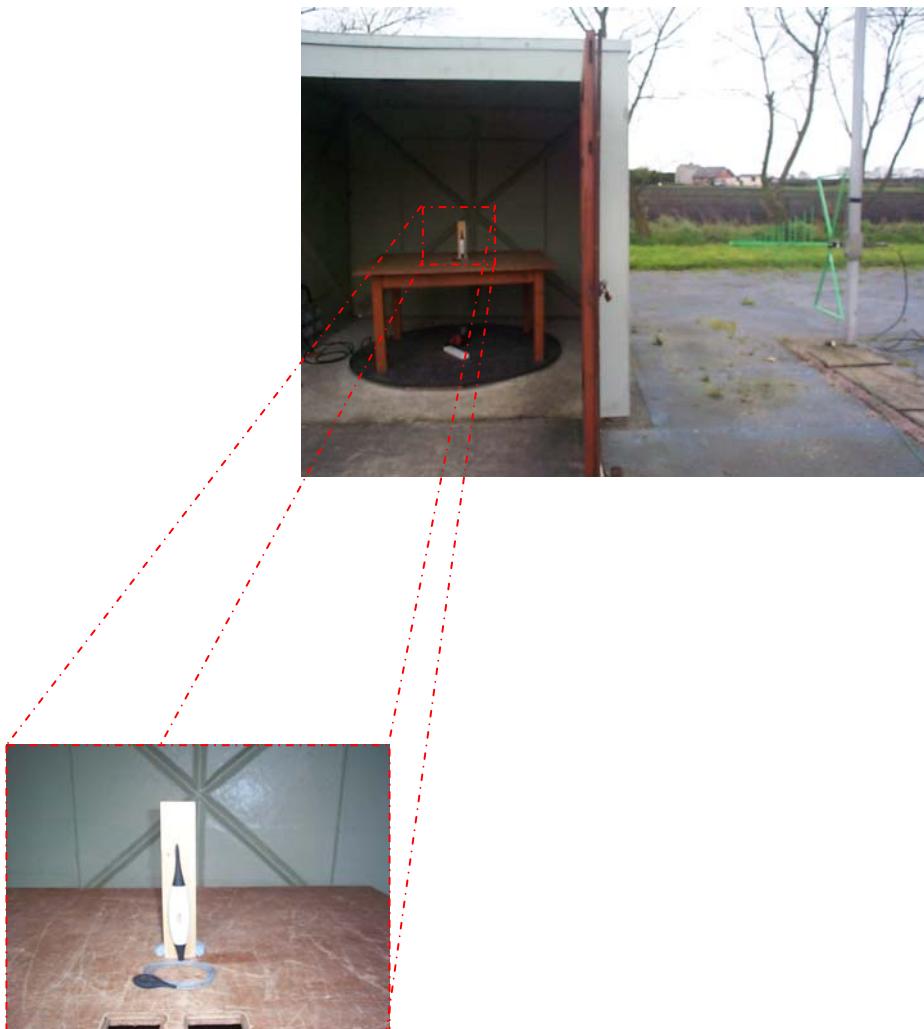

PHOTOGRAPH No. 2

TRANSMITTER FRONT VIEW




PHOTOGRAPH No. 3

TRANSMITTER REAR VIEW




PHOTOGRAPH No. 4

TRANSMITTER PCB TRACK SIDE

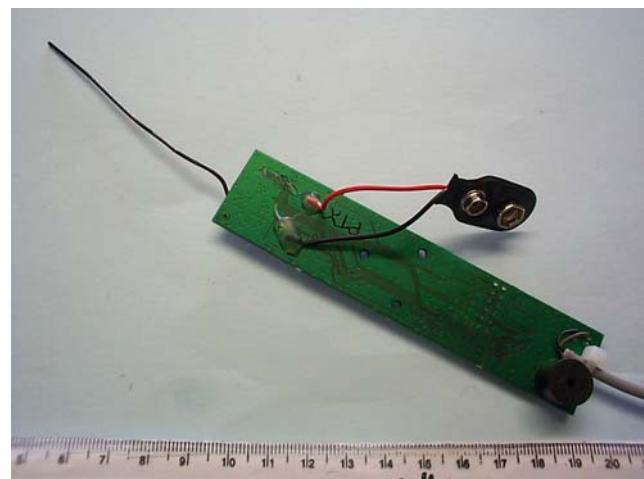

PHOTOGRAPH No. 5

TRANSMITTER PCB COMPONENT SIDE

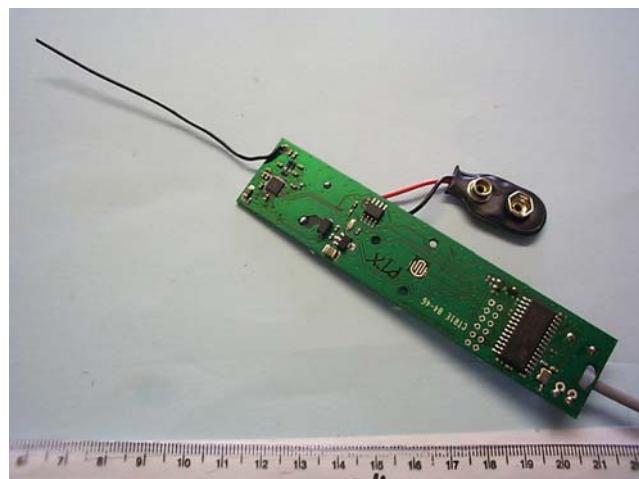


ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[X]
d.	ALTERNATIVE TRADE P GREEN DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[X]
		-	DECLARATION	[X]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
BANDWIDTH PLOT

BANDWIDTH PLOT

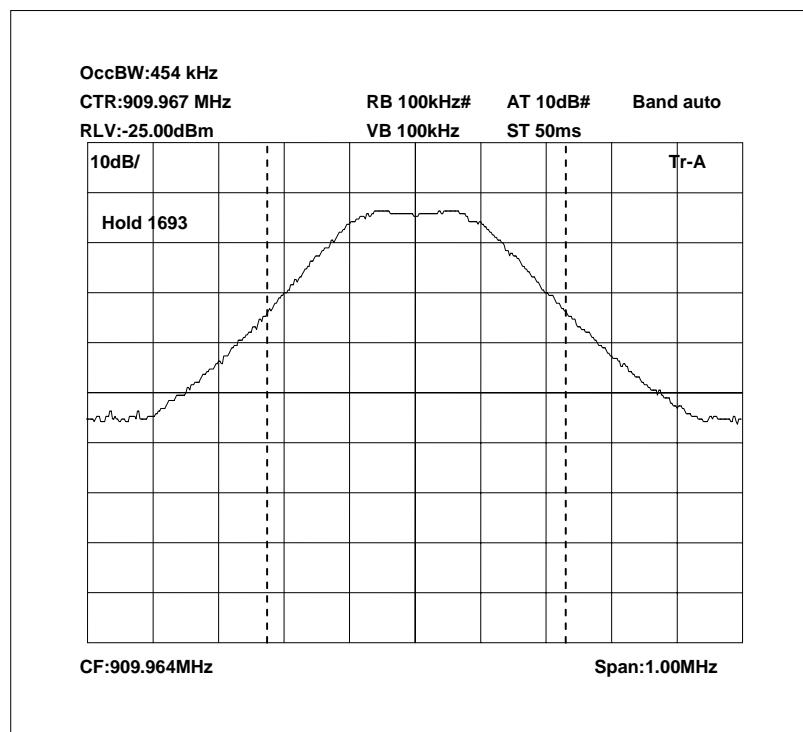


f_l = 909.742 MHz
 f_h = 910.196 MHz
Occupied bandwidth = 454 kHz

ANNEX D
SCAN PLOT(s)

E-Field Radiation

EUT: Wet Sensor
 Manuf: SME
 Op Cond: 3m Indoor Prescan
 Operator: D Winstanley
 Test Spec: CFR47 FCC part 15.109 (Class B)
 Comment: Unit on Permanent Carrier. +9Vdc
 RX Antenna Vertical.

Scan Settings		(1 Range)				Receiver Settings				
		Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Start	Stop	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON		60dB	
Transducer	No.	Start	Stop		Name					
1	15	30MHz	1000MHz		TRLUH72					
	22	30MHz	1000MHz		UH93					
Final Measurement:		Detector:	X QP							
		Meas Time:	2sec							
		Subranges:	50							
		Acc Margin:	10 dB							

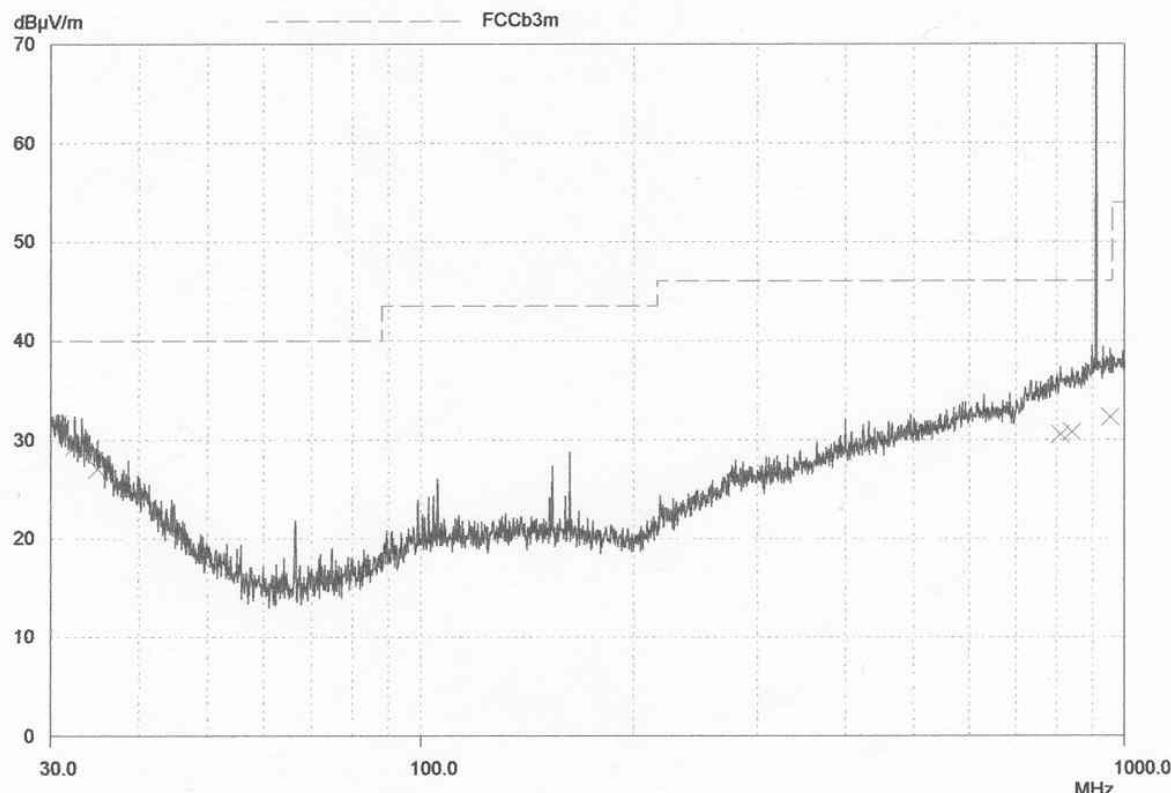

PAGE 1

E-Field Radiation

EUT: Wet Sensor
 Manuf: SME
 Op Cond: 3m Indoor Prescan
 Operator: D Winstanley
 Test Spec: CFR47 FCC part 15.109 (Class B)
 Comment: Unit on Permanent Receive Mode. +9Vdc
 RX Antenna Vertical.

Scan Settings		(1 Range)			Receiver Settings				
		Frequencies			Detector	M-Time	Atten	Preamp	OpRge
Start	Stop	Step	IF BW	PK	1msec	Auto	ON	60dB	
30MHz	1000MHz	50kHz	120kHz						
Transducer	No.	Start	Stop		Name				
1	15	30MHz	1000MHz	TRLUH72					
	22	30MHz	1000MHz	UH93					
Prescan Measurement:		Detector:	X PK						
		Meas Time:	see scan settings						
		Subranges:	50						
		Acc Margin:	10 dB						

