

## Electrical Specification


|                       |               |
|-----------------------|---------------|
| Frequency range       | 2490~2690 MHz |
| Polarization          | Vertical      |
| Gain                  | 8 dBi         |
| Horizontal beam width | 70°           |
| Vertical beam width   | 65°           |
| VSWR                  | ≤ 1.5 : 1     |
| Impedance             | 50 Ohm        |
| Max. Power rating     | 5 W           |




## Mechanical Specifications

|                         |                      |
|-------------------------|----------------------|
| Dimension (L x W x H)   | 138 x 108 x 26 mm    |
| Weight (excl. Brackets) | 0.25 kg              |
| Connector               | 1 x N- Female        |
| Mounting                | Wall                 |
| Tilt                    | Ver. 15° / Hor. 360° |


## Installation

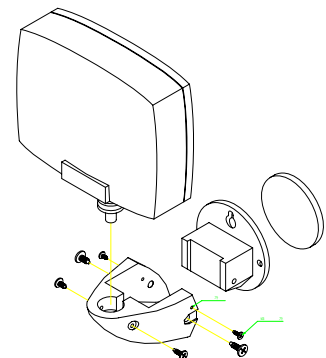

## Radiation Pattern

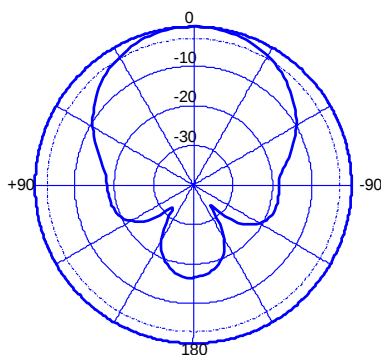

**Horizontal Pattern**

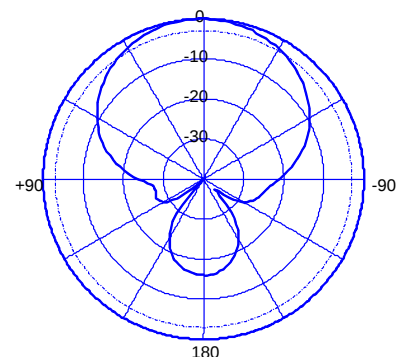

**Vertical Pattern**