

**TEST REPORT**

<b>Applicant:</b>	Klipsch L.L.C.
<b>Address of Applicant:</b>	3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, United States.
<b>Manufacturer:</b>	Klipsch L.L.C.
<b>Address of Manufacturer:</b>	3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, United States.
<b>Product name:</b>	Powered Monitor Speakers
<b>Model:</b>	R-14PM
<b>Rating(s):</b>	100-240Vac, 50/60Hz, 80W
<b>Trademark:</b>	Klipsch
<b>FCC register number:</b>	935596
<b>IC register number:</b>	8368A-1
<b>FCC ID:</b>	STI-R14PM
<b>Standards:</b>	FCC Part15 subpart B: 2017 ICES(Interference-Causing Equipment Standard)-003 Issue 5 April 2017
<b>Date of Receipt:</b>	2017-06-08
<b>Date of Test:</b>	2017-06-08~2017-06-26
<b>Date of Issue:</b>	2017-06-26
<b>Test Result</b>	<b>Pass*</b>

\* In the configuration tested, the test item complied with the standards specified above.

**Authorized for issue by:****Test by:****Reviewed by:**

Jun.26, 2017 Jummy Qiu

Jun.26, 2017

Pauler Li

Project Engineer

Project Manager

Date

Name/Position

Signature

Date

Name/Position

Signature

This report is for the exclusive use of ITL's client and is provided pursuant to the agreement between ITL assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the ITL name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by ITL. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an ITL certification program. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

**Testing Laboratory information:**

Testing Laboratory Name ..... : I-Test Laboratory  
Address ..... : 1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City,  
Guangzhou, Guangdong Province, P.R. China  
Testing location ..... : Same as above  
Tel..... : 0086-20-32209330  
Fax ..... : 0086-20-62824387  
E-mail ..... : itl@i-testlab.com

**Possible test case verdicts:**

- test case does not apply to the test object... : N/A
- test object does meet the requirement..... : P (Pass)
- test object does not meet the requirement . : F (Fail)

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**General product information:**

/

**Test Summary:**

The following standards have been applied to ensure the product conforms with the protection requirements of the council directive FCC part 15B / ICES-003.

<b>Electromagnetic Emissions</b>				
<b>Test Item</b>	<b>Test Standard</b>	<b>Test Method</b>	<b>Class/Severity</b>	<b>Result</b>
Conducted Emission(0.15-30MHz)	FCC part 15.107/ ICES-003	ANSI C63.4:2014/ ICES-003	Class B	PASS
Radiated Emission(30-1000MHz)	FCC part 15.109/ ICES-003	ANSI C63.4:2014/ ICES-003	Class B	PASS

**Test Location:**

All the tests were performed in GuangZhou ITL Co., Ltd. Which is located at 1-2 floor, South Block, Building A2 , No 3 Keyan Lu, Science City, Guangzhou, Guangdong Province, P.R. China

Tel: 0086-20-32209330, Fax: 0086-20-62824387

No test is subcontracted

---

**TABLE OF CONTENTS**

<i>TEST REPORT</i> .....	1
<b>Test Summary:</b> .....	3
<b>Test Location:</b> .....	3
<b>TABLE OF CONTENTS</b> .....	4
<b>Section 1 General Information and Equipment Used</b> .....	5
1.1 Client Information.....	5
1.2 EUT General and Technical Descriptions .....	5
1.3 Support Equipment(s) and Test Configuration.....	5
1.3.1 Details of Support Equipment(s) .....	5
1.3.2 Working State of EUT.....	5
1.3.3 Block Diagram of Test Configuration .....	5
1.4 Equipment Used during Test .....	6
<b>Section 2 Emission Test Results</b> .....	7
2.1 Conducted Emission at Mains Terminals, 150 kHz to 30MHz.....	7
2.1.1 E.U.T. Operation .....	7
2.1.2 Test Setup and Procedure .....	8
2.1.3 Measurement Data .....	8
2.2 Radiated Emissions, 30MHz to 1GHz.....	11
2.2.1 E.U.T. Operation .....	11
2.2.2 Test Setup and Procedure .....	12
2.2.3 Measurement Data .....	13

## Section 1 General Information and Equipment Used

### 1.1 Client Information

Applicant: Klipsch L.L.C.  
 Address of Applicant: 3502 Woodview Trace, Suite 200, Indianapolis, IN 46268, United States.

### 1.2 EUT General and Technical Descriptions

EUT Name: Powered Monitor Speakers  
 EUT Model: R-14PM  
 EUT Trademark: Klipsch  
 Input Voltage: 100-240V ~  
 Frequency: 50/60Hz  
 Input Power/Current: 80W  
 Output rated: /  
 Power Cable Description: /  
 Other Cables Description: /  
 I/O Ports: USB Audio in, Optical, SuB out, Aux in, PHONO L+R, Left speaker out  
 Function(s) Description: /  
 Accessories information: /

### 1.3 Support Equipment(s) and Test Configuration

#### 1.3.1 Details of Support Equipment(s)

Description	Manufacturer	Model No.	Connection	Working state
PC	/	/	/	Normal

#### 1.3.2 Working State of EUT

Power Supply of EUT: 120V~ 60Hz  
 EUT Status: Test the EUT in USB Audio in mode.

#### 1.3.3 Block Diagram of Test Configuration

/

## 1.4 Equipment Used during Test

Conducted Emission						
No.	Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
ITL-102	EMI Test receiver	R&S	ESCI	100910	2017/06/15	2018/06/15
ITL-103	Two-line v-network	R&S	ENV216	100120	2017/06/15	2018/06/15
ITL-101	Shielded Room	ETS•Lindgren	8*4*3	CT09010	2015/03/09	2018/03/09

Radiated Emission						
No.	Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
ITL-100	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	CT09015	2016/11/02	2019/11/02
ITL-154	EMI test receiver 9kHz to 26.5GHz	R&S	ESR26	101257	2017/01/20	2018/01/20
ITL-105	Biconilog Antenna	ETS•Lindgren	3142D	00108096	2015/01/24	2018/01/24
ITL-116	Pre Amplifier	HP	8447F	3113A05905	2017/01/20	2018/01/20

## Section 2 Emission Test Results

### 2.1 Conducted Emission at Mains Terminals, 150 kHz to 30MHz


Test Requirement:	FCC part 15.107/ ICES-003
Test Method:	ANSI C63.4:2014/ ICES-003
Test Voltage:	120V AC, 60Hz
Test Date:	2017-06-23
Frequency Range:	150 kHz to 30MHz
Detector:	Peak for pre-scan Quasi-Peak and Average at frequency with maximum peak (9 kHz resolution bandwidth)
Uncertainty:	2Uc (V) = 2.3dB
Class / Limit:	Class B

Frequency range MHz	Class B Limits dB (µV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
NOTE 1 :The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		
NOTE 2: The lower limit is applicable at the transition frequency.		

#### 2.1.1 E.U.T. Operation

Operating Environment:			
Temperature:	24.0 °C	Humidity:	51 % RH
		Atmospheric Pressure:	101 kPa
EUT Operation:	Test the EUT in USB Audio in mode.		

## 2.1.2 Test Setup and Procedure

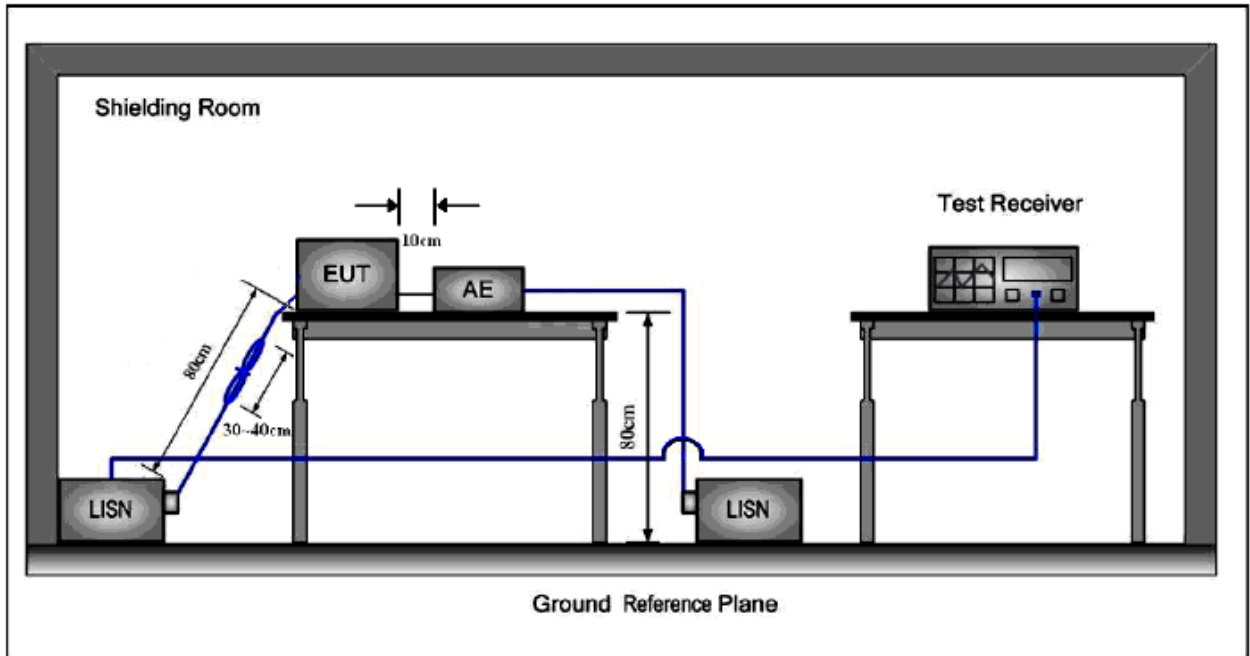

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to nominal power supply through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H}+5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

## 2.1.3 Measurement Data

Pre-scan was performed with peak detected on both live and neutral cable. Quasi-peak & average measurements were performed at the frequencies which maximum peak emission level was detected. Please see the attached Quasi-peak and Average test results.




**Model: R-14PM**

**Live Line:**

Peak Scan:

Level (dBµV)

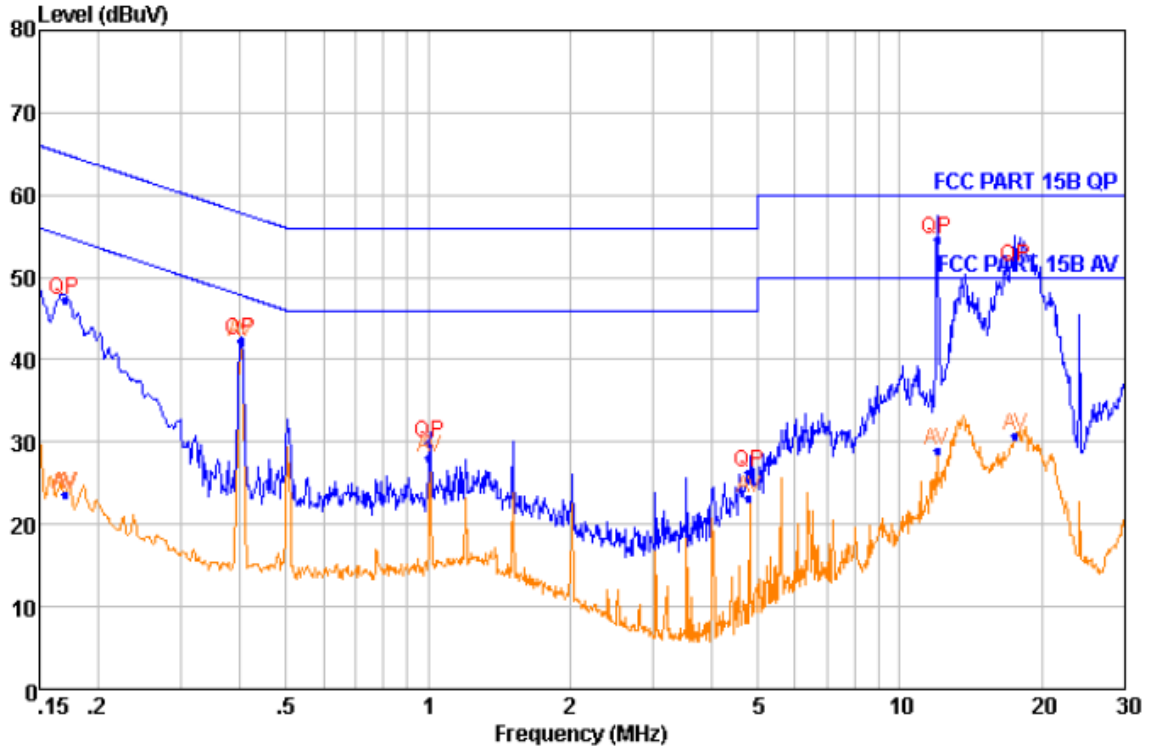

Quasi-peak and Average measurement


NO.	Freq MHz	Level dBµV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBµV	Margin dB
1	0.170	47.20	QP	9.44	0.21	64.96	-17.76
2	0.170	23.69	Average	9.44	0.21	54.96	-31.27
3	0.401	42.36	QP	9.38	0.26	57.83	-15.47
4	0.401	42.05	Average	9.38	0.26	47.83	-5.78
5	1.008	29.94	QP	9.27	0.31	56.00	-26.06
6	1.008	28.07	Average	9.27	0.31	46.00	-17.93
7	4.785	26.22	QP	9.29	0.40	56.00	-29.78
8	4.785	23.14	Average	9.29	0.40	46.00	-22.86
9	11.975	54.70	QP	9.37	0.45	60.00	-5.30
10	11.975	28.92	Average	9.37	0.45	50.00	-21.08
11	17.532	51.32	QP	9.58	0.47	60.00	-8.68
12	17.532	30.68	Average	9.58	0.47	50.00	-19.32

This report is for the exclusive use of ITL's client and is provided pursuant to the agreement between ITL assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the ITL name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by ITL. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an ITL certification program. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

**Neutral Line:**

Peak Scan:

Level (dBμV)

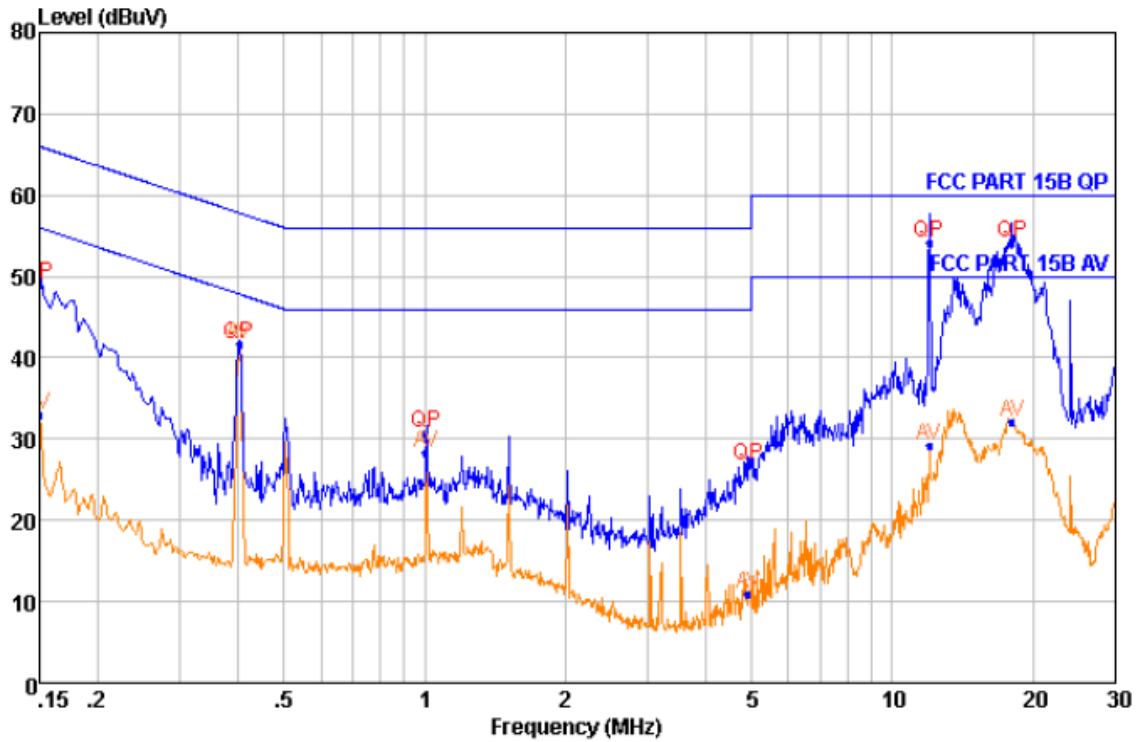

Quasi-peak and Average measurement

NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Margin dB
1	0.150	48.97	QP	9.38	0.20	66.00	-17.03
2	0.150	32.99	Average	9.38	0.20	56.00	-23.01
3	0.401	41.74	QP	9.36	0.26	57.83	-16.09
4	0.401	41.60	Average	9.36	0.26	47.83	-6.23
5	1.008	30.81	QP	9.37	0.31	56.00	-25.19
6	1.008	28.33	Average	9.37	0.31	46.00	-17.67
7	4.914	26.81	QP	9.43	0.40	56.00	-29.19
8	4.914	10.99	Average	9.43	0.40	46.00	-35.01
9	11.975	54.11	QP	9.59	0.45	60.00	-5.89
10	11.975	29.14	Average	9.59	0.45	50.00	-20.86
11	18.000	54.17	QP	9.82	0.47	60.00	-5.83
12	18.000	32.16	Average	9.82	0.47	50.00	-17.84

This report is for the exclusive use of ITL's client and is provided pursuant to the agreement between ITL assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the ITL name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by ITL. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an ITL certification program. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.

## 2.2 Radiated Emissions, 30MHz to 1GHz

Test Requirement:	FCC part 15.109/ ICES-003
Test Method:	ANSI C63.4:2014/ ICES-003
Test Voltage:	120V AC, 60Hz
Test Date:	2017-06-26
Frequency Range:	30MHz to 1GHz
Measurement Distance	3m
Detector:	Peak for pre-scan Quasi-Peak if maximised peak within 6dB of limit (120 kHz resolution bandwidth)
Uncertainty:	$2U_c (V) = 3.35\text{dB}$
Class / Limit:	Class B

Frequency range MHz	Quasi-peak limits dB ( $\mu\text{V/m}$ )
30 to 88	40
88 to 216	43.5
216 to 960	46
960 to 1000	54
At transitional frequencies the lower limit applies	

### 2.2.1 E.U.T. Operation

Operating Environment:


Temperature: 24.0 °C

Humidity: 50 % RH

Atmospheric Pressure: 101 kPa

EUT Operation: Test the EUT in USB Audio in mode.

## 2.2.2 Test Setup and Procedure

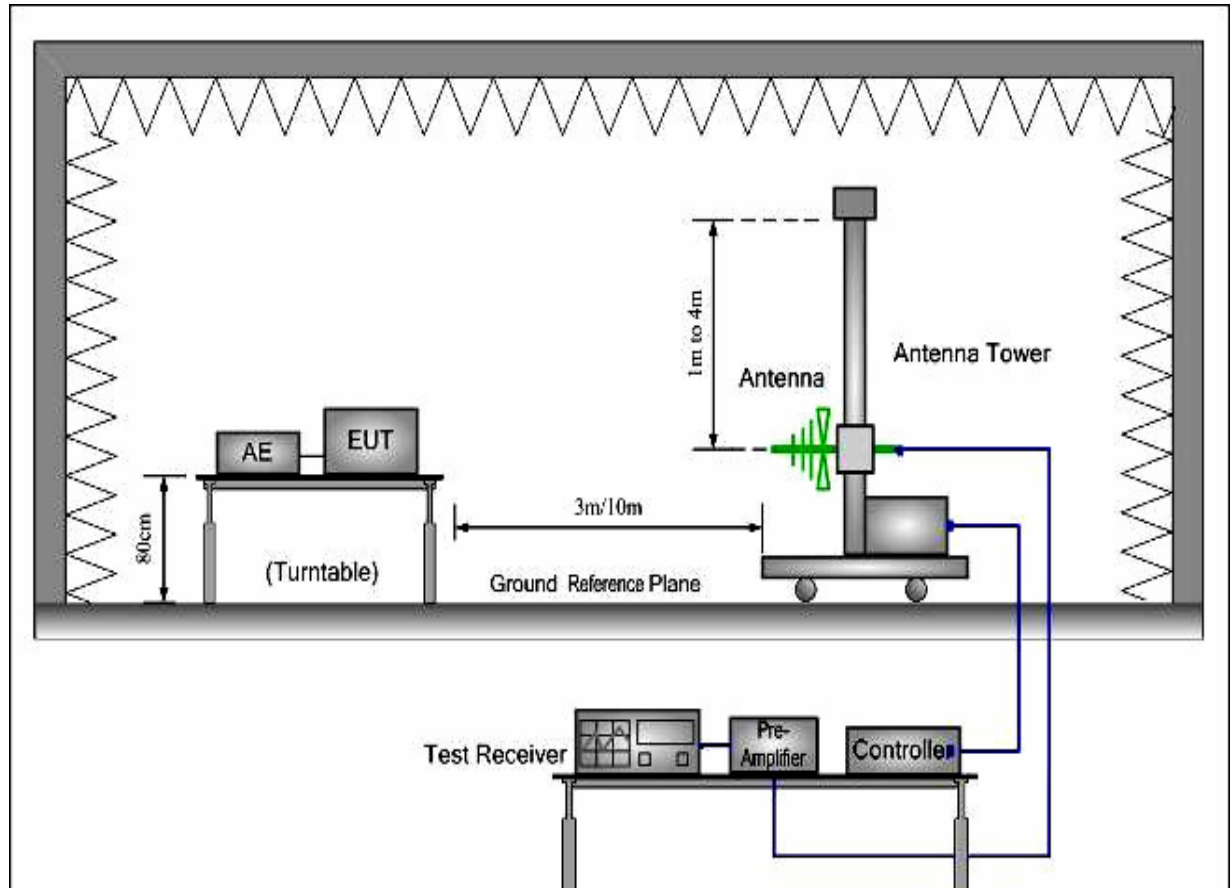

1. The radiated emissions test was conducted in a semi-anechoic chamber.
2. Biconical and log periodic antenna was used for the frequency range from 30MHz to 1GHz
3. The EUT was connected to nominal power supply through a mains power outlet which was bonded to the ground reference plane; The mains cables were draped to the ground reference plane. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.
5. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360° , and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.


## 2.2.3 Measurement Data

Model: R-14PM

Horizontal:

Peak scan

Level (dBµV/m)

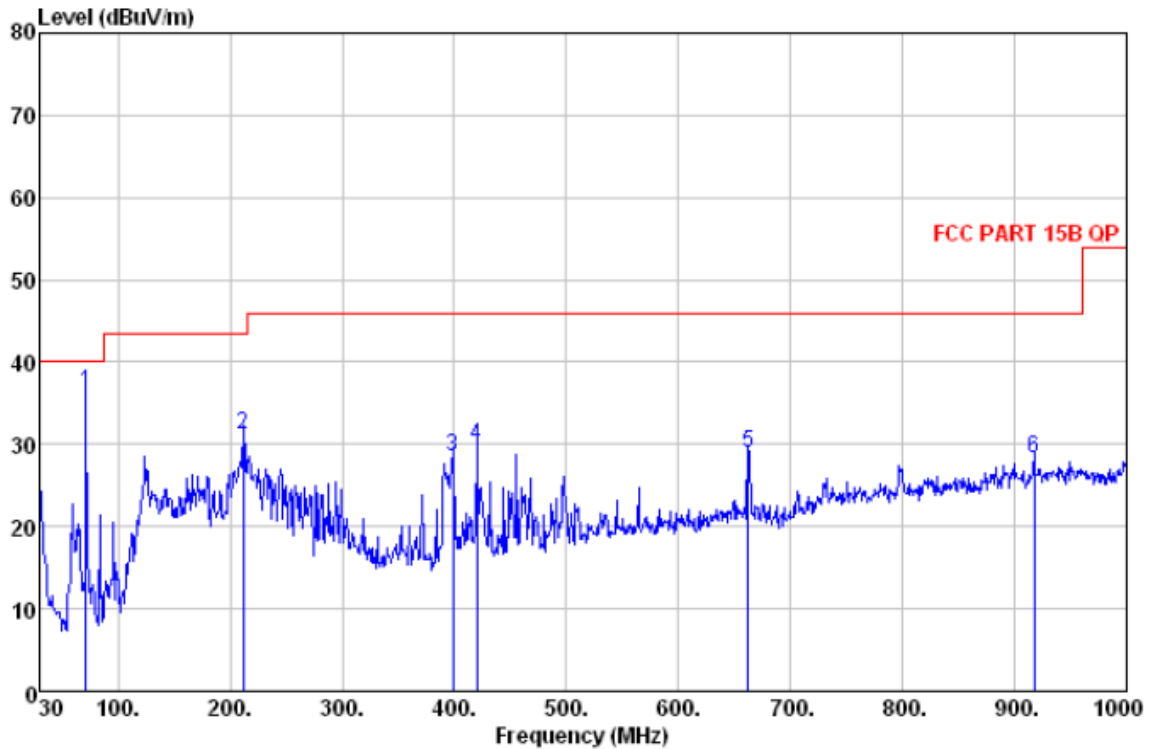


Quasi-peak measurement

No.	Freq MHz	Read Level dBµV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Limit Line dBµV/m	Over Limit dB	Pol/Phase	Remark
1	71.710	56.42	7.10	0.99	28.26	36.25	40.00	-3.75	HORIZONTAL	QP
2	211.390	47.80	9.27	1.76	27.54	31.29	43.50	-12.21	HORIZONTAL	QP
3	398.600	38.57	15.76	2.44	28.21	28.56	46.00	-17.44	HORIZONTAL	QP
4	419.940	39.01	16.50	2.52	28.12	29.91	46.00	-16.09	HORIZONTAL	QP
5	662.440	33.57	20.65	3.23	28.50	28.95	46.00	-17.05	HORIZONTAL	QP
6	917.550	27.64	24.10	3.83	27.34	28.23	46.00	-17.77	HORIZONTAL	QP

**Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**

**Vertical:**  
 Peak scan  
 Level (dBμV/m)

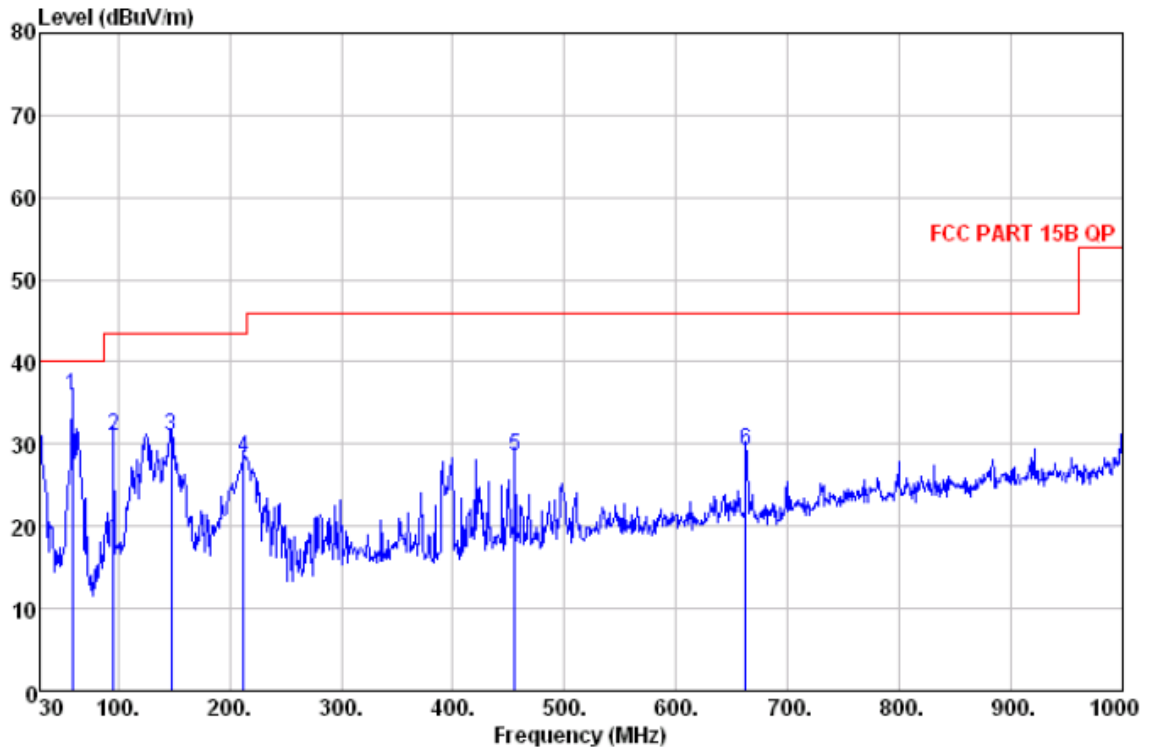

Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	59.100	56.25	6.89	0.88	28.23	35.79	40.00	-4.21	VERTICAL	QP
2	95.960	50.20	8.38	1.14	28.64	31.08	43.50	-12.42	VERTICAL	QP
3	147.370	50.71	7.30	1.45	28.50	30.96	43.50	-12.54	VERTICAL	QP
4	212.360	44.72	9.38	1.76	27.57	28.29	43.50	-15.21	VERTICAL	QP
5	455.830	37.65	16.83	2.64	28.55	28.57	46.00	-17.43	VERTICAL	QP
6	662.440	33.86	20.65	3.23	28.50	29.24	46.00	-16.76	VERTICAL	QP

**Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor**

END OF THE TEST REPORT

This report is for the exclusive use of ITL's client and is provided pursuant to the agreement between ITL assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the ITL name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by ITL. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an ITL certification program. The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.